

## TEST REPORT

Test report no.: 1-1954-56-12/10



### Testing laboratory

**CETECOM ICT Services GmbH**  
 Untertuerkheimer Strasse 6 – 10  
 66117 Saarbruecken / Germany  
 Phone: + 49 681 5 98 - 0  
 Fax: + 49 681 5 98 - 9075  
 Internet: <http://www.cetecom.com>  
 e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

#### Accredited test laboratory:

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025  
 DAR registration number: DGA-PL-176/94-D1

Area of Testing: Radio/Satellite Communications

### Applicant

**Sony Ericsson Mobile Communications AB**  
 Nya Vattentornet  
 22188 Lund / Sweden  
 Phone: +46 46 19 30 00  
 Fax: +46 46 19 32 95  
 Contact: Johan Wedin  
 e-mail: [johan.wedin@sonyericsson.com](mailto:johan.wedin@sonyericsson.com)  
 Phone: +46 70 71 95 73 6

### Manufacturer

**Sony Ericsson Mobile Communications AB**  
 Nya Vattentornet  
 22188 Lund / Sweden

### Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I  
 Part 15 - Radio frequency devices

RSS - 210 Issue 8

Spectrum Management and Telecommunications - Radio Standards Specification  
 Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands):  
 Category I Equipment

For further applied test standards please refer to section 3 of this test report.

### Test item

Kind of test item: Mobile Phone GSM/EDGE 850,900,1800,1900; UMTS FDD1, FDD8; BT2.1+EDR; WLAN; A-GPS; ANT+

Model name: AAD-3880100-BV

Measured technology: ANT+

FCC ID: PY7A3880100

IC: 4170B-A3880100

Frequency [MHz]: ISM band 2400 MHz to 2483.5 MHz  
 (Lowest channel 2402 MHz; Highest channel 2480 MHz)

Power supply: 3.7 V DC by Li-polymer battery (BA700) and DC power supply

Temperature range: -20 °C to +55°C

### Test performed:

2011-03-15 Joerg Warken

### Test report authorised:

2011-03-15 Jakob Reschke

Test report no.: 1-1954-56-12/10



## 1 Table of contents

1	Table of contents .....	3
2	General information .....	4
2.1	Notes.....	4
2.2	Application details.....	4
3	Test standard/s .....	4
4	Test environment.....	4
5	Test item.....	5
6	Test laboratories sub-contracted .....	5
7	Summary of measurement results .....	6
8	RF measurement testing.....	7
8.1	Description of test setup .....	7
8.1.1	Radiated measurements.....	7
8.1.2	Conducted measurements.....	8
8.2	Additional comments .....	8
8.3	RSP100 test report cover sheet / performance test data .....	9
9	Measurement results.....	10
9.1	Maximum output power .....	10
9.2	Antenna gain .....	13
9.3	Power spectral density .....	14
9.4	Spectrum bandwidth of a DSSS system – 6 dB bandwidth .....	17
9.5	Spectrum bandwidth of a DSSS system – 20 dB bandwidth .....	20
9.6	Band edge compliance conducted .....	23
9.7	Band edge compliance radiated .....	25
9.8	TX spurious emissions conducted .....	28
9.9	TX spurious emissions radiated .....	32
9.10	RX spurious emissions radiated .....	44
9.11	TX spurious emissions radiated < 30 MHz.....	49
9.12	TX spurious emissions conducted < 30 MHz.....	51
10	Test equipment and ancillaries used for tests .....	54
Annex A	Photographs of the test setup.....	57
Annex B	External photographs of the EUT.....	59
Annex C	Internal photographs of the EUT .....	64
Annex D	Document history .....	70
Annex E	Further information.....	70

## 2 General information

### 2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

### 2.2 Application details

Date of receipt of order:	2010-11-29
Date of receipt of test item:	2010-12-20
Start of test:	2011-03-09
End of test:	2011-03-14
Person(s) present during the test:	-/-

## 3 Test standard/s

Test standard	Version	Test standard description
47 CFR Part 15	2009-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

## 4 Test environment

Temperature:	$T_{nom}$	21	°C during room temperature tests
	$T_{max}$	-/-	
	$T_{min}$	-/-	
Relative humidity content:		49	%
Air pressure:		not relevant for this kind of testing	
Power supply:	$V_{nom}$	3.7	V DC
	$V_{max}$	-/-	V
	$V_{min}$	-/-	V

**5 Test item**

Kind of test item	:	Mobile Phone GSM/EDGE 850,900,1800,1900; UMTS FDD1, FDD8; BT2.1+EDR; WLAN; A-GPS; ANT+
Type identification	:	AAD-3880100-BV
S/N serial number	:	Radiated: CB5A1CGN36, CB5A1CGN7L Conducted: CB5A1CGN8C, CB5A1CGUJM
HW hardware status	:	AP1.2
SW software status	:	3.0.A.02.42
Frequency band [MHz]	:	ISM band 2400 MHz – 2483.5 MHz (Lowest channel 2402 MHz; highest channel 2480 MHz)
Type of modulation	:	DSSS using GFSK
Number of channels	:	79
Antenna	:	Integrated PCB antenna → for more information, please take a look at the annex C – internal photos of the EUT
Power supply	:	3.7 V DC by Li-polymer battery (BA700) and DC power supply
Temperature range	:	-20°C - +55 °C

**6 Test laboratories sub-contracted**

None

## 7 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	Passed	2011-03-15	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Results (max.)
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a DSSS system 6dB bandwidth	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a DSSS system 20dB bandwidth	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(3) RSS-210 / A8.4(4)	Maximum output power	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen.	RX spurious emissions radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a)	Conducted emissions < 30 MHz	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

**Note:** NA = Not Applicable; NP = Not Performed

## 8 RF measurement testing


### 8.1 Description of test setup

#### 8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

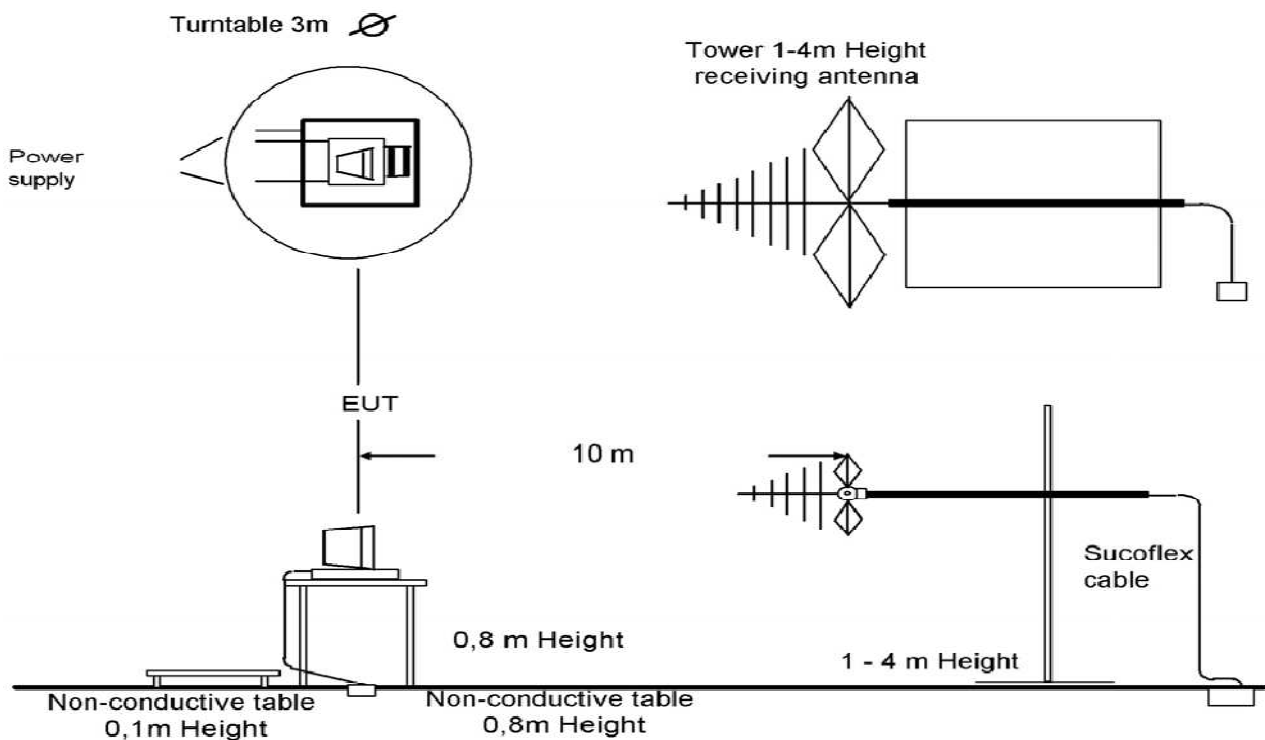


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage

### 8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

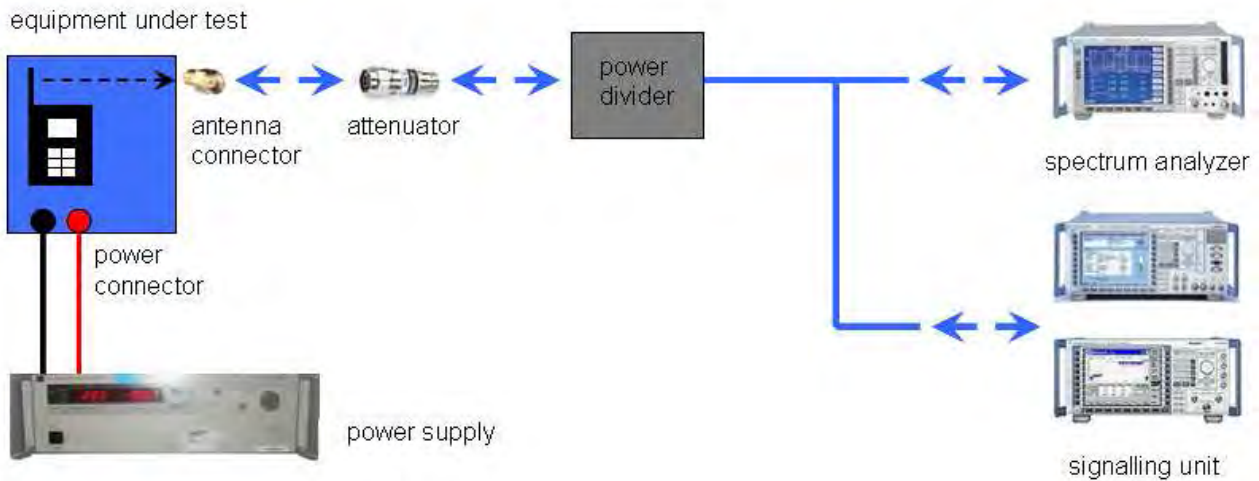

Picture 2: Diagram conducted measurements

### 8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

- Test mode:
- No test mode available.  
Iperf was used to ping another device with the largest support packet size
  - Special software is used.  
EUT is transmitting pseudo random data by itself



### 8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-1954-56-12/10
Equipment model number	:	AAD-3880100-BV
Certification number	:	4170B-A3880100
Manufacturer (complete address)	:	Sony Ericsson Mobile Communications AB Nya Vattentorget 22188 Lund / Sweden
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 8
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 2402 MHz, highest channel 2480 MHz)
RF-power [W] (max.)	:	cond.: 3.98mW (DSSS) EIRP: 3.31mW (DSSS)
Occupied bandwidth (99%-BW) [kHz]	:	DSSS: 1082MHz
Type of modulation	:	DSSS technology with GFSK modulation.
Emission designator (TRC-43)	:	1M08FXD (DSSS)
Antenna information	:	Integrated PCB antenna
Transmitter spurious (worst case) [ $\mu\text{V/m}$ @ 3m]	:	49.4 $\mu\text{V/m}$ (noise floor)
Receiver spurious (worst case) [ $\mu\text{V/m}$ @ 3m]	:	49.2 $\mu\text{V/m}$ (noise floor)

**ATTESTATION:**

**DECLARATION OF COMPLIANCE:**

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

**Laboratory manager:**

2011-03-15

Joerg Warken

Date

Name

Signature



## 9 Measurement results

### 9.1 Maximum output power

#### Description:

Measurement of the maximum output power conducted & radiated

#### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	3 MHz
Span:	3 MHz
Trace-Mode:	Max Hold

#### Result:


Modulation	Maximum output power conducted [dBm]		
	2402 MHz	2441 MHz	2480 MHz
Frequency			
GFSK	6.0	5.7	5.9
Measurement uncertainty	± 1.5 dB		

Modulation	Maximum output power radiated - EIRP [dBm]		
	2402 MHz	2441 MHz	2480 MHz
Frequency			
GFSK	-0.8	-1.3	-1.5
Measurement uncertainty	± 3 dB		


Result: **The result of the measurement is passed.**

**Plots: DSSS / ANT+**


**Plot 1: lowest channel**

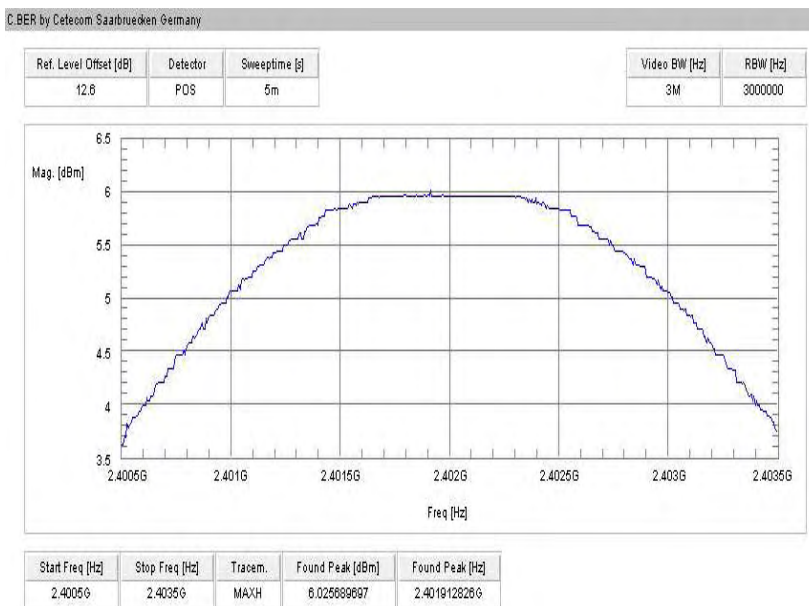

**Plot 1: mid channel**

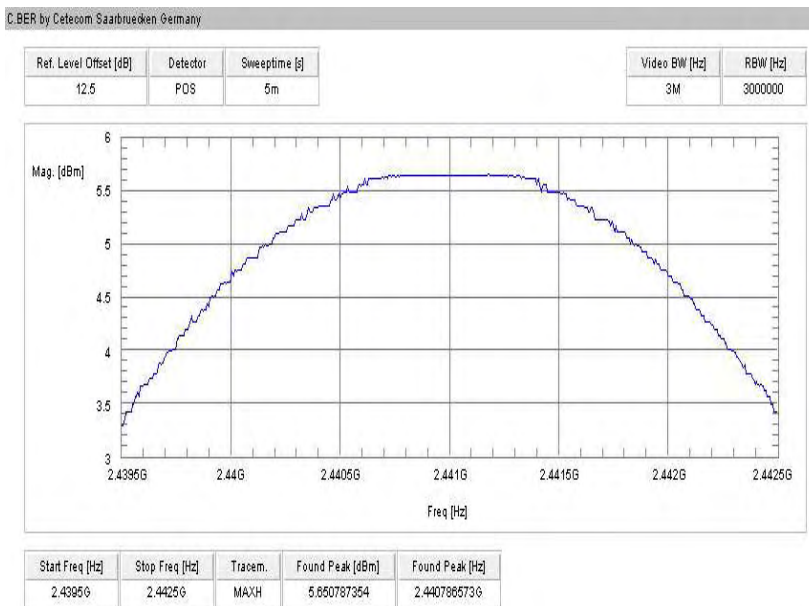

#Plot 1: highest channel

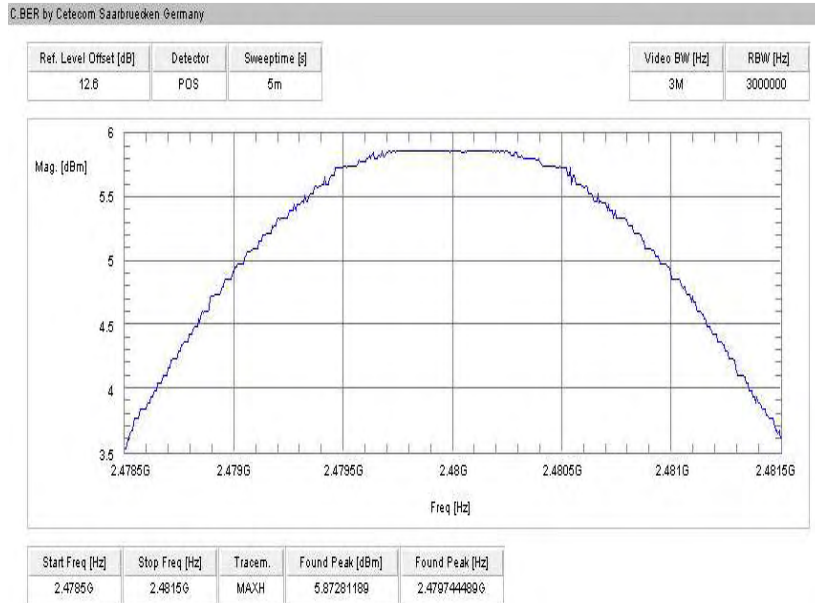

## 9.2 Antenna gain

### Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

### Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	3 MHz
Span:	3 MHz
Trace-Mode:	Max hold

### Limits:

FCC	IC
CFR Part 15.247 (b)(4)	RSS 210, Issue 8, A 8.4(2)
Antenna Gain	
6 dBi	

### Results:

T <sub>nom</sub>	V <sub>nom</sub>	lowest channel 2402 MHz	middle channel 2441 MHz	highest channel 2480 MHz
Conducted power [dBm] Measured with DSSS modulation		6.0	5.7	5.9
Radiated power [dBm] Measured with DSSS modulation		5.2	4.4	4.4
Gain [dBi] Calculated		-0.8	-1.3	-1.5

**Result:** The result of the measurement is passed.

### 9.3 Power spectral density

#### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

#### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	500 s
Video bandwidth:	3 kHz
Resolution bandwidth:	3 kHz
Span:	1.5 MHz
Trace-Mode:	Max Hold

#### Limits:

FCC	IC
CFR Part 15.247 (e)	RSS 210, Issue 8, A 8.2(b)
Power Spectral Density	
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	


#### Results:

Modulation	Power Spectral density [dBm/3kHz]		
	2402 MHz	2441 MHz	2480 MHz
Frequency			
DSSS	-4.7	-4.9	-4.8
Measurement uncertainty	± 1.5 dB		


Result: **The result of the measurement is passed.**

**Plots: DSSS / ANT+**


**Plot 1: lowest channel**

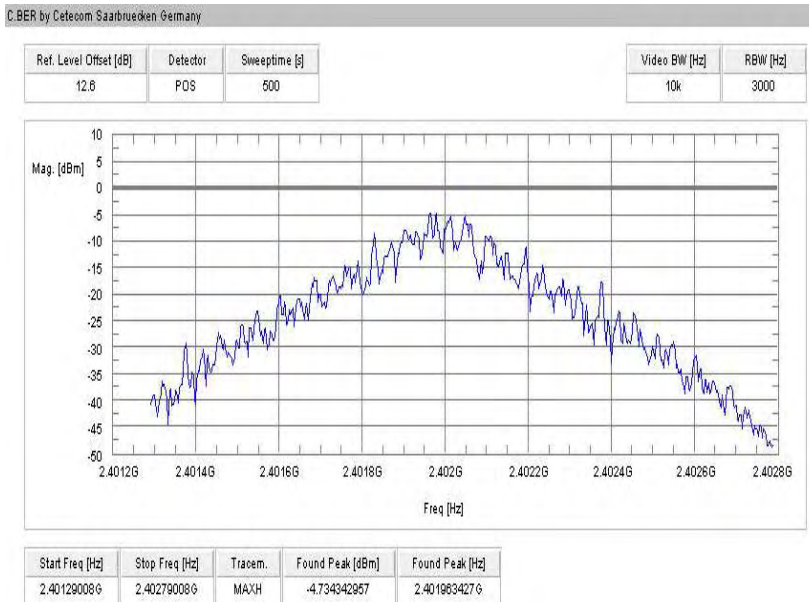

**Plot 2: mid channel**

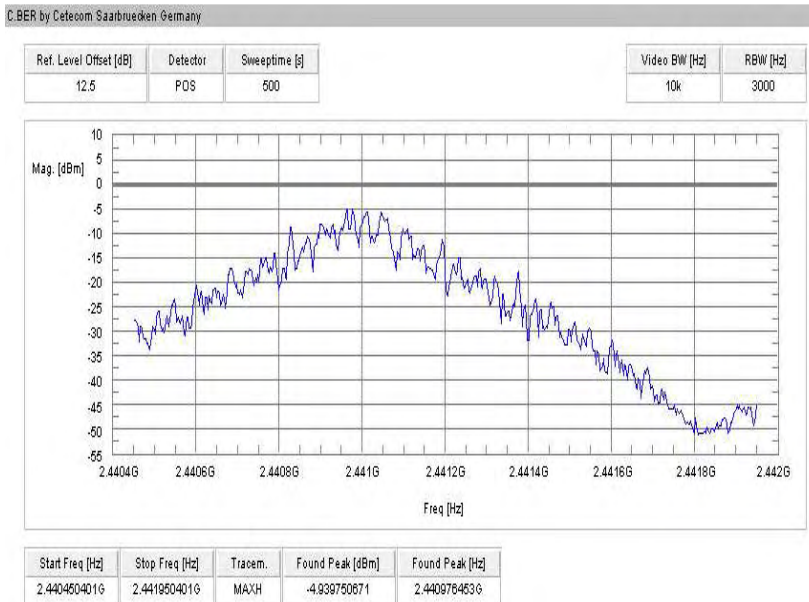

Plot 3: highest channel

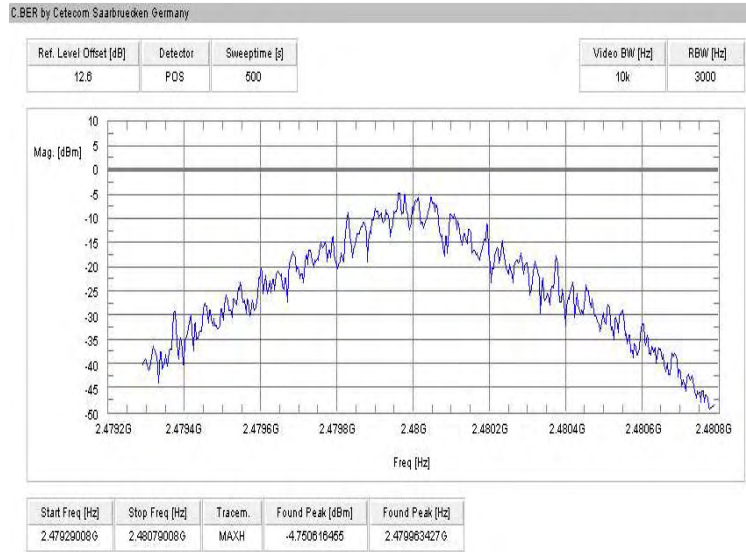



## 9.4 Spectrum bandwidth of a DSSS system – 6 dB bandwidth

### Description:

Measurement of the 6 dB bandwidth of the modulated signal.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plot
Trace-Mode:	Max Hold

### Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a DSSS System – 6 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


### Results:

Modulation Frequency	6 dB BANDWIDTH [MHz]		
	2402 MHz	2441 MHz	2480 MHz
DSSS	505	505	517
Measurement uncertainty	± 100 kHz		


**Result:** The result of the measurement is passed.

**Plots: DSSS / ANT+**


**Plot 1: lowest channel**

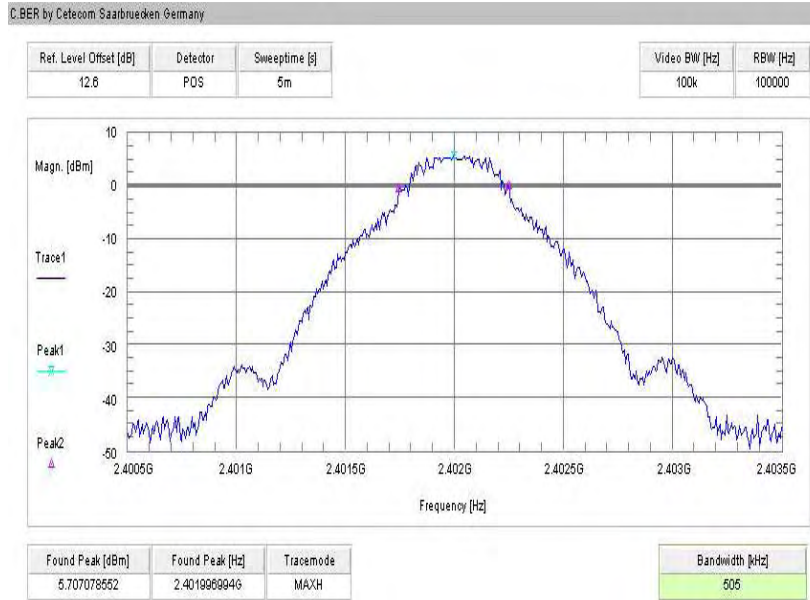

**Plot 2: mid channel**

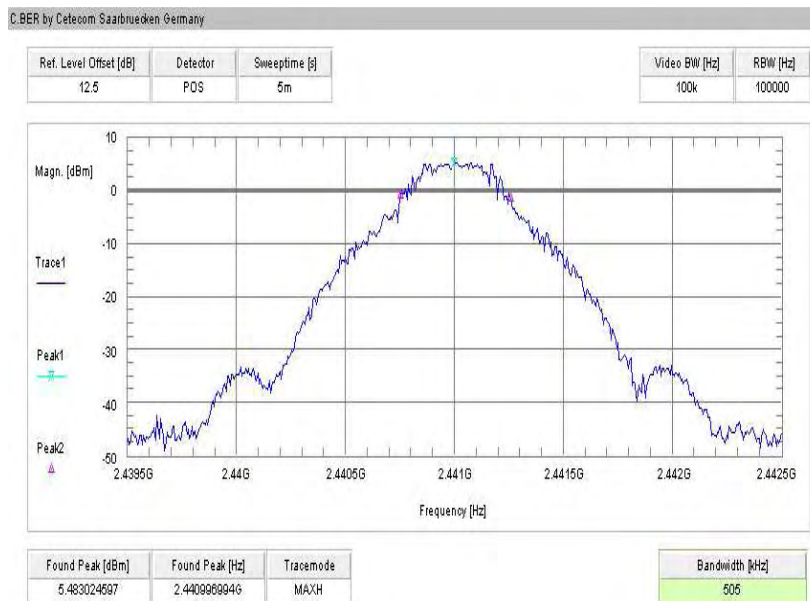

Plot 3: highest channel

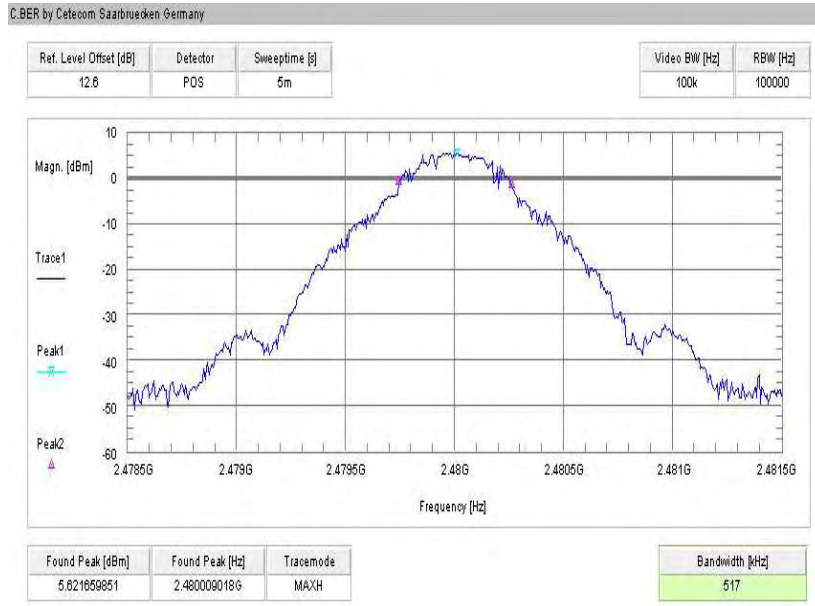

## 9.5 Spectrum bandwidth of a DSSS system – 20 dB bandwidth

### Description:

Measurement of the 20 dB bandwidth of the modulated signal.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plot
Trace-Mode:	Max Hold

### Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a DSSS System – 20 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


### Results:

Modulation Frequency	20 dB BANDWIDTH [kHz]		
	2402 MHz	2441 MHz	2480 MHz
DSSS	1040	1082	1076
Measurement uncertainty	± 100 kHz		


**Result:** The result of the measurement is passed.

**Plots: DSSS / ANT+**


**Plot 1: lowest channel**

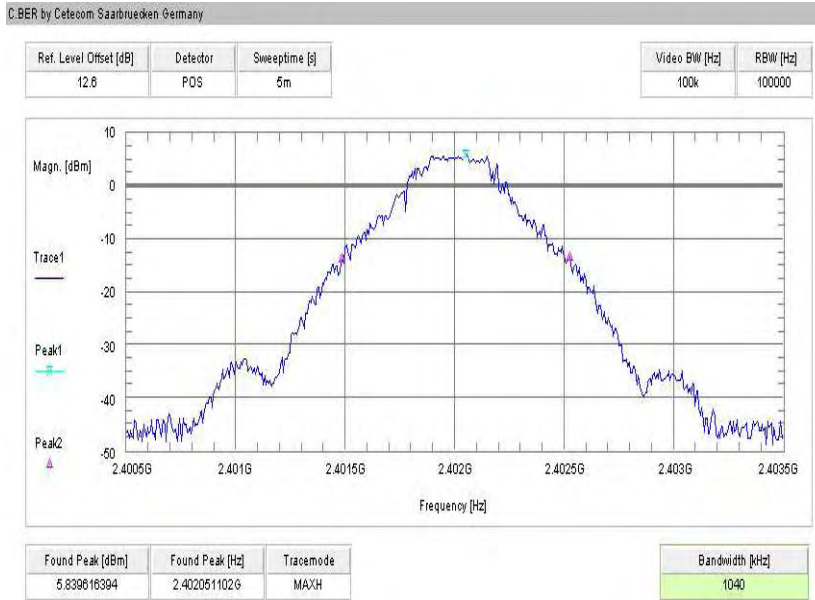

**Plot 2: mid channel**

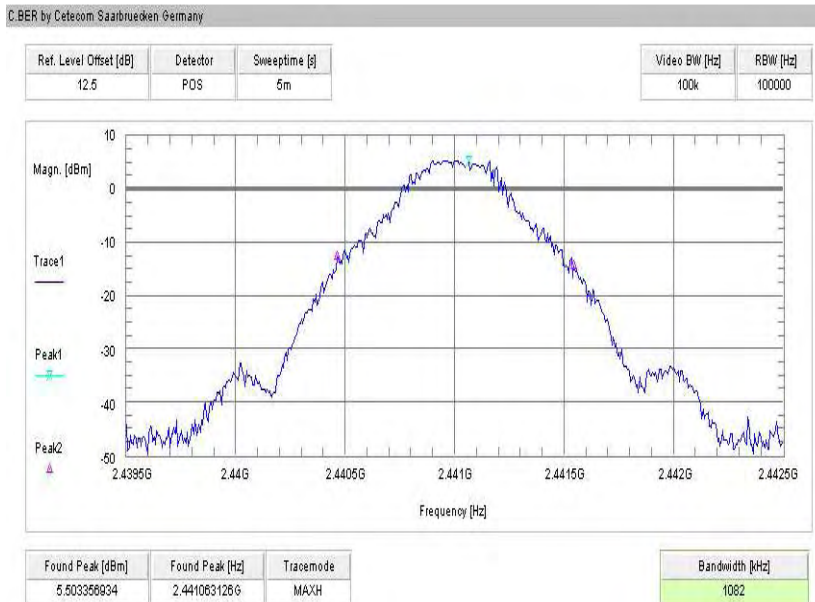

Plot 3: highest channel

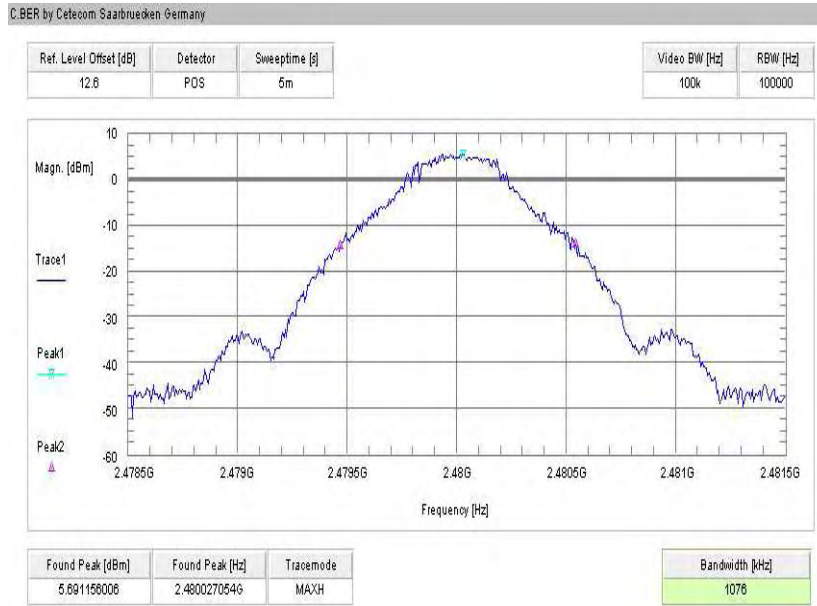

## 9.6 Band edge compliance conducted

### Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots
Trace-Mode:	Max Hold

### Limits:

FCC	IC
CFR Part 15.247 (d)	RSS 210, Issue 8, A 8.5
Band Edge Compliance Conducted	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.</p>	


### Result:

Szenario Modulation	Band Edge Compliance Conducted [dB]
	DSSS
Lower Band Edge – Channel 00	> 20 dB (see plot 1)
Upper Band Edge – Channel 78	> 20 dB (see plot 2)
Measurement uncertainty	± 1.5 dB


**Result:** [The result of the measurement is passed.](#)

**Plots: DSSS / ANT+**

**Plot 1: lower band edge**

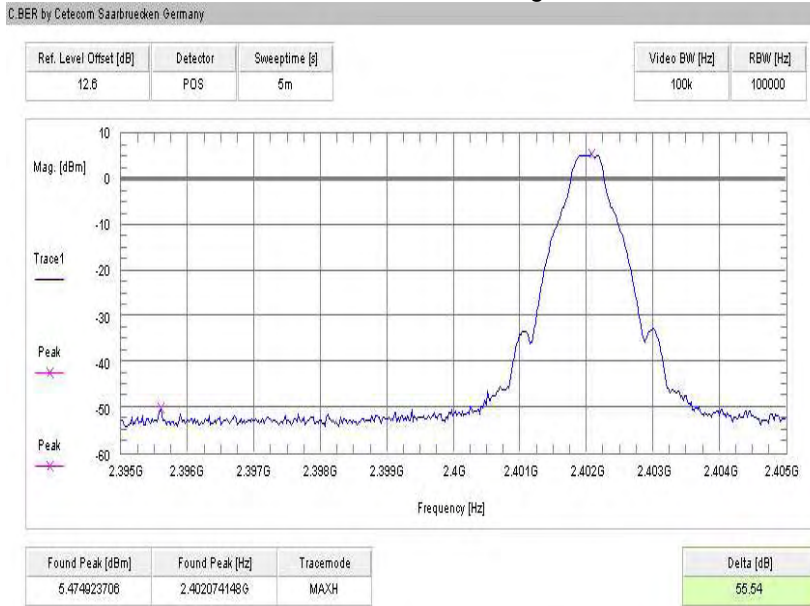

**Plot 2: upper band edge**

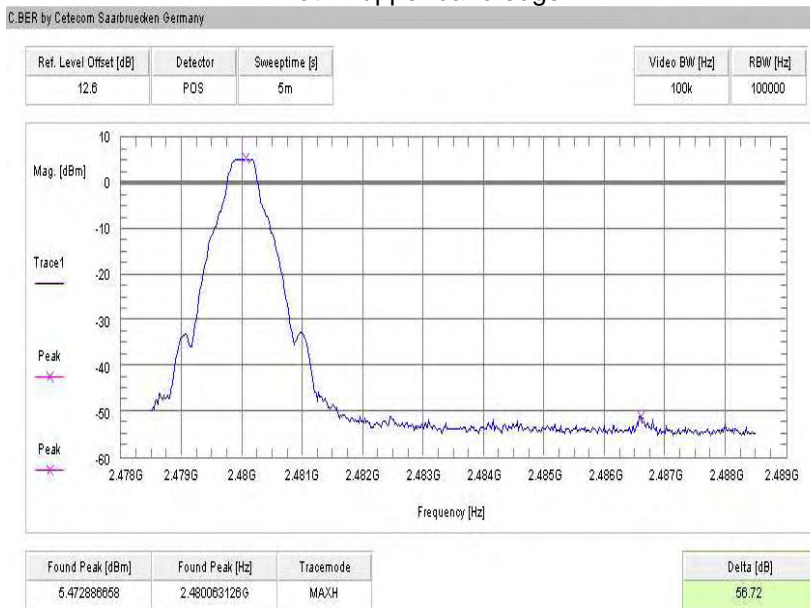



## 9.7 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 00 for the lower restricted band and to channel 78 for the upper restricted band. Measurement distance is 3m.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	10 Hz
Resolution bandwidth:	1 MHz
Span:	Lower Band: 2300 – 2400 MHz Higher Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

### Limits:


FCC	IC
CFR Part 15.205	RSS 210, Issue 8, A 8.5
Band Edge Compliance Radiated	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).</p>	
54 dB $\mu$ V/m AVG	

### Result:


Szenario	Band Edge Compliance Radiated [dB $\mu$ V/m]
Modulation	DSSS
Lower Band Edge – Channel 00	< 54 dB $\mu$ V/m (see plots 1/3)
Upper Band Edge – Channel 78	< 54 dB $\mu$ V/m (see plot 2/4)
Measurement uncertainty	$\pm$ 3 dB

**Plots: DSSS / ANT+**


Plot 1: TX mode, lower band edge, horizontal

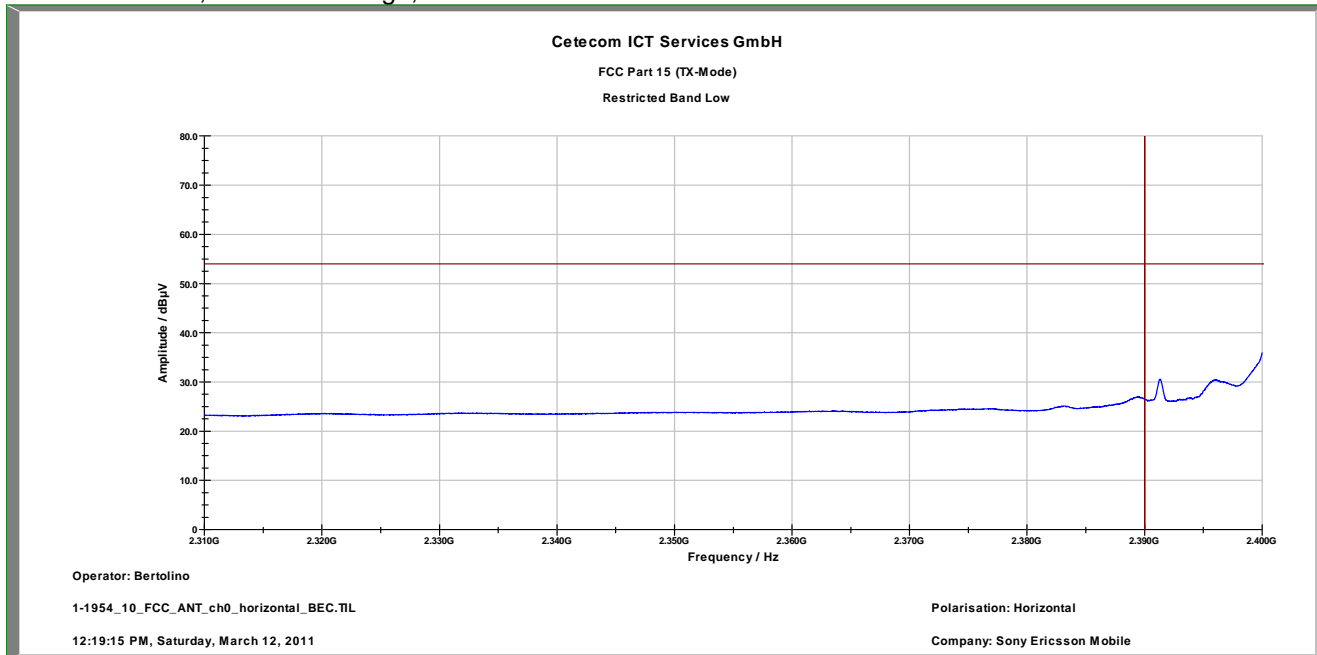


Plot 2: TX mode, upper band edge, horizontal polarization

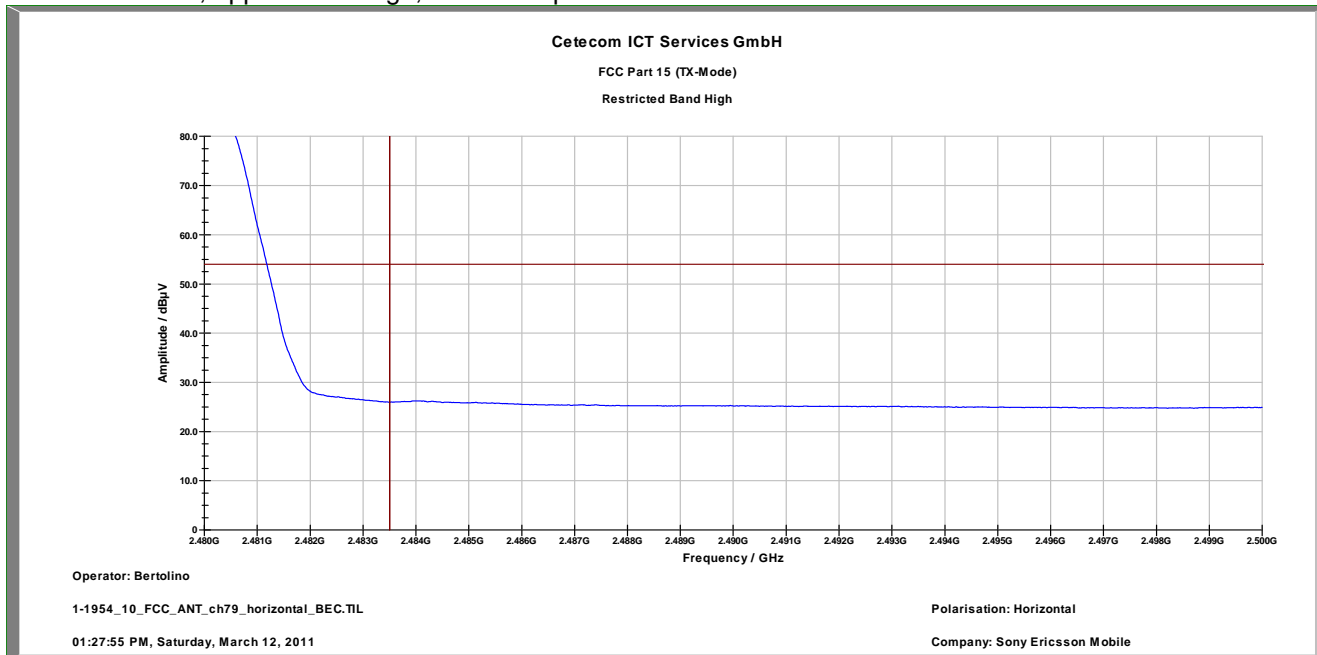

Plot 3: TX mode, lower band edge, vertical polarization

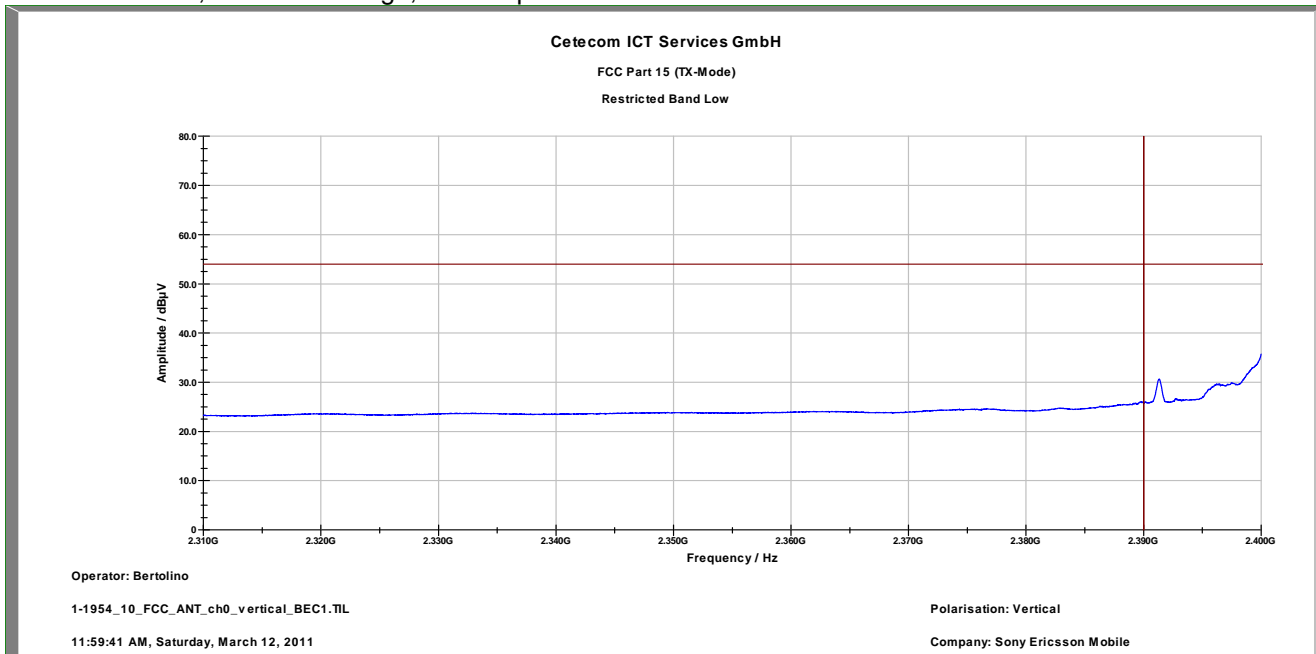

Plot 4: TX mode; upper band edge, vertical polarization

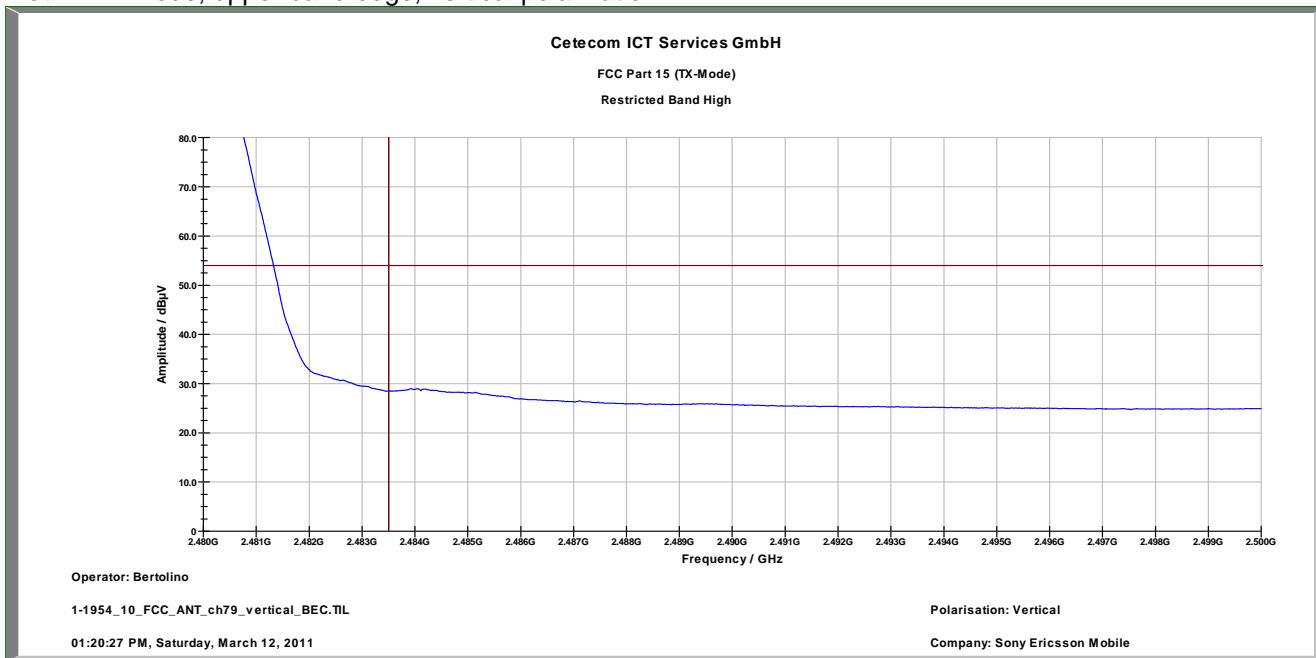

**Result:** The result of the measurement is passed.

## 9.8 TX spurious emissions conducted

### Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC
CFR Part 15.247(d)	RSS 210, Issue 8, A 8.5
TX Spurious Emissions Conducted	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required</p>	


**Results: DSSS / ANT+**

TX Spurious Emissions Conducted					
DSSS - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		7.1	30 dBm		Operating frequency
<i>No critical peaks found</i>			-20 dBc		complies
2441		5.5	30 dBm		Operating frequency
<i>No critical peaks found</i>			-20 dBc		complies
2480		5.8	30 dBm		Operating frequency
<i>No critical peaks found</i>			-20 dBc		complies
Measurement uncertainty		± 3 dB			


**Result:** The result of the measurement is passed.

**Plots: DSSS / ANT+**


**Plot 1: lowest channel**

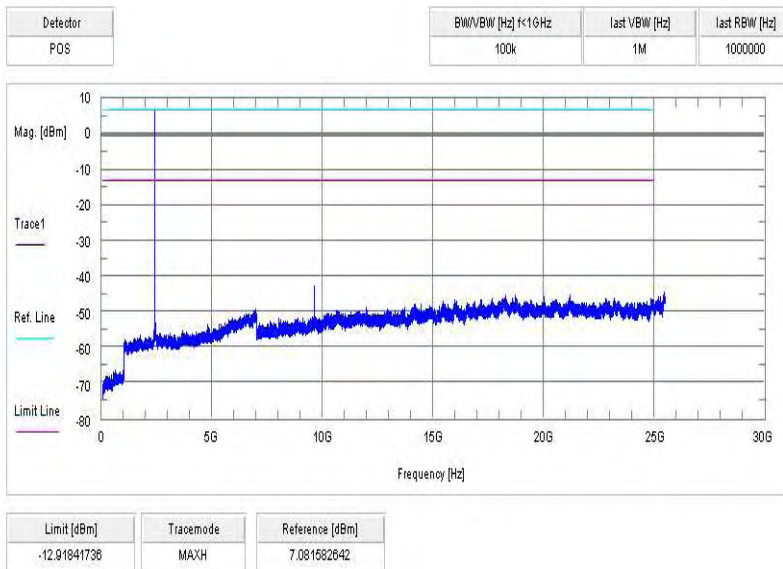

**Plot 2: mid channel**

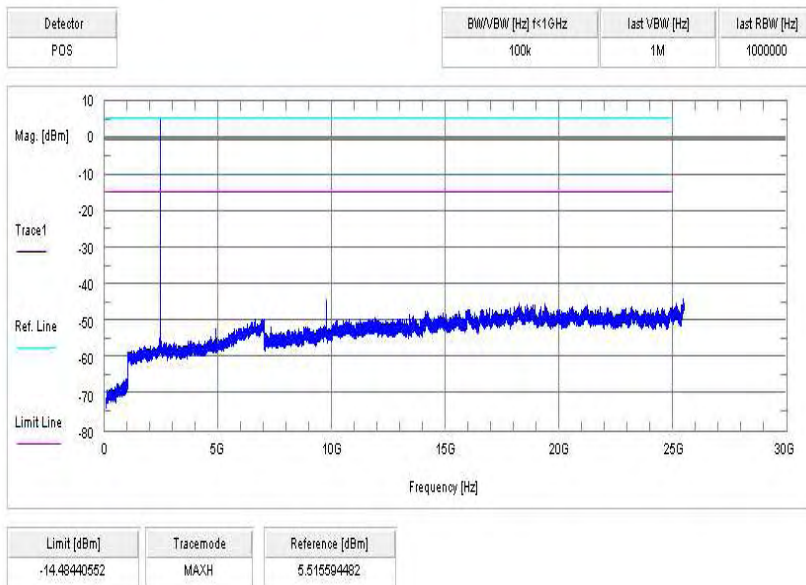

Plot 3: highest channel

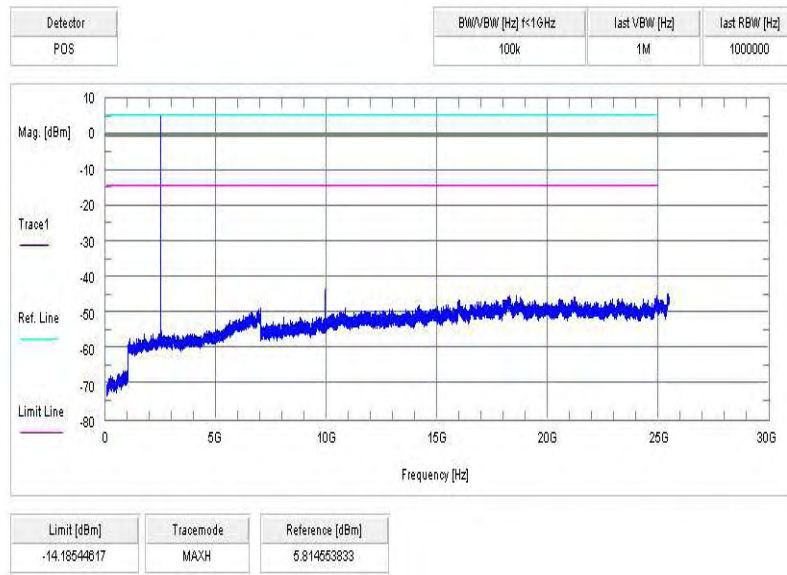

## 9.9 TX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold
Measured Modulation	<input checked="" type="checkbox"/> DSSS

### Limits:

FCC		IC	
CFR Part 15.247(d)		RSS 210, Issue 8, A 8.5	
TX Spurious Emissions Radiated			
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>			
§15.209			
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance	
30 - 88	30.0	10	
88 – 216	33.5	10	
216 – 960	36.0	10	
Above 960	54.0	3	

### Results: DSSS / ANT+ – mode



TX Spurious Emissions Radiated [dB $\mu$ V/m]								
DSSS – mode								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
No critical peaks found			No critical peaks found			No critical peaks found		
Measurement uncertainty			± 3 dB					

**Result:** The result of the measurement is passed.

**Plots: DSSS / ANT+**

**Plot 1:** Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

**CETECOM ICT Services GmbH**


**Common Information**

EUT: AAD-3880100-BV  
 Serial Number: CB5A1CGN7L  
 Test Description: FCC Part 15  
 Operating Conditions: BT testmode Ant + ; channel 0  
 Operator Name: Kraus  
 Comment: power 115V / 60 Hz

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: Electric Field (NOS)  
 Level Unit: dBµV/m

**Subrange**                      **Detectors**                      **IF Bandwidth**                      **Meas. Time**                      **Receiver**  
 30 MHz - 2 GHz                      QuasiPeak                      120 kHz                      15 s                      Receiver

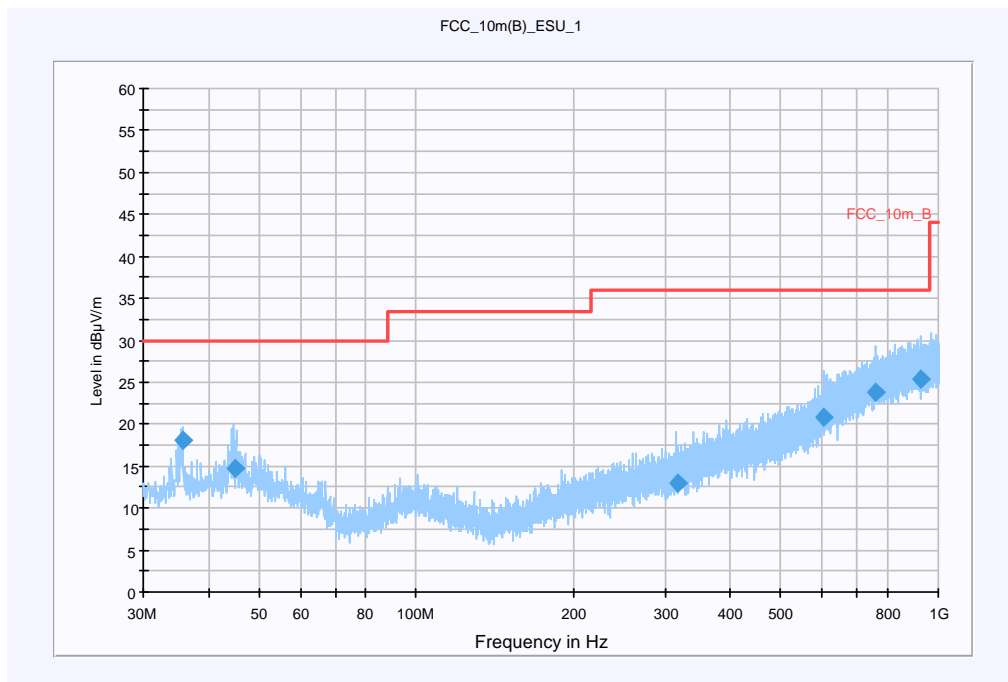

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.787000	18.2	15000.000	120.000	106.0	V	56.0	13.1	11.8	30.0	
45.081660	14.7	15000.000	120.000	98.0	V	62.0	13.3	15.3	30.0	
316.748760	12.9	15000.000	120.000	220.0	H	256.0	15.1	23.1	36.0	
601.569980	20.8	15000.000	120.000	220.0	H	13.0	20.8	15.2	36.0	
756.299820	23.9	15000.000	120.000	197.0	H	298.0	23.7	12.1	36.0	
923.191320	25.4	15000.000	120.000	163.0	V	242.0	25.3	10.6	36.0	

**Hardware Setup: EMI radiated\Electric Field (NOS)\_ESU - [EMI radiated]**

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: ESU [ESU 26]  
@ GPIB0 (ADR 20), SN 100037/026, FW 4.43

Signal Path: without Notch  
FW 1.0


Antenna: VULB 9163  
SN 9163-295, FW ---  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table: Cable\_EN\_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

**Plot 2: 1 GHz to 12.75 GHz, vertical polarization**

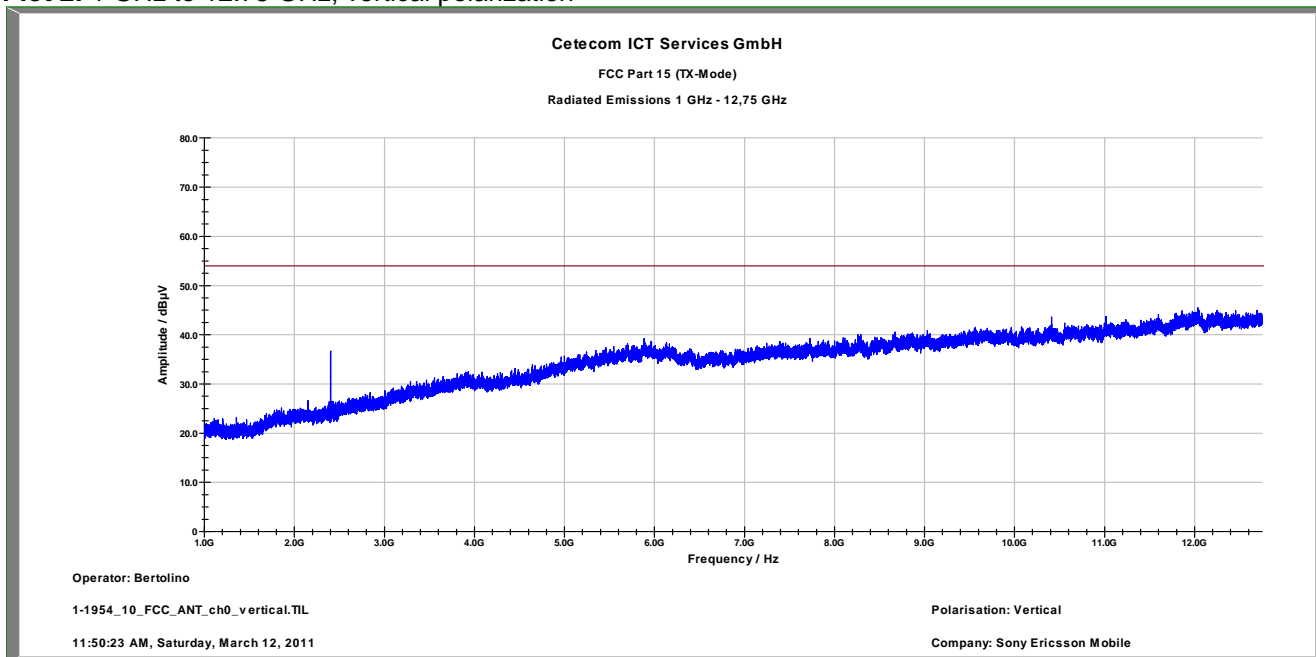

The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 3: Lowest channel, 1 GHz to 12.75 GHz, horizontal polarization**

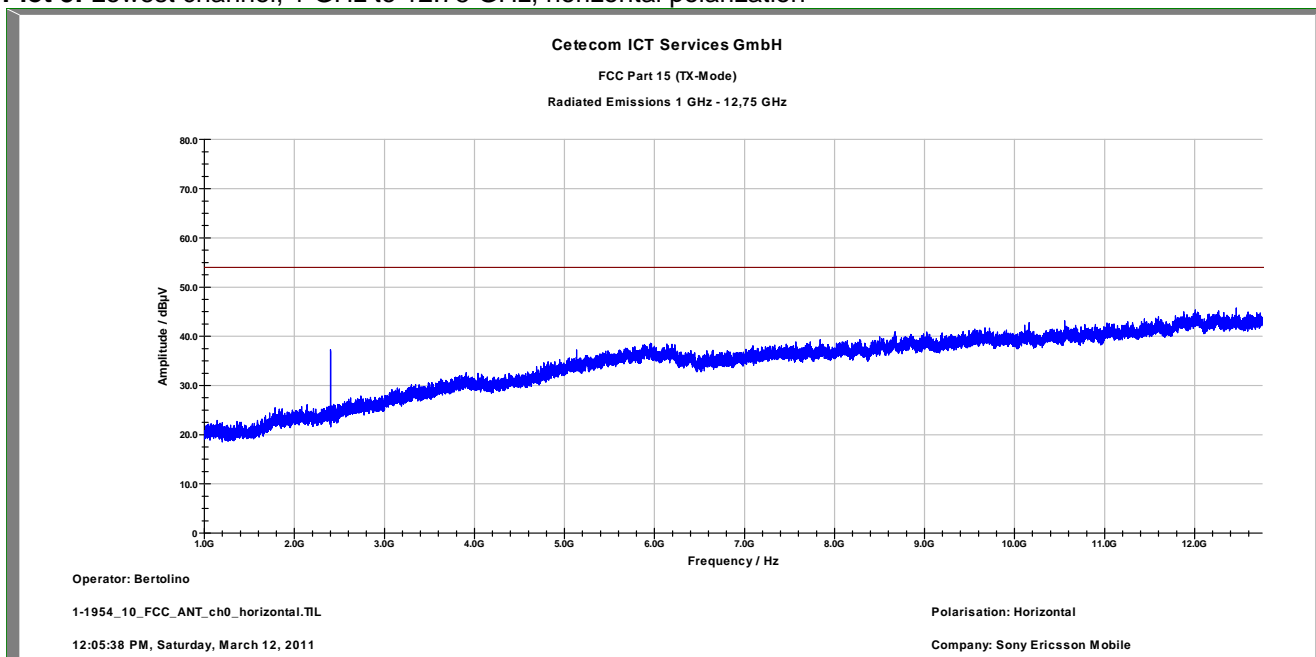

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Lowest channel, 12 GHz to 25 GHz (valid for all channels)



Date: 15.MAR.2011 10:28:38

**Plot 5:** Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

**CETECOM ICT Services GmbH**


**Common Information**

EUT: AAD-3880100-BV  
 Serial Number: CB5A1CGN8C  
 Test Description: FCC part 15 C  
 Operating Conditions: BT TX ch.39  
 Operator Name: Wittenmeier  
 Comment: DC 3,7V

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: Electric Field (NOS)  
 Level Unit: dBµV/m

**Subrange**                      **Detectors**                      **IF Bandwidth**                      **Meas. Time**                      **Receiver**  
 30 MHz - 2 GHz                      QuasiPeak                      120 kHz                      15 s                      Receiver

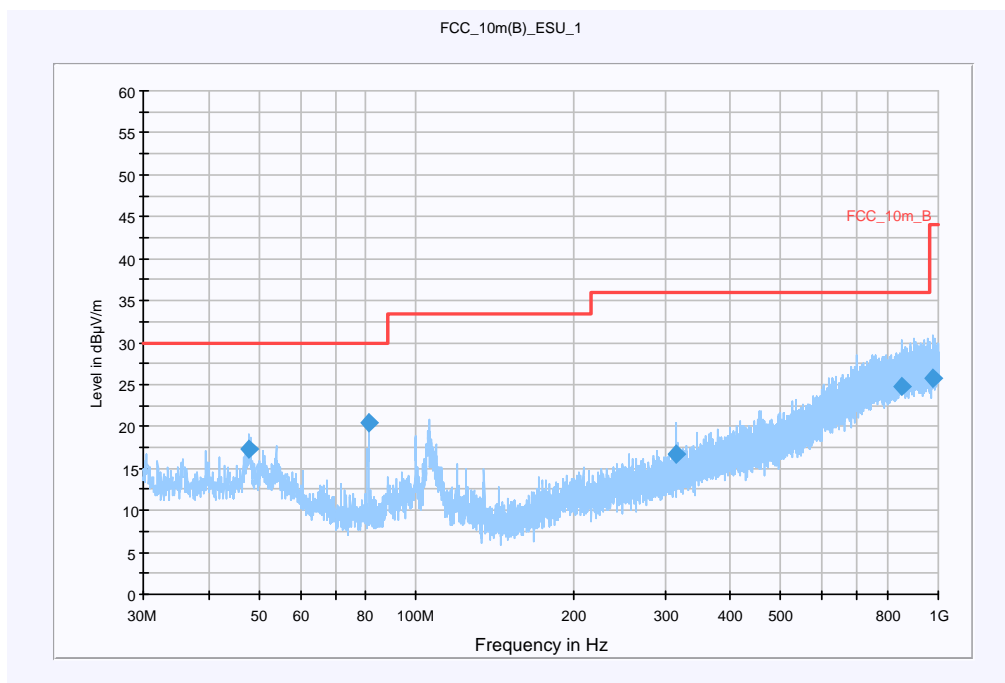

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
47.775180	17.3	15000.000	120.000	98.0	V	62.0	13.3	12.7	30.0	
80.996240	20.4	15000.000	120.000	220.0	V	316.0	9.2	9.6	30.0	
314.979340	16.7	15000.000	120.000	124.0	V	236.0	15.0	19.3	36.0	
849.687000	24.8	15000.000	120.000	98.0	V	12.0	24.5	11.2	36.0	
978.283400	25.9	15000.000	120.000	120.0	V	112.0	25.6	18.1	44.0	

**Hardware Setup: EMI radiated\Electric Field (NOS)\_ESU - [EMI radiated]**

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: ESU [ESU 26]  
@ GPIB0 (ADR 20), SN 100037/026, FW 4.43

Signal Path: without Notch  
FW 1.0


Antenna: VULB 9163  
SN 9163-295, FW ---  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table: Cable\_EN\_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical polarization

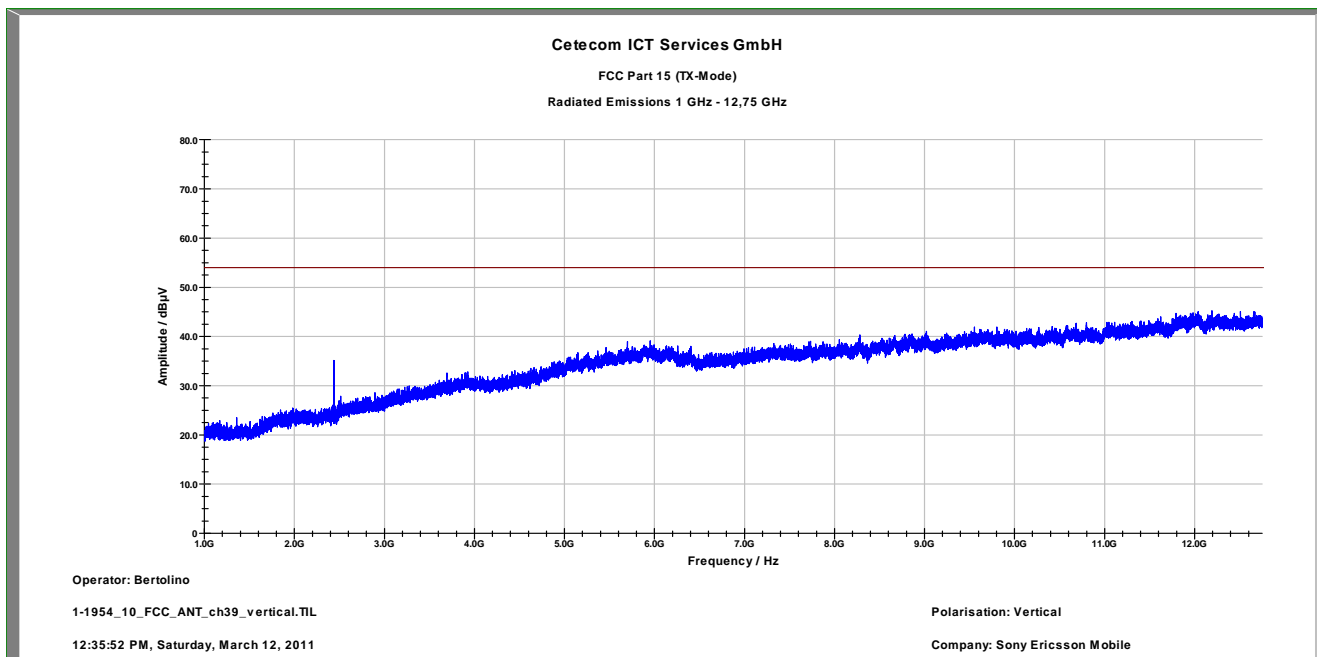

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 1 GHz to 12.75 GHz, horizontal polarization

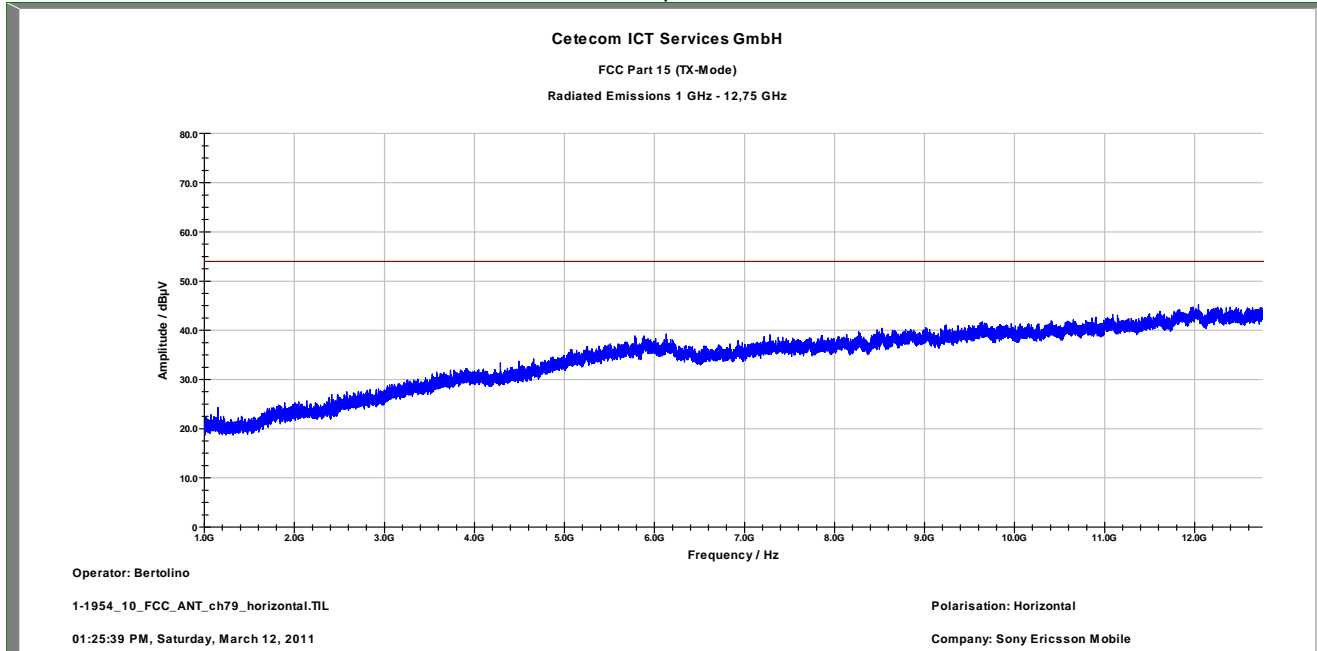

The carrier signal is notched with a 2.4 GHz band rejection filter.



**Plot 8:** Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

**CETECOM ICT Services GmbH**


**Common Information**

EUT: AAD-3880100-BV  
 Serial Number: CB5A1CGN8C  
 Test Description: FCC part 15 C  
 Operating Conditions: BT TX ch.79  
 Operator Name: Wittenmeier  
 Comment: DC 3,7V

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: Electric Field (NOS)  
 Level Unit: dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

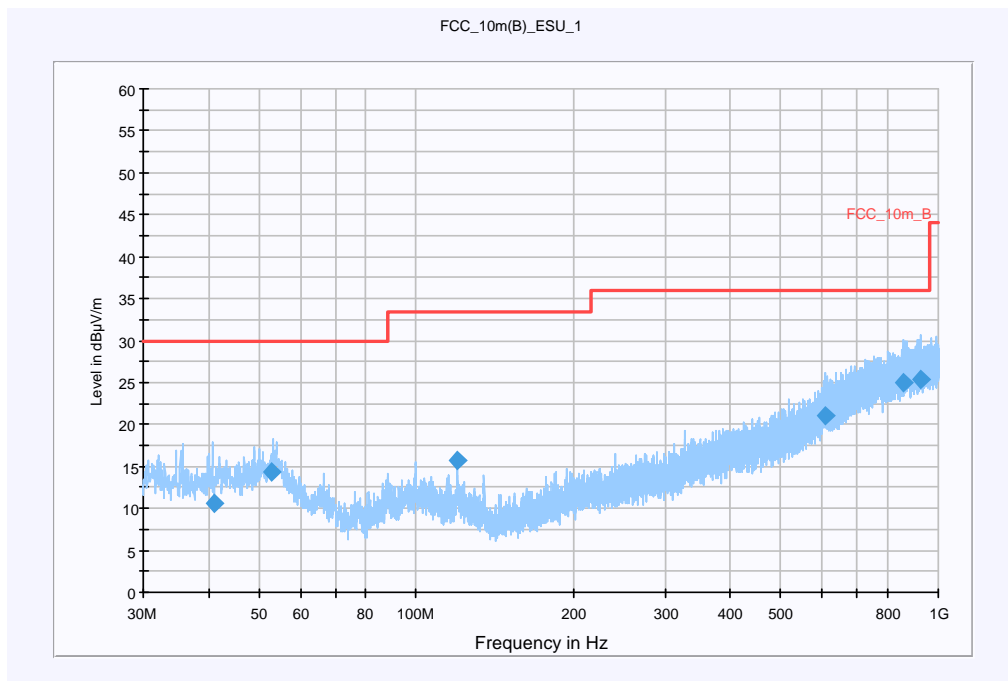

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
41.052320	10.6	15000.000	120.000	147.0	V	136.0	13.4	19.4	30.0	
52.971600	14.4	15000.000	120.000	98.0	V	316.0	13.1	15.6	30.0	
119.984360	15.8	15000.000	120.000	126.0	V	136.0	10.2	17.7	33.5	
606.805780	21.0	15000.000	120.000	199.0	H	126.0	20.8	15.0	36.0	
859.283240	24.9	15000.000	120.000	214.0	V	294.0	24.7	11.1	36.0	
...	...	...	...	...	...	...	...	...	...	...

**Hardware Setup: EMI radiated\Electric Field (NOS)\_ESU - [EMI radiated]**

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: ESU [ESU 26]  
@ GPIB0 (ADR 20), SN 100037/026, FW 4.43

Signal Path: without Notch  
FW 1.0


Antenna: VULB 9163  
SN 9163-295, FW ---  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table: Cable\_EN\_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 9: Highest channel, 1 GHz to 12.75 GHz, vertical polarization

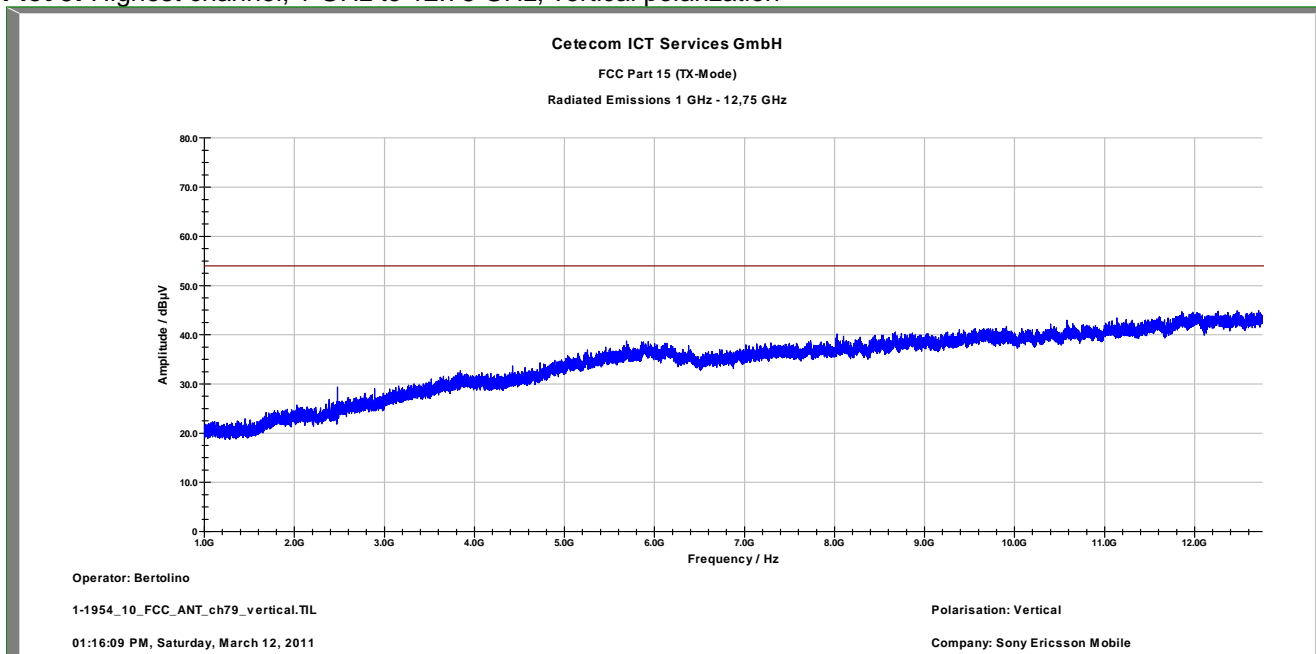

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 10: Highest channel, 1 GHz to 12.75 GHz, horizontal polarization

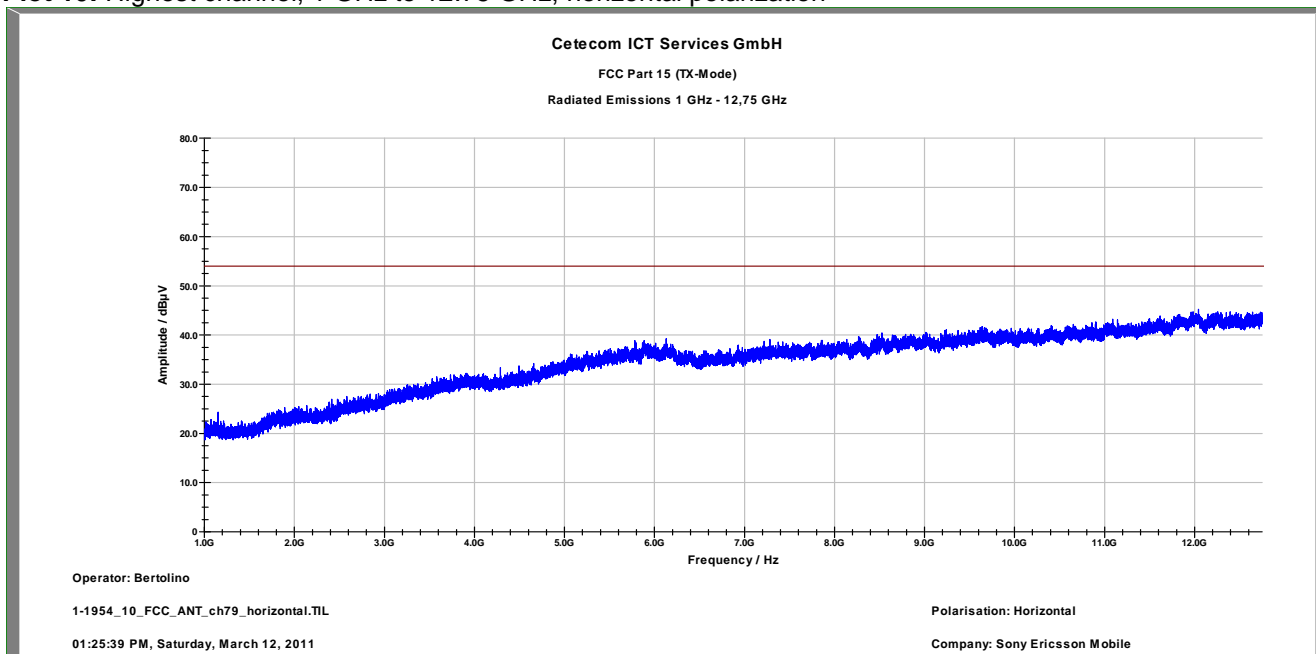

The carrier signal is notched with a 2.4 GHz band rejection filter.

## 9.10 RX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in idle/receive mode.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

### Limits:

FCC		IC
CFR Part 15.109		RSS Gen, Issue 2, 4.10
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
Above 960	54.0	3

### Results:

RX Spurious Emissions Radiated [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	

**Result:** The result of the measurement is passed.

**Plots: RX / Idle – mode**

**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization  
**CETECOM ICT Services GmbH**


**Common Information**

EUT: AAD-3880100-BV  
 Serial Number: CB5A1CGN8C  
 Test Description: FCC part 15 C  
 Operating Conditions: BT RX  
 Operator Name: LANGER  
 Comment: DC 3,7V

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: Electric Field (NOS)  
 Level Unit: dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

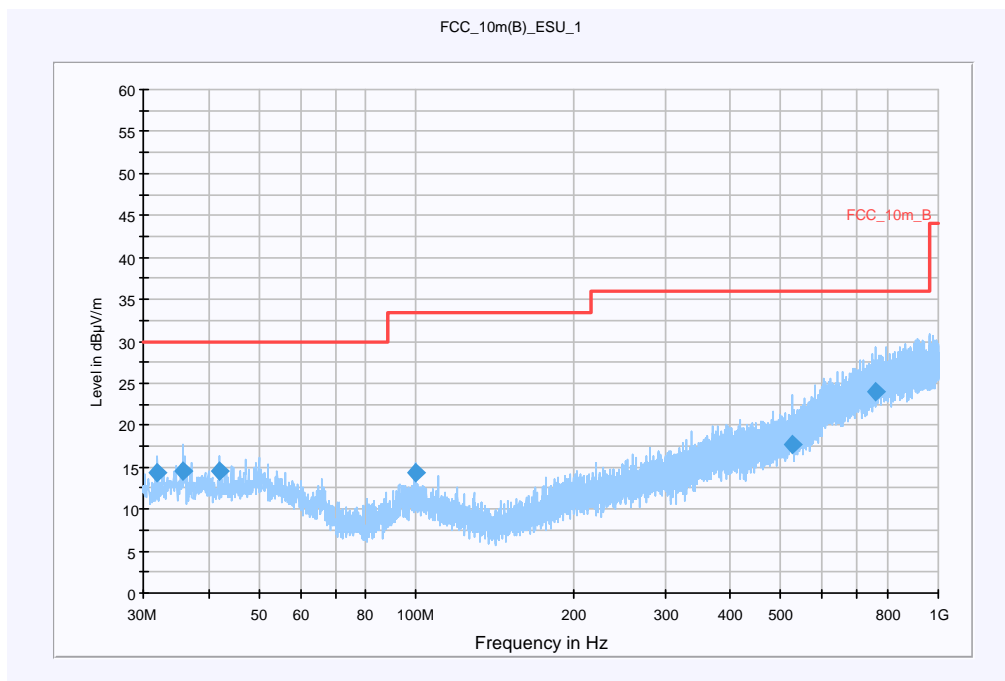

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.999600	14.4	15000.000	120.000	98.0	V	136.0	12.7	15.6	30.0	
35.712220	14.6	15000.000	120.000	120.0	V	316.0	13.1	15.4	30.0	
41.994260	14.5	15000.000	120.000	98.0	V	48.0	13.4	15.5	30.0	
99.989320	14.3	15000.000	120.000	98.0	V	72.0	11.9	19.2	33.5	
524.803640	17.8	15000.000	120.000	212.0	V	307.0	19.0	18.2	36.0	
759.919840	24.0	15000.000	120.000	197.0	H	72.0	23.7	12.0	36.0	

**Hardware Setup: EMI radiated\Electric Field (NOS)\_ESU - [EMI radiated]**

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: ESU [ESU 26]  
@ GPIB0 (ADR 20), SN 100037/026, FW 4.43

Signal Path: without Notch  
FW 1.0


Antenna: VULB 9163  
SN 9163-295, FW ---  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table: Cable\_EN\_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12


Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00


Plot 2: 1 GHz to 12.75 GHz, vertical polarization

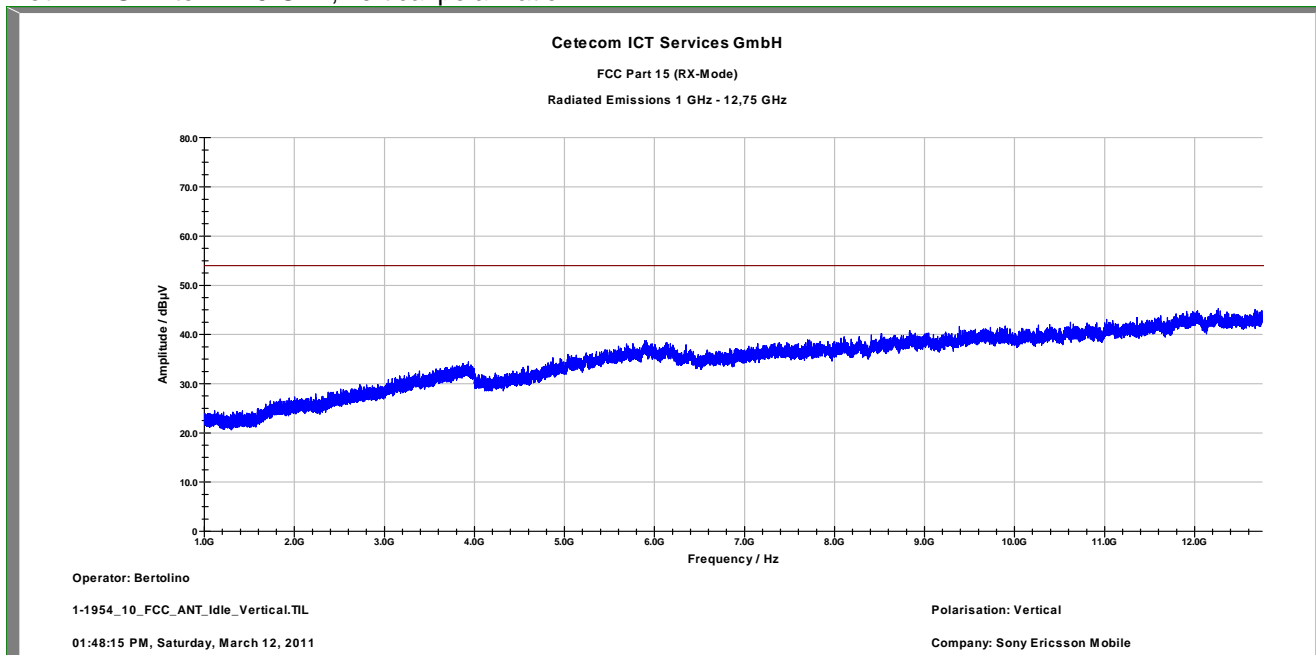


Plot 3: 1 GHz to 12.75 GHz, horizontal polarization

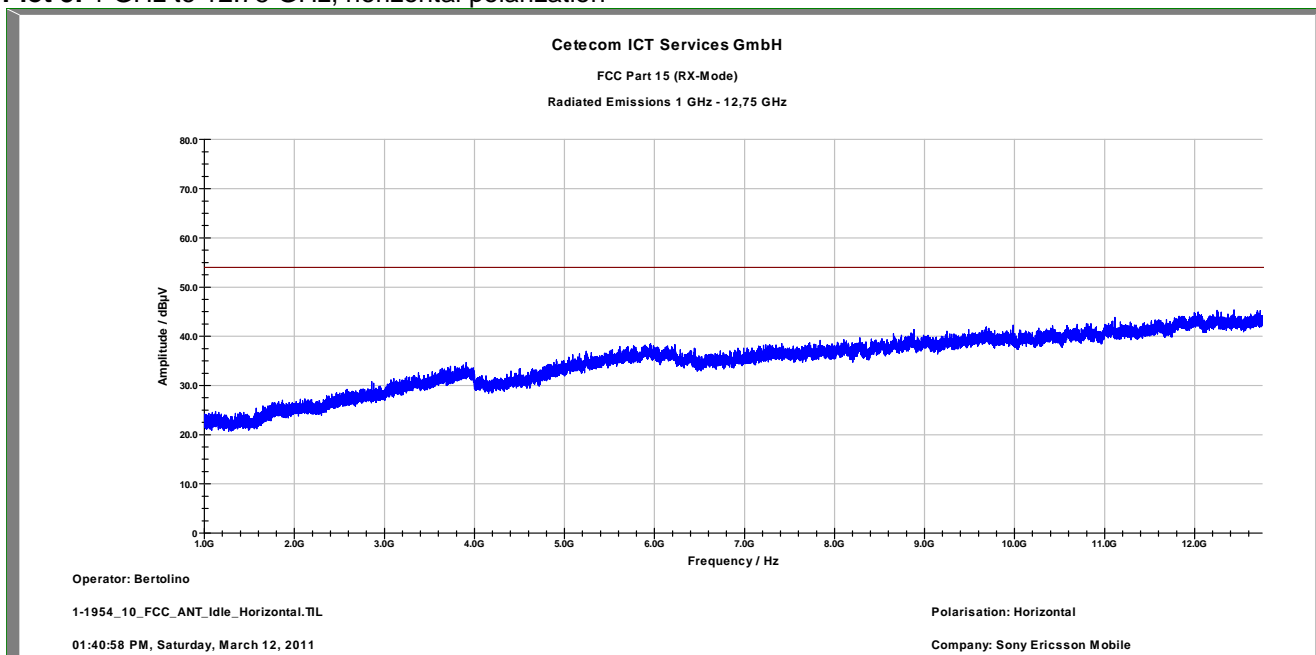

Plot 4: 12 GHz to 25 GHz

 Ref Lvl 87 dBV  
Marker 1 [T1] 17.80961924 GHz  
RBW 1 MHz RF Att 10 dB  
VBW 1 MHz  
SWT 74 ms Unit dBV

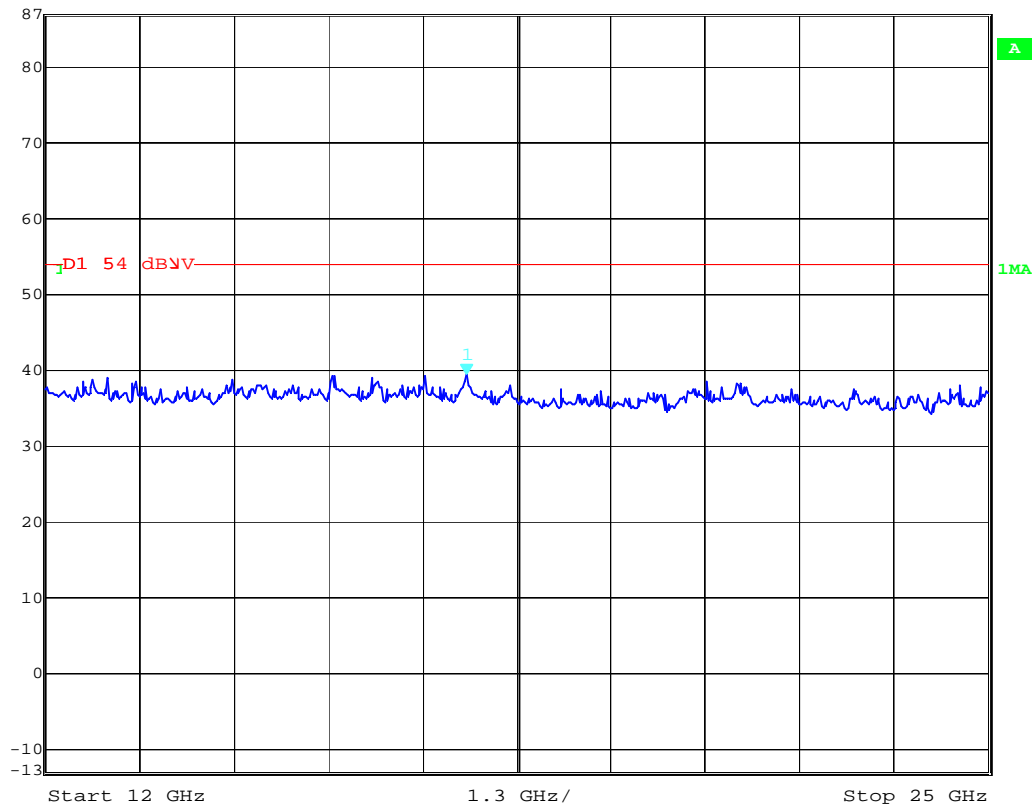

Date: 15.MAR.2011 10:28:54



**9.11 TX spurious emissions radiated < 30 MHz**

**Description:**

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 39. This measurement is representative for all channels and modes. If critical peaks are found channel 00 and channel 78 will be measured too. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

**Measurement:**

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

**Limits:**

FCC		IC
CFR Part 15.209(a)		RSS –Gen
TX Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


**Results:**

TX Spurious Emissions Radiated < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	

**Result:** The result of the measurement is passed.

**Plots: DSSS / ANT+**

**Plot 1: 9 kHz to 30 MHz / valid for all channels**

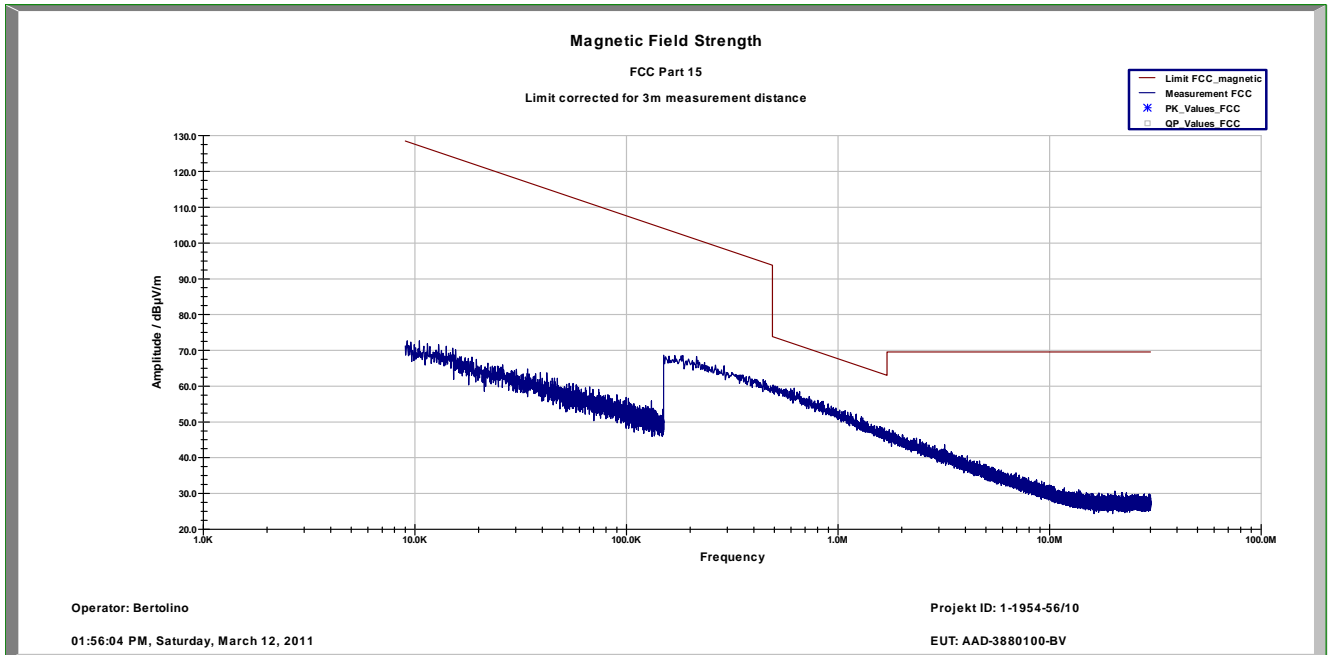

## 9.12 TX spurious emissions conducted < 30 MHz

### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 39. If critical peaks are found channel 00 and channel 78 will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

### Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

### Limits:

FCC		IC	
CFR Part 15.107(a)		ICES-003, Issue 4	
TX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	


\*Decreases with the logarithm of the frequency

### Results:


TX Spurious Emissions Conducted < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	

**Result:** The result of the measurement is passed.


Plot 1: 9 kHz to 30 MHz / phase Line, TX mode

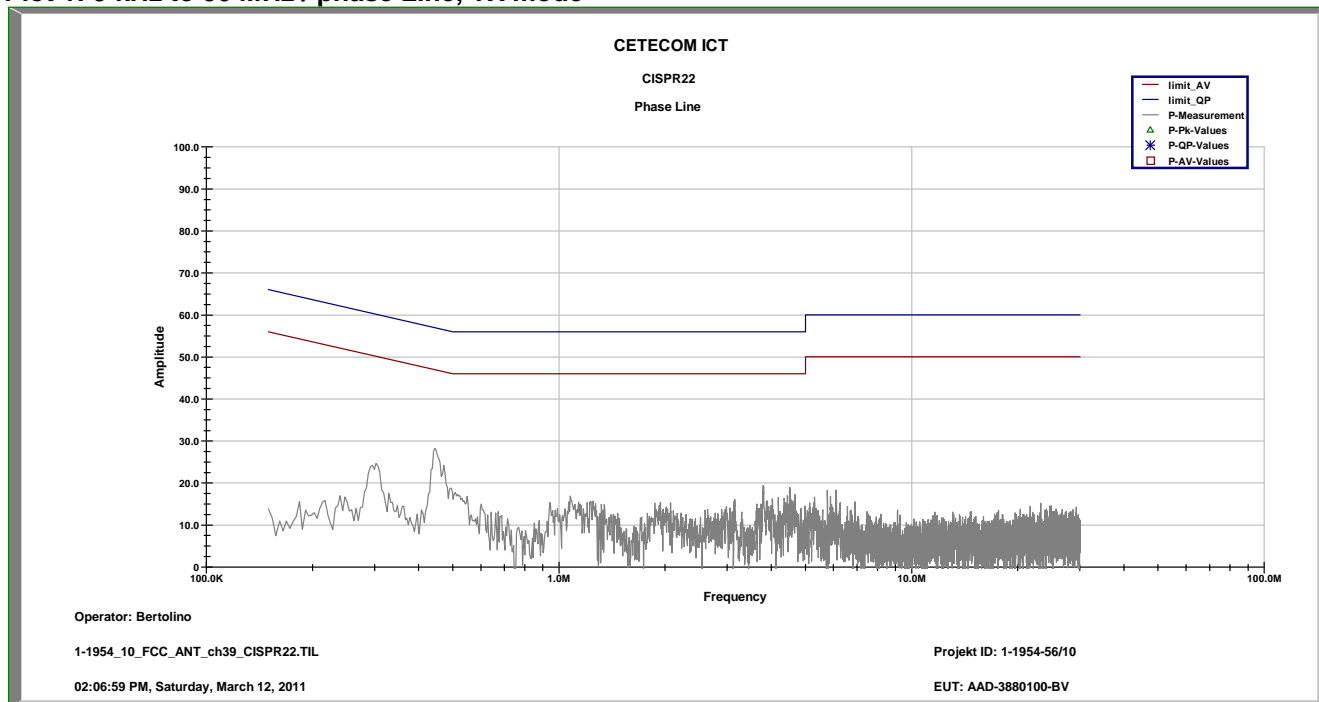


Plot 2: 9 kHz to 30 MHz / neutral Line, TX mode

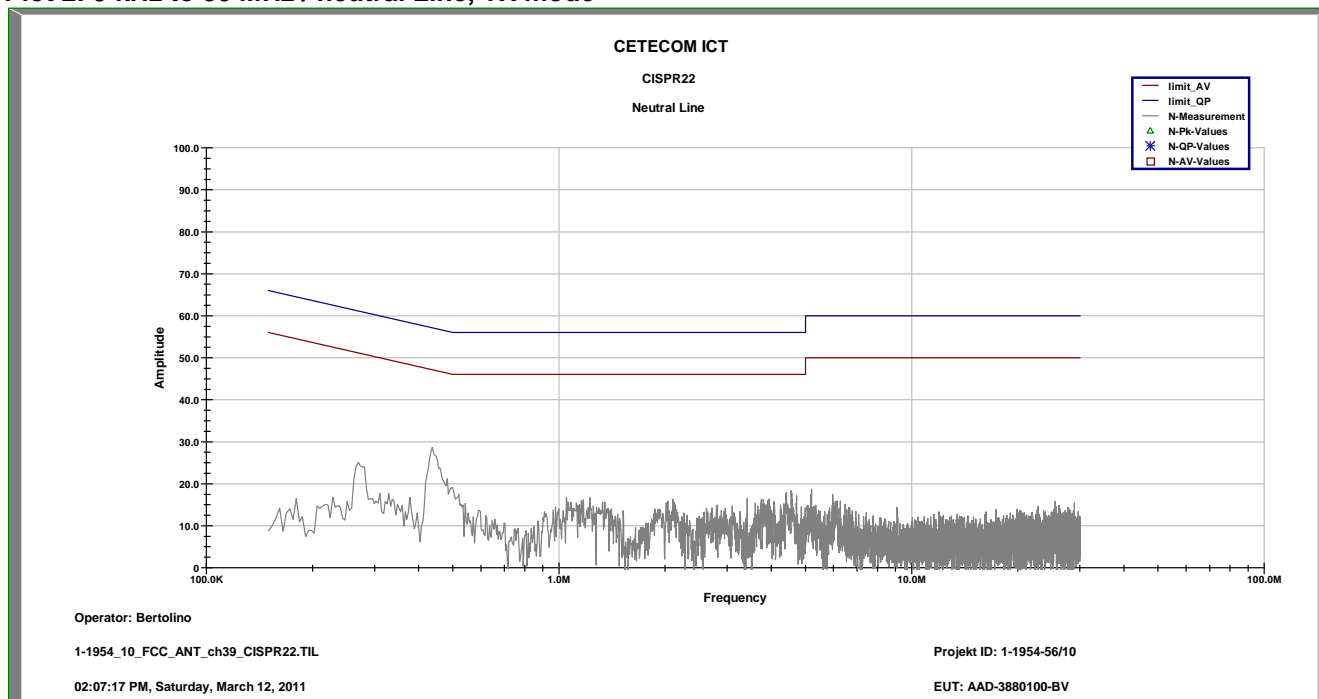

Plot 3: 9 kHz to 30 MHz / phase Line, RX mode

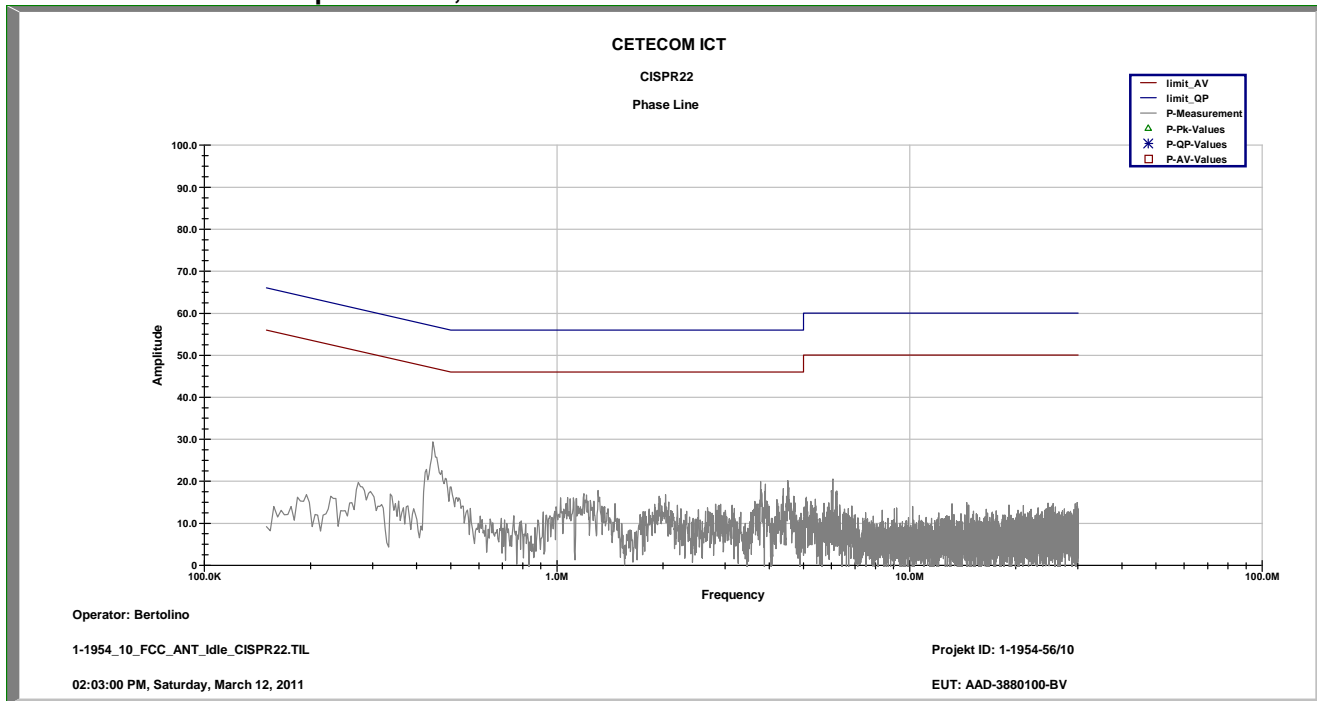

Plot 4: 9 kHz to 30 MHz / neutral Line, RX mode

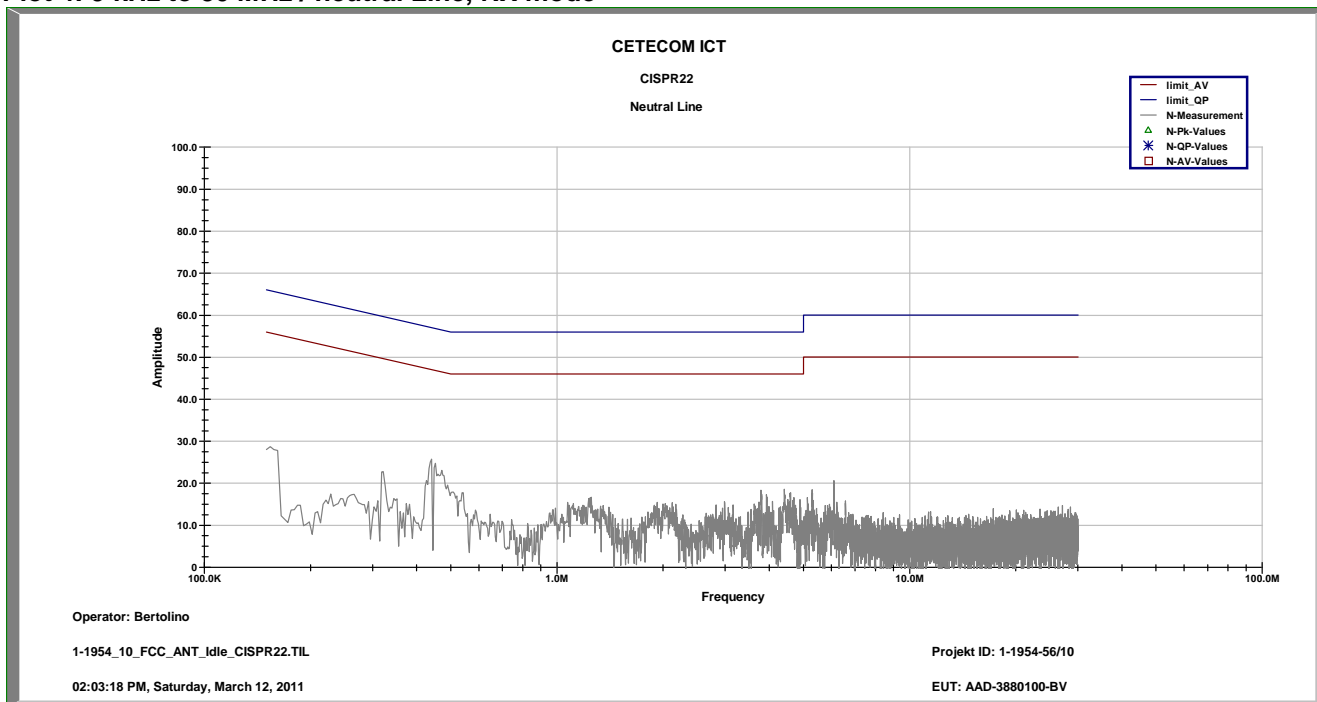

## 10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
2	n. a.	PowerAttenuator	8325	Byrd	1530	300001595	ev		
5	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!		
6	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
7	n. a.	VDE/FCC ANTENNA KIT	HP11965B	HP		300002298	ne		
17	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
18	n. a.	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev		
19	n. a.	Hygro-Thermometer	-/, 5-45°C, 20-100%rF		-/	400000110	izw	04.05.2010	04.05.2011
20	n. a.	Software Option für CMU 200	CMU-K56	R&S	100504	300003765	ne		
21	n. a.	Software Option for CMU 200	CMU-K62	R&S	103402	300003606	ne		
22	n. a.	Software Option for CMU 200	CMU-K64	R&S	102001	300003607	ne		
23	n. a.	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev		
24	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
25	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
26	n. a.	MXG Microwave Analog Signal Generator	N5183A	Agilent Technologies	MY47420220	300003813	k	13.09.2010	13.09.2012
27	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vIKI!	08.09.2010	08.09.2012
29	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	17.12.2008	17.12.2011
30	n. a.	High Pass Filter	VHF-3500+	Mini Circuits	-/	400000193	ne		
31	n. a.	Digital Multimeter	VC 820	Voltcraft	1090451771	400000258	ne		
32	n. a.	Switch / Control Unit	3488A	HP Meßtechnik		300001691	ne		
33	n. a.	Pillar of salt (Salzsäule)		Kontron		300001055	ne		
34	n. a.	Pillar of salt (Salzsäule)				300001341	ne		
37	n. a.	Antenna mast	AM9104	Schwarzbeck		300001278	ne		
38	n. a.	Antenna mast	UAAIp9107	Schwarzbeck		300002478			
39	n. a.	Triple Loop Antenna 9 kHz to 30 MHz	HM020	R&S	832211/003	300002243	ne		
40	62	Inductive Probe for ESH2/ESH3 100 kHz - 30 MHz	HFH2-Z4	R&S	881468/026	300001464	ne		
41	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
44	EMV Sys. 2/5	RF-Preselector	85685A	HP Meßtechnik	2837A00779	300000218	vk		
47	n. a.	Loop Antenna 9	HFH2-Z2	R&S	891847-35	300001169	ne		

		KHz - 30 MHz							
49	n. a.	Power Supply DC	NGPE 40/40	R&S	388	400000078	vIKI!	13.09.2010	13.09.2012
50	n. a.	Power Sensor 50 Ohms, 10 MHz - 18 GHz, 1 nW - 20 mW	NRV-Z1	R&S	833894/011	300002681-0010	k	09.09.2010	09.09.2012
51	n. a.	Hygro-Thermometer	-/, 5-45°C, 20-100%rF	Thies Clima	-/	400000080	k	04.05.2010	04.05.2011
52	n. a.	Vector Signal Generator, 300 kHz to 2.2 GHz	SMIQ03B	R&S	835541/055	300002681-0001	k	25.08.2008	25.08.2011
53	n. a.	Vector Signal Generator, 300 kHz to 2.2 GHz	SMIQ03B	R&S	835541/056	300002681-0002	k	26.08.2008	26.08.2011
54	n. a.	Signal Generator 0.01/2 - 20 GHz, Frequ. Resol. 0.1Hz	SMP02	R&S	835133/011	300002681-0003	k	26.08.2008	26.08.2011
55	n. a.	Dual Channel Power Meter	NRVD	R&S	835430/044	300002681-0004	k	13.09.2010	13.09.2012
56	n. a.	Switch / Control Unit	SSCU	R&S	338864/003	300002681-0006	ne		
57	n. a.	Precision Step Attenuator 50 Ohms, 0 - 2700MHz	RSP	R&S	834500/010	300002681-0007	NK!	26.08.2008	
58	n. a.	Frequency Standard (Rubidium Frequency Standard)	MFS (Rubidium)	R&S (Datum)	002	300002681-0009	Ve	13.09.2010	13.09.2012
59	n. a.	Power Sensor 50 Ohms, 10 MHz - 18 GHz, 1 nW - 20 mW	NRV-Z1	R&S	833894/012	300002681-0013	NK!	26.08.2008	
60	n. a.	Directional Coupler	101020010	Krytar	70215	300002840	ev		
61	n. a.	DC-Blocker	8143	Inmet Corp.	none	300002842	ne		
62	n. a.	Powersplitter	6005-3	Inmet Corp.		300002841	ev		
63	n. a.	Temperature Test Chamber	VT 4002	Heraeus Voetsch	58566046820010	300003019	Ve	28.05.2009	28.05.2011
64	n. a.	CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35	R&S	100185	300003416	vIKI!	13.09.2010	13.09.2012
65	n. a.	Spectrum Analyzer 9kHz to 30GHz - 140...+30dBm	FSP30	R&S	100886	300003575	k	07.09.2010	07.09.2012
66	n. a.	CBT-K57 Software-Option for CBT/CBT32	CBT-K57	R&S	101051	300003910	ne		
67	n. a.	Relaismatrix (FTA)	HP3488A	HP Meßtechnik	2719A15013	300000151	ne		
69	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
70	n. a.	Broadband Horn Antenna EMI	35155P	HP Meßtechnik		300002300	ne		
72	n. a.	VHF Measurement antenna	VHA 9103	Schwarzbeck		300001778	ne		
77	n. a.	Biconical Antenna, 20 MHz - 200 MHz	3104 C	EMCO	9909-4868	300002590	ne		
78	n. a.	Band Reject filter	WRCG1855/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
79	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
80	n. a.	Software Option for CMU 200	CMU-K69	R&S	100109	300003198	ne		
81	n. a.	USB/GPIB Interface	82357A	Meilhaus	MY45468646	300003428	ne		
82	n. a.	EGPRS-Treiber	EGPRS-Treiber für EMQ-100 Software	EMCO	none	300003441	ne		
83	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
85	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B5979	300000210	ne		
86	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	08.01.2010	08.01.2012
87	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
88	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		

89	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
90	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
91	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
92	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	08.01.2010	08.01.2012

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval	*)	next calibration ordered / currently in progress
NK!	Attention: not calibrated		