

Appendix 4. Photographs

This appendix contains the following photographs:

Photo Reference Number	Title
PHT/81726JD01/001	Test configuration for the measurement of Specific Absorption Rate (SAR)
PHT/81726JD01/002	Touch Left
PHT/81726JD01/003	Tilt Left
PHT/81726JD01/004	Touch Right
PHT/81726JD01/005	Tilt Right
PHT/81726JD01/006	Front of EUT Facing Phantom
PHT/81726JD01/007	Rear of EUT Facing Phantom
PHT/81726JD01/008	Left Hand Side of EUT Facing Phantom
PHT/81726JD01/009	Right Hand Side of EUT Facing Phantom
PHT/81726JD01/010	Top of EUT Facing Phantom (WWAN Set up ONLY)
PHT/81726JD01/011	Base of EUT Facing Phantom (WLAN Set up ONLY)
PHT/81726JD01/012	General Set Up of Rear of EUT Facing Phantom with PHF
PHT/81726JD01/013	Front View of EUT
PHT/81726JD01/014	Rear View of EUT
PHT/81726JD01/015	Left Hand Side View of EUT
PHT/81726JD01/016	Right Hand Side View of EUT
PHT/81726JD01/017	Top View of EUT
PHT/81726JD01/018	Base View of EUT
PHT/81726JD01/019	Internal View of EUT (WWAN Sample)
PHT/81726JD01/020	Internal View of EUT (WLAN Sample)
PHT/81726JD01/021	Battery View
PHT/81726JD01/022	PHF View
PHT/81726JD01/023	900 MHz Head Fluid Level
PHT/81726JD01/024	900 MHz Body Fluid Level
PHT/81726JD01/025	1900 MHz Head Fluid Level
PHT/81726JD01/026	1900 MHz Body Fluid Level
PHT/81726JD01/027	2450 MHz Head Fluid Level
PHT/81726JD01/028	2450 MHz Body Fluid Level

PHT/81726JD01/001: Test configuration for the measurement of Specific Absorption Rate (SAR)



PHT/81726JD01/002: Touch Left



PHT/81726JD01/003: Tilt Left



PHT/81726JD01/004: Touch Right



PHT/81726JD01/005: Tilt Right




PHT/81726JD01/006: Front of EUT Facing Phantom



PHT/81726JD01/007: Rear of EUT Facing Phantom



PHT/81726JD01/008: Left Hand Side of EUT Facing Phantom

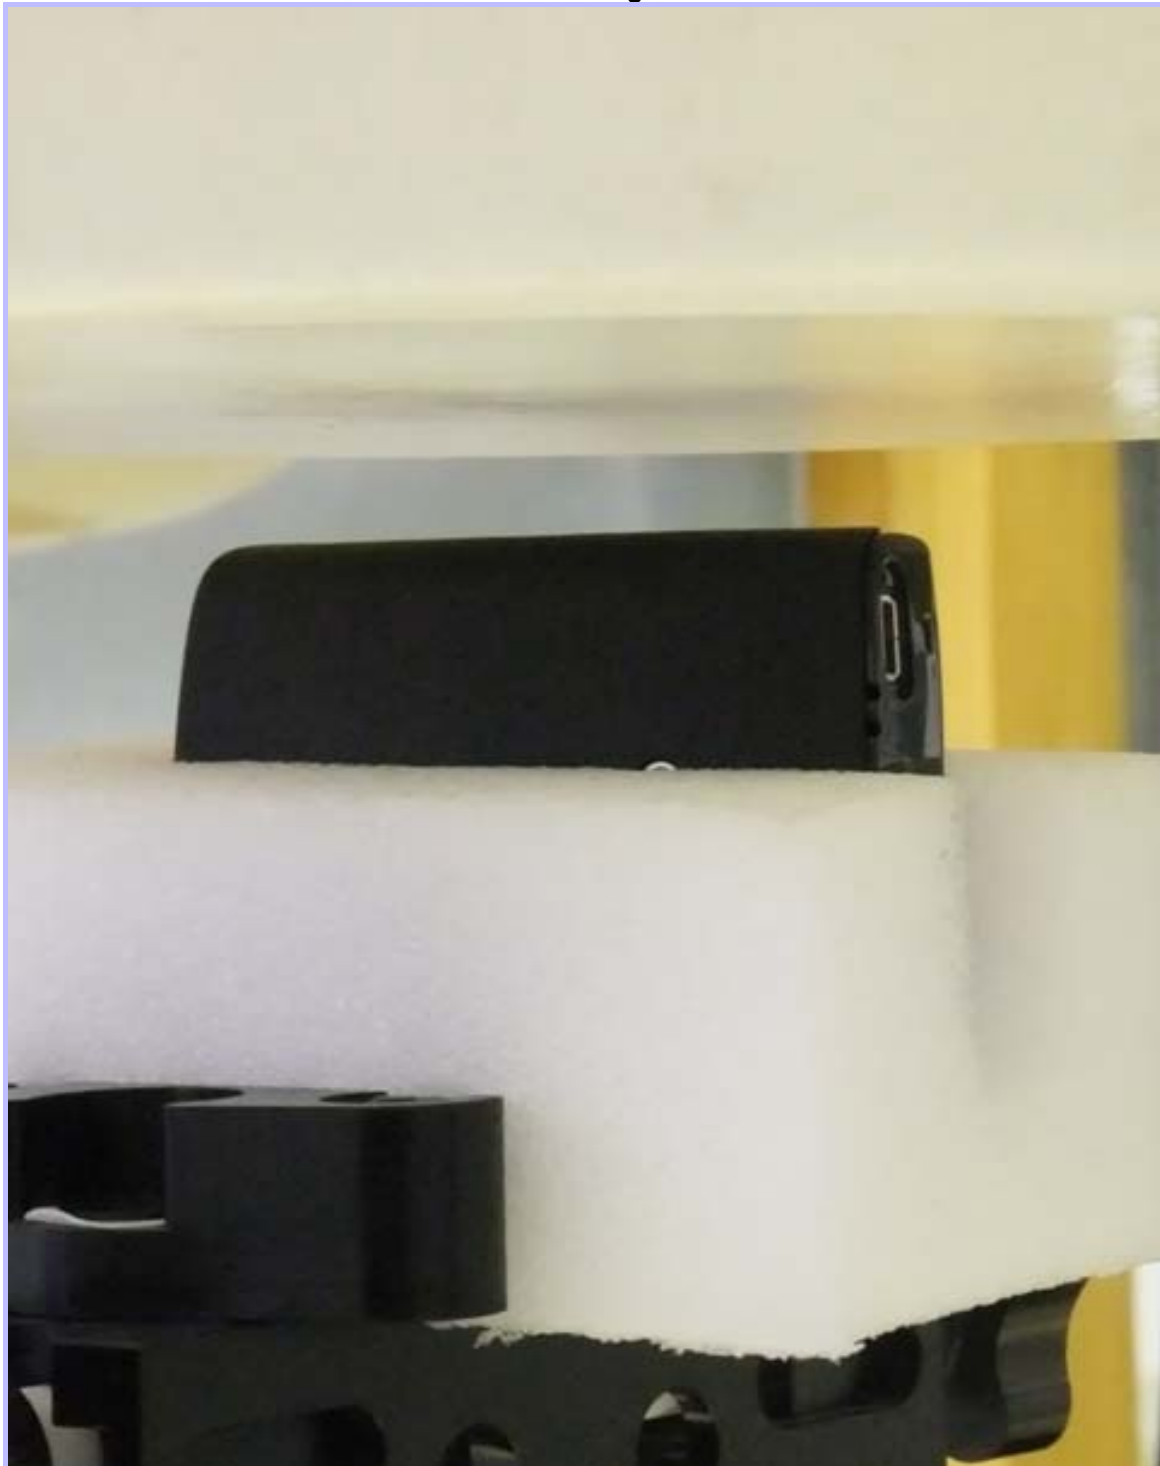


PHT/81726JD01/009: Right Hand Side of EUT Facing Phantom



PHT/81726JD01/010: Top of EUT Facing Phantom (WWAN Set up ONLY)



PHT/81726JD01/011: Base of EUT Facing Phantom (WLAN Set up ONLY)

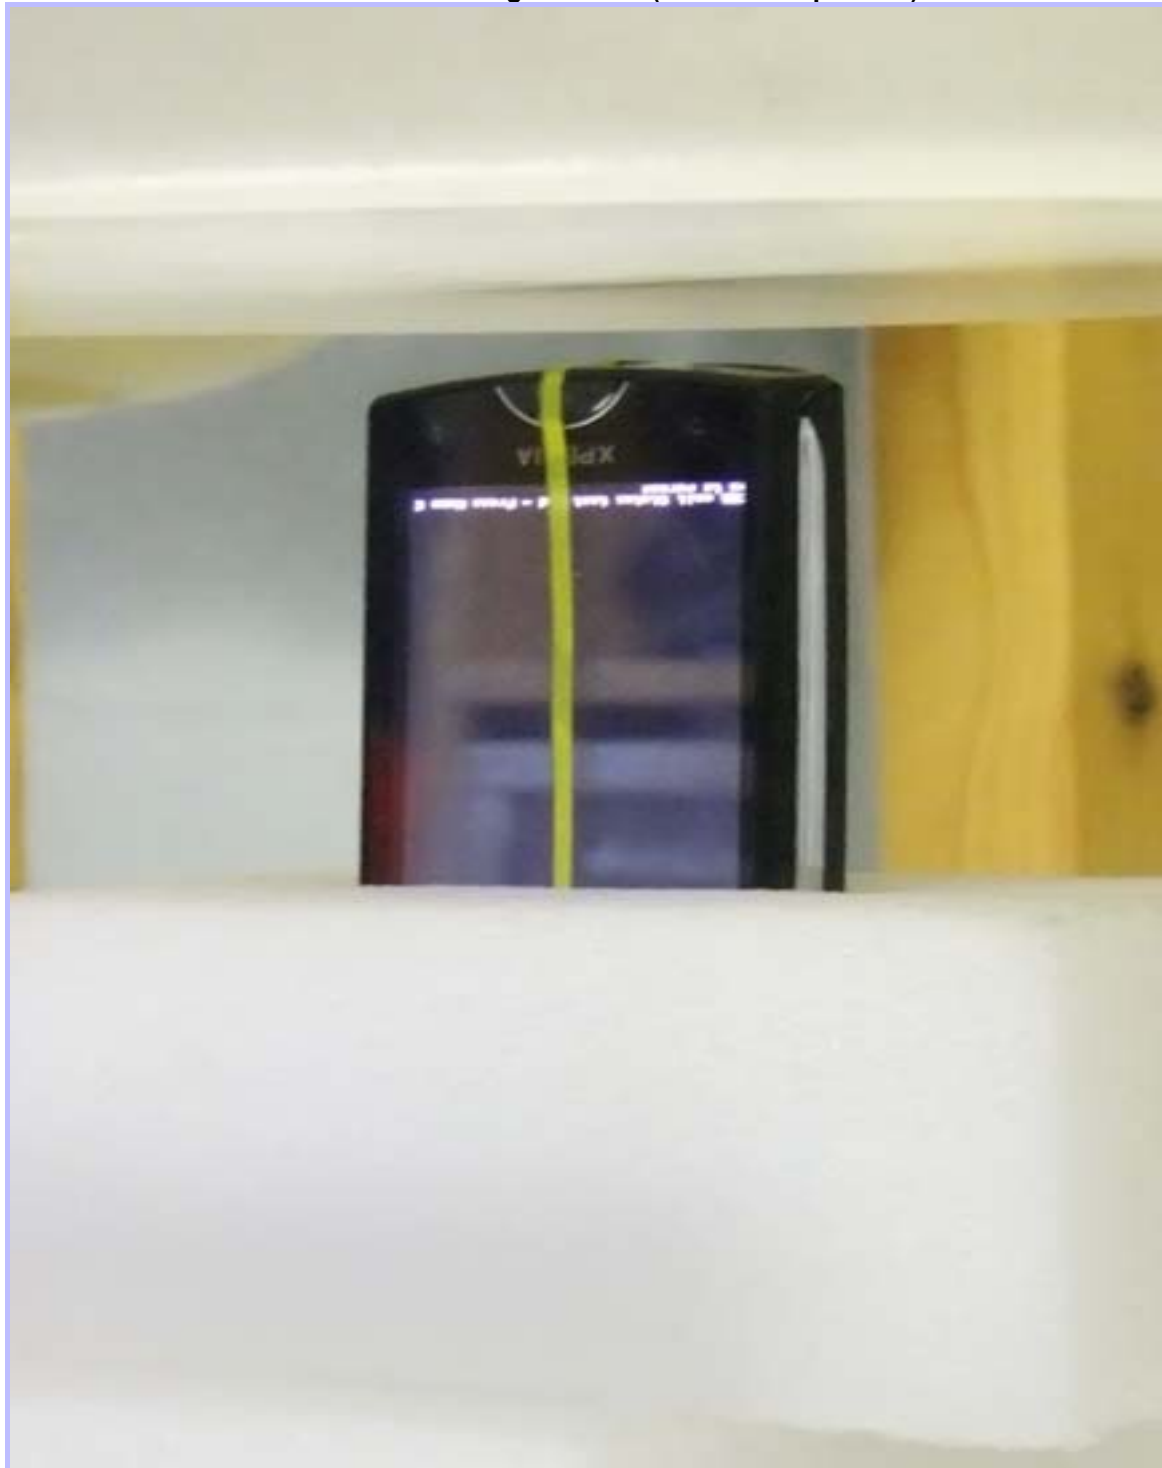

PHT/81726JD01/012: General Set Up of Rear of EUT Facing Phantom with PHF



PHT/81726JD01/013: Front View of EUT



PHT/81726JD01/014: Rear View of EUT



PHT/81726JD01/015: Left Hand Side View of EUT



PHT/81726JD01/016: Right Hand Side View of EUT



PHT/81726JD01/017: Top View of EUT



PHT/81726JD01/018: Base View of EUT



PHT/81726JD01/019: Internal View of EUT (WWAN Sample)



PHT/81726JD01/020: Internal View of EUT (WLAN Sample)




PHT/81726JD01/021: Battery View




PHT/81726JD01/022: PHF View




PHT/81726JD01/023: 900 MHz Head Fluid Level

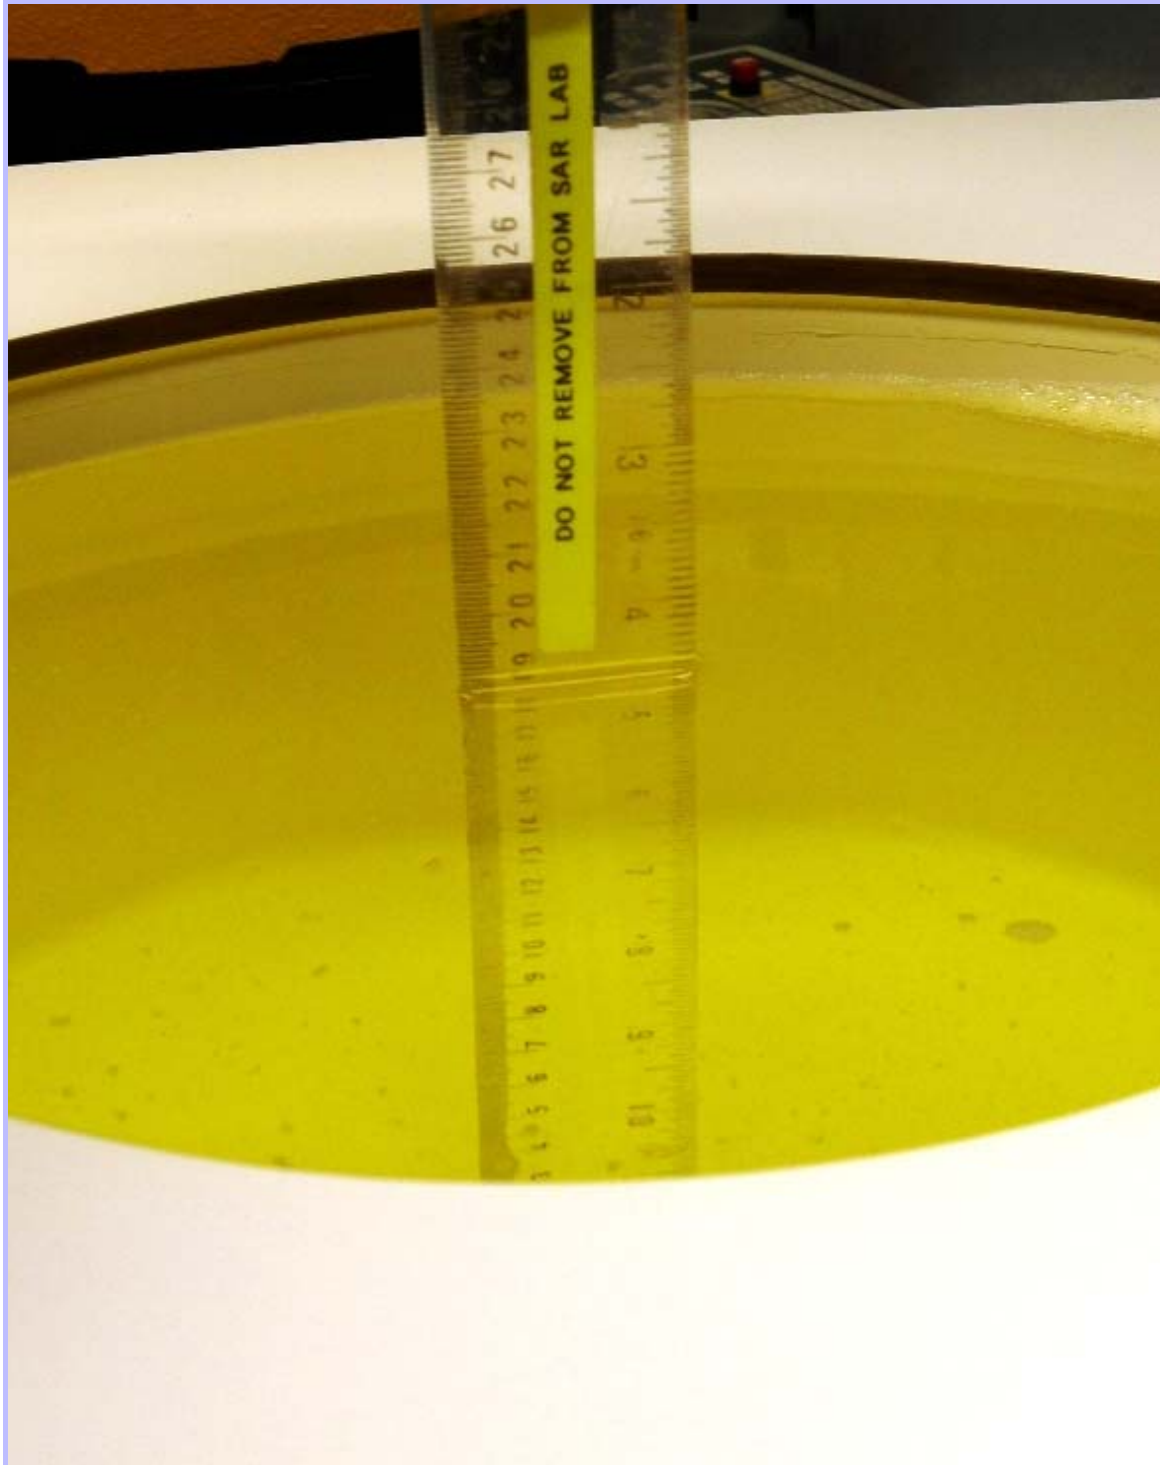

PHT/81726JD01/024: 900 MHz Body Fluid Level

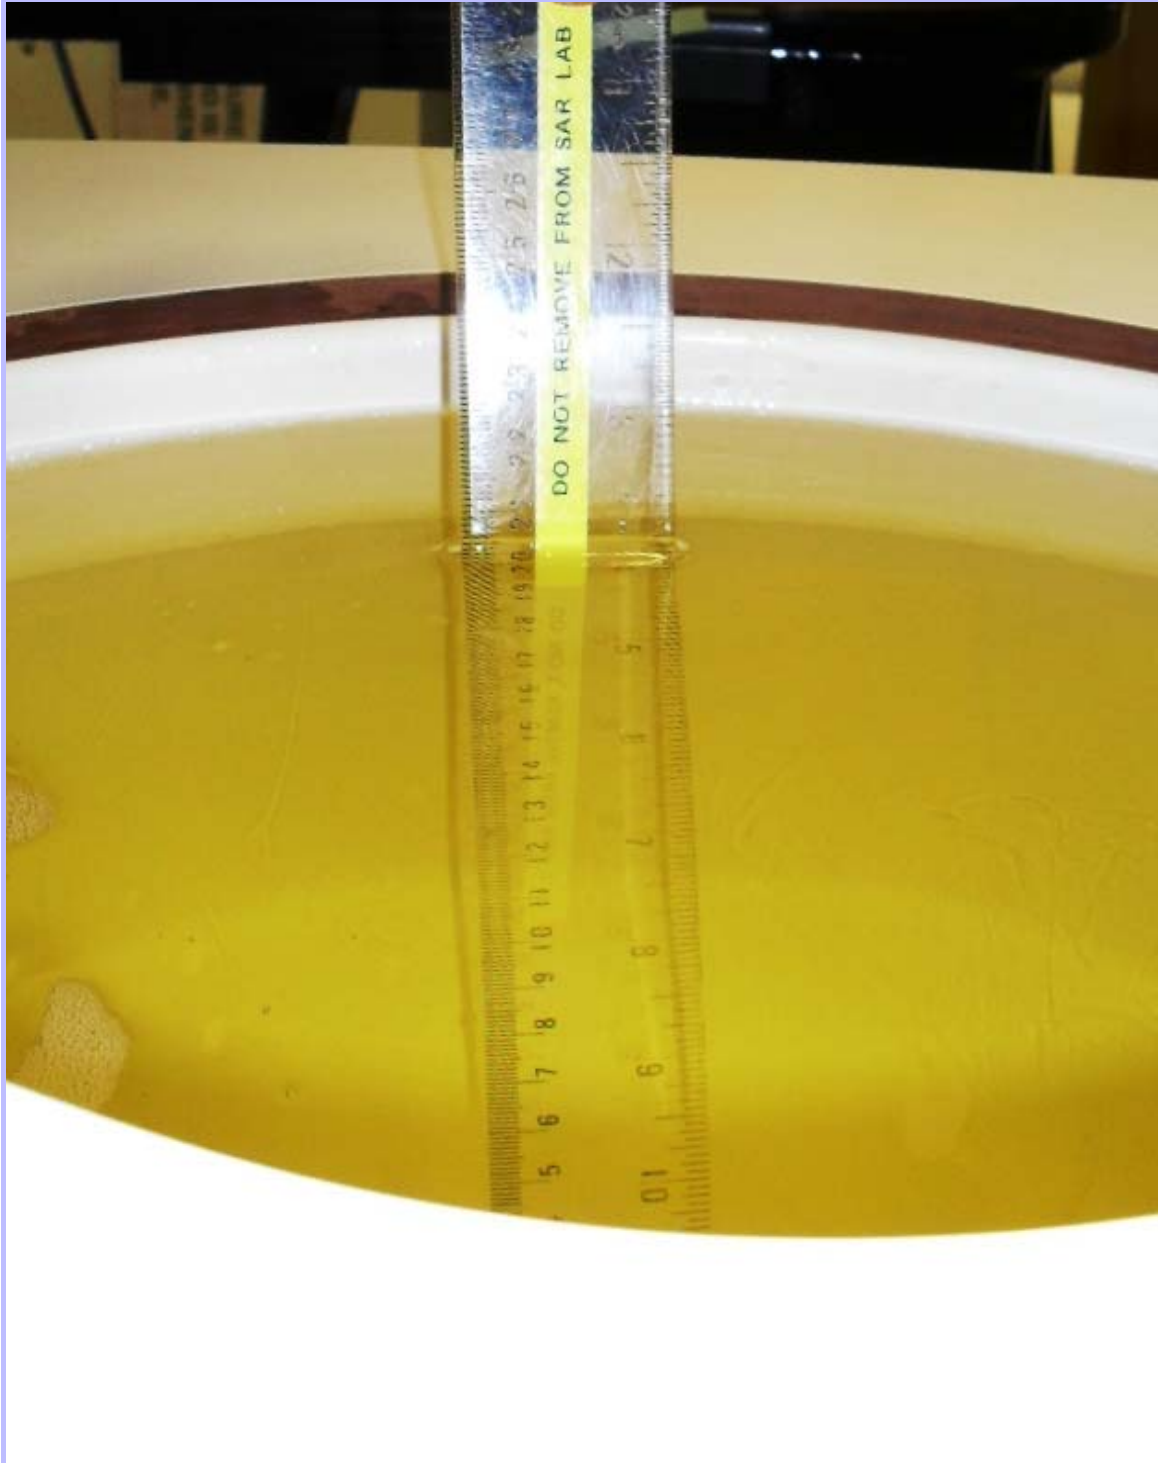


PHT/81726JD01/025: 1900 MHz Head Fluid Level

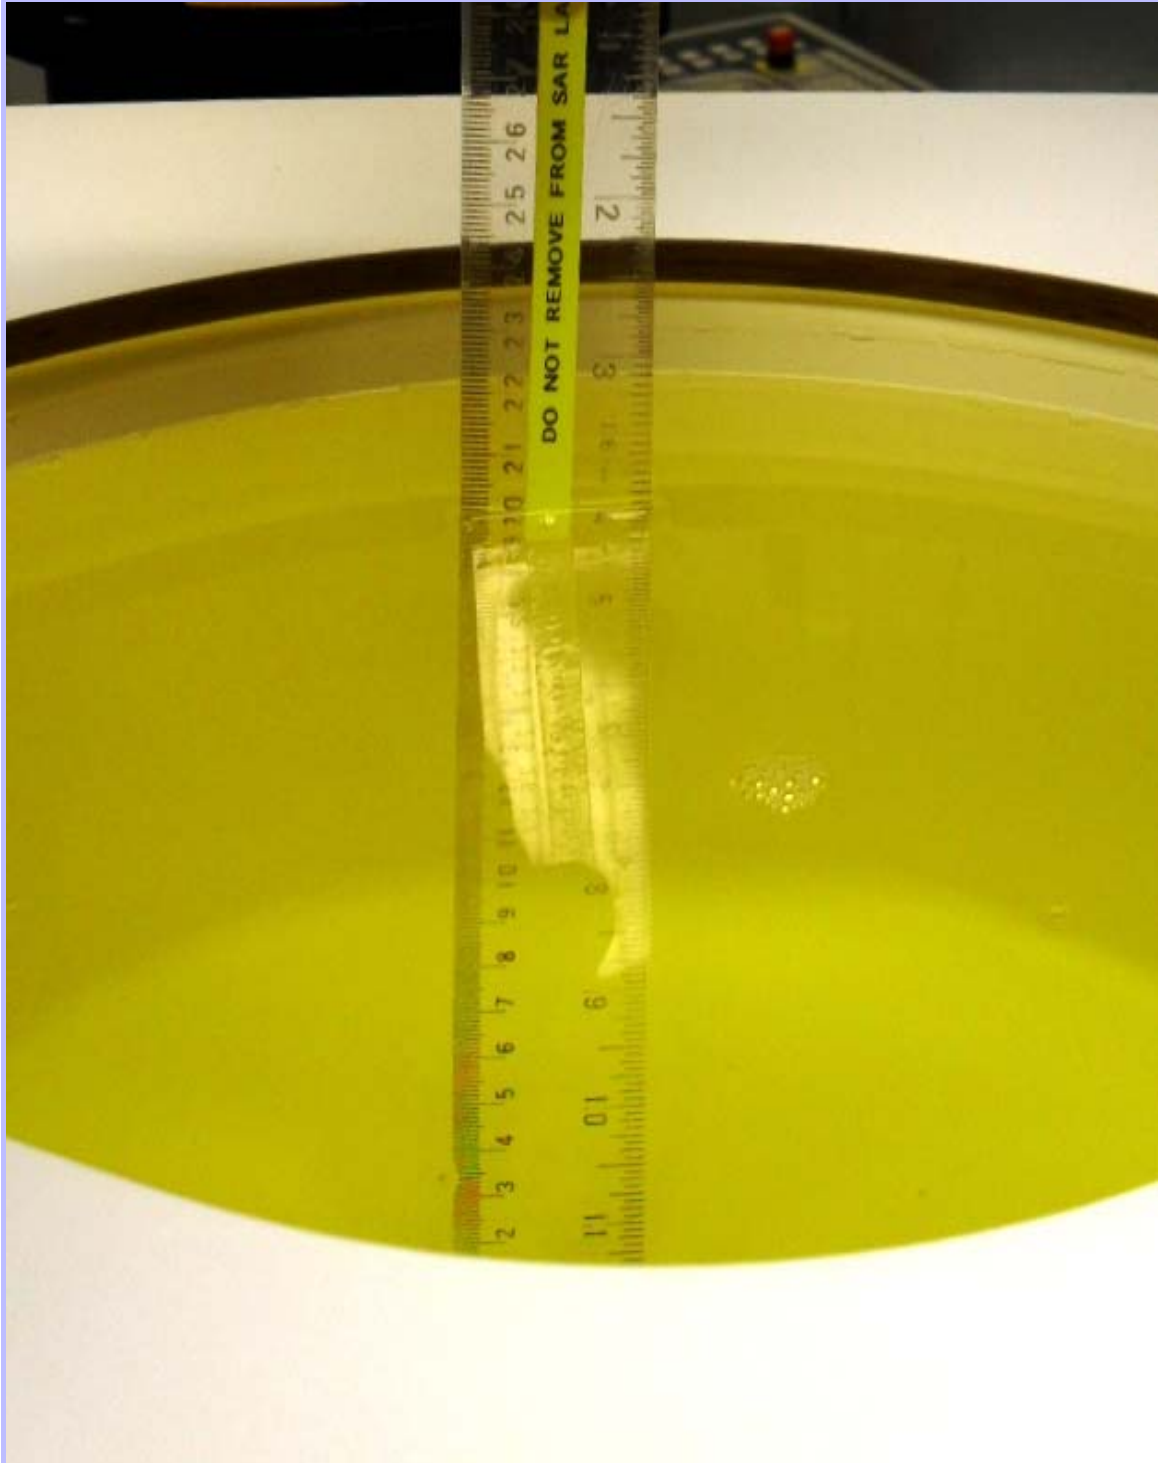


PHT/81726JD01/026: 1900 MHz Body Fluid Level



PHT/81726JD01/027: 2450 MHz Head Fluid Level

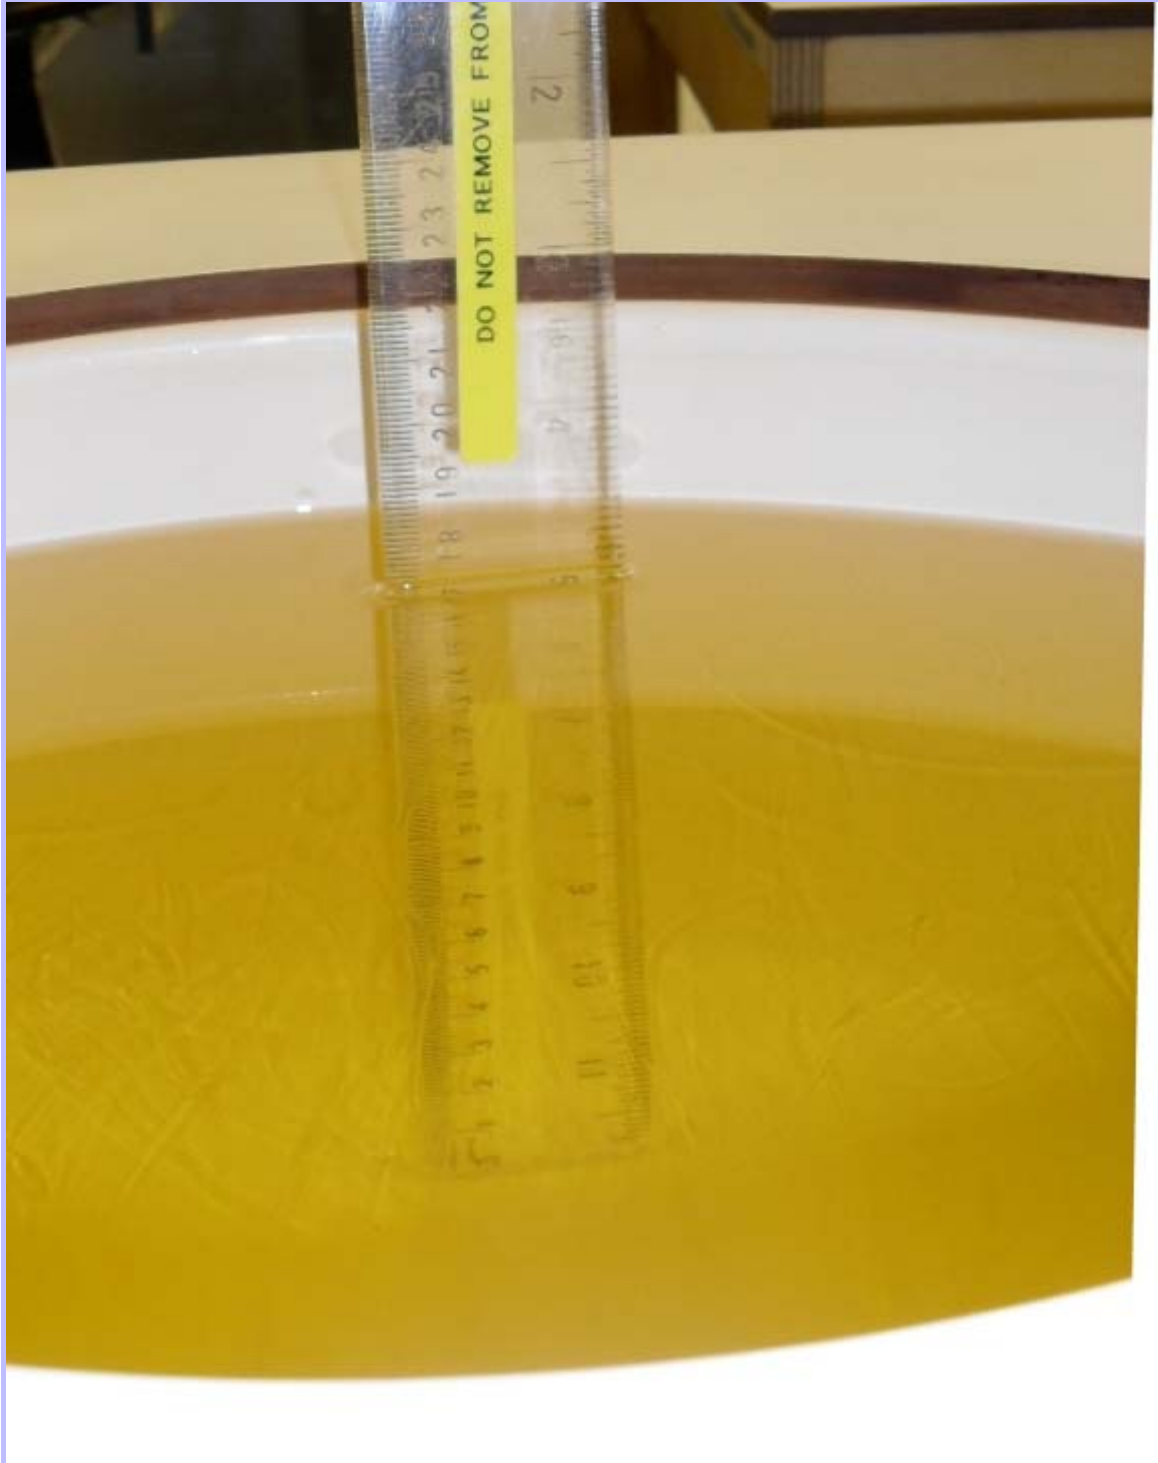

PHT/81726JD01/028: 2450 MHz Body Fluid Level

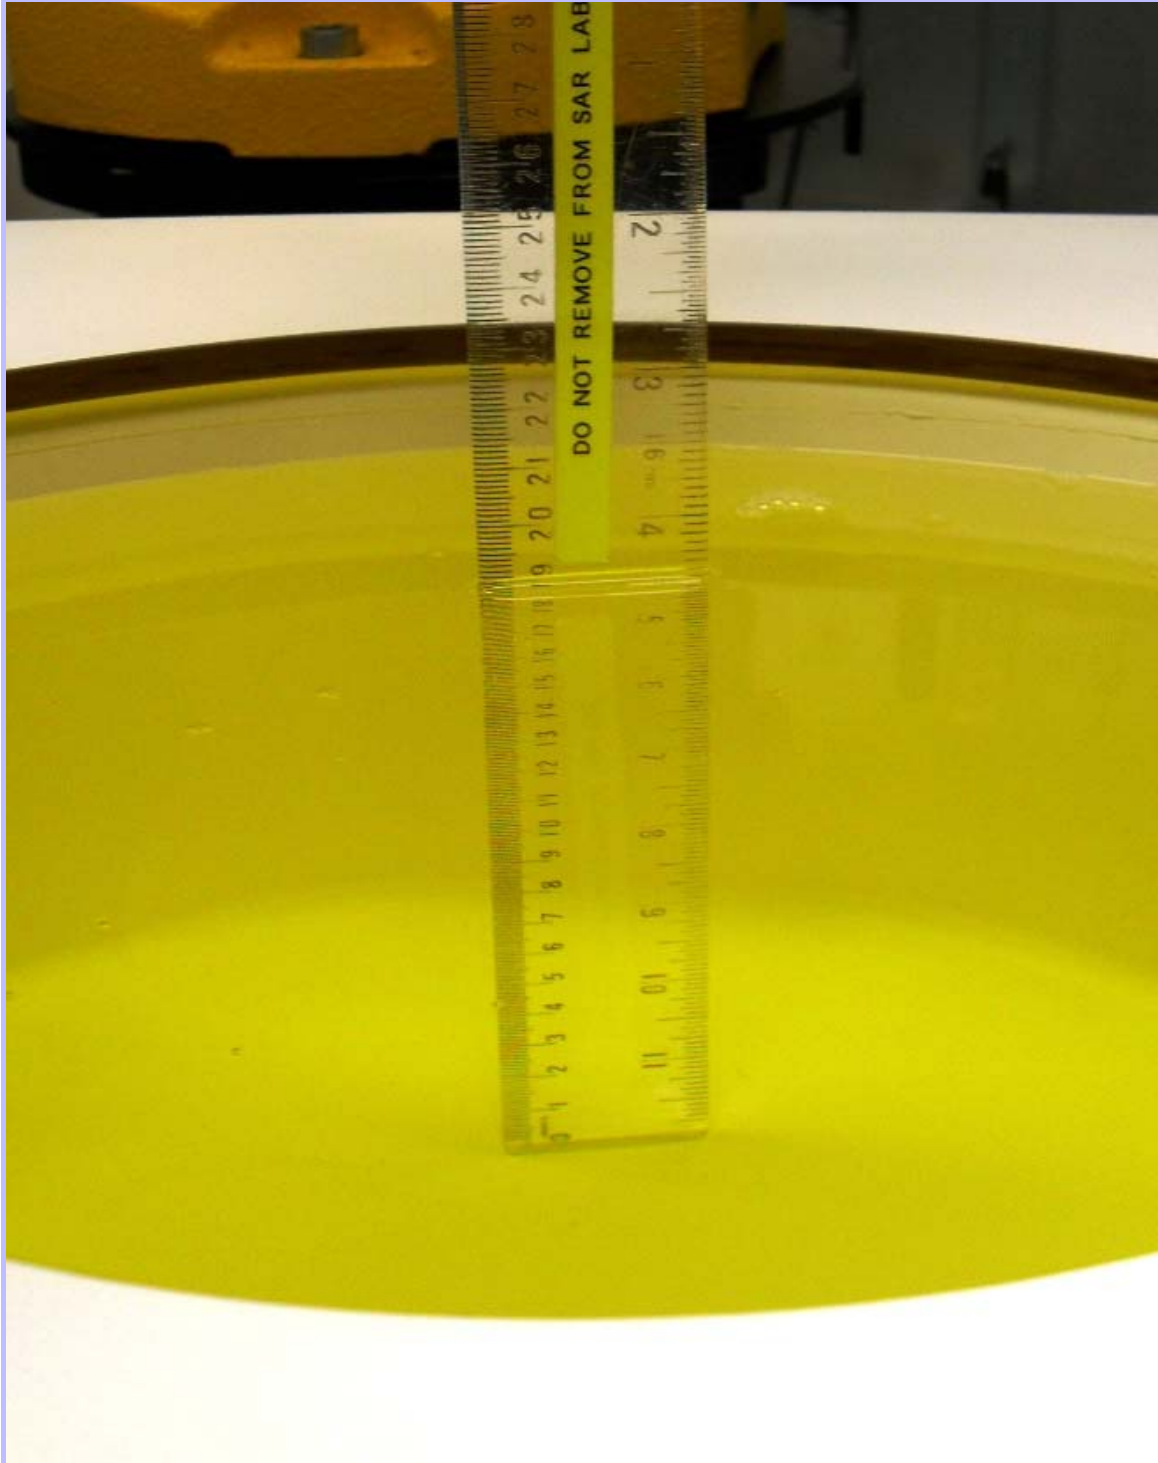

Appendix 5. Validation of System

Prior to the assessment, the system was verified in the flat region of the phantom. A 900MHz, 1900MHz and a 2450MHz dipole was used. A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 5\%$ for the 900MHz, 1900MHz and a 245MHz dipole.

The applicable verification normalised to 1 Watt.

Date: 04/05/2011

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	900	23.0°C	22.1°C	ϵ_r	41.50	41.18	-0.77	5.00
				σ	0.97	0.93	-4.20	5.00
				1g SAR	11.00	11.28	2.55	5.00
				10g SAR	7.01	7.28	3.85	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
128	Low	824.2	ϵ_r	41.60
			σ	0.88
190	Middle	836.6	ϵ_r	41.60
			σ	0.89
251	High	848.8	ϵ_r	41.50
			σ	0.90

Date: 13/05/2011

Validation Dipole and Serial Number: D900V2; SN: 185

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	900	23.0°C	22.4°C	ϵ_r	55.00	53.27	-3.14	5.00
				σ	1.05	1.06	0.69	5.00
				1g SAR	11.00	11.32	2.91	5.00
				10g SAR	7.16	7.32	2.23	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
128	Low	824.2	ϵ_r	53.60
			σ	1.01
190	Middle	836.6	ϵ_r	53.50
			σ	1.02
251	High	848.8	ϵ_r	53.50
			σ	1.03

Validation of System (Continued)								
Date 11/05/2011								
Validation Dipole and Serial Number: D1900V2; SN: 540								
Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	1900	23.0°C	21.0°C	ϵ_r	40.00	39.26	-1.86	5.00
				σ	1.40	1.43	2.28	5.00
				1g SAR	40.30	40.80	1.24	5.00
				10g SAR	21.00	21.08	0.38	5.00
Dielectrics for Frequencies Tested								
Channel Number	Channel Description	Frequency (MHz)	Parameters					
512	Low	1850.2	ϵ_r	39.40				
			σ	1.40				
661	Middle	1880.0	ϵ_r	39.30				
			σ	1.42				
810	High	1909.8	ϵ_r	39.20				
			σ	1.45				

Validation of System (Continued)**Date: 11/05/2011****Validation Dipole and Serial Number: D1900V2; SN: 540**

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	1900	23.0 °C	22.0 °C	ϵ_r	53.30	51.38	-3.60	5.00
				σ	1.52	1.56	2.42	5.00
				1g SAR	40.70	42.00	3.19	5.00
				10g SAR	21.60	21.80	0.93	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
512	Low	1850.2	ϵ_r	51.50
			σ	1.52
661	Middle	1880.0	ϵ_r	51.40
			σ	1.54
810	High	1909.8	ϵ_r	51.40
			σ	1.57

Date: 12/05/2011**Validation Dipole and Serial Number: D1900V2; SN: 540**

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	1900	23.0 °C	22.0 °C	ϵ_r	53.30	51.38	-3.60	5.00
				σ	1.52	1.56	2.42	5.00
				1g SAR	40.70	41.20	1.23	5.00
				10g SAR	21.60	21.44	-0.74	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
512	Low	1850.2	ϵ_r	51.50
			σ	1.52
661	Middle	1880.0	ϵ_r	51.40
			σ	1.54
810	High	1909.8	ϵ_r	51.40
			σ	1.57

Validation of System (Continued)

Date: 16/05/2011

Validation Dipole and Serial Number: D2450V2; SN: 725

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	2450	23.0 °C	22.1 °C	ϵ_r	39.20	39.60	1.02	5.00
				σ	1.80	1.85	2.70	5.00
				1g SAR	52.90	54.24	2.53	5.00
				10g SAR	24.70	24.70	0.01	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
1	Low	2412.0	ϵ_r	39.70
			σ	1.81
6	Middle	2437.0	ϵ_r	39.60
			σ	1.84
11	High	2462.0	ϵ_r	39.60
			σ	1.87

Date: 17/05/2011

Validation Dipole and Serial Number: D2450V2; SN: 725

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	2450	23.0 °C	22.2 °C	ϵ_r	52.70	50.80	-3.60	5.00
				σ	1.95	2.02	3.79	5.00
				1g SAR	51.90	52.00	0.19	5.00
				10g SAR	24.10	23.92	-0.75	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
1	Low	2412.0	ϵ_r	50.90
			σ	1.98
6	Middle	2437.0	ϵ_r	50.80
			σ	2.01
11	High	2462.0	ϵ_r	50.80
			σ	2.04

Validation of System (Continued)

The version of DASY system used by RFI for SAR measurements is v4.7.

The SAR probe for the DASY v4.4 and higher has a validity of +/- 100 MHz from the spot frequency at which the system is calibrated.

The SAR probe was calibrated at 750 MHz (covering 650 MHz to 850 MHz) and 900 MHz (covering 800 MHz to 1000 MHz) for the Head and Body tissue with both the 750 MHz and 900 MHz calibration parameters imported on the same data file of the DASY4 system.

For GSM850 (head and body SAR test) the DASY4 v4.7 system uses the conversion factor for 750 MHz calibration as this covers the frequency range of 650 MHz to 850 MHz. The SAR system uses the 900 MHz conversion factor which is valid from 800 MHz to 1000 MHz for the system validation performed at 900 MHz.

The 900 MHz validation is applicable for the 850 band as this is within 50 MHz of the of the centre frequency.

Appendix 6. Simulated Tissues

The body mixture consists of de-ionised water, Polysorbate 20 and salt. Visual inspection is made to ensure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

ingredient	Frequency
	835/850/900 MHz Head
De-Ionized Water	52.87
Polysorbate 20 (Tween 20)	46.10
Salt	1.03

Ingredient	Frequency
	835/850/900 MHz Body
De-Ionized Water	71.30
Polysorbate 20 (Tween 20)	28.00
Salt	0.70

Ingredient	Frequency
	1800/1900 MHz Head
De-Ionized Water	55.40
Polysorbate 20 (Tween 20)	44.22
Salt	0.38

Ingredient	Frequency
	1800/1900 MHz Body
De-Ionized Water	71.50
Polysorbate 20 (Tween 20)	28.00
Salt	0.50

Ingredient	Frequency
	2450 MHz Head
De-Ionized Water	55.75
Polysorbate 20 (Tween 20)	45.25

Ingredient	Frequency
	2450 MHz Body
De-Ionized Water	71.70
Polysorbate 20 (Tween 20)	28.00
Salt	0.30

Appendix 7. DASY4 System Details

A.7.1. DASY4 SAR Measurement System

RFI Global Services Ltd, SAR measurement facility utilises the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 system is comprised of the robot controller, computer, near-field probe, probe alignment sensor, and the SAM phantom containing brain or muscle equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller; teach pendant (Joystick), and remote control. This is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. The data acquisition electronics (DAE) performs signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection etc. The DAE is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE3 utilises a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

A.7.2. DASY4 SAR System Specifications

Robot System	
Positioner:	Stäubli Unimation Corp. Robot Model: RX90L
Repeatability:	0.025 mm
No. of Axis:	6
Serial Number:	F00/SD89A1/A/01
Reach:	1185 mm
Payload:	3.5 kg
Control Unit:	CS7
Programming Language:	V+
Data Acquisition Electronic (DAE) System	
Serial Number:	DAE3 SN:450
PC Controller	
PC:	Dell Precision 340
Operating System:	Windows 2000
Data Card:	DASY4 Measurement Server
Serial Number:	1080
Data Converter	
Features:	Signal Amplifier, multiplexer, A/D converted and control logic.
Software:	DASY4 Software
Connecting Lines:	Optical downlink for data and status info. Optical uplink for commands and clock.
PC Interface Card	
Function:	24 bit (64 MHz) DSP for real time processing Link to DAE3 16 nit A/D converter for surface detection system serial link to robot direct emergency stop output for robot.

DASY4 SAR System Specifications (Continued)	
E-Field Probe	
Model:	EX3DV3
Serial No:	3508
Construction:	Triangular core
Frequency:	10 MHz to >6 GHz
Linearity:	±0.2 dB (30 MHz to 6 GHz)
Probe Length (mm):	330
Probe Diameter (mm):	12
Tip Length (mm):	20
Tip Diameter (mm):	2.5
Sensor X Offset (mm):	1
Sensor Y Offset (mm):	1
Sensor Z Offset (mm):	1
Phantom	
Phantom:	SAM Phantom
Shell Material:	Fibreglass
Thickness:	2.0 ±0.1 mm