



Prepared (also subject responsible if other)

SEM/CVVGP, Leif Hedin

Approved

SEM/CVVGP, Leif Hedin

Checked

Company Internal
MARKING DRAWING
No.

1257-3980 Uen

Date

Rev

Reference

2011-12-06

1

2

LT26i, Mobile Phone label, ROW, made in...

1 General information

Mobile Phone label part no	<ul style="list-style-type: none"> 1248-2396
Mobile Phone label content part no	<ul style="list-style-type: none"> 1257-3979
Bar code	<ul style="list-style-type: none"> Print quality: according to COSMETIC GUIDELINE – Bar code labels document 1222-6072 Uen Quiet zone: No bar codes are allowed to be closer to a label edge than 2 mm!
Text	If applicable, or nothing else specified, Zebra printer Scaleable Smooth Font CG Triumvirate Bold Condensed is imposed. When needed, the text is adjusted to fit the label.
Coordinates	“(x/y)” under each line number specifies the bottom / left alignment for text, graphics and bar codes, x is measured vertically, and y horizontally from the upper left corner of the label (landscape format), both in mm. When needed, the alignment is adjusted to fit the label.

MLCI= Main Label Content Information Document

2 Printing information

	Content	Format
Line 1a (2,2/1,0)	Sony Ericsson stylized name.	Graphics, height 1,5 mm. According to 1200-1925
Line 1b (2,2/18,0)	Model Name “LT26i”	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
Line 2a (4,8/1,0)	“TYPE: AAD-3880120-AV”	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
Line 2b (4,8/18,0)	HW & SW identification field, if applicable; “FFGG”	Text, height 1,2 mm. According to Type-testing report under Product Model Specifying Documents
Line 2c (4,8/25,0)	Location code of where the phone is flashed, if applicable, “XXX”	Text, height 1,2 mm.
Line 3a (7,0/1,0)	Product number of the Sales Item in which the phone is packed, if applicable. “SI XXXX-XXXX”	Text, height 1,2 mm.
Line 3b (7,0/18,0)	Production week (flash), “yyWww” (yy = year, ww = week)	Text, height 1,2 mm.
Line 4 (9,0/18,0)	Repair week, if applicable. “RyyWww” (yy = year, ww = week)	Text, height 1,2 mm.
Line 5a (15,0/1,0)	“FCC ID: PY7A3880120”	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
Line 5b (15,0/16,0)	“IC: 4170B-A3880120”	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
Line 6 (18,0/2,0)	Line 6 in bar code, according to line 7a. As desired by supplier (e.g. only actual number).	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 symbology).



Prepared (also subject responsible if other)

SEM/CVVGP, Leif Hedin

Approved

SEM/CVVGP, Leif Hedin

Checked

Company Internal
MARKING DRAWING

No.

1257-3980 Uen

Date

Rev

Reference

2011-12-06

1


2

Line 7a (19,5/1,0)	Supplier's identification for trace-ability of the telephone, as desired by supplier (e.g. "S/N: nnn...." for serial number).	Text, height 1,5 mm. Defined by supplier.
Line 7b (19,5/16,0)	Actual electronic serial number (IMEI) of the mobile phone, "00000000-000000-0"	Text, height 1,5mm. In the format TAC-SNR-CD. TAC and SNR derived from pos 500 in BOM. CD = check digit according to the Luhn formula (ISO/IEC 7812), GSM 02.16.
Line 8 (22,0/2,0)	Line 8 in bar code, according to line 7b. As desired by supplier (e.g. only actual number).	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 symbology).
Line 9 (27,0/1,0)	CE approval symbol, the NB-"0682" and "Alert Symbol" in one artwork	Graphics, height 5 mm. According to 1242-7470
Line 10a (45,5/1,0)	Marking of origin; "Made in Xxx" "Xxx" = actual country of production of the included telephone, in English	Text, height 1,2 mm.
Line 10b (45,5/25,0)	WEEE trashcan without bar symbol	Graphics, min. height 5mm, according to 1202-5537.

3 Layout

The conceptual picture (for Zebra 90Xill printer, or equivalent) should not be considered as specifications, but as an additional help for setting up the label.

3.1 Conceptual picture

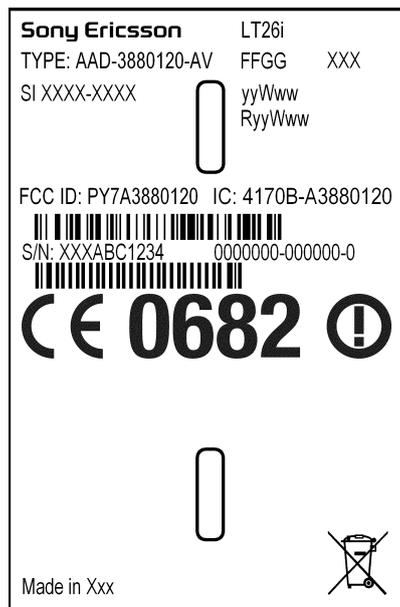

double underlined = major changes since last revision.