


## Appendix 4. Photographs

This appendix contains the following photographs:

Photo Reference Number	Title
PHT/83095JD01/001	Test configuration for the measurement of Specific Absorption Rate (SAR)
PHT/83095JD01/002	Touch Left
PHT/83095JD01/003	Tilt Left
PHT/83095JD01/004	Touch Right
PHT/83095JD01/005	Tilt Right
PHT/83095JD01/006	Front of EUT Facing Phantom
PHT/83095JD01/007	Rear of EUT Facing Phantom
PHT/83095JD01/008	Left Hand Side of EUT Facing Phantom
PHT/83095JD01/009	Right Hand Side of EUT Facing Phantom
PHT/83095JD01/010	Top of EUT Facing Phantom
PHT/83095JD01/011	Base of EUT Facing Phantom
PHT/83095JD01/012	General setup of EUT Facing Phantom with PHF
PHT/83095JD01/013	Front view of EUT
PHT/83095JD01/014	Rear View of EUT
PHT/83095JD01/015	Left Hand Side View of EUT
PHT/83095JD01/016	Right Hand Side View of EUT
PHT/83095JD01/017	Top View of EUT
PHT/83095JD01/018	Base View of EUT
PHT/83095JD01/019	Internal View of EUT (WWAN Sample)
PHT/83095JD01/020	Internal View of EUT (WLAN Sample)
PHT/83095JD01/021	Battery View
PHT/83095JD01/022	PHF View
PHT/83095JD01/023	900 MHz Head Fluid Level
PHT/83095JD01/024	900 MHz Body Fluid Level
PHT/83095JD01/025	1900 MHz Head Fluid Level
PHT/83095JD01/026	1900 MHz Body Fluid Level
PHT/83095JD01/027	2450 MHz Head Fluid Level
PHT/83095JD01/028	2450 MHz Body Fluid Level

PHT/83095JD01/001: Test configuration for the measurement of Specific Absorption Rate (SAR)

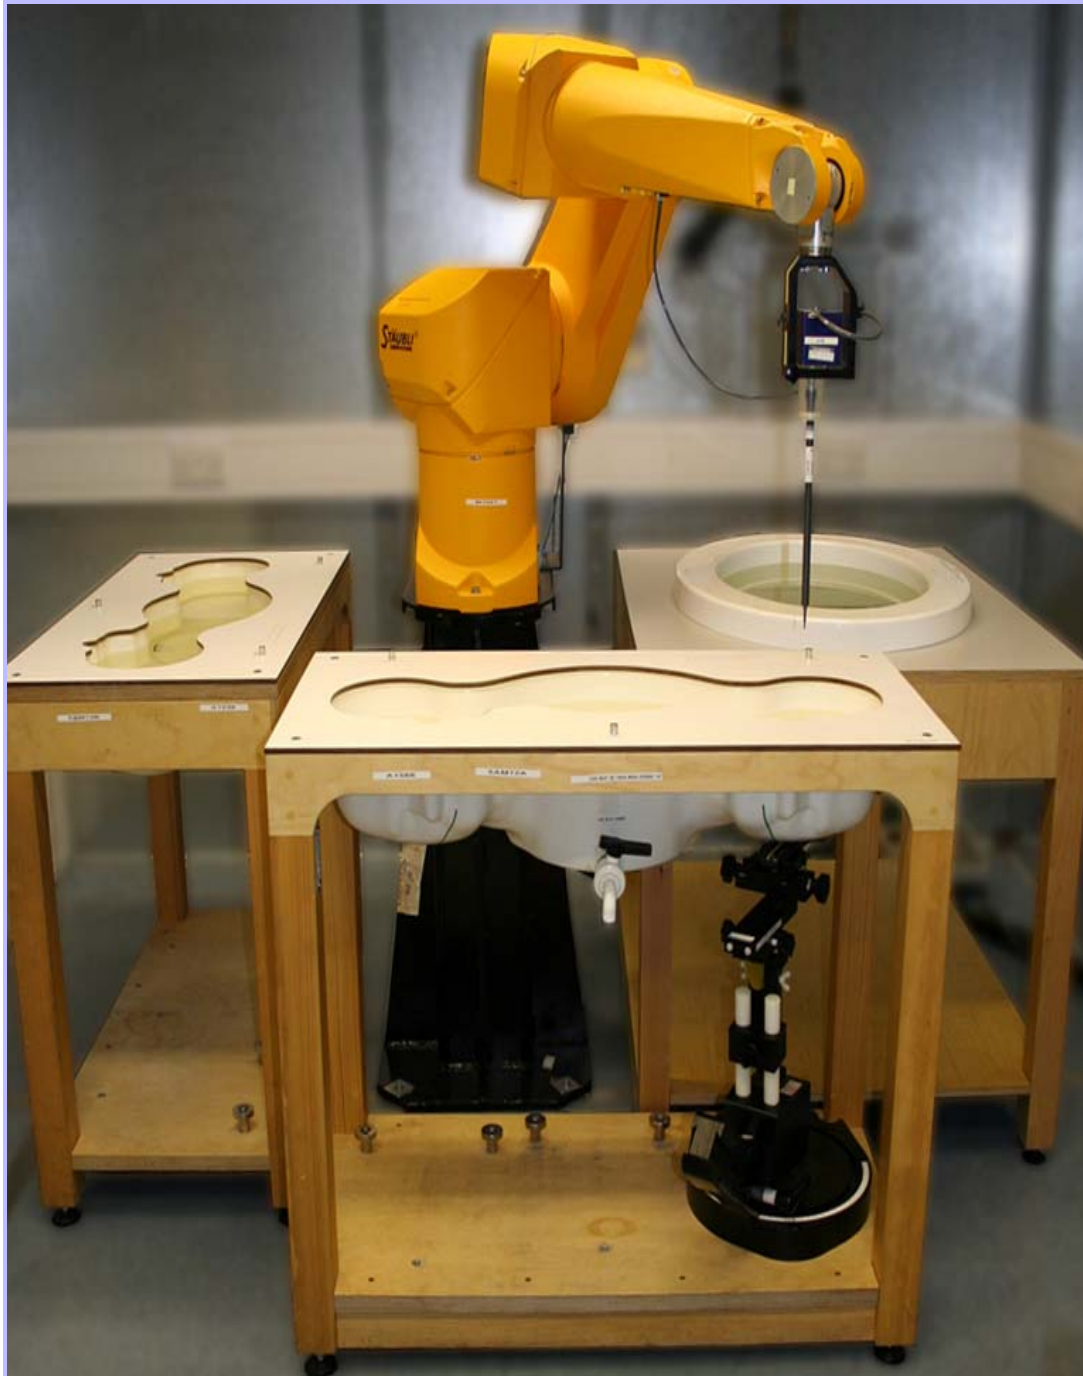

PHT/83095JD01/002: Touch Left




---

PHT/83095JD01/003: Tilt Left



---

PHT/83095JD01/004: Touch Right

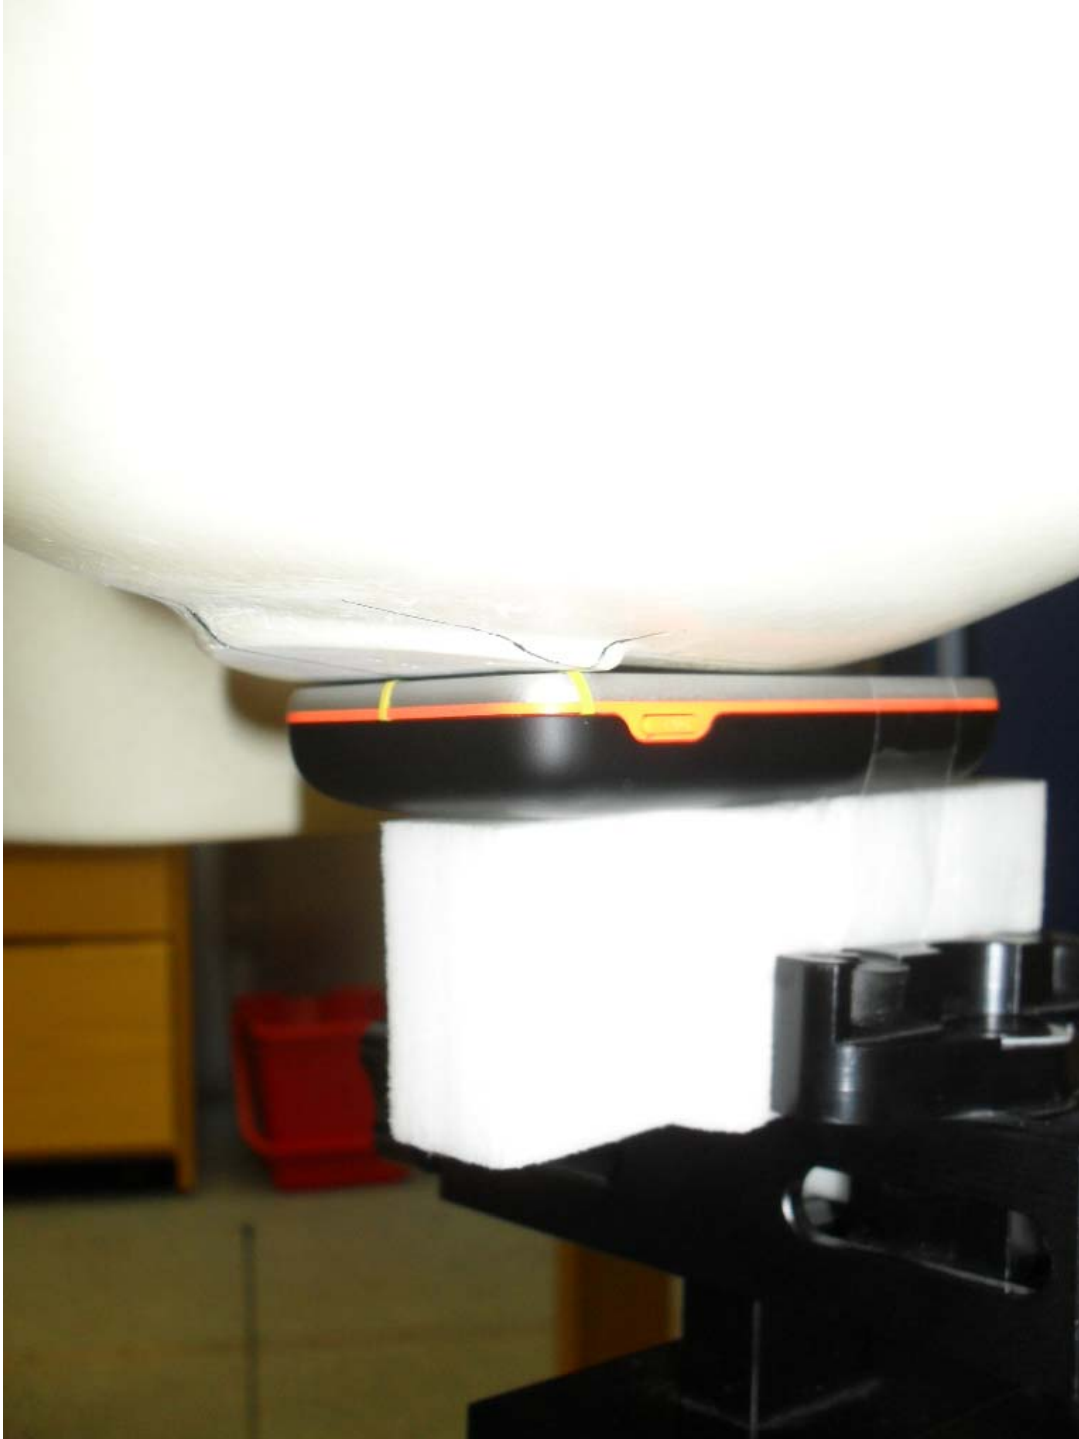

---

PHT/83095JD01/005: Tilt Right



---

PHT/83095JD01/006: Front of EUT Facing Phantom



---

PHT/83095JD01/007: Rear of EUT Facing Phantom





---

PHT/83095JD01/008: Left Hand Side of EUT Facing Phantom



---

PHT/83095JD01/009: Right Hand Side of EUT Facing Phantom




---


PHT/83095JD01/010: Top of EUT Facing Phantom



PHT/83095JD01/011: Base of EUT Facing Phantom

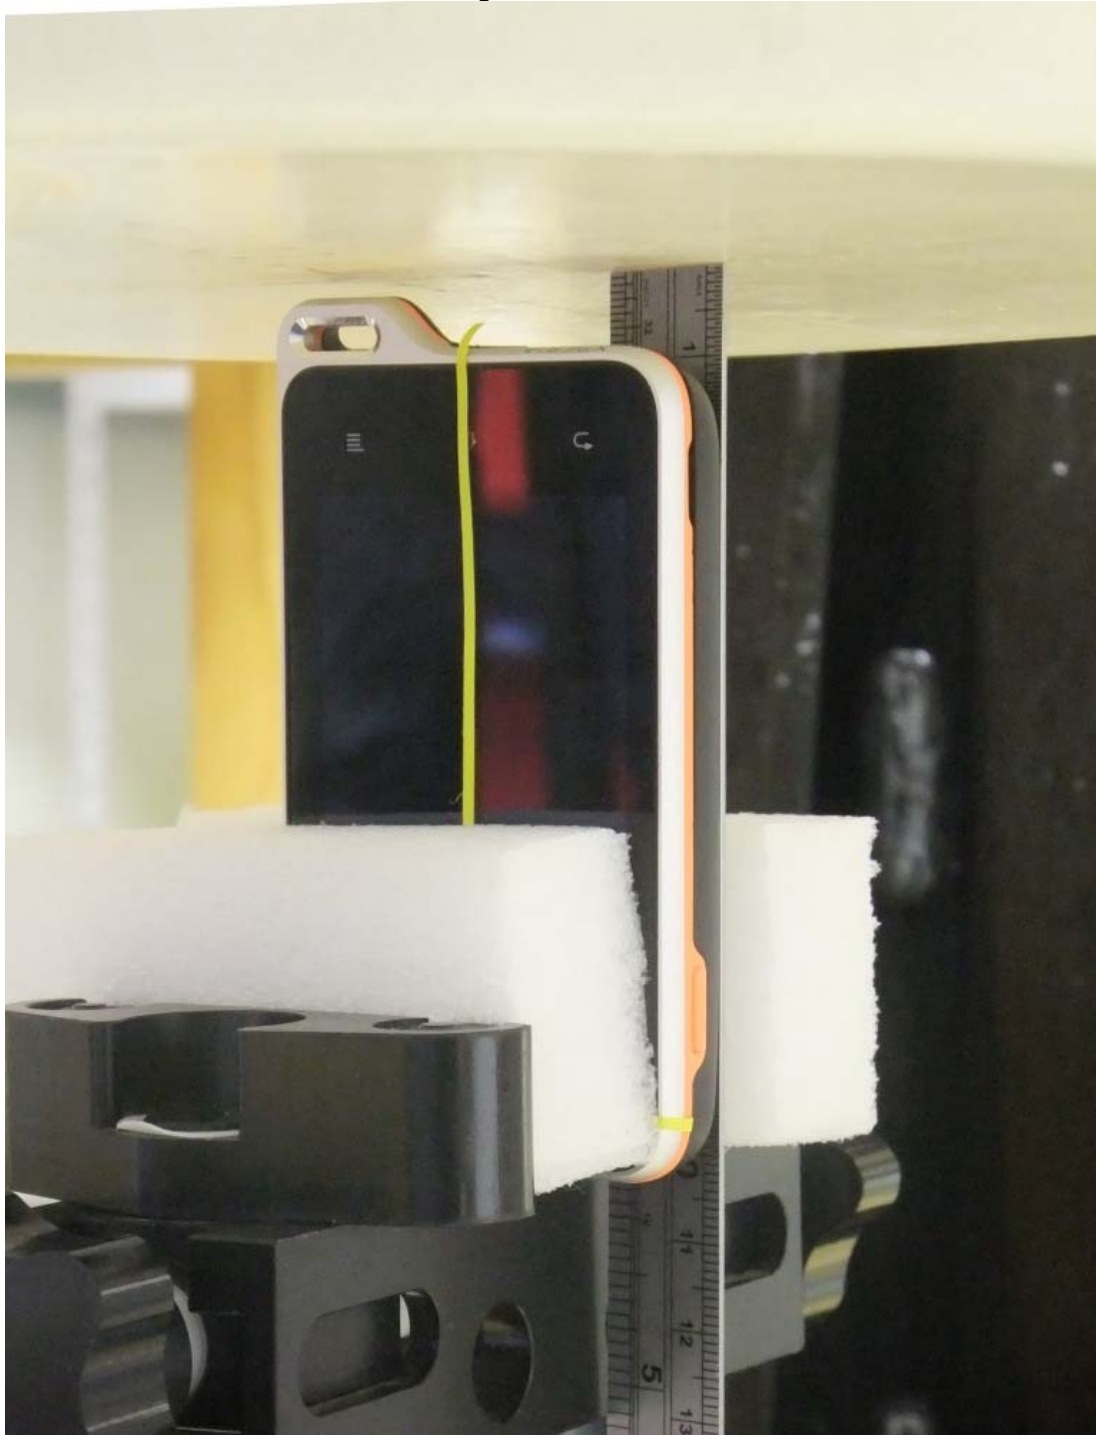

PHT/83095JD01/012: General Set Up of Rear of EUT Facing Phantom with PHF

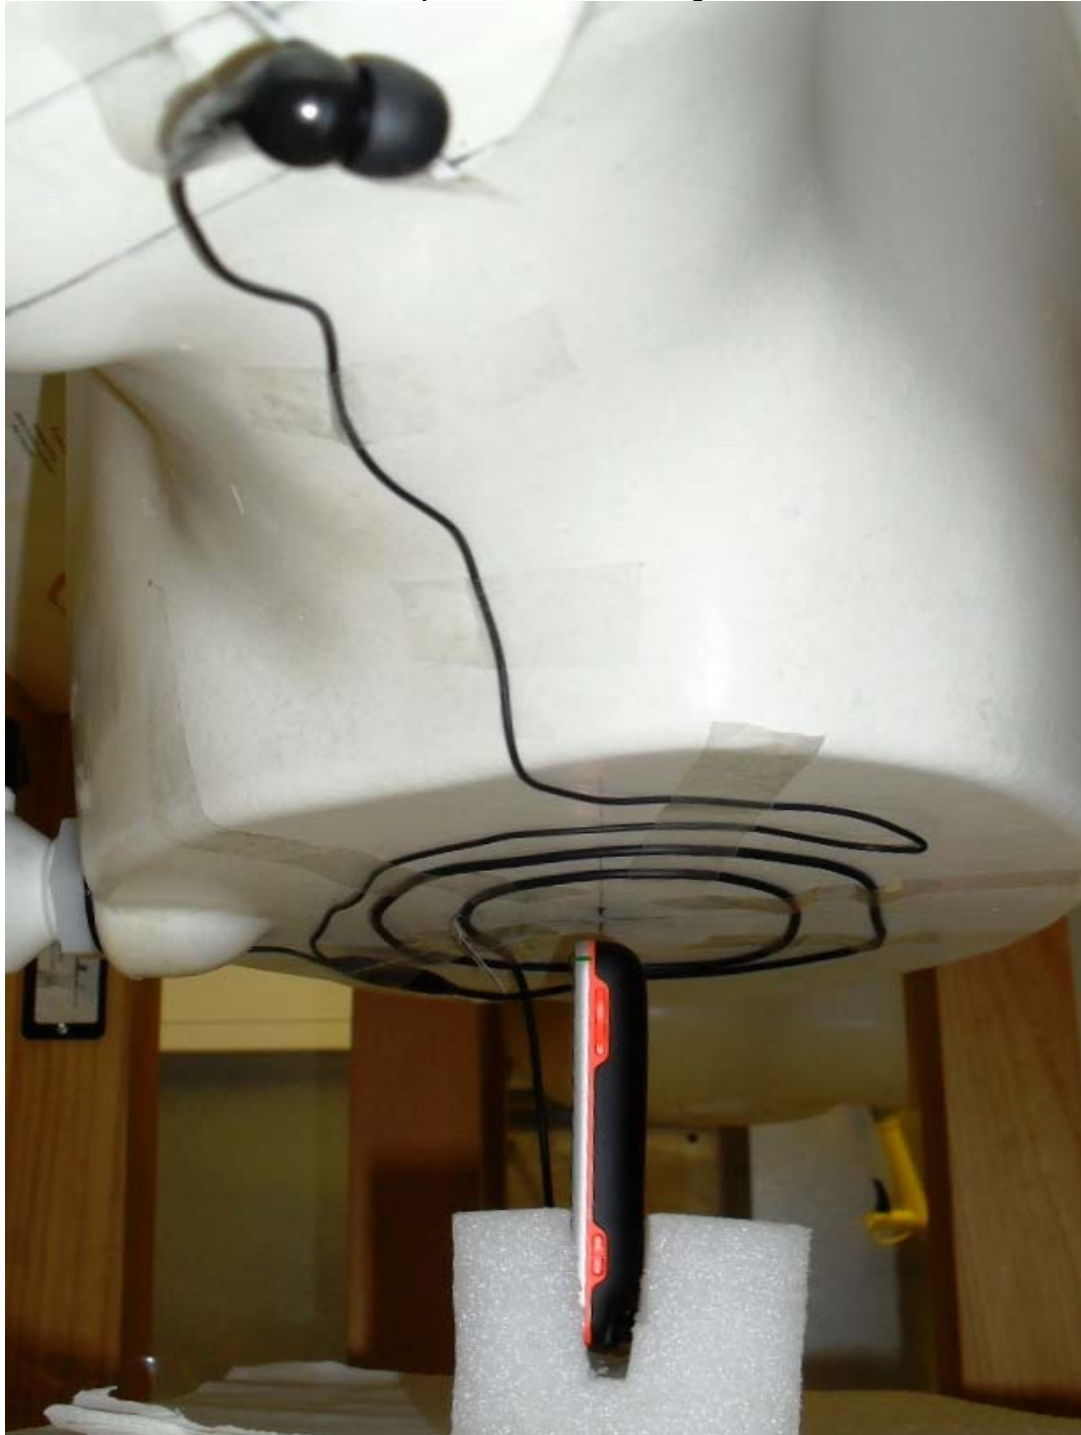

PHT/83095JD01/013: Front View of EUT



PHT/83095JD01/014: Rear View of EUT



PHT/83095JD01/015: Left Hand Side View of EUT





PHT/83095JD01/016: Right Hand Side View of EUT



PHT/83095JD01/017: Top View of EUT




---

PHT/83095JD01/018: Base View of EUT



PHT/83095JD01/019: Internal View of EUT (WWAN Sample)

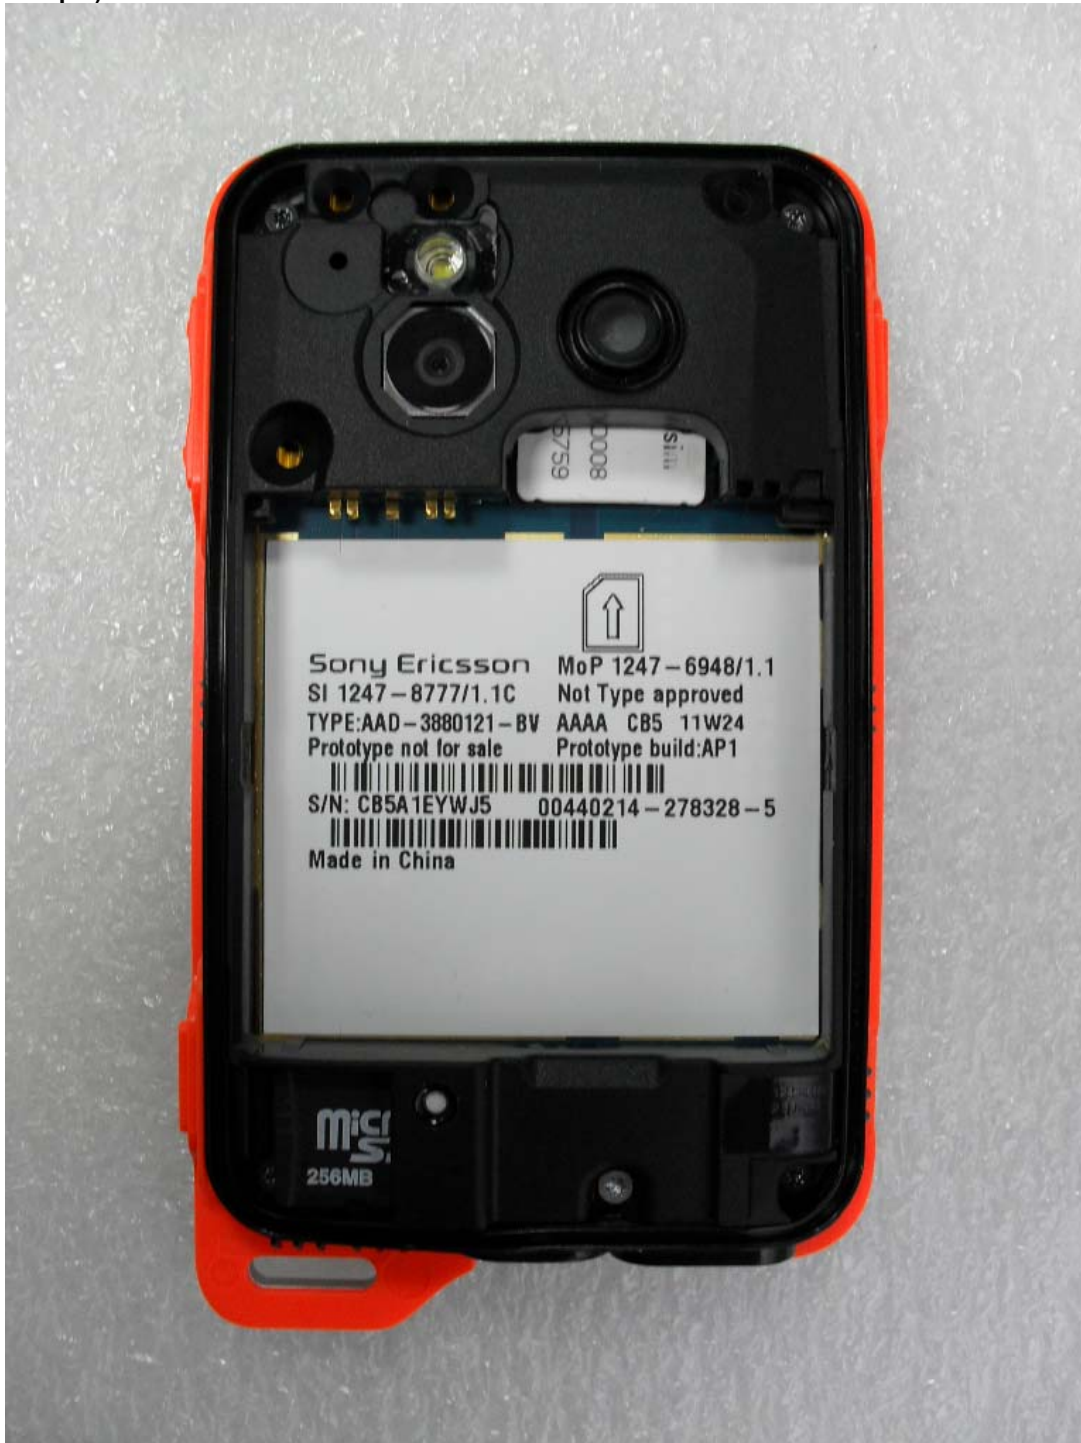

PHT/83095JD01/020: Internal View of EUT (WLAN Sample)



PHT/83095JD01/021: Battery View



PHT/83095JD01/022: PHF View




PHT/83095JD01/023: 900 MHz Head Fluid Level






PHT/83095JD01/024: 900 MHz Body Fluid Level

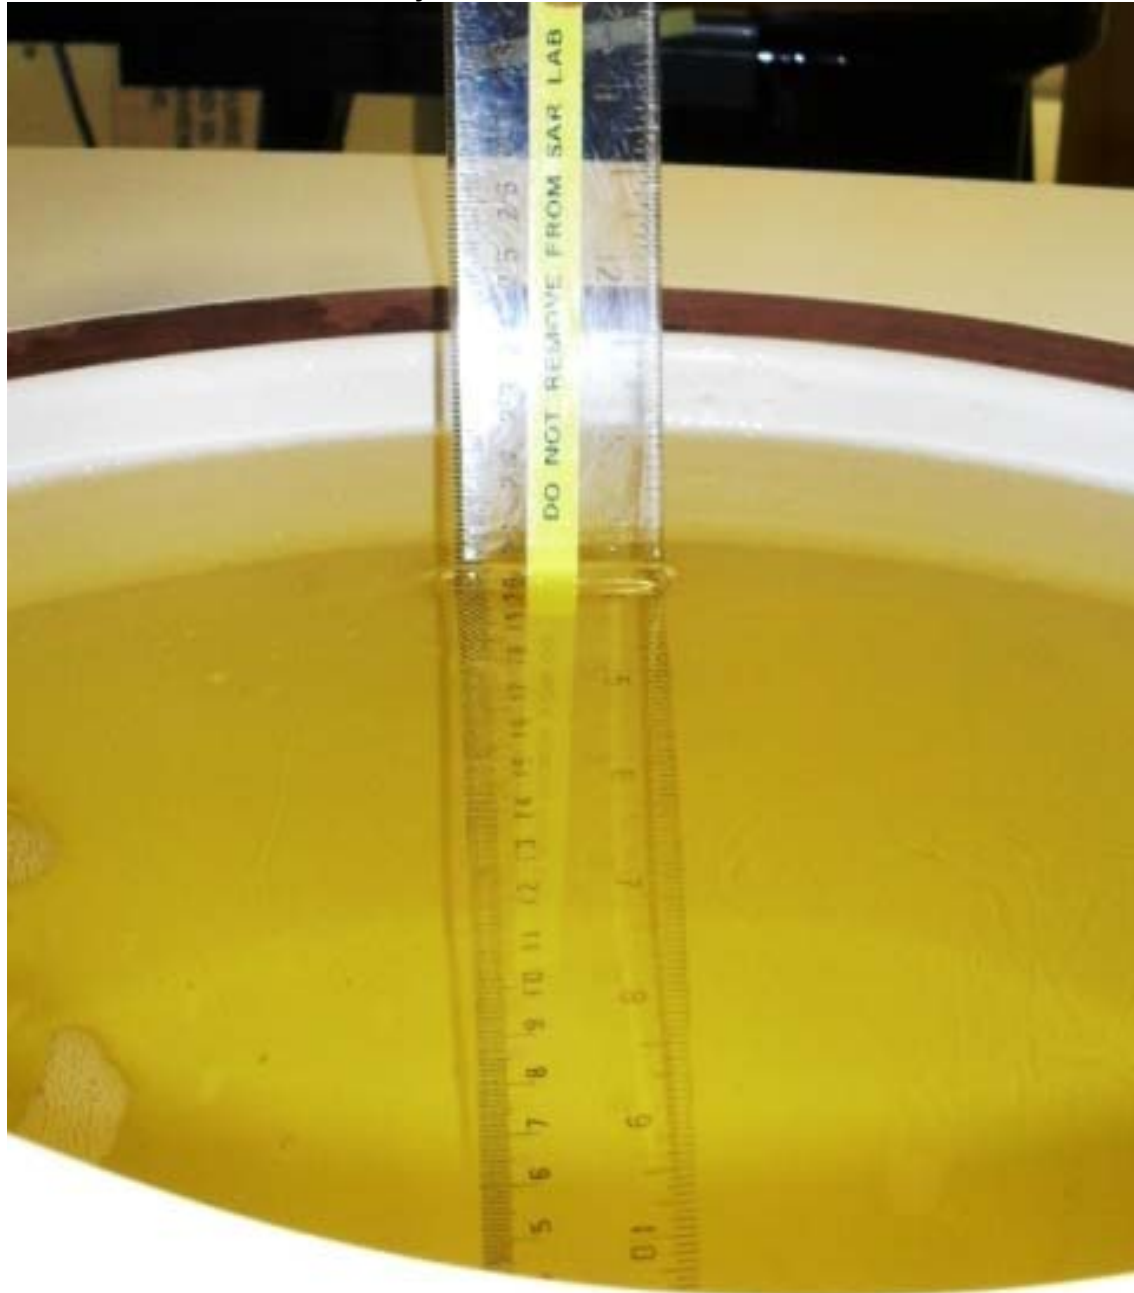

PHT/83095JD01/025: 1900 MHz Head Fluid Level




PHT/83095JD01/026: 1900 MHz Body Fluid Level

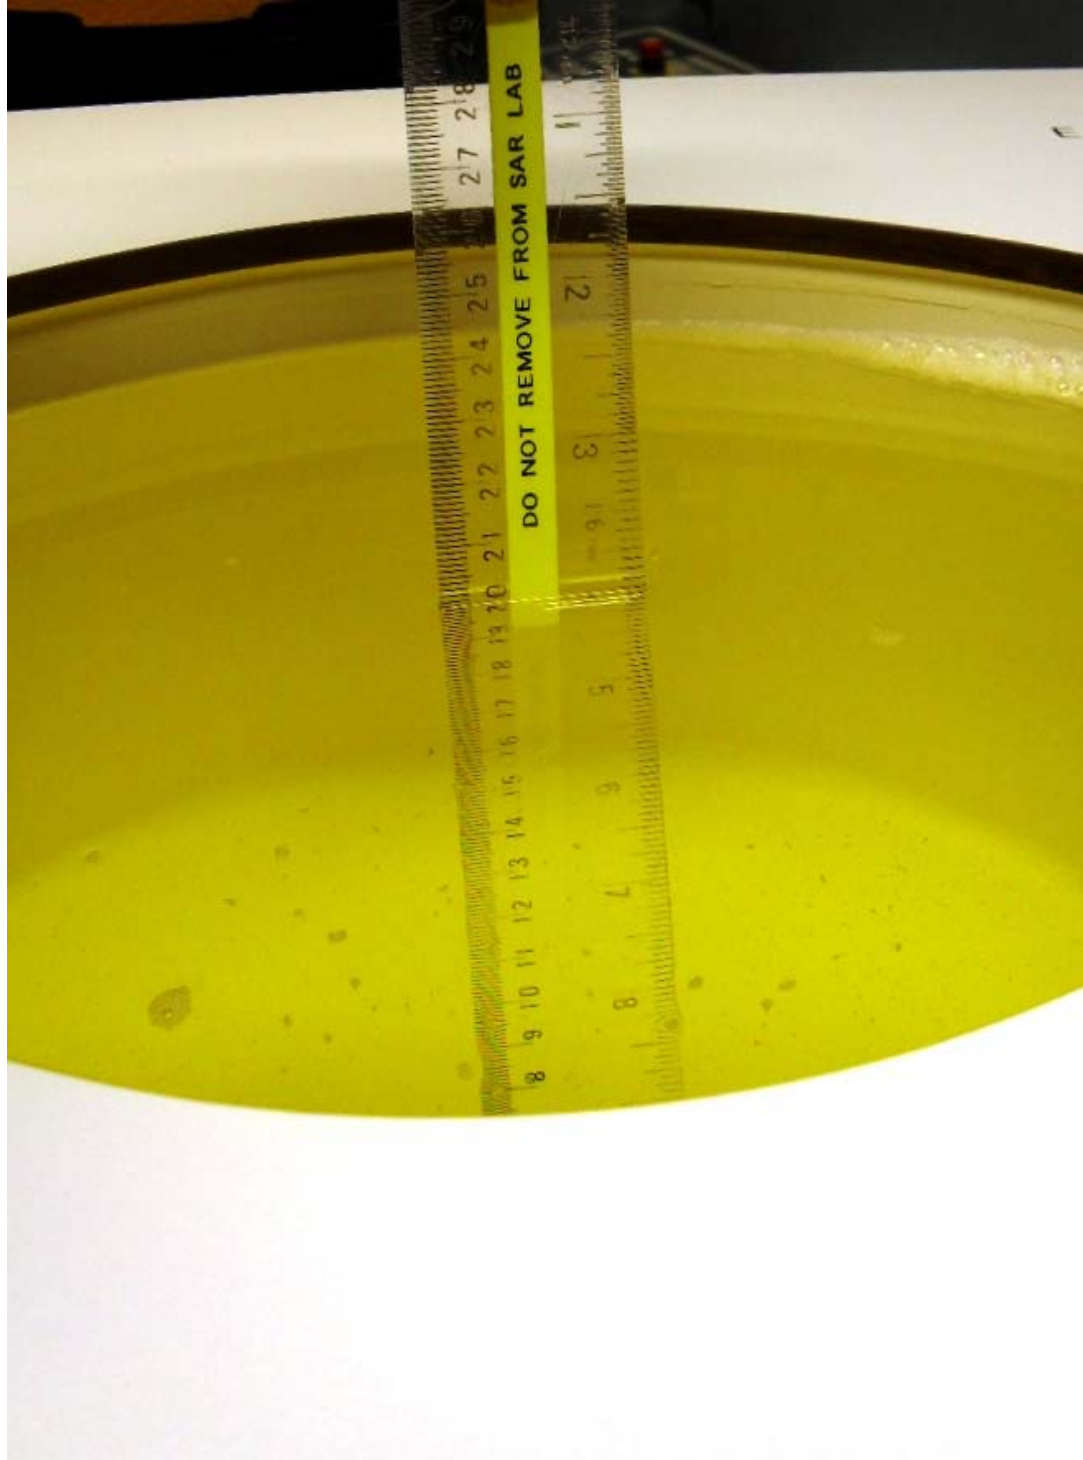

PHT/83095JD01/027: 2450 MHz Head Fluid Level



PHT/83095JD01/028: 2450 MHz Body Fluid Level

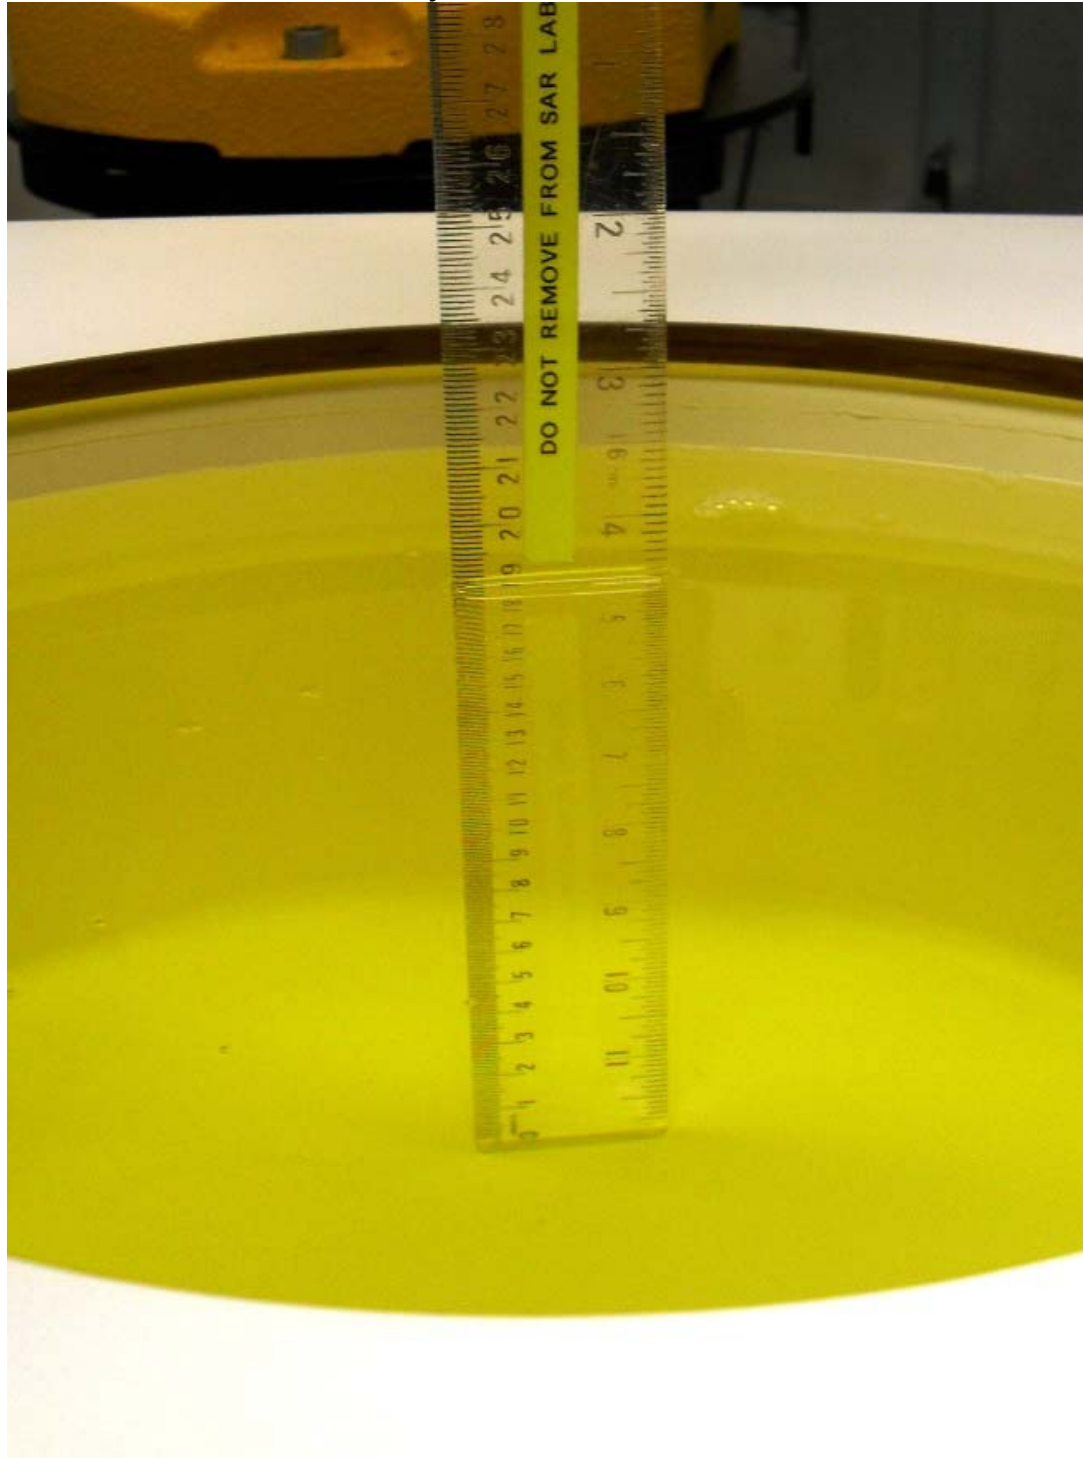

### Appendix 5. Validation of System

Prior to the assessment, the system was verified in the flat region of the phantom. A 900, 1900 and 2450 MHz dipoles was used. A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 5\%$  for the 900, 1900 and 2450 MHz dipoles. The applicable verification (normalised to 1 Watt).

Date: 13/07/2011

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	900	23.0°C	22.8°C	$\epsilon_r$	41.50	41.52	0.04	5.00
				$\sigma$	0.97	0.94	-3.50	5.00
				1g SAR	11.00	10.56	-4.00	5.00
				10g SAR	7.01	6.88	-1.85	5.00

#### Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters
128	Low	824.2	$\epsilon_r$ 41.90
			$\sigma$ 0.89
190	Middle	836.6	$\epsilon_r$ 41.80
			$\sigma$ 0.89
251	High	848.8	$\epsilon_r$ 41.70
			$\sigma$ 0.90

Date: 14/07/2011

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	900	23.0°C	22.7°C	$\epsilon_r$	55.00	54.17	-1.51	5.00
				$\sigma$	1.05	1.07	2.21	5.00
				1g SAR	11.10	10.64	-4.14	5.00
				10g SAR	7.14	6.92	-3.08	5.00

#### Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters
128	Low	824.2	$\epsilon_r$ 54.50
			$\sigma$ 1.03
190	Middle	836.6	$\epsilon_r$ 54.40
			$\sigma$ 1.03
251	High	848.8	$\epsilon_r$ 54.30
			$\sigma$ 1.04

**Validation of System (Continued)**  
**Date: 18/07/2011**  
**Validation Dipole and Serial Number: D1900V2; SN: 540**

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	1900	23.0 °C	23.0 °C	$\epsilon_r$	40.00	38.74	-3.14	5.00
				$\sigma$	1.40	1.45	3.64	5.00
				1g SAR	40.30	38.76	-3.82	5.00
				10g SAR	21.00	20.32	-3.24	5.00

**Dielectrics for Frequencies Tested**

Channel Number	Channel Description	Frequency (MHz)	Parameters	
512	Low	1850.2	$\epsilon_r$	38.90
			$\sigma$	1.41
661	Middle	1880.0	$\epsilon_r$	38.80
			$\sigma$	1.44
810	High	1909.8	$\epsilon_r$	38.70
			$\sigma$	1.46

**Date: 19/07/2011**  
**Validation Dipole and Serial Number: D1900V2; SN: 540**

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	1900	23.0 °C	23.0 °C	$\epsilon_r$	53.30	52.87	-0.81	5.00
				$\sigma$	1.52	1.56	2.50	5.00
				1g SAR	40.70	42.00	3.19	5.00
				10g SAR	21.60	22.20	2.78	5.00

**Dielectrics for Frequencies Tested**

Channel Number	Channel Description	Frequency (MHz)	Parameters	
512	Low	1850.2	$\epsilon_r$	53.00
			$\sigma$	1.52
661	Middle	1880.0	$\epsilon_r$	52.90
			$\sigma$	1.54
810	High	1909.8	$\epsilon_r$	52.90
			$\sigma$	1.57

**Validation of System (Continued)**

Date: 20/07/2011

Validation Dipole and Serial Number: D1900V2; SN: 540

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	1900	23.0 °C	23.0 °C	$\epsilon_r$	53.30	52.87	-0.81	5.00
				$\sigma$	1.52	1.56	2.50	5.00
				1g SAR	40.70	40.80	0.25	5.00
				10g SAR	21.60	21.44	-0.74	5.00

**Dielectrics for Frequencies Tested**

Channel Number	Channel Description	Frequency (MHz)	Parameters	
512	Low	1850.2	$\epsilon_r$	53.00
			$\sigma$	1.52
661	Middle	1880.0	$\epsilon_r$	52.90
			$\sigma$	1.54
810	High	1909.8	$\epsilon_r$	52.90
			$\sigma$	1.57

Date: 21/07/2011

Validation Dipole and Serial Number: D2450V2; SN: 725

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	2450	23.0 °C	22.3 °C	$\epsilon_r$	39.20	37.82	-3.52	5.00
				$\sigma$	1.80	1.80	-0.05	5.00
				1g SAR	52.90	53.60	1.32	5.00
				10g SAR	24.70	24.80	0.40	5.00

**Dielectrics for Frequencies Tested**

Channel Number	Channel Description	Frequency (MHz)	Parameters	
1	Low	2412.0	$\epsilon_r$	38.00
			$\sigma$	1.76
6	Middle	2437.0	$\epsilon_r$	37.90
			$\sigma$	1.79
11	High	2462.0	$\epsilon_r$	37.80
			$\sigma$	1.81



**Validation of System (Continued)**  
Date: 25/07/2011  
Validation Dipole and Serial Number: D2450V2; SN: 725

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	2450	23.0 °C	22.3 °C	$\epsilon_r$	52.7	51.84	-1.64	5.00
				$\sigma$	1.95	1.92	-1.72	5.00
				1g SAR	51.90	53.20	2.50	5.00
				10g SAR	24.1	24.48	1.58	5.00

**Dielectrics for Frequencies Tested**

Channel Number	Channel Description	Frequency (MHz)	Parameters	
1	Low	2412.0	$\epsilon_r$	51.90
			$\sigma$	1.88
6	Middle	2437.0	$\epsilon_r$	51.90
			$\sigma$	1.90
11	High	2462.0	$\epsilon_r$	51.80
			$\sigma$	1.93

## Appendix 6. Simulated Tissues

The body mixture consists of de-ionised water, Polysorbate 20 and salt. Visual inspection is made to ensure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

ingredient	Frequency
	835/850/900 MHz Head
De-Ionized Water	52.87
Polysorbate 20 (Tween 20)	46.10
Salt	1.03

Ingredient	Frequency
	835/850/900 MHz Body
De-Ionized Water	71.30
Polysorbate 20 (Tween 20)	28.00
Salt	0.70

Ingredient	Frequency
	1800/1900 MHz Head
De-Ionized Water	55.40
Polysorbate 20 (Tween 20)	44.22
Salt	0.38

Ingredient	Frequency
	1800/1900 MHz Body
De-Ionized Water	71.50
Polysorbate 20 (Tween 20)	28.00
Salt	0.50

Ingredient	Frequency
	2450 MHz Head
De-Ionized Water	55.75
Polysorbate 20 (Tween 20)	45.25

Ingredient	Frequency
	2450 MHz Body
De-Ionized Water	71.70
Polysorbate 20 (Tween 20)	28.00
Salt	0.30

---

## Appendix 7. DASY4 System Details

### A.7.1. DASY4 SAR Measurement System

RFI Global Services Ltd, SAR measurement facility utilises the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 system is comprised of the robot controller, computer, near-field probe, probe alignment sensor, and the SAM phantom containing brain or muscle equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller; teach pendant (Joystick), and remote control. This is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. The data acquisition electronics (DAE) performs signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection etc. The DAE is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE3 utilises a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

### A.7.2. DASY4 SAR System Specifications

<b>Robot System</b>	
<b>Positioner:</b>	Stäubli Unimation Corp. Robot Model: RX90L
<b>Repeatability:</b>	0.025 mm
<b>No. of Axis:</b>	6
<b>Serial Number:</b>	F00/SD89A1/A/01
<b>Reach:</b>	1185 mm
<b>Payload:</b>	3.5 kg
<b>Control Unit:</b>	CS7
<b>Programming Language:</b>	V+
<b>Data Acquisition Electronic (DAE) System</b>	
<b>Serial Number:</b>	DAE3 SN:450
<b>PC Controller</b>	
<b>PC:</b>	Dell Precision 340
<b>Operating System:</b>	Windows 2000
<b>Data Card:</b>	DASY4 Measurement Server
<b>Serial Number:</b>	1080
<b>Data Converter</b>	
<b>Features:</b>	Signal Amplifier, multiplexer, A/D converted and control logic.
<b>Software:</b>	DASY4 Software
<b>Connecting Lines:</b>	Optical downlink for data and status info. Optical uplink for commands and clock.
<b>PC Interface Card</b>	
<b>Function:</b>	24 bit (64 MHz) DSP for real time processing Link to DAE3 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot.

<b>DASY4 SAR System Specifications (Continued)</b>	
<b>E-Field Probe</b>	
<b>Phantom</b>	
<b>Model:</b>	ET3DV6
<b>Serial No:</b>	1611
<b>Construction:</b>	Triangular core
<b>Frequency:</b>	735 MHz to >2.55 GHz
<b>Linearity:</b>	±0.2 dB (735 MHz to 2.55 GHz)
<b>Probe Length (mm):</b>	337
<b>Probe Diameter (mm):</b>	10
<b>Tip Length (mm):</b>	10
<b>Tip Diameter (mm):</b>	6.8
<b>Sensor X Offset (mm):</b>	2.7
<b>Sensor Y Offset (mm):</b>	2.7
<b>Sensor Z Offset (mm):</b>	2.7
<b>Phantom</b>	
<b>Phantom:</b>	SAM Phantom
<b>Shell Material:</b>	Fibreglass
<b>Thickness:</b>	2.0 ±0.1 mm