**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>

TEST REPORT

Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Annex to test report no.: 1-4254/12-12-02

Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com**Accredited Testing Laboratory:**The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Sony Ericsson Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 46 19 32 95
Contact: Håkan Sjöberg
e-mail: hakan.sjoberg@sonyericsson.com
Phone: +46 46 19 35 59

Manufacturer

Sony Ericsson Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN

Test standard/s

47 CFR Part 22	Title 47 of the Code of Federal Regulations; Chapter I Part 22 - Public mobile services
47 CFR Part 24	Title 47 of the Code of Federal Regulations; Chapter I Part 24 - Personal communications services
RSS - 132 Issue 2	Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDII/FDDV/FDDVIII; HSPA; BT2.1+EDR; WLAN b/g/n; GPS; RFID, FM Rx
Model name:	AAD-3880135-BV
FCC ID:	PY7A3880135
IC:	4170B-A3880135
Frequency:	GSM: 824.2 MHz – 848.8 MHz, 1850.2 MHz – 1909.8 MHz UMTS: 826.4 MHz – 846.6 MHz, 1852.4 MHz – 1907.6 MHz
Technology tested:	GSM, UMTS
Antenna:	Integrated antenna
Power Supply:	3.7 V DC by Li-polymer battery
Temperature Range:	-30°C to +60 °C

Test report authorised:2012-03-20 Jakob Reschke
Testing Manager**Test performed:**

2012-03-20 Andreas Luckenbill

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details.....	3
3	Test standard/s	3
4	Test environment.....	4
5	Test item	4
6	Test laboratories sub-contracted	4
7	Summary of Measurement Results	5
7.1	Receiver.....	5
8	Measurement Results	6
8.1	RX Spurious Emissions Conducted < 30 MHz	6
8.2	Spurious Emissions Radiated – Receiver Mode	9
9	Test equipment and ancillaries used for tests	15
10	Observations	17
Annex A	Photographs of the test setup	18
Annex B	External photographs of the EUT.....	20
Annex C	Internal photographs of the EUT	25
Annex D	Document history	34
Annex E	Further information.....	34
Annex F	Accreditation Certificate	35

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

2.2 Application details

Date of receipt of order:	2012-02-16
Date of receipt of test item:	2012-02-23
Start of test:	2012-02-23
End of test:	2012-03-20
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 22	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 22 - Public mobile services
47 CFR Part 24	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 24 - Personal communications services
RSS - 132 Issue 2	2005-09	Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz
RSS - 133 Issue 5	2009-02	Spectrum Management and Telecommunications Policy - Radio Standards Specifications 2 GHz Personal Communication Services

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+60 °C during high temperature tests
	T_{min}	-30 °C during low temperature tests
Relative humidity content:		37 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li-polymer battery
	V_{max}	4.1 V
	V_{min}	3.4 V

5 Test item

Kind of test item	:	GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDII/FDDV/FDDVIII; HSPA; BT2.1+EDR; WLAN b/g/n; GPS; RFID, FM Rx
Type identification	:	AAD-3880135-BV
S/N serial number	:	Rad. CB511VRTCG, CB511VRTD4 Cond. CB511VRTC6, CB511VRTCH
HW hardware status	:	AP2
SW software status	:	nypon-eng 2.3.GWK74 64
Frequency band [MHz]	:	GSM: 824.2 MHz – 848.8 MHz, 1850.2 MHz – 1909.8 MHz UMTS: 826.4 MHz – 846.6 MHz, 1852.4 MHz – 1907.6 MHz
Type of modulation	:	GMSK, 8-PSK, QPSK, 16QAM
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li-polymer battery
Temperature range	:	-30°C to +60 °C

6 Test laboratories sub-contracted

None

7 Summary of Measurement Results

- No deviations from the technical specifications were ascertained
 There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 15.107, 15.109 ICES-003, Issue 4	passed	2012-03-20	-/-

7.1 Receiver

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Results (max.)
RX-Spurious Emissions Conducted < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:

NA = Not applicable; NP = Not performed

8 Measurement Results

8.1 RX Spurious Emissions Conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to Idle mode. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.107(a)		ICES-003, Issue 4	
RX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	


*Decreases with the logarithm of the frequency

Result: Also see plots


RX Spurious Emissions Conducted < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
No critical peaks detected!		
Measurement uncertainty	± 3 dB	

Result: Passed

Plot 1: 9 kHz to 30 MHz / Phase Line

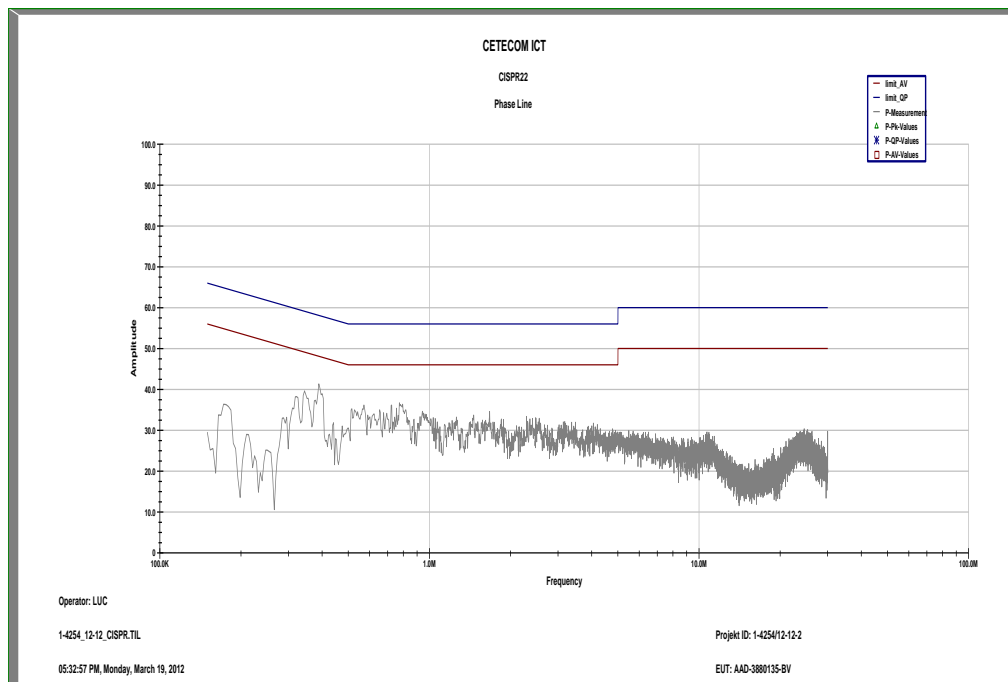

Plot 2: 9 kHz to 30 MHz / Neutral Line

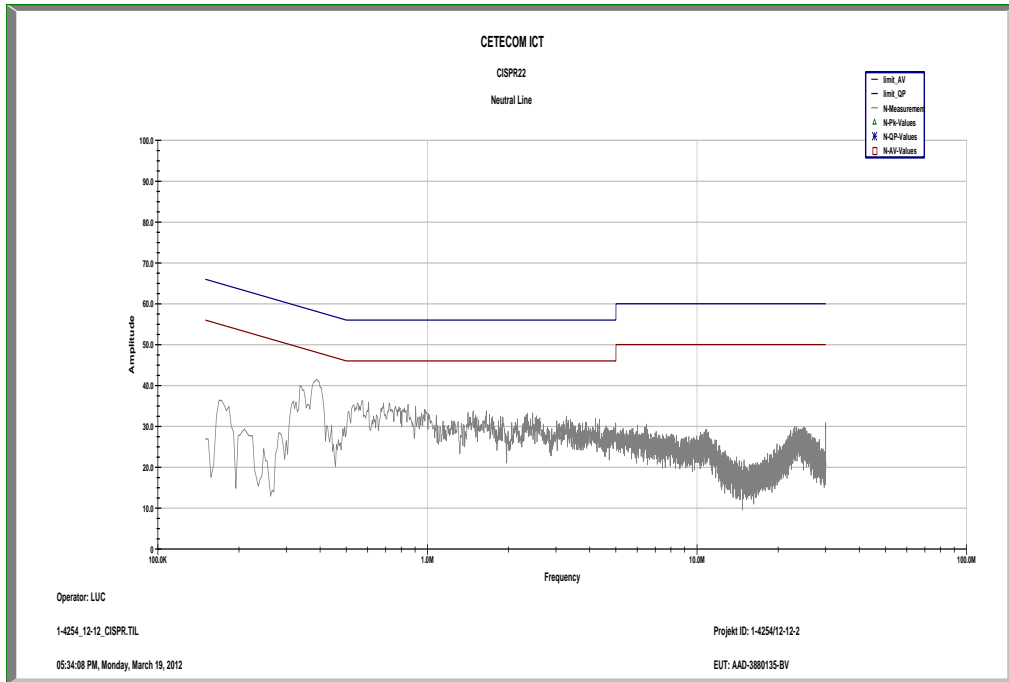

8.2 Spurious Emissions Radiated – Receiver Mode

Description:

The measurement was performed in worst case. The EUT was not connected to the CMU 200. So the EUT performs a network search. In this mode all oscillators are active.

Measurement:

Measurement parameters	
Detector:	Below 1 GHz Peak / QuasiPeak Above 1 GHz Peak / Average
Sweep time:	2 sec
Video bandwidth:	Below 1 GHz 100 kHz Above 1 GHz 1 MHz
Resolution bandwidth:	1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

Limits:


FCC		IC	
CFR Part 15.109 CFR Part 2.1053		RSS Gen, Issue 2, Section 4.10 ICES-003 Issue 4	
Spurious Emissions Radiated – Receiver Mode			
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance (m)	
30 – 88	30.0	10	
88 - 216	33.5	10	
216 – 960	36.0	10	
Above 960	54.0	3	

Results:

Spurious Emission Level (dB μ V/m)		
Frequency (MHz)	Detector	Level (dB μ V/m)
no critical peaks detected!		
Measurement uncertainty		± 3 dB

Result: Passed

Plot 1: Receiver mode up to 30 MHz

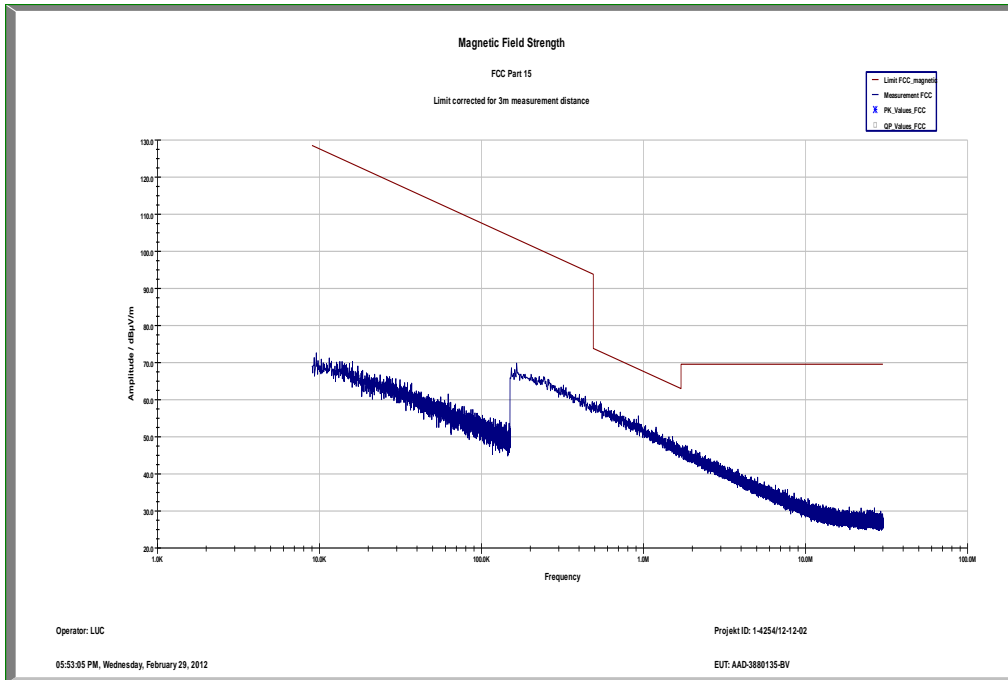

Plot 2: Receiver mode (30 MHz - 1 GHz)


Common Information

EUT: AAD-3880135-BV
 Serial Number: CB511VRTD4 IMEI: 00440214-481306-4
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: GSM idle + video out via HDMI + charging
 Operator Name: Hennemann
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m
Subrange **Step Size** **Detectors** **IF BW** **Meas. Time** **Preamp**
 30 MHz - 2 GHz 60 kHz QPK 120 kHz 1 s 20 dB


FCC_10m(B)_3

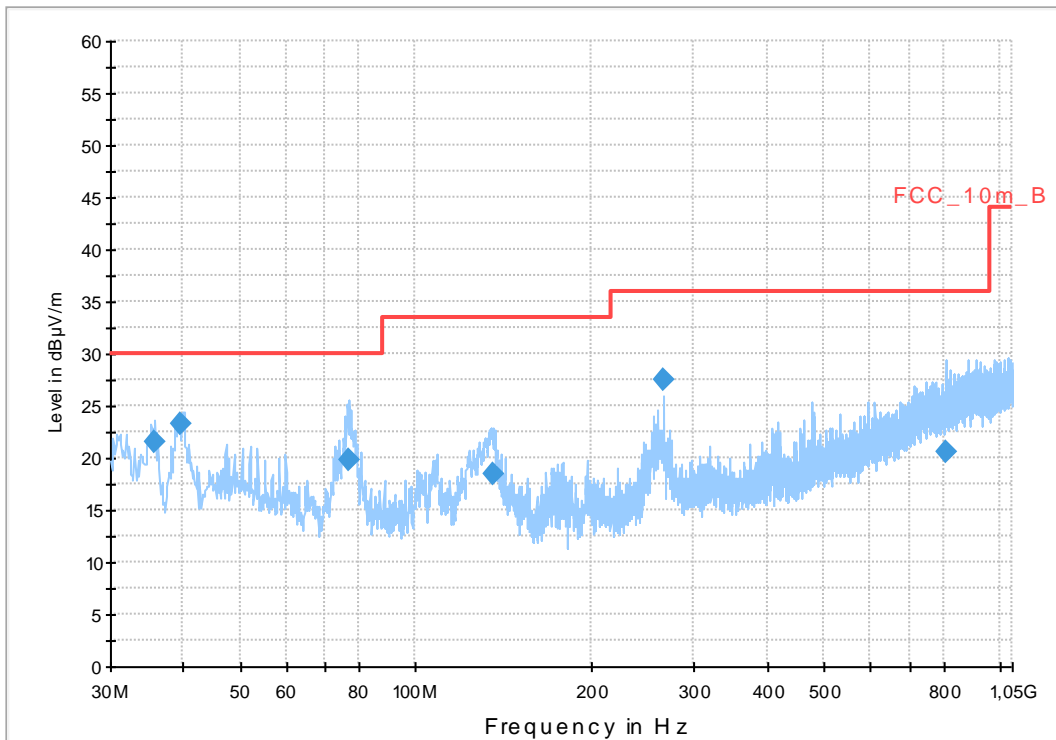


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
35.722500	21.6	1000.0	120.000	114.0	V	260.0	13.1	8.4	30.0	
39.423150	23.2	1000.0	120.000	98.0	V	103.0	13.4	6.8	30.0	
76.590900	19.8	1000.0	120.000	162.0	V	273.0	9.1	10.2	30.0	
135.583650	18.5	1000.0	120.000	106.0	V	195.0	9.0	15.0	33.5	
265.493700	27.5	1000.0	120.000	115.0	V	195.0	13.7	8.5	36.0	
810.229800	20.7	1000.0	120.000	136.0	V	172.0	24.0	15.3	36.0	

Plot 3: Receiver mode (1 GHz – 12.75 GHz)

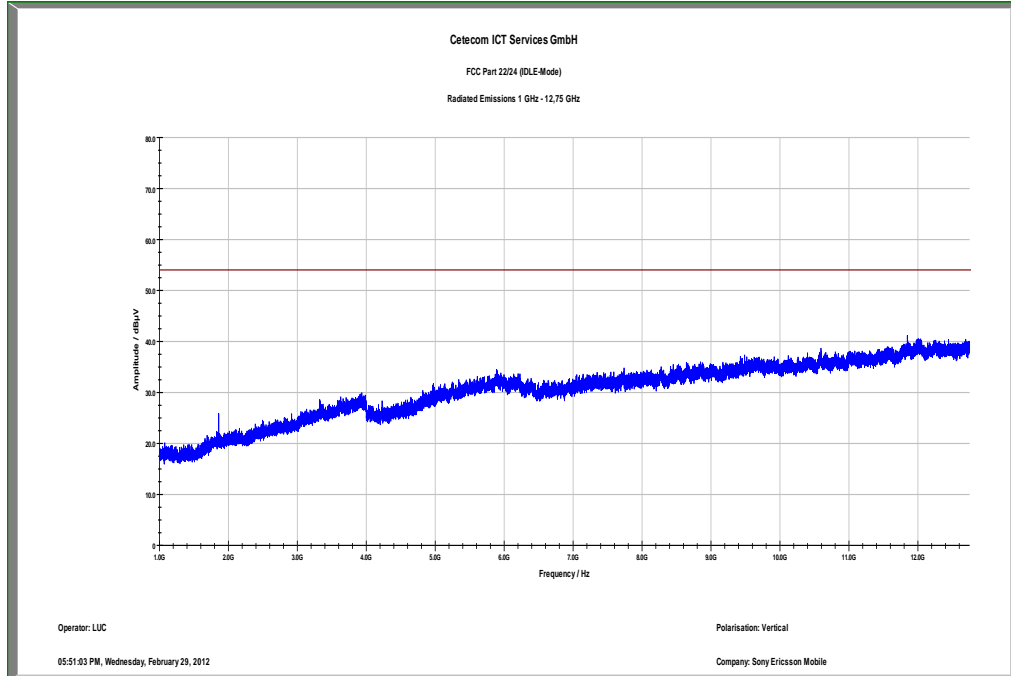


Plot 4: Receiver mode (12 GHz – 18 GHz)

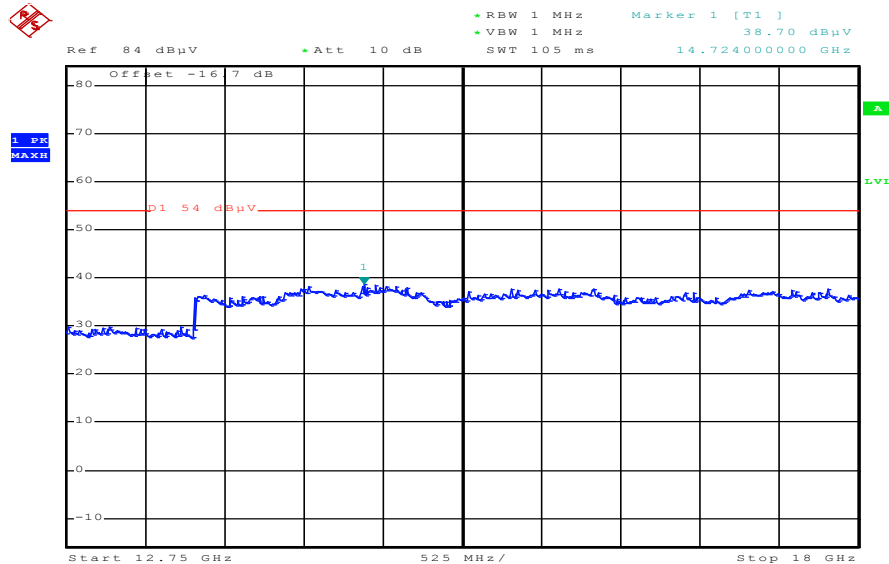

Date: 15.MAR.2012 14:07:14

Plot 4: Receiver mode (18 GHz – 26 GHz)

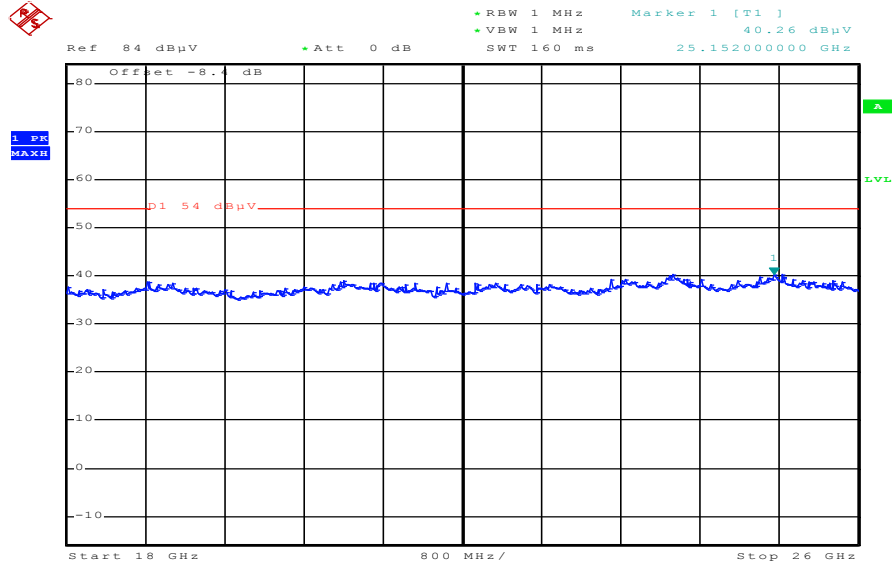

Date: 15.MAR.2012 12:31:45

9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
11	n. a.	DC Power Supply 0 – 32V	1108-32	Heiden	001802	300001383	Ve	23.06.2010	23.06.2013
2	n. a.	Temperature Test Chamber	VT 4002	Heraeus Voetsch	521/83761	300002326	Ve	20.09.2011	20.09.2013
3	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
4	n. a.	Signal Analyzer 20Hz-26,5GHz-150 to + 30 DBM	FSiQ26	R&S	835111/0004	300002678	Ve	04.11.2010	04.11.2012
5	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
6	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
7	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
8	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
9	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
10	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
11	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
12	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vIK!	08.09.2010	08.09.2012
13	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIK!	14.10.2011	14.10.2014
14	n. a.	Universal Communication Tester	CMU200	R&S	103992	300003231	vIK!	30.06.2010	30.06.2012
15	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
16	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
17	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081; B5979	300000210	ne		
18	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	04.01.2012	04.01.2014
19	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/00205	300003314	k	14.07.2011	14.07.2013
20	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
21	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		

22	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
23	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
24	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
25	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	06.01.2012	06.01.2014

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vki! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

10 Observations

No observations exceeding those reported with the single test cases have been made.