

**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>

TEST REPORT

Test report no.: 1-2977/11-94-06



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Sony Ericsson Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 46 19 32 95
Contact: Håkan Sjöberg
e-mail: hakan.sjoberg@sonyericsson.com
Phone: +46 46 19 35 59

Manufacturer

Sony Ericsson Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN

Test standard/s


47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	GSM Mobile Phone 850/900/1800/1900; GPRS/EGPRS; UMTS FDDI/FDDV/FDDVI/FDDIX/FDDXIX; HSPA; RFID; BT EDR; WLAN b/g/n; ANT+; GPS
Model name:	AAD-3880132-BV
FCC ID:	PY7A3880132
IC:	4170B-A3880132
Frequency [MHz]:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 2402 MHz, highest channel 2480 MHz)
Technology tested:	ANT+
Antenna:	Integrated PCB antenna
Power Supply:	3.7 V DC by Li-polymer battery
Temperature Range:	-20°C to +5 °C

Test report authorised:


2012-01-18 Stefan Börs
Senior Testing Manager

Test performed:


2012-01-18 Jakob Reschke
Testing Manager

1 Table of contents

1 Table of contents2

2 General information3

 2.1 Notes and disclaimer3

 2.2 Application details.....3

3 Test standard/s3

4 Test environment.....4

5 Test item4

6 Test laboratories sub-contracted4

7 Summary of measurement results5

8 RF measurements6

 8.1 Description of test setup6

 8.1.1 Radiated measurements.....6

 8.2 Additional comments7

 8.3 RSP100 test report cover sheet / performance test data8

9 Measurement results.....9

 9.1 Timing of the transmitter9

 9.2 Spectrum bandwidth – 99% bandwidth.....11

 9.3 Maximum field strength14

 9.4 Band edge compliance radiated15

 9.5 TX spurious emissions radiated18

 9.6 RX spurious emissions radiated.....29

 9.7 Spurious emissions radiated < 30 MHz.....33

 9.8 Spurious emissions conducted < 30 MHz.....36

10 Test equipment and ancillaries used for tests39

11 Observations40

Annex A Photographs of the test setup41

Annex B External photographs of the EUT45

Annex C Internal photographs of the EUT48

Annex D Document history74

Annex E Further information.....74

Annex F Accreditation Certificate75

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2011-10-19
Date of receipt of test item:	2011-12-09
Start of test:	2011-12-09
End of test:	2012-01-09
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		41 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li-polymer battery
	V_{max}	4.1 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	GSM Mobile Phone 850/900/1800/1900; GPRS/EGPRS; UMTS FDDI/FDDV/FDDVI/FDDIX/FDDXIX; HSPA; RFID; BT EDR; WLAN b/g/n; ANT+; GPS
Type identification	:	AAD-3880132-BV
S/N serial number	:	Conducted units: CB511UVFGR, CB511UVFGG Radiated unit: CB511VCP0K
HW hardware status	:	AP1
SW software status	:	6.0.A.0.463 ATP R1A034
Frequency band [MHz]	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 2402 MHz, highest channel 2480 MHz)
Type of radio transmission	:	Single carrier
Use of frequency spectrum	:	
Channel access method	:	FDMA
Type of modulation	:	GFSK
Number of channels	:	79
Antenna	:	Integrated PCB antenna
Power supply	:	3.7 V DC by Li-polymer battery
Temperature range	:	-20°C to +5 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 2	Passed	2012-01-18	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Results (max.)
CFR 15.35(c) RSS Gen (Issue 3) / 4.5	Timing of the transmitter	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Not limited
RSS Gen (Issue 3) / 4.6.1	99% - Occupied Bandwidth	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Not limited
§15.249(a)(e) RSS-210 / A2.9(a)	Maximum field strength	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.249(d) RSS-210 / A2.9(a)(b)	Band edge compliance radiated	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.249(d) RSS-210 / A2.9(a)(b)	TX spurious emissions radiated	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen	RX spurious emissions radiated	Nominal	Nominal	Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	Spurious emissions radiated < 30 MHz	Nominal	Nominal	TX/Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a) RSS-Gen	Spurious emissions conducted < 30 MHz	Nominal	Nominal	TX/Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.10-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.10-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

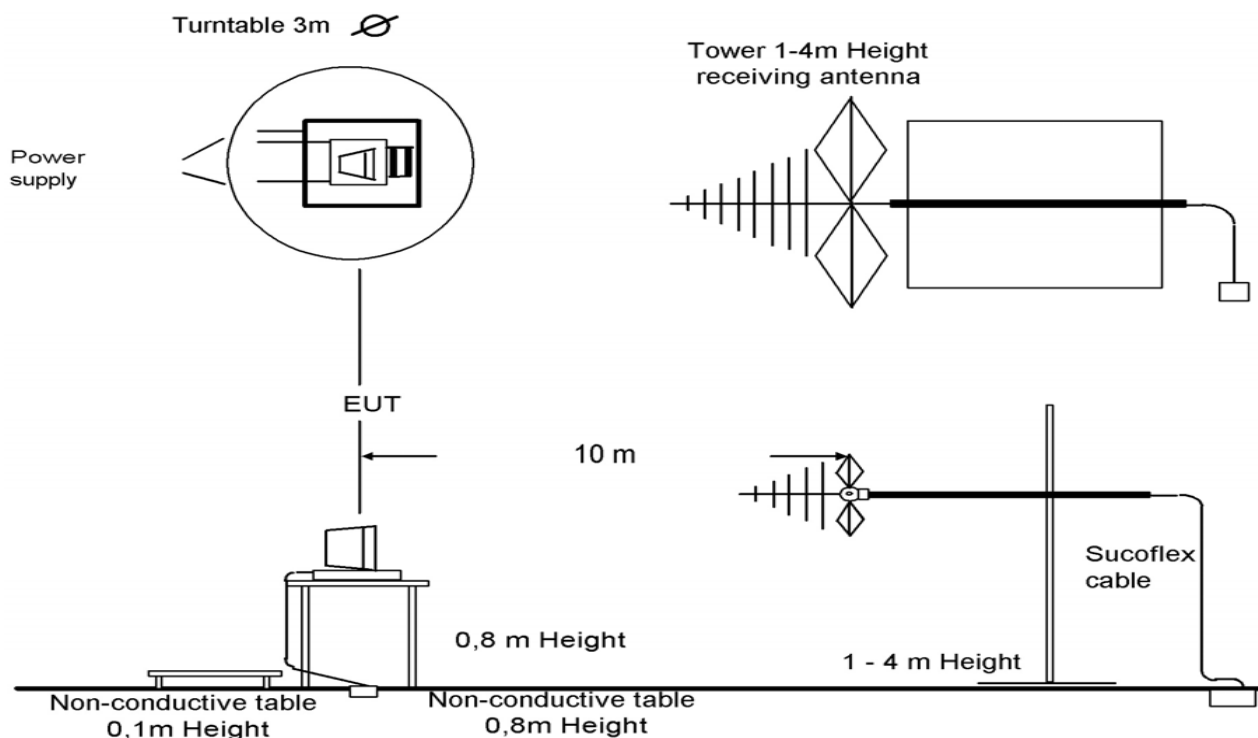

Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage or with battery.

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:

- No test mode available.
Iperf was used to ping another device with the largest support packet size
- Special software is used.
EUT is transmitting pseudo random data by itself

8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-2977/11-94-06
Equipment model number	:	AAD-3880132-BV
Certification number	:	4170B-A3880132
Manufacturer (complete address)	:	Sony Ericsson Mobile Communications AB Nya Vattentornet 22188 Lund / SWEDEN
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 2
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 2402 MHz, highest channel 2480 MHz)
RF-field strength [dB μ V/m @ 3 m] (max.)	:	EIRP: 100.27(GFSK modulation) Peak EIRP: 87.05(GFSK modulation) Average
Occupied bandwidth (99%-BW) [kHz]	:	661
Type of modulation	:	Digital Transmission System using GFSK modulation
Emission designator (TRC-43)	:	661KFXD (GFSK modulation)
Antenna information	:	Integrated PCB antenna
Transmitter spurious (worst case) [dB μ V/m @ 3m]:	:	46 @ 12.75 GHz (noise floor)
Receiver spurious (worst case) [dB μ V/m @ 3m]	:	46 @ 12.75 GHz (noise floor)

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2012-01-18

Jakob Reschke

Date

Name



Signature

9 Measurement results

9.1 Timing of the transmitter

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	See plot
Resolution bandwidth:	See plot
Video bandwidth:	See plot
Span:	Zero
Trace-Mode:	Single

Limits:


FCC	IC
CFR 15.35 (c)	RSS-GEN Issue 3 Section 4.5
Timing of the transmitter	
<p>(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.</p>	

Result:

Plot 1: Transmit bursts (within 100ms)

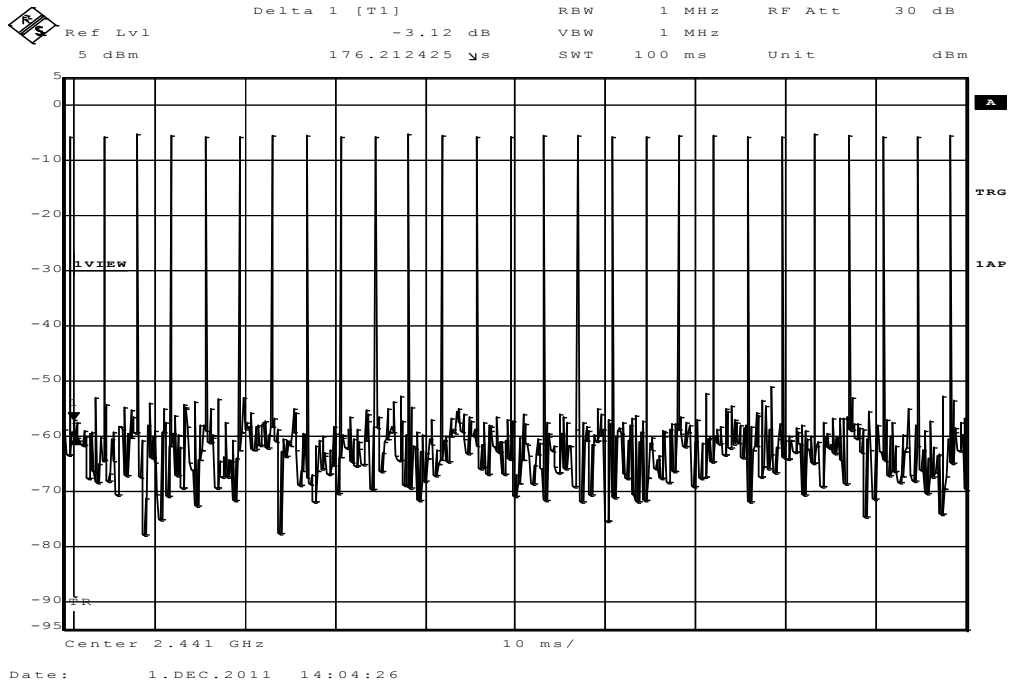

Plot 2: Transmit burst in detail

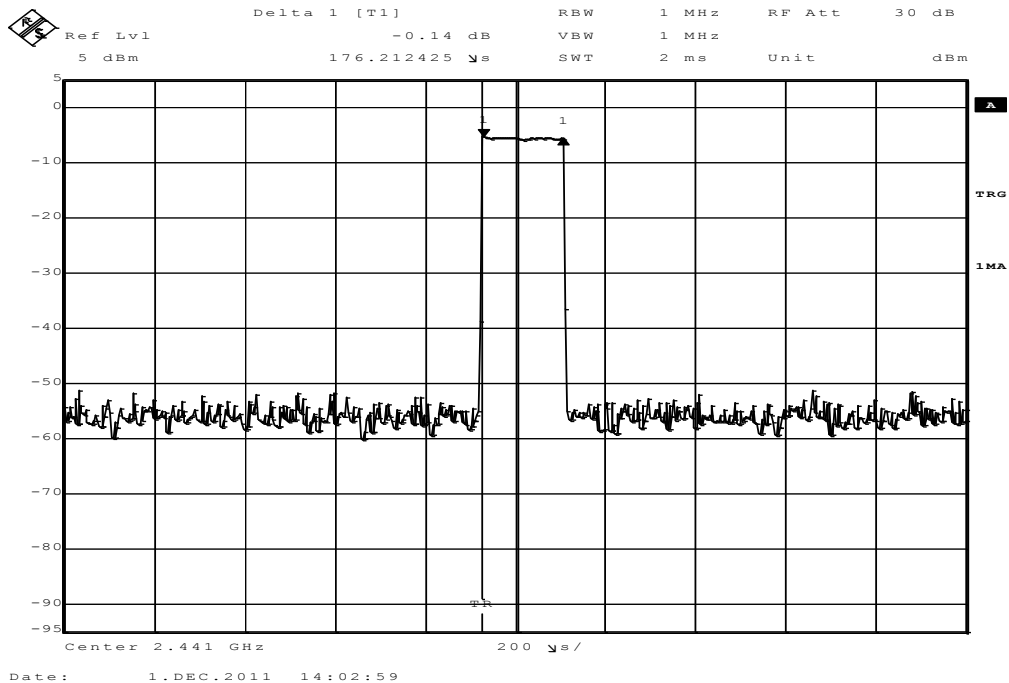

Transmit time (TX on) within 100 ms = 27 x 176.21 μ s = 4757.67 μ s
 Assumed Transmit time (TX on) within 100 ms for further calculations: 4.581 ms

The peak-to-average correction factor [dB] is calculated with $20\text{Log} [\text{TX on} / 100\text{ms}]$.

Result:

Peak-to-average correction factor [dB]: 26.45

9.2 Spectrum bandwidth – 99% bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	10 kHz
Video bandwidth:	10 kHz
Span:	3 MHz
Trace-Mode:	Max Hold

Limits:


FCC	IC
-	RSS Gen, Issue 3, 4.6.1
Spectrum Bandwidth – 99% Bandwidth	
Required for emission designator	

Results:


Modulation Frequency	99% BANDWIDTH [kHz]		
	2402 MHz	2441 MHz	2480 MHz
ANT+	661	661	661
Measurement uncertainty	± 30 kHz		

Plots: ANT+

Plot 1: lowest channel

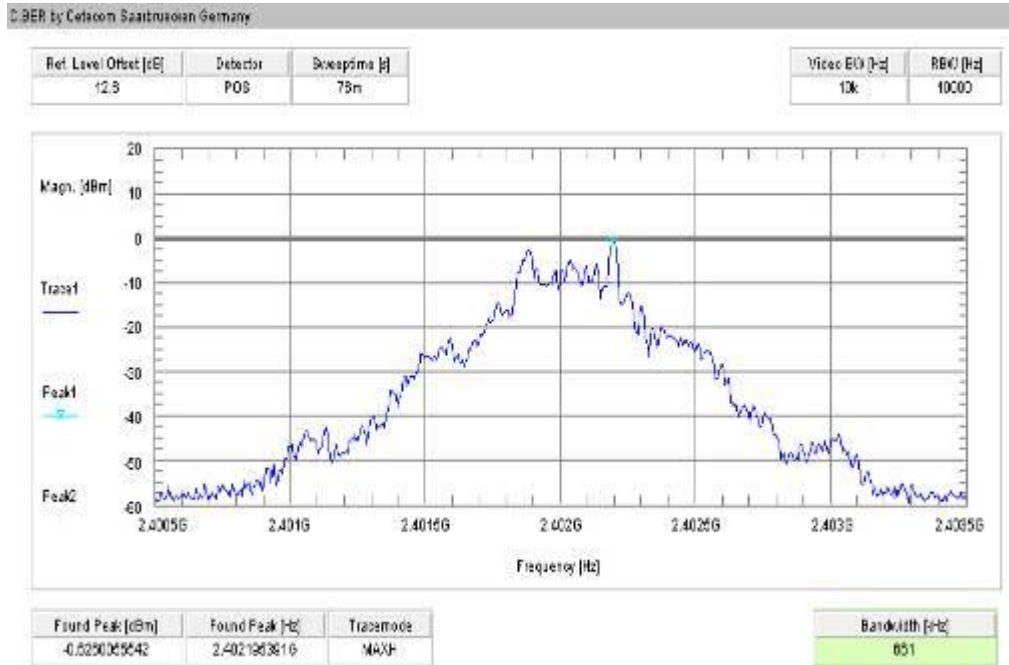

Plot 2: middle channel

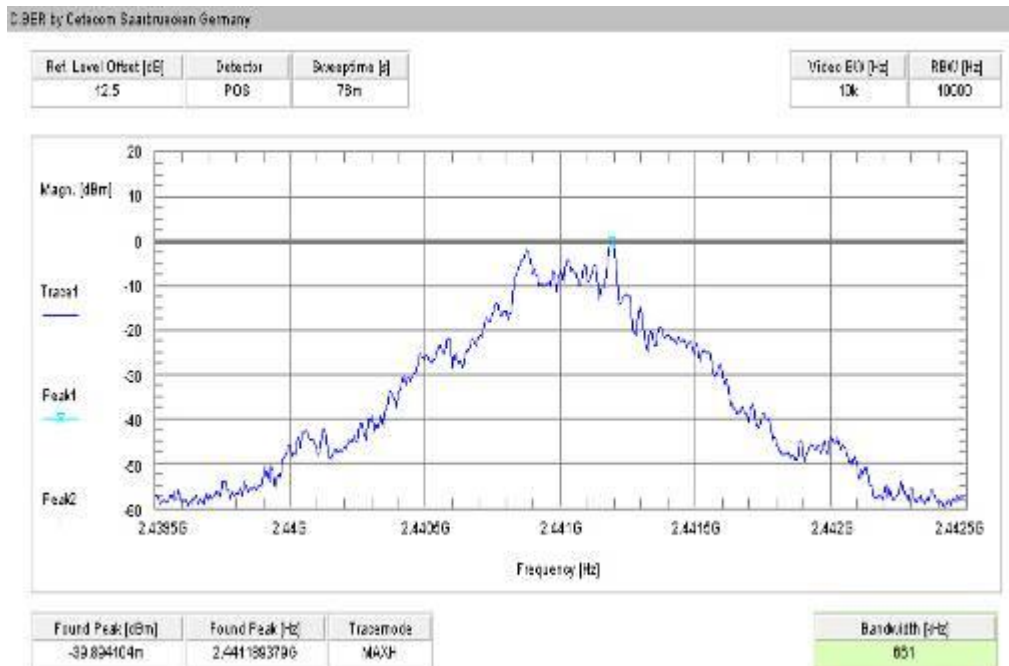

Plot 3: highest channel



9.3 Maximum field strength

Description:

Measurement of the maximum field strength radiated.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	1 MHz
Span:	3 MHz
Trace-Mode:	Max Hold
Measurement distance:	3 m

Limits:

FCC	IC
CFR 15.249(a)(e)	RSS-210, Issue 8, A2.9(a)
Maximum field strength	
The field strength of emissions of intentional radiators shall comply with the following: Field strength of fundamental: 50 mV/m / (94 dB μ V/m) @ 3 m (AVG) 500 mV/m / (114 dB μ V/m) @ 3 m (Peak)	

Result:

Modulation	Maximum field strength [dB μ V/m]		
	2402 MHz	2441 MHz	2480 MHz
Frequency			
Peak	98.12	100.12	100.27
AVG*)	71.67	73.67	73.82
Measurement uncertainty	± 3 dB		

*) Average value calculated with duty cycle correction factor. (see chapter 9.1)

Result: The result of the measurement is passed.

9.4 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to lowest channel for the lower restricted band and to highest channel for the upper restricted band. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Span:	Lower Band: 2300 – 2400 MHz Higher Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

Limits:


FCC	IC
CFR Part 15.249(d)	RSS 210, Issue 8, A 2.9(a)(b)
Band Edge Compliance Radiated	
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 / RSS GEN, whichever is the lesser attenuation.	
54 dB μ V/m (AVG) / 74 dB μ V/m (Pk)	

Result:


Modulation	Band Edge Compliance Radiated [dB μ V/m]
	GFSK
Lower Band Edge – Lowest Channel	< 54 dB μ V/m (see plots 1/3)
Upper Band Edge – Highest Channel	< 54 dB μ V/m (see plot 2/4)
Measurement uncertainty	\pm 3 dB

Plots:


Plot 1: lower band edge, horizontal polarization

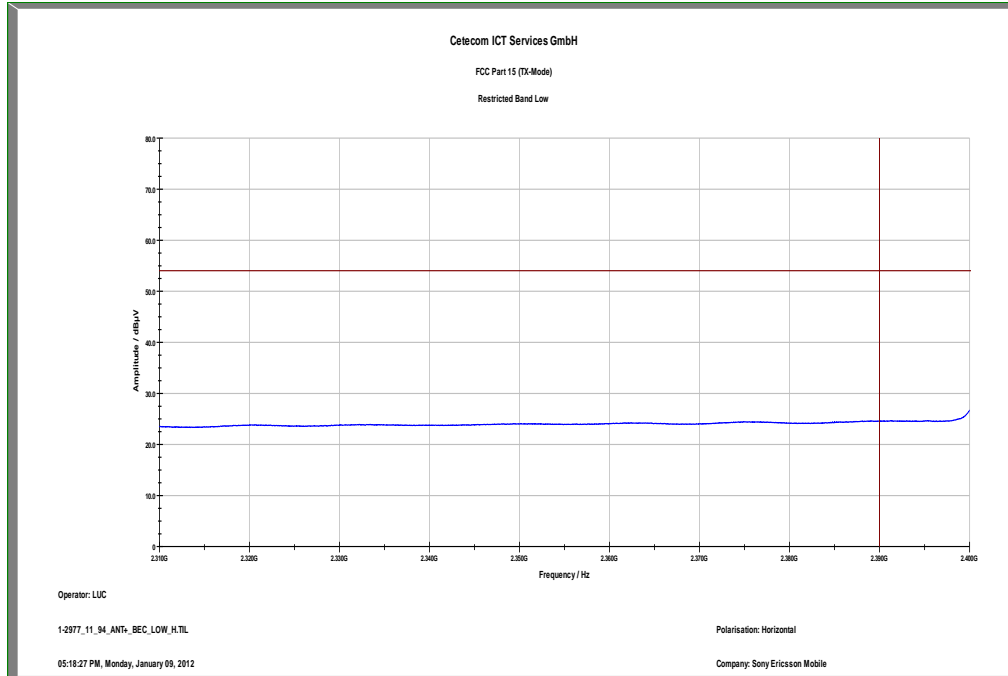


Plot 2: upper band edge, horizontal polarization

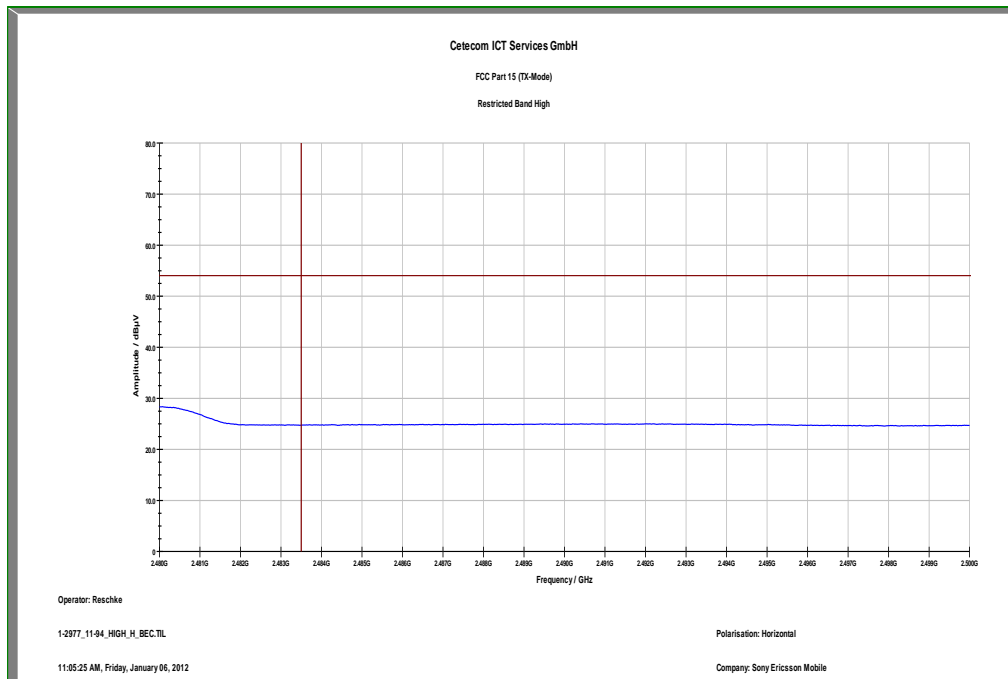

Plot 3: lower band edge, vertical polarization

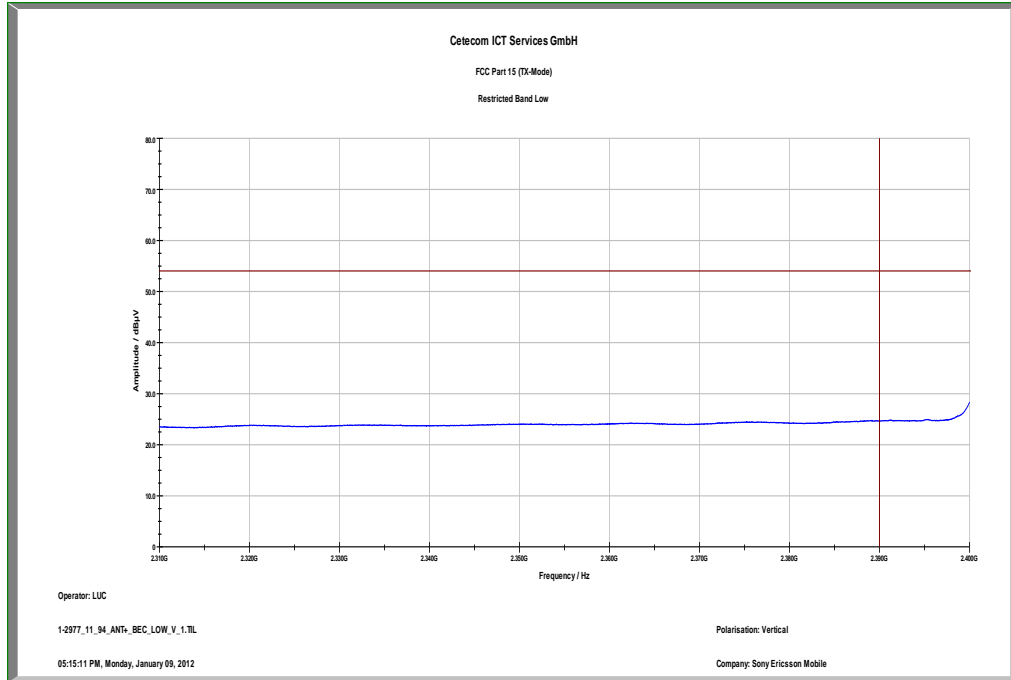

Plot 4: upper band edge, vertical polarization

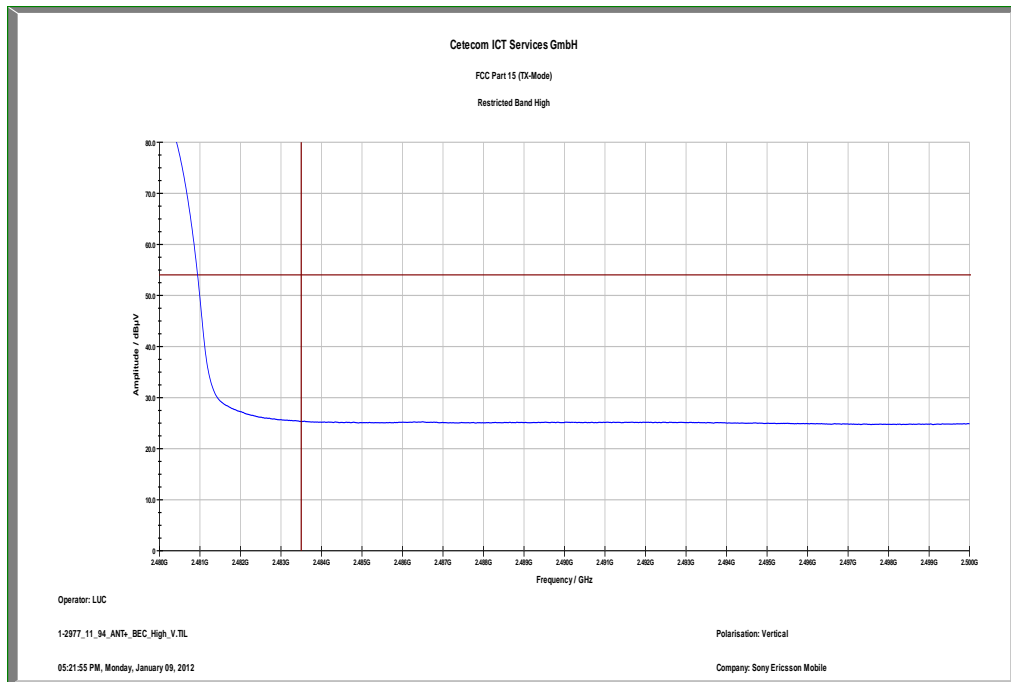

Result: The result of the measurement is passed.

9.5 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz or Duty cycle correction
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.249(d)		RSS 210, Issue 8, A 2.9(a)(b)	
TX spurious emissions radiated			
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 / RSS GEN, whichever is the lesser attenuation.			
§15.209			
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance	
30 - 88	30.0	10	
88 – 216	33.5	10	
216 – 960	36.0	10	
Above 960	54.0	3	

Results:

TX Spurious Emissions Radiated [dB μ V/m]								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot!			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot!			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot!		
1240	1 MHz / 1 MHz PP	38.79	1500	1 MHz / 1 MHz PP	36.33	-/-	-/-	-/-
1300	1 MHz / 1 MHz PP	36.25	-/-	-/-	-/-	-/-	-/-	-/-
3206	1 MHz / 1 MHz PP	42.99	-/-	-/-	-/-	-/-	-/-	-/-
For emissions above 12.75 GHz, please take a look at the plots.			For emissions above 12.75 GHz, please take a look at the plots			For emissions above 12.75 GHz, please take a look at the plots		
Measurement uncertainty			± 3 dB					

Result: The result of the measurement is passed.

Plots:

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: AAD-3880132-BV
 Serial Number: sample radiated 02
 Test Description: FCC part 15 B class B @ 10 m
 Operating Conditions: charging + ANT+ CH0
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m
Subrange **Step Size** **Detectors** **IF BW** **Meas. Time** **Preamp**
 30 MHz - 2 GHz 60 kHz QPK 120 kHz 1 s 20 dB


FCC_10m(B)_3

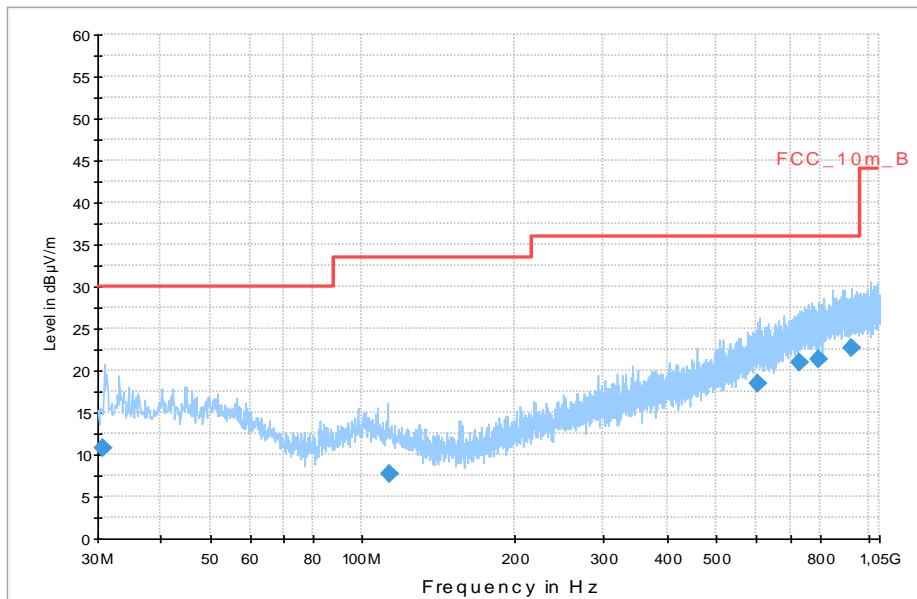


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
30.728100	10.9	1000.0	120.000	136.0	V	174.0	12.6	19.1	30.0	
112.691400	7.7	1000.0	120.000	124.0	V	196.0	10.8	25.8	33.5	
605.965350	18.5	1000.0	120.000	170.0	H	77.0	20.8	17.5	36.0	
732.834150	20.9	1000.0	120.000	170.0	V	196.0	23.3	15.1	36.0	
793.476750	21.3	1000.0	120.000	170.0	H	186.0	23.8	14.7	36.0	
925.231800	22.8	1000.0	120.000	170.0	V	186.0	25.3	13.2	36.0	


Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical polarization

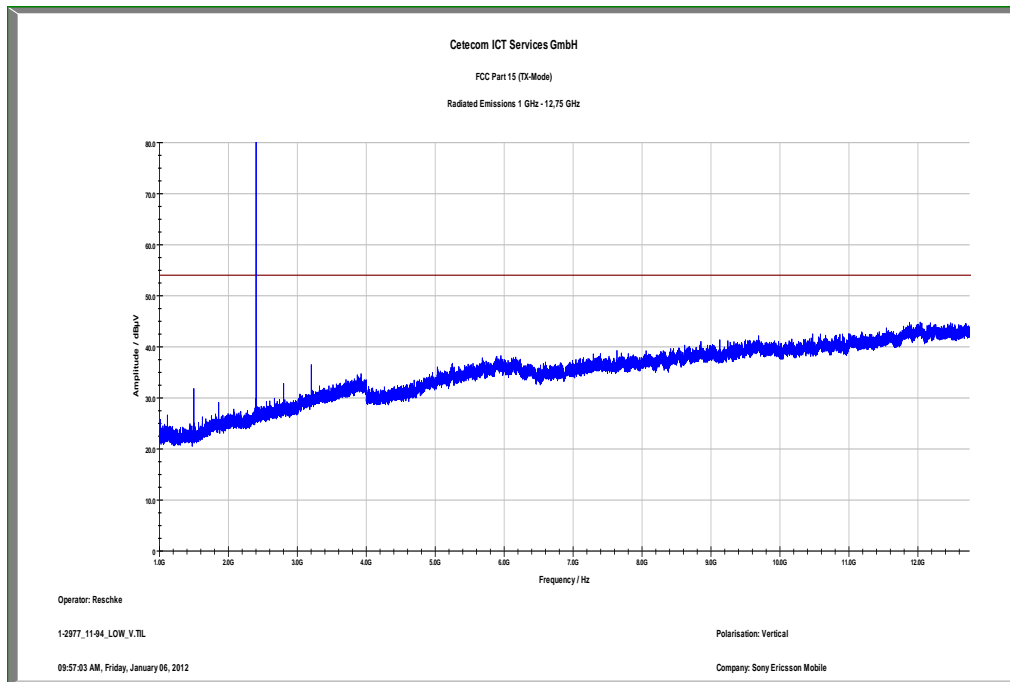

Plot 3: Lowest channel, 1 GHz to 12.75 GHz, horizontal polarization

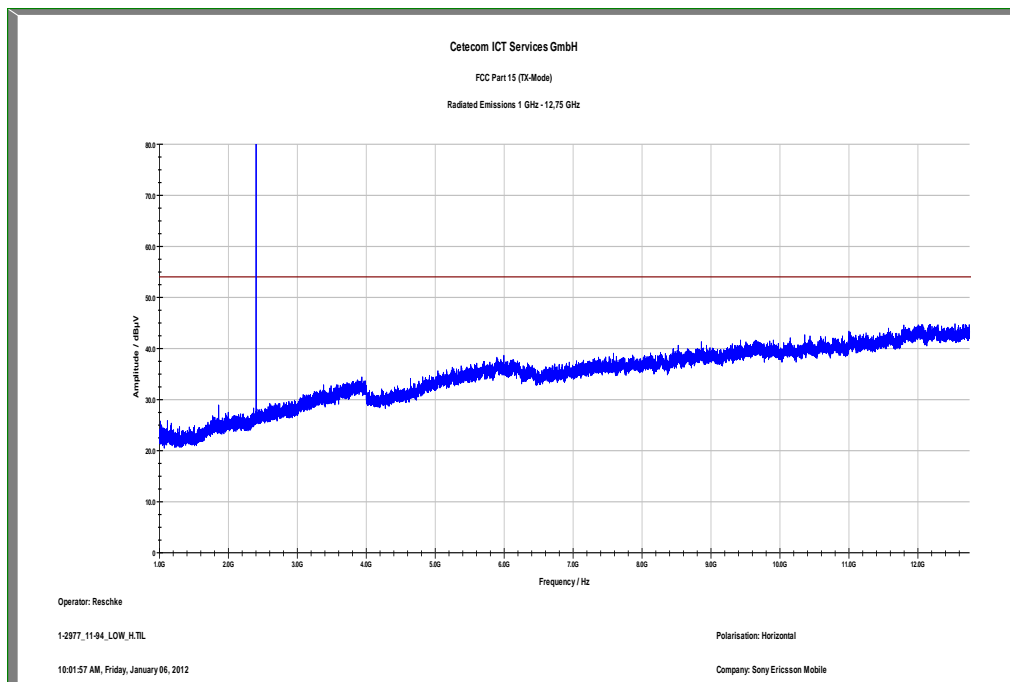


Plot 4: Lowest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

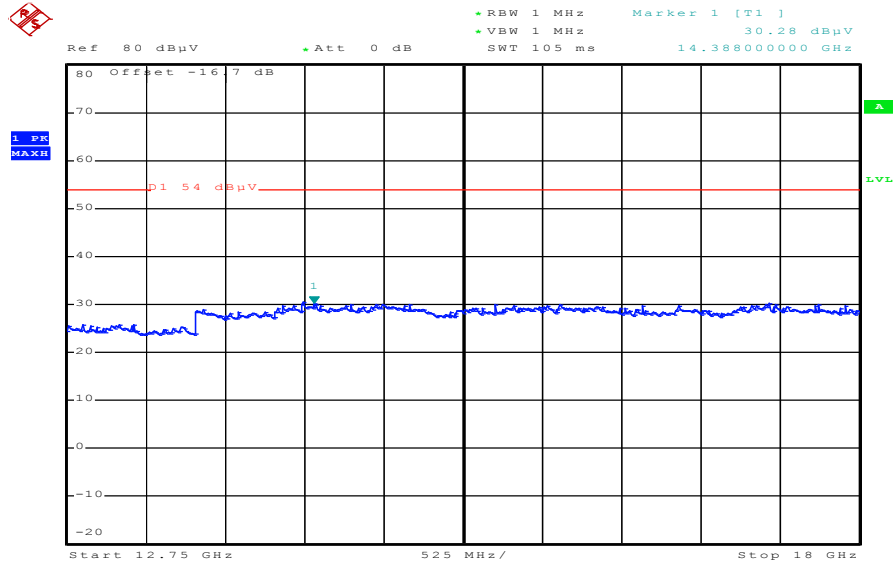

Date: 9.JAN.2012 17:15:45

Plot 5: Lowest channel, 18 GHz to 25 GHz, vertical & horizontal polarization

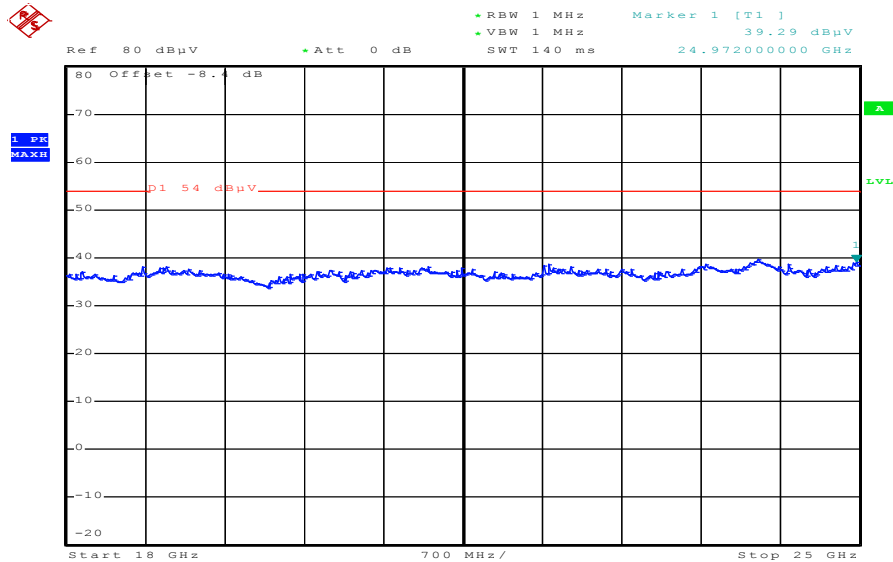

Date: 9.JAN.2012 17:28:54

Plot 6: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: AAD-3880132-BV
 Serial Number: sample radiated 02
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: charging + ANT+ CH39
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange **Step Size** **Detectors** **IF BW** **Meas. Time** **Preamp**
 30 MHz - 2 GHz 60 kHz QPK 120 kHz 1 s 20 dB

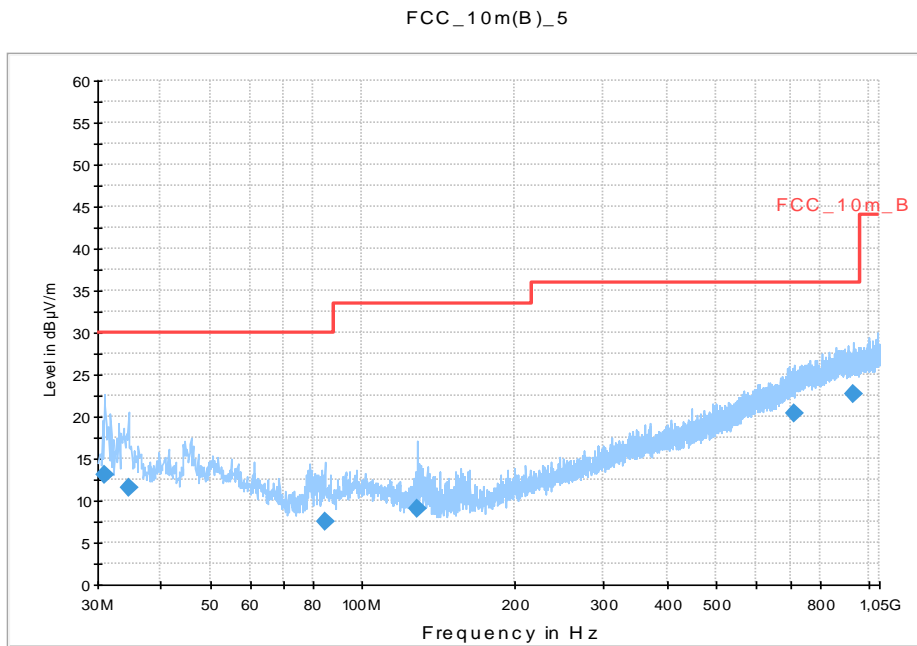


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
30.960000	13.1	1000.0	120.000	143.0	V	321.0	12.6	16.9	30.0	
34.560000	11.5	1000.0	120.000	143.0	V	245.0	13.0	18.5	30.0	
84.240000	7.6	1000.0	120.000	239.0	V	69.0	9.7	22.4	30.0	
128.640000	9.1	1000.0	120.000	133.0	V	245.0	9.5	24.4	33.5	
713.880000	20.5	1000.0	120.000	105.0	H	121.0	22.8	15.5	36.0	
930.840000	22.8	1000.0	120.000	270.0	V	-2.0	25.3	13.2	36.0	


Plot 7: Middle channel, 1 GHz to 12.75 GHz, vertical polarization

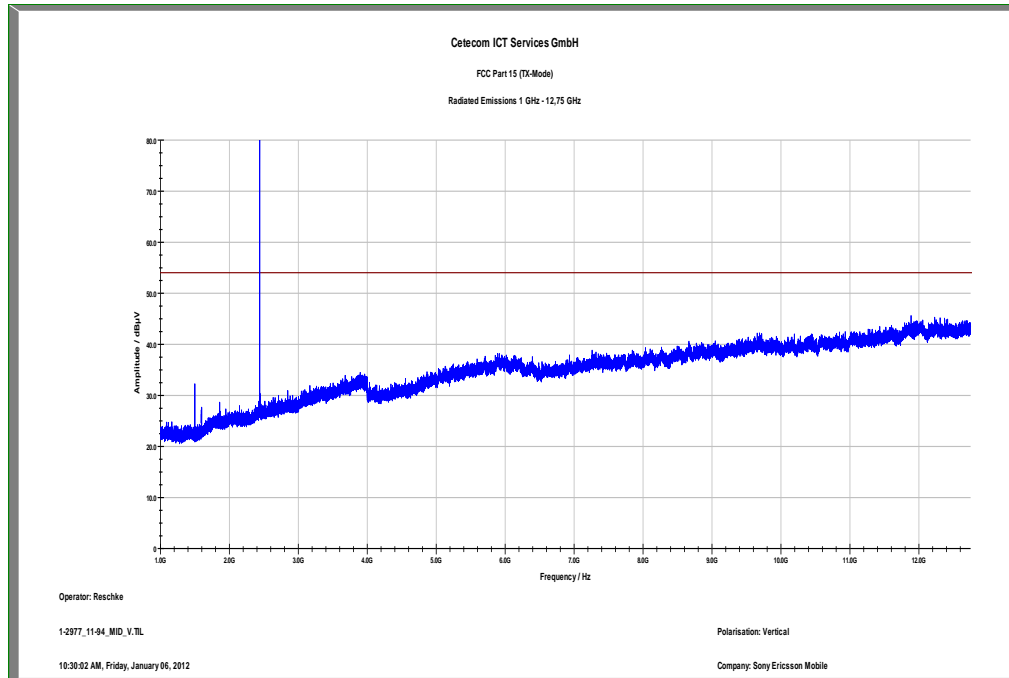

Plot 8: Middle channel, 1 GHz to 12.75 GHz, horizontal polarization

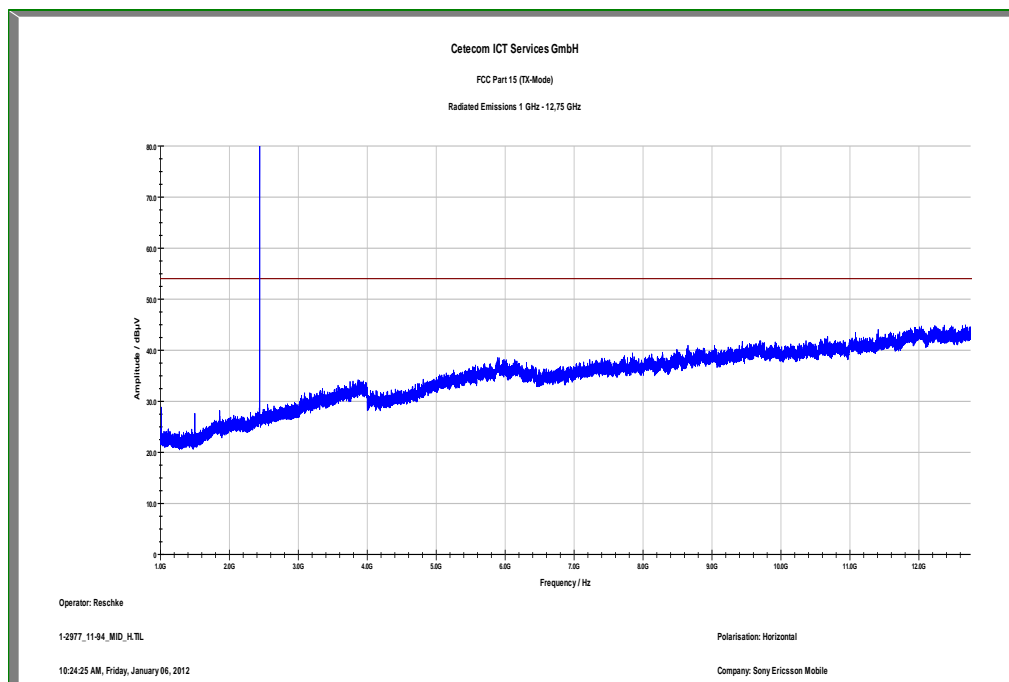


Plot 9: Middle channel, 12 GHz to 18 GHz, vertical & horizontal polarization

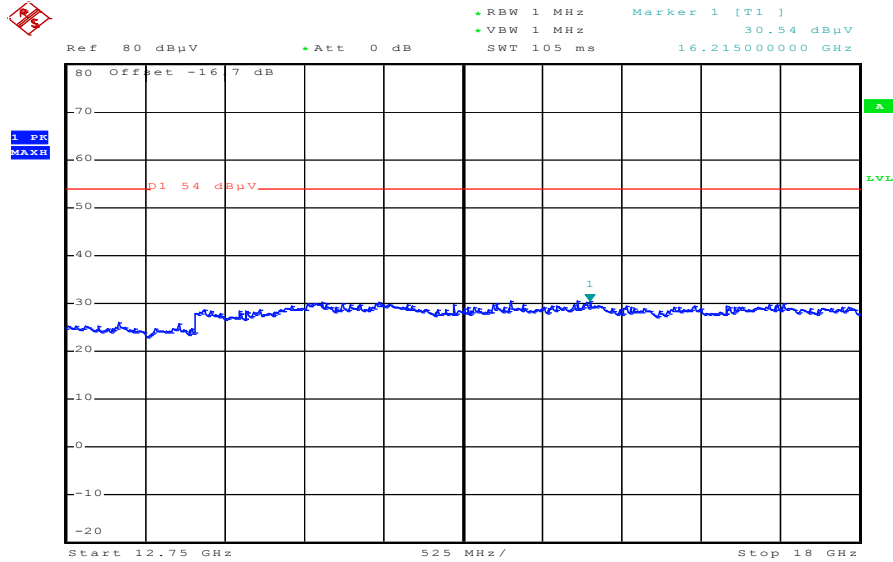

Date: 9.JAN.2012 17:17:08

Plot 10: Middle channel, 18 GHz to 25 GHz, vertical & horizontal polarization

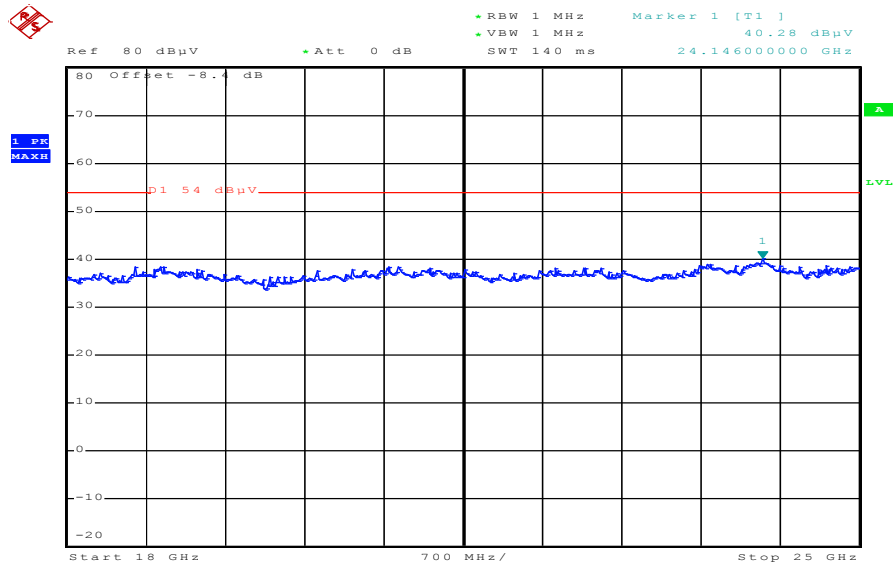

Date: 9.JAN.2012 17:27:39

Plot 11: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880132-BV
 Serial Number: sample radiated 02
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: charging + ANT+ CH78
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB


FCC_10m(B)_5

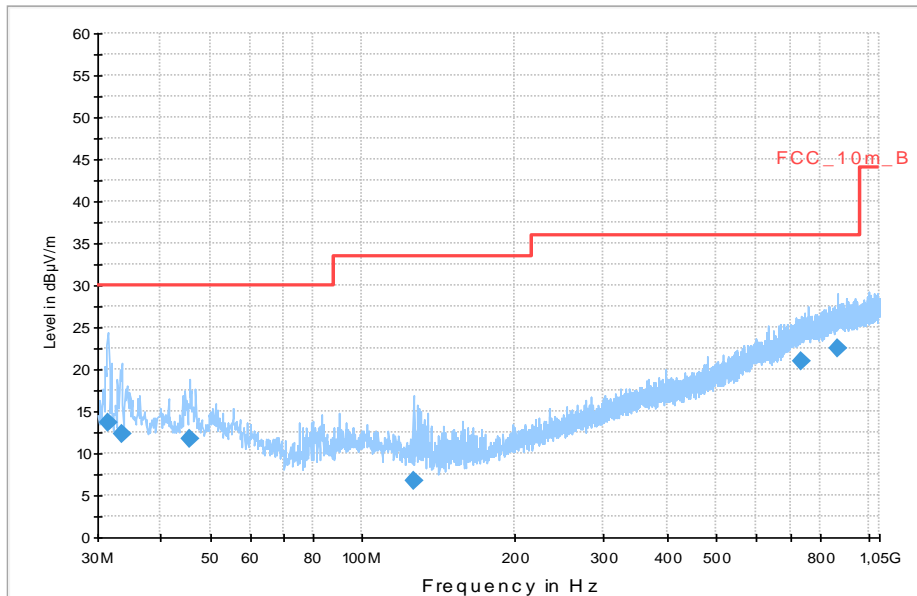


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.440000	13.6	1000.0	120.000	132.0	V	-2.0	12.7	16.4	30.0	
33.480000	12.2	1000.0	120.000	132.0	V	334.0	12.9	17.8	30.0	
45.600000	11.7	1000.0	120.000	114.0	V	50.0	13.3	18.3	30.0	
125.880000	6.8	1000.0	120.000	195.0	V	321.0	9.7	26.7	33.5	
733.320000	20.9	1000.0	120.000	270.0	H	125.0	23.3	15.1	36.0	
865.560000	22.5	1000.0	120.000	185.0	V	334.0	24.8	13.5	36.0	


Plot 12: Highest channel, 1 GHz to 12.75 GHz, vertical polarization

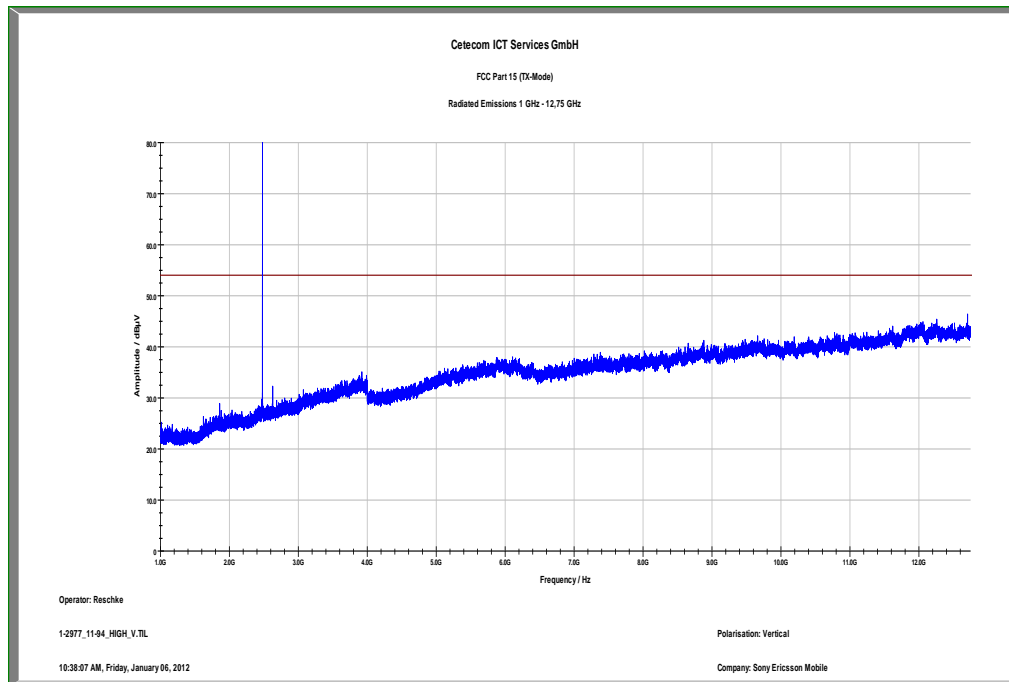

Plot 13: Highest channel, 1 GHz to 12.75 GHz, horizontal polarization

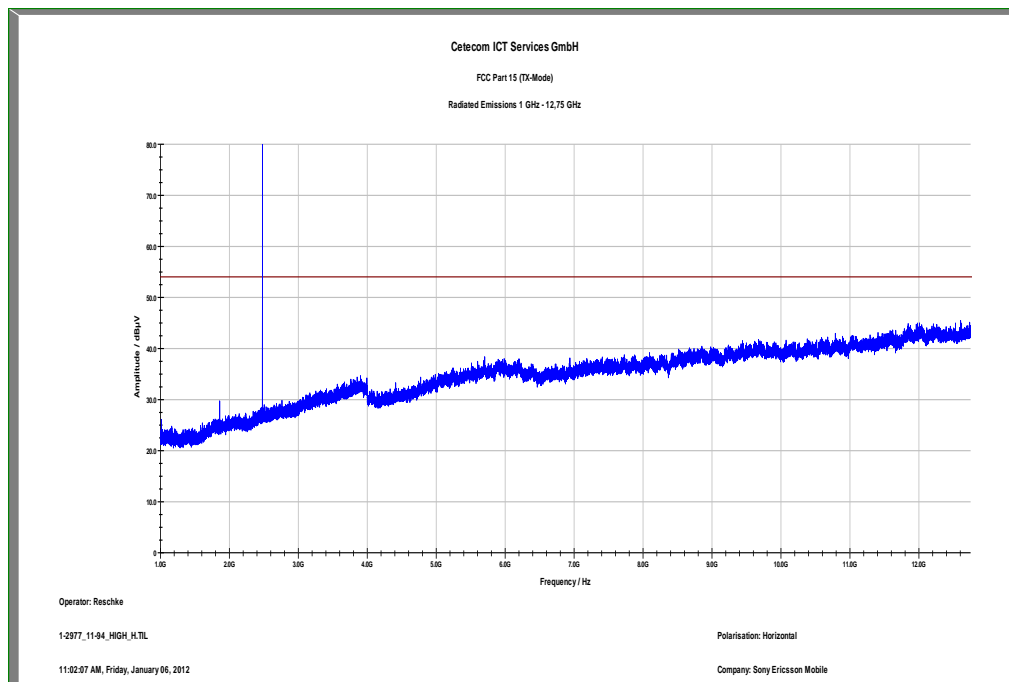


Plot 14: Highest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

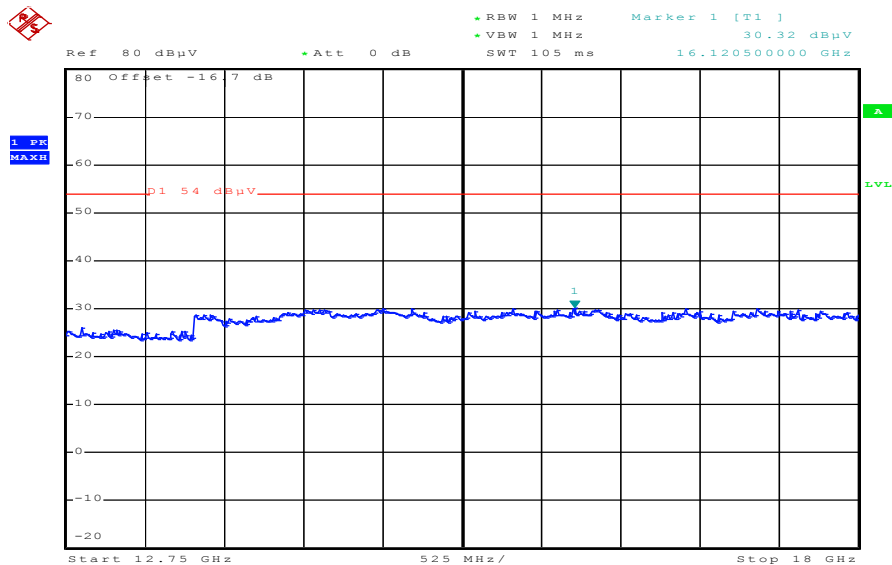

Date: 9.JAN.2012 17:18:27

Plot 15: Highest channel, 18 GHz to 25 GHz, vertical & horizontal polarization

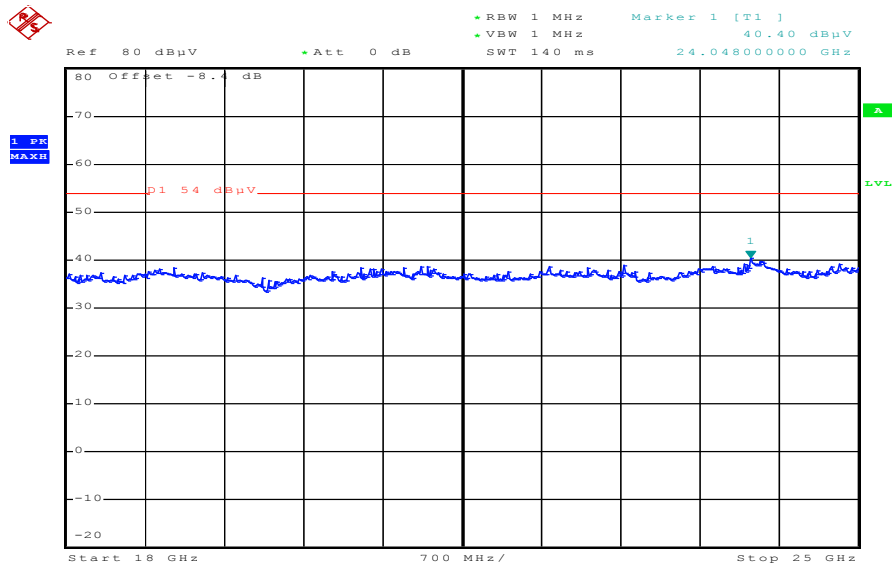

Date: 9.JAN.2012 17:26:24

9.6 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
CFR Part 15.109		RSS Gen, Issue 3, 4.10
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
no critical peaks detected between 1 GHz and 12.75 GHz.		
For emissions above 12.75 GHz take a look at the plots.		
Measurement uncertainty	± 3 dB	

Result: The result of the measurement is passed.

Plots: RX / Idle – mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: AAD-3880132-BV
 Serial Number: sample radiated 02
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: charging + ANT+ idle
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m
Subrange **Step Size** **Detectors** **IF BW** **Meas. Time** **Preamp**
 30 MHz - 2 GHz 60 kHz QPK 120 kHz 1 s 20 dB


FCC_10m(B)_3

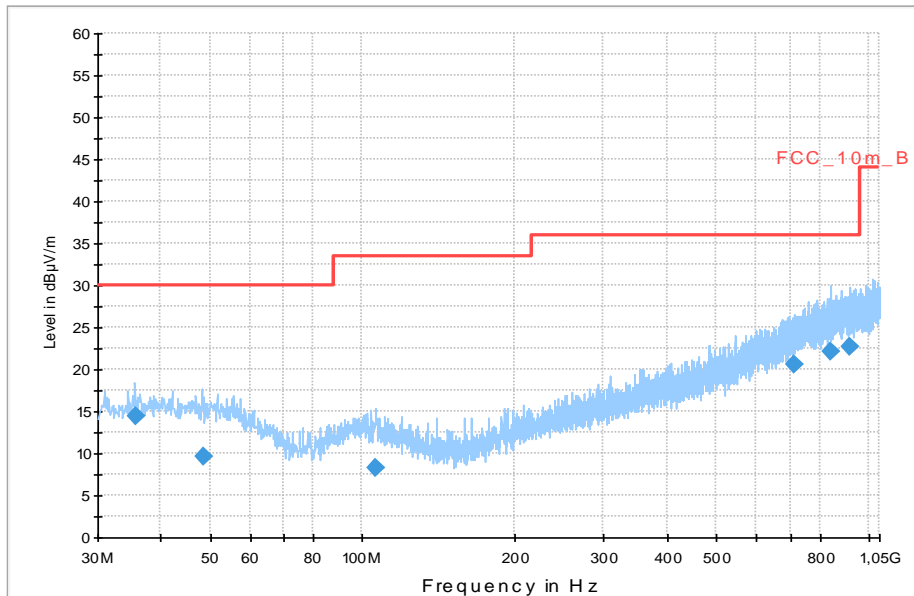


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.732850	14.5	1000.0	120.000	106.0	V	259.0	13.1	15.5	30.0	
48.503250	9.7	1000.0	120.000	170.0	V	-7.0	13.3	20.3	30.0	
106.243650	8.2	1000.0	120.000	105.0	H	187.0	11.3	25.3	33.5	
711.159450	20.5	1000.0	120.000	170.0	V	95.0	22.8	15.5	36.0	
844.725300	22.2	1000.0	120.000	106.0	H	284.0	24.5	13.8	36.0	
915.663150	22.7	1000.0	120.000	98.0	V	80.0	25.2	13.3	36.0	


Plot 2: 1 GHz to 12.75 GHz, vertical polarization

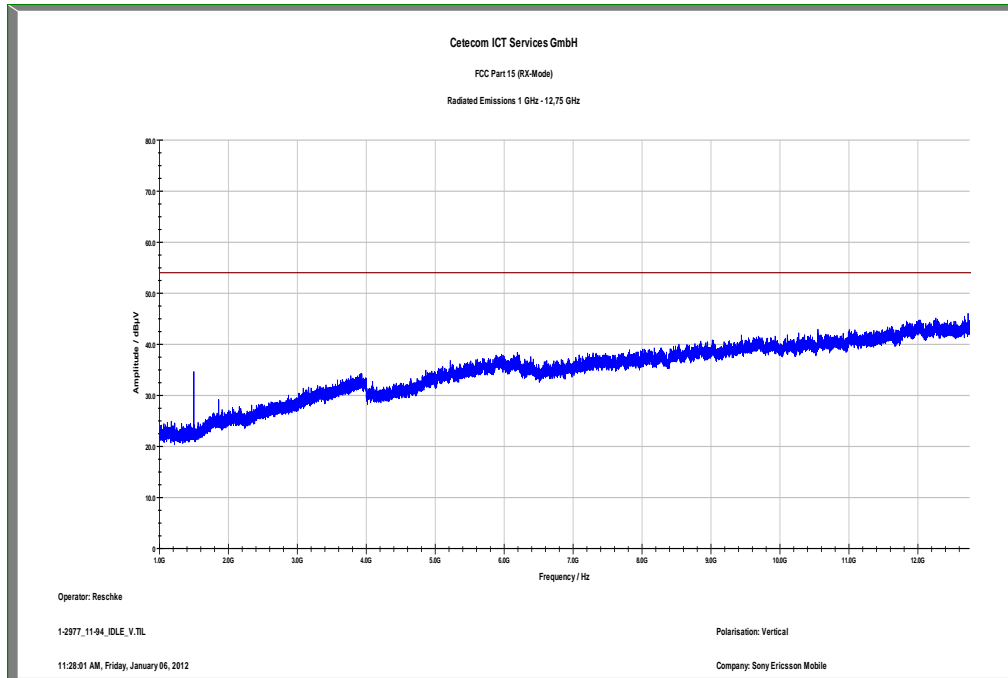

Plot 3: 1 GHz to 12.75 GHz, horizontal polarization

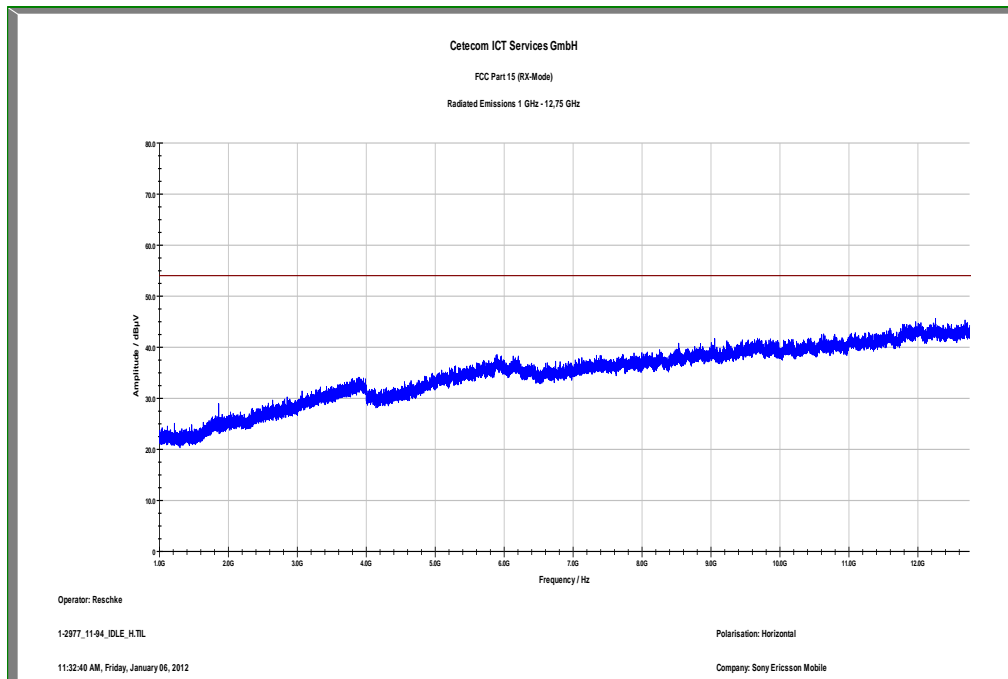


Plot 4: 12 GHz to 18 GHz, vertical & horizontal polarization

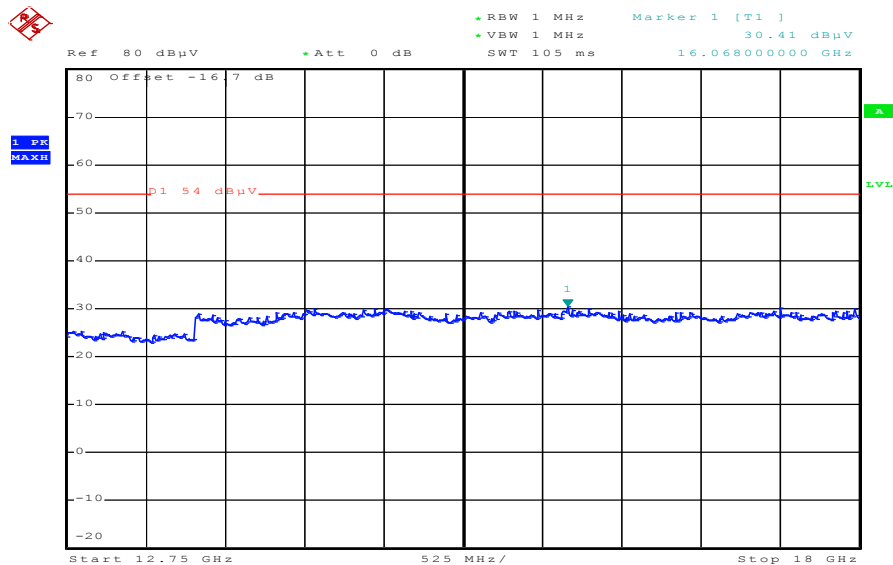

Date: 9.JAN.2012 17:22:04

Plot 5: 18 GHz to 25 GHz, vertical & horizontal polarization

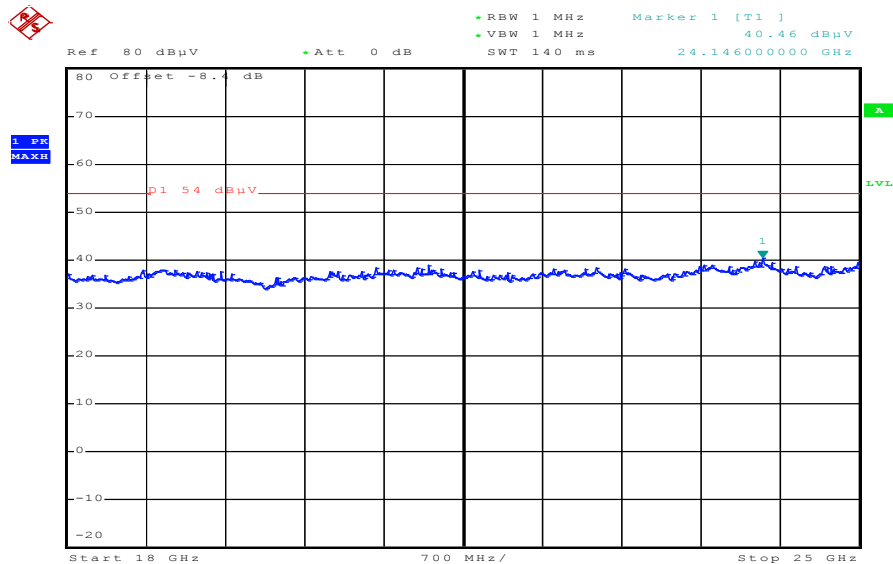

Date: 9.JAN.2012 17:25:15

9.7 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to lowest, middle and highest channel. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.209(a)		RSS –Gen	
Spurious Emissions Radiated < 30 MHz			
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance	
0.009 – 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	


Results:

Spurious Emissions Radiated < 30 MHz [dB μ V/m]								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
No critical peaks detected!			No critical peaks detected!			No critical peaks detected!		
Measurement uncertainty			± 3 dB					


Result: The result of the measurement is passed.

Plots:


Plot 1: 9 kHz to 30 MHz / lowest channel

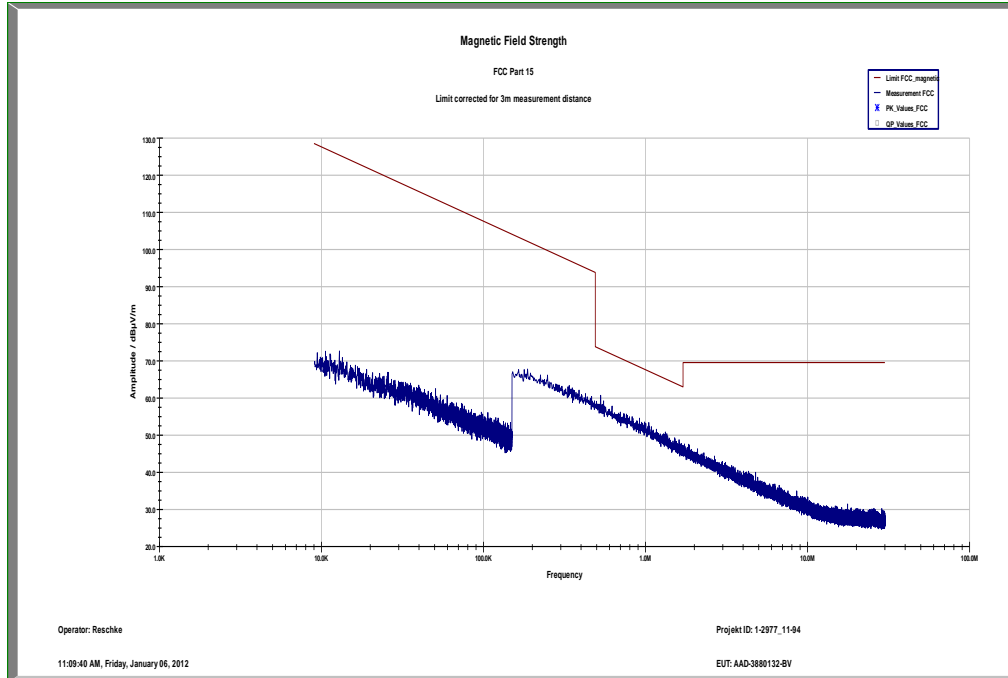


Plot 2: 9 kHz to 30 MHz / middle channel

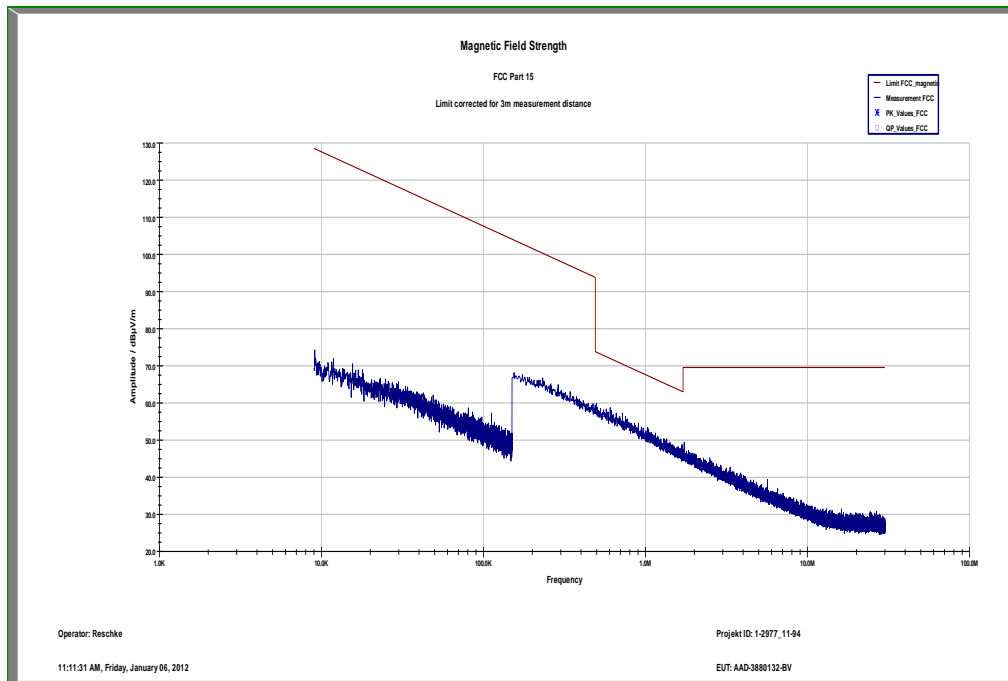

Plot 3: 9 kHz to 30 MHz / highest channel

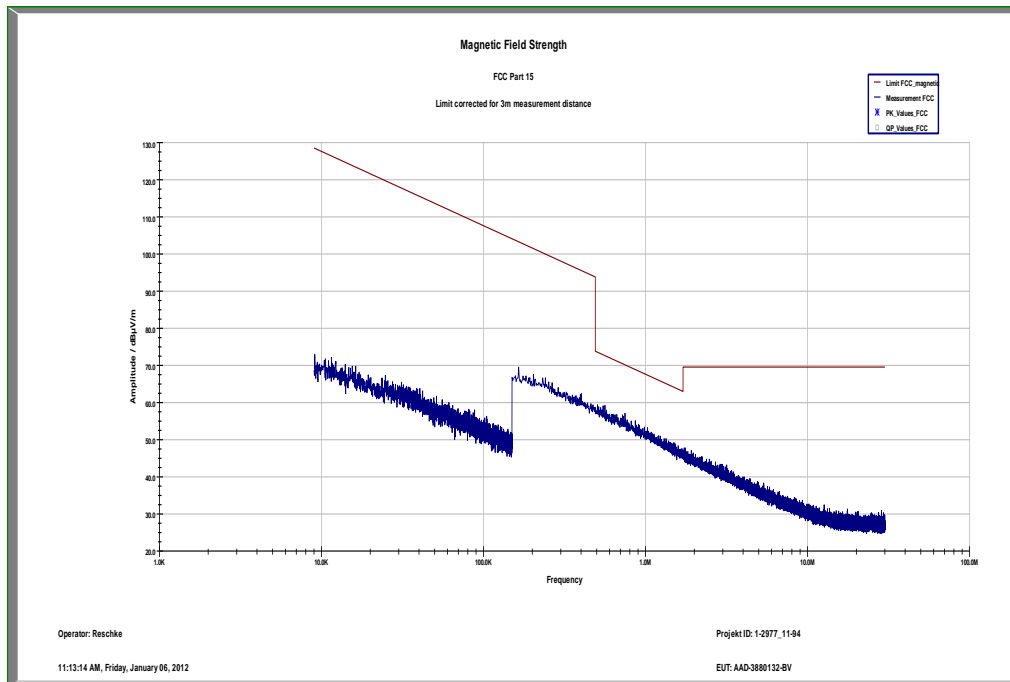

Plot 4: 9 kHz to 30 MHz / Idle mode

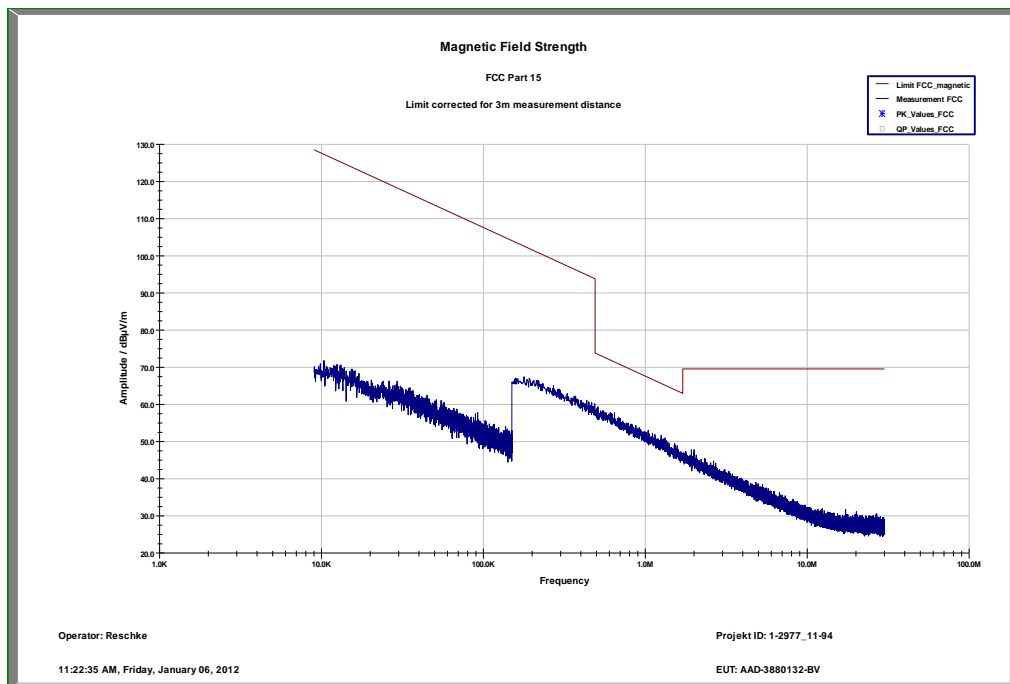

9.8 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel and Idle mode. If critical peaks are found the lowest and highest channel will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.107(a)		ICES-003, Issue 4	
TX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dB μ V/m)	Average (dB μ V/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	

*Decreases with the logarithm of the frequency


Results:

Spurious Emissions Conducted < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No critical peaks detected!		
Measurement uncertainty	± 3 dB	


Result: The result of the measurement is passed.

Plots:


Plot 1: 9 kHz to 30 MHz / phase Line, TX mode

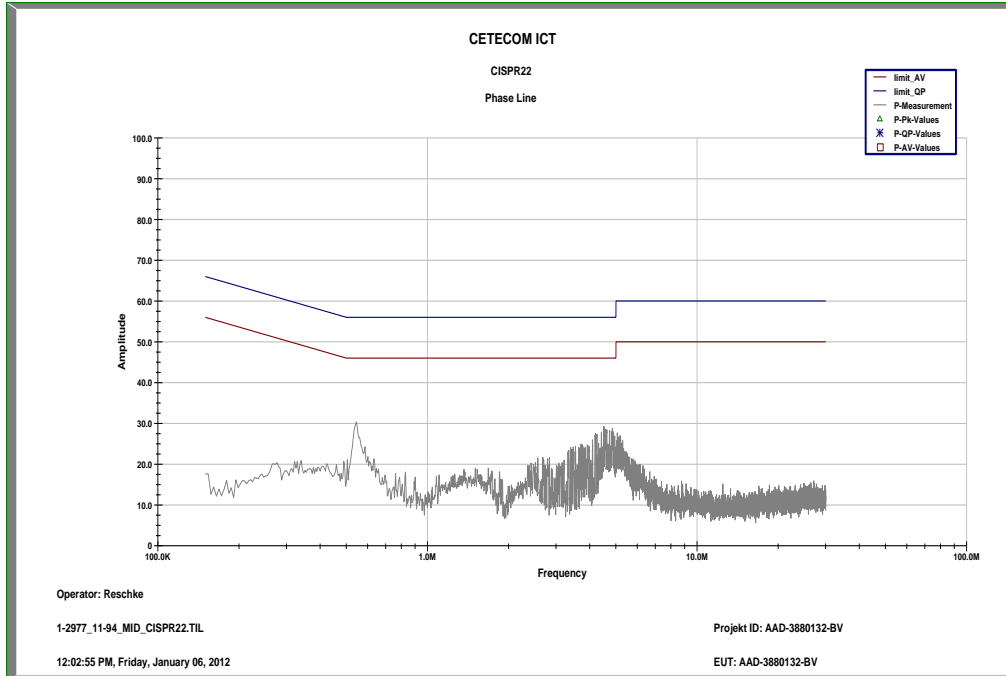


Plot 2: 9 kHz to 30 MHz / neutral Line, TX mode

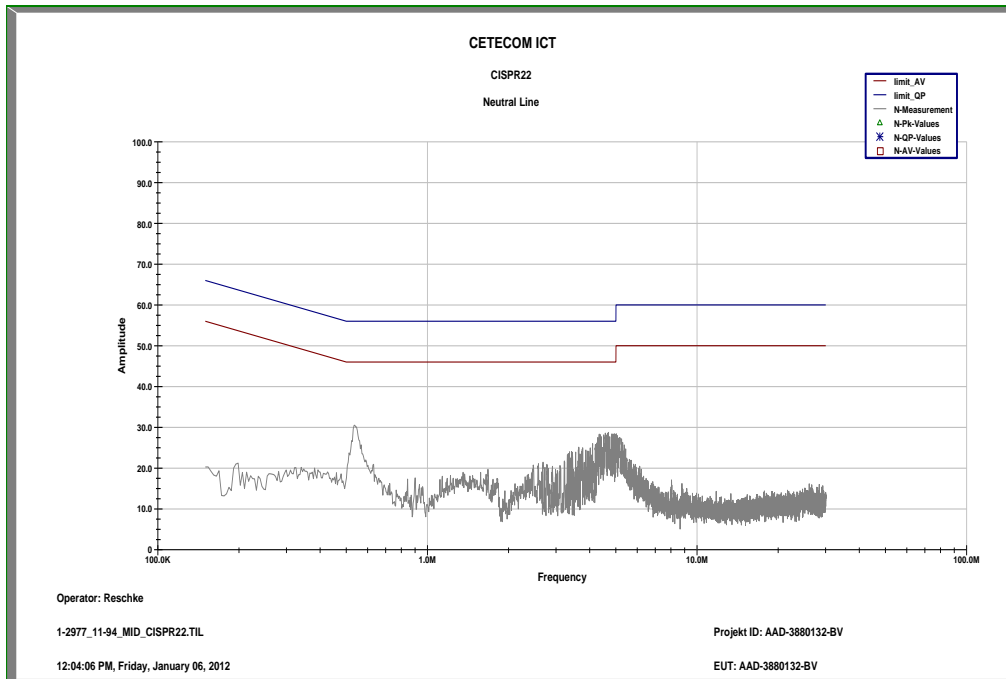

Plot 3: 9 kHz to 30 MHz / phase Line, Idle mode

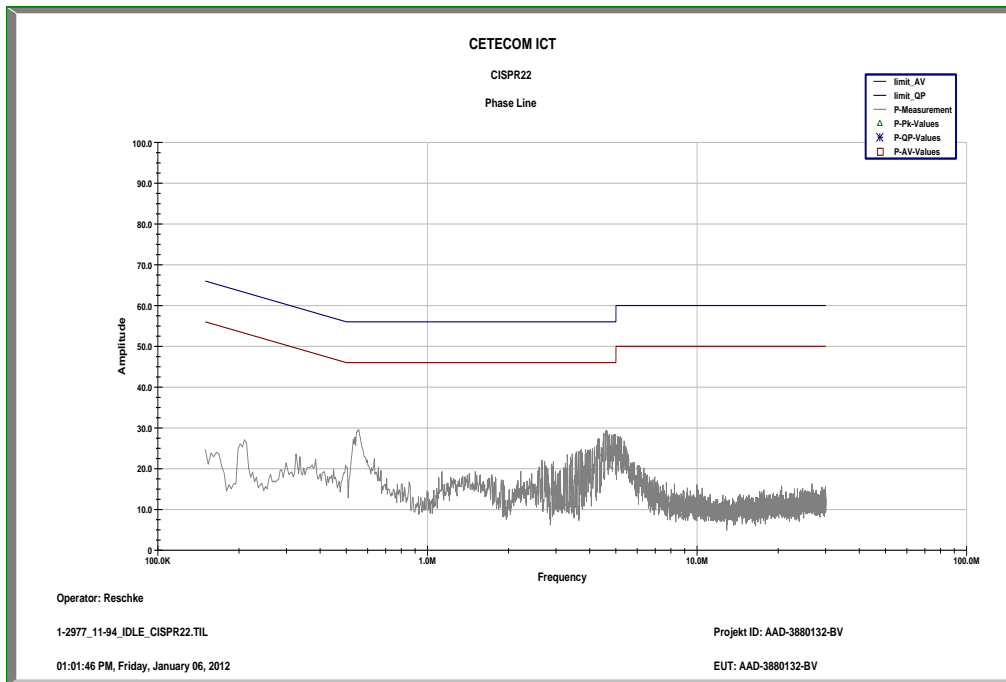

Plot 4: 9 kHz to 30 MHz / neutral Line, Idle mode

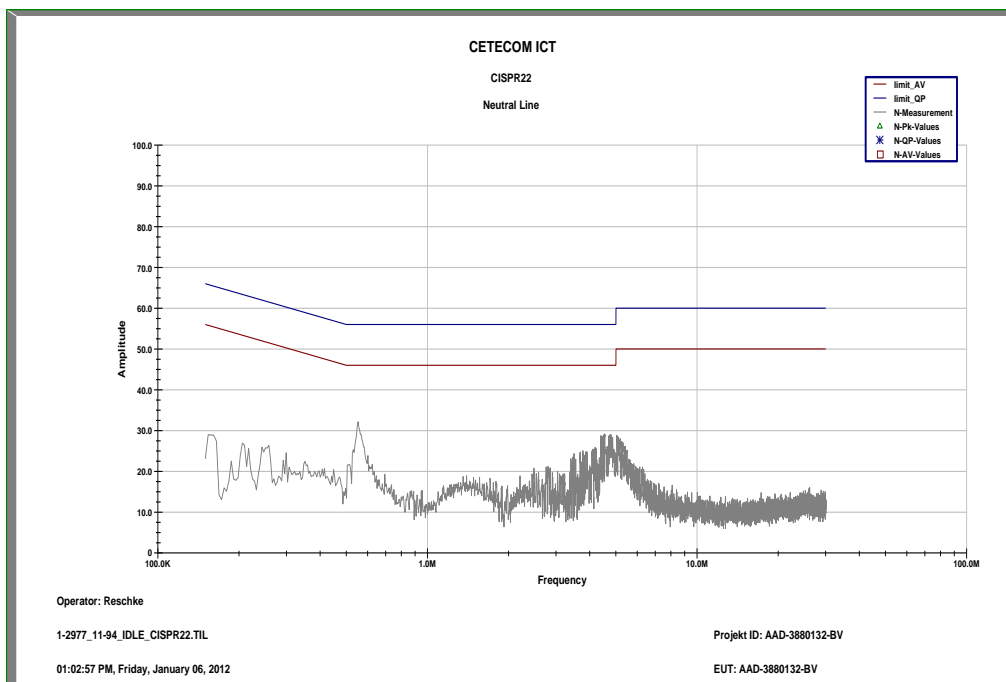

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
2	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	11.05.2011	11.05.2013
3	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
4	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
5	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
6	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
7	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
8	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
9	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
10	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
11	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
12	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
13	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
14	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vIKI!	08.09.2010	08.09.2012
15	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	14.10.2011	14.10.2014
16	n. a.	Switch / Control Unit	3488A	HP Meßtechnik		300001691	ne		
17	n. a.	Power Supply DC	NGPE 40/40	R&S	388	400000078	vIKI!	13.09.2010	13.09.2012
18	n. a.	Hygro-Thermometer	-/, 5-45°C, 20-100%rF	Thies Clima	-/	400000080	k	04.08.2011	04.08.2012
19	n. a.	Signal Generator 0.01/2 - 20 GHz, Frequ. Resol. 0.1Hz	SMP02	R&S	835133/011	300002681-0003	k	12.08.2011	12.08.2014
20	n. a.	Signal Analyzer 20Hz-26,5GHz-150 to + 30 DBM	FSIQ26	R&S	835540/018	300002681-0005	k	07.01.2010	07.01.2012
21	n. a.	Frequency Standard (Rubidium Frequency Standard)	MFS (Rubidium)	R&S (Datum)	002	300002681-0009	Ve	13.09.2010	13.09.2012
22	n. a.	Directional	101020010	Krytar	70215	300002840	ev		

		Coupler							
23	n. a.	DC-Blocker	8143	Inmet Corp.	none	300002842	ne		
24	n. a.	Powersplitter	6005-3	Inmet Corp.		300002841	ev		
25	n. a.	Spectrum Analyzer 9kHz to 30GHz - 140..+30dBm	FSP30	R&S	100886	300003575	k	07.09.2010	07.09.2012
26	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000787	ne		
27	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300002442	ne		
28	11b	Microwave System Amplifier, 0.5-26.5 GHz; 25 dB gain	83017A	HP Meßtechnik	00419	300002268	ev	10.03.2011	

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

11 Observations

No observations exceeding those reported with the single test cases have been made.