

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

**SecurityClass  
REPORT**

No.

GUG/N03 :059

Date

030402

Rev

A

Reference

File

**SAR Test Report: T610 (PY7AAB-1021011)****Date of test:** Mars 30 to 31, 2003**Laboratory:** Electromagnetic Near Field and Radio Frequency  
Dosimetry LAB  
Sony Ericsson Mobile Communications AB  
Nya Vattentorget  
SE-221 82 LUND, Sweden**Test Responsible:** H. Kami Shirazi  
Type Approval Engineer  
[Kami.shirazi@sonyericsson.com](mailto:Kami.shirazi@sonyericsson.com)  
+ 46 46 23 26 44**Statement of Compliance**

Sony Ericsson Mobile Communications AB declares under its sole responsibility that the product

***Sony Ericsson Type AAB-1021011-BV (T610); FCC ID: PY7AAB-1021011***

to which this declaration relates, is in conformity with the appropriate RF exposure standards recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

**(None)**

© Sony Ericsson Mobile Communications AB, 2002

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sony Ericsson encourages all feedback, both positive and negative, on this report.



SecurityClass  
REPORT

Prepared (also subject responsible if other)  
LD/SEM/GUG/NM/H. Kami Shirazi  
Approved  
LD/SEM/GUG/NM/ Mats Hansson

Checked  
MHAN

No.  
GUG/NV 03:059  
Date  
030402

Rev  
A

Reference  
File

**1 Table of contents**

**2 INTRODUCTION .....3**

**3 DEVICE UNDER TEST .....3**

3.1 ANTENNA DESCRIPTION ..... 3

3.2 DEVICE DESCRIPTION..... 3

**4 TEST EQUIPMENT .....3**

4.1 DOSIMETRIC SYSTEM..... 3

4.2 ADDITIONAL EQUIPMENT ..... 4

**5 ELECTRICAL PARAMETERS ON THE TISSUE SIMULATING LIQUID .....5**

**6 SYSTEM ACCURACY VERIFICATION .....5**

**7 SAR MEASUREMENT UNCERTAINTY .....6**

**8 TEST RESULTS .....7**

**9 REFERENCES .....8**

**10 APPENDIX .....9**

10.1 SAR DISTRIBUTION COMPARISON FOR SYSTEM ACCURACY VERIFICATION ..... 9

10.2 SAR DISTRIBUTION PLOT S ..... 12

10.3 PHOTOGRAPHS OF THE DEVICE UNDER TEST ..... 15

10.4 DEVICE POSITION ON SAM PHANTOM..... 17

10.5 PROBE CALIBRATION PARAMETERS..... 23

**SecurityClass  
REPORT**

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File

## 2 Introduction

In this test report, compliance of the Sony Ericsson T610 portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR measurement specifications used for the test are described in the *SAR Measurement Specifications of Wireless Handsets* [1].

## 3 Device Under Test

### 3.1 Antenna Description

<b>Type</b>	Internal antenna	
<b>Location</b>	Inside the back cover, near the top	
<b>Dimensions</b>	Max length	38mm
	Max width	14mm
<b>Configuration</b>	PIFA	

### 3.2 Device description

<b>Device model</b>	T610
<b>Serial number</b>	A6101TUXTK
<b>Mode</b>	GSM 1900
<b>Multiple Access Scheme</b>	TDMA
<b>Maximum Output Power Setting</b>	28.8dBm
<b>Factory Tolerance in Power Setting</b>	± 0.5dB
<b>Maximum Peak Output Power</b>	29.3
<b>Crest Factor</b>	8
<b>Transmitting Frequency Range</b>	(1850.2 – 1909.8) MHz)
<b>Prototype or Production Unit</b>	Preproduction
<b>Device Category</b>	Portable
<b>RF exposure environment</b>	General population / uncontrolled

## 4 Test equipment

### 4.1 Dosimetric system

SAR measurements were made using the DASY3 professional system (software version 3.1c) with SAM phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

<b>Description</b>	<b>Serial Number</b>	<b>Due Date</b>
DASY3 DAE V1	419	April23, 2003
E-field probe ET3DV6	1569	April25, 2002
Dipole Validation Kit, D1900 V2	5d002	April29, 2002



Sony Ericsson

SecurityClass  
REPORT

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File

## 4.2 Additional equipment

Description	Inventory Number	Due Date
Signal generator ESG-D4000A	INV 483972	9/2003
Directional coupler HP778D	INV 39656	1/2004
Power meter R&S NRVD	INV 483920	1/2004
Power sensor R&S NRV-Z5	INV 2333	1/2004
Power sensor R&S NRV-Z5	INV 2334	1/2004
Termination 65N50-0-11	INV 2903	1/2004
Network analyzer HP8753C	INV421671	8/2003
S-parameter test set HP85047A	INV 421670	8/2003
Dielectric probe kit HP8507D	INV 2000053	2/2004
Termometer Fluke 51	INV 2071	3/2004
Multimeter Almemo 2290-4 V5	INV2391	3/2004
Wavetek STABILOK 4031D	INV 421578	7/2003

## 5 Electrical parameters on the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity,  $\epsilon$ , and the conductivity,  $S$ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density,  $\rho$ , entered into the DASY3 software is also given. Recommended limits for permittivity  $\epsilon$ , conductivity  $S$  and mass density  $\rho$  are also shown.

**Application Note:** The head and body tissue dielectric parameter recommended by the IEEE SCC-34/SC in P1528 have been incorporated in the following table is prepared according the following receipt.

**For 1900MHz head: Water 54.9% Salt 0.18% and DGBE 44.92%; for 1900 body: Water 56.1%, Salt 0.5%, and DGBE 33.4%.**

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			$\epsilon$	s (S/m)	$\rho$ (g/cm <sup>3</sup> )
1900	Head	Measured Mars 18, 2003	38.0	1.47	1.0
		Recommended	40.0	1.40	1.0
	Muscle	Measured Mars 19, 2003	50.5	1.50	1.0
		Recommended	53.3	1.52	1.0



## SecurityClass REPORT

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File

## 6 System accuracy verification

A system accuracy verification of the DASY3 was performed using the dipole validation kit listed in section 3.1. The system verification test was conducted on the same day as the measurement of the DUT. Measurement made in ambient temperature 23.2 °C and humidity 40.8%. The obtained results are displayed in the table below.

RF noise in liquid measured when all RF equipment in the lab was set off. Measured value was 0.001 mW/g in 1g mass.

f (MHz)	Tissue type	Measured / Reference	SAR (W/kg) 1g mass	Dielectric Parameters			t (°C)
				$\epsilon$	s (S/m)	? (g/cm <sup>3</sup> )	
1900	Head	Measured, Mars 18, 2003	43.1	38.1	1.44	1.0	22.5
		Reference, February 20, 2002	45.2	39.1	1.47	1.0	-
	Muscle	Measured, Mars 19, 2003	44.9	50.7	1.55	1.0	22.6
		Reference, April 29, 2002	44.0	51.9	1.58	1.0	-



SecurityClass  
REPORT

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File

## 7 SAR measurement uncertainty

Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	GSM 1900 Head	GSM 1900 Body
<b>Measurement System</b>					
Probe Calibration	2.6	N	1	2.6	2.6
Axial Isotropy	4.7	R	v3	1.9	1.9
Hemispherical Isotropy	9.6	R	v3	3.9	3.9
Boundary Effect	11.0	R	v3	6.4	6.4
Linearity	4.7	R	v3	2.7	2.7
System Detection Limits	1.0	R	v3	0.6	0.6
Readout Electronics	1.0	N	1	1.0	1.0
Response Time	0.8	R	v3	0.5	0.5
Integration Time	1.8	R	v3	1.1	1.1
RF Ambient Conditions	3.0	R	v3	1.7	1.7
Probe Positioned Mechanical Tolerance	0.4	R	v3	0.2	0.2
Probe Positioning respect to Phantom Shell	2.9	R	v3	1.7	1.7
Extrapolation, Interpolation and Integration Algorithm for Max. SAR	3.9	R	v3	2.3	2.3
<b>Measurement System Uncertainty</b>				<b>9.4</b>	<b>9.4</b>
<b>Test Sample Related</b>					
Test Sample Positioning		R	v3	6.7	6.7
Device Holder Uncertainty		R	v3	5.9	5.9
Output Power Variation – Drift	0.9/3.5	R	v3	0.52	2
<b>Test Sample Related Uncertainty</b>				<b>8.9</b>	<b>9.2</b>
<b>Phantom and Tissue Parameters</b>					
Phantom Uncertainty (shape and thickness tolerances)	4.0	R	v3	2.3	2.3
Liquid Conductivity (deviation from target value)	5/1,3	R	v3	2.9	0.8
Liquid Conductivity – measurement uncertainty	5	R	v3	2.9	2.9
Liquid Permittivity (deviation from target value)	5/5,3	R	v3	2.9	3
Liquid Permittivity – measurement uncertainty	5	R	v3	2.9	2.9
<b>Phantom and Tissue Parameters Uncertainty</b>				<b>6.2</b>	<b>5.6</b>
<b>Combined Standard Uncertainty</b>		RSS		<b>14.4</b>	<b>14.3</b>
<b>Expanded Uncertainty ( 95% CONFIDENCE LEVEL )</b>				<b>28.8</b>	<b>28.6</b>

**SAR measurement uncertainty evaluation for Sonyericsson T610 phone**

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

**SecurityClass  
REPORT**

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File

## 8 Test results

The measured 1-gram averaged SAR values of the device against the head and the body are provided in Tables 1 and 2 respectively. The humidity and ambient temperature of test facility were 44.4% - 40.8% and 22.5 °C – 24.2 °C respectively. The depth of the head tissue simulating liquid was 15.1cm and of the muscle tissue simulating liquid was 15.5cm. A base station simulator was used to control the device during the SAR measurement. The phone was supplied with full-charged battery for each measurement.

For head measurement, the device was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom in two phone position, cheek (touch) and tilt (cheek + 15deg). For GSM 1900 modes, the device was tested at the lowest, middle and highest frequencies in the transmit band.

Mode	Channel	Peak Output Power(dBm)	Phone Position	Liquid temp(°C)	SAR (w/kg)in1g/10g mass	
					Right-hand	Left-hand
GSM 1900	512	29.29	Cheek	22.4/22.6	1,06/0,58	0,73/0,43
			Tilt	22.5/22.9	<b>1,21/0,66</b>	1,02/0,57
			Tilt and blue tooth on	22.5/22.9	<b>1,21/0,66</b>	-
	661	29.23	Cheek	22.8/23.0	1,04/0,58	0,73/0,42
			Tilt	23.1/23.1	1,10/0,60	0,77/0,43
	810	29.26	Cheek	23.1/23.2	0,54/0,30	0,45/0,29
Tilt			23.2/23.2	0,63/0,34	0,51/0,29	

**Table1: SAR measurement results for Sonyericsson T610 phone. Measured against the head.**

For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement the phone was hold under the flat phantom and with 15mm distance, the measurement provides for both front and back part the phone to the phantom.

Mode	Channel	Peak Output Power(dBm)	Phone Position	Liquid temp(°C)	SAR (w/kg)in1g/10g mass
					Measured
1900 GSM	512	29.23	Back	22.5	<b>0,97/0,55</b>
			Front	22.7	0,25/0,15
	661	29.23	Back	22.5	0,58/0,33
			Front	22.7	0,14/0,09
	810	29.26	Back	22.6	0,32/0,18
			Front	22.6	0,08/0,05

**Table 2: SAR measurement results for Sonyericsson T610 phone. Measured against the body.**



## SecurityClass REPORT

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File

## 9 References

[ 1 ] M.Douglas, "SAR Measurement Specification of Wireless Handsets", Sonyericsson internal document EUS/CV/R-01:1061/REP

[ 2 ] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio Frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97- 01).

[ 3 ] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wirelles Communications Devices: Experimental Techniques," Std 1528-200x, Draft 6.5 – August 20, 2001.





SecurityClass  
REPORT

Prepared (also subject responsible if other)  
LD/SEM/GUG/NM/H. Kami Shirazi  
Approved  
LD/SEM/GUG/NM/ Mats Hansson

Checked  
MHAN

No.  
GUG/NV 03:059  
Date  
030402

Rev  
A

Reference  
File

## 10 Appendix


### 10.1 SAR distribution comparison for system accuracy verification

03/30/03 Hamid Kami

D1900 V2 SN5d002,d=10

SAM 1800 and 1900 Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz  
Probe: ET3DV6 - SN1569;ConvF(5.40,5.40,5.40); Crest factor: 1.0; Head 1900MHz:  $\sigma = 1.47 \text{ mho/m}$ ,  $\epsilon_r = 38.0$ ,  $\rho = 1.00 \text{ g/cm}^3$   
Cubes (2): SAR (1g):  $4.39 \text{ mW/g} \pm 0.04 \text{ dB}$ , SAR (10g):  $2.26 \text{ mW/g} \pm 0.02 \text{ dB}$ , (Worst-case extrapolation)  
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0  
Powdrift: -0.03 dB

Validation Dipole, measured with head simulating tissue.



Sony Ericsson Mobile Communications

Validation Dipole, measured with head simulating tissue on Mars 30, 2003

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

**SecurityClass  
REPORT**

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File

02/20/02

**Validation Dipole D1900V2 SN:5d002, d = 10 mm**

Frequency: 1900 MHz; Antenna Input Power: 250 [mW]



SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0

Probe: ET3DV6 - SN1507; ConvF(5.30,5.30,5.30) at 1800 MHz; IEEE1528 1900 MHz;  $\sigma = 1.47$  mho/m  $\epsilon_r = 39.1$   $\rho = 1.00$  g/cm<sup>3</sup>

Cubes (2): Peak: 21.7 mW/g  $\pm 0.02$  dB, SAR (1g): 11.3 mW/g  $\pm 0.01$  dB, SAR (10g): 5.76 mW/g  $\pm 0.03$  dB, (Worst-case extrapolation)

Penetration depth: 7.9 (7.5, 8.8) [mm]

Powerdrift: -0.07 dB



Schmid & Partner Engineering AG, Zurich, Switzerland

**1900MHz SAR distribution of validation dipole from reference measurement**

**Measured with head simulating tissue on February 20, 2002**

SecurityClass  
REPORT

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File

03/31/03 Hamid Kami

D1900 V2 SN5d002,d=10

SAM 1800 and 1900 Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1569; ConvF(5.00, 5.00, 5.00); Crest factor: 1.0; Muscle1900 MHz:  $\sigma = 1.50 \text{ mho/m}$ ,  $\epsilon_r = 50.5$ ,  $\rho = 1.00 \text{ g/cm}^3$

Cubes (2): SAR (1g):  $4.23 \text{ mW/g} \pm 0.04 \text{ dB}$ , SAR (10g):  $2.23 \text{ mW/g} \pm 0.02 \text{ dB}$ , (Worst-case extrapolation)


Course: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.11 dB

Validation Dipole, measured with muscle simulating tissue.



SAR<sub>10g</sub> [mW/g]



Sony Ericsson Mobile Communications

Validation Dipole, measured with muscle simulating tissue on mars 31, 2003

**SecurityClass  
REPORT**

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File

04/29/02

**Validation Dipole D1900V2 SN5d002, d = 10 mm**

Frequency: 1900 MHz; Antenna Input Power: 250 [mW]


SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0

Probe: ET3DV6 - SN1507; ConvF(5.10,5.10,5.10) at 1800 MHz; IEEE1528 1900 MHz:  $\sigma = 1.58 \text{ mho/m}$ ,  $\epsilon_r = 51.9$ ,  $\rho = 1.00 \text{ g/cm}^3$


Cubes (2): Peak: 21.0 mW/g  $\pm 0.03 \text{ dB}$ , SAR (1g): 11.0 mW/g  $\pm 0.01 \text{ dB}$ , SAR (10g): 5.01 mW/g  $\pm 0.00 \text{ dB}$ , (Worst-case extrapolation)

Penetration depth: 8.4 (7.7, 9.6) [mm]

Powerdrift: -0.01 dB



SAR<sub>max</sub> [mW/g]



Schmid & Partner Engineering AG, Zurich, Switzerland

**1900MHz SAR distribution of validation dipole from reference measurement**

**Measured with Body simulating tissue on April 29, 2002**

**SecurityClass  
REPORT**

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference

File


## 10.2 SAR distribution plot

03/30/03 Hamid Kami

### T610

SAM 1800 and 1900 Phantom; Right Hand Section; Position: (106°,301°); Frequency: 1850 MHz  
 Probe: ET3DV6 - SN1569;ConvF(5,40,5,40); Crest factor: 8.0; Head 1900MHz:  $\sigma = 1.47 \text{ mho/m}$ ,  $\epsilon_r = 38.0$ ,  $\rho = 1.00 \text{ g/cm}^3$   
 Cube 5x5x7; SAR (1g): 1.21 mW/g, SAR (10g): 0.664 mW/g. (Worst-case extrapolation)  
 Course: Dx = 15.0, Dy = 15.0, Dz = 10.0  
 Powerdift: -0.04 dB

Distribution of max SAR, measured against the head for (check+15deg.) phone position.

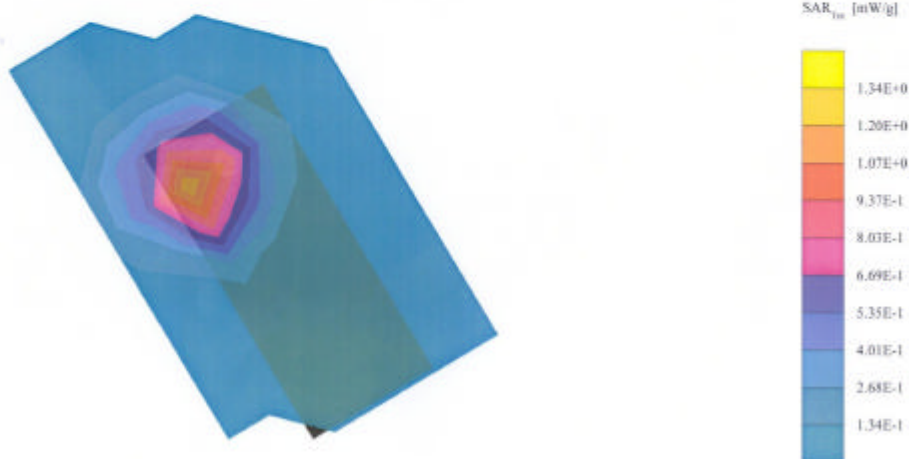

Sony Ericsson Mobile Communications

**Distributions of max SAR in GSM1900 mode at 1850.2MHz. Measured against the head for Tilt phone position**

SecurityClass  
REPORT

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference


File

03/30/03 Hamid Kami

T610

SAM 1800 and 1900 Phantom; Right Hand Section; Position: (106°,301°); Frequency: 1850 MHz  
 Probe: ET3DV6 - SN1569;ConvF(5.40,5.40,5.40); Crest factor: 8.0; Head 1900MHz:  $\sigma = 1.47 \text{ mho/m}$ ,  $\rho = 38.0 \text{ p} = 1.00 \text{ g/cm}^3$   
 Cube 5x5x7: SAR (1g): 1.21 mW/g, SAR (10g): 0.657 mW/g, (Worst-case extrapolation)  
 Course: Dx = 15.0, Dy = 15.0, Dz = 10.0  
 Powerdrift: -0.01 dB  
 Blue Tooth ON

Distribution of max SAR,measured against the head for (clock+15deg.) phone position and blue tooth is activated.

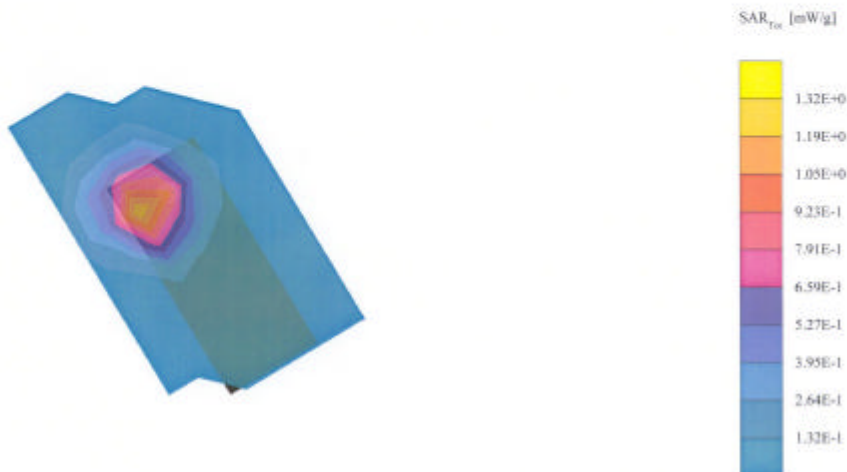

Sony Ericsson Mobile Communications

**Distributions of max SAR in GSM1900 mode at 1850.2MHz. Measured against the head for tilt phone position and Bluetooth is activated .**

**SecurityClass  
REPORT**

Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

No.

GUG/NV 03:059

Date


030402

Rev

A

Reference

File

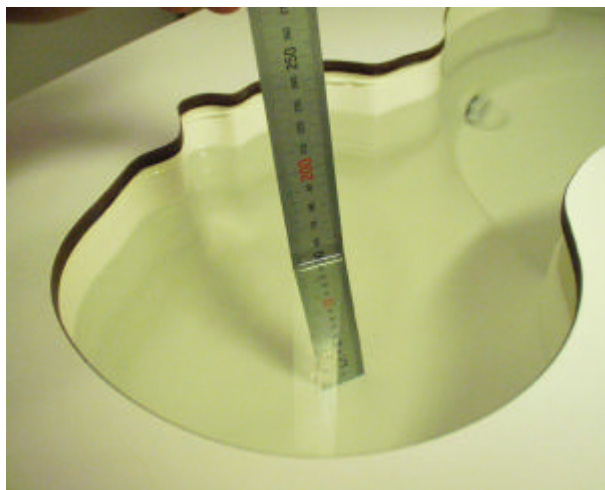

**Tissue within the phantom shell measured from the ear reference point is 15cm**

03/31/03 Hamid Kami

**F610**

iAM 1800 and 1900 Phantom; Flat Section; Position: (90°, 270°); Frequency: 1850 MHz  
 Probe: ET3DV6 - SN1569; ConvF(5.00, 5.00, 5.00); Crest factor: 8.0; Muscle1900 MHz:  $\sigma = 1.50 \text{ mho/m}$ ,  $\rho = 50.5 \text{ g/cm}^3$   
 Label 5x5x7: SAR (1g): 0.972 mW/g, SAR (10g): 0.551 mW/g, (Worst-case extrapolation)  
 Course: Dx = 10.0, Dy = 10.0, Dz = 10.0  
 Powerdrift: -0.15 dB

Back side of the phone in a case with no. KRY104157 against flat position of the phantom.



Sony Ericsson Mobile Communications

**Distributions of max SAR in GSM1900 mode at 1850.2MHz. Measured against the body for back phone position to the phantom**

**SecurityClass  
REPORT**

Prepared (also subject responsible if other)  
LD/SEM/GUG/NM/H. Kami Shirazi  
Approved  
LD/SEM/GUG/NM/ Mats Hansson

Checked  
MHAN

No.  
GUG/NV 03:059  
Date  
030402  
Rev  
A

Reference  
File

**10.3 Photographs of the device under test**



**Front side**



Prepared (also subject responsible if other)  
LD/SEM/GUG/NM/H. Kami Shirazi  
Approved  
LD/SEM/GUG/NM/ Mats Hansson

Checked  
MHAN

**SecurityClass  
REPORT**

No.  
GUG/NV 03:059  
Date  
030402

Rev  
A

Reference  
File



**Side**

SecurityClass  
REPORT


Prepared (also subject responsible if other)  
LD/SEM/GUG/NM/H. Kami Shirazi  
Approved  
LD/SEM/GUG/NM/ Mats Hansson

Checked  
MHAN

No.  
GUG/NV 03:059  
Date  
030402

Rev  
A

Reference  
File

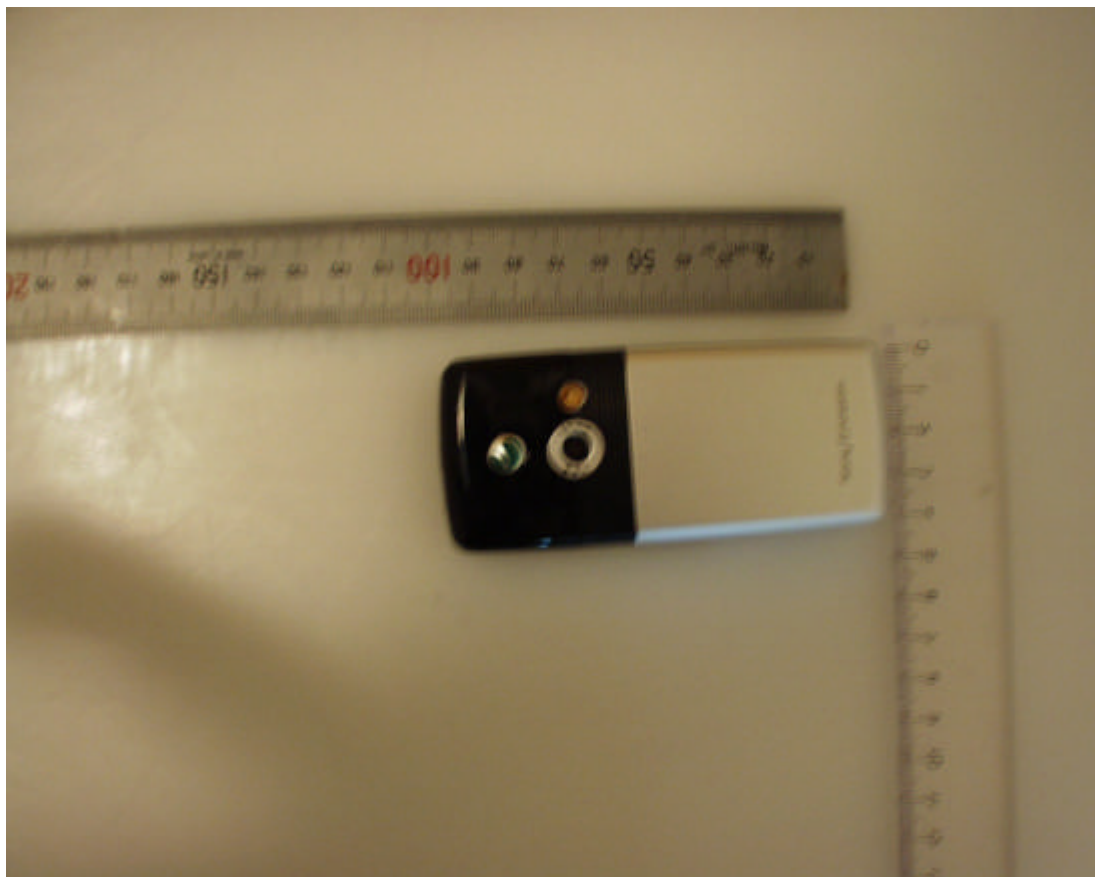

Back side

**SecurityClass  
REPORT**


Prepared (also subject responsible if other)  
LD/SEM/GUG/NM/H. Kami Shirazi  
Approved  
LD/SEM/GUG/NM/ Mats Hansson

Checked  
MHAN

No.  
GUG/NV 03:059  
Date  
030402

Rev  
A

Reference  
File

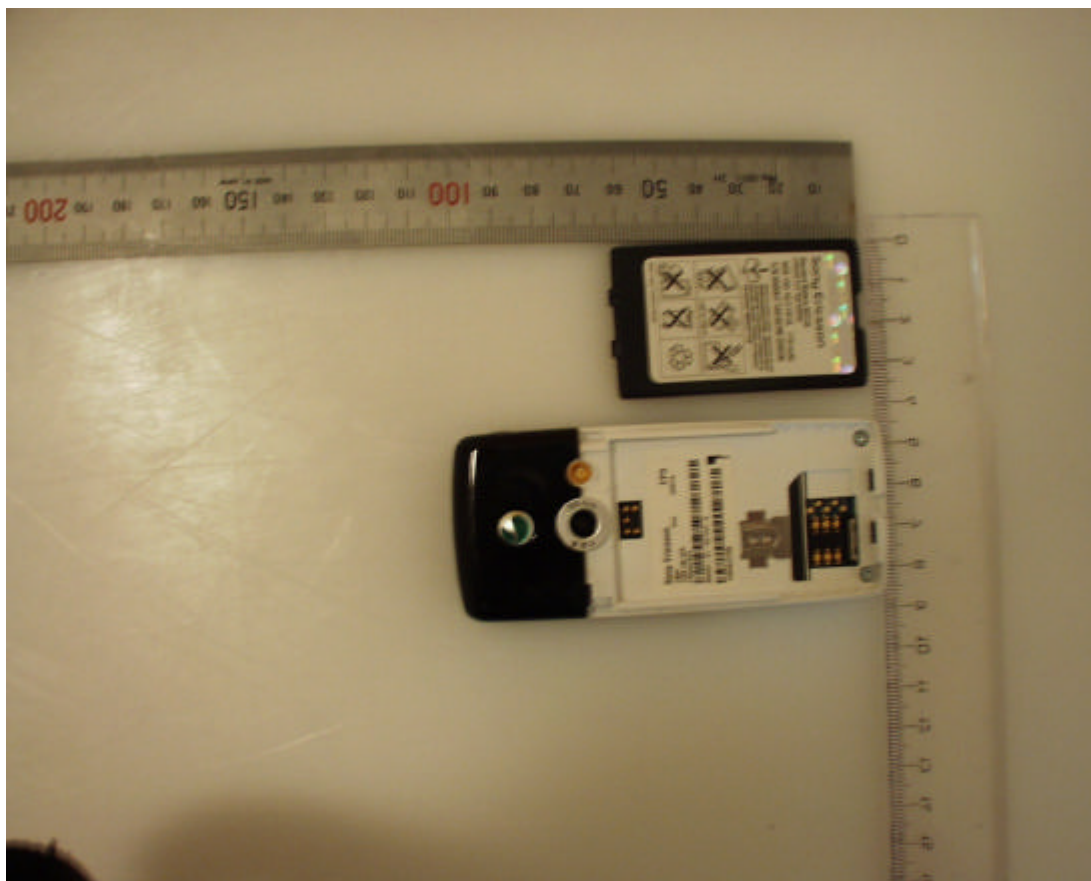

**Battery**

SecurityClass  
REPORT

Prepared (also subject responsible if other)  
LD/SEM/GUG/NM/H. Kami Shirazi  
Approved  
LD/SEM/GUG/NM/ Mats Hansson


Checked  
MHAN

No.  
GUG/NV 03:059  
Date  
030402

Rev  
A

Reference  
File

## 10.4 Device position on SAM Phantom

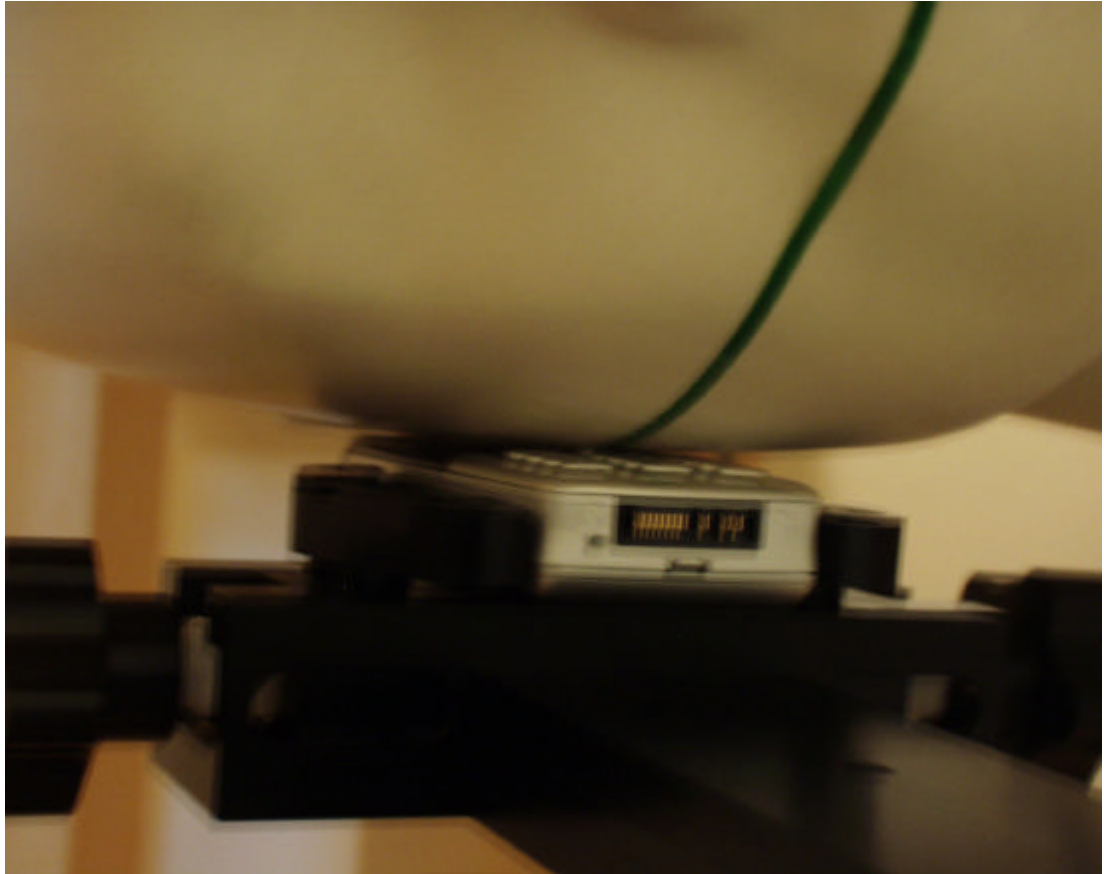

Device position against the head: Cheek (touch) phone position

SecurityClass  
REPORT


Prepared (also subject responsible if other)  
LD/SEM/GUG/NM/H. Kami Shirazi  
Approved  
LD/SEM/GUG/NM/ Mats Hansson

Checked  
MHAN

No.  
GUG/NV 03:059  
Date  
030402

Rev  
A

Reference  
File

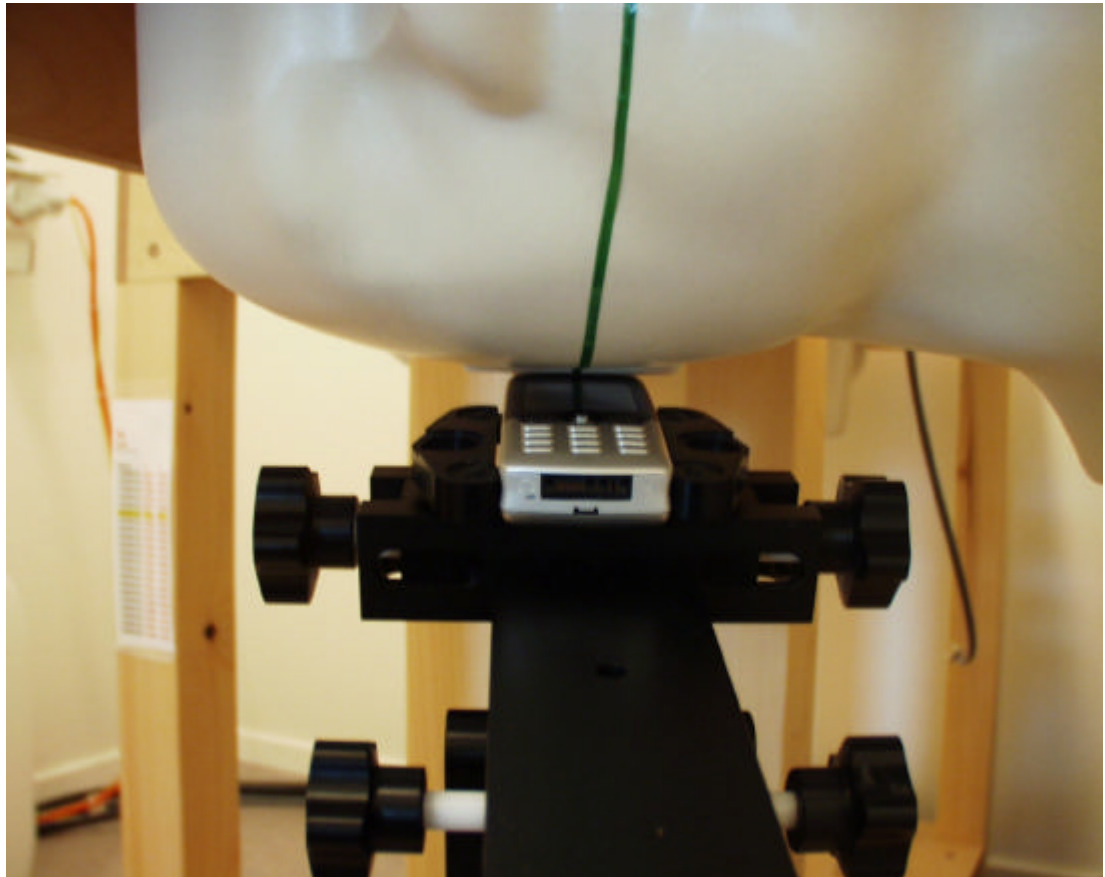

**Device position against the head: Tilt (cheek+15deg) phone position**

SecurityClass  
REPORT

Prepared (also subject responsible if other)  
LD/SEM/GUG/NM/H. Kami Shirazi  
Approved  
LD/SEM/GUG/NM/ Mats Hansson

Checked  
MHAN

No.  
GUG/NV 03:059  
Date  
030402

Rev  
A

Reference  
File



**Device position against the body: Phone inside case and in touch with the flat position of phantom**



Prepared (also subject responsible if other)

LD/SEM/GUG/NM/H. Kami Shirazi

Approved

LD/SEM/GUG/NM/ Mats Hansson

Checked

MHAN

**SecurityClass  
REPORT**

No.

GUG/NV 03:059

Date

030402

Rev

A

Reference


File

## 10.5 Probe calibration parameters

ET3DV6 SN:1569

April 25, 2002

### Conversion Factor Assessment

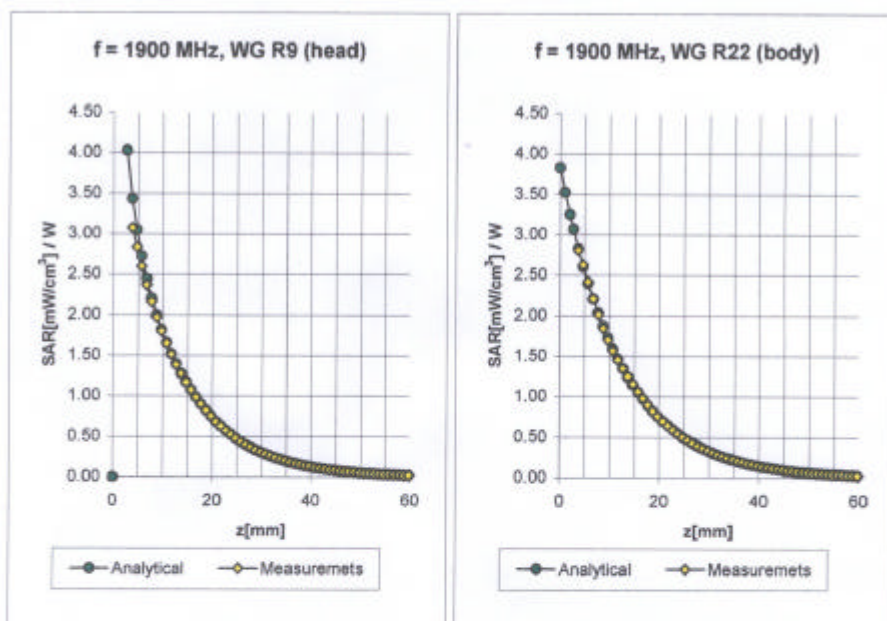

<b>Head</b>	<b>1900 MHz</b>	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
-------------	-----------------	-----------------------------	---------------------------------------

ConvF X	<b>5.4</b> $\pm 8.9\%$ (k=2)
---------	------------------------------

ConvF Y	<b>5.4</b> $\pm 8.9\%$ (k=2)
---------	------------------------------

ConvF Z	<b>5.4</b> $\pm 8.9\%$ (k=2)
---------	------------------------------

Boundary effect:

Alpha	<b>0.47</b>
-------	-------------

Depth	<b>2.44</b>
-------	-------------

<b>Body</b>	<b>1900 MHz</b>	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\% \text{ mho/m}$
-------------	-----------------	-----------------------------	---------------------------------------

ConvF X	<b>5.0</b> $\pm 8.9\%$ (k=2)
---------	------------------------------

ConvF Y	<b>5.0</b> $\pm 8.9\%$ (k=2)
---------	------------------------------

ConvF Z	<b>5.0</b> $\pm 8.9\%$ (k=2)
---------	------------------------------

Boundary effect:

Alpha	<b>0.65</b>
-------	-------------

Depth	<b>2.16</b>
-------	-------------