

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

Company Internal
REPORT

No.

BGGIN06:372

Date

060814

Rev

A

Reference

File

Report issued by Accredited SAR Laboratory**For***PY7AD022021 (W850)***Date of test:** *07 to 09, Aug, 2006***Laboratory:** Sony Ericsson SAR Test Laboratory
Sonyericsson Mobile Communications AB
Nya Vattentornet
SE-221 82 LUND, Sweden**Testing Engineer:** *Hamid Kami Shirazi*
Kami.shirazi@sonyericsson.com
+46 46232644**Testing Approval** *Peter Lindeborg*
Peter.lindeborg@sonyericsson.com
+ 46 (0) 46 212 61 80**Statement of Compliance**

Sony Ericsson Mobile Communications AB declares under its sole responsibility that the product

Sony Ericsson Type AAD-3022021-BV; FCC ID: PY7AD022021; IC:4170B-AD022021

to which this declaration relates, is in conformity with the appropriate RF exposure standards recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(None)

This laboratory is accredited to ISO/IEC 17025 (SWEDAC accreditation no. 1847).



Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. The accredited laboratory activities meet the requirements in SS-EN ISO/IEC 17025 (2000). This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sony Ericsson encourages all feedback, both positive and negative, on this report.

© Sony Ericsson Mobile Communication AB, 2006



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

No.

BGGIN06:372

Date

060814

Rev

A

Reference

File

1 Table of contents

2 INTRODUCTION.....3

3 DEVICE UNDER TEST.....3

3.1 ANTENNA DESCRIPTION3

3.2 DEVICE DESCRIPTION3

4 TEST EQUIPMENT.....4

4.1 DOSIMETRIC SYSTEM.....4

4.2 ADDITIONAL EQUIPMENT4

5 ELECTRICAL PARAMETERS ON THE TISSUE SIMULATING LIQUID4

6 SYSTEM ACCURACY VERIFICATION.....5

7 SAR MEASUREMENT UNCERTAINTY6

8 TEST RESULTS7

9 REFERENCES.....8

10 APPENDIX9

10.1 PHOTOGRAPHS OF THE DEVICE UNDER TEST9

10.2 DEVICE POSITION ON SAM TWINS PHANTOM11

10.3 ATTACHMENTS.....11



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

No.

BGGIN06:372

Date

060814

Rev

A

Reference

File

2 Introduction

In this test report, compliance of the Sony Ericsson PY7AD022021 (W850) portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR measurement specifications used for the test are described in the *SAR Measurement Specifications of Wireless Handsets* [1].

3 Device under Test

3.1 Antenna Description

Type	Internal antenna	
Location	Inside, Back, at the Top	
Dimensions	Max length	38mm
	Max width	16mm
Configuration	PIFA	

3.2 Device description

Device model	PY7AD022021(W850)		
Serial number	CB5108W2B2		
Mode	GSM1900		
Crest Factor	8.3		
Multiple Access Scheme	TDMA		
Maximum Output Power Setting (dBm)	Ch512	Ch661	Ch810
4	30.0	30.0	30.0
Factory Tolerance in Power Setting	±0.5dB		
Maximum Peak Output Power (dBm)	30.5	30.5	30.5
Mode	GPRS2TX		
Crest Factor	4.15		
Maximum Output Power Setting (dBm)	Ch512	Ch661	Ch810
6	30.0	30.0	30.0
Factory Tolerance in Power Setting	±0.5dB		
Maximum Peak Output Power (dBm)	30.5	30.5	30.5
Prototype or Production Unit	Preproduction (FP2)		
Device Category	Portable		
RF exposure environment	General population / uncontrolled		



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

No.

BGGIN06:372

Date

060814

Rev

A

Reference

File

4 Test equipment

4.1 Dosimetric system

SAR measurements were made using the DASY4 professional system (software version 4.6, Build 23/7) with SAM twin phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

Description	Serial Number	Due Date
DASY3 DAE V1	419	March 2007
E-field probe ETDV6	1585	March 2007
Dipole Validation Kit, D1900V2	5d002	March 2007

4.2 Additional equipment

Description	Inventory Number	Due Date
Signal generator R&S SML03	INV 20007667	Dec. 2007
Power meter R&S NRVZ	INV 20007669	Dec. 2007
Power sensor R&S NRV-Z5	INV 20007672	Dec. 2007
Power sensor R&S NRV-Z5	INV 20007673	Dec. 2007
Network analyzer HP8753C	INV421671	March 2007
S-parameter test set HP85047A	INV 421670	March 2007
Dielectric probe kit HP8507D	INV 200 000 53	Self calibrated
CMU200	INV 20002149	March 2007



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

No.

BGGIN06:372

Date

060814

Rev

A

Reference

File

5 Electrical parameters on the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density, ρ , entered into the DASY4 software is also given.

Recommended limits for permittivity ϵ_r , conductivity σ and mass density ρ are also shown.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	ρ (g/cm ³)
1900	Head	Measured, 07/Aug./2006	39.0	1.45	1.00
		Recommended	40.0	1.40	1.00
	Body	Measured, 09/Aug./2006	50.7	1.51	1.00
		Recommended	53.3	1.52	1.00

6 System accuracy verification

A system accuracy verification of the DASY4 was performed using the dipole validation kit listed in section 3.1. Measurement made in ambient temperature (23-24) °C and humidity (30-40) %. The obtained results are displayed in the table below.

RF noise had been measured in liquid when all RF equipment in lab was set off. Measured value was 0.0002mW/g in 1g mass

f (MHz)	Tissue type	Measured / Reference	SAR (W/kg) 1g/10g	Dielectric Parameters			Liquid t(°C)
				ϵ_r	σ (S/m)	ρ (g/cm ³)	
1900	Head	Measured, 07/Aug./2006	39.3/20.5	39.0	1.45	1.00	22±0.2
		Reference	39.2/20.6	39.6	1.45	1.00	22±0.2
	Body	Measured, 09/Aug./2006	39.5/21.2	50.7	1.51	1.00	22±0.2
		Reference	39.6/20.9	51.6	1.58	1.00	22±0.2



Prepared (also subject responsible if other)

No.

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

BGGIN06:372

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGGI/ NM *Peter Lindeborg*

060814

060814

A

File

7 SAR measurement uncertainty

SAR measurement uncertainty evaluation for Sonyericsson PY7AD022021 (W850) phone

Uncertainty Component	Uncer. (%)	Prob Dist.	Div.	C _i	GSM 1900-Head	GSM 1900-Body
Measurement System						
Probe Calibration	±4.8	N	1	1	±4.8	±4.8
Axial Isotropy	±4.7	R	√3	0.7	±1.9	±1.9
Spherical Isotropy	±9.6	R	√3	0.7	±3.9	±3.9
Boundary effect	±1.0	R	√3	1	±1.0	±1.0
Probe linearity	±4.7	R	√3	1	±2.7	±2.7
Detection limit	±1.0	R	√3	1	±0.6	±0.6
Readout electronics	±1.0	N	1	1	±1.0	±1.0
Response time	±0.8	R	√3	1	±0.5	±0.5
Integration time	±1.4	R	√3	1	±0.8	±0.8
RF Ambient Conditions	±3.0	R	√3	1	±1.7	±1.7
Mech. Constraints of robot	±0.4	R	√3	1	±0.2	±0.2
Probe positioning	±2.9	R	√3	1	±1.7	±1.7
Extrap, interpolation and integration	±3.9	R	√3	1	±2.3	±2.3
Measurement System Uncertainty					±8.0	±8.0
Test Sample Related						
Device positioning	±3.5	N	1	1	±3.5	±3.5
Device holder uncertainty	±3.5	N	1	1	±3.5	±3.5
Power drift	±(0.1/0.2)	R	√3	1	-0.0	-1.2
Test Sample Related Uncertainty					±5.0	±5.1
Phantom and Tissue Parameters						
Phantom uncertainty	±4.0	R	√3	1	±2.3	±2.3
Liquid conductivity (measurement)	±(4.3/0.0)	N	1	0.64	±2.8	±0.0
Liquid conductivity (target)	±5.0	R	√3	0.64	±1.8	±1.8
Liquid Permittivity (measurement)	±(2.5/4.9)	N	1	0.6	±1.5	±2.9
Liquid Permittivity (target)	±5.0	R	√3	0.6	±1.7	±1.7
Phantom and Tissue Parameters Uncertainty					±4.6	±4.5
Combined standard uncertainty					±10.5	±10.5
Extended standard uncertainty (k=2)					±21.0	±21.0



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

No.

BGGIN06:372

Date

060814

Rev

A

Reference

File

8 Test results

The measured 1-gram averaged SAR values of the device against head and body are provided in tables 1 and 2. The ambient humidity and temperature of test facility were 30%-40% and 23°C–24°C respectively. The depth of tissue simulating liquid for head and body are 15.4cm and 15cm. A base station simulator was used to control the device during the SAR measurement. The phone was supplied with full-charged battery for each measurement.

For head measurement, the device was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom in two phone position, cheek (touch) and tilt (cheek + 15deg).

For body measurement phone was tested on the antenna (back) and Front against flat section of phantom with 15mm distance in both speech and Data (GPRS) mode. For all modes, the device was tested at the lowest, middle and highest frequencies in the transmit band. For Hands free used Sony Ericsson head set (HPB-60) and for Blue Tooth phone was paired with Sony Ericsson HBH-60 Blue Tooth accessory and measured on worst case speech mode and for body.

Mode	Channel	Power (dB)	Phone Position	Liquid t (°C)	SAR (W/kg)			
					Right-hand		Left-hand	
					1g mass		1g mass	
Phone Close	Phone Open	Phone Close	Phone Open					
1900 GSM Head	512	29.4	Cheek	23±0.2	0.19	0.07	0.19	0.05
			Tilt	23±0.2	0.19	-	0.15	-
	661	29.3	Cheek	23±0.2	0.23	0.09	0.22	0.07
			Tilt	23±0.2	0.23	-	0.20	-
	810	29.3	Cheek	23±0.2	0.23	0.11	0.22	0.10
			Tilt	23±0.2	0.23	0.09	0.25	0.10

Table1: SAR measurement result for Sony Ericsson PY7AD022021 (W850) telephone at highest possible output power. The phone has measured against head.

Mode	Channel	Power (dBm)	Phone Position	Liquid t (°C)	SAR (W/kg) in 1 g mass
	512	29.4	Antenna to phantom Blue Tooth	23±0.2	0.18
		29.4	Antenna to phantom GPRS2TX	23±0.2	0.41
	661	29.3	Antenna to phantom Blue Tooth	23±0.2	0.27
		29.3	Antenna to phantom GPRS2TX	23±0.2	0.68
	810	29.3	Antenna to phantom Blue Tooth	23±0.2	0.38
		29.3	Antenna to phantom GPRS2TX	23±0.2	0.88
	29.3	Antenna to phantom Hands Free	23±0.2	0.33	

Table2: SAR measurement result for Sony Ericsson PY7AD022021 (W850) telephone at highest possible output power. The phone has measured against the Body.



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

No.

BGGIN06:372

Date

060814

Rev

A

Reference

File

9 References

[1] R.Plicanic, "SAR Measurement Specification of Wireless Handsets", Sony Ericsson SAR Test Laboratory internal document GUG/N 03:141

[2] Basic standard for the Measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz-3GHz), European Standard EN 50361, July 2001

[3] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio Frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01).

[4] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques," STD 1528-2003, June, 2003.



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

No.

BGGIN06:372

Date

060814

Rev

A

Reference

File

10 Appendix

10.1 Photographs of the device under test



Phone Close



Phone Open


Front & Back side



Back with Battery



down Connector

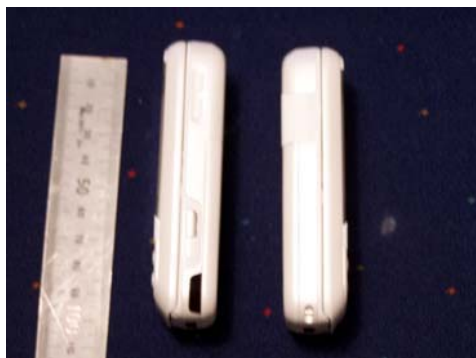

Sides



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

No.

BGGIN06:372

Date

060814


Rev

A



Reference

File

10.2 Device position on SAM Twins Phantom

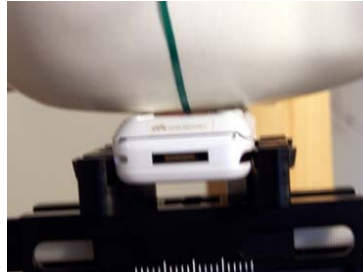

Close Phone

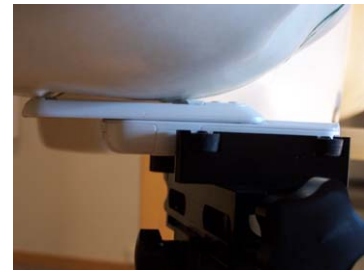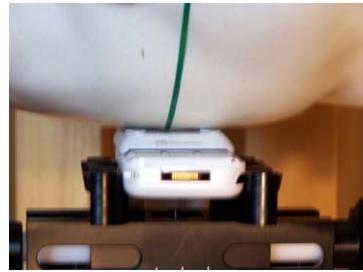

Open Phone

Device position against the head: Cheek (touch) phone position



Close Phone



Open Phone

Device position against the head: Tilt (cheek+15deg) phone position

Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/ NM *Peter Lindeborg*

Checked

060814

No.

BGGIN06:372

Date


060814

Rev

A

Reference

File



Device position against the body: Phone on 15mm distance against Phantom

10.3 Attachment

- Probe & Dipole Calibration
- Measurement plots and system validation
- Annex

Date/Time: 2006-08-07 09:13:20

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=10mm, Pin=100mW/Area Scan (41x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.55 mW/g


d=10mm, Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.0 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 6.88 W/kg

SAR(1 g) = 3.93 mW/g; SAR(10 g) = 2.05 mW/g

Maximum value of SAR (measured) = 4.36 mW/g

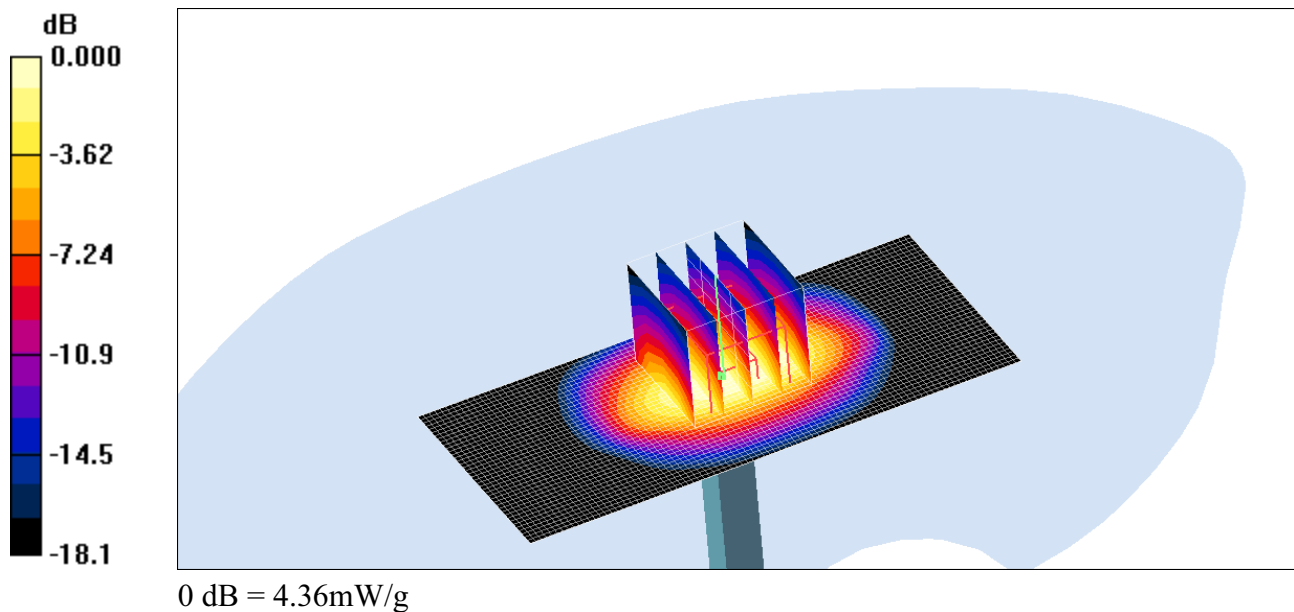

Date/Time: 2006-08-09 09:41:06

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(4.56, 4.56, 4.56); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=10mm, Pin=100mW/Area Scan (41x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.80 mW/g


d=10mm, Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.6 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 6.65 W/kg

SAR(1 g) = 3.95 mW/g; SAR(10 g) = 2.12 mW/g

Maximum value of SAR (measured) = 4.38 mW/g

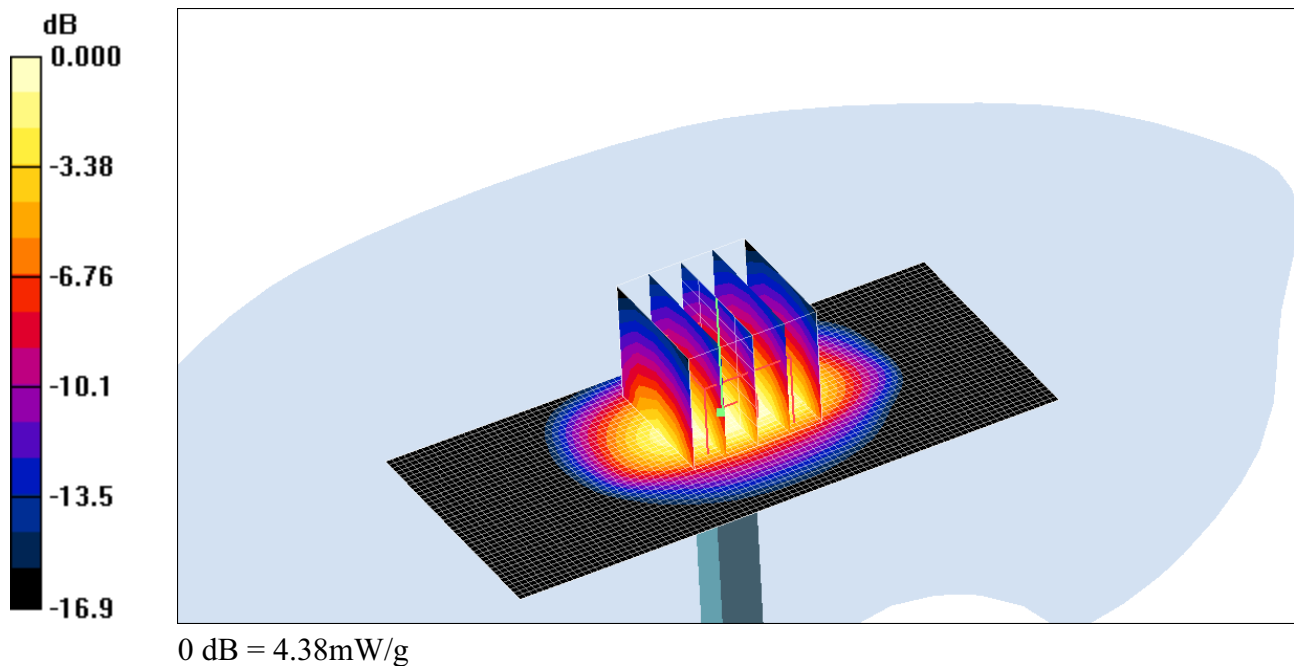

Date/Time: 2006-08-07 14:21:59

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108W2B2

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position - High Open Phone/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.119 mW/g


Touch position - High Open Phone/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.65 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.120 mW/g

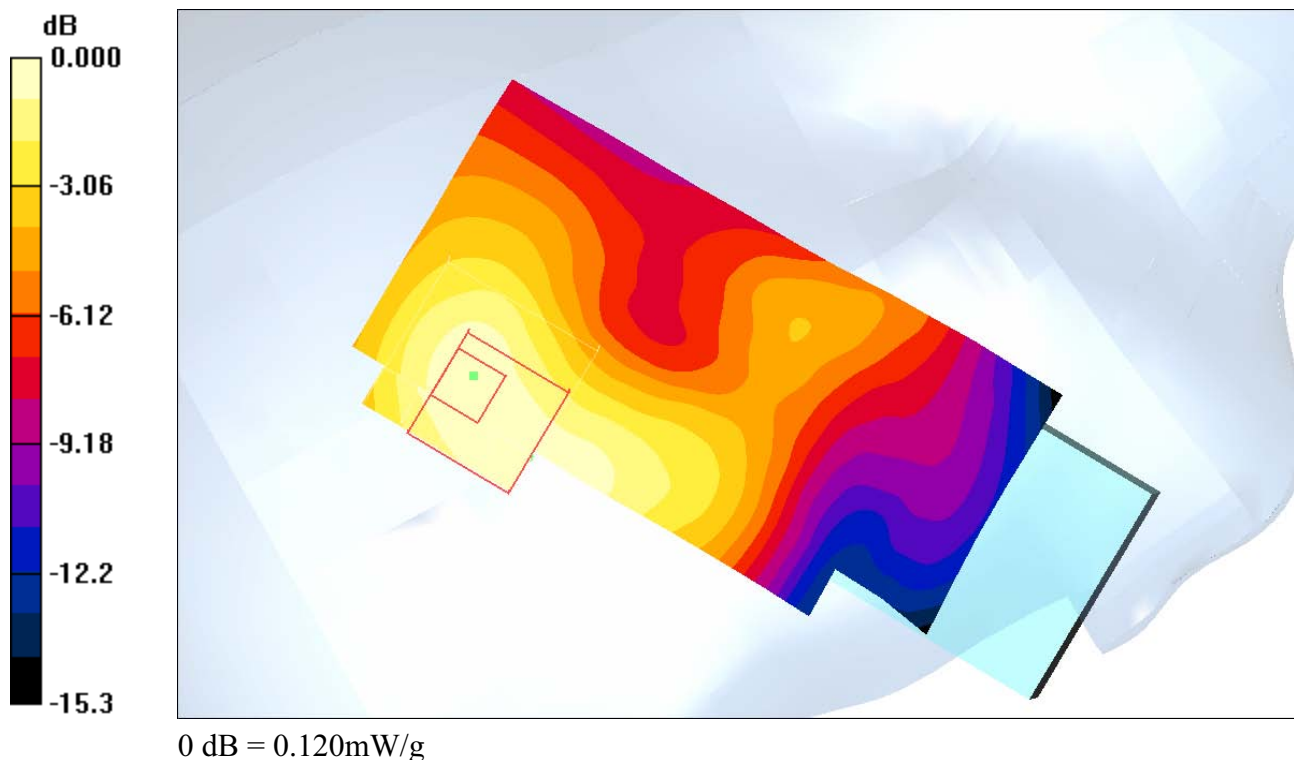

Date/Time: 2006-08-08 09:20:40

Test Laboratory: Sony Ericsson Mobile Communications AB
DUT: #5471; Type: PY7AD022021; Serial: CB5108W2B2

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position - High Open Phone/Area Scan (61x131x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.112 mW/g

Tilt position - High Open Phone/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.13 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.110 mW/g

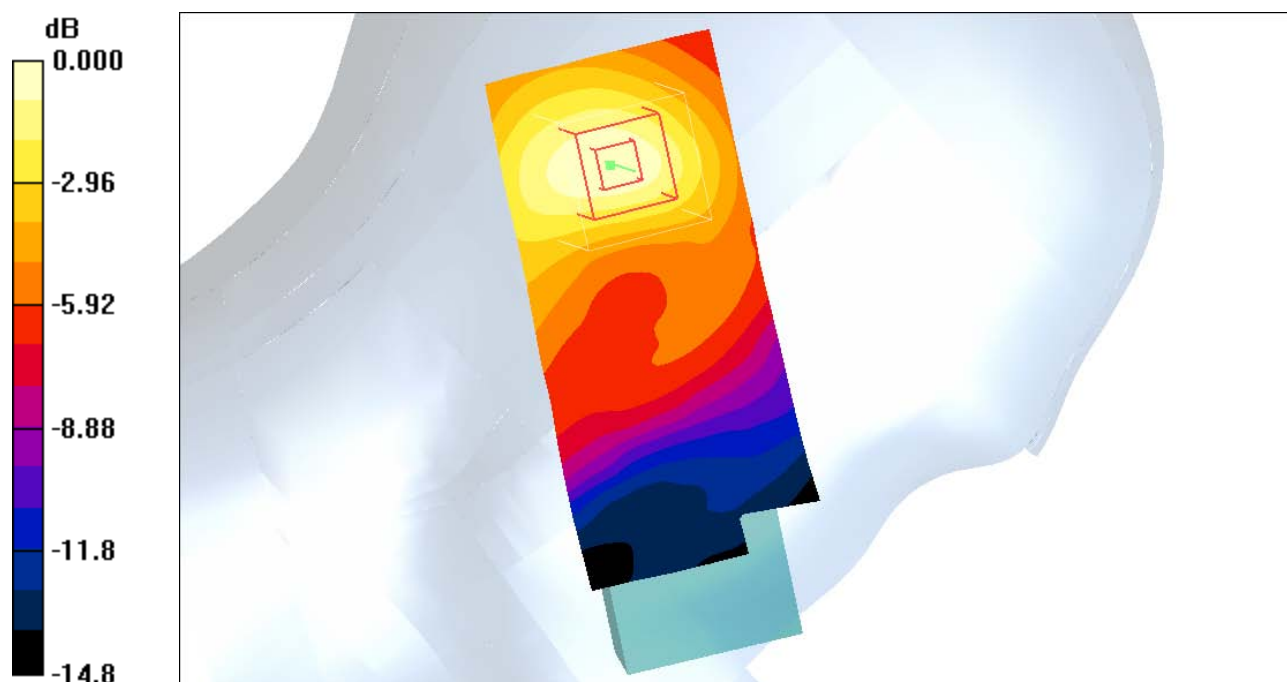

0 dB = 0.110mW/g

Date/Time: 2006-08-07 16:45:00

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108W2B2

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position - High/Area Scan (61x131x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.284 mW/g


Tilt position - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

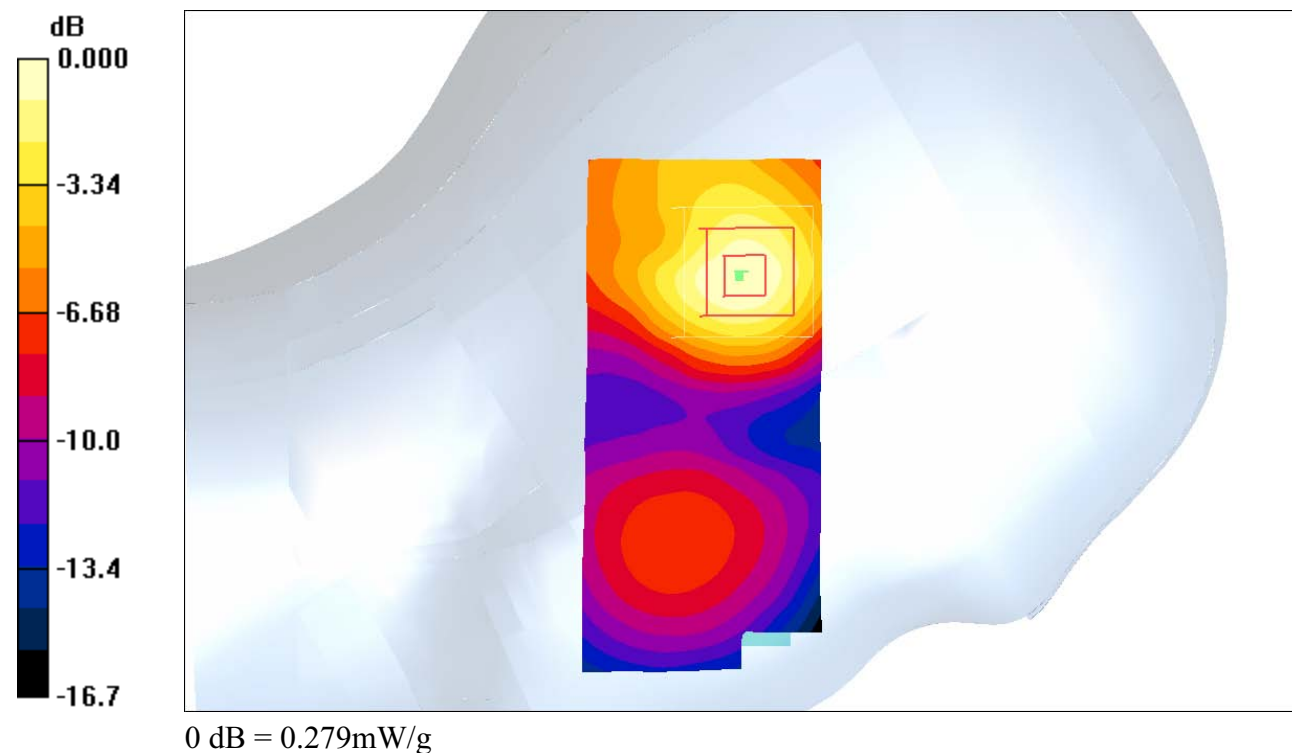

Date/Time: 2006-08-08 08:58:32

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108W2B2

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position - Open Phone/Area Scan 2 (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.116 mW/g


Touch position - Open Phone/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.27 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.114 mW/g

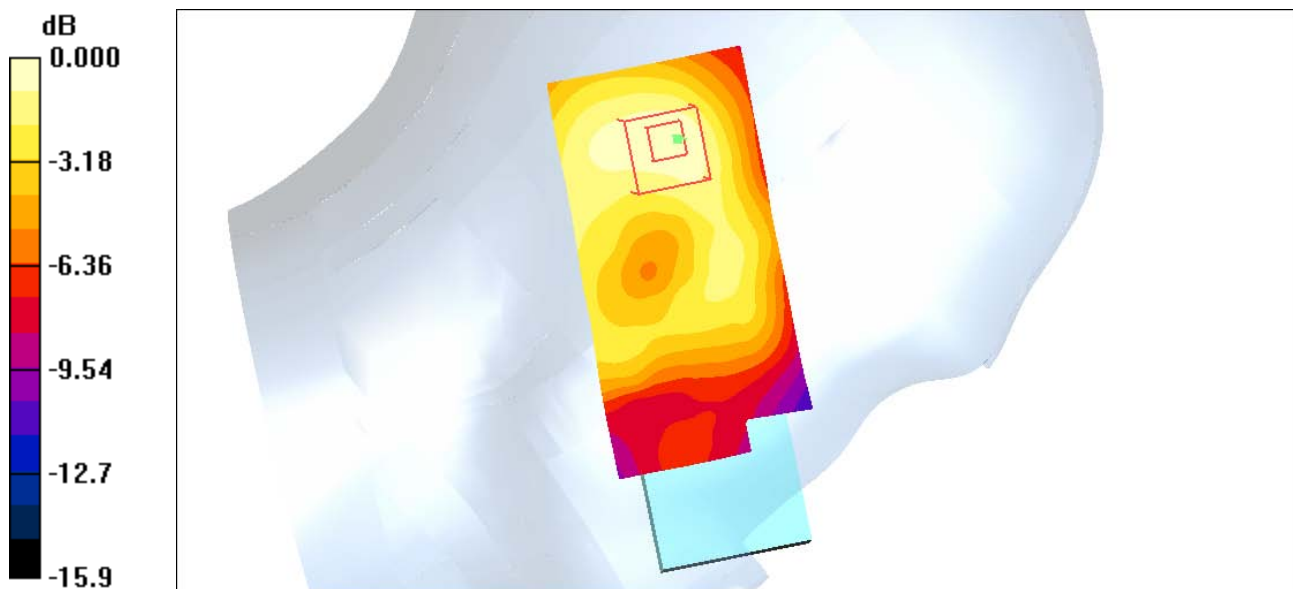

Date/Time: 2006-08-07 16:02:38

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108W2B2

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position - Middle/Area Scan (61x131x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.248 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.245 mW/g

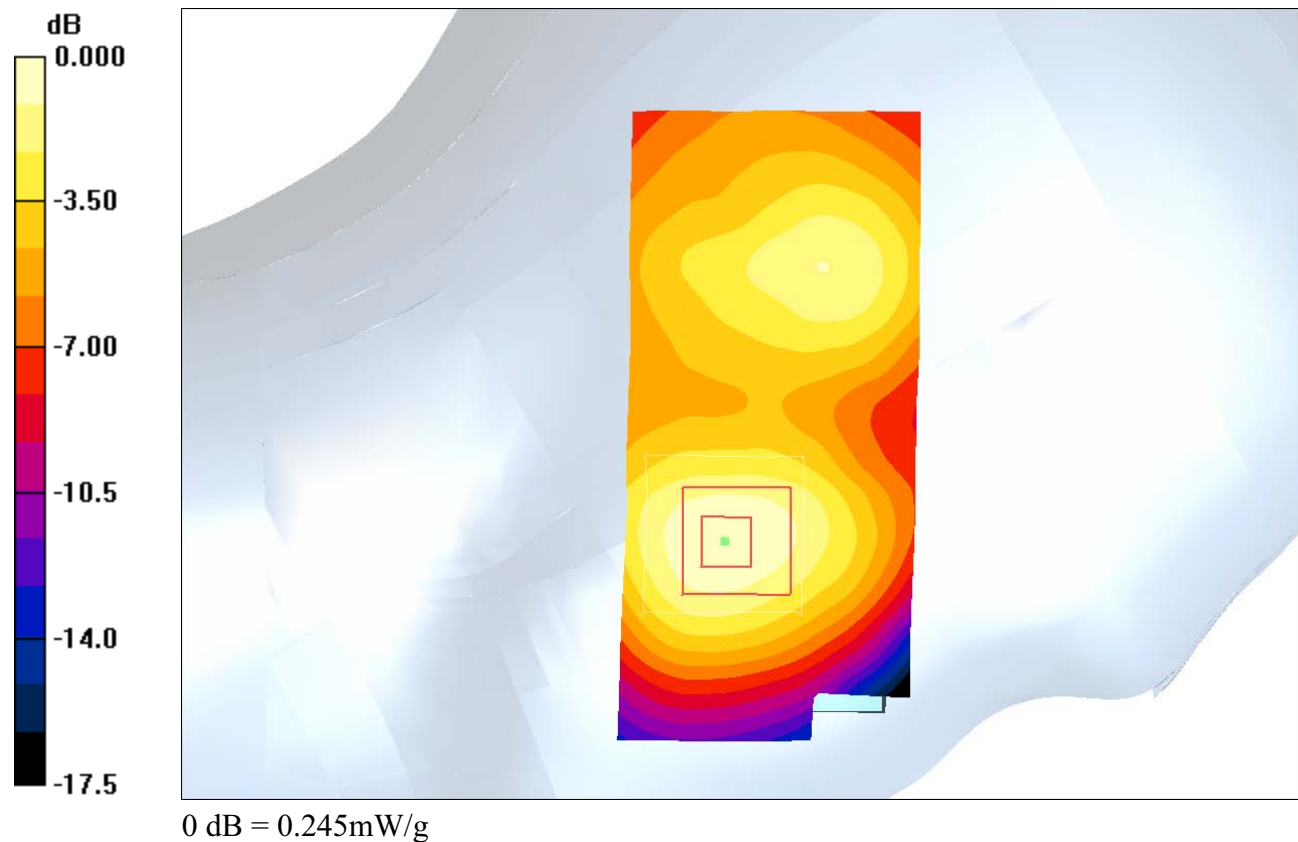

Date/Time: 2006-08-07 11:56:16

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108W2B2

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position - Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.251 mW/g


Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = 0.168 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.248 mW/g

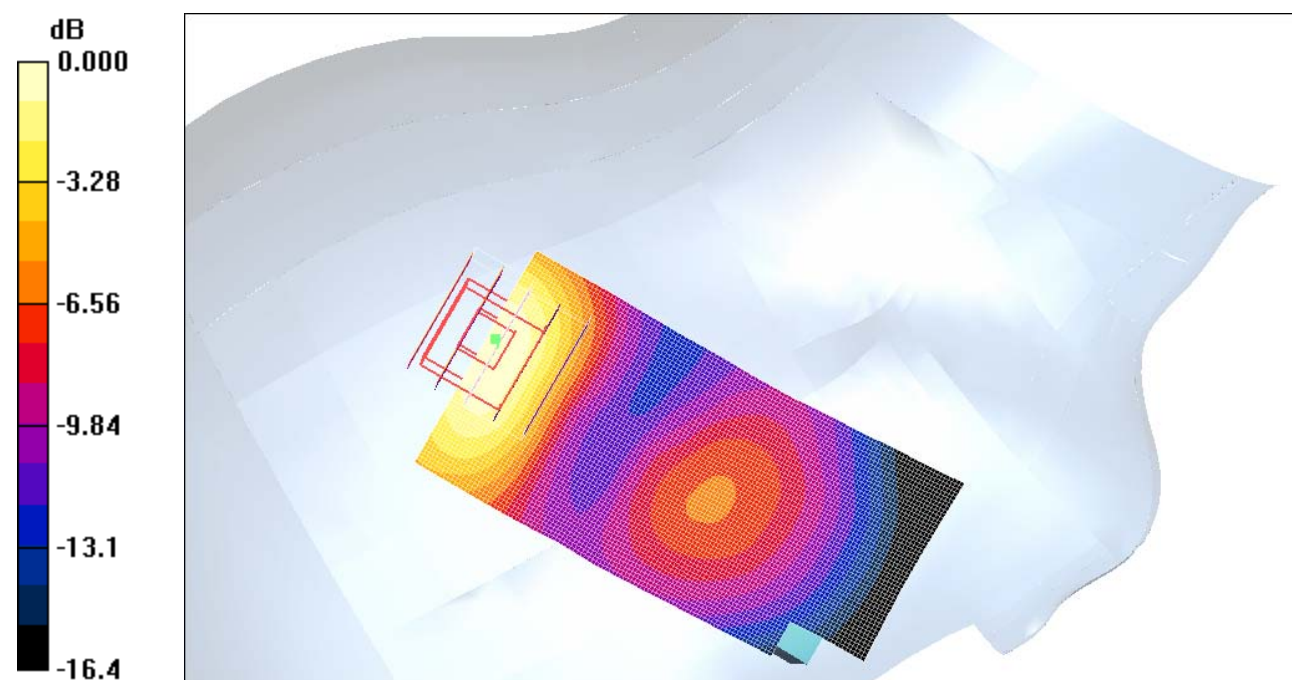

0 dB = 0.248mW/g

Date/Time: 2006-08-07 10:14:22

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108W2B2

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position - Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.246 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.256 mW/g

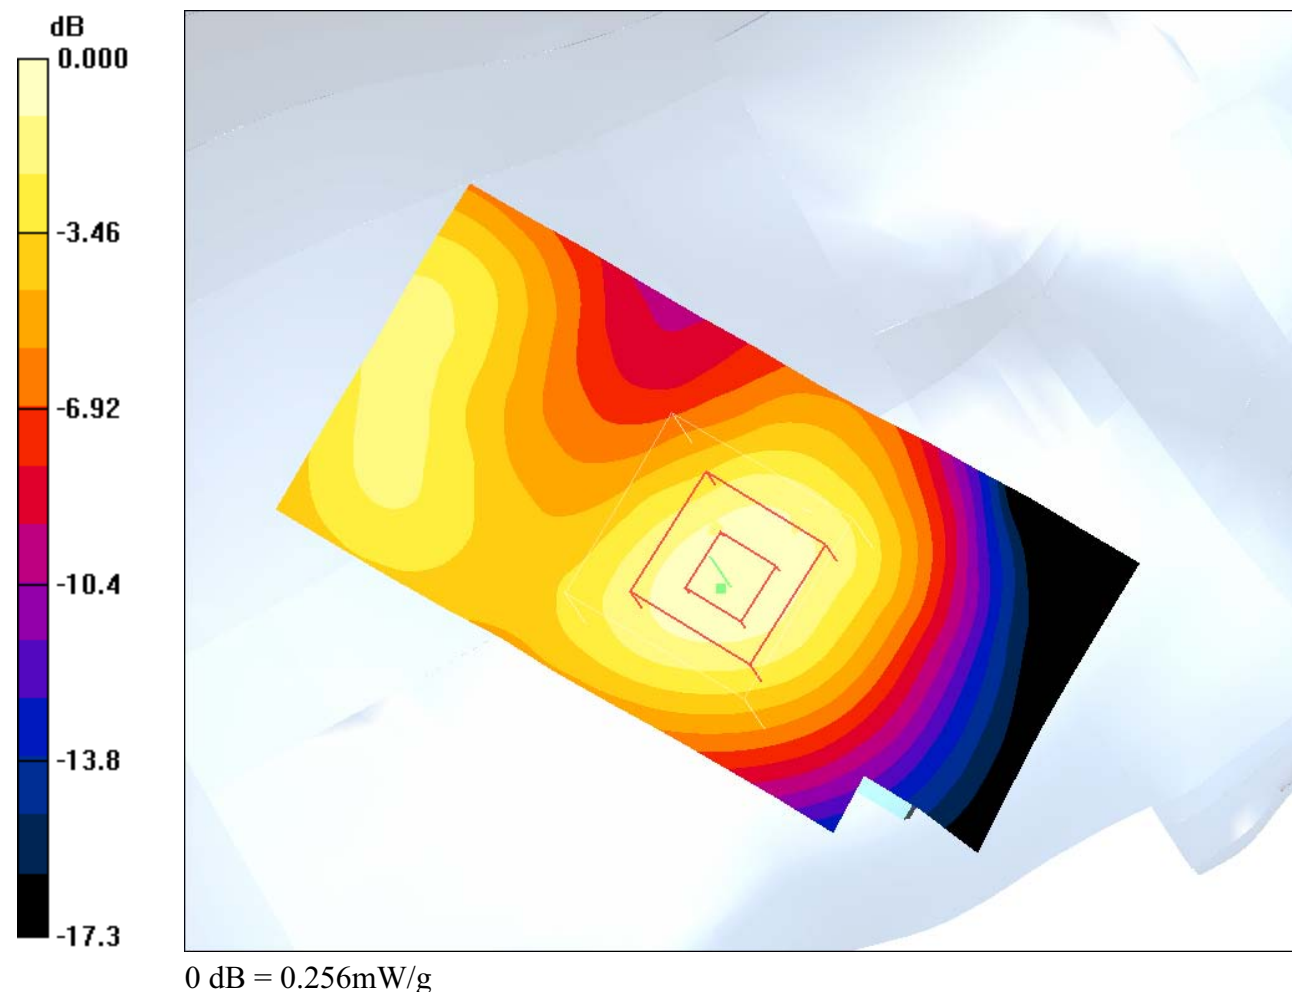

Date/Time: 2006-08-07 14:47:22

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108W2B2

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position - HighOpen Phone/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.095 mW/g


Tilt position - HighOpen Phone/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.56 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

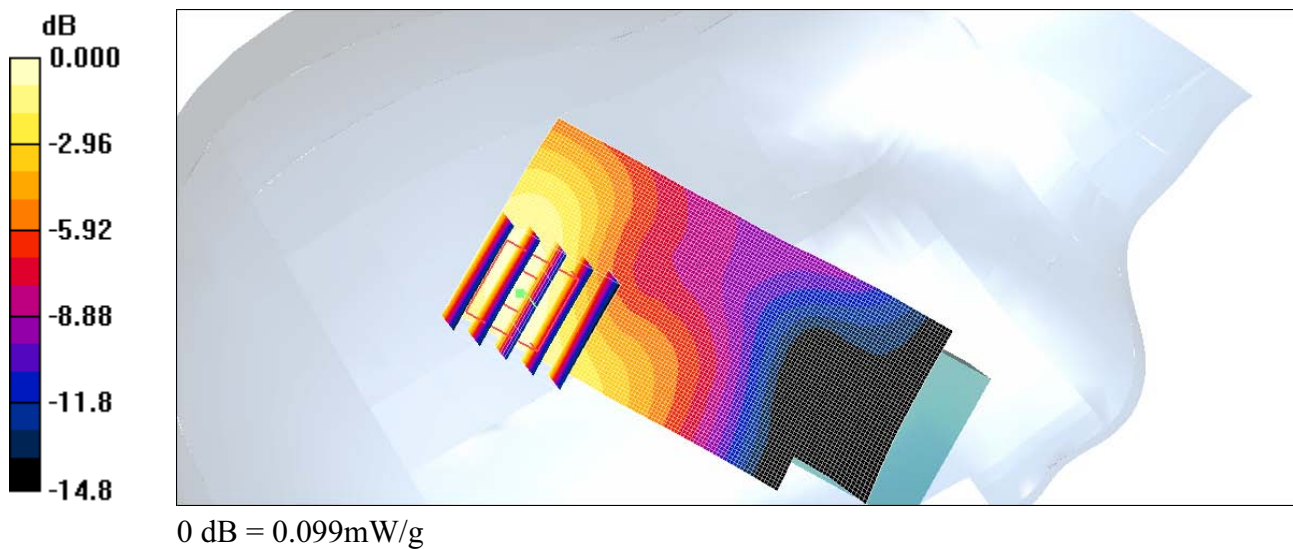

Date/Time: 2006-08-09 10:38:21

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108W2B2

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(4.56, 4.56, 4.56); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm,Back,High ,Speech;BT/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.417 mW/g


d=15mm,Back,High ,Speech;BT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.216 mW/g

Maximum value of SAR (measured) = 0.413 mW/g

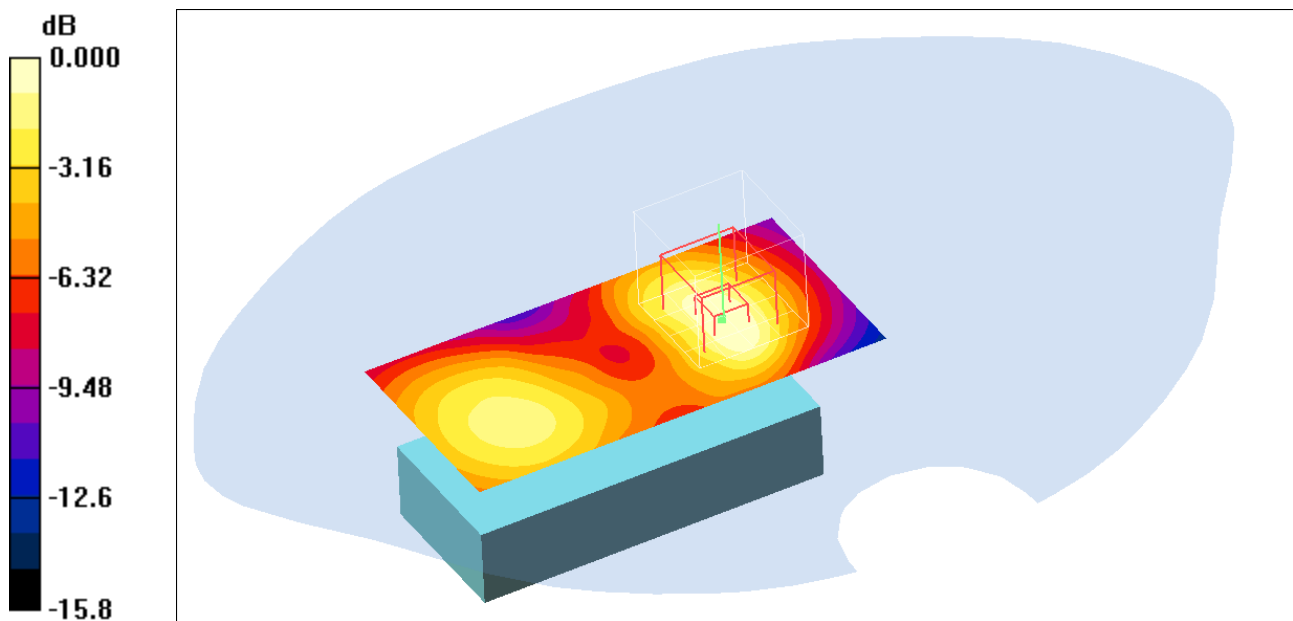

0 dB = 0.413mW/g

Date/Time: 2006-08-09 13:41:33

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108WB2

Communication System: GSM1900 GPRS2TX; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(4.56, 4.56, 4.56); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm,Back,High;GPRS2TX/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.767 mW/g

d=15mm,Back,High;GPRS2TX/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.0 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.877 mW/g; SAR(10 g) = 0.422 mW/g

Maximum value of SAR (measured) = 0.736 mW/g

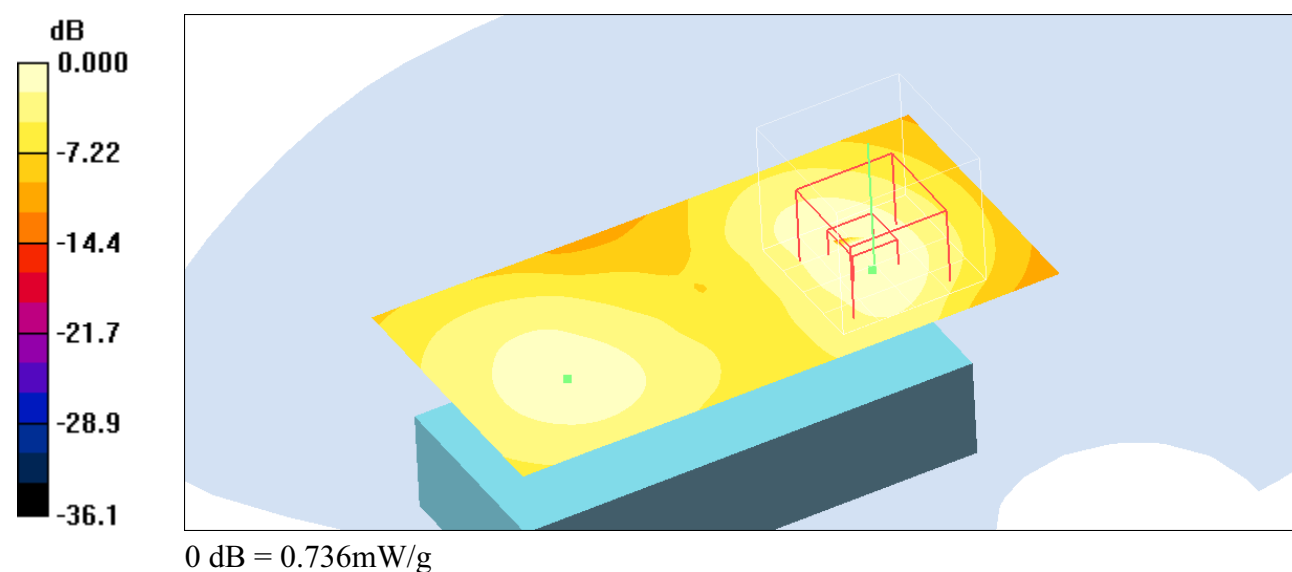

Date/Time: 2006-08-09 13:55:21

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: #5471; Type: PY7AD022021; Serial: CB5108WB2

Communication System: GSM1900 GPRS2TX; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(4.56, 4.56, 4.56); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm,FrontHigh;GPRS2TX/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.185 mW/g

d=15mm,FrontHigh;GPRS2TX/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.18 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.186 mW/g

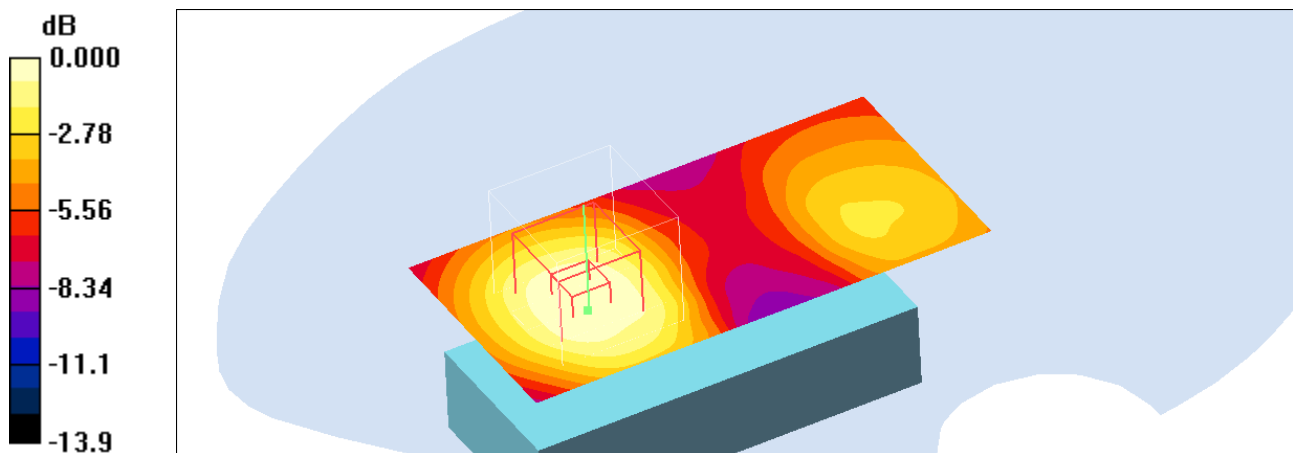

0 dB = 0.186mW/g

Date/Time: 2006-08-09 09:51:45

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(4.56, 4.56, 4.56); Calibrated: 2006-03-16

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=10mm, Pin=100mW/Z Scan (1x1x16): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (interpolated) = 1.77 mW/g

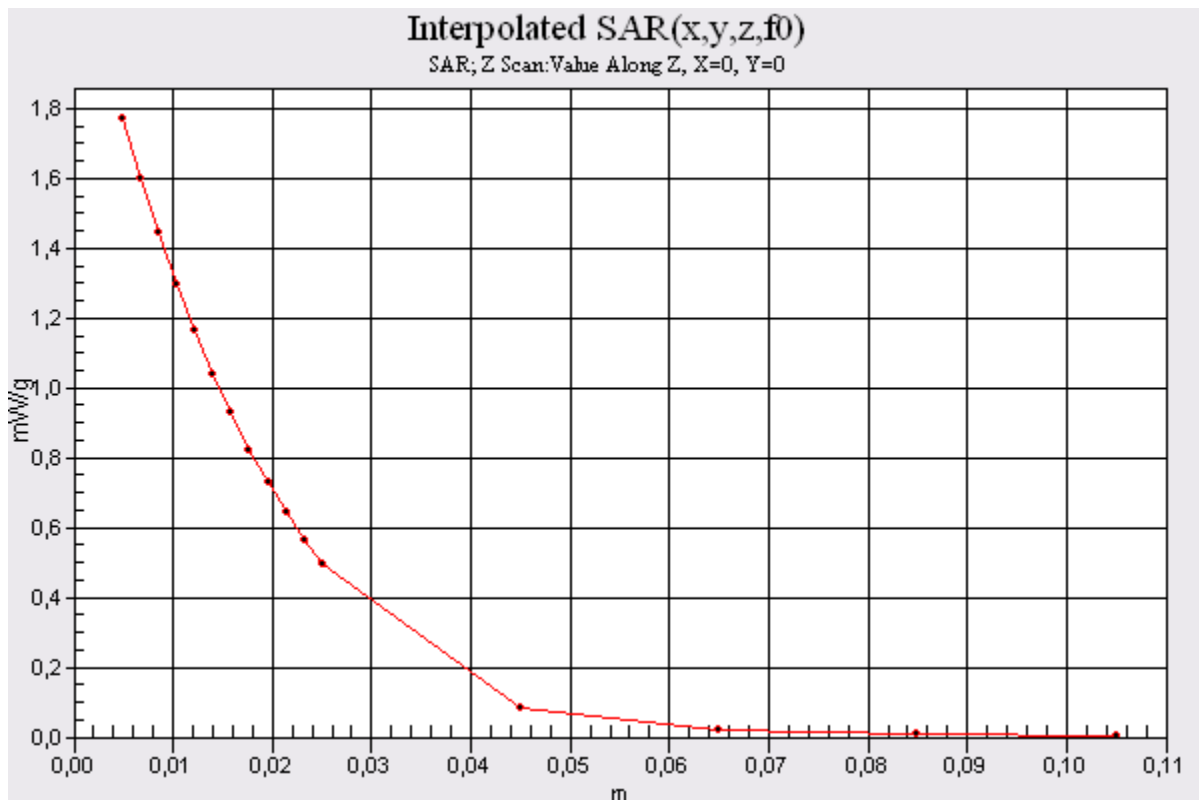

Date/Time: 2006-08-07 09:13:20

Test Laboratory: Sony Ericsson Mobile Communications AB

DUT: Dipole 1900MHz; Type: D1900V2; Serial: D1900V2-SN:5d002

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)


- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=10mm, Pin=100mW/Z Scan (1x1x16): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (Measured) = 4.36 mW/g

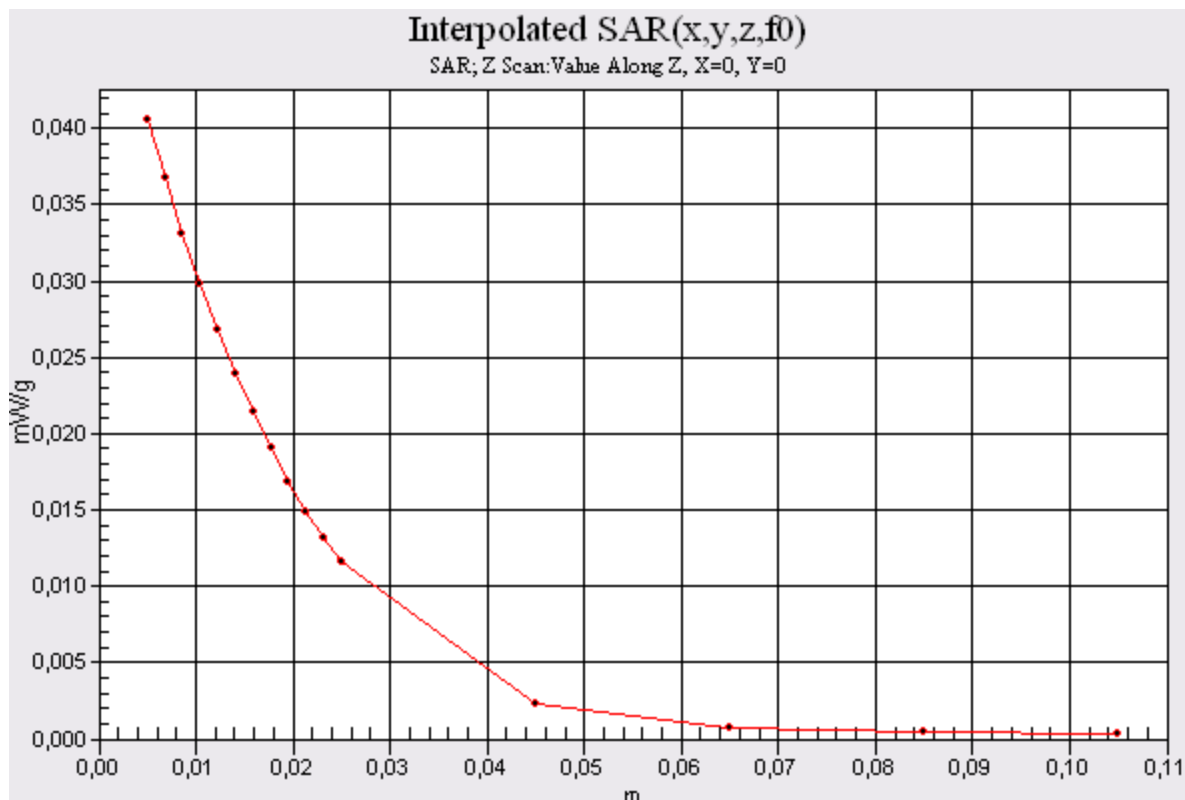

DASY4 Validation Report for Body TSL

Date/Time: 15.03.2005 15:20:32

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.43, 4.43, 4.43); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.4 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.3 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.23 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

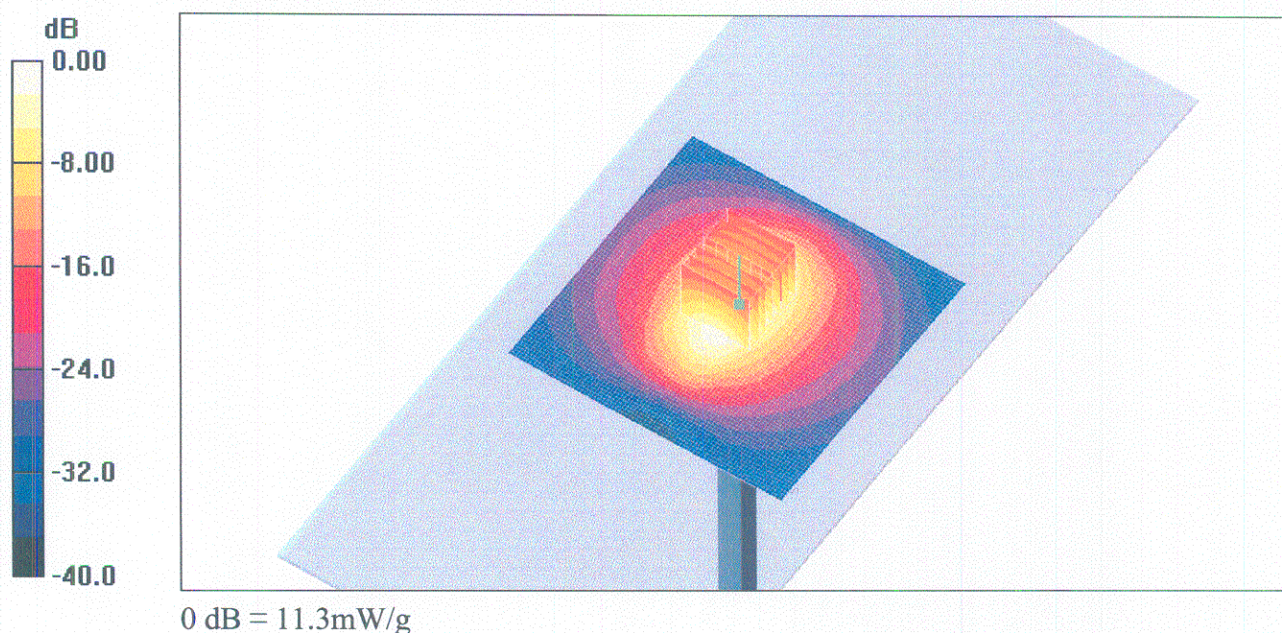

DASY4 Validation Report for Head TSL

Date/Time: 09.03.2005 15:20:45

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.96, 4.96, 4.96); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.4 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.4 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.81 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 11.0 mW/g

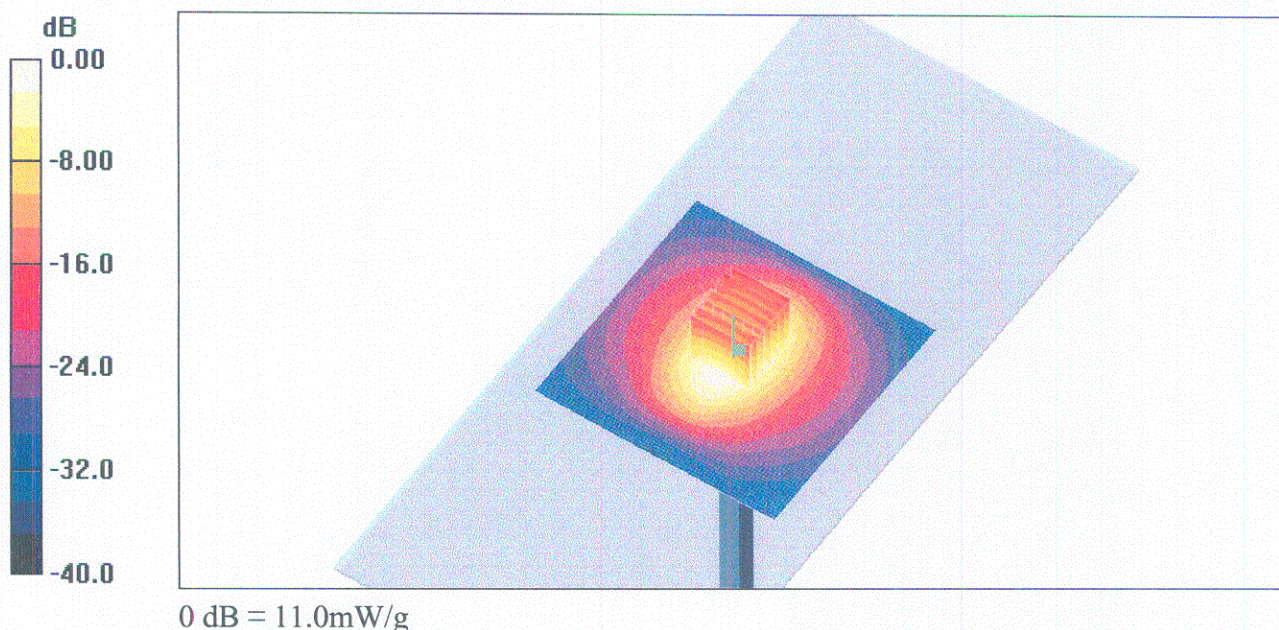



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sony Ericsson Lund**

Certificate No. **ET3-1585_Mar06**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN: 1585**

Calibration procedure(s) **QA CAL-01 v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 16, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	11-Aug-05 (METAS, No. 251-00499)	Aug-06
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	2-Feb-06 (SPEAG, No. DAE4-654_Feb06)	Feb-07

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

	Name	Function	Signature
Calibrated by:	Kata Pokovic	Technical Manager	
Approved by:	Niele Kuater	Quality Manager	

Issued: March 18, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1585


Manufactured:	May 7, 2001
Last calibrated:	March 16, 2005
Recalibrated:	March 16, 2006

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

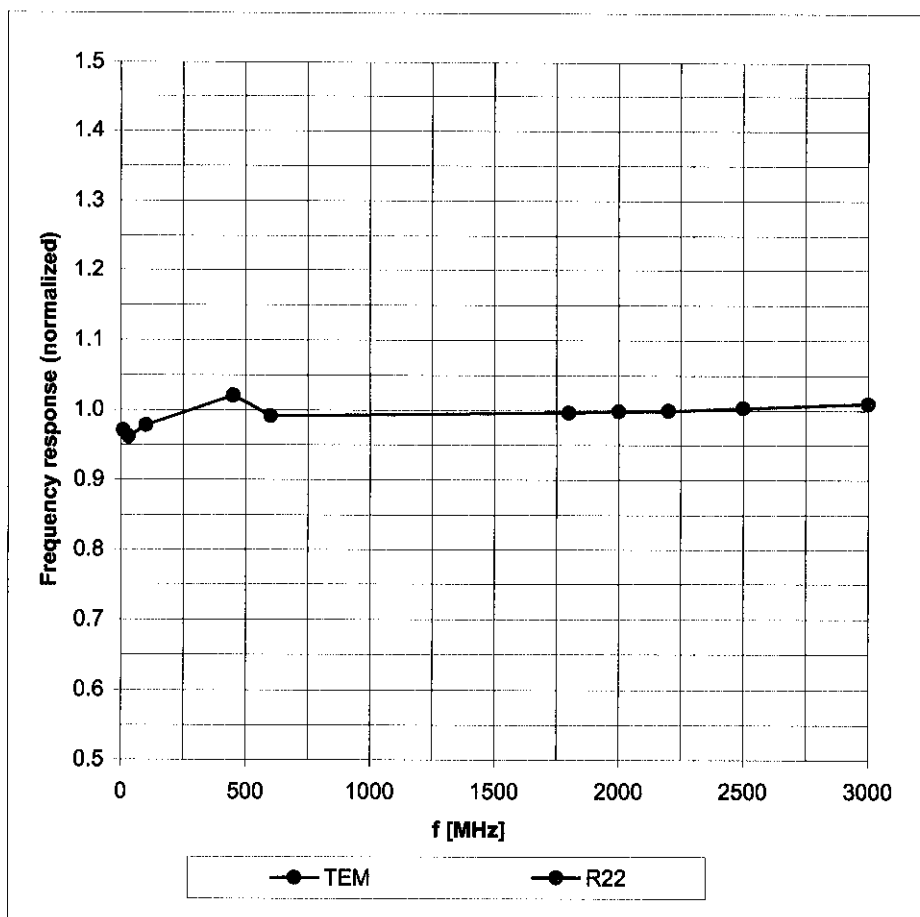



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

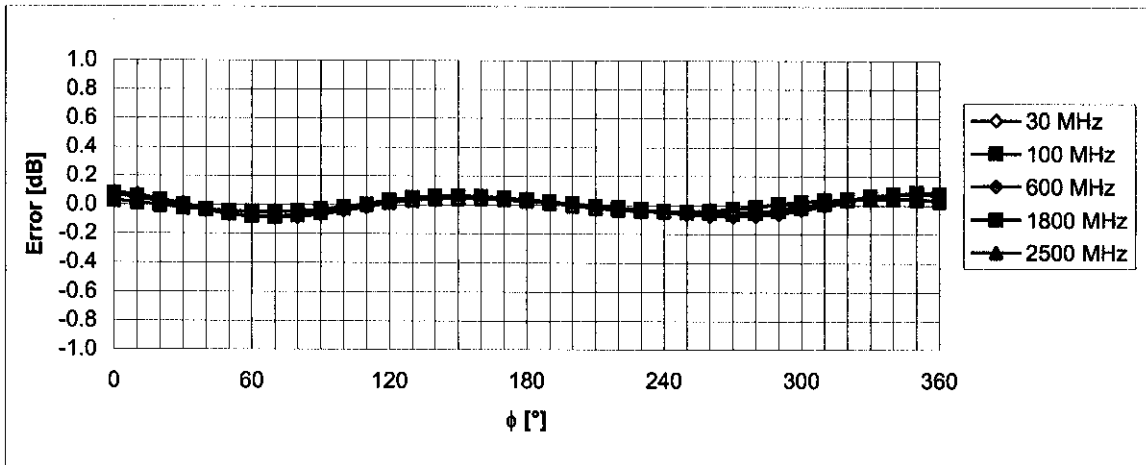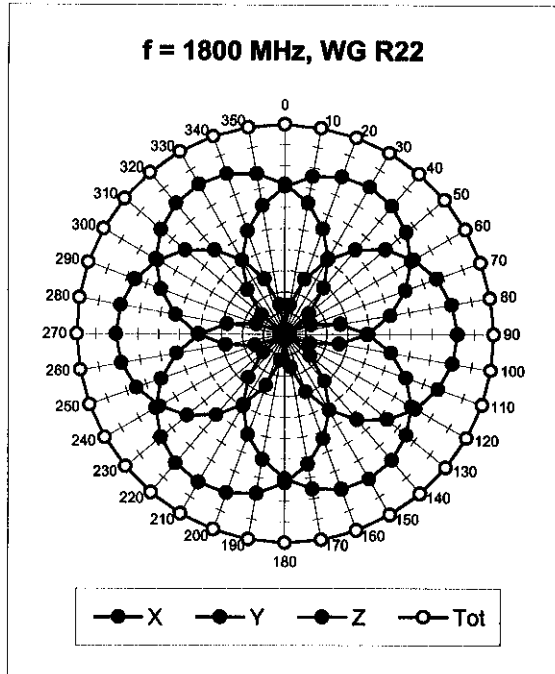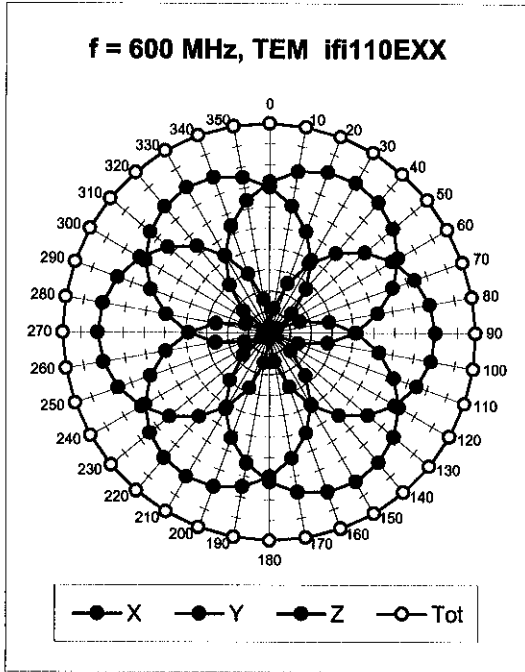



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

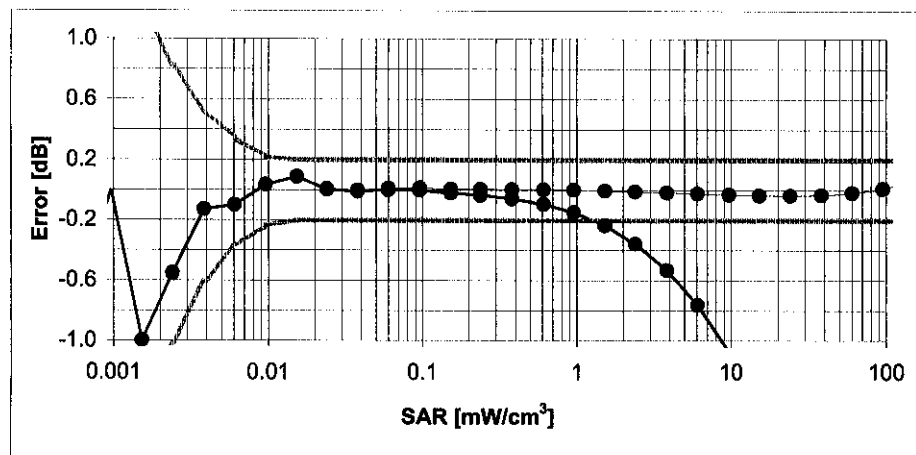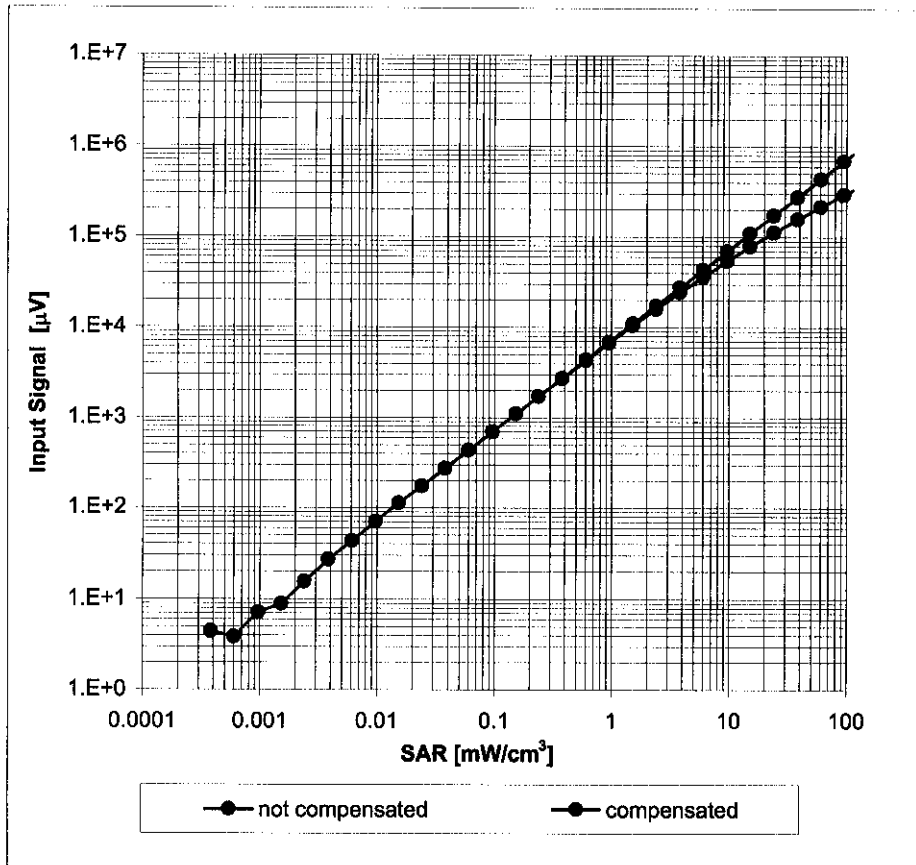

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


Conversion Factor Assessment

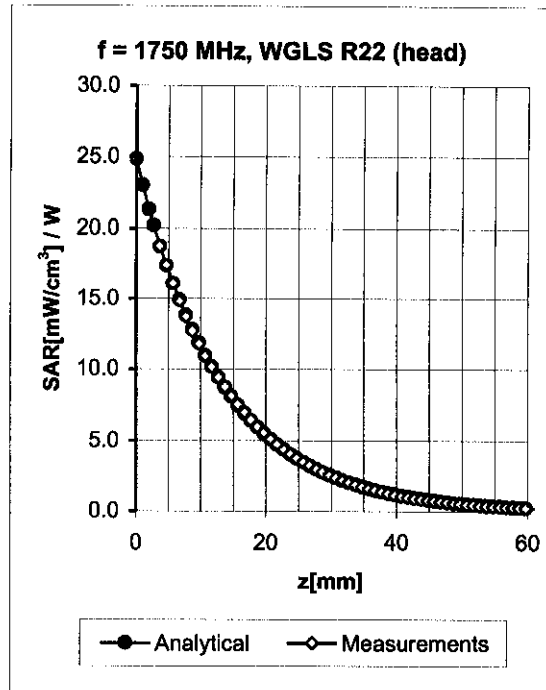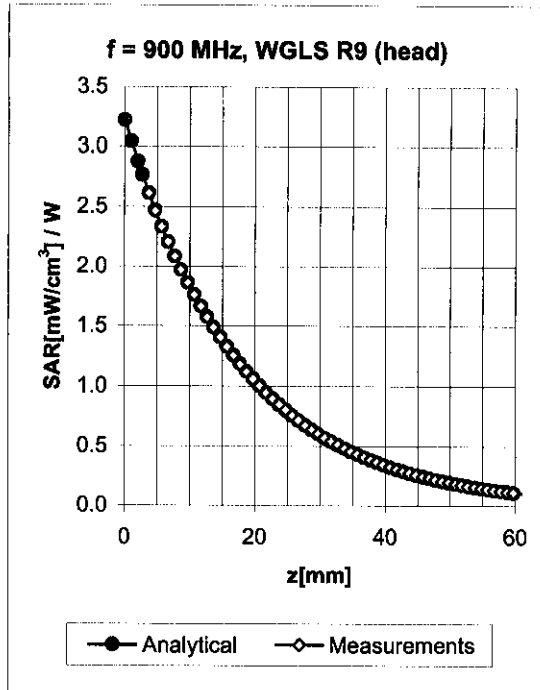

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.52	1.80	6.77 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.49	1.89	6.63 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.45	2.80	5.36 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.47	2.59	5.11 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.48	2.18	4.44 ± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.48	2.00	6.53 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.44	2.12	6.21 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.53	2.67	4.77 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.64	2.35	4.56 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.61	2.29	4.07 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL Error (ϕ , θ), $f = 900$ MHz

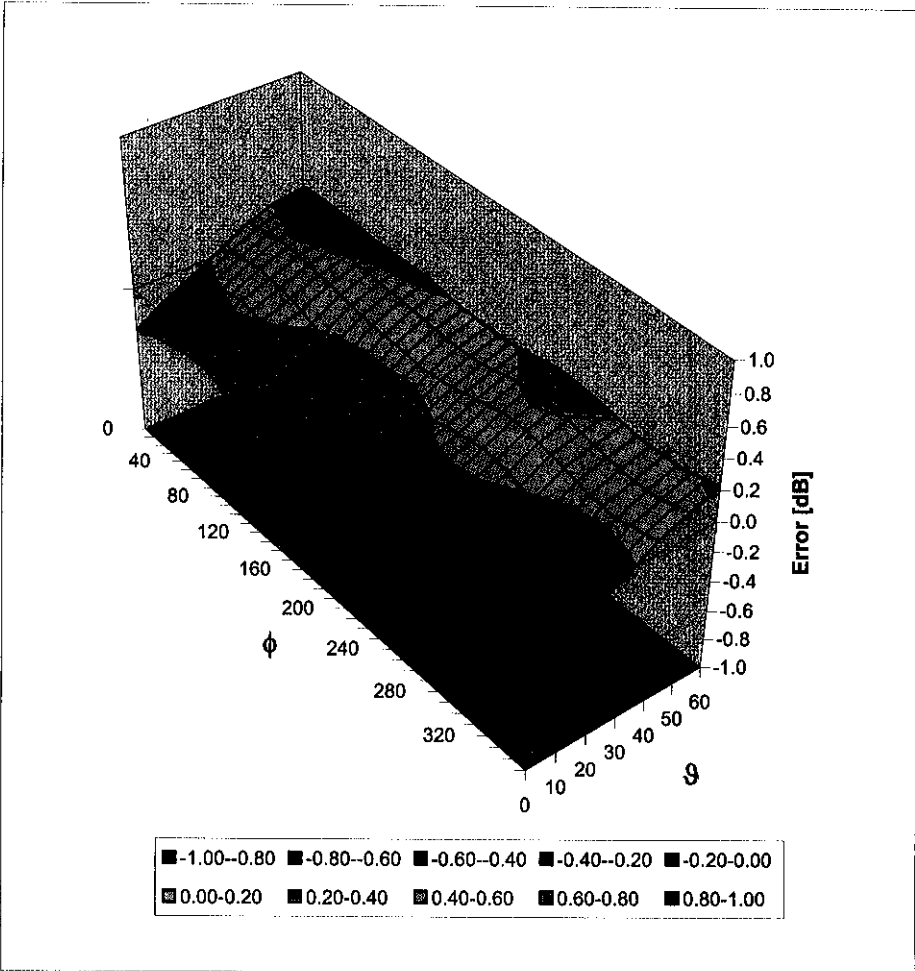

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)