

**Limited Internal
MARKING DRAWING**

Prepared (also subject responsible if other)

SEM/CA/K Michael Frink

Approved

SEM/CA/K (Michael Frink)

Checked

No.

1/151 86 – DPY 101 1421/10

Date

2004-06-28

Rev

C

Reference

Approved according to: 000 21 – LXE 107 42/1

***changes from previous document revision shown in BOLD BLUE**
Type AAF-1031011-BV.
Label


The label used for marking is defined in the Manufacturing Specification on the SVF 930 361/1.

Placing

The label shall be placed on the back of the telephone on top of shield can, shown across.

Print layout

Sony Ericsson trademark	Model Number
DPY number, r-state/variant	
Type number G H Y1 field	
Country approval mark 1	Country approval mark 2
IMEI-numbers as barcode	
IMEI-numbers as characters	
Serial number as barcode	
Serial number as characters	
*AWS Wireless product number as bar code	
*AWS Wireless product number as characters	
Marking of Origin	
Production Week Repair Code CE Marking	
Use Disclaimer	

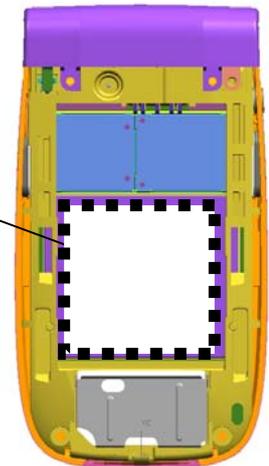

* Only applicable if labeling a KRH 101 161/54

Definitions:

Sony Ericsson trademark	Sony Ericsson trademark shall be according to the corporate standard 190 89-EN/LZT 108 5347.
Model number	The model number is Z500a and shall be printed "Model : Z500a"
DPY product number & r-state/variant	The product number of the DPY including the R-state of the file, eg. DPY 101 1421/10 P1B
Type number	Print : "Type number: AAF-1031011-BV"
G – Field	R-State identification of the CXC-module according to the Marking Data 1/151 86 for the KRH
H-field	R-state identification of the KRH according to the Marking data 1/151 86 for the KRH.
Y ¹ -field	R-state identification of the ROA according to the Marking data 1/151 86 for the KRH.
Country approval	Consist of text: FCC ID: PY7AF031011

Limited Internal
 MARKING DRAWING

Prepared (also subject responsible if other)

SEM/CA/K Michael Frink

Approved

Checked

No.

1/151 86 – DPY 101 1421/10

Date

Rev

Reference

SEM/CA/K (Michael Frink)

2004-06-28

C

mark 1	<i>Within a frame</i> with height > 1,5 mm.
Country approval mark 2	Consist of text: CAN: 4170B-AF031011
IMEI number as bar code	See below for definition of IMEI-number. The bar code shall only contain the digits of the IMEI number (01040800yyyyyy x).
IMEI number as characters	The IMEI number has format: TAC-FAC-SNR-CD TAC = according to the Marking Data 1/151 86 for the KRH FAC = 00 for prototype SNR = according to the Marking Data 1/151 86 for the KRH CD = A check digit, from 0-9, calculated according to the Luhn formula (ISO/IEC 7812), GSM 02.16.
Serial number as bar code	According to Ericsson corporate standard 102 01 – 109.
Serial number as characters	According to Ericsson group standard 0012-101. Ericsson group factory number system according the Ericsson corporate standard 1120-101
*ATT Wireless product number as bar code	The bar code shall only contain the digits
*ATT wireless product number as characters	Product Number 791234567890.
Production week (Prod wk)	The production week shall be given as yyWww (yy = year, ww = week) according to the ISO 8601 standard.
Repair code	Six character code to identify repair data; four characters for date code followed by a two character repair code. "Manufacturing" will <u>NOT</u> be using this space; populated <u>ONLY</u> after completion of repairs and " <u>RELABELING</u> ", when required.
Marking of origin	"Made in" statement should reflect the country of origin of the DPY (i.e. Made in Malaysia).
Approval Marks (CE Marking)	<ol style="list-style-type: none"> 1. According to 1424 - SVF 930 52 2. The notified body number from the type approval certificate, 0682. The print size (height) for the notified body number (e.g. 0682) and the corresponding approval marks shall be minimum 5 mm. This is a regulatory requirement.

Limited Internal
 MARKING DRAWING

Prepared (also subject responsible if other)

SEM/CA/K Michael Frink

Approved

SEM/CA/K (Michael Frink)

Checked

No.

1/151 86 – DPY 101 1421/10

Date

2004-06-28

Rev

C

Reference

Print regulations

The printing shall be well readable and permanent.

Typeface	OCR-B
Type size	min 1.1 mm
Line spacing	min 1.5 mm
Trademark	min 1.5 mm

Document History

Rev.	Date Created (not released date)	Detailed Changes (BOLD)
A	2004-05-07	1. Initial Release
B	2004-05-19	1. Updated to clarify type number