

Prepared (also subject responsible if other)

GBBA/SEM/BMD/V Jose A. Rodrigo

Approved

GBBA/SEM/BMD/P (Danny Bravo)

Checked

Limited Internal
MARKING DRAWING

No.

151 86-KRD 102 326/01 Uen

Date

2003-10-22

Rev

B

Reference

Marking Drawing Type FAA-1041011-BV

Label

The label used for marking is defined in the Manufacturing Specification on the media used.

Placing

The label shall be placed on the back of the PC card according to the Assembly Drawing (151 88) for the KRD.

Print layout

Printing area 38 x 26 mm.

Lines:

1

2

3

4


5

6

7

8

9

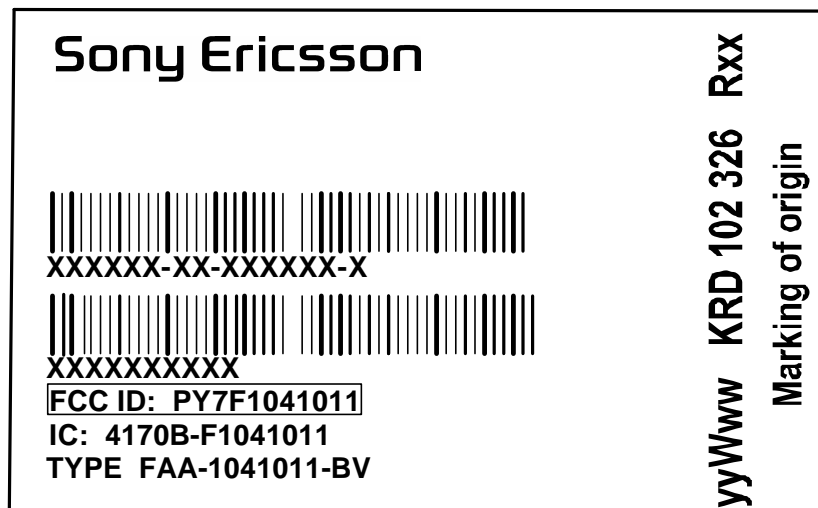

Line 10 Line 11

Prepared (also subject responsible if other)

GBBA/SEM/BMD/V Jose A. Rodrigo

Approved

GBBA/SEM/BMD/P (Danny Bravo)

Checked

**Limited Internal
MARKING DRAWING**

No.

151 86-KRD 102 326/01 Uen

Date

Rev

Reference

2003-10-22

A

Definitions

Line	1	Sony Ericsson trademark
	2	Approval marks (1, 2) and Local approval marks
	3	IMEI number as bar-code
	4	IMEI number as characters
	5	Serial number as bar-code
	6	Serial number as characters
	7	Country approval mark 1 and 3
	8	Country approval mark 2 and 3
	9	Type number
	10	Production week, Product number, R-state
	11	Marking of origin

Sony Ericsson trademark Sony Ericsson and the Sony Ericsson trademark shall be according to the corporate standard 190 89-EN/LZT 108 5347. Height min. 3 mm.

Approval marks 1. This field shall be blank.
2. This field shall be blank.

Local approval marks This field shall be used for local approval marks in countries where special marking is required.

IMEI number as bar code See below for definition of IMEI-number. The bar code shall only contain the digits of the IMEI number (no -). Height 3.5 mm.

IMEI number as characters The IMEI number has format:
TAC1-TAC2-SNR-CD
TAC1 = First six digits of the Type Approval code after assignment from the PTCRB: **010256**.
TAC2 = Last two digits of the Type Approval code after assignment from the PTCRB: **00**
SNR = A serial number from 000000 to 999999.
CD = A check digit, from 0-9, calculated according to the Luhn formula (ISO/IEC 7812), GSM 02.16.

Prepared (also subject responsible if other)

GBBA/SEM/BMD/V Jose A. Rodrigo

Approved

GBBA/SEM/BMD/P (Danny Bravo)

Checked

**Limited Internal
MARKING DRAWING**

No.

151 86-KRD 102 326/01 Uen

Date

Rev

Reference

2003-10-22

A

Serial number as bar code	According to Ericsson corporate standard 102 01 - 109. Height 3.5 mm.
Serial number as characters	According to Ericsson group standard 0012-101. Ericsson group factory number system according the Ericsson corporate standard 1120-101 Factory codes.
Country approval mark 1	FCC approval marking: consists of the text: FCC ID: PY7F1041011 <i>Within a frame</i> with height > 1.5 mm.
Country approval mark 2	Canada approval marking: consists of text: IC: 4170B- F1041011
Country approval mark 3	This field shall be used for country approval marks.
Type number	The type number is FAA-1041011-BV and shall be printed "TYPE FAA-1041011-BV".
Production week	The production week shall be given as yyWww (yy = year, ww = week)
KRD number	The KRD number for the product.
R-state	The R-state for the KRD according to the 1095 for the KRD.
Marking of origin	Marking of origin and shall be printed "Made in Mexico".

Printing regulations

Fontface:	OCR-B
Type size:	min. 1.3 mm
Line spacing:	min. 0.3 mm
Trade mark height:	min. 3 mm
Approval marks height:	min. 5 mm
Colour:	Black

Prepared (also subject responsible if other)

GBBA/SEM/BMD/V Jose A. Rodrigo

Approved

GBBA/SEM/BMD/P (Danny Bravo)

Checked

Limited Internal
MARKING DRAWING

No.

151 86-KRD 102 326/01 Uen

Date

2003-10-22

Rev

A

Reference

Print layout for prototypes

Line 7, 8 and 9 are replaced with text "NOT TYPE APPROVED". Text height min. 2 mm.

Line 2 is replaced with text with alternative shown below. Type size min. 5 mm.

DEMO
PROTOTYPE 2A
PROTOTYPE 2B
PROTOTYPE 2C
etc.



Line 4, the field shall be filled with the **test** IMEI number.

The test IMEI number is: **001003-00-** and the SNR are between **087000** and **088999**

(the CD number must be added)

LINES

1
2
3
4
5
6
7, 8, 9
10
11

Sony Ericsson		
XXXXXXXXXX		
		
XXXXXX-XX-XXXXXX-X		
		
XXXXXXXXXX		
NOT TYPE APPROVED		
yyWww	KRD 102 326	RXX
Marking of origin		