



Report issued by an Accredited Laboratory
Rapport utförd av ett ackrediterat laboratorium

This laboratory is accredited to SS-EN ISO/IEC 17025
 (SWEDAC accreditation no. 1761).

SAR Test Report, FCC ID: PY7F3022016

Document number:	EAB-07:009548 Uen Rev B	Date of report:	2007-02-27
Testing laboratory:	Ericsson EMF Research Laboratory Ericsson AB SE-164 80 Stockholm Sweden	Company/Client:	Lars Melin Sony Ericsson Mobile Communications AB Box 64 SE-164 94 Stockholm Sweden
Tests performed by:	Johan Danestig Björn Hansson	Date of tests:	February 7-20 2007
Manufacturer and market name(s) of device:	Sony Ericsson Mobile Communications AB, M610i		
Testing has been performed in accordance with:	IEEE Std 1528, IEC 62209-1, FCC OET Bulletin 65 Supplement C		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test.		
Additional information:			

Signature:
Test engineer



Johan Danestig
Research Engineer
johan.danestig@ericsson.com
Tel: +46 8 508 765 41

Test engineer



Björn Hansson
Research Engineer
bjorn.hansson@ericsson.com
Tel: +46 8 4042202

Quality manager



Christer Törnevik
Director, EMF Health and Safety
christer.tornevik@ericsson.com
Tel: +46 8 7641235

Table of Contents

Table of Contents	2
1 Summary of SAR Test Report	3
1.1 Equipment under test (EUT).....	3
1.2 Results	3
2 General information	4
3 Equipment under test	4
4 Test equipment	6
4.1 Dosimetric system.....	6
4.2 Additional equipment.....	6
5 Electrical parameters of the tissue simulating liquids	7
6 SAR system performance check	8
7 Uncertainty evaluation of SAR measurement system DASY4 according to IEEE 1528	9
8 Test results	10
8.1 Results for the GSM1900 mode (head).....	11
8.2 Results for the GSM1900 mode (body).....	11
8.3 Results for the GPRS(2Tx)1900 mode (body).....	12
8.4 Results for the GPRS(1Tx)1900 mode (body).....	12
8.5 Results for the WLAN 802.11b mode (head).....	13
8.6 Results for the WLAN 802.11b (body).....	13
8.7 Multi-mode maximum SAR.....	14
9 Conclusion	15
10 References	15
11 Revision History	15
APPENDIX A: Photographs of the DUT	16
APPENDIX B: Photographs of the DUT when positioned for SAR measurements	17
APPENDIX C: SAR distribution plots for the system performance checks	19
APPENDIX D: SAR Distribution Plots	24
APPENDIX E: Probe calibration parameters for ES3DV3, SN: 3113	35

1 Summary of SAR Test Report¹

1.1 Equipment under test (EUT)

Serial Number	CB5A08N827 (Cellular), CB5A08KCQ3 (WLAN)
Type Number	FAD-3022016-BV
Device ID	FCC ID: PY7F3022016 IC: 4170B-F3022016
Accessories used in testing	Headset HPM-61, Bluetooth headset HBH-DS970 Batteries: BST-33 BKB193200/1, BST-33 BKB193200/11
Hardware status	Pre-production EP2.2E
Notes	-



Frequency Band [MHz]	850		900	1800	1900		2000	2450
	GSM	WCDMA	GSM	GSM	GSM	WCDMA	WCDMA	WLAN
Modes								
Supported	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Covered by report	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Data and connectivity	GPRS class 10, GPRS capability class: B, Bluetooth class 2, WLAN 802.11b							
Exposure environment	General public							

1.2 Results

The maximum SAR values are given in the table below. The device conforms to the requirements of the relevant standards when the maximum SAR value is less than or equal to the limit.

Results applicable to the 1g SAR limit of 1.6 W/kg:

	Mode	Channel/Frequency (MHz)	Position	Max SAR _{1g} for single mode operation	Max SAR _{1g} for multi-mode operation ²	SAR _{1g} limit ³	Result
HEAD	GSM 1900	810 / 1909.8	Left, Tilt	0.94 W/kg	1.07 W/kg	1.6 W/kg	PASSED
BODY	GSM 1900	810 / 1909.8	Back, 15mm	0.97 W/kg	1.06 W/kg	1.6 W/kg	PASSED
BODY	GPRS 1900	810 / 1909.8	Back, 15mm	0.89 W/kg	0.98 W/kg	1.6 W/kg	PASSED
HEAD	WLAN	6 / 2437	Right, Cheek	0.13 W/kg	-	1.6 W/kg	PASSED
BODY	WLAN	6 / 2437	Back, 15mm	0.09 W/kg	-	1.6 W/kg	PASSED

Extended Uncertainty (k=2) 95%	± 22.4 %
--------------------------------	----------

¹ This page contains a summary of the test results. The full report provides a complete description of all test details and results.

² Cellular and WLAN/Bluetooth operating simultaneously. WLAN and Bluetooth cannot operate simultaneously.

³ SAR limit applicable in USA and Canada

2 General information

The tests reported in this document have been performed in accordance with the SAR measurement standards IEC 62209-1 [1], IEEE Standard 1528 [2] and the FCC OET Bulletin 65 Supplement C [3]. The purpose of the tests was to verify that the PY7F3022016 mobile phone model is in compliance with the appropriate RF exposure standards, recommendations and limits [3-4].

3 Equipment under test

The tables below summarize the technical data for the equipment under test. Photographs of the device are presented in Appendix A.

Device model	Type No: FAD-3022016-BV FCC ID: PY7F3022016 IC: 4170B-F3022016
Serial number of tested unit(s)	CB5A08N827 (Used for Cellular testing) CB5A08KCQ3 (Used for WLAN testing)
Mode(s) covered by this report	GSM/GPRS1900 WLAN 802.11b
Antenna(s)	Internal
Maximum output power level⁴ (dBm)	GSM/GPRS(1Tx)1900: 29.5 GPRS(2Tx)1900: 26.5 WLAN 802.11b: 14.0 Bluetooth: 4.0
GPRS Class, GPRS capability class	10, B
Duty cycle(s)	1:8 (GSM), 1:4 (GPRS), 1 (WLAN)
Transmitter frequency range (MHz)	GSM1900: 1850.2-1909.8 WLAN, US: 2412-2462
Hardware status	Pre-production EP2.2E
Software(s)	CB5A08N827 (Cellular): CXC162144 R1A12, CDA162027 R1A12, CXC162037 R9F003, CXC162143 R1C CB5A08KCQ3 (WLAN): CXC162150 P1F (Internal Sony Ericsson test SW.)
Tested accessories	Stereo headset HPM-61 Bluetooth headset HBH-DS970
Tested batteries	BST-33 BKB193200/1 BST-33 BKB193200/11

⁴ Output power level of the phone at the antenna port for the maximum power setting. This equals the nominal output power level plus the tolerance in production.

WLAN Output power					
Mode	Nominal output power (dBm)	Tolerance, upper limit (dB)	EUT power (dBm)		
			Ch 1	Ch 6	Ch11
802.11b 1Mbit/s	13.5	+0.5	13.7	13.8	13.5
802.11b 2 Mbit/s			13.7	13.8	13.5
802.11b 5.5 Mbit/s			13.8	13.9	13.6
802.11b 11Mbit/s			13.8	13.9	13.6

GSM/GPRS 1900 MHz Output power					
Mode	Nominal output power (dBm)	Tolerance, upper limit (dB)	EUT power ⁵ (dBm)		
			Ch 512	Ch 661	Ch 810
GSM/GPRS(1Tx) 1900	29.0	+0.5	29.7	29.5	29.4
GPRS(2Tx)1900	26.0	+0.5	26.7	26.5	26.5

⁵ The EUT was tuned to specified nominal output power plus production tolerance at mid channel, resulting in a higher output power than any production unit at low channel.

4 Test equipment

4.1 Dosimetric system

The SAR measurements were made using the DASY4 professional near-field scanner by Schmid & Partner Engineering AG that was installed in December 2002. The total uncertainty (k=1) of the system is $\pm 11.2\%$ for 1g SAR assessments. The corresponding extended uncertainty (k=2) is $\pm 22.4\%$. The equipment list is given below. In Appendix E calibration parameters for the SAR test probes are listed.

Description	Asset number	Calibration due date	Calibration interval
DAE3	S/N 422	2007-05-17	12 months
E-field probe, ES3DV3	S/N 3113	2007-06-30	12 months
Dipole validation kit, D1900V2	S/N 510	NA	NA
Dipole validation kit D2440V2	S/N 705	NA	NA
SAM Phantom (SAM1)	S/N TP-1390	NA	NA

4.2 Additional equipment

Description	Asset number	Calibration due date	Calibration interval
Dielectric probe kit, HP 85070C	S/N US99360060	NA	NA
Network analyzer, HP 8752C	S/N 3410A03732	2007-11-03	12 months
Power meter, R&S NRVS	S/N 848888/052	2008-06-06	24 months
Power sensor, R&S NRV-Z5	S/N 849895/030	2008-06-06	24 months
Digital radio tester, R&S CMU 200	S/N 107639	2007-04-26	12 months
Thermometer, EBRO TFX-392SKWT	S/N 10130918	2007-07-17	12 months
Thermo/Hygrometer, Testo 608-H2	S/N 60013082	2007-02-28	12 months

5 Electrical parameters of the tissue simulating liquids

The parameters of the tissue simulating liquids were measured with the dielectric probe kit prior to the SAR measurement and the results are shown in the table below. Specified standard values for the permittivity and the conductivity are given in [1-3]. The measured values are within 5% of the standard values. The mass density of the liquid entered into the DASY4 program was 1000 kg/m³. The depth of the tissue simulating liquid was more than 15 cm as shown in the figures below.


f (MHz)	Tissue type	Measured/Specification	ϵ_r	σ (S/m)
1900	Head	Measured ⁶	39.2 38.8	1.37 1.41
		Specified value	40.0	1.40
		Difference ⁶ (%)	-2 -3	-2 +1
	Body (muscle)	Measured	51.2	1.56
		Specified value	53.3	1.52
		Difference (%)	-4	+3
2450	Head	Measured	39.9	1.86
		Specified value	39.2	1.80
		Difference (%)	+2	+3
	Body (muscle)	Measured	51.5	2.05
		Specified value	52.7	1.95
		Difference (%)	-2	+5



Measured level (152 mm, head section) of 1900 MHz head tissue simulating liquid in phantom.



Measured level (167 mm, flat section) of 1900 MHz muscle tissue simulating liquid in phantom

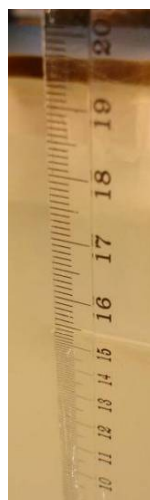

Measured level (154mm, head section) of 2450 MHz head tissue simulating liquid in phantom



Measured level (172 mm, flat section) of 2450 MHz muscle tissue simulating liquid in phantom

⁶ 1900 Head tissue simulating liquid was measured at two occasions. See SAR system performance check table in Section 6.

6 SAR system performance check

System performance checks for the DASY4 were conducted before the SAR measurements with the D1900V2 and D2440V2 dipole kits and the obtained results are displayed in the table below. The results are within 10% of the reference values [2][5]. Evaluations prior to the SAR testing showed that the maximum SAR system noise was below 2 mW/kg, which is below the standard requirements. The temperature of the test facility during the system performance checks was in the range 20°C to 25°C.

f (MHz)	Tissue type	Measured/Reference	SAR 1g (W/kg)	SAR 10g (W/kg)	ϵ_r	σ (S/m)	Liquid temp (°C)	Date
1900	Head	Measured	40.5 40.6	21.0 21.1	39.2 38.8	1.37 1.41	21.1 20.8	2007-02-09 2007-02-20
		Reference [2]	39.7	20.5	40.0	1.40	-	-
		Difference (%)	+2 +2	+2 +3	-2 -3	-2 +1	-	2007-02-09 2007-02-20
	Body (muscle)	Measured	43.6	22.6	51.2	1.56	22.4	2007-02-07
		Reference [5]	40.4	21.1	53.3	1.52	-	-
		Difference (%)	+8	+7	-4	+3	-	-
2450	Head	Measured	53.9	24.8	39.9	1.86	24.7	2007-02-13
		Reference [2]	52.4	24.0	39.2	1.80	-	-
		Difference (%)	+3	+3	+2	+3	-	-
	Body (muscle)	Measured	55.9	25.6	51.5	2.05	22.1	2007-02-12
		Reference [5]	54.5	25.2	52.7	1.95	-	-
		Difference (%)	+3	+2	-2	+5	-	-

7 Uncertainty evaluation of SAR measurement system DASY4 according to IEEE 1528

Uncertainty Component	Section in IEEE 1528	Uncer. (%)	Prob Dist.	Div.	C _i	Std. Uncer. (1g) (%)
Measurement System						
Probe Calibration	E2.1	±5.9	N	1	1	±5.9
Axial Isotropy	E2.2	±4.7	R	√3	0.7	±1.9
Spherical Isotropy	E2.2	±9.6	R	√3	0.7	±3.9
Boundary Effect	E2.3	±1.0	R	√3	1	±1.0
Linearity	E2.4	±4.7	R	√3	1	±2.7
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6
Readout electronics	E2.6	±0.3	N	1	1	±0.3
Response time	E2.7	±0.8	R	√3	1	±0.5
Integration time	E2.8	±2.6	R	√3	1	±1.5
RF Ambient Conditions	E6.1	±3.0	R	√3	1	±1.7
Probe Positioner	E6.2	±0.4	R	√3	1	±0.2
Probe Positioning	E6.3	±2.9	R	√3	1	±1.7
Max. SAR Evaluation	E5	±1.0	R	√3	1	±0.6
<i>Measurement System Uncertainty</i>						±8.4
Test Sample Related						
Device positioning	E4.2	±2.9	N	1	1	±2.9
Device holder uncertainty	E4.1	±3.6	N	1	1	±3.6
Power drift ⁷	6.6.3	±5.0	R	√3	1	±2.9
<i>Test Sample Related Uncertainty</i>						±4.7
Phantom and Tissue Parameters						
Phantom uncertainty	E3.1	±4.0	R	√3	1	±2.3
Liquid conductivity (meas uncertainty)	E3.3	±5.0	N	1	0.64	±3.2
Liquid conductivity (target)	E3.2	±5.0	R	√3	0.64	±1.8
Liquid Permittivity (meas uncertainty)	E3.3	±2.5	N	1	0.6	±1.5
Liquid Permittivity (target)	E3.2	±5.0	R	√3	0.6	±1.7
<i>Phantom and Tissue Parameters Uncertainty</i>						±4.9
Combined standard uncertainty						±11.2
Extended standard uncertainty (k=2)						±22.4

⁷ Power drift for GSM. For WLAN the drift was up to 18%. Therefore, all WLAN SAR results have been scaled up by 18%.

8 Test results

The tables in this section show the measured 1g and 10g averaged SAR for the device and the corresponding values normalized to the maximum output power level. A digital radio tester was used to control the device during the SAR measurements on cellular bands. In WLAN operation a PC was used to control the device via a cable. The cable was disconnected prior to testing. All WLAN measurements were performed in accordance with [7]. Continuous transmission at the lowest data rate, 1 Mbit/s was used. The phone was supplied with a fully charged battery, BST-33 BKB193200/1, for the tests. The temperature of the test facility during the tests was in the range 20° to 25°C. During the tests, the temperature of the tissue simulating liquid was within $\pm 2^{\circ}\text{C}$ from the liquid temperature at system performance check.

The device was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom for the cheek and tilt phone positions in the middle of each transmit band, corresponding to the traffic channel 661 for GSM1900 and traffic channel 6 for 802.11b WLAN. In Appendix B, pictures of the device positioned on the head phantom are shown. For the phone position giving the highest SAR result, the device was then also tested at the lowest and the highest frequencies of the transmit bands corresponding to the traffic channels 512 and 810 for GSM1900 and traffic channels 1 and 11 for WLAN 802.11b. Finally, for the position and frequency giving the highest SAR result in each band, tests were performed with the secondary battery BST-33 BKB193200/11, with the stylus pen removed and for the maximum configuration with the Bluetooth transmitter turned on. A picture showing the location of the stylus pen is found in Appendix A.

The device was also tested in body worn positions with the front and back side of the device facing the phantom on the middle channel of each transmit band. For the phone position giving the highest SAR result, the device was then tested at the lowest and the highest frequencies of each transmit band. Finally, for the position and frequency giving the highest SAR result in each band, tests were performed with the secondary battery BST-33 BKB193200/11, with the stylus pen removed and for the maximum configuration with the Bluetooth transmitter turned on. All tests were performed at 15 mm separation between the device and the flat phantom, with the stereo headset attached for speech and data mode (replaced by Bluetooth headset when Bluetooth enabled). In Appendix B, pictures of the device when positioned under the flat section of the phantom are shown.

The device can operate simultaneously, either in WLAN mode or Bluetooth mode, with the GSM speech and GPRS data modes. Multi-mode SAR results for these configurations are presented in the end of this section.

8.1 Results for the GSM1900 mode (head)

Accessory	Hand side	Phone position	f (MHz)	Measured output power (dBm)	Measured (W/kg)		Normalized to max power, 29.5 dBm (W/kg)	
					SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}
	Left	Cheek	1880.0	29.5	0.63	0.37	0.63	0.37
		Tilt	1850.2	29.7	0.60	0.35	0.57	0.33
			1880.0	29.5	0.73	0.41	0.73	0.41
			1909.8	29.4	0.87	0.50	0.89	0.51
	Right	Cheek	1880.0	29.5	0.44	0.28	0.44	0.28
		Tilt	1880.0	29.5	0.60	0.37	0.60	0.37
BKB193200/11 battery	Left	Tilt	1909.8	29.4	0.86	0.50	0.88	0.51
Pen removed	Left	Tilt	1909.8	29.4	0.92	0.53	0.94	0.54
Pen removed Bluetooth	Left	Tilt	1909.8	29.4	0.92	0.53	0.94	0.54

Appendix D, Figures a-d, show SAR distributions for Left Cheek, Left Tilt, Right Cheek and Right Tilt positions, including the configuration giving the maximum 1g SAR for GSM1900 Head measurements.

8.2 Results for the GSM1900 mode (body)

Separation	Accessory	Phone position	f (MHz)	Measured output power (dBm)	Measured (W/kg)		Normalized to max power, 29.5 dBm (W/kg)	
					SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}
15mm between device and flat phantom	Stereo headset	Front	1880.0	29.5	0.19	0.12	0.19	0.12
		Back	1850.2	29.7	0.71	0.42	0.67	0.40
			1880.0	29.5	0.75	0.44	0.75	0.44
			1909.8	29.4	0.79	0.45	0.80	0.46
	Stereo headset BKB193200/11 battery	Back	1909.8	29.4	0.83	0.48	0.87	0.50
	Stereo headset BKB193200/11 battery Pen removed	Back	1909.8	29.4	0.95	0.54	0.97	0.55
	BKB193200/11 battery Pen removed Bluetooth	Back	1909.8	29.4	0.93	0.53	0.95	0.54

Appendix D, Figure e, shows the SAR distribution for the configuration giving the maximum 1g SAR for GSM1900 Body measurements.

8.3 Results for the GPRS(2Tx)1900 mode (body)

Separation	Accessory	Phone position	f (MHz)	Measured output power (dBm)	Measured (W/kg)		Normalized to max power, 26.5 dBm (W/kg)	
					SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}
15mm between device and flat phantom	Stereo headset	Front	1880.0	26.5	-	-	-	-
		Back	1850.2	26.7	0.66	0.39	0.63	0.37
			1880.0	26.5	0.72	0.42	0.72	0.42
			1909.8	26.5	0.85	0.49	0.85	0.49
	Stereo headset BKB193200/11 battery	Back	1909.8	26.5	0.80	0.46	0.80	0.46
	Stereo headset Pen removed	Back	1909.8	26.5	0.89	0.51	0.89	0.51
	Pen removed Bluetooth	Back	1909.8	26.5	0.93	0.53	0.93	0.53

Appendix D, Figure f, shows the SAR distribution for the configuration giving the maximum 1g SAR for GPRS(2Tx)1900 Body measurements.

8.4 Results for the GPRS(1Tx)1900 mode (body)

Separation	Accessory	Phone position	f (MHz)	Measured output power (dBm)	Measured (W/kg)		Normalized to max power, 29.5 dBm (W/kg)	
					SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}
15mm between device and flat phantom	Pen removed Bluetooth	Back	1909.8	29.4	0.86	0.49	0.88	0.50

8.5 Results for the WLAN 802.11b mode (head)

Accessory	Hand side	Phone position	f (MHz)	Measured output power (dBm)	Measured (W/kg)		Normalized to max power ⁸ , 14 dBm (W/kg)	
					SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}
	Left	Cheek	2437	13.8	0.06	0.03	0.08	0.04
		Tilt	2437	13.8	0.01	0.01	0.01	0.01
	Right	Cheek	2412	13.7	0.10	0.04	0.12	0.05
			2437	13.8	0.10	0.04	0.13	0.05
			2462	13.5	0.08	0.04	0.11	0.05
		Tilt	2437	13.8	0.01	0.01	0.02	0.01
BKB193200/11 battery	Right	Cheek	2437	13.8	0.10	0.05	0.12	0.05
Pen removed	Right	Cheek	2437	13.8	0.10	0.06	0.12	0.08

Appendix D, Figures g-j, show SAR distributions for Left Cheek, Left Tilt, Right Cheek, Right Tilt positions, including the configuration giving the maximum 1g SAR for WLAN Head measurements.

8.6 Results for the WLAN 802.11b (body)

Separation	Accessory	Phone position	f (MHz)	Measured output power (dBm)	Measured (W/kg)		Normalized to max power ⁸ , 14 dBm (W/kg)	
					SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}
15mm between device and flat phantom	Stereo headset	Front	2437	13.8	0.02	0.01	0.02	0.01
			2412	13.7	0.06	0.03	0.08	0.04
		Back	2437	13.8	0.07	0.04	0.09	0.05
			2462	13.5	0.07	0.04	0.09	0.05
	Stereo headset BKB193200/11 battery	Back	2437	13.8	0.06	0.04	0.08	0.04
	Stereo headset Pen removed	Back	2437	13.8	0.07	0.04	0.09	0.05
	Headset removed Pen removed	Back	2437	13.8	0.06	0.03	0.07	0.04

Appendix D, Figure k, shows the SAR distribution for the configuration giving the maximum 1g SAR for WLAN Body measurements.

⁸ Including drift compensation (see footnote 7).

8.7 Multi-mode maximum SAR

The multi-mode maximum SAR values given in the table below are the sum of the maximum SAR for modes that can be used simultaneously. Note, simultaneous operation of WLAN and Bluetooth is not possible; hence SAR values used for the summation are the maximum results for each cellular band combined with either WLAN or Bluetooth. Summation of maximum SAR for obtaining multi-mode SAR is according to the procedures in [6]. The summation is conducted for the maximum SAR values for each mode, regardless if the values were obtained for different test configurations, and will then represent a conservative estimate of the multi-mode SAR.

Usage position	Modes	Multi-mode SAR, normalized to max power ⁸ for both modes	
		SAR _{1g}	SAR _{10g}
Head	GSM1900 & WLAN	1.07	0.62
Body	GSM1900 & WLAN	1.06	0.60
	GPRS1900 & WLAN	0.98	0.56

9 Conclusion

The results above show that the maximum SAR for the PY7F3022016 mobile phone is below the applicable SAR limits. Consequently, the PY7F3022016 mobile phone model is in compliance with the appropriate RF exposure standards and recommendations.

10 References

- [1] IEC 62209-1, International Standard, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Humans models, instrumentation, and procedures – Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held mobile devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)", IEC, February, 2005.
- [2] IEEE, Standard 1528, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.", The Institute for Electrical and Electronics Engineers (IEEE) Inc., June 2003
- [3] FCC, "Evaluating Compliance with FCC Guidelines from Human Exposure To Radiofrequency Electromagnetic Fields", Supplement C Edition 01-01 to OET Bulletin 65 Edition 97-01, June 2001.
- [4] ANSI/IEEE Std C95.1-2005 (Revision of IEEE Std C95.1-1991), "Safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz", The Institute of Electrical and Electronics Engineers Inc., New York, 2006.
- [5] EAB/TF-03:090, "Calculation of reference SAR values for system performance checks with muscle tissue simulating liquid", Ericsson technical report, December 2006.
- [6] IEC 62209-2, Draft, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Humans models, instrumentation, and procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR) for devices used in close proximity of the body (frequency range of 30 MHz to 6 GHz)", December, 2005.
- [7] FCC KDB248227, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", October 2006.

11 Revision History

Rev.	Date	Description
A	2007-02-23	First revision
B	2007-02-27	Editorial changes. Corrected device model info, section 3

APPENDIX C: SAR distribution plots for the system performance checks**System performance check at 1900 MHz (Body) conducted February 7th**

Date/Time: 2007-02-07 15:51:31

-Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
-Medium: Muscle 1950 MHz Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.7, 4.7, 4.7)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin= 254.3 mW/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 12.9 mW/g


d=10mm, Pin= 254.3 mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.5 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 20.5 W/kg

SAR(1 g) = 11.1 mW/g; SAR(10 g) = 5.75 mW/g

Maximum value of SAR (measured) = 12.5 mW/g

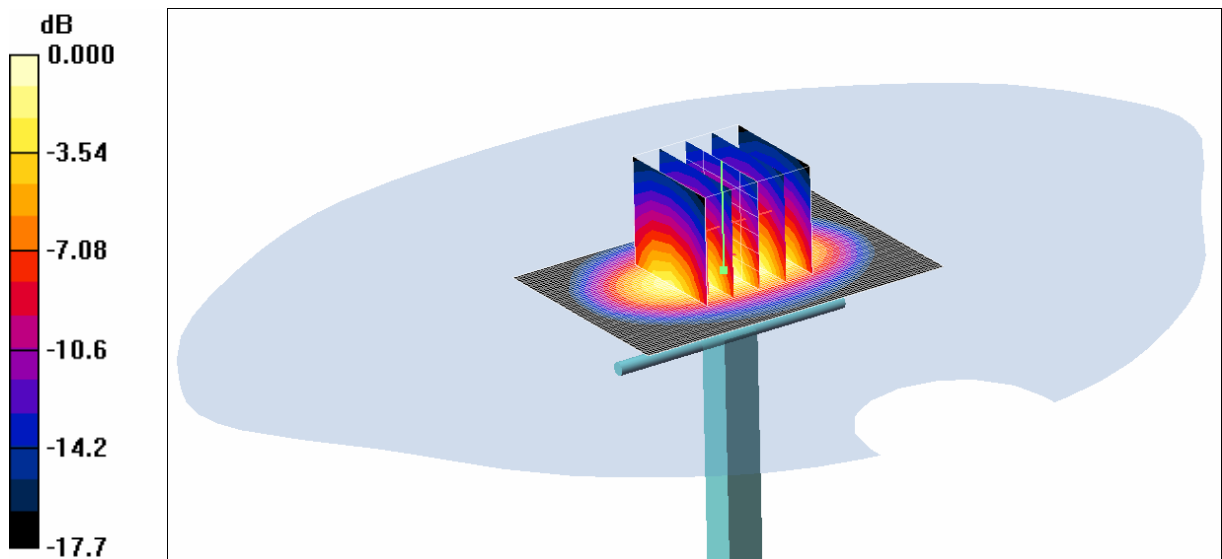

0 dB = 12.5mW/g

System performance check at 1900 MHz (Head) conducted February 9th

Date/Time: 2007-02-09 12:06:44

-Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

-Medium: HSL1950 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.94, 4.94, 4.94)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172


d=10mm, Pin= 249.4 mW/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 11.5 mW/g**d=10mm, Pin= 249.4 mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 89.7 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.24 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

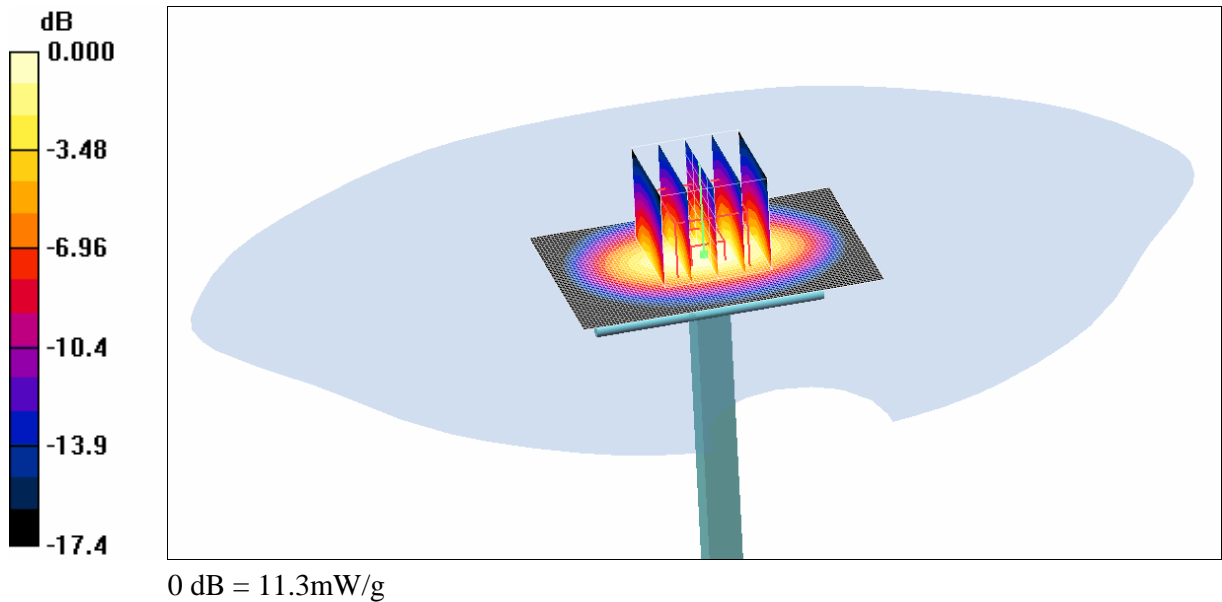

System performance check at 1900 MHz (Head) conducted February 20th

Date/Time: 2007-02-20 15:42:58

-Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

-Medium: HSL1950 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.94, 4.94, 4.94)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172


d=10mm, Pin= 253.4 mW/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 11.7 mW/g**d=10mm, Pin= 253.4 mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 88.6 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 19.2 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.34 mW/g

Maximum value of SAR (measured) = 11.6 mW/g

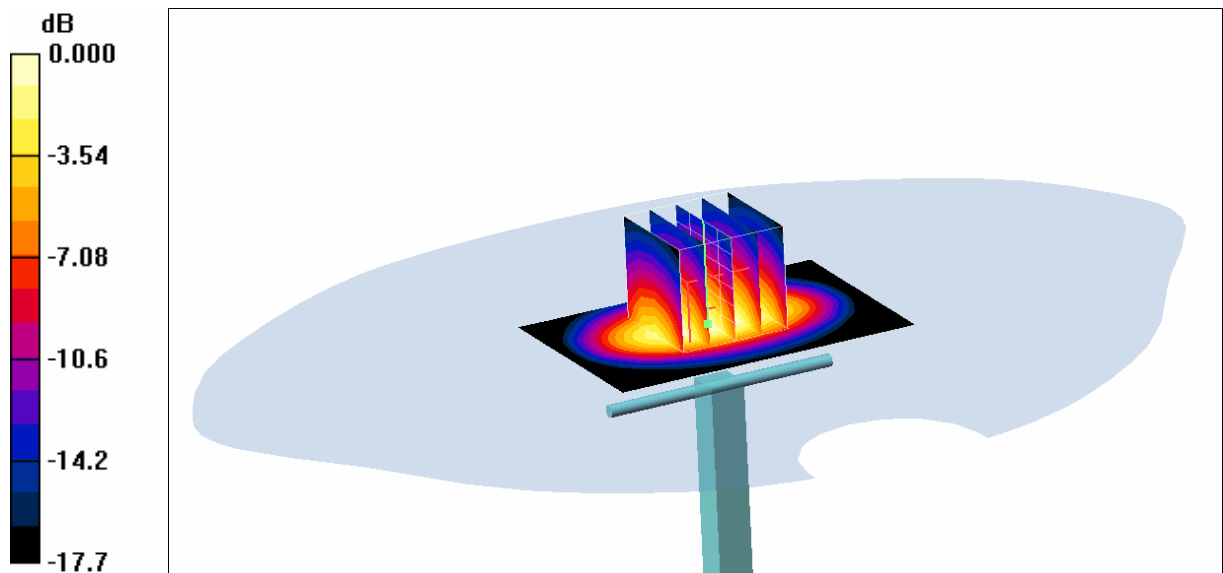

0 dB = 11.6mW/g

System performance check at 2450 MHz (Body) conducted February 12th

Date/Time: 2007-02-12 15:38:08

-Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
-Medium: MSL2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.05$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.15, 4.15, 4.15)
-Electronics: DAE3 Sn422
-Phantom: SAM 1; Serial: TP1390
-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=248.6 mW/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 16.3 mW/g


d=10mm, Pin=248.6 mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.8 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.36 mW/g

Maximum value of SAR (measured) = 15.8 mW/g

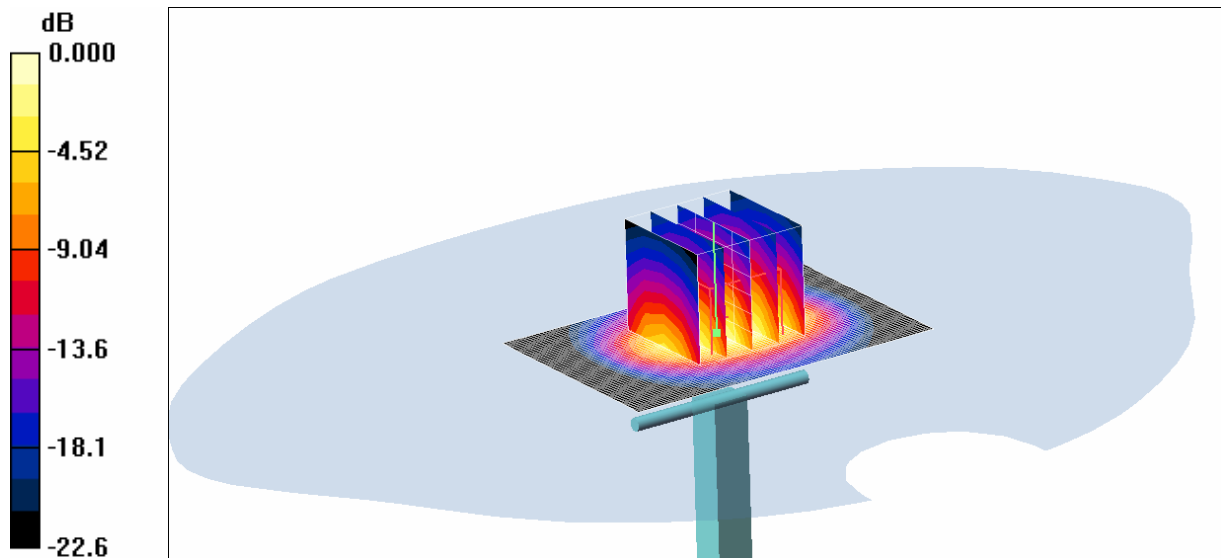

0 dB = 15.8mW/g

System performance check at 2450 MHZ (Head) conducted February 13th

Date/Time: 2007-02-13 15:08:45

-Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

-Medium: HSL2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.48, 4.48, 4.48)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172


d=10mm, Pin= 246.6 mW/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 15.6 mW/g**d=10mm, Pin= 246.6 mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.8 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.12 mW/g

Maximum value of SAR (measured) = 15.1 mW/g

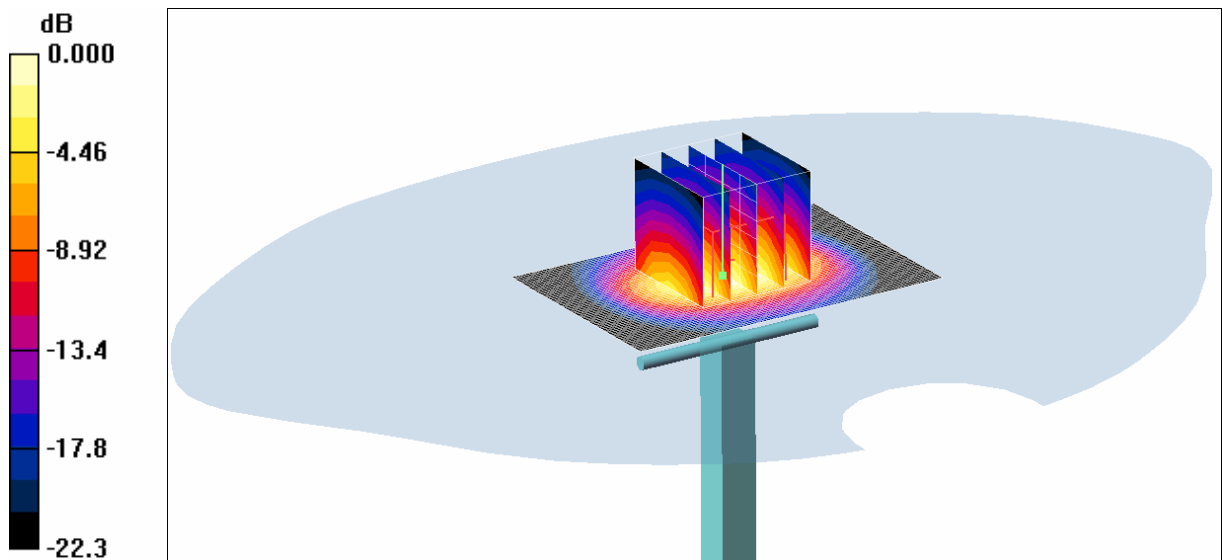

0 dB = 15.1mW/g

APPENDIX D: SAR Distribution Plots

Date/Time: 2007-02-20 11:18:07

-Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

-Medium: HSL1950 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.94, 4.94, 4.94)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; ; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek Mid/Area Scan (81x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.479 mW/g


Cheek Mid/Zoom Scan 5x5x7 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.462 mW/g

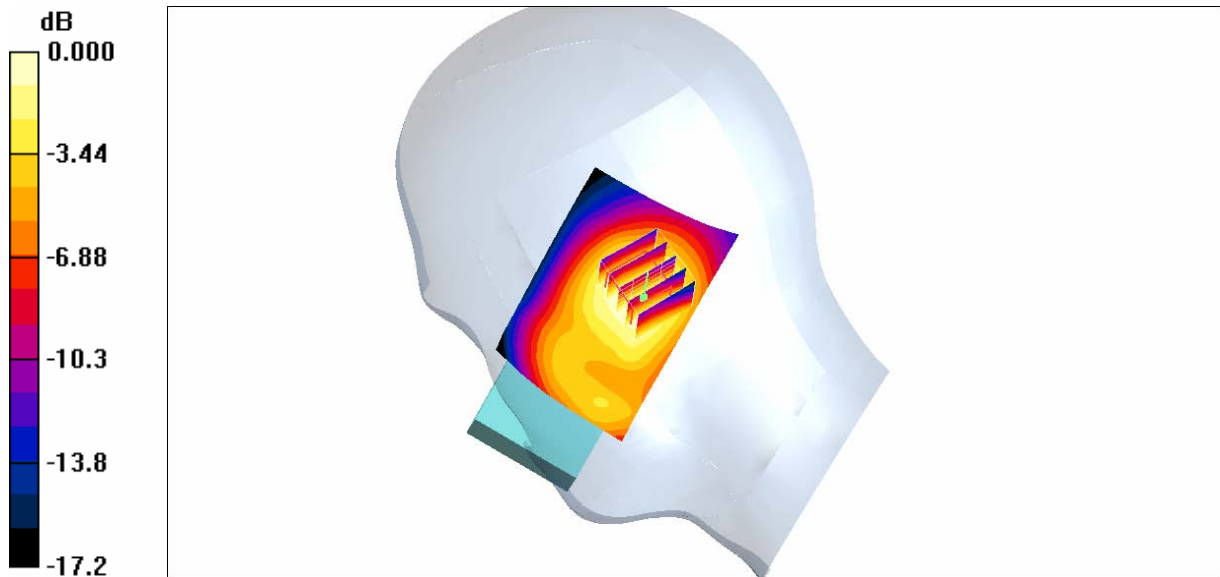

0 dB = 0.462mW/g

(a) SAR Distribution for mobile phone PY7F3022016 in GSM1900 mode measured against the right hand side phantom for the cheek phone position.

EAB-07:009548 Uen, Rev B, 2007-02-27

Date/Time: 2007-02-20 10:56:40

-Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

-Medium: HSL1950 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.94, 4.94, 4.94)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; ; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt Mid/Area Scan (81x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.671 mW/g


Tilt Mid/Zoom Scan 5x5x7 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.937 W/kg

SAR(1 g) = 0.602 mW/g; SAR(10 g) = 0.365 mW/g

Maximum value of SAR (measured) = 0.656 mW/g

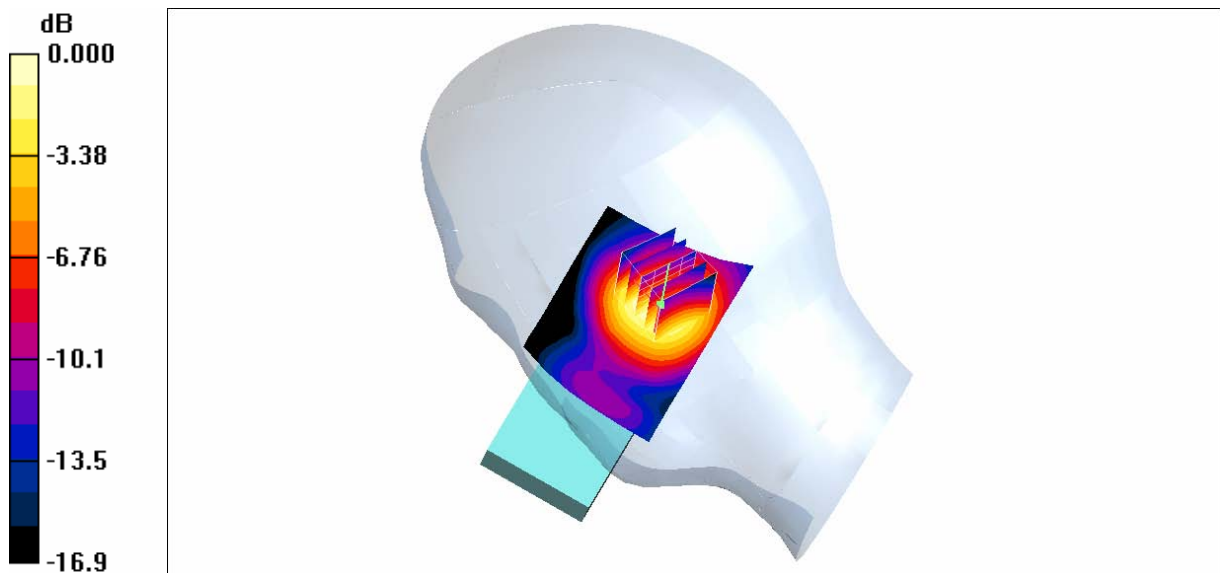

0 dB = 0.656mW/g

(b) SAR Distribution for mobile phone PY7F3022016 in GSM1900 mode measured against the right hand side phantom for the tilt phone position.

EAB-07:009548 Uen, Rev B, 2007-02-27

Date/Time: 2007-02-09 13:15:44

-Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

-Medium: HSL1950 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.94, 4.94, 4.94)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; ; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek Mid/Area Scan (81x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.671 mW/g

Cheek Mid/Zoom Scan 5x5x7 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.373 mW/g

Maximum value of SAR (measured) = 0.667 mW/g



(c) SAR Distribution for mobile phone PY7F3022016 in GSM1900 mode measured against the left hand side phantom for the cheek phone position.

EAB-07:009548 Uen, Rev B, 2007-02-27

Date/Time: 2007-02-09 16:16:32

-Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
-Medium: HSL1950 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.94, 4.94, 4.94)
-Electronics: DAE3 Sn422
-Phantom: SAM 1; ; Serial: TP1390
-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt High, batt1, no pen/Area Scan (81x51x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.01 mW/g


Tilt High, batt1, no pen/Zoom Scan 5x5x7 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.1 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.921 mW/g; SAR(10 g) = 0.527 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

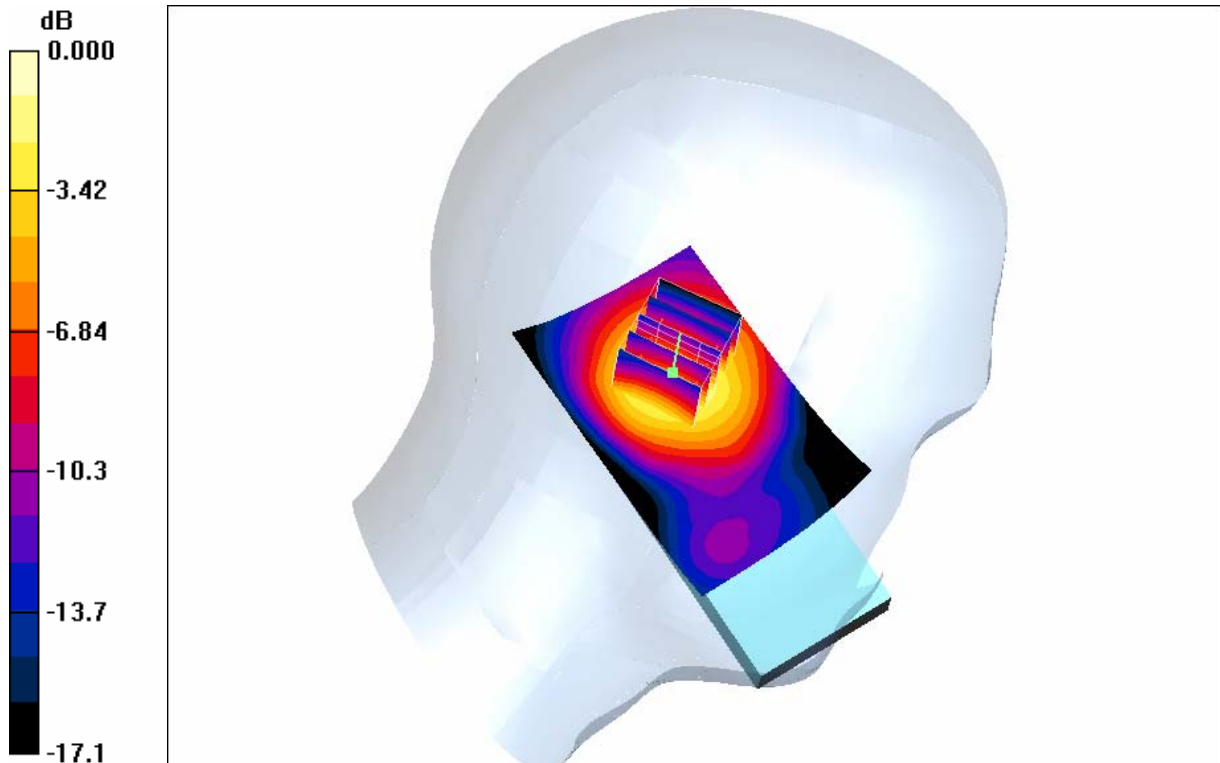

0 dB = 1.01mW/g

(d) Maximum SAR Distribution for mobile phone PY7F3022016 in GSM1900 mode measured against the left hand side phantom for the tilt phone position.

EAB-07:009548 Uen, Rev B, 2007-02-27

Date/Time: 2007-02-08 10:53:58

-Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
-Medium: Muscle 1950 MHz Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.7, 4.7, 4.7)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; ; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Back to Phantom High, batt2 , no pen/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.09 mW/g


Back to Phantom High, batt2 , no pen/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.951 mW/g; SAR(10 g) = 0.541 mW/g

Maximum value of SAR (measured) = 1.04 mW/g

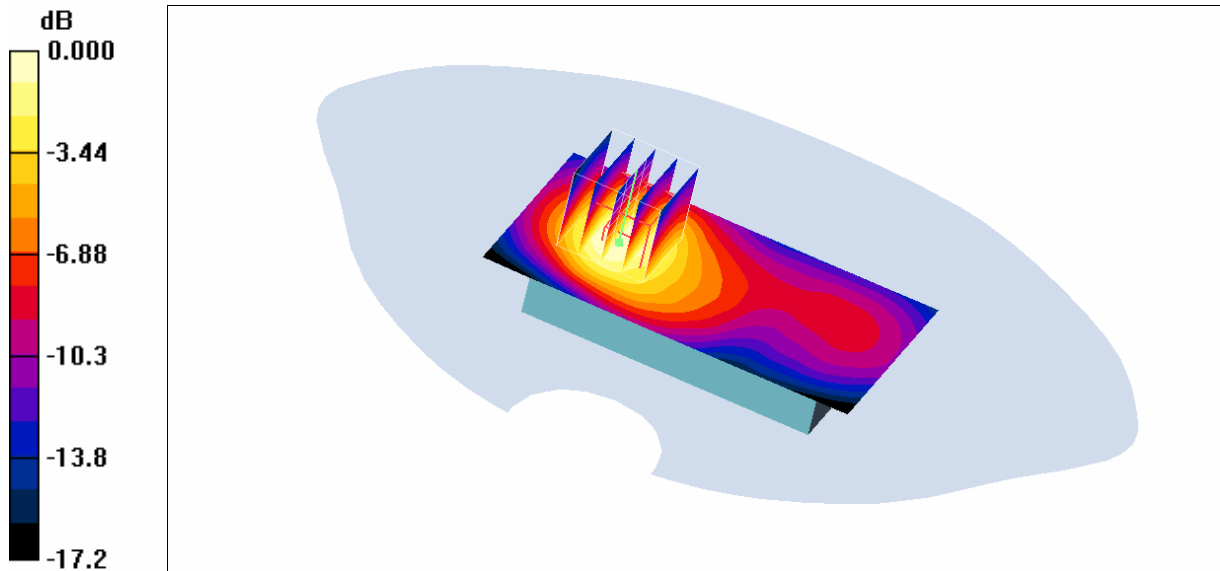

0 dB = 1.04mW/g

(e) Maximum SAR Distribution for mobile phone PY7F3022016 in GSM1900 mode measured with the back of the phone facing the flat section of phantom.

EAB-07:009548 Uen, Rev B, 2007-02-27

Date/Time: 2007-02-07 22:19:28

-Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15
-Medium: Muscle 1950 MHz Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.7, 4.7, 4.7)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; ; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Back to Phantom High BT, batt1, no pen/Area Scan (51x91x1): Measurement grid: dx=15mm,
dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g


Back to Phantom High BT, batt1, no pen/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.926 mW/g; SAR(10 g) = 0.530 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

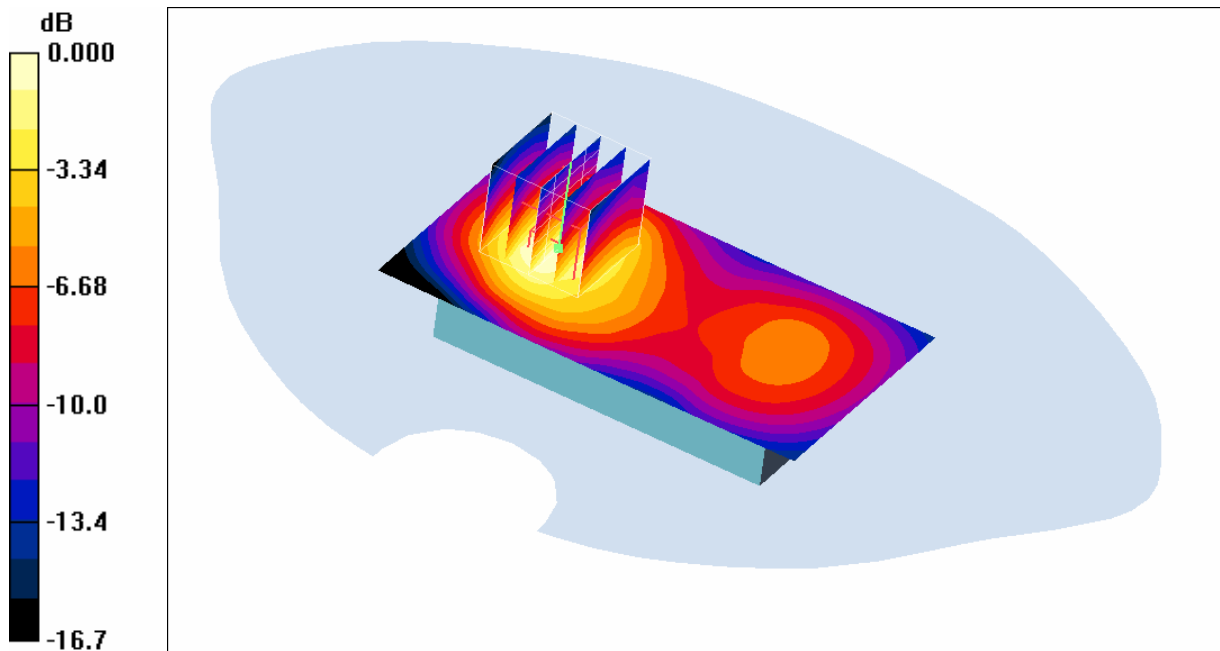

0 dB = 1.02mW/g

(f) Maximum SAR Distribution for mobile phone PY7F3022016 in GPRS(2Tx)1900 mode measured with the back of the phone facing the flat section of phantom.

EAB-07:009548 Uen, Rev B, 2007-02-27

Date/Time: 2007-02-13 17:09:56

-Communication System: WLAN 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

-Medium: HSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.48, 4.48, 4.48)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; ; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek Mid 2/Area Scan (81x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.099 mW/g


Cheek Mid 2/Zoom Scan 5x5x7 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.05 V/m; Power Drift = -0.698 dB

Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.117 mW/g

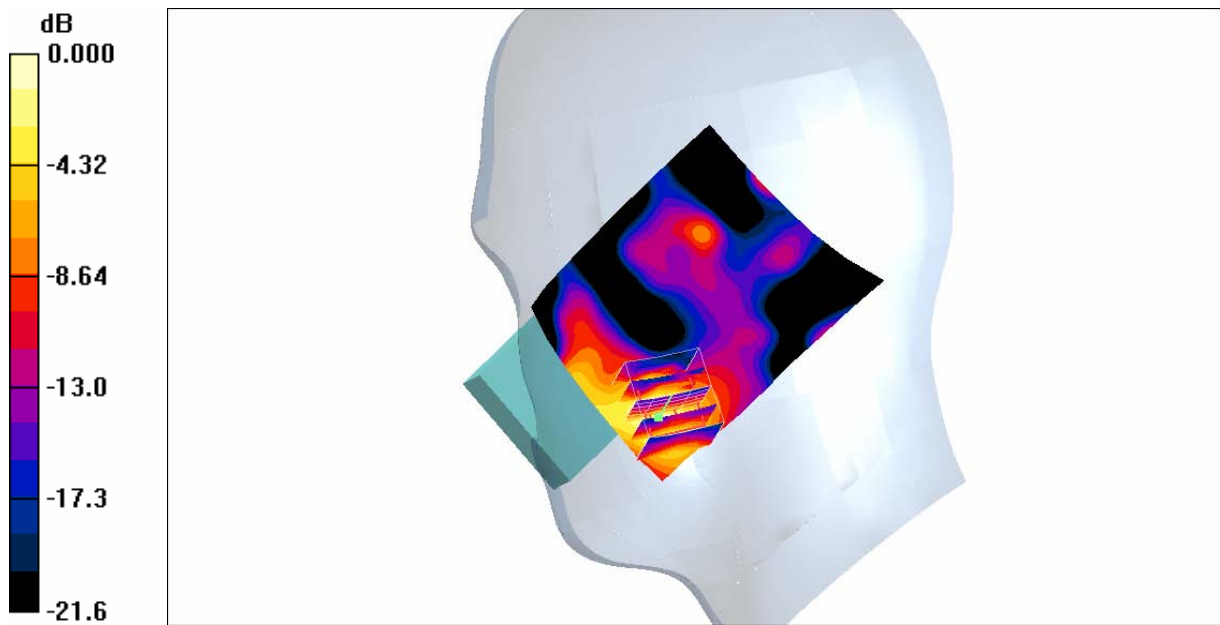

0 dB = 0.117mW/g

(g) Maximum SAR Distribution for mobile phone PY7F3022016 in WLAN mode measured against the right hand side phantom for the cheek phone position.

EAB-07:009548 Uen, Rev B, 2007-02-27

Date/Time: 2007-02-13 17:41:31


-Communication System: WLAN 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
-Medium: HSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.48, 4.48, 4.48)
-Electronics: DAE3 Sn422
-Phantom: SAM 1; ; Serial: TP1390
-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt Mid/Area Scan (81x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.019 mW/g

Tilt Mid/Zoom Scan 5x5x7 (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.63 V/m; Power Drift = 0.132 dB
Peak SAR (extrapolated) = 0.034 W/kg
SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00356 mW/g
Maximum value of SAR (measured) = 0.033 mW/g

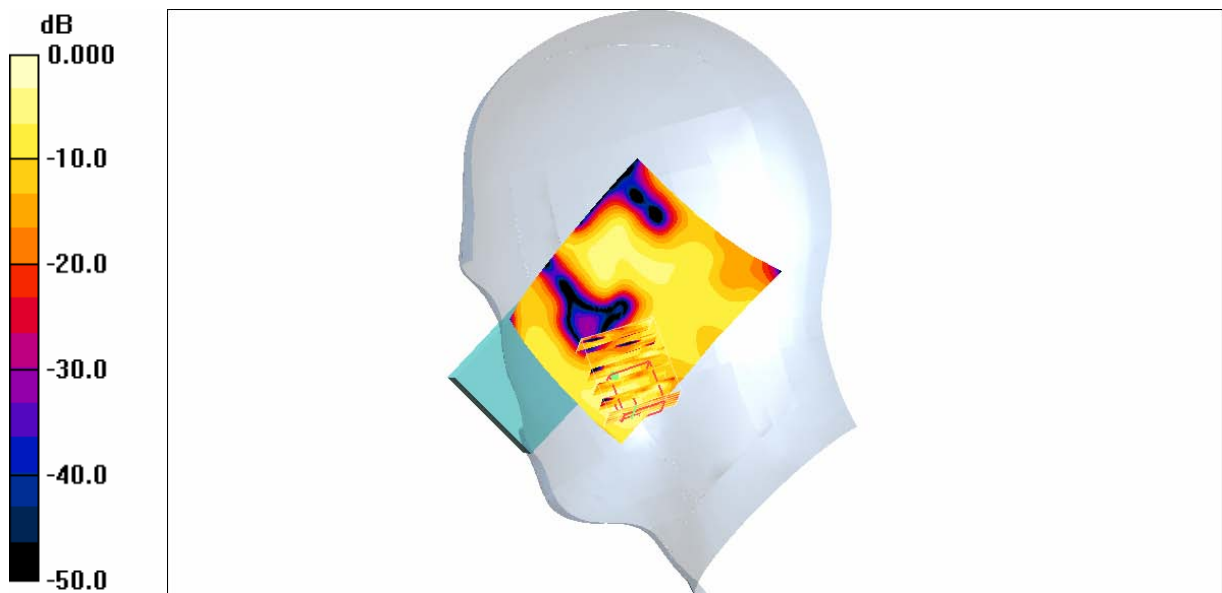

(h) SAR Distribution for mobile phone PY7F3022016 in WLAN mode measured against the right hand side phantom for the tilt phone position.

EAB-07:009548 Uen, Rev B, 2007-02-27

Date/Time: 2007-02-13 15:49:39


-Communication System: WLAN 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
-Medium: HSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.48, 4.48, 4.48)
-Electronics: DAE3 Sn422
-Phantom: SAM 1; ; Serial: TP1390
-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek Mid/Area Scan (81x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.071 mW/g

Cheek Mid/Zoom Scan 5x5x7 (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.01 V/m; Power Drift = -0.353 dB
Peak SAR (extrapolated) = 0.132 W/kg
SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.030 mW/g
Maximum value of SAR (measured) = 0.069 mW/g

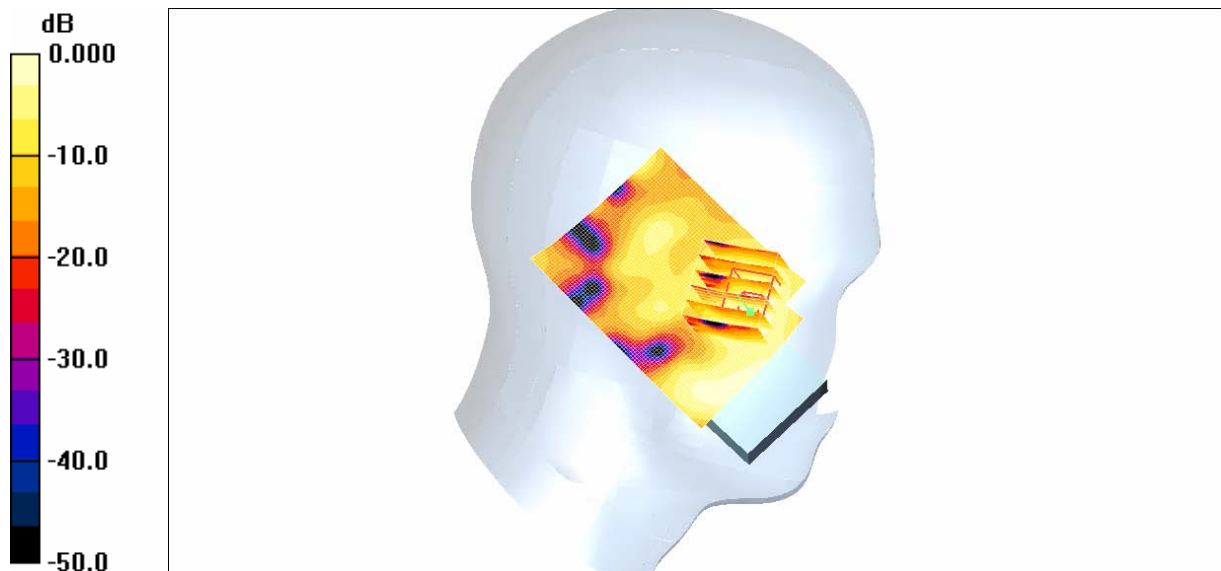

(i) SAR Distribution for mobile phone PY7F3022016 in WLAN mode measured against the left hand side phantom for the cheek phone position.

EAB-07:009548 Uen, Rev B, 2007-02-27

Date/Time: 2007-02-13 16:13:44


-Communication System: WLAN 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
-Medium: HSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.48, 4.48, 4.48)
-Electronics: DAE3 Sn422
-Phantom: SAM 1; ; Serial: TP1390
-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt Mid/Area Scan (81x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.018 mW/g

Tilt Mid/Zoom Scan 5x5x7 (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.62 V/m; Power Drift = -0.582 dB
Peak SAR (extrapolated) = 0.024 W/kg
SAR(1 g) = 0.00878 mW/g; SAR(10 g) = 0.00294 mW/g
Maximum value of SAR (measured) = 0.024 mW/g

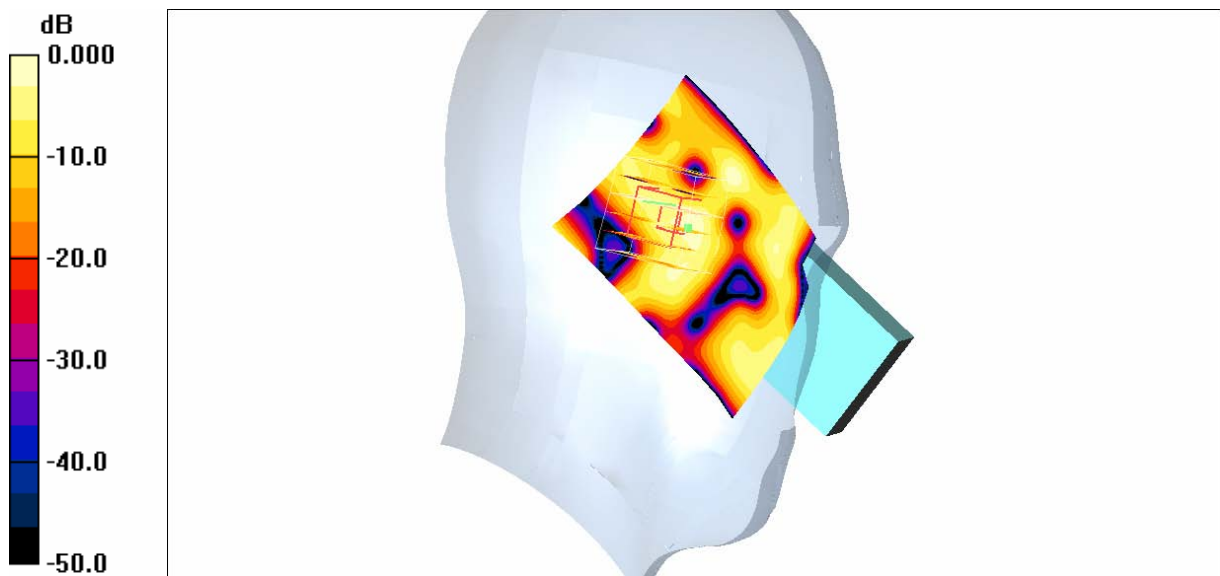

0 dB = 0.024mW/g

(j) SAR Distribution for mobile phone PY7F3022016 in WLAN mode measured against the left hand side phantom for the tilt phone position.

Date/Time: 2007-02-13 12:05:28

-Communication System: GSM 1900; Frequency: 2437 MHz; Duty Cycle: 1:1

-Medium: M2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 2.05$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

-Probe: ES3DV3 - SN3113; ConvF(4.15, 4.15, 4.15)

-Electronics: DAE3 Sn422

-Phantom: SAM 1; ; Serial: TP1390

-Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Back to Phantom Mid batt1, no pen/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.077 mW/g


Back to Phantom Mid batt1, no pen/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 3.72 V/m; Power Drift = -0.412 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

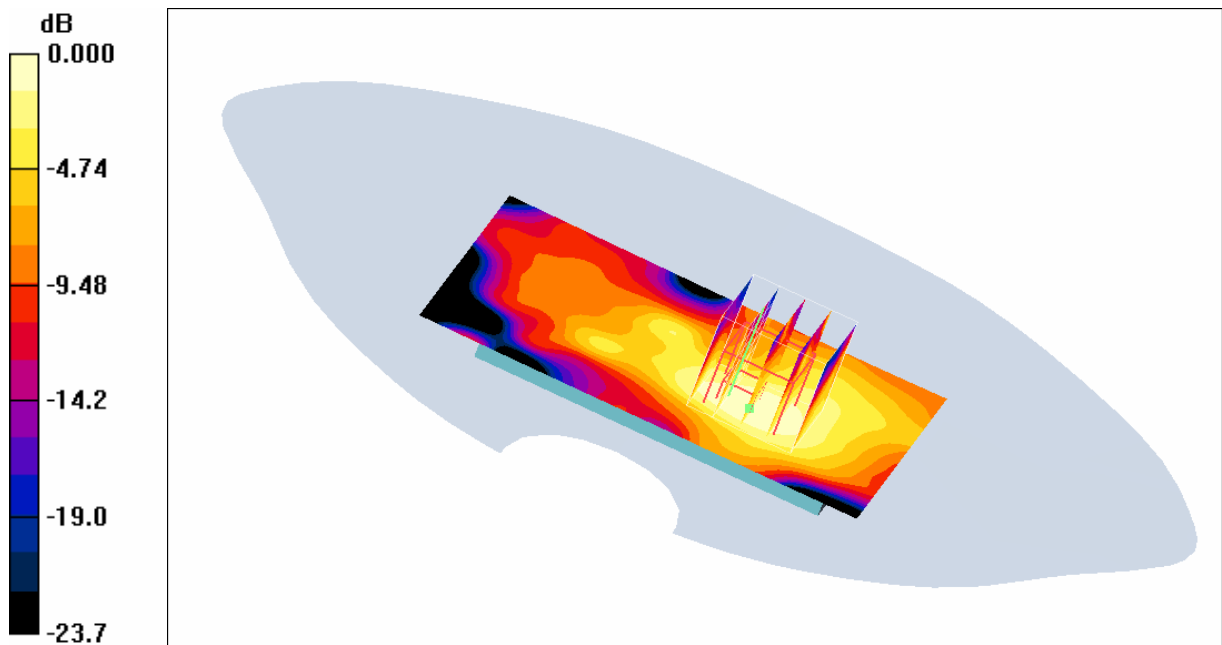

0 dB = 0.078mW/g

(k) Maximum SAR Distribution for mobile phone PY7F3022016 in WLAN mode measured with the back of the phone facing the flat section of phantom.

APPENDIX E: Probe calibration parameters for ES3DV3, SN: 3113
Diode compression:

Parameter	Value in mV
DCP X	95
DCP Y	95
DCP Z	95

Sensitivity in free space:

Parameter	Value in $\mu\text{V}/(\text{V}/\text{m})^2$
Norm X	1.20
Norm Y	1.10
Norm Z	1.28

Sensitivity in tissue simulating liquid

Head 1900 MHz; $\epsilon_r=40 \pm 5\%$, $\sigma=1.40 \pm 5\%$ S/m.

Parameter	Value
ConvF X	4.94
ConvF Y	4.94
ConvF Z	4.94

Muscle 1900 MHz; $\epsilon_r=53.3 \pm 5\%$, $\sigma=1.52 \pm 5\%$ S/m.

Parameter	Value
ConvF X	4.70
ConvF Y	4.70
ConvF Z	4.70

Head 2450 MHz; $\epsilon_r=39.2 \pm 5\%$, $\sigma=1.80 \pm 5\%$ S/m.

Parameter	Value
ConvF X	4.48
ConvF Y	4.48
ConvF Z	4.48

Muscle 2450 MHz; $\epsilon_r=52.7 \pm 5\%$, $\sigma=1.95 \pm 5\%$ S/m.

Parameter	Value
ConvF X	4.15
ConvF Y	4.15
ConvF Z	4.15

Probe tip to sensor center: 2.7 mm