


KRD 104 1024 R1A IC: 41708 – FF051011 DPY1011455/34 R1A TYPE FAF – 1051011 – BY Made in Mexico GC89





GBFA/SEM/BMD/TP Pete Saunders

GBFA/SEM/BMD/TP (Pam Wood)

Company Internal SPECIFICATION

No.

151 86-KRD 104 1024 Uen

te Rev Reference

2005-02-21 C

Approved according to 1776-KRD 104 1024-1

Checked

Marking Drawing GC89 Type FAF-1051011-BV


<u>Label</u>

The label used for marking is defined in the Manufacturing Specification on the media used.

Placing

The label shall be placed on the back of the PC card according to the Assembly Drawing (151 88) for the KRD.

Print layout

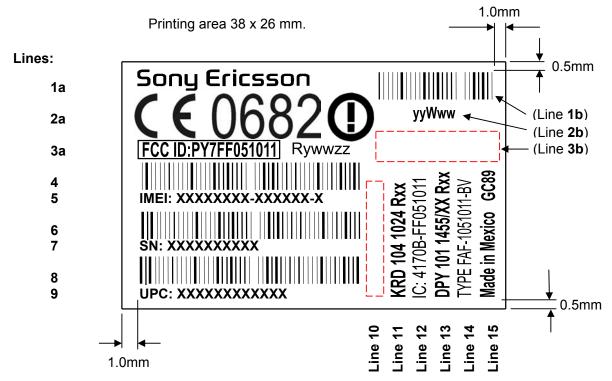



GBFA/SEM/BMD/TP Pete Saunders

Approved

GBFA/SEM/BMD/TP (Pam Wood)

Company Internal SPECIFICATION

No.

151 86-KRD 104 1024 Uen

Date Rev Reference

2005-02-21 C

Definitions

Line 1a Sony Ericsson trademark

Checked

- 1b Production Week as bar code
- 2a Approval marks (1,2 and 3)
- 2b Production Week as characters
- 3a FCC approval marking and Repair year/week/revision re-work code
- 3b Left blank space for country approval mark
- 4 IMEI number as bar code
- 5 IMEI number as characters
- 6 Serial number as bar-code
- 7 Serial number as characters
- 8 UPC number as bar code
- 9 UPC number as characters
- 10 Left blank space for country approval mark
- 11 KRD number, R-state
- 12 Industry Canada marking
- 13 Product (DPY) number, R-state
- 14 Type number
- 15a Marking of origin
- 15b Product Name "GC89"



GBFA/SEM/BMD/TP Pete Saunders

Approved

GBFA/SEM/BMD/TP (Pam Wood)

Company Internal SPECIFICATION

No.

151 86-KRD 104 1024 Uen

Date Rev Reference

2005-02-21 C

Sony Ericsson trademark

Checked

Sony Ericsson and the Sony Ericsson trademark shall be according to the corporate standard 190 89-EN/LZT 108 5347. Height min. 3 mm.

Production Week as bar

code

According to Ericsson corporate standard 102

01 - 109. Height 3.5 mm

Production week

The production week shall be given as yyWww

(yy = year, ww = week)

Approval marks

1. CE Marking. According to 1424 - SVF 930 52.

2. The Notified Body number. It shall be 0682. The print size (height) for the notified body number and the corresponding approval marks shall be minimum 5 mm. This is a regulatory requirement.

3. Alert sign (at same height as CE mark)

FCC approval marking

FCC approval marking: consists of the text:

FCC ID: PY7FF051011

Within a frame with height > 1.5 mm.

Repair year/week/revision re-work code

For service use only.

The field format shall be Rywwzz, repair year/week/revision.

When the unit leaves manufacturing this field shall be left blank with space for the 6-digit repair code to be added during re-work at

service center.



GBFA/SEM/BMD/TP Pete Saunders

Approved

GBFA/SEM/BMD/TP (Pam Wood)

Company Internal SPECIFICATION

No

151 86-KRD 104 1024 Uen

Date Rev Reference

2005-02-21 C

Country approval mark 1

Checked

Left blank – space for country approval mark

(The Australian A-tick symbol and text will be placed here once approvals are gained)

IMEI number as bar code

See below for definition of IMEI-number. The bar code shall only contain the digits of the

IMEI number (no -). Height 3.5 mm. The IMEI number has format:

IMEI number as characters

TAC SNR - CD

TAC = First eight digits of the Type Approval code after assignment from the Notified Body:

SNR = A serial number from 000 000

to 999 999.

CD = A check digit, from 0-9, calculated according to the Luhn formula

(ISO/IEC 7812), GSM 02.16.

Serial number as bar code

According to Ericsson corporate standard 102

01 - 109. Height 3.5 mm.

Serial number as characters

According to Ericsson group standard 0012-

101

Ericsson group factory number system according the Ericsson corporate standard

1120-101 Factory codes:

Celestica (Monterrey, Mexico) = BL3

UPC number as bar code

According to Ericsson group standard 0012-

101. Code 128 Type B. Height 3.5mm. According to AT&T PM-100-1-03.

UPC number as characters

Country approval mark 2

Left blank – space for country approval mark (Brazilian Anatel approval mark and text will be

placed here once approvals are gained)



GBFA/SEM/BMD/TP Pete Saunders

Approved

GBFA/SEM/BMD/TP (Pam Wood)

Company Internal SPECIFICATION

No.

Checked

151 86-KRD 104 1024 Uen

Date Rev Reference

2005-02-21 C

KRD number The KRD number for the product.

R-state The R-state for the KRD according to the 1095

for the KRD.

Industry Canada marking Industry Canada approval marking: consists of

text:

IC: 4170B-FF051011

R-state The R-state for the KRD according to the 1095

for the KRD.

Type number The type number is FAF-1051011-BV and shall

be printed "TYPE FAF-1051011-BV".

Marking of origin Marking of origin and shall be printed "Made in

Mexico".



Company Internal SPECIFICATION

GBFA/SEM/BMD/TP Pete Saunders

Prepared (also subject responsible if other)

GBFA/SEM/BMD/TP (Pam Wood)

151 86-KRD 104 1024 Uen Checked

Date Reference

2005-02-21 С

Printing regulations

OCR-B Fontface: Type size: min. 1.3 mm Line spacing: min. 0.3 mm Trade mark height: min. 3 mm min. 5 mm Approval marks height: Colour: Black

Margins: 1.0mm clear margin on Left & Right edges

0.5mm clear margin on Top & Bottom edges

Lines 10 to 15 should be Justified to the Bottom & Layout:

Right label margins.



GBFA/SEM/BMD/TP Pete Saunders
Approved

GBFA/SEM/BMD/TP (Pam Wood)

Company Internal SPECIFICATION

No.

Checked

151 86-KRD 104 1024 Uen

ate Rev Reference

2005-02-21 C

Completed label;

NOTE – label shown as per factory configuration = repair re-work code not shown.





GBFA/SEM/BMD/TP Pete Saunders

GBFA/SEM/BMD/TP (Pam Wood)

Company Internal SPECIFICATION

No.

151 86-KRD 104 1024 Uen

Date Rev Reference

2005-02-21 C

Print layout for prototypes

Line 2 is replaced with text with alternative shown below. Type size min. 5 mm.

DEMO
PROTOTYPE 2A
PROTOTYPE 2B
PROTOTYPE 2C
etc.

Checked

Line 3 is left blank.

Lines 4 and 5 the field shall be filled with the **test** IMEI number.


The test IMEI number is: XXXXXXXX and the SNR are between XXXXXX to XXXXXX (the CD number must be added)

Lines 6 and 7 the field shall be filled with the serial number.

Lines 8 and 9 are replaced with text "NOT TYPE APPROVED". Text height min. 2 mm. Under this text the following fields should be put:

- Production week, Product number, R-state. Text height min. 1.3 mm.
- Text "Made by Sony Ericsson". Text height min. 1.3 mm.

LINES

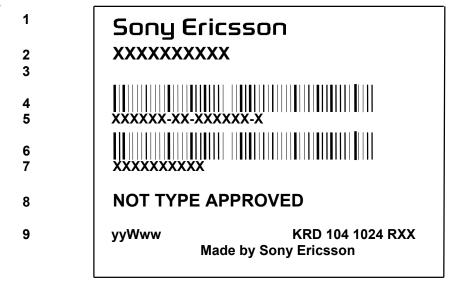



GBFA/SEM/BMD/TP Pete Saunders

GBFA/SEM/BMD/TP (Pam Wood)

Company Internal SPECIFICATION

No.

Checked

151 86-KRD 104 1024 Uen

te Rev Reference

2005-02-21 C

Completed label;

NOTE – "CERTIFIED" text over-printed with a black line to ensure it is NOT legible.

