

**CETECOM™****CETECOM ICT Services**  
consulting - testing - certification >>>**TEST REPORT****Test report no.: 1-4254/12-19-06-B****DAkkS**  
Deutsche  
Akreditierungsstelle  
D-PL-12076-01-01**Testing laboratory****CETECOM ICT Services GmbH**Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / GermanyPhone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Area of Testing: Radio/Satellite Communications

**Applicant****Sony Mobile Communications AB**Nya Vattentornet  
22188 Lund / SWEDEN  
Phone: +46 46 19 30 00  
Fax: +46 46 19 32 95  
Contact: Håkan Sjöberg  
e-mail: [hakan.sjoberg@sonymobile.com](mailto:hakan.sjoberg@sonymobile.com)  
Phone: +46 46 19 35 59**Manufacturer****Sony Mobile Communications AB**  
Nya Vattentornet  
22188 Lund / SWEDEN**Test standard/s**

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

**Test Item**

Kind of test item:	GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDV/FDDVI/FDDXIX; HSPA; LTE Band 1; BT3.1; WLAN a/b/g/n; AGPS; RFID, FM Rx
Model name:	PM-0000-BV
FCC ID:	PY7PM-0000
IC:	4170B-PM-0000
Frequency:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412 MHz, highest channel 11 – 2462 MHz)
Technology tested:	WLAN
Antenna:	Integrated antenna
Power Supply:	3.7 V DC by Li-ion battery
Temperature Range:	-20°C to +55 °C

**Test report authorised:**  
2012-05-15 Stefan Bös  
Senior Testing Manager**Test performed:**  
2012-05-15 Christoph Schneider

## 1 Table of contents

1	Table of contents .....	2
2	General information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details.....	3
3	Test standard/s .....	3
4	Test environment.....	4
5	Test item.....	4
6	Test laboratories sub-contracted .....	4
7	Summary of measurement results .....	5
8	RF measurements .....	6
8.1	Description of test setup .....	6
8.1.1	Radiated measurements.....	6
8.1.2	Conducted measurements.....	7
8.2	Additional comments .....	7
8.3	RSP100 test report cover sheet / performance test data .....	8
9	Measurement results.....	9
9.1	Maximum output power (conducted) .....	9
9.2	Antenna gain .....	20
9.3	Maximum output power .....	23
9.4	Power spectral density .....	30
9.5	Spectrum bandwidth of a FHSS system – 6 dB bandwidth .....	36
9.6	Spectrum bandwidth of a FHSS system – 20 dB bandwidth .....	42
9.7	Band edge compliance conducted .....	48
9.8	Band edge compliance radiated .....	52
9.9	TX spurious emissions conducted .....	55
9.10	TX spurious emissions radiated.....	64
9.11	RX spurious emissions radiated .....	75
9.12	TX spurious emissions radiated < 30 MHz .....	79
9.13	TX spurious emissions conducted < 30 MHz.....	81
10	Test equipment and ancillaries used for tests .....	83
11	Observations .....	84
Annex A	Photographs of the test setup.....	85
Annex B	External photographs of the EUT.....	88
Annex C	Internal photographs of the EUT .....	94
Annex D	Document history .....	102
Annex E	Further information.....	102
Annex F	Accreditation Certificate .....	103

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

### 2.2 Application details

Date of receipt of order:	2012-03-27
Date of receipt of test item:	2012-04-11
Start of test:	2012-04-11
End of test:	2012-04-24
Person(s) present during the test:	-/-

## 3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

## 4 Test environment

Temperature:	$T_{\text{nom}}$	+22 °C during room temperature tests
	$T_{\text{max}}$	+55 °C during high temperature tests
	$T_{\text{min}}$	-20 °C during low temperature tests
Relative humidity content:		39 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	$V_{\text{nom}}$	3.7 V DC by Li-ion battery
	$V_{\text{max}}$	4.1 V
	$V_{\text{min}}$	3.3 V

## 5 Test item

Kind of test item	: <b>GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDV/FDDVI/FDDXIX; HSPA; LTE Band 1; BT3.1; WLAN a/b/g/n; AGPS; RFID, FM Rx</b>
Type identification	: <b>PM-0000-BV</b>
S/N serial number	: <b>Radiated units: CB5A1JYNKA; CB5A1JYNF4 Conducted units: CB5A1JYNK5</b>
HW hardware status	: <b>AP1</b>
SW software status	: <b>s_atp_hayabusa_0_0_37_0_b</b>
Frequency band [MHz]	: <b>ISM band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412 MHz; highest channel 11 – 2462 MHz)</b>
Type of radio transmission	: <b>DSSS &amp; OFDM</b>
Use of frequency spectrum	: <b>FDMA</b>
Channel access method	: <b>BPSK, QPSK, 16 – &amp; 64 – QAM</b>
Number of channels	: <b>11</b>
Antenna	: <b>Integrated antenna</b>
Power supply	: <b>3.7 V DC by Li-ion battery</b>
Temperature range	: <b>-20°C to +55 °C</b>

## 6 Test laboratories sub-contracted

None

## 7 Summary of measurement results



**No deviations from the technical specifications were ascertained**



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	Passed	2012-06-14	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 6dB bandwidth	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 20dB bandwidth	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(3) RSS-210 / A8.4(4)	Maximum output power	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	Worst case mode!	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen.	RX spurious emissions radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	Worst case mode!	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a)	Conducted emissions < 30 MHz	Nominal	Nominal	Worst case mode!	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

**Note:** NA = Not Applicable; NP = Not Performed

## 8 RF measurements


### 8.1 Description of test setup

#### 8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

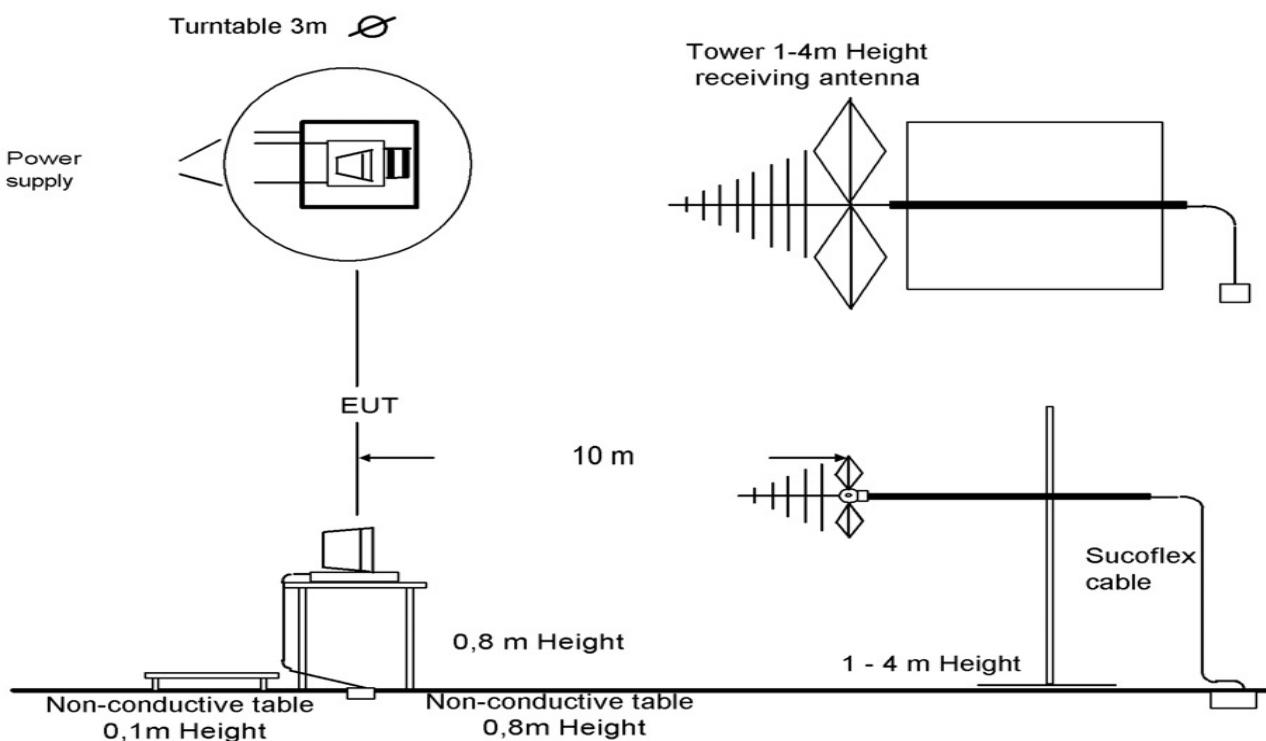


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

### 8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

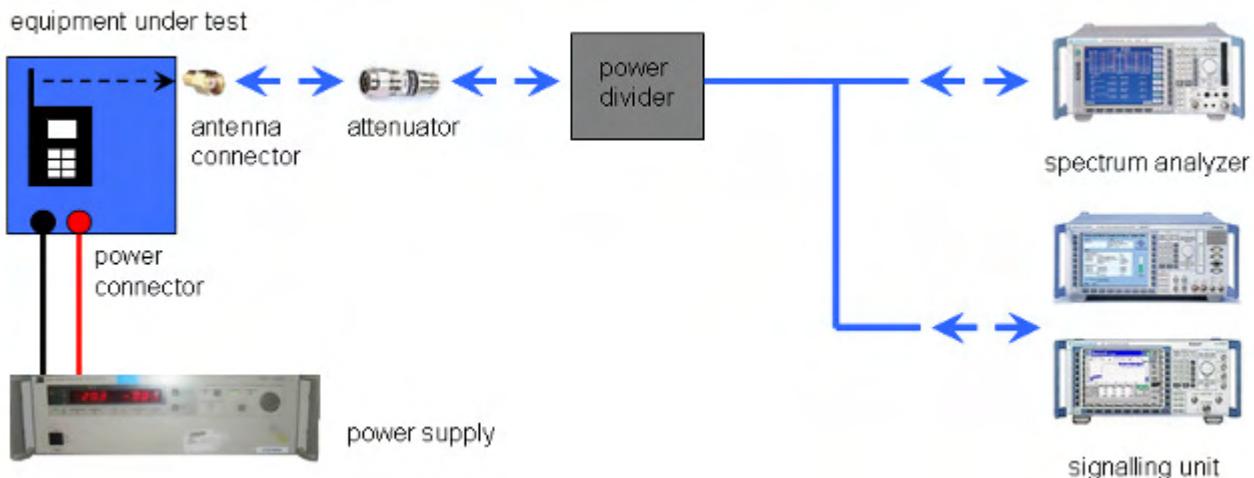

Picture 2: Diagram conducted measurements

### 8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:

- No test mode available.  
Iperf was used to ping another device with the largest support packet size
- Special software is used.  
EUT is transmitting pseudo random data by itself

### 8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-4254/12-19-06-B
Equipment model number	:	PM-0000-BV
Certification number	:	4170B-PM-0000
Manufacturer (complete address)	:	Sony Mobile Communications AB Nya Vattentornet 22188 Lund / SWEDEN
Tested to radio standards specification no.	:	RSS 210, Issue 8
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 2412 MHz, highest channel 2462 MHz)
RF-power [W] (max.)	:	cond.: 37.50 mW (DSSS / b – mode) 92.04 mW (OFDM / g – mode) 82.60 mW (OFDM / n – mode)  EIRP: 48.75 mW (DSSS / b – mode) 106.91 mW (OFDM / g – mode) 100.93 mW (OFDM / n – mode)
Occupied bandwidth (99%-BW) [kHz]	:	DSSS / b – mode: 14.76 MHz OFDM / g – mode: 18.33 MHz OFDM / n – mode: 18.84 MHz
Type of modulation	:	DSSS & OFDM technology with BPSK, QPSK, 16- and 64 QAM modulation.
Emission designator (TRC-43)	:	14M8G1D (DSSS / b – mode) 18M3G7D (OFDM / g – mode) 18M8G7D (OFDM / n – mode)
Antenna information	:	Integrated antenna
Transmitter spurious (worst case) [dB $\mu$ V/m @ 3m]:		52 dB $\mu$ V/m @3m (noise floor)
Receiver spurious (worst case) [dB $\mu$ V/m @ 3m]:		52 dB $\mu$ V/m @3m (noise floor)

#### ATTESTATION:


#### DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

#### Laboratory manager:

2012-05-15  
Date

Christoph Schneider  
Name

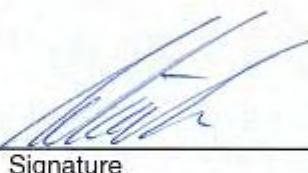

Signature

## 9 Measurement results

### 9.1 Maximum output power (conducted)

#### Description:

Measurement of the maximum output power conducted. This measurement is performed only at the middle channel in both modes and all data rates to determine the data rate per mode which results in the highest output power. This mode will be selected for all further measurements.

#### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	40 MHz
Resolution bandwidth:	40 MHz
Span:	Zero span
Trace-Mode:	Max Hold

#### Results:

DSSS / b – mode	Maximum Output Power Conducted [dBm]			
	1	2	5.5	11
Ch 6 - 2437 MHz	15.68	15.64	15.50	15.68
Measurement uncertainty	± 0.5 dB			

OFDM / g – mode	Maximum Output Power Conducted [dBm]							
	6	9	12	18	24	36	48	54
Ch 6 - 2437 MHz	19.45	19.23	18.90	19.43	18.93	18.84	18.81	18.82
Measurement uncertainty	± 0.5 dB							


OFDM / n – mode	Maximum Output Power Conducted [dBm]							
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Ch 6 - 2437 MHz	18.44	18.45	19.19	18.98	18.57	18.71	18.45	18.20
Measurement uncertainty	± 0.5 dB							

#### Result: Selected data rate for all measurements:


DSSS / b – mode: 1 MBit/s  
 OFDM / g – mode: 6 MBit/s  
 OFDM / n – mode: MCS2



### Plots: DSSS / b - mode

**Plot 1:** TX mode, middle channel, 1 MBit/s

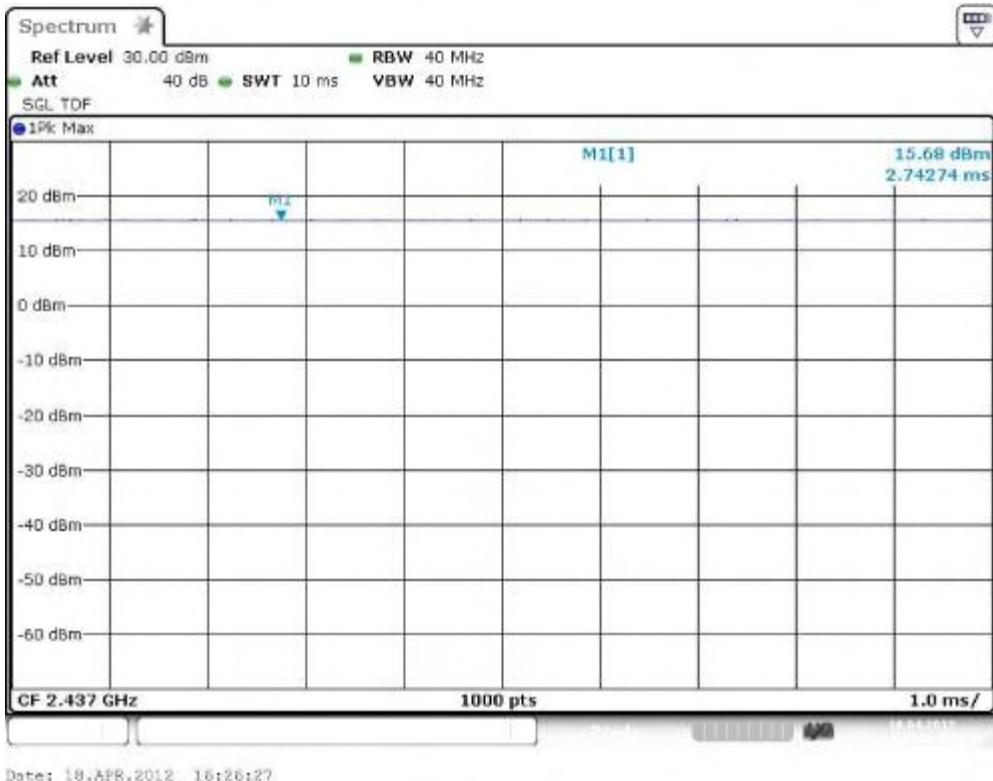


**Plot 2:** TX mode, middle channel, 2 MBit/s

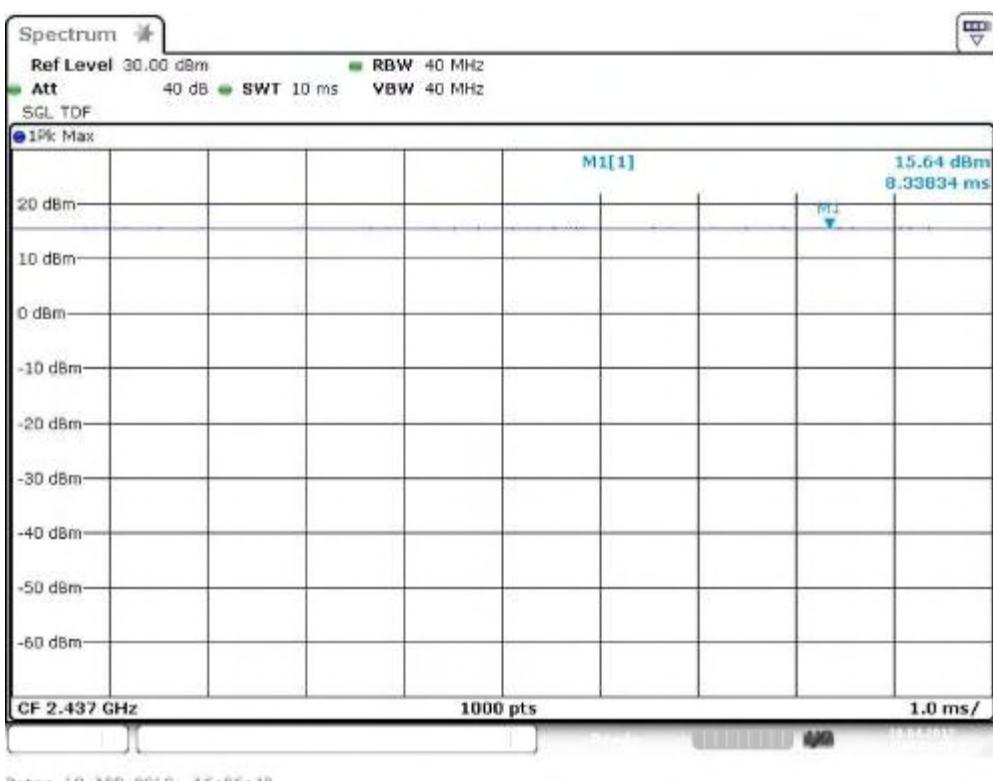

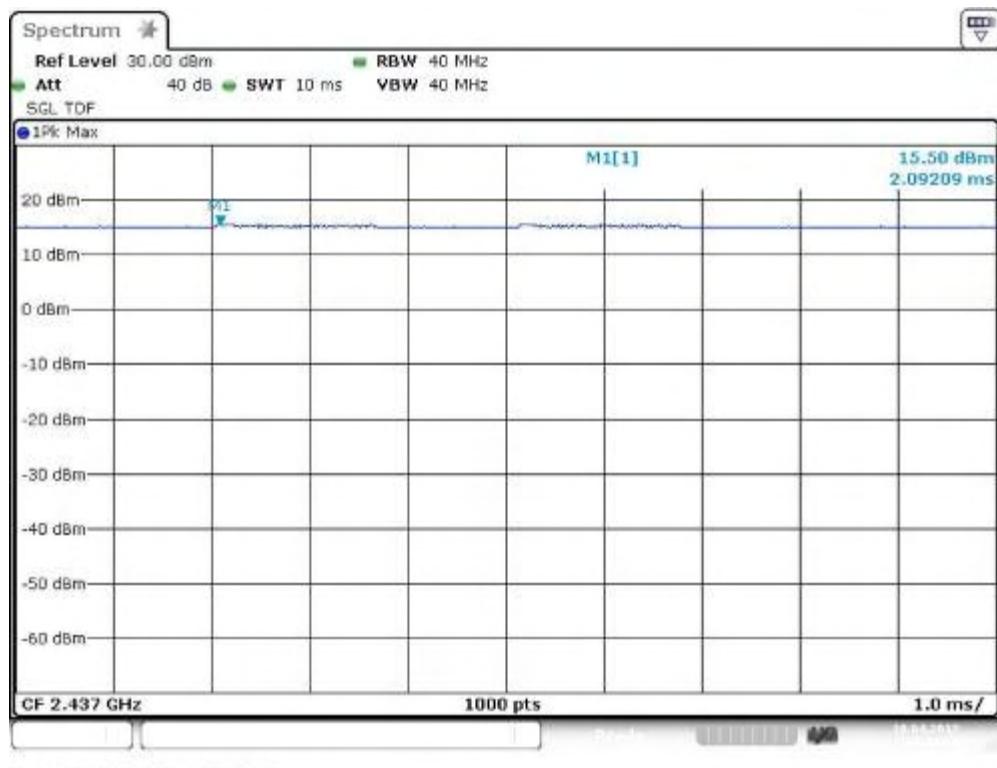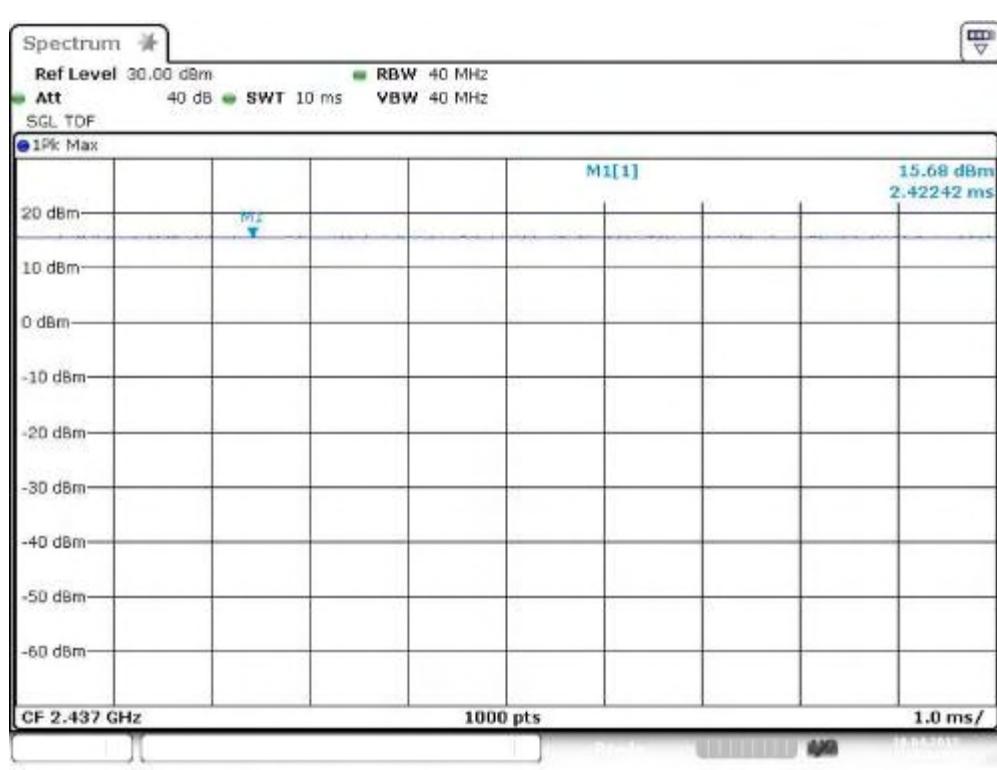
**Plot 3:** TX mode, middle channel, 5.5 MBit/s**Plot 4:** TX mode, middle channel, 11 MBit/s



### Plots: OFDM / g - mode



**Plot 1:** TX mode, middle channel, 6 MBit/s


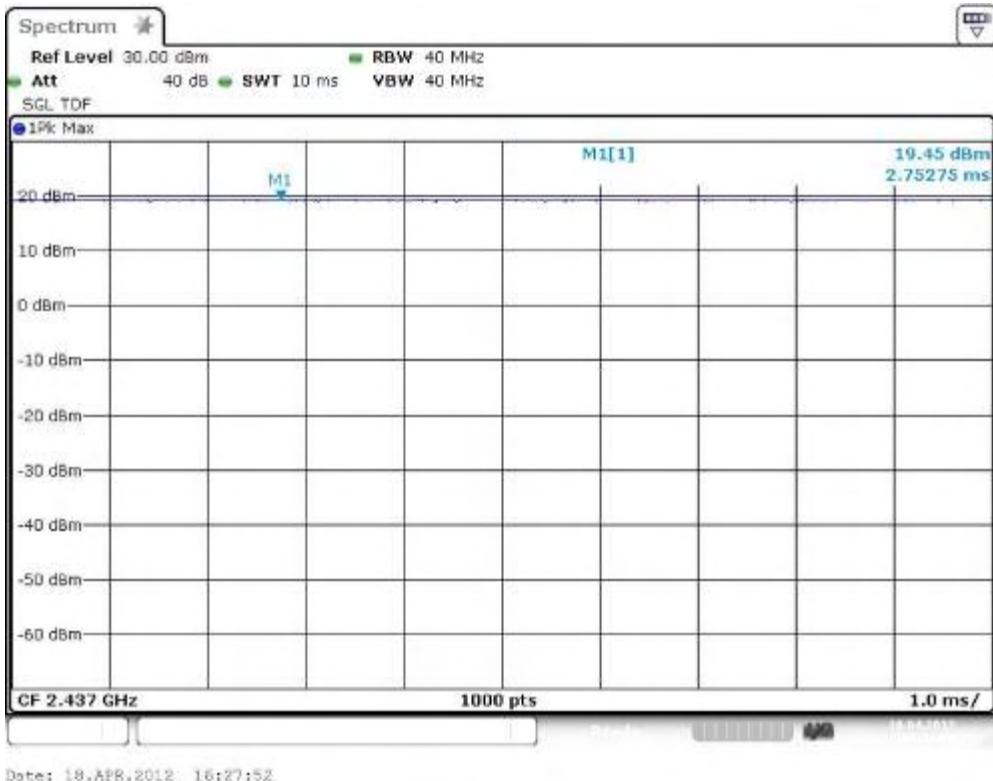


**Plot 2:** TX mode, middle channel, 9 MBit/s

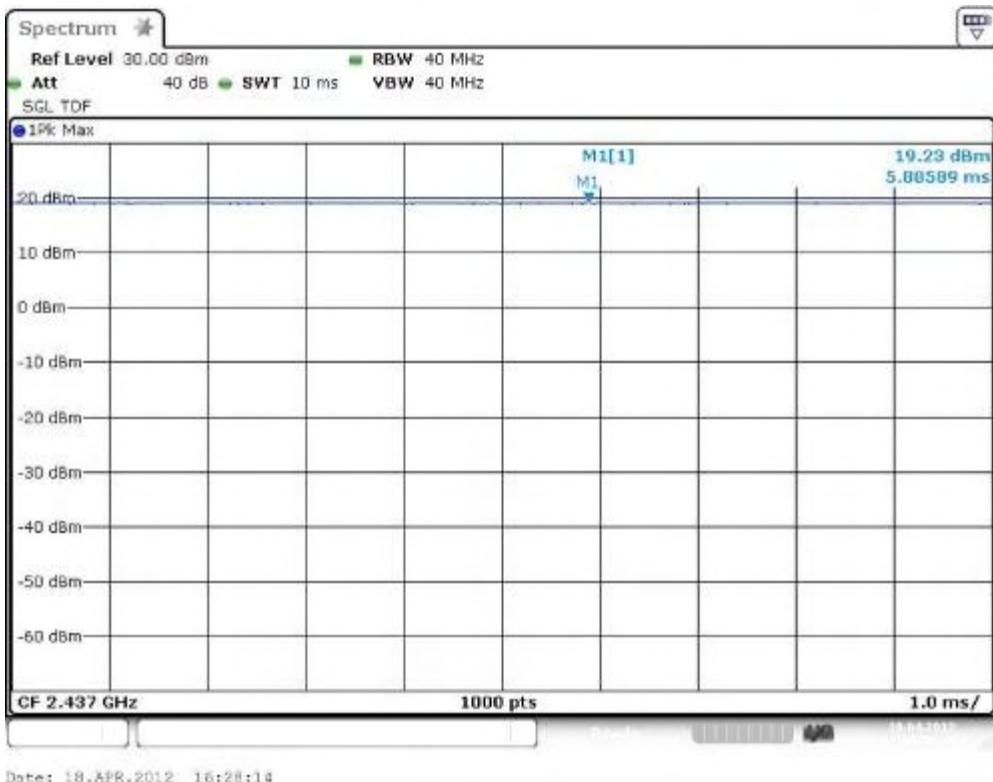

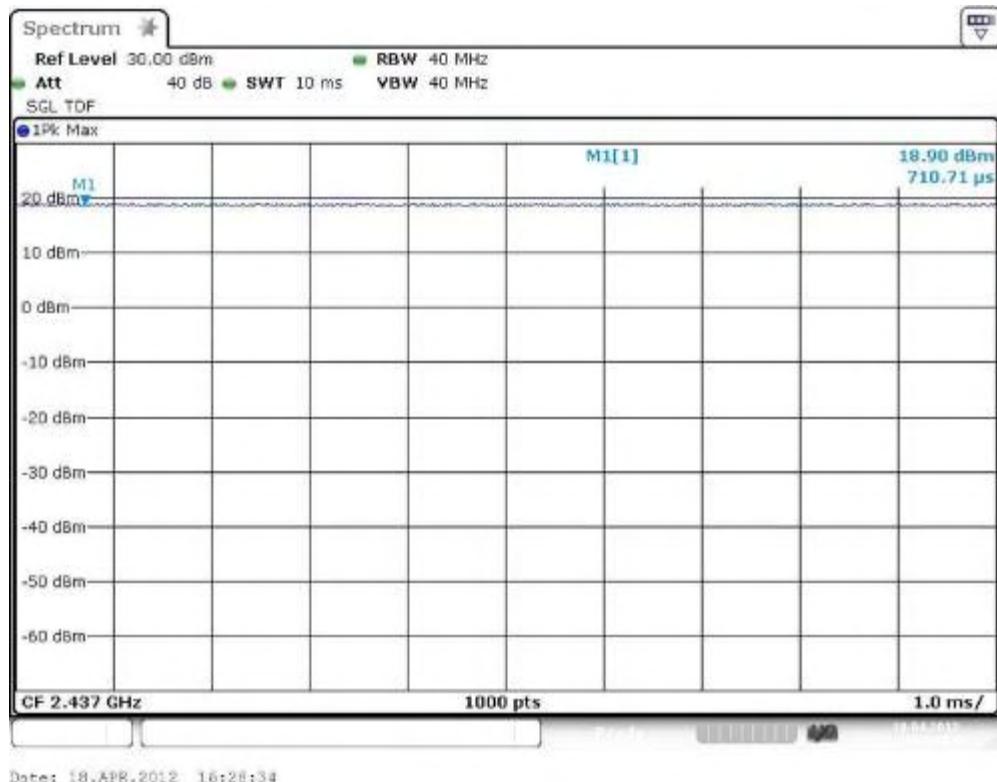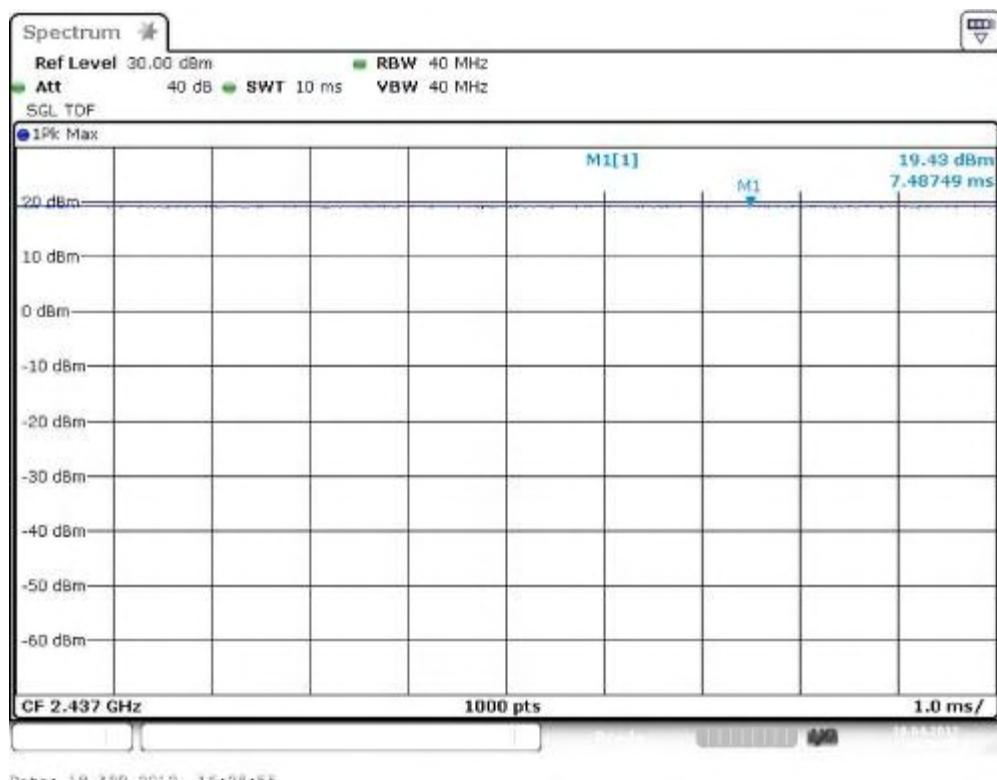
**Plot 3:** TX mode, middle channel, 12 MBit/s**Plot 4:** TX mode, middle channel, 18 MBit/s

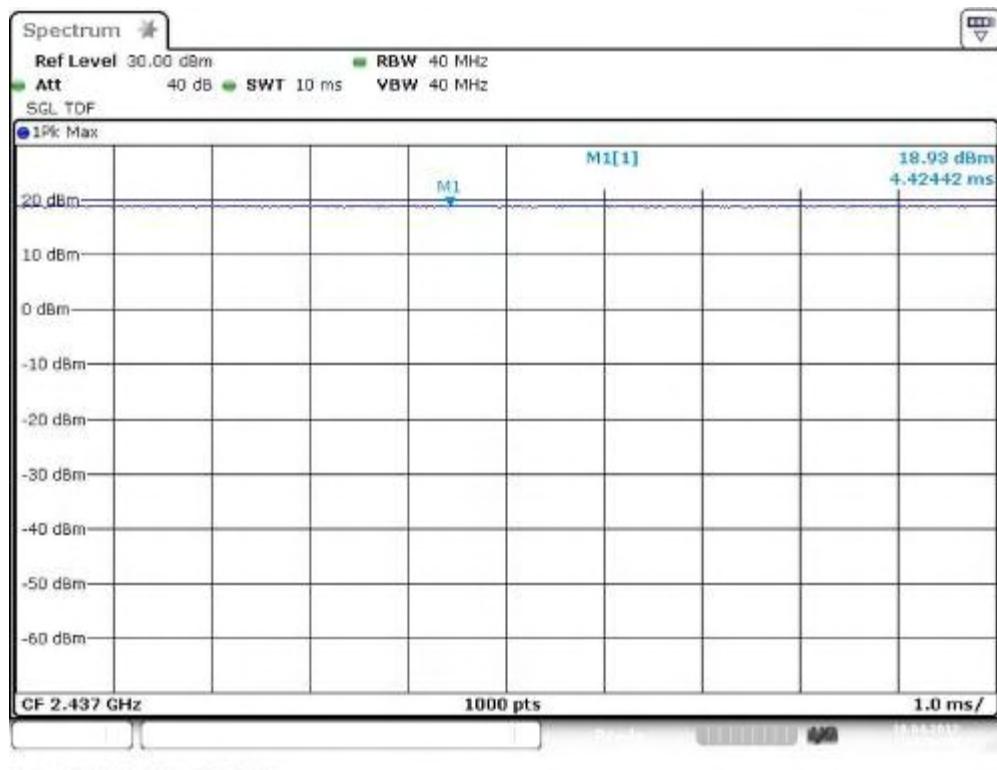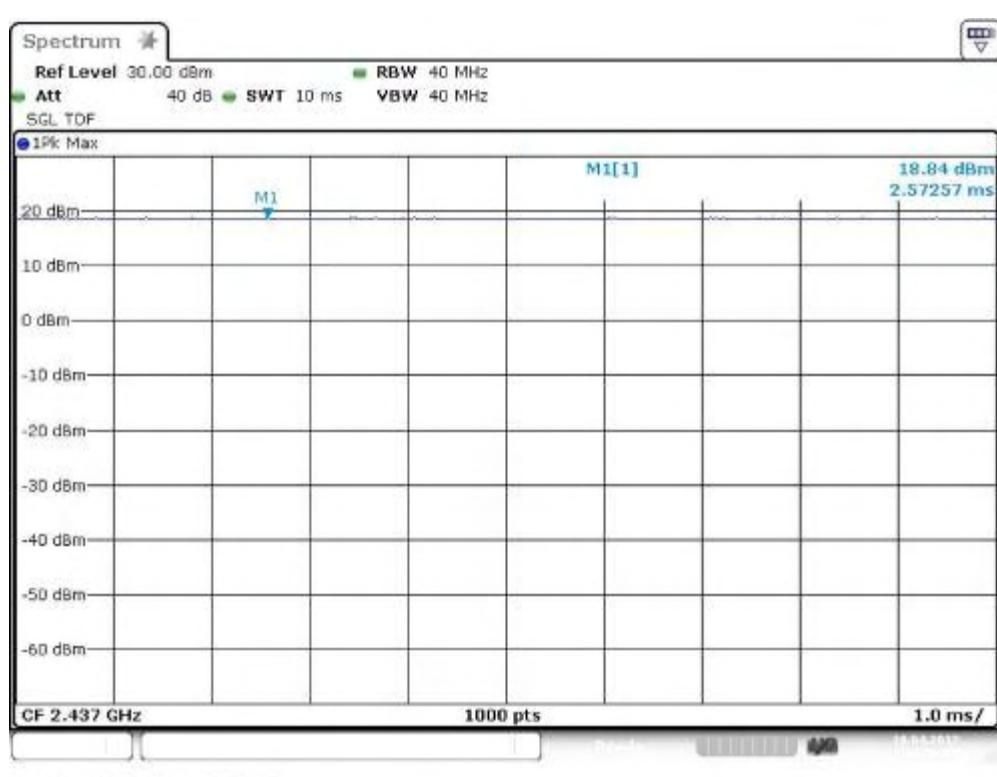**Plot 5:** TX mode, middle channel, 24 MBit/s**Plot 6:** TX mode, middle channel, 36 MBit/s

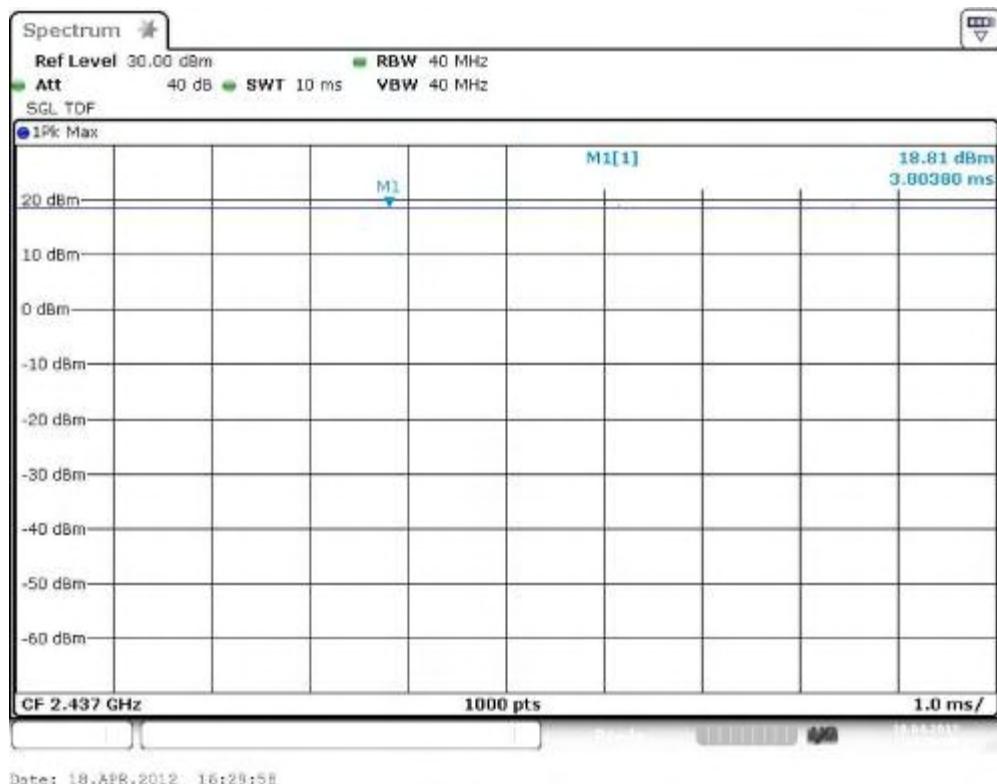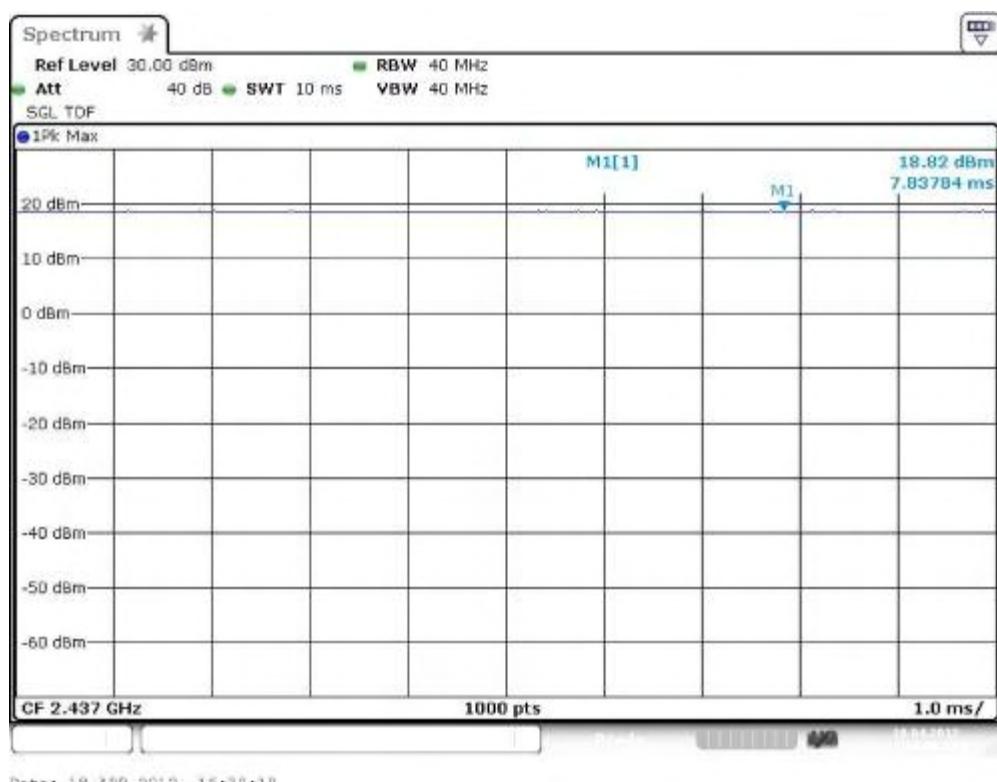
**Plot 7:** TX mode, middle channel, 48 MBit/s**Plot 8:** TX mode, middle channel, 54 MBit/s



### Plots: OFDM / n - mode



**Plot 1:** TX mode, middle channel, MCS0


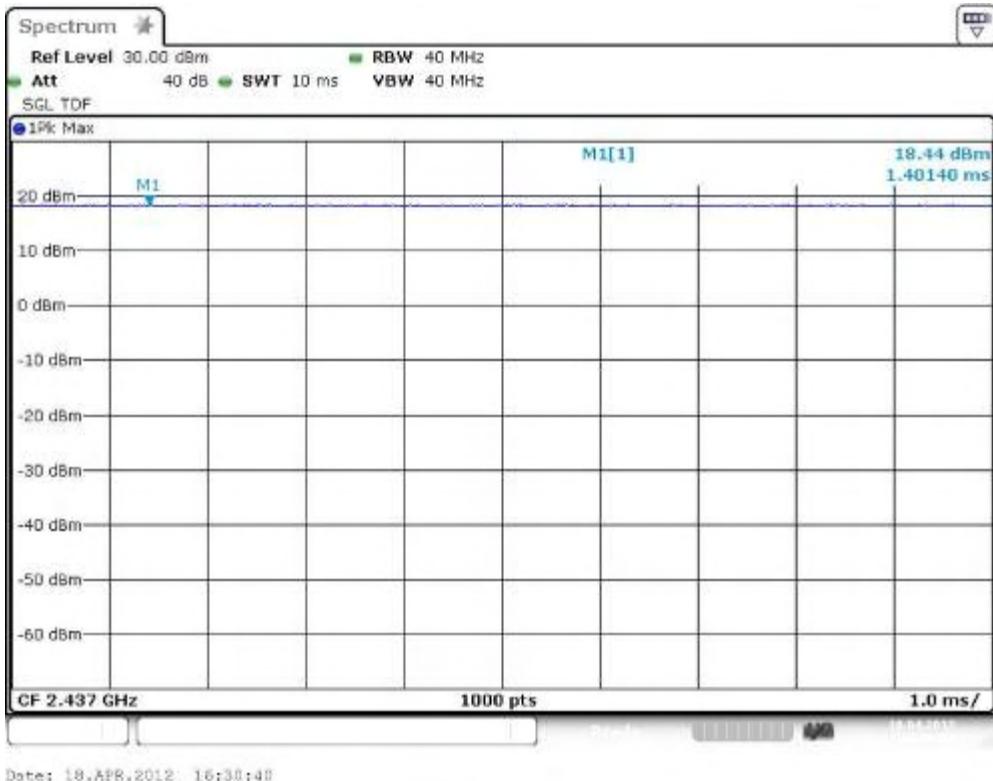


**Plot 2:** TX mode, middle channel, MCS1

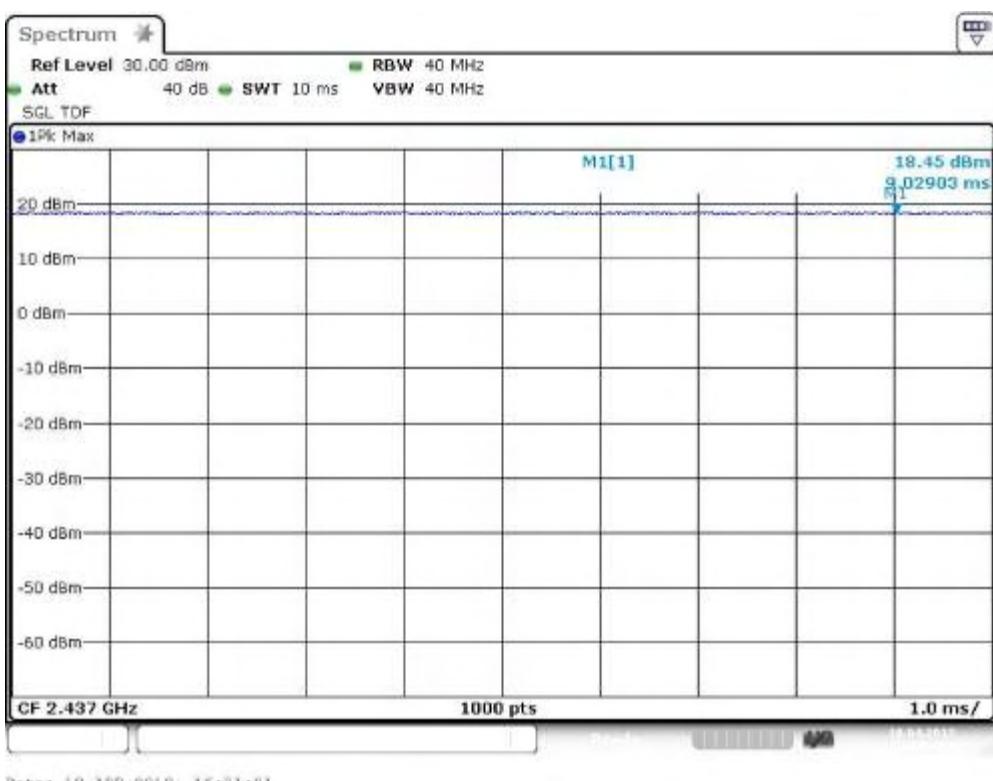

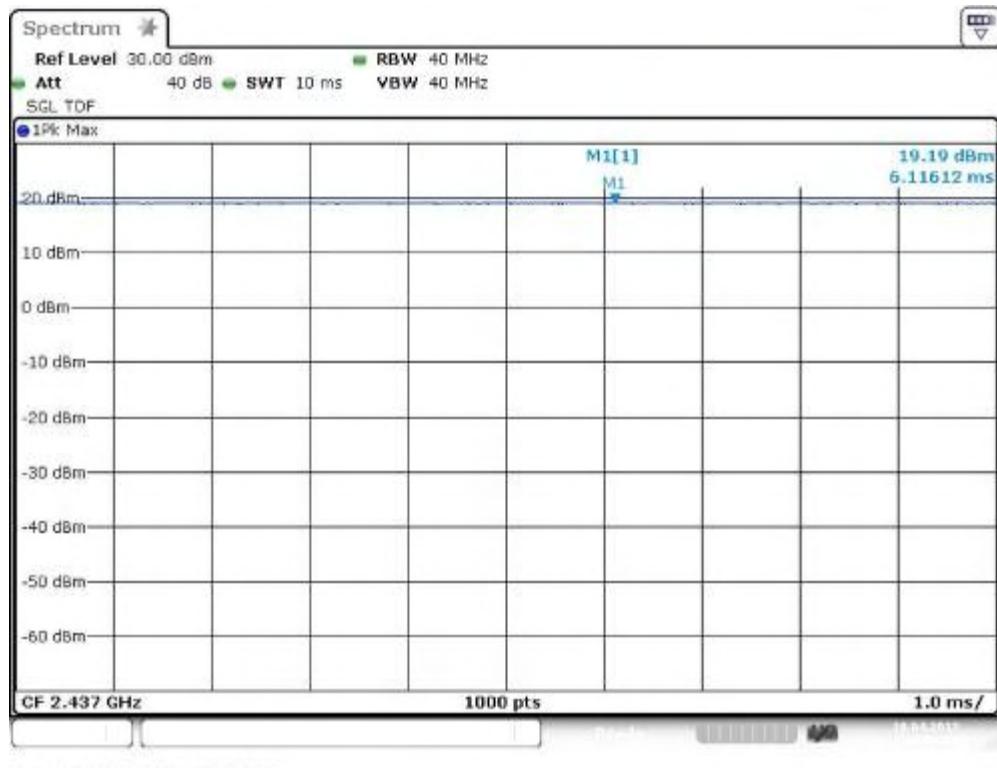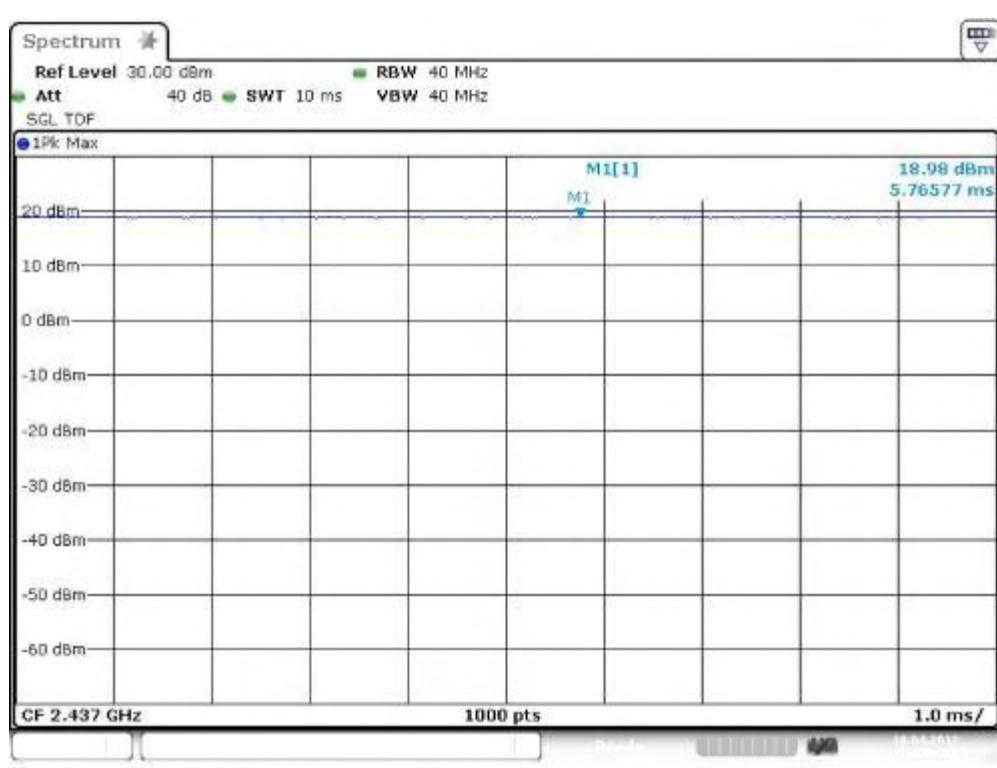**Plot 3: TX mode, middle channel, MCS2****Plot 4: TX mode, middle channel, MCS3**

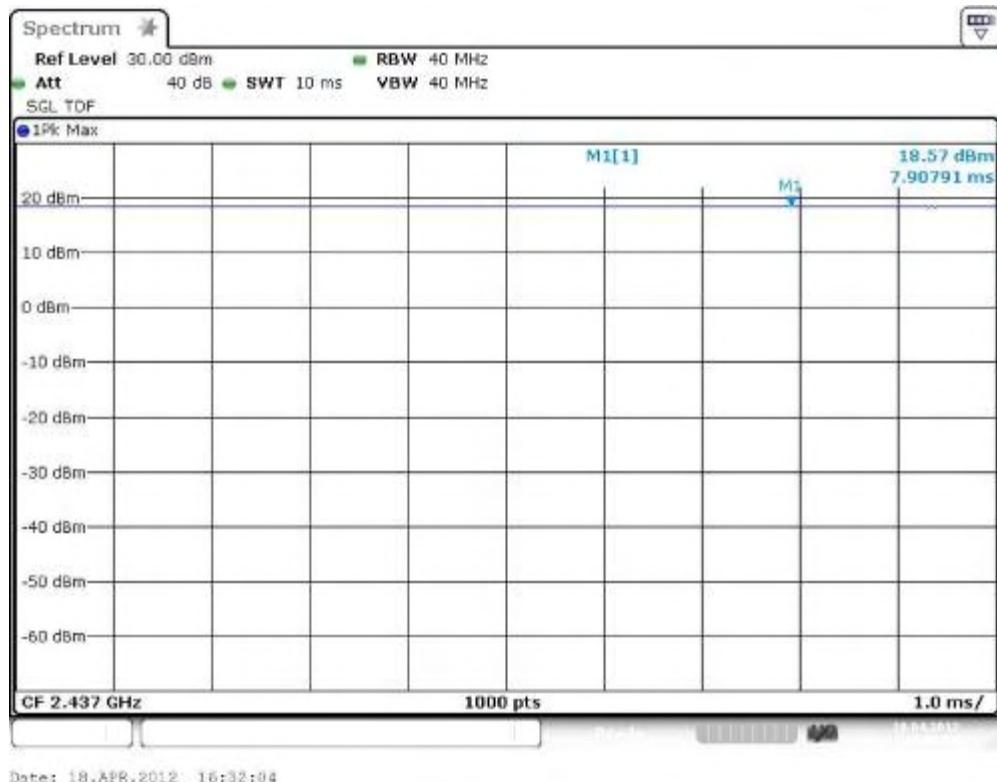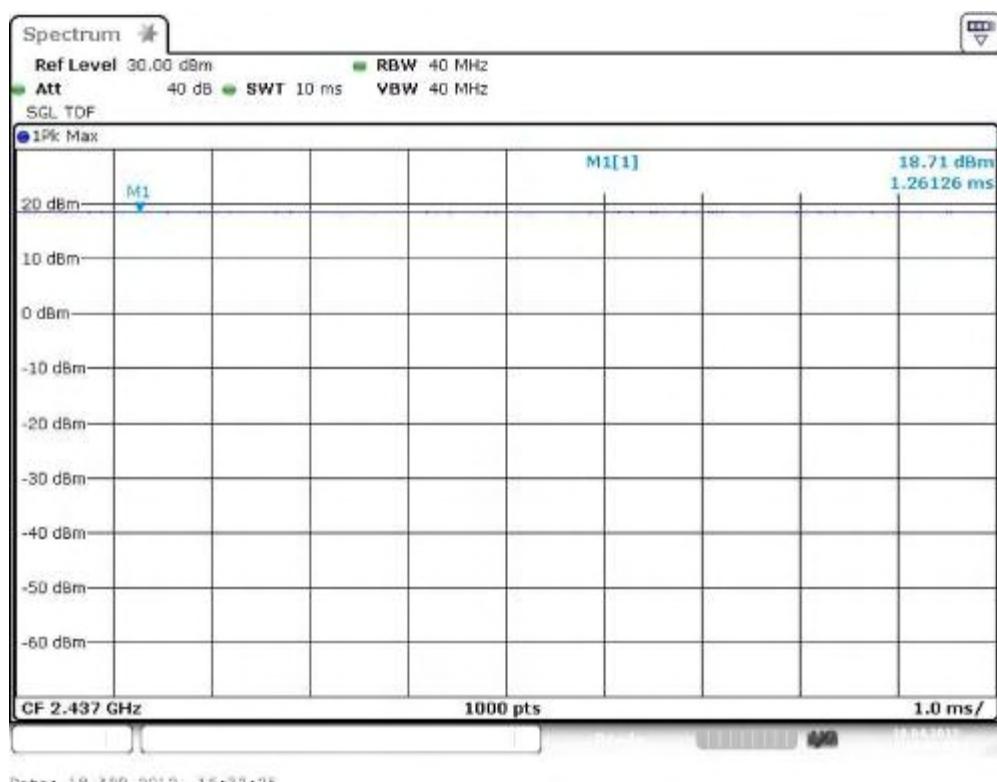**Plot 5:** TX mode, middle channel, MCS4**Plot 6:** TX mode, middle channel, MCS5

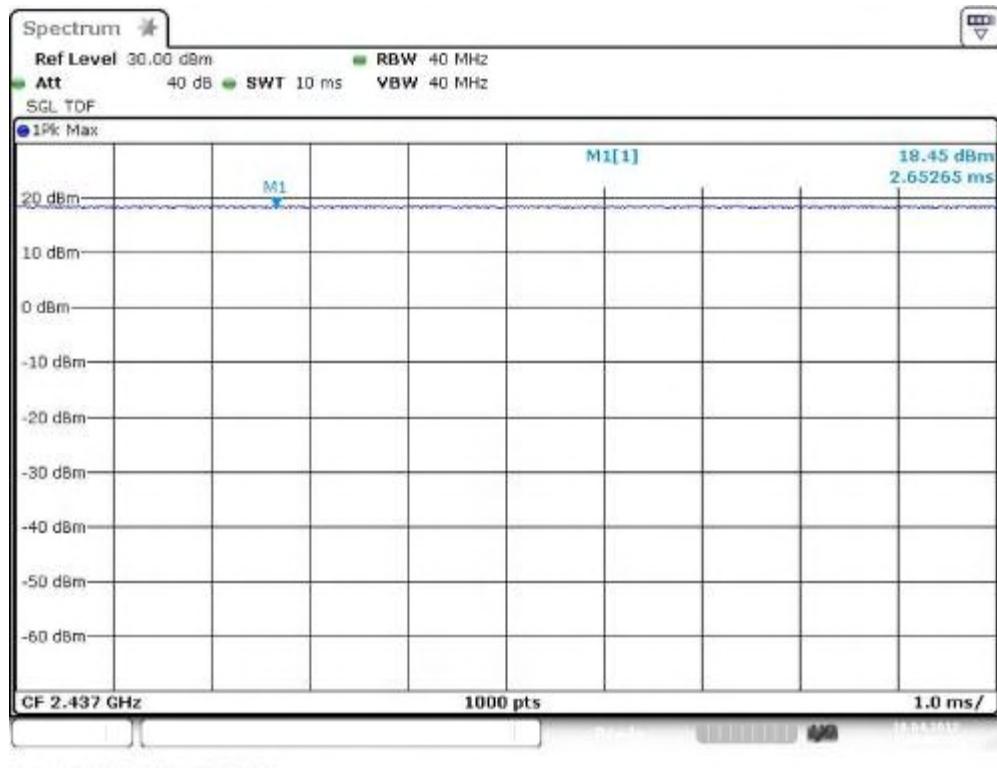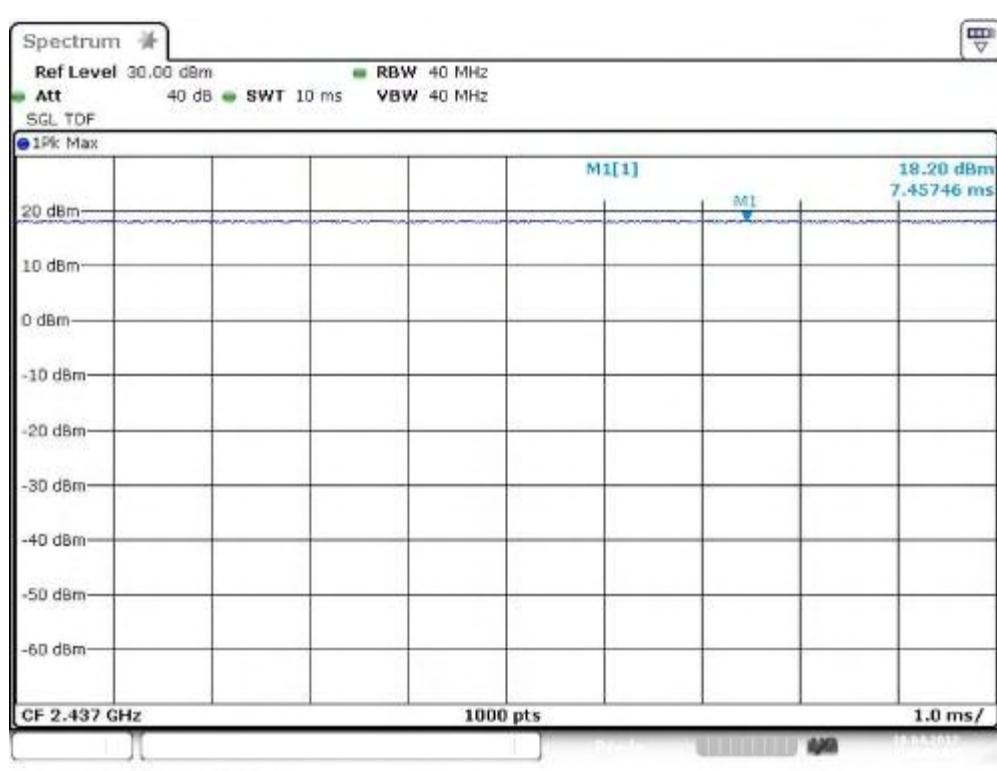**Plot 7:** TX mode, middle channel, MCS6**Plot 8:** TX mode, middle channel, MCS7

## 9.2 Antenna gain

### Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

### Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	3 MHz
Trace-Mode:	Max hold



### Limits:


FCC	IC
CFR Part 15.247 (b)(4)	RSS 210, Issue 8, A 8.4(2)
Antenna Gain	
6 dBi	

### Results:

T <sub>nom</sub>	V <sub>nom</sub>	lowest channel 2412 MHz	middle channel 2437 MHz	highest channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		14.50	14.27	13.70
Radiated power [dBm] Measured with DSSS modulation		15.86	14.51	13.89
Gain [dBi] Calculated		1.36	0.24	0.19
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

**Result: Passed**

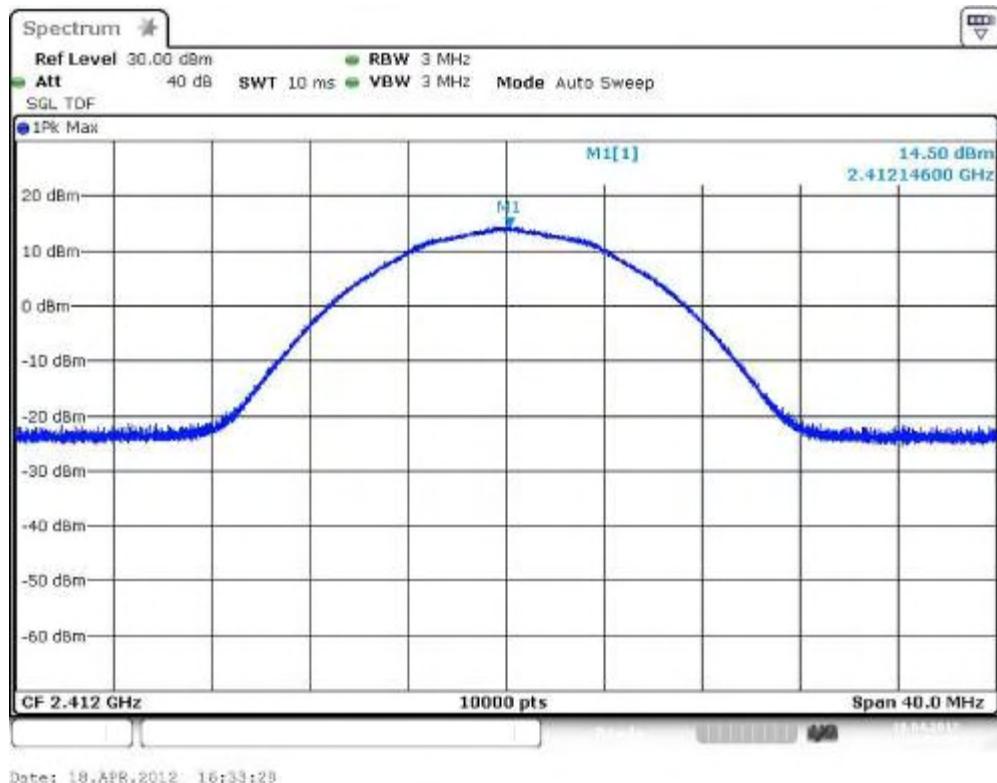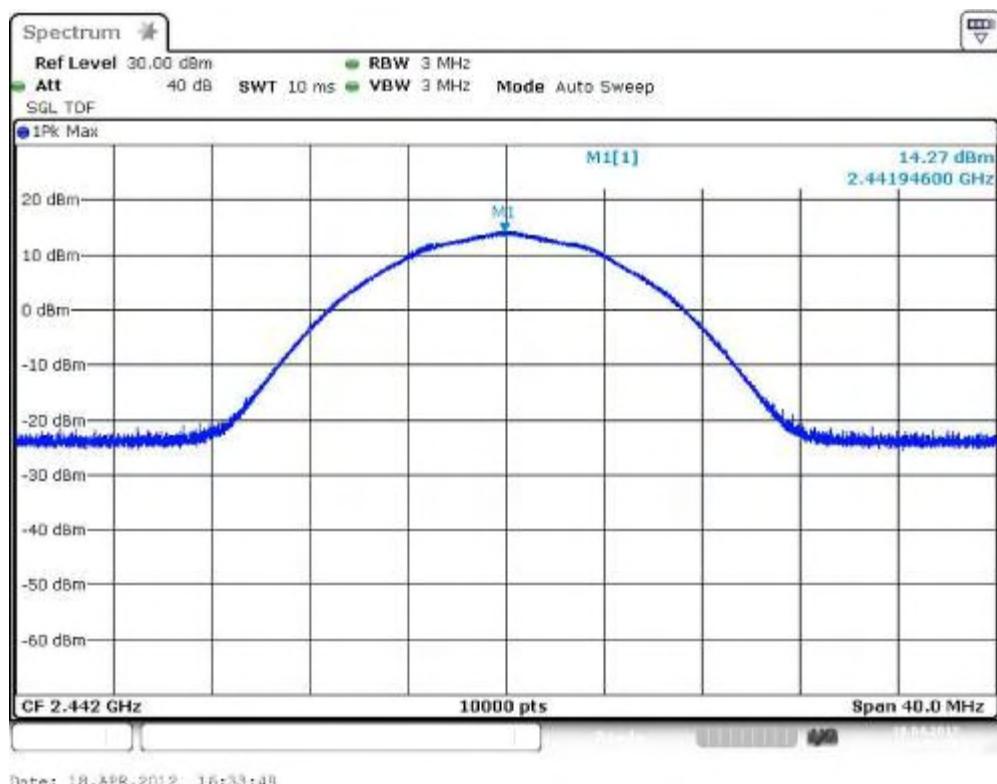**Plots:****Plot 1:** lowest channel, conducted**Plot 2:** middle channel, conducted

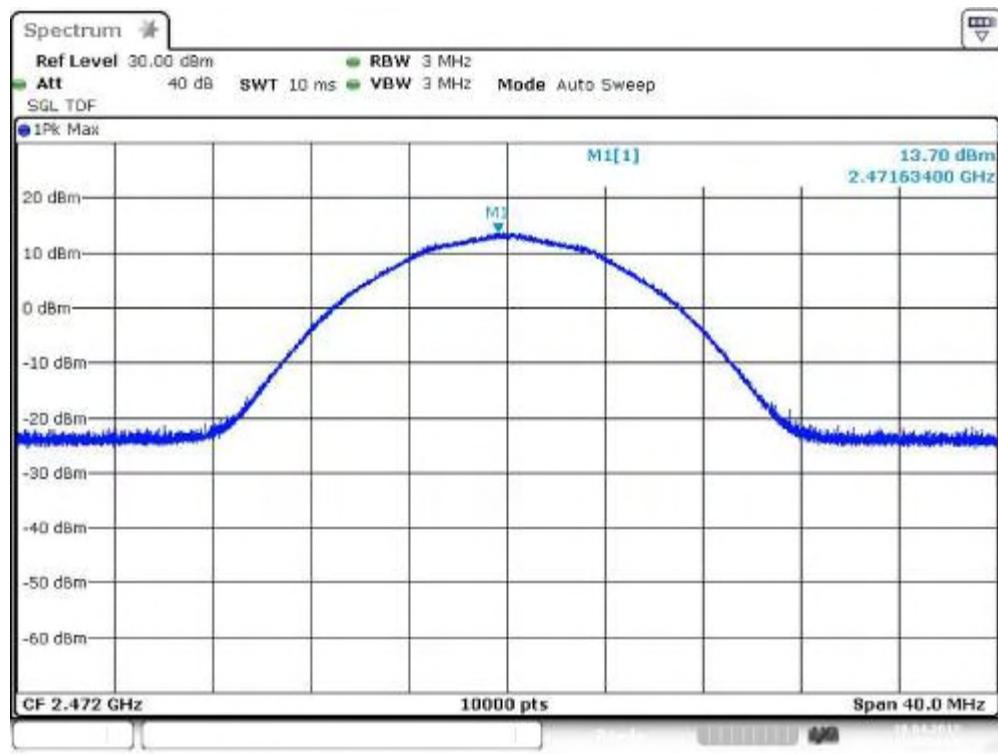**Plot 3: highest channel, conducted**

Date: 18.APR.2012 16:34:10

### 9.3 Maximum output power

#### Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power. The determination of these data rates was performed at the beginning of the tests.

#### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	40 MHz
Resolution bandwidth:	40 MHz
Span:	Zero span
Trace-Mode:	Max Hold

#### Limits:

FCC	IC
CFR Part 15.247 (b)(3)	RSS 210, Issue 8, A 8.4(4)
Maximum Output Power	
Conducted: 1.0 W – Antenna Gain max. 6 dBi	

#### Results: DSSS / b – mode

DSSS / b – mode	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	15.52	15.74	14.94
Output Power Radiated – EIRP*)	16.88	15.98	15.13
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

\*) calculated with Antenna gain

#### Result: Passed

**Results: OFDM / g – mode**

OFDM / g – mode	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	18.93	19.43	19.64
Output Power Radiated – EIRP*)	20.29	19.67	19.83
Measurement uncertainty	$\pm 1.5$ dB (cond.) / $\pm 3$ dB (rad.)		

\*) calculated with Antenna gain

**Result: Passed****Results: OFDM / n – mode**

OFDM / n – mode	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	18.68	19.17	19.09
Output Power Radiated – EIRP*)	20.04	19.41	19.28
Measurement uncertainty	$\pm 1.5$ dB (cond.) / $\pm 3$ dB (rad.)		

\*) calculated with Antenna gain


**Result: Passed**

### Plots: DSSS / b – mode


**Plot 1: TX mode, lowest channel**



**Plot 2: TX mode, middle channel**

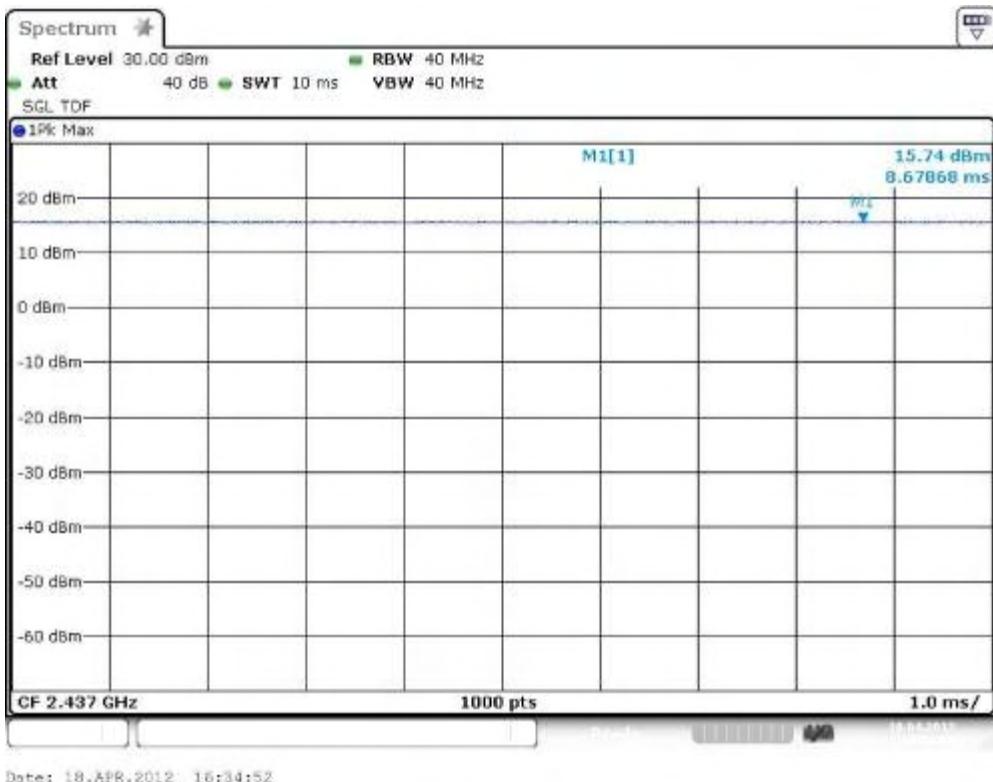


**Plot 3: TX mode, highest channel**

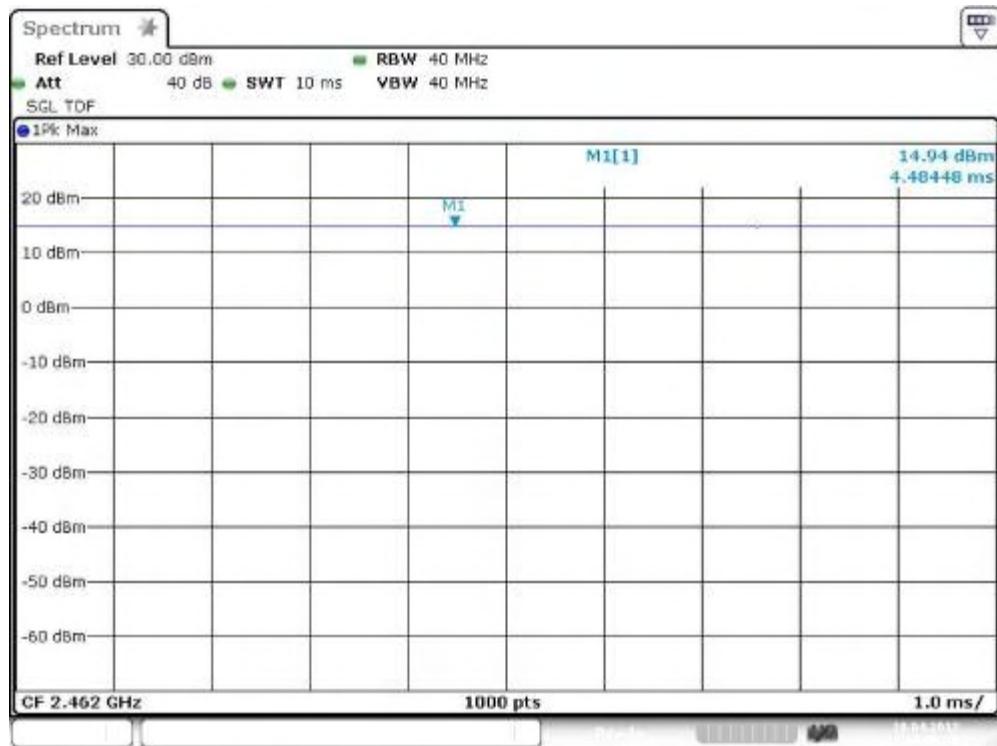


Date: 18.APR.2012 16:35:13

**Plots: OFDM / g – mode**


**Plot 1: TX mode, lowest channel**

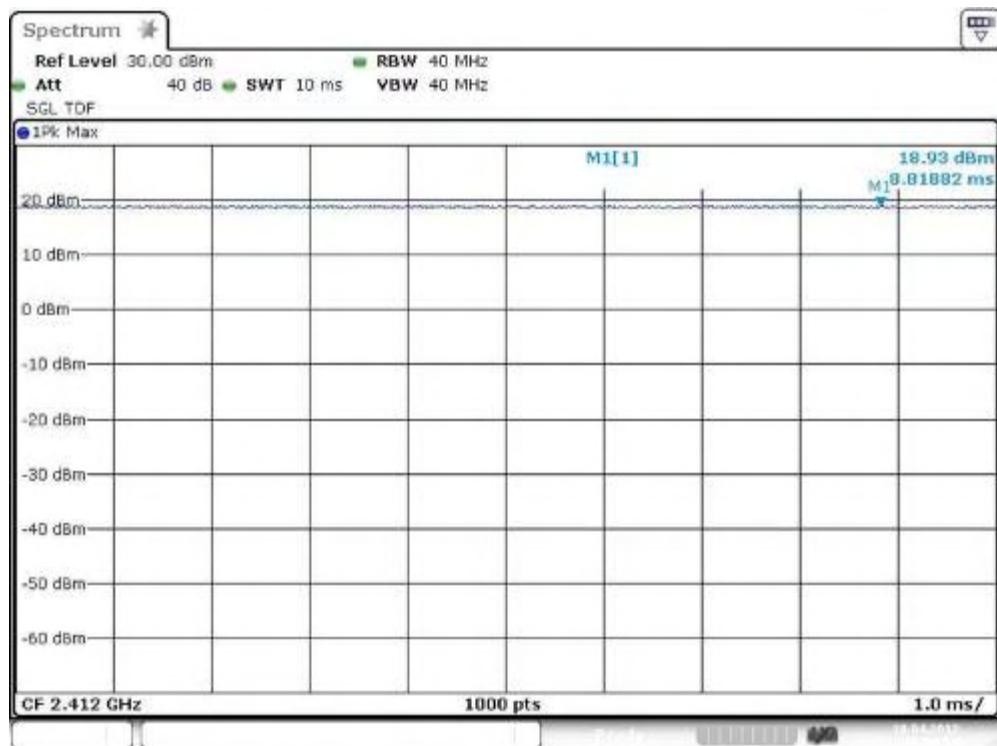

Date: 18.APR.2012 16:35:35

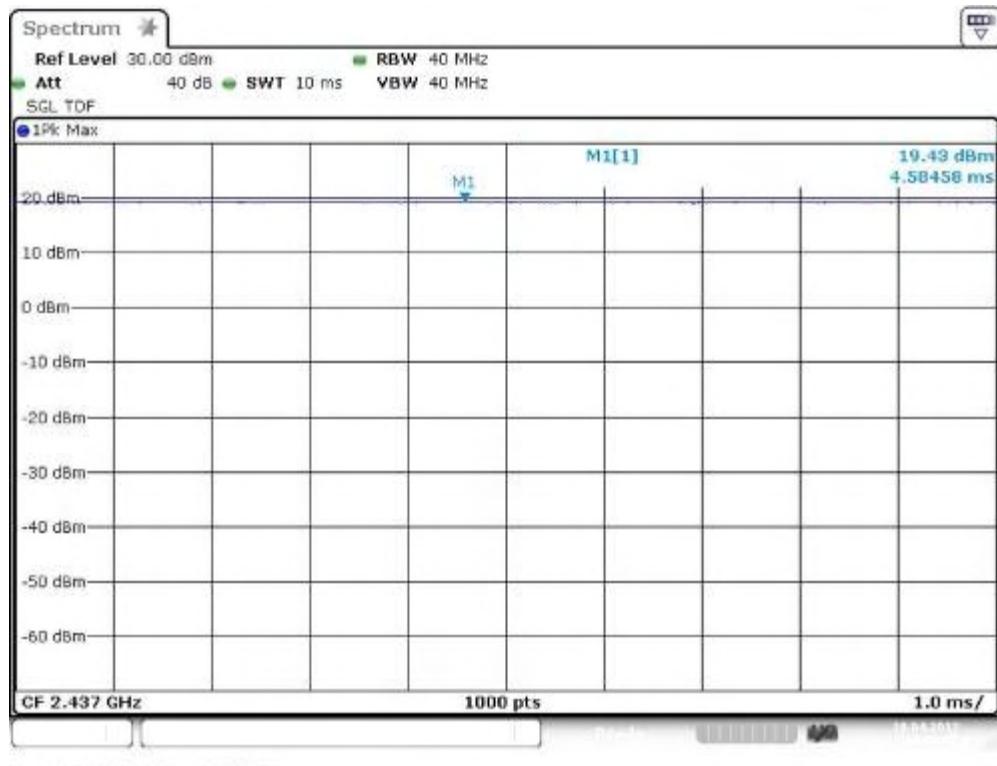**Plot 2: TX mode, middle channel**


Date: 18.APR.2012 16:35:56

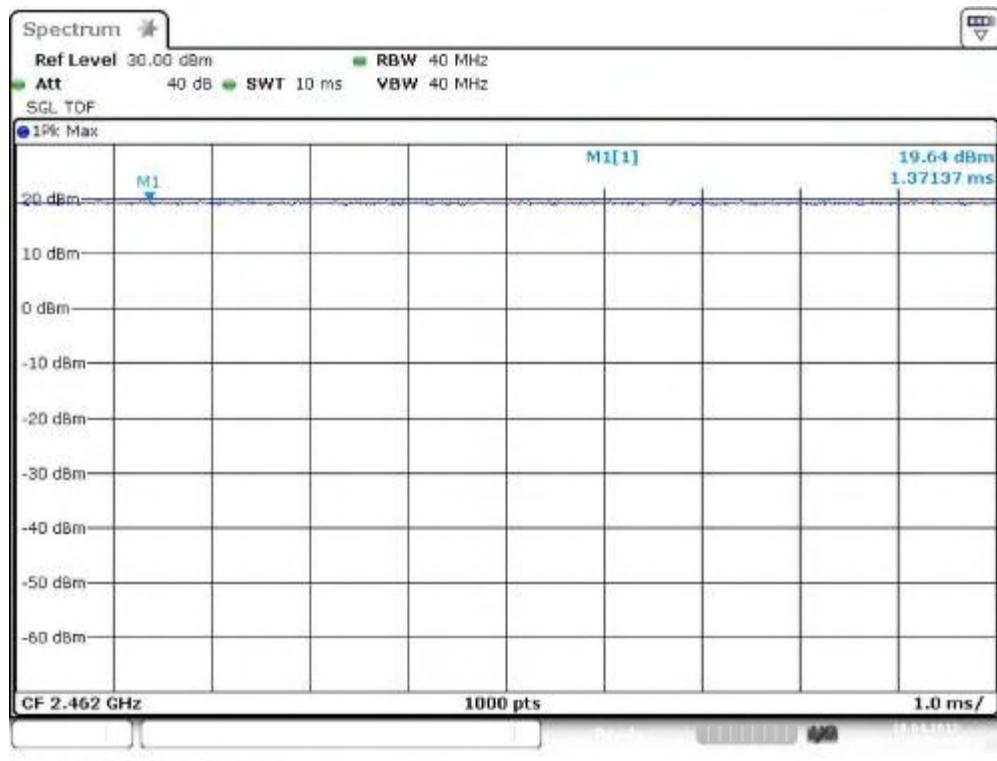**Plot 3: TX mode, highest channel**


Date: 18.APR.2012 16:36:17

### Plots: OFDM / n – mode


**Plot 1: TX mode, lowest channel**

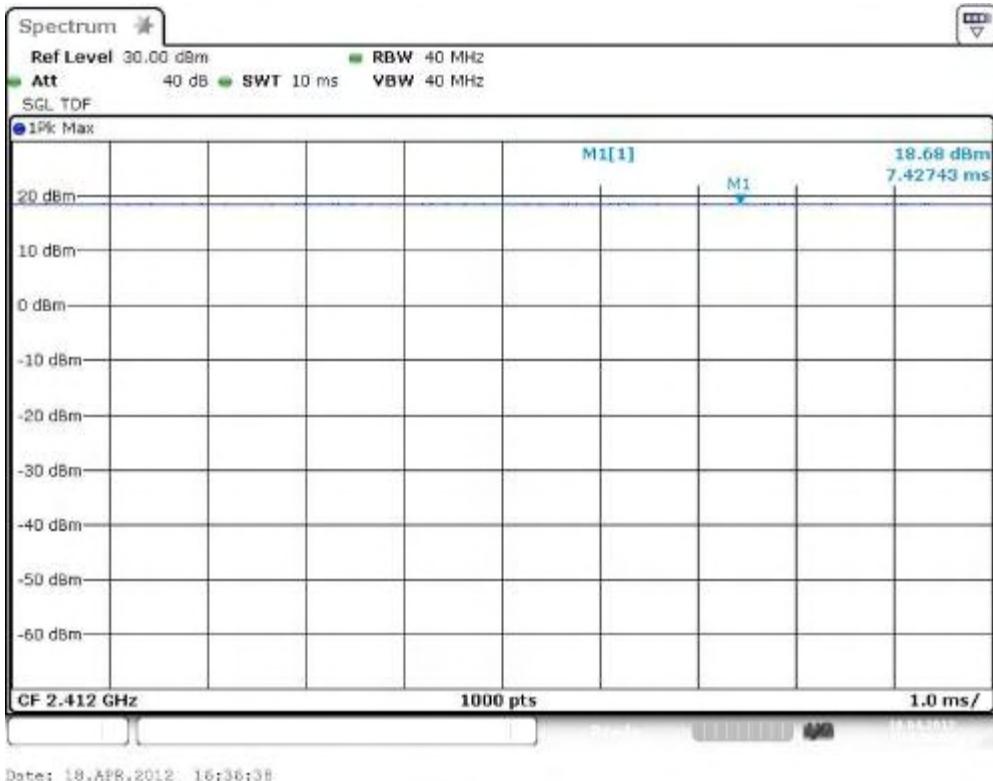

**Plot 2: TX mode, middle channel**

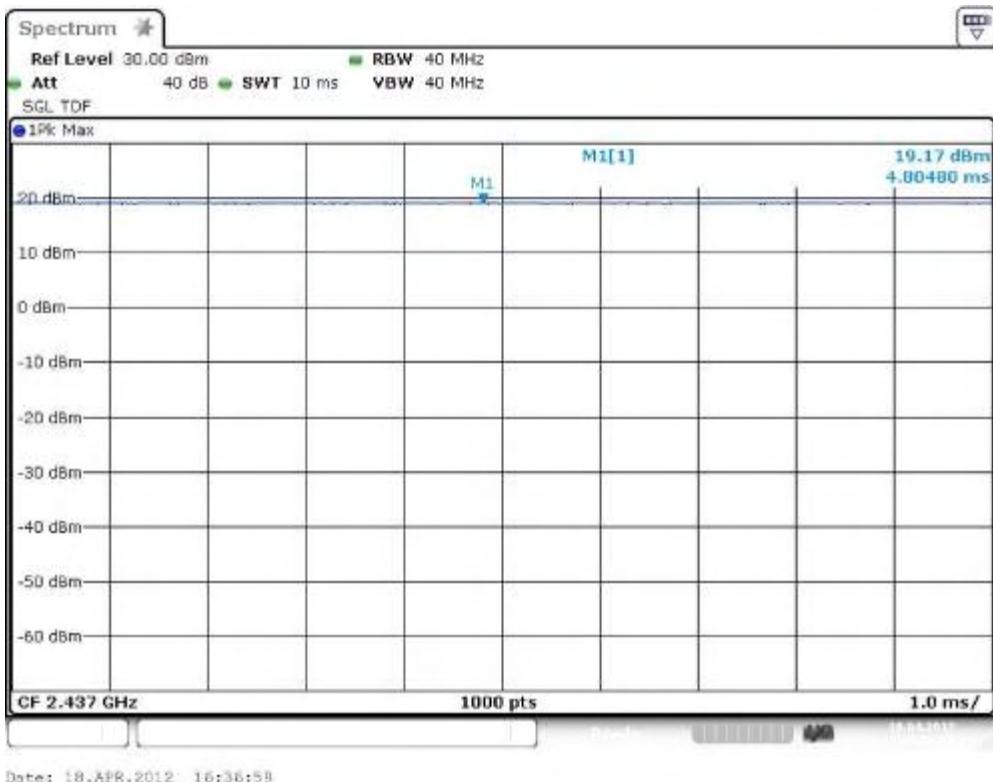

**Plot 3: TX mode, highest channel**

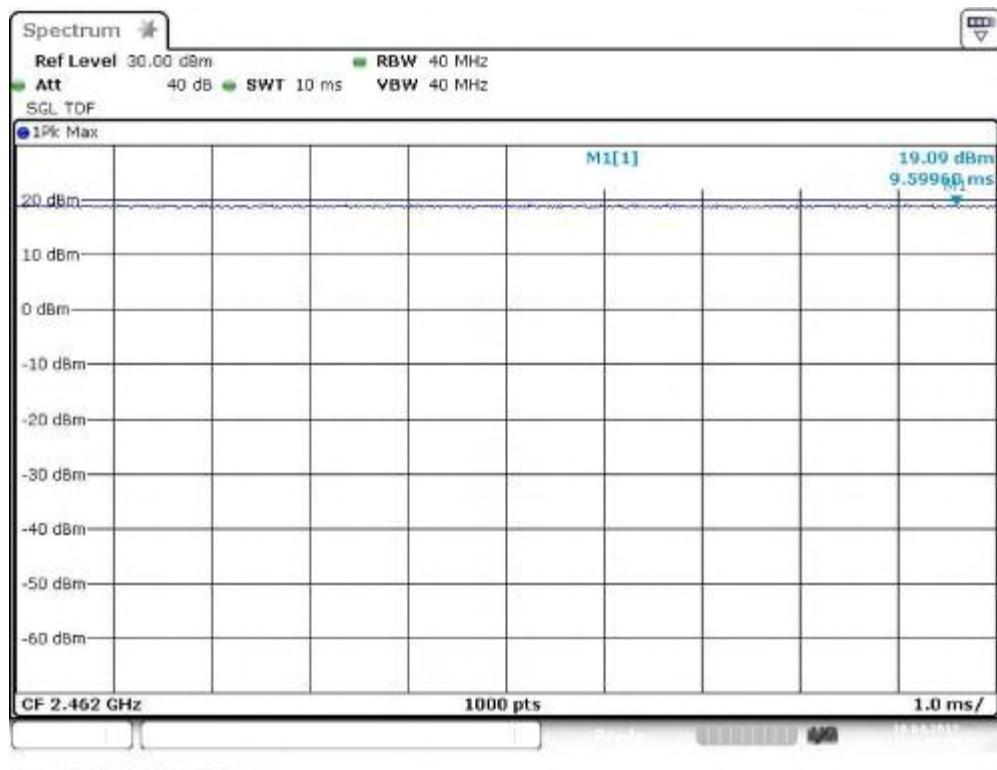

Date: 18.APR.2012 16:37:20

## 9.4 Power spectral density

### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	300 kHz
Resolution bandwidth:	100 kHz
Span:	20 MHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC
CFR Part 15.247 (e)	RSS 210, Issue 8, A 8.2(b)
Power Spectral Density	
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	


### Results:

Modulation	Power Spectral density [dBm/3kHz]			
	Frequency	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode		-10.44	-10.21	-11.35
OFDM / g – mode		-16.28	-15.45	-16.22
OFDM / n – mode		-16.95	-16.48	-16.90
Measurement uncertainty		± 1.5 dB		


**Result:** Passed

### Plots: DSSS / b – mode


**Plot 1: TX mode, lowest channel**

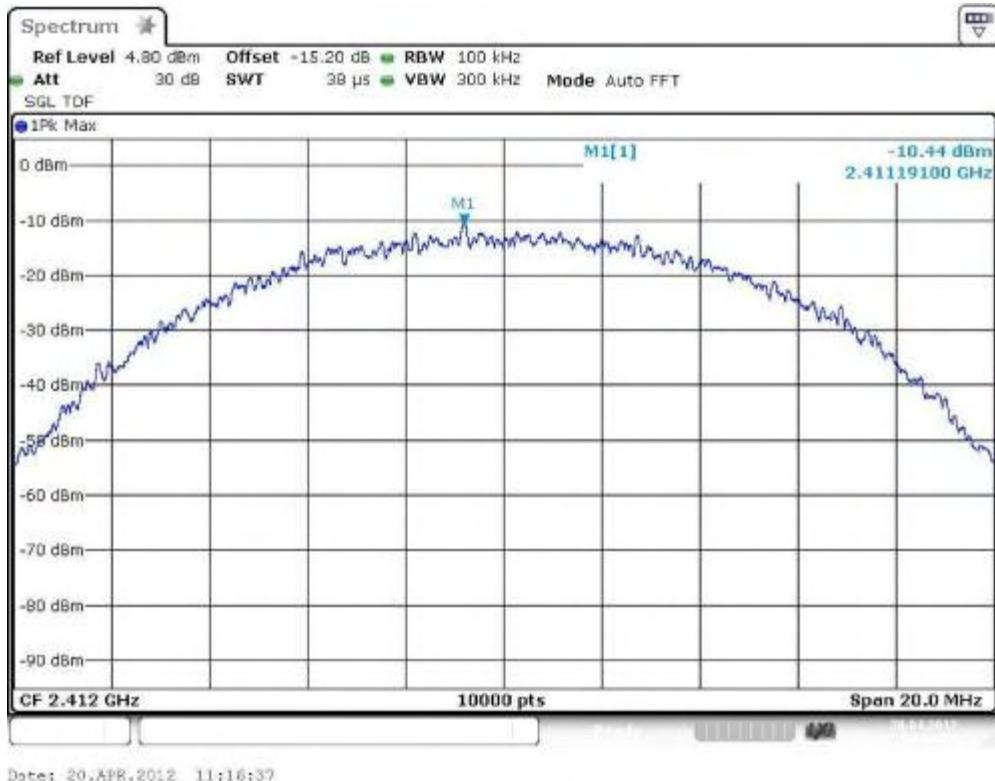

**Plot 2: TX mode, middle channel**

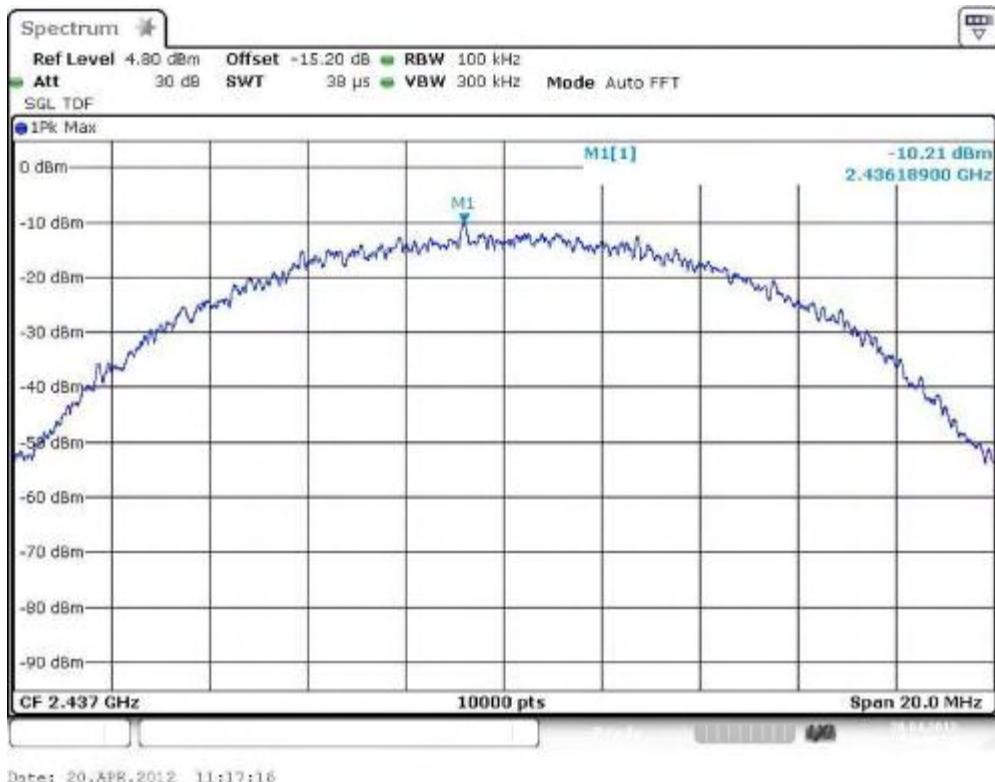




**Plot 3: TX mode, highest channel**

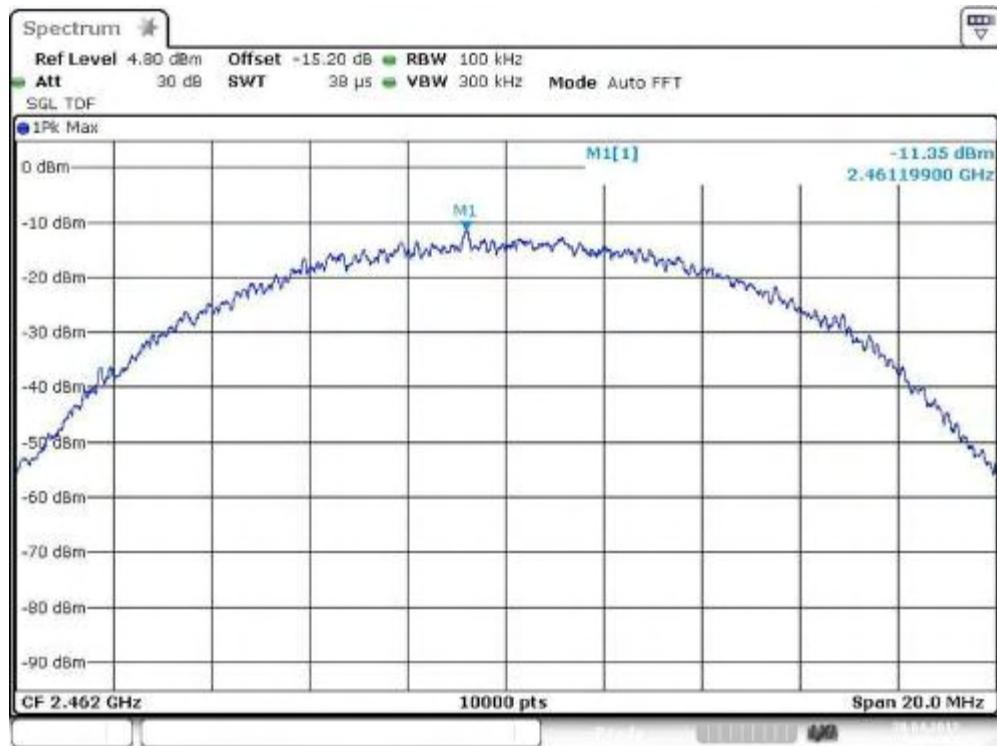

**Plots: OFDM / g – mode**


**Plot 1: TX mode, lowest channel**

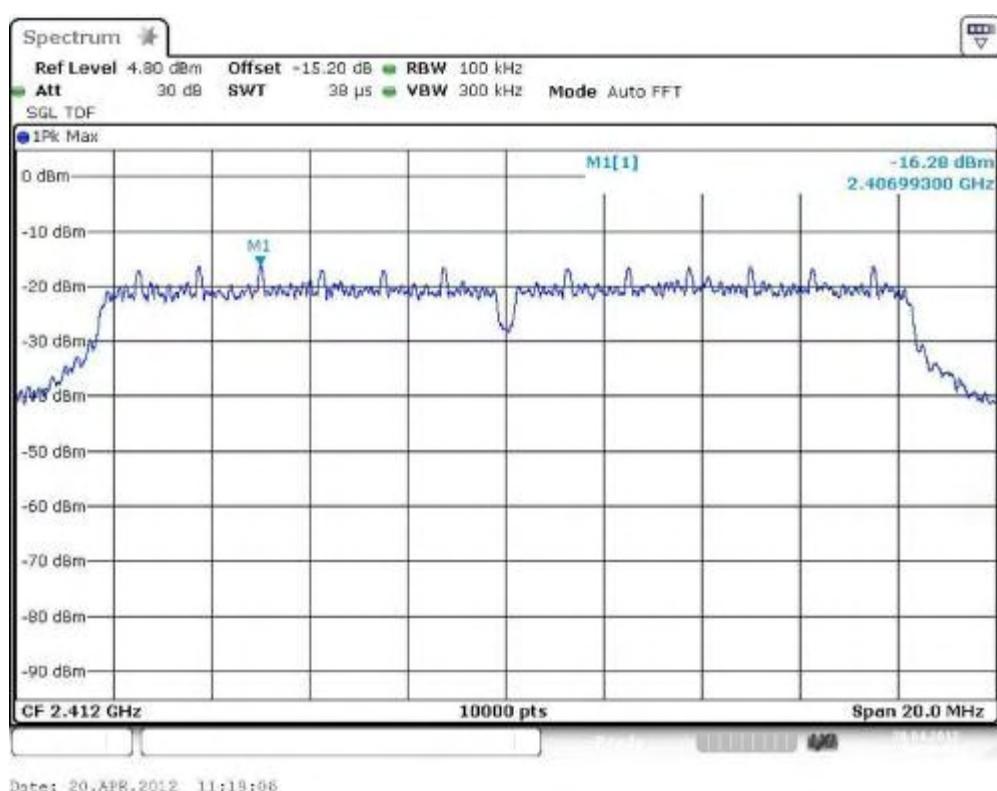

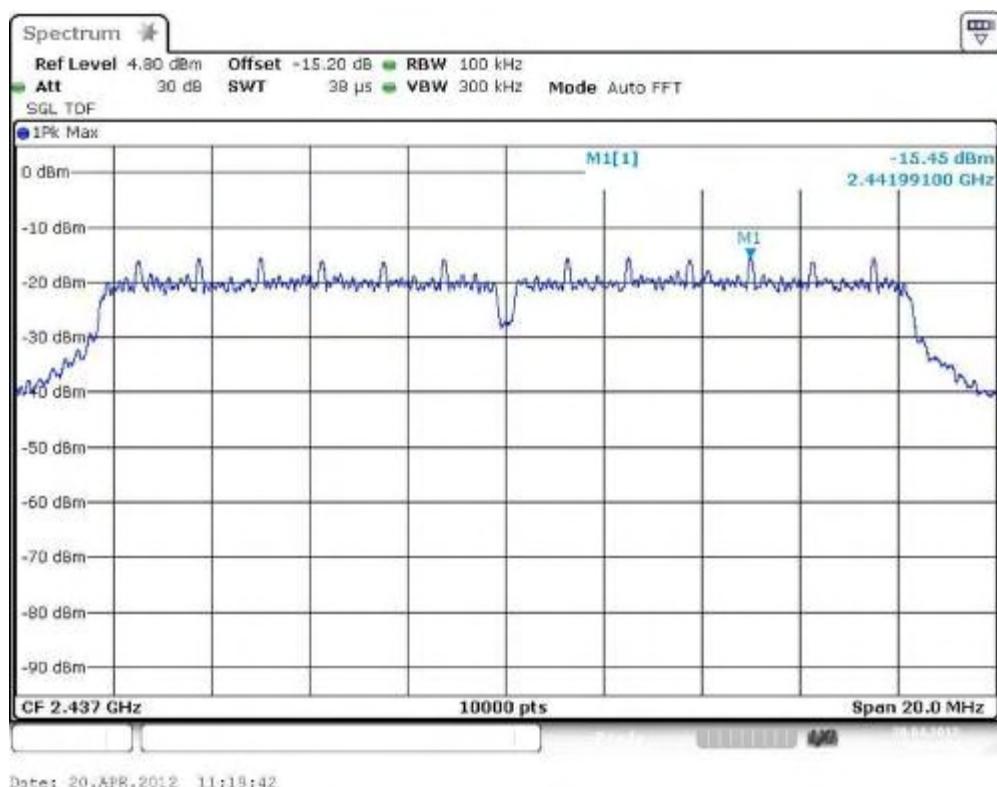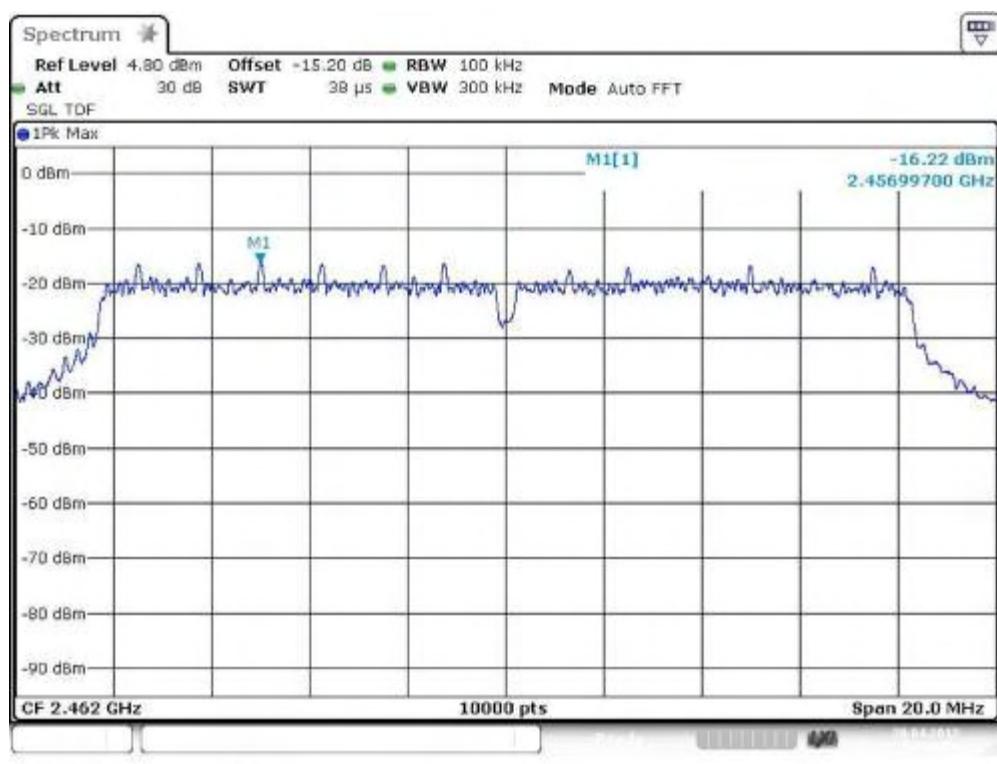
**Plot 2: TX mode, middle channel****Plot 3: TX mode, highest channel**


### Plots: OFDM / n – mode

**Plot 1: TX mode, lowest channel**

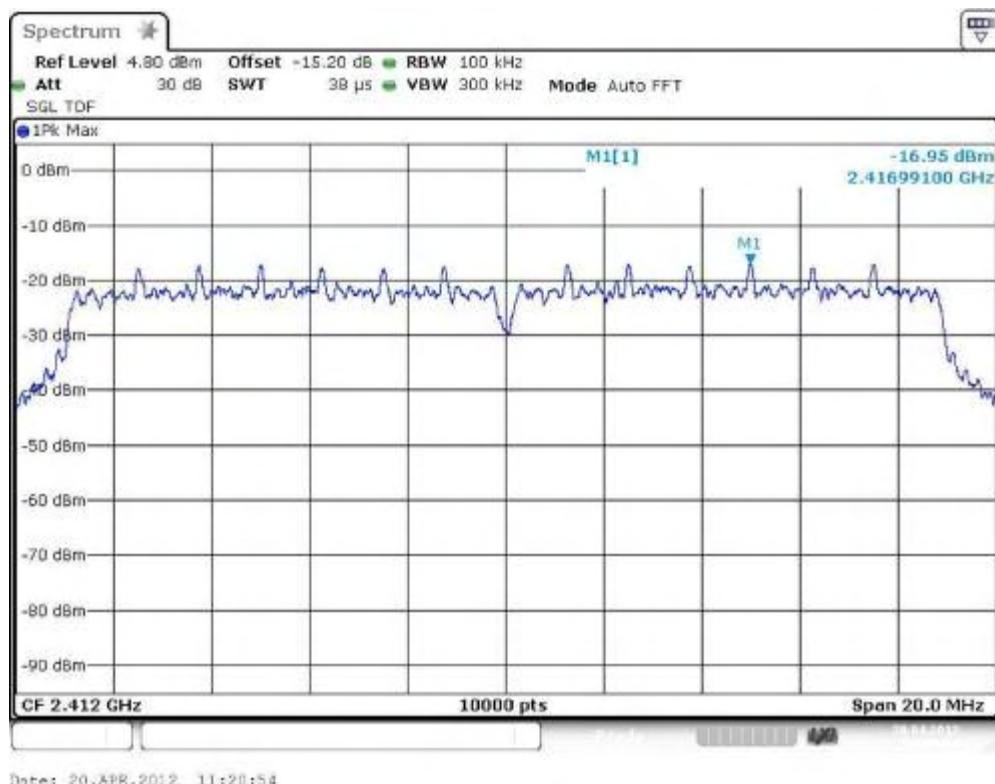

**Plot 2: TX mode, middle channel**

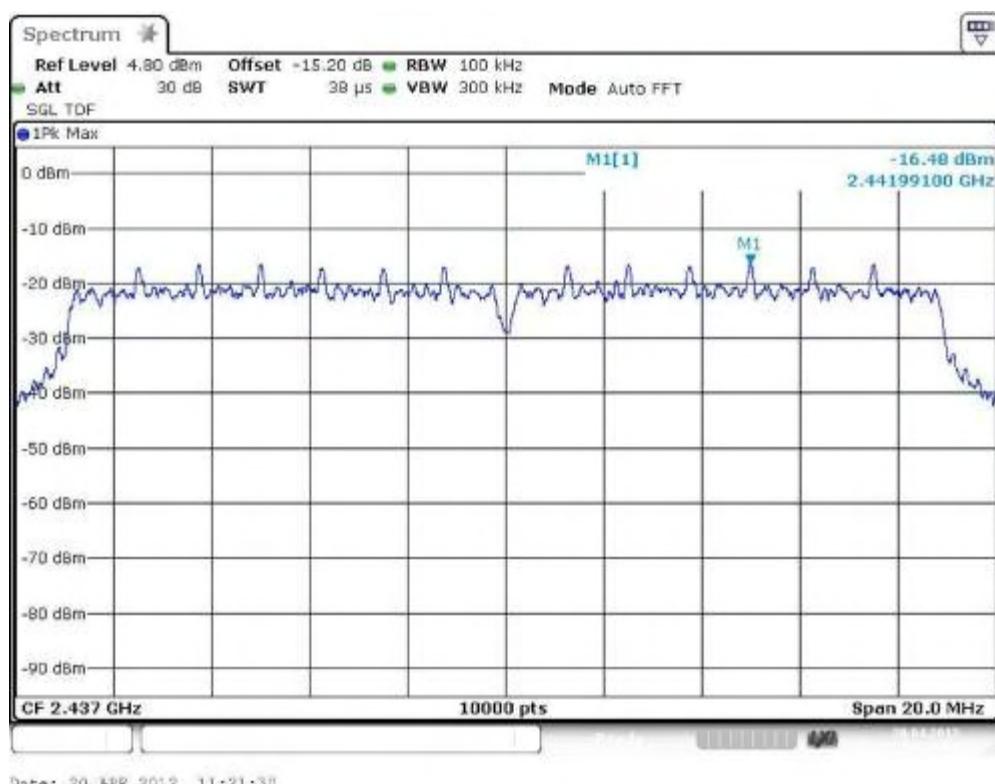

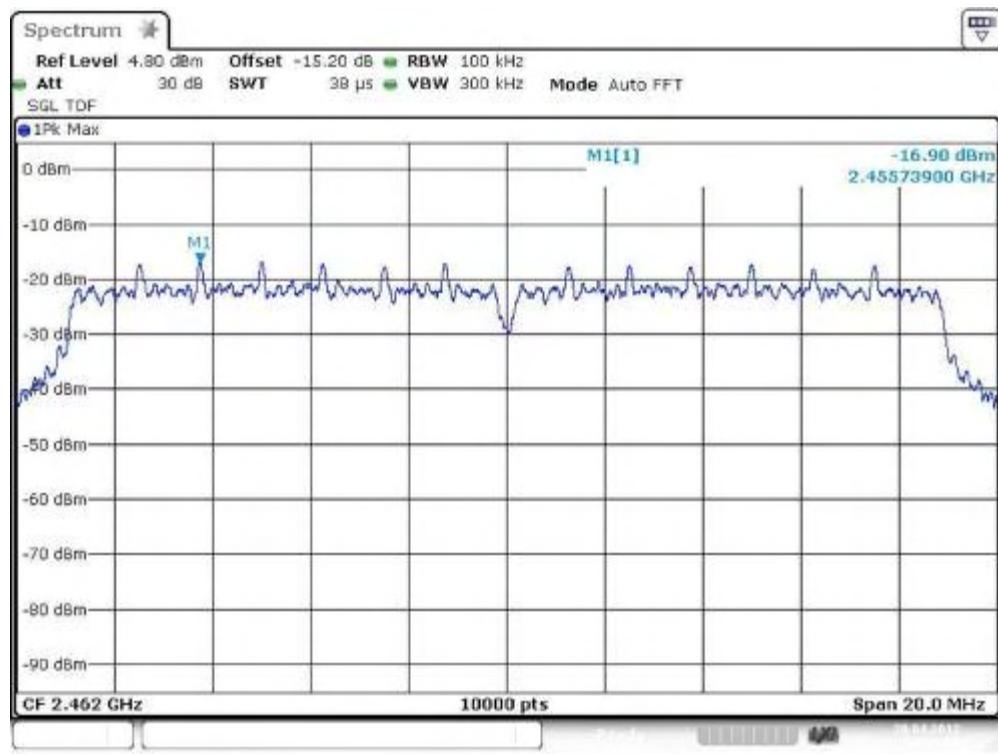**Plot 3: TX mode, highest channel**

## 9.5 Spectrum bandwidth of a FHSS system – 6 dB bandwidth

### Description:

Measurement of the 6 dB bandwidth of the modulated signal.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	10s
Video bandwidth:	1 MHz
Resolution bandwidth:	300 kHz
Span:	See plots
Trace-Mode:	Max Hold

### Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a FHSS System – 6 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


### Results:

Modulation	6 dB BANDWIDTH [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	8.76	8.82	8.59
OFDM / g – mode	16.40	16.40	16.36
OFDM / n – mode	17.72	17.73	17.71
Measurement uncertainty	± 300 kHz		


**Result:** Passed

### Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel, 6 dB bandwidth

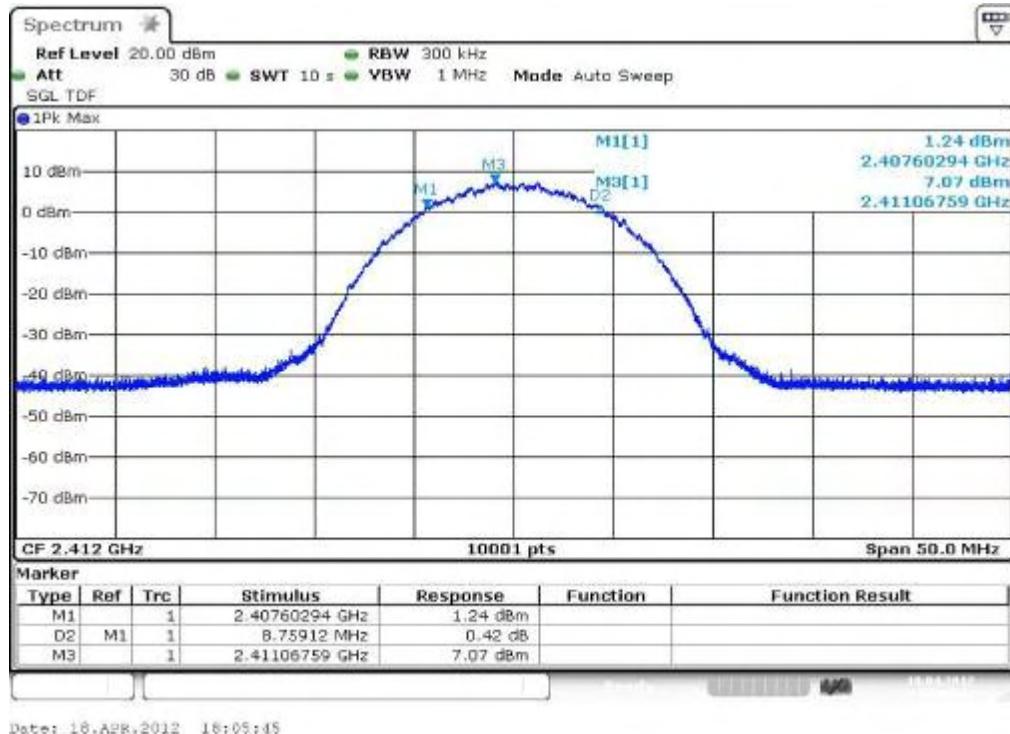

Plot 2: TX mode, middle channel, 6 dB bandwidth

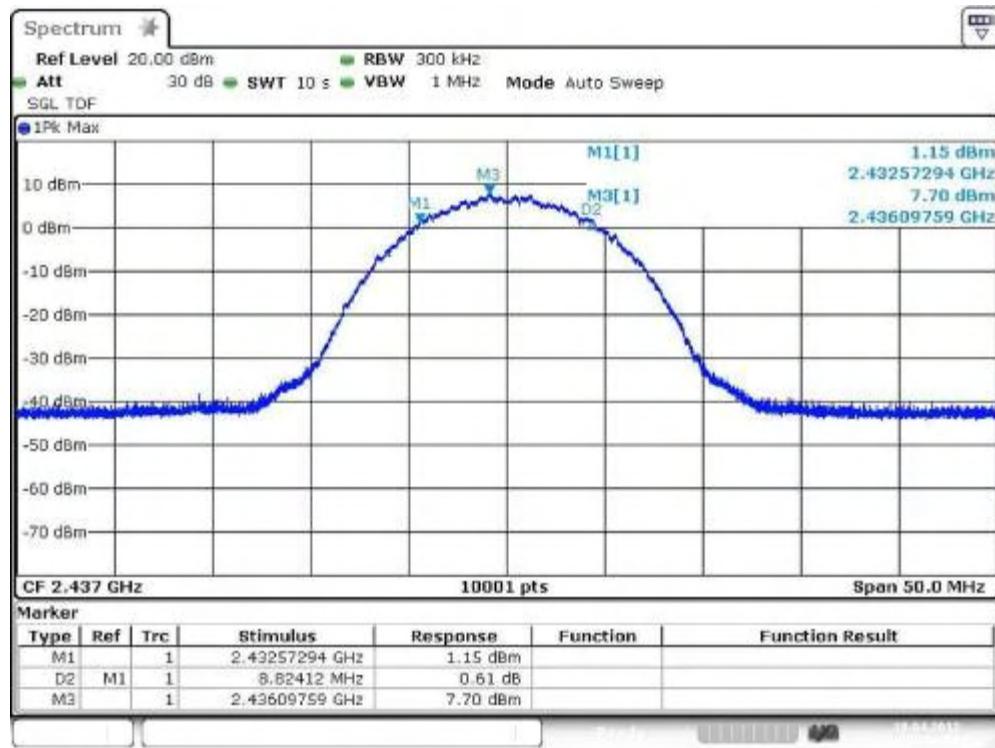

Plot 3: TX mode, highest channel, 6 dB bandwidth

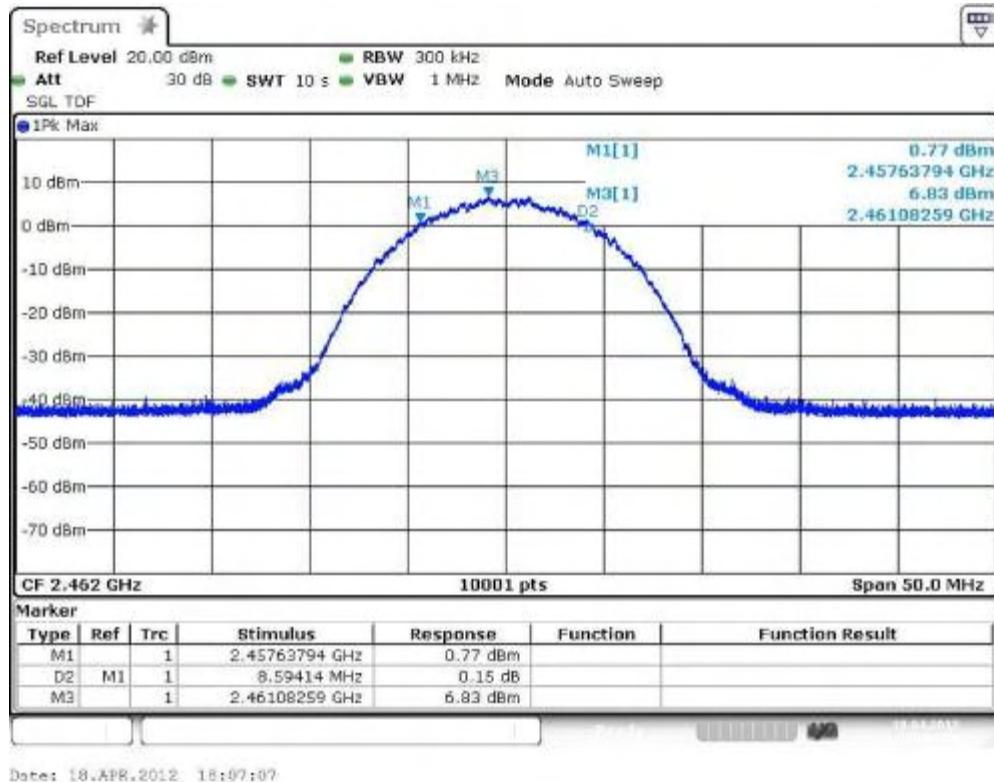


### Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel, 6 dB bandwidth




Plot 2: TX mode, middle channel, 6 dB bandwidth

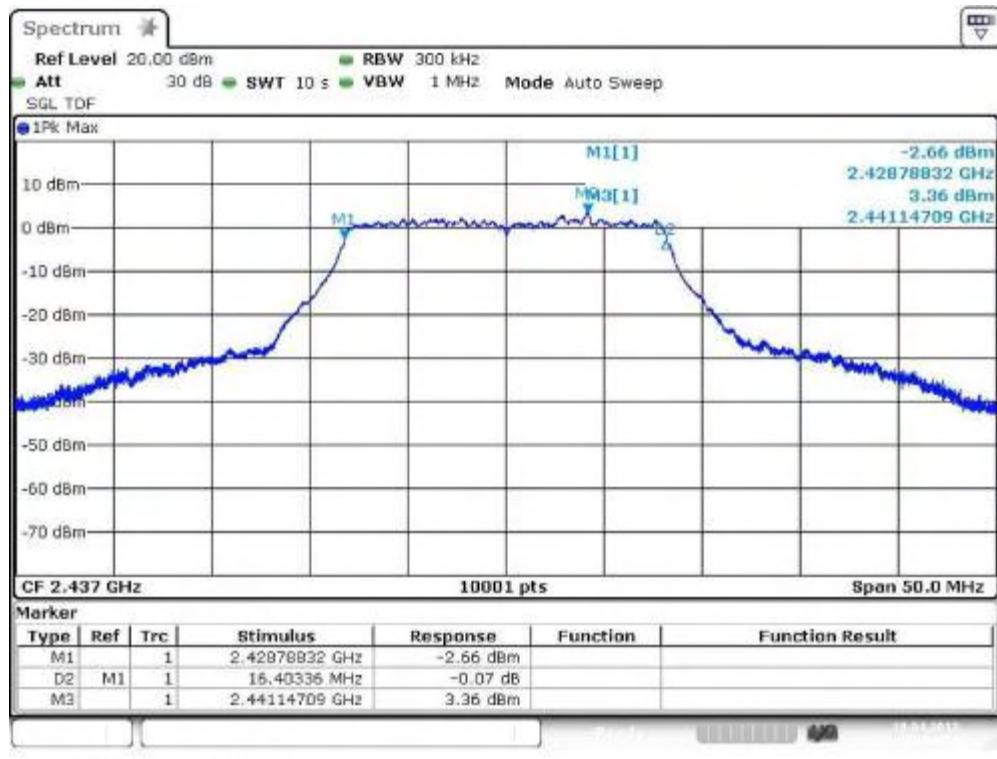

Date: 18.APR.2012 18:06:30


Plot 3: TX mode, highest channel, 6 dB bandwidth

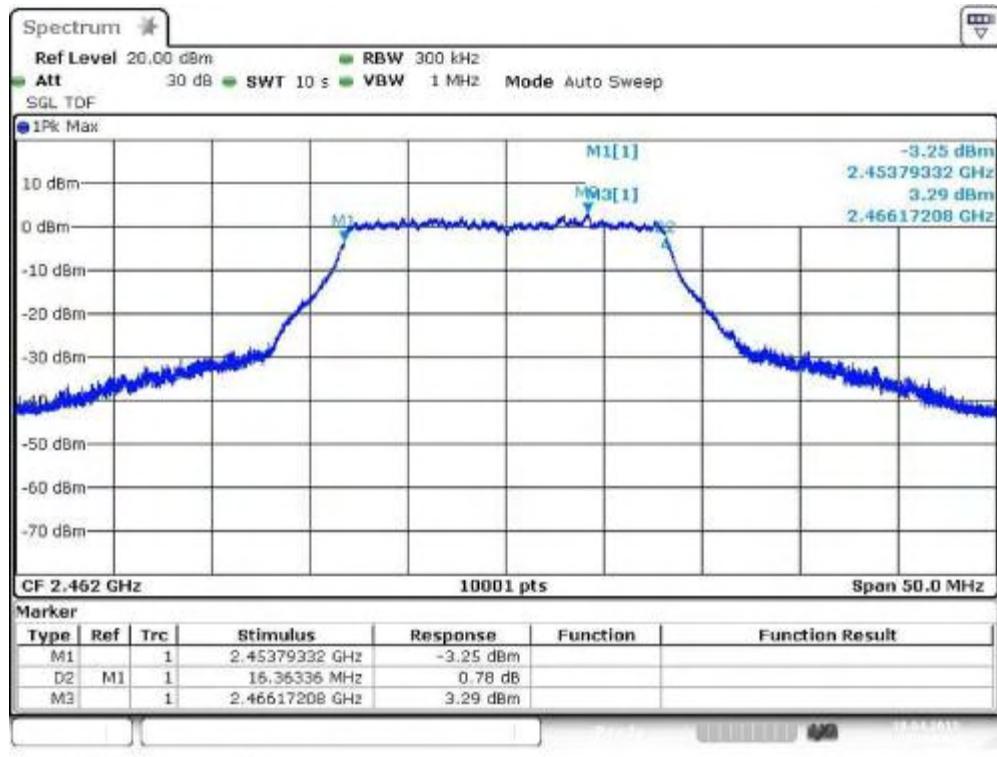


Date: 18.APR.2012 18:09:12


### Plots: OFDM / n – mode

**Plot 1:** TX mode, lowest channel, 6 dB bandwidth

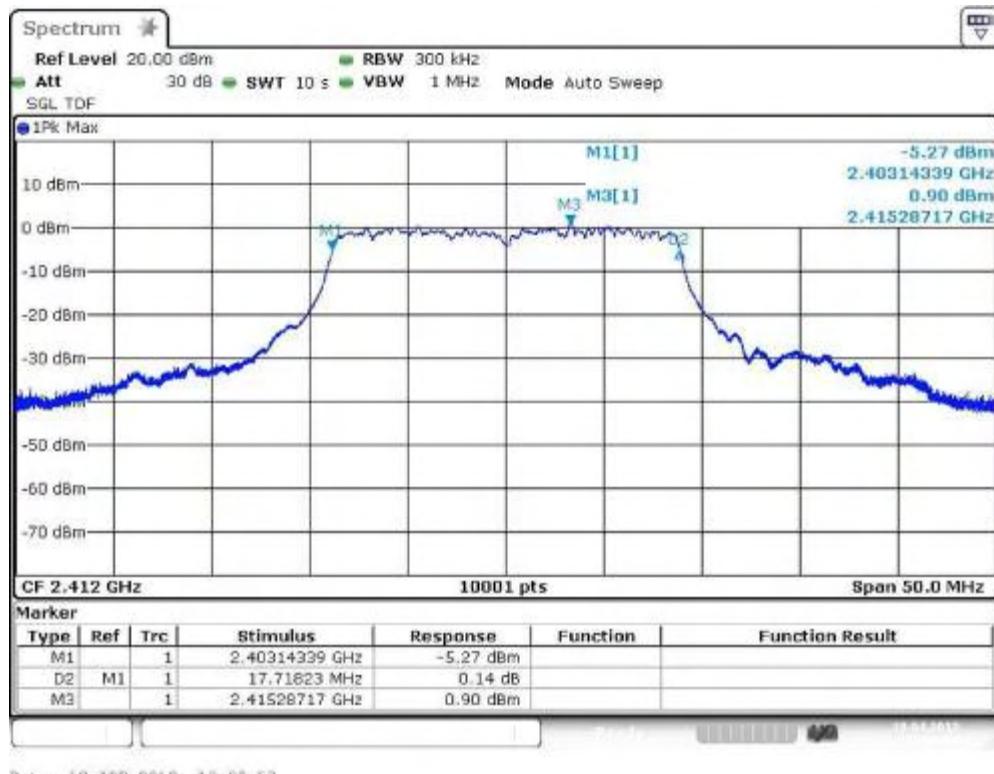

**Plot 2:** TX mode, middle channel, 6 dB bandwidth

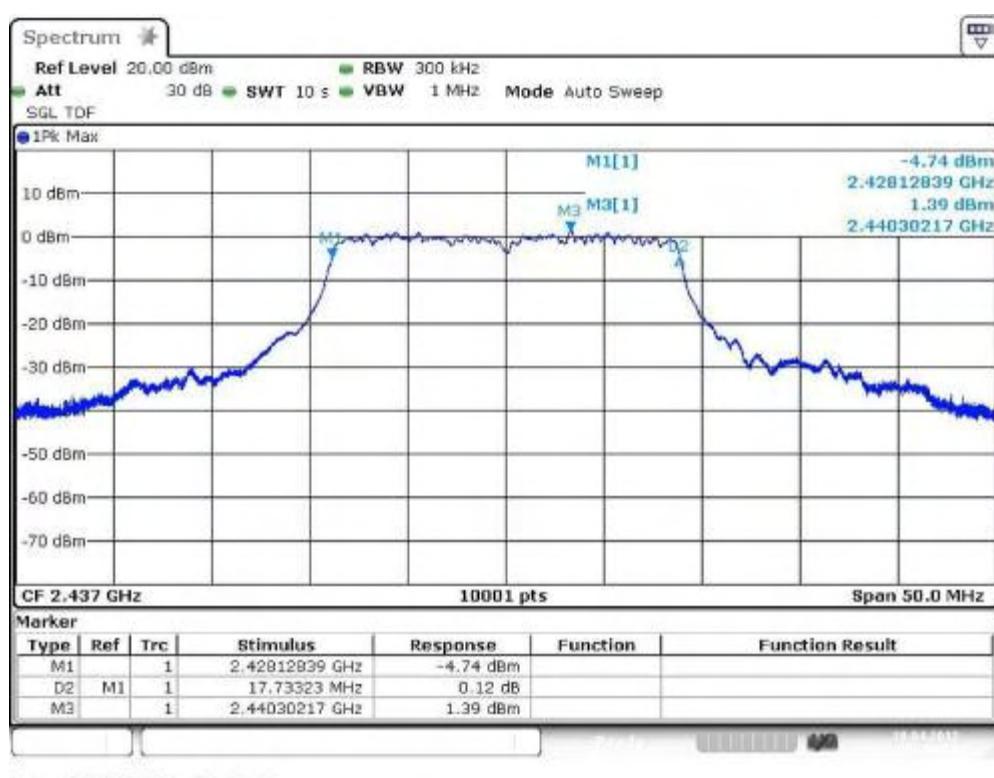

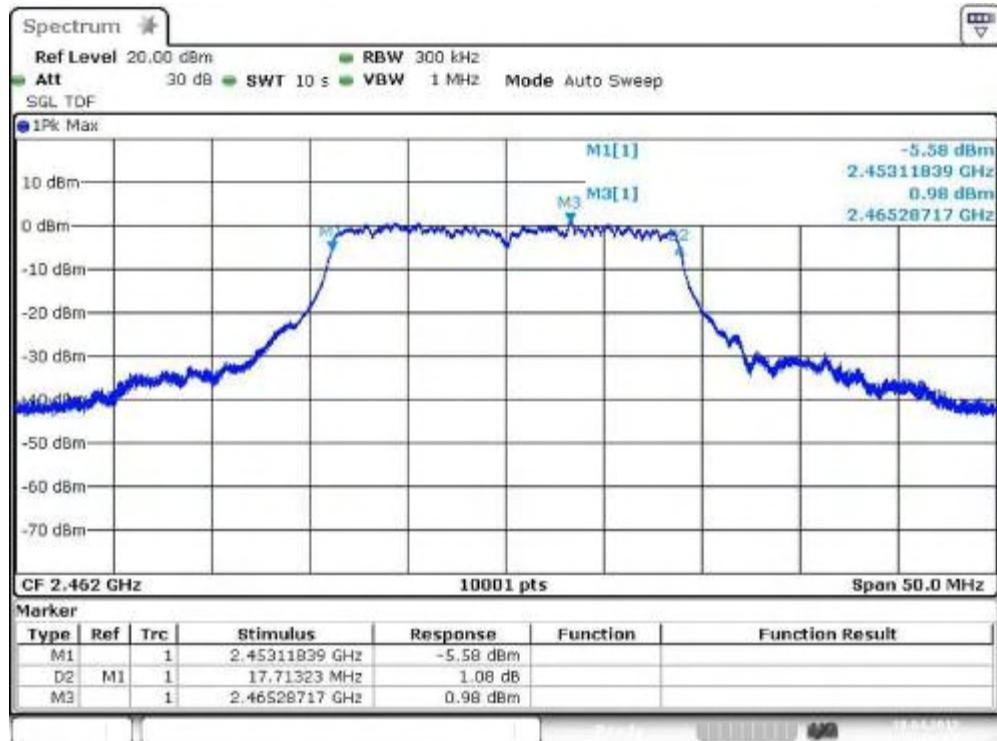**Plot 3: TX mode, highest channel, 6 dB bandwidth**

## 9.6 Spectrum bandwidth of a FHSS system – 20 dB bandwidth

### Description:

Measurement of the 20 dB bandwidth of the modulated signal.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	10s
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots
Trace-Mode:	Max Hold

### Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a FHSS System – 20 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


### Results:

Modulation	20 dB BANDWIDTH [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	14.66	14.67	14.76
OFDM / g – mode	18.14	18.15	18.33
OFDM / n – mode	18.82	18.84	18.60
Measurement uncertainty	± 300 kHz		


**Result:** Passed

### Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel, 20 dB bandwidth

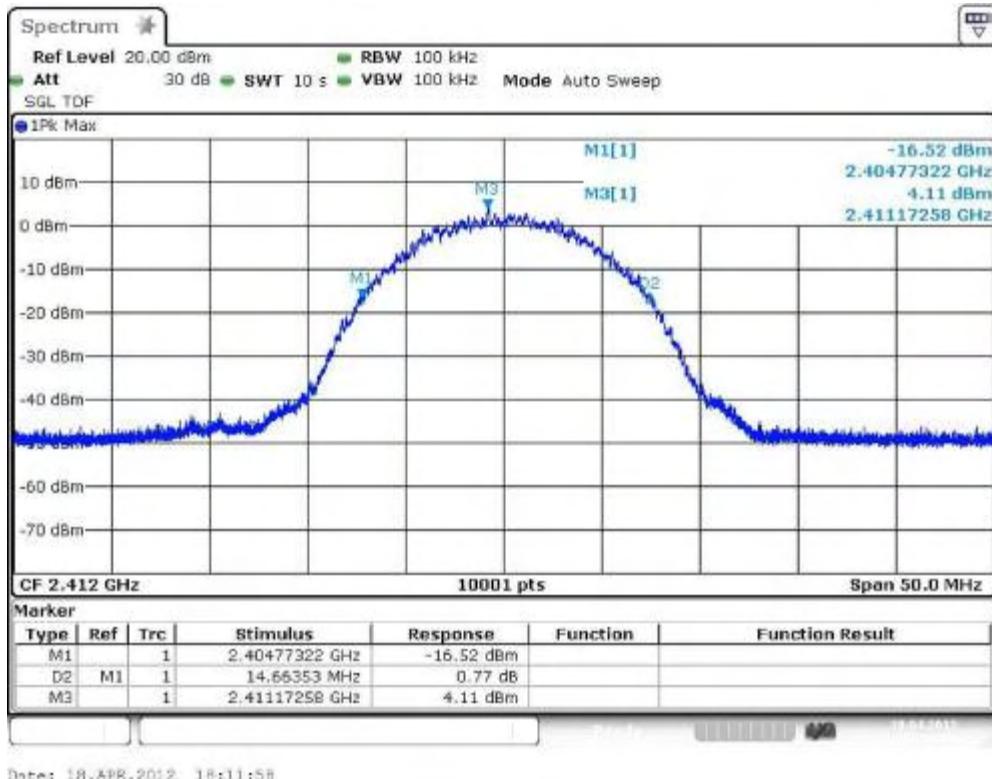

Plot 2: TX mode, middle channel, 20 dB bandwidth

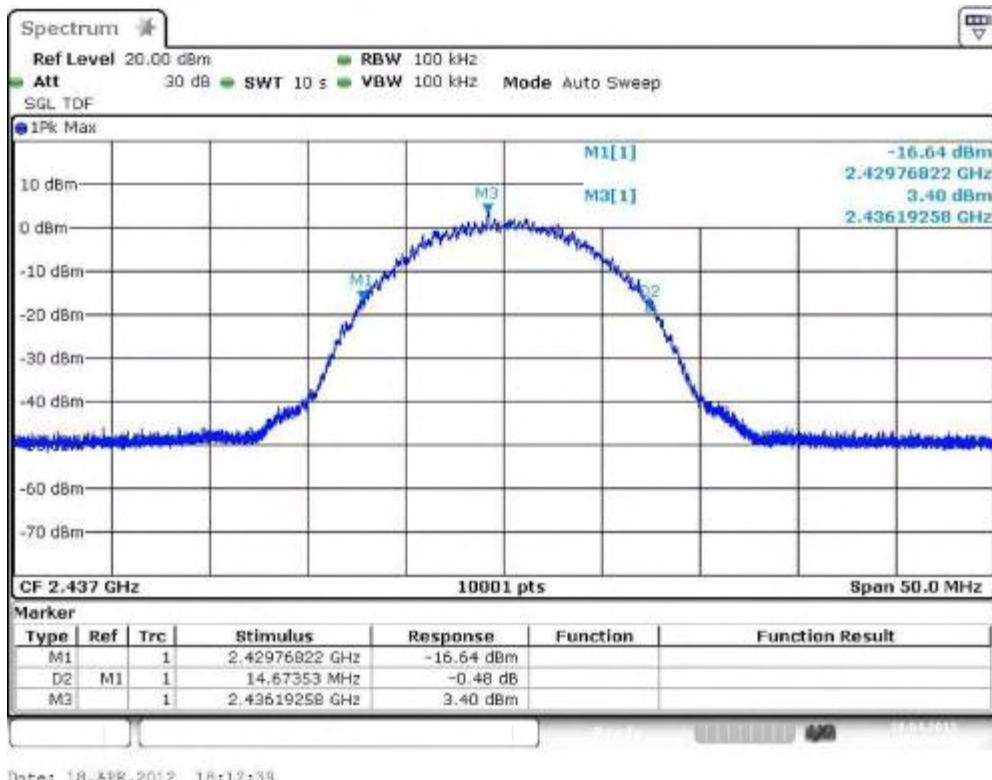


Plot 3: TX mode, highest channel, 20 dB bandwidth

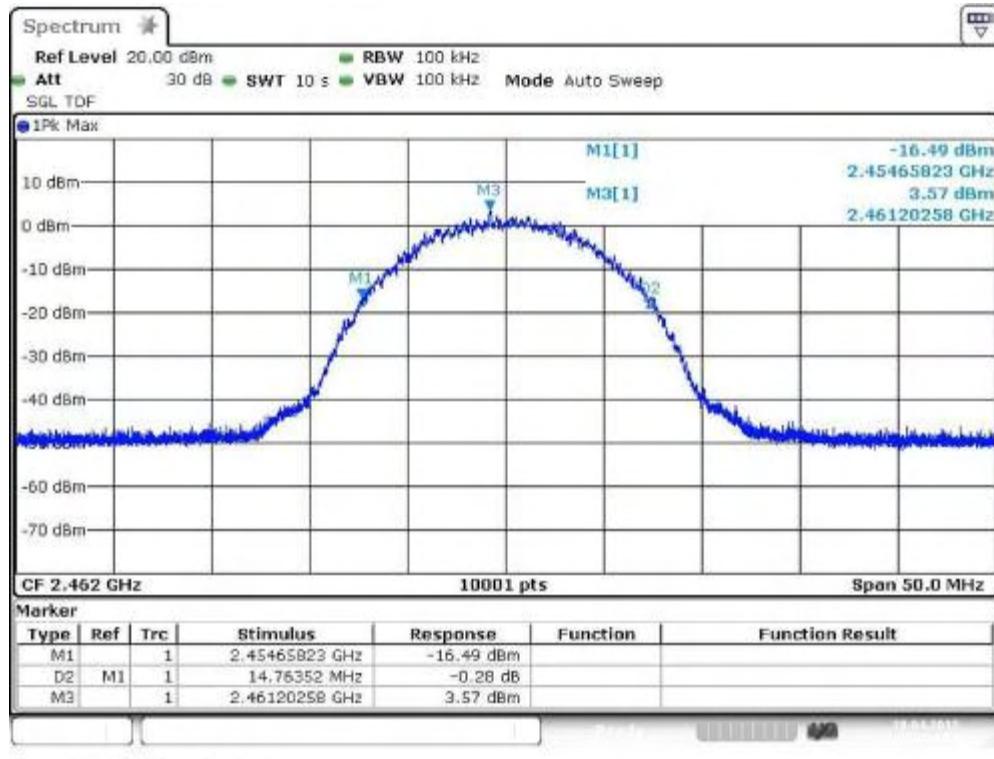

Date: 18.APR.2012 16:13:21


**Plots: OFDM / g – mode**

Plot 1: TX mode, lowest channel, 20 dB bandwidth

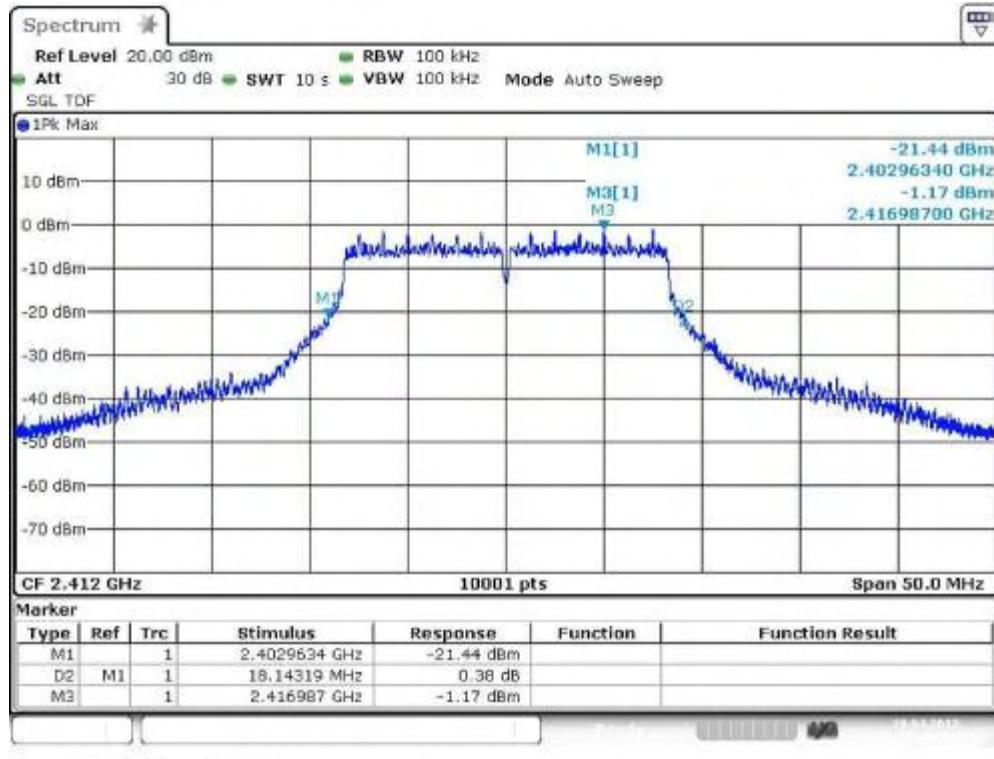


Date: 18.APR.2012 16:14:02

Plot 2: TX mode, middle channel, 20 dB bandwidth

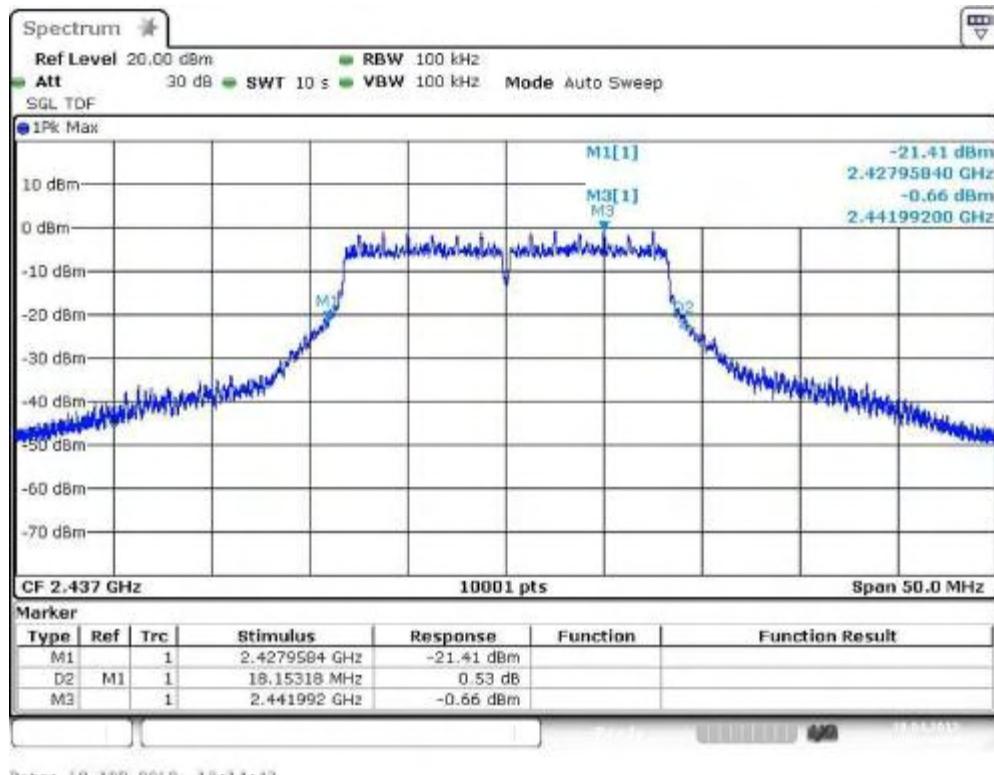


Plot 3: TX mode, highest channel, 20 dB bandwidth

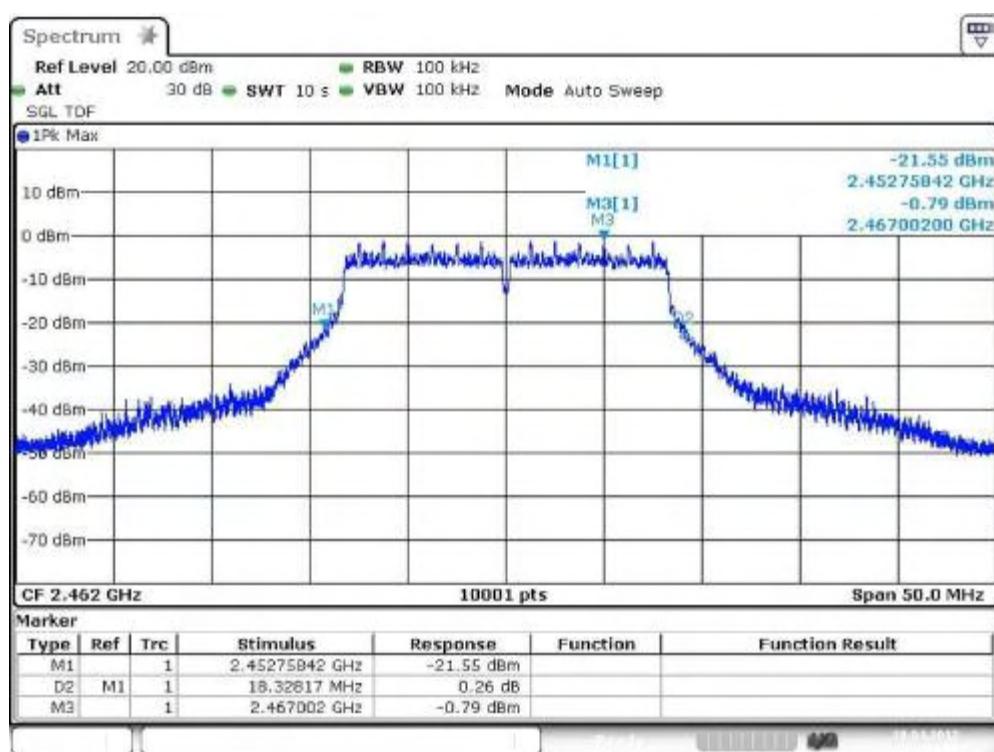



### Plots: OFDM / n – mode

**Plot 1:** TX mode, lowest channel, 20 dB bandwidth

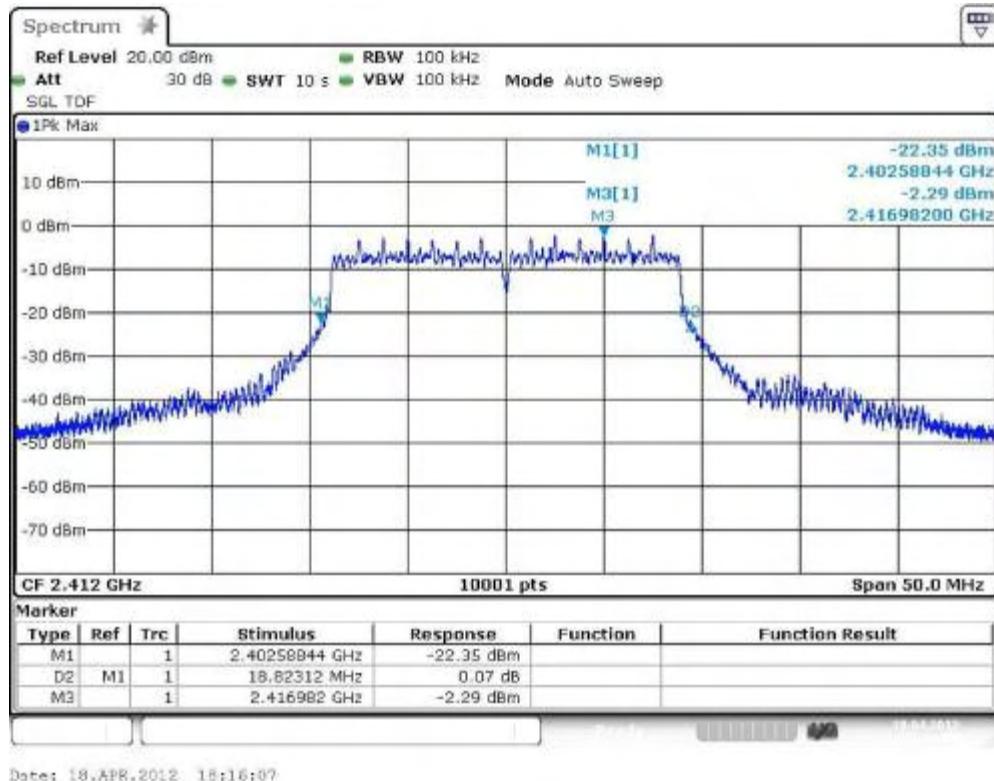

**Plot 2:** TX mode, middle channel, 20 dB bandwidth

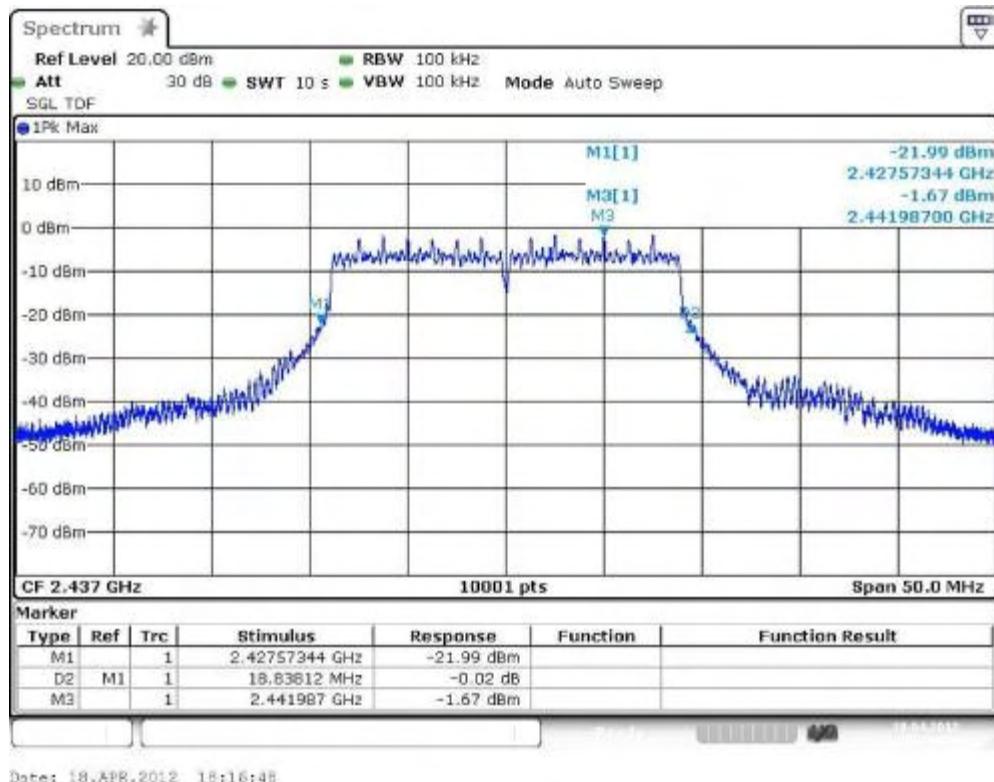

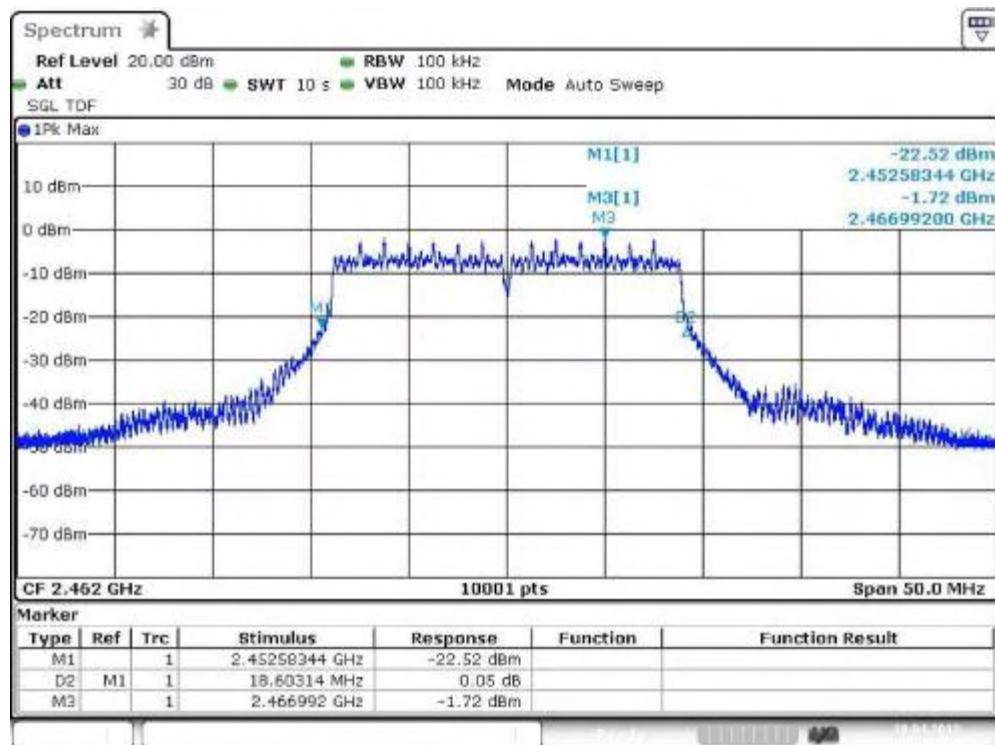**Plot 3:** TX mode, highest channel, 20 dB bandwidth

## 9.7 Band edge compliance conducted

### Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in both modes.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	500 kHz
Resolution bandwidth:	100 kHz
Span:	Lower Band Edge: 2300 – 2425 MHz Upper Band Edge: 2450 – 2500 MHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC
CFR Part 15.247 (d)	RSS 210, Issue 8, A 8.5
Band Edge Compliance Conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	


### Results:

Scenario	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB (see plot 1)	> 20 dB (see plot 3)	> 20 dB (see plot 5)
Upper Band Edge – Channel 11	> 20 dB (see plot 2)	> 20 dB (see plot 4)	> 20 dB (see plot 6)
Measurement uncertainty	± 1.5 dB		


**Result:** Passed

### Plots: DSSS / b – mode

Plot 1: TX mode, lower band edge

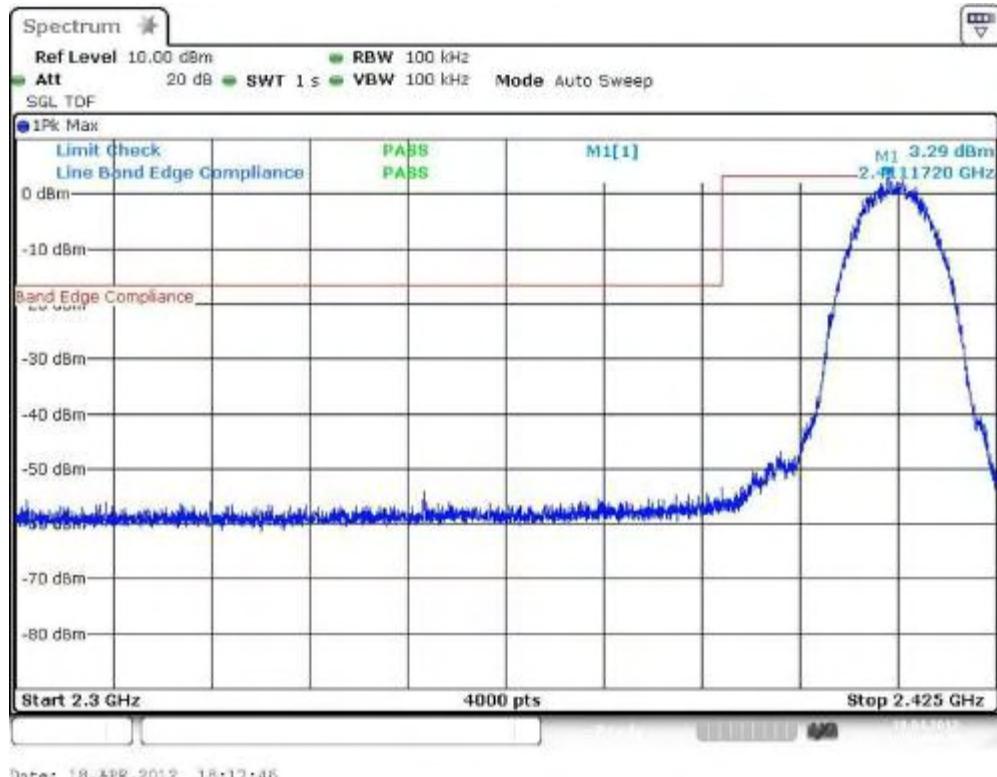


Plot 2: TX mode, upper band edge

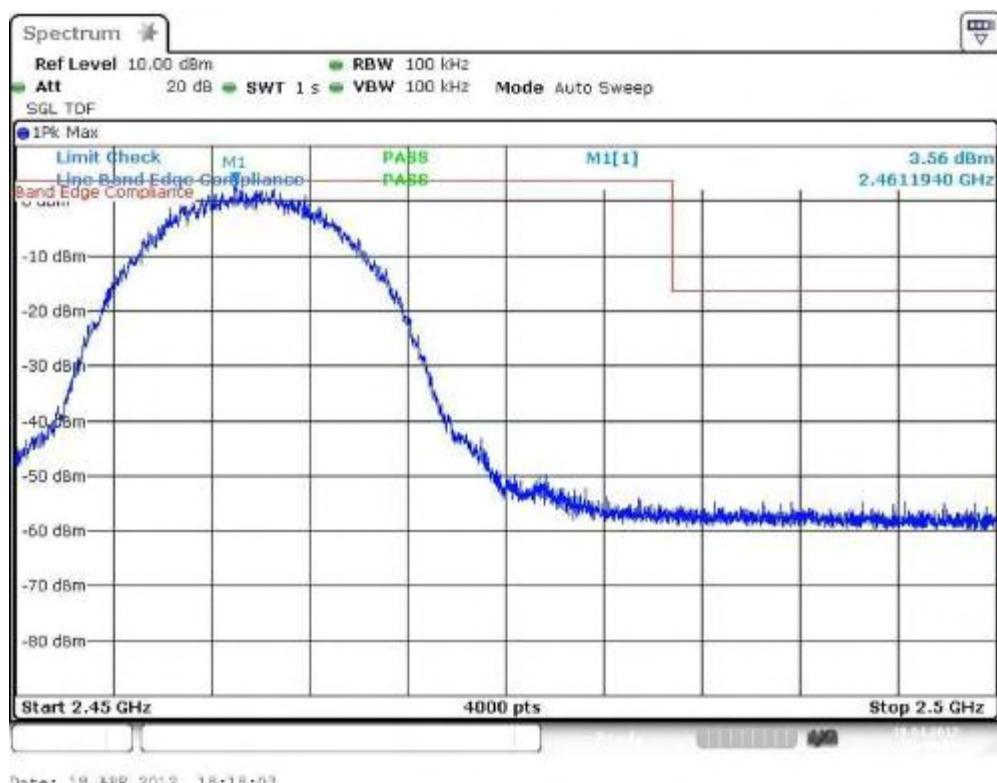


### Plots: OFDM / g – mode

Plot 1: TX mode, lower band edge

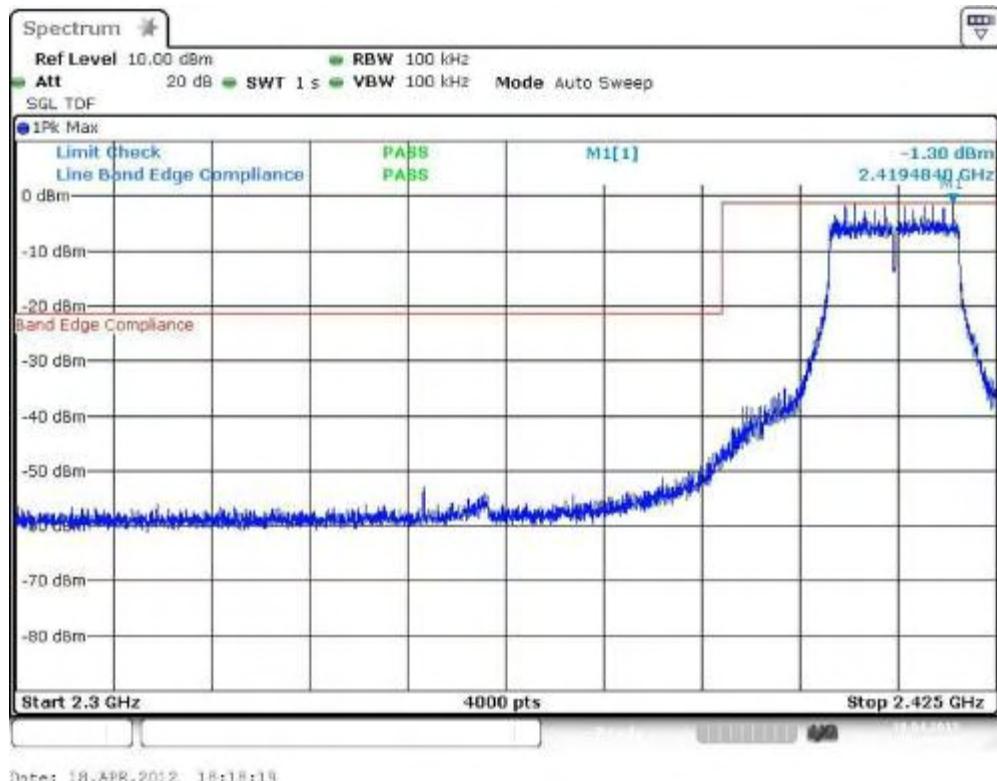

Date: 18.APR.2012 18:18:19


Plot 2: TX mode, upper band edge

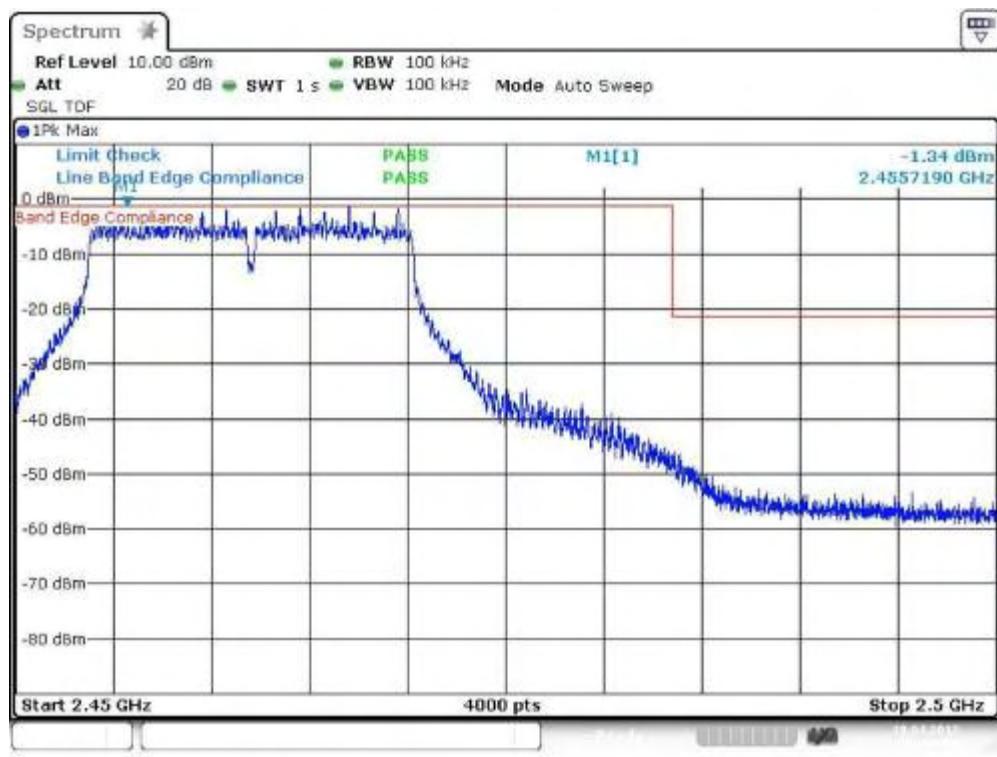


Date: 18.APR.2012 18:18:36

## Plots: OFDM / n – mode

Plot 1: TX mode, lower band edge

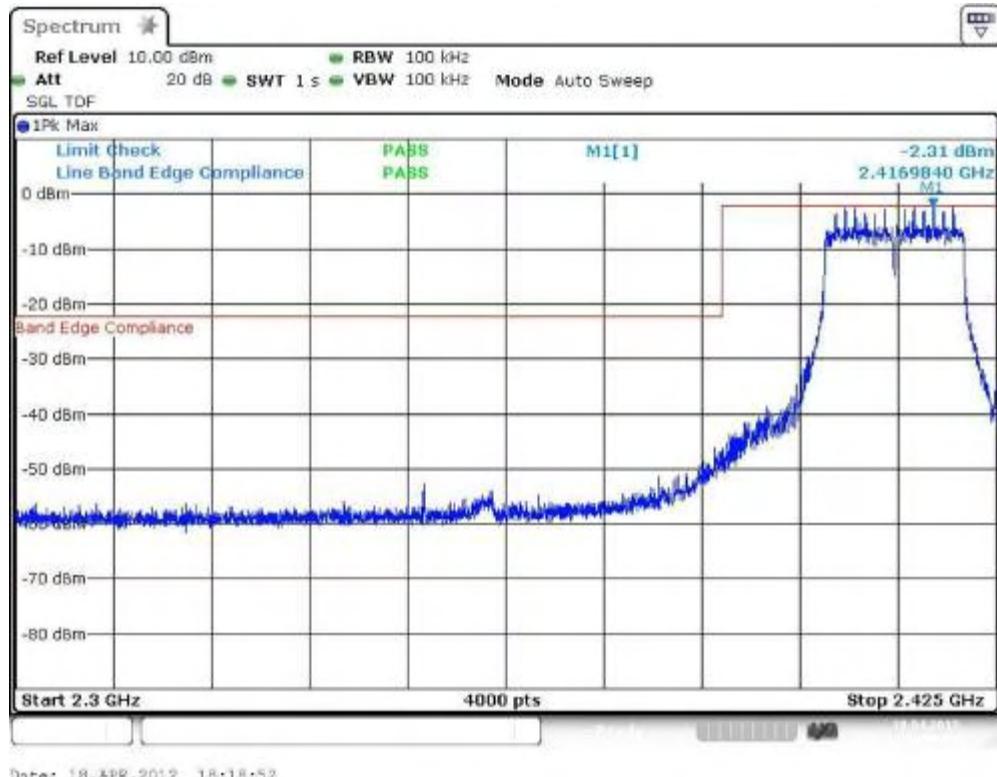

Plot 2: TX mode, upper band edge

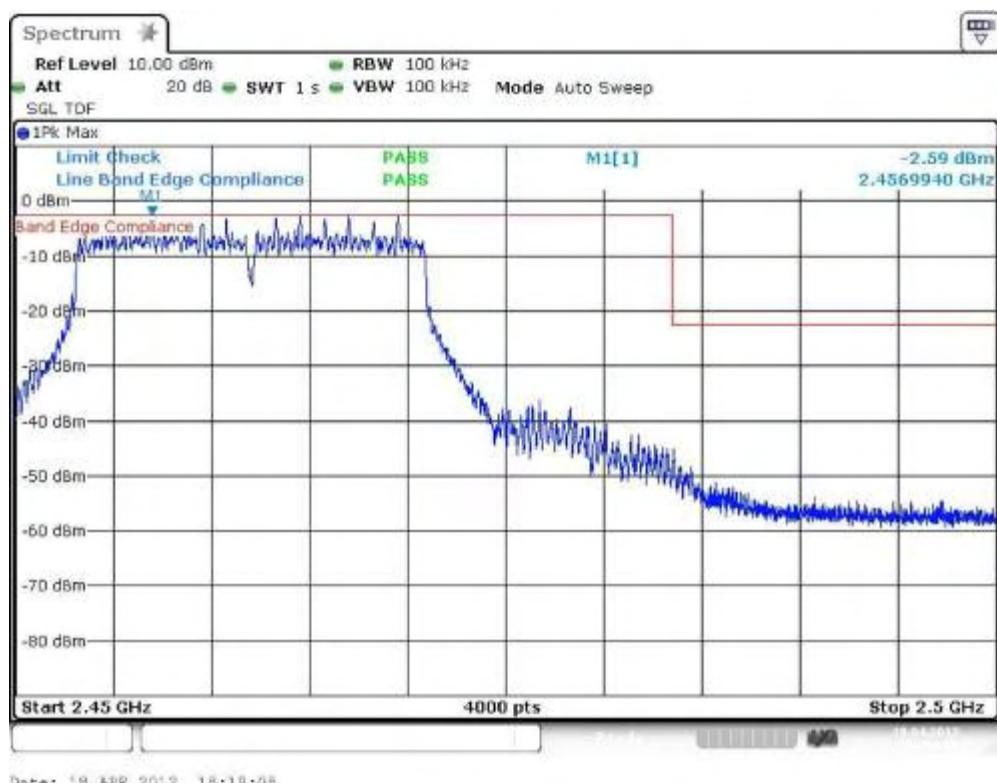

## 9.8 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	10 Hz
Resolution bandwidth:	1 MHz
Span:	Lower Band: 2300 – 2400 MHz Upper Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold



### Limits:



FCC	IC
CFR Part 15.205	RSS 210, Issue 8, A 8.5
Band Edge Compliance Radiated	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
54 dB $\mu$ V/m AVG	

### Results:

Scenario	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB	> 20 dB	> 20 dB
Upper Band Edge – Channel 11	> 20 dB	> 20 dB	> 20 dB
Measurement uncertainty	$\pm 3$ dB		

**Result: Passed**

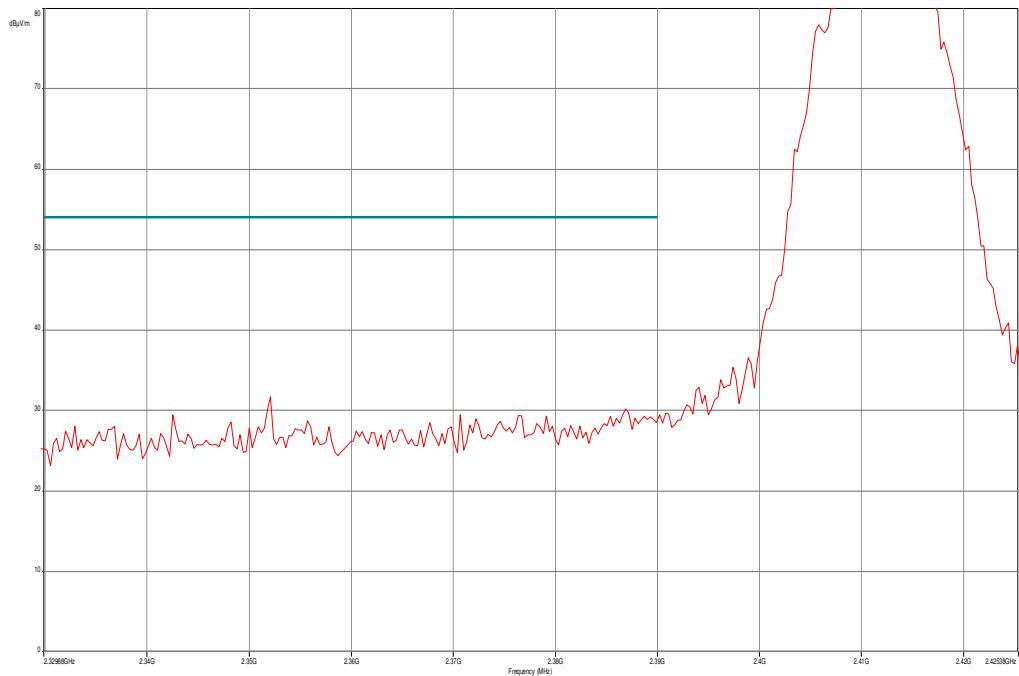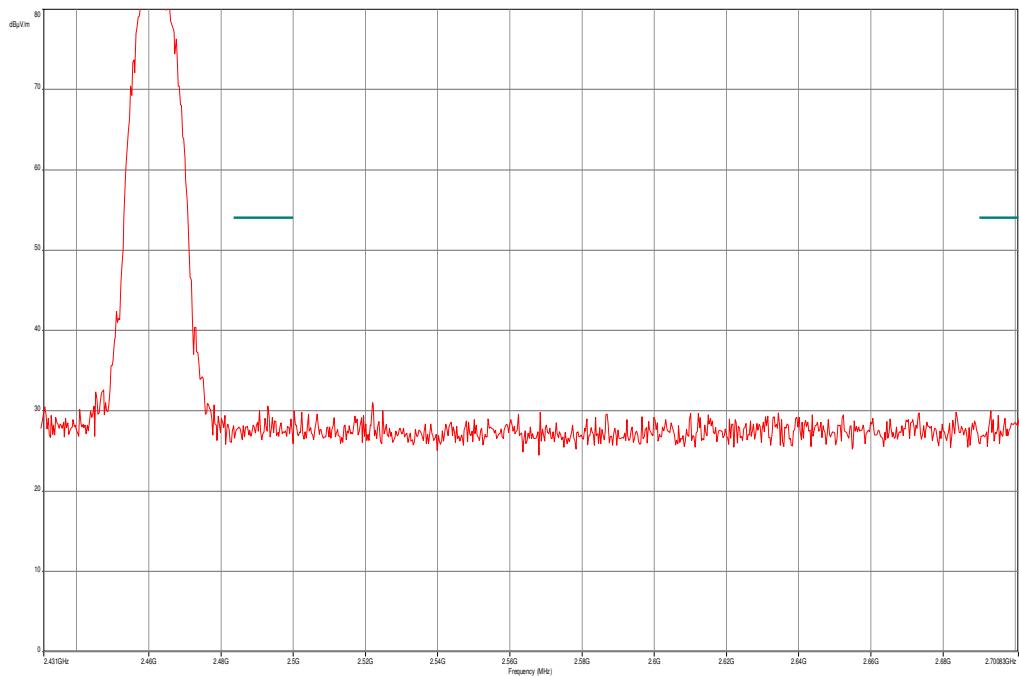**Plots: DSSS****Plot 1: TX mode, lower band edge, vertical & horizontal polarization****Plot 2: TX mode, upper band edge, vertical & horizontal polarization**

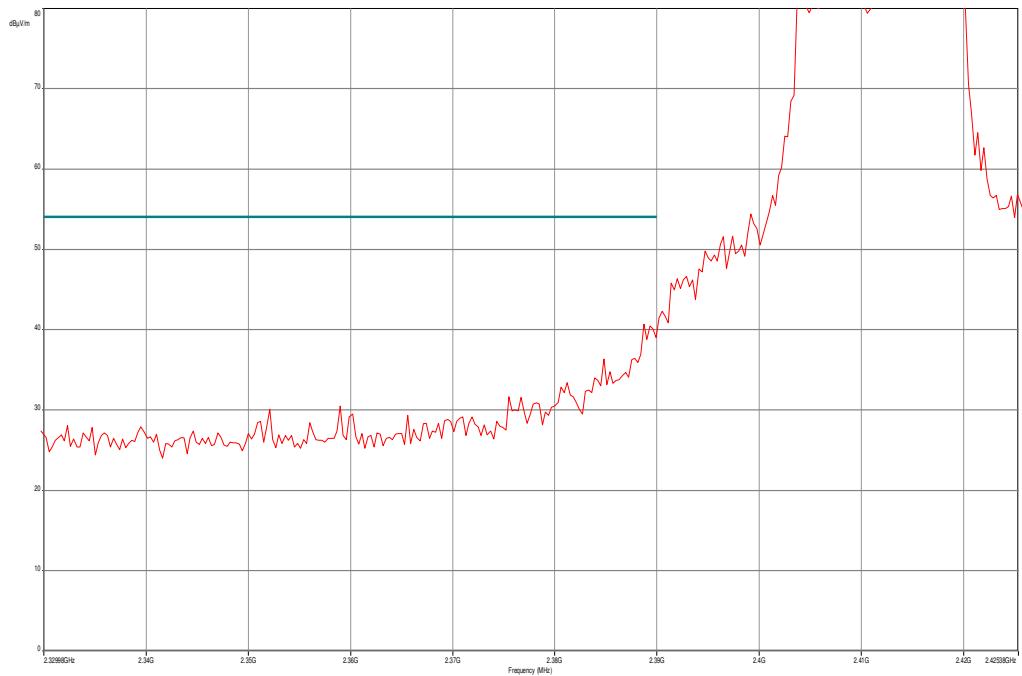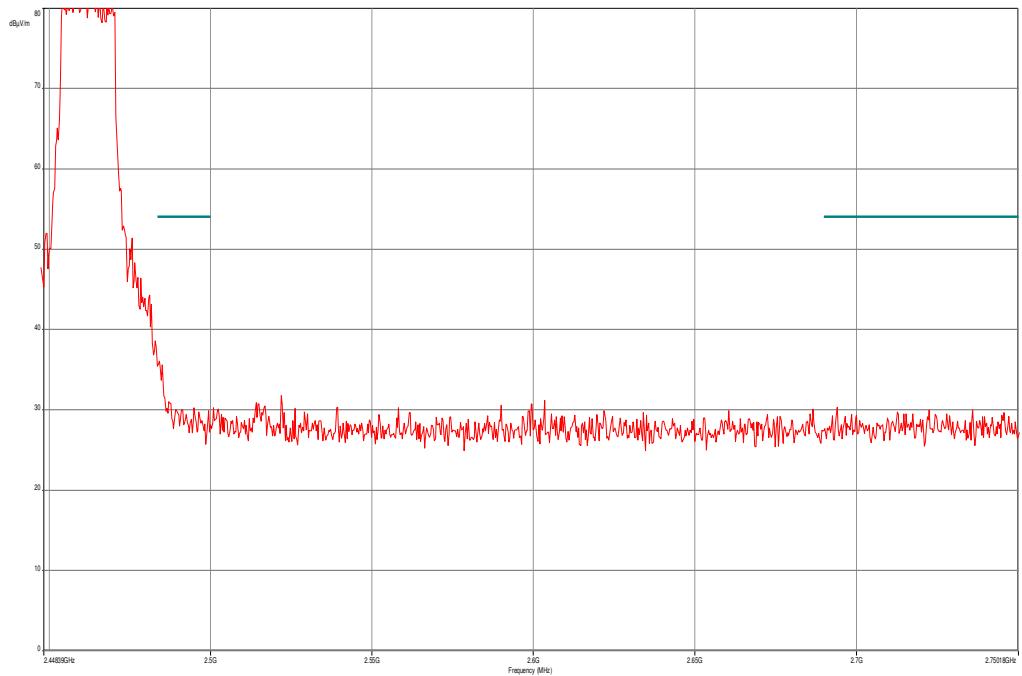**Plots: OFDM****Plot 1: TX mode, lower band edge, vertical & horizontal polarization****Plot 2: TX mode, upper band edge, vertical & horizontal polarization**

## 9.9 TX spurious emissions conducted

### Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC
CFR Part 15.247(d)	RSS 210, Issue 8, A 8.5
TX Spurious Emissions Conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

**Results: DSSS / b – mode**

TX Spurious Emissions Conducted					
DSSS - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		4.46	30 dBm		Operating frequency
		No critical peaks detected. All detected emissions are more than 6 dB below the limit.			complies
2437		5.02	30 dBm		Operating frequency
		No critical peaks detected. All detected emissions are more than 6 dB below the limit.			complies
2462		3.80	30 dBm		Operating frequency
		No critical peaks detected. All detected emissions are more than 6 dB below the limit.			complies
Measurement uncertainty		± 3 dB			

**Result: Passed**
**Results: OFDM / g – mode**

TX Spurious Emissions Conducted					
OFDM - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		-0.68	30 dBm		Operating frequency
		No critical peaks detected. All detected emissions are more than 6 dB below the limit.			complies
2437		-0.19	30 dBm		Operating frequency
		No critical peaks detected. All detected emissions are more than 6 dB below the limit.			complies
2462		-0.61	30 dBm		Operating frequency
		No critical peaks detected. All detected emissions are more than 6 dB below the limit.			complies
Measurement uncertainty		± 3 dB			

**Result: Passed**


**Results: OFDM / n – mode**

TX Spurious Emissions Conducted OFDM - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		-1.73	30 dBm		Operating frequency
		No critical peaks detected. All detected emissions are more than 6 dB below the limit.			complies
2437		-1.17	30 dBm		Operating frequency
		No critical peaks detected. All detected emissions are more than 6 dB below the limit.			complies
2462		-1.60	30 dBm		Operating frequency
		No critical peaks detected. All detected emissions are more than 6 dB below the limit.			complies
Measurement uncertainty		± 3 dB			

**Result: Passed**


### Plots: DSSS / b – mode

**Plot 1:** TX mode, lowest channel, up to 25 GHz

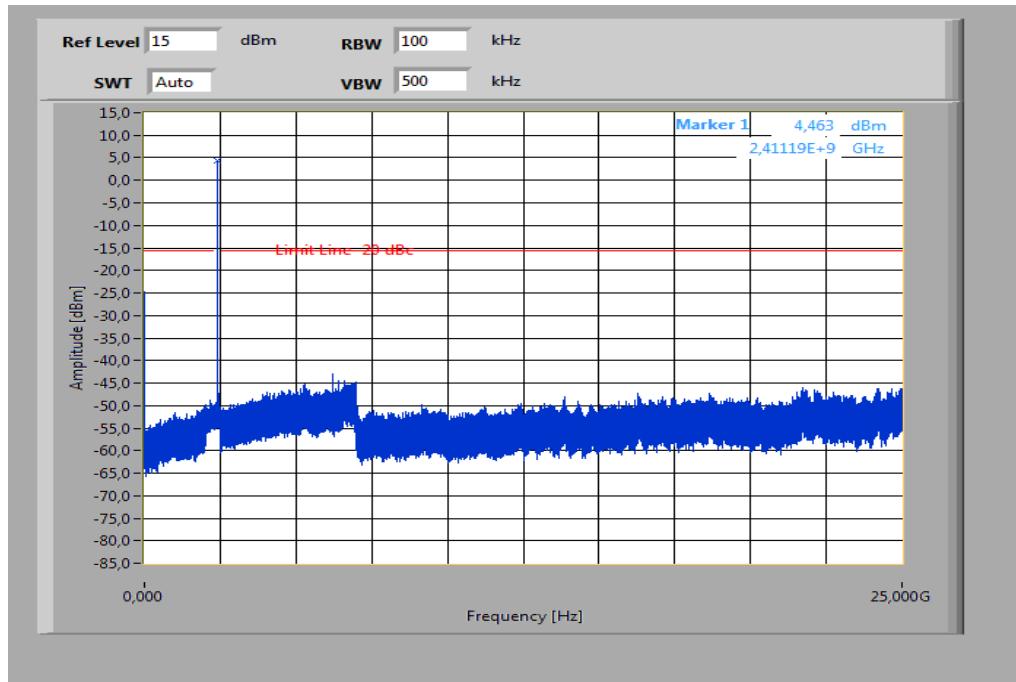


The peak at the beginning of the plot is the LO from the SA.

**Plot 2:** TX mode, middle channel, up to 25 GHz

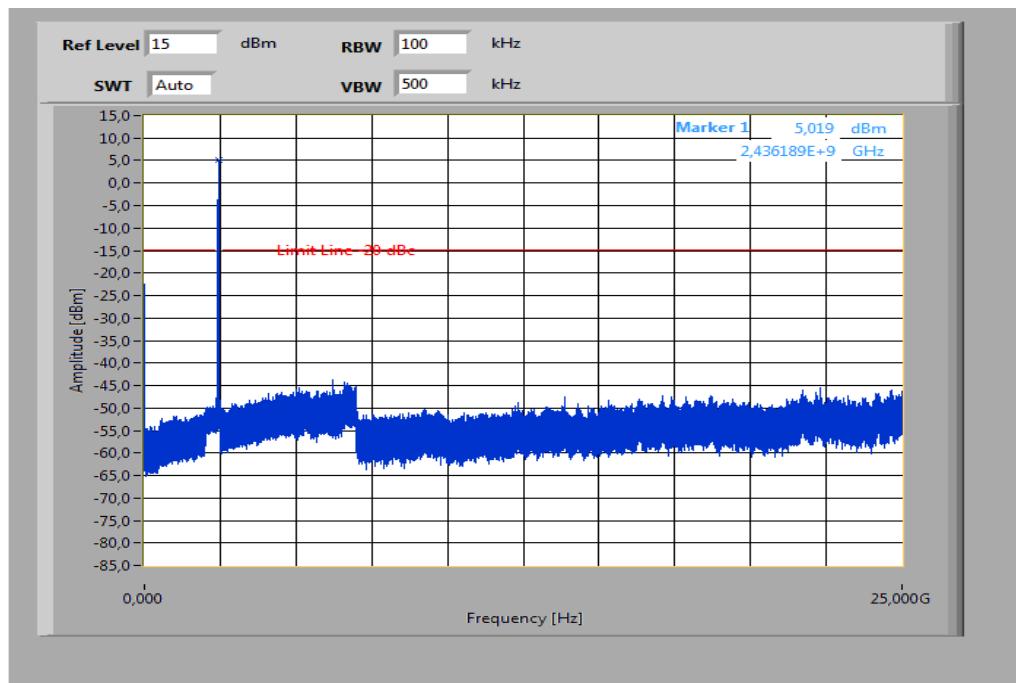


The peak at the beginning of the plot is the LO from the SA.

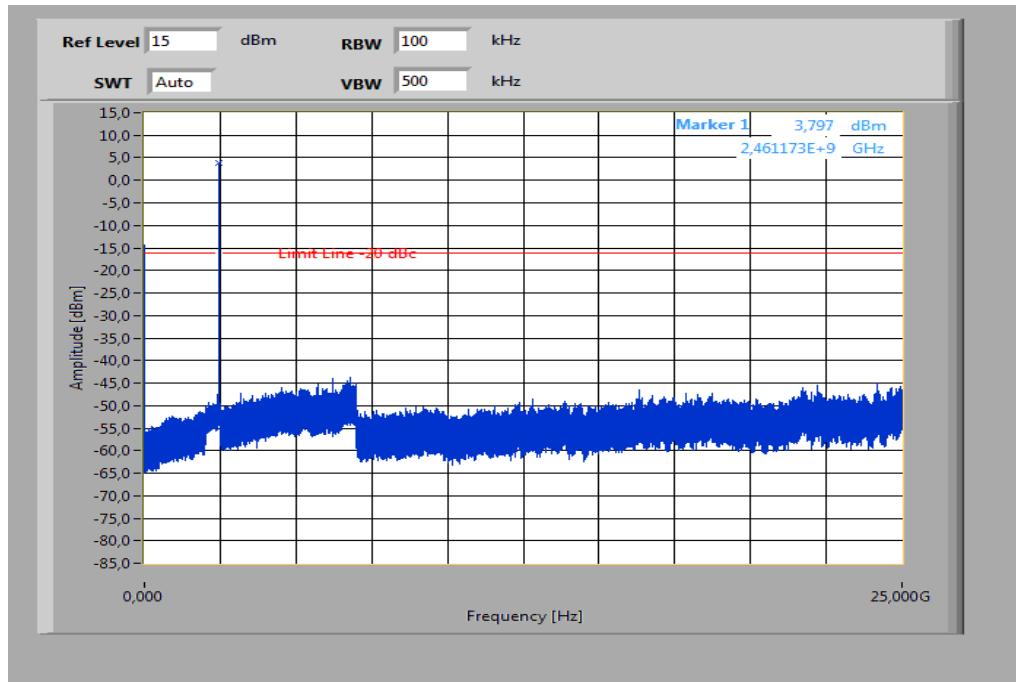**Plot 3:** TX mode, highest channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.


### Plots: OFDM / g – mode

**Plot 1:** TX mode, lowest channel, up to 25 GHz

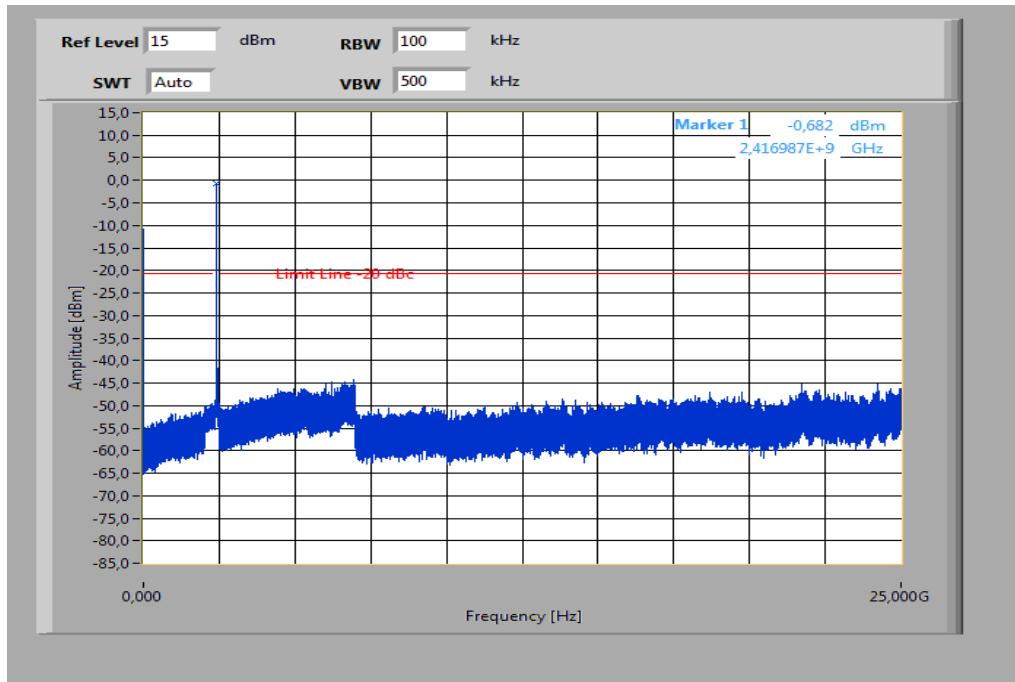


The peak at the beginning of the plot is the LO from the SA.

**Plot 2:** TX mode, middle channel, up to 25 GHz

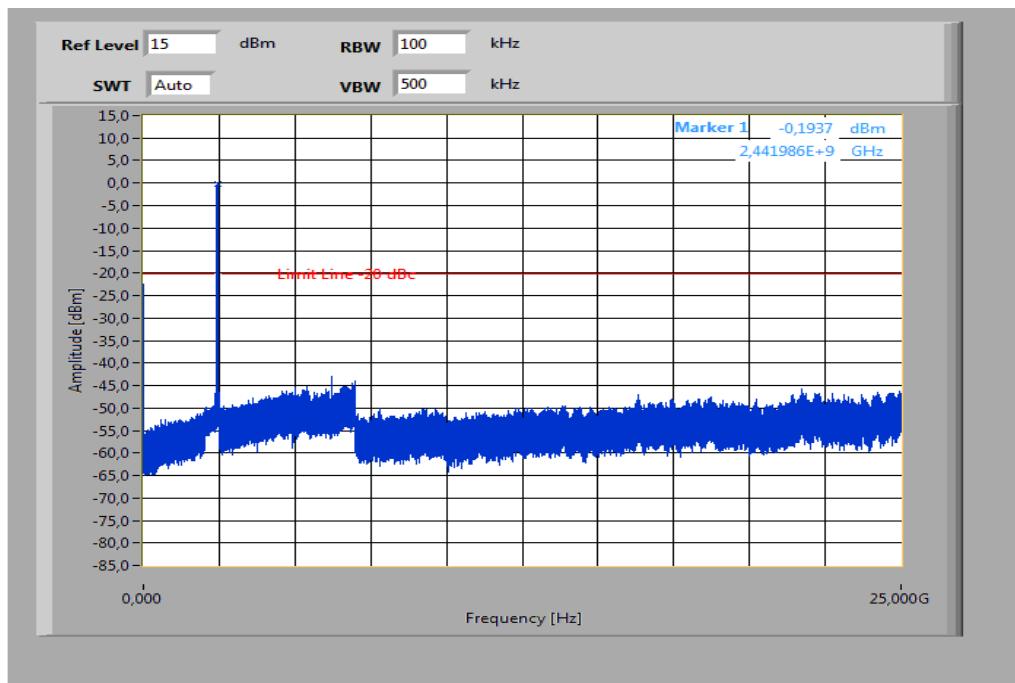


The peak at the beginning of the plot is the LO from the SA.

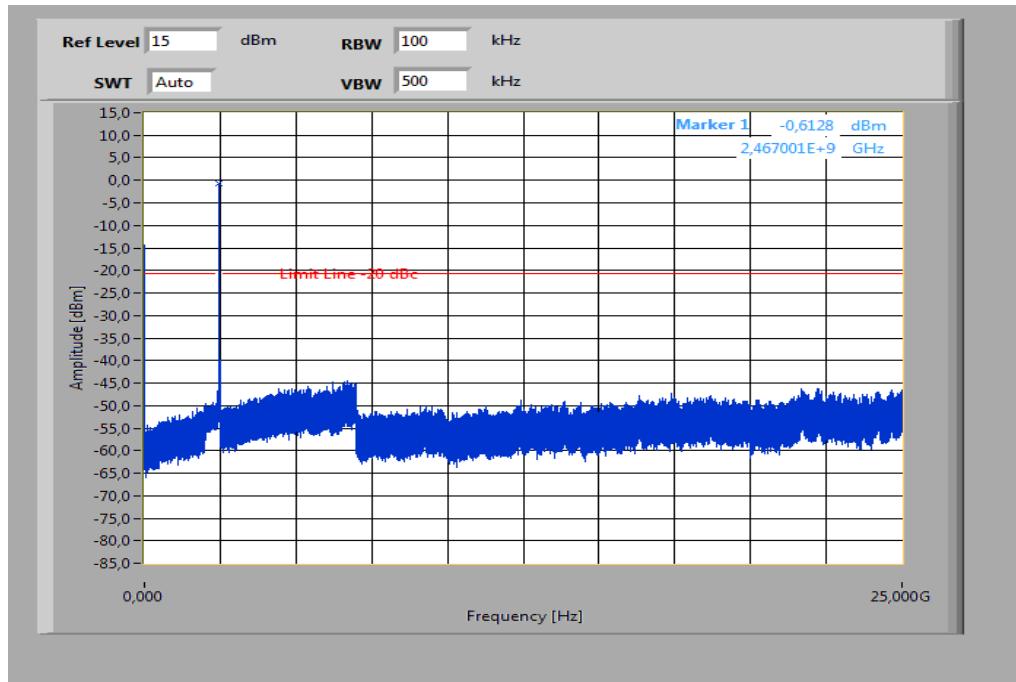**Plot 3:** TX mode, highest channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.


### Plots: OFDM / n – mode

**Plot 1:** TX mode, lowest channel, up to 25 GHz

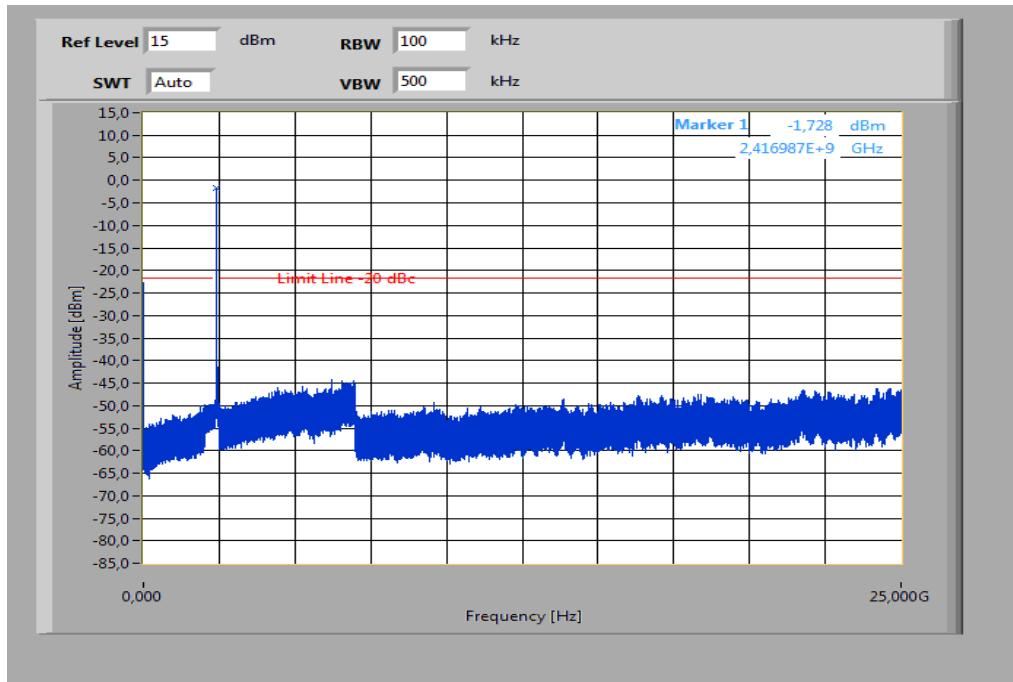


The peak at the beginning of the plot is the LO from the SA.

**Plot 2:** TX mode, middle channel, up to 25 GHz

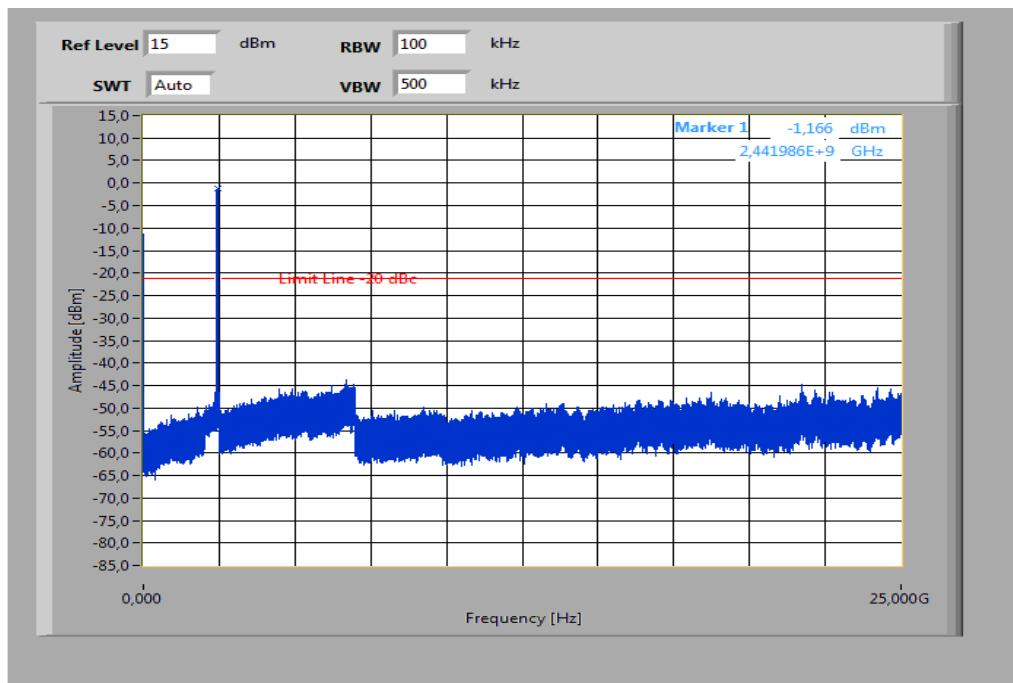

The peak at the beginning of the plot is the LO from the SA.

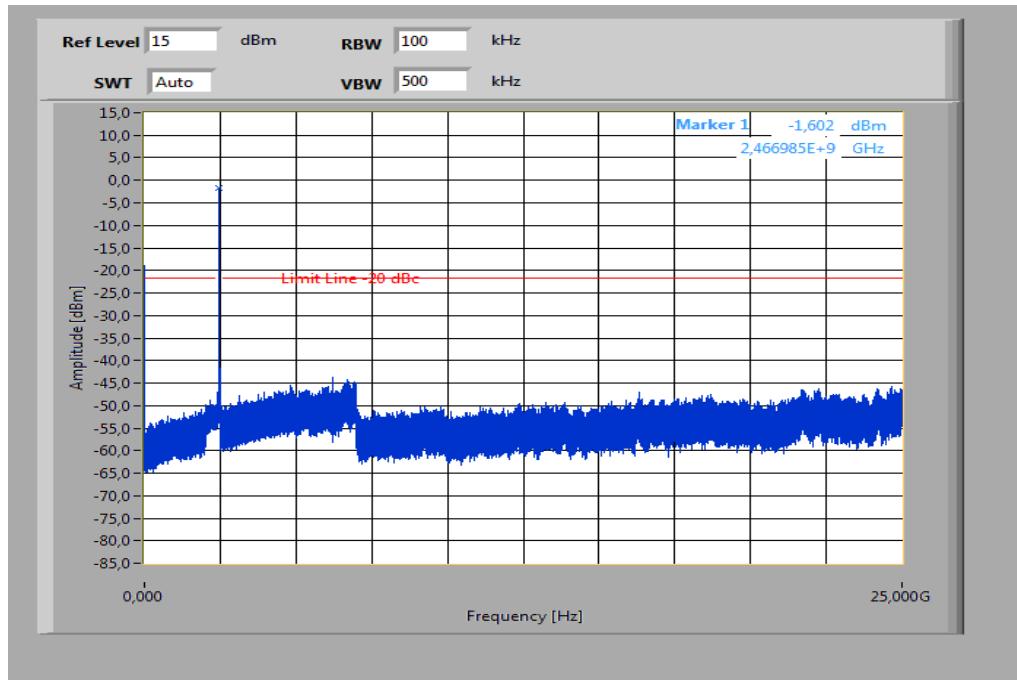**Plot 3:** TX mode, highest channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

## 9.10 TX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11.

### Measurement:

Measurement parameter	
Detector:	Quasi Peak / Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold
Measured Modulation	<input checked="" type="checkbox"/> DSSS b – mode <input type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n – mode

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

### Limits:

FCC	IC
CFR Part 15.247(d)	RSS 210, Issue 8, A 8.5
TX Spurious Emissions Radiated	

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

§15.209		
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

**Results: DSSS / b – mode**

TX Spurious Emissions Radiated [dB $\mu$ V/m]								
DSSS – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks detected!			No peaks detected!			No peaks detected!		
Measurement uncertainty			$\pm 3$ dB					

Results from b-mode show the results valid for all WLAN modes.

**Result: Passed**

### Plots: DSSS / b – mode

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

#### Common Information

EUT: PM-0000-BV  
 Serial Number: CB5A1JYNKA | IMEI: 00440245-009328-5  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: WLAN 2,4 TX CH 1 + charging  
 Operator Name: Hennemann  
 Comment: AC: 115 V / 60 Hz


#### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)

Receiver: [ESCI 3]  
Level Unit: dB $\mu$ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB


FCC\_10m(B)\_3

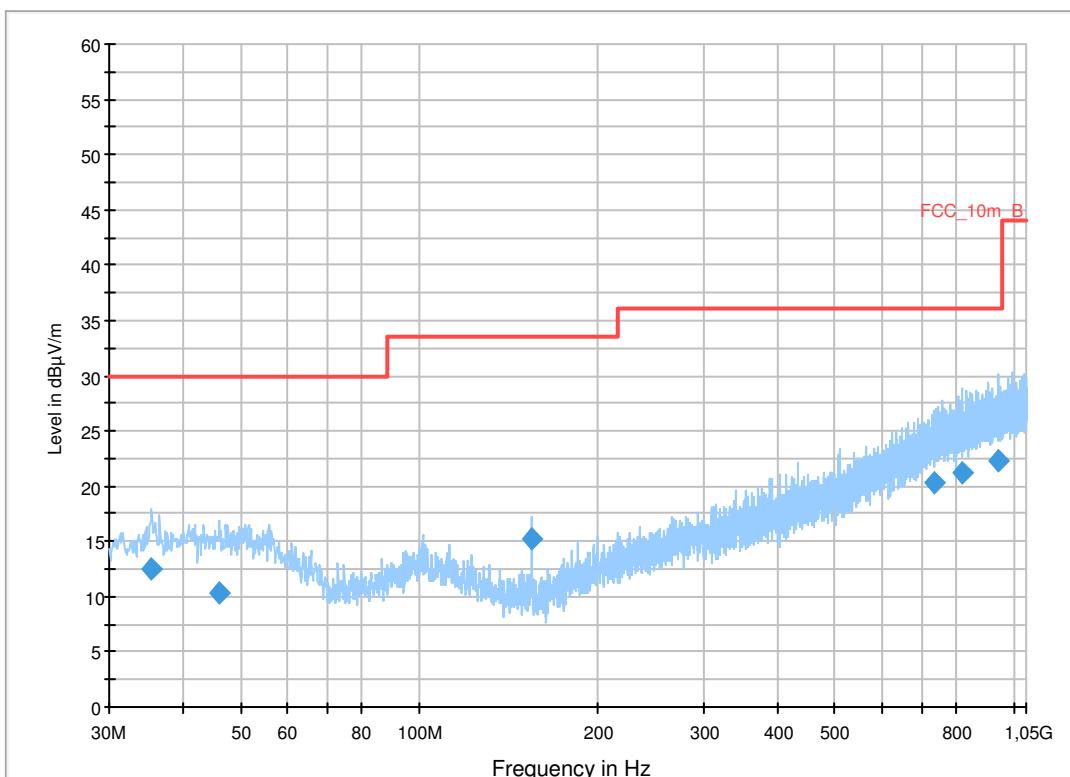


#### Final Result 1

Frequency (MHz)	Quasi Peak (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)	Comment
35.383050	12.6	1000.0	120.00	149.0	V	10.0	13.1	17.4	30.0	
46.078650	10.3	1000.0	120.00	148.0	V	-3.0	13.3	19.7	30.0	
154.096500	15.3	1000.0	120.00	120.0	V	2.0	9.0	18.2	33.5	
733.099800	20.4	1000.0	120.00	170.0	V	272.0	23.3	15.6	36.0	
821.614200	21.1	1000.0	120.00	98.0	H	260.0	24.1	14.9	36.0	
942.631650	22.3	1000.0	120.00	112.0	H	190.0	25.3	13.7	36.0	


**Plot 2:** Lowest channel, 30 MHz to 12.75 GHz, vertical & horizontal polarization

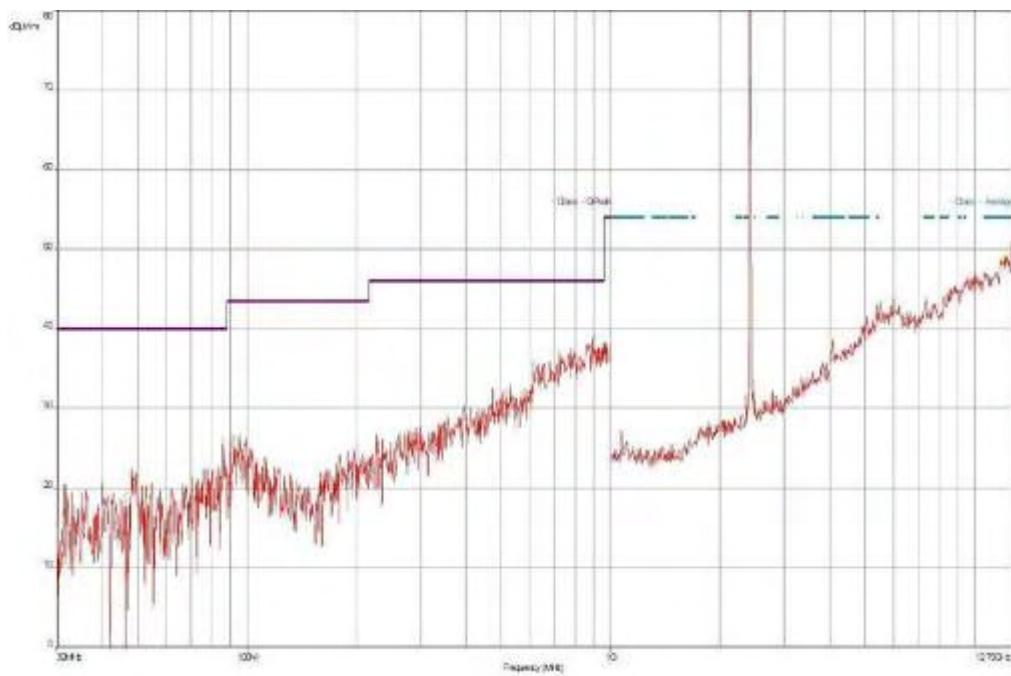

**Plot 3:** Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

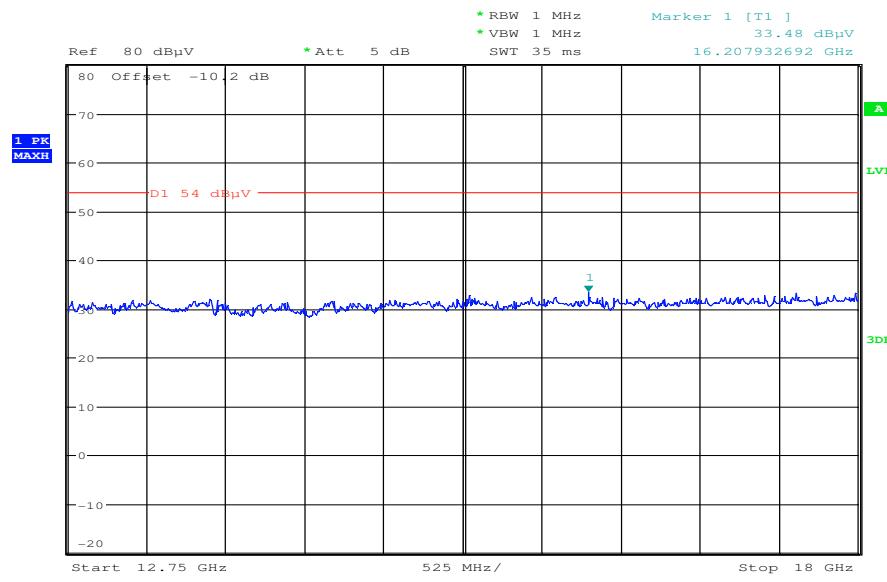

Date: 24.APR.2012 10:37:56

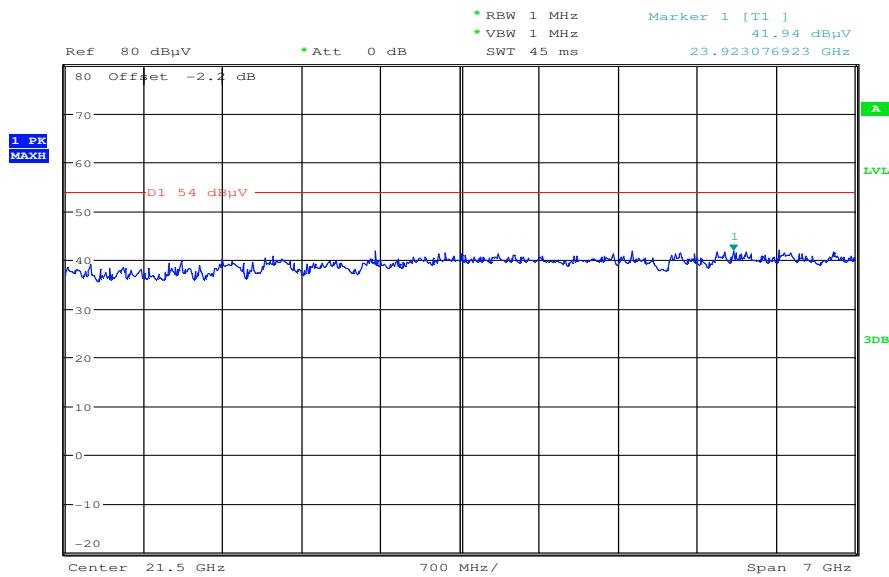**Plot 4:** Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Date: 24.APR.2012 10:53:25


**Plot 5:** Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

### Common Information

EUT: PM-0000-BV  
 Serial Number: CB5A1JYNKA | IMEI: 00440245-009328-5  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: WLAN 2,4 TX CH 6 + charging  
 Operator Name: Hennemann  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB
			FCC_10m(B)_3		

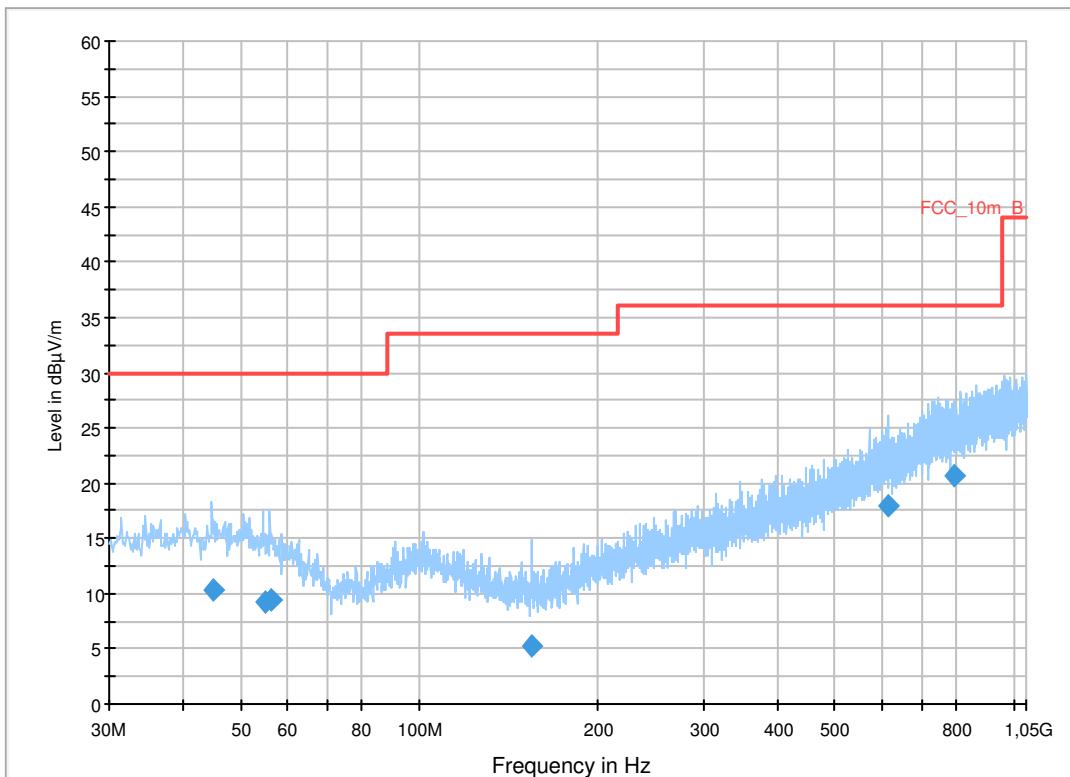


### Final Result 1

Frequency (MHz)	Quasi Peak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
45.049650	10.3	1000.0	120.00	111.0	V	182.0	13.3	19.7	30.0	
54.943200	9.2	1000.0	120.00	170.0	V	175.0	12.9	20.8	30.0	
56.208000	9.4	1000.0	120.00	143.0	V	272.0	12.6	20.6	30.0	
154.502250	5.2	1000.0	120.00	170.0	V	184.0	9.0	28.3	33.5	
613.730850	17.9	1000.0	120.00	160.0	V	100.0	20.9	18.1	36.0	
793.364100	20.7	1000.0	120.00	170.0	H	85.0	23.8	15.3	36.0	


**Plot 6:** Middle channel, 30 MHz to 12.75 GHz, vertical & horizontal polarization

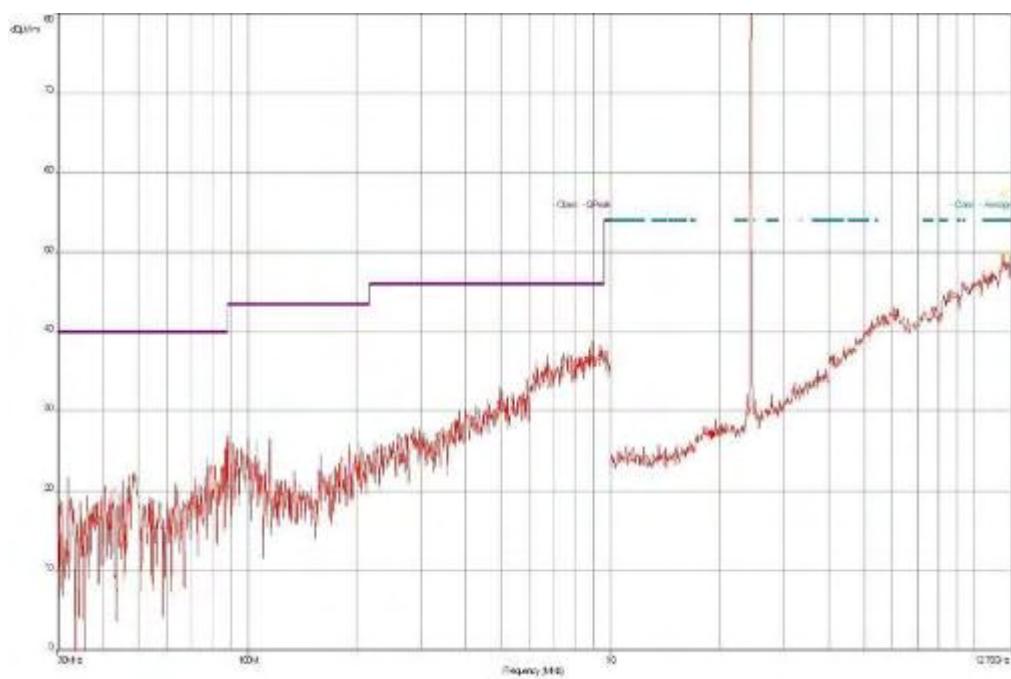

**Plot 7:** Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

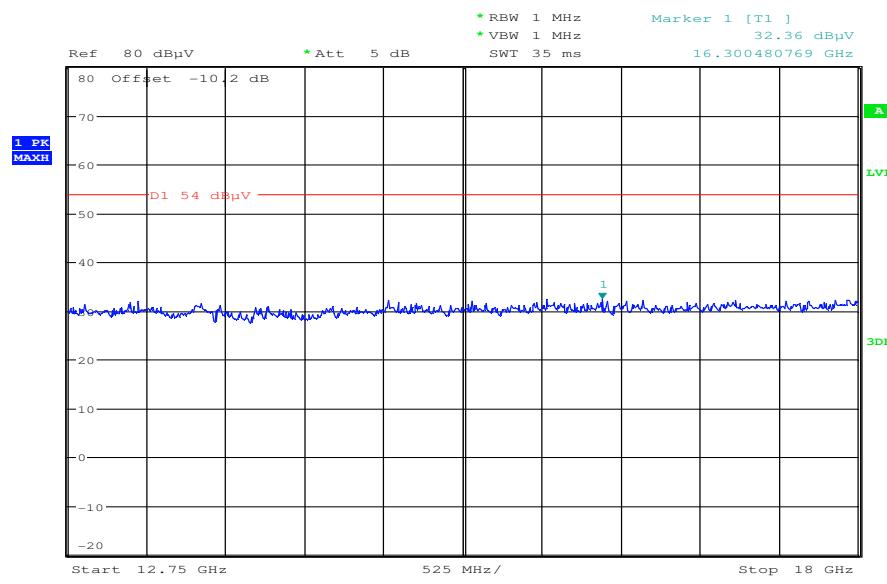

Date: 24.APR.2012 10:38:44

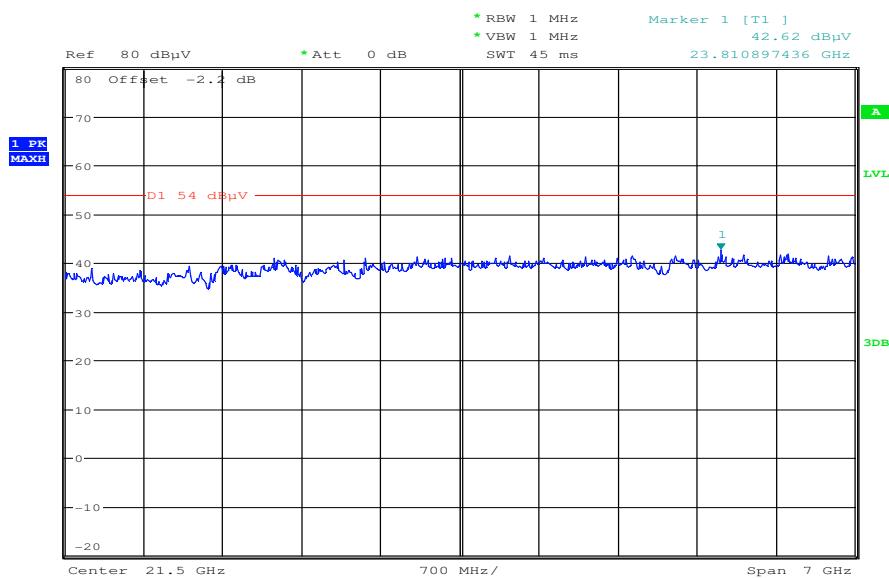**Plot 8:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Date: 24.APR.2012 10:53:43


**Plot 9:** Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

### Common Information

EUT: PM-0000-BV  
 Serial Number: CB5A1JYNKA | IMEI: 00440245-009328-5  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: WLAN 2,4 TX CH 11 + charging  
 Operator Name: Hennemann  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB
			FCC_10m(B)_3		

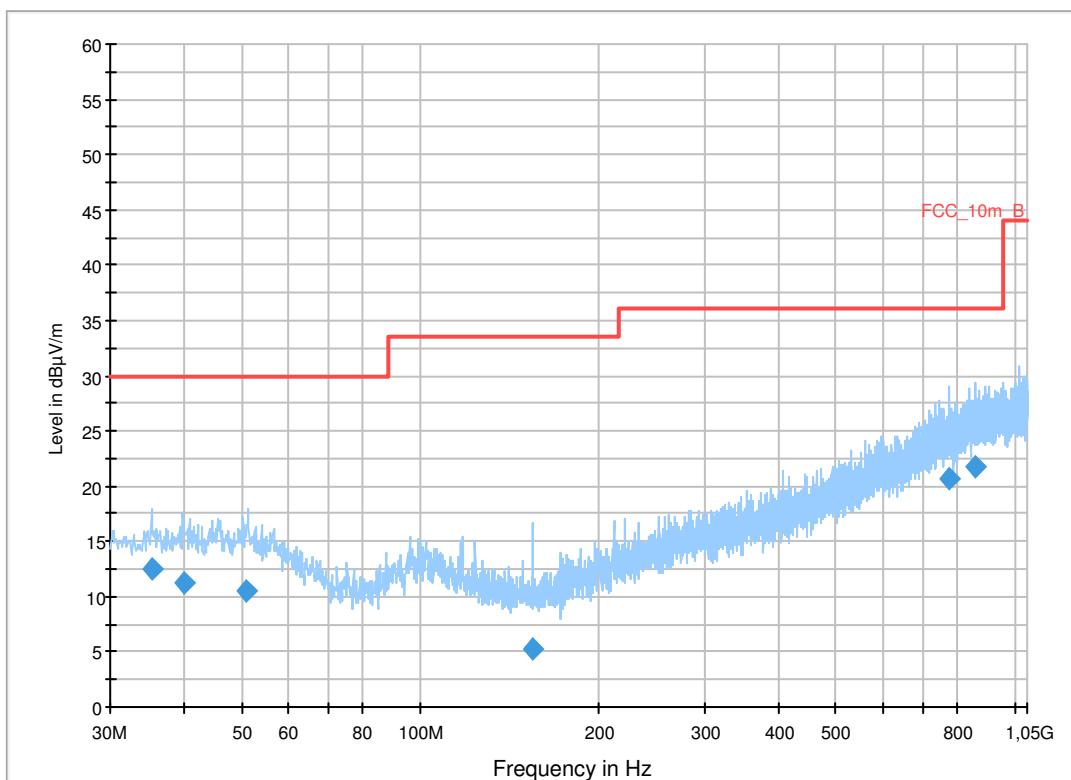


### Final Result 1

Frequency (MHz)	Quasi Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
35.323950	12.4	1000.0	120.00	98.0	V	190.0	13.1	17.6	30.0	
40.085250	11.3	1000.0	120.00	98.0	V	10.0	13.4	18.7	30.0	
50.760000	10.4	1000.0	120.00	170.0	V	90.0	13.3	19.6	30.0	
154.076700	5.2	1000.0	120.00	170.0	V	-1.0	9.0	28.3	33.5	
777.028650	20.6	1000.0	120.00	104.0	V	177.0	23.7	15.4	36.0	
855.878700	21.7	1000.0	120.00	170.0	V	190.0	24.6	14.3	36.0	


**Plot 10:** Highest channel, 30 MHz to 12.75 GHz, vertical & horizontal polarization

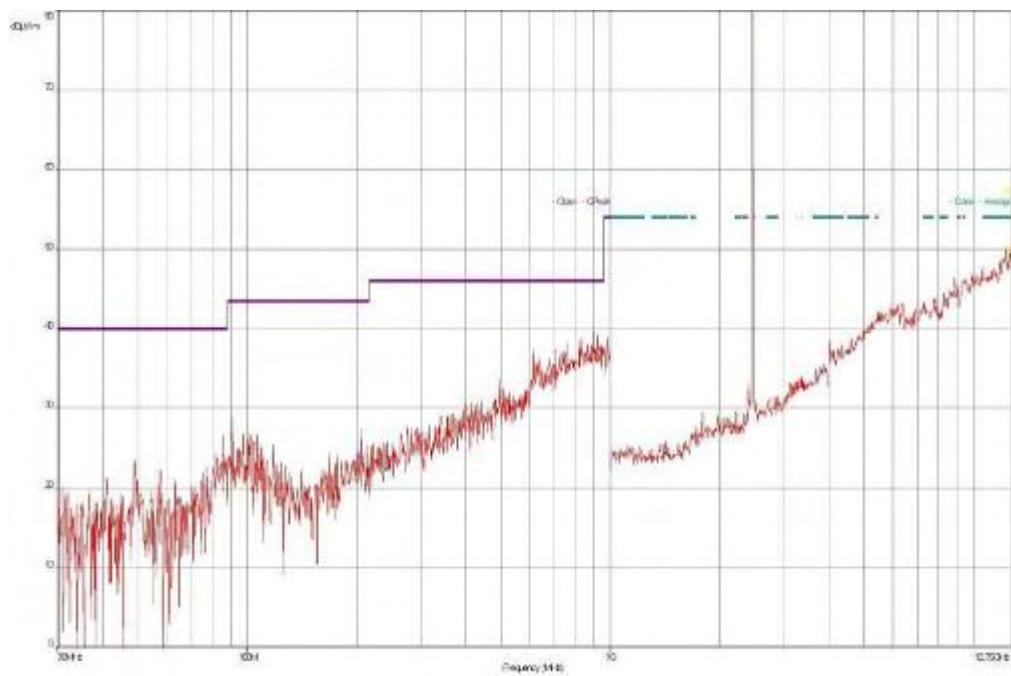

**Plot 11:** Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

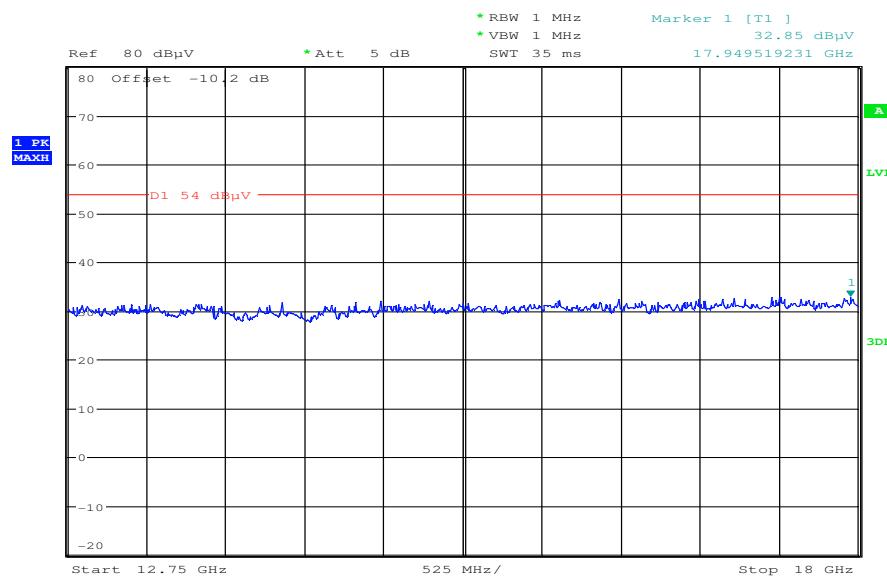

Date: 24.APR.2012 10:39:52

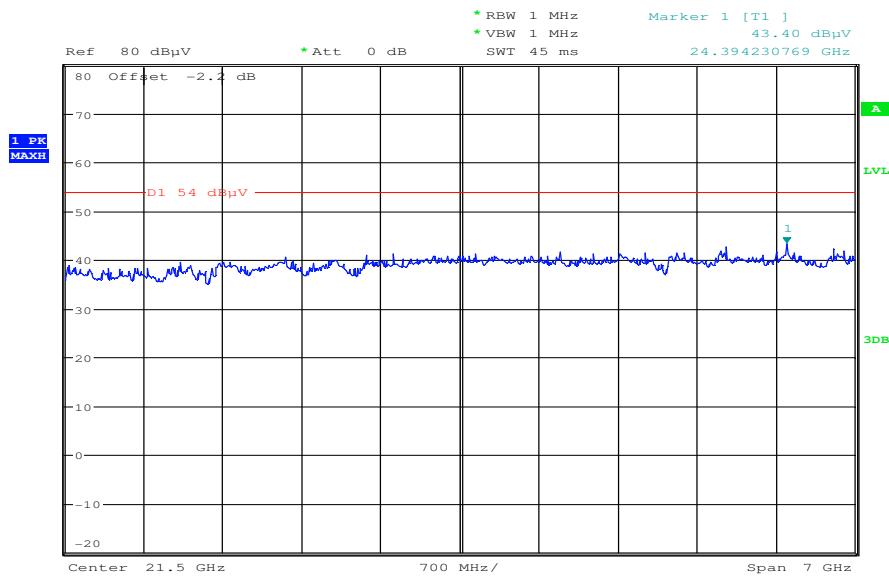**Plot 12:** Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Date: 24.APR.2012 10:54:10

## 9.11 RX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in idle/receive mode. The results are valid for both modes.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC	
CFR Part 15.109	RSS Gen, Issue 2, 4.10	
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
Above 960	54.0	3

### Results:

RX Spurious Emissions Radiated [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks detected!		
Measurement uncertainty		± 3 dB

**Result:** Passed

**Plots: RX / Idle – mode****Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**


EUT: PM-0000-BV  
 Serial Number: CB5A1JYNKA | IMEI: 00440245-009328-5  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: WLAN 2,4 RX + charging  
 Operator Name: Hennemann  
 Comment: AC: 115 V / 60 Hz

**Scan Setup: STAN\_Fin [EMI radiated]**



Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dB $\mu$ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB


FCC\_10m(B)\_3

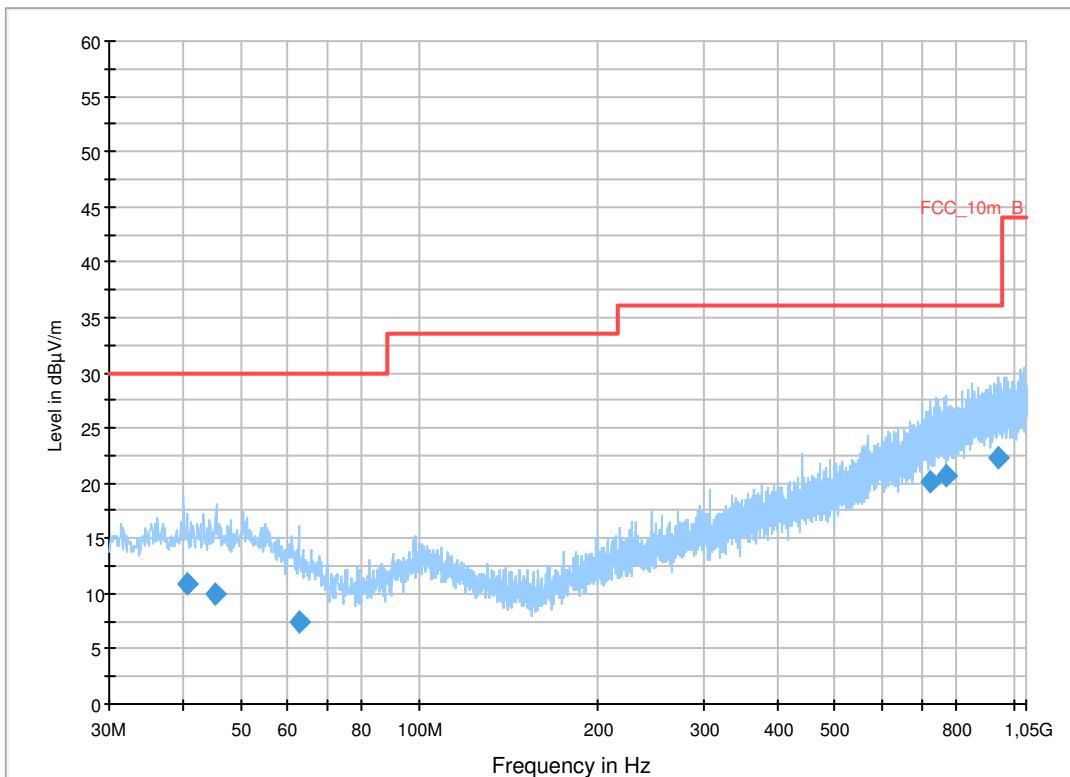**Final Result 1**

Frequency (MHz)	Quasi Peak (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)	Comment
40.489800	10.9	1000.0	120.00	170.0	V	190.0	13.4	19.1	30.0	
45.161100	10.0	1000.0	120.00	130.0	H	170.0	13.3	20.0	30.0	
62.672250	7.4	1000.0	120.00	105.0	H	10.0	11.0	22.6	30.0	
725.363850	20.1	1000.0	120.00	170.0	H	260.0	23.1	15.9	36.0	
768.970800	20.7	1000.0	120.00	170.0	H	10.0	23.7	15.3	36.0	
942.778050	22.3	1000.0	120.00	170.0	H	190.0	25.3	13.7	36.0	

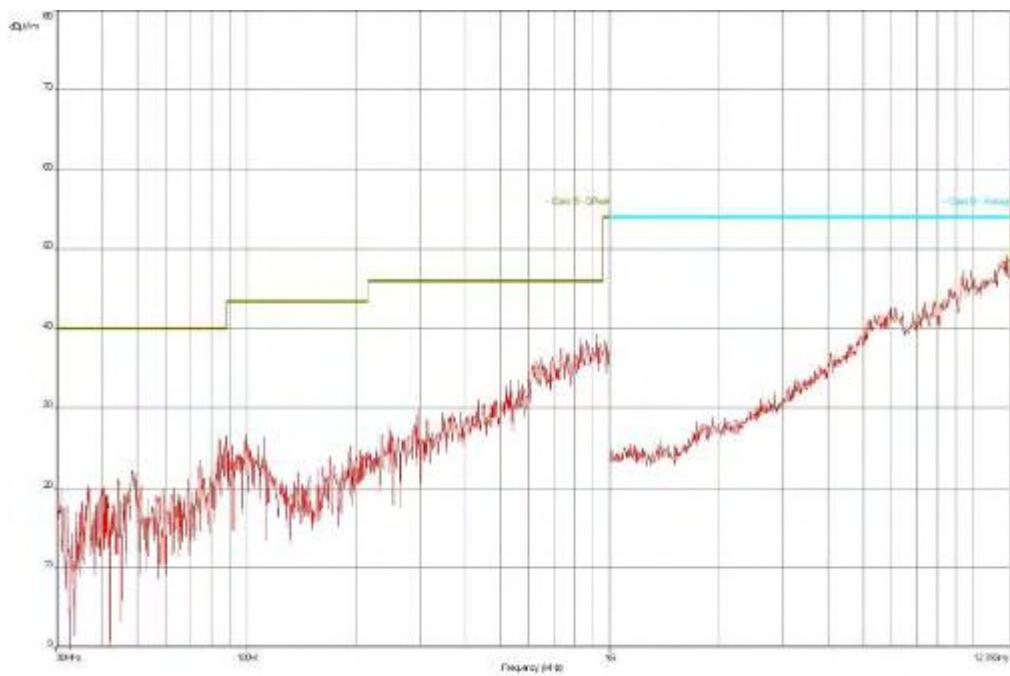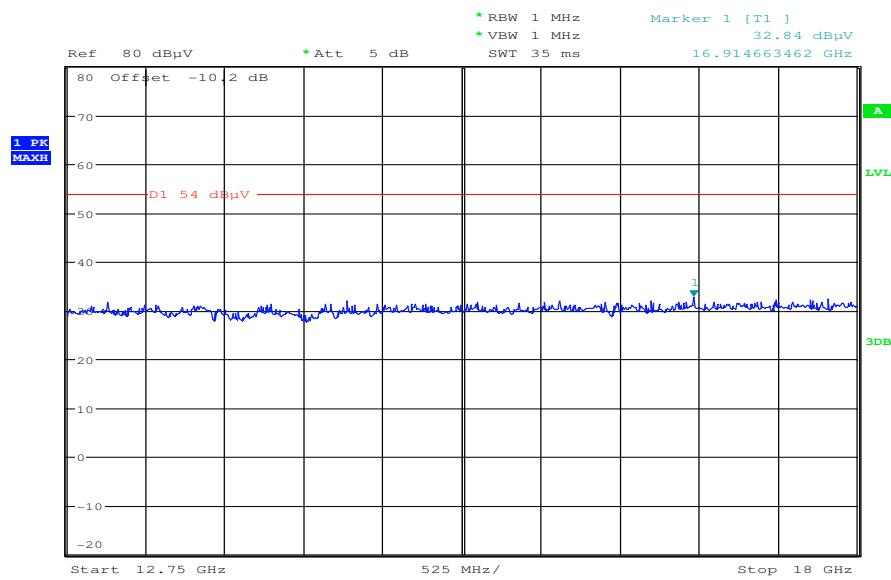**Plot 2:** 30 MHz to 12.75 GHz, vertical & horizontal polarization**Plot 4:** 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 24.APR.2012 10:40:34

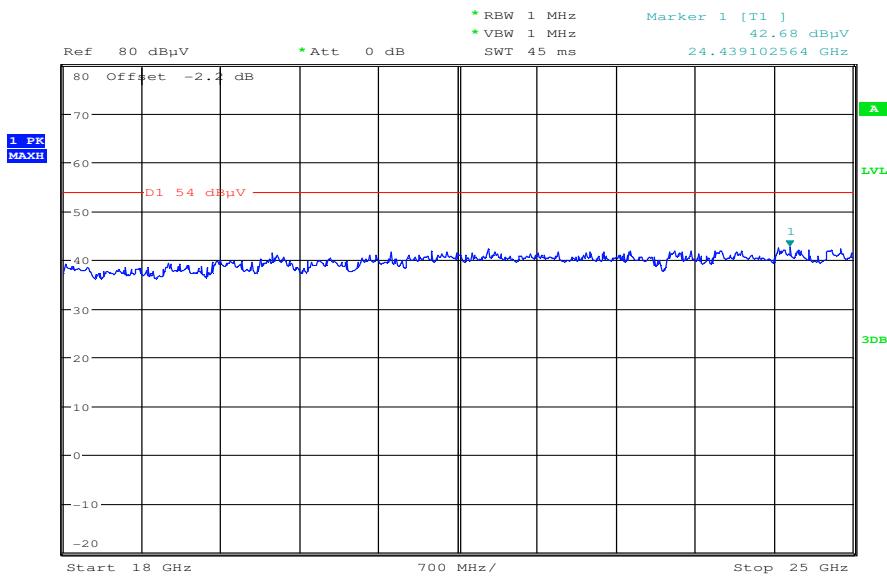**Plot 5: 18 GHz to 26 GHz, vertical & horizontal polarization**

Date: 24.APR.2012 10:50:03

## 9.12 TX spurious emissions radiated < 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is representative for all channels and modes. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold



### Limits:

FCC	IC	
CFR Part 15.209(a)	RSS –Gen	
TX Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

### Results:

TX Spurious Emissions Radiated < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks found.		
Measurement uncertainty		± 3 dB

Result: Passed

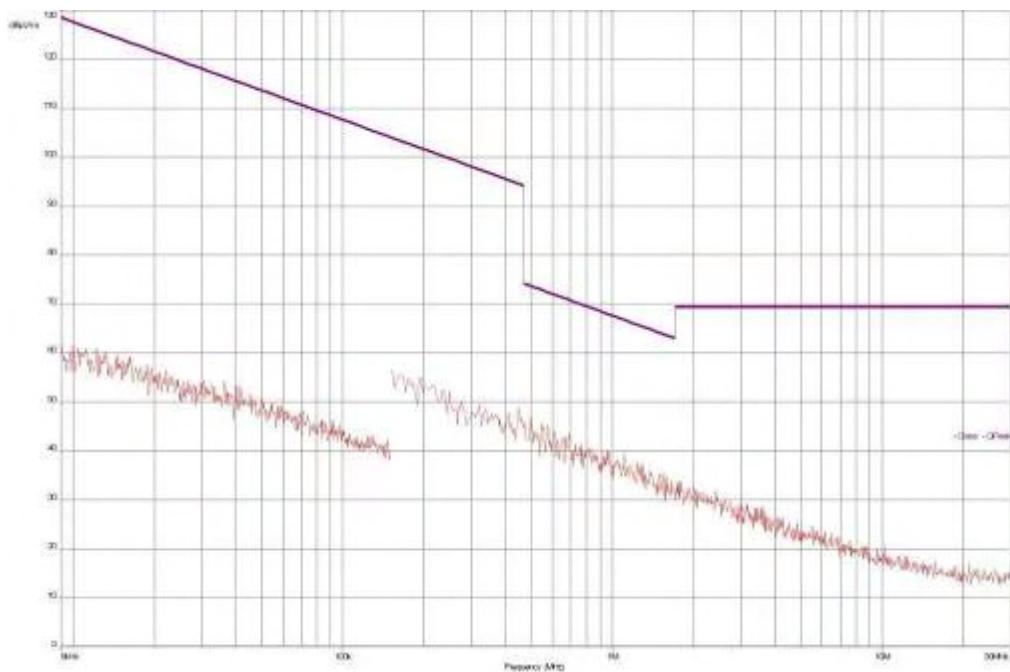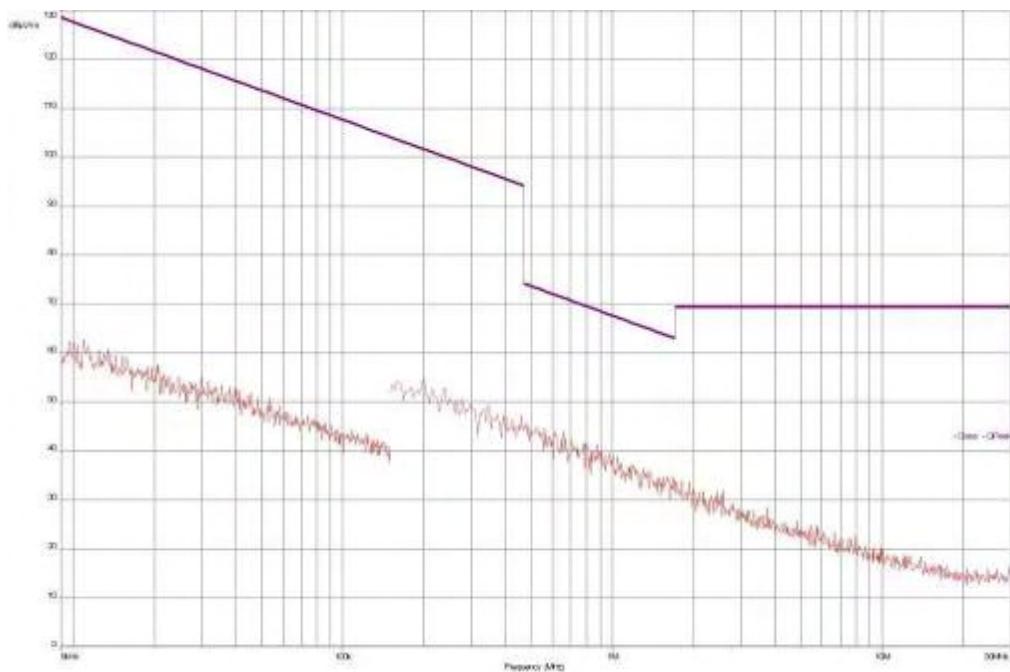**Plots: DSSS / b – mode****Plot 1:** Middle channel, 9 kHz to 30 MHz**Plots: RX / Idle – mode****Plot 1:** 9 kHz to 30 MHz

## 9.13 TX spurious emissions conducted < 30 MHz

### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

### Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

### Limits:



FCC	IC	
CFR Part 15.107(a)	ICES-003, Issue 4	
TX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

\*Decreases with the logarithm of the frequency

### Results:

TX Spurious Emissions Conducted < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No critical peaks detected		
Measurement uncertainty		± 3 dB

**Result: Passed**

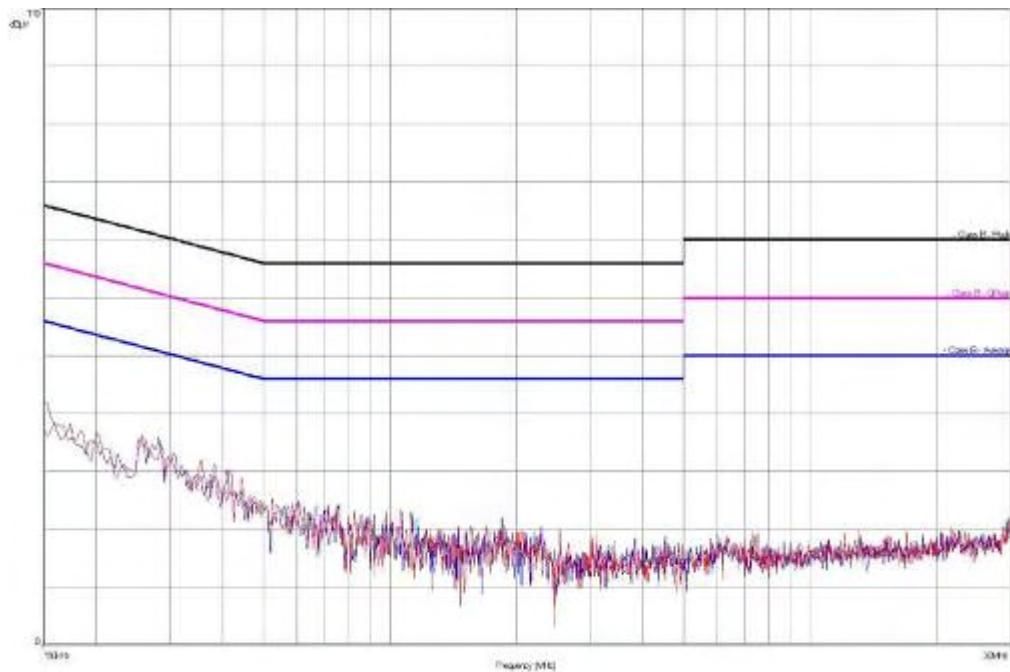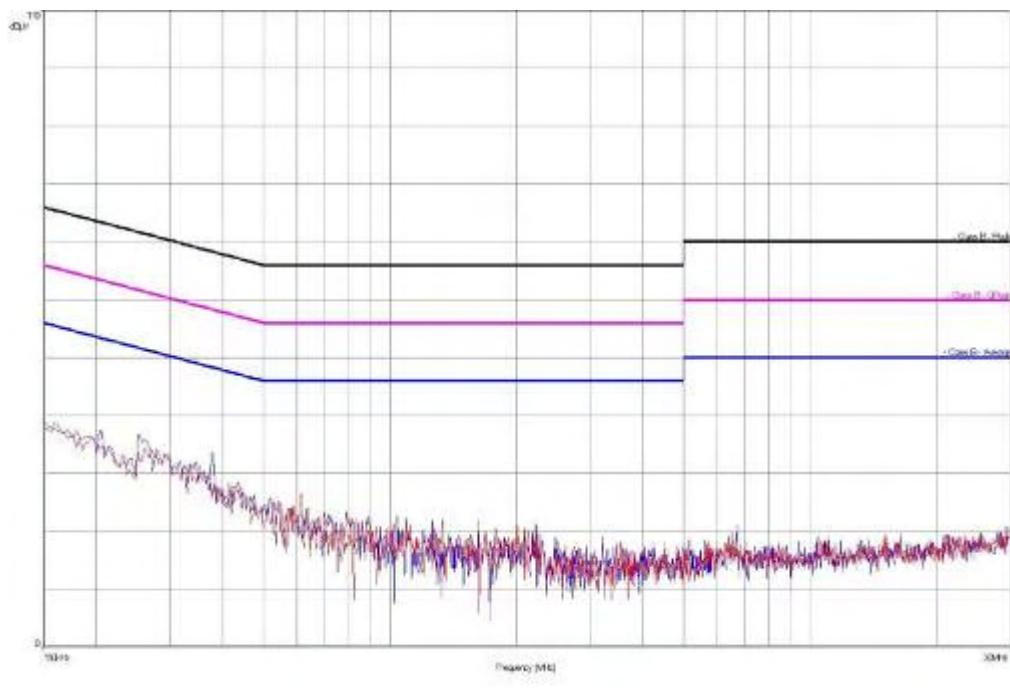**Plots:****Plot 1:** DSSS / b – mode, 9 kHz to 30 MHz, phase line (red), neutral line (blue)**Plot 2:** RX / Idle – mode, 9 kHz to 30 MHz, phase line (red), neutral line (blue)

## 10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B597 9	300000210	ne		
4	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	04.01.2012	04.01.2014
5	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013
6	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
7	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
8	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
9	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
10	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k		
11	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	06.01.2012	06.01.2014
12	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
13	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	11.05.2011	11.05.2013
14	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
15	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
16	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
17	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
18	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
19	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
20	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
21	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
22	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	14.10.2011	14.10.2014
23	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	3000042xx	k	19.12.2011	19.12.2012

24	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000787	ne		
25	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300002442	ne		
26	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	ve	01.07.2010	01.07.2012
27	n. a.	Spectrum Analyzer 9kHz to 30GHz - 140...+30dBm	FSP30	R&S	100886	300003575	k	07.09.2010	07.09.2012
28	n. a.	Netzgerät	E3634A	Agilent Technologies	MY40011505	300003742	k	10.02.2012	10.02.2014
29	n. a.	Spectrumanalyzer	FSV30	R&S	100763	300003950	k	13.04.2012	13.04.2013
30	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev	10.03.2011	

#### Agenda: Kind of Calibration

k calibration / calibrated  
 ne not required (k, ev, izw, zw not required)  
 ev periodic self verification  
 Ve long-term stability recognized  
 vkl! Attention: extended calibration interval  
 NK! Attention: not calibrated

EK limited calibration  
 zw cyclical maintenance (external cyclical maintenance)  
 izw internal cyclical maintenance  
 g blocked for accredited testing  
 \*) next calibration ordered / currently in progress

## 11 Observations

No observations exceeding those reported with the single test cases have been made.

## Annex F Accreditation Certificate



Deutsche Akkreditierungsstelle GmbH  
German Accreditation Body

Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1  
subsection 1 AkkStelleGBV  
Signatory to the Multilateral Agreements of  
EA, ILAC and IAF for Mutual Recognition

### Accreditation



The Deutsche Akkreditierungsstelle GmbH (German Accreditation Body) attests that the testing laboratory

CETECOM ICT Services GmbH  
Untertürkheimer Straße 6-10  
66117 Saarbrücken

is competent under the terms of DIN EN ISO/IEC 17025:2005, to carry out tests in the following fields:

Wired communications and DECT  
Acoustic  
Radio  
Short Range Devices (SRD)  
RFID  
WiMax and Richtfunk  
Mobile radio (GSM / DCS), Over the Air (OTA) Performance  
Electromagnetic Compatibility (EMC) incl. Automotive  
Product safety  
SAR and Hearing Aid Compatibility (HAC)  
Environmental simulation  
Smart Card Terminals  
Bluetooth  
Wi-Fi-Services

The accreditation certificate shall only apply in connection with the notice of accreditation of 13.04.2011 with the accreditation number D-PL-12076-01 and is valid until 03.09.2014. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 82 pages.

Registration number of the certificate: D-PL-12076-01-01

Frankfurt am Main, 13.04.2011

  
Dr. Ingrid Eigner  
Head of Division 2

This document is a translation. The definitive version is the original German accreditation certificate.

See notes overleaf.

Deutsche Akkreditierungsstelle GmbH

Office Berlin  
Spittelmarkt 10  
10117 Berlin

Office Frankfurt am Main  
Gartenstraße 6  
60594 Frankfurt am Main

Office Braunschweig  
Bundesallee 100  
38116 Braunschweig

The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.

No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.

The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.

The up-to-date state of membership can be retrieved from the following websites:  
EA: [www.european-accreditation.org](http://www.european-accreditation.org)  
ILAC: [www.ilac.org](http://www.ilac.org)  
IAF: [www.iaf.nu](http://www.iaf.nu)

Front side of certificate

Back side of certificate

### Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

[http://www.cetecom.com/fileadmin/de/CETECOM\\_D\\_Saarbruecken/accreditations\\_Jan\\_2010/DAKKS\\_Akkreditierung\\_URK\\_EN17025-En\\_incl\\_Annex.pdf](http://www.cetecom.com/fileadmin/de/CETECOM_D_Saarbruecken/accreditations_Jan_2010/DAKKS_Akkreditierung_URK_EN17025-En_incl_Annex.pdf)