



TEST REPORT

Test report no.: 1-4254/12-16-14-A



Deutsche
 Akkreditierungsstelle
 D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH
 Untertuerkheimer Strasse 6 – 10
 66117 Saarbruecken / Germany
 Phone: + 49 681 5 98 - 0
 Fax: + 49 681 5 98 - 9075
 Internet: <http://www.cetecom.com>
 e-mail: ict@cetecom.com

Accredited Testing Laboratory:
 The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
 Area of Testing: Radio/Satellite Communications

Applicant

Sony Mobile Communications AB
 Nya Vattentornet
 22188 Lund / SWEDEN
 Phone: +46 46 19 30 00
 Fax: +46 46 19 32 95
 Contact: Håkan Sjöberg
 e-mail: hakan.sjoberg@sonymobile.com
 Phone: +46 46 19 35 59

Manufacturer

Sony Mobile Communications AB
 Nya Vattentornet
 22188 Lund / SWEDEN

Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I
 Part 15 - Radio frequency devices
 RSS - 210 Issue 8 Spectrum Management and Telecommunications - Radio Standards Specification
 Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands):
 Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDII/FDDIV/FDDV; HSPA; LTE Band 2/4/5/17; BT3.1; WLAN a/b/g/n; AGPS; RFID, FM Rx
Model name: PM-0140-BV
FCC ID: PY7PM-0140
IC: 4170B-PM0140
Frequency: ISM band 5725 MHz to 5850 MHz
 (lowest channel 149 – 5745 MHz, highest channel 165 – 5825 MHz)
Technology tested: WLAN (OFDM a; n HT20 & n HT40 – mode)
Antenna: Integrated antenna
Power Supply: 3.7 V DC by Li - polymer battery
Temperature Range: -20°C to +55 °C

Test report authorised:

2012-08-30 Stefan Bös
 Senior Testing Manager

Test performed:

2012-08-30 Marco Bertolino
 Testing Manager

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details.....	3
3	Test standard/s	3
3.1	Measurement guidance.....	3
4	Test environment.....	4
5	Test item	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
8	RF measurements	6
8.1	Description of test setup	6
8.1.1	Radiated measurements.....	6
8.1.2	Conducted measurements.....	7
8.2	Additional comments	7
8.3	RSP100 test report cover sheet / performance test data	8
9	Measurement results.....	9
9.1	Output power verification (conducted)	9
9.2	Antenna gain	22
9.3	Maximum output power	25
9.4	Power spectral density	31
9.5	Spectrum bandwidth – 6 dB / 75 % power bandwidth (EBW)	37
9.6	Spectrum bandwidth – 20 dB / 99 % power bandwidth	42
9.7	Band edge compliance conducted	47
9.8	Band edge compliance radiated	47
9.9	TX spurious emissions conducted	48
9.10	TX spurious emissions radiated.....	64
9.11	RX spurious emissions radiated	90
9.12	TX spurious emissions radiated < 30 MHz	94
9.13	TX spurious emissions conducted < 30 MHz.....	96
10	Test equipment and ancillaries used for tests	99
11	Observations	100
Annex A	Photographs of the test setup	101
Annex B	External photographs of the EUT	106
Annex C	Internal photographs of the EUT	109
Annex D	Document history	120
Annex E	Further information.....	120
Annex F	Accreditation Certificate	121

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

2.2 Application details

Date of receipt of order:	2012-03-14
Date of receipt of test item:	2012-06-25
Start of test:	2012-07-09
End of test:	2012-07-10
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

3.1 Measurement guidance

DTS : KDB 558074	2012-01	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
------------------	---------	---------------------------------------------------------------------------------------------------------------

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		58 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li - polymer battery
	V_{max}	4.2 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDII/FDDIV/FDDV; HSPA; LTE Band 2/4/5/17; BT3.1; WLAN a/b/g/n; AGPS; RFID, FM Rx
Type identification	:	PM-0140-BV
S/N serial number	:	Radiated units: CB511Z7M8J, CB511Z7M8M Conducted units: CB511Z7M6M, CB511Z7MKT
HW hardware status	:	AP1.2
SW software status	:	7.0.A.1.68 7.0.B.0.102
Frequency band [MHz]	:	ISM band 5725 MHz to 5850 MHz (lowest channel 149 – 5745 MHz, highest channel 165 – 5825 MHz)
Type of radio transmission	:	OFDM
Use of frequency spectrum	:	
Channel access method	:	FDMA
Type of modulation	:	QPSK, 16 – QAM & 64 – QAM
Number of channels	:	a & n HT20 – mode: 5 n HT40 – mode: 2
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li - polymer battery
Temperature range	:	-20°C to +55 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8	Passed	2012-08-30	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth - 6dB bandwidth	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth - 20dB bandwidth	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(3) RSS-210 / A8.4(4)	Maximum output power	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen	RX spurious emissions radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a)	Conducted emissions < 30 MHz	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

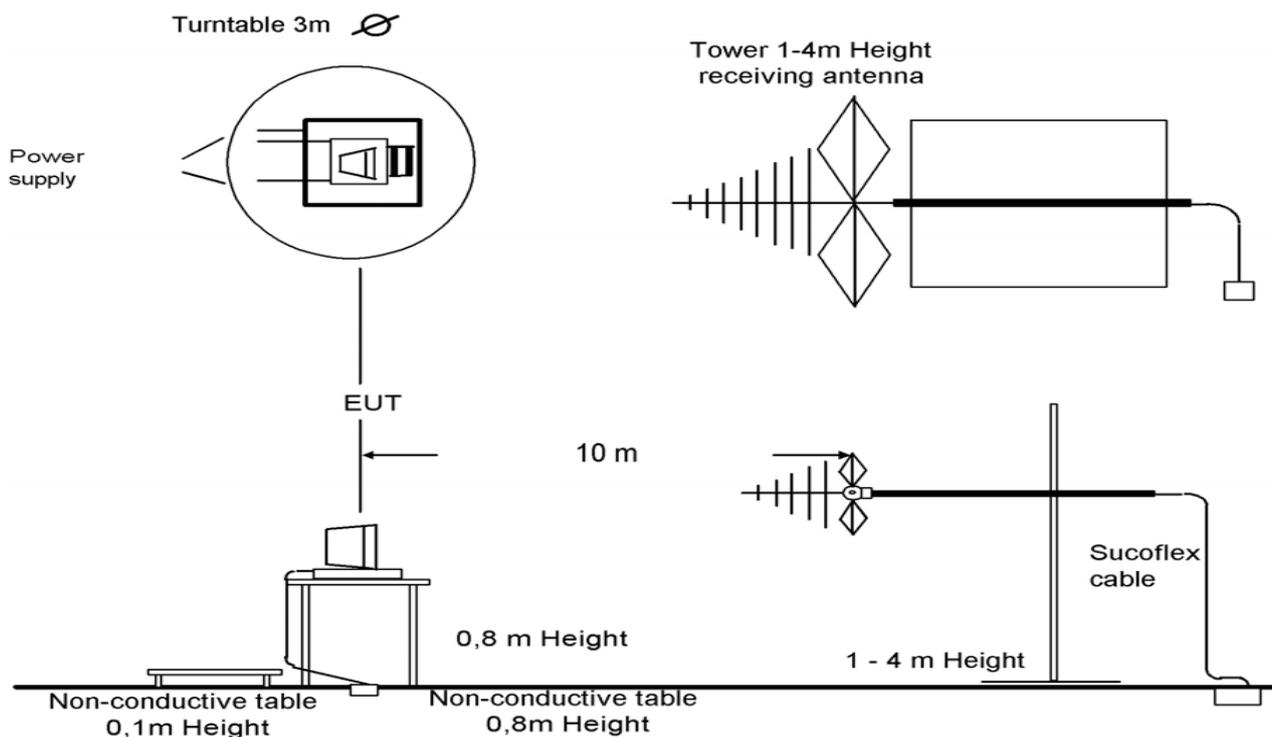


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

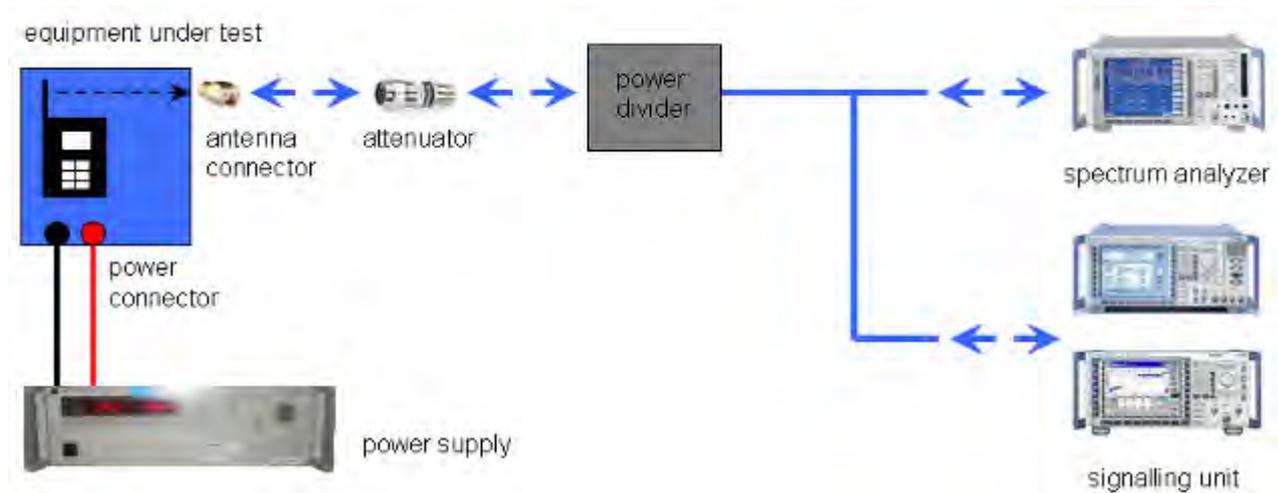

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

- Test mode:
- No test mode available.
Iperf was used to ping another device with the largest support packet size
 - Special software is used.
EUT is transmitting pseudo random data by itself

8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-4254/12-16-14-A
Equipment model number	:	PM-0140-BV
Certification number	:	4170B-PM0140
Manufacturer (complete address)	:	Sony Mobile Communications AB Nya Vattentorget 22188 Lund / SWEDEN
Tested to radio standards specification no.	:	RSS 210, Issue 8
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 5725 MHz to 5850 MHz (lowest channel 149 – 5745 MHz, highest channel 165 – 5825 MHz)
RF-power (max.)	:	Conducted output power: 98.63 mW (OFDM / a – mode) 91.62 mW (OFDM / n – mode HT20) 123.59 mW (OFDM / n – mode HT40) Radiated output power: 57.81 mW (OFDM / a – mode) 51.64 mW (OFDM / n – mode HT20) 75.51 mW (OFDM / n – mode HT40)
Occupied bandwidth (99%-BW)	:	OFDM / a – mode: 18.27 MHz OFDM / n – mode HT20: 18.51 MHz OFDM / n – mode HT40: 36.41 MHz
Type of modulation	:	QPSK, 16 – QAM, 64 – QAM
Emission designator (TRC-43)	:	18M3G7D (OFDM / a – mode) 18M5G7D (OFDM / n – mode HT20) 36M4G7D (OFDM / n – mode HT40)
Antenna information	:	Integrated antenna
Transmitter spurious (worst case) [dB μ V/m @ 3m]:		48 @ 12.5 GHz (noise floor) Peak
Receiver spurious (worst case) [dB μ V/m @ 3m]:		48 @ 12.5 GHz (noise floor) Peak

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2012-08-30
Date

Marco Bertolino
Name



Signature

9 Measurement results

9.1 Output power verification (conducted)

Description:

Measurement of the maximum output power conducted. This measurement is performed only at the middle channel in both modes and all data rates to determine the data rate per mode which results in the highest output power. This mode will be selected for all further measurements.

Used measurement option: 5.2.1.1 PK1

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	5 s
Resolution bandwidth:	> EBW
Video bandwidth:	≥ 3 x RBW (or the maximum of the analyzer)
Span:	Zero span
Trace-Mode:	Max hold (allow trace to fully stabilize)

Results:

OFDM / a – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	6	9	12	18	24	36	48	54
Ch 157 - 5785 MHz	19.72	19.94	19.58	19.40	19.40	19.33	19.38	19.30
Measurement uncertainty	± 0.5 dB							

OFDM / n – mode HT20 Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Ch 157 - 5785 MHz	19.51	19.25	19.35	19.10	19.05	18.99	18.84	18.01
Measurement uncertainty	± 0.5 dB							


OFDM / n – mode HT40 Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Ch 149 - 5755 MHz	20.77	20.92	20.23	20.31	19.94	20.55	19.90	20.42
Measurement uncertainty	± 0.5 dB							

Result: Selected data rate for all measurements:

OFDM / a – mode: 9 MBit/s
 OFDM / n – mode HT20: MCS0
 OFDM / n – mode HT40: MCS1


Plots: a – mode

Plot 1: 6 Mbit/s

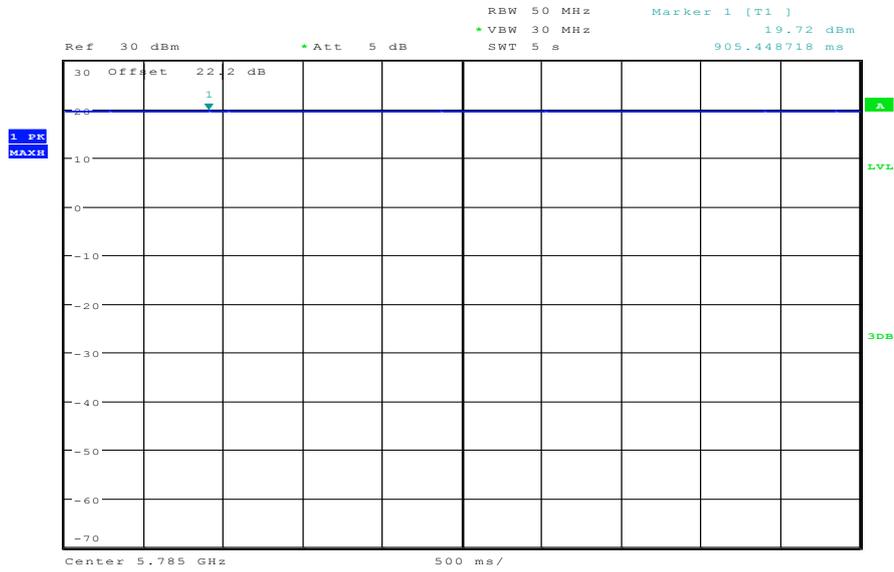


Date: 9.JUL.2012 08:20:58

Plot 2: 9 Mbit/s

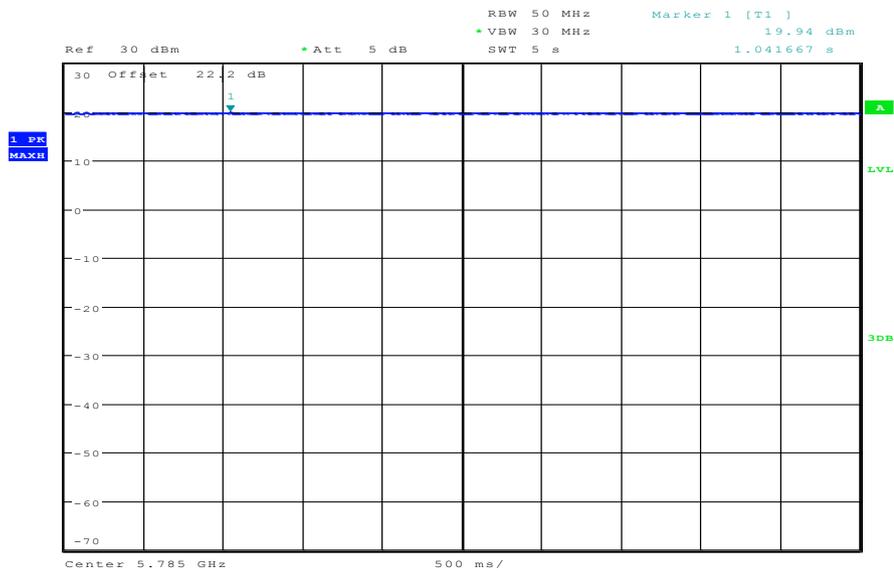


Date: 9.JUL.2012 08:23:18

Plot 3: 12 Mbit/s

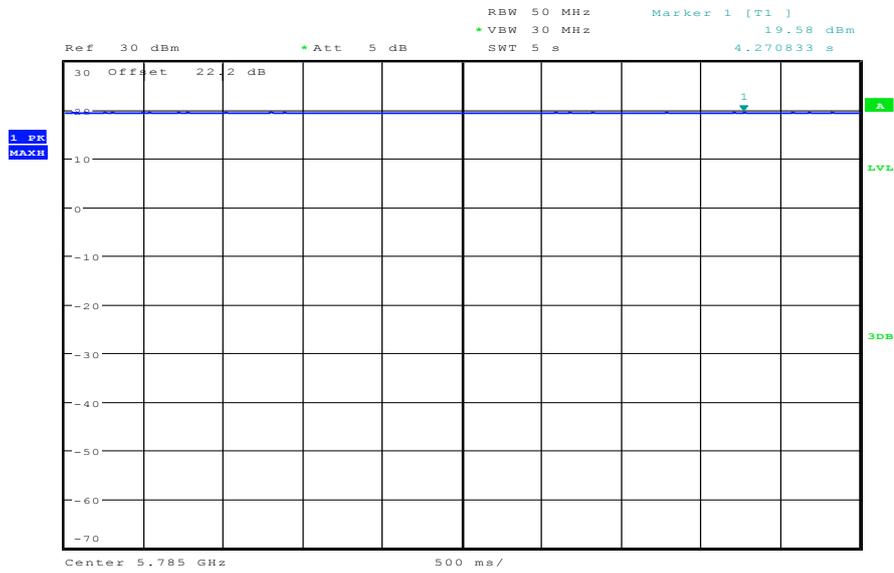


Date: 9.JUL.2012 08:25:58

Plot 4: 18 Mbit/s

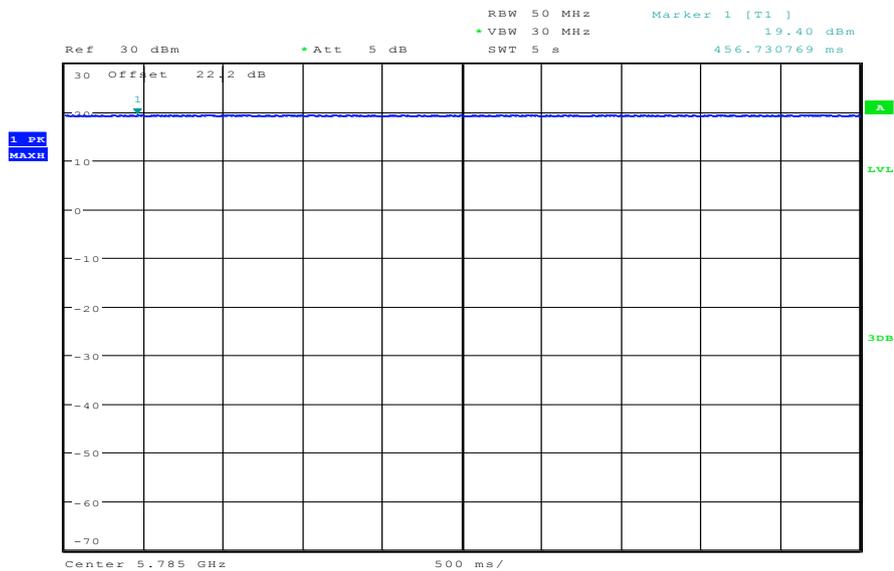


Date: 9.JUL.2012 08:29:01

Plot 5: 24 Mbit/s

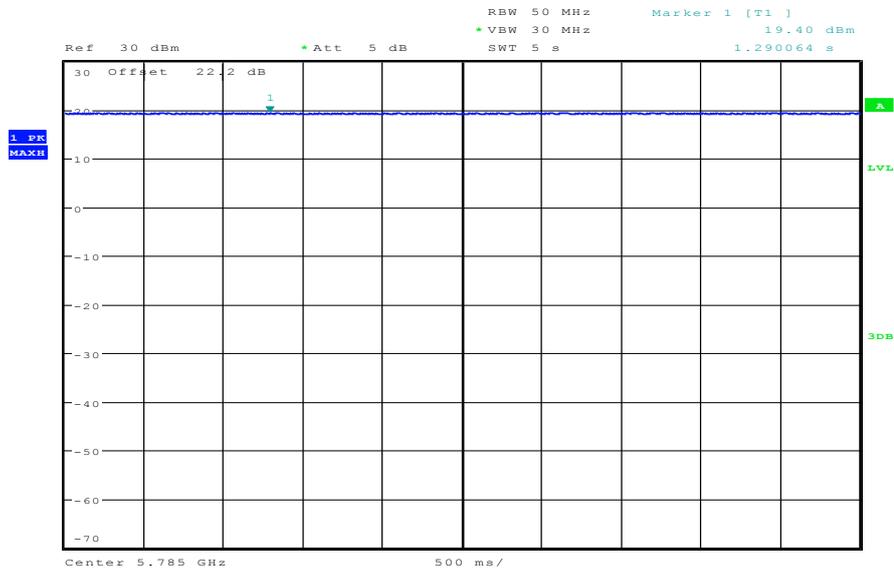


Date: 9.JUL.2012 08:30:45

Plot 6: 36 Mbit/s

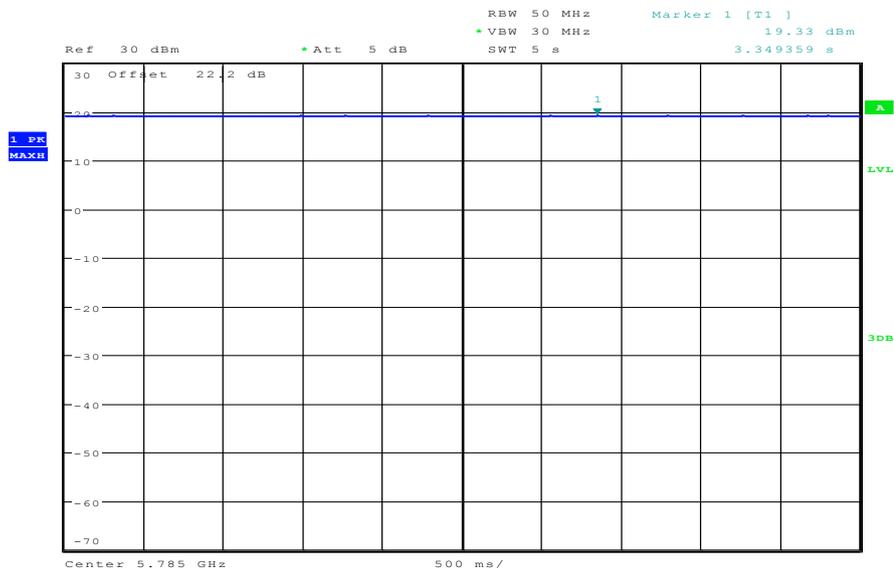


Date: 9.JUL.2012 08:33:10

Plot 7: 48 Mbit/s

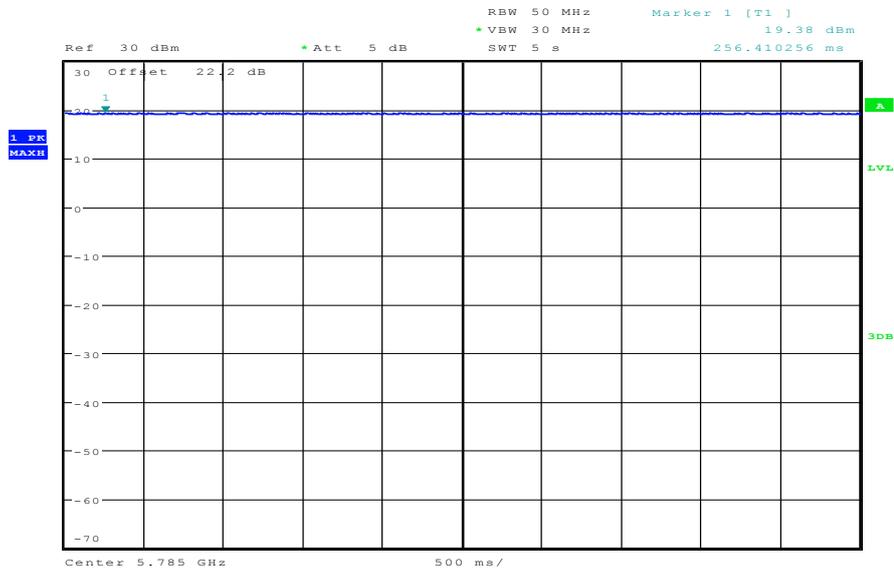

Date: 9.JUL.2012 08:35:17


Plot 8: 54 Mbit/s

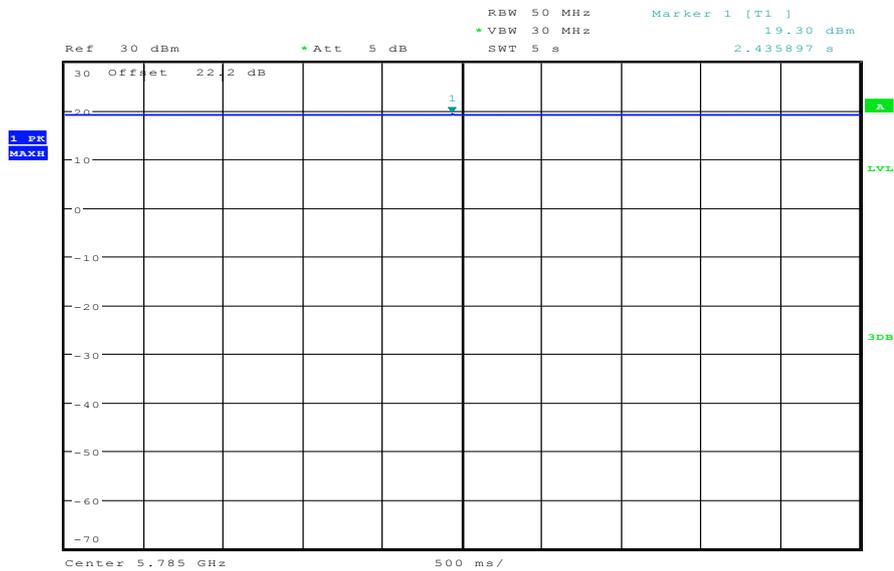

Date: 9.JUL.2012 08:36:59


Plots: n – mode HT20

Plot 1: MCS 0

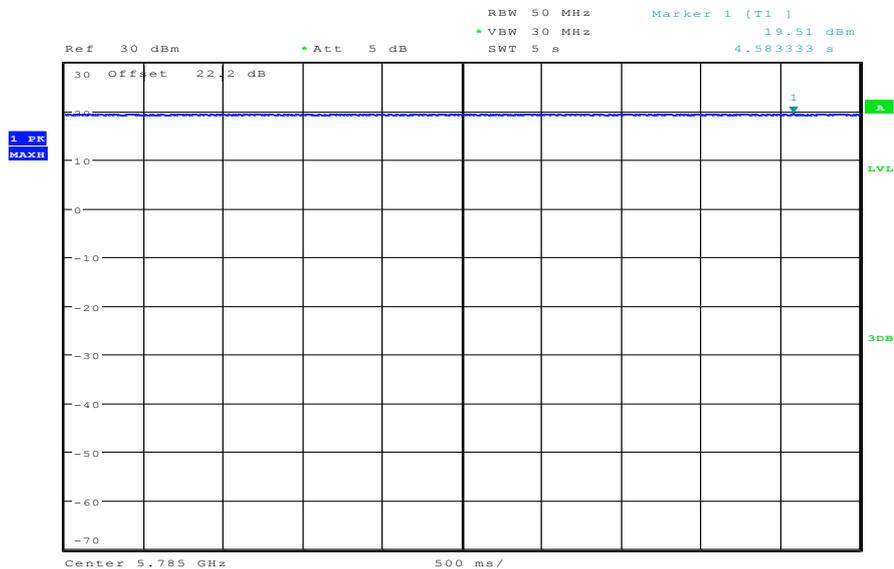


Date: 9.JUL.2012 08:39:59

Plot 2: MCS 1

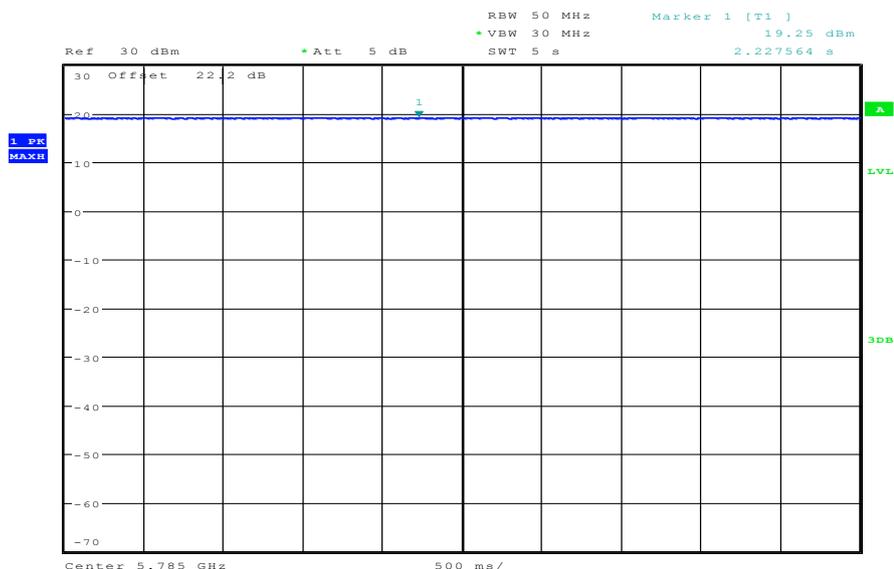


Date: 9.JUL.2012 08:42:09

Plot 3: MCS 2

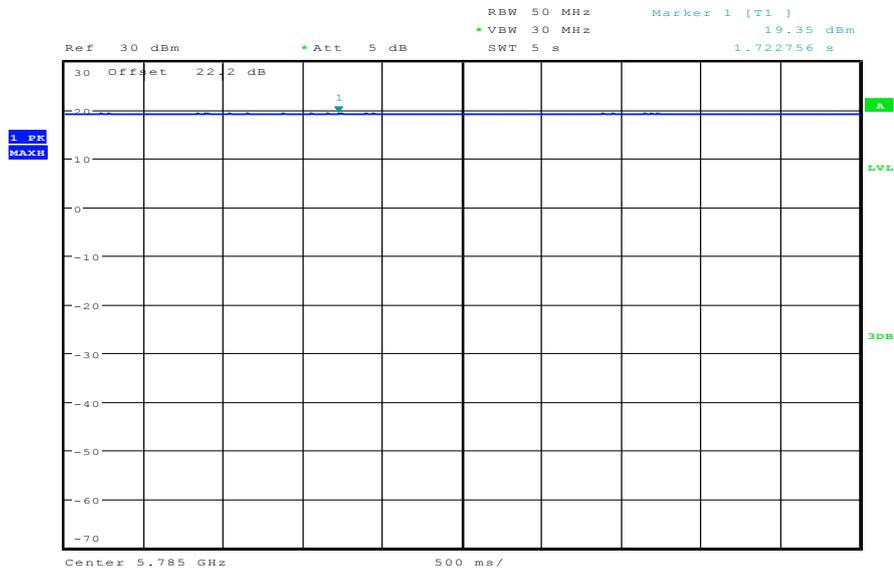


Date: 9.JUL.2012 08:43:52

Plot 4: MCS 3

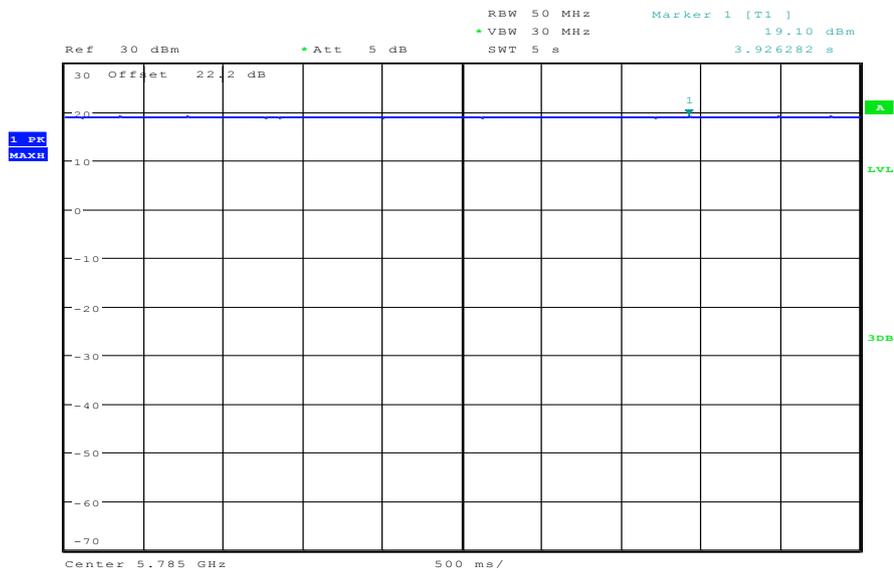


Date: 9.JUL.2012 08:45:40

Plot 5: MCS 4

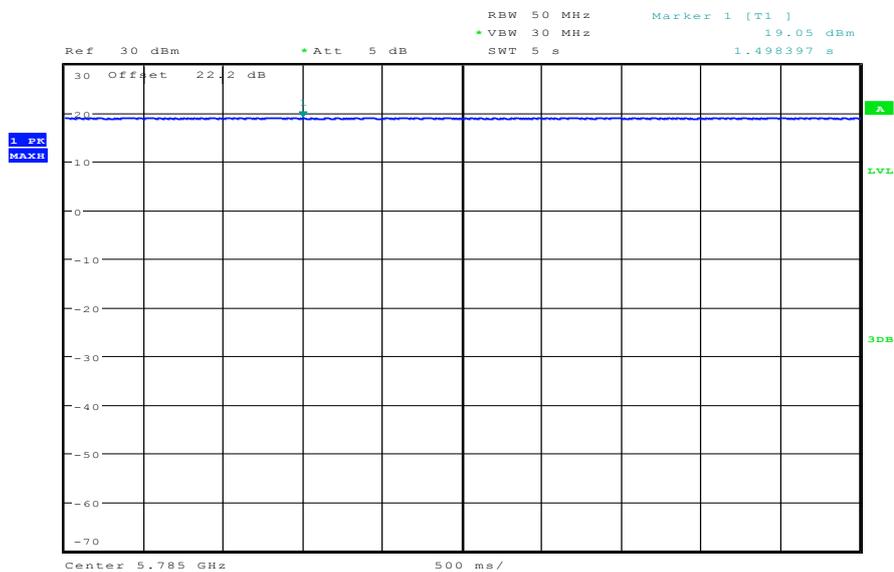


Date: 9.JUL.2012 08:47:44

Plot 6: MCS 5

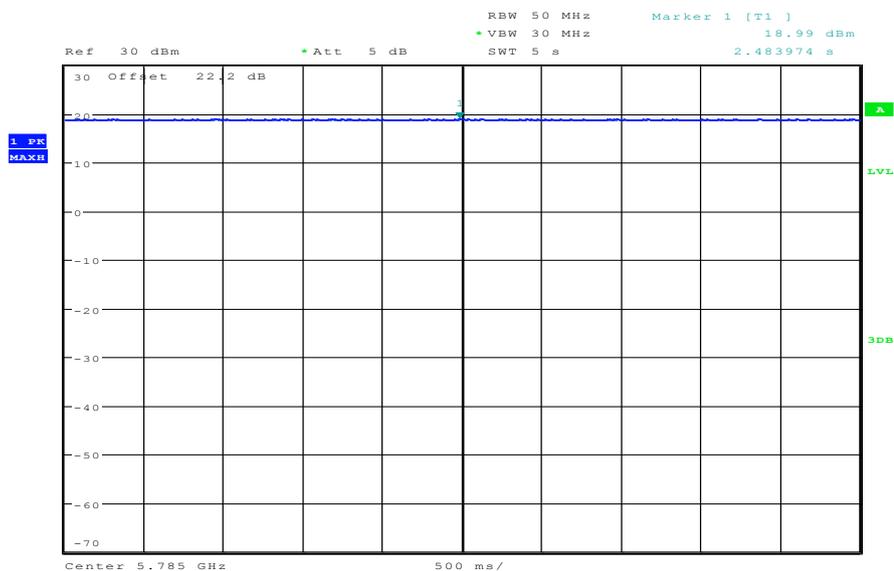


Date: 9.JUL.2012 08:49:59

Plot 7: MCS 6

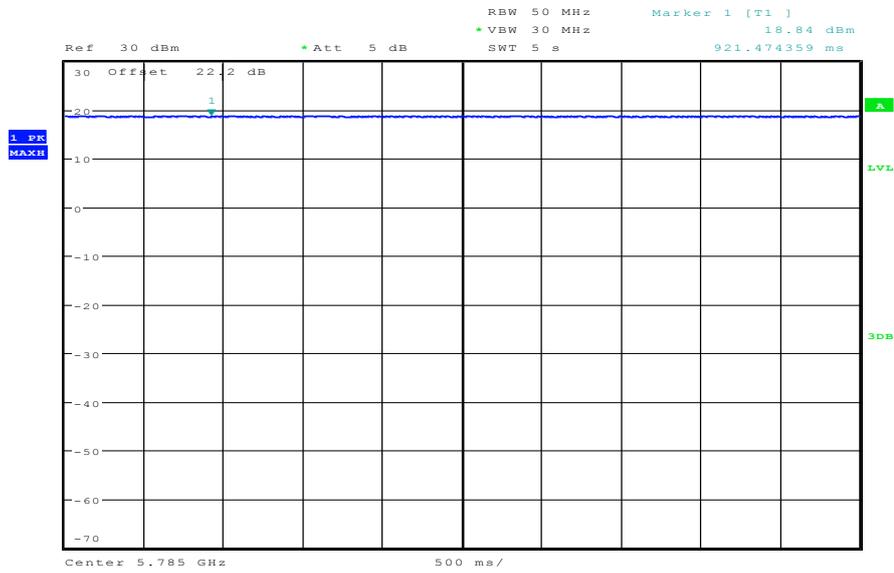

Date: 9.JUL.2012 08:51:41


Plot 8: MCS 7

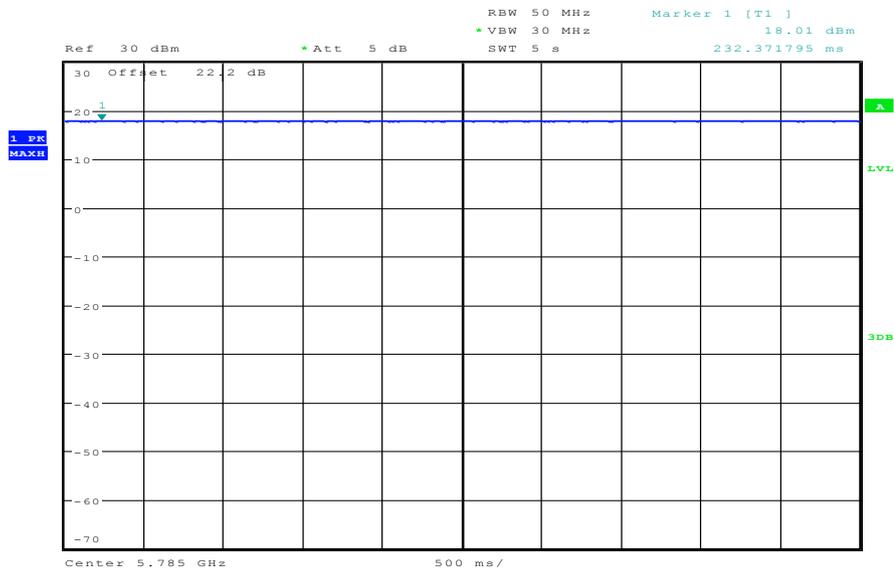

Date: 9.JUL.2012 08:54:37


Plots: n – mode HT40

Plot 1: MCS 0

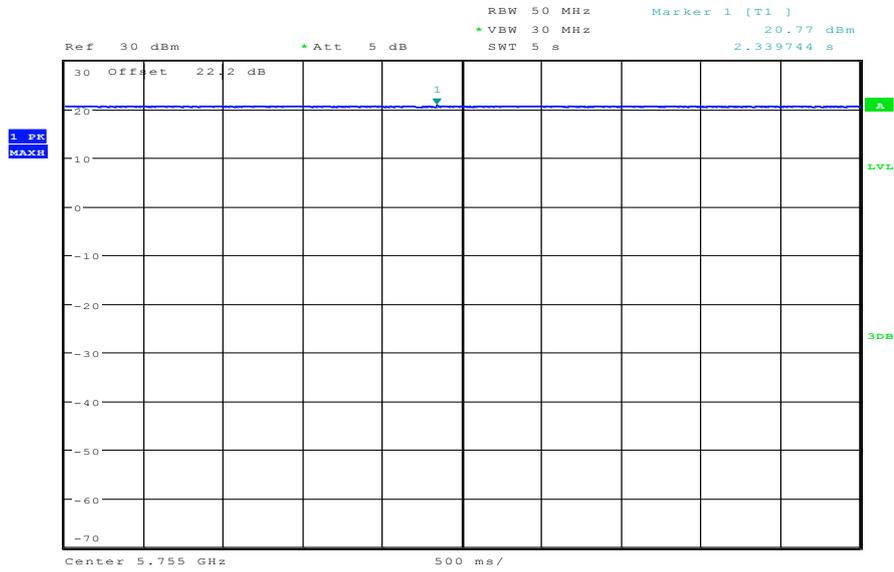


Date: 9.JUL.2012 10:55:03

Plot 2: MCS 1

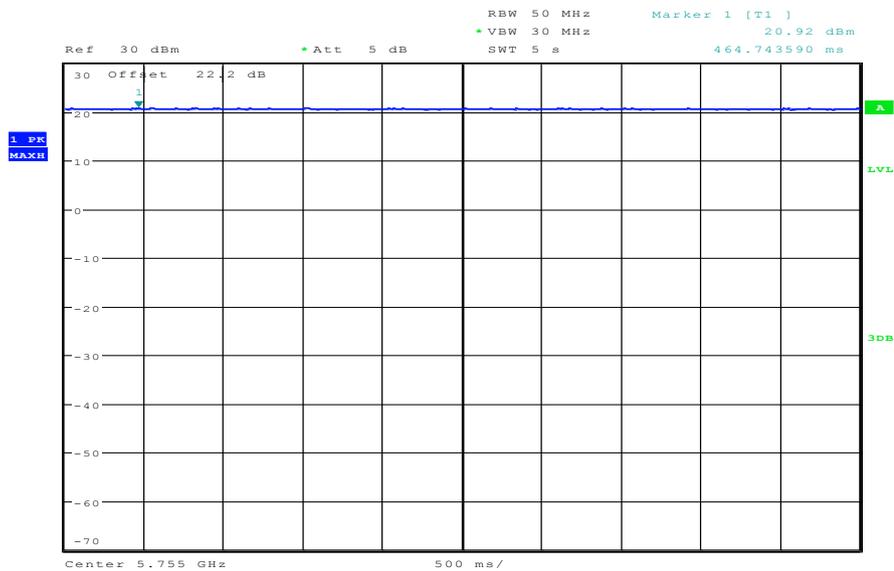


Date: 9.JUL.2012 10:53:47

Plot 3: MCS 2

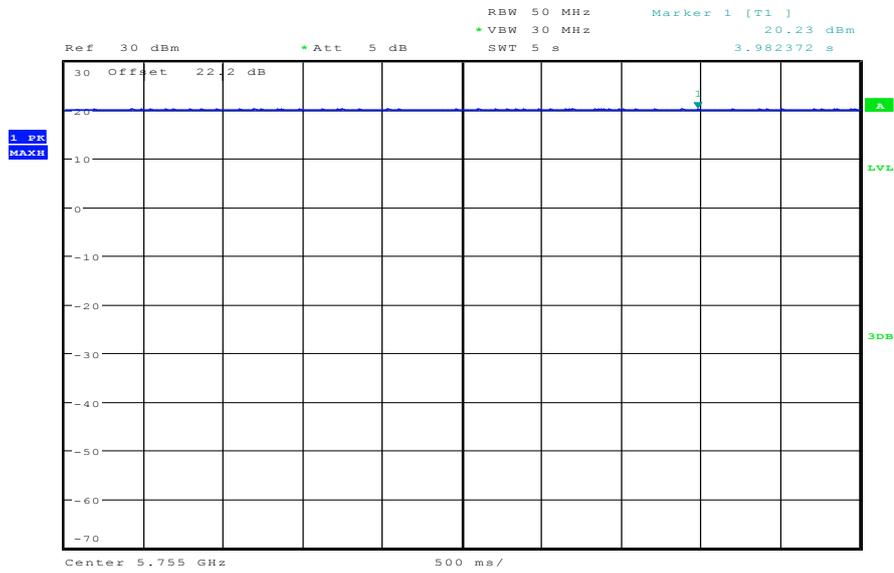


Date: 9.JUL.2012 10:56:22

Plot 4: MCS 3

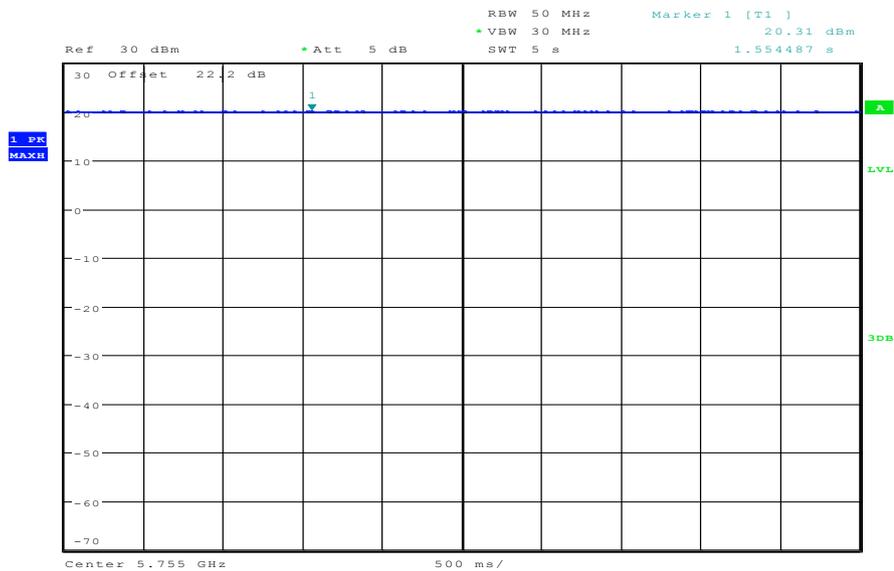


Date: 9.JUL.2012 11:06:23

Plot 5: MCS 4

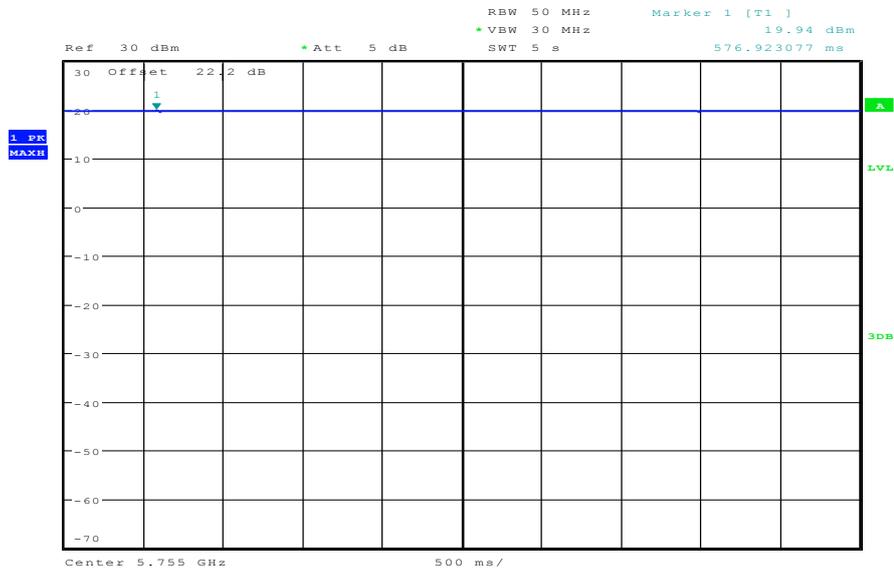


Date: 9.JUL.2012 11:08:00

Plot 6: MCS 5

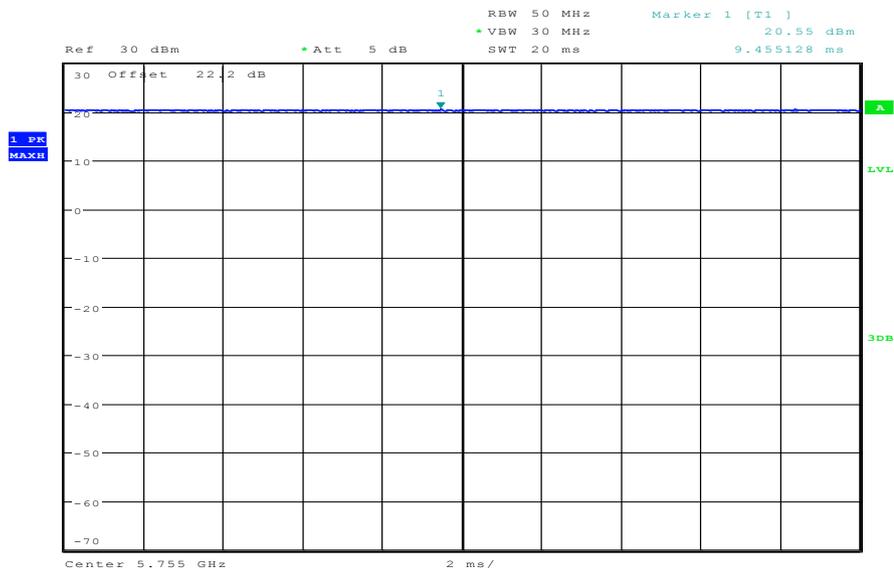


Date: 9.JUL.2012 09:40:00

Plot 7: MCS 6

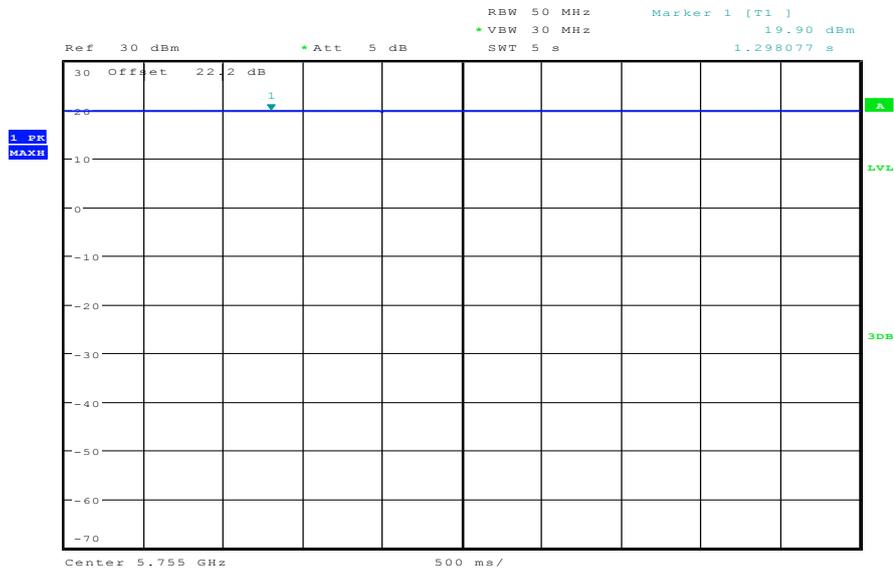

Date: 9.JUL.2012 11:09:43

Plot 8: MCS 7

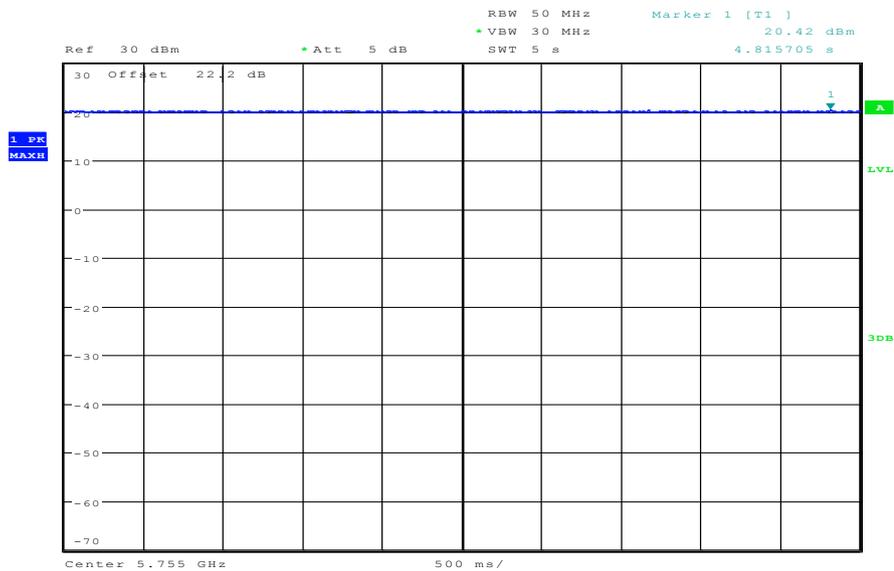

Date: 9.JUL.2012 11:11:20

9.2 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	5 s
Resolution bandwidth:	3 MHz
Video bandwidth:	10 MHz
Trace-Mode:	Max hold

Limits:

FCC	IC
Antenna Gain	
6 dBi	


Results:

T _{nom}	V _{nom}	lowest channel 5745 MHz	middle channel 5785 MHz	highest channel 5825 MHz
Conducted power [dBm]		15.34	15.34	16.20
Radiated power [dBm]		13.20	12.50	12.92
Gain [dBi] Calculated		-2.14	-2.84	-3.28
Measurement uncertainty			± 1.5 dB (cond.) / ± 3 dB (rad.)	

Result: **Passed**


Plots: conducted power for gain calculation

Plot 1: low channel

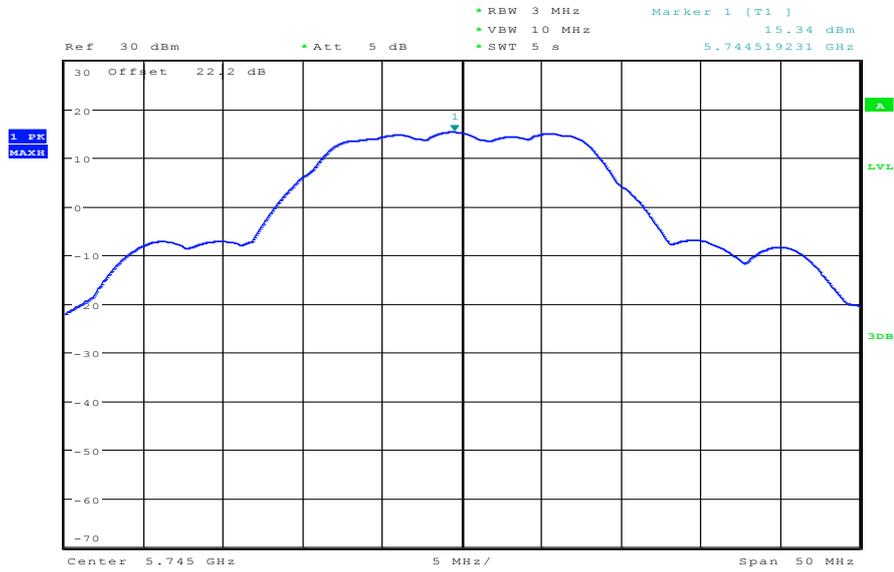


Date: 9.JUL.2012 10:35:09

Plot 2: middle channel

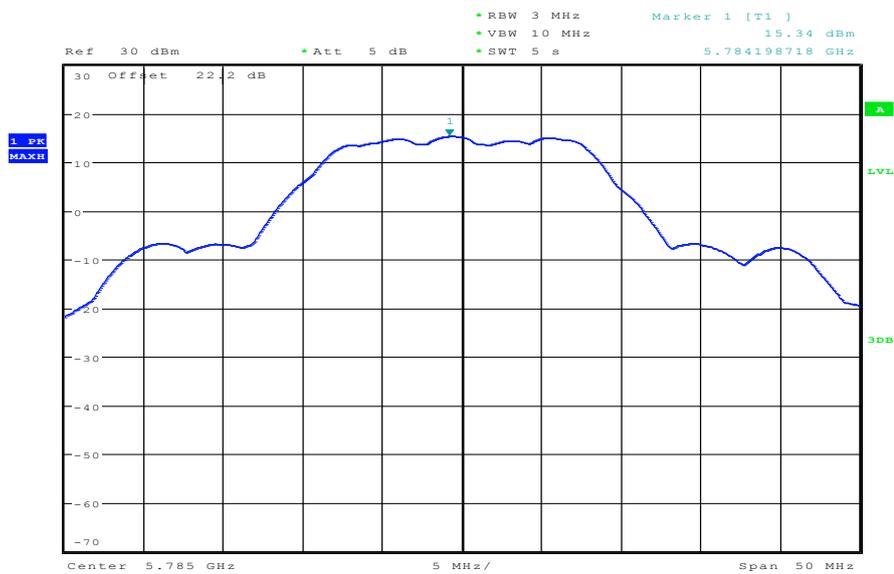

Date: 9.JUL.2012 10:36:36

Plot 3: high channel

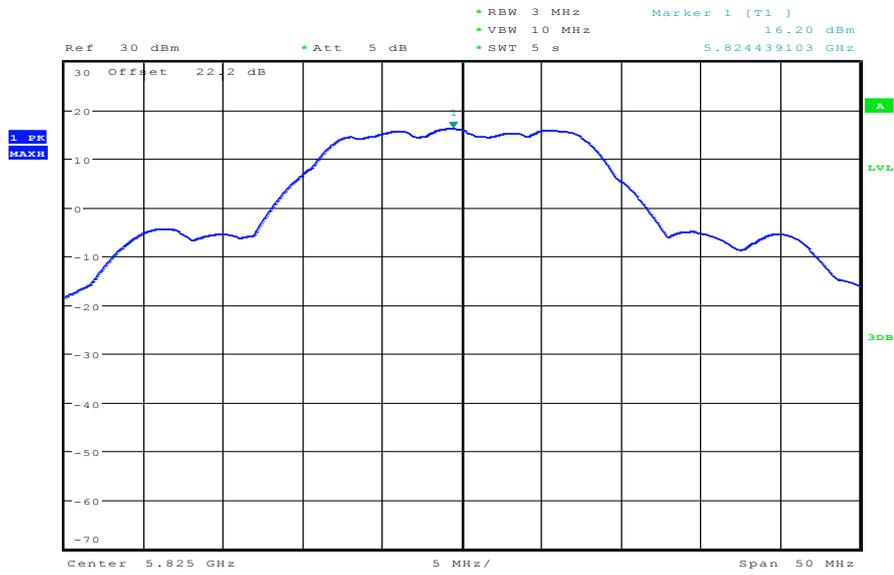

Date: 9.JUL.2012 10:38:27

9.3 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power. The determination of these data rates was performed at the beginning of the tests.

Used measurement option: 5.2.1.1 PK1

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	5 s
Resolution bandwidth:	> EBW
Video bandwidth:	≥ 3 x RBW (or the maximum of the analyzer)
Span:	Zero span
Trace-Mode:	Max hold (allow trace to fully stabilize)

Limits:

FCC	IC
Maximum Output Power	
Conducted: 1.0 W – Antenna Gain max. 6 dBi	

Results: OFDM / a – mode

OFDM / a – mode Frequency	Maximum Output Power [dBm]		
	5745 MHz	5785 MHz	5825 MHz
Peak Output Power Conducted	19.76	19.94	19.93
Output Power Radiated – EIRP*)	17.62	17.10	16.65
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed

Results: OFDM / n – mode HT20

OFDM / n – mode Ht20 Frequency	Maximum Output Power [dBm]		
	5745 MHz	5785 MHz	5825 MHz
Peak Output Power Conducted	19.27	19.51	19.62
Output Power Radiated – EIRP*)	17.13	16.67	16.34
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed**Results: OFDM / n – mode**


OFDM / n – mode Ht40 Frequency	Maximum Output Power [dBm]		
	5755 MHz	5795 MHz	-/-
Peak Output Power Conducted	20.92	18.75	-/-
Output Power Radiated – EIRP*)	18.78	15.91	-/-
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed


Plots: OFDM / a – mode

Plot 1: TX mode, lowest channel

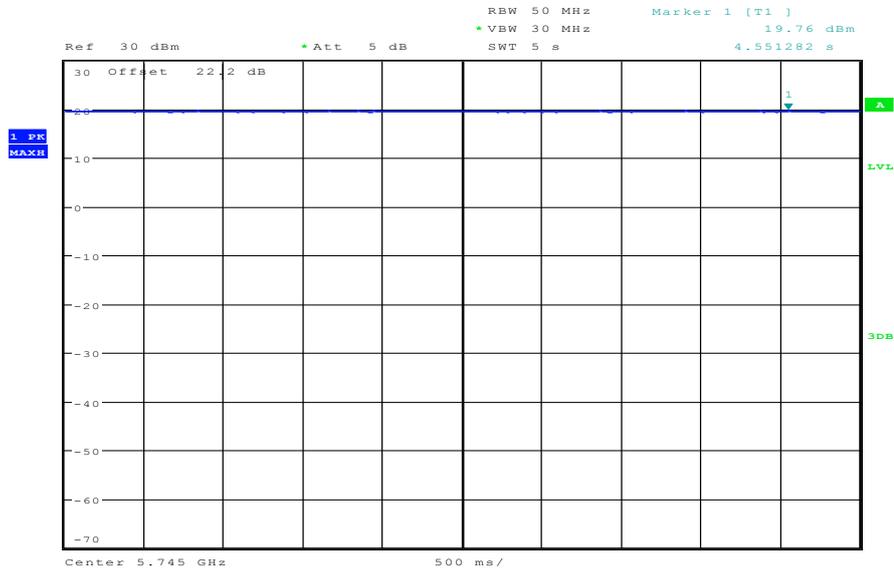


Date: 9.JUL.2012 10:43:24

Plot 2: TX mode, middle channel

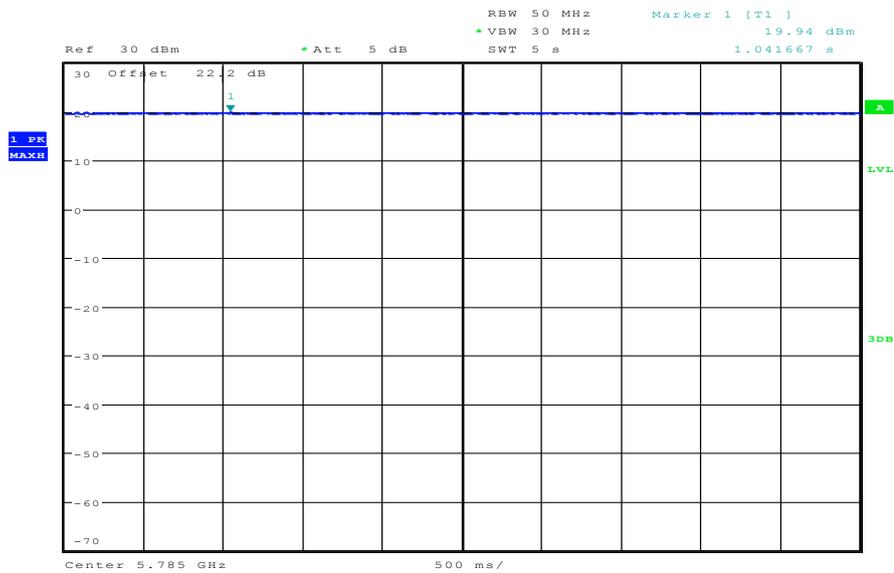

Date: 9.JUL.2012 08:23:18


Plot 3: TX mode, highest channel

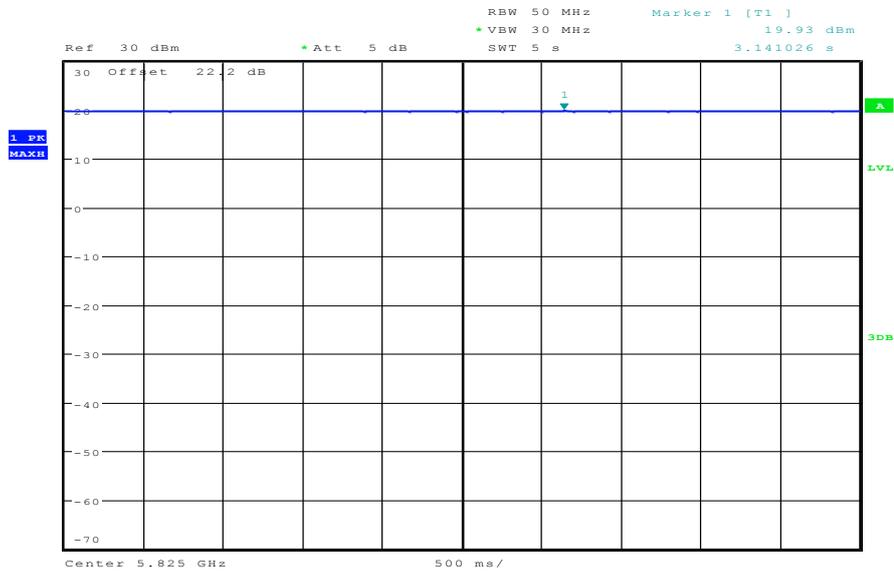

Date: 9.JUL.2012 10:41:23


Plots: OFDM / n – mode HT20

Plot 1: TX mode, lowest channel

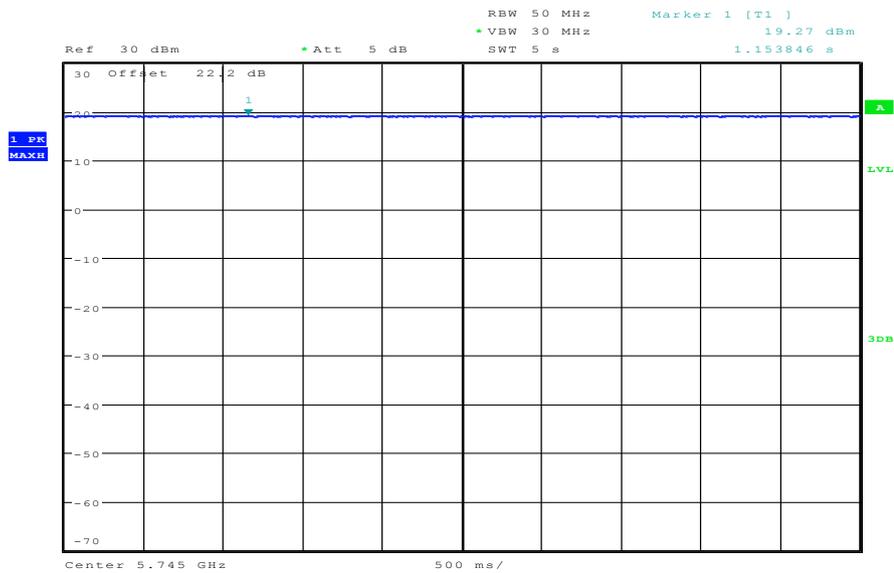


Date: 9.JUL.2012 10:46:08

Plot 2: TX mode, middle channel

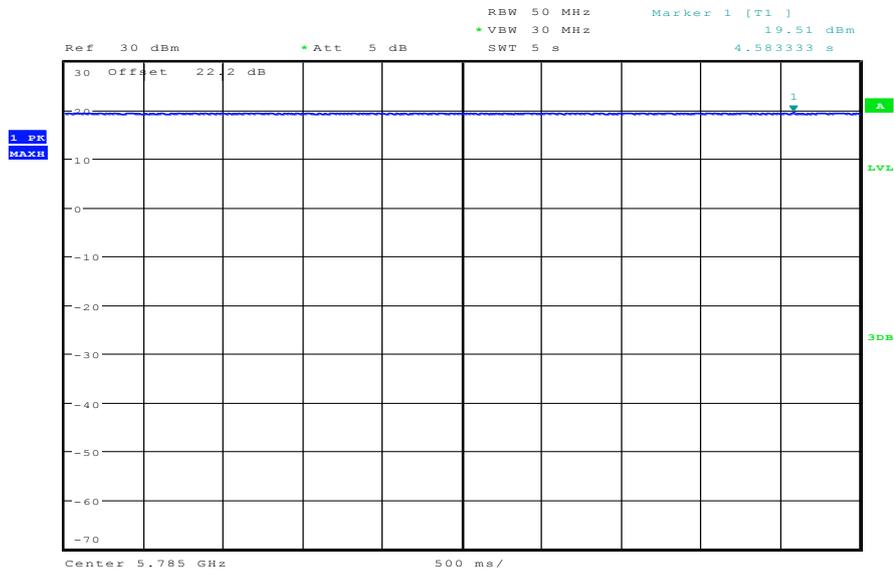

Date: 9.JUL.2012 08:39:59


Plot 3: TX mode, highest channel

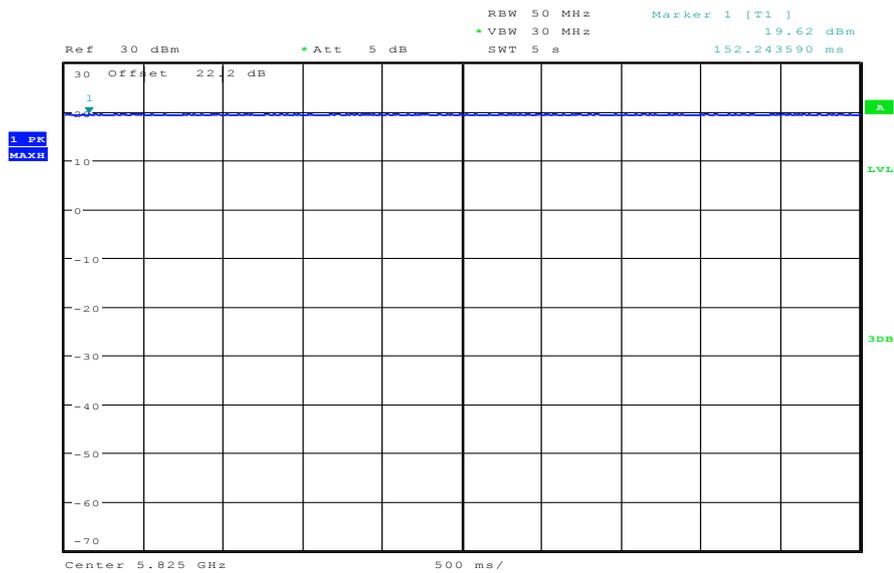

Date: 9.JUL.2012 10:47:58


Plots: OFDM / n – mode HT40

Plot 1: TX mode, lowest channel

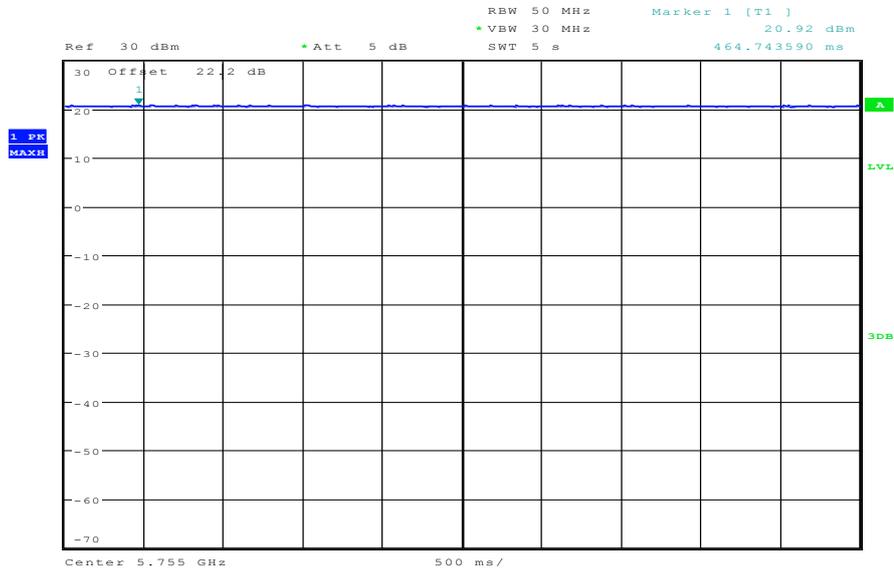

Date: 9.JUL.2012 10:53:47

Plot 2: TX mode, highest channel

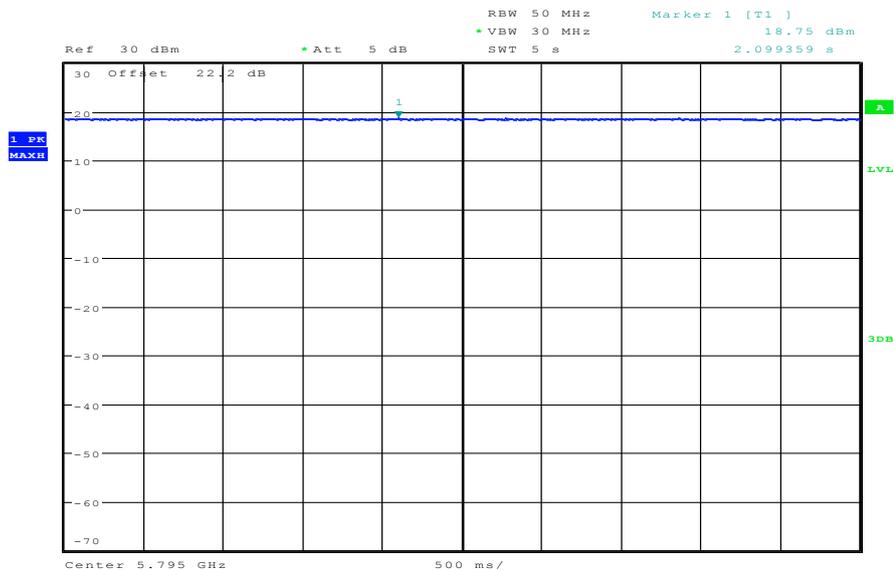

Date: 9.JUL.2012 11:13:06

9.4 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Used measurement option: 5.3.1 PKPSD

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	≥ 300 kHz
Span:	5 - 30 % greater than the EBW
Trace-Mode:	Max hold (allow trace to fully stabilize)
Bandwidth correction:	$10 \log (3\text{kHz} / 100\text{kHz}) = -15.2 \text{ dB}$

Limits:

FCC	IC
Power Spectral Density	
8 dBm (conducted)	


Results:

Modulation Frequency	Power Spectral density [dBm]		
	5725 MHz	5785 MHz	5825 MHz
OFDM / a – mode measured value (100 kHz)	1.07	1.08	1.92
OFDM / a – mode re-calculated value (to 3 kHz)	-14.13	-14.12	-13.28
OFDM / n – mode HT20 measured value (100 kHz)	-0.16	0.14	0.65
OFDM / n – mode HT20 re-calculated value (to 3 kHz)	-15.36	-15.06	-14.55
Frequency	5755 MHz	5795 MHz	-/-
OFDM / n – mode HT40 measured value (100 kHz)	-2.66	-2.41	-/-
OFDM / n – mode HT40 re-calculated value (to 3 kHz)	-17.86	-17.61	-/-
Measurement uncertainty	± 1.5 dB		

Result: Passed


Plots: OFDM / a – mode

Plot 1: TX mode, lowest channel

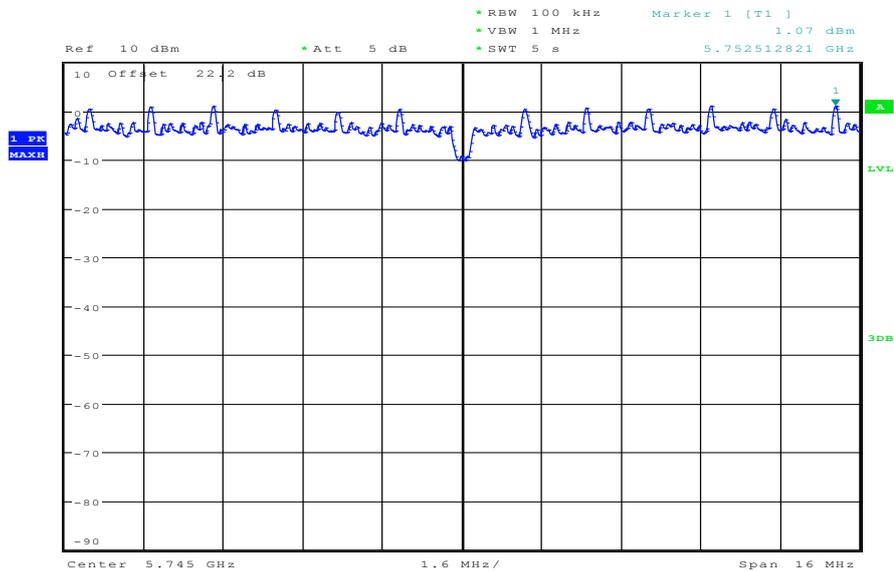


Date: 9.JUL.2012 12:04:30

Plot 2: TX mode, middle channel

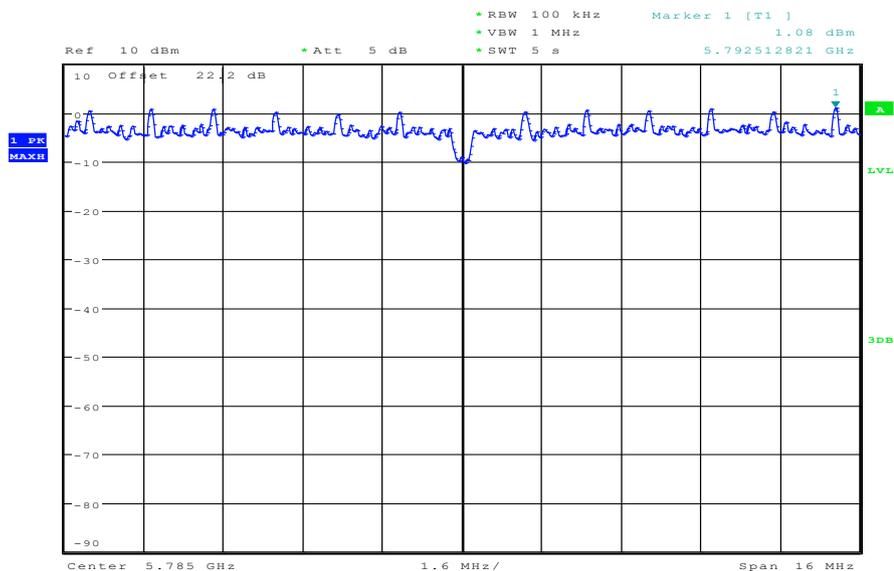

Date: 9.JUL.2012 12:06:09


Plot 3: TX mode, highest channel

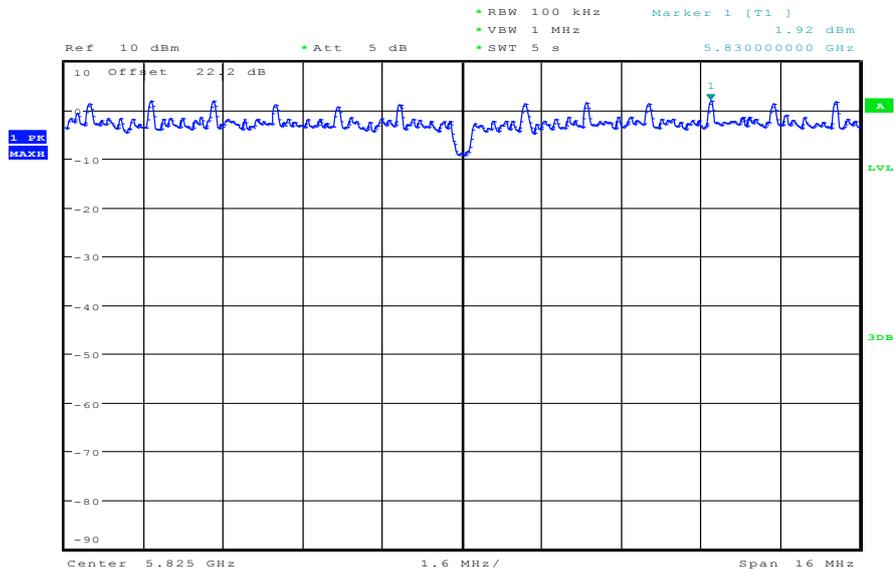

Date: 9.JUL.2012 12:07:40


Plots: OFDM / n – mode HT20

Plot 1: TX mode, lowest channel

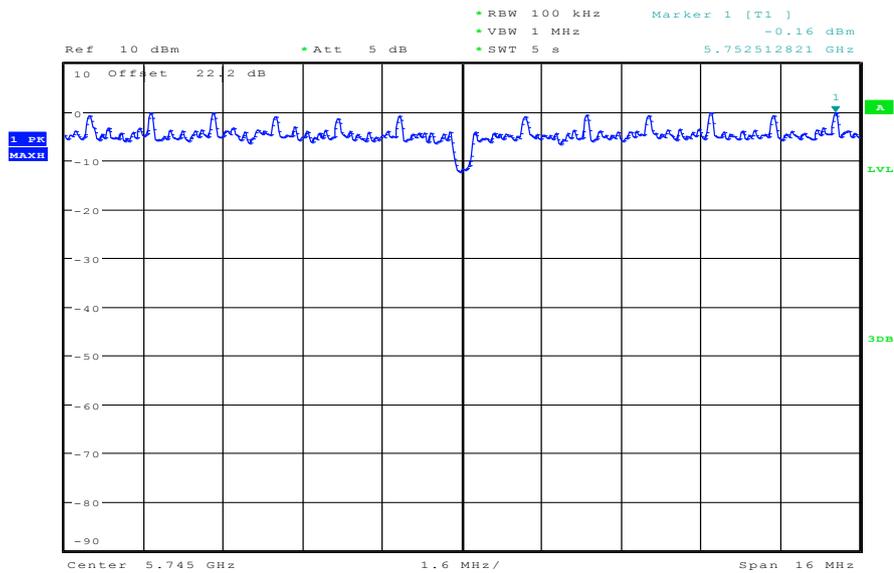


Date: 9.JUL.2012 12:10:46

Plot 2: TX mode, middle channel

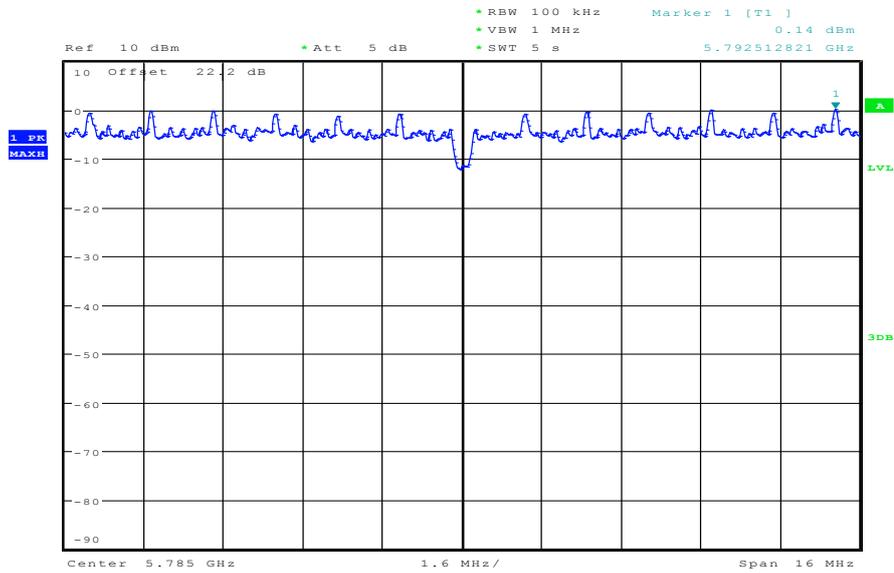

Date: 9.JUL.2012 12:12:23


Plot 3: TX mode, highest channel

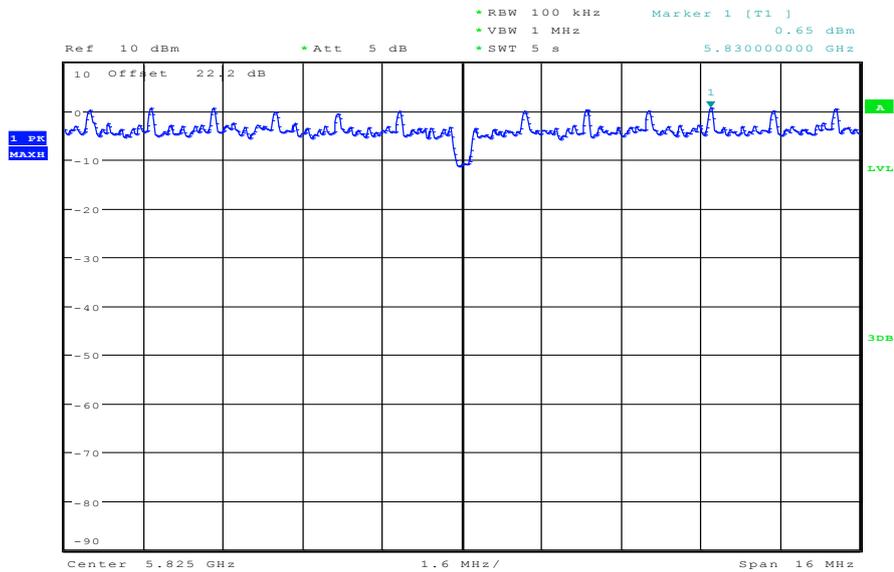

Date: 9.JUL.2012 12:13:54


Plots: OFDM / n – mode HT40

Plot 1: TX mode, lowest channel

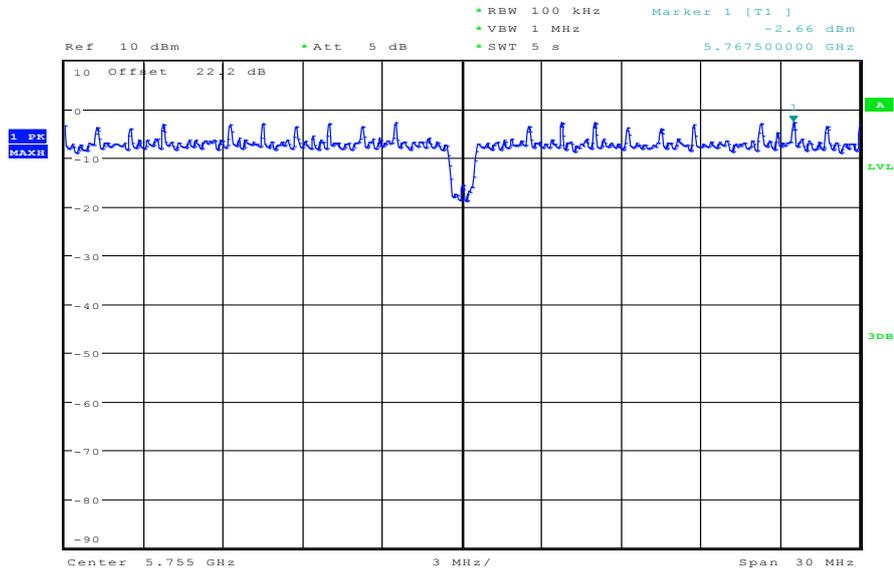

Date: 9.JUL.2012 12:16:41

Plot 2: TX mode, highest channel

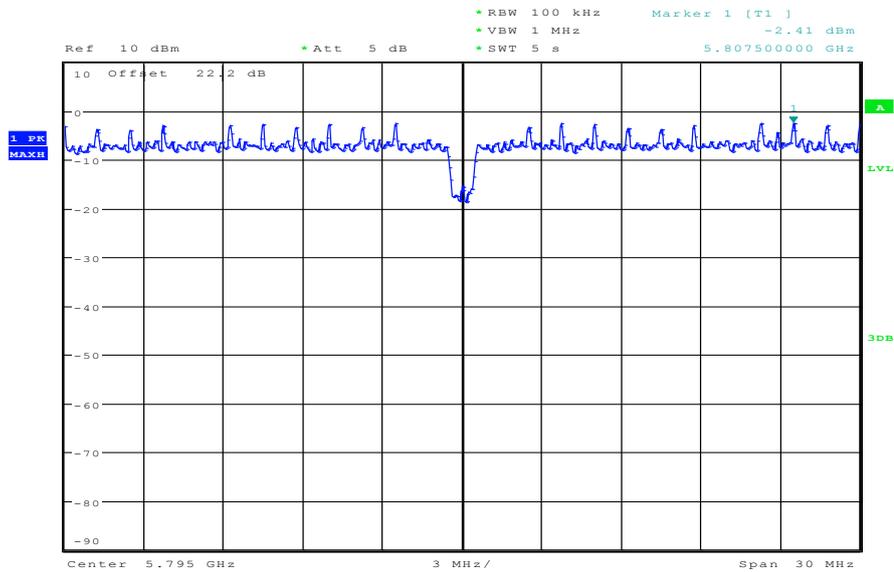

Date: 9.JUL.2012 12:18:25

9.5 Spectrum bandwidth – 6 dB / 75 % power bandwidth (EBW)

Description:

Measurement of the 6 dB / 75 % power bandwidth of the modulated signal.

Used measurement option: 5.1.2.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 - 5% of emission bandwidth
Video bandwidth:	≥ 3 x RBW
Span:	> complete emission
Trace-Mode:	Max hold (allow trace to stabilize)
Measurement option:	Automatic bandwidth measurement (75% power)

Limits:

FCC	IC
Spectrum Bandwidth – 6 dB / 75 % power bandwidth (EBW)	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation Frequency	6 dB / 75 % power bandwidth [MHz] (EBW)		
	Lowest channel	Middle channel	Highest channel
OFDM / a – mode	12.74	12.74	12.74
OFDM / n – mode HT20	13.46	13.54	13.46
OFDM / n – mode HT40	26.03	-/-	26.15
Measurement uncertainty	± RBW		

Result: Passed


Plots: OFDM / a – mode

Plot 1: TX mode, lowest channel

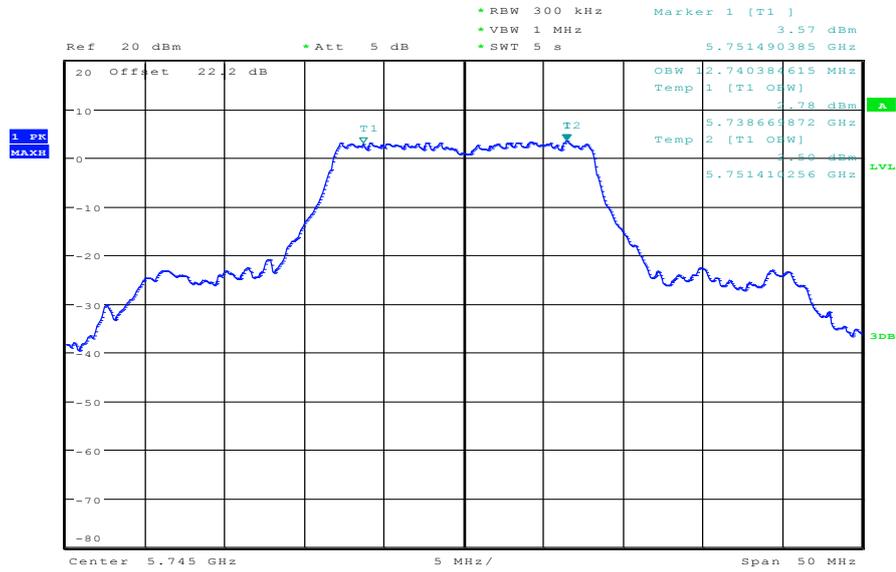


Date: 9.JUL.2012 11:20:21

Plot 2: TX mode, middle channel

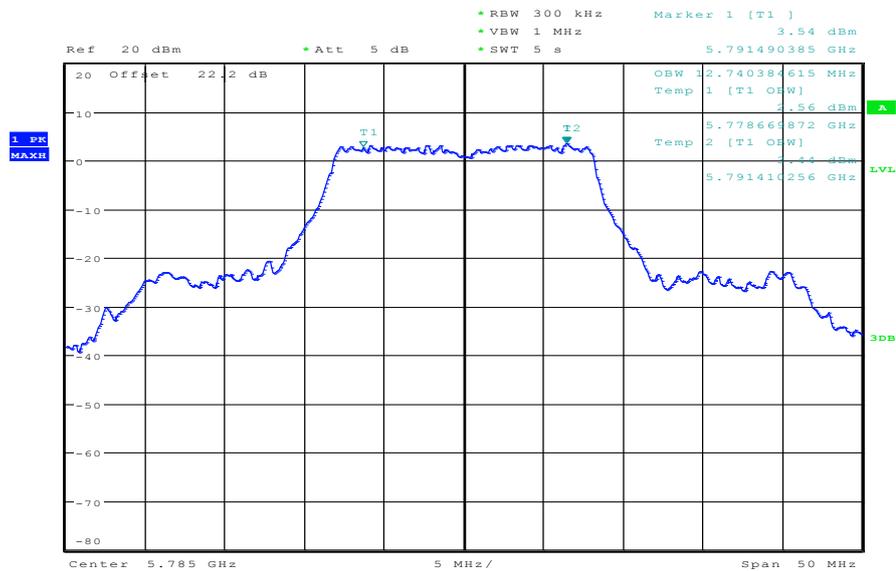

Date: 9.JUL.2012 11:24:07


Plot 3: TX mode, highest channel

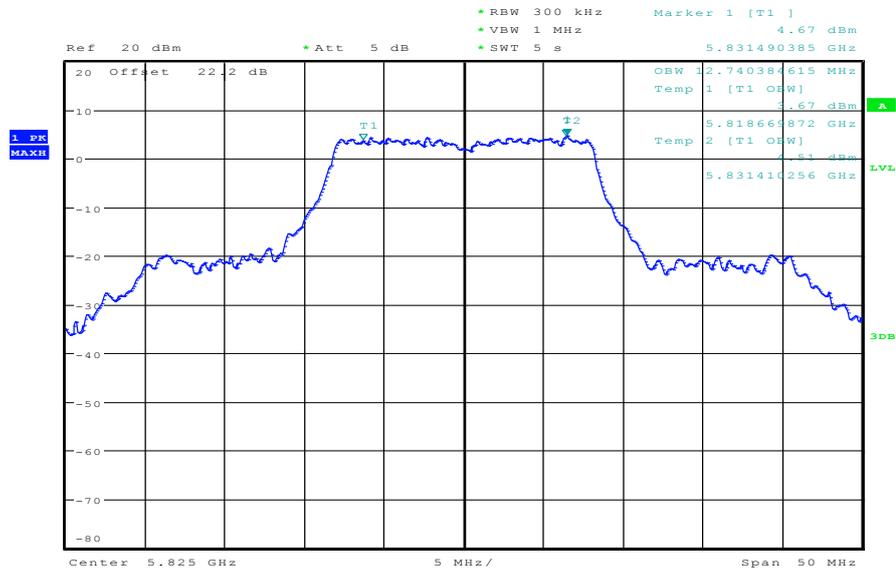

Date: 9.JUL.2012 11:25:57


Plots: OFDM / n – mode HT20

Plot 1: TX mode, lowest channel

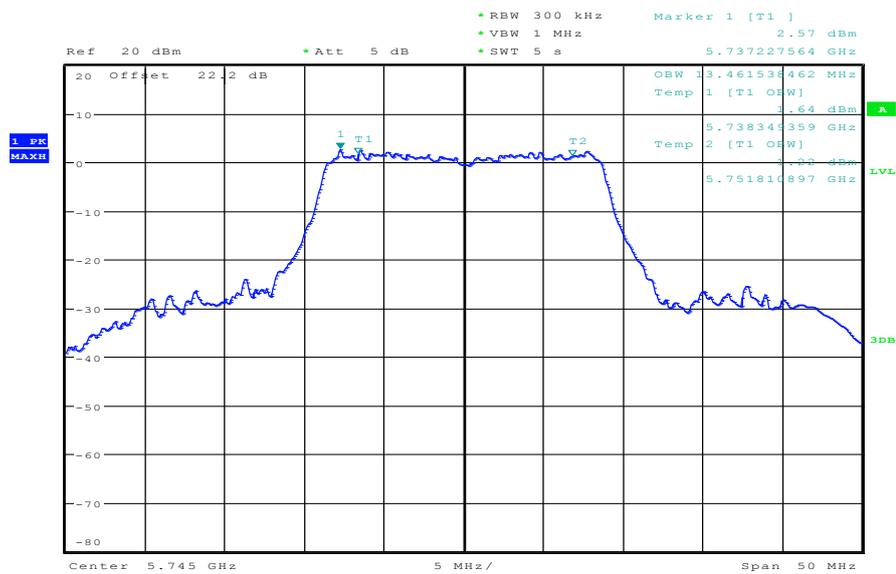


Date: 9.JUL.2012 11:30:41

Plot 2: TX mode, middle channel

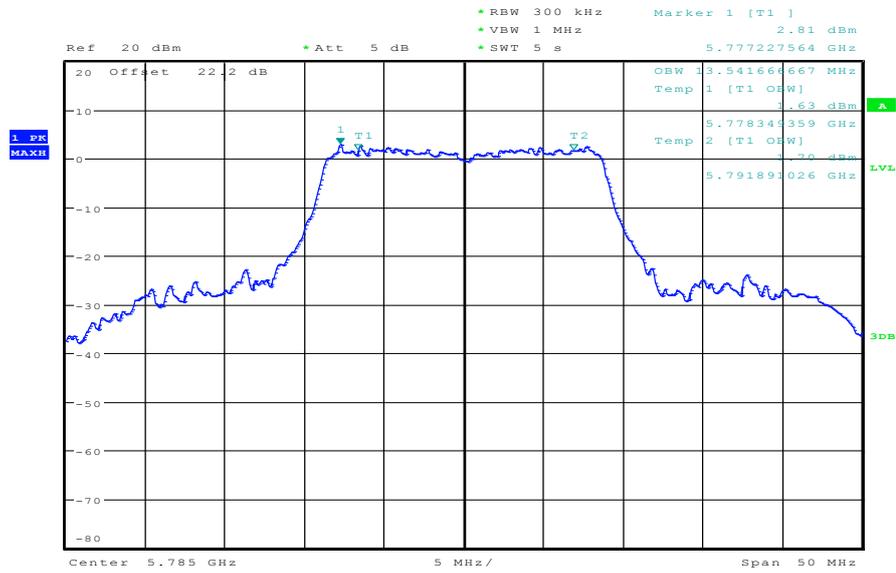

Date: 9.JUL.2012 11:32:56


Plot 3: TX mode, highest channel

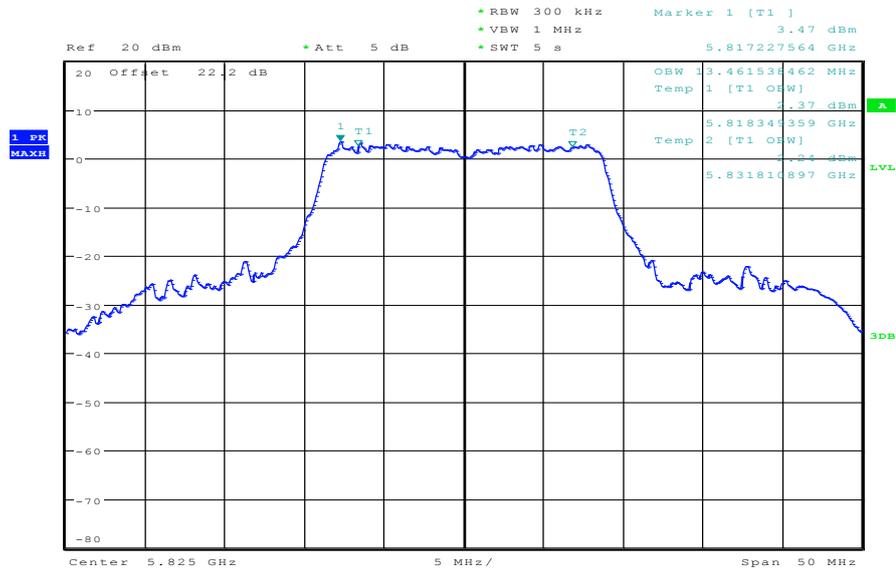

Date: 9.JUL.2012 11:45:20


Plots: OFDM / n – mode HT40

Plot 1: TX mode, lowest channel

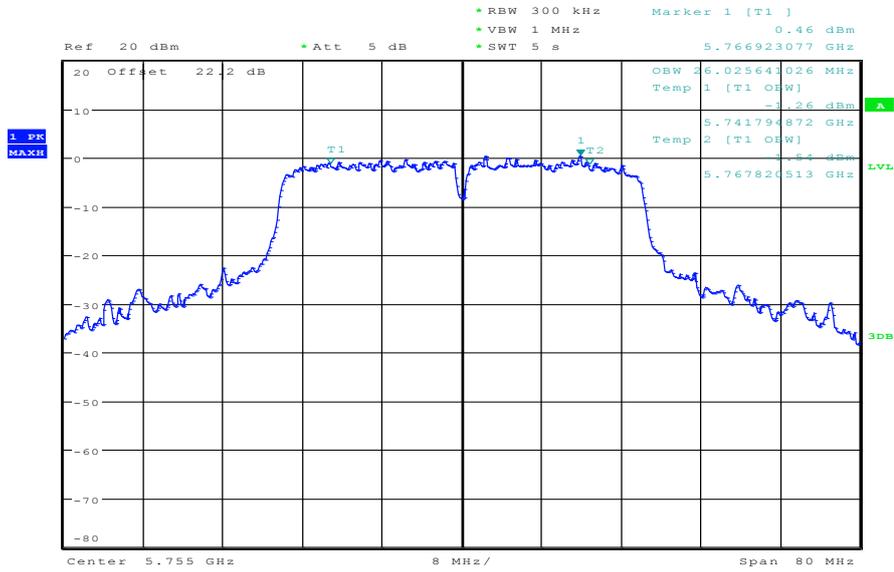

Date: 9.JUL.2012 11:53:28

Plot 2: TX mode, highest channel

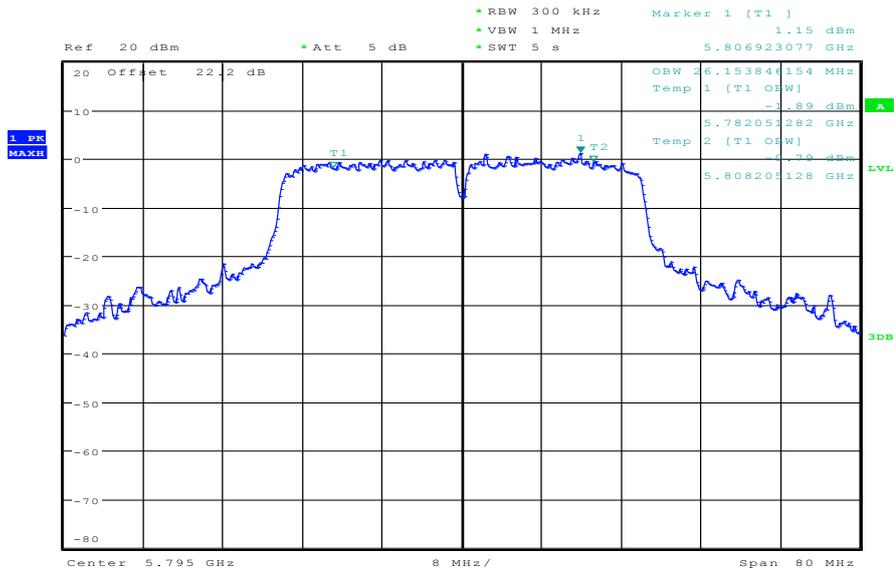

Date: 9.JUL.2012 11:55:47

9.6 Spectrum bandwidth – 20 dB / 99 % power bandwidth

Description:

Measurement of the 20 dB / 99% power bandwidth of the modulated signal.

Used measurement option: 5.1.2.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 - 5% of emission bandwidth
Video bandwidth:	≥ 3 x RBW
Span:	> complete emission
Trace-Mode:	Max hold (allow trace to stabilize)
Measurement option:	Automatic bandwidth measurement (99% power)

Limits:

FCC	IC
Spectrum Bandwidth – 20 dB / 99 % power bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation Frequency	20 dB / 99 % power bandwidth [MHz]		
	Lowest channel	Middle channel	Highest channel
OFDM / a – mode	17.79	17.87	18.27
OFDM / n – mode HT20	18.35	18.35	18.51
OFDM / n – mode HT40	36.41	-/-	36.41
Measurement uncertainty	± RBW		

Result: Passed


Plots: OFDM / a – mode

Plot 1: TX mode, lowest channel

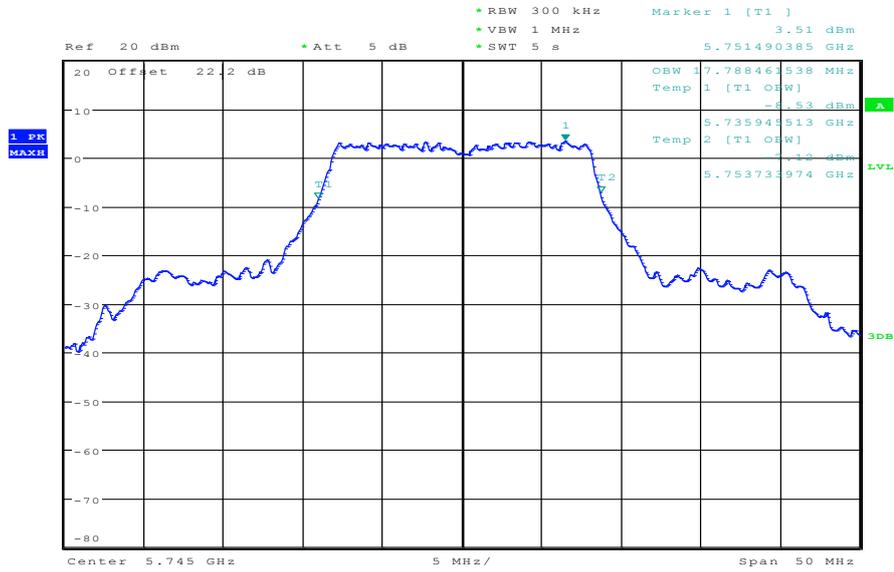


Date: 9.JUL.2012 11:21:06

Plot 2: TX mode, middle channel

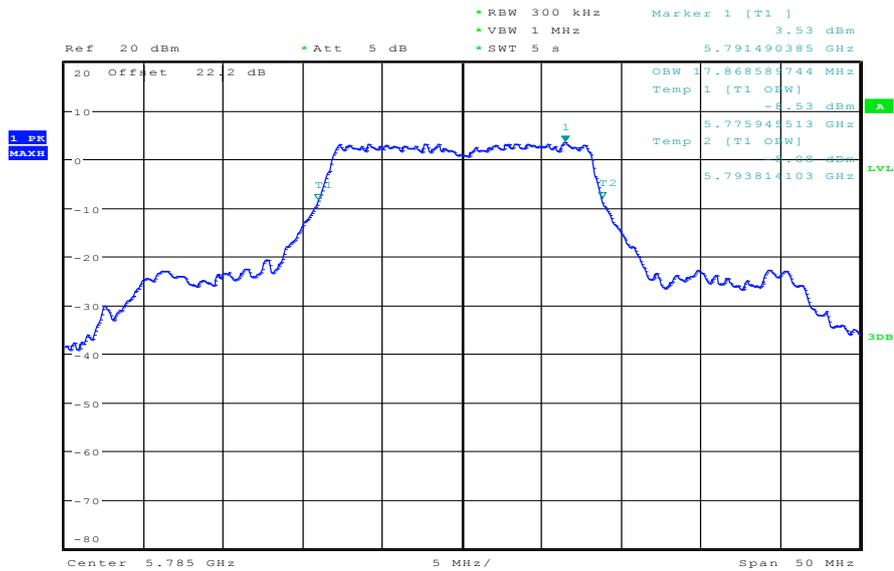

Date: 9.JUL.2012 11:22:55


Plot 3: TX mode, highest channel

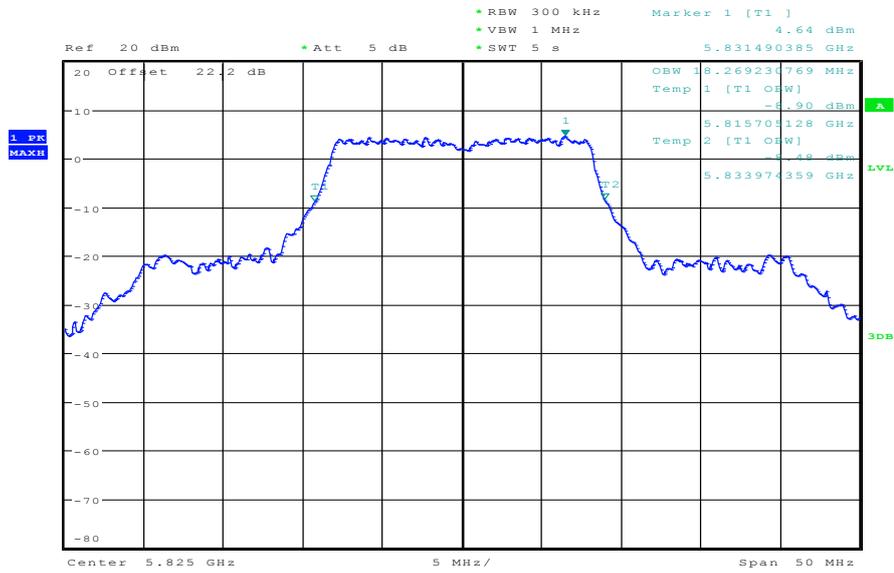

Date: 9.JUL.2012 11:27:09


Plots: OFDM / n – mode HT20

Plot 1: TX mode, lowest channel

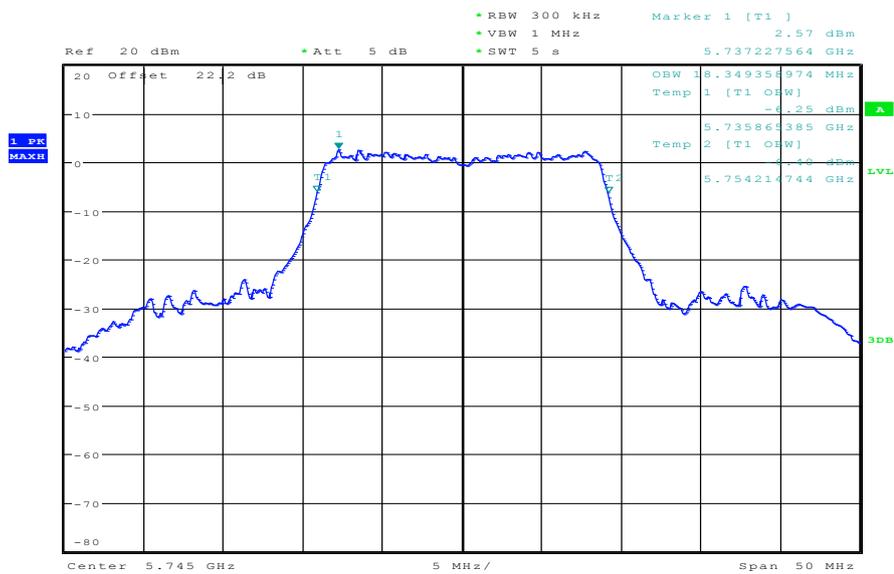


Date: 9.JUL.2012 11:29:28

Plot 2: TX mode, middle channel

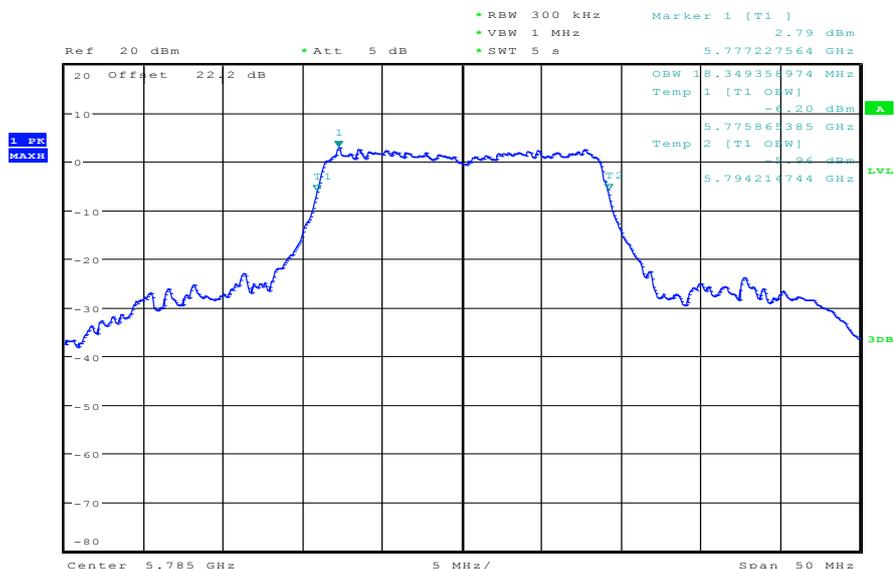

Date: 9.JUL.2012 11:33:36


Plot 3: TX mode, highest channel

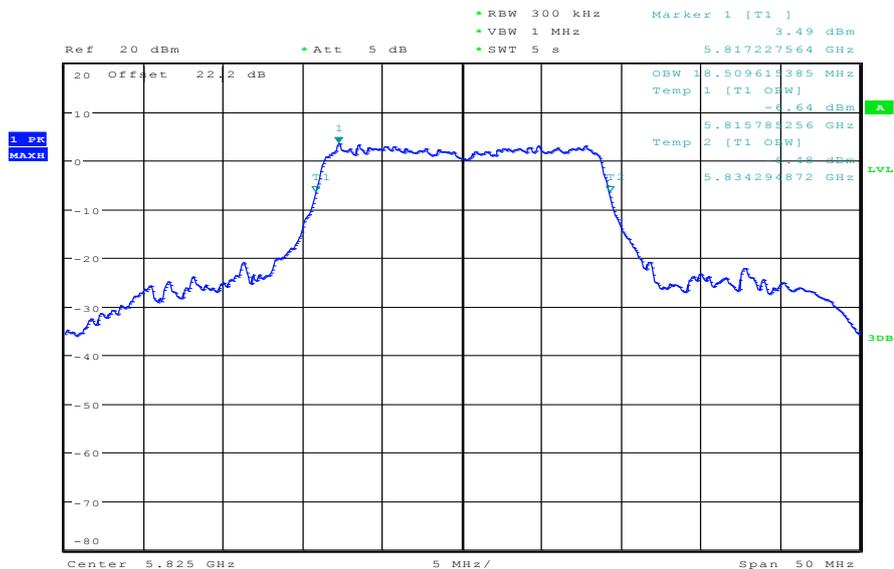

Date: 9.JUL.2012 11:40:59


Plots: OFDM / n – mode HT40

Plot 1: TX mode, lowest channel

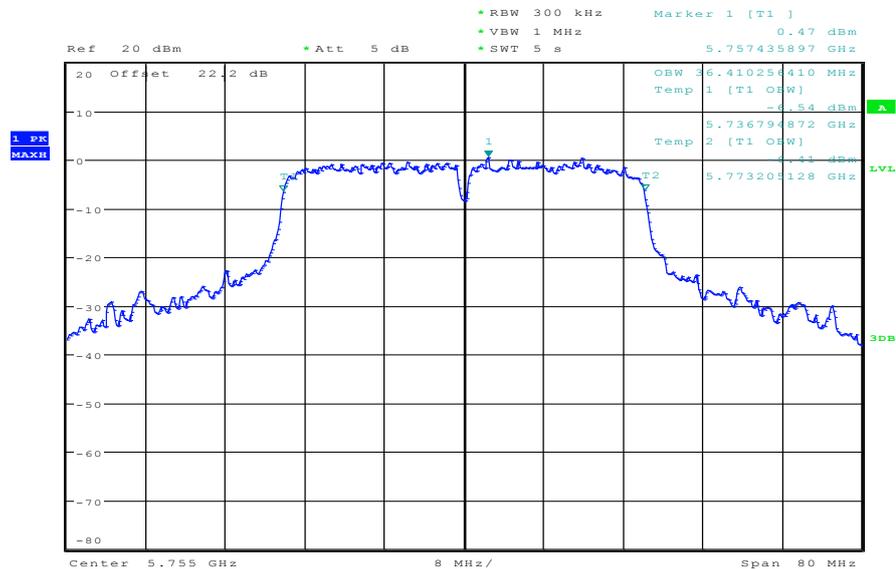

Date: 9.JUL.2012 11:52:05

Plot 2: TX mode, highest channel

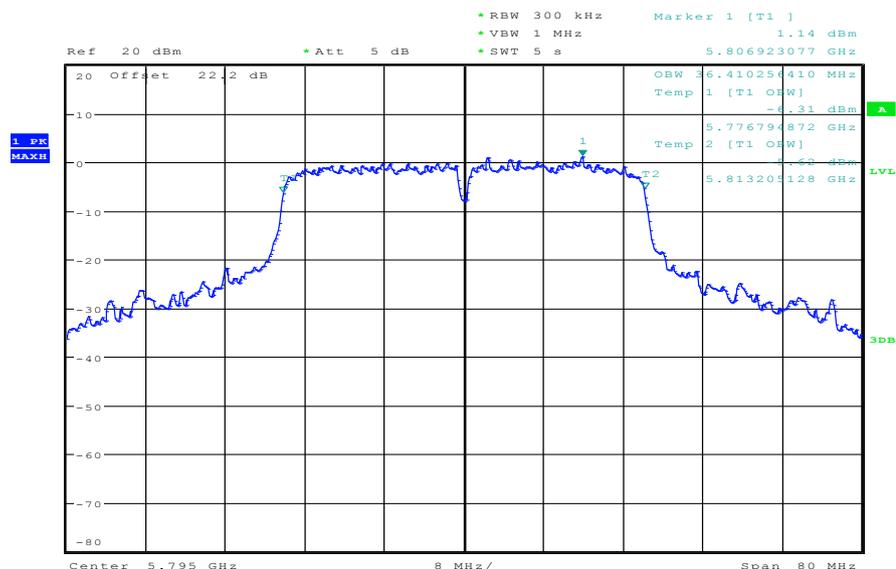

Date: 9.JUL.2012 11:56:33

9.7 Band edge compliance conducted

Not applicable! No restricted band close to used band!

9.8 Band edge compliance radiated

Not applicable! No restricted band close to used band!

9.9 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter		
Detector:	Peak	
Sweep time:	1s / 100 MHz	
Resolution bandwidth:	F < 1 GHz:	100 kHz
	F > 1 GHz:	100 kHz
Video bandwidth:	F < 1 GHz:	500 kHz
	F > 1 GHz:	500 kHz
Span:	9 kHz to 25 GHz	
Trace-Mode:	Max Hold	

Limits:

FCC	IC
TX Spurious Emissions Conducted	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required</p>	

Results: OFDM / a – mode

TX Spurious Emissions Conducted					
OFDM / a – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
5745		2.10	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5785		1.79	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5825		2.68	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
Measurement uncertainty		± 3 dB			

Result: Passed

Results: OFDM / n – mode HT20

TX Spurious Emissions Conducted					
OFDM / n – mode HT20					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
5745		0.73	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5785		0.27	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5825		1.47	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
Measurement uncertainty		± 3 dB			

Result: Passed


Results: OFDM / n – mode HT40

TX Spurious Emissions Conducted					
OFDM / n – mode HT40					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
5755		-1.93	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5785		-1.66	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
			30 dBm		Operating frequency
-/-			-20 dBc (peak) -30 dBc (average)		-/-
Measurement uncertainty		± 3 dB			

Result: Passed

Plots: OFDM / a – mode


Plot 1: TX mode, lowest channel, up to 12 GHz

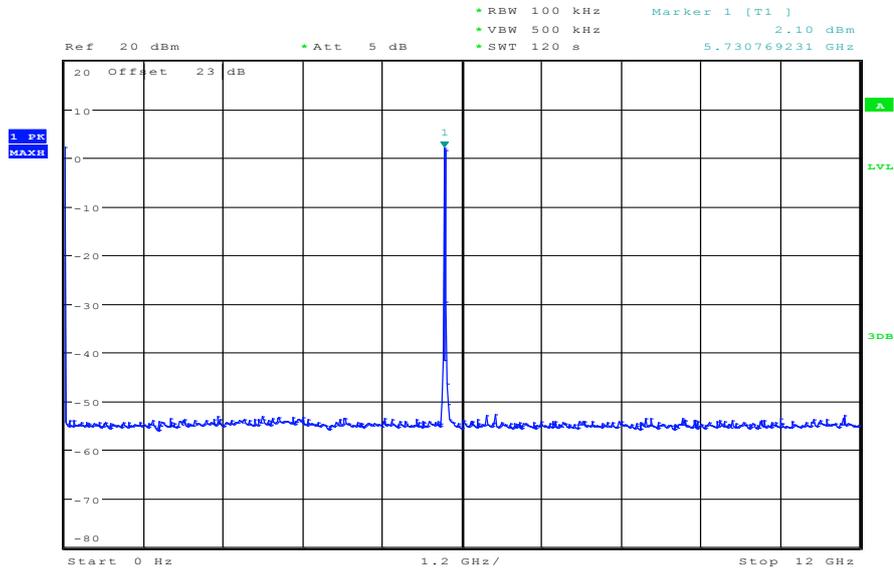

Date: 9.JUL.2012 13:11:00


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, lowest channel, up to 25 GHz

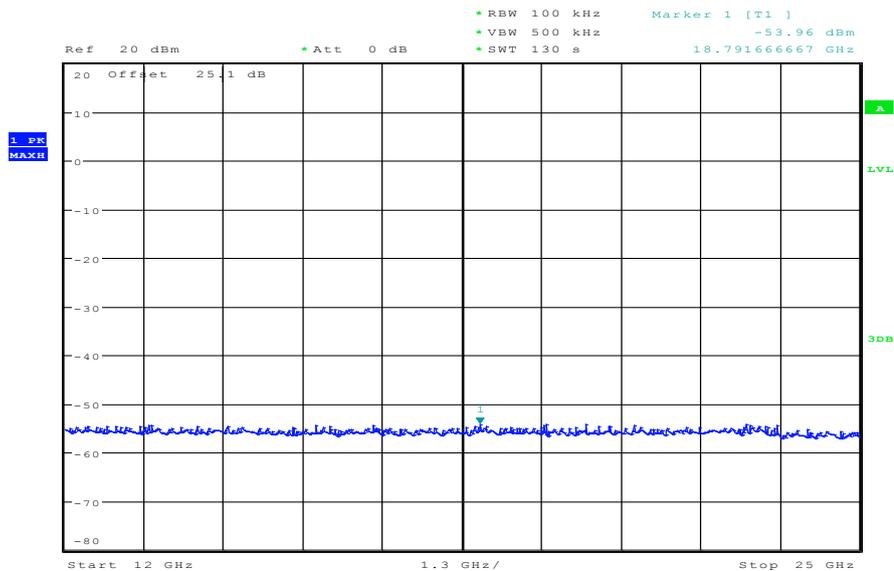


Date: 9.JUL.2012 14:10:49

Plot 3: TX mode, lowest channel, up to 40 GHz

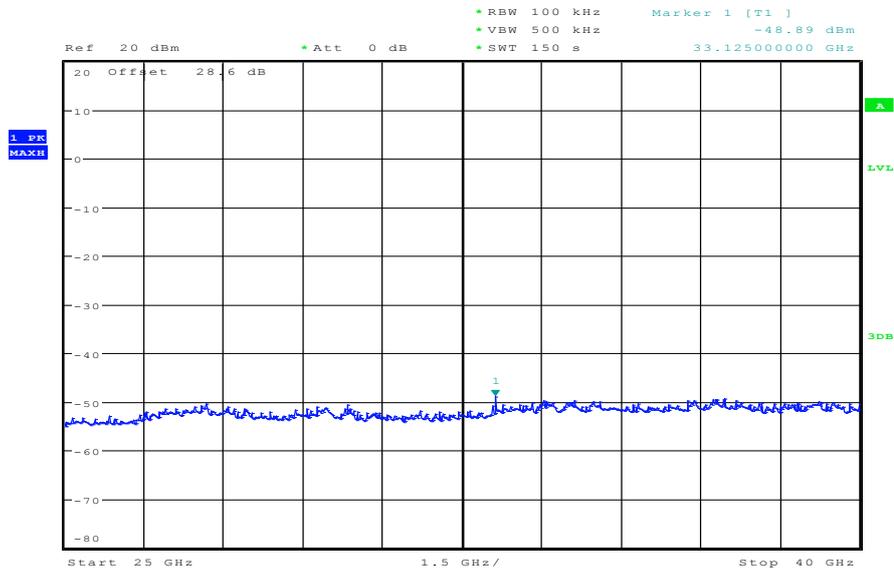

Date: 9.JUL.2012 14:29:44


Plot 4: TX mode, middle channel, up to 12 GHz

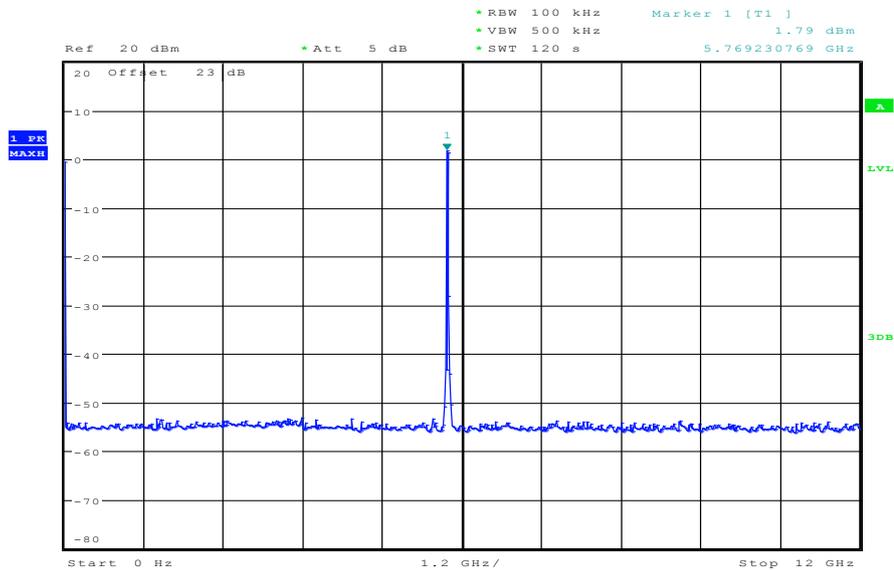

Date: 9.JUL.2012 13:14:31


The peak at the beginning of the plot is the LO from the SA.

Plot 5: TX mode, middle channel, up to 25 GHz

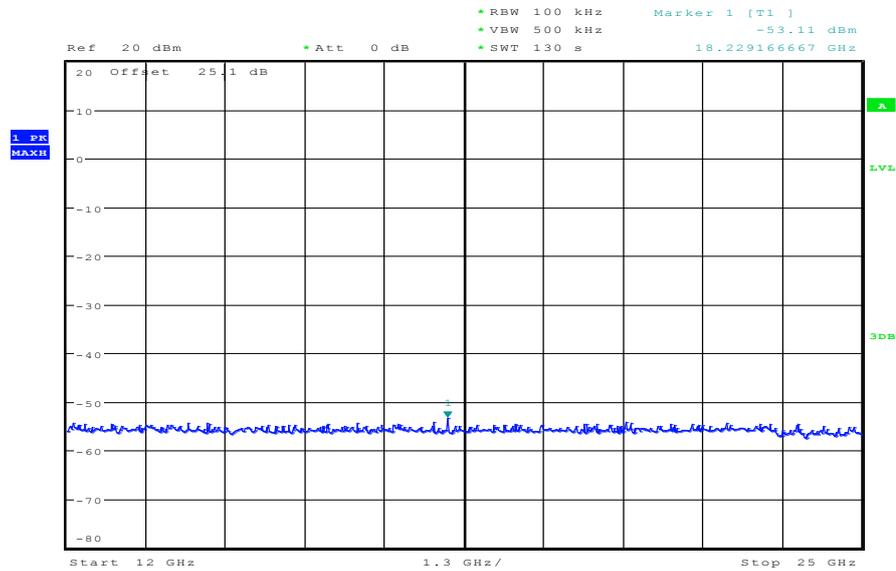


Date: 9.JUL.2012 14:14:08

Plot 6: TX mode, middle channel, up to 40 GHz

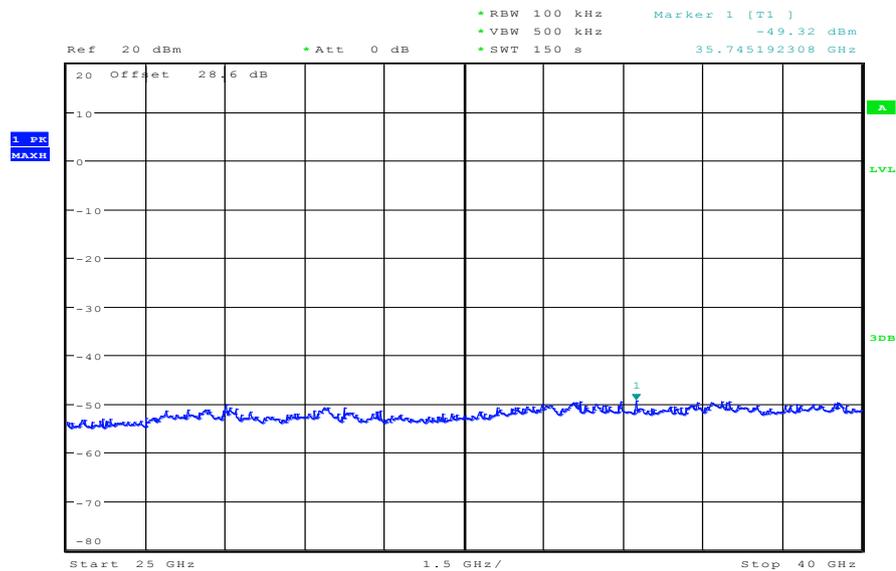

Date: 9.JUL.2012 14:26:01


Plot 7: TX mode, highest channel, up to 12 GHz

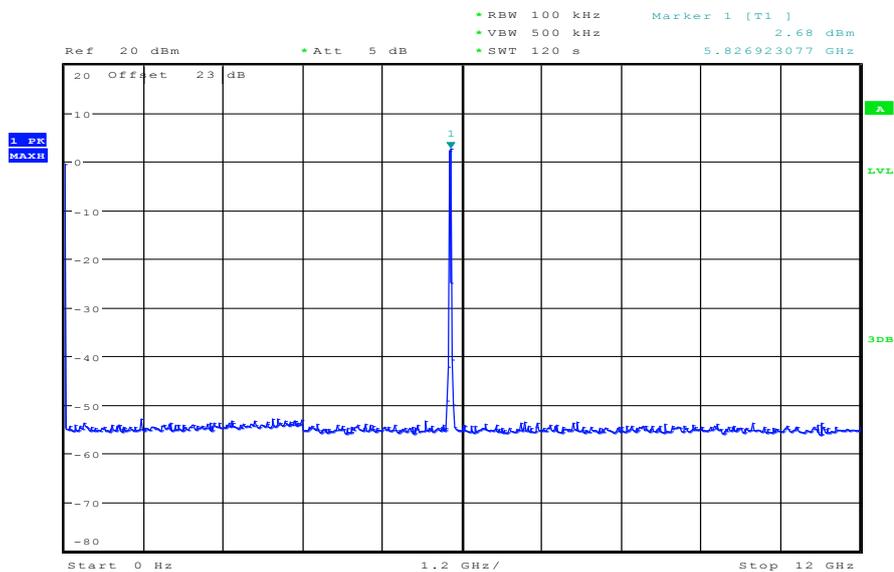

Date: 9.JUL.2012 13:18:01


The peak at the beginning of the plot is the LO from the SA.

Plot 8: TX mode, highest channel, up to 25 GHz

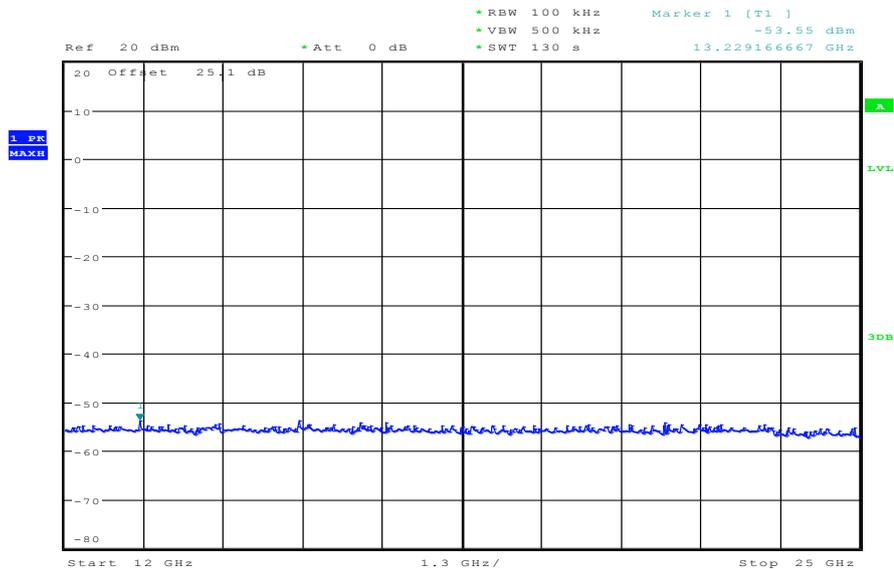

Date: 9.JUL.2012 14:17:50


Plot 9: TX mode, highest channel, up to 40 GHz

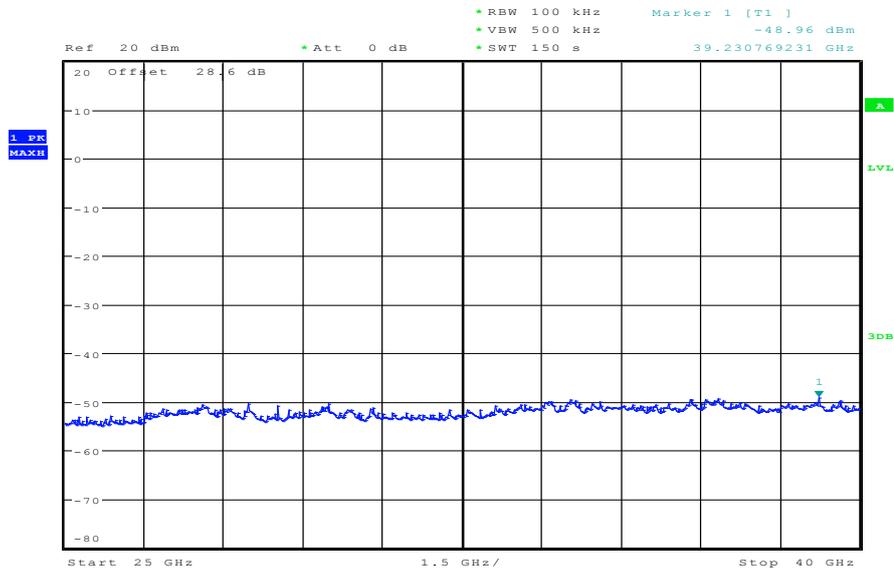

Date: 9.JUL.2012 14:22:26

Plots: OFDM / n – mode HT20


Plot 1: TX mode, lowest channel, up to 12 GHz

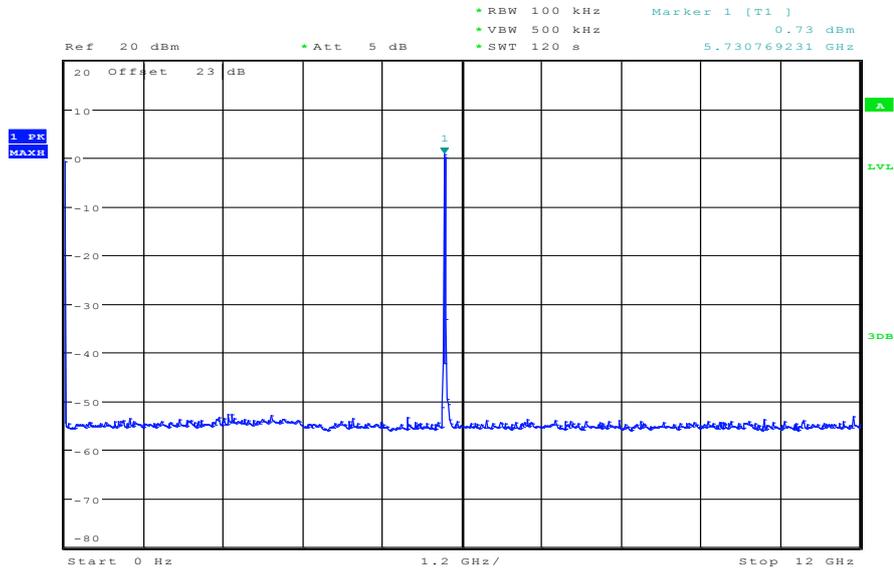

Date: 9.JUL.2012 13:23:27


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, lowest channel, up to 25 GHz

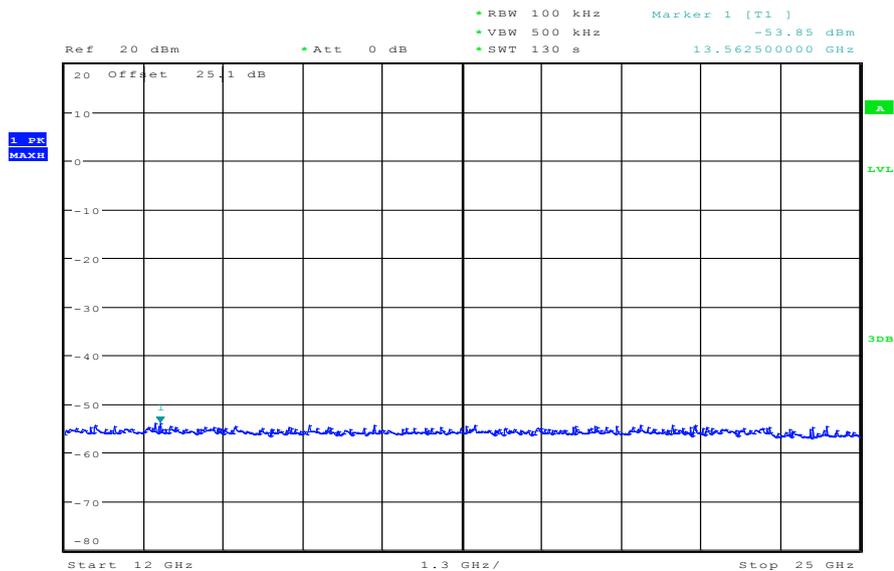


Date: 9.JUL.2012 13:50:04

Plot 3: TX mode, lowest channel, up to 40 GHz

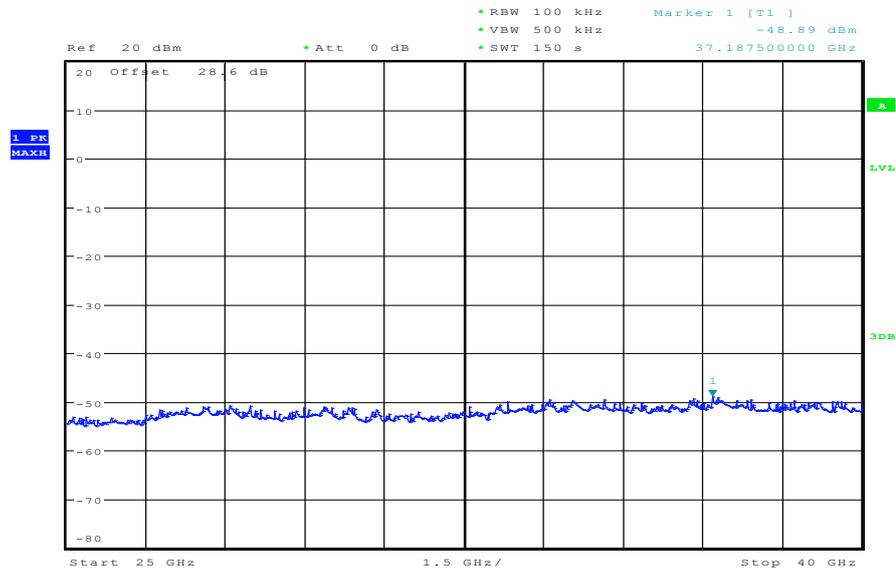

Date: 9.JUL.2012 14:33:44


Plot 4: TX mode, middle channel, up to 12 GHz

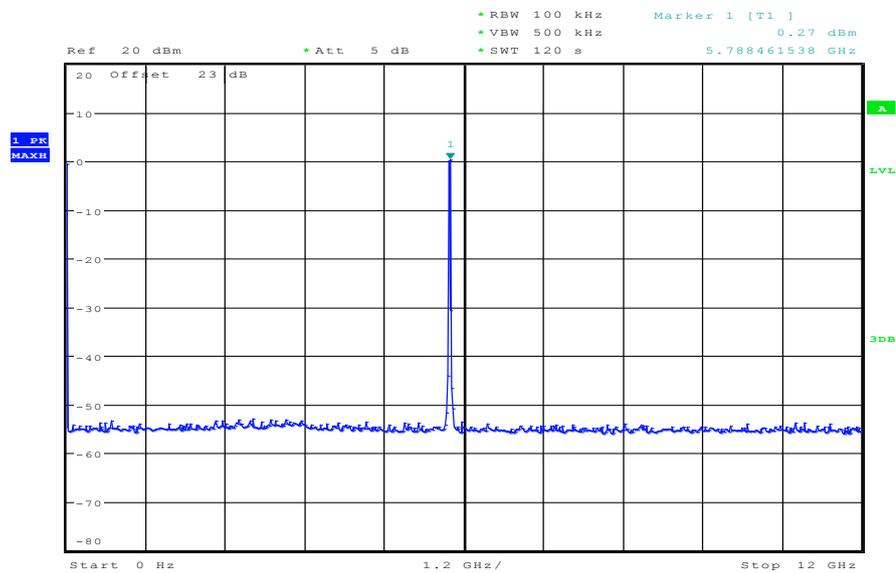

Date: 9.JUL.2012 13:28:16


The peak at the beginning of the plot is the LO from the SA.

Plot 5: TX mode, middle channel, up to 25 GHz

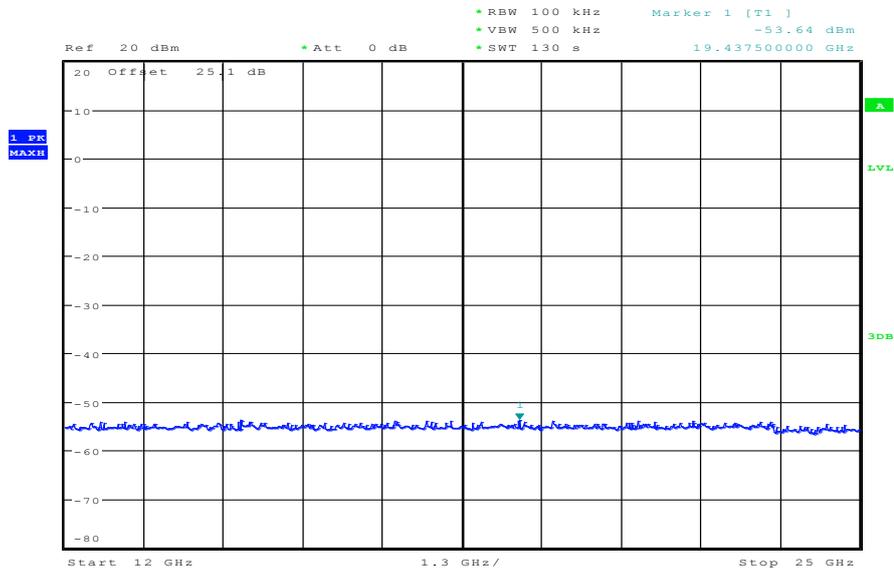


Date: 9.JUL.2012 14:03:41

Plot 6: TX mode, middle channel, up to 40 GHz

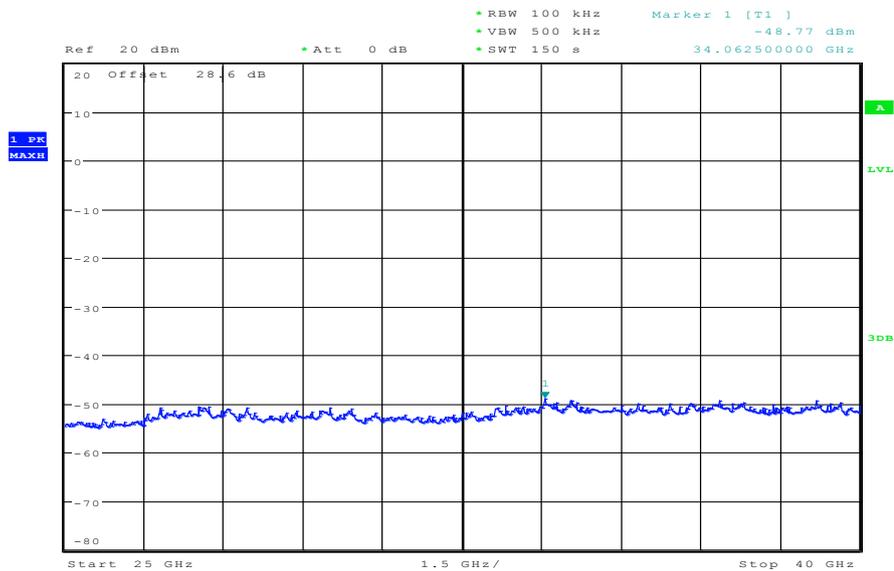

Date: 9.JUL.2012 14:38:09


Plot 7: TX mode, highest channel, up to 12 GHz

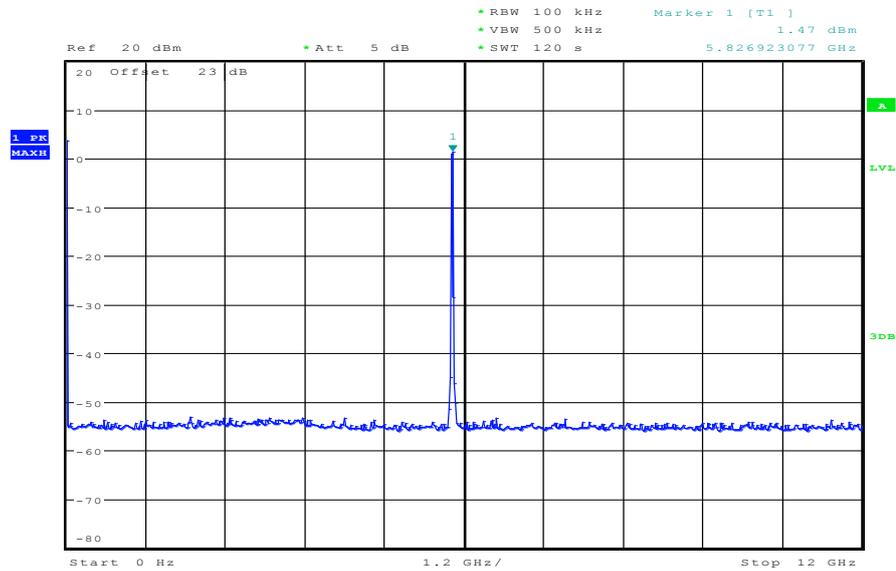

Date: 9.JUL.2012 13:32:24


The peak at the beginning of the plot is the LO from the SA.

Plot 8: TX mode, highest channel, up to 25 GHz

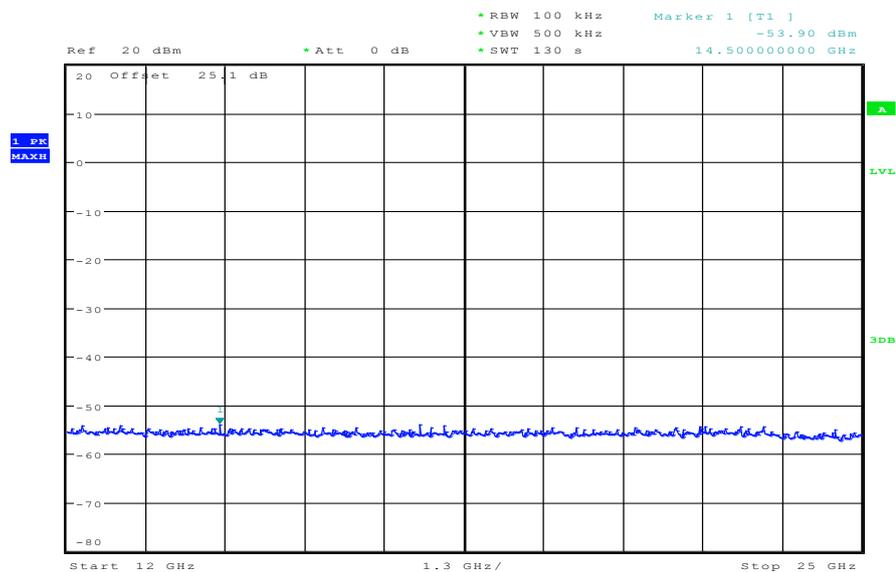

Date: 9.JUL.2012 14:07:16


Plot 9: TX mode, highest channel, up to 40 GHz

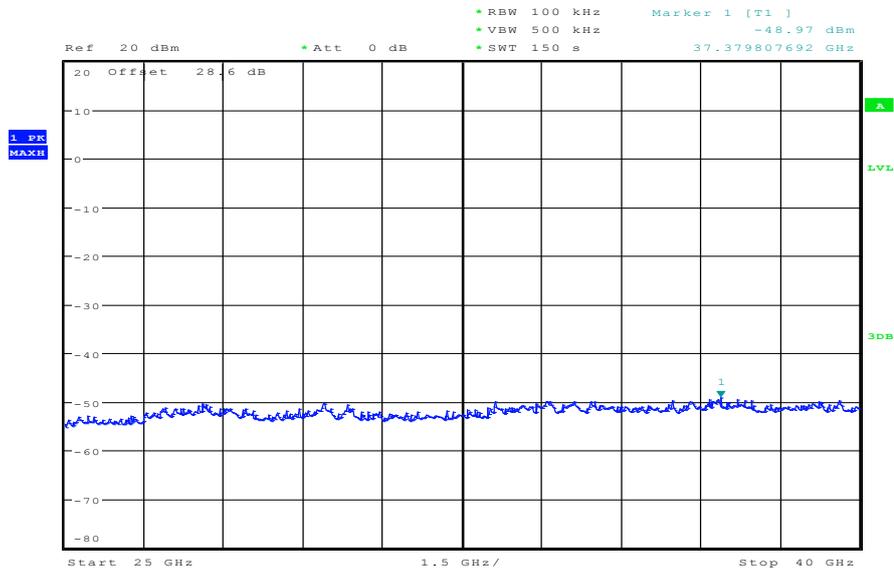

Date: 9.JUL.2012 14:41:45

Plots: OFDM / n – mode HT40


Plot 1: TX mode, lowest channel, up to 12 GHz

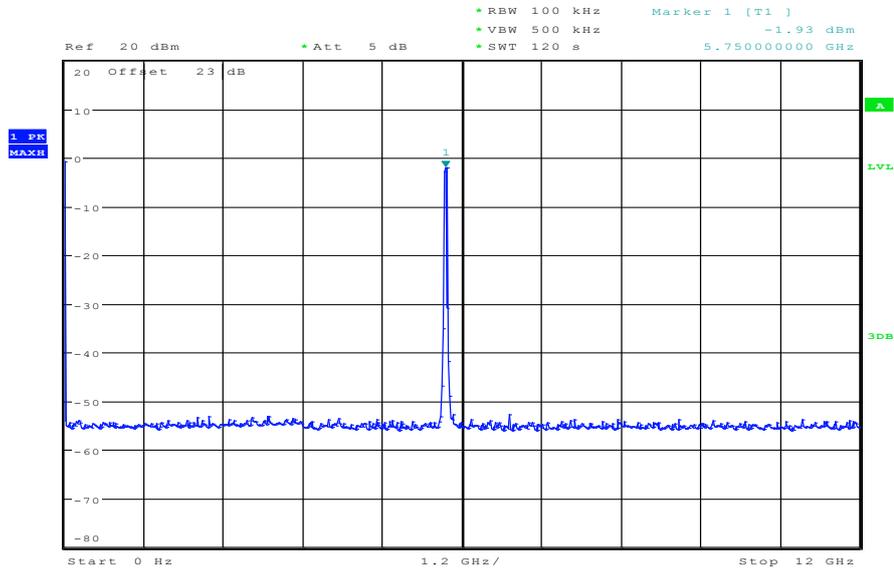

Date: 9.JUL.2012 13:36:00


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, lowest channel, up to 25 GHz

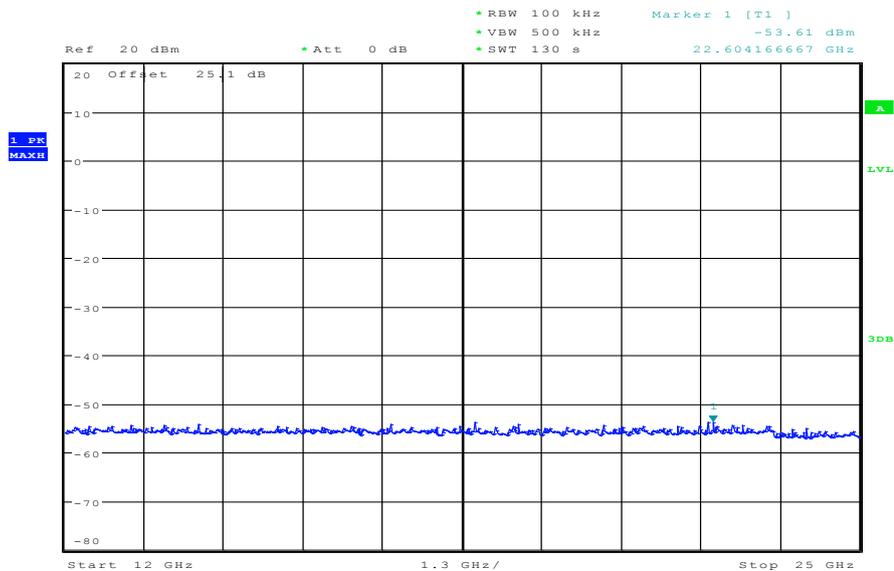


Date: 9.JUL.2012 13:46:30

Plot 3: TX mode, lowest channel, up to 40 GHz

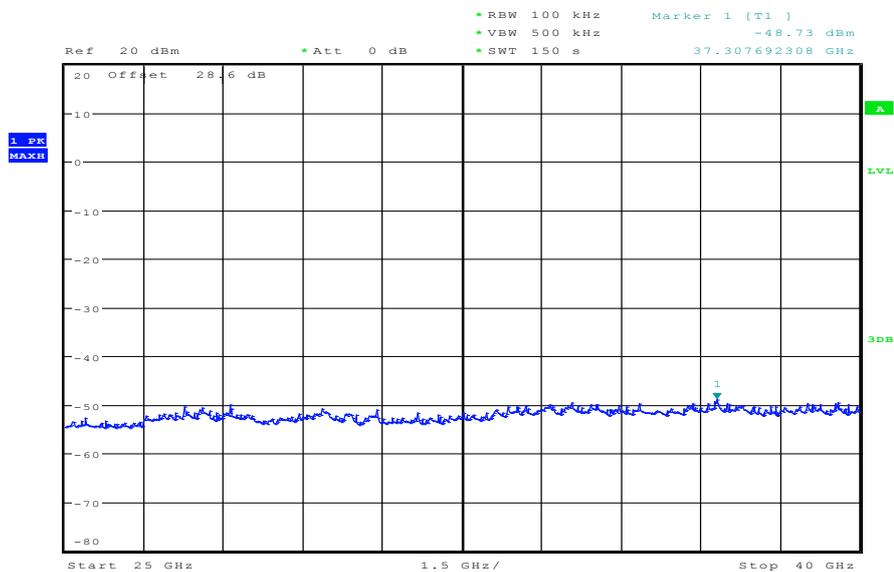

Date: 9.JUL.2012 14:45:51


Plot 4: TX mode, highest channel, up to 12 GHz

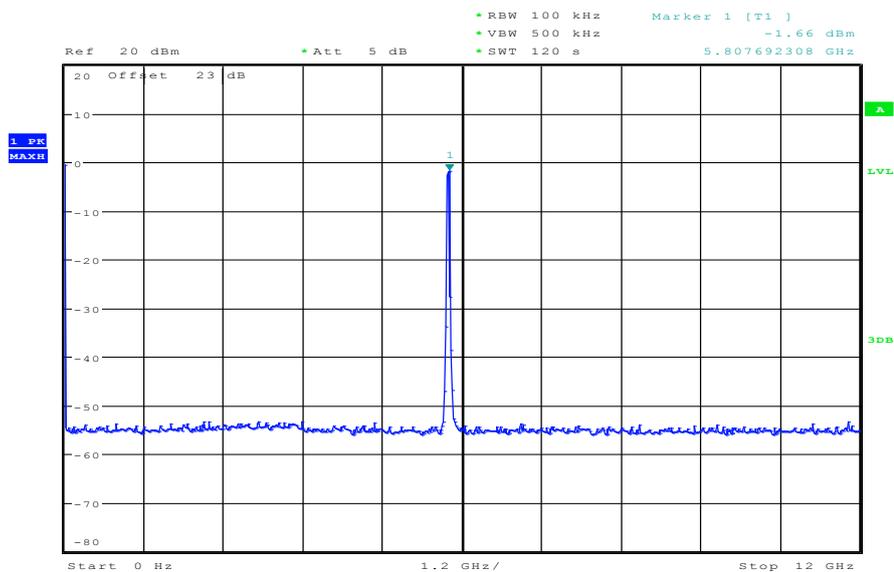

Date: 9.JUL.2012 13:39:19


The peak at the beginning of the plot is the LO from the SA.

Plot 5: TX mode, highest channel, up to 25 GHz

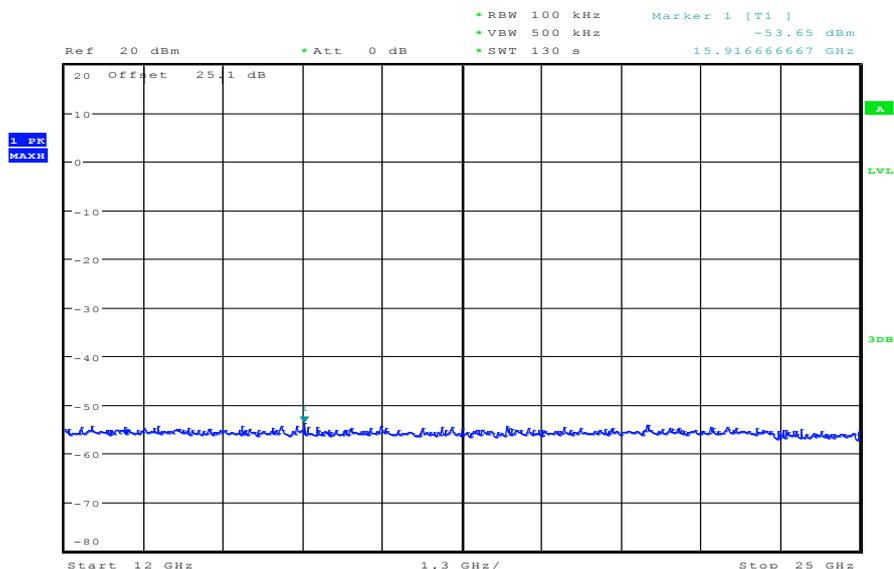

Date: 9.JUL.2012 13:42:32

Plot 6: TX mode, highest channel, up to 40 GHz

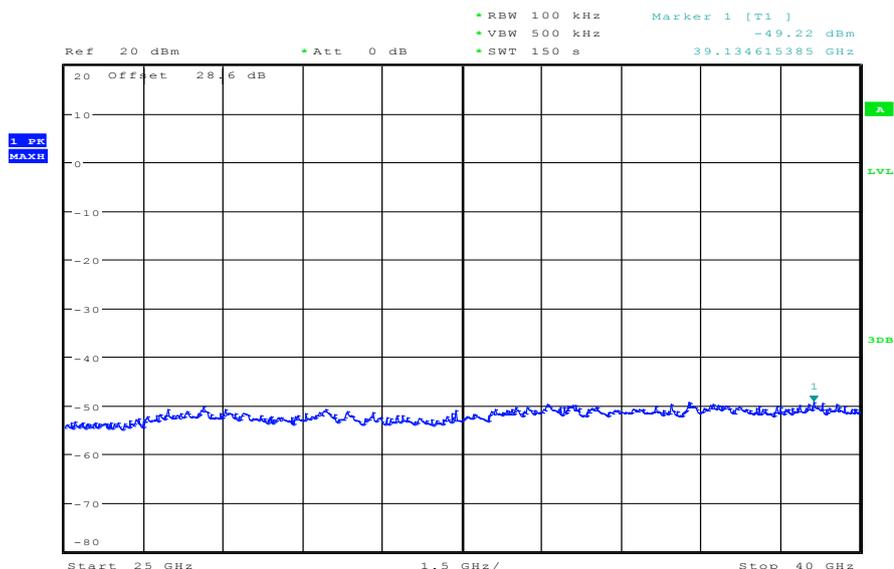

Date: 9.JUL.2012 14:50:01

9.10 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz / 3 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold
Measured Modulation	<input checked="" type="checkbox"/> OFDM a – mode <input checked="" type="checkbox"/> OFDM n – mode HT20 <input checked="" type="checkbox"/> OFDM n – mode HT40

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

FCC	IC	
TX Spurious Emissions Radiated		
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results: OFDM / a – mode

TX Spurious Emissions Radiated [dB μ V/m]								
OFDM / a – mode								
5745 MHz			5785 MHz			5825 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Emissions above 1 GHz: all detected peak values are below the average limit!			Emissions above 1 GHz: all detected peak values are below the average limit!			Emissions above 1 GHz: all detected peak values are below the average limit!		
Measurement uncertainty			± 3 dB					

Result: Passed

Results: OFDM / n – mode HT20

TX Spurious Emissions Radiated [dB μ V/m]								
OFDM / n – mode HT20								
5745 MHz			5785 MHz			5825 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Emissions above 1 GHz: all detected peak values are below the average limit!			Emissions above 1 GHz: all detected peak values are below the average limit!			Emissions above 1 GHz: all detected peak values are below the average limit!		
Measurement uncertainty			± 3 dB					

Result: Passed

Results: OFDM / n – mode HT40

TX Spurious Emissions Radiated [dB μ V/m]								
OFDM / n – mode HT40								
5755 MHz			5795 MHz			-/-		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			-/-		
Emissions above 1 GHz: all detected peak values are below the average limit!			Emissions above 1 GHz: all detected peak values are below the average limit!			-/-		
Measurement uncertainty			± 3 dB					

Result: Passed

Plots: OFDM / a – mode

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0140-BV
 Serial Number: FCC rad 1 sample
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN a_mode 5745MHz + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

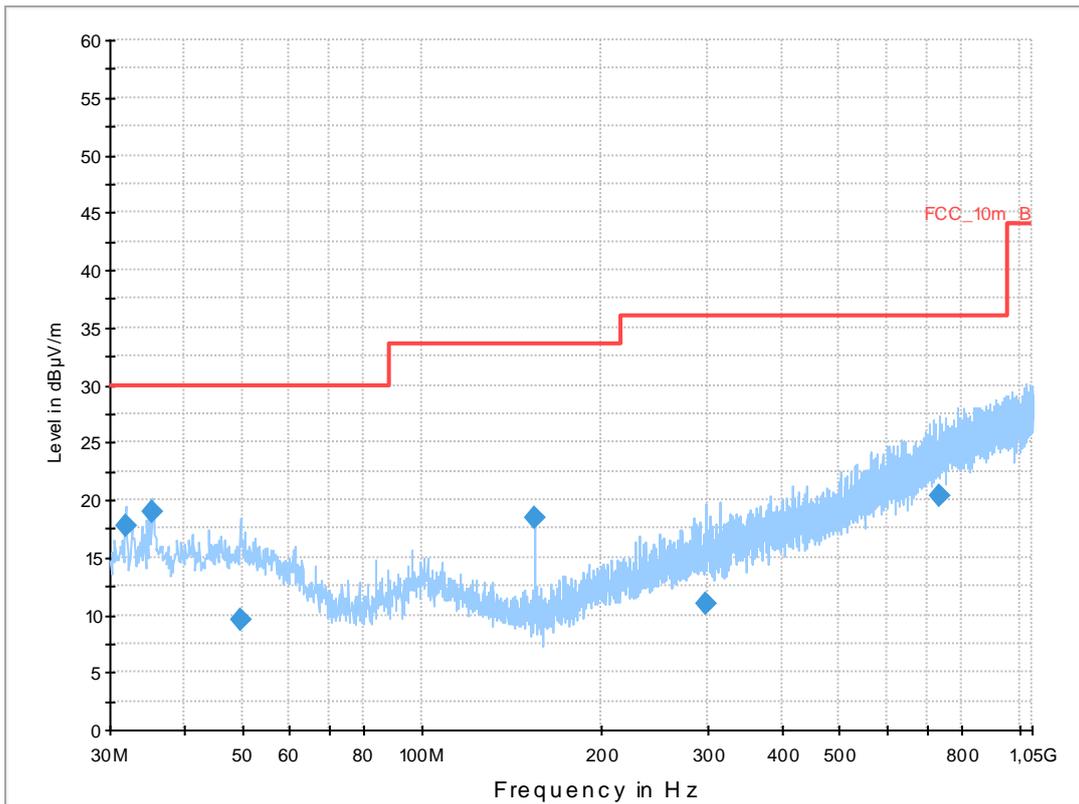


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.959150	17.8	1000.0	120.000	112.0	V	81.0	12.7	12.2	30.0	
35.356650	18.9	1000.0	120.000	142.0	V	81.0	13.1	11.1	30.0	
49.597050	9.6	1000.0	120.000	170.0	H	2.0	13.4	20.4	30.0	
154.073100	18.4	1000.0	120.000	98.0	V	-5.0	9.0	15.1	33.5	
299.538150	10.9	1000.0	120.000	170.0	V	170.0	14.5	25.1	36.0	
734.434650	20.4	1000.0	120.000	170.0	V	10.0	23.3	15.6	36.0	

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

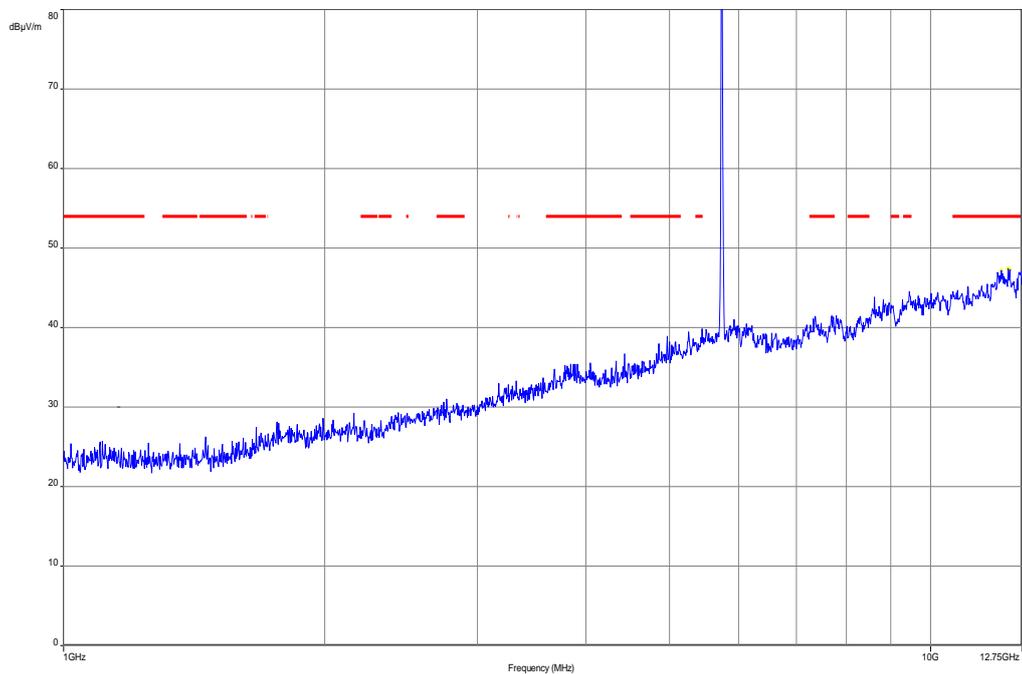


Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

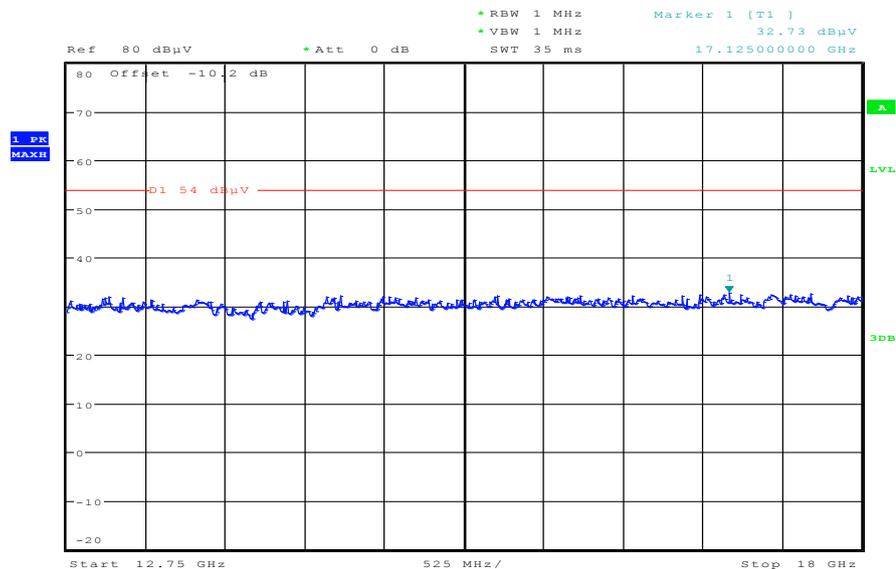


Date: 9 JUL 2012 15:08:48

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

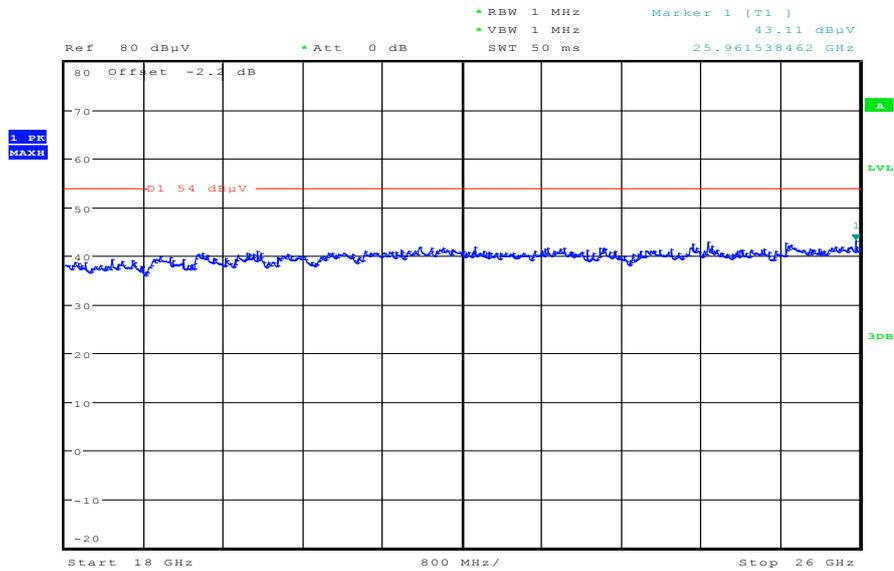

Date: 9.JUL.2012 15:45:54

Plot 5: Lowest channel, 26 GHz to 40 GHz, vertical & horizontal polarization

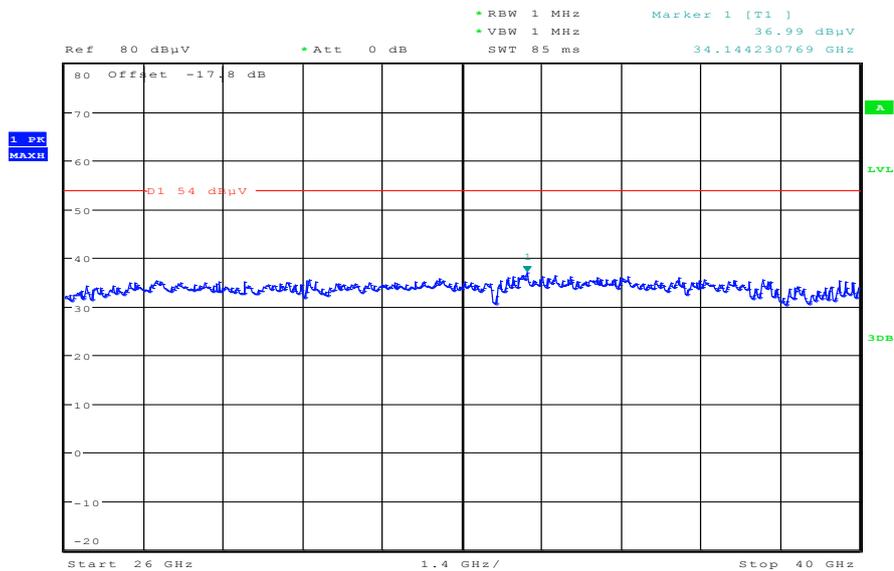

Date: 9.JUL.2012 16:06:33

Plot 6: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0140-BV
 Serial Number: FCC rad 1 sample
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN a_mode 5785MHz + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

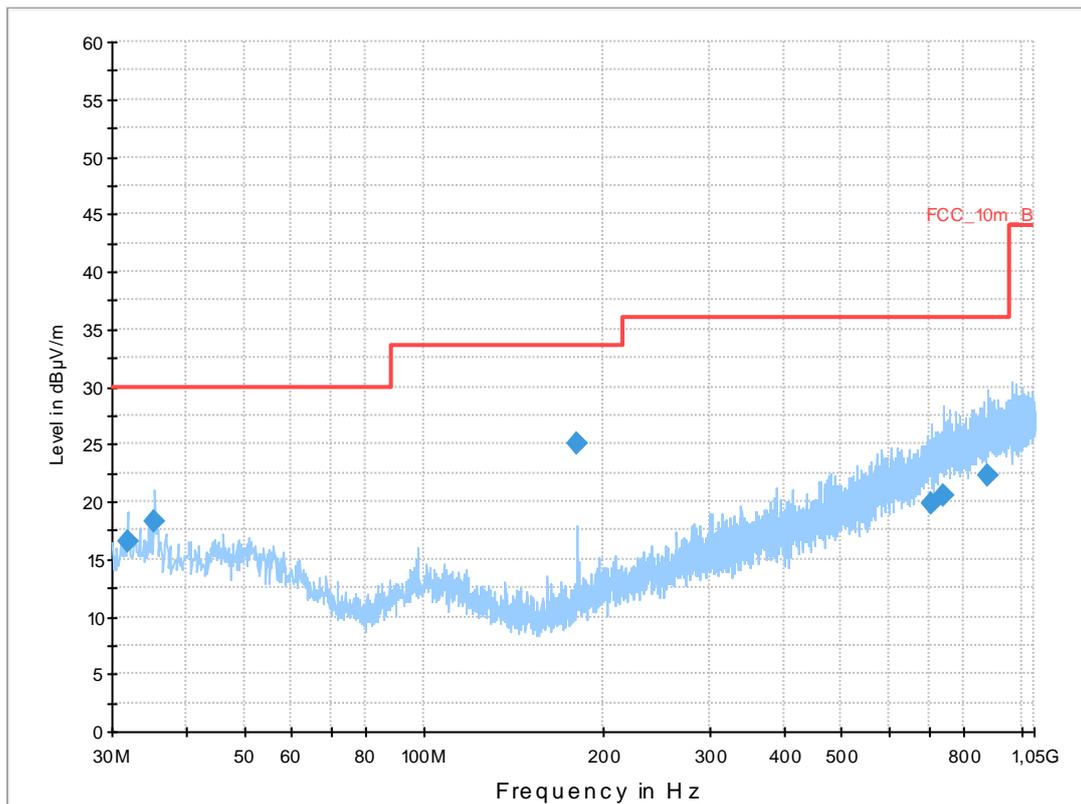


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
32.001150	16.5	1000.0	120.000	111.0	V	190.0	12.7	13.5	30.0	
35.370900	18.2	1000.0	120.000	170.0	V	261.0	13.1	11.8	30.0	
179.995200	25.1	1000.0	120.000	120.0	V	171.0	10.4	8.4	33.5	
705.536100	19.8	1000.0	120.000	170.0	V	175.0	22.6	16.2	36.0	
741.439500	20.6	1000.0	120.000	170.0	V	190.0	23.5	15.4	36.0	
881.163450	22.2	1000.0	120.000	170.0	H	267.0	25.0	13.8	36.0	

Plot 7: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

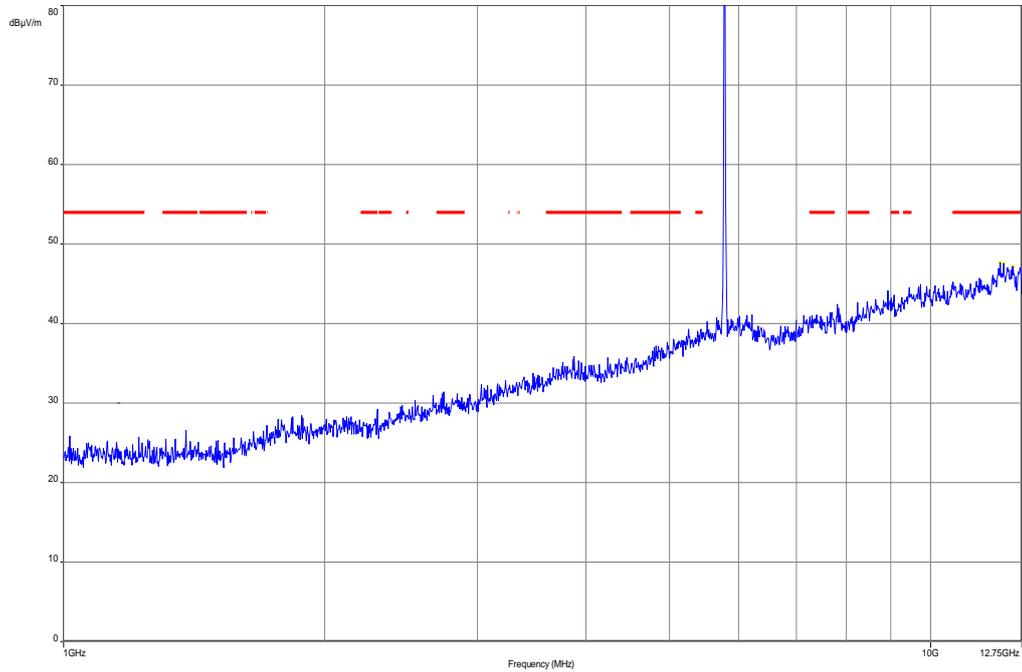


Plot 8: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

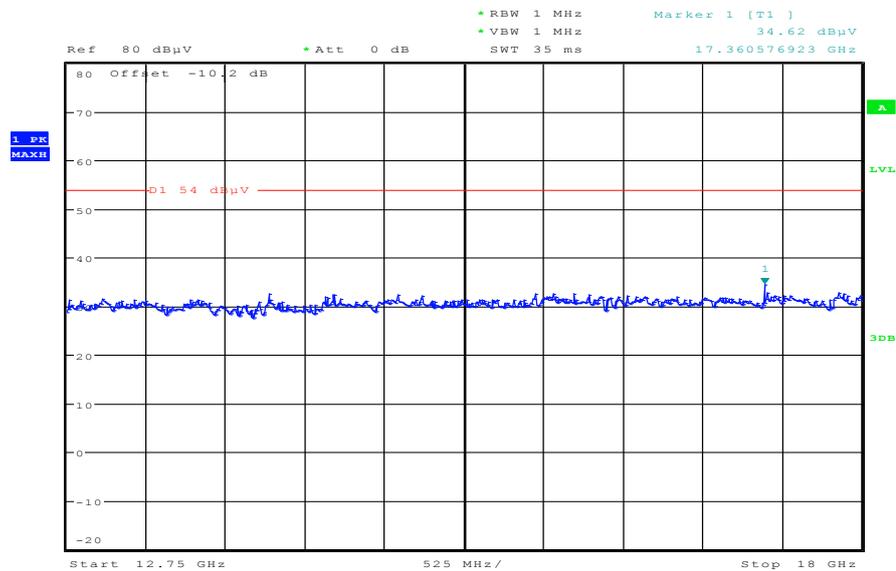


Date: 9.JUL.2012 15:11:30

Plot 9: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

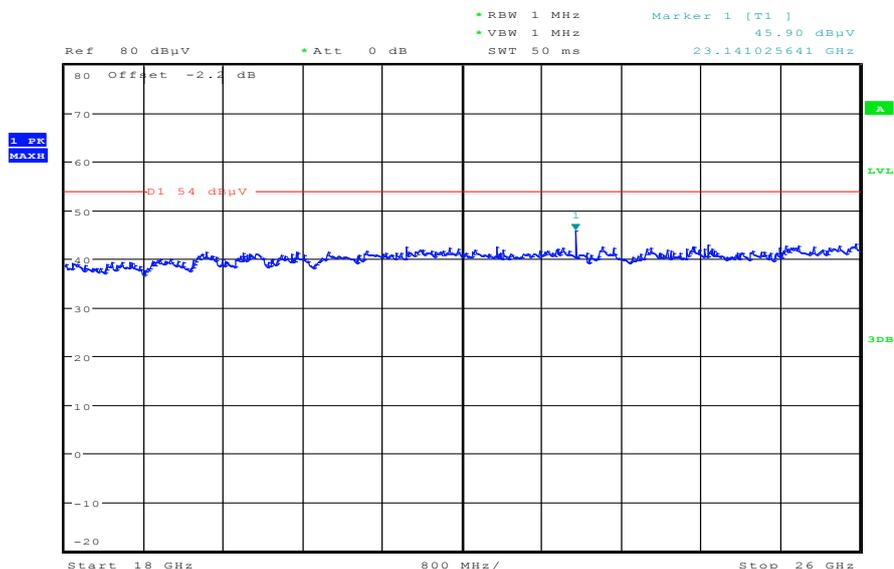

Date: 9.JUL.2012 15:47:12

Plot 10: Middle channel, 26 GHz to 40 GHz, vertical & horizontal polarization

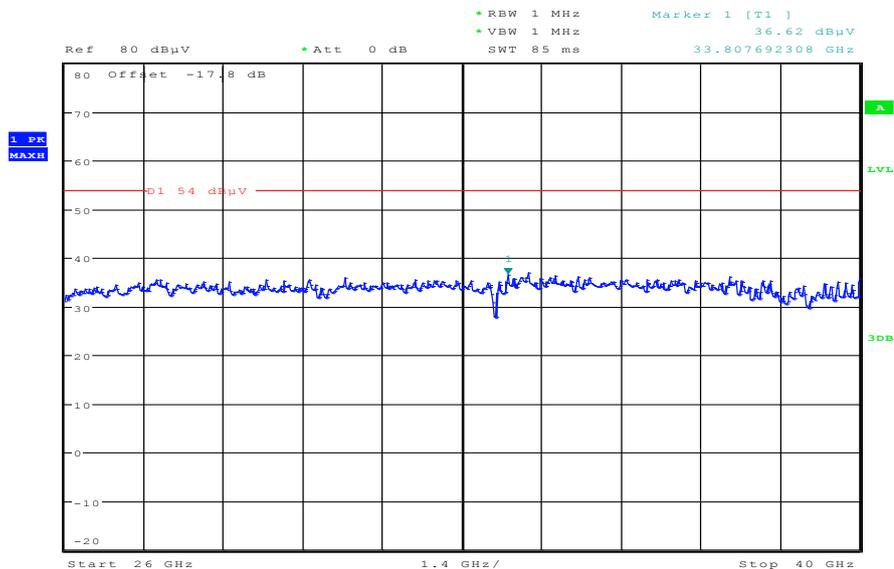

Date: 9.JUL.2012 16:08:23

Plot 11: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0140-BV
 Serial Number: FCC rad 1 sample
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN a_mode 5825MHz + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

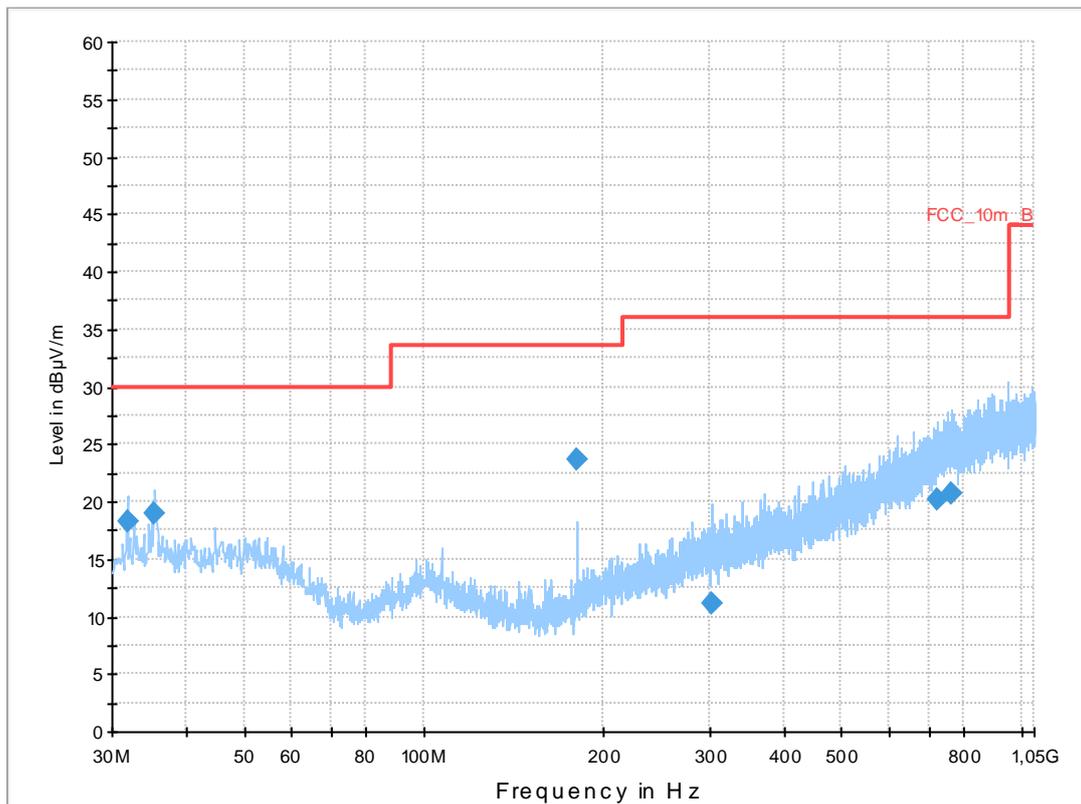


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.959750	18.3	1000.0	120.000	98.0	V	81.0	12.7	11.7	30.0	
35.346900	19.0	1000.0	120.000	154.0	V	-9.0	13.1	11.0	30.0	
180.012300	23.6	1000.0	120.000	120.0	V	265.0	10.4	9.9	33.5	
303.601350	11.2	1000.0	120.000	170.0	H	190.0	14.6	24.8	36.0	
722.731800	20.1	1000.0	120.000	98.0	H	-9.0	23.0	15.9	36.0	
762.172800	20.7	1000.0	120.000	160.0	V	-10.0	23.7	15.3	36.0	

Plot 12: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

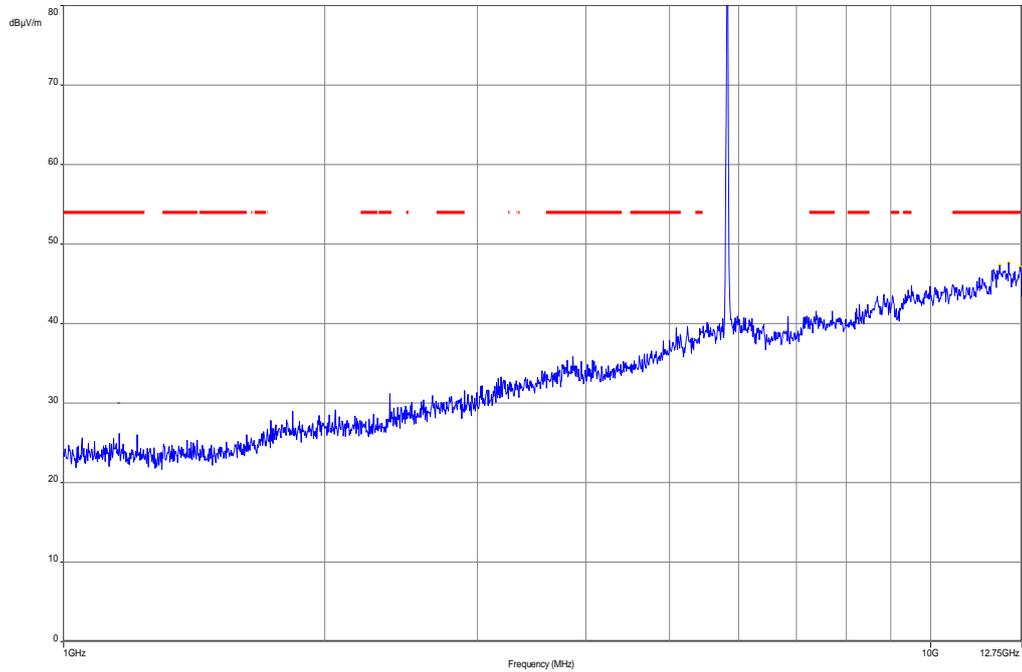


Plot 13: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

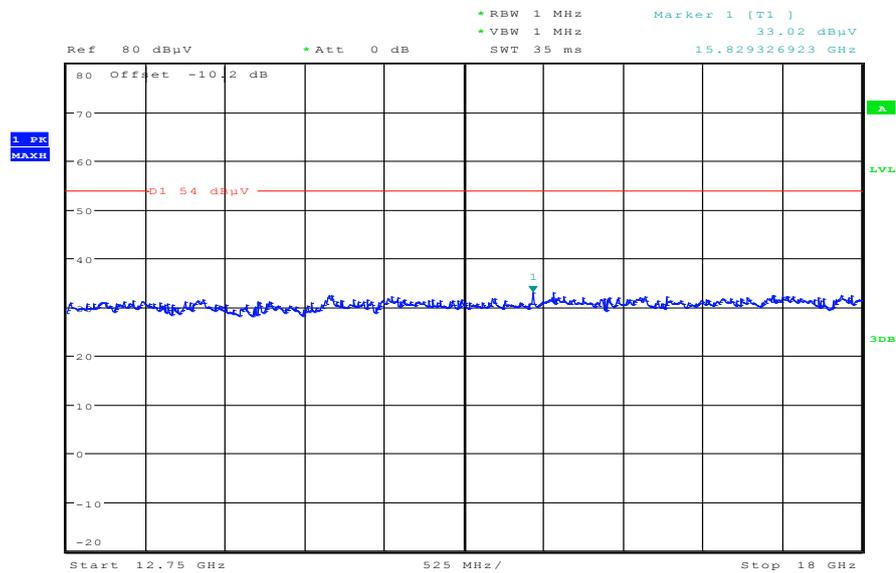


Date: 9.JUL.2012 15:13:03

Plot 14: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

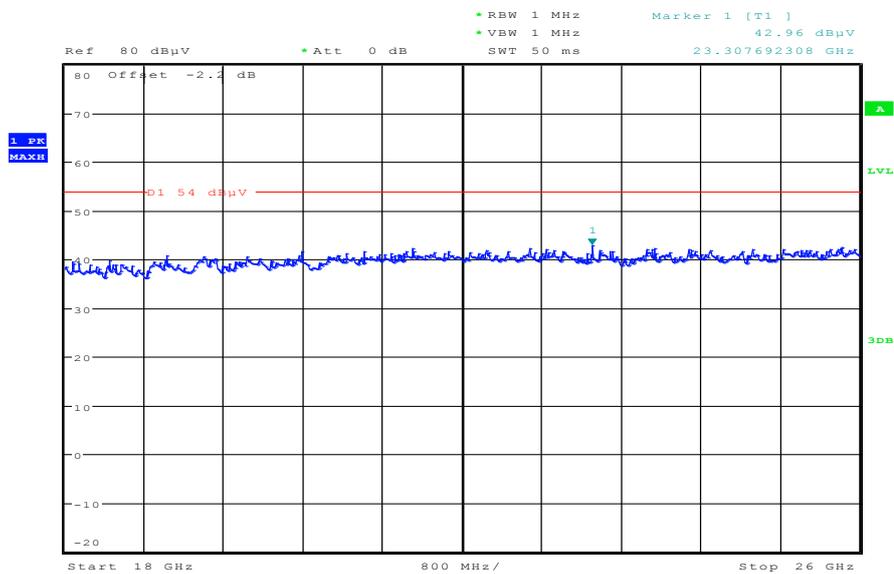

Date: 9.JUL.2012 15:48:00

Plot 15: Highest channel, 26 GHz to 40 GHz, vertical & horizontal polarization

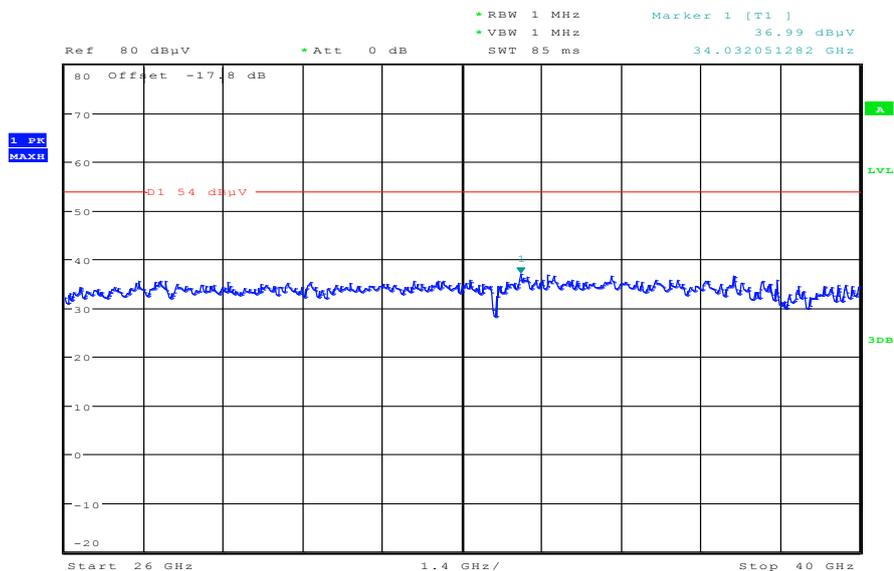

Date: 9.JUL.2012 16:10:44

Plots: OFDM / n – mode HT20

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0140-BV
 Serial Number: FCC rad 1 sample
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN n_mode HT20 5745MHz + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

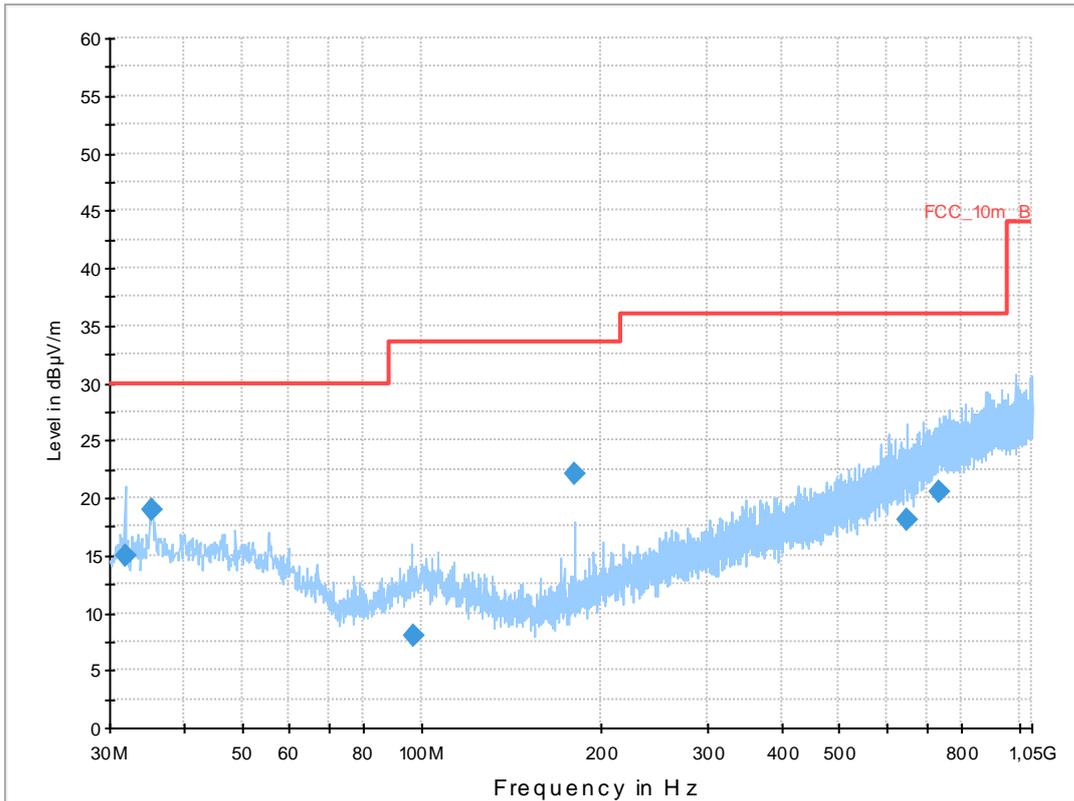


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.885950	14.9	1000.0	120.000	113.0	V	261.0	12.7	15.1	30.0	
35.345850	18.9	1000.0	120.000	136.0	V	170.0	13.1	11.1	30.0	
96.667950	7.9	1000.0	120.000	170.0	H	81.0	11.5	25.6	33.5	
179.979000	22.1	1000.0	120.000	105.0	V	261.0	10.4	11.4	33.5	
646.609800	18.2	1000.0	120.000	170.0	V	190.0	21.1	17.8	36.0	
734.608650	20.4	1000.0	120.000	143.0	V	10.0	23.3	15.6	36.0	

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

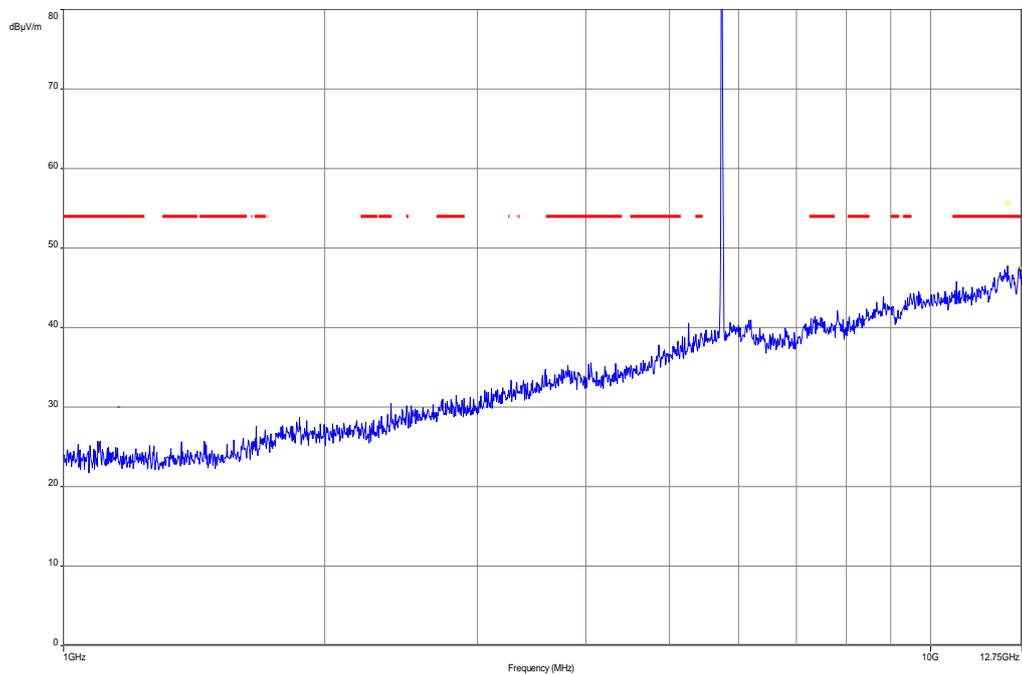

Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

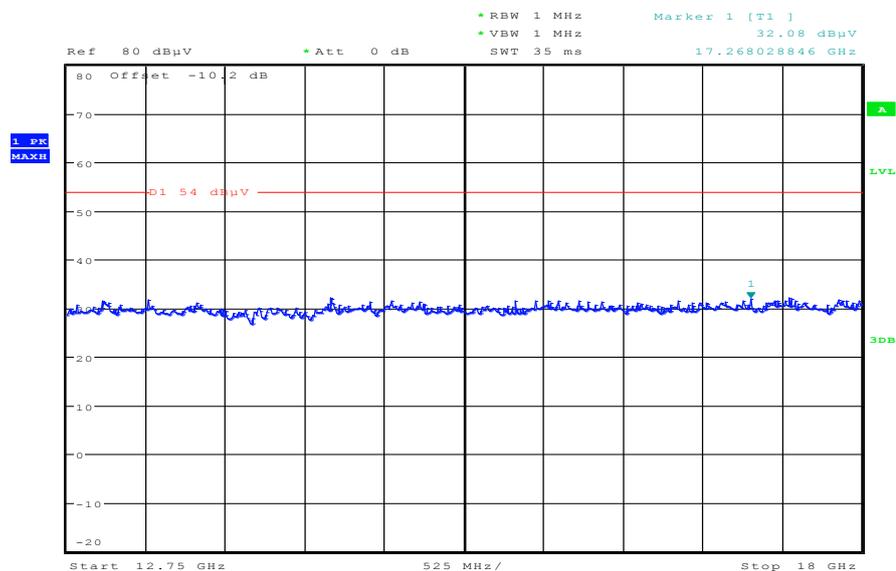

Date: 9 JUL 2012 15:17:52

Plot 6: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0140-BV
 Serial Number: FCC rad 1 sample
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN n_mode HT20 5785MHz + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

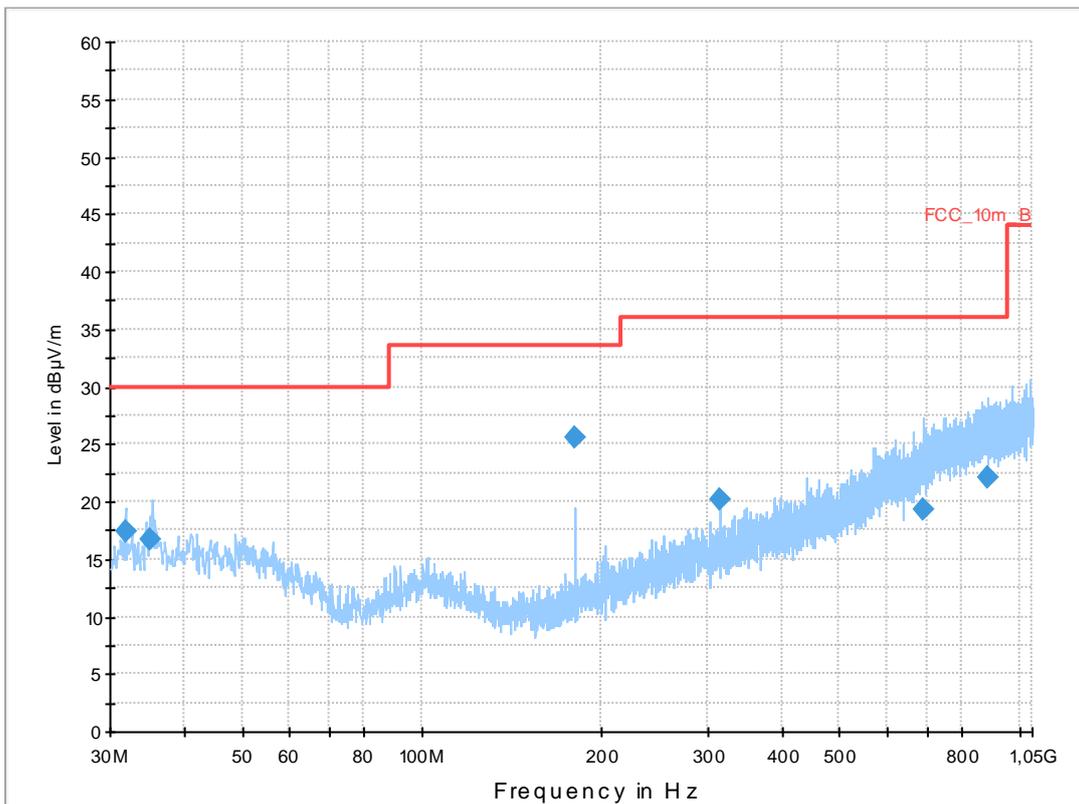


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.900500	17.4	1000.0	120.000	98.0	V	190.0	12.7	12.6	30.0	
35.006700	16.7	1000.0	120.000	120.0	V	261.0	13.0	13.3	30.0	
180.009300	25.5	1000.0	120.000	170.0	V	-2.0	10.4	8.0	33.5	
314.966550	20.2	1000.0	120.000	98.0	V	170.0	15.0	15.8	36.0	
688.575150	19.3	1000.0	120.000	131.0	H	100.0	22.2	16.7	36.0	
887.817150	22.2	1000.0	120.000	170.0	H	90.0	25.0	13.8	36.0	

Plot 7: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

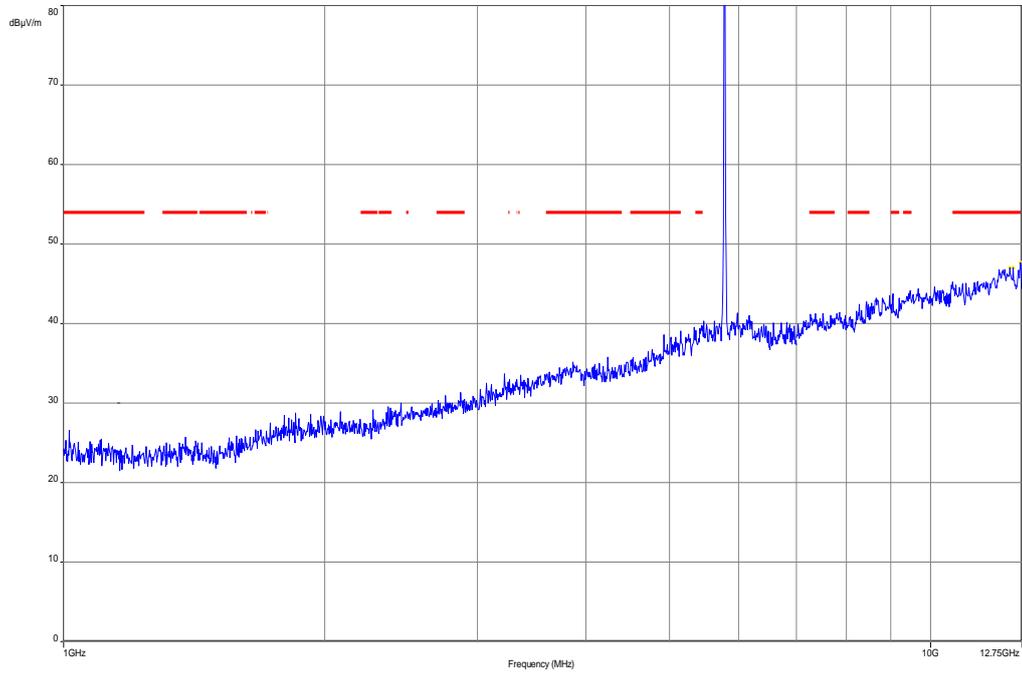


Plot 8: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

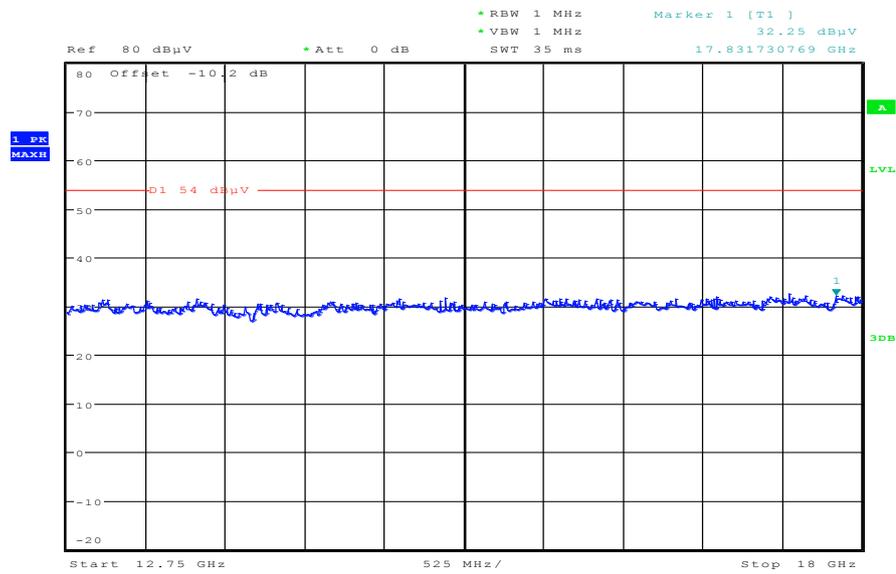


Date: 9 JUL 2012 15:16:35

Plot 9: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

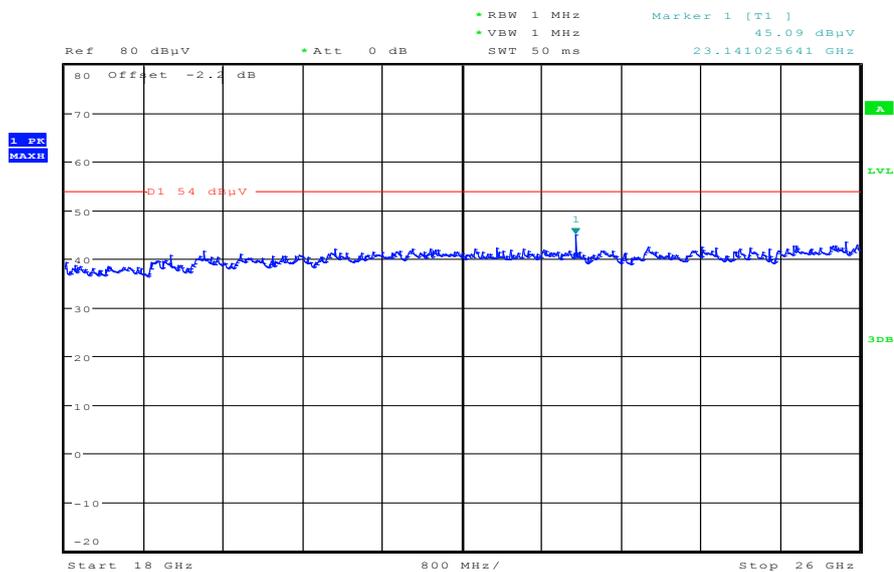

Date: 9.JUL.2012 15:51:16

Plot 10: Middle channel, 26 GHz to 40 GHz, vertical & horizontal polarization

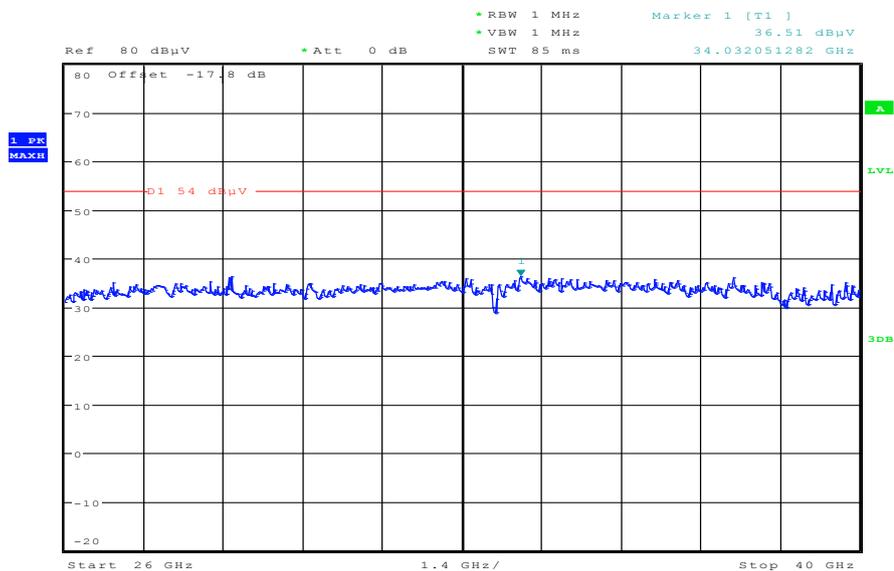

Date: 9.JUL.2012 16:03:42

Plot 11: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0140-BV
 Serial Number: FCC rad 1 sample
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN n_mode HT20 5825MHz + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

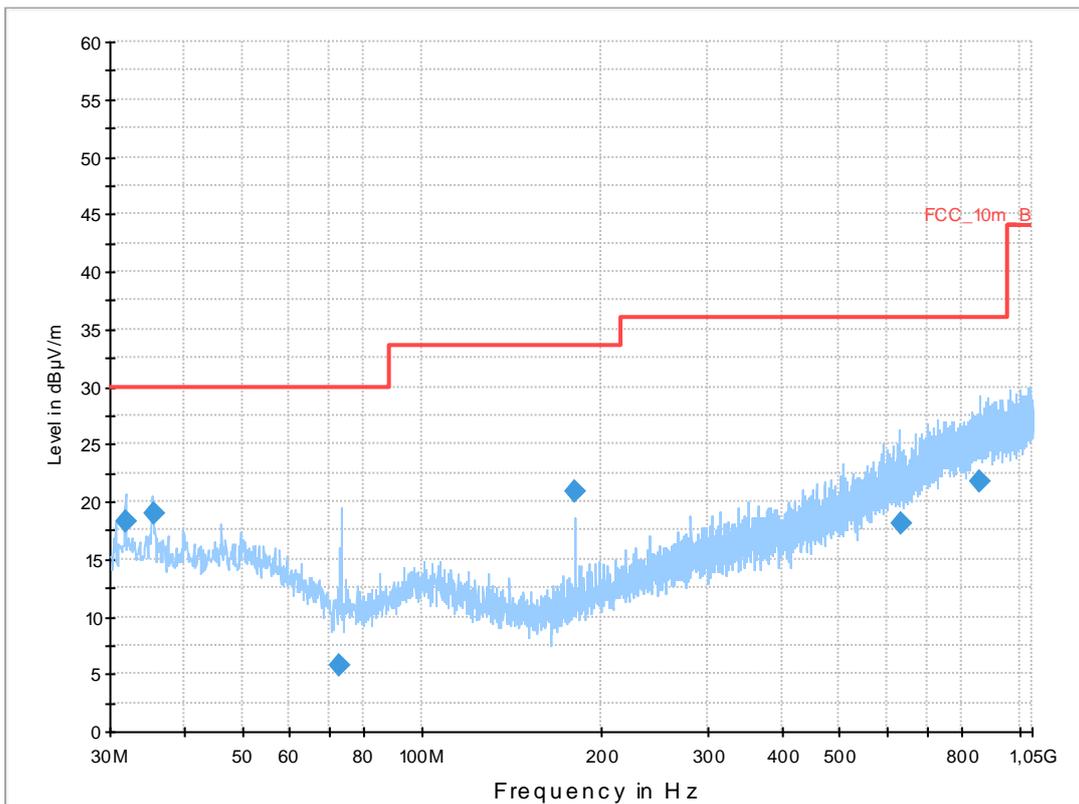


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.939500	18.3	1000.0	120.000	98.0	V	261.0	12.7	11.7	30.0	
35.479650	19.0	1000.0	120.000	170.0	V	81.0	13.1	11.0	30.0	
72.783450	5.7	1000.0	120.000	123.0	V	175.0	9.2	24.3	30.0	
179.983350	20.9	1000.0	120.000	170.0	V	100.0	10.4	12.6	33.5	
631.657050	18.1	1000.0	120.000	105.0	H	171.0	21.0	17.9	36.0	
856.782300	21.8	1000.0	120.000	170.0	H	-10.0	24.6	14.2	36.0	

Plot 12: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

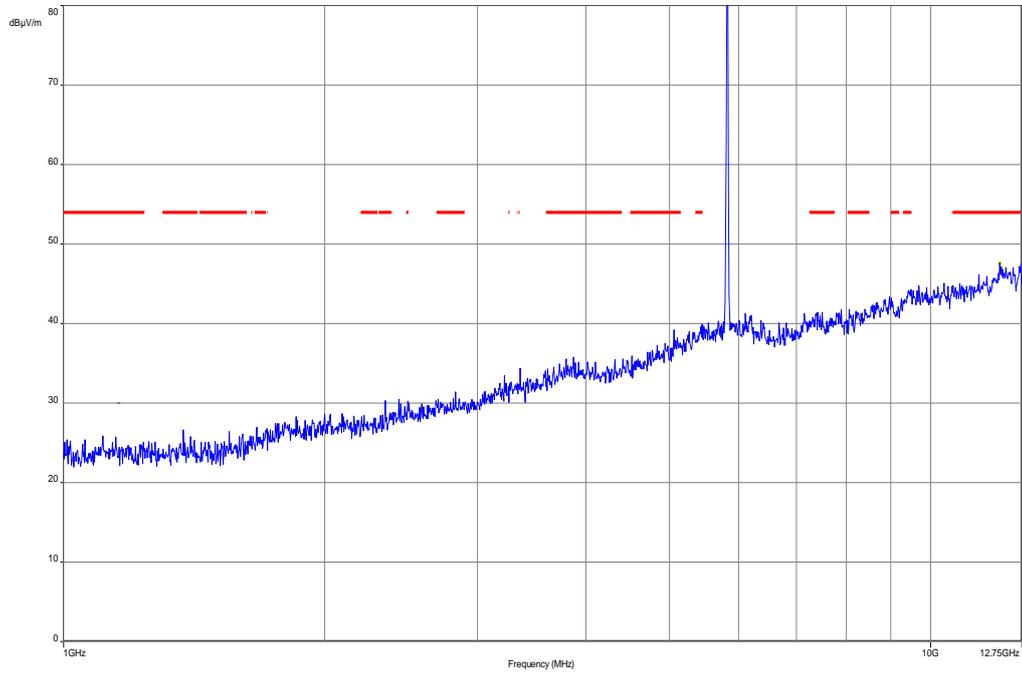


Plot 13: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

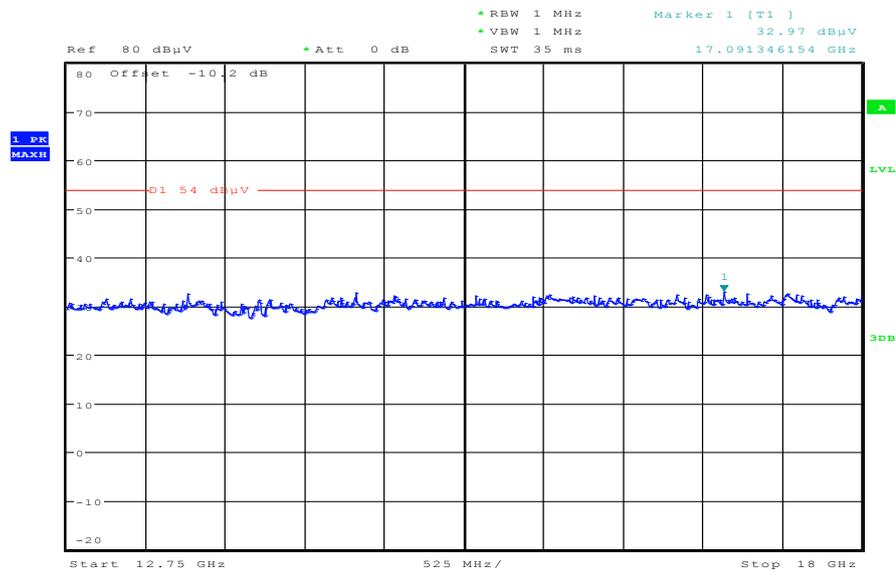


Date: 9.JUL.2012 15:15:03

Plot 14: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

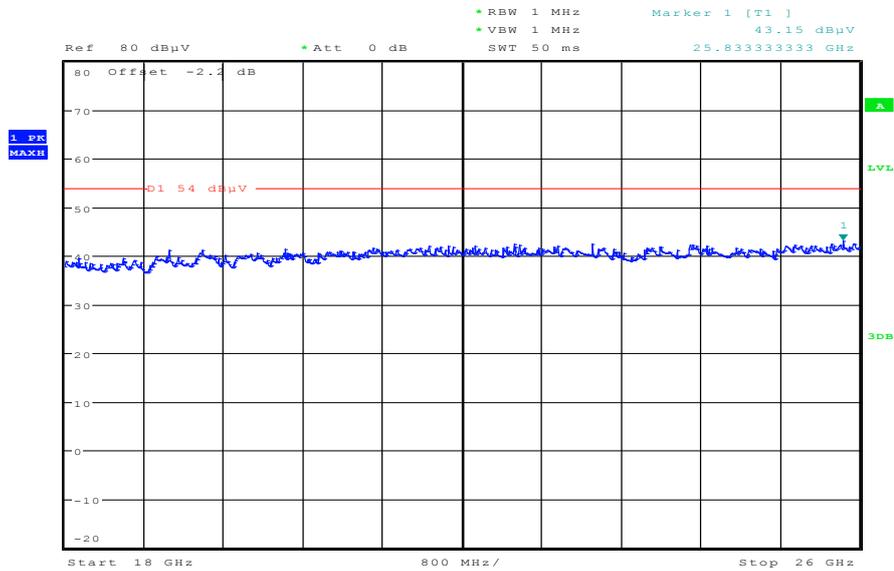

Date: 9.JUL.2012 15:52:41

Plot 15: Highest channel, 26 GHz to 40 GHz, vertical & horizontal polarization

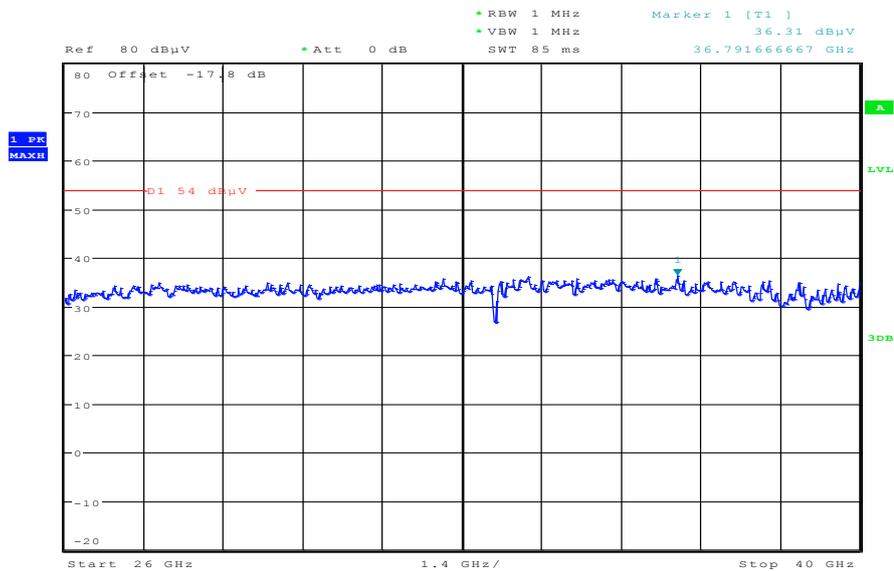

Date: 9.JUL.2012 16:04:13

Plots: OFDM / n – mode HT40

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0140-BV
 Serial Number: FCC rad 1 sample
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN n_mode HT40 5755MHz + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

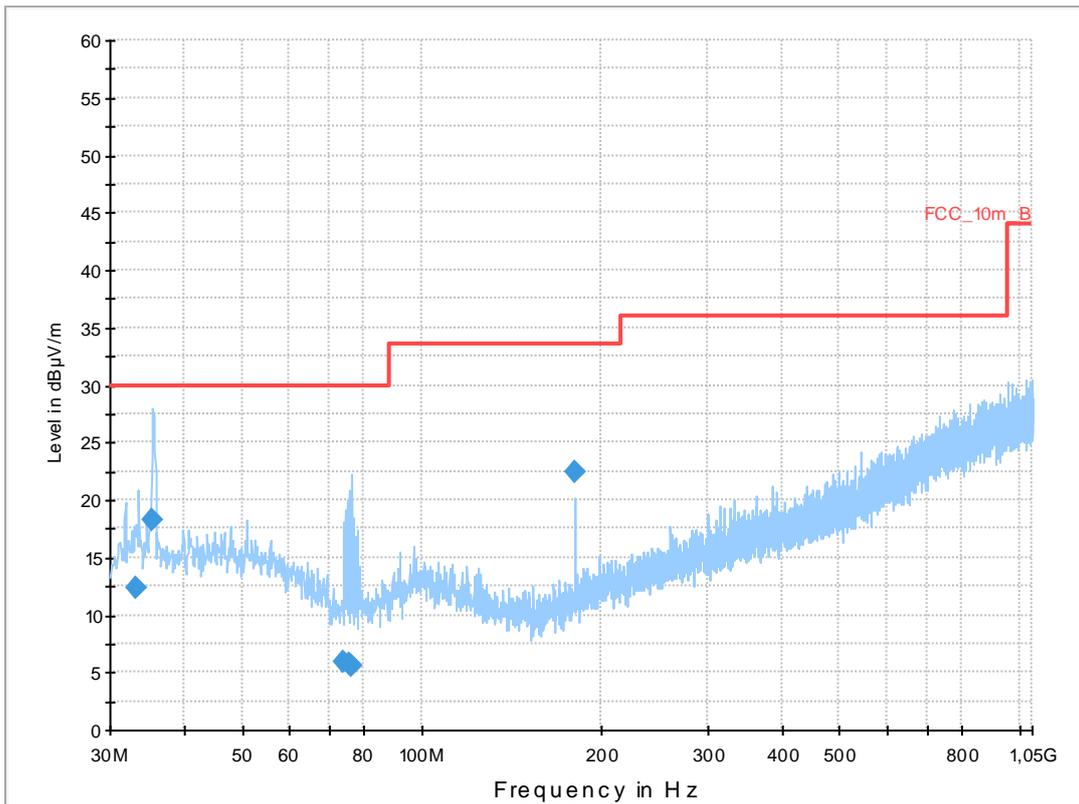


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
33.100500	12.4	1000.0	120.000	111.0	H	10.0	12.8	17.6	30.0	
35.343750	18.2	1000.0	120.000	170.0	V	-10.0	13.1	11.8	30.0	
74.047050	6.0	1000.0	120.000	112.0	V	265.0	9.2	24.0	30.0	
75.748200	5.7	1000.0	120.000	170.0	V	273.0	9.2	24.3	30.0	
76.053450	5.6	1000.0	120.000	170.0	V	180.0	9.2	24.4	30.0	
180.003750	22.5	1000.0	120.000	98.0	V	-10.0	10.4	11.0	33.5	

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

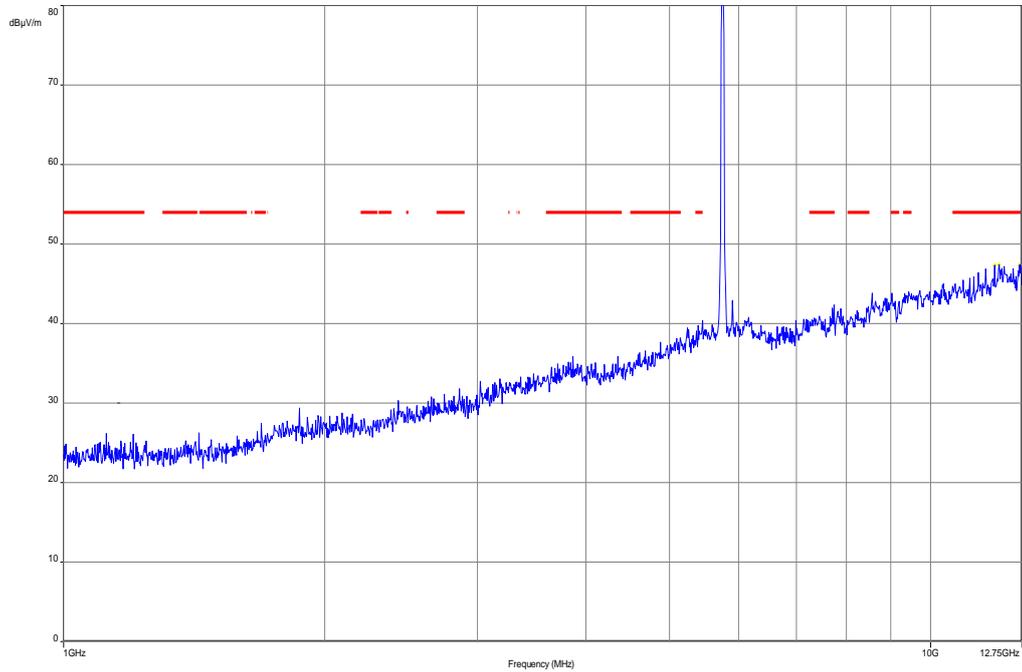


Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

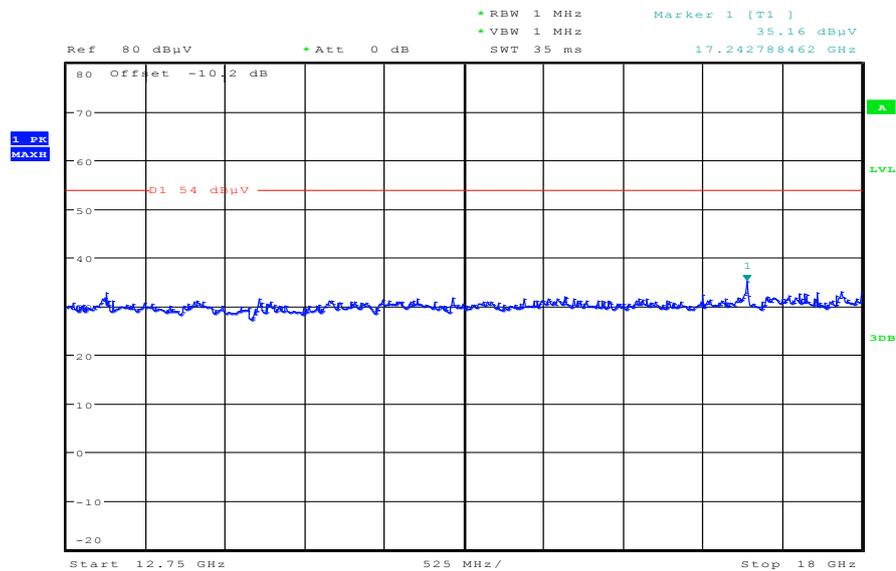


Date: 9.JUL.2012 15:19:17

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

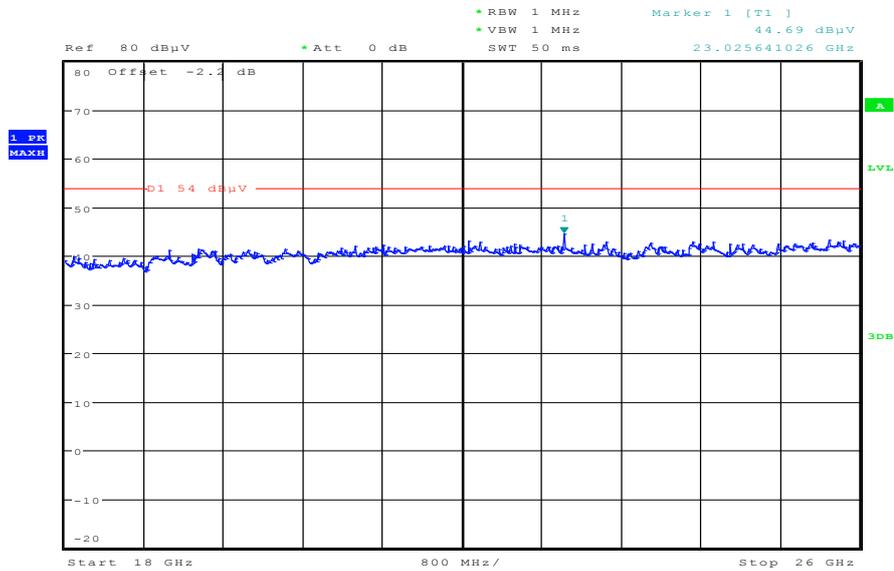

Date: 9.JUL.2012 15:54:18

Plot 5: Lowest channel, 26 GHz to 40 GHz, vertical & horizontal polarization

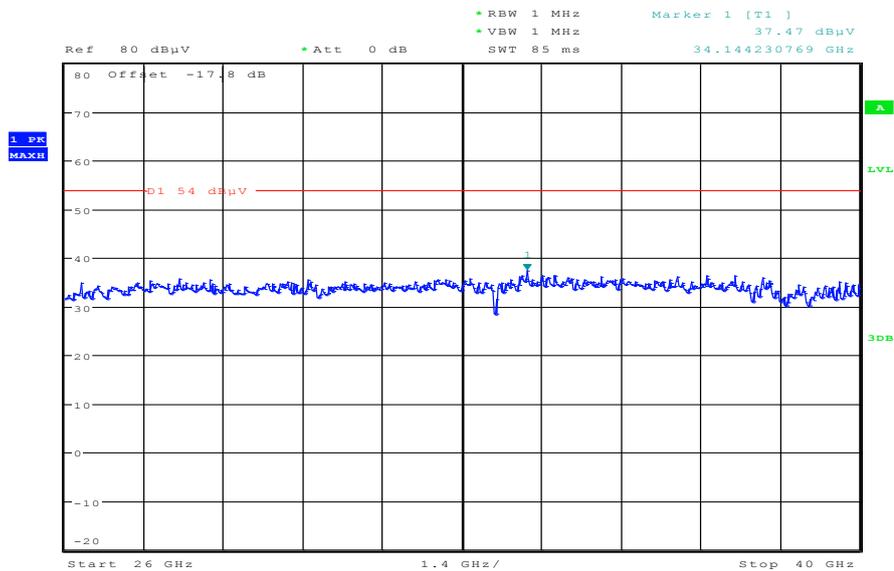

Date: 9.JUL.2012 16:00:54

Plot 6: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0140-BV
 Serial Number: FCC rad 1 sample
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN n_mode HT40 5795MHz + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

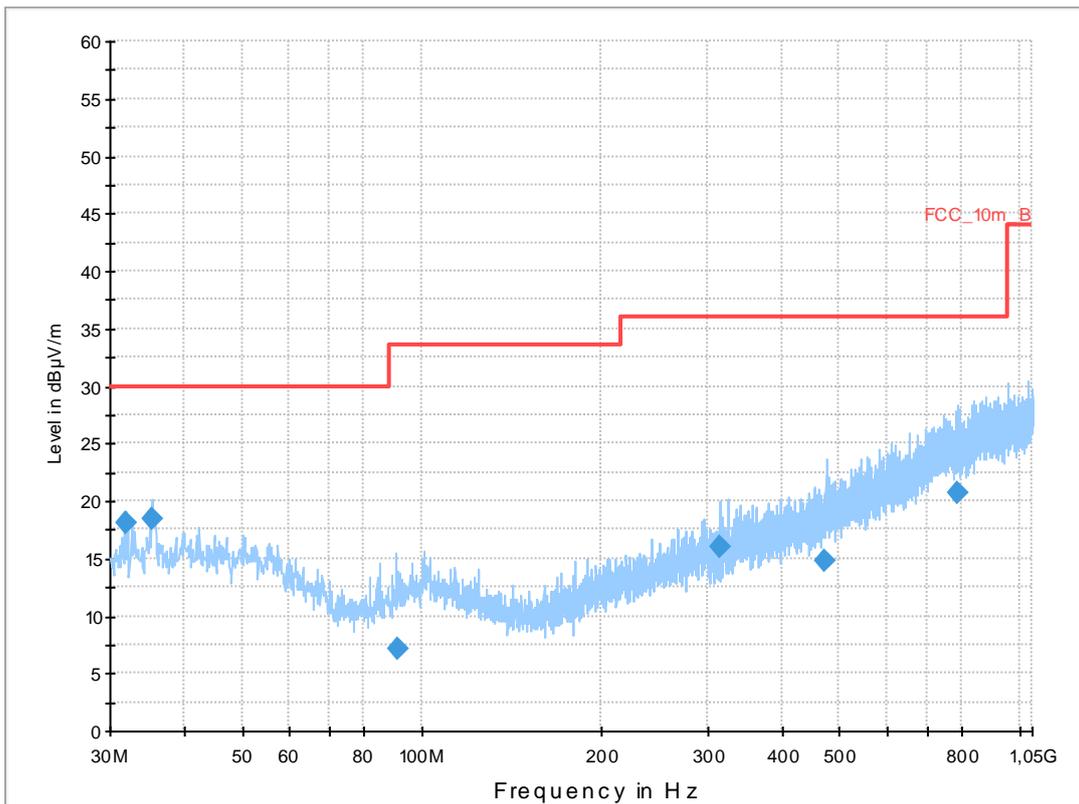


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.915350	18.1	1000.0	120.000	112.0	V	-9.0	12.7	11.9	30.0	
35.320200	18.5	1000.0	120.000	170.0	V	81.0	13.1	11.5	30.0	
90.908400	7.1	1000.0	120.000	98.0	H	260.0	10.7	26.4	33.5	
314.945700	16.0	1000.0	120.000	98.0	V	80.0	15.0	20.0	36.0	
473.617350	14.7	1000.0	120.000	121.0	H	10.0	18.2	21.3	36.0	
787.143300	20.7	1000.0	120.000	170.0	H	270.0	23.8	15.3	36.0	

Plot 7: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

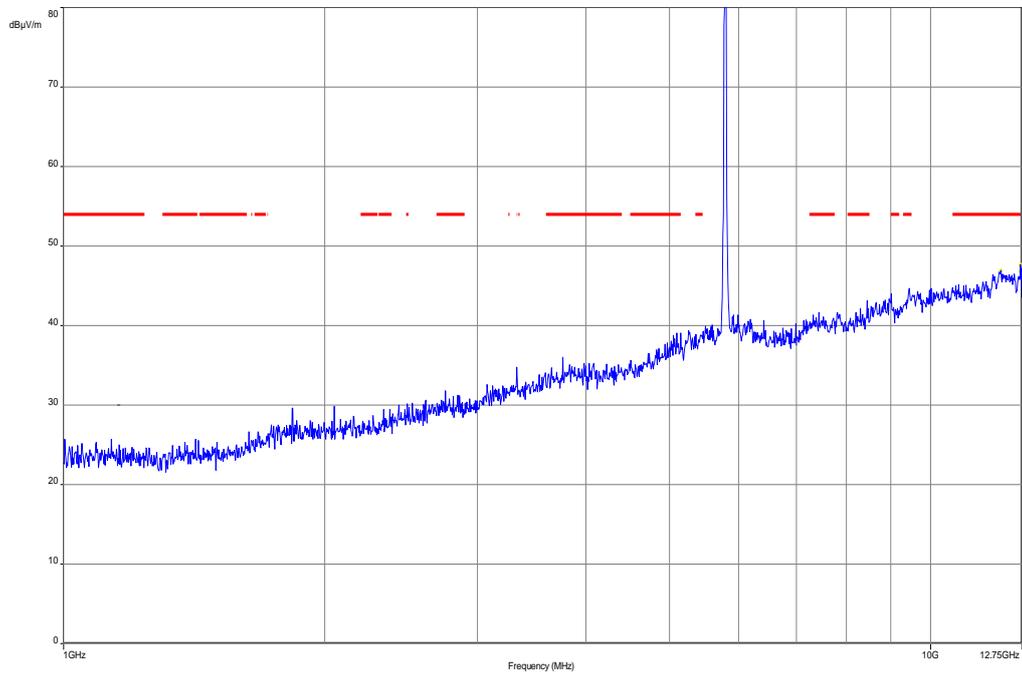


Plot 8: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

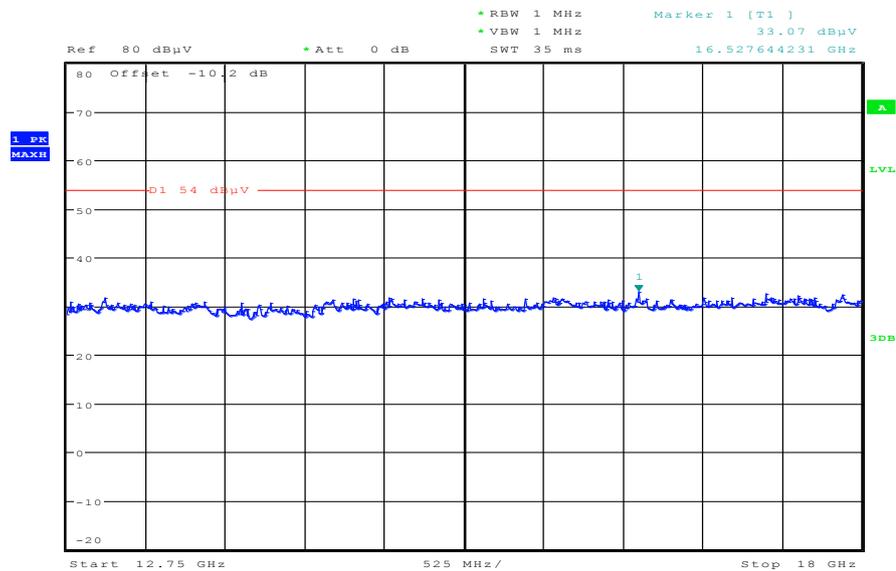


Date: 9 JUL 2012 15:20:46

Plot 9: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

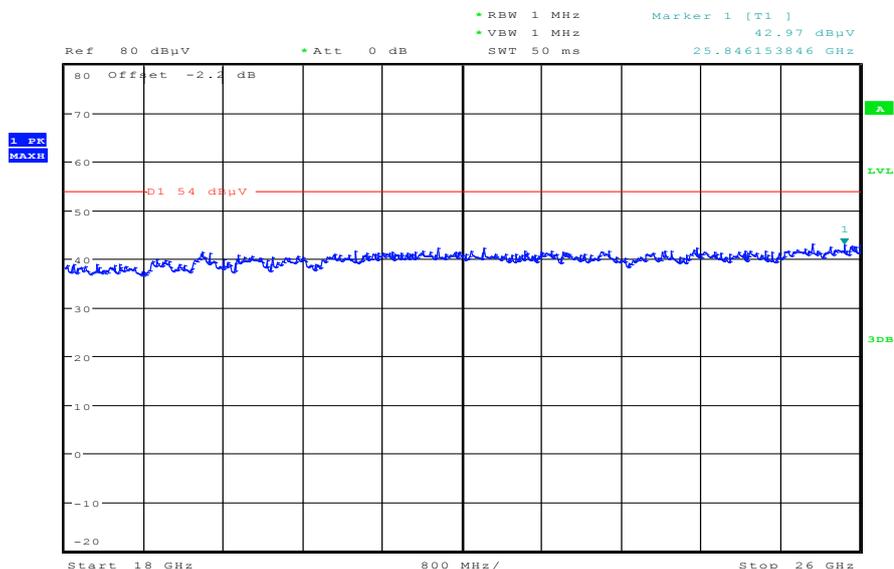

Date: 9.JUL.2012 15:55:21

Plot 10: Highest channel, 26 GHz to 40 GHz, vertical & horizontal polarization

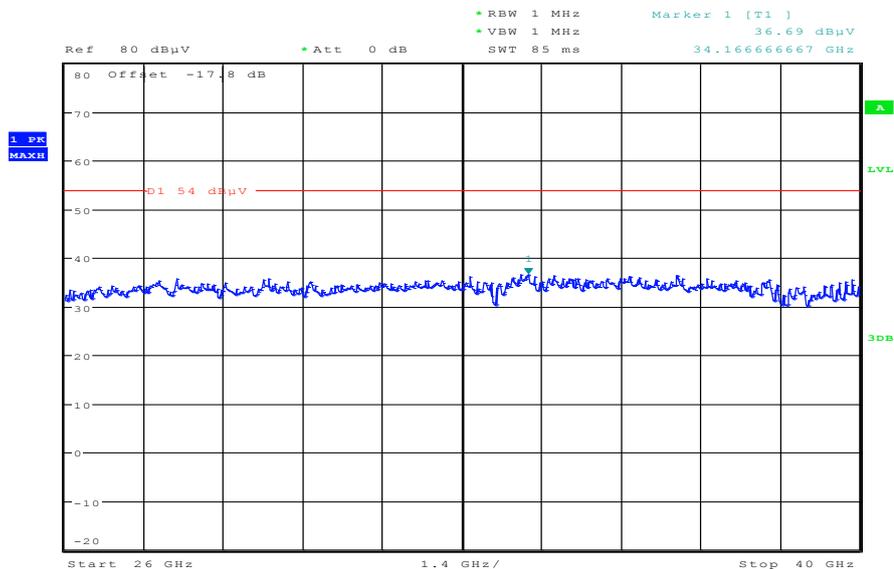

Date: 9.JUL.2012 15:59:22

9.11 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode. The results are valid for both modes.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz / 3 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

RX Spurious Emissions Radiated [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Emissions above 1 GHz: all detected peak values are below the average limit!		
Measurement uncertainty	± 3 dB	

Result: Passed.

Plots: RX / Idle – mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0140-BV
 Serial Number: FCC rad 1 sample
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN n_mode idle + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

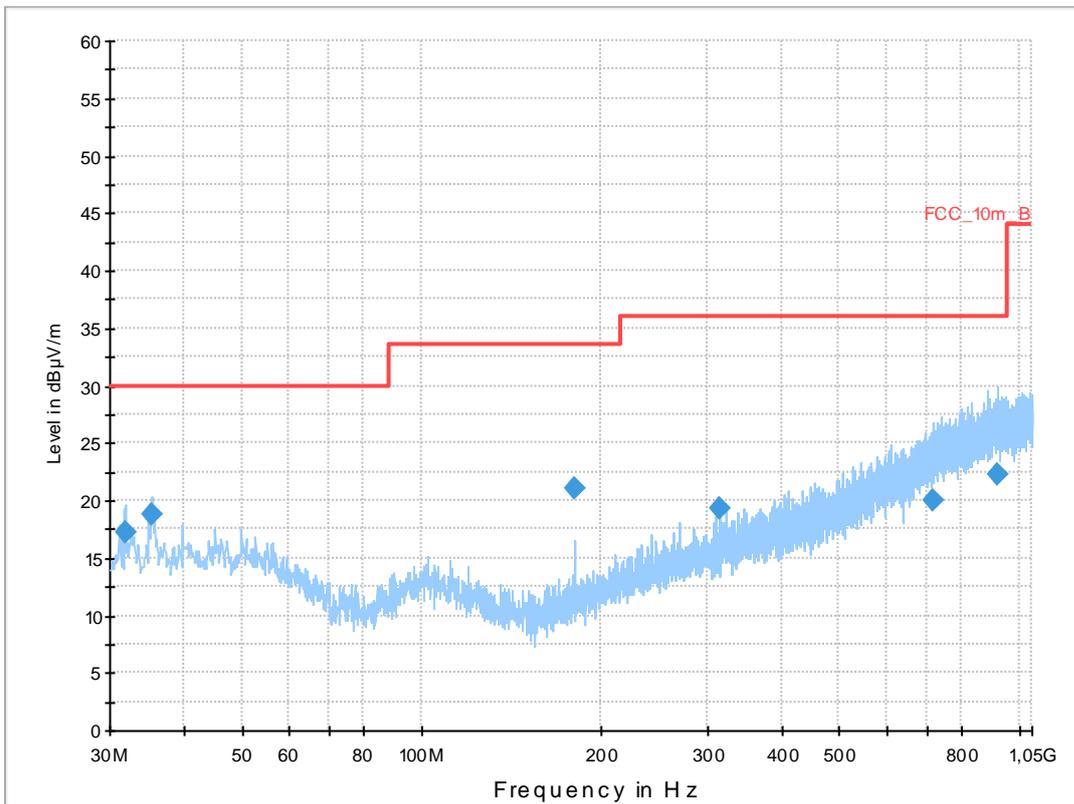


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.905900	17.3	1000.0	120.000	120.0	V	267.0	12.7	12.7	30.0	
35.302200	18.8	1000.0	120.000	120.0	V	182.0	13.0	11.2	30.0	
180.004200	21.1	1000.0	120.000	170.0	V	190.0	10.4	12.4	33.5	
315.004950	19.4	1000.0	120.000	98.0	V	100.0	15.0	16.6	36.0	
717.801600	20.1	1000.0	120.000	163.0	V	267.0	22.9	15.9	36.0	
922.913100	22.2	1000.0	120.000	170.0	V	280.0	25.3	13.8	36.0	

Plot 2: 1 GHz to 12.75 GHz, vertical & horizontal polarization

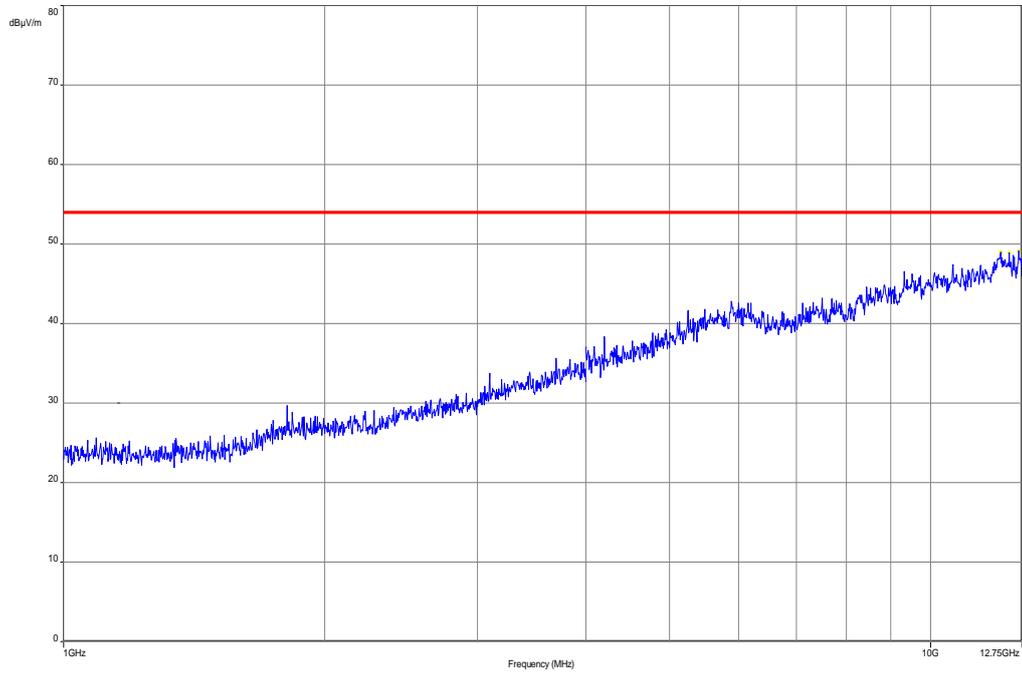


Plot 3: 12.75 GHz to 18 GHz, vertical & horizontal polarization

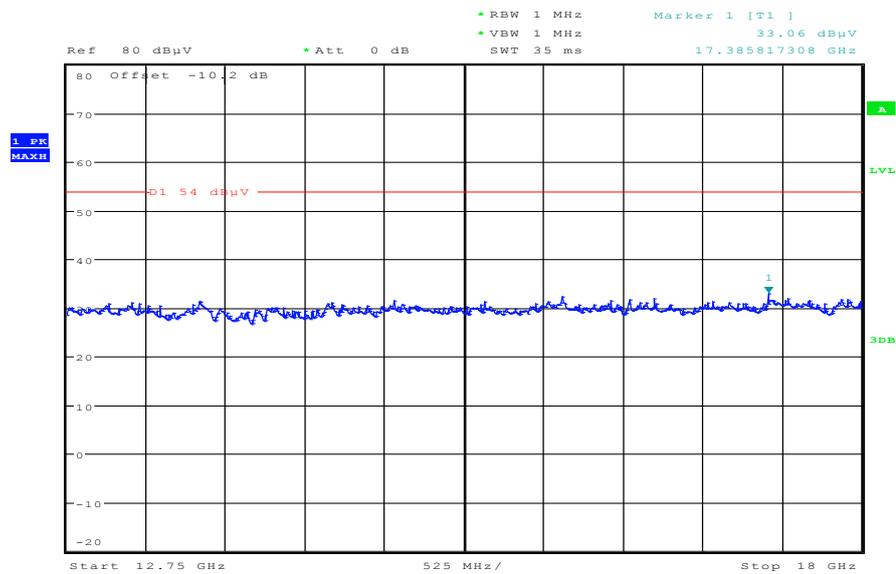


Date: 9.JUL.2012 15:41:13

Plot 4: 18 GHz to 26 GHz, vertical & horizontal polarization

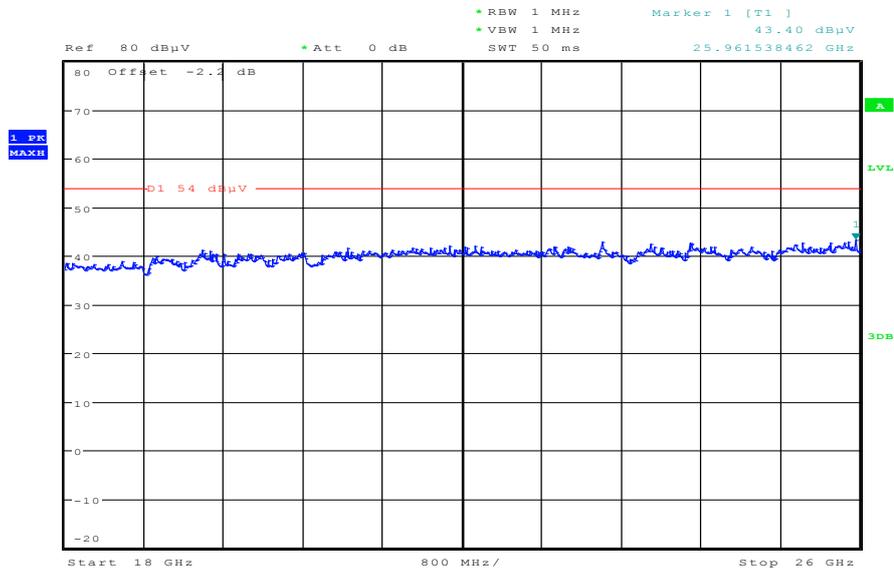

Date: 9.JUL.2012 15:43:12

Plot 5: 26 GHz to 40 GHz, vertical & horizontal polarization

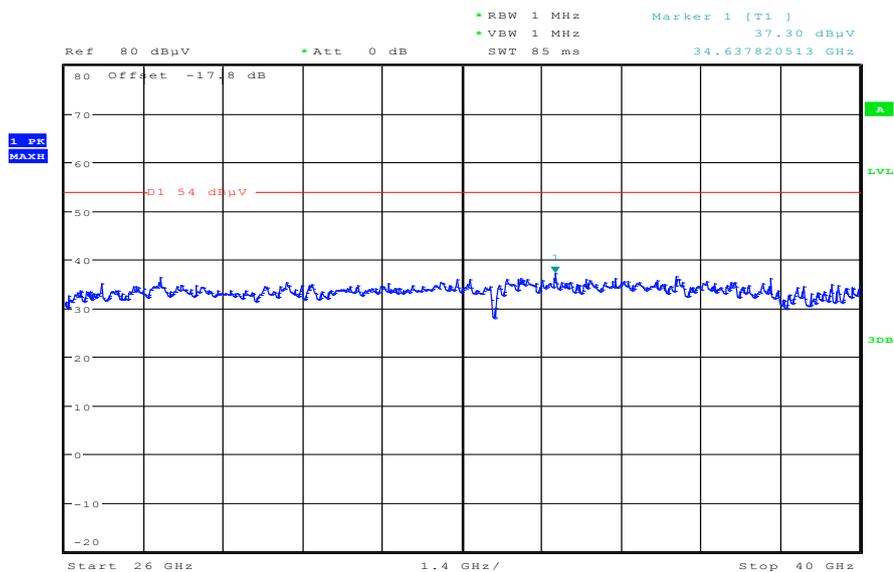

Date: 9.JUL.2012 15:58:33

9.12 TX spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is representative for all channels and modes. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
TX Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


Results:

TX Spurious Emissions Radiated < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No peaks found.		
Measurement uncertainty	± 3 dB	

Result: Passed


Plots: TX mode

Plot 1: 9 kHz to 30 MHz

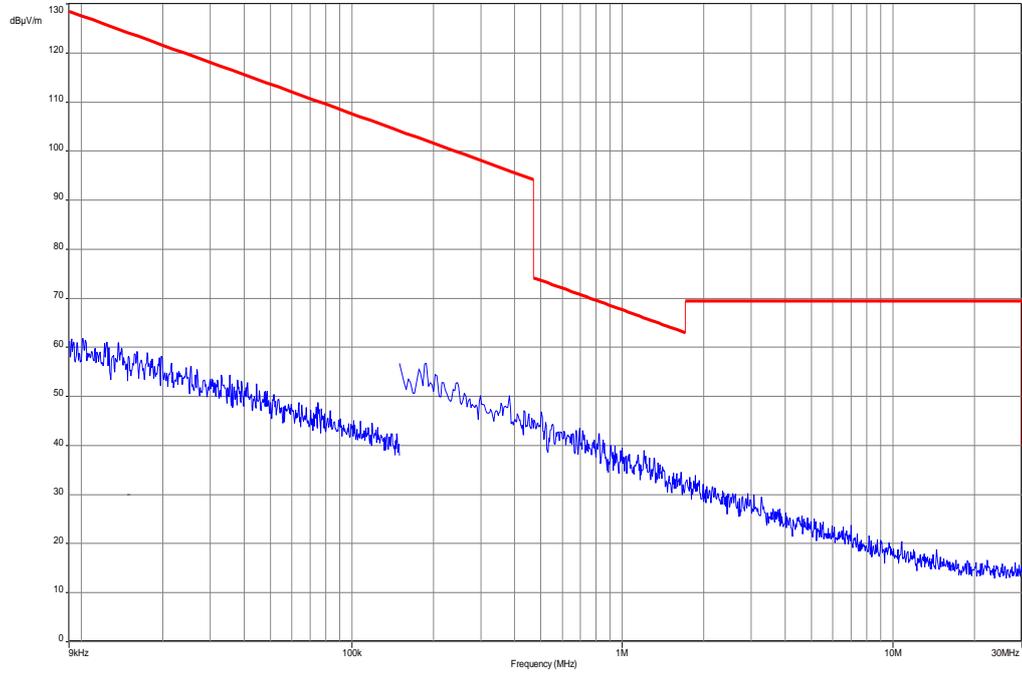

Plots: RX / Idle – mode

Plot 1: 9 kHz to 30 MHz

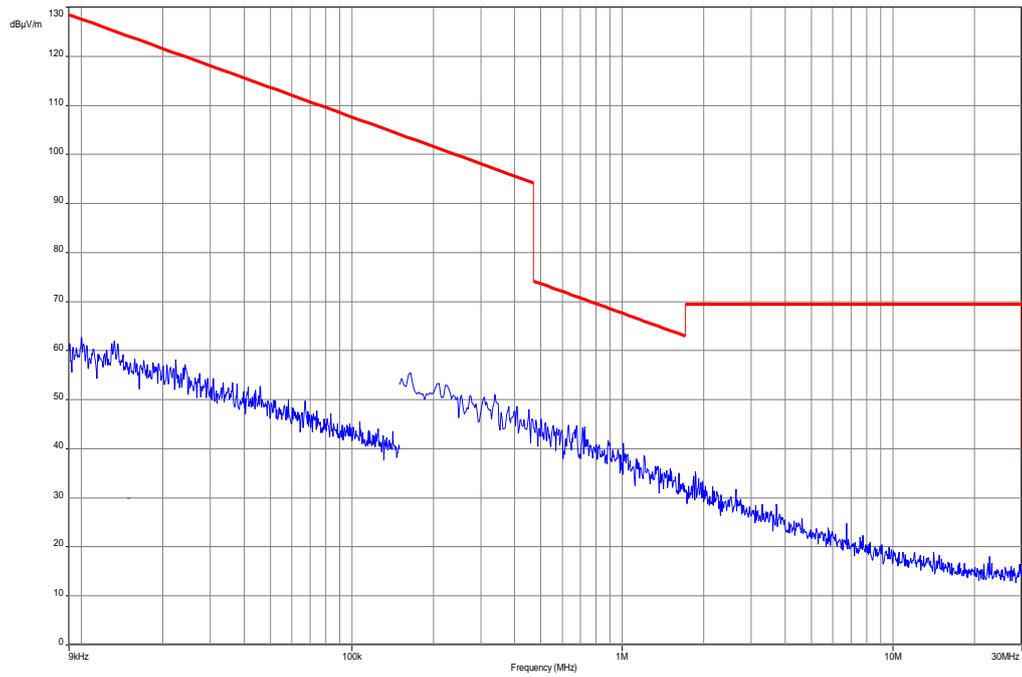

9.13 TX spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
TX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency


Results:

TX Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No critical peaks detected. All detected peak values are below the average limits.		
Measurement uncertainty	± 3 dB	


Result: Passed

Plots:


Plot 1: TX mode, 9 kHz to 30 MHz, phase line

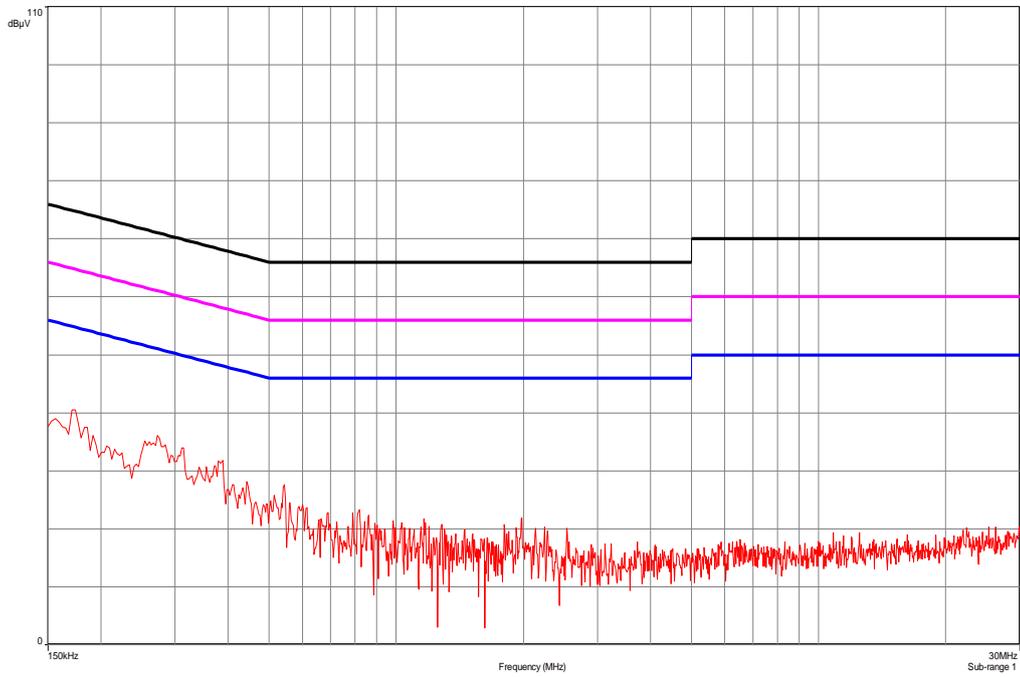


Plot 2: TX mode, 9 kHz to 30 MHz, neutral line

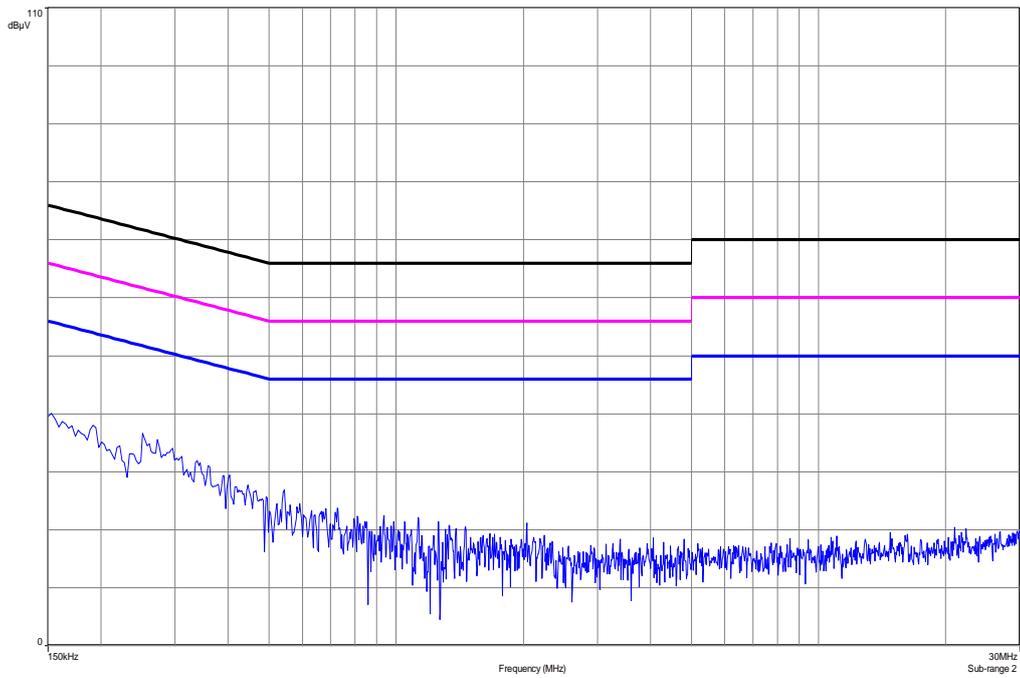

Plot 3: RX / Idle – mode, 9 kHz to 30 MHz, phase line

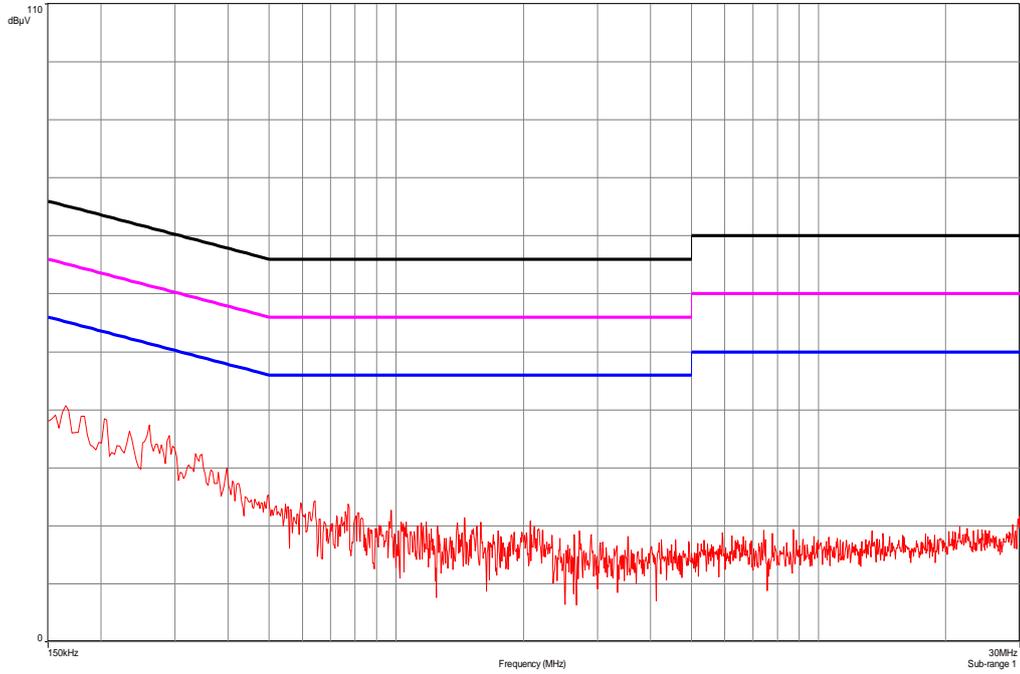

Plot 4: RX / Idle – mode, 9 kHz to 30 MHz, neutral line

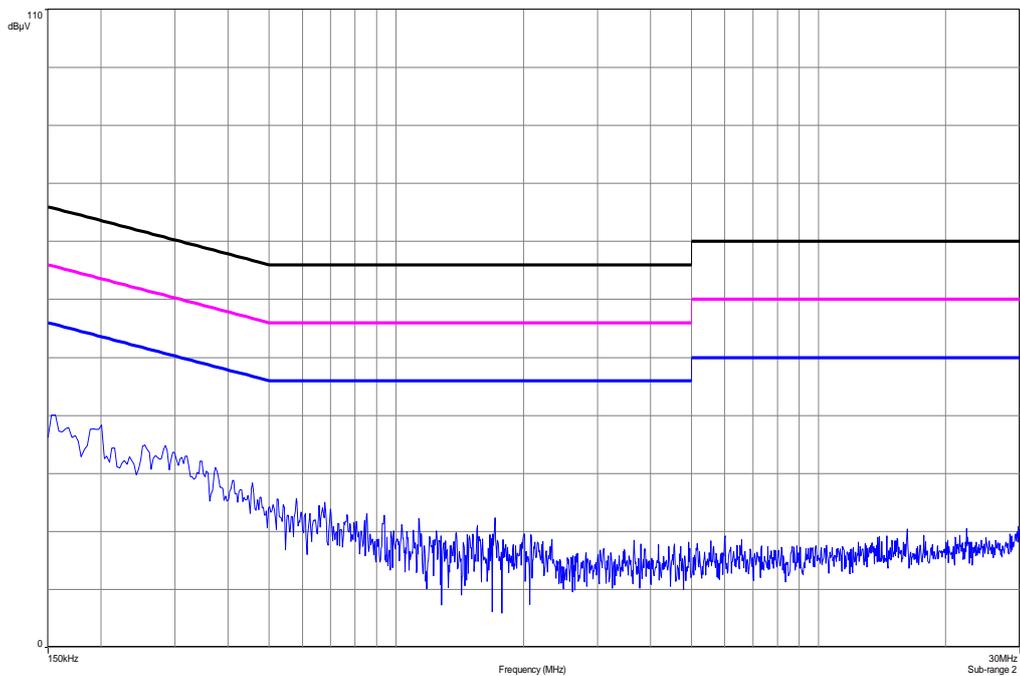

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B597 9	300000210	ne		
4	n. a.	EMI Test Receiver	ESCI 1166.5950. 03	R&S	100083	300003312	k	04.01.2012	04.01.2013
5	n. a.	Analyzer- Reference- System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013
6	n. a.	Amplifier	JS42- 00502650- 28-5A	MITEQ	1084532	300003379	ev		
7	n. a.	Antenna Tower	Model 2175	ETS- LINDGREN	64762	300003745	izw		
8	n. a.	Positioning Controller	Model 2090	ETS- LINDGREN	64672	300003746	izw		
9	n. a.	Turntable Interface-Box	Model 105637	ETS- LINDGREN	44583	300003747	izw		
10	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbe ck	295	300003787	k		
11	n. a.	Spectrum- Analyzer	FSU26	R&S	200809	300003874	k	06.01.2012	06.01.2014
12	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
13	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	11.05.2011	11.05.2013
14	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
15	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
16	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
17	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
18	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
19	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
20	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
21	n. a.	Amplifier	js42- 00502650- 28-5a	Parzich GMBH	928979	300003143	ne		
22	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbe ck	371	300003854	vIKI!	14.10.2011	14.10.2014
23	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologi es	MY51210197	300004405	k	19.12.2011	19.12.2012

24	CR 79	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	7911	300001751	ne		
25	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000787	ne		
26	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300002442	ne		
27	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	ve		
28	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
29	n. a.	Broadband Low Noise Amplifier 18-50 GHz	CBL19503 070-XX	CERNEX	19338	300004273	ne		

Agenda: Kind of Calibration

- | | | | |
|-----|--------------------------------------------|-----|------------------------------------------------------|
| k | calibration / calibrated | EK | limited calibration |
| ne | not required (k, ev, izw, zw not required) | zw | cyclical maintenance (external cyclical maintenance) |
| ev | periodic self verification | izw | internal cyclical maintenance |
| Ve | long-term stability recognized | g | blocked for accredited testing |
| vk! | Attention: extended calibration interval | | |
| NK! | Attention: not calibrated | *) | next calibration ordered / currently in progress |

11 Observations

No observations exceeding those reported with the single test cases have been made.

Annex D Document history

Version	Applied changes	Date of release
1.0	Initial release	2012-07-10
-A	New standard version	2012-08-30

Annex E Further information

Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex F Accreditation Certificate



Front side of certificate



Back side of certificate

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

http://www.cetecom.com/fileadmin/de/CETECOM_D_Saarbruecken/accreditations_Jan_2010/DAKKS_Akkredi_Urk_EN17025-En_incl_Annex.pdf