



## TEST REPORT

Test report no.: 1-4254/12-16-12-A



### Testing laboratory

**CETECOM ICT Services GmbH**  
Untertuerheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01  
Area of Testing: Radio/Satellite Communications

### Applicant

**Sony Mobile Communications AB**  
Nya Vattentornet  
22188 Lund / SWEDEN  
Phone: +46 46 19 30 00  
Fax: +46 46 19 32 95  
Contact: Håkan Sjöberg  
e-mail: [hakan.sjoberg@sonymobile.com](mailto:hakan.sjoberg@sonymobile.com)  
Phone: +46 46 19 35 59

### Manufacturer

**Sony Mobile Communications AB**  
Nya Vattentornet  
22188 Lund / SWEDEN

### Test standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

### Test Item

Kind of test item:	GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDII/FDDIV/FDDV; HSPA; LTE Band 2/4/5/17; BT3.1; WLAN a/b/g/n; AGPS; RFID, FM Rx
Model name:	PM-0140-BV
FCC ID:	PY7PM-0140
IC:	4170B-PM0140
Frequency:	ISM band 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz
Technology tested:	WLAN (OFDM a; n HT20 & n HT40 – mode)
Antenna:	Integrated antenna
Power Supply:	3.7 V DC by Li - polymer battery
Temperature Range:	-20°C to +55 °C

### Test report authorised:

  
2012-08-30 Stefan Bös  
Senior Testing Manager

### Test performed:

  
2012-08-30 Marco Bertolino  
Testing Manager

**1 Table of contents**

1 Table of contents .....2

2 General information .....3

    2.1 Notes and disclaimer .....3

    2.2 Application details.....3

3 Test standard/s .....3

    3.1 Measurement guidance.....3

4 Test environment.....4

5 Test item .....4

6 Test laboratories sub-contracted .....4

7 Summary of measurement results .....5

8 RF measurements .....6

    8.1 Description of test setup .....6

        8.1.1 Radiated measurements.....6

        8.1.2 Conducted measurements.....7

    8.2 Additional comments .....7

    8.3 RSP100 test report cover sheet / performance test data .....8

9 Measurement results.....9

    9.1 Output power verification (conducted) .....9

    9.2 Gain.....22

    9.3 Duty cycle.....28

    9.4 Maximum output power conducted and radiated .....30

    9.5 Power spectral density .....46

    9.6 Spectrum bandwidth – 26 dB bandwidth .....60

    9.7 Peak excursion measurements.....74

    9.8 Band edge compliance radiated .....89

    9.9 TX spurious emissions radiated .....93

    9.10 RX spurious emissions radiated .....139

    9.11 Spurious emissions radiated < 30 MHz .....143

    9.12 Spurious emissions conducted < 30 MHz.....145

10 Test equipment and ancillaries used for tests .....148

11 Observations .....149

Annex A Photographs of the test setup .....150

Annex B External photographs of the EUT .....155

Annex C Internal photographs of the EUT .....158

Annex D Document history .....169

Annex E Further information.....169

Annex F Accreditation Certificate .....170

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

### 2.2 Application details

Date of receipt of order:	2012-03-14
Date of receipt of test item:	2012-06-25
Start of test:	2012-07-10
End of test:	2012-07-13
Person(s) present during the test:	-/-

## 3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

### 3.1 Measurement guidance

UNII: KDB 789033	2011-10	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E
------------------	---------	--

#### 4 Test environment

Temperature:	$T_{nom}$	+22 °C during room temperature tests
	$T_{max}$	+55 °C during high temperature tests
	$T_{min}$	-20 °C during low temperature tests
Relative humidity content:		56 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	$V_{nom}$	3.7 V DC by Li - polymer battery
	$V_{max}$	4.2 V
	$V_{min}$	3.3 V

#### 5 Test item

Kind of test item	:	GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDII/FDDIV/FDDV; HSPA; LTE Band 2/4/5/17; BT3.1; WLAN a/b/g/n; AGPS; RFID, FM Rx
Type identification	:	PM-0140-BV
S/N serial number	:	Radiated units: CB511Z7M8J, CB511Z7M8M Conducted units: CB511Z7M6M, CB511Z7MKT
HW hardware status	:	AP1.2
SW software status	:	7.0.A.1.68 7.0.B.0.102
Frequency band [MHz]	:	ISM bands: - 5150 MHz to 5250 MHz - 5250 MHz to 5350 MHz - 5470 MHz to 5725 MHz
Type of radio transmission	:	OFDM
Use of frequency spectrum	:	
Channel access method	:	FDMA
Type of modulation	:	QPSK, 16 – QAM & 64 – QAM
Number of channels	:	19
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li - polymer battery
Temperature range	:	-20°C to +55 °C

#### 6 Test laboratories sub-contracted

None

## 7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	Passed	2012-08-30	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Pass	Fail	NA	NP	Results (max.)
-/-	Output power verification (conducted)	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No passed / fail criteria!
-/-	Gain	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No passed / fail criteria!
U-III Part 15	Duty cycle	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No passed / fail criteria!
§15.407(a) RSS-210	Maximum output power (conducted & radiated)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.407(a) RSS-210	Power spectral density	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.407(a) RSS-210	Spectrum bandwidth 26dB bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.407(a) RSS-210	Peak excursion measurements	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205 RSS-210	Band edge compliance radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.407(b) RSS-210	TX spurious emissions radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen	RX spurious emissions radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	Spurious emissions radiated < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a)	Spurious emissions conducted emissions < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

**Note:** NA = Not Applicable; NP = Not Performed

## 8 RF measurements


### 8.1 Description of test setup

#### 8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

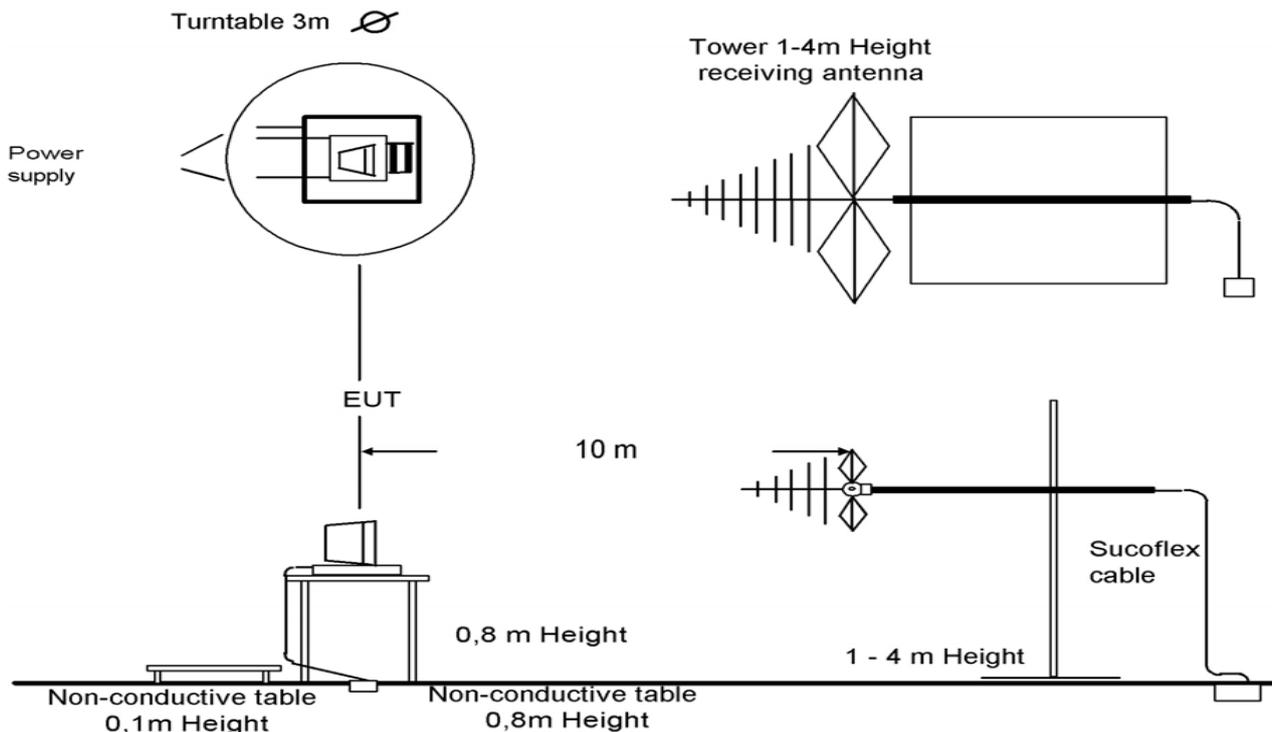


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage

## 8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

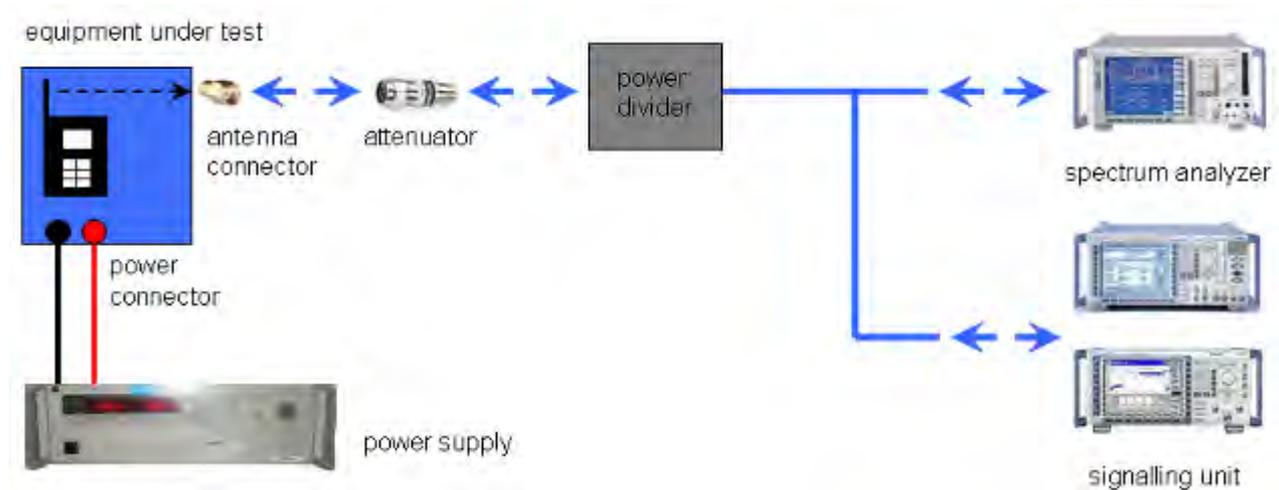

Picture 2: Diagram conducted measurements

## 8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:  No test mode available.

Special software is used.  
EUT is transmitting pseudo random data by itself

### 8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-4254/12-16-12-A
Equipment model number	:	PM-0140-BV
Certification number	:	4170B-PM0140
Manufacturer (complete address)	:	Sony Mobile Communications AB Nya Vattentornet 22188 Lund / SWEDEN
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 8
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 5150 MHz to 5250 MHz ISM band 5250 MHz to 5350 MHz ISM band 5470 MHz to 5725 MHz
RF-power (max.)	:	<u>Conducted values:</u> OFDM / a – mode: 20.89 mW OFDM / n – mode HT20: 15.35 mW OFDM / n – mode HT40: 15.92 mW  <u>Radiated values:</u> OFDM / a – mode: 14.66 mW OFDM / n – mode HT20: 11.19 mW OFDM / n – mode HT40: 11.04 mW
Occupied bandwidth (99%-BW)	:	OFDM / a – mode: 17.98 MHz OFDM / n – mode HT20: 18.56 MHz OFDM / n – mode HT40: 36.70 MHz
Type of modulation	:	QPSK, 16 – QAM, 64 – QAM
Emission designator (TRC-43)	:	OFDM / a – mode: 18M0G7D OFDM / n – mode HT20: 18M6G7D OFDM / n – mode HT40: 36M7G7D
Antenna information	:	Integrated PCB antenna
Transmitter spurious (worst case)[dBµV/m @ 3m]:		48 @ 12.5 GHz (noise floor) peak
Receiver spurious (worst case) [dBµV/m @ 3m]:		48 @ 12.5 GHz (noise floor) peak

#### ATTESTATION:

#### DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

#### Laboratory manager:


2012-08-30

Marco Bertolino

Date

Name

Signature

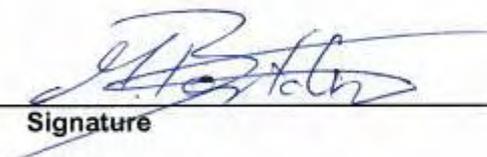

## 9 Measurement results

### 9.1 Output power verification (conducted)

#### Description:

Measurement of the maximum output power conducted. This measurement is performed only at the middle channel in all modes and all data rates to determine the data rate per mode which results in the highest output power. This mode will be selected for all further measurements.

Used measurement option: 5.2.1.1 PK1

#### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	5s
Resolution bandwidth:	> EBW
Video bandwidth:	≥ 3 x RBW (or the maximum of the analyzer)
Span:	Zero span
Trace-Mode:	Max hold (allow trace to fully stabilize)

#### Results:

OFDM / a – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	6	9	12	18	24	36	48	54
Ch 48 - 5240 MHz	19.88	19.84	19.14	19.33	18.94	19.09	19.10	19.02
Measurement uncertainty	± 0.5 dB							

OFDM / n – mode HT 20 Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Ch 48 - 5240 MHz	19.37	19.19	19.11	18.67	18.52	18.48	18.38	17.60
Measurement uncertainty	± 0.5 dB							

OFDM / n – mode HT40 Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Ch 46 - 5230 MHz	18.31	21.33	20.40	20.68	20.04	20.36	20.34	20.52
Measurement uncertainty	± 0.5 dB							

**Result:** Selected data rate for all measurements:

OFDM / a – mode:

6 MBit/s

OFDM / n – mode HT20:


MCS0

OFDM / n – mode HT40:

MCS1


**Plots: OFDM / a – mode**

Plot 1: 6 Mbit/s

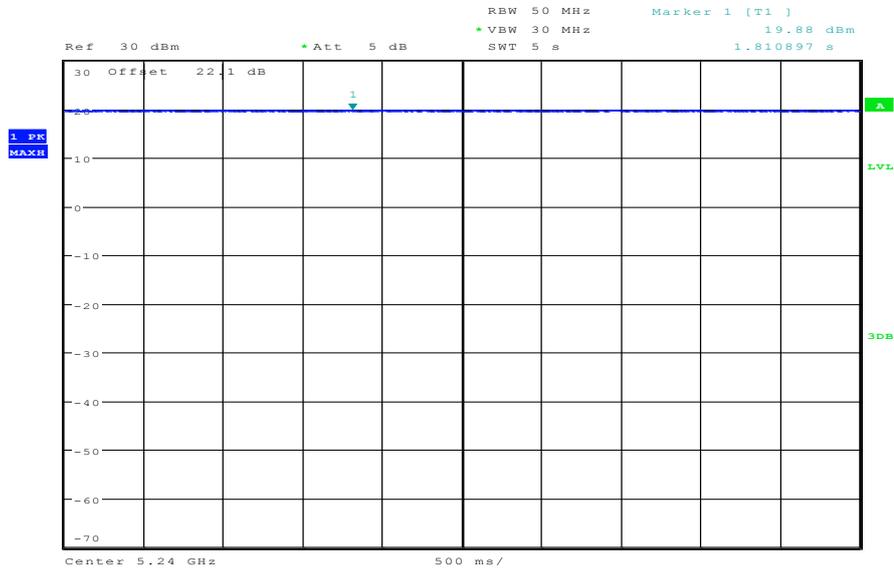


Date: 10.JUL.2012 11:48:37

Plot 2: 9 Mbit/s

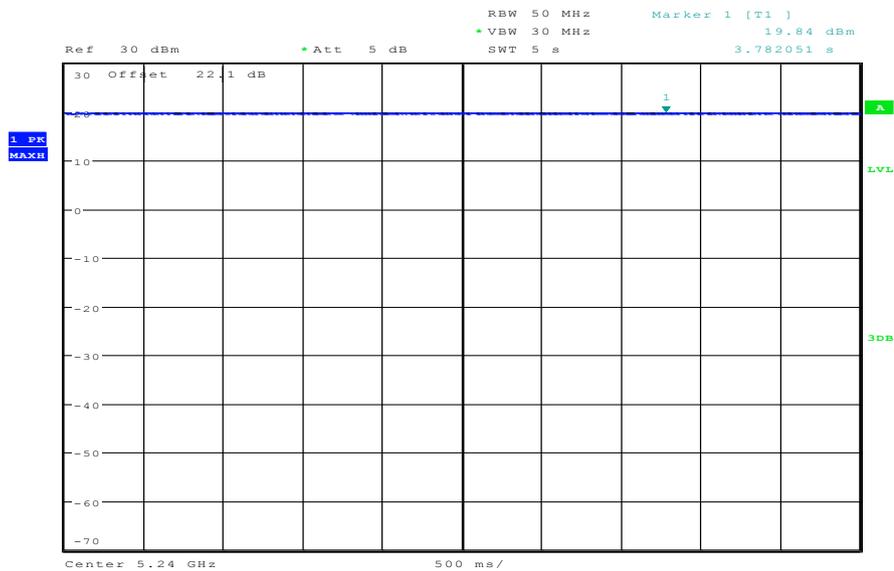


Date: 10.JUL.2012 11:54:27

Plot 3: 12 Mbit/s

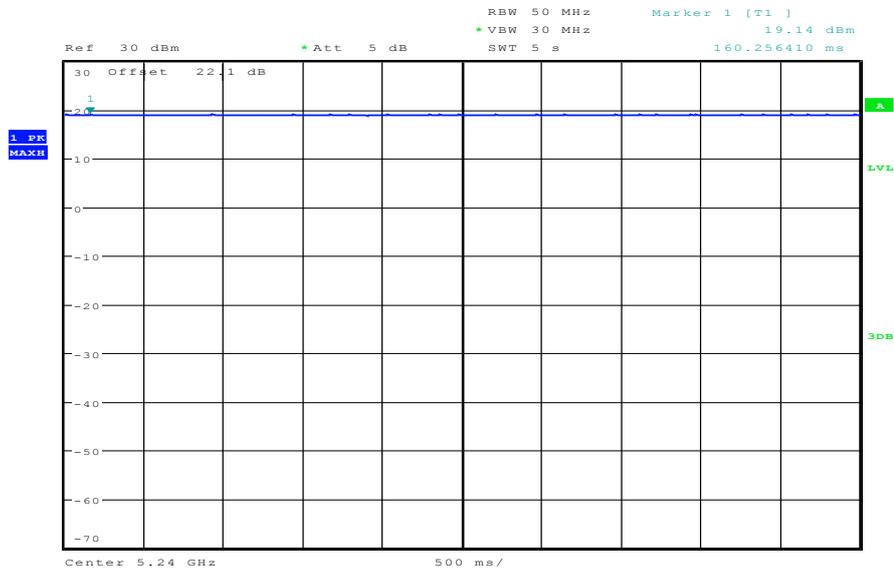


Date: 10.JUL.2012 11:56:15

Plot 4: 18 Mbit/s

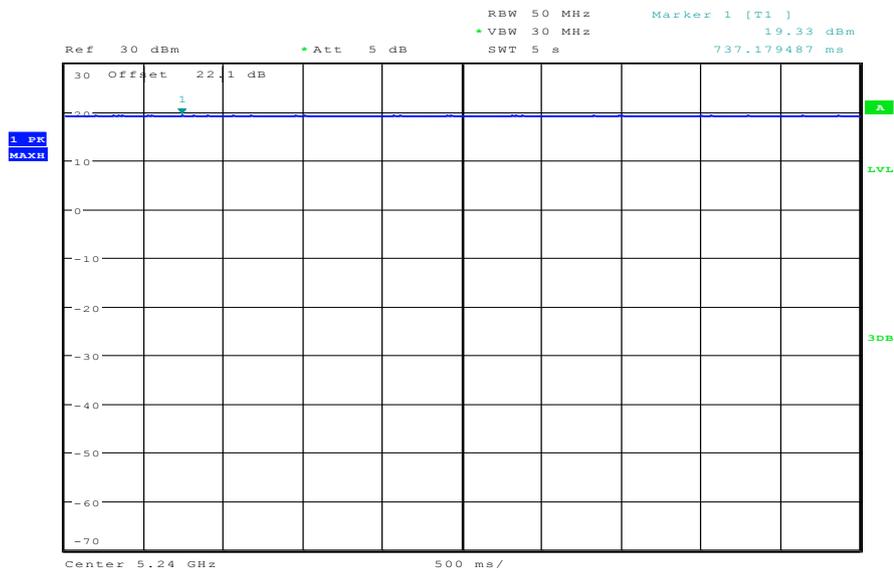


Date: 10.JUL.2012 11:57:53

Plot 5: 24 Mbit/s

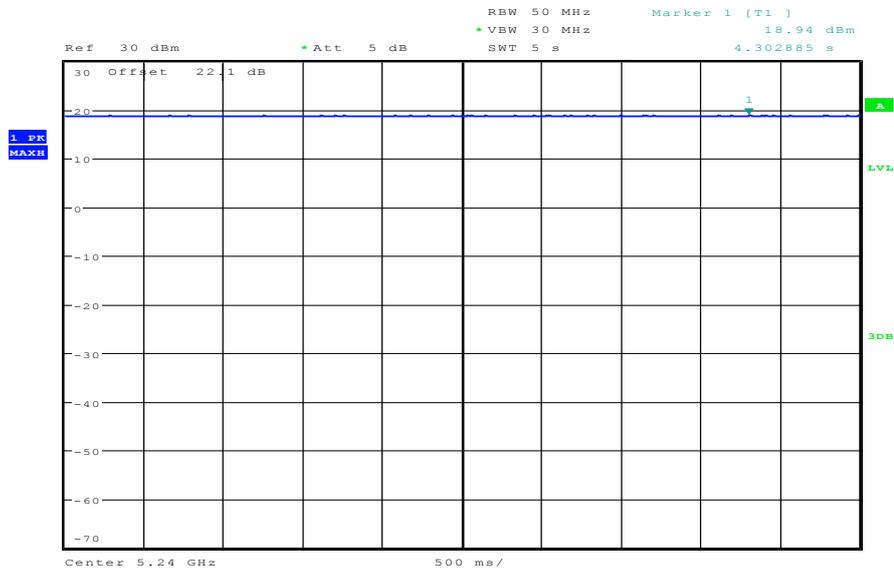


Date: 10.JUL.2012 11:59:50

Plot 6: 36 Mbit/s

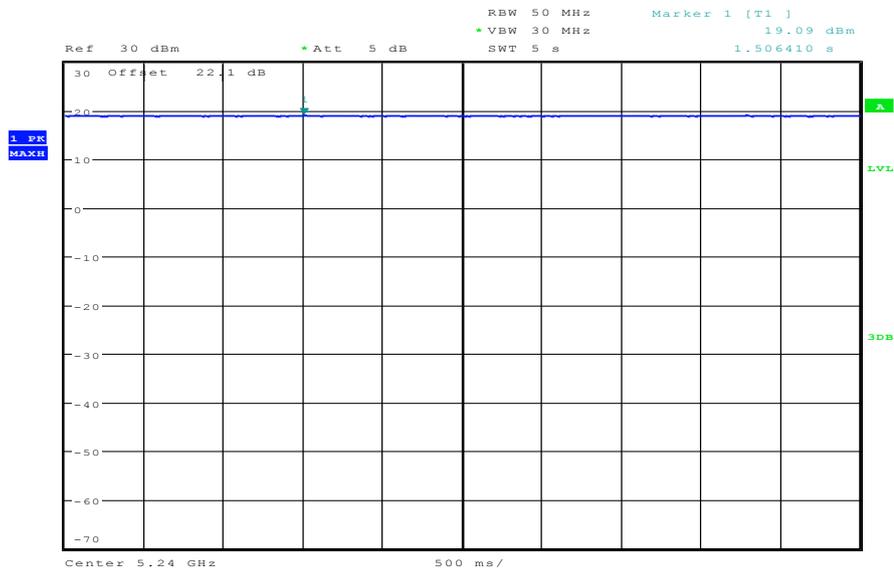


Date: 10.JUL.2012 12:02:13

Plot 7: 48 Mbit/s

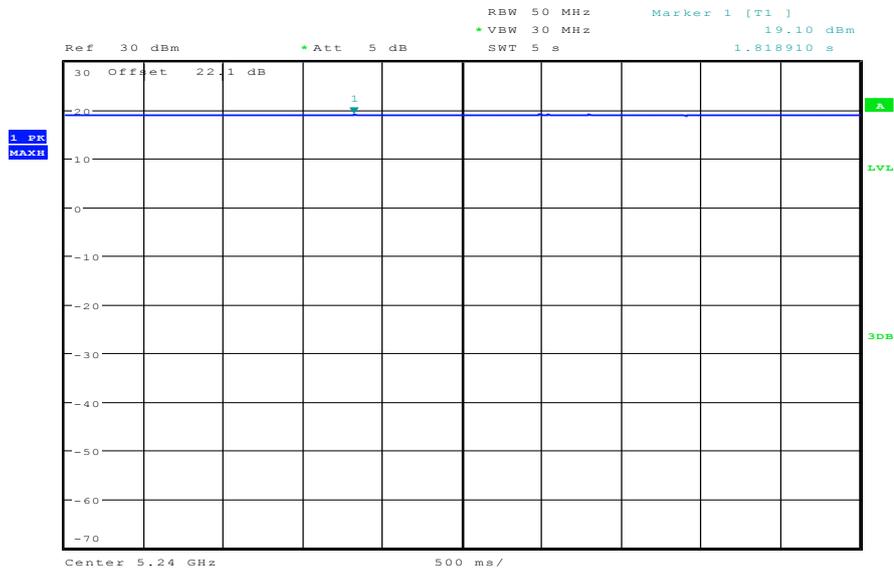

Date: 10.JUL.2012 12:03:34


Plot 8: 54 Mbit/s

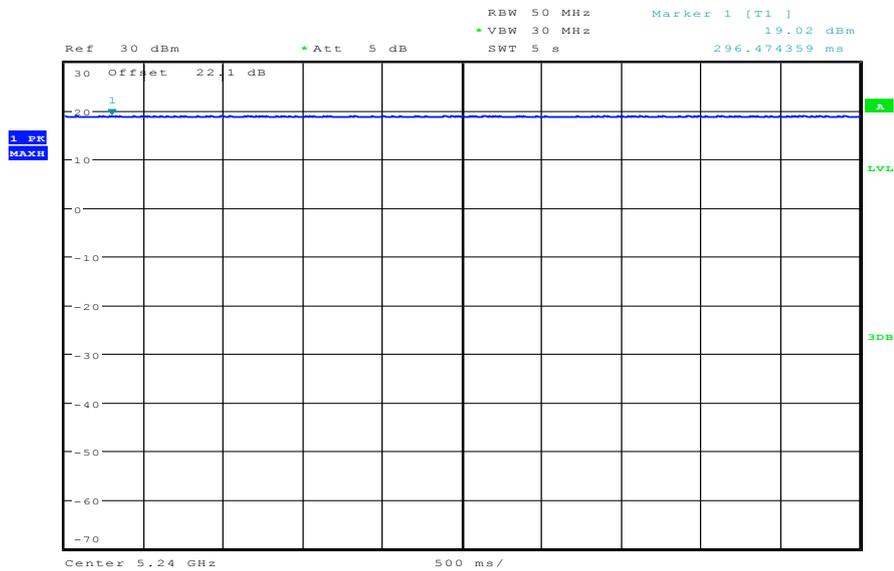

Date: 10.JUL.2012 12:06:14


**Plots: OFDM / n – mode HT20**

Plot 1: MCS0

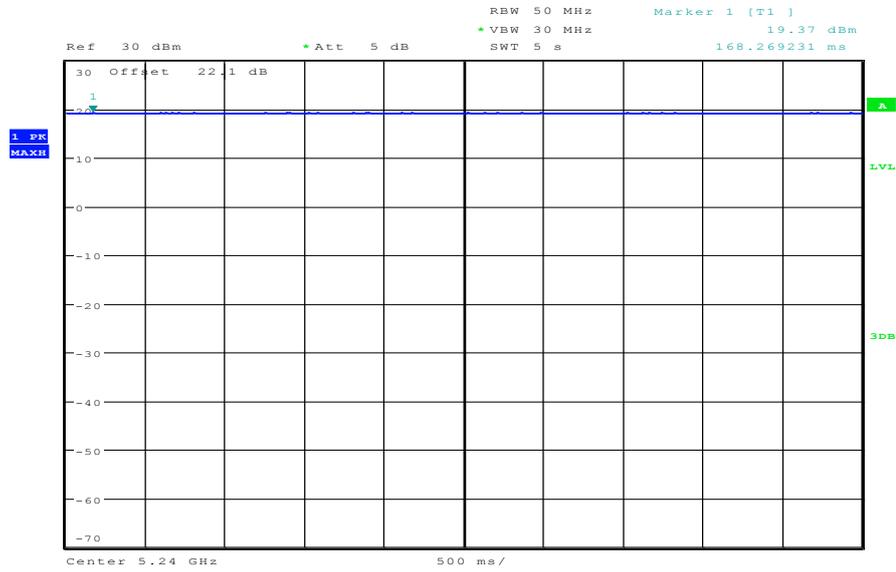


Date: 10.JUL.2012 12:08:55

Plot 2: MCS1

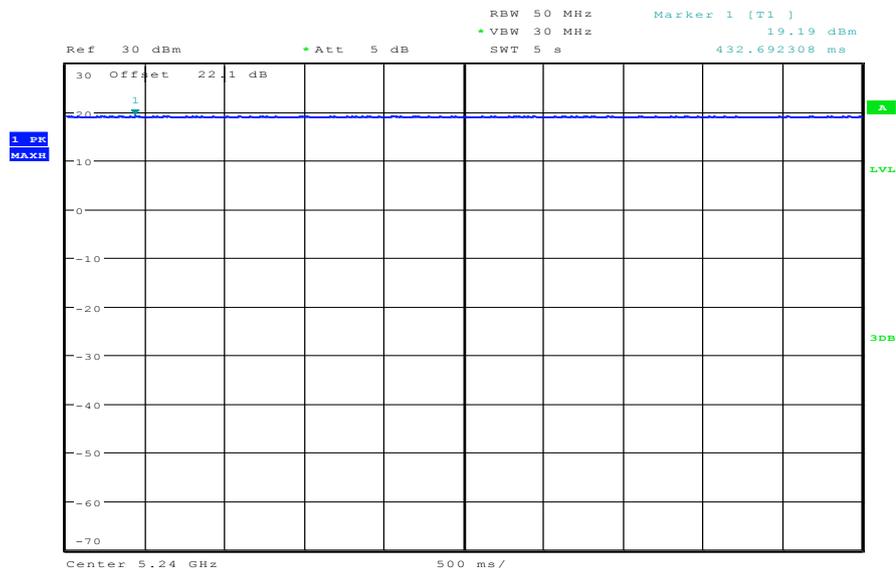


Date: 10.JUL.2012 12:10:32

Plot 3: MCS2

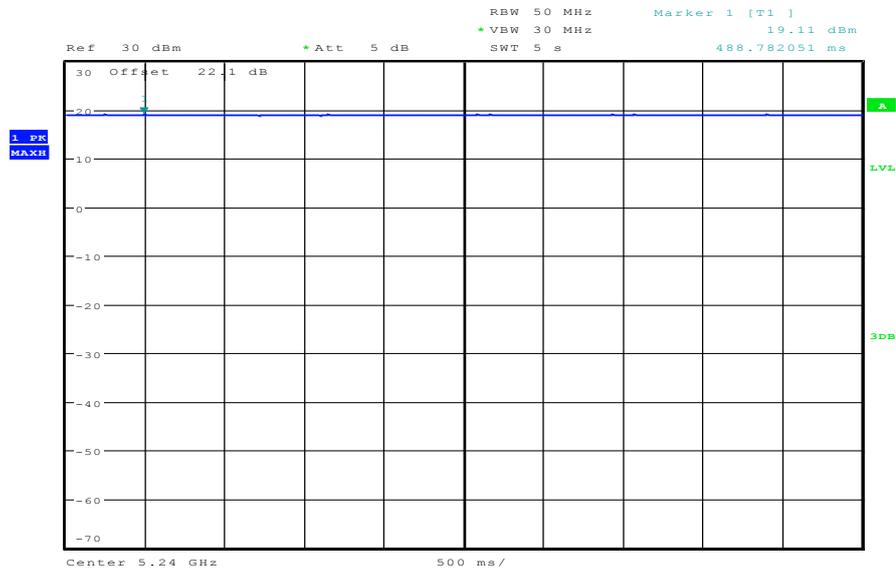


Date: 10.JUL.2012 12:13:40

Plot 4: MCS3

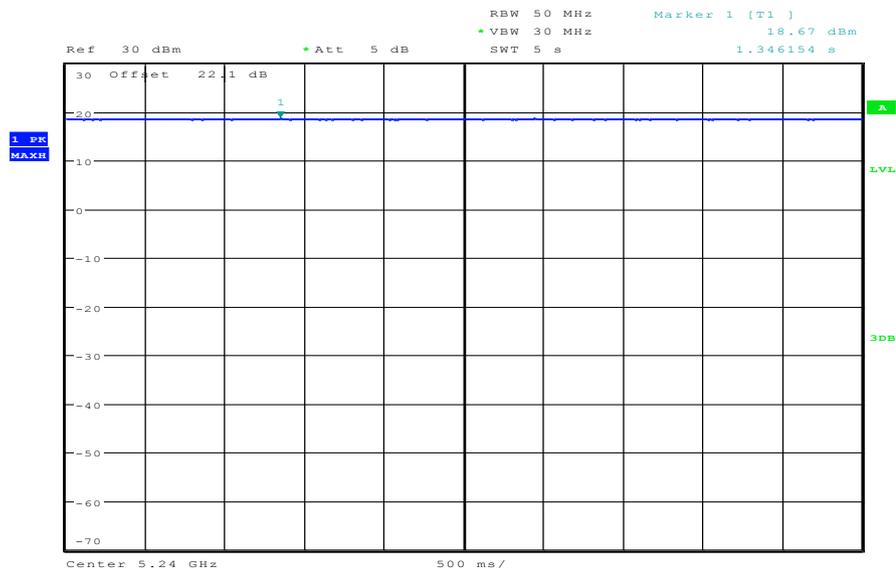


Date: 10.JUL.2012 12:14:56

Plot 5: MCS4

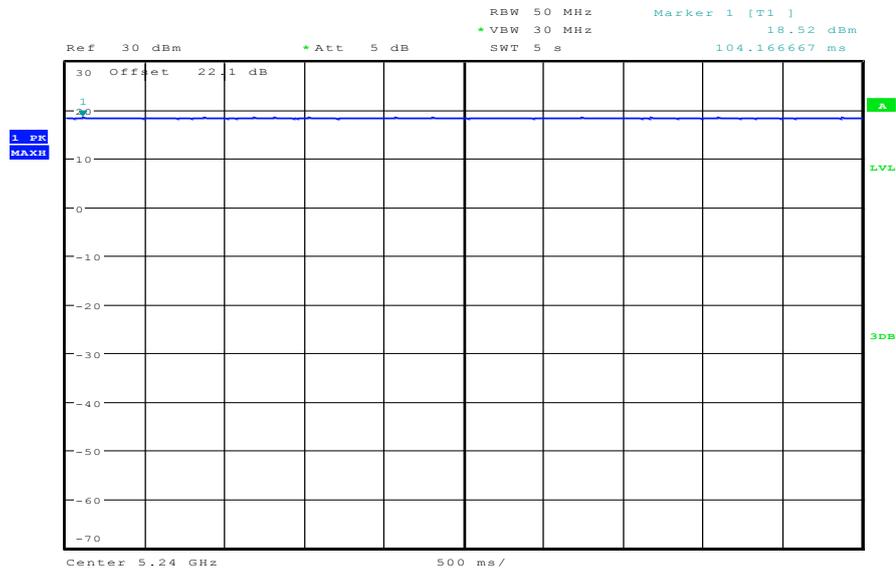


Date: 10.JUL.2012 12:16:14

Plot 6: MCS5

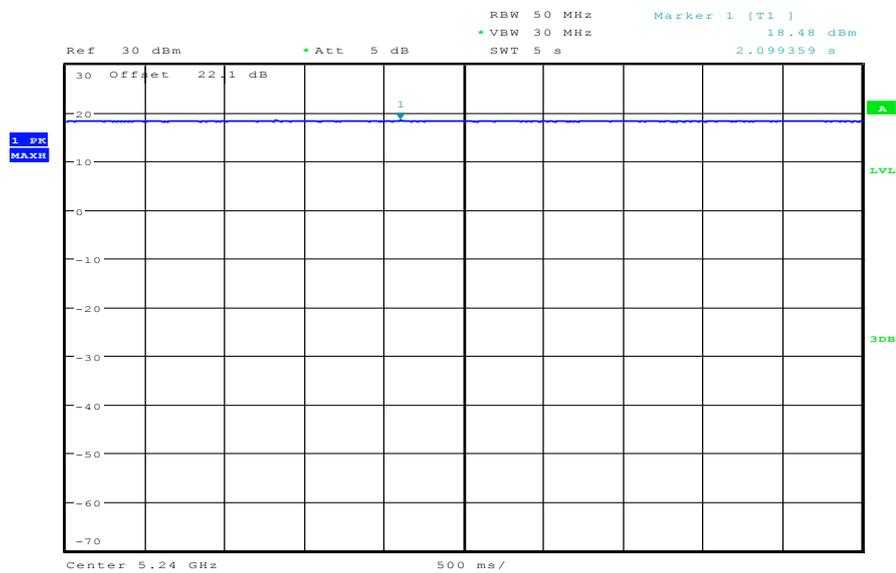


Date: 10.JUL.2012 12:17:28

Plot 7: MCS6

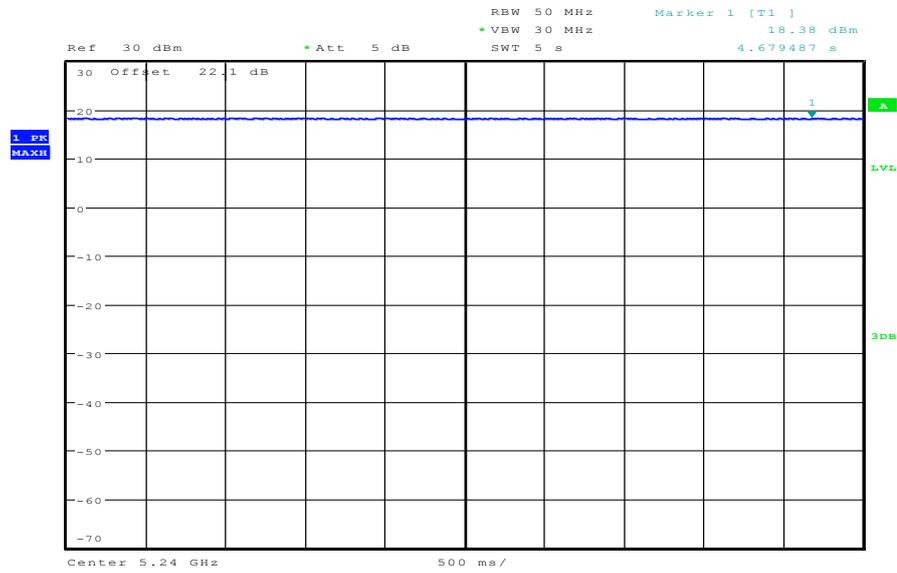

Date: 10.JUL.2012 12:18:36


Plot 8: MCS7

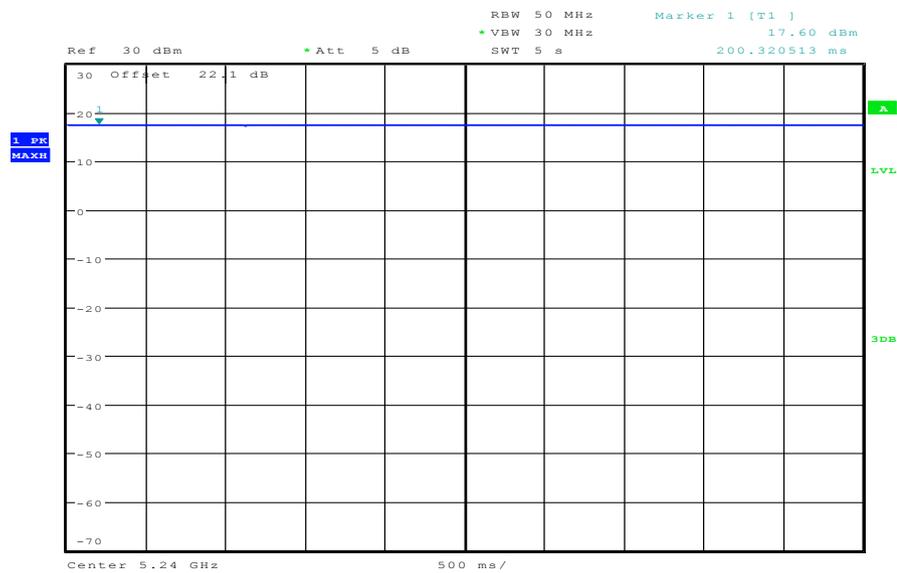

Date: 10.JUL.2012 12:19:48


**Plots: OFDM / n – mode HT40**

Plot 1: MCS0

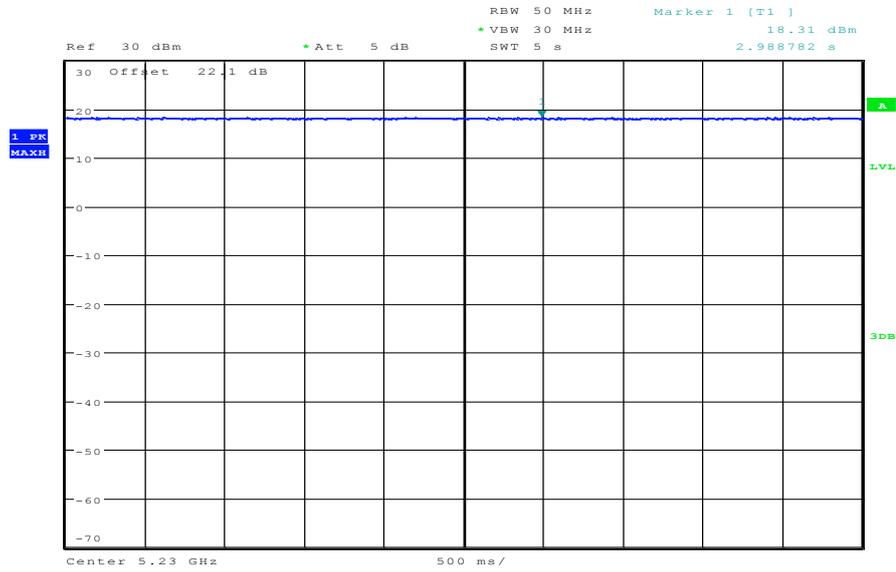


Date: 10.JUL.2012 13:10:02

Plot 2: MCS1

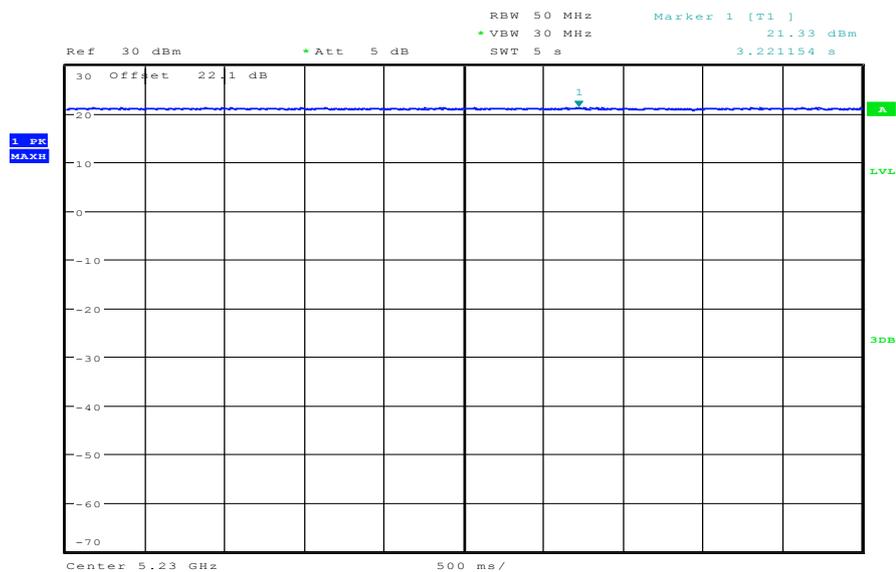


Date: 10.JUL.2012 13:11:28

Plot 3: MCS2

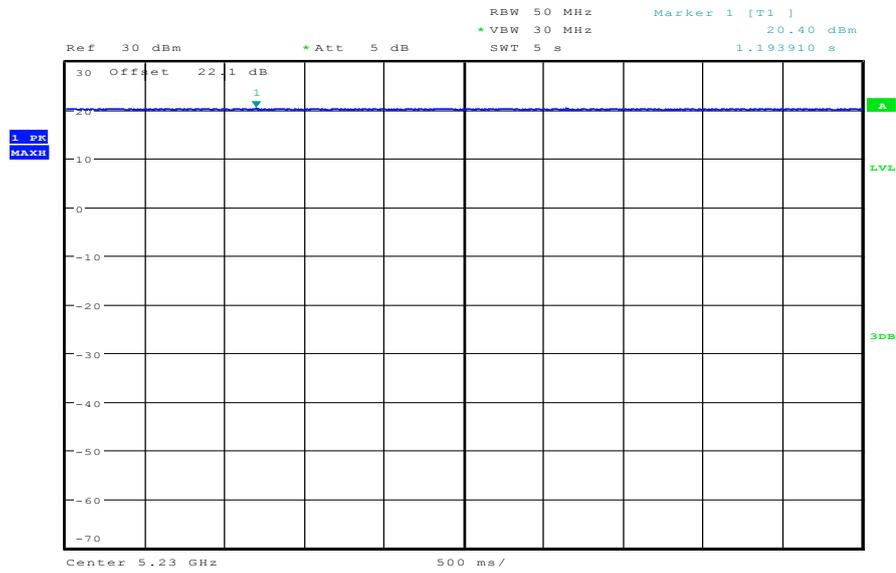


Date: 10.JUL.2012 13:13:06

Plot 4: MCS3

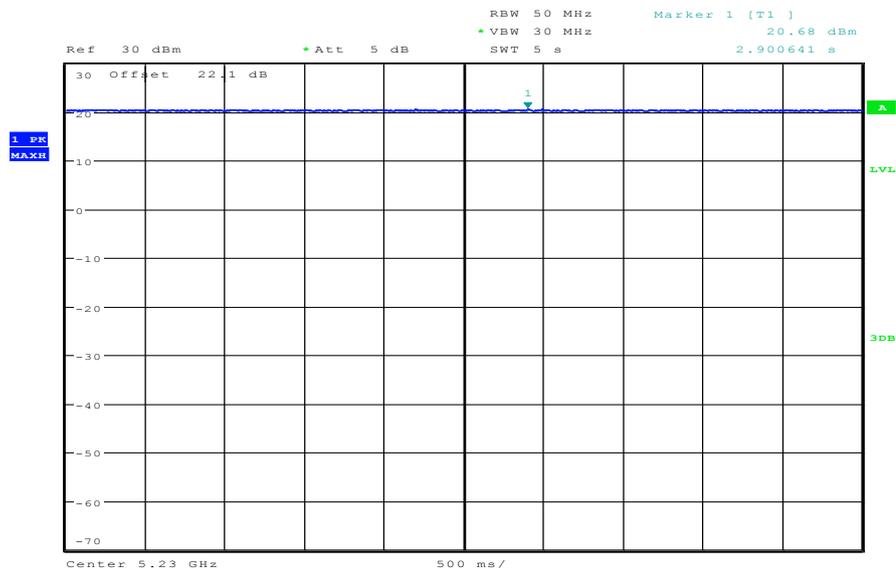


Date: 10.JUL.2012 13:16:08

Plot 5: MCS4

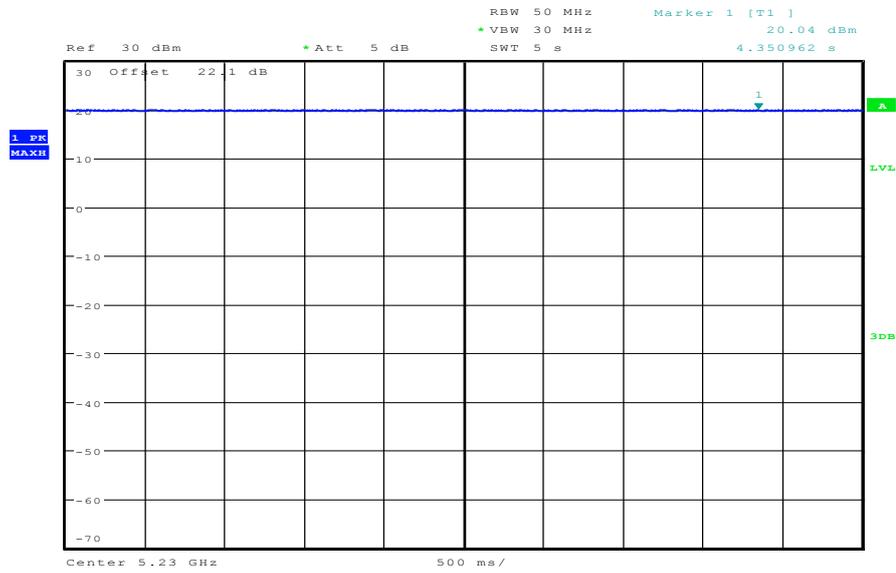


Date: 10.JUL.2012 13:17:39

Plot 6: MCS5

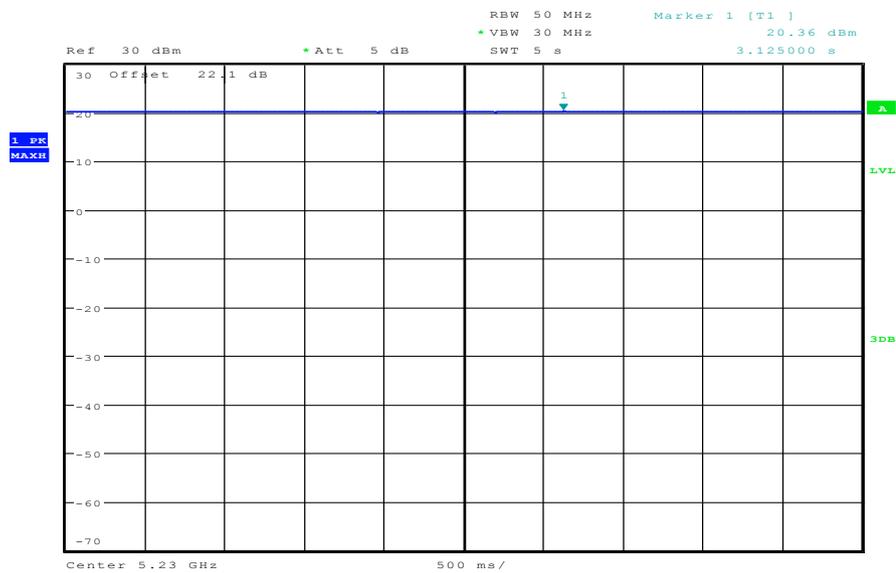


Date: 10.JUL.2012 13:19:18

Plot 7: MCS6

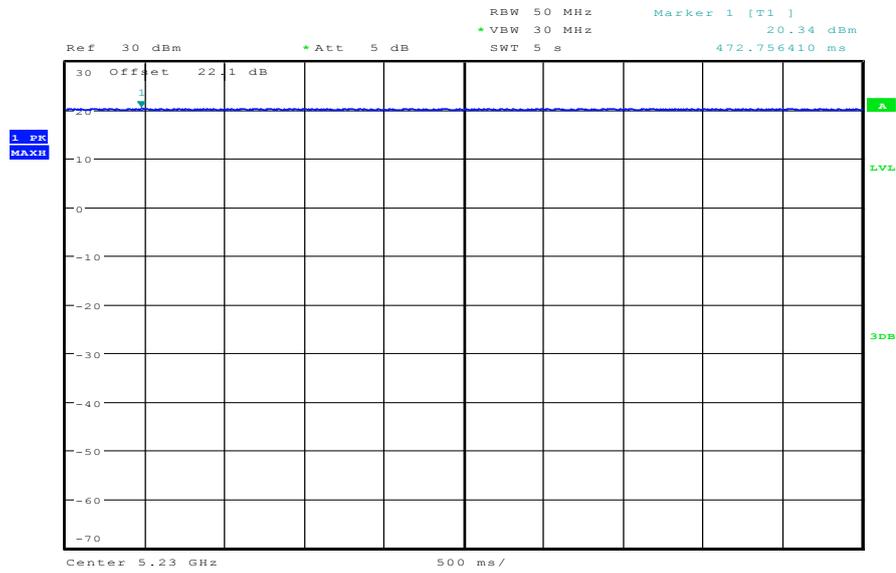

Date: 10.JUL.2012 13:20:44

Plot 8: MCS7

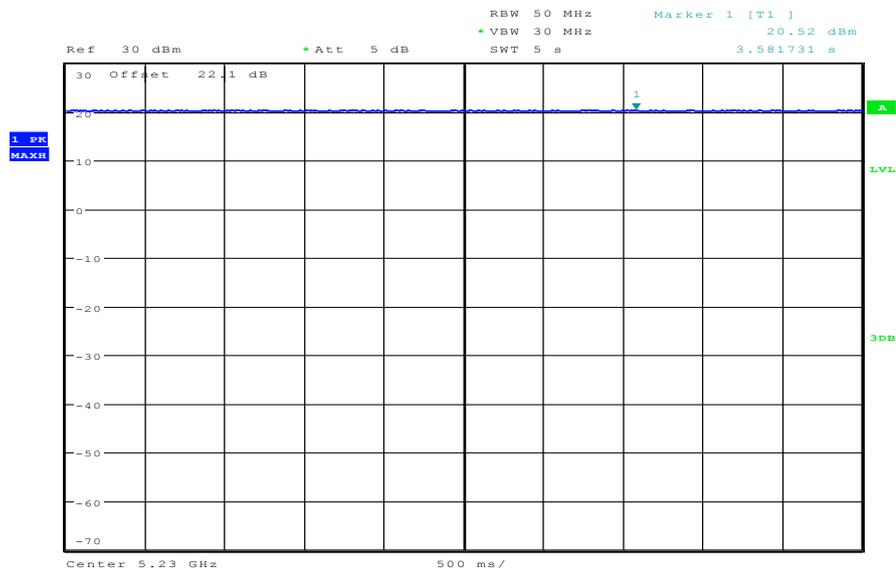

Date: 10.JUL.2012 13:21:53

## 9.2 Gain

### Description:

Measurement of the maximum output power conducted and radiated

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	5s
Resolution bandwidth:	3 MHz
Video bandwidth:	8 MHz / 10 MHz
Span:	See complete signal!
Trace-Mode:	Max Hold

### Limits:

Antenna Gain
Maximum 6 dBi

**Result:**

OFDM Band 5150 MHz to 5250 MHz Channel	Gain		
	Lowest 5180 MHz	-/-	Highest 5240 MHz
Radiated power for gain calculation	13.27	-/-	13.84
Conducted power for gain calculation	15.73	-/-	15.48
Gain	-2.46	-/-	-1.64
Measurement uncertainty	± 3 dB		


OFDM Band 5250 MHz to 5350 MHz Channel	Gain		
	Lowest 5260 MHz	-/-	Highest 5320 MHz
Radiated power for gain calculation	15.05	-/-	15.52
Conducted power for gain calculation	15.59	-/-	15.62
Gain	-0.54	-/-	-0.10
Measurement uncertainty	± 3 dB		

OFDM Band 5470 MHz to 5725 MHz Channel	Gain		
	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz
Radiated power for gain calculation	14.97	13.10	12.26
Conducted power for gain calculation	16.84	16.01	15.40
Gain	-1.87	-2.91	-3.14
Measurement uncertainty	± 3 dB		

**Result:** **Passed**


**Plots: conducted power for gain calculation**

Plot 1: OFDM / a – mode, 5180 MHz

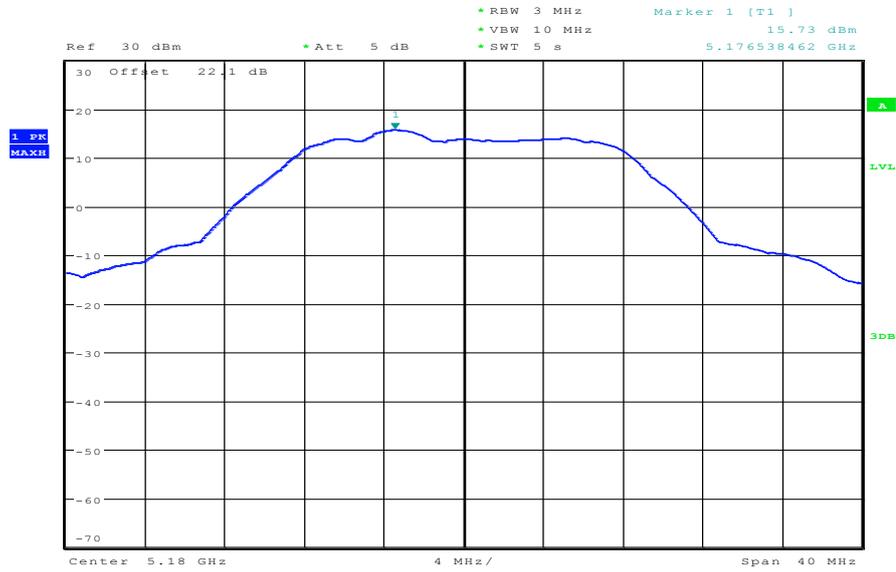


Date: 11.JUL.2012 07:35:01

Plot 2: OFDM / a – mode, 5240 MHz

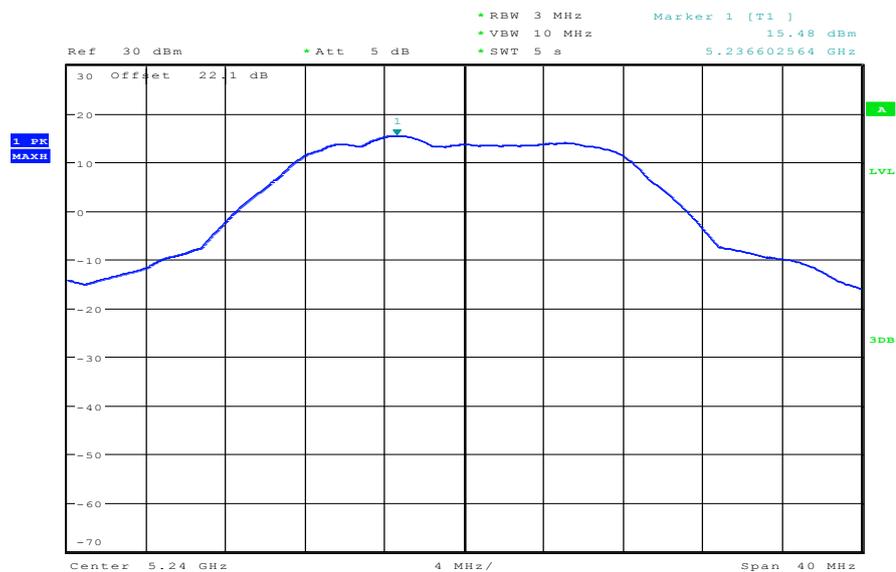


Date: 11.JUL.2012 07:37:15

Plot 3: OFDM / a – mode, 5260 MHz

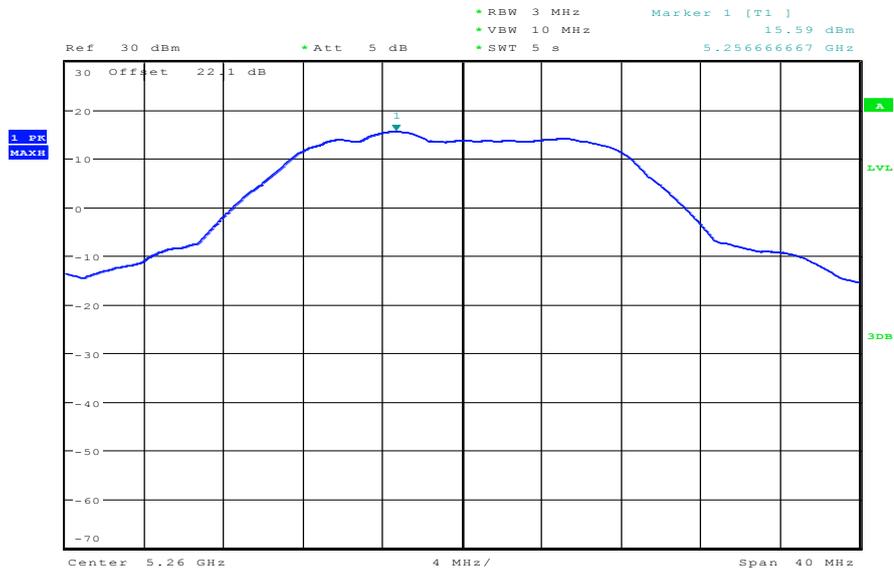


Date: 11.JUL.2012 07:38:52

Plot 4: OFDM / a – mode, 5320 MHz

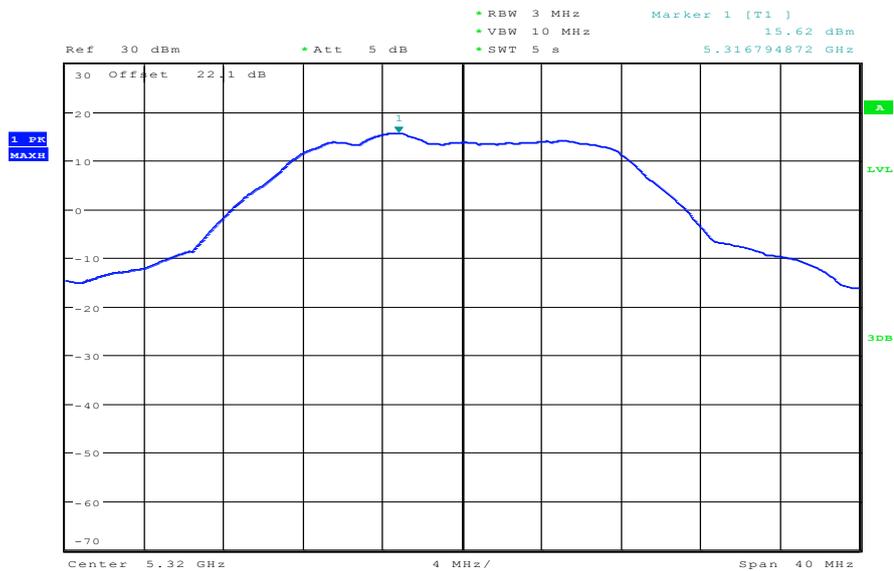


Date: 11.JUL.2012 07:40:56

Plot 5: OFDM / a – mode, 5500 MHz

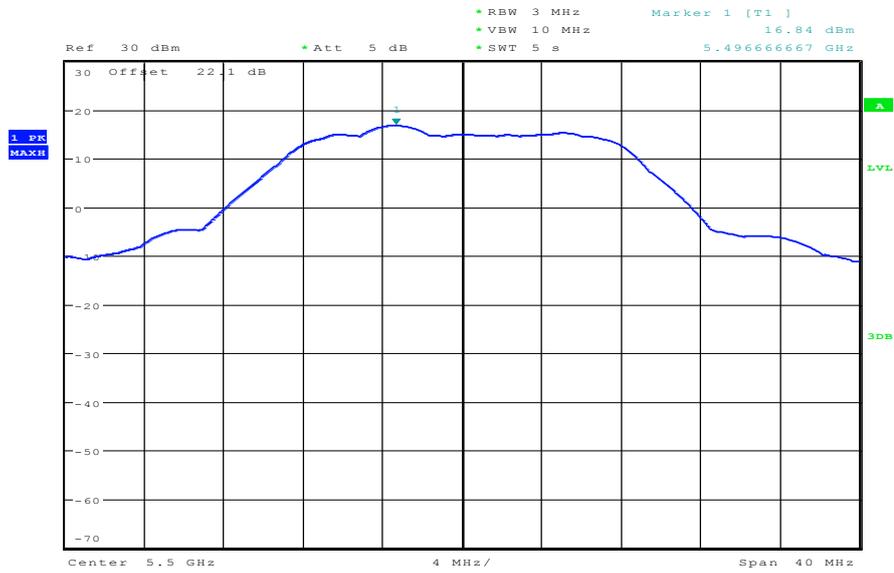


Date: 11.JUL.2012 07:48:01

Plot 6: OFDM / a – mode, 5600 MHz

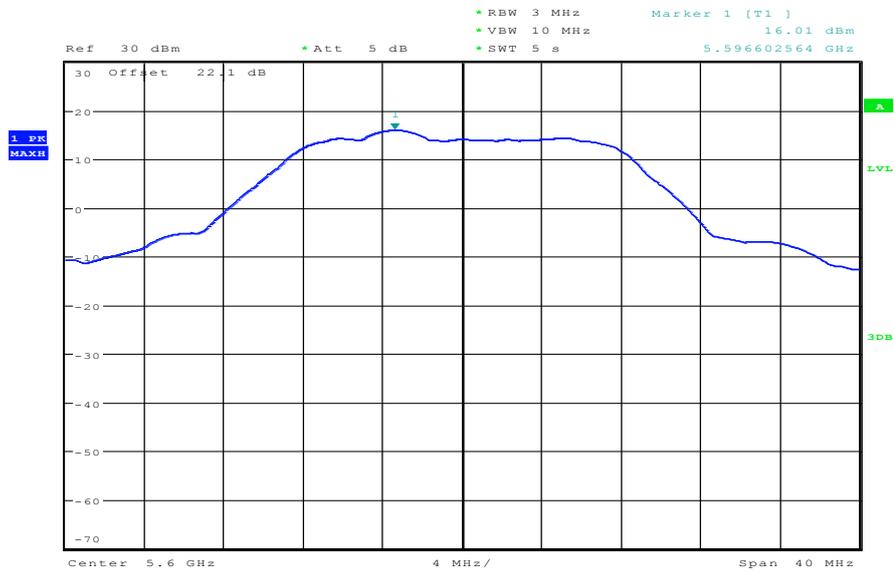

Date: 11.JUL.2012 07:49:15

Plot 7: OFDM / a – mode, 5700 MHz

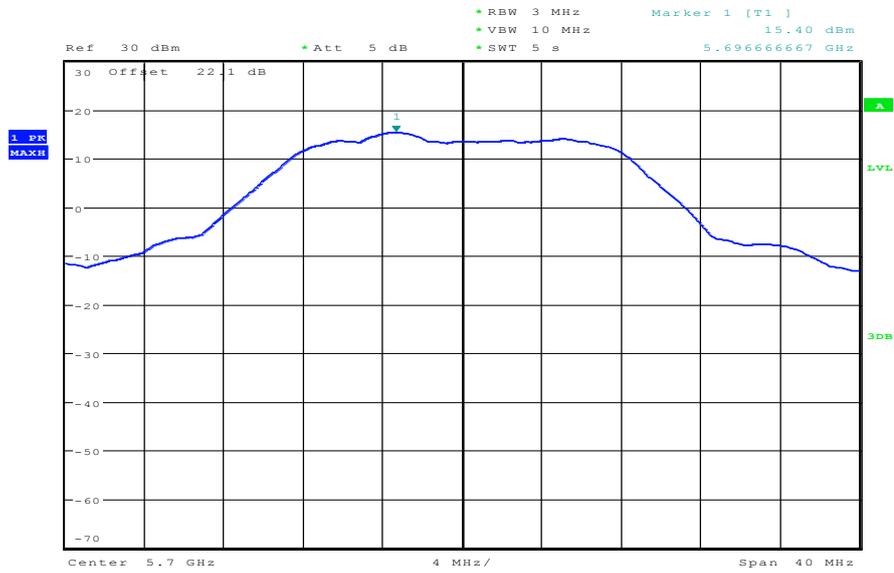

Date: 11.JUL.2012 07:51:33

### 9.3 Duty cycle

**Measurement:**

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	50 MHz
Video bandwidth:	30 MHz
Span:	Zero
Trace-Mode:	Video trigger / View


**Results:**

**Duty cycle and correction factor:**

OFDM / a – mode:                    87.47 % duty cycle    =>    0.58 dB  
 OFDM / n – mode HT20:            87.06 % duty cycle    =>    0.60 dB  
 OFDM / n – mode HT40:            86.64 % duty cycle    =>    0.62 dB


**Plots:**

**Plot 1:** duty cycle of the transmitter – OFDM / a – mode

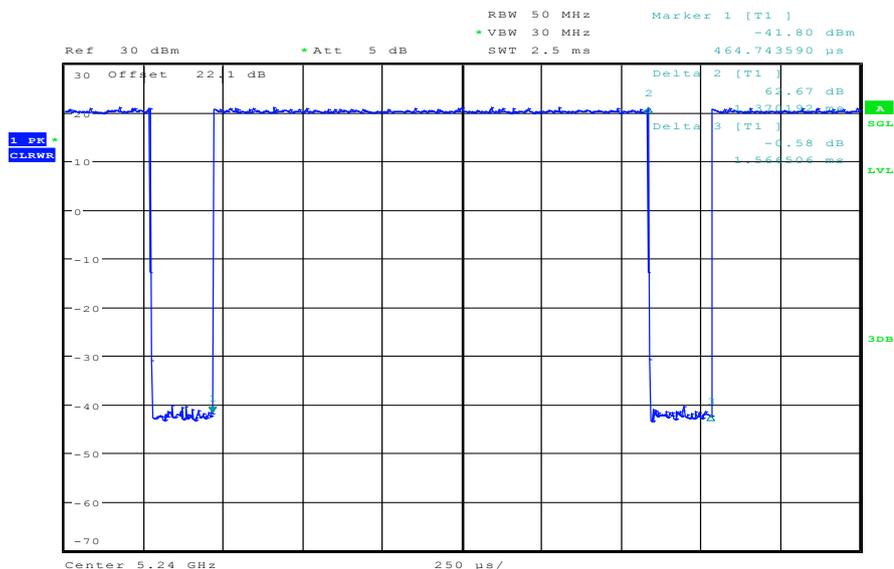


Date: 11.JUL.2012 07:20:06

Plot 2: duty cycle of the transmitter – OFDM / n – mode HT20

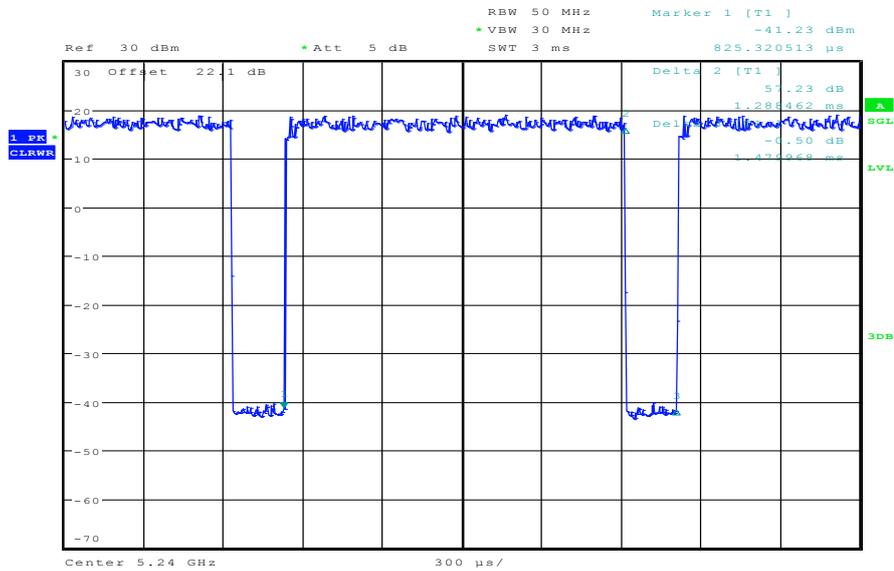

Date: 11.JUL.2012 07:22:20

Plot 3: duty cycle of the transmitter – OFDM / n – mode HT40

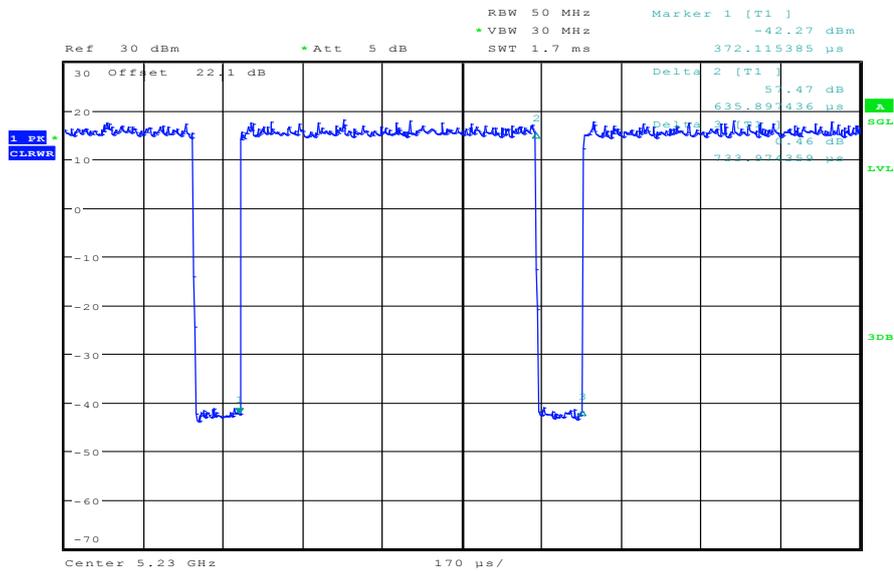

Date: 11.JUL.2012 07:28:41

## 9.4 Maximum output power conducted and radiated

**Description:**

Measurement of the maximum output power conducted and radiated

**Measurement:** Method SA-2 alternative

Measurement parameter	
Detector:	RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 MHz
Span:	> EBW
Trace-Mode:	Max hold
Analyzer function	Band power / channel power Interval > 26 dB EBW

**Limits:**

Radiated output power	Conducted output power
Conducted power + 6dBi antenna gain	The lesser one of 50mW or 4 dBm + 10 log Bandwidth 5.15-5.25 GHz 250mW or 11 dBm + 10 log Bandwidth 5.25-5.35 GHz 250mW or 11 dBm + 10 log Bandwidth 5.47-5.725 GHz (where Bandwidth is the 26 dB Bandwidth)

**Result: OFDM / a – mode**

OFDM / a – mode Channel	Maximum output power conducted [dBm]			
	Lowest 5180 MHz	Middle 5240 MHz	Middle 5260 MHz	Highest 5320 MHz
+0.58 dB duty cycle correction	11.98	11.76	11.90	11.76
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.58 dB duty cycle correction	13.20	12.42	11.88	-/-
Measurement uncertainty	± 1 dB			

**Result: Passed**

OFDM / a – mode Channel	Maximum output power radiated - EIRP [dBm]			
	Lowest 5180 MHz	Middle 5240 MHz	Middle 5260 MHz	Highest 5320 MHz
+0.58 dB duty cycle correction	9.52	10.12	11.36	11.66
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.58 dB duty cycle correction	11.33	9.51	8.74	-/-
Measurement uncertainty	± 3 dB			

**Result: Passed**

**Result: OFDM / n – mode HT20**

OFDM / n – mode HT20 Channel	Maximum output power conducted [dBm]			
	Lowest 5180 MHz	Middle 5240 MHz	Middle 5260 MHz	Highest 5320 MHz
+0.60 dB duty cycle correction	11.05	10.55	10.76	10.59
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.60 dB duty cycle correction	11.86	11.53	10.61	-/-
Measurement uncertainty	± 1 dB			

**Result: Passed**

OFDM / n – mode HT20 Channel	Maximum output power radiated - EIRP [dBm]			
	Lowest 5180 MHz	Middle 5240 MHz	Middle 5260 MHz	Highest 5320 MHz
+0.60 dB duty cycle correction	8.59	8.91	10.22	10.49
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.60 dB duty cycle correction	9.99	8.62	7.47	-/-
Measurement uncertainty	± 3 dB			

**Result: Passed**

**Result: OFDM / n – mode HT40**

OFDM / n – mode HT40 Channel	Maximum output power conducted [dBm]			
	Lowest 5190 MHz	Middle 5230 MHz	Middle 5270 MHz	Highest 5310 MHz
+0.62 dB duty cycle correction	10.83	10.58	10.47	10.53
Channel	Lowest 5510 MHz	Middle 5590 MHz	Highest 5670 MHz	-/-
+0.62 dB duty cycle correction	12.02	11.77	11.09	-/-
Measurement uncertainty	± 1 dB			


**Result: Passed**

OFDM / n – mode HT40 Channel	Maximum output power radiated - EIRP [dBm]			
	Lowest 5190 MHz	Middle 5230 MHz	Middle 5270 MHz	Highest 5310 MHz
+0.62 dB duty cycle correction	8.37	8.94	9.93	10.43
Channel	Lowest 5510 MHz	Middle 5590 MHz	Highest 5670 MHz	-/-
+0.62 dB duty cycle correction	10.15	8.86	7.95	-/-
Measurement uncertainty	± 3 dB			

**Result: Passed**


**Plots: OFDM / a – mode**

**Plot 1: 5180 MHz**

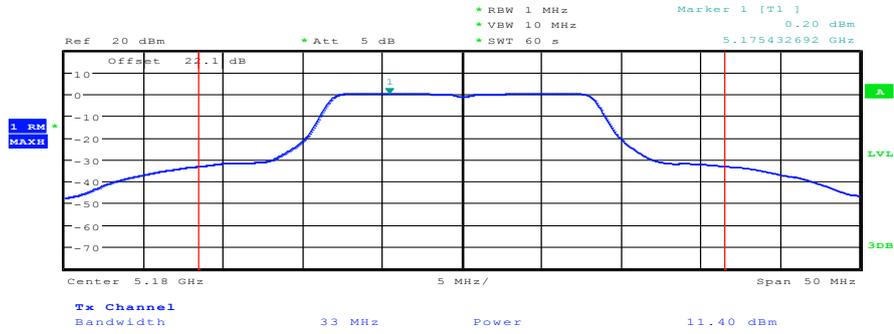


Date: 11.JUL.2012 12:40:49

**Plot 2: 5240 MHz**

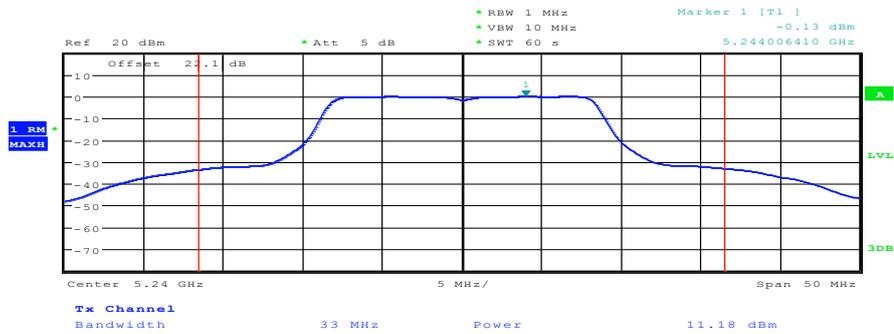


Date: 11.JUL.2012 12:43:37

Plot 3: 5260 MHz

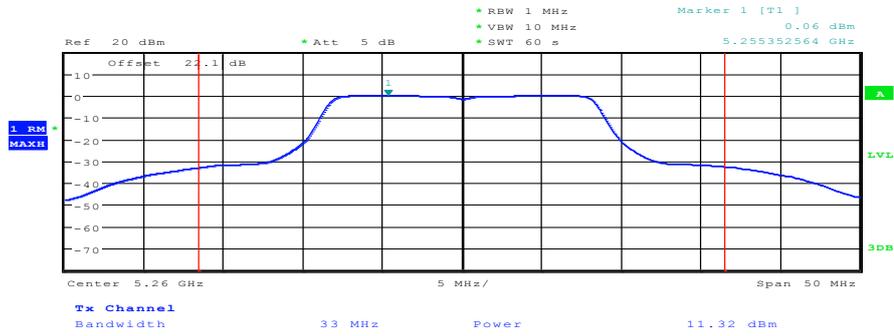


Date: 11.JUL.2012 12:47:14

Plot 4: 5320 MHz

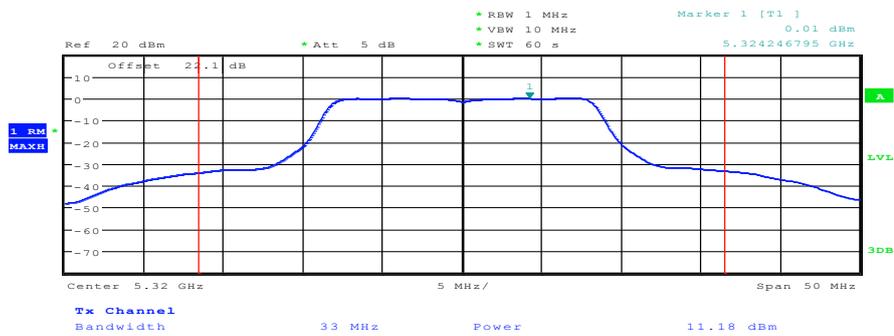


Date: 11.JUL.2012 12:51:01

Plot 5: 5500 MHz

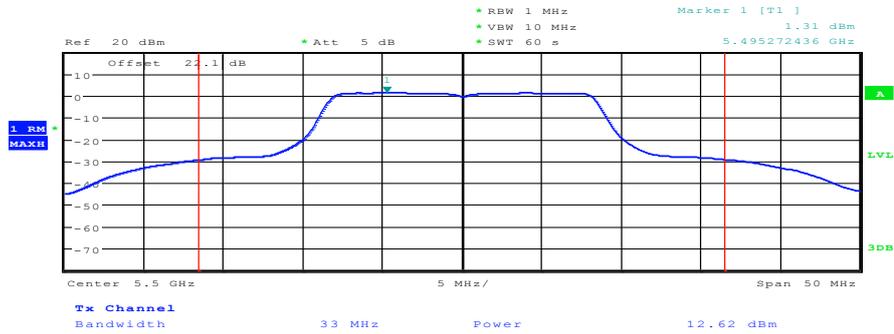


Date: 11.JUL.2012 12:54:09

Plot 6: 5600 MHz

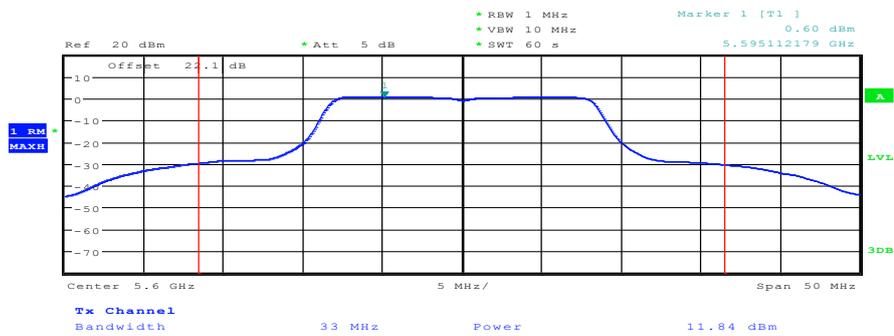

Date: 11.JUL.2012 12:56:38


Plot 7: 5700 MHz

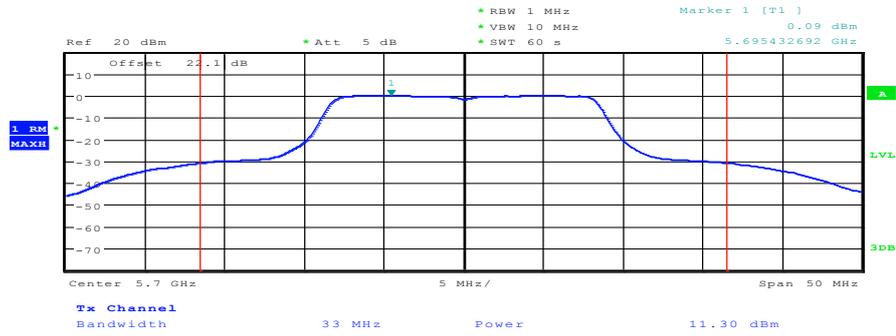

Date: 11.JUL.2012 12:59:18


**Plots: OFDM / n – mode HT20**

**Plot 1: 5180 MHz**

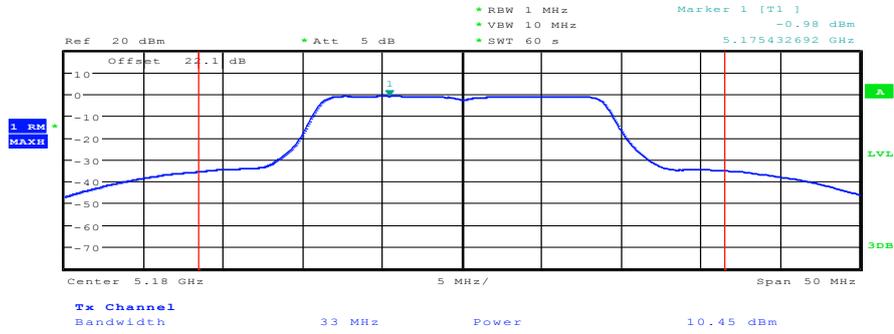


Date: 11.JUL.2012 13:04:37

**Plot 2: 5240 MHz**

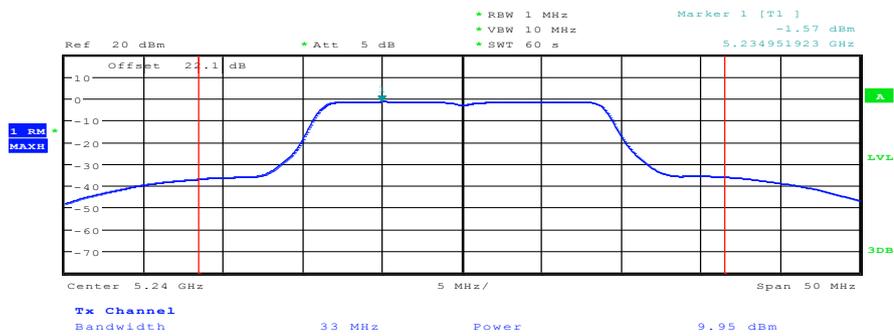


Date: 11.JUL.2012 13:07:43

Plot 3: 5260 MHz

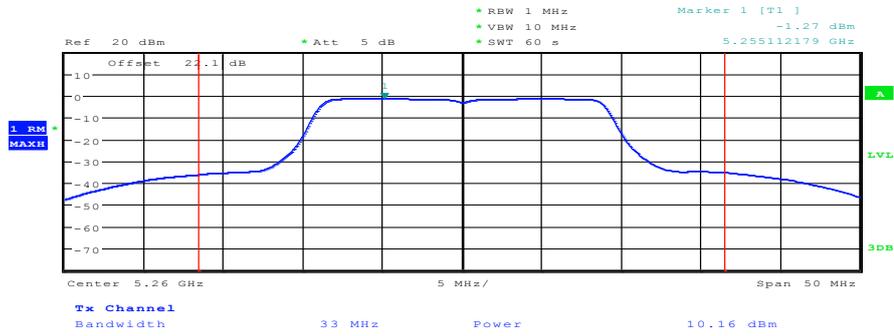


Date: 11.JUL.2012 13:10:15

Plot 4: 5320 MHz

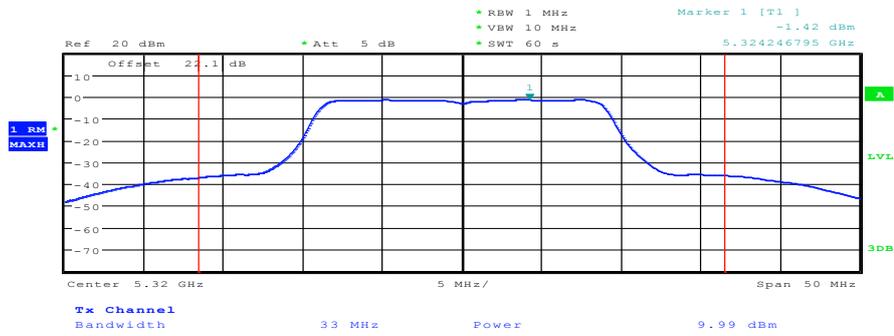


Date: 11.JUL.2012 13:14:06

Plot 5: 5500 MHz

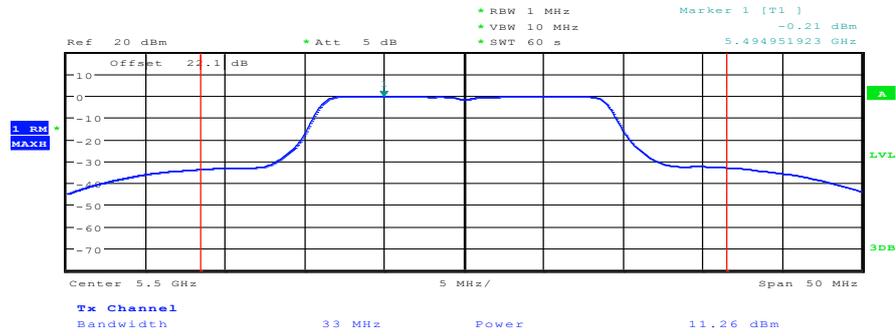


Date: 11.JUL.2012 13:17:39

Plot 6: 5600 MHz

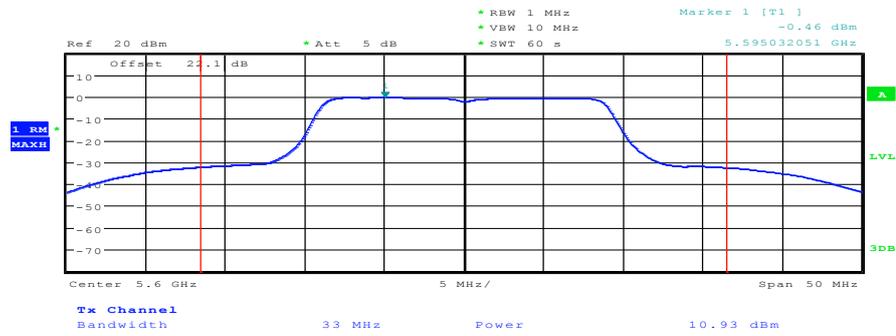

Date: 11.JUL.2012 13:19:41


Plot 7: 5700 MHz

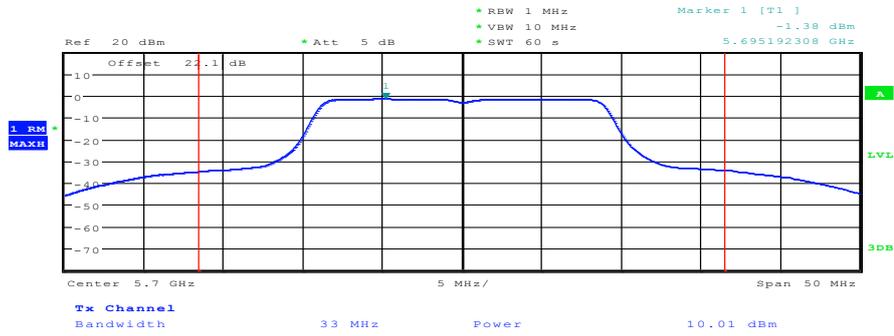

Date: 11.JUL.2012 13:21:37


**Plots: OFDM / n – mode HT40**

**Plot 1: 5190 MHz**

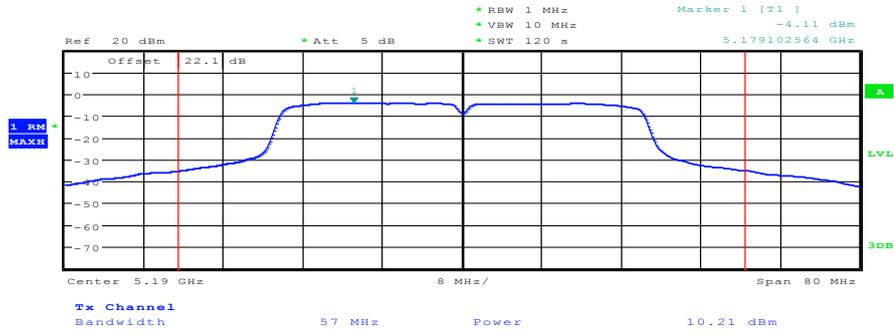


Date: 11.JUL.2012 13:26:18

**Plot 2: 5230 MHz**

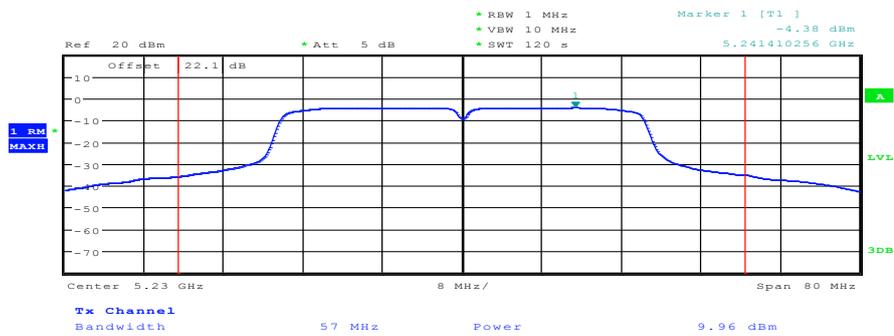


Date: 11.JUL.2012 13:29:14

Plot 3: 5270 MHz

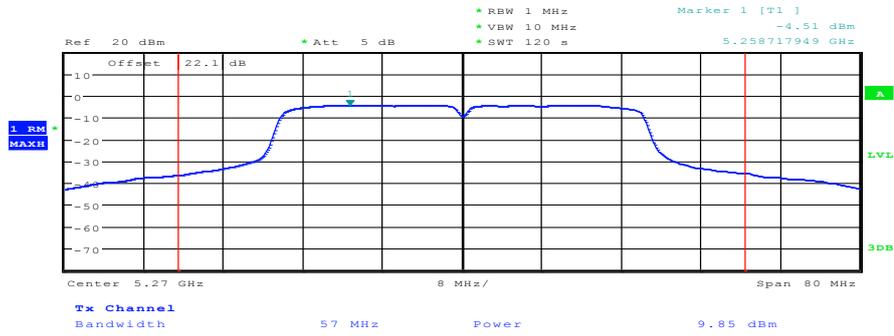


Date: 11.JUL.2012 13:32:40

Plot 4: 5310 MHz

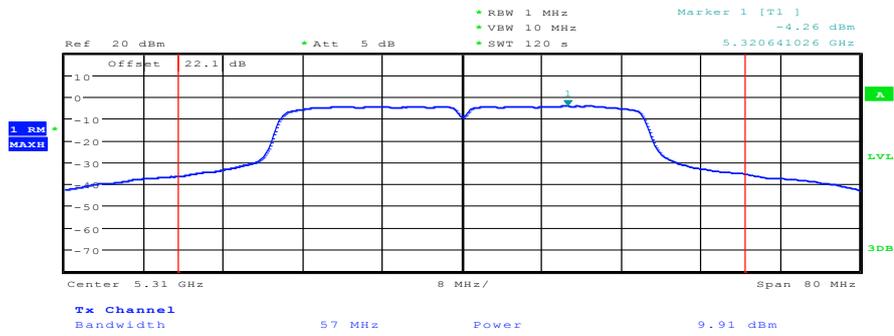


Date: 11.JUL.2012 13:35:38

Plot 5: 5510 MHz

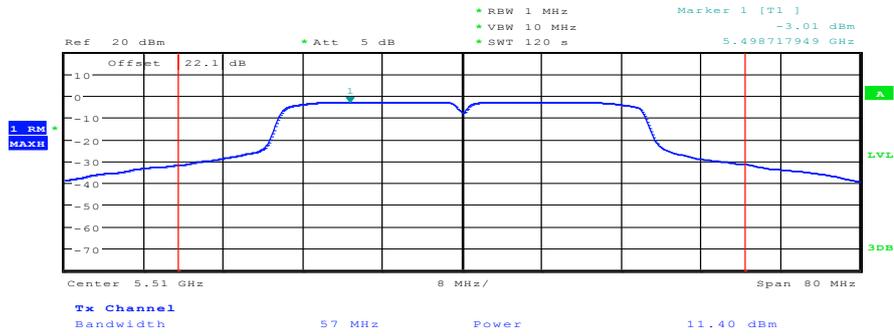


Date: 11.JUL.2012 13:38:50

Plot 6: 5590 MHz

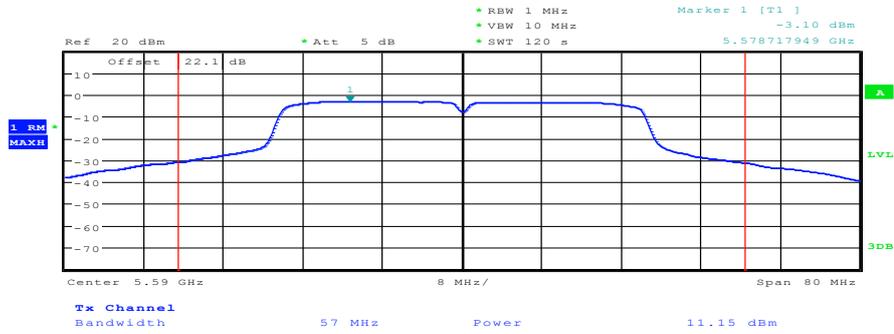

Date: 11.JUL.2012 13:42:26

Plot 7: 5670 MHz

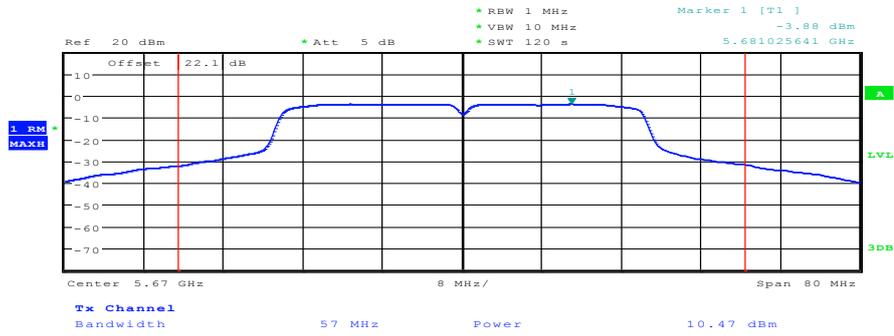

Date: 11.JUL.2012 13:45:59

## 9.5 Power spectral density

### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

**Measurement:** Method SA-1 alternative (for devices with 100 % duty cycle only)

Measurement parameter	
Detector:	RMS
Sweep time:	60 s / 120 s
Resolution bandwidth:	1 MHz
Video bandwidth:	$\geq 3$ MHz
Span:	> EBW
Trace-Mode:	Max hold

### Limits:

Power Spectral Density
power spectral density conducted $\leq 4$ dBm in any 1 MHz band (band 5150 – 5250 MHz) power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5250 – 5350 MHz) power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5470 – 5725 MHz)

**Result: OFDM / a – mode**

OFDM / a – mode Channel	Power Spectral density [dBm/MHz]			
	Lowest 5180 MHz	Middle 5240 MHz	Middle 5260 MHz	Highest 5320 MHz
+0.58 dB duty cycle correction	0.68	0.44	0.54	0.61
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.58 dB duty cycle correction	1.90	1.20	0.66	-/-
Measurement uncertainty	± 1 dB			

**Result: Passed**

**Result: OFDM / n – mode HT20**

OFDM / n – mode HT20 Channel	Power Spectral density [dBm/MHz]			
	Lowest 5180 MHz	Middle 5240 MHz	Middle 5260 MHz	Highest 5320 MHz
+0.60 dB duty cycle correction	-0.48	-1.01	-0.81	-0.80
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.60 dB duty cycle correction	0.37	0.15	-0.91	-/-
Measurement uncertainty	± 1 dB			

**Result: Passed**


**Result: OFDM / n – mode HT40**

OFDM / n – mode HT40 Channel	Power Spectral density [dBm/MHz]			
	Lowest 5190 MHz	Middle 5230 MHz	Middle 5270 MHz	Highest 5310 MHz
+0.62 dB duty cycle correction	-3.59	-3.45	-3.48	-3.19
Channel	Lowest 5510 MHz	Middle 5590 MHz	Highest 5670 MHz	-/-
+0.62 dB duty cycle correction	-2.29	-2.40	-2.98	-/-
Measurement uncertainty	± 1 dB			

**Result: Passed**


**Plots: OFDM / a – mode**

**Plot 1: 5180 MHz**

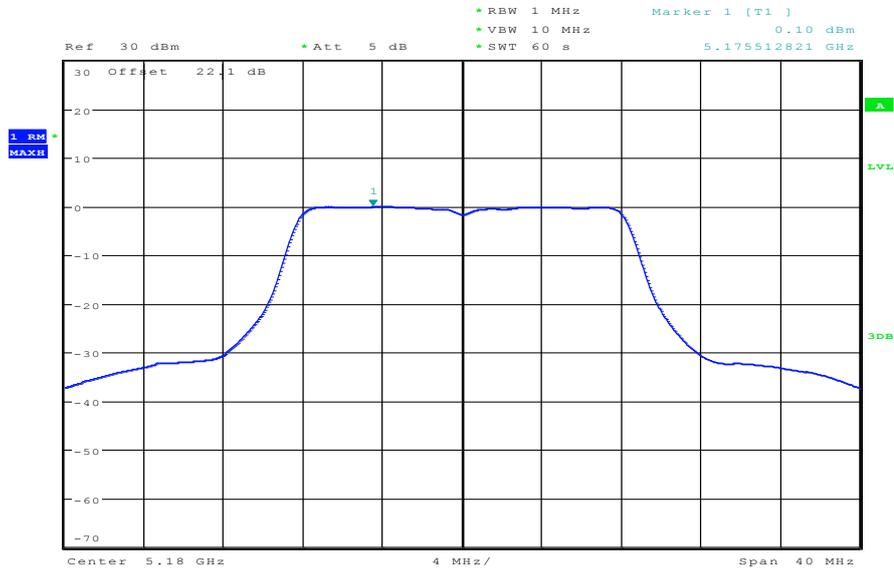


Date: 11.JUL.2012 15:09:23

**Plot 2: 5240 MHz**

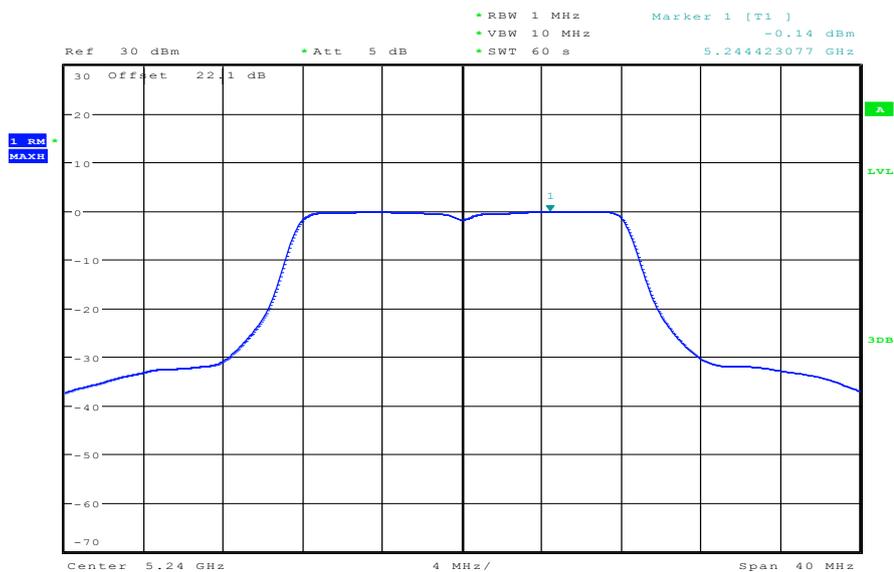


Date: 11.JUL.2012 15:11:40

Plot 3: 5260 MHz

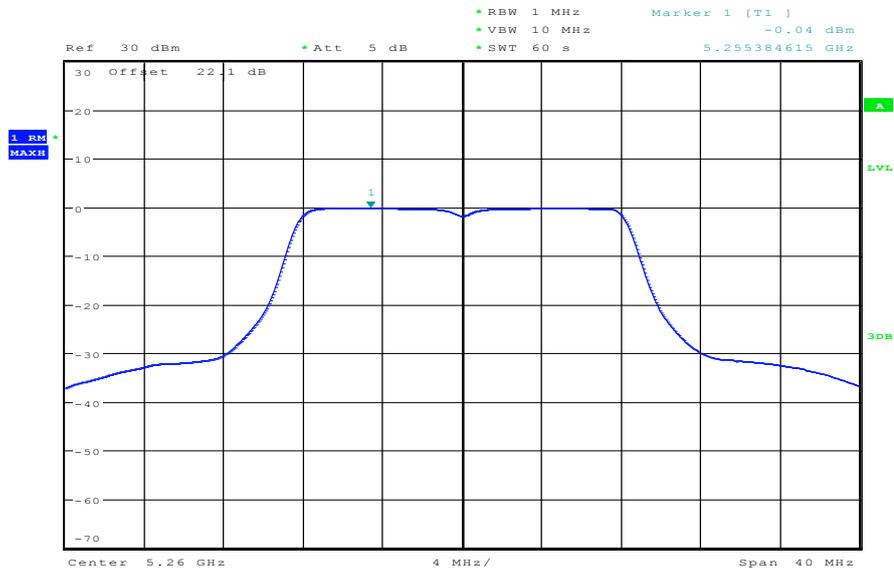


Date: 11.JUL.2012 15:16:36

Plot 4: 5320 MHz

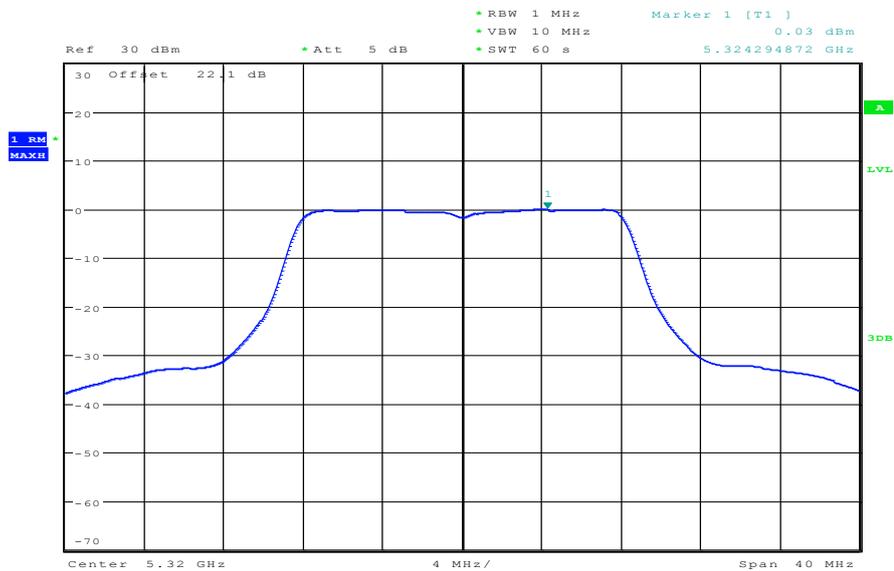


Date: 11.JUL.2012 15:18:55

Plot 5: 5500 MHz

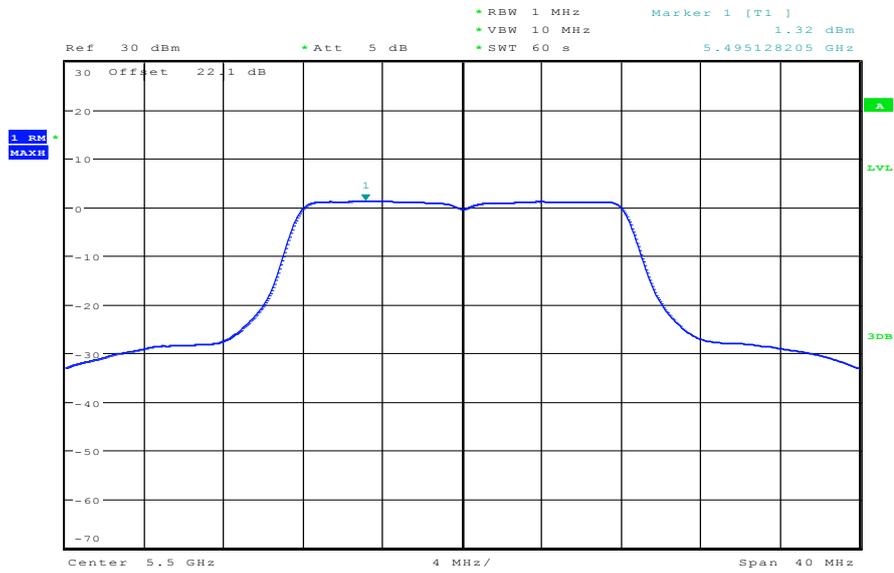


Date: 11.JUL.2012 15:24:23

Plot 6: 5600 MHz

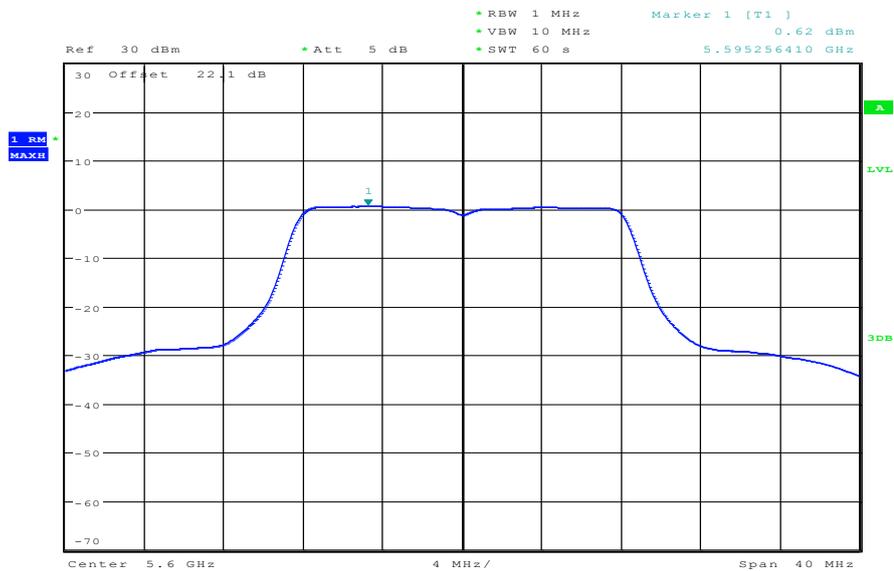

Date: 11.JUL.2012 15:30:11


Plot 7: 5700 MHz

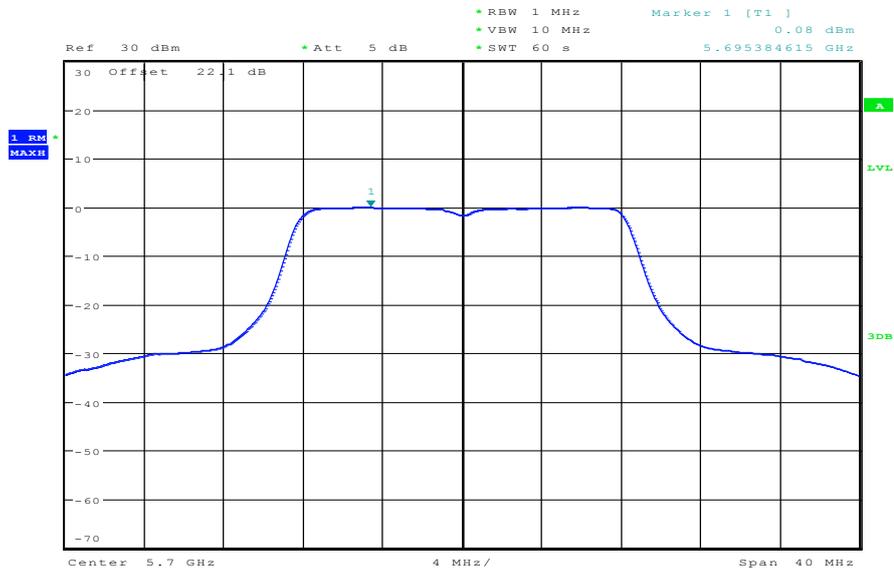

Date: 11.JUL.2012 15:35:28


**Plots: OFDM / n – mode HT20**

**Plot 1: 5180 MHz**

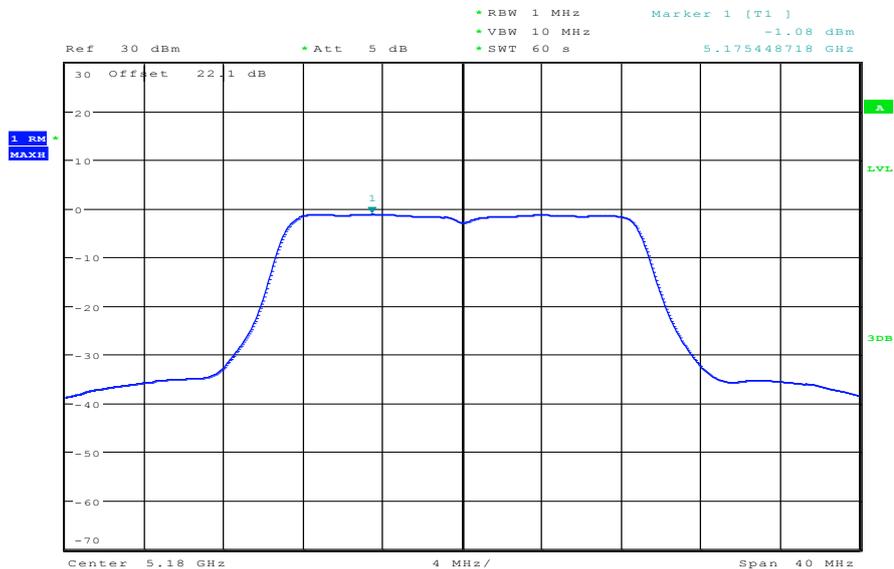


Date: 11.JUL.2012 15:38:02

**Plot 2: 5240 MHz**

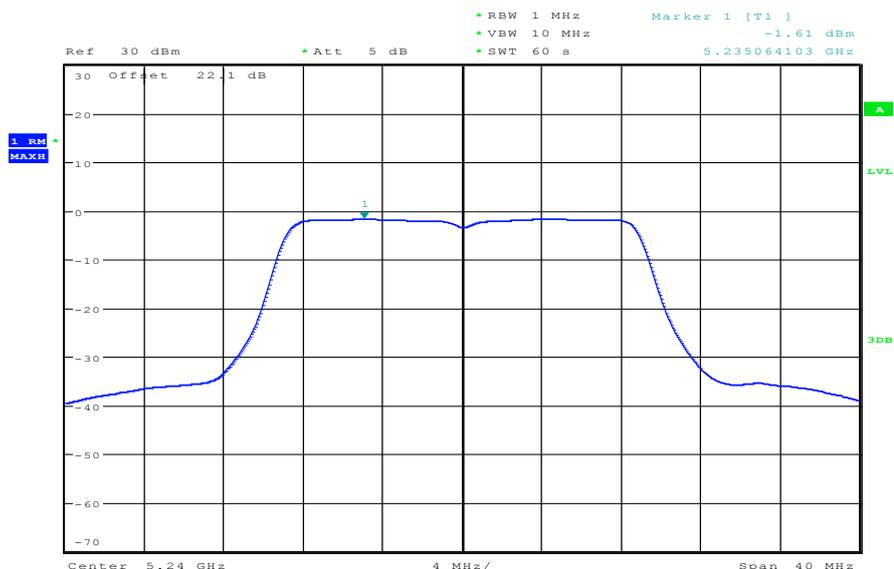


Date: 11.JUL.2012 15:43:46

Plot 3: 5260 MHz

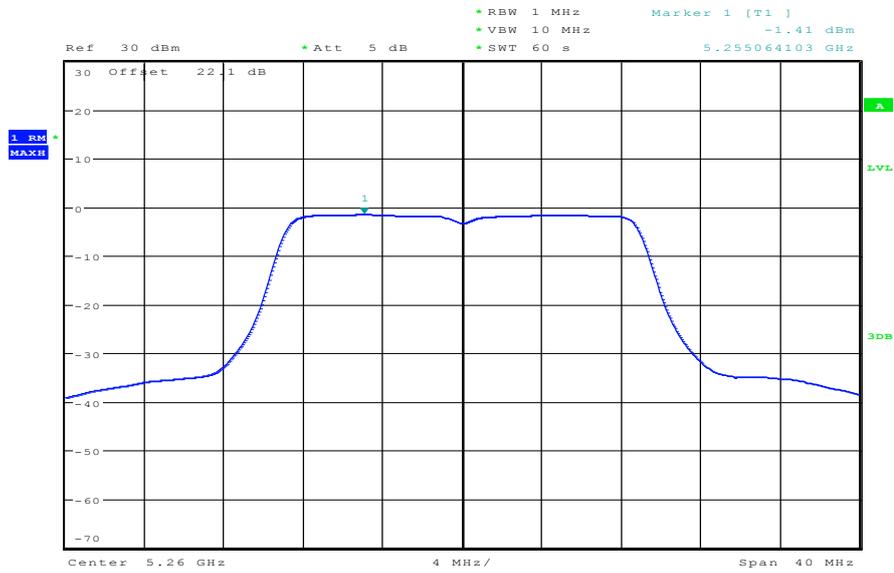


Date: 11.JUL.2012 15:45:56

Plot 4: 5320 MHz

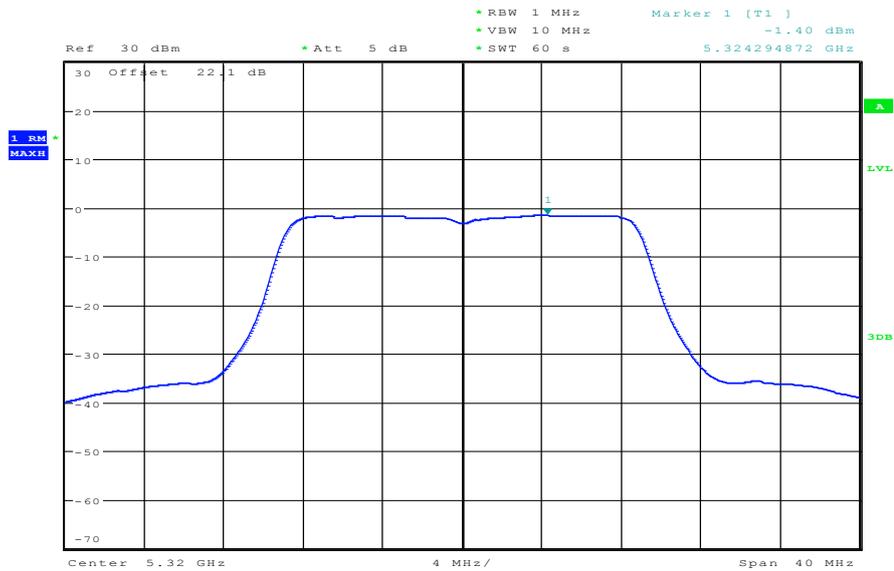


Date: 11.JUL.2012 15:51:14

Plot 5: 5500 MHz

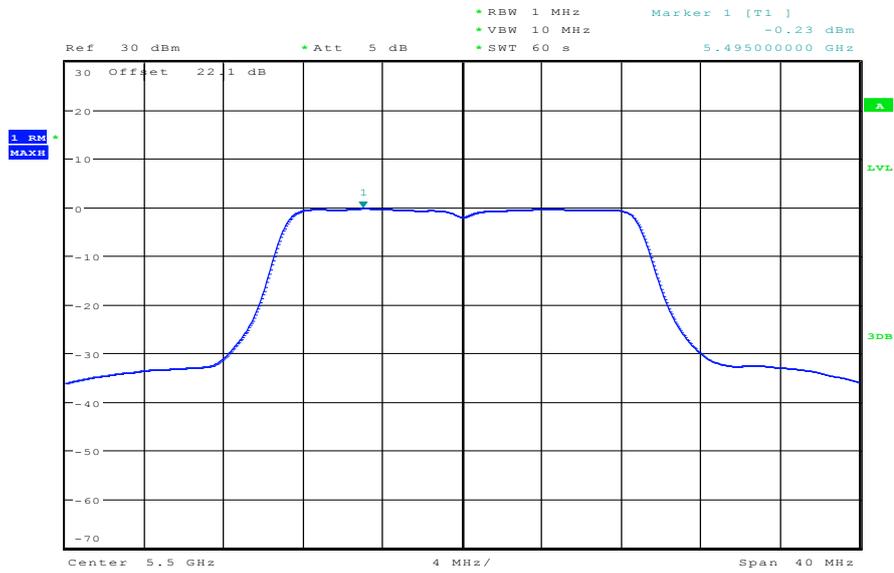


Date: 11.JUL.2012 15:53:07

Plot 6: 5600 MHz

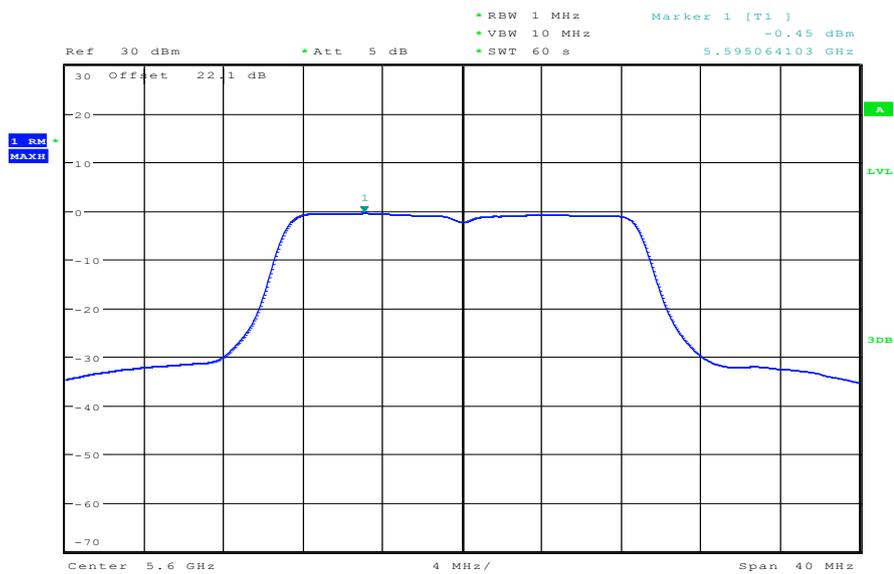

Date: 11.JUL.2012 16:04:32


Plot 7: 5700 MHz

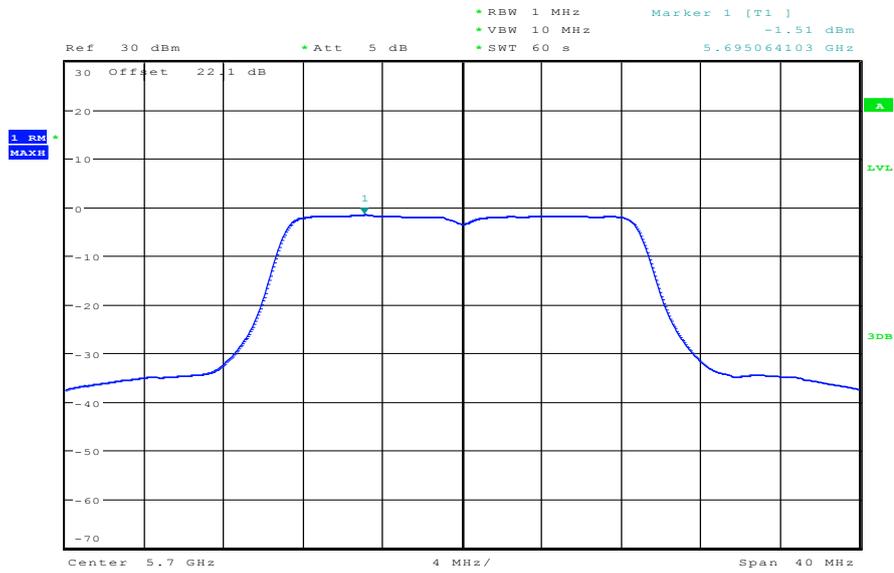

Date: 11.JUL.2012 16:07:30


**Plots: OFDM / n – mode HT40**

**Plot 1: 5190 MHz**

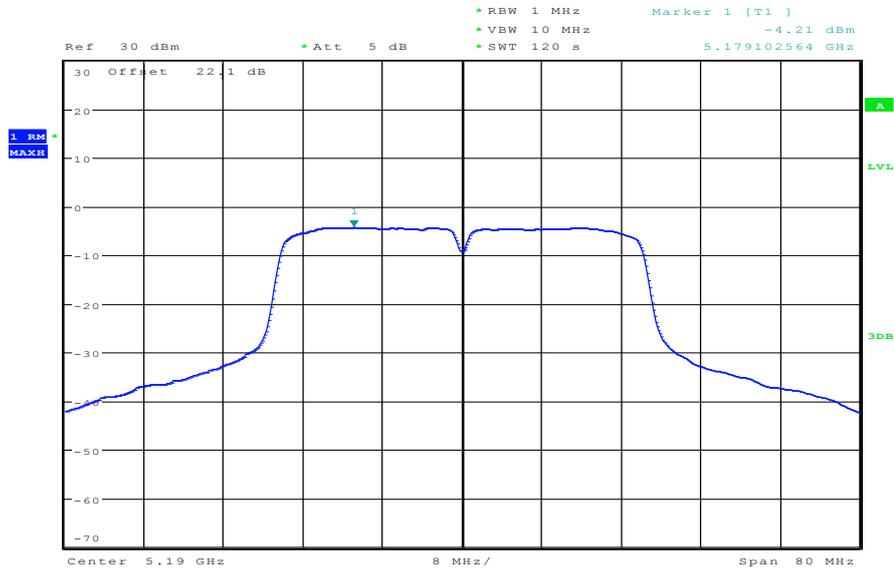


Date: 12.JUL.2012 07:08:12

**Plot 2: 5230 MHz**

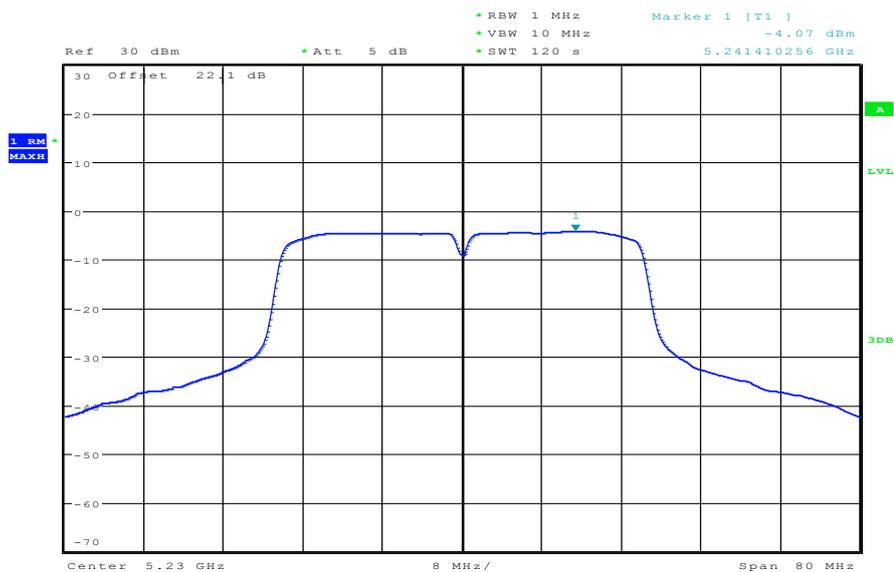


Date: 12.JUL.2012 07:14:17

Plot 3: 5270 MHz

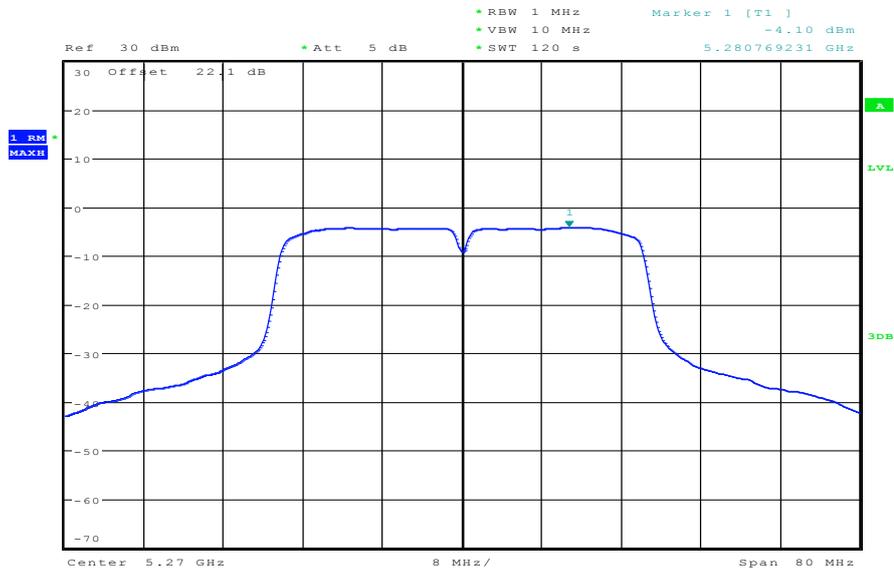


Date: 12.JUL.2012 07:26:01

Plot 4: 5310 MHz

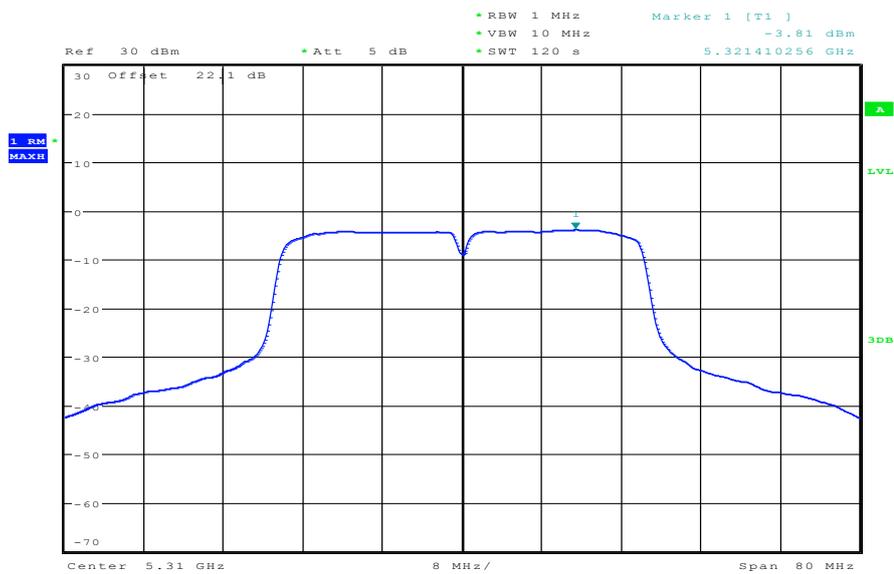


Date: 12.JUL.2012 07:29:30

Plot 5: 5510 MHz

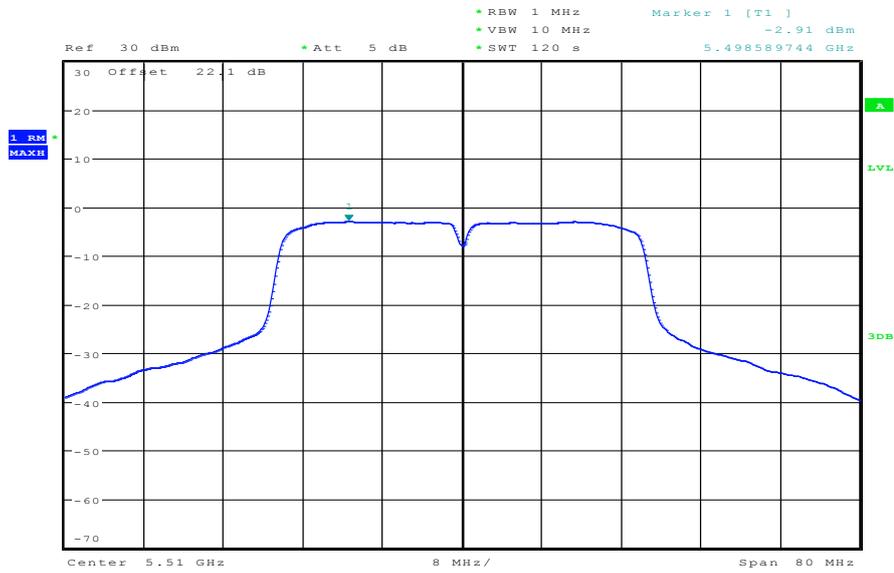


Date: 12.JUL.2012 07:40:02

Plot 6: 5590 MHz

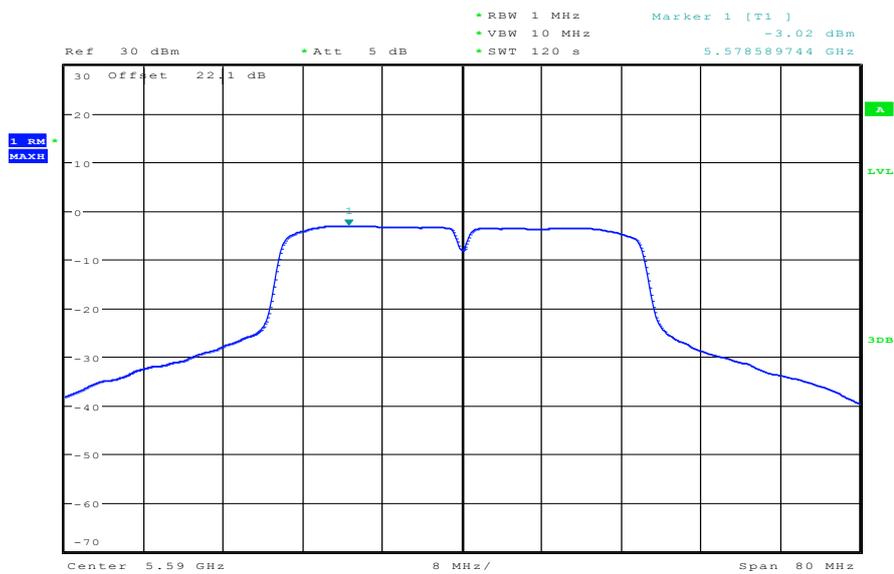

Date: 12.JUL.2012 07:44:15

Plot 7: 5670 MHz

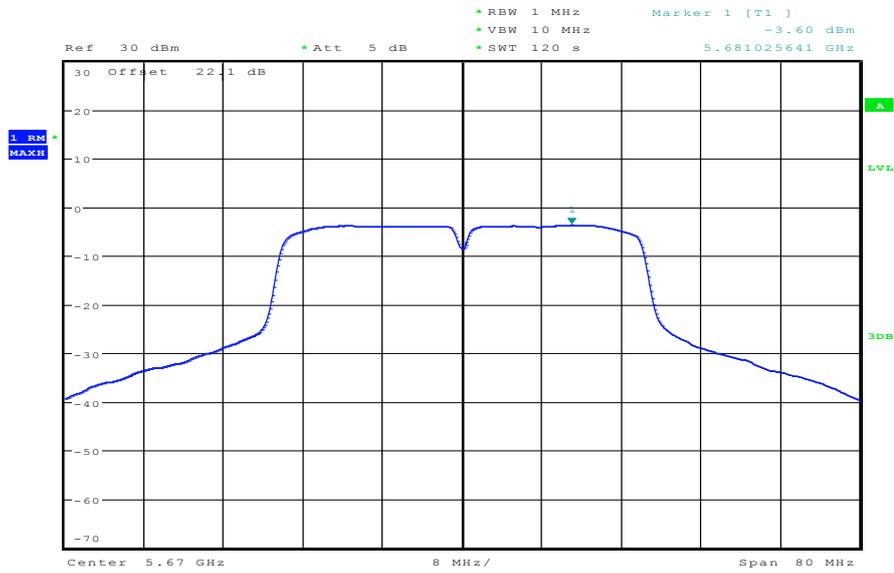

Date: 12.JUL.2012 08:01:15

## 9.6 Spectrum bandwidth – 26 dB bandwidth

### Description:

Measurement of the 26 dB bandwidth of the modulated signal.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1% EBW
Video bandwidth:	≥ EBW
Span:	> complete signal!
Trace-Mode:	Max hold

### Limits:

Spectrum Bandwidth – 26 dB Bandwidth
-/-

**Result: OFDM / a – mode**

OFDM / a – mode Channel	26 dB BANDWIDTH [MHz]			
	Lowest 5180 MHz	Middle 5240 MHz	Middle 5280 MHz	Highest 5320 MHz
	22.60	22.60	22.98	22.50
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
	32.12	27.02	28.56	-/-
Measurement uncertainty	± 300 kHz			

**Result: Passed**

**Result: OFDM / n – mode HT20**

OFDM / n – mode HT20 Channel	26 dB BANDWIDTH [MHz]			
	Lowest 5180 MHz	Middle 5240 MHz	Middle 5280 MHz	Highest 5320 MHz
	23.27	23.56	23.75	23.27
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
	31.73	32.02	25.87	-/-
Measurement uncertainty	± 300 kHz			

**Result: Passed**


**Result: OFDM / n – mode HT40**

OFDM / n – mode HT40 Channel	26 dB BANDWIDTH [MHz]			
	Lowest 5190 MHz	Highest 5230 MHz	Lowest 5270 MHz	Highest 5310 MHz
	47.76	47.69	47.60	47.82
Channel	Lowest 5510 MHz	Middle 5590 MHz	Highest 5670 MHz	-/-
	54.49	56.57	56.57	-/-
Measurement uncertainty	± 300 kHz			

**Result: Passed**


**Plots: OFDM / a – mode**

**Plot 1: 5180 MHz**

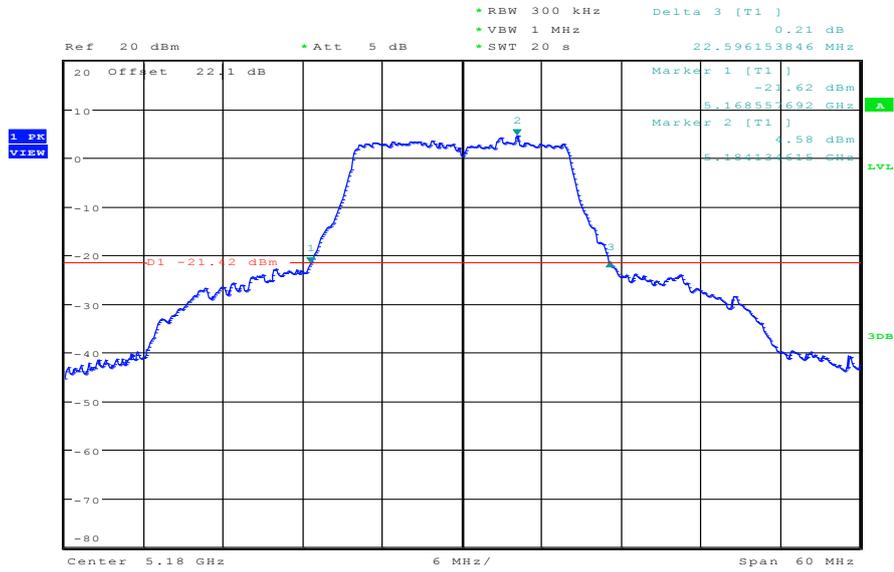


Date: 11.JUL.2012 08:30:29

**Plot 2: 5240 MHz**

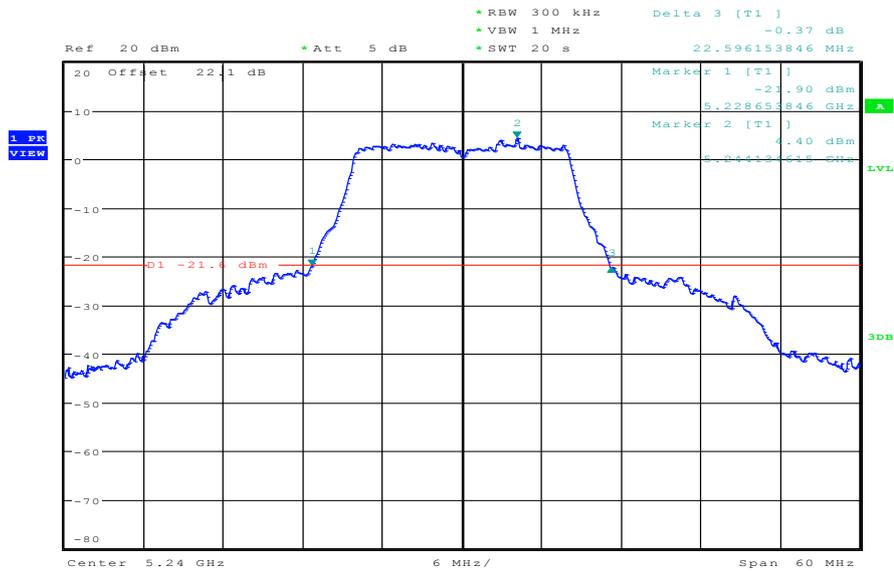


Date: 11.JUL.2012 08:27:48

Plot 3: 5260 MHz

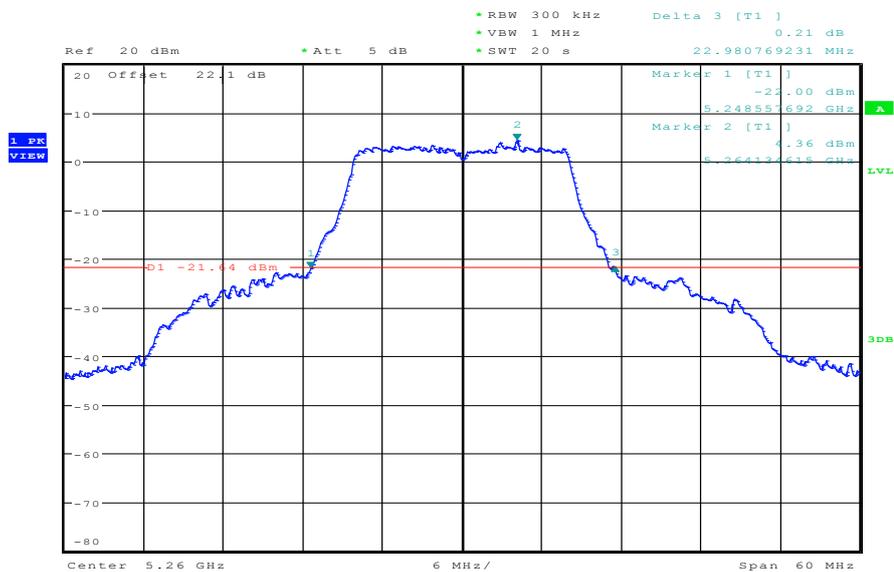


Date: 11.JUL.2012 08:32:45

Plot 4: 5320 MHz

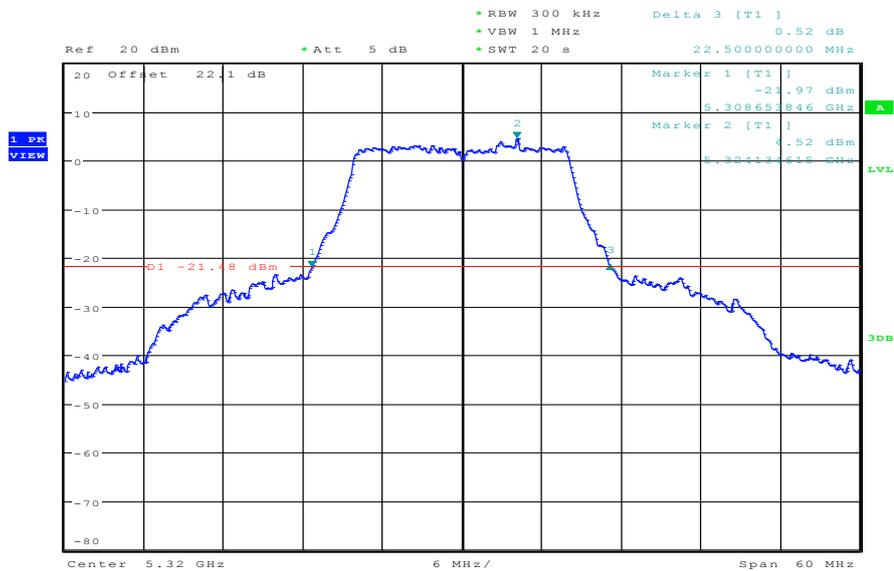


Date: 11.JUL.2012 08:35:32

Plot 5: 5500 MHz

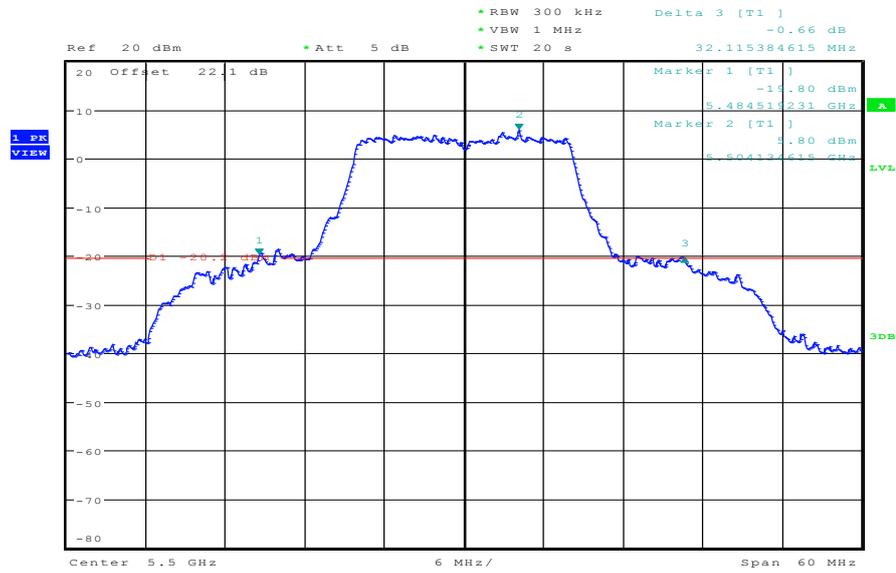


Date: 11.JUL.2012 08:38:15

Plot 6: 5600 MHz

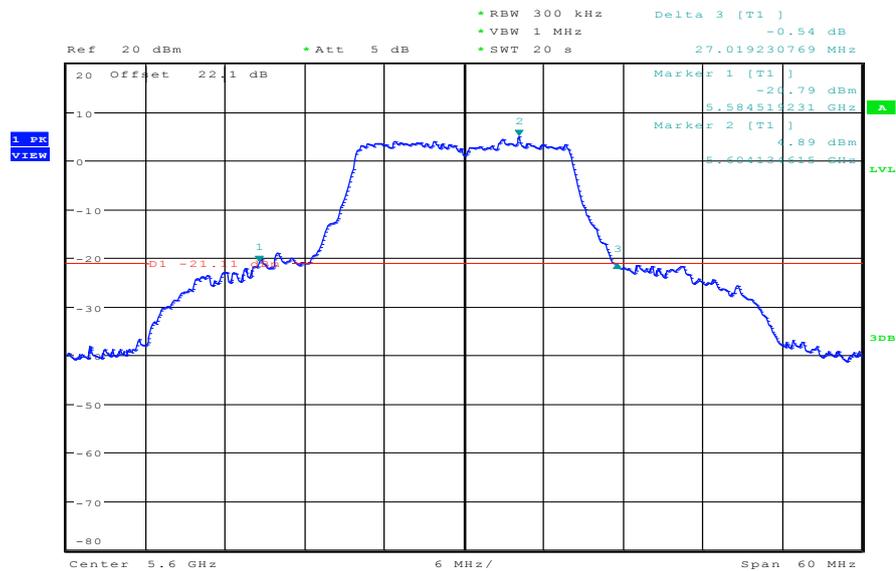

Date: 11.JUL.2012 08:40:41


Plot 7: 5700 MHz

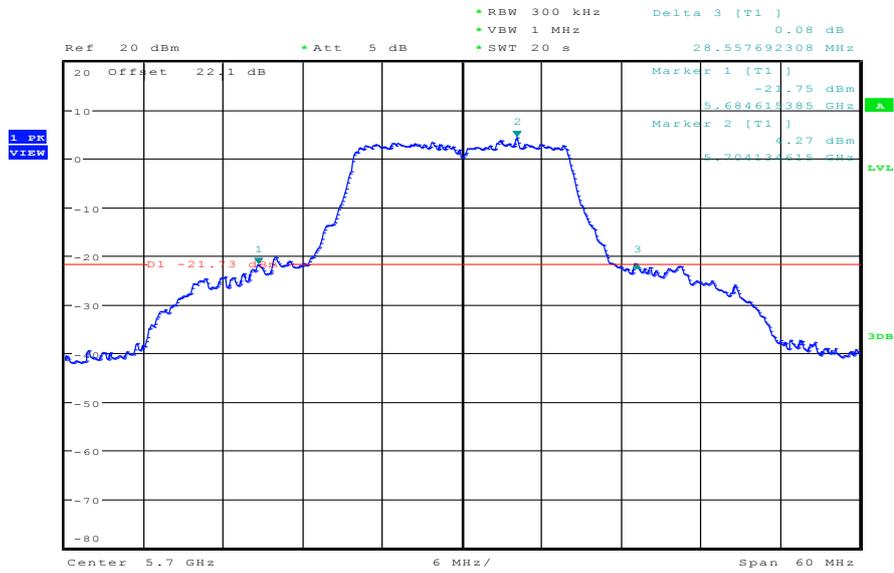

Date: 11.JUL.2012 08:42:57


**Plots: OFDM / n – mode HT20**

**Plot 1: 5180 MHz**

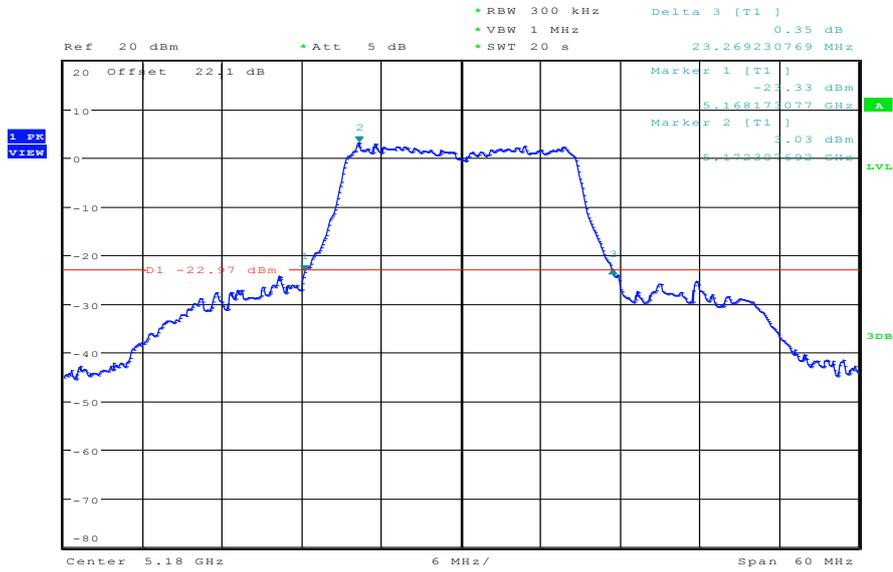


Date: 11.JUL.2012 09:40:45

**Plot 2: 5240 MHz**

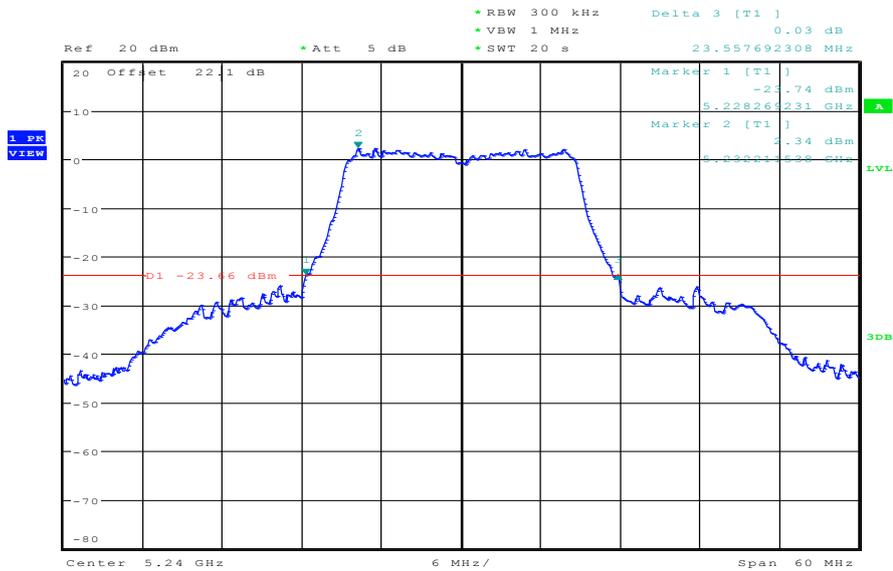


Date: 11.JUL.2012 09:43:07

Plot 3: 5260 MHz

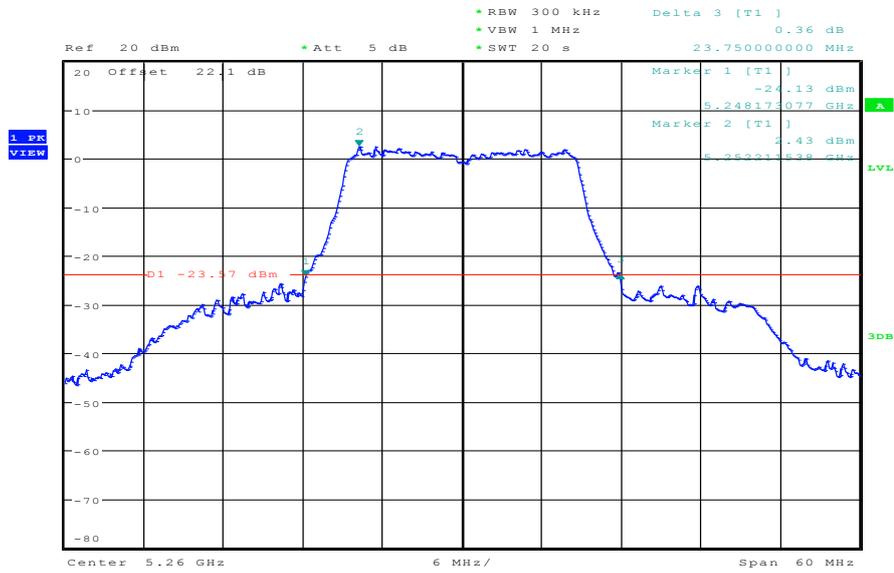


Date: 11.JUL.2012 09:45:24

Plot 4: 5320 MHz

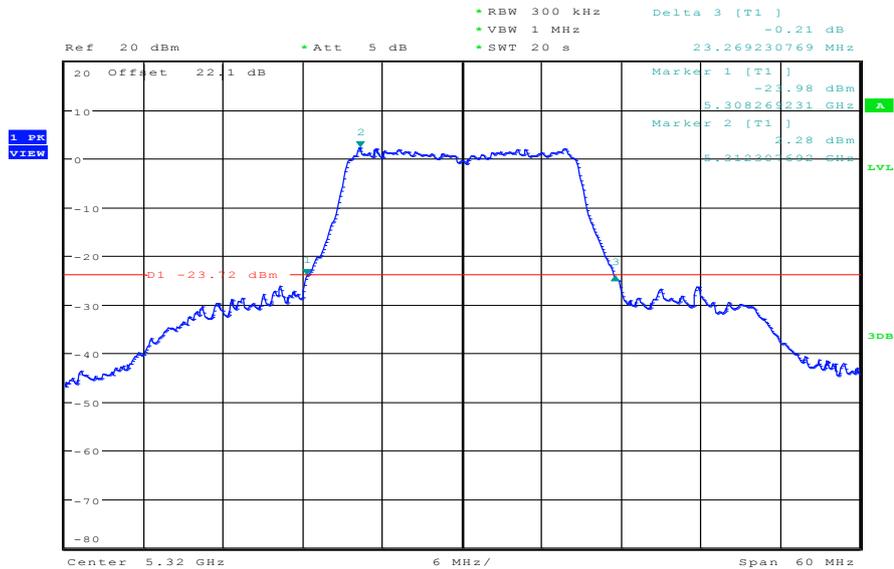


Date: 11.JUL.2012 09:47:34

Plot 5: 5500 MHz

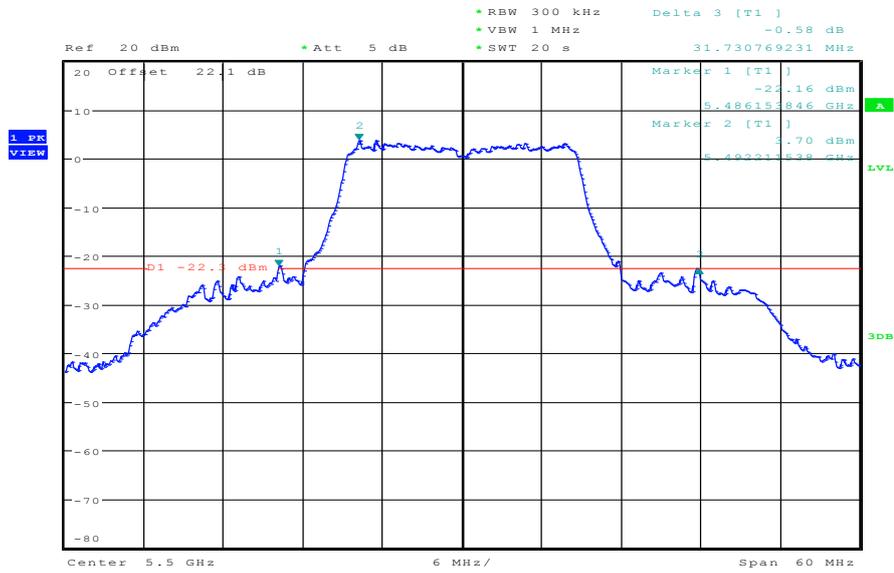


Date: 11.JUL.2012 09:49:52

Plot 6: 5600 MHz

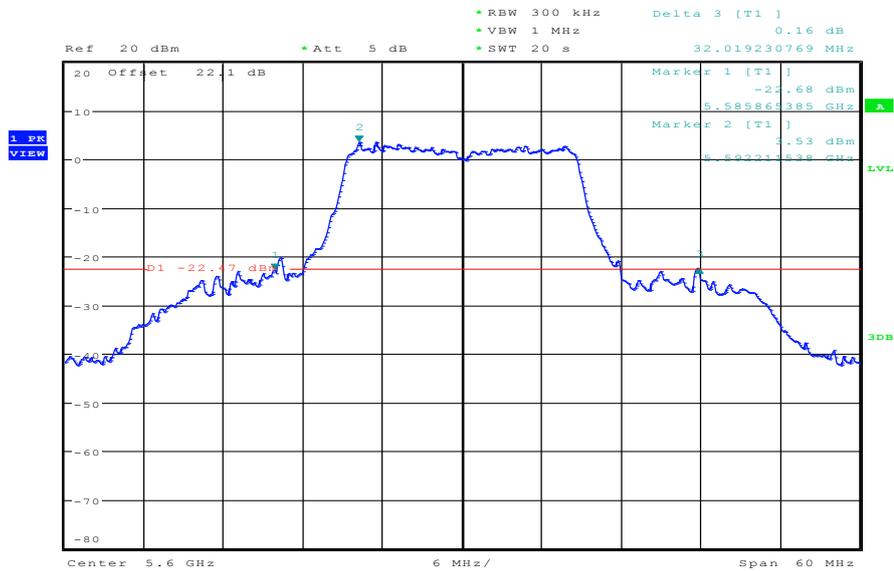

Date: 11.JUL.2012 09:52:54


Plot 7: 5700 MHz

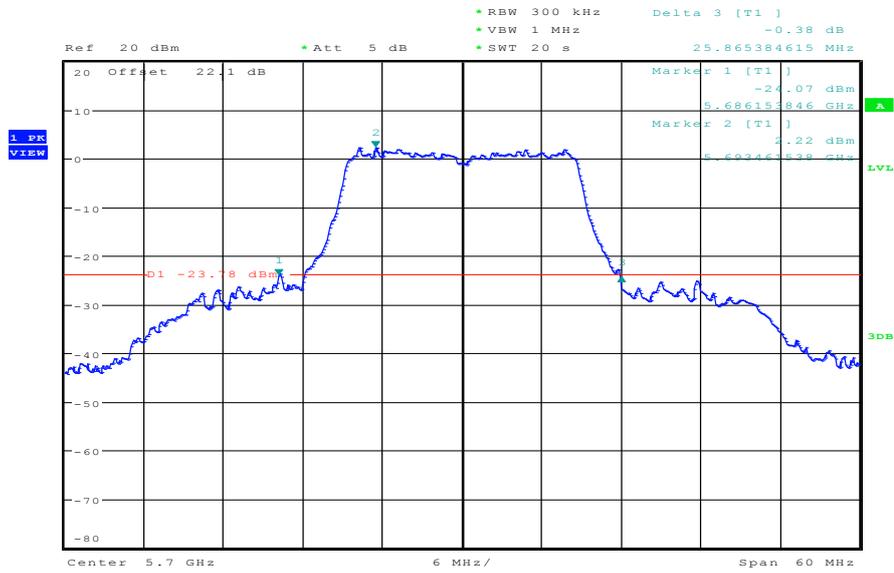

Date: 11.JUL.2012 09:56:54


**Plots: OFDM / n – mode HT40**

**Plot 1: 5190 MHz**

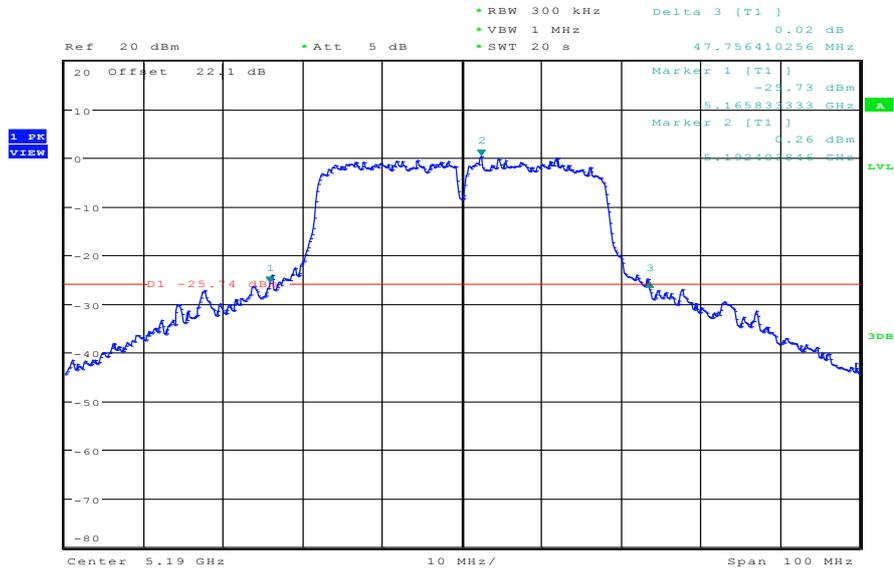


Date: 11.JUL.2012 10:02:12

**Plot 2: 5230 MHz**

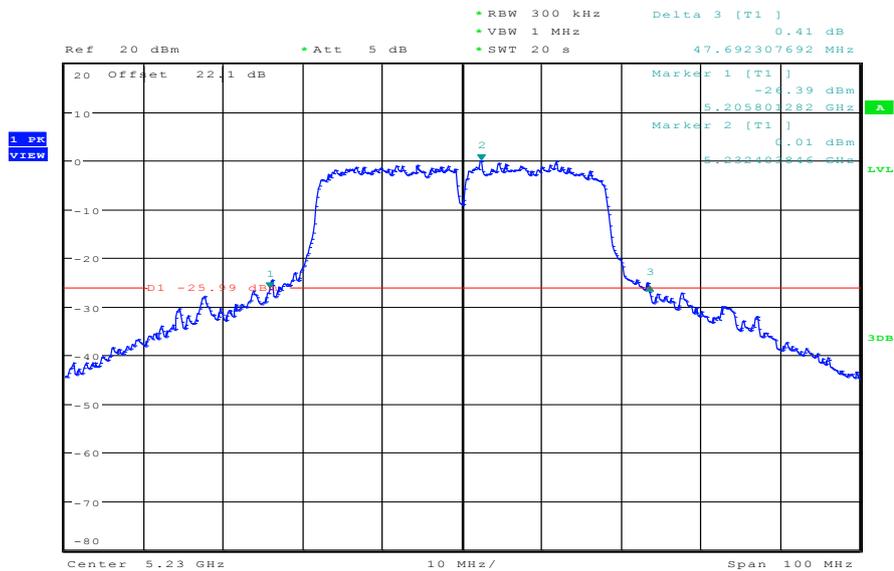


Date: 11.JUL.2012 10:05:38

Plot 3: 5270 MHz

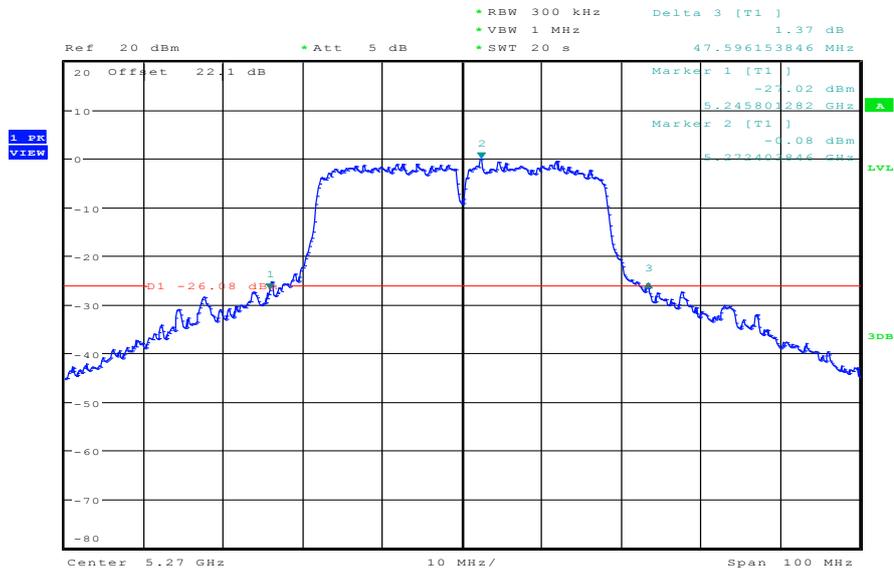


Date: 11.JUL.2012 10:08:28

Plot 4: 5310 MHz

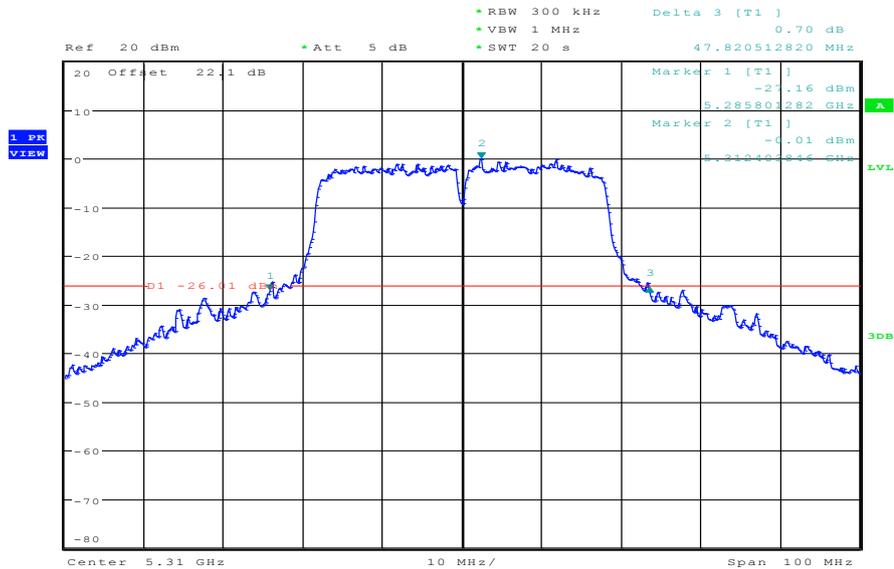


Date: 11.JUL.2012 10:11:31

Plot 5: 5510 MHz

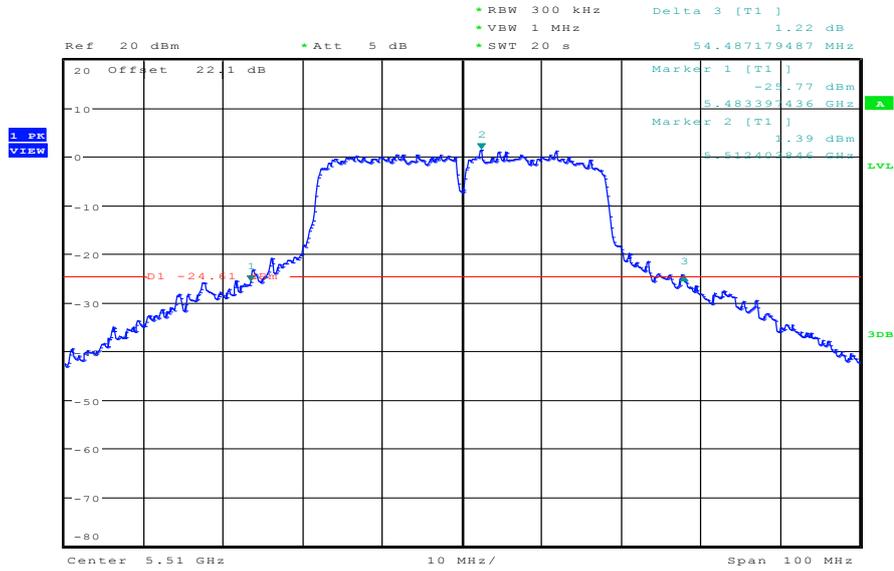


Date: 11.JUL.2012 10:14:36

Plot 6: 5590 MHz

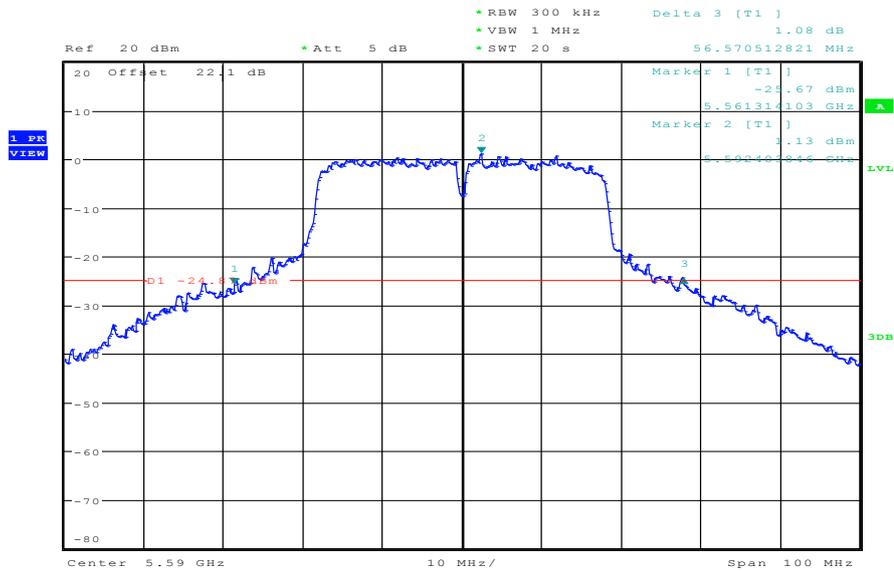

Date: 11.JUL.2012 10:18:15

Plot 7: 5670 MHz

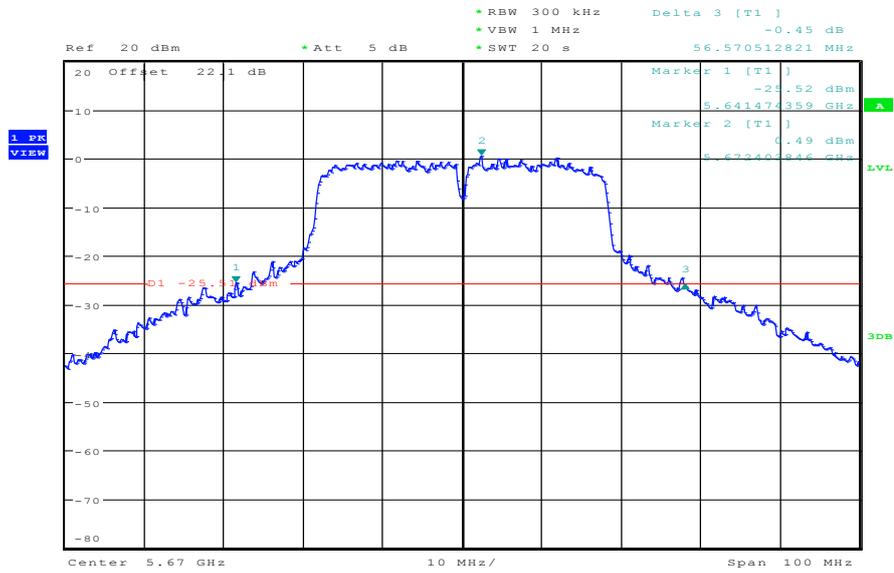

Date: 11.JUL.2012 10:22:24

## 9.7 Peak excursion measurements

### Description:

Peak to average value.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	60 s / 120 s
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 MHz
Span:	> Complete signal
Trace-Mode:	Max hold

### Limits:

Peak excursion value
Does not exceed 13 dB.

**Results:**

Modulation OFDM / a – mode	Peak excursion value		
	5180 MHz	5240 MHz	5260 MHz
Channel	5180 MHz	5240 MHz	5260 MHz
RMS	0.68	0.44	0.54
Peak	9.77	9.66	9.60
Peak excursion value	9.09	9.22	9.06
Channel	5320 MHz	5500 MHz	5600 MHz
RMS	0.61	1.90	1.20
Peak	9.77	11.03	10.25
Peak excursion value	9.16	9.13	9.05
Channel	5700 MHz	-/-	-/-
RMS	0.66	-/-	-/-
Peak	9.67	-/-	-/-
Peak excursion value	9.01	-/-	-/-
Measurement uncertainty	± 1 dB		

**Result:** Passed

**Results:**

Modulation OFDM / n – mode HT20	Peak excursion value		
	5180 MHz	5240 MHz	5260 MHz
Channel	5180 MHz	5240 MHz	5260 MHz
RMS	-0.48	-1.01	-0.81
Peak	8.19	7.85	7.79
Peak excursion value	8.67	8.86	8.60
Channel	5320 MHz	5500 MHz	5600 MHz
RMS	-0.80	0.37	0.15
Peak	8.01	9.06	8.80
Peak excursion value	8.81	8.69	8.65
Channel	5700 MHz	-/-	-/-
RMS	-0.91	-/-	-/-
Peak	7.72	-/-	-/-
Peak excursion value	8.63	-/-	-/-
Measurement uncertainty	± 1 dB		

**Result:** Passed


**Results:**

Modulation OFDM / n – mode HT40	Peak excursion value		
	5190 MHz	5230 MHz	5270 MHz
Channel	5190 MHz	5230 MHz	5270 MHz
RMS	-3.59	-3.45	-3.48
Peak	6.30	5.93	6.15
Peak excursion value	9.89	9.38	9.63
Channel	5310 MHz	5510 MHz	5590 MHz
RMS	-3.19	-2.29	-2.40
Peak	6.25	7.48	7.46
Peak excursion value	9.44	9.77	9.86
Channel	5670 MHz	-/-	-/-
RMS	-2.98	-/-	-/-
Peak	6.70	-/-	-/-
Peak excursion value	9.68	-/-	-/-
Measurement uncertainty	± 1 dB		

**Result: Passed**


**Plots: OFDM / a – mode**

**Plot 1: 5180 MHz**

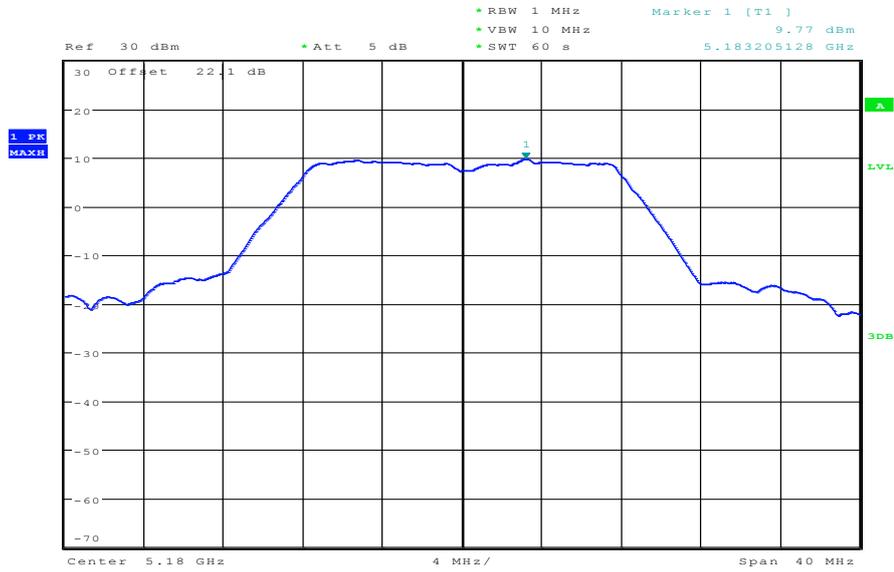


Date: 11.JUL.2012 15:07:56

**Plot 2: 5240 MHz**

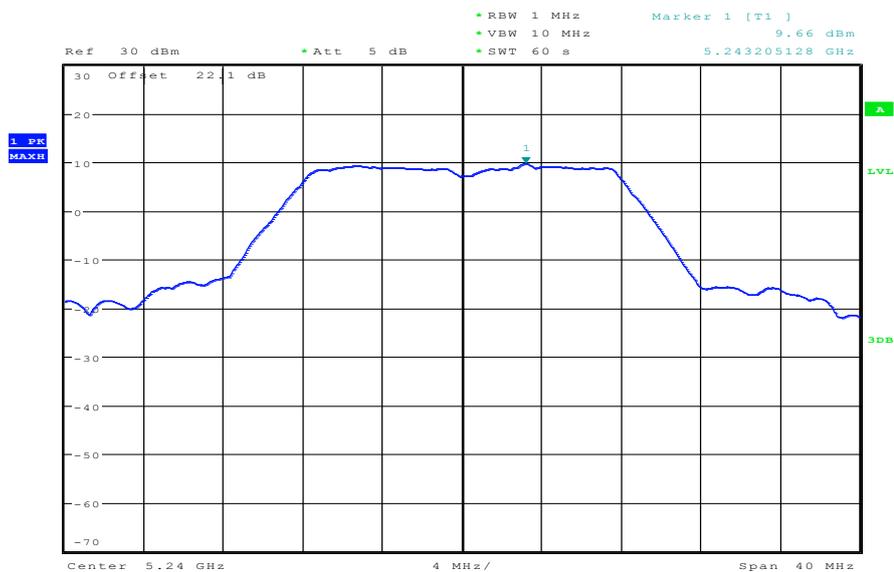


Date: 11.JUL.2012 15:13:12

Plot 3: 5260 MHz

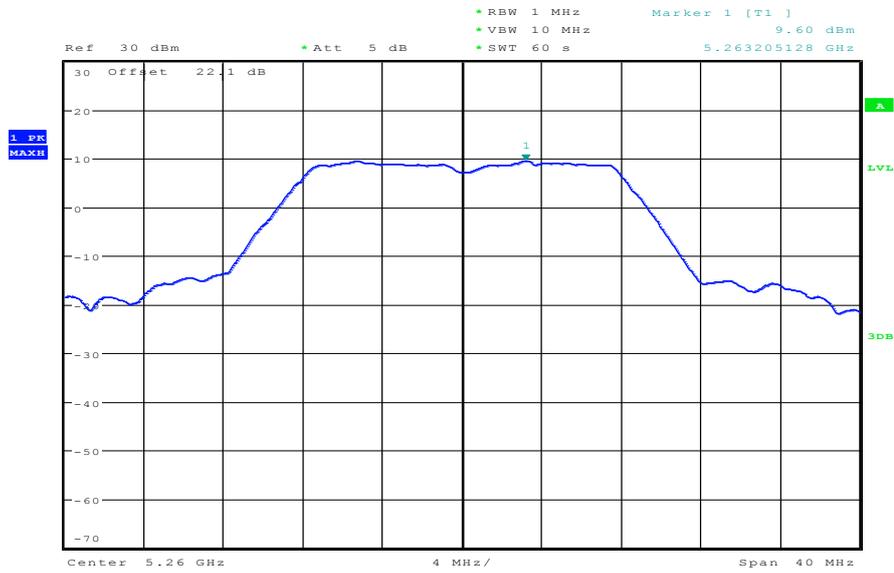


Date: 11.JUL.2012 15:15:08

Plot 4: 5320 MHz

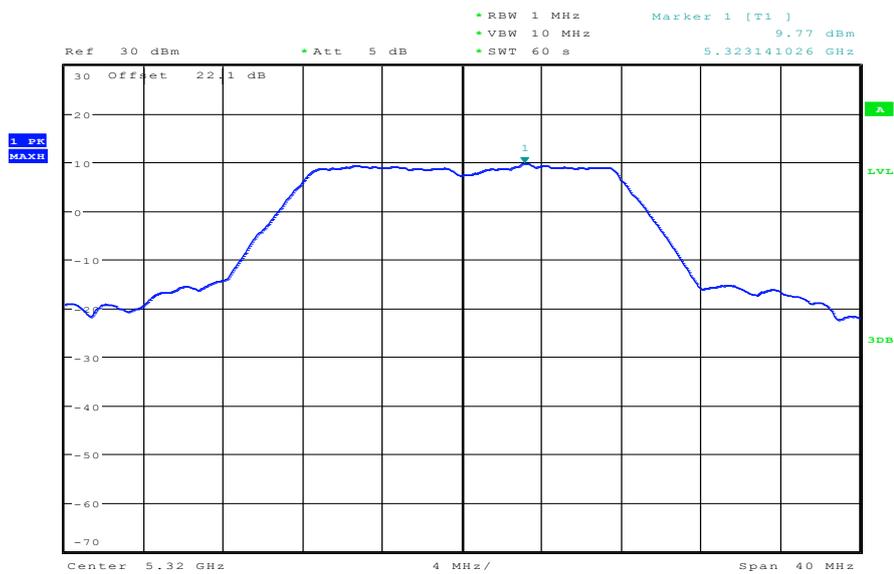


Date: 11.JUL.2012 15:20:35

Plot 5: 5500 MHz

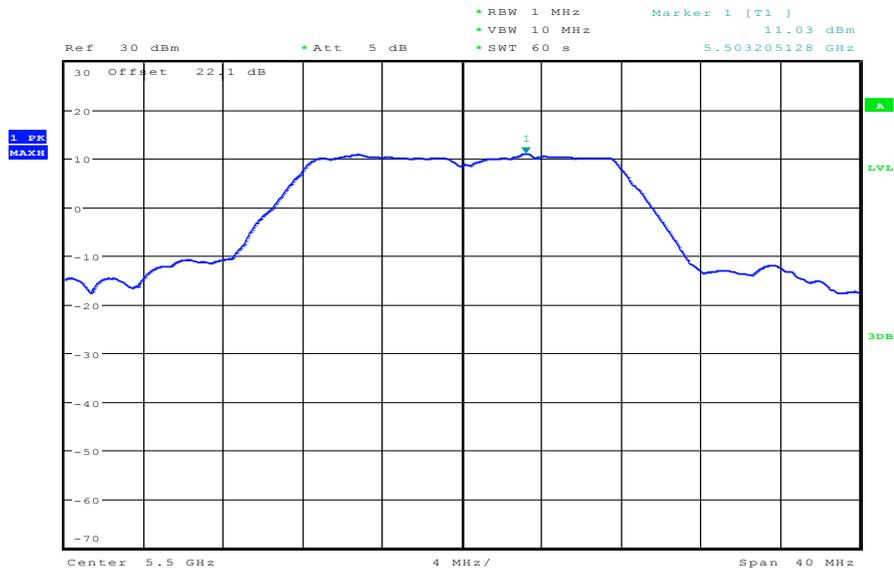


Date: 11.JUL.2012 15:22:48

Plot 6: 5600 MHz

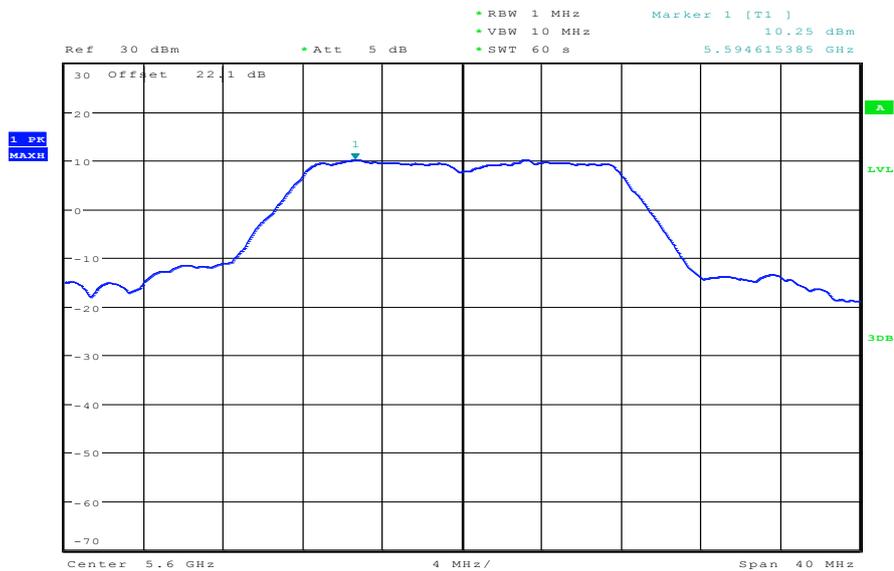

Date: 11.JUL.2012 15:31:42


Plot 7: 5700 MHz

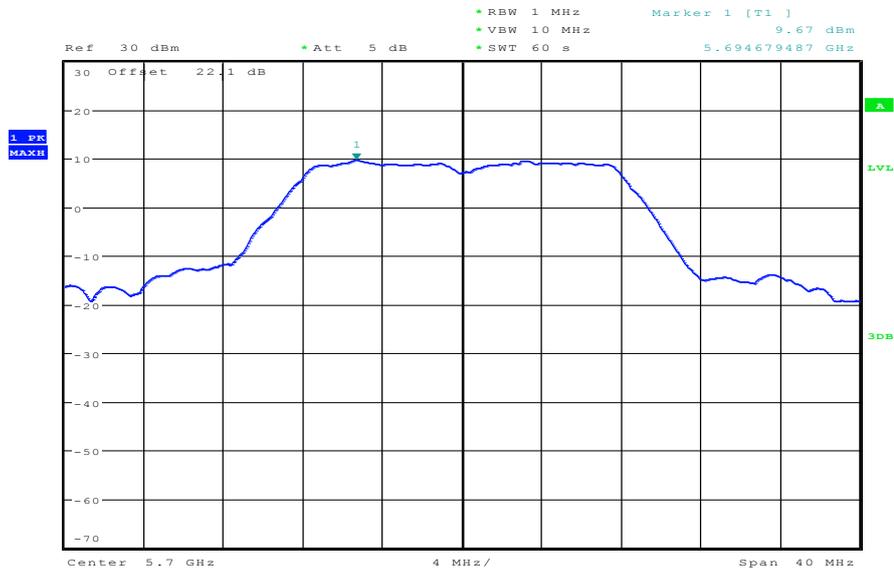

Date: 11.JUL.2012 15:34:07


**Plots: OFDM / n – mode HT20**

**Plot 1: 5180 MHz**

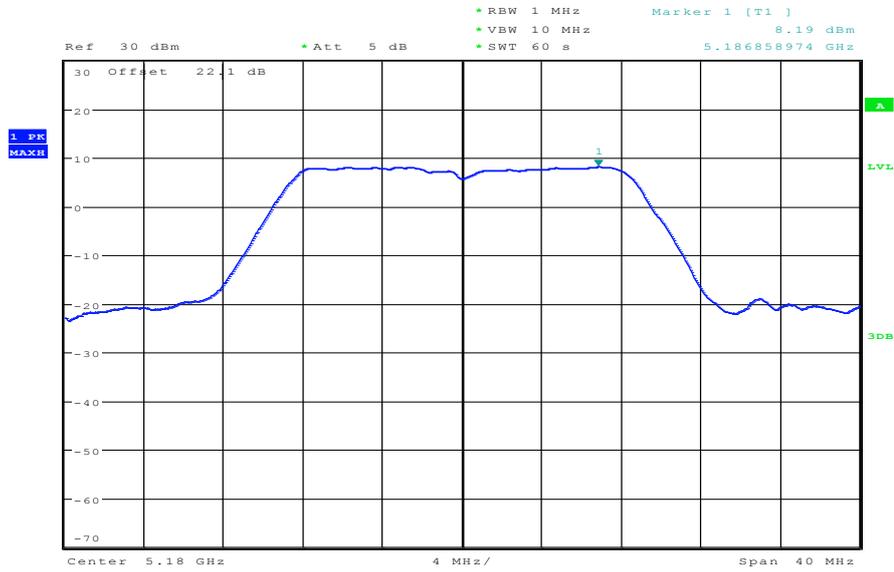


Date: 11.JUL.2012 15:39:33

**Plot 2: 5240 MHz**

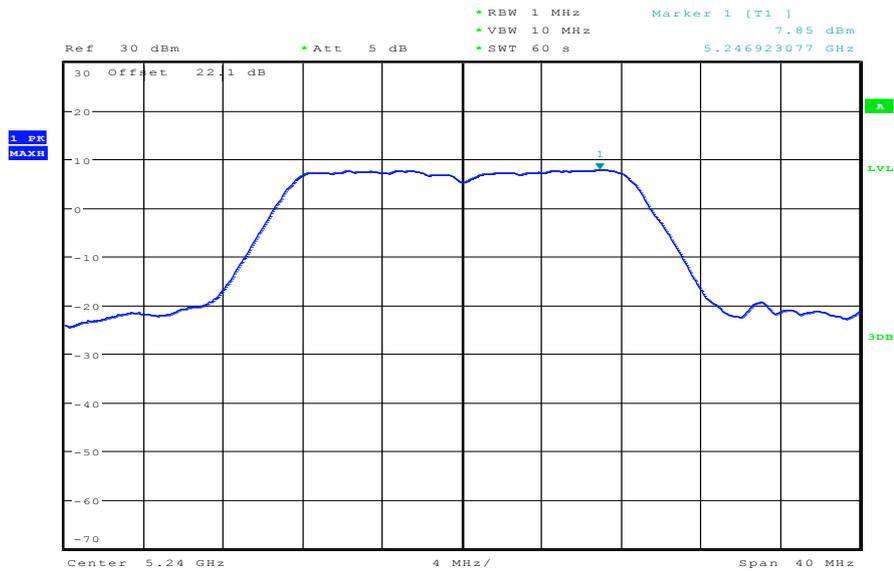


Date: 11.JUL.2012 15:42:18

Plot 3: 5260 MHz

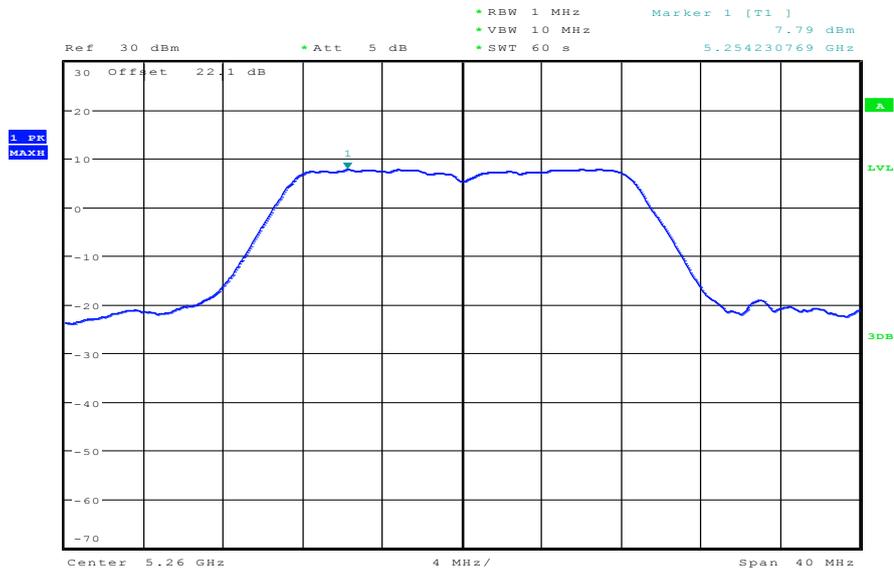


Date: 11.JUL.2012 15:47:37

Plot 4: 5320 MHz

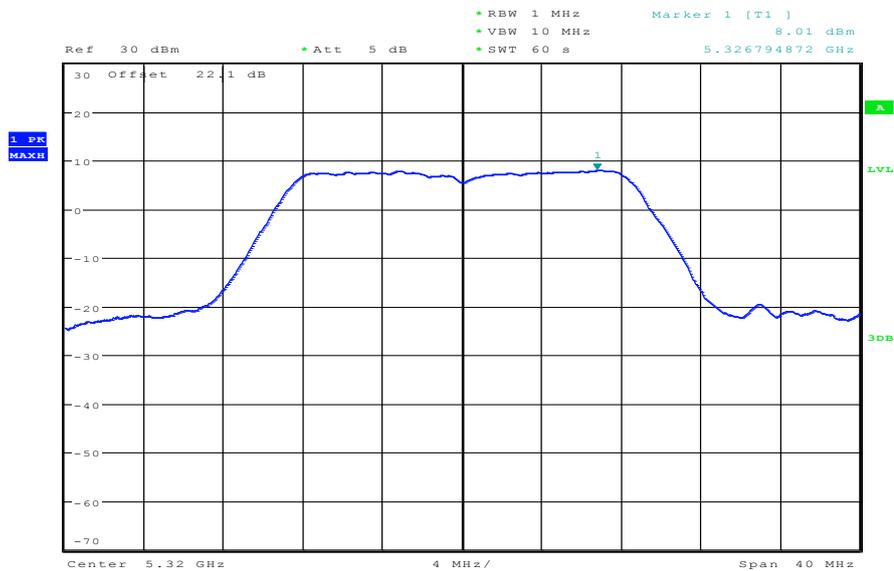


Date: 11.JUL.2012 15:49:40

Plot 5: 5500 MHz

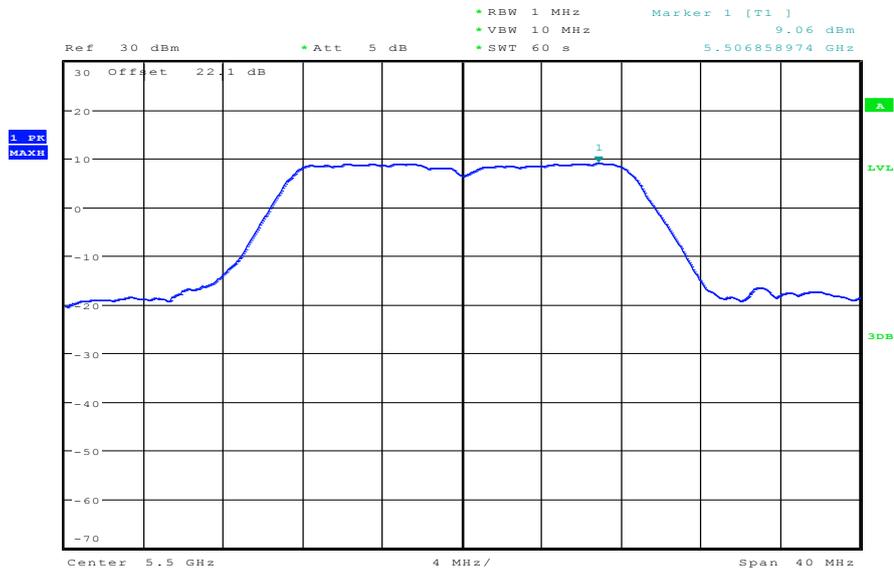


Date: 11.JUL.2012 15:54:30

Plot 6: 5600 MHz

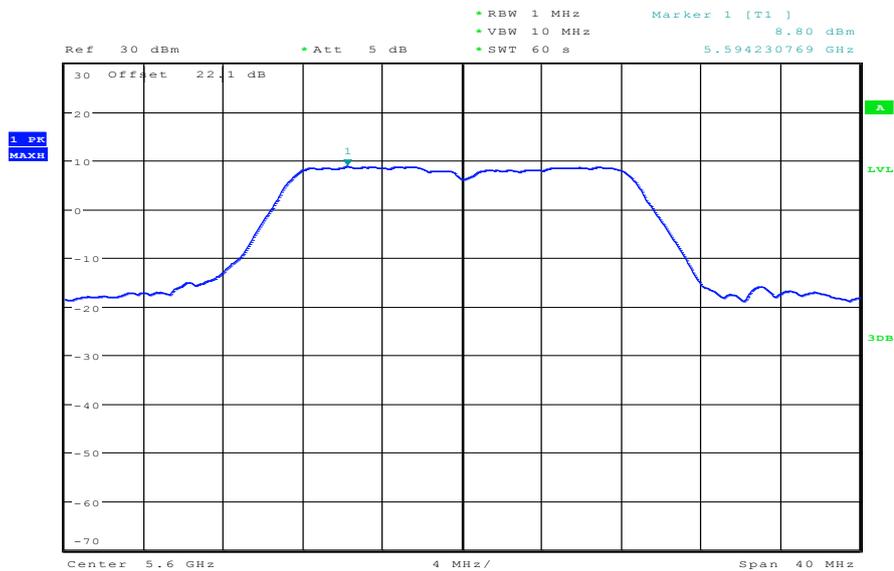

Date: 11.JUL.2012 16:03:15


Plot 7: 5700 MHz

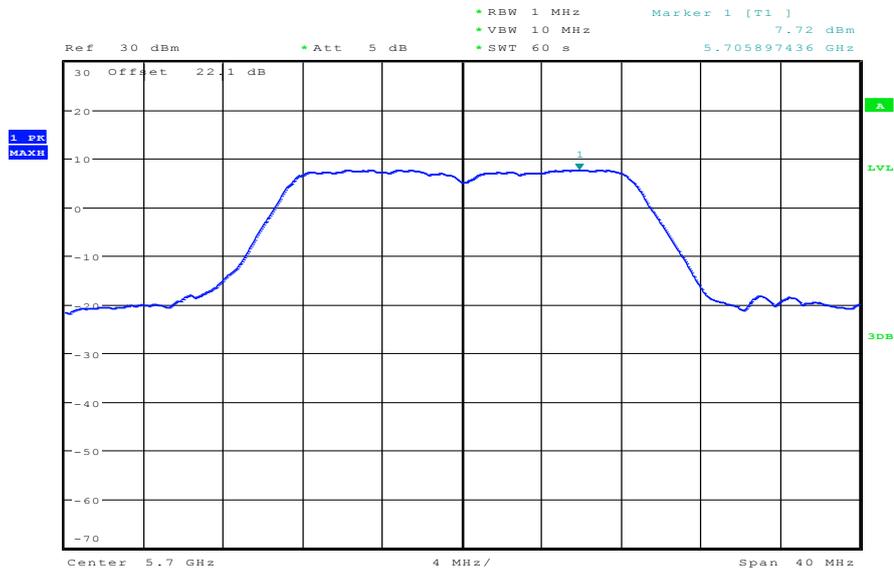

Date: 11.JUL.2012 16:09:20


**Plots: OFDM / n – mode HT40**

**Plot 1: 5190 MHz**

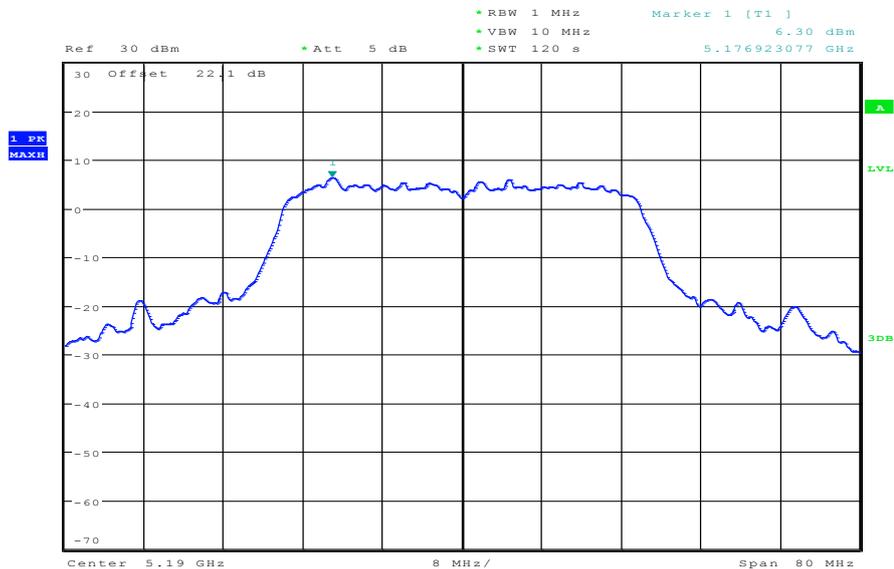


Date: 12.JUL.2012 07:05:43

**Plot 2: 5230 MHz**

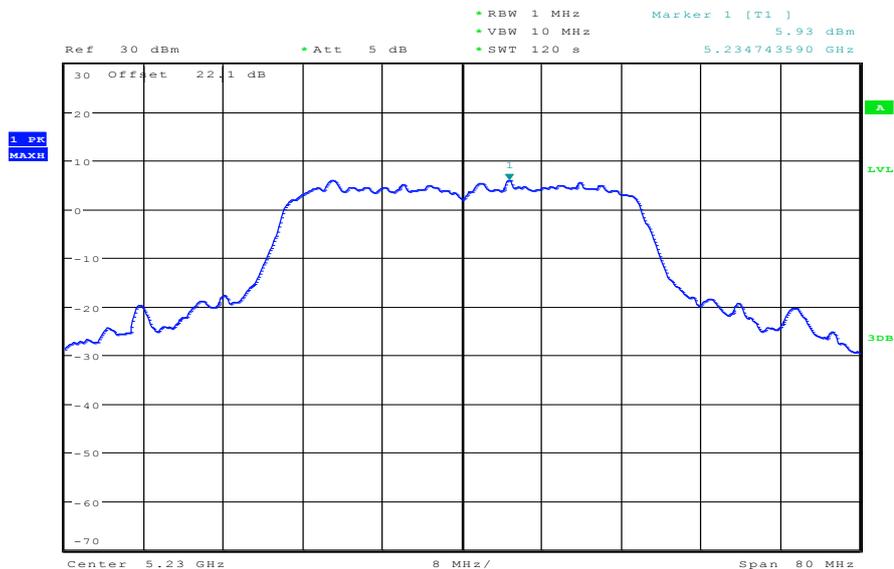


Date: 12.JUL.2012 07:16:51

Plot 3: 5270 MHz

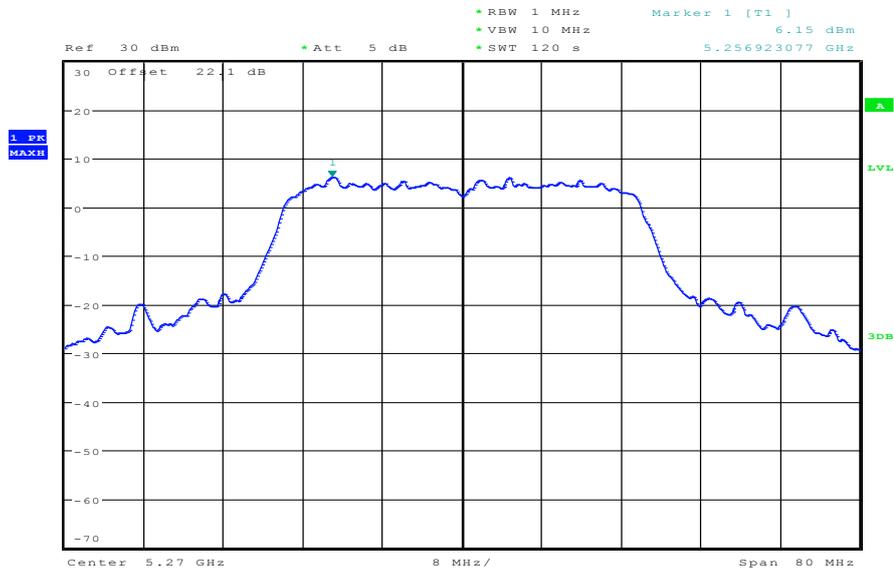


Date: 12.JUL.2012 07:23:28

Plot 4: 5310 MHz

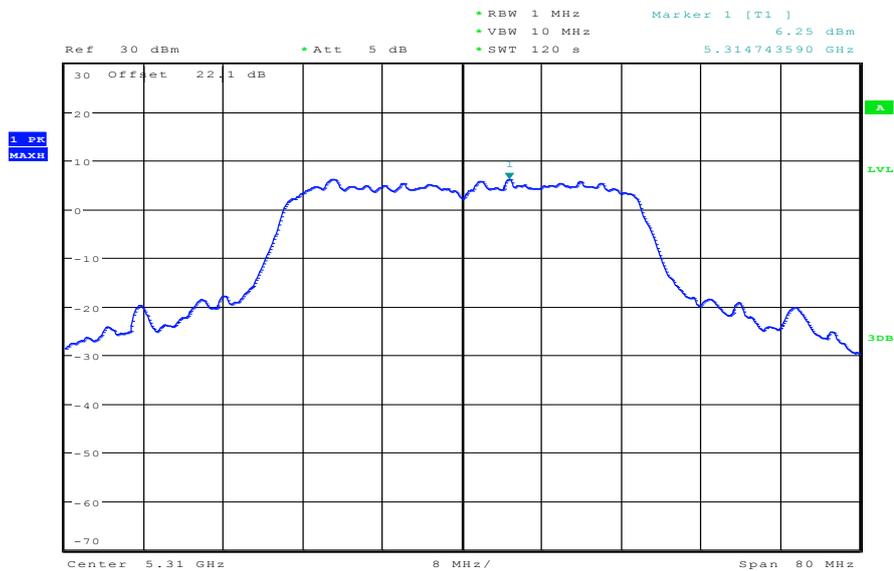


Date: 12.JUL.2012 07:33:21

Plot 5: 5510 MHz

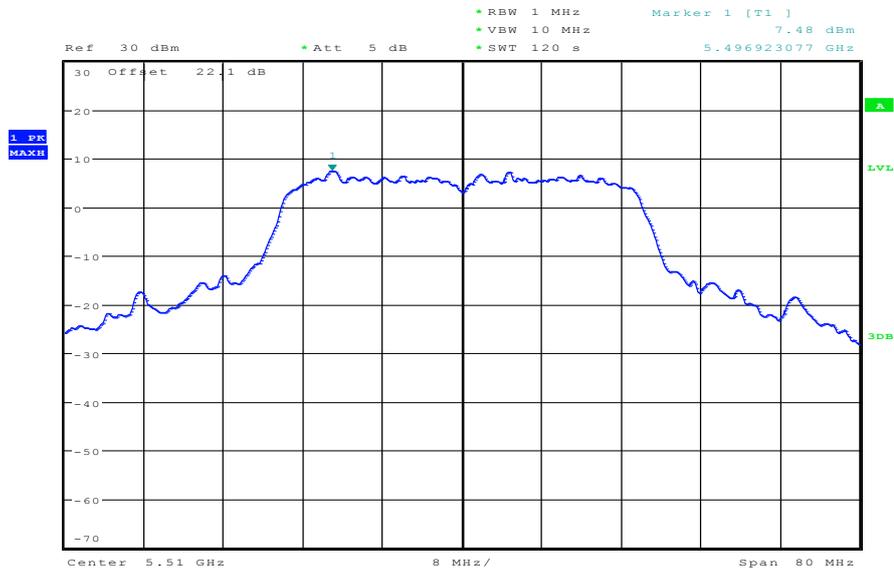


Date: 12.JUL.2012 07:37:31

Plot 6: 5590 MHz

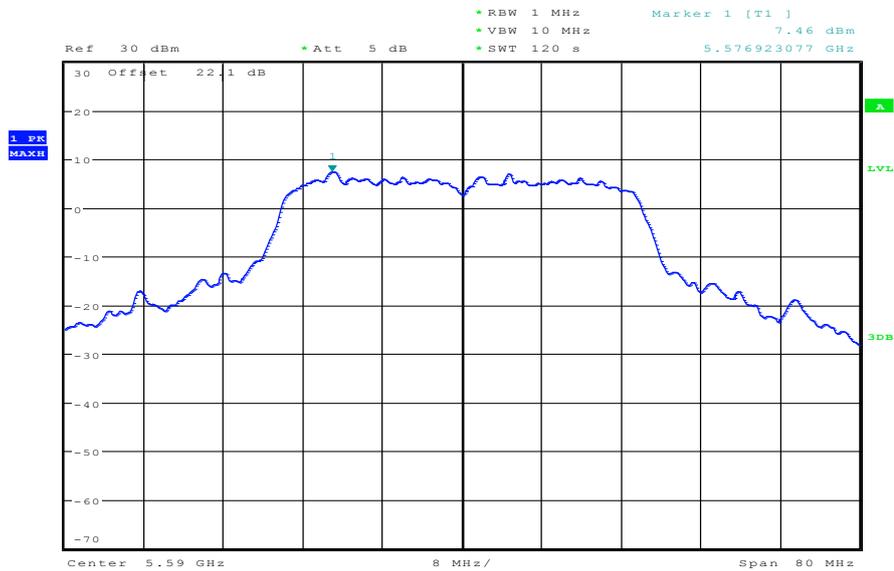

Date: 12.JUL.2012 07:46:42

Plot 7: 5670 MHz

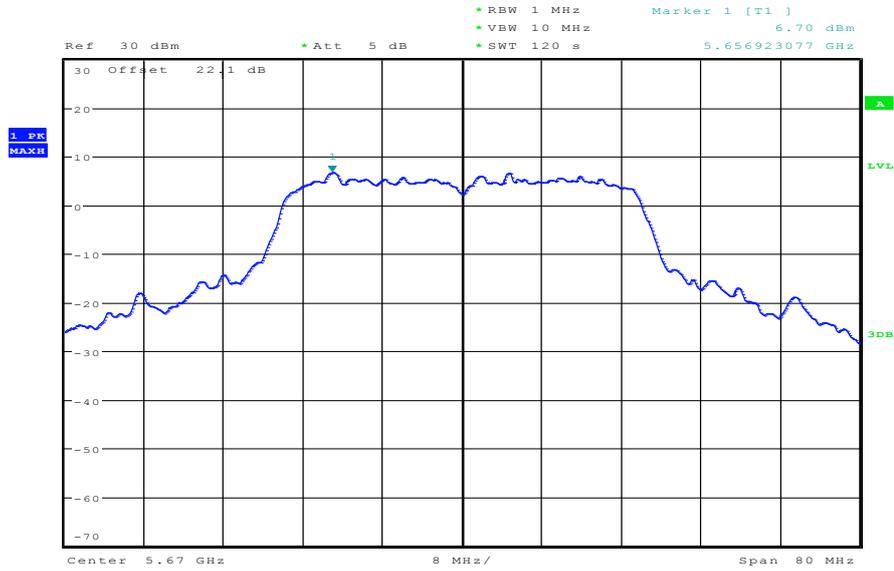

Date: 12.JUL.2012 07:58:40

## 9.8 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3m.

### Measurement:

Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz / 1 MHz
Span:	See plots!
Trace-Mode:	Max Hold

### Limits:

Band Edge Compliance Radiated
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
54 dB $\mu$ V/m AVG

### Result:


Scenario	Band Edge Compliance Radiated [dB $\mu$ V/m]
band edge	< 54 dB $\mu$ V/m (see plots 1/3)
Measurement uncertainty	$\pm$ 3 dB

### Note:


Results of the OFDM / n – mode HT20 and HT40 are added to show the behaviour of the EUT.

**Plots:**


**Plot 1:** lower band edge, vertical & horizontal polarization (n HT 20 mode), channel 36

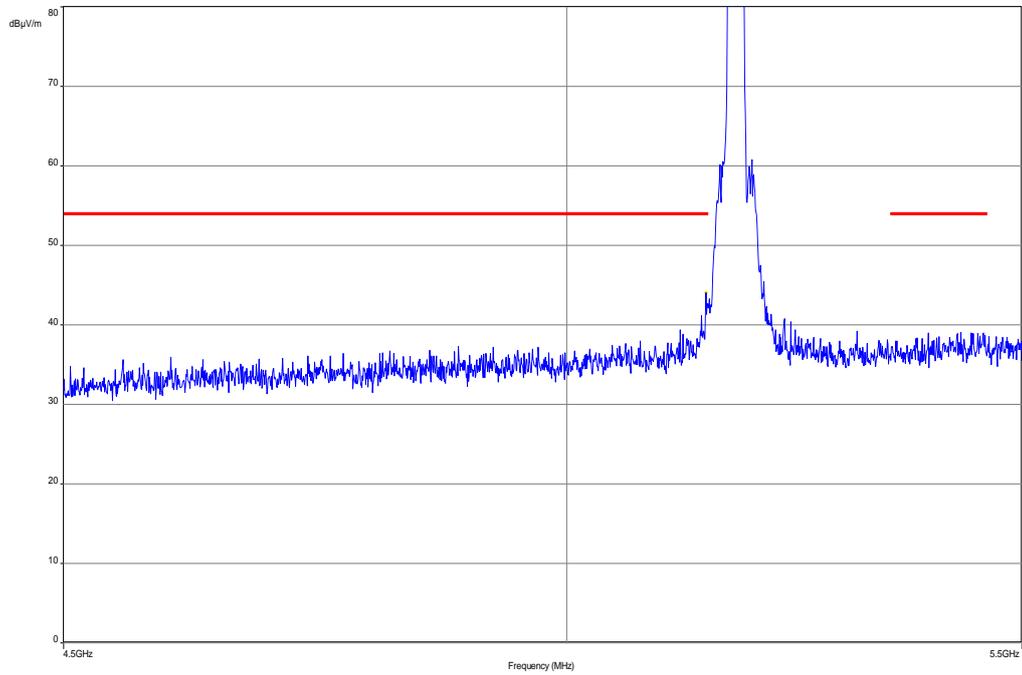


**Plot 2:** upper band edge, vertical & horizontal polarization (n HT 20 mode), channel 64

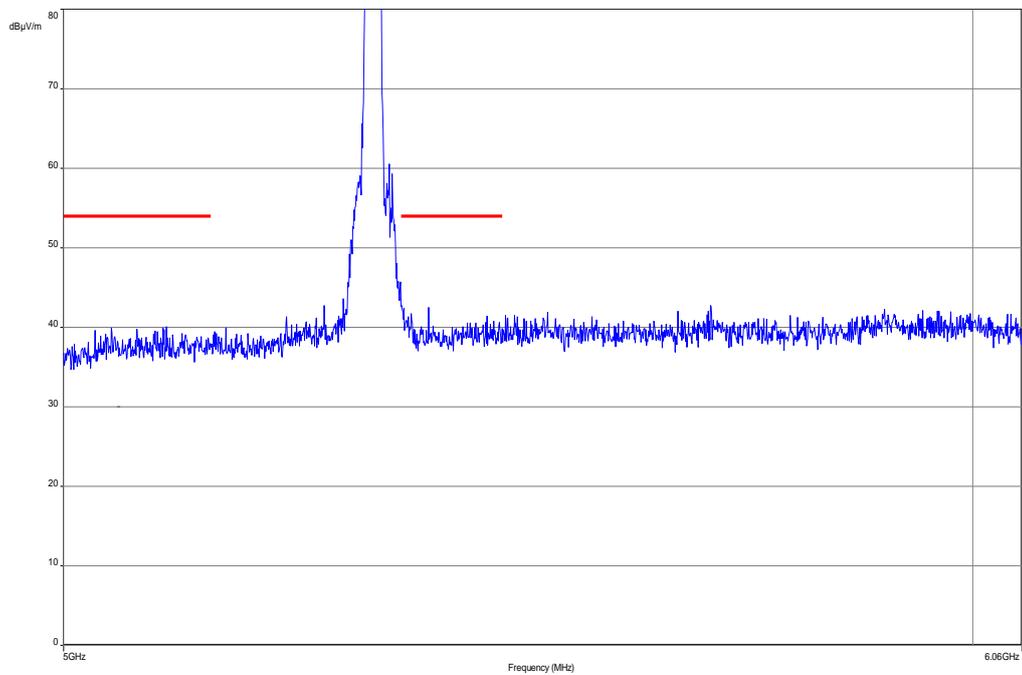


**Plot 3:** lower band edge, vertical & horizontal polarization (n HT 20 mode), channel 100

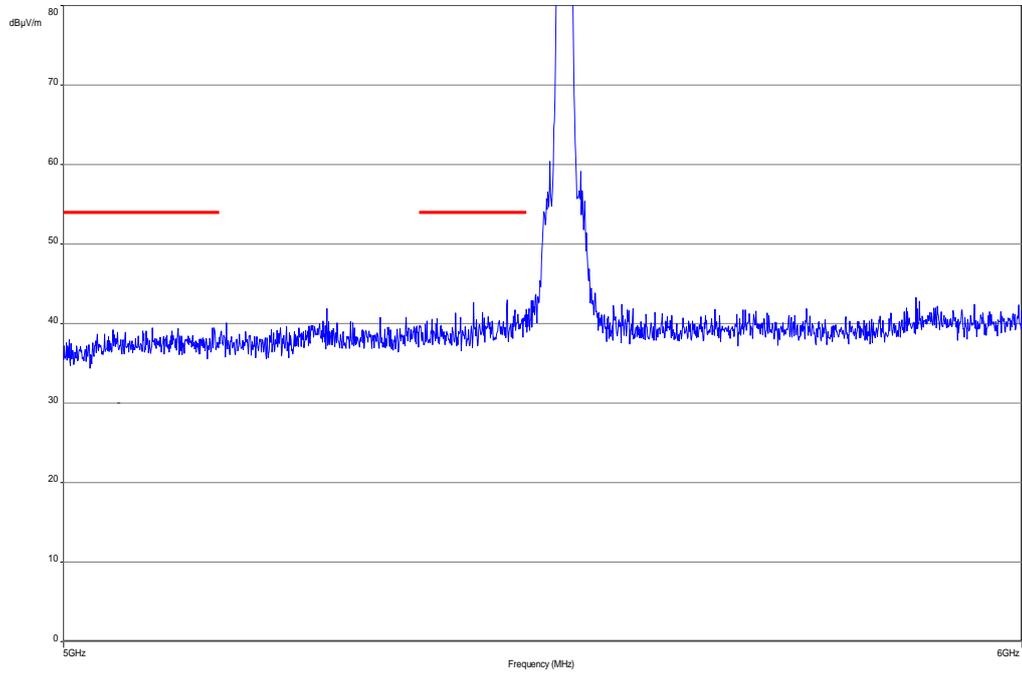


**Plot 4:** lower band edge, vertical & horizontal polarization (n HT 40 mode), channel 38

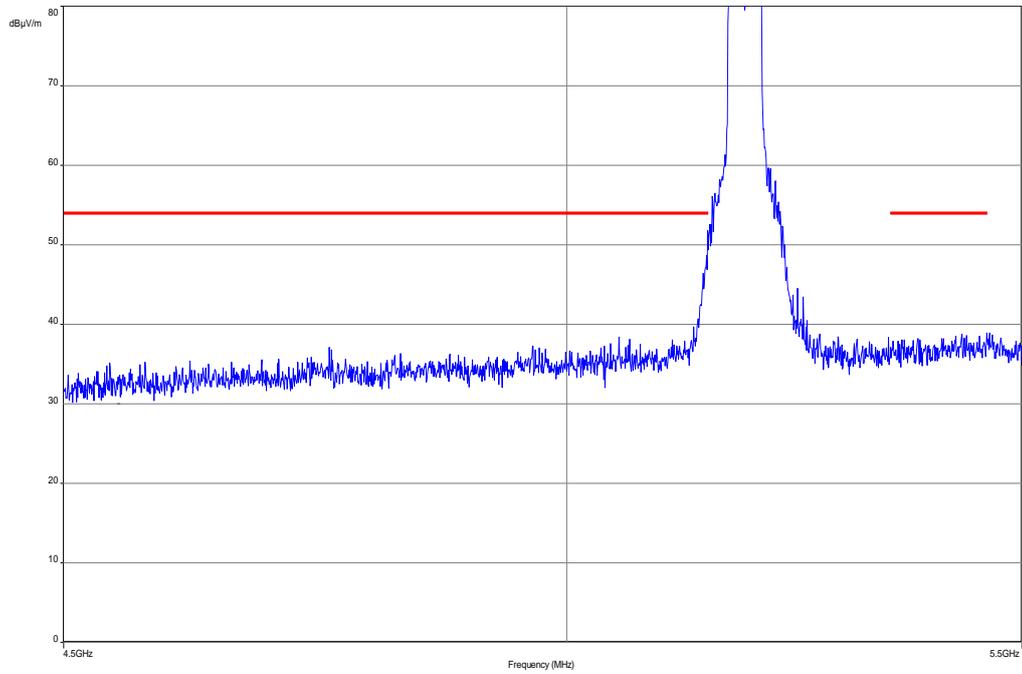

**Plot 5:** upper band edge, vertical & horizontal polarization (n HT 40 mode), channel 62

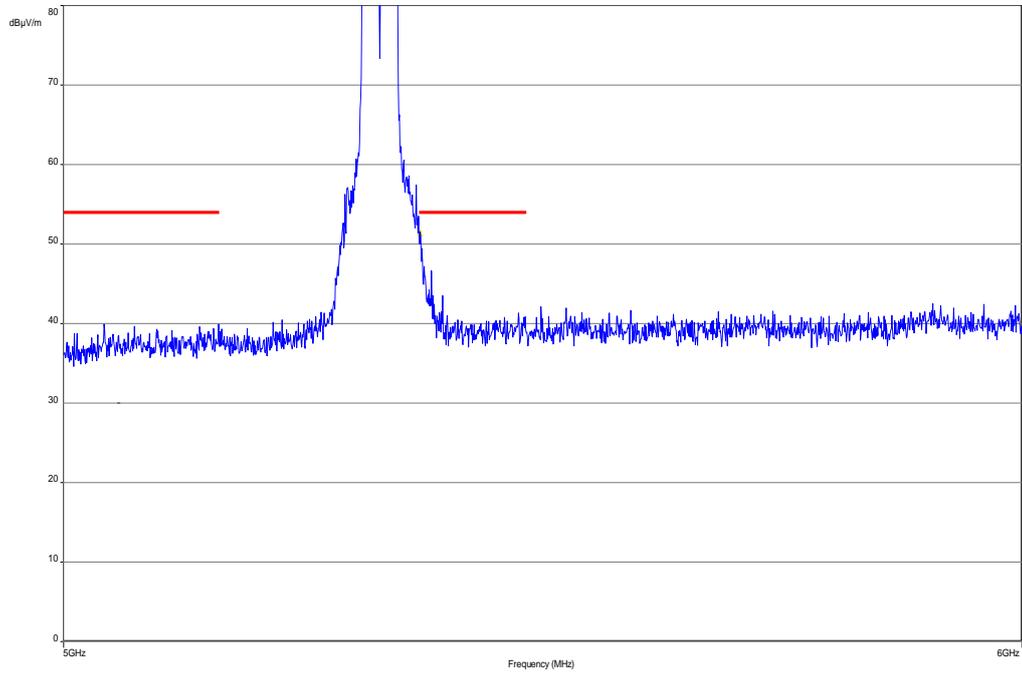

**Plot 6:** lower band edge, vertical & horizontal polarization (n HT 40 mode), channel 102

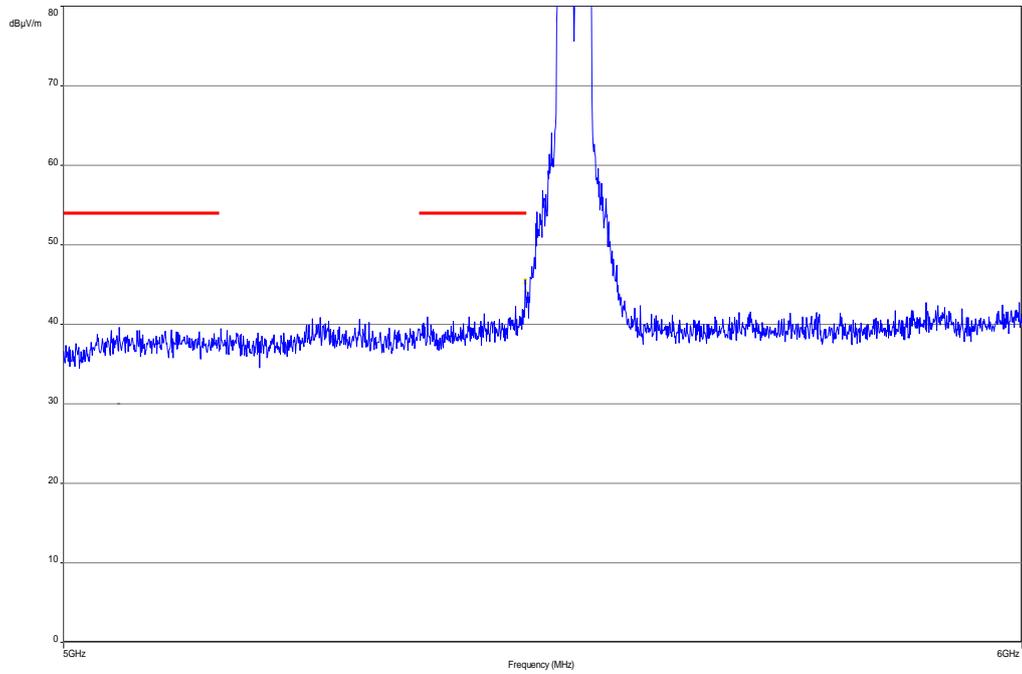

**Result:** Passed

## 9.9 TX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

### Measurement:

Measurement parameter	
Detector:	Quasi Peak below 1 GHz (alternative Peak) Peak above 1 GHz / RMS
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: ≥ 3 MHz / 10 Hz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold / Average with 100 counts + 20 log (1 / X) for duty cycle lower than 100 %

### Limits:

TX Spurious Emissions Radiated		
§15.209		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

**Results: OFDM / a – mode**

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
OFDM a – mode								
Lowest 5180 MHz			-/-			Highest 5240 MHz		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks found.			No peaks found.			No peaks found.		
Measurement uncertainty			± 3 dB					

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
OFDM a – mode								
Lowest 5260 MHz			-/-			Highest 5320 MHz		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks found.			No peaks found.			No peaks found.		
Measurement uncertainty			± 3 dB					

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
OFDM a – mode								
Lowest 5500 MHz			Middle 5600 MHz			Highest 5700 MHz		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks found.			No peaks found.			No peaks found.		
Measurement uncertainty			± 3 dB					

**Result: Passed**

**Results: OFDM / n – modeHT20**

TX Spurious Emissions Radiated [dBµV/m] / dBm								
OFDM n – mode HT20								
Lowest 5180 MHz			-/-			Highest 5240 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
No peaks found.			No peaks found.			No peaks found.		
Measurement uncertainty			± 3 dB					

TX Spurious Emissions Radiated [dBµV/m] / dBm								
OFDM n – mode HT20								
Lowest 5260 MHz			-/-			Highest 5320 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
No peaks found.			No peaks found.			No peaks found.		
Measurement uncertainty			± 3 dB					

TX Spurious Emissions Radiated [dBµV/m] / dBm								
OFDM n – mode HT20								
Lowest 5500 MHz			Middle 5600 MHz			Highest 5700 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
No peaks found.			No peaks found.			No peaks found.		
Measurement uncertainty			± 3 dB					

**Result: Passed**

**Results: OFDM / n – mode HT40**

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
OFDM n – mode HT40								
Lowest 5190 MHz			Middle 5230 MHz			Highest 5270 MHz		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks found.			No peaks found.			No peaks found.		
Measurement uncertainty			± 3 dB					

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
OFDM n – mode HT40								
Lowest 5310 MHz			Middle 5510 MHz			Highest 5590 MHz		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks found.			No peaks found.			No peaks found.		
Measurement uncertainty			± 3 dB					

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
OFDM n – mode HT40								
Highest 5670 MHz			-/-			-/-		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks found.			-/-			-/-		
Measurement uncertainty			± 3 dB					

**Result:** Passed

**Note:**

Results of the OFDM / n – mode HT20 and HT40 are added to show the behaviour of the EUT.

**Plots:** OFDM / n – mode HT20

**Plot 1:** 30 MHz to 1 GHz, 5180 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT20 5180MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

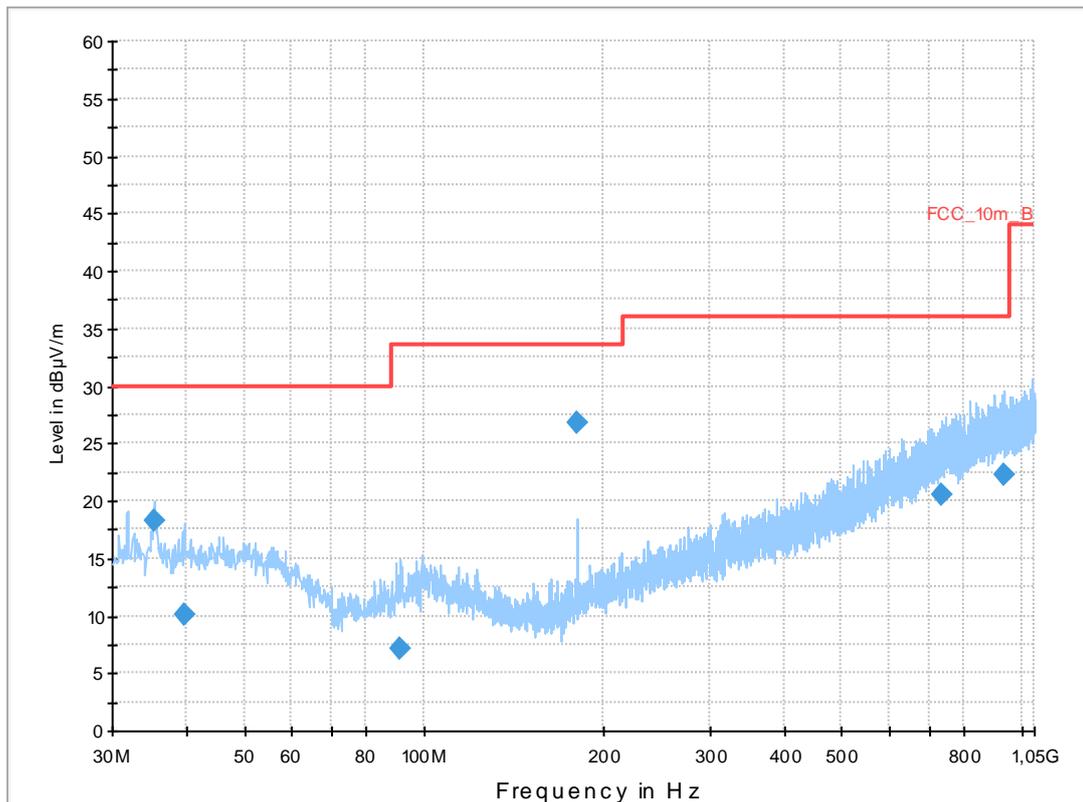


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.284200	18.2	1000.0	120.000	120.0	V	-3.0	13.0	11.8	30.0	
39.713850	10.1	1000.0	120.000	170.0	V	280.0	13.4	19.9	30.0	
91.368750	7.1	1000.0	120.000	133.0	H	273.0	10.7	26.4	33.5	
179.985600	26.8	1000.0	120.000	120.0	V	270.0	10.4	6.7	33.5	
734.024550	20.5	1000.0	120.000	143.0	V	10.0	23.3	15.5	36.0	
936.425850	22.3	1000.0	120.000	170.0	H	81.0	25.3	13.7	36.0	

**Plot 2:** 1 GHz to 12.75 GHz, 5180 MHz, vertical & horizontal polarization

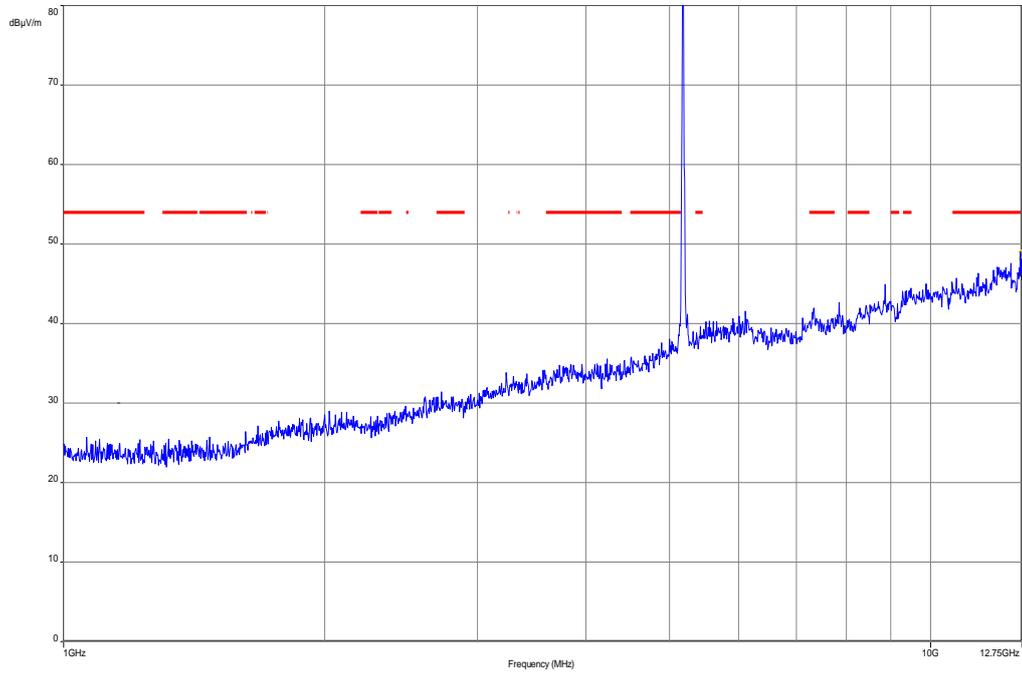


**Plot 3:** 12.75 GHz to 18 GHz, 5180 MHz, vertical & horizontal polarization

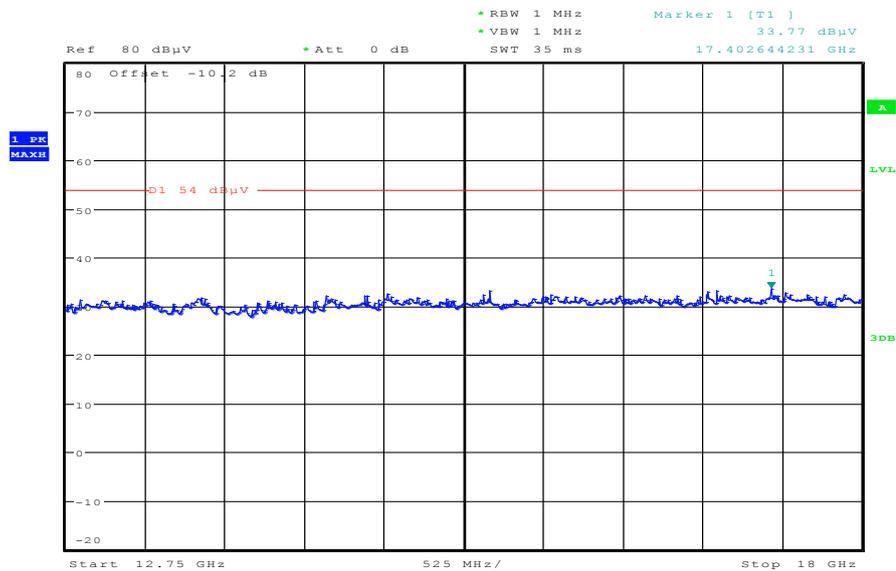


Date: 12.JUL.2012 13:28:23

Plot 4: 18 GHz to 26 GHz, 5180 MHz, vertical & horizontal polarization

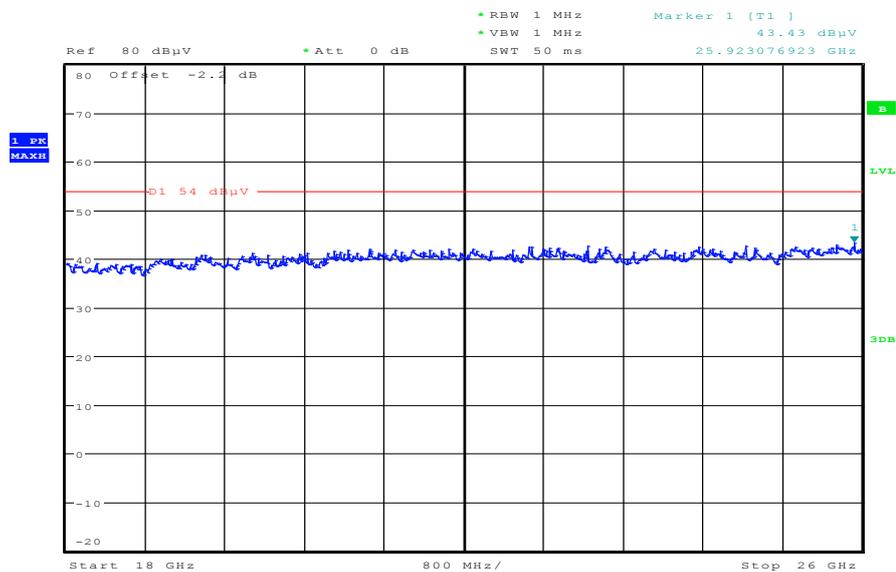

Date: 12.JUL.2012 13:58:23

Plot 5: 26 GHz to 40 GHz, 5180 MHz, vertical & horizontal polarization

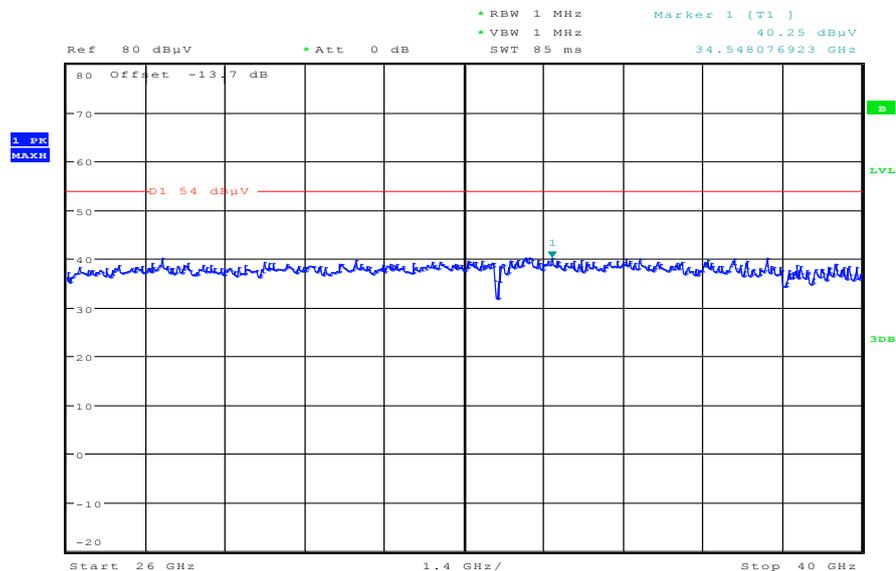

Date: 12.JUL.2012 14:57:36

Plot 6: 30 MHz to 1 GHz, 5240 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT20 5240MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

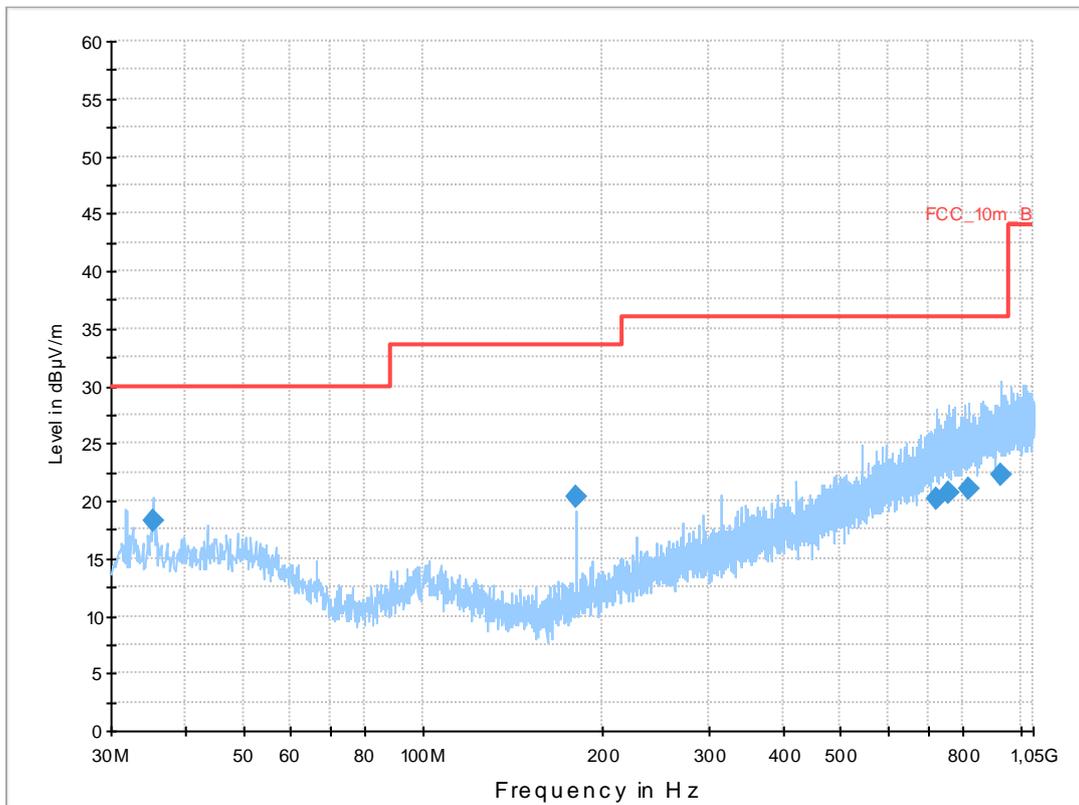


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.284500	18.3	1000.0	120.000	98.0	V	10.0	13.0	11.7	30.0	
180.012300	20.4	1000.0	120.000	170.0	V	-10.0	10.4	13.1	33.5	
721.931700	20.1	1000.0	120.000	132.0	V	183.0	23.0	15.9	36.0	
755.622000	20.7	1000.0	120.000	170.0	H	190.0	23.7	15.3	36.0	
817.837050	21.0	1000.0	120.000	170.0	H	171.0	24.1	15.0	36.0	
930.357000	22.3	1000.0	120.000	113.0	H	265.0	25.3	13.7	36.0	

**Plot 7:** 1 GHz to 12.75 GHz, 5240 MHz, vertical & horizontal polarization

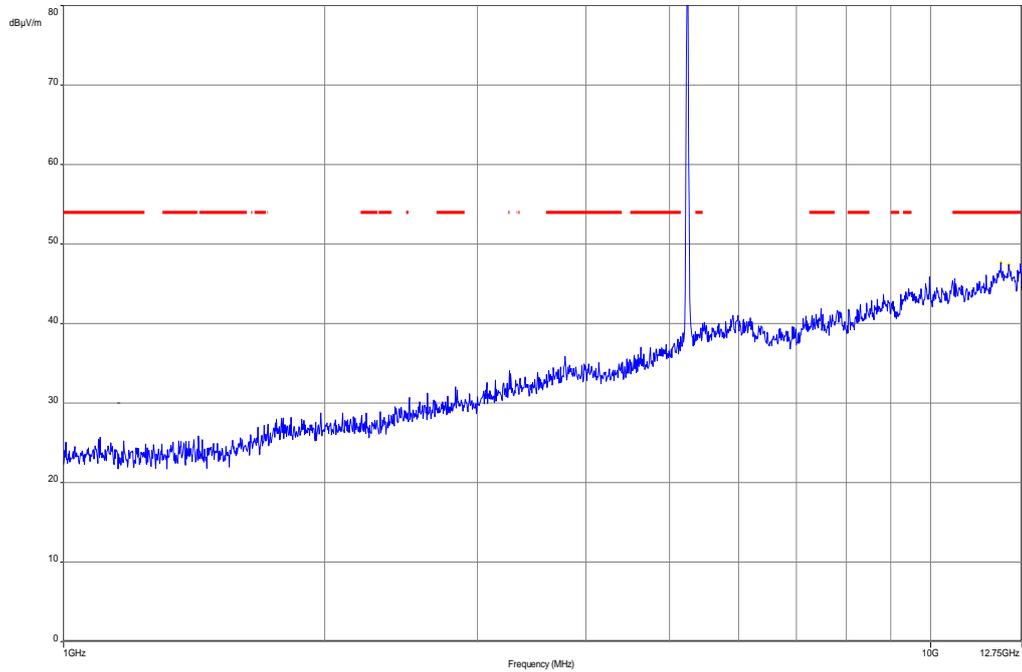

**Plot 8:** 12.75 GHz to 18 GHz, 5240 MHz, vertical & horizontal polarization

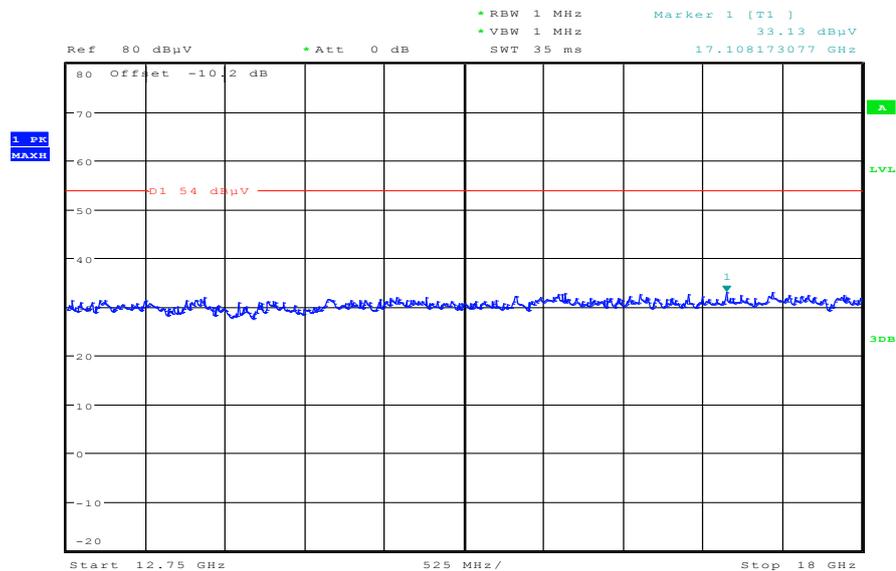

Date: 12.JUL.2012 13:29:34



Plot 11: 30 MHz to 1 GHz, 5260 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT20 5260MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

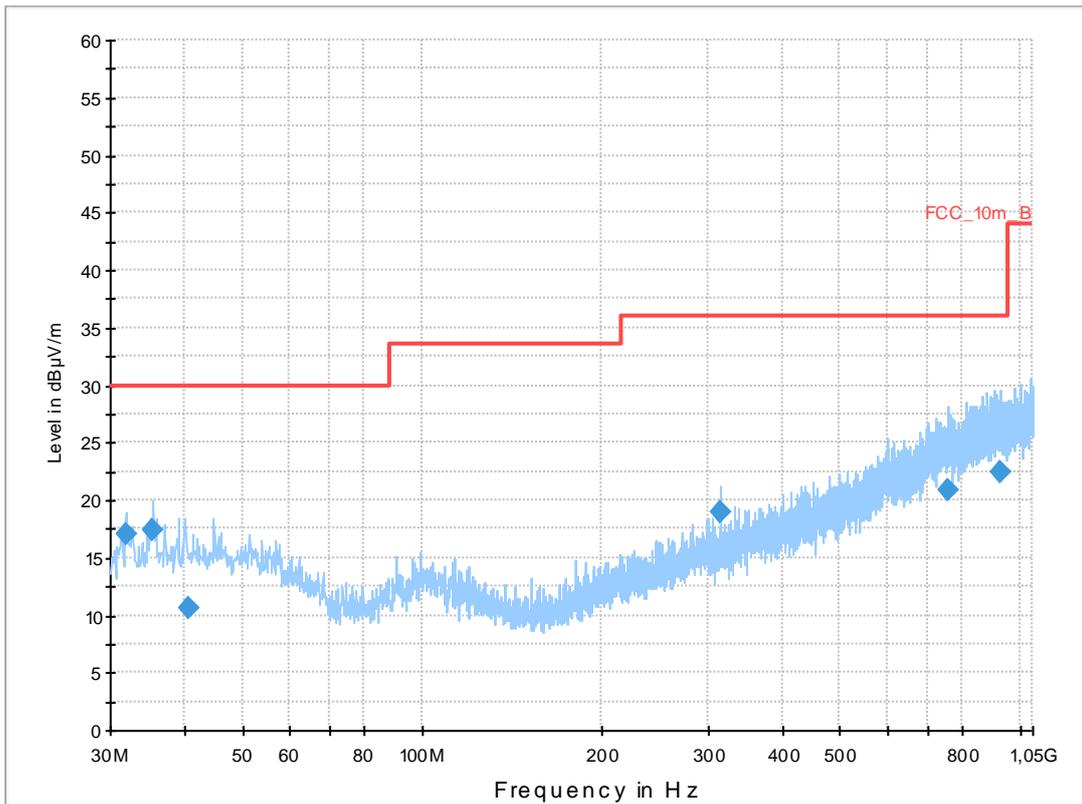


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.953900	17.0	1000.0	120.000	111.0	V	190.0	12.7	13.0	30.0	
35.361300	17.5	1000.0	120.000	98.0	V	190.0	13.1	12.5	30.0	
40.644300	10.6	1000.0	120.000	104.0	V	190.0	13.4	19.4	30.0	
315.024450	19.0	1000.0	120.000	143.0	V	100.0	15.0	17.0	36.0	
756.176400	20.8	1000.0	120.000	98.0	H	280.0	23.7	15.2	36.0	
926.137800	22.4	1000.0	120.000	162.0	V	268.0	25.3	13.6	36.0	

Plot 12: 1 GHz to 12.75 GHz, 5260 MHz, vertical & horizontal polarization

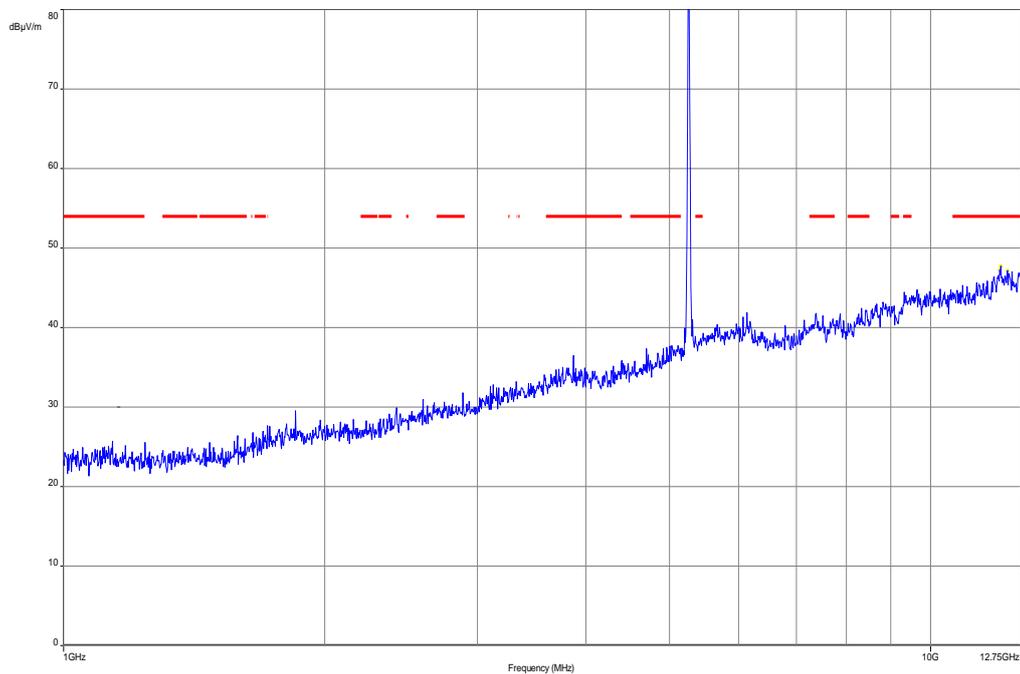


Plot 13: 12.75 GHz to 18 GHz, 5260 MHz, vertical & horizontal polarization

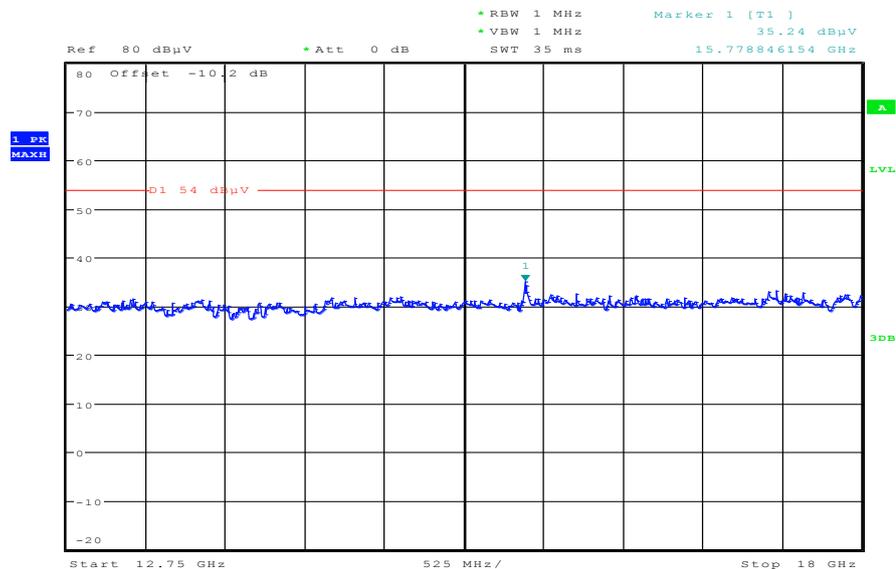


Date: 12.JUL.2012 13:31:12

Plot 14: 18 GHz to 26 GHz, 5260 MHz, vertical & horizontal polarization

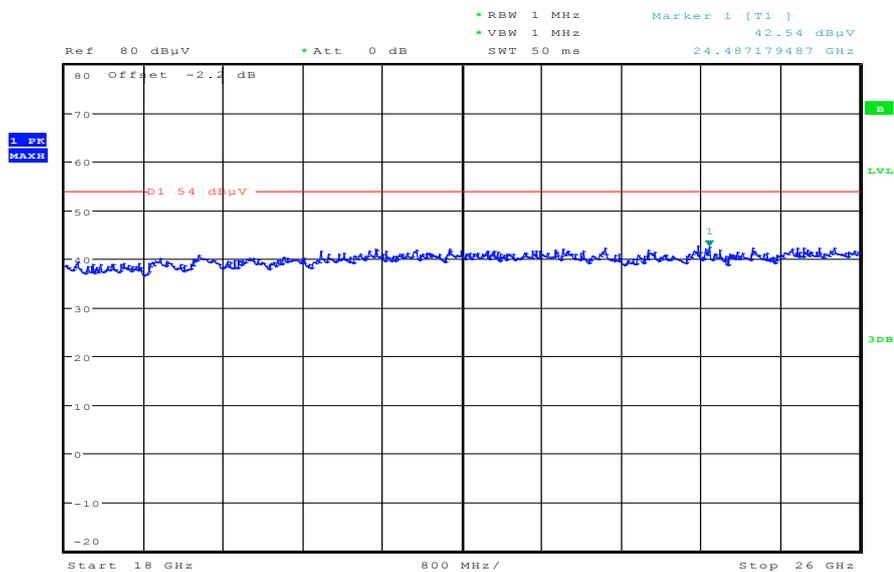

Date: 12.JUL.2012 14:20:43

Plot 15: 26 GHz to 40 GHz, 5260 MHz, vertical & horizontal polarization

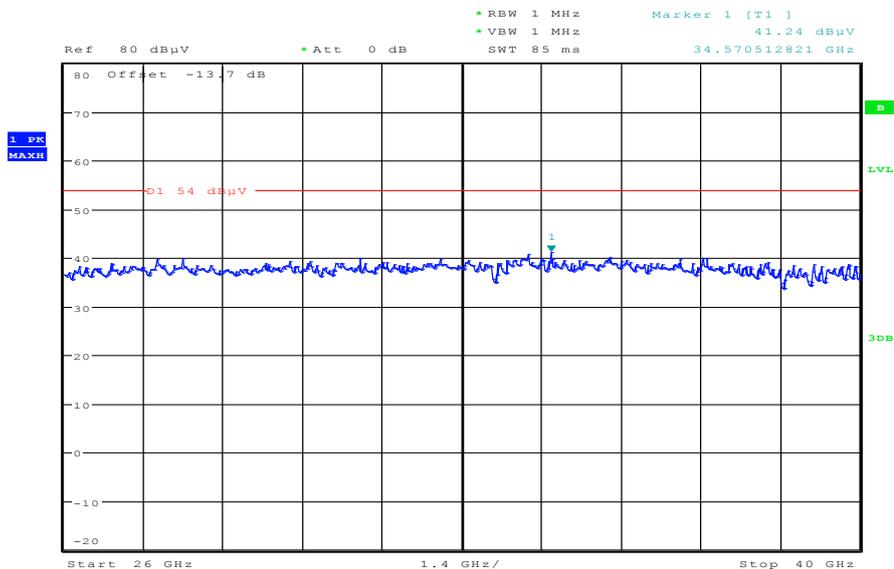

Date: 12.JUL.2012 15:00:00

Plot 16: 30 MHz to 1 GHz, 5320 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT20 5320MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

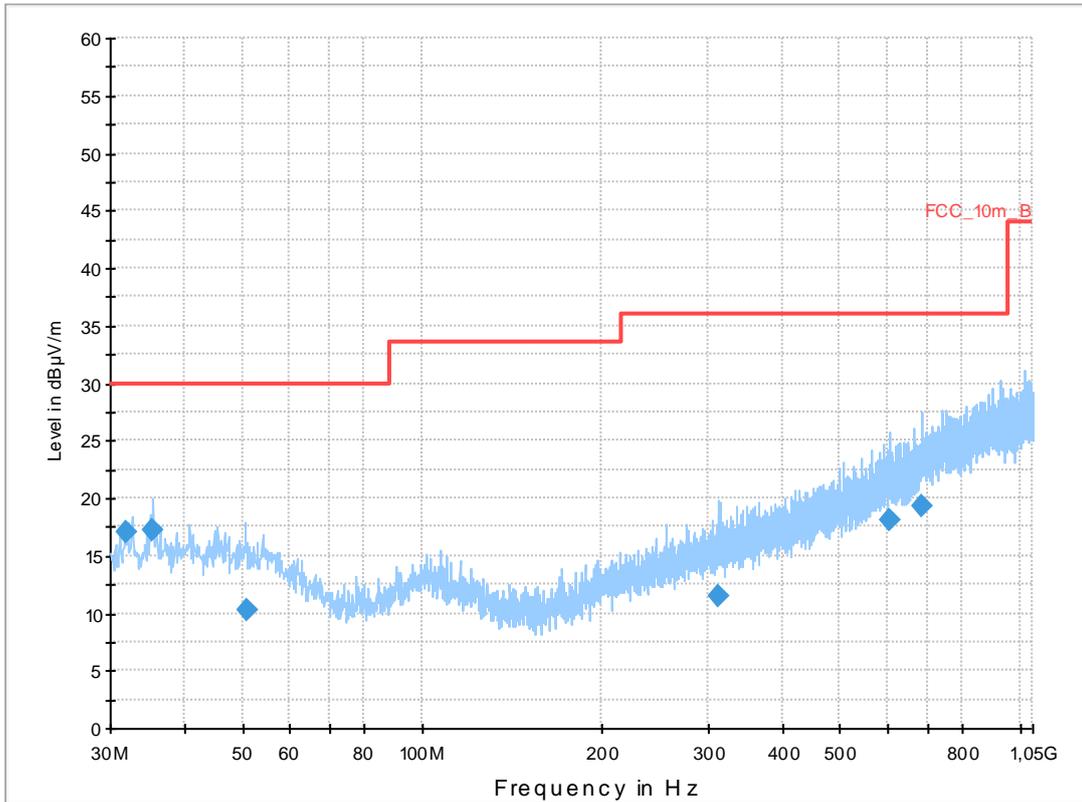


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.959450	17.0	1000.0	120.000	98.0	V	183.0	12.7	13.0	30.0	
35.368800	17.3	1000.0	120.000	170.0	V	-10.0	13.1	12.7	30.0	
50.990850	10.2	1000.0	120.000	170.0	H	92.0	13.3	19.8	30.0	
312.213450	11.4	1000.0	120.000	170.0	H	171.0	14.9	24.6	36.0	
606.616350	18.1	1000.0	120.000	120.0	V	270.0	20.8	17.9	36.0	
685.313550	19.3	1000.0	120.000	122.0	V	93.0	22.1	16.7	36.0	

**Plot 17:** 1 GHz to 12.75 GHz, 5320 MHz, vertical & horizontal polarization

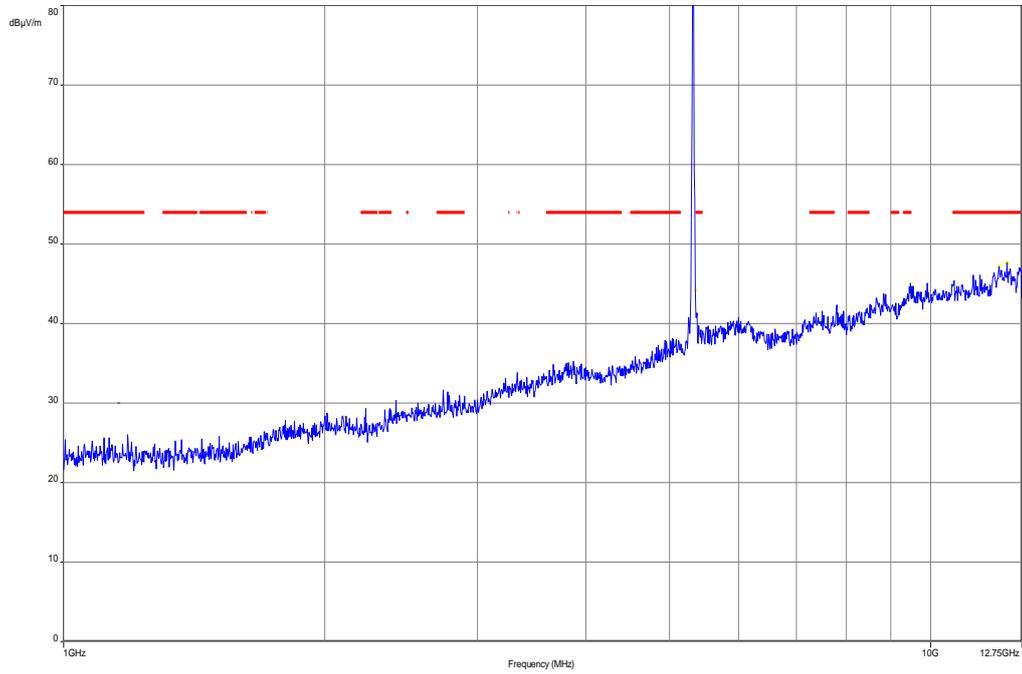


**Plot 18:** 12.75 GHz to 18 GHz, 5320 MHz, vertical & horizontal polarization

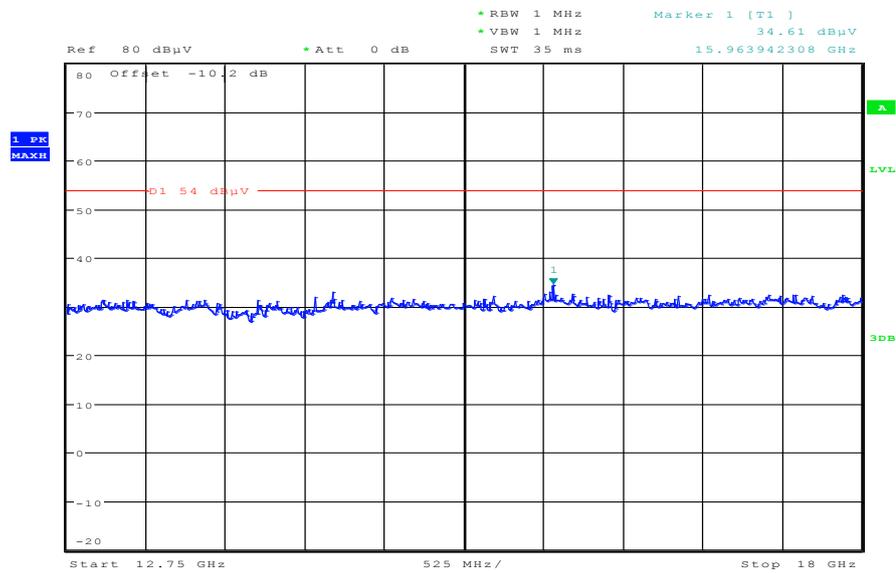


Date: 12.JUL.2012 13:32:02

Plot 19: 18 GHz to 26 GHz, 5320 MHz, vertical & horizontal polarization

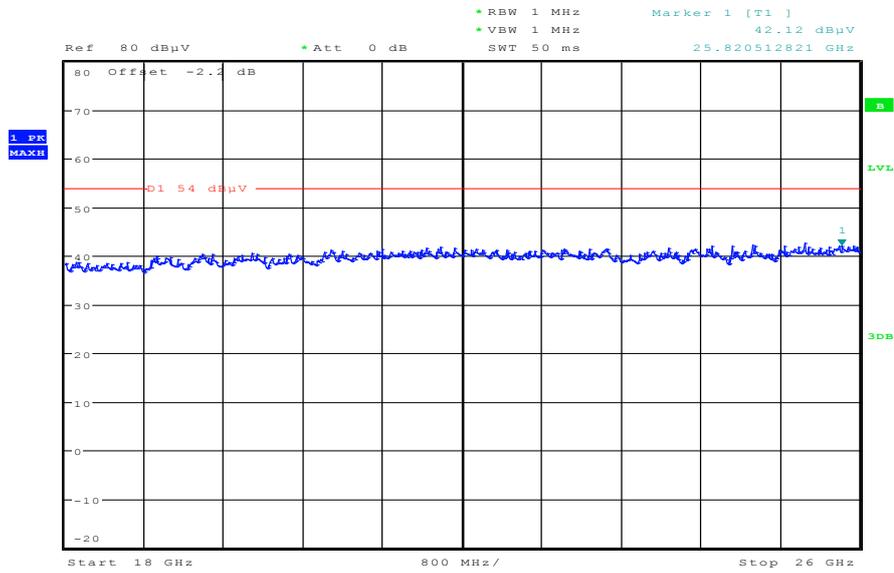

Date: 12.JUL.2012 14:21:48

Plot 20: 26 GHz to 40 GHz, 5320 MHz, vertical & horizontal polarization

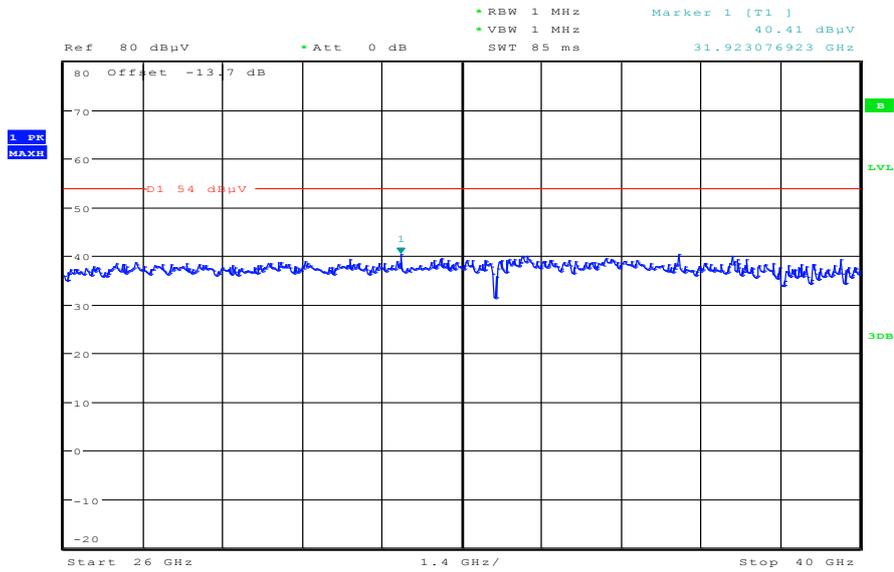

Date: 12.JUL.2012 15:00:53

Plot 21: 30 MHz to 1 GHz, 5500 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT20 5500MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

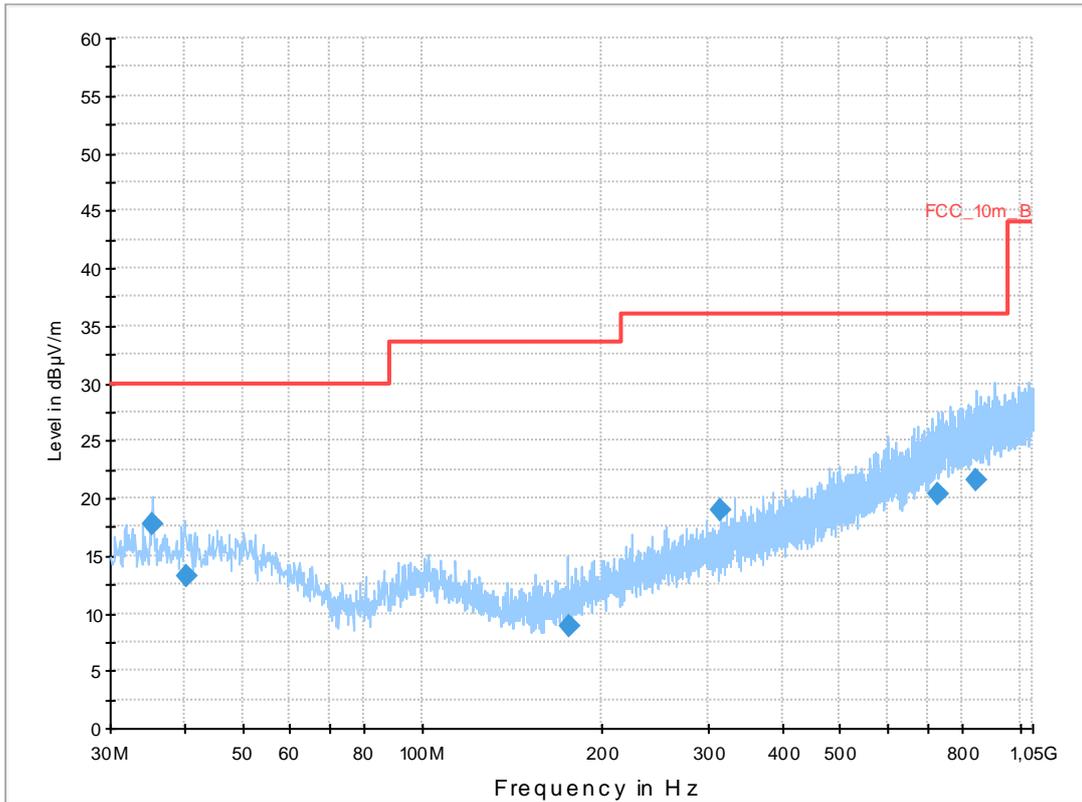


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.344500	17.7	1000.0	120.000	98.0	V	81.0	13.1	12.3	30.0	
40.370850	13.3	1000.0	120.000	170.0	V	100.0	13.4	16.7	30.0	
175.548000	8.8	1000.0	120.000	133.0	H	280.0	10.2	24.7	33.5	
314.978100	18.9	1000.0	120.000	170.0	V	268.0	15.0	17.1	36.0	
729.520500	20.3	1000.0	120.000	170.0	H	280.0	23.2	15.7	36.0	
843.695550	21.6	1000.0	120.000	170.0	V	10.0	24.5	14.4	36.0	

Plot 22: 1 GHz to 12.75 GHz, 5500 MHz, vertical & horizontal polarization

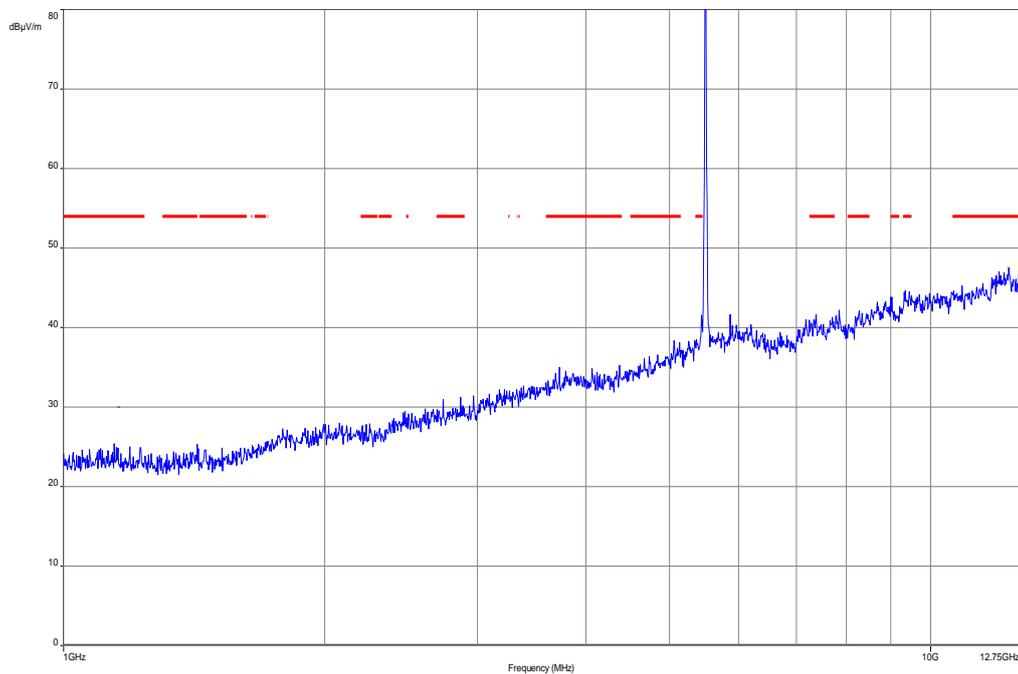


Plot 23: 12.75 GHz to 18 GHz, 5500 MHz, vertical & horizontal polarization

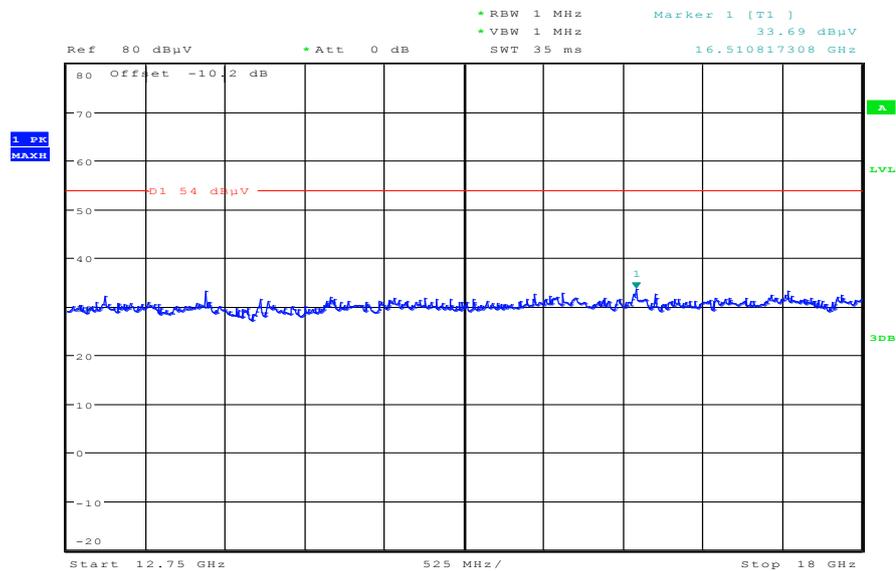


Date: 12.JUL.2012 13:32:52

Plot 24: 18 GHz to 26 GHz, 5500 MHz, vertical & horizontal polarization

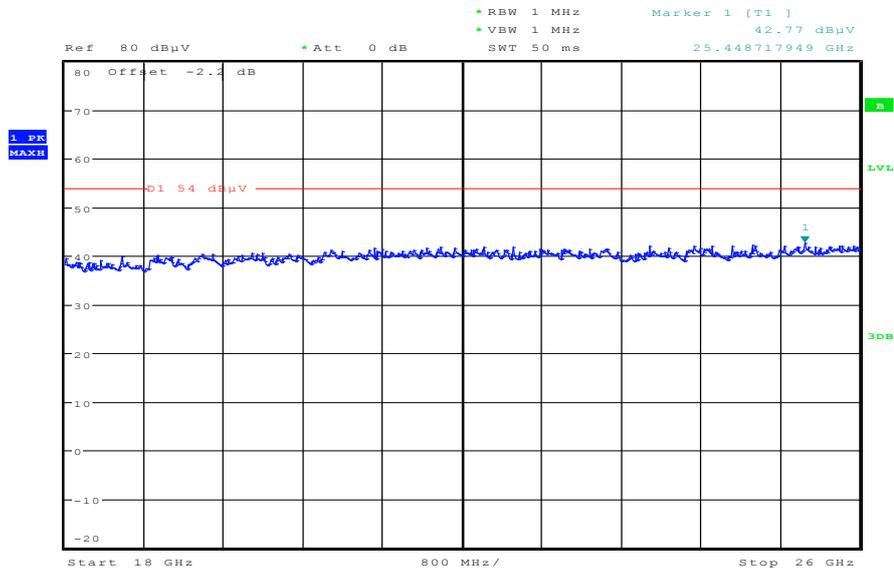

Date: 12.JUL.2012 14:22:08

Plot 25: 26 GHz to 40 GHz, 5500 MHz, vertical & horizontal polarization

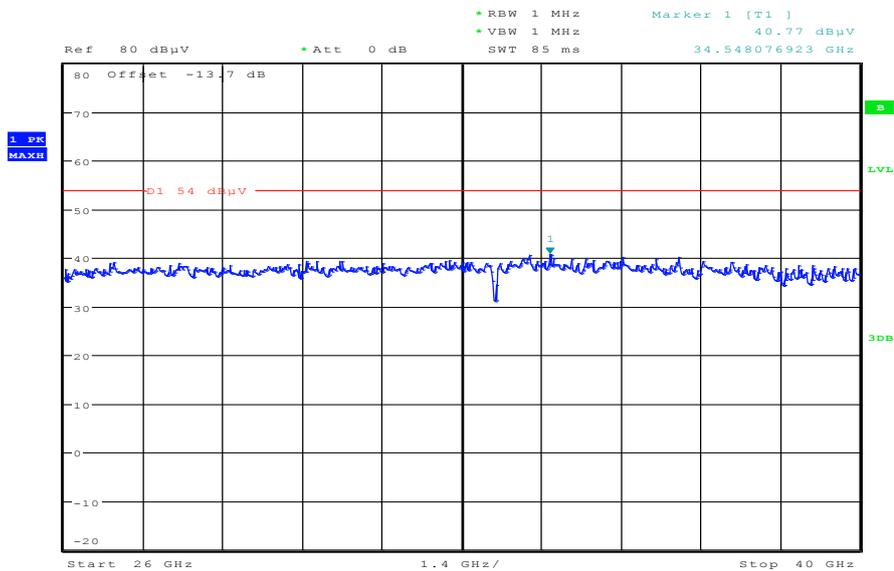

Date: 12.JUL.2012 15:01:56

Plot 26: 30 MHz to 1 GHz, 5600 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT20 5600MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

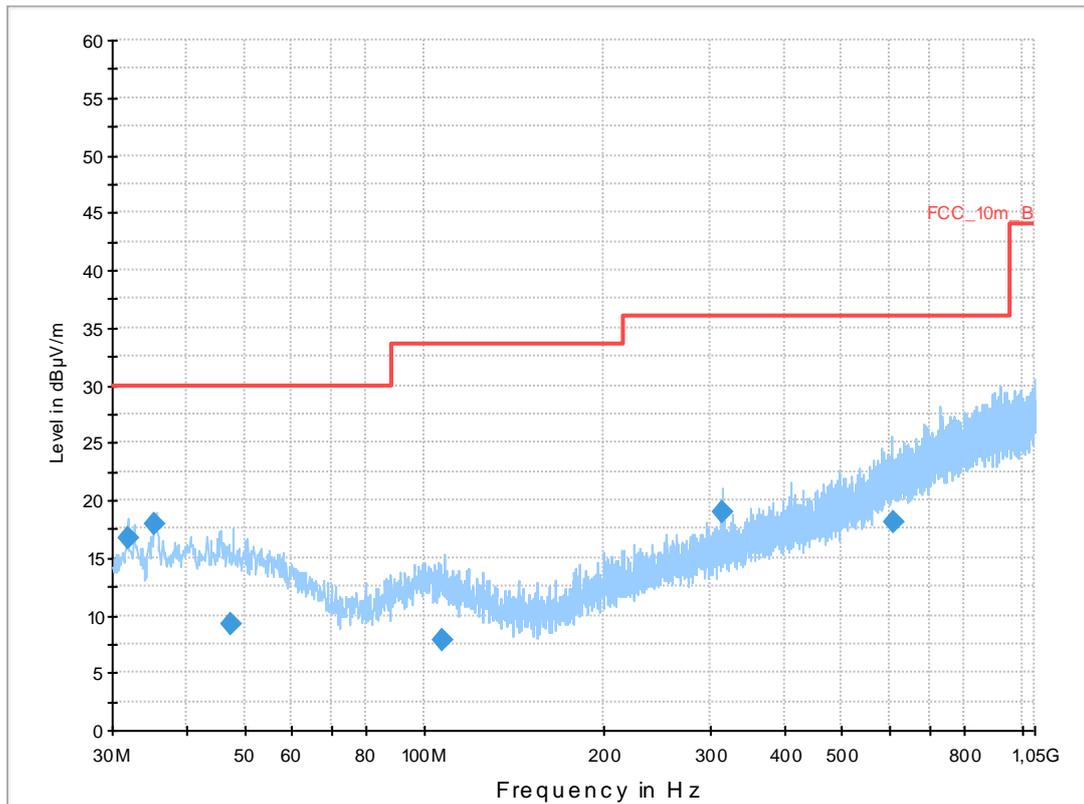


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.929150	16.7	1000.0	120.000	98.0	V	267.0	12.7	13.3	30.0	
35.341050	18.0	1000.0	120.000	98.0	V	260.0	13.1	12.0	30.0	
47.545800	9.3	1000.0	120.000	170.0	H	280.0	13.3	20.7	30.0	
107.406750	7.9	1000.0	120.000	170.0	H	170.0	11.2	25.6	33.5	
314.998800	19.0	1000.0	120.000	170.0	V	261.0	15.0	17.0	36.0	
607.794150	18.0	1000.0	120.000	170.0	H	90.0	20.8	18.0	36.0	

**Plot 27:** 1 GHz to 12.75 GHz, 5600 MHz, vertical & horizontal polarization

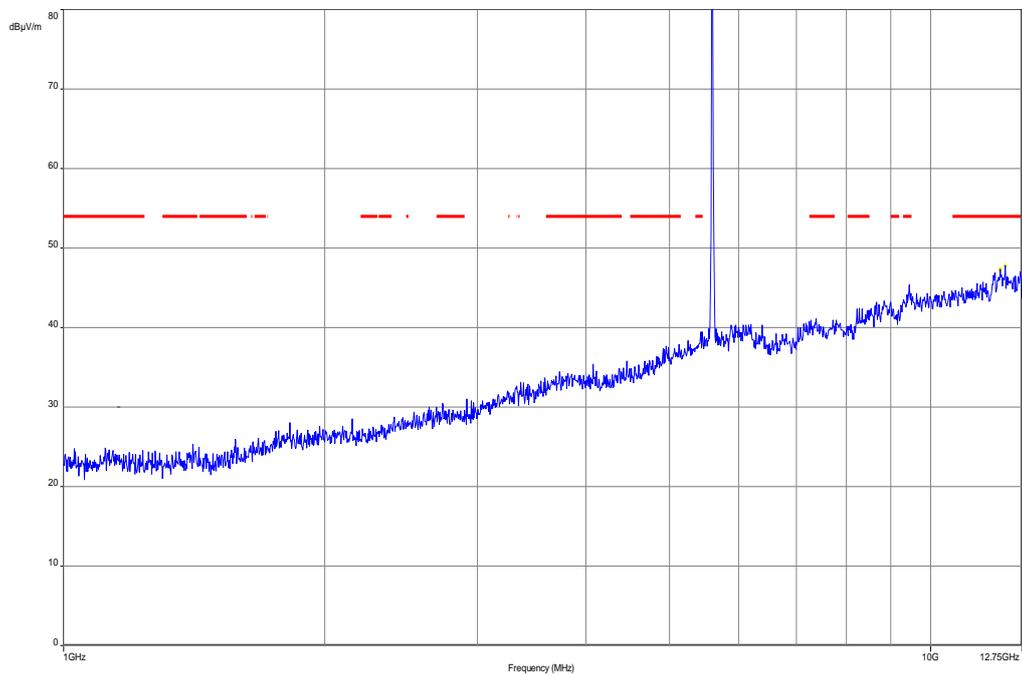


**Plot 28:** 12.75 GHz to 18 GHz, 5600 MHz, vertical & horizontal polarization

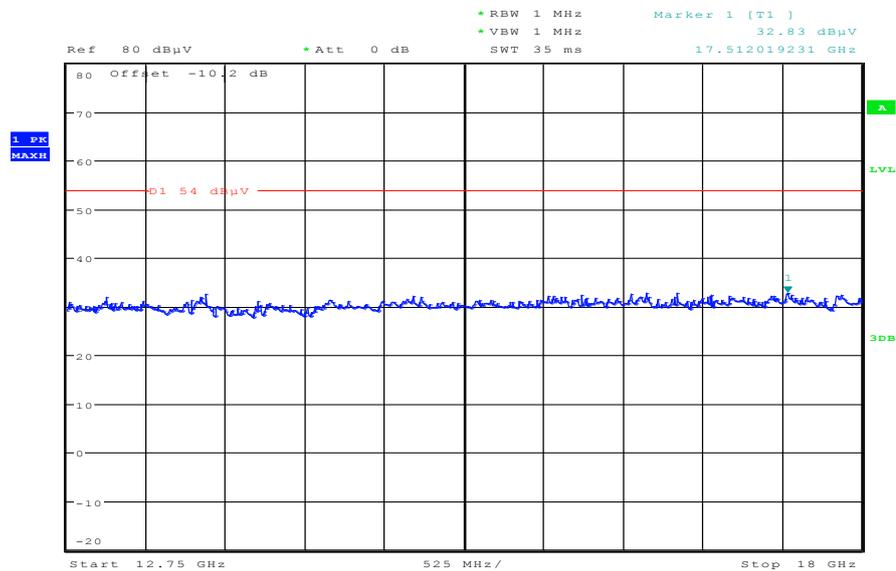


Date: 12.JUL.2012 13:33:55

Plot 29: 18 GHz to 26 GHz, 5600 MHz, vertical & horizontal polarization

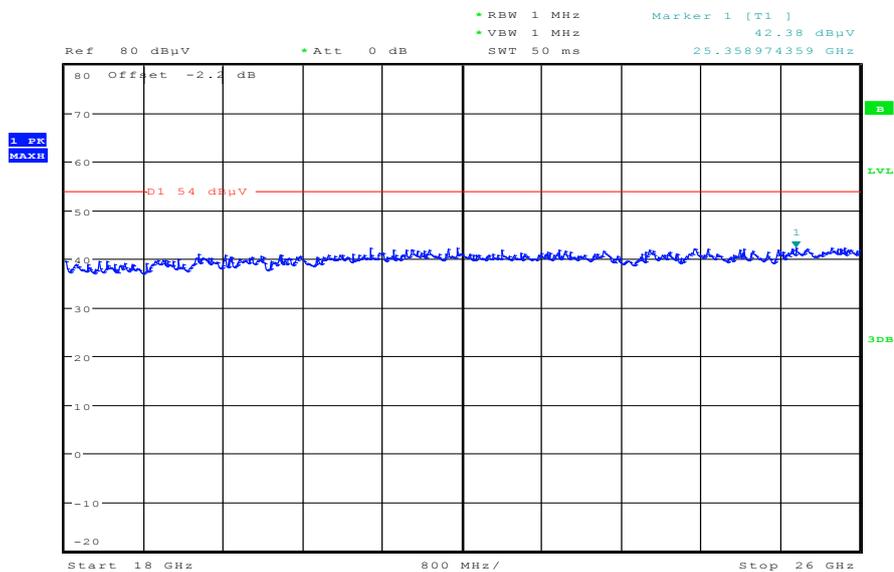

Date: 12.JUL.2012 14:23:11

Plot 30: 26 GHz to 40 GHz, 5600 MHz, vertical & horizontal polarization

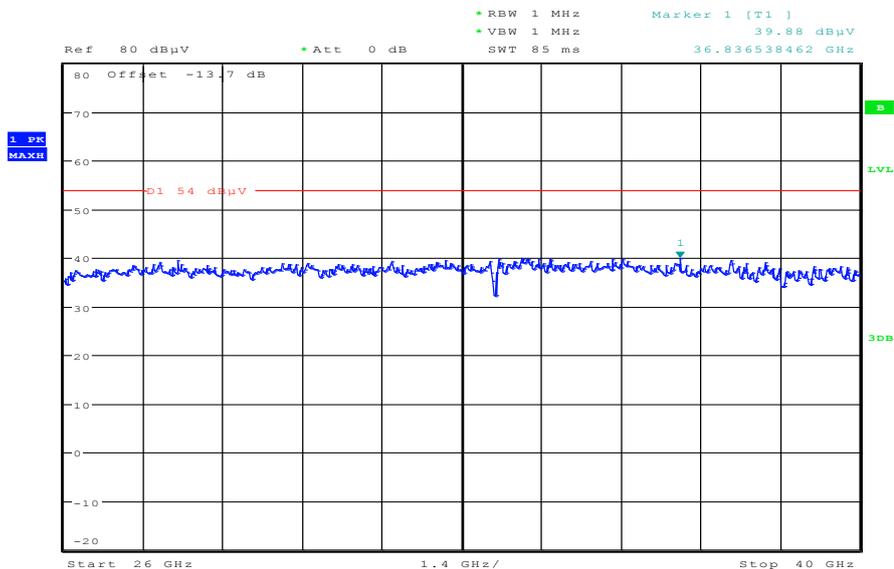

Date: 12.JUL.2012 15:02:51

Plot 31: 30 MHz to 1 GHz, 5700 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT20 5700MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

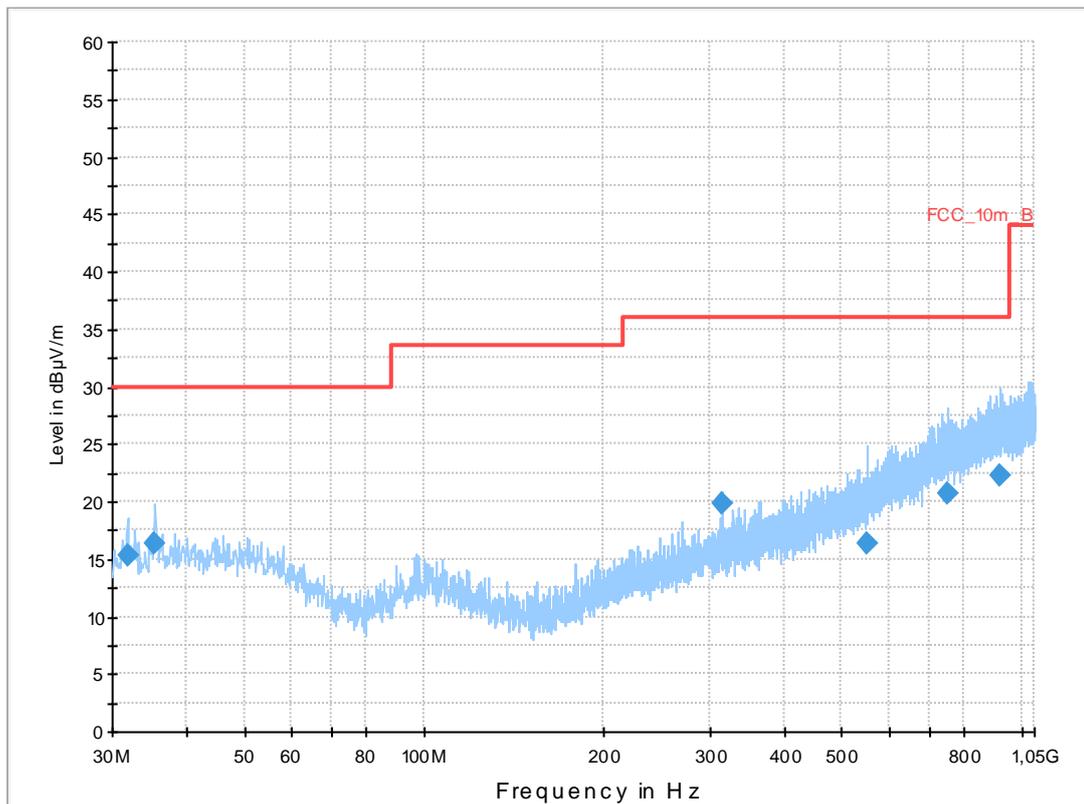


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.916400	15.3	1000.0	120.000	170.0	V	10.0	12.7	14.7	30.0	
35.314800	16.3	1000.0	120.000	170.0	V	177.0	13.1	13.7	30.0	
314.998800	19.8	1000.0	120.000	98.0	V	183.0	15.0	16.2	36.0	
550.247100	16.3	1000.0	120.000	121.0	V	-10.0	19.4	19.7	36.0	
753.199950	20.7	1000.0	120.000	170.0	H	260.0	23.7	15.3	36.0	
923.007600	22.3	1000.0	120.000	133.0	H	100.0	25.3	13.7	36.0	

**Plot 32:** 1 GHz to 12.75 GHz, 5700 MHz, vertical & horizontal polarization

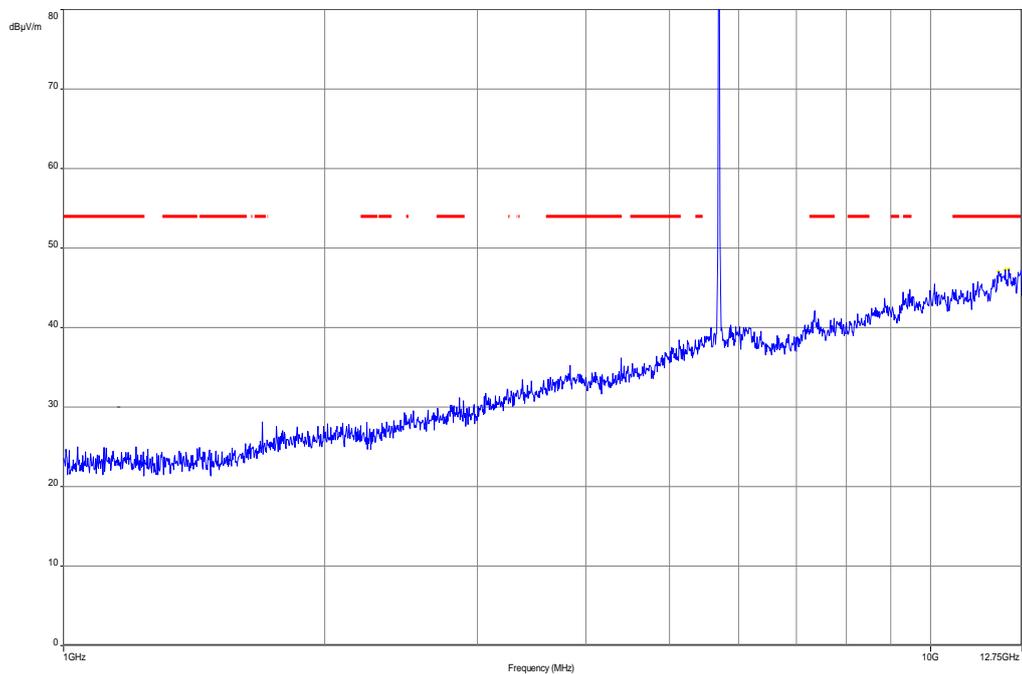


**Plot 33:** 12.75 GHz to 18 GHz, 5700 MHz, vertical & horizontal polarization

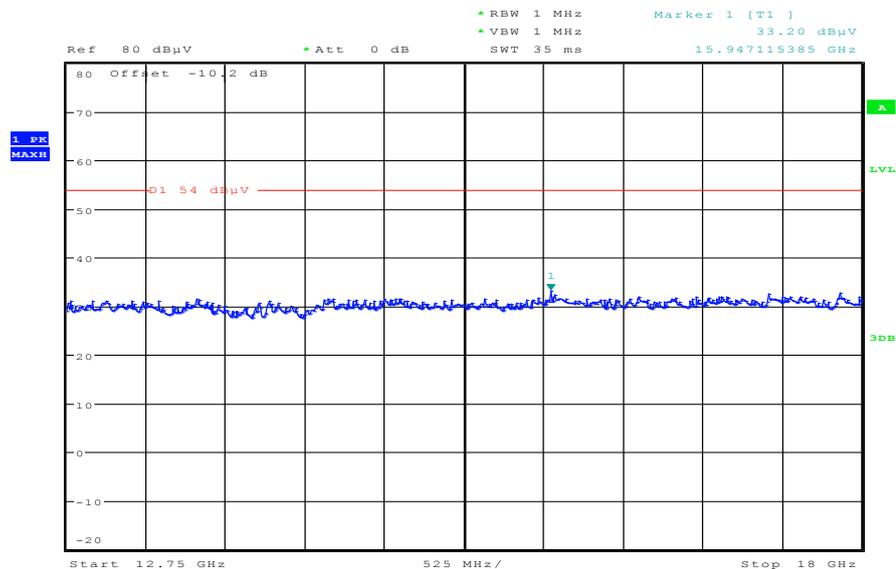


Date: 12.JUL.2012 13:34:46

Plot 34: 18 GHz to 26 GHz, 5700 MHz, vertical & horizontal polarization

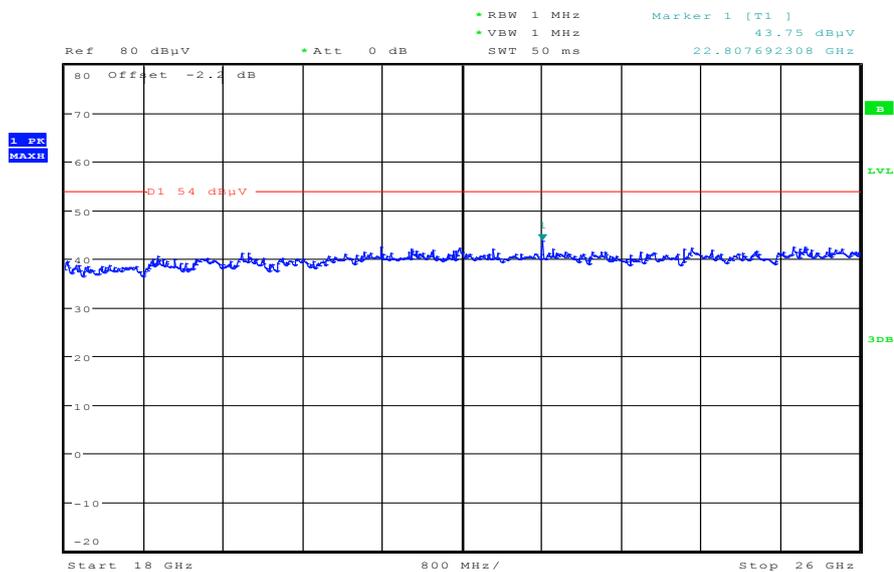

Date: 12.JUL.2012 14:24:03

Plot 35: 26 GHz to 40 GHz, 5700 MHz, vertical & horizontal polarization

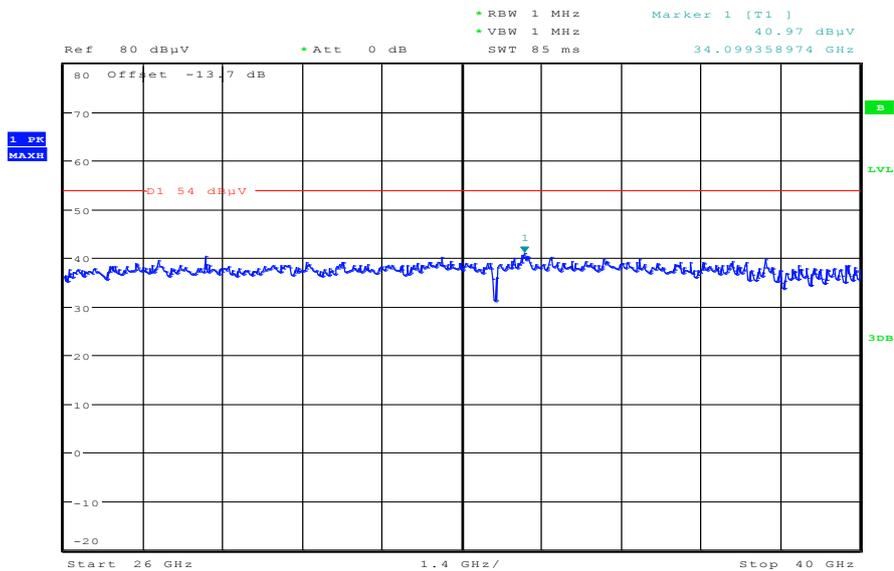

Date: 12.JUL.2012 15:04:18

**Plots:** OFDM / n – mode HT40

**Plot 1:** 30 MHz to 1 GHz, 5190 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT40 5190MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

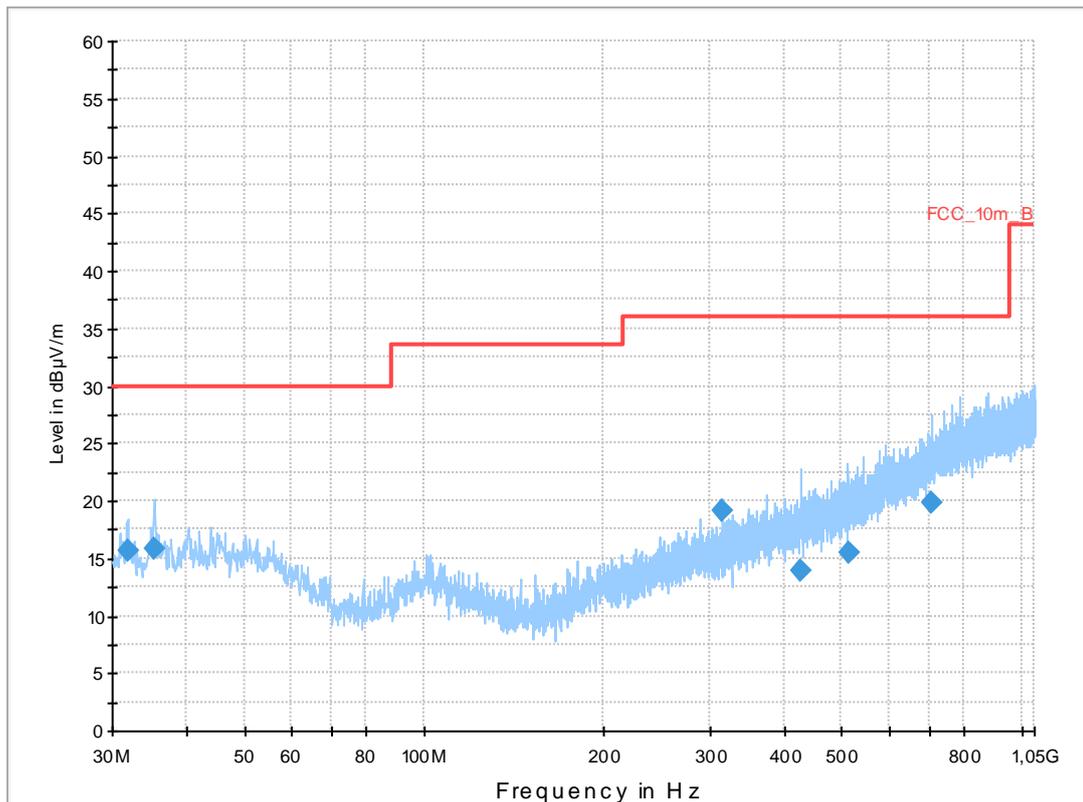


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.911300	15.6	1000.0	120.000	163.0	V	10.0	12.7	14.4	30.0	
35.370900	15.8	1000.0	120.000	170.0	V	92.0	13.1	14.2	30.0	
314.998800	19.1	1000.0	120.000	170.0	V	180.0	15.0	16.9	36.0	
427.929150	13.9	1000.0	120.000	98.0	H	100.0	17.3	22.1	36.0	
512.479800	15.4	1000.0	120.000	170.0	H	-10.0	18.9	20.6	36.0	
706.853850	19.9	1000.0	120.000	170.0	V	-10.0	22.7	16.1	36.0	

Plot 2: 1 GHz to 12.75 GHz, 5190 MHz, vertical & horizontal polarization

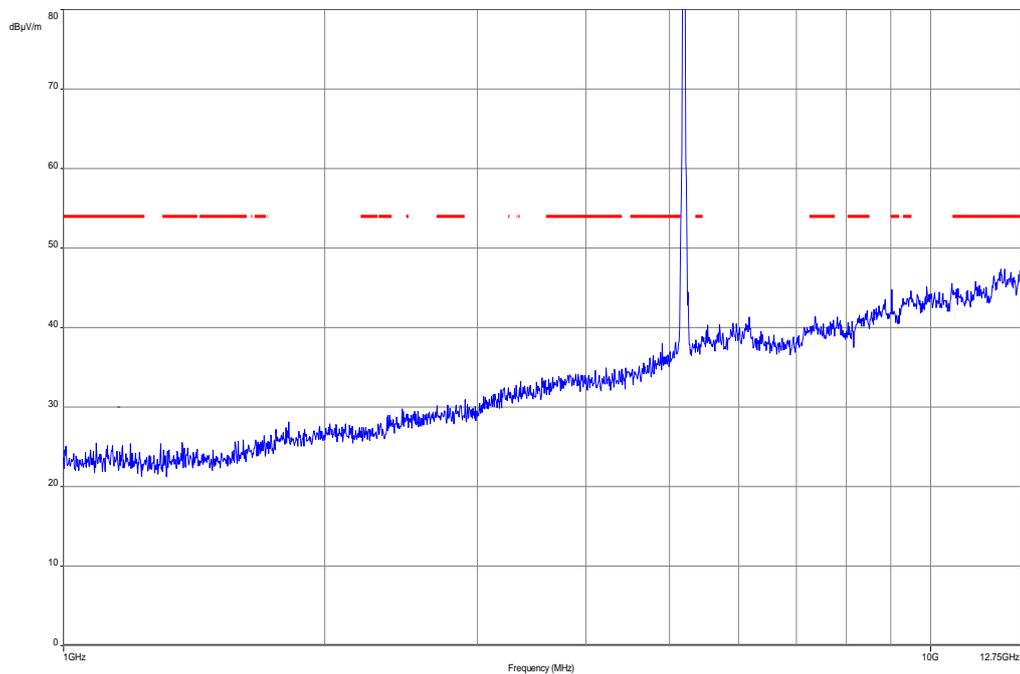


Plot 3: 12.75 GHz to 18 GHz, 5190 MHz, vertical & horizontal polarization

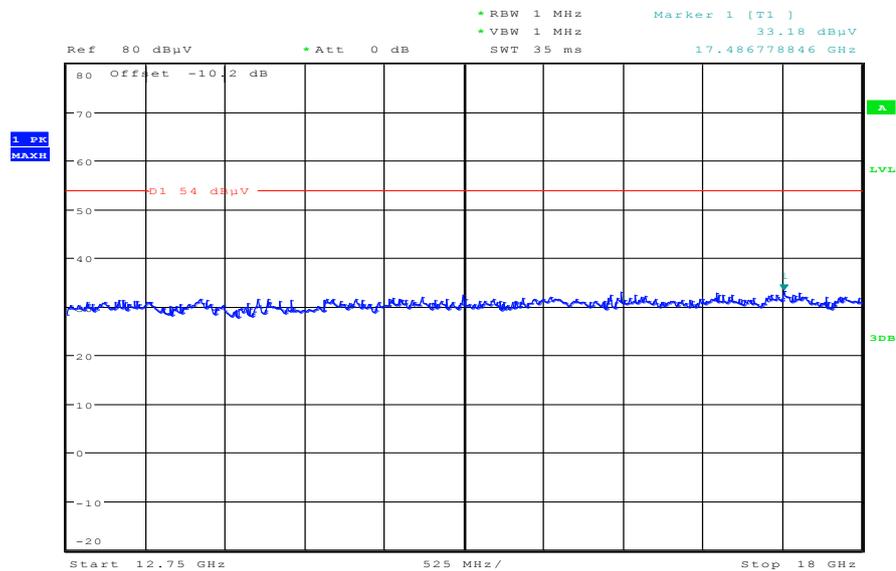


Date: 12.JUL.2012 13:36:40

Plot 4: 18 GHz to 26 GHz, 5190 MHz, vertical & horizontal polarization

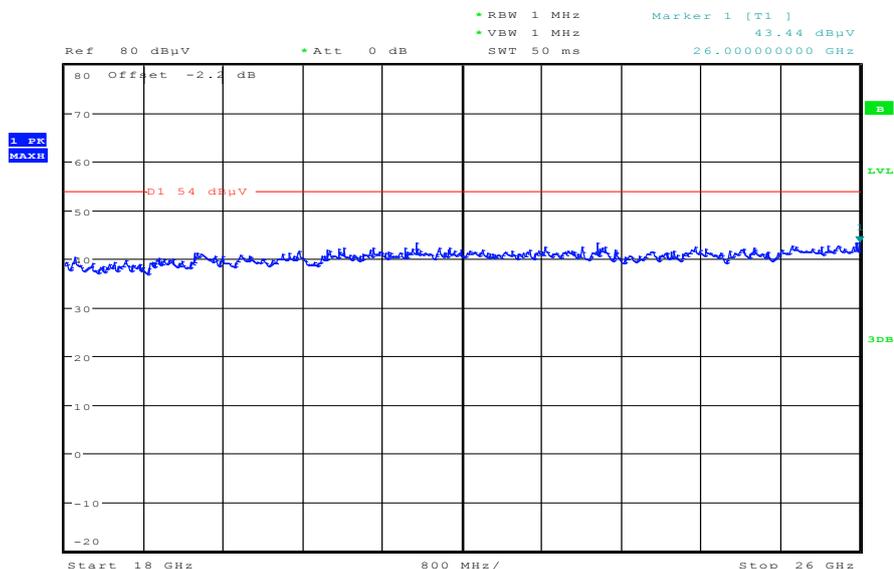

Date: 12.JUL.2012 13:56:09

Plot 5: 26 GHz to 40 GHz, 5190 MHz, vertical & horizontal polarization

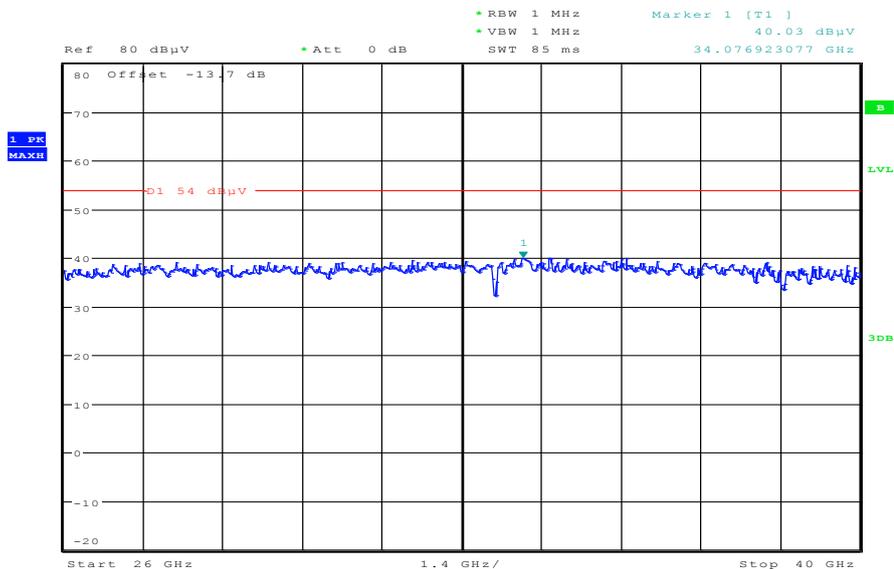

Date: 12.JUL.2012 15:05:42

Plot 6: 30 MHz to 1 GHz, 5230 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT40 5230MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

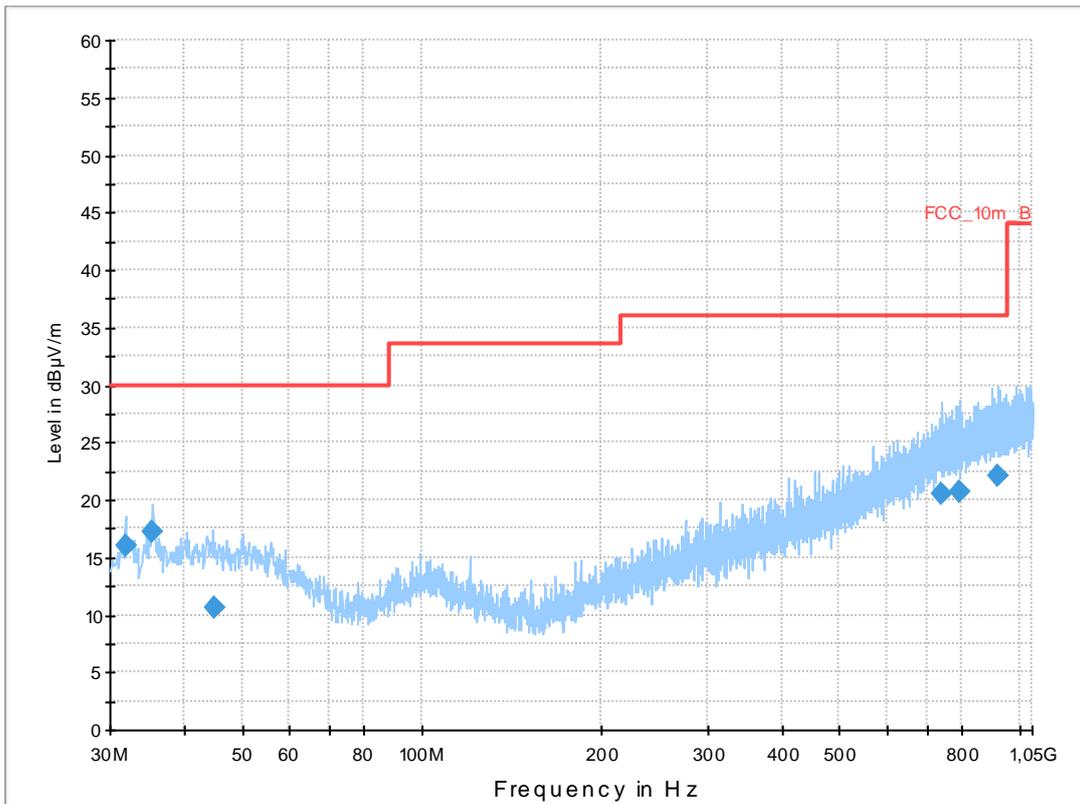


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.923900	15.9	1000.0	120.000	143.0	V	10.0	12.7	14.1	30.0	
35.330550	17.2	1000.0	120.000	120.0	V	-10.0	13.1	12.8	30.0	
44.948400	10.7	1000.0	120.000	170.0	V	10.0	13.3	19.3	30.0	
742.861650	20.6	1000.0	120.000	170.0	V	171.0	23.5	15.4	36.0	
794.596050	20.8	1000.0	120.000	154.0	H	280.0	23.8	15.2	36.0	
916.668450	22.2	1000.0	120.000	170.0	V	190.0	25.3	13.8	36.0	

**Plot 7:** 1 GHz to 12.75 GHz, 5230 MHz, vertical & horizontal polarization

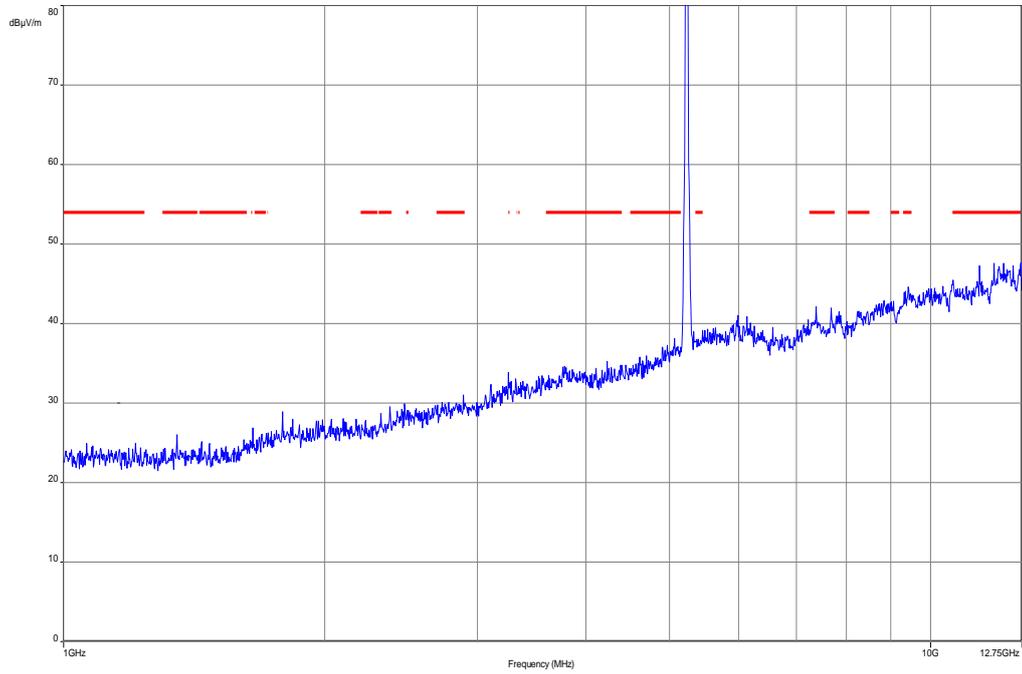


**Plot 8:** 12.75 GHz to 18 GHz, 5230 MHz, vertical & horizontal polarization

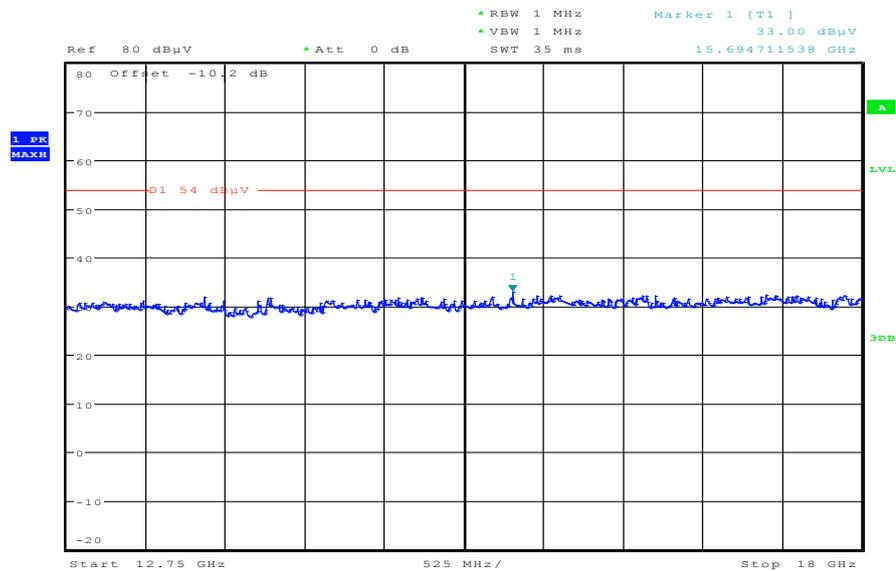


Date: 12.JUL.2012 13:37:54

Plot 9: 18 GHz to 26 GHz, 5230 MHz, vertical & horizontal polarization

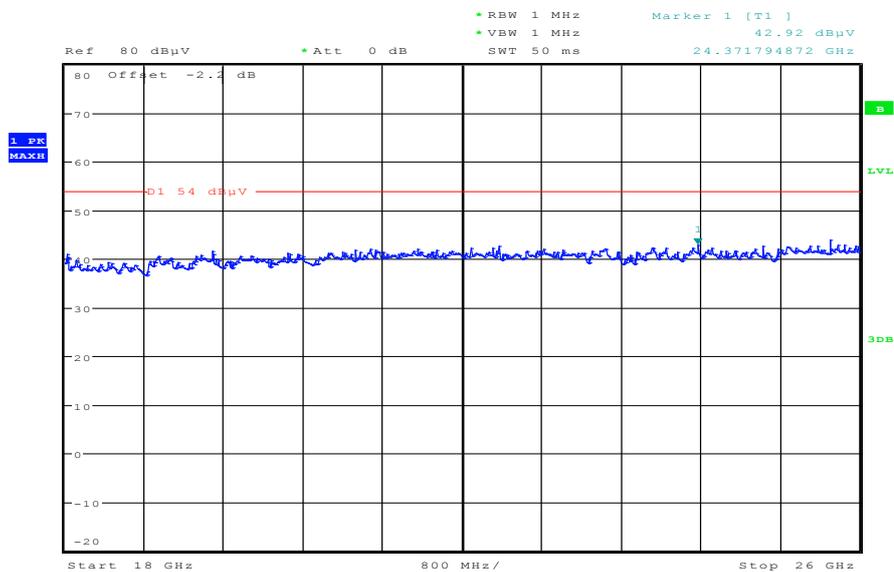

Date: 12.JUL.2012 13:55:00

Plot 10: 26 GHz to 40 GHz, 5230 MHz, vertical & horizontal polarization

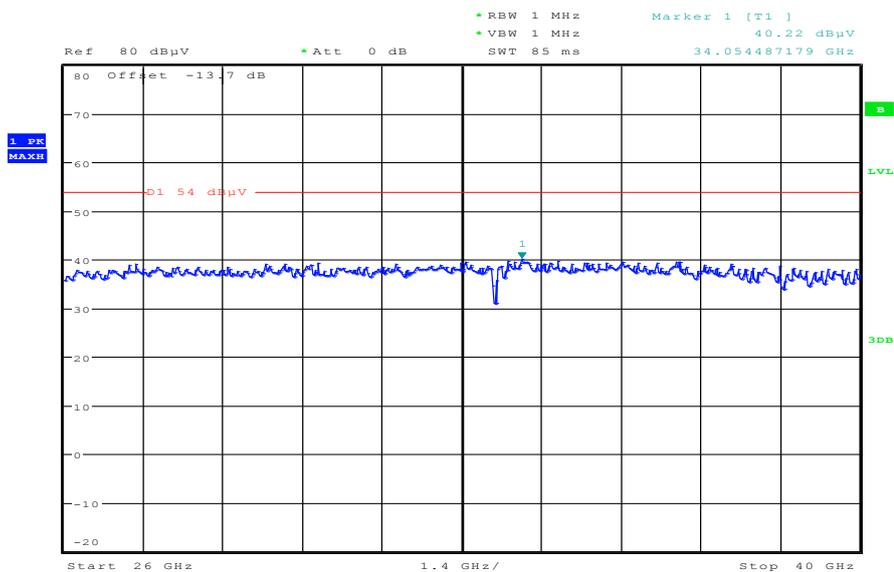

Date: 12.JUL.2012 15:07:06

Plot 11: 30 MHz to 1 GHz, 5270 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT40 5270MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

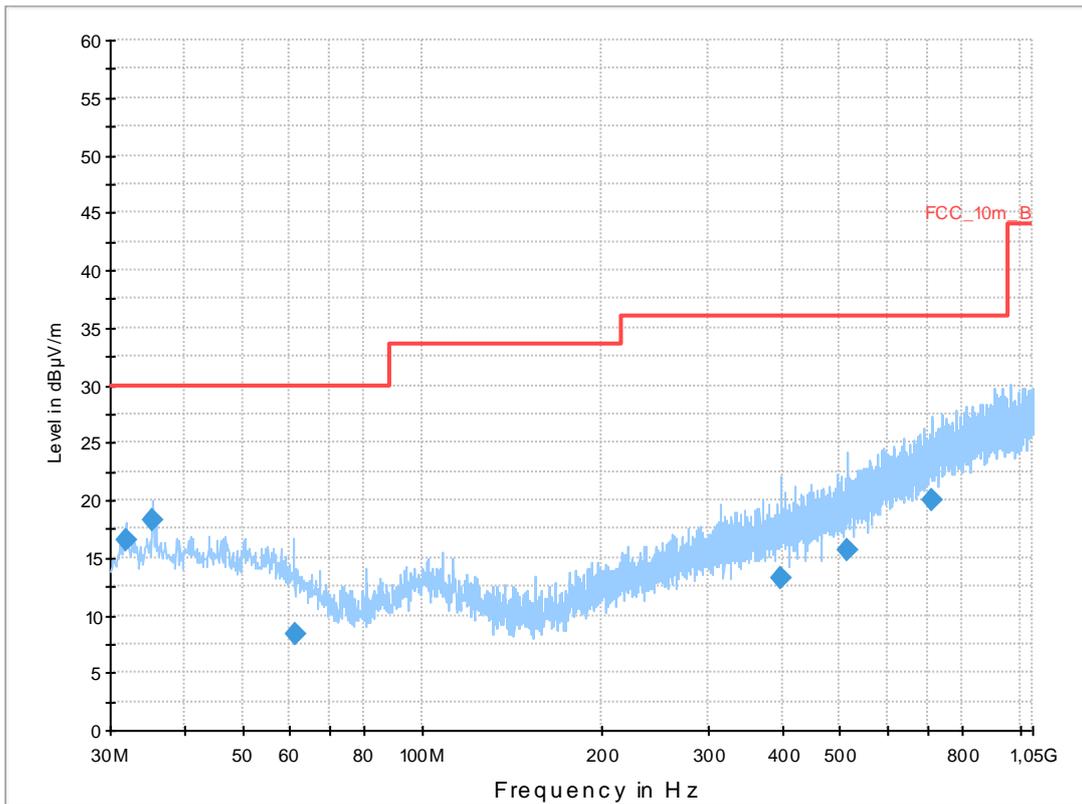


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.959900	16.5	1000.0	120.000	170.0	V	273.0	12.7	13.5	30.0	
35.380500	18.2	1000.0	120.000	98.0	V	273.0	13.1	11.8	30.0	
61.165800	8.3	1000.0	120.000	161.0	V	10.0	11.3	21.7	30.0	
398.220450	13.3	1000.0	120.000	105.0	V	-10.0	16.9	22.7	36.0	
514.610400	15.7	1000.0	120.000	98.0	H	280.0	18.9	20.3	36.0	
714.141150	20.0	1000.0	120.000	105.0	V	10.0	22.8	16.0	36.0	

Plot 12: 1 GHz to 12.75 GHz, 5270 MHz, vertical & horizontal polarization

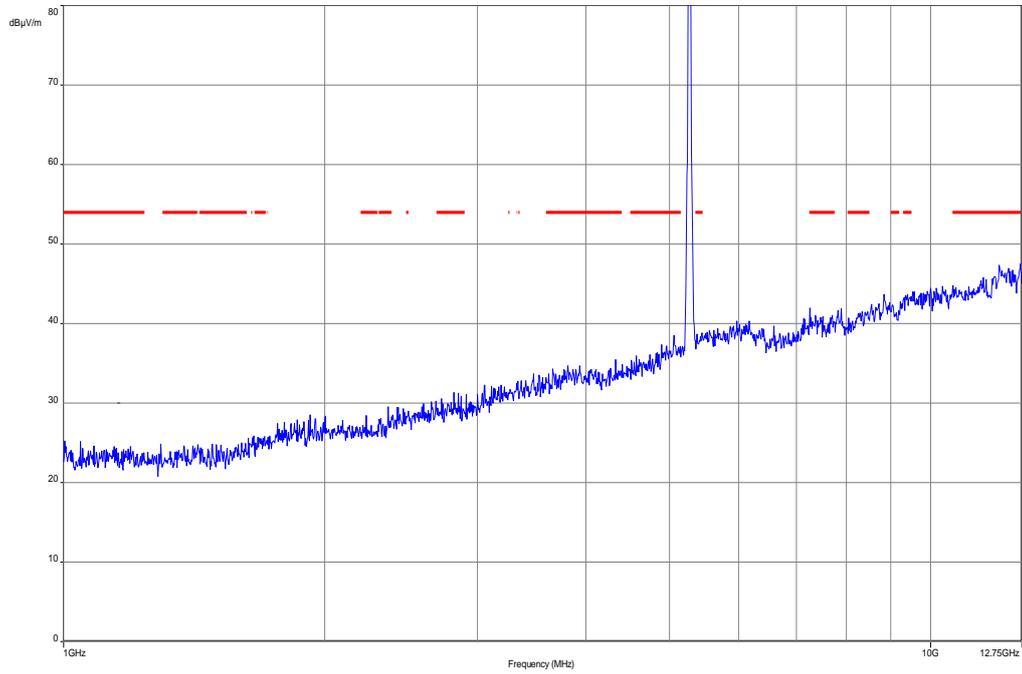


Plot 13: 12.75 GHz to 18 GHz, 5270 MHz, vertical & horizontal polarization

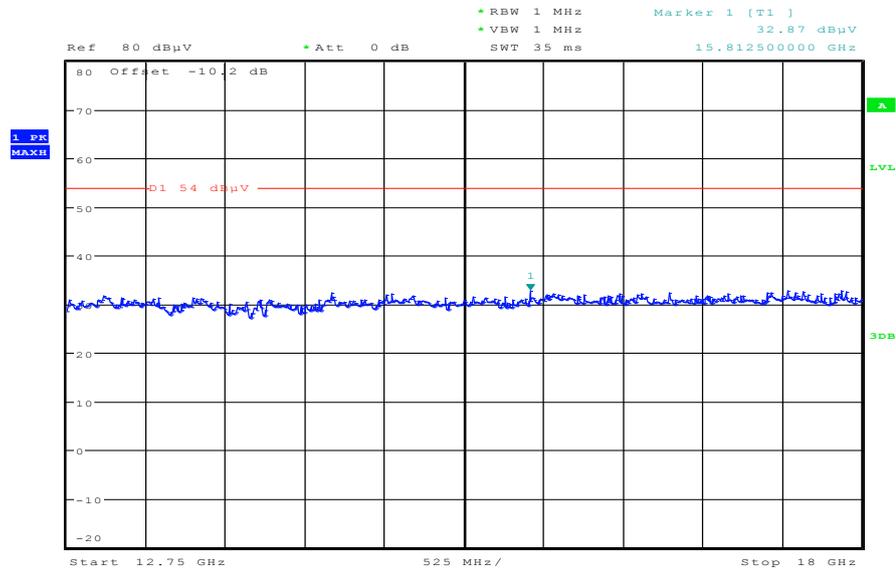


Date: 12.JUL.2012 13:38:58

Plot 14: 18 GHz to 26 GHz, 5270 MHz, vertical & horizontal polarization

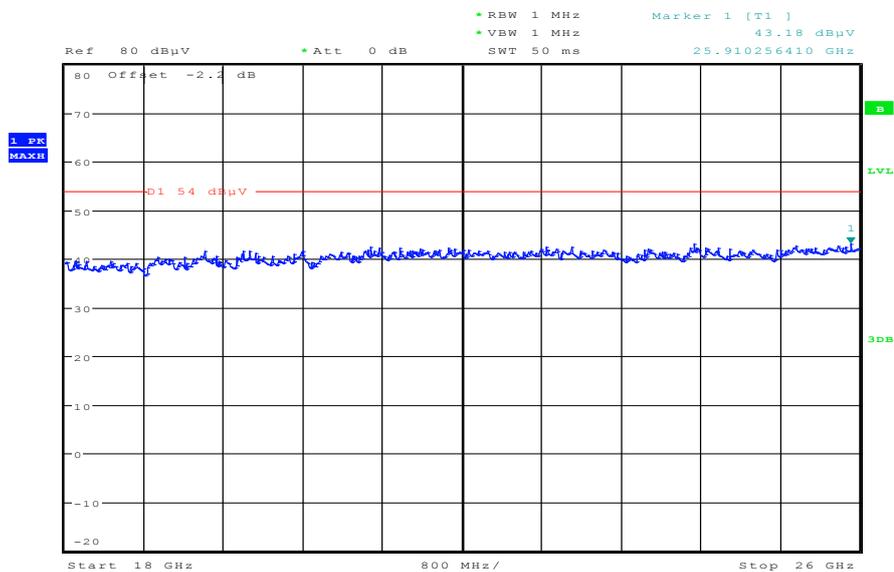

Date: 12.JUL.2012 13:53:30

Plot 15: 26 GHz to 40 GHz, 5270 MHz, vertical & horizontal polarization

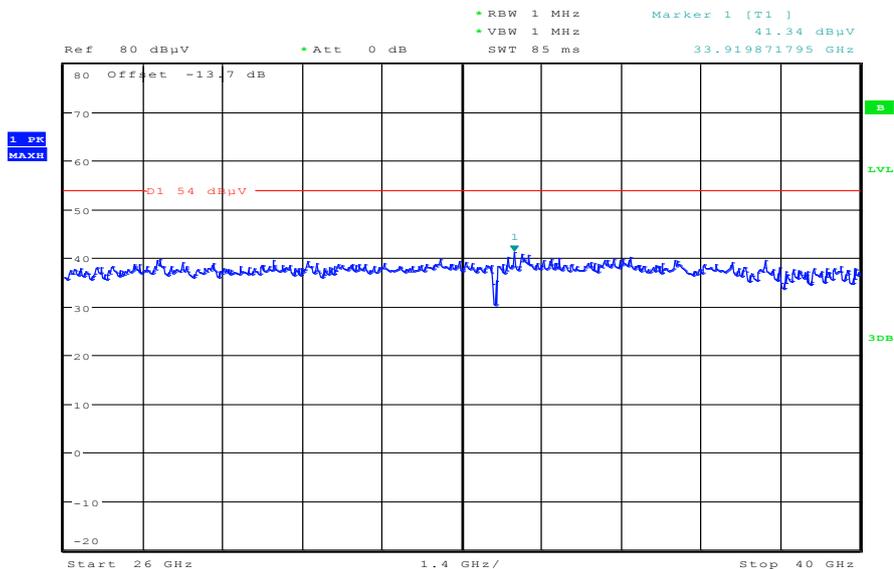

Date: 12.JUL.2012 15:08:14

Plot 16: 30 MHz to 1 GHz, 5310 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT40 5310MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

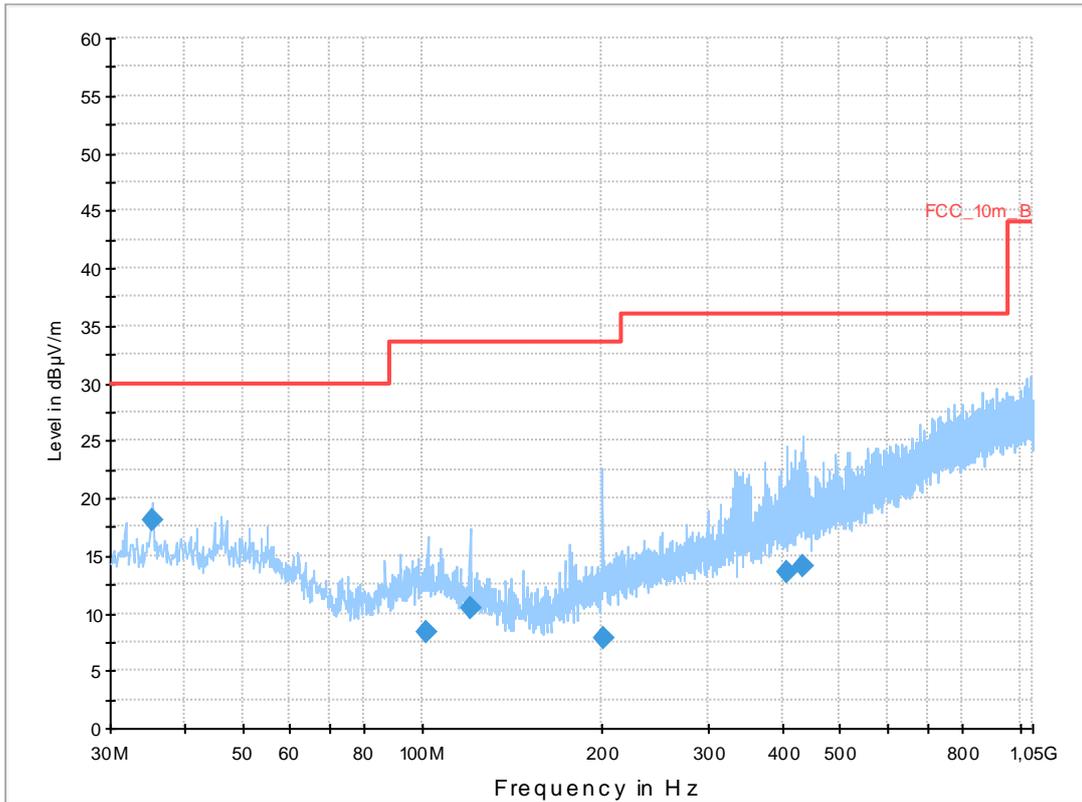


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.339700	18.0	1000.0	120.000	98.0	V	180.0	13.1	12.0	30.0	
101.405250	8.3	1000.0	120.000	170.0	V	190.0	11.8	25.2	33.5	
119.943900	10.4	1000.0	120.000	104.0	V	260.0	10.2	23.1	33.5	
200.230800	7.8	1000.0	120.000	170.0	V	-3.0	11.7	25.7	33.5	
407.100600	13.6	1000.0	120.000	111.0	H	260.0	17.0	22.4	36.0	
432.614250	14.0	1000.0	120.000	98.0	V	280.0	17.4	22.0	36.0	

Plot 17: 1 GHz to 12.75 GHz, 5310 MHz, vertical & horizontal polarization

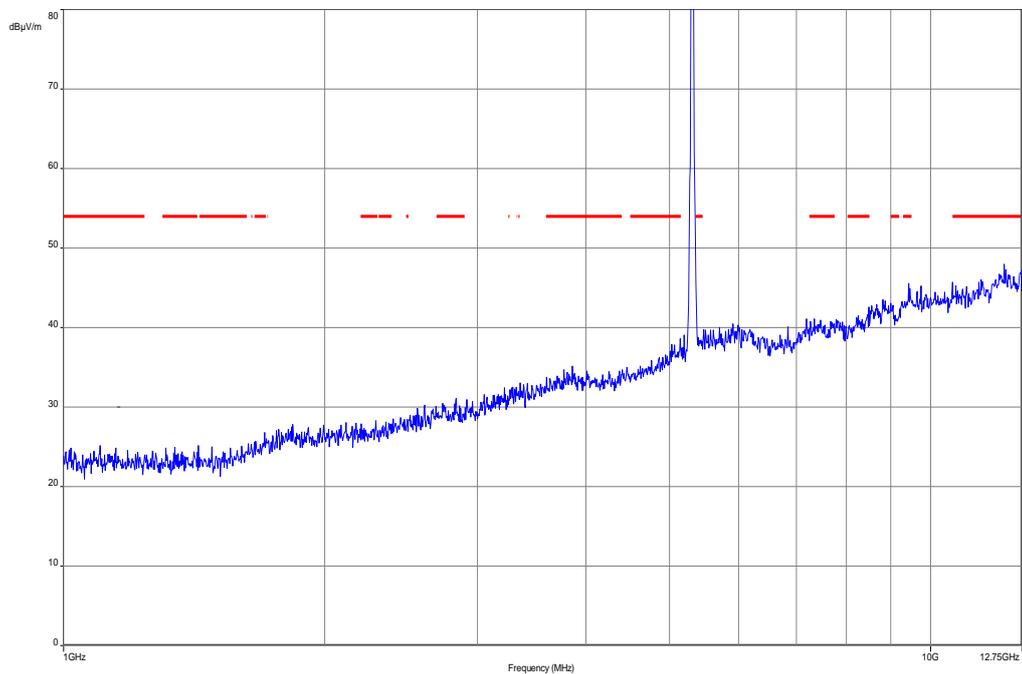


Plot 18: 12.75 GHz to 18 GHz, 5310 MHz, vertical & horizontal polarization

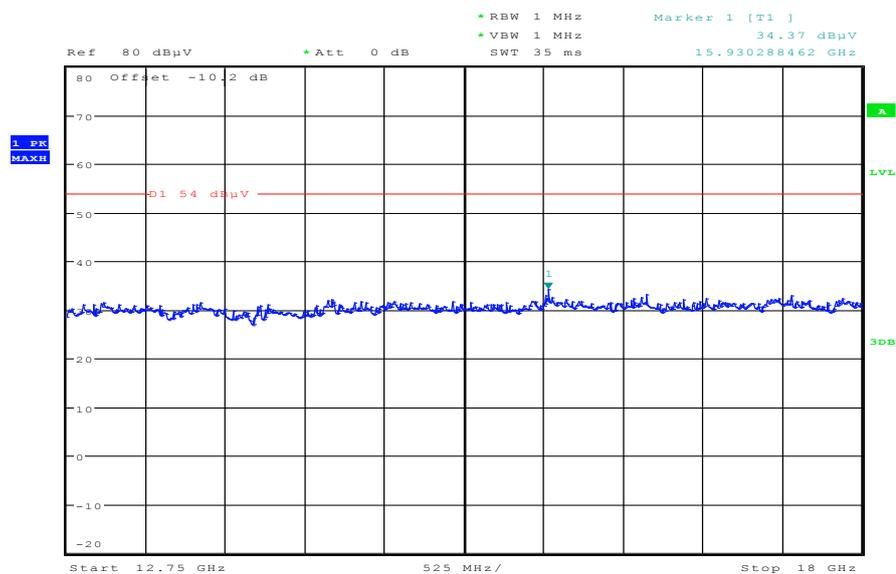


Date: 12.JUL.2012 13:40:01

Plot 19: 18 GHz to 26 GHz, 5310 MHz, vertical & horizontal polarization

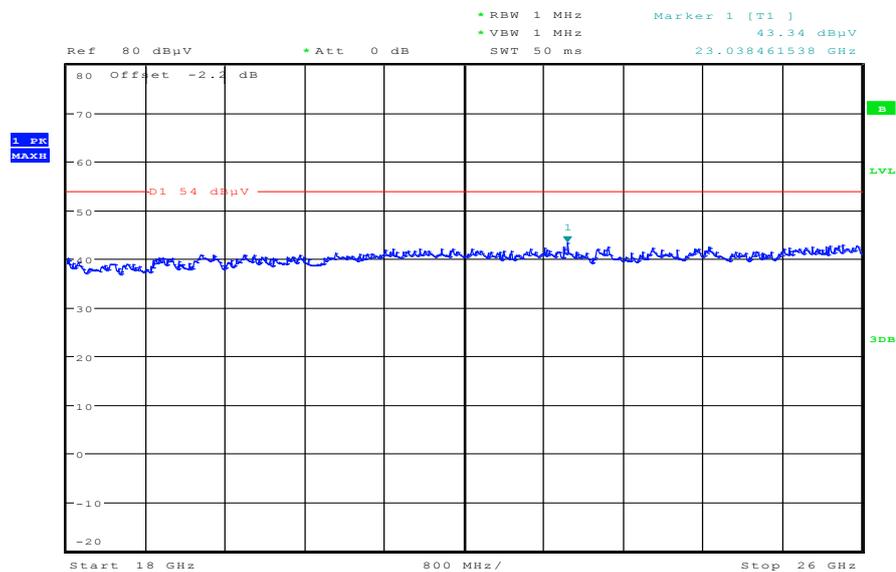

Date: 12.JUL.2012 13:52:07

Plot 20: 26 GHz to 40 GHz, 5310 MHz, vertical & horizontal polarization

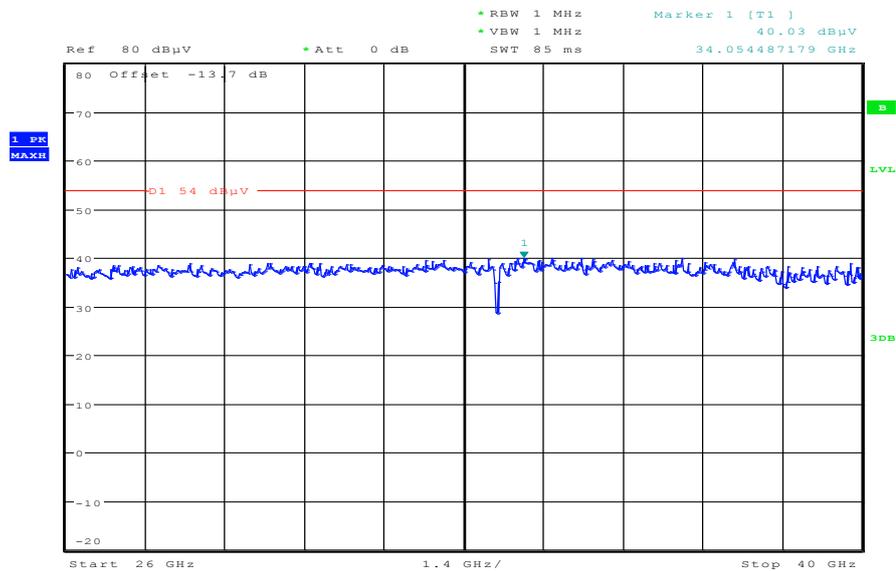

Date: 12.JUL.2012 15:08:53

Plot 21: 30 MHz to 1 GHz, 5510 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN n\_mode HT40 5510MHz + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

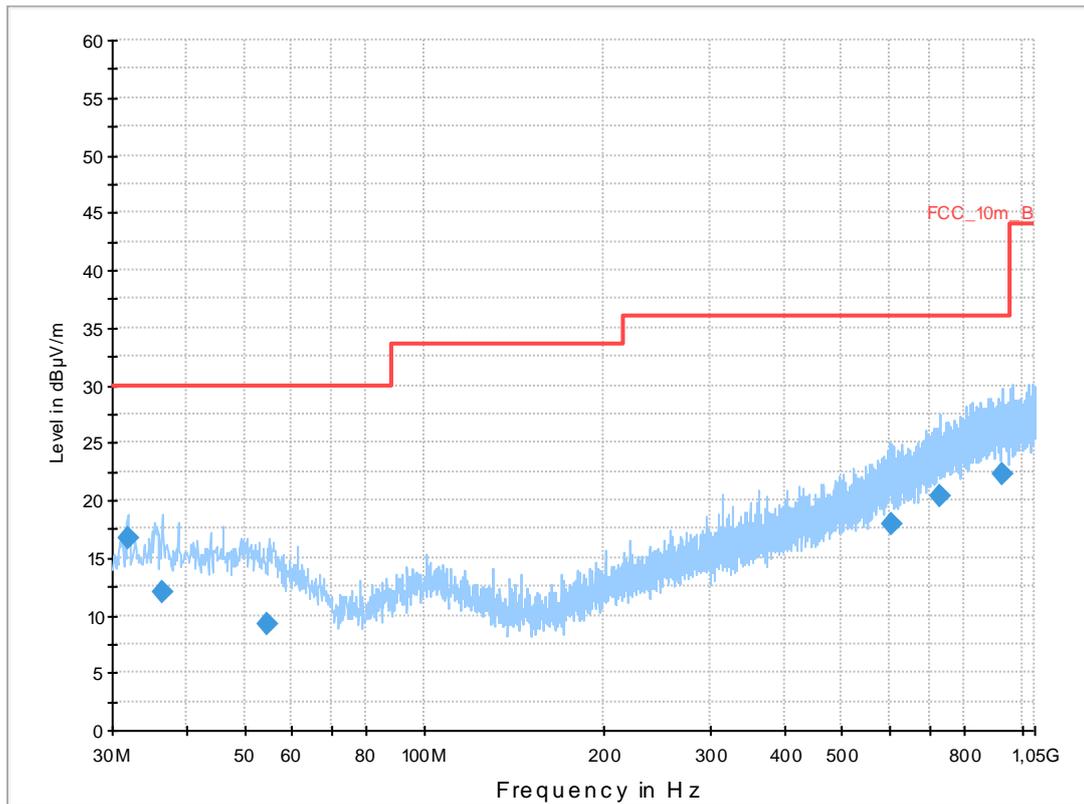


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.959600	16.7	1000.0	120.000	98.0	V	280.0	12.7	13.3	30.0	
36.359100	12.0	1000.0	120.000	131.0	V	260.0	13.1	18.0	30.0	
54.633450	9.2	1000.0	120.000	98.0	H	280.0	12.9	20.8	30.0	
604.537350	18.0	1000.0	120.000	132.0	H	85.0	20.8	18.0	36.0	
727.690800	20.3	1000.0	120.000	98.0	H	-10.0	23.1	15.7	36.0	
927.098550	22.3	1000.0	120.000	98.0	V	182.0	25.3	13.7	36.0	

**Plot 22:** 1 GHz to 12.75 GHz, 5510 MHz, vertical & horizontal polarization

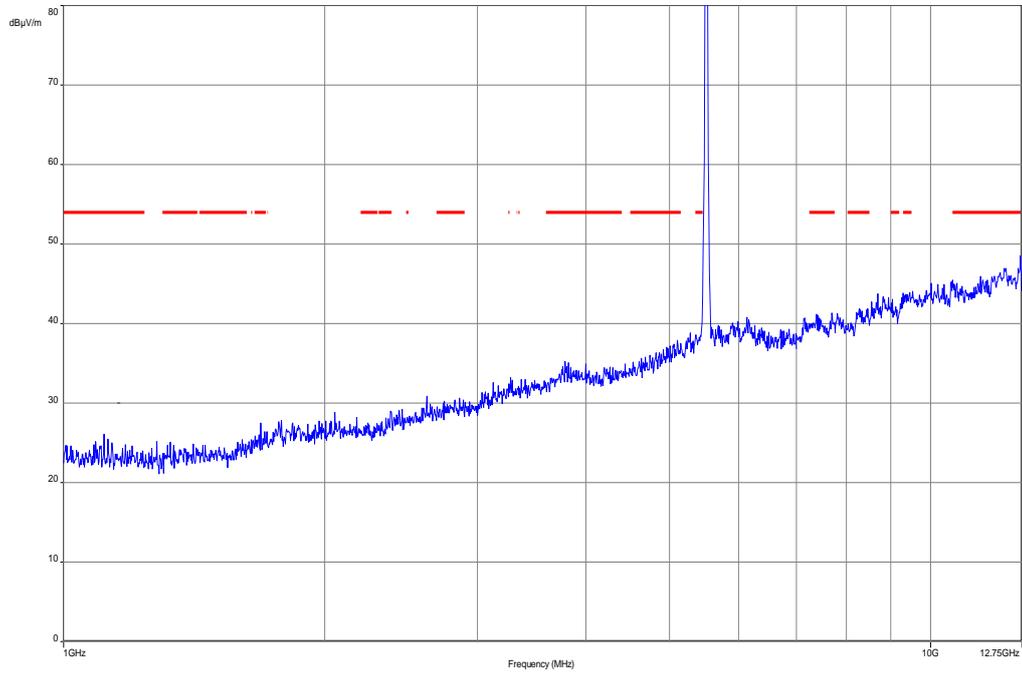


**Plot 23:** 12.75 GHz to 18 GHz, 5510 MHz, vertical & horizontal polarization

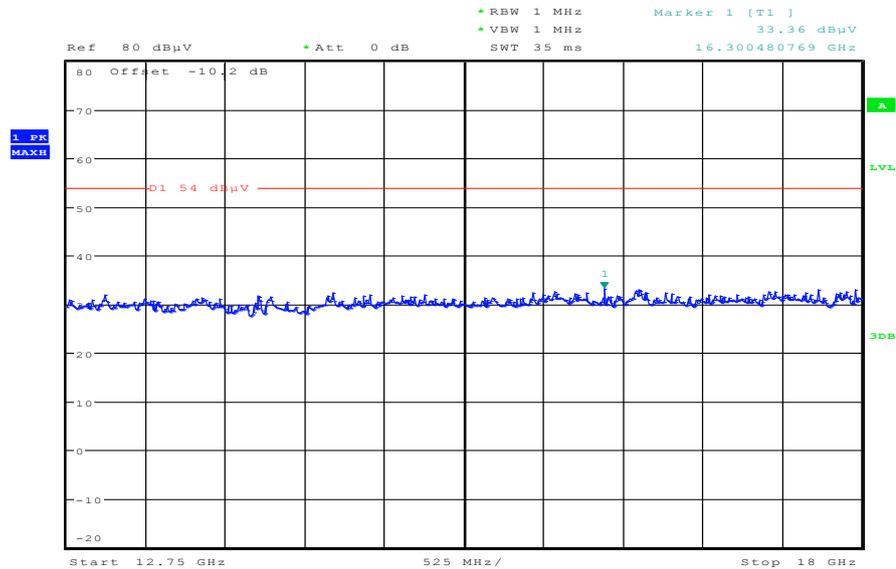


Date: 12.JUL.2012 13:41:47

Plot 24: 18 GHz to 26 GHz, 5510 MHz, vertical & horizontal polarization

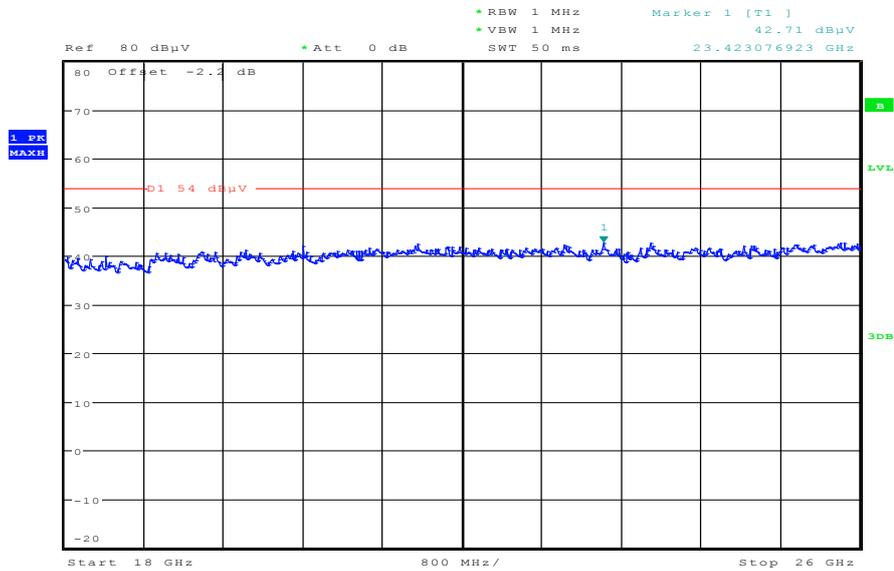

Date: 12.JUL.2012 13:50:54

Plot 25: 26 GHz to 40 GHz, 5510 MHz, vertical & horizontal polarization

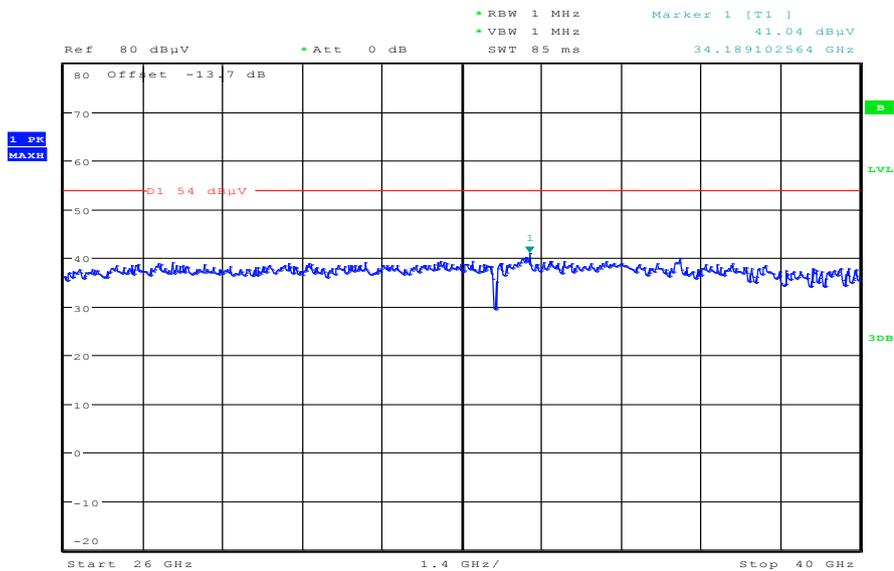

Date: 12.JUL.2012 15:09:38

Plot 26: 30 MHz to 1 GHz, 5590 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: WLAN n-mode HT40; ch118; 5590MHz + charging  
 Operator Name: Hennemann  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

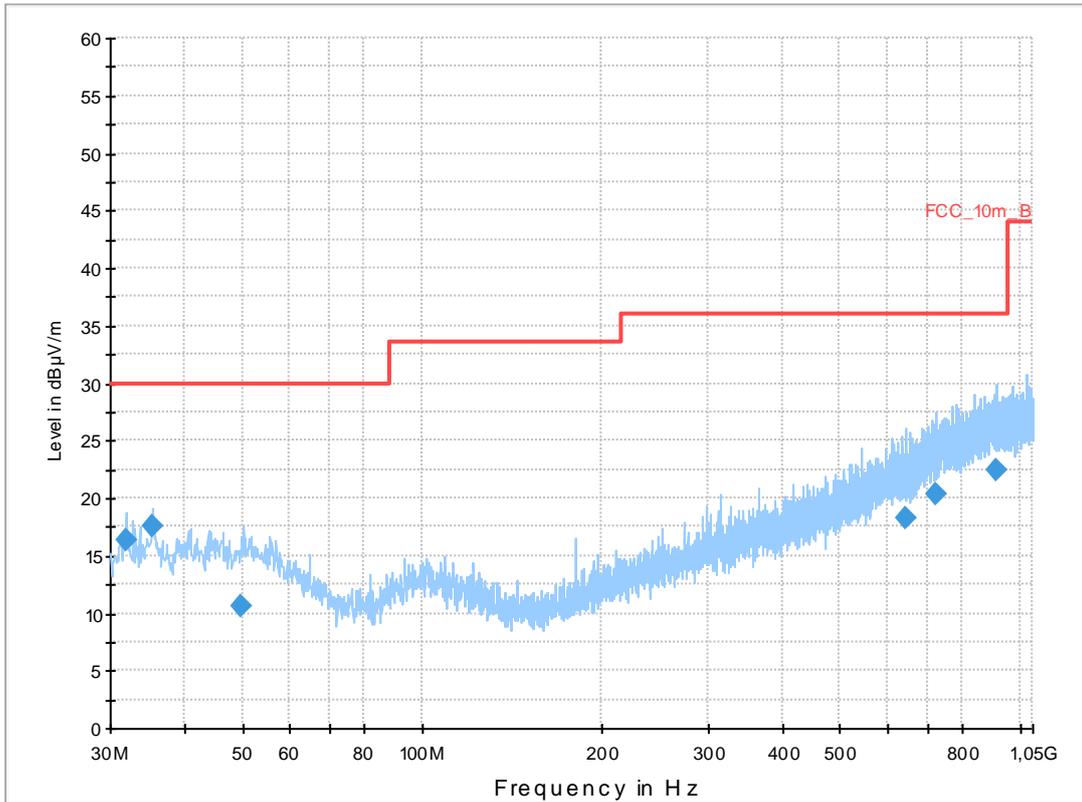


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.961700	16.4	1000.0	120.000	111.0	V	190.0	12.7	13.6	30.0	
35.391150	17.5	1000.0	120.000	122.0	V	81.0	13.1	12.5	30.0	
49.818150	10.6	1000.0	120.000	98.0	V	178.0	13.4	19.4	30.0	
642.694800	18.2	1000.0	120.000	170.0	H	261.0	21.1	17.8	36.0	
720.789900	20.3	1000.0	120.000	121.0	H	-4.0	23.0	15.7	36.0	
913.228200	22.4	1000.0	120.000	170.0	H	-2.0	25.2	13.6	36.0	

Plot 27: 1 GHz to 12.75 GHz, 5590 MHz, vertical & horizontal polarization

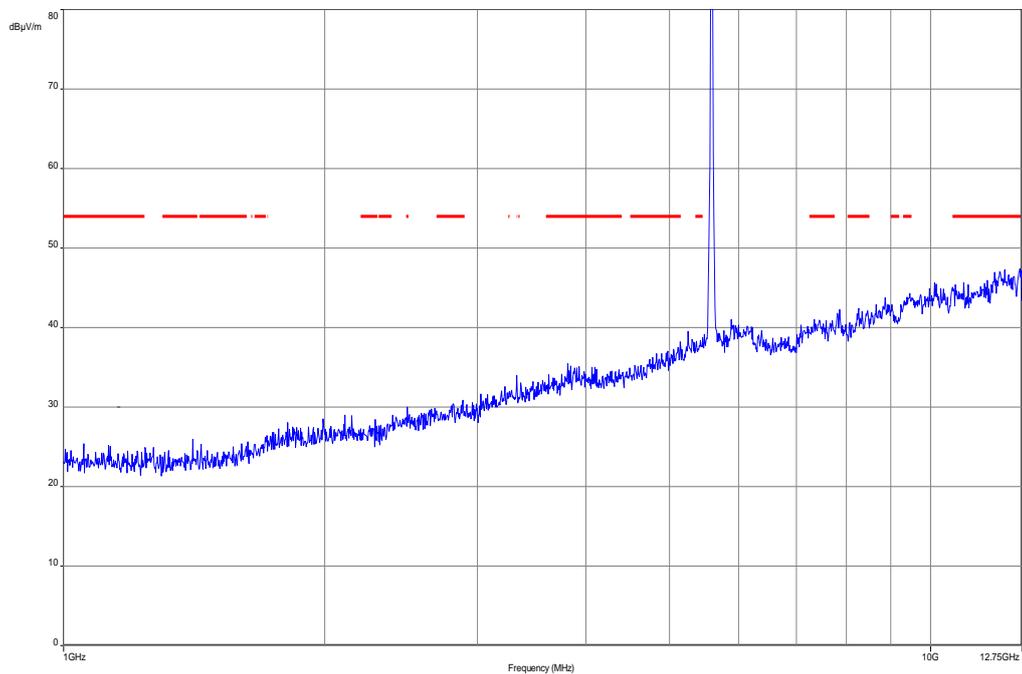


Plot 28: 12.75 GHz to 18 GHz, 5590 MHz, vertical & horizontal polarization

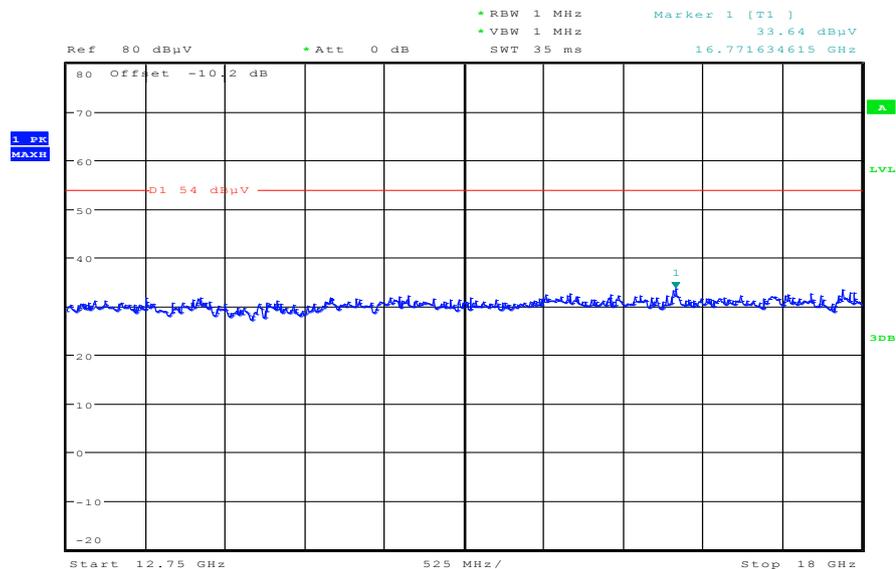


Date: 12.JUL.2012 13:43:12

Plot 29: 18 GHz to 26 GHz, 5590 MHz, vertical & horizontal polarization

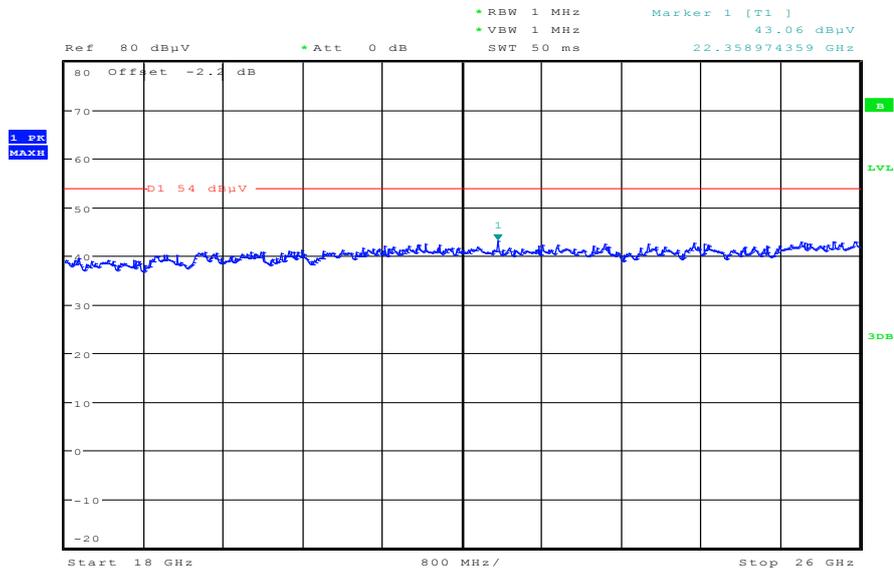

Date: 12.JUL.2012 13:49:44

Plot 30: 26 GHz to 40 GHz, 5590 MHz, vertical & horizontal polarization

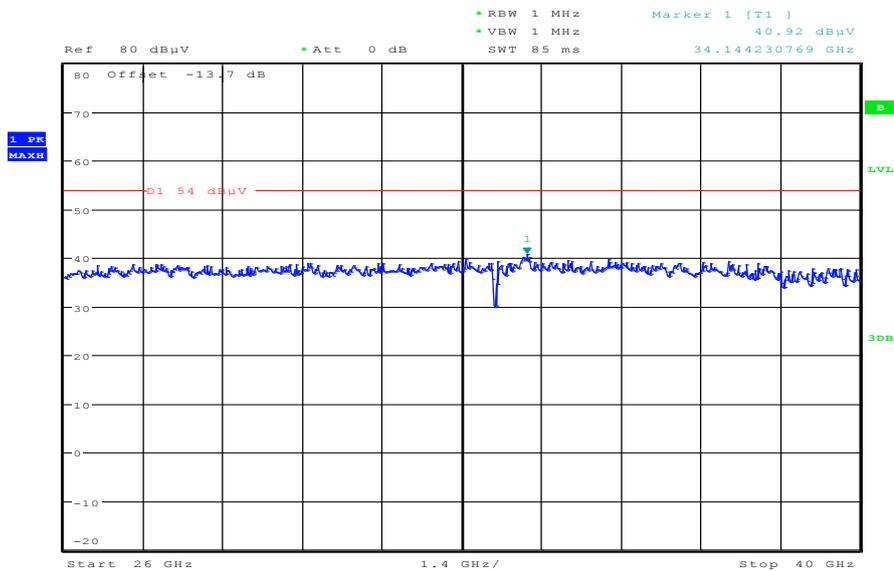

Date: 12.JUL.2012 15:10:12

Plot 31: 30 MHz to 1 GHz, 5670 MHz, vertical & horizontal polarization


### Common Information

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: WLAN n-mode HT40; ch134; 5670MHz + charging  
 Operator Name: Hennemann  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

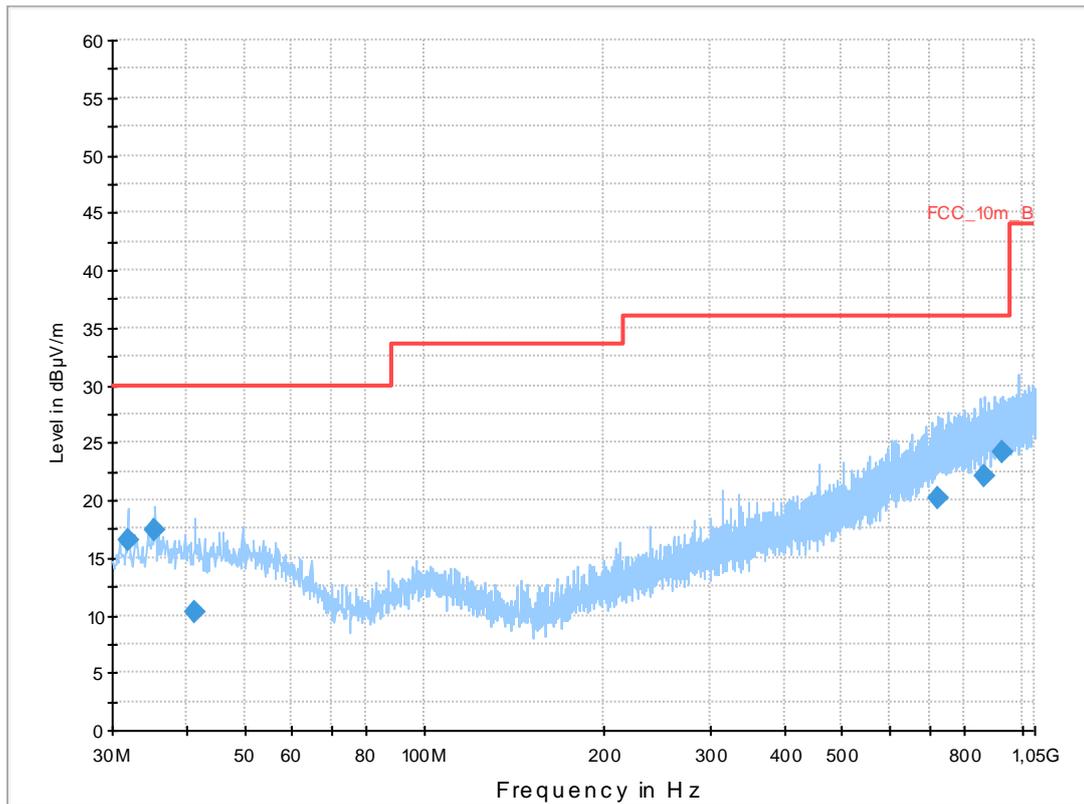


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.956150	16.5	1000.0	120.000	98.0	V	270.0	12.7	13.5	30.0	
35.404500	17.3	1000.0	120.000	98.0	V	0.0	13.1	12.7	30.0	
41.182200	10.3	1000.0	120.000	98.0	H	178.0	13.4	19.7	30.0	
724.723800	20.2	1000.0	120.000	170.0	V	270.0	23.1	15.8	36.0	
867.871050	22.1	1000.0	120.000	170.0	H	100.0	24.8	13.9	36.0	
927.421500	24.1	1000.0	120.000	120.0	H	190.0	25.3	11.9	36.0	

**Plot 32:** 1 GHz to 12.75 GHz, 5670 MHz, vertical & horizontal polarization

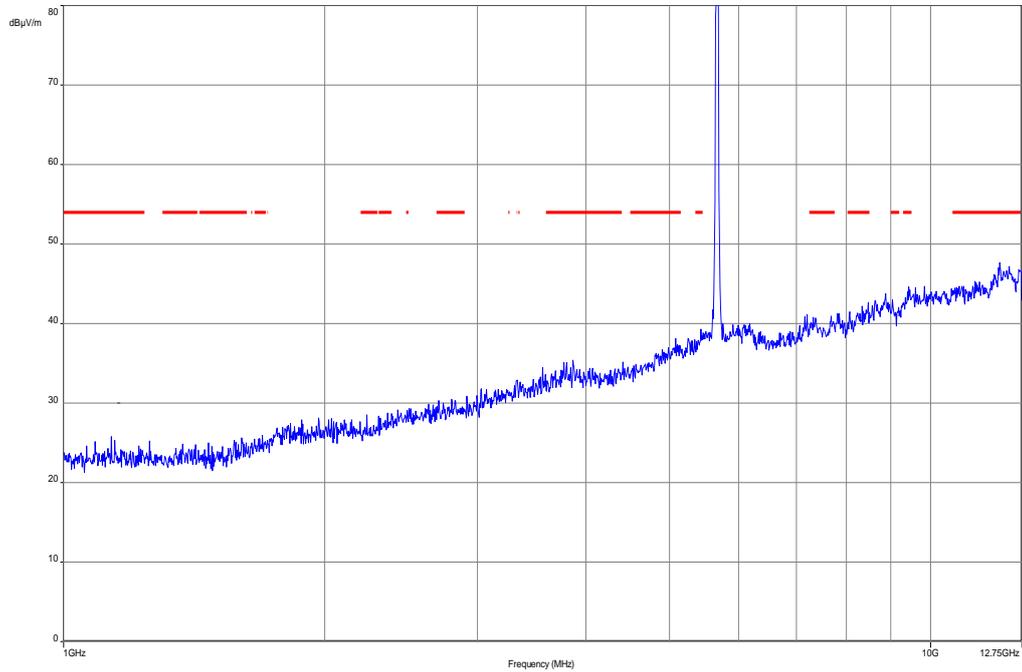


**Plot 33:** 12.75 GHz to 18 GHz, 5670 MHz, vertical & horizontal polarization

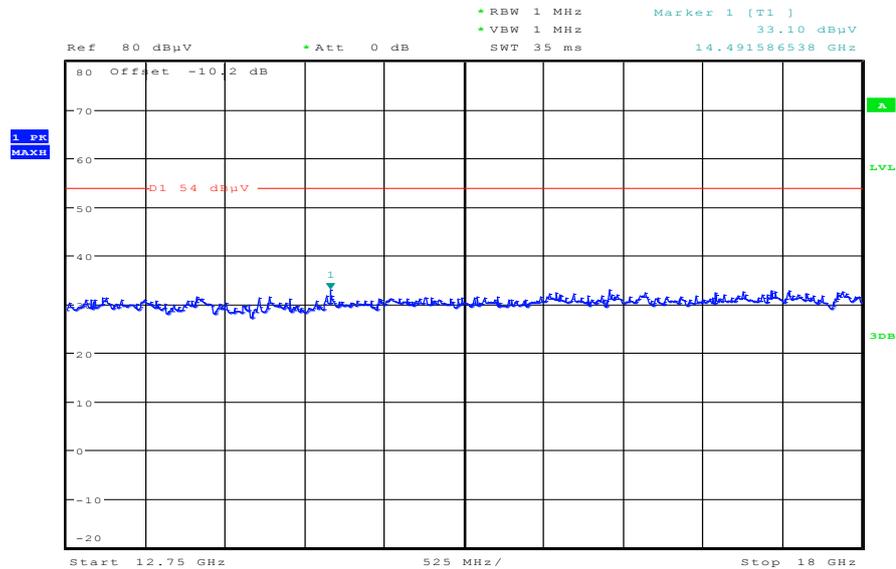


Date: 12.JUL.2012 13:44:23

Plot 34: 18 GHz to 26 GHz, 5670 MHz, vertical & horizontal polarization

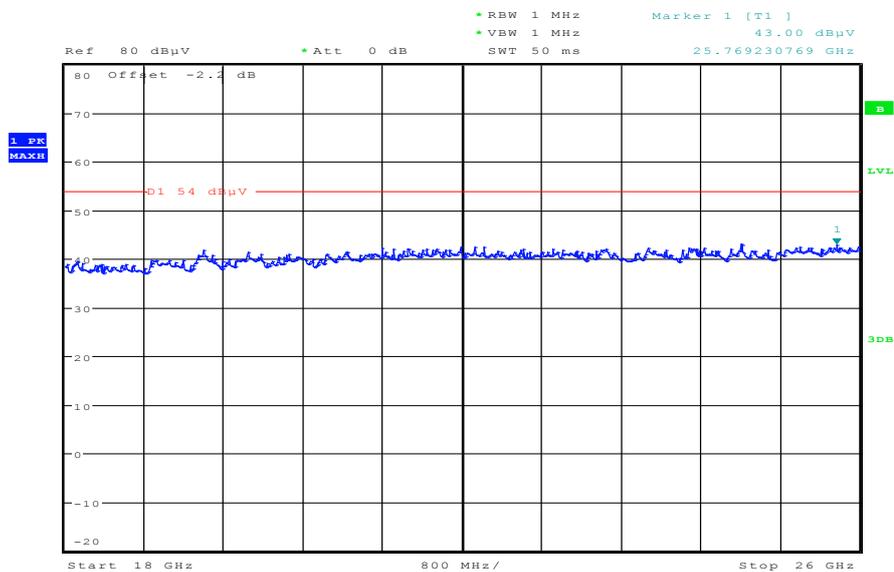

Date: 12.JUL.2012 13:47:24

Plot 35: 26 GHz to 40 GHz, 5670 MHz, vertical & horizontal polarization

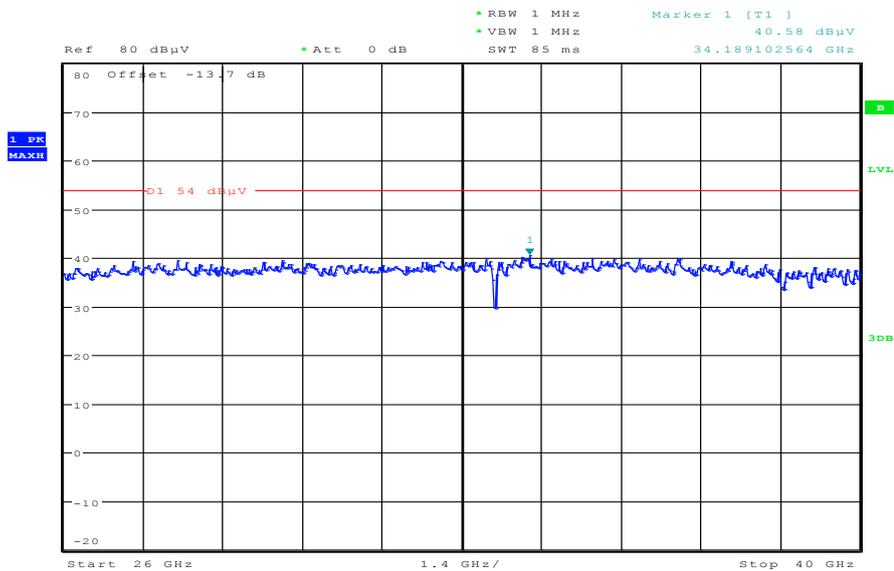

Date: 12.JUL.2012 15:11:11

## 9.10 RX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in idle/receive mode.

### Measurement:

Measurement parameter	
Detector:	Quasi Peak below 1 GHz (alternative Peak)  Peak above 1 GHz / RMS
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: ≥ 3 MHz /10 Hz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold / Average with 100 counts + 20 log (1 / X) for duty cycle lower than 100 %

### Limits:

RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

### Results:

RX Spurious Emissions Radiated [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	

**Result: Passed**

**Plots: RX / Idle – mode**

**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization


**Common Information**

EUT: PM-0140-BV  
 Serial Number: FCC rad 1 sample  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: W-LAN Idle mode + charging  
 Operator Name: Wolsdorfer  
 Comment: AC: 115 V / 60 Hz

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

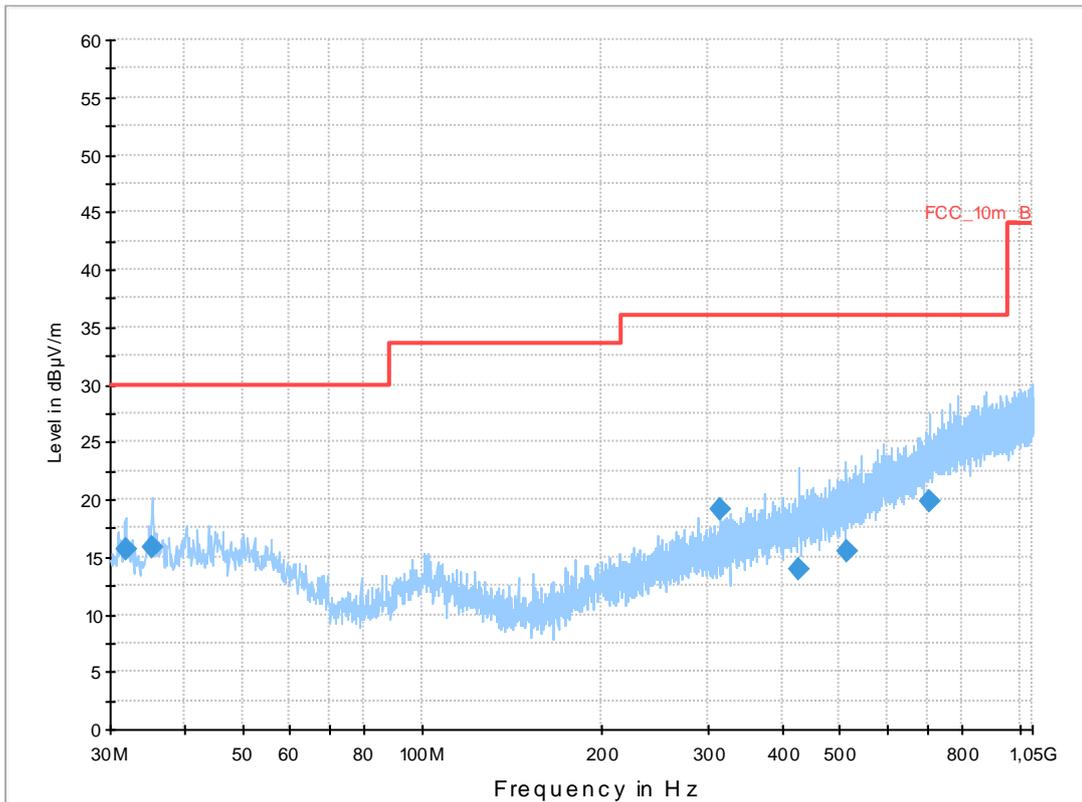


**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.911300	15.6	1000.0	120.000	163.0	V	10.0	12.7	14.4	30.0	
35.370900	15.8	1000.0	120.000	170.0	V	92.0	13.1	14.2	30.0	
314.998800	19.1	1000.0	120.000	170.0	V	180.0	15.0	16.9	36.0	
427.929150	13.9	1000.0	120.000	98.0	H	100.0	17.3	22.1	36.0	
512.479800	15.4	1000.0	120.000	170.0	H	-10.0	18.9	20.6	36.0	
706.853850	19.9	1000.0	120.000	170.0	V	-10.0	22.7	16.1	36.0	

Plot 2: 1 GHz to 12.75 GHz, vertical & horizontal polarization

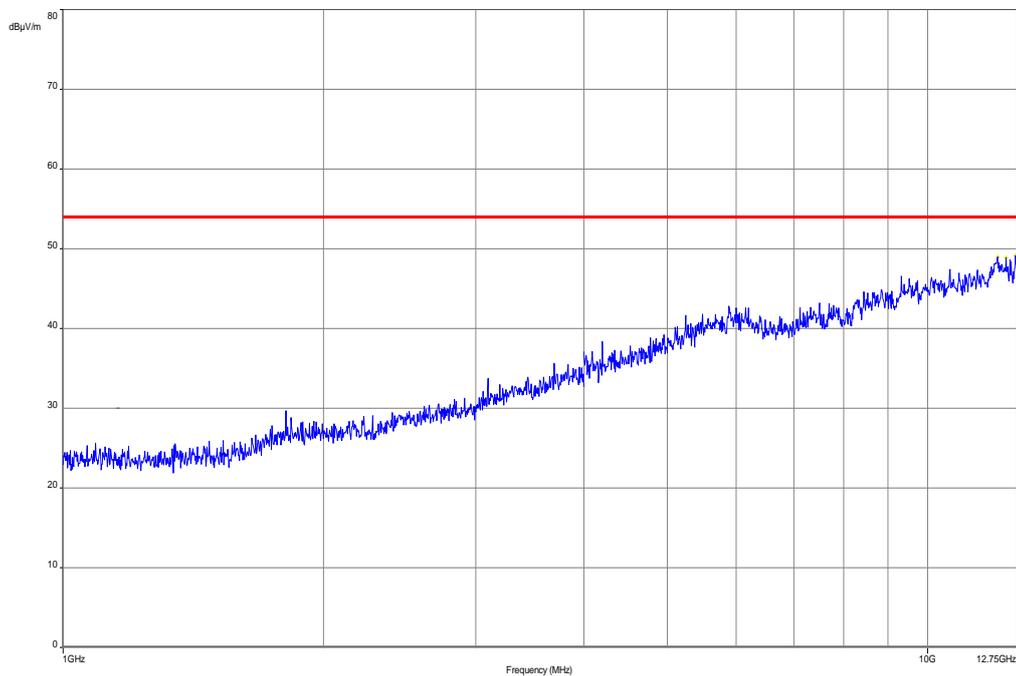


Plot 3: 12.75 GHz to 18 GHz, vertical & horizontal polarization

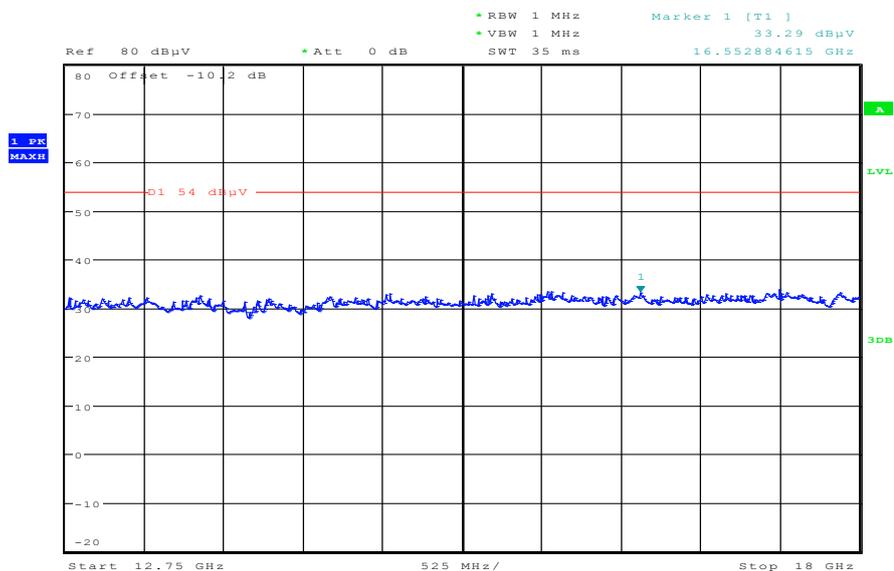


Date: 12.JUL.2012 13:19:20

Plot 4: 18 GHz to 26 GHz, vertical & horizontal polarization

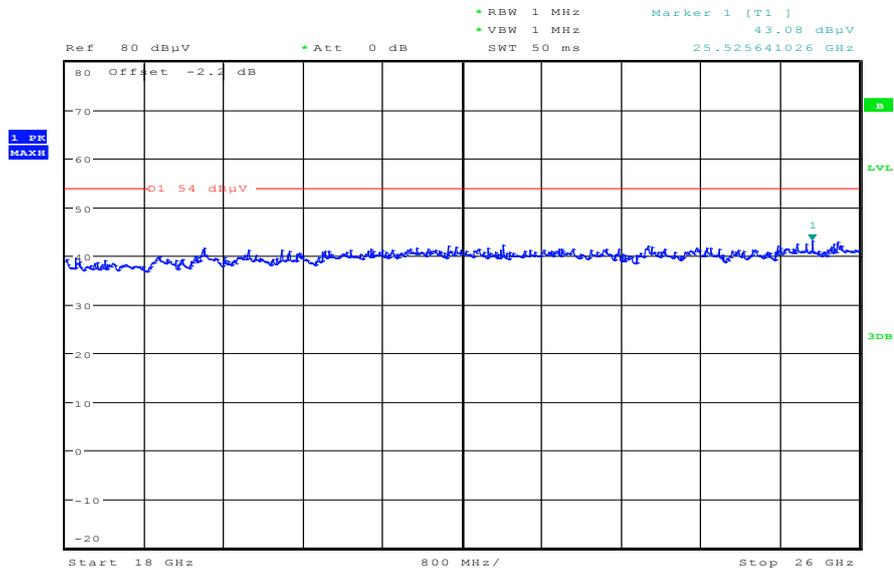

Date: 12.JUL.2012 14:25:02

Plot 5: 26 GHz to 40 GHz, vertical & horizontal polarization

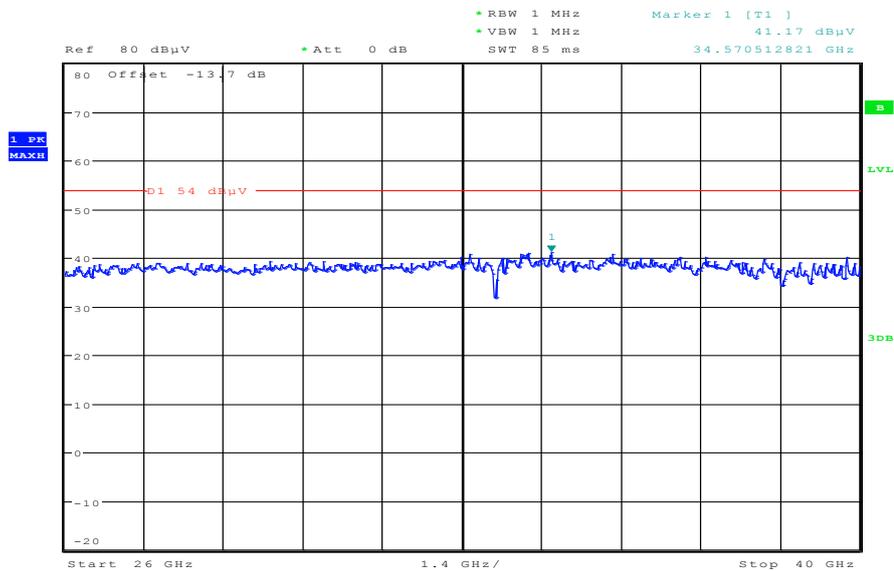

Date: 12.JUL.2012 14:50:22

### 9.11 Spurious emissions radiated < 30 MHz

**Description:**

Measurement of the radiated spurious emissions in transmit mode and receive mode below 30 MHz. The EUT is set first to middle channel. This measurement is representative for all channels and modes. If critical peaks are found channel Low and channel High will be measured too. Then the EUT is set to receive or idle mode. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

**Measurement:**

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

**Limits:**

TX Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


**Results:**

TX Spurious Emissions Radiated < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	


**Result: Passed**

**Plots:**

**Plot 1: 9 kHz to 30 MHz, TX mode**

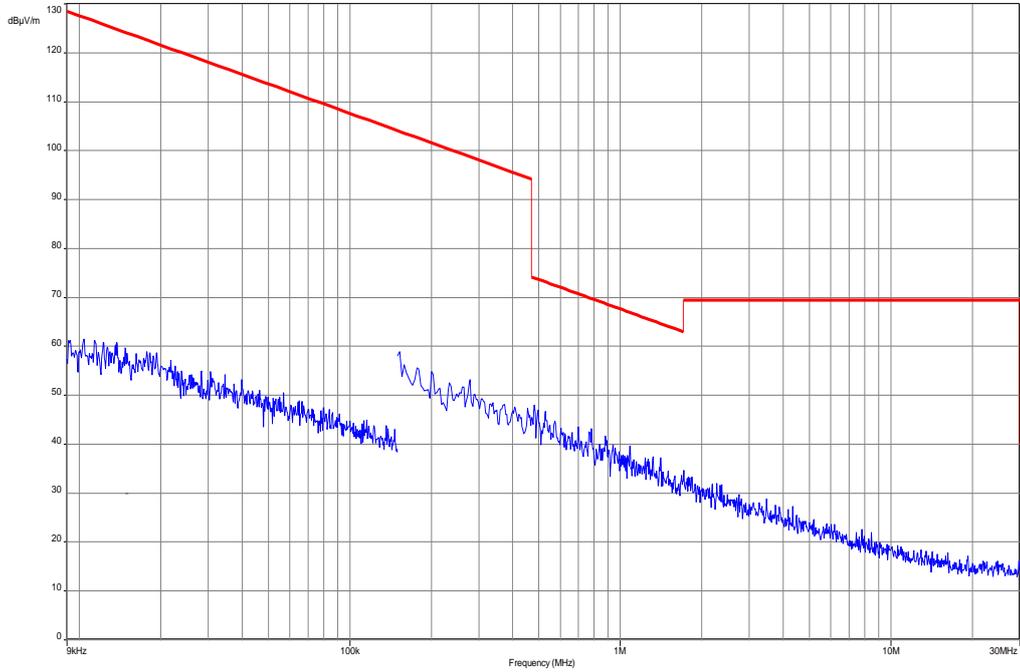

**Plot 2: 9 kHz to 30 MHz, RX mode**

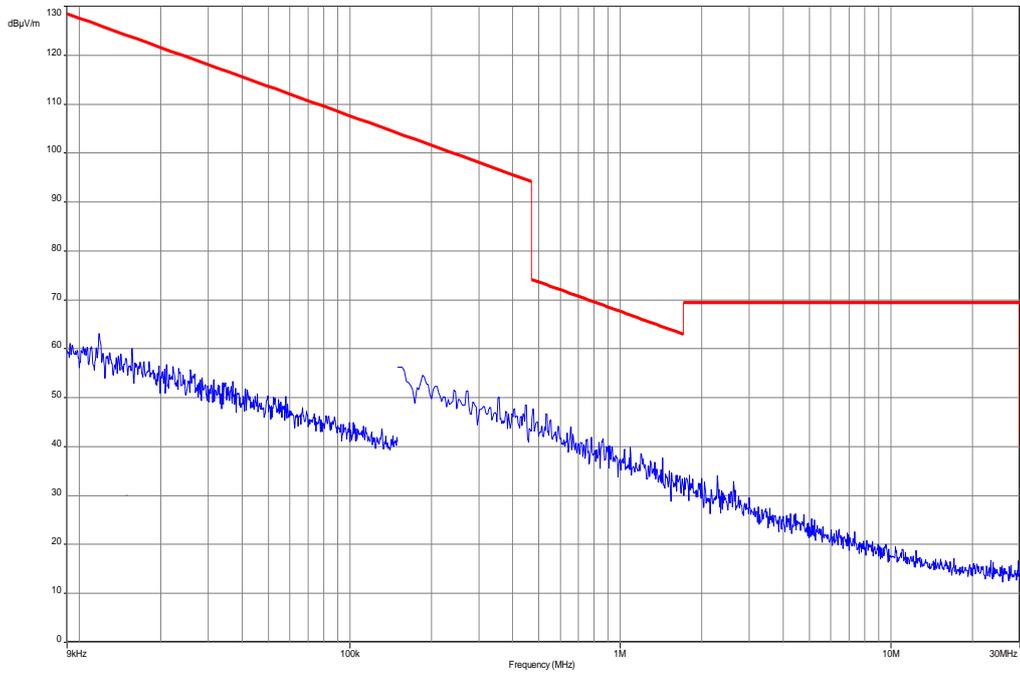

## 9.12 Spurious emissions conducted < 30 MHz

### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel. If critical peaks are found channel Low and channel High will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

### Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

### Limits:

TX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

\*Decreases with the logarithm of the frequency


### Results:

TX Spurious Emissions Conducted < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	


**Result: Passed**

**Plots:**


**Plot 1: 9 kHz to 30 MHz / phase Line, TX mode**

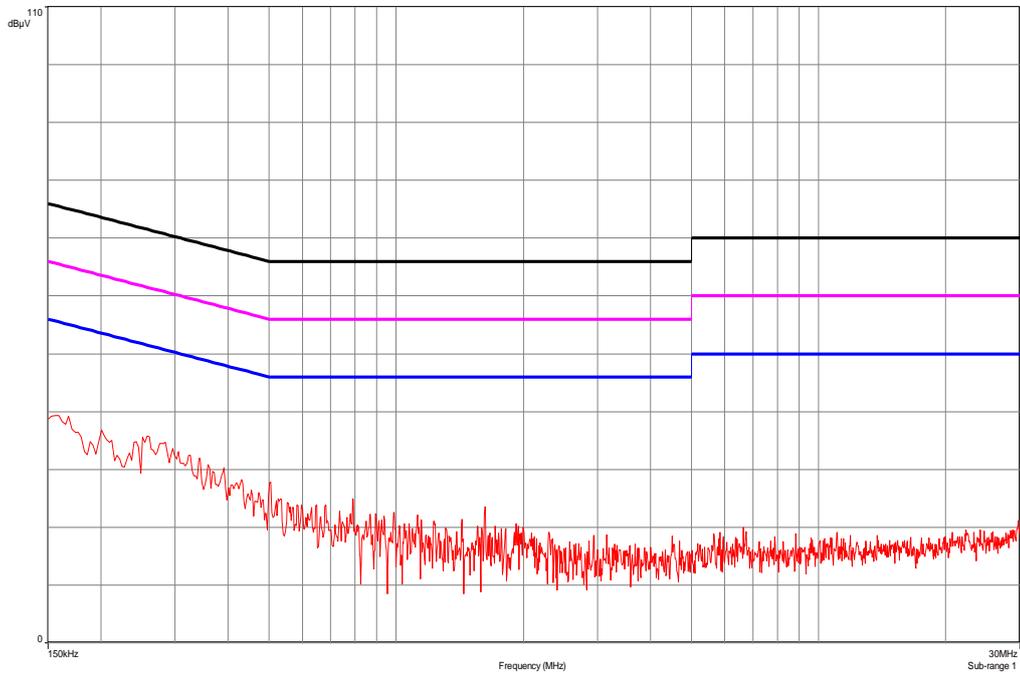


**Plot 2: 9 kHz to 30 MHz / neutral Line, TX mode**

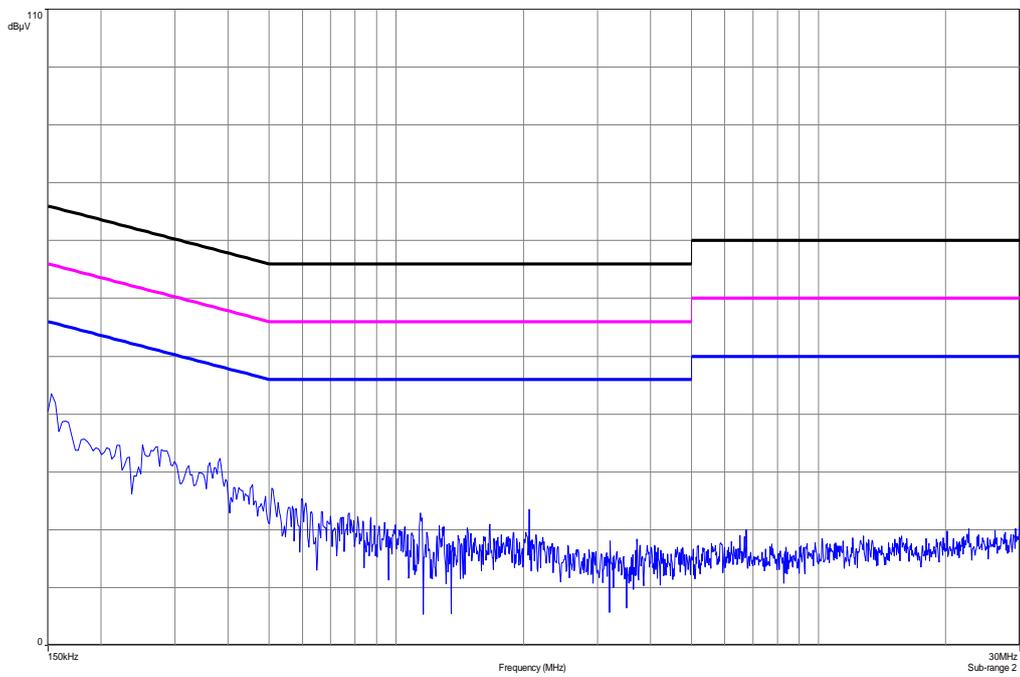

Plot 3: 9 kHz to 30 MHz / phase Line, RX mode

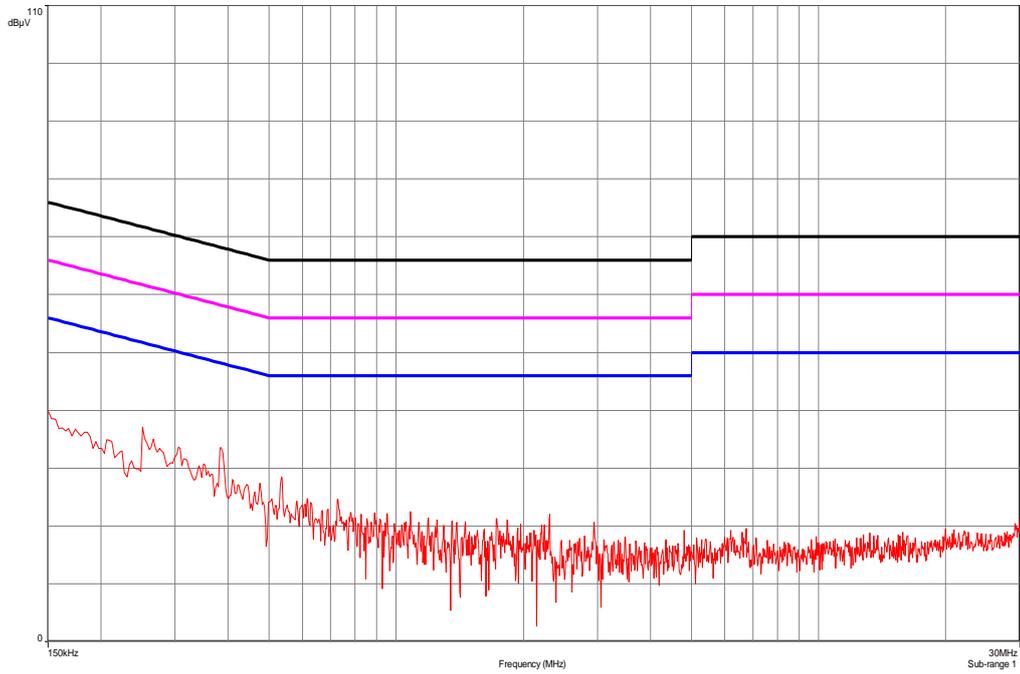

Plot 4: 9 kHz to 30 MHz / neutral Line, RX mode

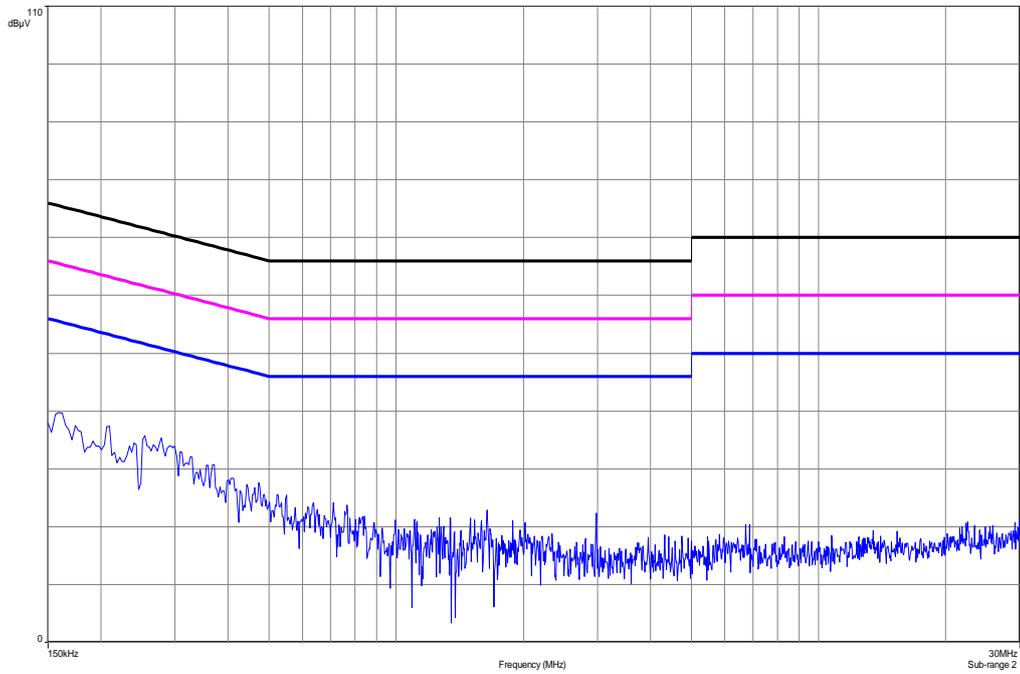

## 10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B597 9	300000210	ne		
4	n. a.	EMI Test Receiver	ESCI 1166.5950. 03	R&S	100083	300003312	k	04.01.2012	04.01.2013
5	n. a.	Analyzer- Reference- System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013
6	n. a.	Amplifier	JS42- 00502650- 28-5A	MITEQ	1084532	300003379	ev		
7	n. a.	Antenna Tower	Model 2175	ETS- LINDGREN	64762	300003745	izw		
8	n. a.	Positioning Controller	Model 2090	ETS- LINDGREN	64672	300003746	izw		
9	n. a.	Turntable Interface-Box	Model 105637	ETS- LINDGREN	44583	300003747	izw		
10	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbe ck	295	300003787	k		
11	n. a.	Spectrum- Analyzer	FSU26	R&S	200809	300003874	k	06.01.2012	06.01.2014
12	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
13	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	11.05.2011	11.05.2013
14	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
15	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
16	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
17	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
18	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
19	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
20	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
21	n. a.	Amplifier	js42- 00502650- 28-5a	Parzich GMBH	928979	300003143	ne		
22	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbe ck	371	300003854	vIKI!	14.10.2011	14.10.2014
23	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologi es	MY51210197	300004405	k	19.12.2011	19.12.2012
24	CR 79	Std. Gain Horn Antenna 26.5-	V637	Narda	7911	300001751	ne		

		40.0 GHz							
25	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000787	ne		
26	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300002442	ne		
27	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	ve		
28	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
29	n. a.	Broadband Low Noise Amplifier 18-50 GHz	CBL19503 070-XX	CERNEX	19338	300004273	ne		

**Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval	*)	next calibration ordered / currently in progress
NK!	Attention: not calibrated		

## 11 Observations

No observations exceeding those reported with the single test cases have been made.

## Annex D Document history

Version	Applied changes	Date of release
1.0	Initial release	2012-07-13
-A	New standard version	2012-08-30

## Annex E Further information

### Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

**Annex F Accreditation Certificate**



Front side of certificate



Back side of certificate

**Note:**

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

[http://www.cetecom.com/fileadmin/de/CETECOM\\_D\\_Saarbruecken/accreditations\\_Jan\\_2010/DAKKS\\_Akkredi\\_Urk\\_EN17025-En\\_incl\\_Annex.pdf](http://www.cetecom.com/fileadmin/de/CETECOM_D_Saarbruecken/accreditations_Jan_2010/DAKKS_Akkredi_Urk_EN17025-En_incl_Annex.pdf)