

**TEST REPORT  
FROM  
RFI GLOBAL SERVICES LTD**

Test of: ST27a

FCC ID: PY7PM-0100

IC ID: 4170B-PM-0100

To: OET Bulletin 65 Supplement C: (2001-01)  
and RSS-102 Issue 4 March 2010)

Test Report Serial No:  
RFI-SAR-RP87693JD02A V3.0  
Version 3.0 Supersedes All Previous Versions

This Test Report Is Issued Under The Authority  
Of Chris Guy, Head of Global Approvals:



(APPROVED SIGNATORY)

Checked By: Richelieu Quoi



(APPROVED SIGNATORY)

Issue Date:

29 June 2012

Test Dates:

26 May 2012 to 02 June 2012

This report is issued in portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

The Bluetooth® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by RFI Global Services Ltd. is under license. Other trademarks and trade names are those of their respective owners.



This page has been left intentionally blank.

---

## TABLE OF CONTENTS

1. Customer Information.....	5
2. Equipment Under Test (EUT).....	6
3. Test Specification, Methods and Procedures .....	13
4. Deviations from the Test Specification .....	15
5. Operation and Configuration of the EUT during Testing .....	16
6. Summary of Test Results .....	18
7. Measurements, Examinations and Derived Results .....	21
8. Measurement Uncertainty .....	47
Appendix 1. Test Equipment Used .....	54
Appendix 2. Measurement Methods .....	58
Appendix 3. SAR Distribution Scans .....	60
Appendix 4. Photographs.....	164
Appendix 5. System Check .....	197
Appendix 6. Simulated Tissues.....	204

**1. Customer Information**

<b>Company Name:</b>	Sony Mobile Communications AB
<b>Address:</b>	Nya Vattentorget 22188 Lund Sweden

## 2. Equipment Under Test (EUT)

### 2.1. Identification of Equipment Under Test (EUT)

<b>Description:</b>	Mobile Handset
<b>Brand Name:</b>	Sony
<b>Model Name or Number:</b>	ST27a
<b>Serial Number:</b>	CB5A1JZ8WU
<b>Type Number:</b>	PM-0100-BV
<b>IMEI Number:</b>	00440214-542402-8
<b>Hardware Version Number:</b>	AP1
<b>Software Version Number:</b>	6.0.B.3.20
<b>Hardware Revision of GSM Module:</b>	None Specified
<b>Software Revision of GSM Module:</b>	None Specified
<b>FCC ID Number:</b>	PY7PM-0100
<b>IC Number:</b>	4170B-PM-0100
<b>Country of Manufacture:</b>	China
<b>Date of Receipt:</b>	25 May 2012

#### Note(s):

This sample was used to perform WWAN GSM850 and UMTS FDD V SAR evaluation measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna < 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

**Identification of Equipment Under Test (EUT) (Continued)**

<b>Description:</b>	Mobile Handset
<b>Brand Name:</b>	Sony
<b>Model Name or Number:</b>	ST27a
<b>Serial Number:</b>	CB5A1JZ8YP
<b>Type Number:</b>	PM-0100-BV
<b>IMEI Number:</b>	00440214-501805-0
<b>Hardware Version Number:</b>	AP1
<b>Software Version Number:</b>	6.0.B.3.20
<b>Hardware Revision of GSM Module:</b>	None Specified
<b>Software Revision of GSM Module:</b>	None Specified
<b>FCC ID Number:</b>	PY7PM-0100
<b>IC Number:</b>	4170B-PM-0100
<b>Country of Manufacture:</b>	China
<b>Date of Receipt:</b>	25 May 2012

**Note(s):**

This sample was used to perform WWAN PCS1900 and UMTS FDD II SAR evaluation measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna < 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

In order to perform conducted power measurement this sample back cover was removed and replaced with a modified back cover to allow for this. The detail below is for the modified back cover:

<b>Serial Number (Conducted Cover):</b>	CB5A1K50Z1
<b>IMEI Number (Conducted Cover):</b>	00440214-542699-9

**Identification of Equipment Under Test (EUT) (Continued)**

<b>Description:</b>	Mobile Handset
<b>Brand Name:</b>	Sony
<b>Model Name or Number:</b>	ST27a
<b>Serial Number:</b>	CB5A1JZ8SS
<b>Type Number:</b>	PM-0100-BV
<b>IMEI Number:</b>	00440214-501709-5
<b>Hardware Version Number:</b>	AP1
<b>Software Version Number:</b>	s_atp_Lotus_0_0_101_d
<b>Hardware Revision of GSM Module:</b>	None Specified
<b>Software Revision of GSM Module:</b>	None Specified
<b>FCC ID Number:</b>	PY7PM-0100
<b>IC Number:</b>	4170B-PM-0100
<b>Country of Manufacture:</b>	China
<b>Date of Receipt:</b>	25 May 2012

**Note(s):**

This sample was used to perform WLAN Head SAR evaluation measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna < 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

<b>Description:</b>	Mobile Handset
<b>Brand Name:</b>	Sony
<b>Model Name or Number:</b>	ST27a
<b>Serial Number:</b>	CB5A1JZ92D
<b>Type Number:</b>	PM-0100-BV
<b>IMEI Number:</b>	00440214-501707-9
<b>Hardware Version Number:</b>	AP1
<b>Software Version Number:</b>	s_atp_Lotus_0_0_101_d
<b>Hardware Revision of GSM Module:</b>	None Specified
<b>Software Revision of GSM Module:</b>	None Specified
<b>FCC ID Number:</b>	PY7PM-0100
<b>IC Number:</b>	4170B-PM-0100
<b>Country of Manufacture:</b>	China
<b>Date of Receipt:</b>	25 May 2012

**Note(s):**

This sample was used to perform WLAN Body SAR evaluation measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna < 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

In order to perform conducted power measurement this sample back cover was removed and replaced with a modified back cover to allow for this. The detail below is for the modified back cover:

<b>Serial Number (Conducted Cover):</b>	CB5A1K50Z8
<b>IMEI Number (Conducted Cover):</b>	00440214-542674-2



## 2.2. Description of EUT

The Equipment Under Test is a Smart Mobile Phone with GSM 2G Quad Band, 3G Tri band and Wi-Fi. The EUT has GPRS / EDGE Class 33, UMTS FDD I, II and V With HSPA, WLAN 802.11 b/g/n and Bluetooth and 'Wi-Fi Hotspot Auto RF Power Reduction' mode capabilities.

## 2.3. Modifications Incorporated in the EUT

EUT (IMEI: 00440214-542402-8) was setup for WWAN GSM850 and UMTS FDD V SAR test only.  
EUT (IMEI: 00440214-501805-0) was setup for WWAN PCS1900 and UMTS FDD II SAR test only.  
EUT (IMEI: 00440214-501805-0) with Back Cover (IMEI: 00440214-542699) was setup for WWAN conducted power measurements only.  
EUT (IMEI: 00440214-501709-5) was setup for WLAN Head SAR test only.  
EUT (IMEI: 00440214-501707-9) was setup for WLAN Body SAR test only.  
EUT (IMEI: 00440214-501707-9) with Back Cover (IMEI: 00440214-542674-2) was setup for WLAN conducted power measurements only.

## 2.4. Accessories

The following accessories were supplied with the EUT during testing:

<b>Description:</b>	Personal Hands-Free Kit (PHF)
<b>Brand Name:</b>	Sony
<b>Model Name or Number:</b>	MH750
<b>Serial Number:</b>	12060C160061850
<b>Cable Length and Type:</b>	~1.2m
<b>Country of Manufacture:</b>	China
<b>Connected to Port</b>	3.5mm Audio Jack

## 2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

<b>Description:</b>	Wireless Communication Test Set
<b>Brand Name:</b>	Agilent
<b>Model Name or Number:</b>	8960 Series 10
<b>Serial Number:</b>	GB46311280
<b>Cable Length and Type:</b>	~4.0m Utiflex Cable
<b>Connected to Port:</b>	RF (Input / Output) Air Link

<b>Description:</b>	Wireless Communication Test Set
<b>Brand Name:</b>	Agilent
<b>Model Name or Number:</b>	8960 Series 10
<b>Serial Number:</b>	MY50261230
<b>Cable Length and Type:</b>	~4.0m Utiflex Cable
<b>Connected to Port:</b>	RF (Input / Output) Air Link

<b>Description:</b>	Wireless Communication Test Set
<b>Brand Name:</b>	Agilent
<b>Model Name or Number:</b>	8960 Series 10
<b>Serial Number:</b>	GB462000666
<b>Cable Length and Type:</b>	~4.0m Utiflex Cable
<b>Connected to Port:</b>	RF (Input / Output) Air Link

**2.6. Additional Information Related to Testing**

<b>Equipment Category</b>	GSM/GPRS/EDGES850, EGSM/GPRS/EDGE900, DCS/GPRS/EDGE1800, PCS1900/GPRS/EDGE1900, UMTS FDD I, II, V, WiFi802.11 b/g/n, <i>Bluetooth</i> .	
<b>Type of Unit</b>	Portable Transceiver	
<b>Intended Operating Environment:</b>	Within GSM, UMTS and Wi-Fi Coverage	
<b>Transmitter Maximum Output Power Characteristics:</b>	GSM850	Communication Test Set was configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5.
	PCS1900	Communication Test Set was configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0.
	UMTS Band II	Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
	UMTS Band V	Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
	Wi-Fi 802.11b/g/n	Communication Test Set was configured to allow the EUT to transmit at a maximum power of up to 16.0 dBm.
	Bluetooth	<10 dBm
<b>Transmitter Frequency Range:</b>	GSM850	824 to 849 MHz
	PCS1900	1850 to 1910 MHz
	UMTS Band II	1852 to 1908 MHz
	UMTS Band V	826 to 847 MHz
	WiFi802.11b/g/n	2412 to 2462 MHz

**Additional Information Related to Testing (Continued)**

Transmitter Frequency Allocation of EUT When Under Test:	Channel Number	Channel Description	Frequency (MHz)
	128	Low	824.2
	190	Middle	836.6
	251	High	848.8
	512	Low	1850.2
	661	Middle	1880.0
	810	High	1909.8
	9262	Low	1852.4
	9400	Middle	1880.0
	9538	High	1907.6
	4132	Low	826.4
	4183	Middle	836.6
	4233	High	846.6
	1	Low	2412.0
	6	Middle	2437.0
	11	High	2462.0
<b>Modulation(s):</b>	GMSK (GSM/ GPRS): 217 Hz QPSK(UMTS / HSDPA/HSPA):0Hz DBPSK, CCK (Wi-Fi): 0 Hz		
<b>Modulation Scheme (Crest Factor):</b>	GSMK (GSM): 8.3 GMSK (GPRS): 2.67 QPSK(UMTS / HSDPA/HSPA):0Hz DBPSK, CCK (Wi-Fi): 1		
<b>Antenna Type:</b>	Internal integral		
<b>Antenna Length:</b>	Unknown		
<b>Number of Antenna Positions:</b>	2 fixed (WWAN and Wi-Fi)		
<b>Power Supply Requirement:</b>	3.7V		
<b>Battery Type(s):</b>	Li-ion		

### 3. Test Specification, Methods and Procedures

#### 3.1. Test Specification

<b>Reference:</b>	OET Bulletin 65 Supplement C: (2001-01)
<b>Title:</b>	Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
<b>Purpose of Test:</b>	To determine whether the equipment met the basic restrictions as defined in OET Bulletin 65 Supplement C: (2001-01) using the SAR averaging method as described in the test specification above.
<b>Reference:</b>	RSS-102 Issue 4 March 2010
<b>Title:</b>	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
<b>Purpose of Test:</b>	To determine whether the equipment met the basic restrictions as defined in RSS-102 Issue 4 March 2010 using the SAR averaging method as described in the test specification above.

### 3.2. Methods and Procedures Reference Documentation

The methods and procedures used were as detailed in:

Federal Communications Commission, —Evaluating compliance with FCC Guidelines for human exposure to radio frequency electromagnetic fields”, OET Bulletin 65 Supplement C, FCC, Washington, D.C, 20554, 2001.

Thomas Schmid, Oliver Egger and Neils Kuster, —Automated E-field scanning system for dosimetric assessments”, IEEE Transaction on microwave theory and techniques, Vol. 44, pp. 105-113, January 1996.

Neils Kuster, Ralph Kastle and Thomas Schmid, —Dosimetric evaluation of mobile communications equipment with know precision”, IEICE Transactions of communications, Vol. E80-B, No.5, pp. 645-652, May 1997.

EN 62209-1: 2006

Title: Basic standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz).

EN 62209-2:2010

Human exposure to radio frequency fields from handheld and body mounted wireless communication devices — Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) (IEC 62209-2:2010)

KDB 248227 D01 "SAR measurements for 802.11a/b/g v01r02"

KDB 447498 D01 —Mobile Portable RF Exposure v04"

KDB 648474 D01 SAR Handsets Multi Xmitter and Ant v01r05"

KDB 941225 D03 "SAR Test Reduction GSM/GPRS/EDGE v01"

KDB 941225 D06 "Hot Spot SAR v01"

The version of DASY system used by RFI for SAR measurements is v4.7.

The SAR probe for the DASY v4.4 and higher has a validity of +/- 100 MHz from the spot frequency at which the system is calibrated.

The system validation performed at 900 MHz is valid for 800 MHz to 1000 MHz which covers the 850 MHz band. The probe calibration for SN3814 and SN: 1528 was performed at the spot frequencies of 750 MHz and 900 MHz. The SAR software selects the conversion factor based on the following attributes; 1. The operating frequency 2. The measured permittivity imported to the software and 3. The measured conductivity imported to the software.

The 900 MHz system check is applicable for the 850 band as this is within 100 MHz of the of the 850 MHz spot frequency.

As per FCC KDB pub 450824 for SAR probe calibration; The following procedures are recommended for DUT measurements at 150 MHz to 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. Measurements exceeding 50 % of these intervals, in this case +/- 50 MHz, EUT frequency greater than or equal to 300 MHz, shall apply method 1 of the steps.

1) When the actual tissue dielectric parameters used for probe calibration are available the differences for relative permittivity and conductivity between probe calibration and routine measurements should each be less than or equal to 5 % while also satisfying the required +/- 5 % tolerances in target dielectric parameters.

The simulation liquid used satisfies both 835 MHz and 900 MHz target values for all channels in the GSM850 band. The SAR probe coverage and conversion factor has been calibrated to ensure this condition is met and the appropriate conversion factor is used in the frequency range for up to +/- 100 MHz.

### 3.3. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

#### 4. Deviations from the Test Specification

Test was performed as per KDB 648474 D01 —SAR Handsets Multi Xmitter and Ant v01r05", KDB 941225 D01/D03 "SAR Test Reduction GSM/GPRS/EDGE v01", KDB 941225 D01 "SAR test for 3G v02", KDB 248227 D01 "SAR measurements for 802.11a/b/g v01r02" and KDB 941225 D06 "Hot Spot SAR v01" according to the handset procedures in IEEE Std 1528-2003 and OET Bulletin 65 Supplement C 01-01. The assessment for Personal Wireless Hotspot was also evaluated as per the FCC KDB 941225 D06 "Hot Spot SAR v01".

For technologies bands supporting personal hotspot mode, SAR was evaluated on all the sides and surfaces within 25mm of the transmitting antenna (WWAN or WLAN) as per FCC KDB 941225 D06 "Hot Spot SAR v01".

SAR test was performed in the middle channels for WWAN and WLAN. The worst case configuration for both Head and Body test was evaluated in the low and high channels.

GPRS class33 / uplink setup of 1-uplink; 2-uplink, 3-uplink and 4-uplink were all evaluated to find the setting with the highest power reference point (unit v/m) as per the DASY4 system. 3-uplink was found to give the highest power reference point measurement on the DASY4 system (unit v/m). All settings were performed with the device in a fixed position Back facing phantom at 0mm separation to ensure there were no positioning errors. The following values were measured relative to the uplink settings:

GPRS Mode	GPRS850 Power (v/m)	GPRS1900 Power (v/m)
1 uplink	16.34	15.60
2 uplink	16.56	15.22
<b>3 uplink</b>	<b>17.18</b>	<b>16.01</b>
4 uplink	16.70	15.70

Note: Power reference point measurements are from the DASY4 system and used to check the device power drift although the units are v/m. For informational purpose to ensure the worst case uplink time slot is also verified by the DASY4 SAR system, this was use as per above comment at a fixed point.

## 5. Operation and Configuration of the EUT during Testing

### 5.1. Operating Modes

The EUT was tested in the following operating mode(s) unless otherwise stated:

- GSM850 – Voice allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5.
- GPRS850 – Data allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5. Tested using 3 Uplink time slots with CS1 for GPRS.
- PCS1900 – Voice allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0.
- GPRS1900 – Data allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0. Tested using 3 Uplink time slots with CS1 for GPRS.

GSM85 – Power Table Settings used for Test Set	
Power Control Level PCL	Nominal Power (dBm)
0 ... 2	39
3	37
4	35
<b>5</b>	<b>33</b>
6	31
7	29
8	27
9	25
10	23
11	21
12	19
13	17
14	15
15	13
16	11
17	9
18	7
19 ... 31	5

PCS1900 – Power Table Settings used for Test Set	
Power Control Level PCL	Nominal Power (dBm)
22 ... 29	Reserved
30	33
31	32
<b>0</b>	<b>30</b>
1	28
2	26
3	24
4	22
5	20
6	18
7	16
8	14
9	12
10	10
11	8
12	6
13	4
14	2
15	0
16 ... 21	Reserved

- UMTS FDD II & V Call allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum as per KDB 941225 D01.
- WiFi802.11b/g/n Data allocated mode using 'HyperTerminal' software to excise mode b<sup>i</sup>, g<sup>i</sup> and n<sup>i</sup>, with maximum power of up to 16.0 dBm for b<sup>i</sup> mode and 16.0 dBm for g<sup>i</sup> and 16.0 dBm for n<sup>i</sup> modes.



## 5.2. Configuration and Peripherals

The EUT was tested in the following configuration(s) unless otherwise stated:

- Test performed with the EUT in a Standalone Battery Powered configuration.
- GPRS class 33 uplink setup of 1-uplink, 2-uplink, 3-uplink and 4-uplink were all evaluated to find the setting with the highest power reference measurements. 3-uplink was found to give the highest power reference measurement on the DASY4 system. All testing were performed with the device in a fixed position to ensure there were no positioning errors.
- The applied configurations for hotspot orientations where the corresponding edge(s) is closest to the user with the most conservative exposure condition were all evaluated at 10 mm from the body as Personal Hotspot mode was supported. Therefore SAR test at 15 mm for configuration that overlapped with the Personal hotspot configuration were not evaluated.

### Head Configuration

- a) The handset was placed in a normal operating position with the centre of the ear-piece aligned with the ear canal on the phantom.
- b) With the ear-piece touching the phantom the centre line of the handset was aligned with an imaginary plane (X and Y axis) consisting of three lines connecting both ears and the mouth.
- c) For the cheek position the handset was gradually moved towards the cheek until any point of the mouth-piece or keypad touched the cheek.
- d) For the tilted position the EUT was positioned as for the cheek position, and then the horizontal angle was increased by fifteen degrees (the phone keypad was moved away from the cheek by fifteen degrees).
- e) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimise the drift.
- f) The device was keyed to operate continuously in the transmit mode for the duration of the test.
- g) The location of the maximum spatial SAR distribution (hot spot) was determined relative to the EUT and its antenna.
- h) The EUT was transmitting at full power throughout the duration of the test powered by a fully charged battery.

### Body Configuration

- a) The EUT was placed in a normal operating position where the centre of EUT was aligned with the centre reference point on the flat section of the 'SAM' phantom.
- b) With the EUT touching the phantom at an imaginary centre line. The EUT was aligned with a marked plane (X and Y axis) consisting of two lines.
- c) For the touch-safe position the EUT was gradually moved towards the flat section of the 'SAM' phantom until any point of the EUT touched the phantom.
- d) For position(s) greater than 0mm separation the EUT was positioned as per the touch-safe position, and then the vertical height was decreased/adjusted as required.
- e) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimise the drift.
- f) The device was keyed to operate continuously in the transmit mode for the duration of the test.
- g) The location of the maximum spatial SAR distribution (hot spot) was determined relative to the EUT and its antenna.
- h) The EUT was transmitting at full power throughout the duration of the test powered by a fully charged battery.

## 6. Summary of Test Results

Test Name	Specification Reference	Result
Specific Absorption Rate-GSM 850 Head Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-GPRS 850 Hotspot Mode Configuration 1g POWER BACK-OFF Enabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-GPRS 850 Body-worn Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate GSM 850 Body-worn Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-PCS 1900 Head Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-GPRS 1900 Hotspot Mode Configuration 1g POWER BACK-OFF Enabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-GPRS 1900 Body-worn Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-GSM 1900 Body-worn Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-UMTS-FDD II Head Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-UMTS-FDD II Hotspot Mode Configuration 1g POWER BACK-OFF Enabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-UMTS-FDD II Body-worn Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-UMTS-FDD V Head Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-UMTS-FDD V Hotspot Mode Configuration 1g POWER BACK-OFF Enabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-UMTS-FDD V Body-worn Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-Wi-Fi 2450 Head Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-Wi-Fi 2450 Hotspot Mode Configuration 1g POWER BACK-OFF Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied

**Summary of Test Results (Continued)****SAR Individual Transmitter Evaluation Measurements**

Device, mode	Frequency, (MHz)	Phantom Configuration	P <sub>x</sub> (mW)	P <sub>REF</sub> (mW)	single SAR, W/kg	Remarks
WWAN, GSM	850	Back	257	60/f	1.140	Routine Evaluation
WWAN, UMTS	850	Touch Left	230	60/f	1.100	Routine Evaluation
WWAN, GSM	1900	Touch Left	162	60/f	0.851	Routine Evaluation
WWAN, UMTS	1900	Touch Left	191	60/f	1.070	Routine Evaluation
WLAN, WiFi802.11b/g	2450	Back	40	60/f	0.294	Routine Evaluation
BT, Bluetooth	2400	-	~10	12	:=0	{P <sub>BT</sub> ≤ 2P <sub>REF</sub> } {d <sub>WWAN, BT</sub> < 5cm}

**Note(s):**

1. Simultaneous transmission was not evaluated as the sum of the individual SAR for WWAN and WLAN was < 1.6 W/kg.
2. Bluetooth transmitter thresholds output power —P<sub>Ref</sub> = 12 mW as listed in KDB 648474.
3. P<sub>x</sub>: power level measured by RFI.
4. Single SAR value measured by RFI.
5. The Antenna-to-Antenna distance and Antenna-to-User distance were provided by the customer.

**SAR Simultaneous Transmitter Evaluation**

(x,y)	D(x,y) cm	L(x,y) cm	SPLSR <sub>xy</sub>	Sim-Tx SAR	Remarks
(WWAN <sub>GSM</sub> , BT)	<5	N/A	N/A	N/A	{no stand-alone SAR for BT}
(WWAN <sub>GSM</sub> , Wi-Fi)	<5	N/A	N/A	N/A	{Σ <sub>WWAN, WLAN</sub> < 1.6 W/kg}

**Summary of Test Results (Continued)****SAR Scale-Up Worst case Configuration Measurements per Technology Bands:**

Technology Mode	Config	Channel Number	Mode	Meas output power <sup>1</sup> [dBm]	Max Rated Power <sup>2</sup> [dBm]	Measured SAR(W/kg)	Calculated Scaled SAR(W/kg)
						1g mass	1g mass
GSM850	Head	251	Voice	24.10	24.47	1.060	1.154
	Hotspot	251	Data	21.90	21.24	0.746	0.641
	Body-worn	251	Data	24.90	24.74	1.140	1.099
GSM1900	Head	810	Voice	21.90	21.97	0.851	0.865
	Hotspot	810	Data	19.00	18.74	0.519	0.489
	Body-worn	661	Voice	22.00	21.97	0.556	0.552
UMTS Band V	Head	4233	Data RMC	23.50	24.00	1.100	1.234
	Hotspot	4233	Data RMC	18.70	20.50	0.426	0.645
	Body-worn	4233	Data RMC	23.50	24.00	0.985	1.105
UMTS Band II	Head	9400	Data RMC	22.50	23.00	1.070	1.201
	Hotspot	9538	Data RMC	17.70	19.50	0.504	0.763
	Body-worn	9400	Data RMC	22.50	23.00	0.753	0.845
WiFi 802.11b	Head	11	Data	15.80	15.00	0.223	0.185
	Hotspot	11	Data	15.80	15.00	0.294	0.245

\*Maximum tolerance of  $\pm 5\%$  corresponds to 0.2dB included in Maximum rated power.

**Note(s):**

1. Meas output power (Source Base average power) level measured by RFI.
2. Max Rated power (Source Base average power) level measured by manufacturer.
3. Measured SAR value measured by RFI.
4. The "Maximum Rated Power" was provided by the customer.

**6.1. Location of Tests**

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG United Kingdom

## 7. Measurements, Examinations and Derived Results

### 7.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

**7.2. Test Results**

**For All SAR measurement in this report the SAR limit tested to is 1.6 W/kg**

**7.2.1. Specific Absorption Rate - GSM 850 Head Configuration 1g****POWER BACK-OFF Disabled****Test Summary:**

**Tissue Volume:** 1g

**Maximum Level (W/kg):** 1.060

**Environmental Conditions:**

**Temperature Variation in Lab (°C):** 24.0 to 24.0

**Temperature Variation in Liquid (°C):** 24.0 to 24.0

**Results:**

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	190	24.1	N/A	0.941	1	GMSK
Touch	Left	128	24.1	N/A	0.757	1	GMSK
Touch	Left	251	24.1	N/A	1.060	1	GMSK
Tilt	Left	190	24.1	N/A	0.574	1	GMSK
Touch	Right	190	24.1	N/A	0.884	1	GMSK
Touch	Right	128	24.1	N/A	0.744	1	GMSK
Touch	Right	251	24.1	N/A	0.996	1	GMSK
Tilt	Right	190	24.1	N/A	0.535	1	GMSK

**Note(s):**

1. Voice

### 7.2.2. Specific Absorption Rate - GPRS 850 Hotspot Mode Configuration 1g POWER BACK-OFF Enabled Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.746

#### Environmental Conditions:

Temperature Variation in Lab (°C): 24.0 to 24.0

Temperature Variation in Liquid (°C): 23.1 to 23.1

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	190	21.8	3.1	0.566	1, 2	GMSK
Back of EUT Open Facing Phantom	Flat (SAM)	190	21.8.	3.1	0.691	1, 2	GMSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	190	21.8	3.1	0.536	1, 2	GMSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	190	21.8	3.1	0.510	1, 2	GMSK
Bottom of EUT Facing Phantom	Flat (SAM)	190	21.8	3.1	0.107	1, 2	GMSK
Back of EUT Open Facing Phantom	Flat (SAM)	128	21.8	3.1	0.630	1, 2	GMSK
Back of EUT Open Facing Phantom	Flat (SAM)	251	21.9	3.0	0.746	1, 2	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

\*KDB 941225 - SAR is not required for EDGE channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding GPRS channels.

### 7.2.3. Specific Absorption Rate - GPRS 850 Body-Worn Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	1.140

#### Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	23.1 to 23.1

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	190	24.9	N/A	1.080	1, 2, 3	GMSK
Back of EUT Facing Phantom	Flat (SAM)	128	24.9	N/A	0.949	1, 2, 3	GMSK
Back of EUT Facing Phantom	Flat (SAM)	251	24.9	N/A	1.140	1, 2, 3	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots
2. Worst case configuration (Back of EUT) from GPRS Hotspot Mode (POWER BACK-OFF Enabled) is used on GPRS body (POWER BACK-OFF Disabled).
3. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.

\*KDB 941225 - SAR is not required for EDGE channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding GPRS channels.



#### 7.2.4. Specific Absorption Rate - GSM 850 Body-Worn Configuration 1g POWER BACK-OFF Disabled

##### Test Summary:

Tissue Volume:	1g
----------------	----

Maximum Level (W/kg):	0.961
-----------------------	-------

##### Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
------------------------------------	--------------

Temperature Variation in Liquid (°C):	23.1 to 23.1
---------------------------------------	--------------

##### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	190	24.1	N/A	0.898	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	128	24.1	N/A	0.781	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	251	24.1	N/A	0.961	1, 2	GMSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	190	24.1	N/A	0.753	1, 2, 3	GMSK

##### Note(s):

1. Voice - Worst case configuration (Back of EUT) from GPRS body (POWER BACK-OFF Disabled) is used on GSM body (POWER BACK-OFF Disabled).
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
3. Personal Hands-Free Kit attached, using the worst-case configuration acquired.

### 7.2.5. Specific Absorption Rate - PCS 1900 Head Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.851

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	21.6 to 21.6

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	661	22.0	N/A	0.747	1	GMSK
Tilt	Left	661	22.0	N/A	0.342	1	GMSK
Touch	Right	661	22.0	N/A	0.567	1	GMSK
Tilt	Right	661	22.0	N/A	0.310	1	GMSK
Touch	Left	512	22.1	N/A	0.677	1	GMSK
Touch	Left	810	21.9	N/A	0.851	1	GMSK

#### Note(s):

1. Voice

### 7.2.6. Specific Absorption Rate - GPRS 1900 Hotspot Mode Configuration 1g POWER BACK-OFF Enabled

#### Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.519

#### Environmental Conditions:

Temperature Variation in Lab (°C): 23.0 to 23.0

Temperature Variation in Liquid (°C): 22.7 to 22.7

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	661	18.8	3.3	0.281	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	661	18.8	3.3	0.480	1, 2	GMSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	661	18.8	3.3	0.086	1, 2	GMSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	661	18.8	3.3	0.058	1, 2	GMSK
Bottom of EUT Facing Phantom	Flat (SAM)	661	18.8	3.3	0.344	1, 2	GMSK
Back of EUT Open Facing Phantom	Flat (SAM)	512	18.7	3.4	0.428	1, 2	GMSK
Back of EUT Open Facing Phantom	Flat (SAM)	810	19.0	3.2	0.519	1, 2	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

\*KDB 941225 - SAR is not required for EDGE channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding GPRS channels.

### 7.2.7. Specific Absorption Rate - GPRS 1900 Body-Worn Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.532

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	22.7 to 22.7

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	661	22.1	N/A	0.491	1, 2, 3	GMSK
Back of EUT Facing Phantom	Flat (SAM)	512	22.1	N/A	0.470	1, 2, 3	GMSK
Back of EUT Facing Phantom	Flat (SAM)	810	22.2	N/A	0.532	1, 2, 3	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots
2. Worst case configuration (Back of EUT) from GPRS Hotspot Mode (POWER BACK-OFF Enabled) is used on GPRS body (POWER BACK-OFF Disabled).
3. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.

\*KDB 941225 - SAR is not required for EDGE channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding GPRS channels.

### 7.2.8. Specific Absorption Rate - PCS 1900 Body-Worn Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.556

#### Environmental Conditions:

Temperature Variation in Lab (°C): 23.0 to 23.0

Temperature Variation in Liquid (°C): 22.7 to 22.7

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	661	22.0	N/A	0.482	1, 2	GMSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	661	22.0	N/A	0.556	1, 2, 3	GMSK

#### Note(s):

1. Voice - Worst case configuration (Back of EUT) from GPRS body (POWER BACK-OFF Disabled) is used on PCS body (POWER BACK-OFF Disabled).
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
3. Personal Hands-Free Kit attached, using the worst-case configuration acquired.

### 7.2.9. Specific Absorption Rate - UMTS-FDD II Head Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	1.070

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	22.1 to 22.1

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	9400	22.5	N/A	1.070	1	QPSK
Touch	Left	9262	22.5	N/A	0.967	1	QPSK
Touch	Left	9538	22.5	N/A	0.988	1	QPSK
Tilt	Left	9400	22.5	N/A	0.477	1	QPSK
Touch	Right	9400	22.5	N/A	0.777	1	QPSK
Tilt	Right	9400	22.5	N/A	0.451	1	QPSK

#### Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"

### 7.2.10. Specific Absorption Rate - UMTS-FDD II Hotspot Mode Configuration 1g POWER BACK-OFF Enabled

#### Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.504

#### Environmental Conditions:

Temperature Variation in Lab (°C): 23.0 to 23.0

Temperature Variation in Liquid (°C): 22.7 to 22.7

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	9400	17.8	4.7	0.306	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9400	17.8	4.7	0.459	1, 2	QPSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	9400	17.8	4.7	0.092	1, 2	QPSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	9400	17.8	4.7	0.060	1, 2	QPSK
Bottom of EUT Facing Phantom	Flat (SAM)	9400	17.8	4.7	0.362	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9262	17.8	4.7	0.478	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9538	17.7	4.8	0.504	1, 2	QPSK

#### Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

\*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.

### 7.2.11. Specific Absorption Rate - UMTS-FDD II Body-Worn Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.753

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	22.7 to 22.7

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	9400	22.5	N/A	0.753	1, 2, 3	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9262	22.5	N/A	0.676	1, 2, 3	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9538	22.5	N/A	0.717	1, 2, 3	QPSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	9400	22.5	N/A	0.749	1, 2, 3, 4	QPSK

#### Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
2. Worst case configuration (Back of EUT) from GPRS Hotspot Mode (POWER BACK-OFF Enabled) is used on RMC body (POWER BACK-OFF Disabled).
3. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
4. Personal Hands-Free Kit attached, using the worst-case configuration acquired.

\*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.



### 7.2.12. Specific Absorption Rate - UMTS-FDD V Head Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	1.100

#### Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	24.0 to 24.0

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	4183	23.6	N/A	0.940	1	QPSK
Touch	Left	4132	23.6	N/A	0.755	1	QPSK
Touch	Left	4233	23.6	N/A	1.100	1	QPSK
Tilt	Left	4183	23.6	N/A	0.587	1	QPSK
Touch	Right	4183	23.6	N/A	0.855	1	QPSK
Touch	Right	4132	23.6	N/A	0.732	1	QPSK
Touch	Right	4233	23.5	N/A	1.000	1	QPSK
Tilt	Right	4183	23.6	N/A	0.600	1	QPSK

#### Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"

### 7.2.13. Specific Absorption Rate - UMTS-FDD V Hotspot Mode Configuration 1g POWER BACK-OFF Enabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.426

#### Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	23.1 to 23.1

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	4183	18.9	4.7	0.331	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4183	18.9	4.7	0.411	1, 2	QPSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	4183	18.9	4.7	0.344	1, 2	QPSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	4183	18.9	4.7	0.337	1, 2	QPSK
Bottom of EUT Facing Phantom	Flat (SAM)	4183	18.9	4.7	0.050	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4132	19.0	4.6	0.356	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4233	18.7	4.8	0.426	1, 2	QPSK

#### Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

\*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.

### 7.2.14. Specific Absorption Rate - UMTS-FDD V Body-Worn Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.985

#### Environmental Conditions:

Temperature Variation in Lab (°C): 24.0 to 24.0

Temperature Variation in Liquid (°C): 22.5 to 22.5

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	4183	23.6	N/A	0.877	1, 2, 3	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4132	23.6	N/A	0.748	1, 2, 3	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4233	23.5	N/A	0.985	1, 2, 3	QPSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	4233	23.5	N/A	0.785	1, 2, 3, 4	QPSK

#### Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
2. Worst case configuration (Back of EUT) from GPRS Hotspot Mode (POWER BACK-OFF Enabled) is used on RMC body (POWER BACK-OFF Disabled).
3. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
4. Personal Hands-Free Kit attached, using the worst-case (Back of EUT) configuration acquired.

\*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.

### 7.2.15. Specific Absorption Rate - Wi-Fi 2450 Head Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.223

#### Environmental Conditions:

Temperature Variation in Lab (°C):	22.3 to 22.3
Temperature Variation in Liquid (°C):	24.0 to 24.0

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	6	15.7	N/A	0.074	1	DBPSK
Tilt	Left	6	15.7	N/A	0.023	1	DBPSK
Touch	Right	6	15.7	N/A	0.143	1	DBPSK
Tilt	Right	6	15.7	N/A	0.042	1	DBPSK
Touch	Right	1	15.8	N/A	0.132	1	DBPSK
Touch	Right	11	16.0	N/A	0.223	1	DBPSK

#### Note(s):

1. 802.11b 1Mbps

\* KDB 248227 - SAR is not required for 802.11g/n channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

### 7.2.16. Specific Absorption Rate - Wi-Fi 2450 Body- Worn Configuration 1g POWER BACK-OFF Disabled

#### Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.294

#### Environmental Conditions:

Temperature Variation in Lab (°C): 24.0 to 24.0

Temperature Variation in Liquid (°C): 23.0 to 23.0

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	POWER BACK-OFF (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	6	15.7	N/A	0.034	1, 2	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	6	15.7	N/A	0.204	1, 2	DBPSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	6	15.7	N/A	0.108	1, 2	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	1	15.8	N/A	0.191	1, 2	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	11	16.0	N/A	0.294	1, 2	DBPSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	11	16.0	N/A	0.226	1, 2, 3	DBPSK

#### Note(s):

- 802.11b 1Mbps
- SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.
- Personal Hands-Free Kit attached, using the worst-case configuration acquired.

\* KDB 248227 - SAR is not required for 802.11g/n channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

**7.2.17. Conducted Average Power Measurement 2G: POWER BACK-OFF Disabled: GSM850**

Channel Number	Frequency (MHZ)	Power before Test (dBm)	Avg. Burst Power with consideration for uplink time slot (dBm)	Note
128	824.2	33.1	24.1	Conducted, GMSK
190	836.6	33.1	24.1	Conducted, GMSK
251	848.8	33.1	24.1	Conducted, GMSK

**GPRS850 - Measured Average Power Without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	33.1	30.6	29.2	27.8	Conducted, GMSK
190	836.6	33.1	30.6	29.2	27.8	Conducted, GMSK
251	848.8	33.1	30.6	29.2	27.8	Conducted, GMSK

**GPRS850 - Calculated Value With consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	24.1	18.1	24.9	24.8	Conducted, GMSK
190	836.6	24.1	18.1	24.9	24.8	Conducted, GMSK
251	848.8	24.1	18.1	24.9	24.8	Conducted, GMSK

**EDGE850 - Measured Average Power Without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	33.1	30.6	29.2	27.8	Conducted, GMSK
190	836.6	33.1	30.6	29.2	27.8	Conducted, GMSK
251	848.8	33.1	30.6	29.2	27.8	Conducted, GMSK

**EDGE850 - Calculated Value With consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	24.1	18.1	24.9	24.8	Conducted, GMSK
190	836.6	24.1	18.1	24.9	24.8	Conducted, GMSK
251	848.8	24.1	18.1	24.9	24.8	Conducted, GMSK

**Note:****Scale factor for uplink time slot:**

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03 \text{ dB}$
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02 \text{ dB}$
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26 \text{ dB}$
- 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01 \text{ dB}$

### 7.2.18. Conducted Average Power Measurement 2G: POWER BACK-OFF Enabled GPRS850 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	30.4	27.6	26.1	24.6	Conducted, GMSK
190	836.6	30.4	27.6	26.1	24.6	Conducted, GMSK
251	848.8	30.4	27.7	26.2	24.7	Conducted, GMSK

### GPRS850 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	21.4	21.6	<b>21.8</b>	21.6	Conducted, GMSK
190	836.6	21.4	21.6	21.8	21.6	Conducted, GMSK
251	848.8	21.4	21.7	21.9	21.7	Conducted, GMSK

### EDGE850 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	30.4	27.6	26.1	24.6	Conducted, GMSK
190	836.6	30.4	27.6	26.1	24.6	Conducted, GMSK
251	848.8	30.4	27.7	26.2	24.7	Conducted, GMSK

### EDGE850 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	21.4	21.6	<b>21.8</b>	21.6	Conducted, GMSK
190	836.6	21.4	21.6	21.8	21.6	Conducted, GMSK
251	848.8	21.4	21.7	21.9	21.7	Conducted, GMSK

### Note:

#### Scale factor for uplink time slot:

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03 \text{ dB}$
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02 \text{ dB}$
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26 \text{ dB}$
- 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01 \text{ dB}$

**EDGE (MCS9 ~ 8PSK)****POWER BACK-OFF Disabled****EDGE850 - Measured Average Power Without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	27.8	27.8	26.0	23.9	Conducted, 8PSK
190	836.6	28.1	28.1	26.3	24.2	Conducted, 8PSK
251	848.8	28.2	28.2	26.4	24.3	Conducted, 8PSK

**EDGE850 - Calculated Value With consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	18.8	18.8	20.0	20.9	Conducted, 8PSK
190	836.6	19.1	19.1	20.3	21.2	Conducted, 8PSK
251	848.8	19.2	19.2	20.4	21.3	Conducted, 8PSK

**POWER BACK-OFF Enabled****EDGE850 - Measured Average Power Without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	27.8	27.8	26.0	23.9	Conducted, 8PSK
190	836.6	28.1	28.1	26.3	24.2	Conducted, 8PSK
251	848.8	28.2	28.2	26.4	24.3	Conducted, 8PSK

**EDGE850 - Calculated Value With consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	18.8	18.8	20.0	20.9	Conducted, 8PSK
190	836.6	19.1	19.1	20.3	21.2	Conducted, 8PSK
251	848.8	19.2	19.2	20.4	21.3	Conducted, 8PSK

**Note:****Scale factor for uplink time slot:**

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03 \text{ dB}$
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02 \text{ dB}$
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26 \text{ dB}$
- 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01 \text{ dB}$



**7.2.19. Conducted Average Power Measurement 2G: POWER BACK-OFF Disabled: PCS1900**

Channel Number	Frequency (MHZ)	GSM TX Power before Test (dBm)	Avg. Burst Power with consideration for uplink time slot (dBm)	Note
512	1850.2	31.1	22.1	Conducted, GMSK
661	1880.0	31.0	22.0	Conducted, GMSK
810	1909.8	30.9	21.9	Conducted, GMSK

**GPRS1900 - Measured Average Power Without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	31.0	27.7	26.4	24.9	Conducted, GMSK
661	1880.0	30.9	27.7	26.4	24.9	Conducted, GMSK
810	1909.8	30.9	27.7	26.5	25.1	Conducted, GMSK

**GPRS1900 - Calculated Value With consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	22.0	21.7	22.1	21.9	Conducted, GMSK
661	1880.0	21.9	21.7	22.1	21.9	Conducted, GMSK
810	1909.8	21.9	21.7	<b>22.2</b>	22.1	Conducted, GMSK

**EDGE1900 - Measured Average Power Without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	31.0	27.7	26.4	24.9	Conducted, GMSK
661	1880.0	30.9	27.7	26.4	24.9	Conducted, GMSK
810	1909.8	30.9	27.7	26.5	25.1	Conducted, GMSK

**EGPR1900 - Calculated Value With consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	22.0	21.7	22.1	21.9	Conducted, GMSK
661	1880.0	21.9	21.7	22.1	21.9	Conducted, GMSK
810	1909.8	21.9	21.7	<b>22.2</b>	22.1	Conducted, GMSK

**Note:****Scale factor for uplink time slot:**

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03 \text{ dB}$
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02 \text{ dB}$
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26 \text{ dB}$

4. 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01$  dB

### 7.2.20. Conducted Average Power Measurement 2G: POWER BACK-OFF Enabled GPRS1900 – Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	27.4	24.5	23.0	21.5	Conducted, GMSK
661	1880.0	27.4	24.6	23.1	21.6	Conducted, GMSK
810	1909.8	27.4	24.8	23.3	21.8	Conducted, GMSK

### GPRS1900 – Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	18.4	18.5	18.7	18.5	Conducted, GMSK
661	1880.0	18.4	18.6	18.8	18.6	Conducted, GMSK
810	1909.8	18.4	18.7	19.0	18.8	Conducted, GMSK

### EDGE1900 – Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	27.4	24.5	23.0	21.5	Conducted, GMSK
661	1880.0	27.4	24.6	23.1	21.6	Conducted, GMSK
810	1909.8	27.4	24.8	23.3	21.8	Conducted, GMSK

### EGPR1900 – Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	18.4	18.5	18.7	18.5	Conducted, GMSK
661	1880.0	18.4	18.6	18.8	18.6	Conducted, GMSK
810	1909.8	18.4	18.7	19.0	18.8	Conducted, GMSK

#### Note:

#### Scale factor for uplink time slot:

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03$  dB
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02$  dB
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26$  dB
- 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01$  dB

**EDGE (MCS9 ~ 8PSK):****POWER BACK-OFF Disabled****EDGE1900 - Measured Average Power Without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	26.9	26.8	25.0	22.9	Conducted, 8PSK
661	1880.0	26.7	26.6	24.9	22.8	Conducted, 8PSK
810	1909.8	26.7	26.6	24.9	22.8	Conducted, 8PSK

**EDGE1900 - Calculated Value With consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	17.9	20.8	20.7	19.9	Conducted, 8PSK
661	1880.0	17.7	20.6	20.6	19.8	Conducted, 8PSK
810	1909.8	17.7	20.6	20.6	19.8	Conducted, 8PSK

**POWER BACK-OFF Enabled****EDGE1900 - Measured Average Power Without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	26.9	26.8	25.0	22.9	Conducted, 8PSK
661	1880.0	26.7	26.6	24.9	22.8	Conducted, 8PSK
810	1909.8	26.7	26.6	24.9	22.8	Conducted, 8PSK

**EGPR1900 - Calculated Value With consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	17.9	20.8	20.7	19.9	Conducted, 8PSK
661	1880.0	17.7	20.6	20.6	19.8	Conducted, 8PSK
810	1909.8	17.7	20.6	20.6	19.8	Conducted, 8PSK

**Note:****Scale factor for uplink time slot:**

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03 \text{ dB}$
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02 \text{ dB}$
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26 \text{ dB}$
- 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01 \text{ dB}$

**7.2.21. Conducted Average Power Measurement 3G: POWER BACK-OFF Disabled**

Modes		HSDPA				HSPA					WCDMA
Sets		1	2	3	4	1	2	3	4	5	Voice / RMC 12.2kbps
Band	Channel	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]
1900 (Band II)	9262 9662	21.7	21.1	20.9	20.8	21.0	21.2	20.9	21.6	21.0	22.5
	9400 9800	21.7	21.0	20.9	20.8	21.0	21.2	20.8	21.6	20.9	22.5
	9538 9938	21.7	21.0	20.9	20.8	21.1	21.3	20.9	21.6	20.9	22.5
850 (Band V)	4132 4357	22.7	22.1	22.0	21.7	22.0	22.2	21.9	22.7	21.9	23.6
	4183 4408	22.6	22.0	21.9	21.6	21.9	22.1	21.7	22.6	21.8	23.6
	4233 4458	22.6	22.0	21.9	21.6	21.9	22.1	21.7	22.5	21.8	23.5

**Conducted Average Power Measurement 3G: POWER BACK-OFF Enabled**

Modes		HSDPA				HSPA					WCDMA
Sets		1	2	3	4	1	2	3	4	5	Voice / RMC 12.2kbps
Band	Channel	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]
1900 (Band II)	9262 9662	18.0	17.4	17.3	17.1	17.5	17.6	17.3	17.9	17.1	17.8
	9400 9800	17.9	17.3	17.2	17.1	17.4	17.5	17.2	17.9	16.6	17.8
	9538 9938	17.8	17.2	17.2	17.1	17.2	17.4	17.3	17.7	16.9	17.7
850 (Band V)	4132 4357	19.0	18.2	18.1	18.0	18.2	18.5	18.1	19.0	18.1	19.0
	4183 4408	18.9	18.1	17.9	17.9	18.1	18.4	18.1	18.8	18.0	18.9
	4233 4458	18.8	18.0	17.8	17.8	18.0	18.3	18.0	18.8	17.9	18.7
βc		2	12	15	15	11	6	15	2	15	
βd		15	15	8	4	15	15	9	15	15	
ΔACK, ΔNACK, ΔCQI		8	8	8	8	8	8	8	8	8	
AGV		-	-	-	-	20	12	15	17	21	

Prior to commencement of SAR testing the module power levels were measured in both HSPA and 3G RMC 12.2kbps modes and compared to ensure the correct mode of operation had been established.

The following tables taken from FCC 3G SAR procedures (KDB 941225 D01 SAR test for 3G devices v02) below were applied using an Agilent 8960 series 10 wireless communications test set which supports 3G / HSDPA release 5 / HSPA release 6.

**Sub-test 1 Setup for Release 5 HSDPA**

Sub-test	$\beta_c$	$\beta_d$	$B_d$ (SF)	$\beta_c \beta_d$	$\beta_{hs}^{(1)}$	SM (dB) <sup>(2)</sup>
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	12/15 <sup>(3)</sup>	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, B_{hs}/\beta_c = 24/15$

Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$

**Sub-test 5 Setup for Release 6 HSPA**

Sub-test	$\beta_c$	$\beta_d$	$B_d$ (SF)	$\beta_c \beta_d$	$\beta_{hs}^{(1)}$	$B_{oc}$	$B_{od}$	$B_{od}$ (SF)	$B_{od}$ (codes)	CM <sup>(2)</sup> (dB)	POWER BACK- OFF (dB)	AG <sup>(4)</sup> Index	E- TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	31/15	$B_{alt1}$ : 47/15 $B_{alt2}$ : 47/15	4	1	2.0	1.0	15	92
4	2/15	15/15	64	2/15	2/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	24/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, B_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH AND E-DPCCH for the POWER BACK-OFF is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Tavle 5.1g.

Note 6:  $B_{od}$  can not be set directly; it is set by Absolute Grant Value.

**7.2.22. Conducted Power Measurements Wi-Fi 802.11b/g/n  
802.11b/g**

Channel Number	Frequency (MHZ)	TX Power before Test (dBm)	Note
1	2412.0	15.8	<b>2.4GHz 802.11b</b> (1Mbps)
6	2437.0	15.7	
11	2462.0	16.0	
1	2412.0	14.9	<b>2.4GHz 802.11b</b> (11Mbps)
6	2437.0	14.6	
11	2462.0	15.1	
1	2412.0	15.7	<b>2.4GHz 802.11g</b> (6Mbps)
6	2437.0	15.7	
11	2462.0	16.0	
1	2412.0	13.0	<b>2.4GHz 802.11g</b> (54Mbps)
6	2437.0	13.2	
11	2462.0	13.3	

**802.11n**

Channel Number	Frequency (MHZ)	TX Power before Test (dBm)	Note
1	2412.0	15.7	<b>2.4GHz 802.11n</b> (MCS0 6.5Mbps)
6	2437.0	15.7	
11	2462.0	16.0	
1	2412.0	12.7	<b>2.4GHz 802.11n</b> (MCS7 65Mbps)
6	2437.0	12.9	
11	2462.0	13.0	

## 8. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document —approximately” is interpreted as meaning —effectively” or —for most practical purposes”.

Test Name	Confidence Level	Calculated Uncertainty
Specific Absorption Rate-GSM 850 / UMTS FDD V Head Configuration 1g	95%	19.94
Specific Absorption Rate-GSM/GPRS850/UMTS FDD V Body Configuration 1g	95%	20.07
Specific Absorption Rate-PCS 1900 / UMTS FDD II Head Configuration 1g	95%	20.72
Specific Absorption Rate-PCS / GPRS1900 / UMTS FDD II Body Configuration 1g	95%	20.00
Specific Absorption Rate-Wi-Fi 2450 Head Configuration 1g	95%	19.47
Specific Absorption Rate-Wi-Fi 2450 Body Configuration 1g	95%	19.90

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

**8.1. Specific Absorption Rate Uncertainty - GSM 850 / UMTS FDD V Head Configuration 1g**

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.400	2.400	normal (k=1)	1.0000	1.0000	2.400	2.400	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.920	4.920	normal (k=1)	1.0000	0.6400	3.149	3.149	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.970	4.970	normal (k=1)	1.0000	0.6000	2.982	2.982	5
	Combined standard uncertainty			t-distribution			10.17	10.17	>250
	Expanded uncertainty			k = 1.96			19.94	19.94	>250



**8.2. Specific Absorption Rate-GSM/GPRS850/UMTS FDD V Body Configuration 1g**

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration /Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.900	2.900	normal (k=1)	1.0000	1.0000	2.900	2.900	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.690	4.690	normal (k=1)	1.0000	0.6400	3.002	3.002	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.860	4.860	normal (k=1)	1.0000	0.6000	2.916	2.916	5
	Combined standard uncertainty			t-distribution			10.24	10.24	>250
	Expanded uncertainty			k = 1.96			20.07	20.07	>250

**8.3. Specific Absorption Rate-PCS 1900 Head Configuration 1g**

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with Regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	3.800	3.800	normal (k=1)	1.0000	1.0000	3.800	3.800	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.900	4.900	normal (k=1)	1.0000	0.6400	3.136	3.136	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.880	4.880	normal (k=1)	1.0000	0.6000	2.928	2.928	5
	Combined standard uncertainty			t-distribution			10.57	10.57	>200
	Expanded uncertainty			k = 1.96			20.72	20.72	>200

**8.4. Specific Absorption Rate-PCS / GPRS1900 Body Configuration 1g**

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.500	2.500	normal (k=1)	1.0000	1.0000	2.500	2.500	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.940	4.940	normal (k=1)	1.0000	0.6400	3.162	3.162	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.980	4.980	normal (k=1)	1.0000	0.6000	2.988	2.988	5
	Combined standard uncertainty			t-distribution			10.20	10.20	>250
	Expanded uncertainty			k = 1.96			20.00	20.00	>250

**8.5. Specific Absorption Rate-Wi-Fi 2450 Head Configuration 1g**

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.000	2.000	normal (k=1)	1.0000	1.0000	2.000	2.000	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.410	4.410	normal (k=1)	1.0000	0.6400	2.822	2.822	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.930	4.930	normal (k=1)	1.0000	0.6000	2.958	2.958	5
	Combined standard uncertainty			t-distribution			9.93	9.93	>300
	Expanded uncertainty			k = 1.96			19.47	19.47	>300

**8.6. Specific Absorption Rate-Wi-Fi 2450 Body Configuration 1g**

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.570	2.570	normal (k=1)	1.0000	1.0000	2.570	2.570	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.900	4.900	normal (k=1)	1.0000	0.6400	3.136	3.136	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.920	4.920	normal (k=1)	1.0000	0.6000	2.952	2.952	5
	Combined standard uncertainty			t-distribution			10.15	10.15	>250
	Expanded uncertainty			k = 1.96			19.90	19.90	>250

### Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A034	Narda 20W Termination	Narda	374BNM	8706	Calibrated as part of system	-
A1097	SMA Directional Coupler	MiDISCO	MDC6223-30	None	Calibrated as part of system	-
A1137	3dB Attenuator	Narda	779	04690	Calibrated as part of system	-
A1174	Dielectric Probe Kit	Agilent Technologies	85070C	Us99360072	Calibrated before use	-
A1328	Handset Positioner	Schmid & Partner Engineering AG	Modification	SD 000 H01 DA	-	-
A1182	Handset Positioner	Schmid & Partner Engineering AG	V3.0	None	-	-
A1184	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	394	26 Jan 2012	12
A2110	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	431	04 May 2011	12
A2111	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	432	02 May 2012	12
A2077	Probe	Schmid & Partner Engineering AG	EX3 DV4	3814	22 Sep 2011	12
A2113	Probe	Schmid & Partner Engineering AG	ET3 DV6	1587	11 May 2012	12
A1235	900 MHz Dipole Kit	Schmid & Partner Engineering AG	D900V2	124	09 Feb 2011	24
A1237	1900 MHz Dipole Kit	Schmid & Partner Engineering AG	D1900V2	540	08 Feb 2011	24
A1322	2450 MHz Dipole Kit	Schmid & Partner Engineering AG	D2450V2	725	08 Feb 2011	24
A1497	Amplifier	Mini-Circuits	zhl-42w (sma)	e020105	Calibrated as part of system	-
A1566	SAM Phantom	Schmid & Partner Engineering AG	SAM a (Site 56)	002	Calibrated before use	-
A1238	SAM Phantom	Schmid & Partner Engineering AG	SAM b (Site 56)	001	Calibrated before use	-
A2125	SAM Phantom	Schmid & Partner Engineering AG	SAM b (Site 57)	TP-1031	Calibrated before use	-

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A2124	SAM Phantom	Schmid & Partner Engineering AG	SAM a (Site 57)	TP-1030	Calibrated before use	-
A215	20 dB Attenuator	Narda	766-20	9402	Calibrated as part of system	-
A1531	Antenna	AARONIA AG	7025	02458	-	-
M1015	Network Analyser	Agilent Technologies	8753ES	US39172406	27 Sept 2011	12
C1145	Cable	Rosenberger MICRO-COAX	FA147A F003003030	41843-1	Calibrated as part of system	-
C1146	Cable	Rosenberger MICRO-COAX	FA147A F030003030	41752-1	Calibrated as part of system	-
G0528	Robot Power Supply	Schmid & Partner Engineering AG	DASY4	None	Calibrated before use	-
GO591	Robot Power Supply	Schmid & Partner Engineering AG	DASY4	None	Calibrated before use	-
G087	PSU	Thurlby Thandar	CPX200	100701	Calibrated before use	-
M1047	Robot Arm	Staubli	RX908 L	F00/SD8 9A1/A/01	Calibrated before use	-
M1653	Robot Arm	Staubli	RX908 L	F01/5J8 6A1/C/01	Calibrated before use	-
M1159	Signal Generator	Agilent Technologies	E8241A	US42110332	Internal Checked 14 Apr 2012	4
M1071	Spectrum Analyzer	Agilent	HP8590E	3647U00514	(Monitoring use only)	-
M1270	Digital Thermometer	RS	N/A	N/A	Internal Checked 13 May 2012	12
S256	SAR Lab	RFI	Site 56	N/A	Calibrated before use	-
S512	SAR Lab	RFI	Site 57	N/A	Calibrated before use	-

**Note: All the assets were in calibration during the course of testing.**

**A.1.1. Calibration Certificates**

This section contains the calibration certificates and data for the Probe(s) and Dipole(s) used, which are not included in the total number of pages for this report.

The following information is justification to why the listed dipoles calibration period has been extended. This address FCC KDB 450824 D02

Cal Date	Dipole Calibration History									
	Dipole SN: 124, Frequency 900 MHz									
	Head Parameters					Body Parameters				
	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)
09-Feb-11	11.00	7.01	-21.60	48.90	-8.20	11.10	7.14	-20.20	46.10	-8.60
23-Aug-07	10.20	6.56	-21.20	48.60	-8.50	10.50	6.89	-20.20	45.40	-8.10
31-Aug-05	10.60	6.78	-24.70	49.10	-5.70	10.50	6.77	-18.90	44.90	-8.90
13-May-03	10.60	6.76	-24.00	50.30	-6.40	11.00	7.12	-20.60	46.20	-8.20
03-Aug-01	11.28	7.16	-25.40	50.80	-5.60	Dipole calibrated for Head only				
<b>Standard Deviation</b>	<b>0.42</b>	<b>0.23</b>	<b>1.88</b>	<b>0.96</b>	<b>1.38</b>	<b>0.32</b>	<b>0.18</b>	<b>0.74</b>	<b>0.61</b>	<b>0.37</b>
<b> Mean Value </b>	<b>10.74</b>	<b>6.85</b>	<b>23.38</b>			<b>10.78</b>	<b>6.98</b>	<b>19.98</b>		
<b>Relative standard deviation %</b>	<b>3.87%</b>	<b>3.41%</b>	<b>8.04%</b>			<b>2.97%</b>	<b>2.58%</b>	<b>3.71%</b>		

Cal Date	Dipole Calibration History									
	Dipole SN: 540, Frequency 1900 MHz									
	Head Parameters					Body Parameters				
	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)
08-Feb-11	40.30	21.00	-27.60	50.50	4.20	40.70	21.60	-23.10	45.60	5.00
26-Jun-09	40.30	21.10	-30.00	48.50	2.70	40.90	21.50	-24.30	44.90	2.80
11-Jun-07	36.10	19.30	-25.40	51.90	5.10	38.00	20.70	-25.30	47.70	4.80
14-Jun-05	38.1	19.90	-25.40	51.90	5.20	39.10	20.70	-24.00	48.10	5.90
04-Jun-03	41.20	21.20	-28.50	50.30	3.80	Dipole calibrated for Head only				
<b>Standard Deviation</b>	<b>2.08</b>	<b>0.85</b>	<b>2.00</b>	<b>1.40</b>	<b>1.03</b>	<b>1.38</b>	<b>0.49</b>	<b>0.91</b>	<b>1.56</b>	<b>1.31</b>
<b> Mean Value </b>	<b>39.20</b>	<b>20.50</b>	<b>27.38</b>			<b>39.68</b>	<b>21.13</b>	<b>24.18</b>		
<b>Relative standard deviation %</b>	<b>5.30%</b>	<b>4.15%</b>	<b>7.31%</b>			<b>3.47%</b>	<b>2.33%</b>	<b>3.75%</b>		



Cal Date	Dipole Calibration History									
	Dipole SN: 725, Frequency 2450 MHz									
	Head Parameters					Body Parameters				
	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real ( $\Omega$ )	Imaginary ( $\Omega$ )	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real ( $\Omega$ )	Imaginary ( $\Omega$ )
08-Feb-11	52.90	24.70	-20.50	45.60	7.90	51.90	24.10	-20.20	49.50	9.70
08-Jan-09	52.10	24.30	-23.70	54.40	5.30	52.20	24.70	-23.40	49.00	6.70
17-Jan-07	53.30	24.80	-22.10	52.40	7.70	53.30	24.50	-21.80	47.80	7.70
04-Jan-05	54.5	24.70	-22.30	53.50	7.20	52.90	24.50	-22.20	48.50	7.50
17-Jan-03	54.70	24.50	-22.60	53.00	7.00	52.10	24.10	-21.70	49.00	8.10
<b>Standard Deviation</b>	<b>1.10</b>	<b>0.20</b>	<b>1.15</b>	<b>3.53</b>	<b>1.03</b>	<b>0.59</b>	<b>0.27</b>	<b>1.15</b>	<b>0.64</b>	<b>1.11</b>
<b> Mean Value </b>	<b>53.50</b>	<b>24.60</b>	<b>22.24</b>			<b>52.48</b>	<b>24.38</b>	<b>21.86</b>		
<b>Relative standard deviation %</b>	<b>2.05%</b>	<b>0.81%</b>	<b>5.18%</b>			<b>1.13%</b>	<b>1.10%</b>	<b>5.25%</b>		

## Note:

1. SAR lab has more than one dipole, the 900 MHz calibration gap is 24 months from 2007 and a second dipole was use after this period.
2. The dipole history shows that the measured SAR relative standard deviation was all less than 10% for the calibration period. The return loss relative standard deviation was all less than 10 %. And the real and imaginary impedance standard deviation is within 5 ( $\Omega$ ).

27-SEPT-2011  
Checked by R. J. [Signature]

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RFI**

Certificate No: **EX3-3814\_Sep11**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3814**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-12.v7, QA CAL-14.v3, QA CAL-23.v4,  
QA CAL-25.v4  
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	[Signature]
Approved by:	Fin Bomholt	R&D Director	[Signature]
			Issued: September 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- **NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- **NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe EX3DV4

## SN:3814

Manufactured: September 2, 2011  
Calibrated: September 22, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3814

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.52	0.51	0.44	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	100.8	96.5	101.1	

### Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	121.7	$\pm 2.7\%$
			Y	0.00	0.00	1.00	115.0	
			Z	0.00	0.00	1.00	105.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3814

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	9.55	9.55	9.55	0.12	1.00	± 13.4 %
750	41.9	0.89	9.26	9.26	9.26	0.80	0.67	± 12.0 %
900	41.5	0.97	8.75	8.75	8.75	0.71	0.73	± 12.0 %
1750	40.1	1.37	8.13	8.13	8.13	0.80	0.62	± 12.0 %
1900	40.0	1.40	7.78	7.78	7.78	0.80	0.61	± 12.0 %
2450	39.2	1.80	7.02	7.02	7.02	0.80	0.60	± 12.0 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3814


### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	10.39	10.39	10.39	0.04	1.00	± 13.4 %
750	55.5	0.96	9.28	9.28	9.28	0.80	0.65	± 12.0 %
900	55.0	1.05	8.92	8.92	8.92	0.80	0.65	± 12.0 %
1750	53.4	1.49	7.58	7.58	7.58	0.80	0.67	± 12.0 %
1900	53.3	1.52	7.31	7.31	7.31	0.80	0.68	± 12.0 %
2150	53.1	1.66	7.38	7.38	7.38	0.80	0.65	± 12.0 %
2450	52.7	1.95	7.15	7.15	7.15	0.80	0.50	± 12.0 %
2600	52.5	2.16	7.02	7.02	7.02	0.80	0.50	± 12.0 %
3700	51.0	3.55	6.35	6.35	6.35	0.26	1.68	± 13.1 %
5200	49.0	5.30	4.19	4.19	4.19	0.60	1.95	± 13.1 %
5500	48.6	5.65	3.86	3.86	3.86	0.60	1.95	± 13.1 %
5800	48.2	6.00	3.94	3.94	3.94	0.60	1.95	± 13.1 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

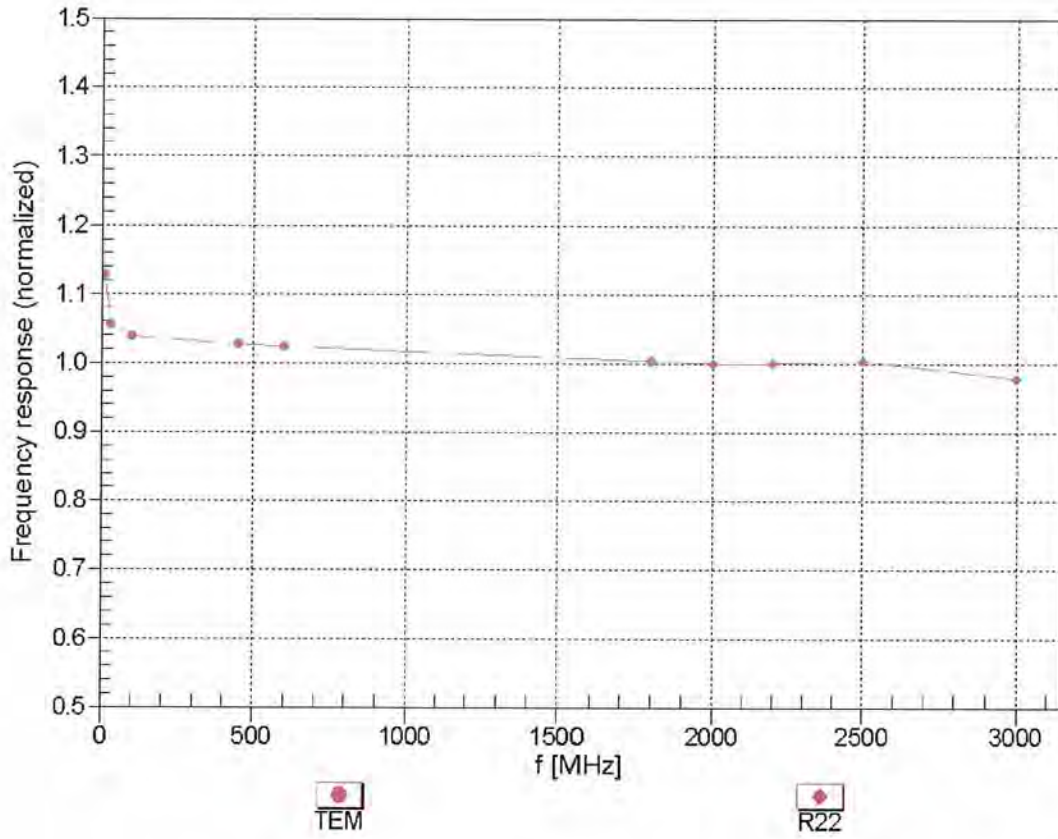


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)





## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz, TEM


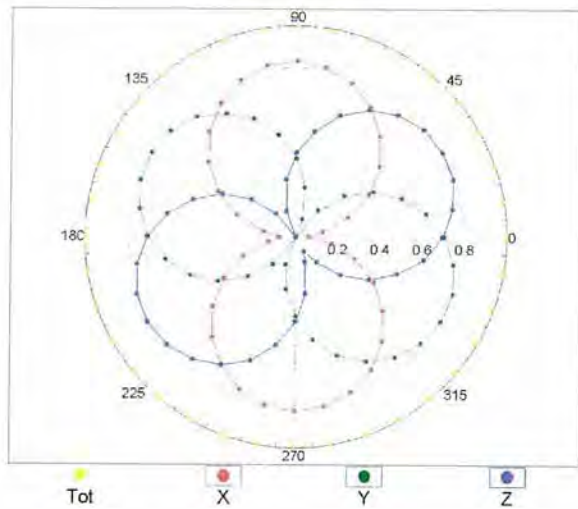


f=1800 MHz, R22

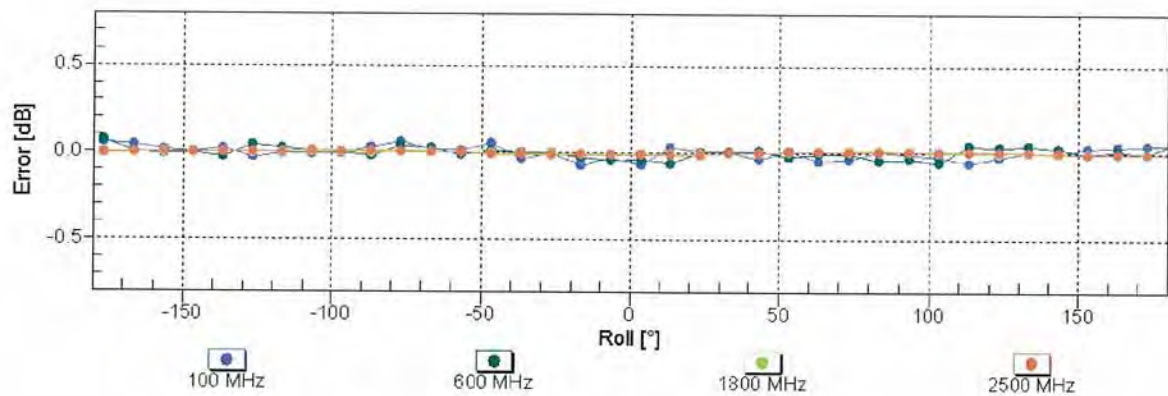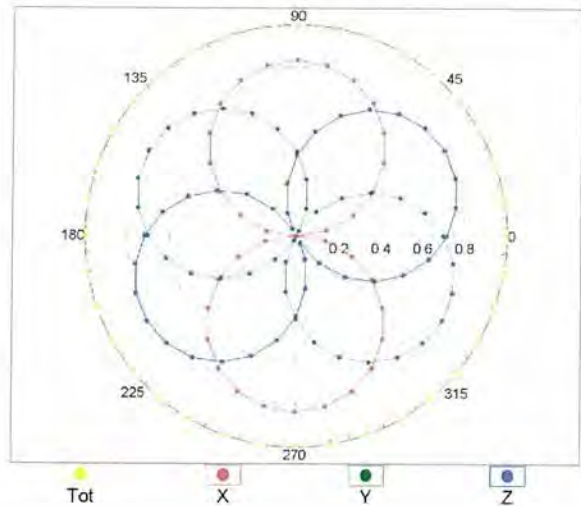


**Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )**

## Dynamic Range $f(SAR_{head})$ (TEM cell , $f = 900$ MHz)

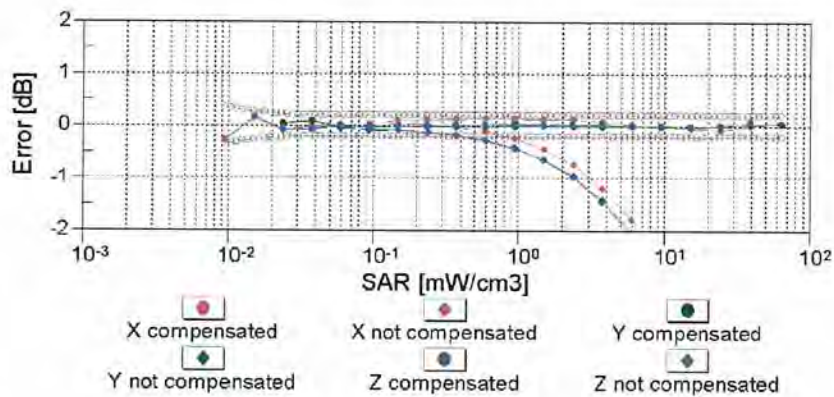
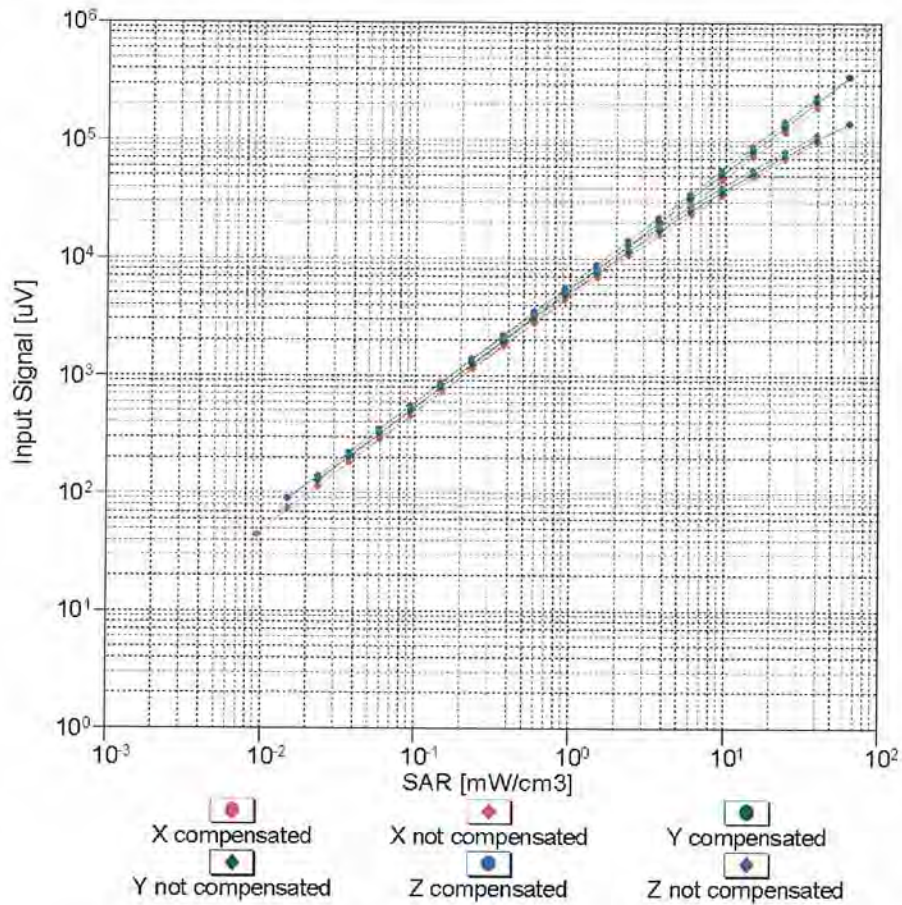


**Uncertainty of Linearity Assessment: ± 0.6% (k=2)**

# Conversion Factor Assessment

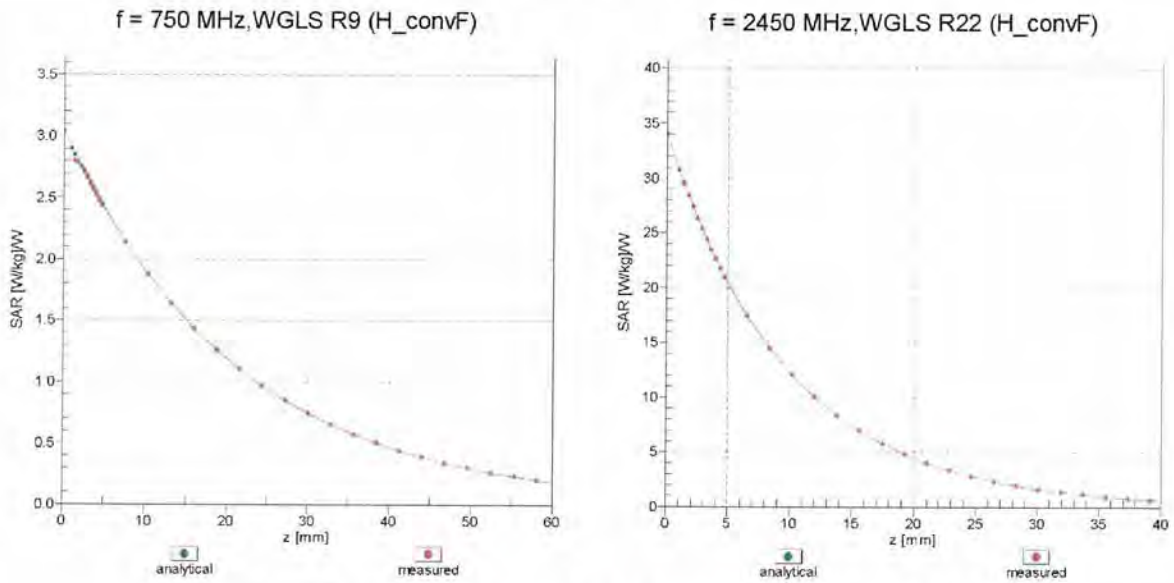

## Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), f = 900 MHz

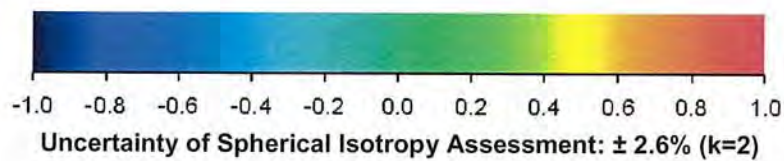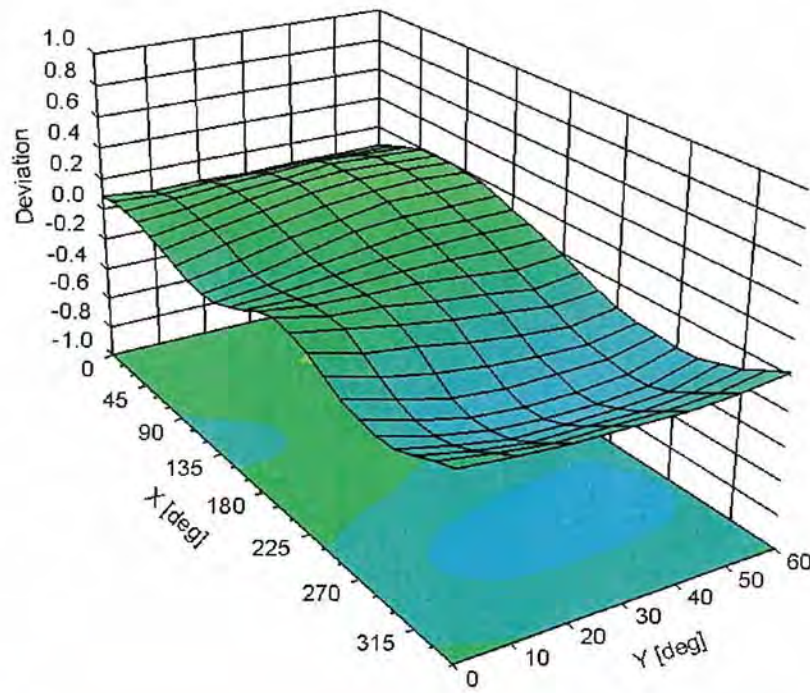



## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3814

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

Checked by *R.D.*

17-MAY-2012

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

*ASSET A2113*

Client **RFI**

Certificate No: **ET3-1587\_May12**

**CALIBRATION CERTIFICATE**

Object **ET3DV6 - SN:1587**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4  
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 11, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 660	10-Jan-12 (No. DAE4-660_Jan12)	Jan-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Claudio Leubler	Laboratory Technician	<i>[Signature]</i>
Approved by:	Katja Pokovic	Technical Manager	<i>[Signature]</i>

Issued: May 11, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

## SN:1587

Manufactured: May 7, 2001  
Calibrated: May 11, 2012

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1587

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	2.14	1.92	1.79	$\pm 10.1 \%$
DCP (mV) <sup>B</sup>	99.0	97.5	99.1	

### Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	0.00	X	0.00	0.00	1.00	119.0	$\pm 2.7 \%$
			Y	0.00	0.00	1.00	114.6	
			Z	0.00	0.00	1.00	111.6	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1587

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Uct. (k=2)
835	41.5	0.90	6.33	6.33	6.33	0.24	3.00	± 12.0 %
900	41.5	0.97	6.18	6.18	6.18	0.28	3.00	± 12.0 %
1750	40.1	1.37	5.47	5.47	5.47	0.58	2.35	± 12.0 %
1900	40.0	1.40	5.18	5.18	5.18	0.80	1.68	± 12.0 %
2450	39.2	1.80	4.52	4.52	4.52	0.80	1.95	± 12.0 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1587


### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	6.28	6.28	6.28	0.30	3.00	± 12.0 %
900	55.0	1.05	6.26	6.26	6.26	0.37	2.56	± 12.0 %
1750	53.4	1.49	4.92	4.92	4.92	0.74	2.18	± 12.0 %
1900	53.3	1.52	4.69	4.69	4.69	0.77	2.38	± 12.0 %
2450	52.7	1.95	4.13	4.13	4.13	0.80	2.02	± 12.0 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)



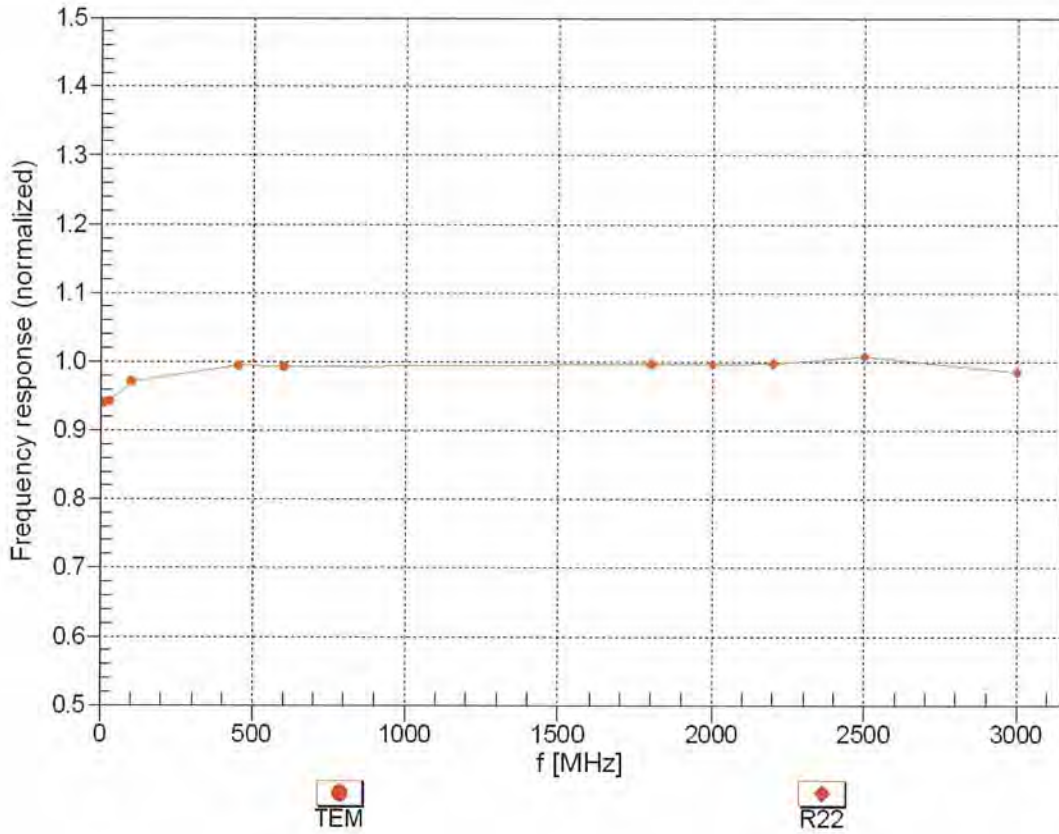


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

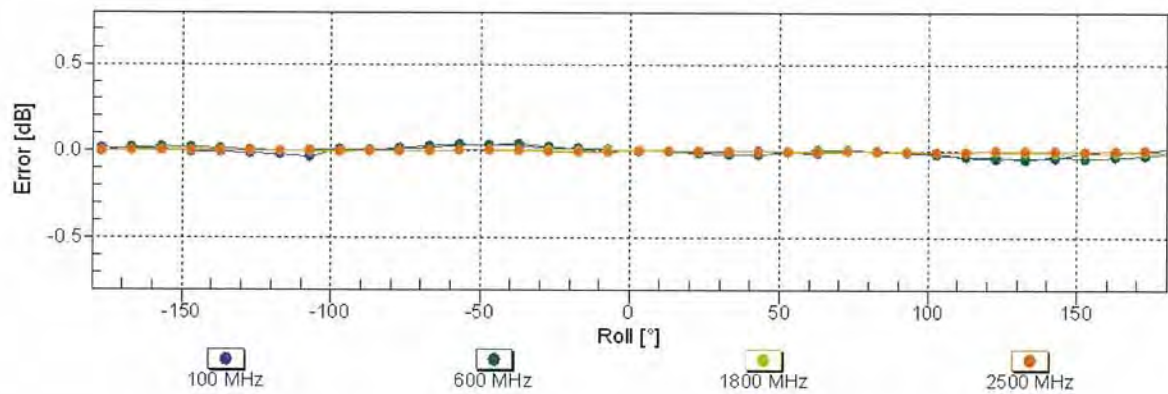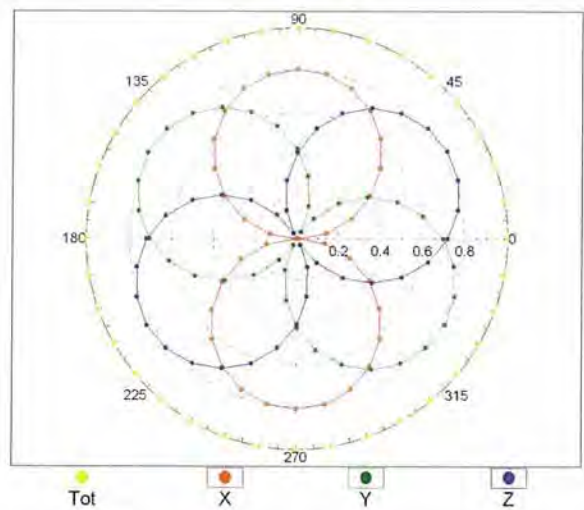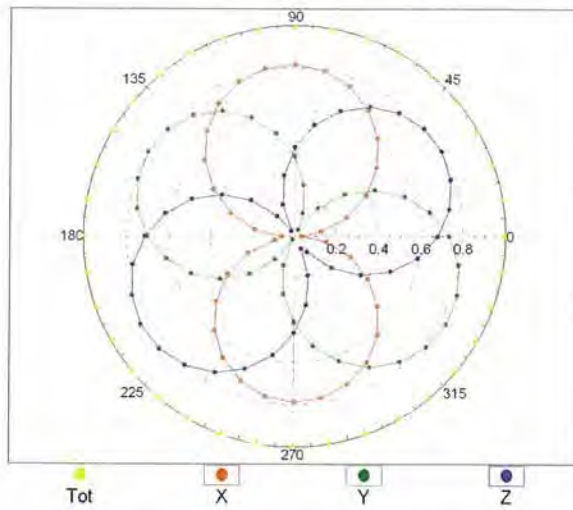

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)


### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

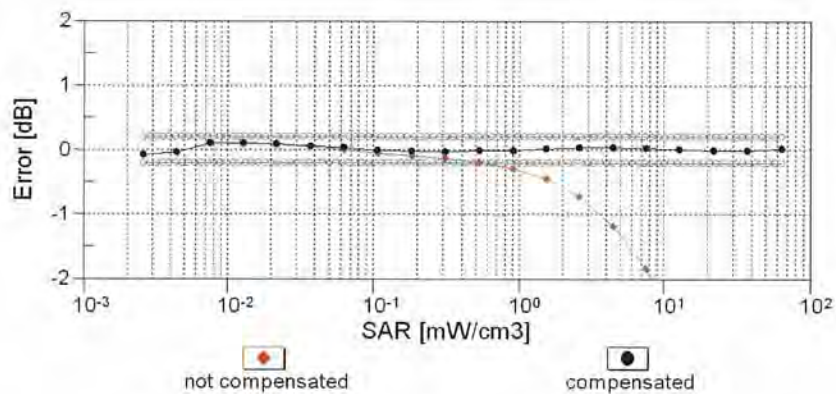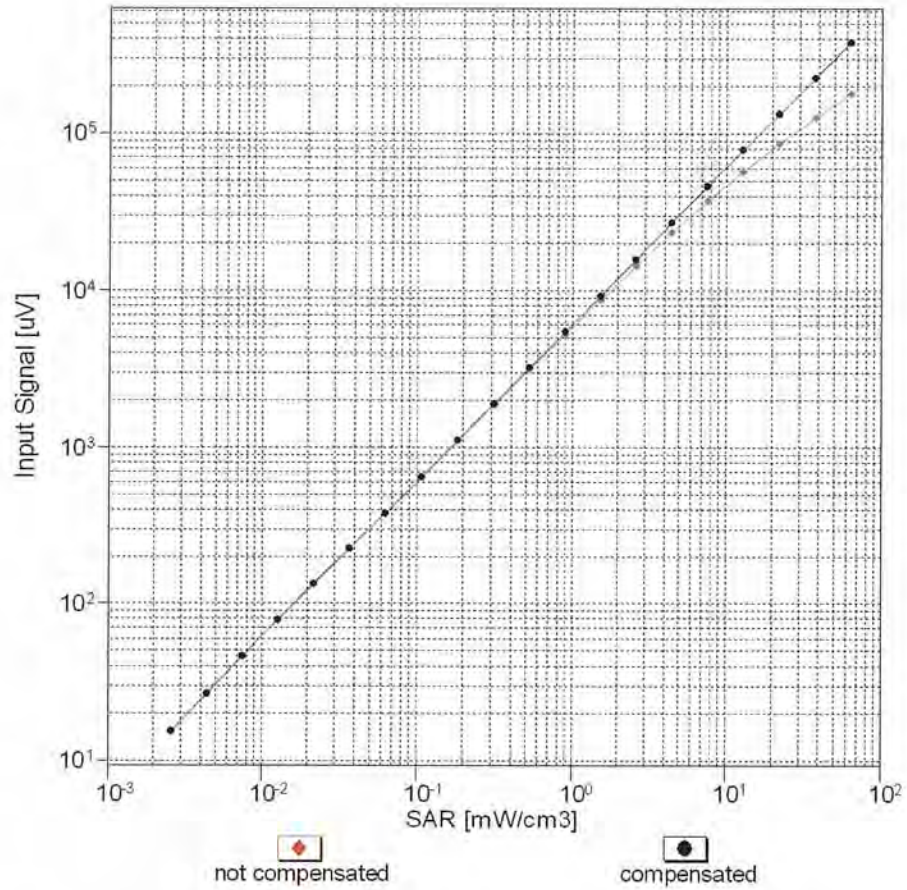



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )



# Conversion Factor Assessment

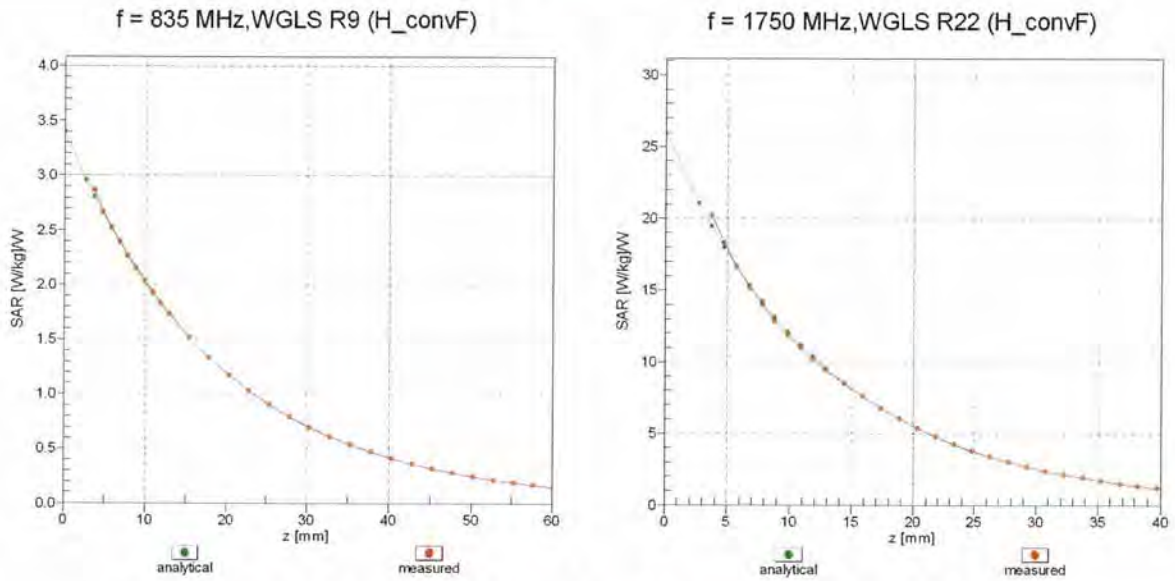

## Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), f = 900 MHz

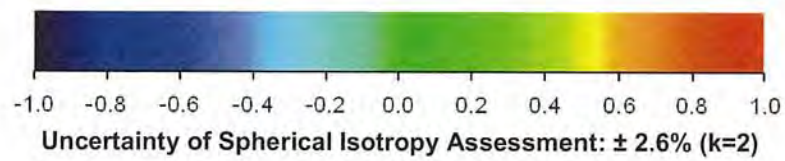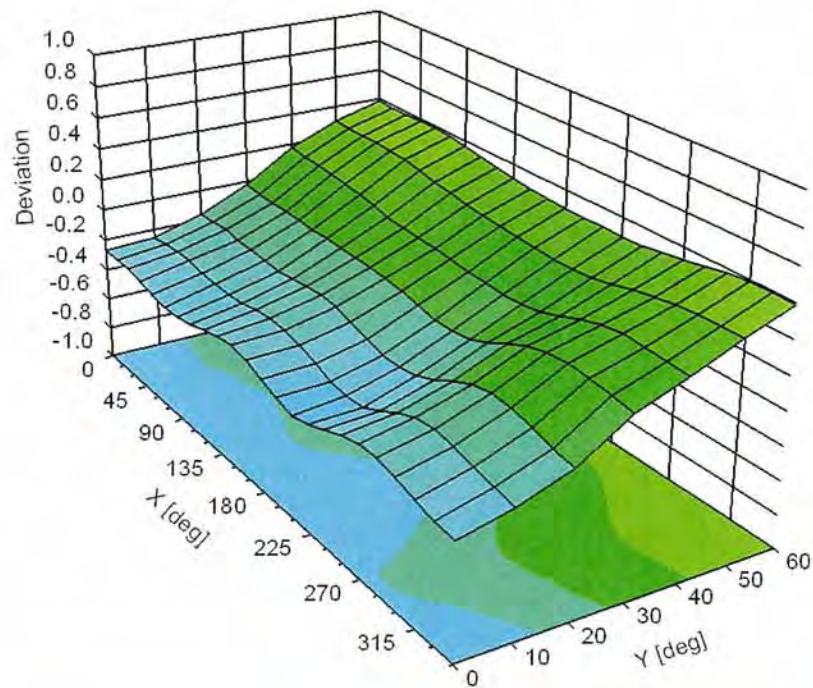

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1587

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	72.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

ASSET A1235 Checked by KA  
21/02/2011

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RFI**

Certificate No: **D900V2-124\_Feb11**

## CALIBRATION CERTIFICATE

Object **D900V2 - SN: 124**

Calibration procedure(s) **QA CAL-05.v8  
Calibration procedure for dipole validation kits**

Calibration date: **February 09, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Dimce Iliev**      Name: **Dimce Iliev**      Function: **Laboratory Technician**      Signature: *[Signature]*

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**      Signature: *[Signature]*

Issued: February 9, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.2 °C	41.5	0.97 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.3 $\pm$ 6 %	0.95 mho/m $\pm$ 6 %
Head TSL temperature during test	(21.5 $\pm$ 0.2) °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.72 mW / g
SAR normalized	normalized to 1W	10.9 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>11.0 mW / g <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.74 mW / g
SAR normalized	normalized to 1W	6.96 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>7.01 mW / g <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.0	1.05 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.6 ± 6 %	1.05 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.79 mW / g
SAR normalized	normalized to 1W	11.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>11.1 mW / g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.79 mW / g
SAR normalized	normalized to 1W	7.16 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>7.14 mW / g ± 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.9 $\Omega$ - 8.2 j $\Omega$
Return Loss	- 21.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.1 $\Omega$ - 8.6 j $\Omega$
Return Loss	- 20.2 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.409 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 04, 2001

## DASY5 Validation Report for Head TSL

Date/Time: 09.02.2011 11:44:15

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:124**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.95$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.88, 5.88, 5.88); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.560 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.135 W/kg

**SAR(1 g) = 2.72 mW/g; SAR(10 g) = 1.74 mW/g**

Maximum value of SAR (measured) = 3.183 mW/g


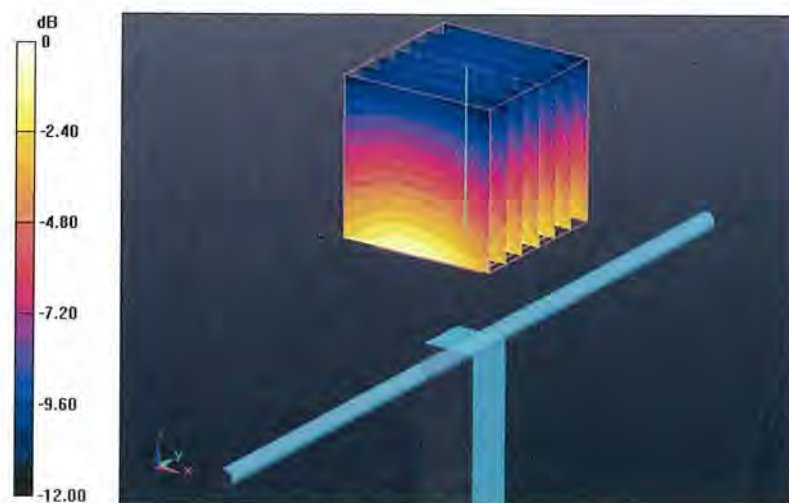




# Impedance Measurement Plot for Head TSL

9 Feb 2011 10:21:37  
[CH1] S11 1 U FS 2: 48.854  $\Omega$  -8.1758  $\Omega$  21.630 pF 900.000 000 MHz

\*  
De1  
Cor  
Avg  
16  
↑

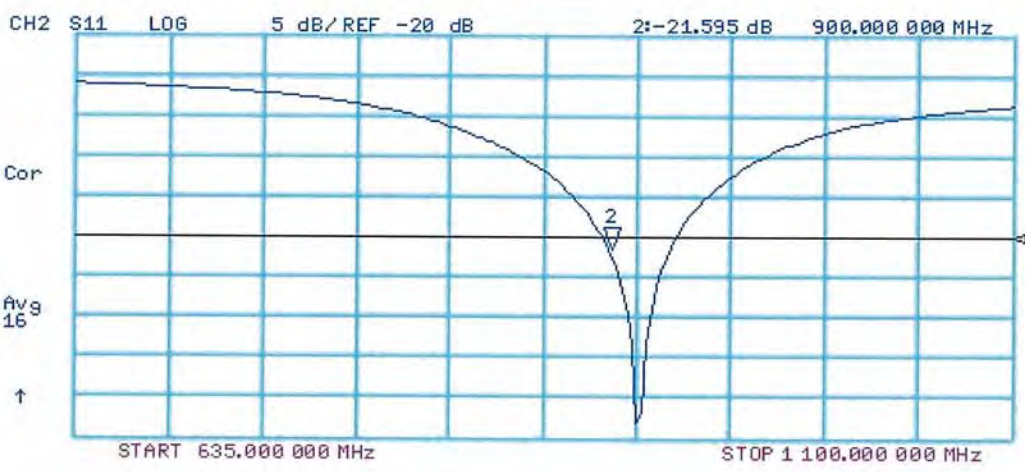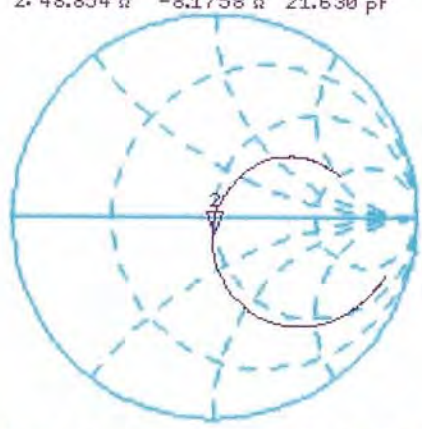

# DASY5 Validation Report for Body TSL

Date/Time: 09.02.2011 14:54:48

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:124**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: M900

Medium parameters used:  $f = 900 \text{ MHz}$ ;  $\sigma = 1.05 \text{ mho/m}$ ;  $\epsilon_r = 53.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.81, 5.81, 5.81); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)



**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.520 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.203 W/kg

**SAR(1 g) = 2.79 mW/g; SAR(10 g) = 1.79 mW/g**

Maximum value of SAR (measured) = 3.271 mW/g

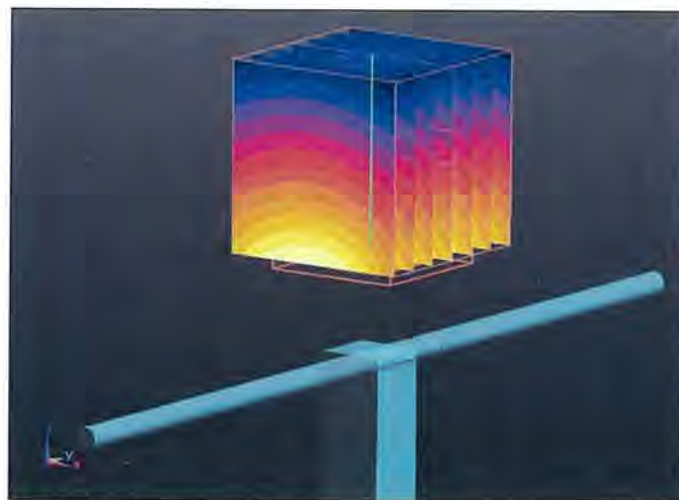


0 dB = 3.270mW/g

# Impedance Measurement Plot for Body TSL

9 Feb 2011 14:24:47  
[CH1] S11 1 U FS 2: 46.072  $\Omega$  -8.6230  $\Omega$  20.508 pF 900.000 000 MHz

\*  
Del  
Cor

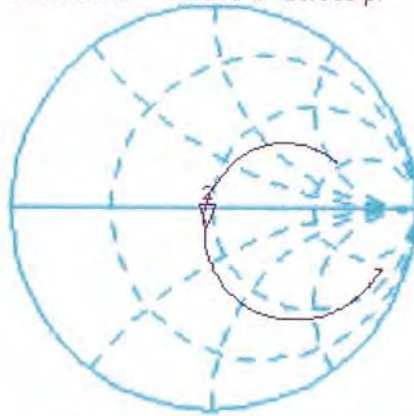

Avg  
16  
↑

CH2 S11 LOG 5 dB/REF -20 dB 2:-20.156 dB 900.000 000 MHz

Cor

Avg  
16  
↑





ASSET: A/1237 - checked by KTS  
21/02/2011

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RFI**

Certificate No: **D1900V2-540\_Feb11**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 540**

Calibration procedure(s) **QA CAL-05.v8  
Calibration procedure for dipole validation kits**

Calibration date: **February 08, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	

Approved by:	Katja Pokovic	Technical Manager	
--------------	---------------	-------------------	--

Issued: February 8, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.6
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	40.0	1.40 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	39.8 $\pm$ 6 %	1.41 mho/m $\pm$ 6 %
<b>Head TSL temperature during test</b>	(21.0 $\pm$ 0.2) °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	10.1 mW / g
SAR normalized	normalized to 1W	40.4 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>40.3 mW / g <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	5.25 mW / g
SAR normalized	normalized to 1W	21.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>21.0 mW / g <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.8 ± 6 %	1.55 mho/m ± 6 %
Body TSL temperature during test	(21.2 ± 0.2) °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 mW / g
SAR normalized	normalized to 1W	41.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>40.7 mW / g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.43 mW / g
SAR normalized	normalized to 1W	21.7 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>21.6 mW / g ± 16.5 % (k=2)</b>



## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	$50.5 \Omega + 4.2 j\Omega$
Return Loss	- 27.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	$45.6 \Omega + 5.0 j\Omega$
Return Loss	- 23.1 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.195 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 26, 2001

## DASY5 Validation Report for Head TSL

Date/Time: 07.02.2011 15:18:47

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:540**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.936 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.544 W/kg

**SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.25 mW/g**

Maximum value of SAR (measured) = 12.384 mW/g

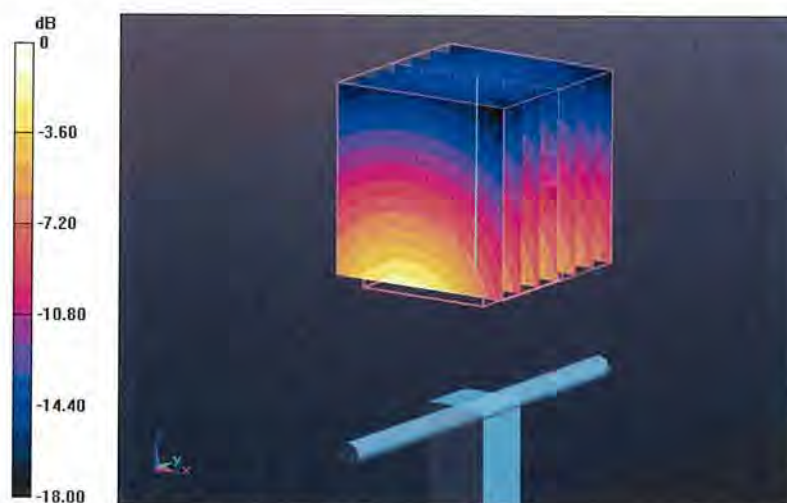


# Impedance Measurement Plot for Head TSL

7 Feb 2011 16:45:39

CH1 S11 1 U FS 1: 50.525  $\Omega$  4.1680  $\Omega$  349.13 pF 1 900.000 000 MHz

\*  
Del  
CA

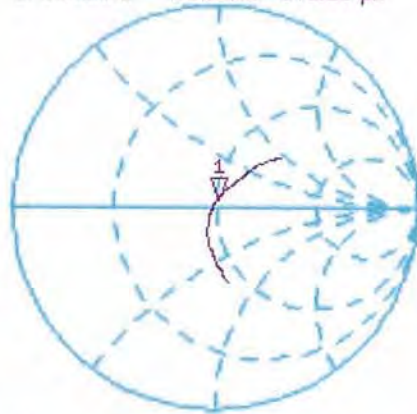


Avg  
16  
↑

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.575 dB 1 900.000 000 MHz

CA

Avg  
16  
↑

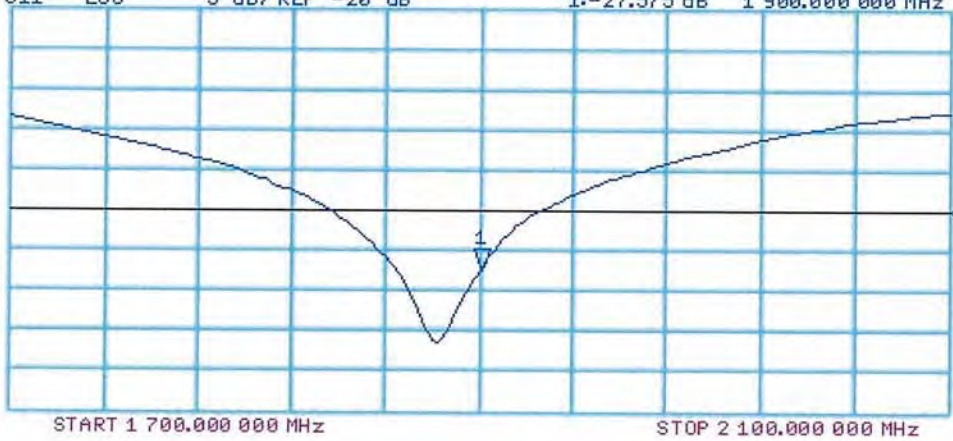

# DASY5 Validation Report for Body TSL

Date/Time: 08.02.2011 12:04:35

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:540**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.55 \text{ mho/m}$ ;  $\epsilon_r = 52.9$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.899 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.597 W/kg

**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.43 mW/g**

Maximum value of SAR (measured) = 13.038 mW/g



0 dB = 13.040mW/g




# Impedance Measurement Plot for Body TSL

8 Feb 2011 10:45:02

CH1 S11 1 U FS 3: 45.568  $\Omega$  5.0391  $\Omega$  422.10  $\mu$ H 1 900.000 000 MHz


\*  
De1  
CA

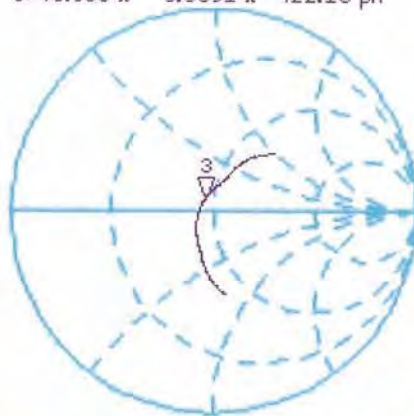

Avg  
16

CH2 S11 LOG 5 dB/REF -20 dB 3:-23.090 dB 1 900.000 000 MHz

CA  
Avg  
16

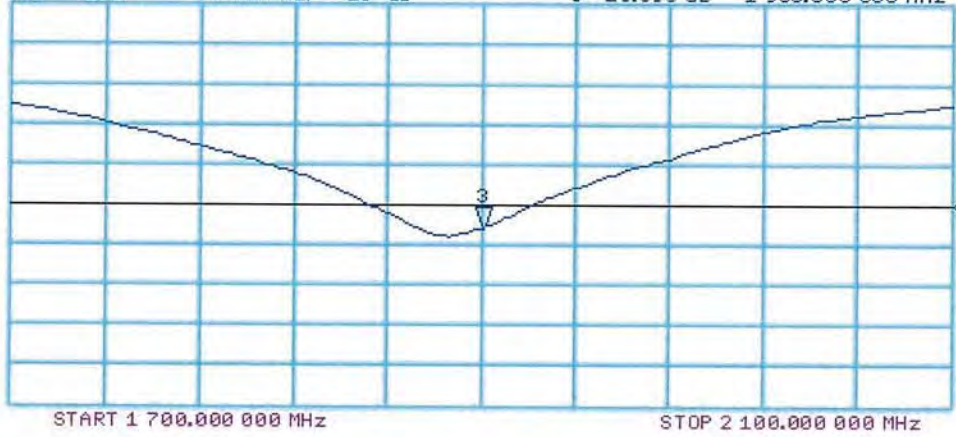

ASSET 1A1322 - Checked by *[Signature]*

21/02/2011

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RFI**

Certificate No: **D2450V2-725\_Feb11**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 725**

Calibration procedure(s) **QA CAL-05.v8  
Calibration procedure for dipole validation kits**

Calibration date: **February 08, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	<i>[Signature]</i>
Approved by:	Katja Pokovic	Technical Manager	<i>[Signature]</i>

Issued: February 8, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.1 $\pm$ 6 %	1.73 mho/m $\pm$ 6 %
Head TSL temperature during test	(21.0 $\pm$ 0.2) °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>52.9 mW / g <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.13 mW / g
SAR normalized	normalized to 1W	24.5 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>24.7 mW / g <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.2 ± 6 %	1.94 mho/m ± 6 %
Body TSL temperature during test	(21.0 ± 0.2) °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>51.9 mW / g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.04 mW / g
SAR normalized	normalized to 1W	24.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>24.1 mW / g ± 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	$45.6 \Omega + 7.9 j\Omega$
Return Loss	- 20.5 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	$49.5 \Omega + 9.7 j\Omega$
Return Loss	- 20.2 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 16, 2002

## DASY5 Validation Report for Head TSL

Date/Time: 07.02.2011 14:34:55

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:725**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.74$  mho/m;  $\epsilon_r = 39.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.3 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 26.701 W/kg

**SAR(1 g) = 13 mW/g; SAR(10 g) = 6.13 mW/g**

Maximum value of SAR (measured) = 16.608 mW/g

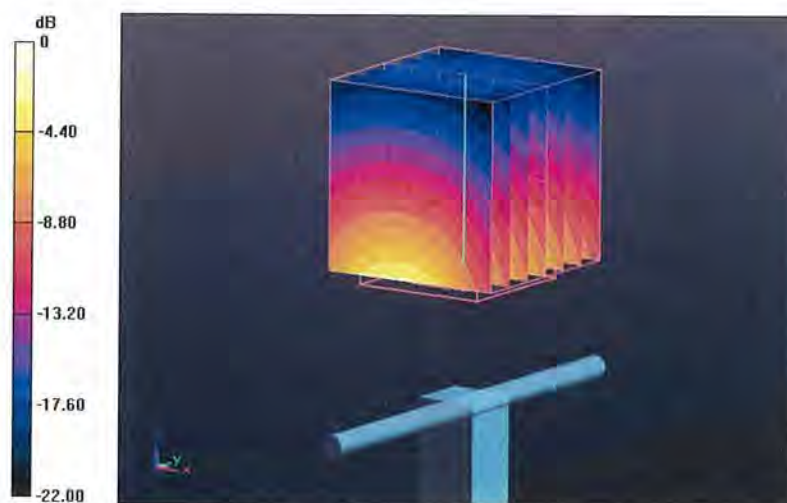




# Impedance Measurement Plot for Head TSL


7 Feb 2011 16:48:44  
 CH1 S11 1 U FS 2: 45.582  $\Omega$  7.8730  $\Omega$  511.44 pF 2 450.000 000 MHz

\*  
 De1  
 CA  
 Avg  
 16  
 ↑

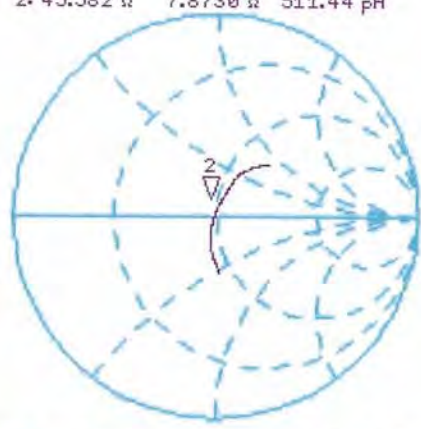

CH2 S11 LOG 5 dB/REF -20 dB 2:-20.528 dB 2 450.000 000 MHz

CA  
 Avg  
 16  
 ↑

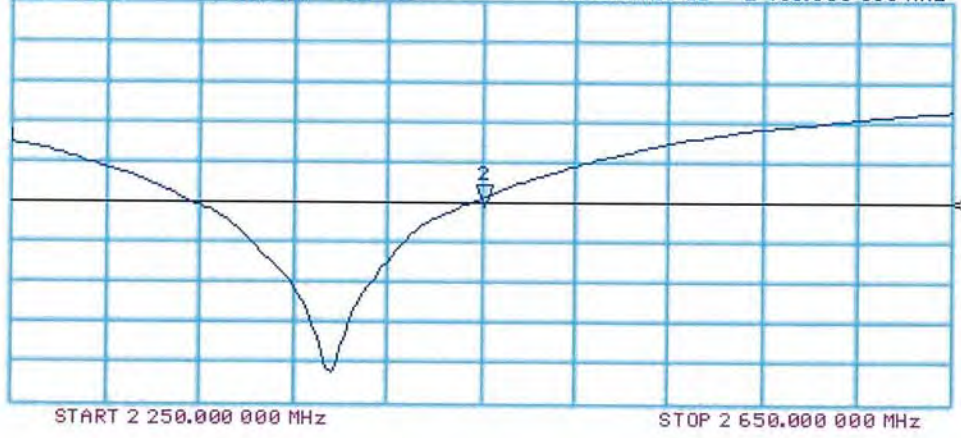

## DASY5 Validation Report for Body TSL

Date/Time: 08.02.2011 12:48:13

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:725**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.95$  mho/m;  $\epsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.406 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 27.401 W/kg

**SAR(1 g) = 13 mW/g; SAR(10 g) = 6.04 mW/g**


Maximum value of SAR (measured) = 17.121 mW/g

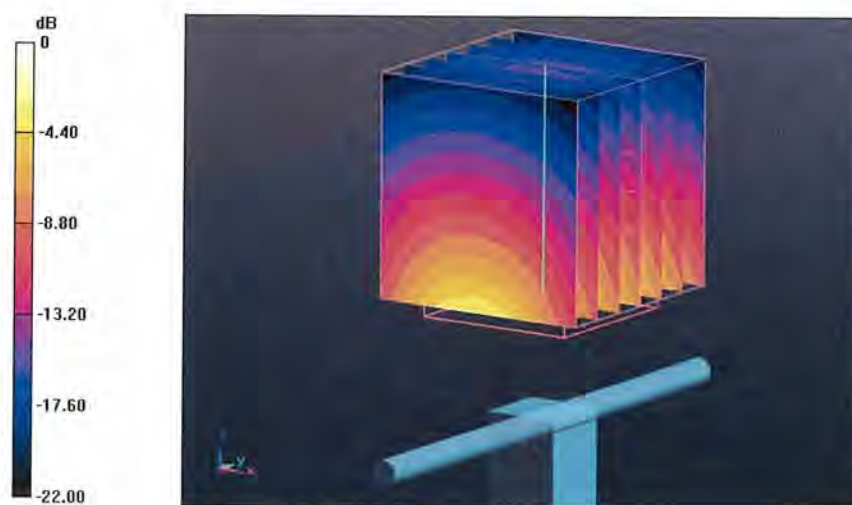

# Impedance Measurement Plot for Body TSL

8 Feb 2011 10:56:06  
 [CH1] S11 1 U FS 5: 49.523 Ω 9.7422 Ω 632.86 pF 2 450.000 000 MHz

\*  
 De1  
 CA

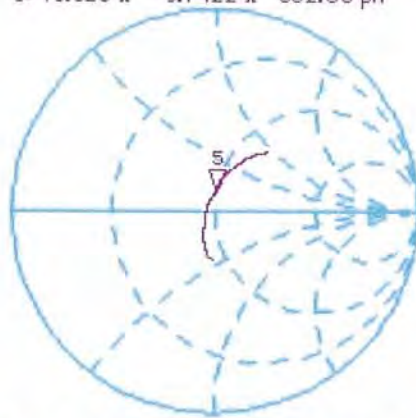

Avg  
 16


↑

CH2 S11 LOG 5 dB/REF -20 dB 5: -20.215 dB 2 450.000 000 MHz

CA

Avg  
 16

↑

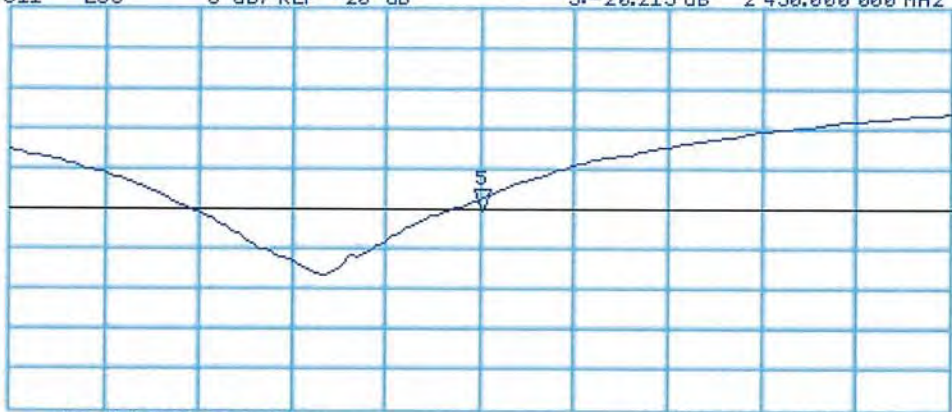

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

## Appendix 2. Measurement Methods

### A.2.1. Evaluation Procedure

The Specific Absorption Rate (SAR) evaluation was performed in the following manner:

- a) (i) The evaluation was performed in an applicable area of the phantom depending on the type of device being tested. For devices worn about the ear during normal operation, both the left and right ear positions were evaluated at the centre frequency of the band at maximum power. The side, which produced the greatest SAR, determined which side of the phantom would be used for the entire evaluation. The positioning of the head worn device relative to the phantom was dictated by the test specification identified in section 3.1 of this report.  
  
(ii) For body worn devices or devices which can be operated within 20 cm of the body, the flat section of the SAM phantom was used where the size of the device(s) is normal. For bigger devices and base station the 2mm Oval phantom is used for evaluation. The type of device being evaluated dictated the distance of the EUT to the outer surface of the phantom flat section.
- b) The SAR was determined by a pre-defined procedure within the DASY4 software. The exposed region of the phantom was scanned near the inner surface with a grid spacing of 20mm x 20mm or appropriate resolution.
- c) A 5x5x7 matrix was performed around the greatest spatial SAR distribution found during the area scan of the applicable exposed region. SAR values were then calculated using a 3-D spline interpolation algorithm and averaged over spatial volumes of 1 and 10 grams.
- d) If the EUT had any appreciable drift over the course of the evaluation, then the EUT was re-evaluated. Any unusual anomalies over the course of the test also warranted a re-evaluation.

**A.2.2. Specific Absorption Rate (SAR) Measurements to OET Bulletin 65 Supplement C: (2001-01)**

Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields

SAR measurements were performed in accordance with Appendix D of the standard FCC OET Bulletin 65 Supplement C: 2001, IEEE 1528 and FCC KDB procedures, against appropriate limits for each measurement position in accordance with the standard. In some cases the FCC was contacted using a PBA or KDB process to ensure test is performed correctly.

The test was performed in a shielded enclosure with the temperature controlled to remain between +18.0°C and +25.0°C. The tissue equivalent material fluid temperature was controlled to give a maximum variation of  $\pm 2.0^\circ\text{C}$

Prior to any SAR measurements on the EUT, system validation and material dielectric property measurements were conducted. In the absence of a detailed procedure within the specification, system validation and material dielectric property measurements were performed in accordance with Appendix C and Appendix D of FCC OET Bulletin 65 Supplement C: 2001 and FCC KDB publication 450824.

Following the successful system validation and material dielectric property measurements, a SAR versus time sweep shall be performed within 10 mm of the phantom inner surface. If the EUT power output is stable after three minutes then the measurement probe will perform a coarse surface level scan at each test position in order to ascertain the location of the maximum local SAR level. Once this area had been established, a 5x5x7 cube of 175 points (5 mm spacing in each axis  $\approx 27\text{g}$ ) will be centred at the area of concern. Extrapolation and interpolation will then be carried out on the 27g of tissue and the highest averaged SAR over a 10g cube determined.

Once the maximum interpolated SAR measurement is complete; the coarse scan is visually assessed to check for secondary peaks within 50% of the maximum SAR level. If there are any further SAR measurements required, extra 5x5x7 cubes shall be centred on each of these extra local SAR maxima.

At the end of each position test case a second time sweep shall be performed to check whether the EUT has remained stable throughout the test.