

TEST REPORT

Test report no.: 1-4254/12-59-10



Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 46 19 32 95
Contact: Håkan Sjöberg
e-mail: hakan.sjoberg@sonymobile.com
Phone: +46 46 19 35 59

Manufacturer

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN

Test standard/s


47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I
Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.


Test Item

Kind of test item: GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VI/XIX; LTE FDD 1/19/21; WLAN a/b/g/n; BT 3.1; BT LE; RFID; FM Rx; GPS
Model name: PM-0220-BV
FCC ID: PY7PM-0220
IC: -/
Frequency: ISM band 2400 MHz to 2483.5 MHz
(lowest channel 01 – 2412 MHz; highest channel 11 – 2462 MHz)
Technology tested: WLAN (DSSS / b – mode, OFDM / g – mode and OFDM / n HT20 – mode)
Antenna: Integrated antenna
Power Supply: 3.7 V DC by Li - polymer battery
Temperature Range: -20°C to +55 °C

Test report authorised:


2012-10-26 Stefan Bös
Senior Testing Manager

Test performed:


2012-10-26 Marco Bertolino
Testing Manager

| | | |
|----------|--|----------|
| 1 | Table of contents | 2 |
| 1 | Table of contents | 2 |
| 2 | General information | 3 |
| 2.1 | Notes and disclaimer | 3 |
| 2.2 | Application details | 3 |
| 3 | Test standard/s | 3 |
| 3.1 | Measurement guidance | 3 |
| 4 | Test environment | 4 |
| 5 | Test item | 4 |
| 6 | Test laboratories sub-contracted | 4 |
| 7 | Summary of measurement results | 5 |
| 8 | RF measurements | 6 |
| 8.1 | Description of test setup | 6 |
| 8.1.1 | Radiated measurements | 6 |
| 8.1.2 | Conducted measurements | 7 |
| 8.2 | Additional comments | 7 |
| 9 | Measurement results | 8 |
| 9.1 | Output power verification (conducted) | 8 |
| 9.2 | Antenna gain | 9 |
| 9.3 | Maximum output power | 12 |
| 9.4 | Power spectral density | 20 |
| 9.5 | Spectrum bandwidth – 6 dB / 75 % power bandwidth (EBW) | 27 |
| 9.6 | Spectrum bandwidth – 20 dB / 99 % power bandwidth | 34 |
| 9.7 | Band edge compliance conducted | 41 |
| 9.8 | Band edge compliance radiated | 45 |
| 9.9 | TX spurious emissions conducted | 48 |
| 9.10 | TX spurious emissions radiated | 57 |
| 9.11 | RX spurious emissions radiated | 77 |
| 9.12 | Spurious emissions radiated < 30 MHz | 81 |
| 9.13 | Spurious emissions conducted < 30 MHz | 83 |
| 10 | Test equipment and ancillaries used for tests | 86 |
| 11 | Observations | 87 |
| Annex A | Photographs of the test setup | 88 |
| Annex B | External photographs of the EUT | 93 |
| Annex C | Internal photographs of the EUT | 96 |
| Annex D | Document history | 102 |
| Annex E | Further information | 102 |
| Annex F | Accreditation Certificate | 103 |

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

2.2 Application details

| | |
|------------------------------------|------------|
| Date of receipt of order: | 2012-10-12 |
| Date of receipt of test item: | 2012-10-12 |
| Start of test: | 2012-10-22 |
| End of test: | 2012-10-26 |
| Person(s) present during the test: | -/- |

3 Test standard/s

| Test standard | Date | Test standard description |
|----------------|---------|--|
| 47 CFR Part 15 | 2010-10 | Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices |

3.1 Measurement guidance

| | | |
|------------------|---------|---|
| DTS : KDB 558074 | 2012-01 | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 |
|------------------|---------|---|

4 Test environment

| | | |
|----------------------------|-----------|---------------------------------------|
| Temperature: | T_{nom} | +22 °C during room temperature tests |
| | T_{max} | +55 °C during high temperature tests |
| | T_{min} | -20 °C during low temperature tests |
| Relative humidity content: | | 48 % |
| Barometric pressure: | | not relevant for this kind of testing |
| Power supply: | V_{nom} | 3.7 V DC by Li - polymer battery |
| | V_{max} | 4.1 V |
| | V_{min} | 3.3 V |

5 Test item

| | | |
|----------------------------|---|--|
| Kind of test item | : | GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VI/XIX; LTE FDD 1/19/21; WLAN a/b/g/n; BT 3.1; BT LE; RFID; FM Rx; GPS |
| Type identification | : | PM-0220-BV |
| S/N serial number | : | Radiated units: CB5A1LN5WE, CB5A1LN60G Conducted units: CB5A1LN60V, CB5A1LN60F |
| HW hardware status | : | AP1 |
| SW software status | : | 10.1.D.0.51 |
| Frequency band [MHz] | : | ISM band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412 MHz; highest channel 11 – 2462 MHz) |
| Type of radio transmission | : | DSSS, OFDM |
| Use of frequency spectrum | : | |
| Channel access method | : | FDMA |
| Type of modulation | : | BPSK, QPSK, 16 – QAM & 64 – QAM |
| Number of channels | : | 11 |
| Antenna | : | Integrated antenna |
| Power supply | : | 3.7 V DC by Li - polymer battery |
| Temperature range | : | -20 °C to +55 °C |

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

| TC Identifier | Description | Verdict | Date | Remark |
|---------------|-------------|---------|------------|--------|
| RF-Testing | CFR Part 15 | Passed | 2012-12-12 | -/- |

| Test specification clause | Test case | Temperature conditions | Power source voltages | Mode | Pass | Fail | NA | NP | Remark |
|---------------------------|---|------------------------|-----------------------|--------------------|--|--|--|--|----------|
| §15.247(b)(4) | Antenna gain | Nominal | Nominal | DSSS | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(e) | Power spectral density | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |
| §15.247(a)(2) | Spectrum bandwidth - 6dB bandwidth | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |
| §15.247(a)(2) | Spectrum bandwidth - 20dB bandwidth | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |
| §15.247(b)(3) | Maximum output power | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |
| §15.247(d) | Band edge compliance conducted | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |
| §15.205 | Band edge compliance radiated | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |
| §15.247(d) | TX spurious emissions conducted | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |
| §15.247(d) | TX spurious emissions radiated | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |
| §15.109 | RX spurious emissions radiated | Nominal | Nominal | -/- | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.209(a) | TX spurious emissions radiated < 30 MHz | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |
| §15.107(a) | Conducted emissions < 30 MHz | Nominal | Nominal | DSSS OFDM g & n | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | complies |

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

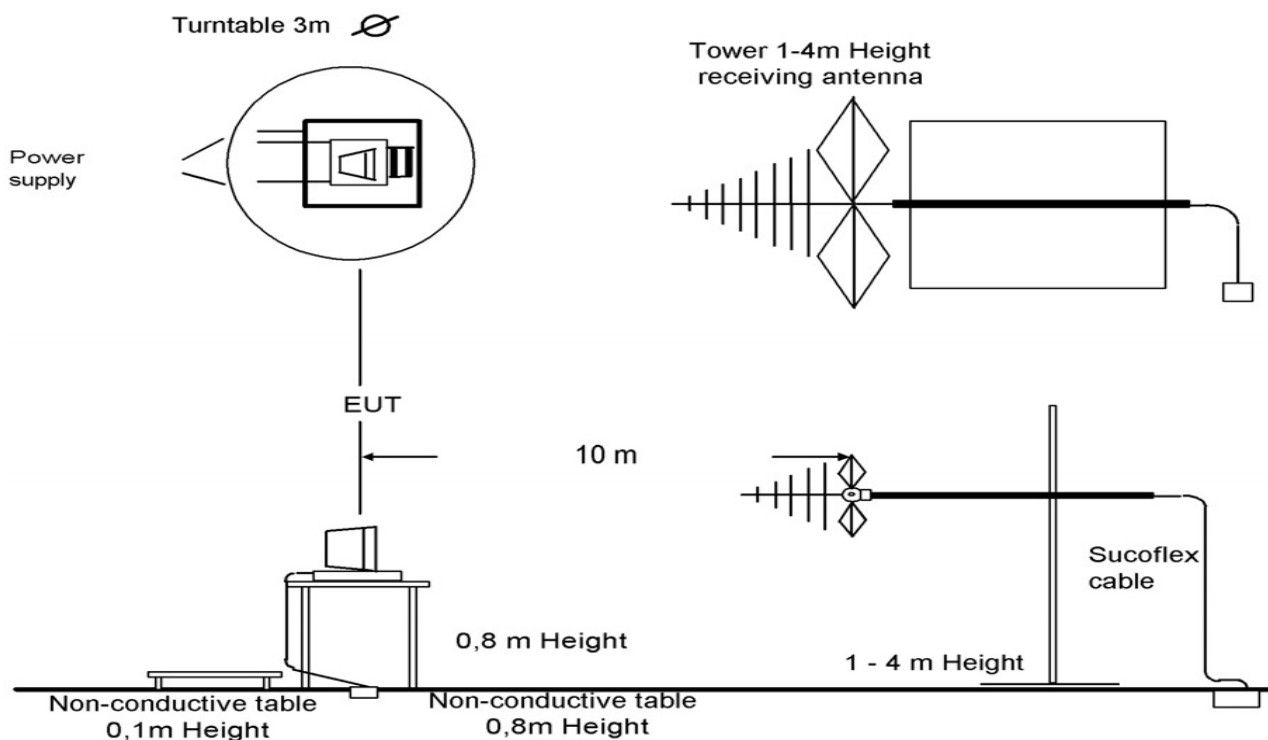


Picture 1: Diagram radiated measurements

| | |
|-----------------|---------------------|
| 9 kHz - 30 MHz: | active loop antenna |
| 30 MHz – 1 GHz: | tri-log antenna |
| > 1 GHz: | horn antenna |

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

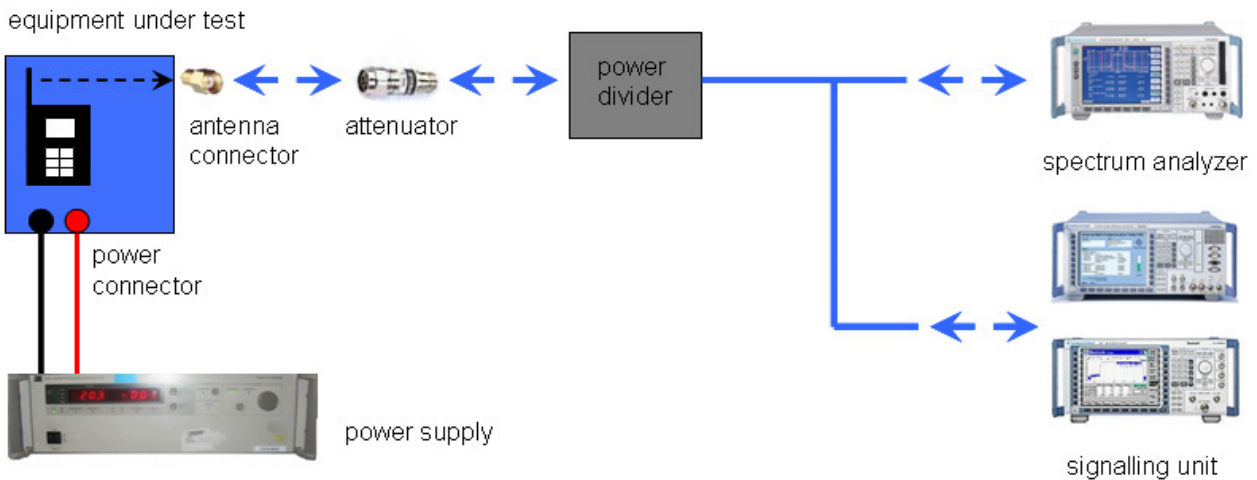

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

- Test mode:
- No test mode available.
lperf was used to ping another device with the largest support packet size
 - Special software is used.
EUT is transmitting pseudo random data by itself

9 Measurement results

9.1 Output power verification (conducted)

Description:

Measurement of the maximum output power conducted. This measurement is performed only at the middle channel in both modes and all data rates to determine the data rate per mode which results in the highest output power. This mode will be selected for all further measurements.

Measurement:

| Measurement parameter | |
|-----------------------|---|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | > EBW |
| Video bandwidth: | ≥ 3 x RBW (or the maximum of the analyzer) |
| Span: | Zero span |
| Trace-Mode: | Max hold (allow trace to fully stabilize) |

Results:

| DSSS / b – mode Data Rate [MBit/s] | Maximum Output Power Conducted [dBm] | | | |
|---------------------------------------|--------------------------------------|-------|-------|-------|
| | 1 | 2 | 5.5 | 11 |
| Ch 6 - 2437 MHz | 16.99 | 17.55 | 17.53 | 17.61 |
| Measurement uncertainty | ± 0.5 dB | | | |

| OFDM / g – mode Data Rate [MBit/s] | Maximum Output Power Conducted [dBm] | | | | | | | |
|---------------------------------------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | 6 | 9 | 12 | 18 | 24 | 36 | 48 | 54 |
| Ch 6 - 2437 MHz | 22.13 | 22.09 | 22.10 | 22.15 | 22.10 | 21.96 | 22.16 | 21.99 |
| Measurement uncertainty | ± 0.5 dB | | | | | | | |

| OFDM / n – mode Data Rate [MBit/s] | Maximum Output Power Conducted [dBm] | | | | | | | |
|---------------------------------------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | MCS0 | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
| Ch 6 - 2437 MHz | 20.91 | 21.32 | 21.24 | 21.03 | 21.48 | 20.87 | 21.16 | 21.35 |
| Measurement uncertainty | ± 0.5 dB | | | | | | | |

Result: Selected data rate for all measurements:

DSSS / b – mode: 11 MBit/s
 OFDM / g – mode: 48 MBit/s
 OFDM / n – mode: MCS4

9.2 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters:

| Measurement parameter | |
|-----------------------|----------|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 3 MHz |
| Video bandwidth: | 3 MHz |
| Trace-Mode: | Max hold |

Limits:

| FCC | IC |
|--------------|----|
| Antenna Gain | |
| 6 dBi | |


Results:

| T _{nom} | V _{nom} | lowest channel 2412 MHz | middle channel 2437 MHz | highest channel 2462 MHz |
|--|------------------|----------------------------|----------------------------------|-----------------------------|
| Conducted power [dBm] Measured with DSSS modulation | | 15.05 | 16.19 | 15.92 |
| Radiated power [dBm] Measured with DSSS modulation | | 12.83 | 13.70 | 14.41 |
| Gain [dBi] Calculated | | -2.22 | -2.49 | -1.51 |
| Measurement uncertainty | | | ± 1.5 dB (cond.) / ± 3 dB (rad.) | |

Result: Passed


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel

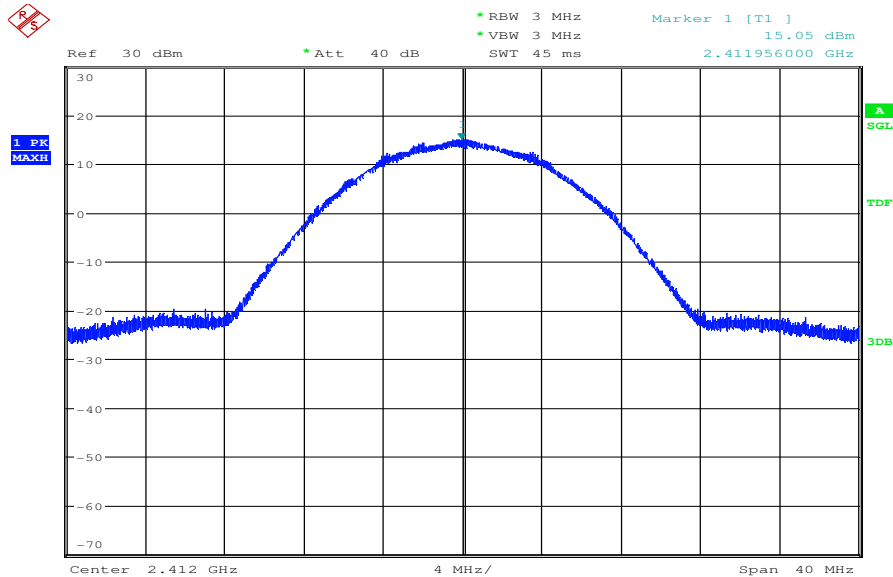


Date: 18.OCT.2012 14:27:58

Plot 2: TX mode, middle channel

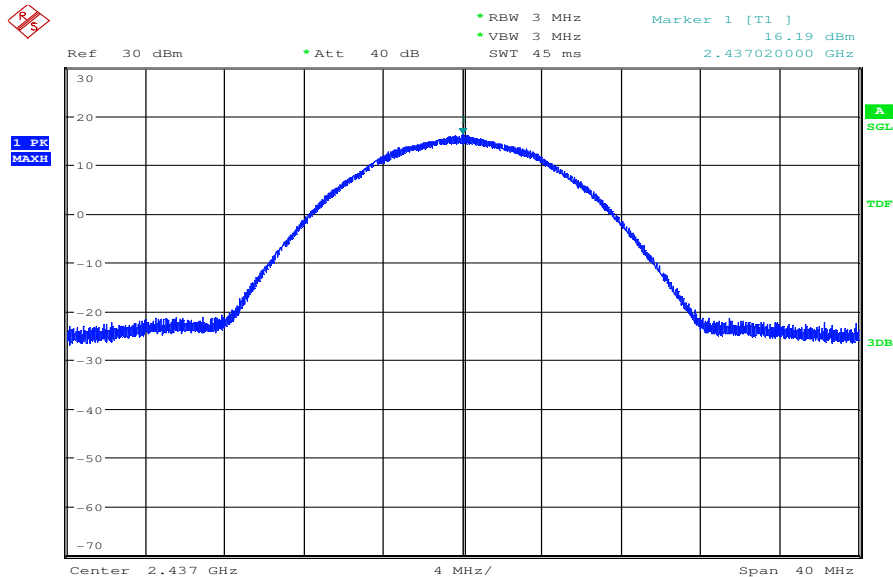

Date: 18.OCT.2012 14:42:47

Plot 3: TX mode, highest channel

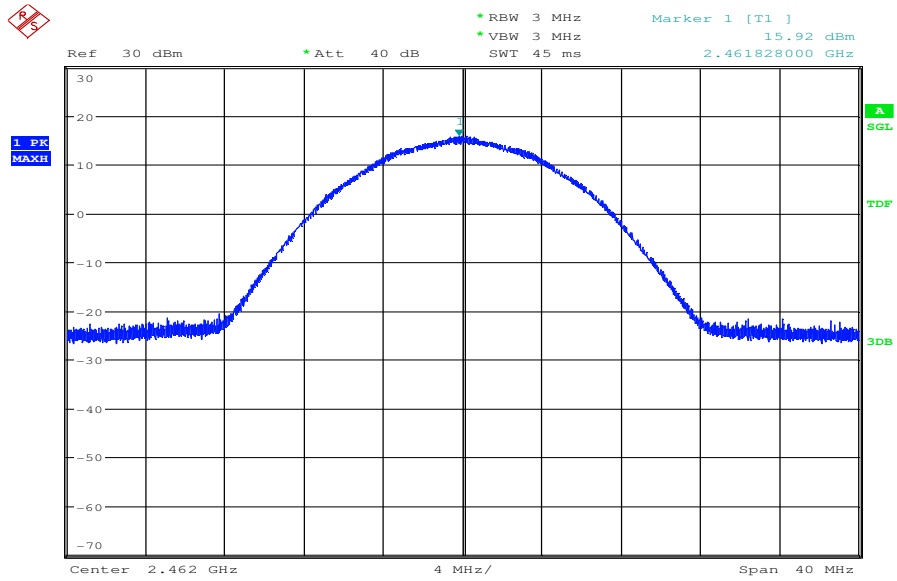

Date: 18.OCT.2012 14:54:40

9.3 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power. The determination of these data rates was performed at the beginning of the tests.

Measurement:

| Measurement parameter | |
|-----------------------|---|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | > EBW |
| Video bandwidth: | ≥ 3 x RBW (or the maximum of the analyzer) |
| Span: | Zero span |
| Trace-Mode: | Max hold (allow trace to fully stabilize) |

Limits:

| FCC | IC |
|--|----|
| Maximum Output Power | |
| Conducted: 1.0 W – Antenna Gain max. 6 dBi | |

Results: DSSS / b – mode

| DSSS / b – mode Frequency | Maximum Output Power [dBm] | | |
|--------------------------------|----------------------------------|----------|----------|
| | 2412 MHz | 2437 MHz | 2462 MHz |
| Peak Output Power Conducted | 16.99 | 17.15 | 16.81 |
| Output Power Radiated – EIRP*) | 14.77 | 14.66 | 15.30 |
| Measurement uncertainty | ± 1.5 dB (cond.) / ± 3 dB (rad.) | | |

*) calculated with Antenna gain

Result: Passed

Results: OFDM / g – mode

| OFDM / g – mode Frequency | Maximum Output Power [dBm] | | |
|--------------------------------|----------------------------------|----------|----------|
| | 2412 MHz | 2437 MHz | 2462 MHz |
| Peak Output Power Conducted | 20.85 | 21.63 | 21.37 |
| Output Power Radiated – EIRP*) | 18.63 | 19.14 | 19.86 |
| Measurement uncertainty | ± 1.5 dB (cond.) / ± 3 dB (rad.) | | |

*) calculated with Antenna gain

Result: Passed**Results: OFDM / n – mode**


| OFDM / n – mode Frequency | Maximum Output Power [dBm] | | |
|--------------------------------|----------------------------------|----------|----------|
| | 2412 MHz | 2437 MHz | 2462 MHz |
| Peak Output Power Conducted | 19.83 | 20.66 | 20.95 |
| Output Power Radiated – EIRP*) | 17.61 | 18.17 | 19.44 |
| Measurement uncertainty | ± 1.5 dB (cond.) / ± 3 dB (rad.) | | |

*) calculated with Antenna gain

Result: Passed


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel

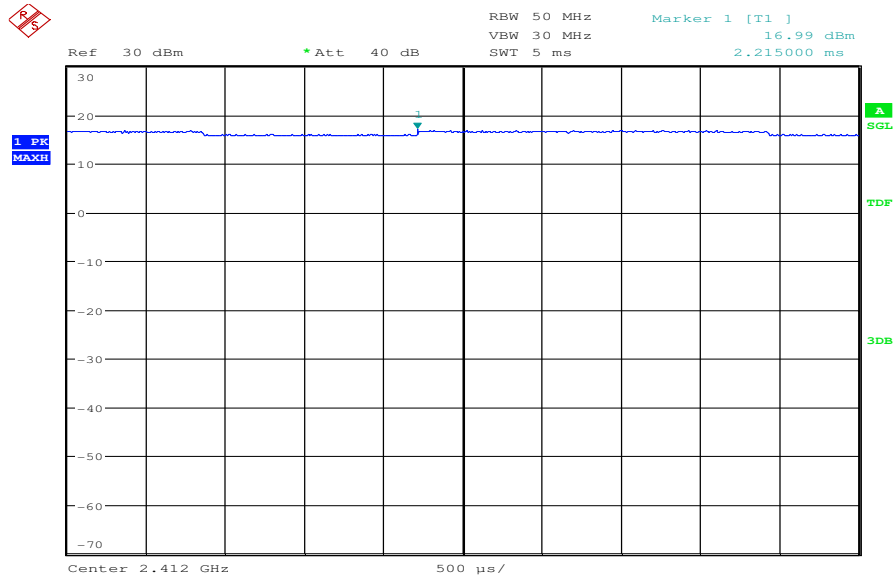


Date: 18.OCT.2012 14:28:17

Plot 2: TX mode, middle channel

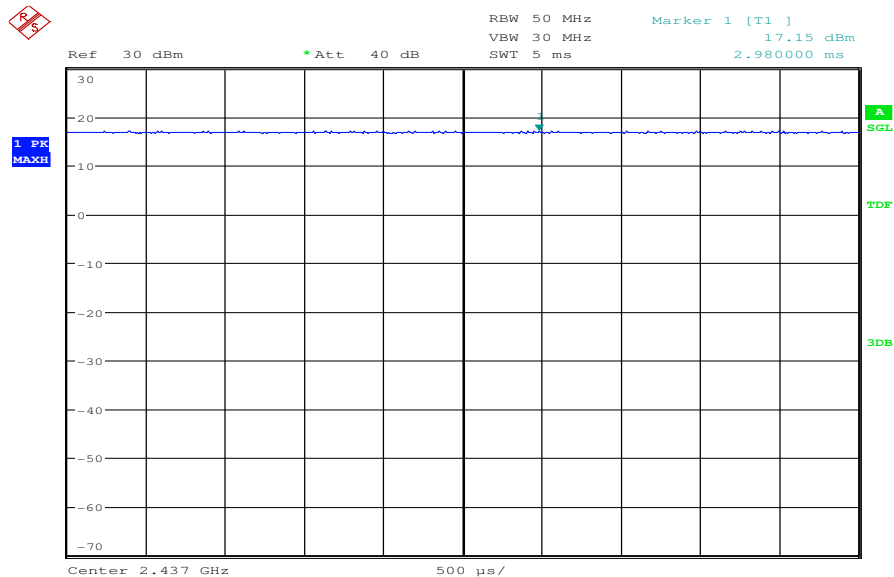

Date: 18.OCT.2012 14:43:06


Plot 3: TX mode, highest channel

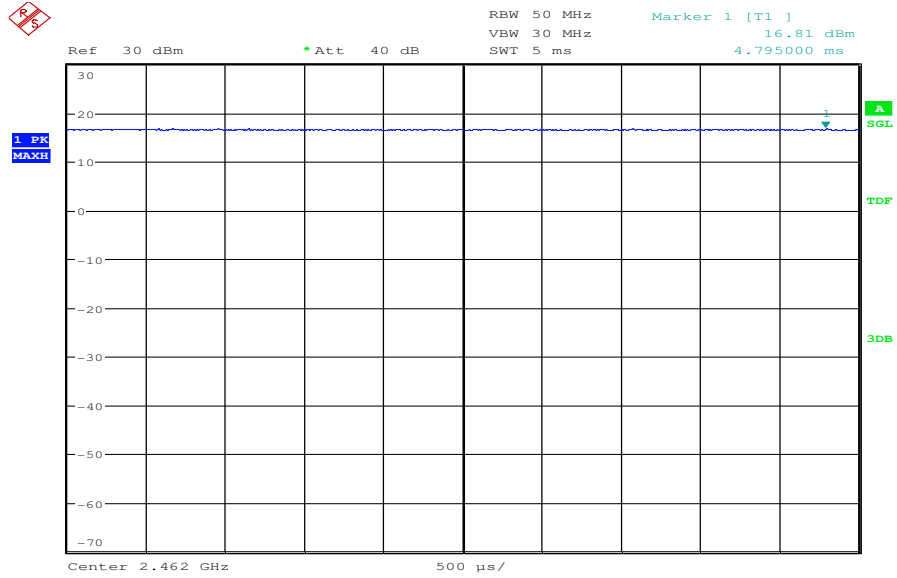

Date: 18.OCT.2012 14:54:59


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel

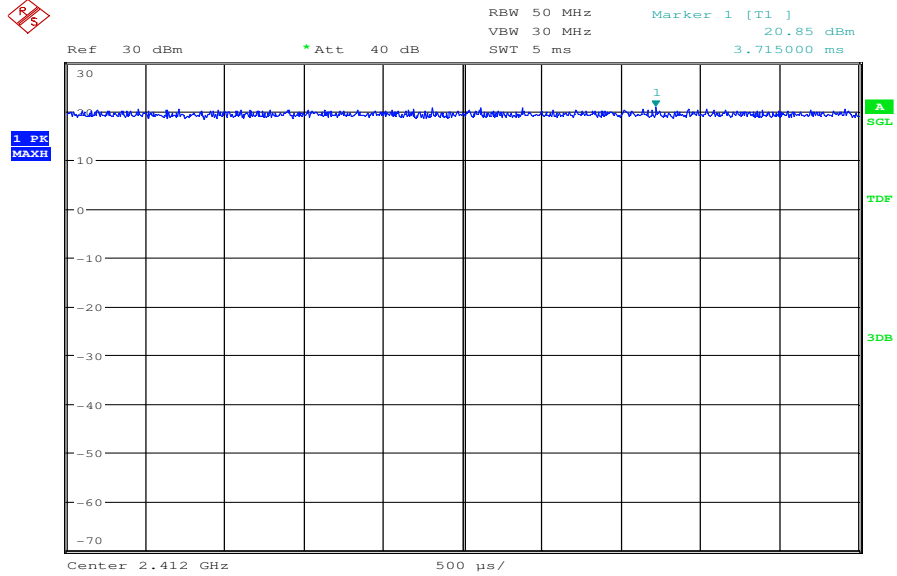


Date: 18.OCT.2012 16:41:48

Plot 2: TX mode, middle channel

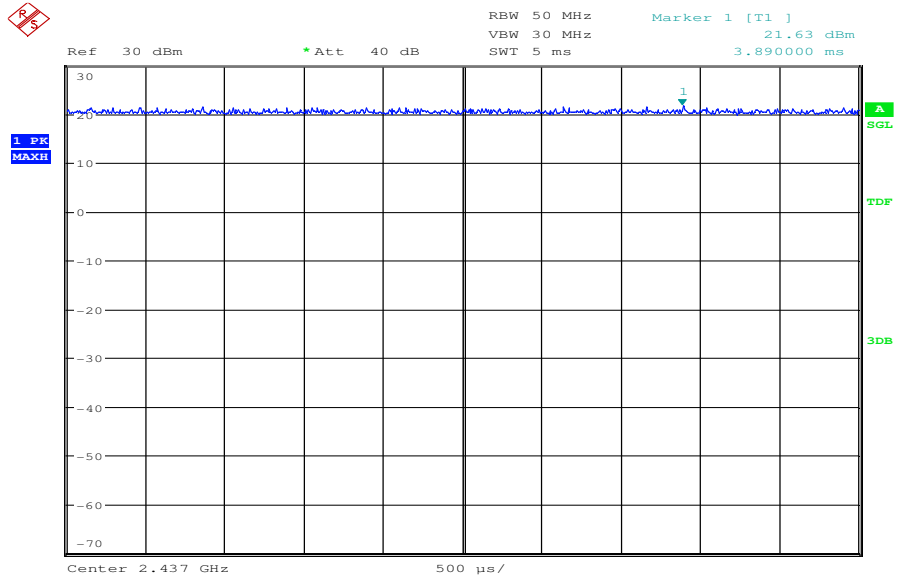

Date: 18.OCT.2012 17:06:27


Plot 3: TX mode, highest channel

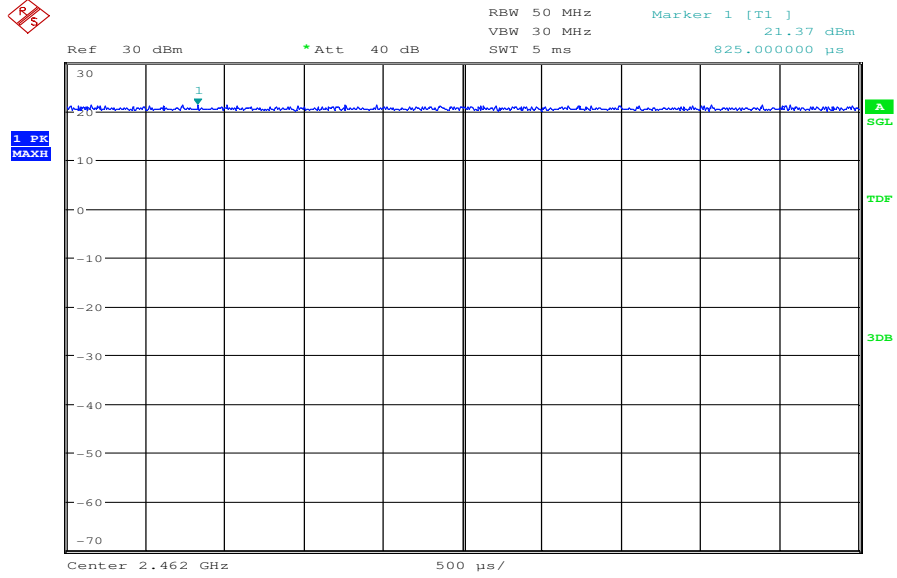

Date: 18.OCT.2012 17:30:05


Plots: OFDM / n – mode

Plot 1: TX mode, lowest channel

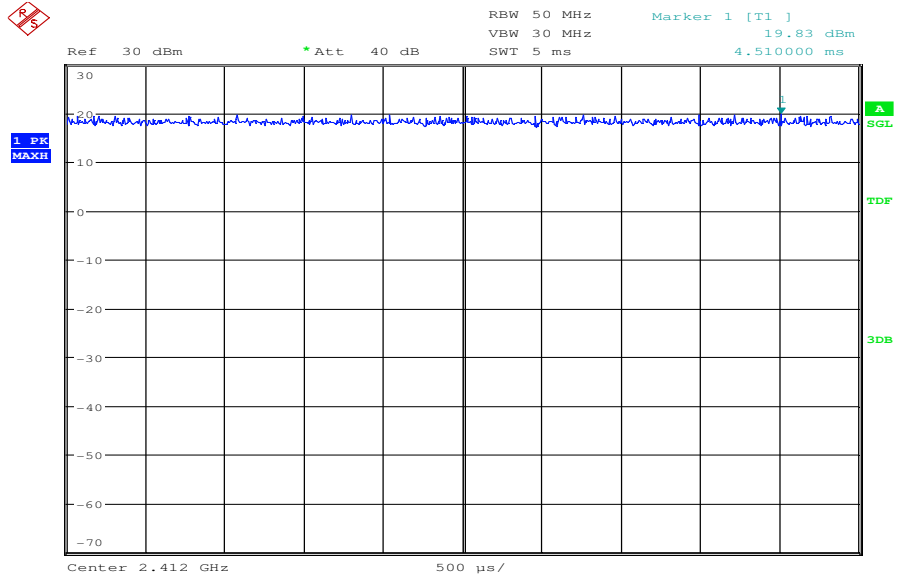


Date: 18.OCT.2012 17:43:49

Plot 2: TX mode, middle channel

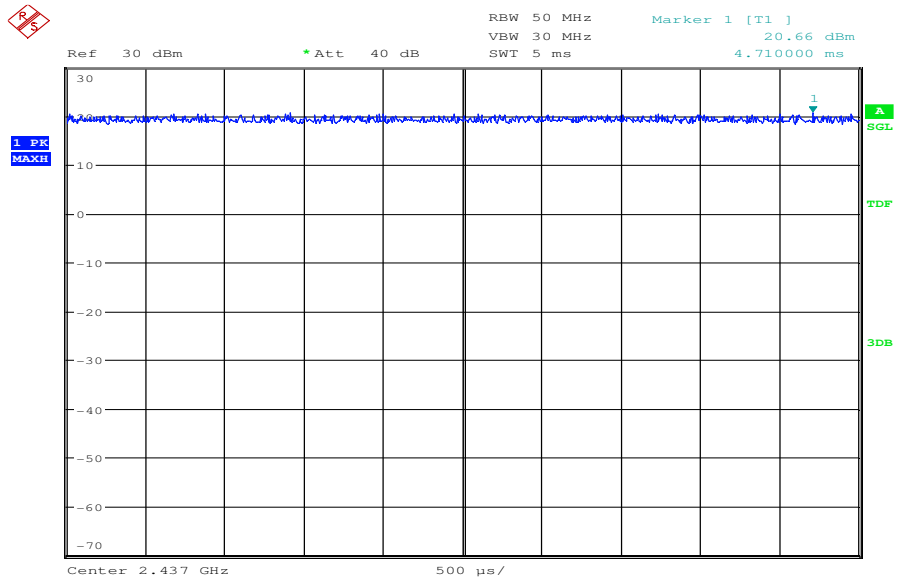

Date: 19.OCT.2012 07:47:45

Plot 3: TX mode, highest channel

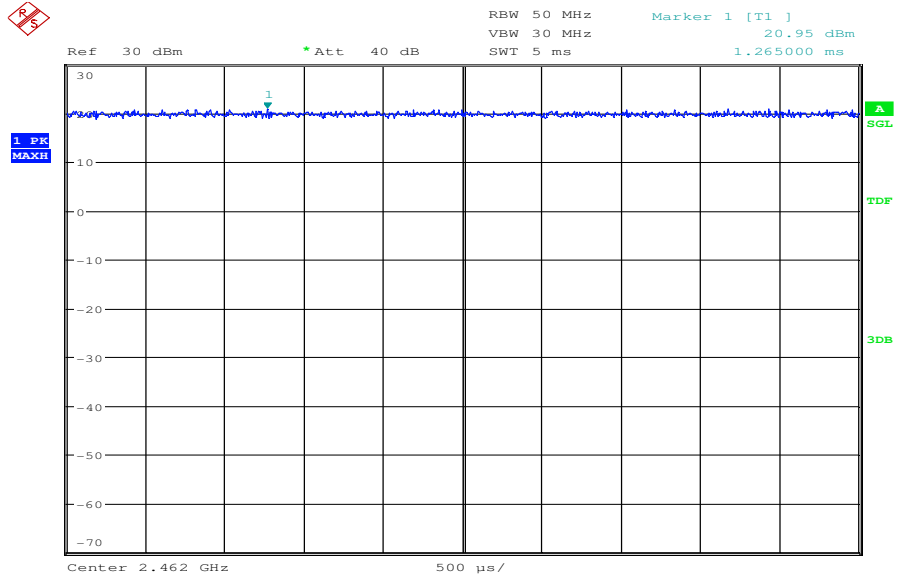

Date: 19.OCT.2012 08:04:51

9.4 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

| Measurement parameter | |
|-----------------------|--|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | ≥ 300 kHz |
| Span: | 5 - 30 % greater than the EBW |
| Trace-Mode: | Max hold (allow trace to fully stabilize) |
| Bandwidth correction: | $10 \log (3\text{kHz} / 100\text{kHz}) = -15.2 \text{ dB}$ |

Limits:

| FCC | IC |
|------------------------|----|
| Power Spectral Density | |
| 8 dBm (conducted) | |


Results:

| Modulation Frequency | Power Spectral density [dBm] | | |
|---|------------------------------|----------|----------|
| | 2412 MHz | 2437 MHz | 2462 MHz |
| DSSS / b – mode measured value (100 kHz) | 5.26 | 6.21 | 5.41 |
| DSSS / b – mode re-calculated value (to 3 kHz) | -9.94 | -8.99 | -9.79 |
| OFDM / g – mode measured value (100 kHz) | -1.67 | -0.67 | -0.43 |
| OFDM / g – mode re-calculated value (to 3 kHz) | -16.87 | -15.87 | -15.63 |
| OFDM / n – mode measured value (100 kHz) | -2.68 | -1.69 | -1.45 |
| OFDM / n – mode re-calculated value (to 3 kHz) | -17.88 | -16.89 | -16.65 |
| Measurement uncertainty | ± 1.5 dB | | |

Result: Passed


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel

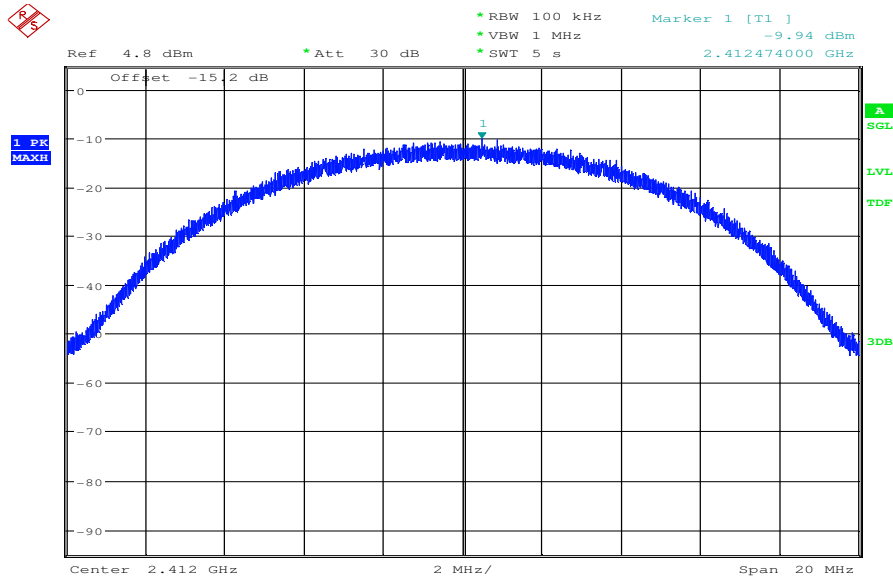


Date: 18.OCT.2012 14:28:50

Plot 2: TX mode, middle channel

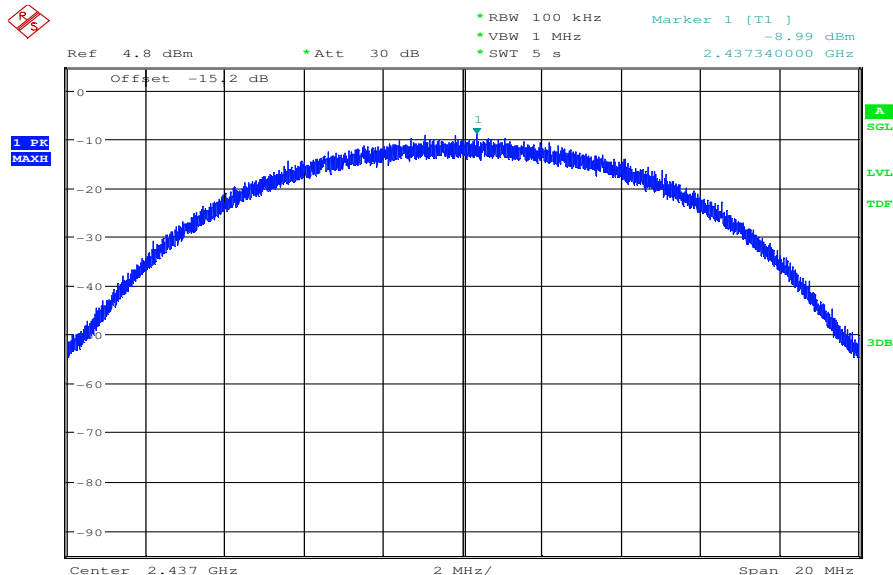

Date: 18.OCT.2012 14:43:40


Plot 3: TX mode, highest channel

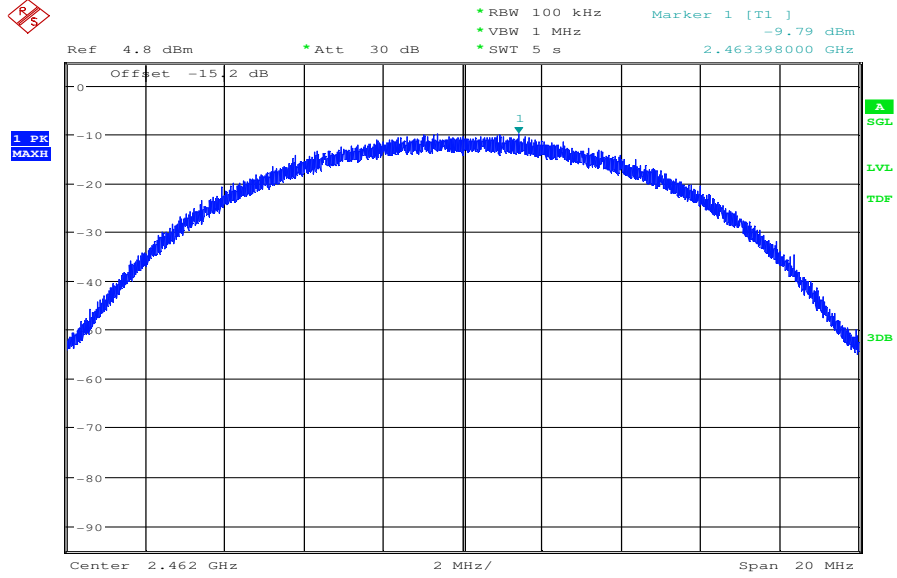

Date: 18.OCT.2012 14:55:32


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel

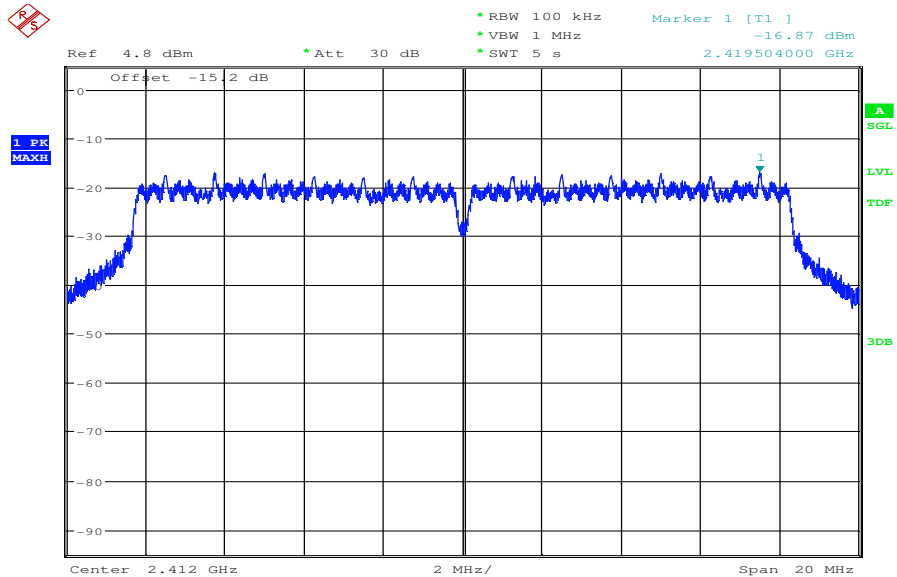


Date: 18.OCT.2012 16:42:22

Plot 2: TX mode, middle channel

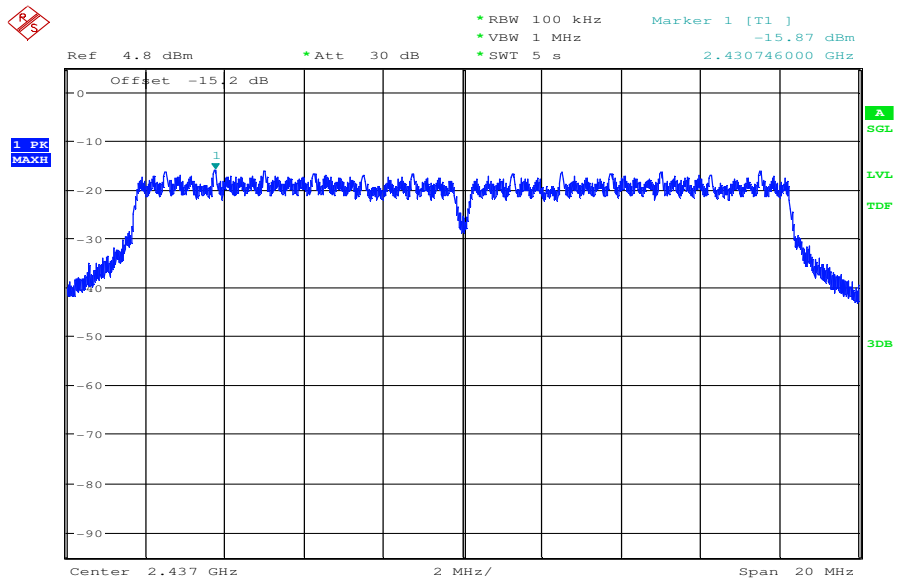

Date: 18.OCT.2012 17:07:01


Plot 3: TX mode, highest channel

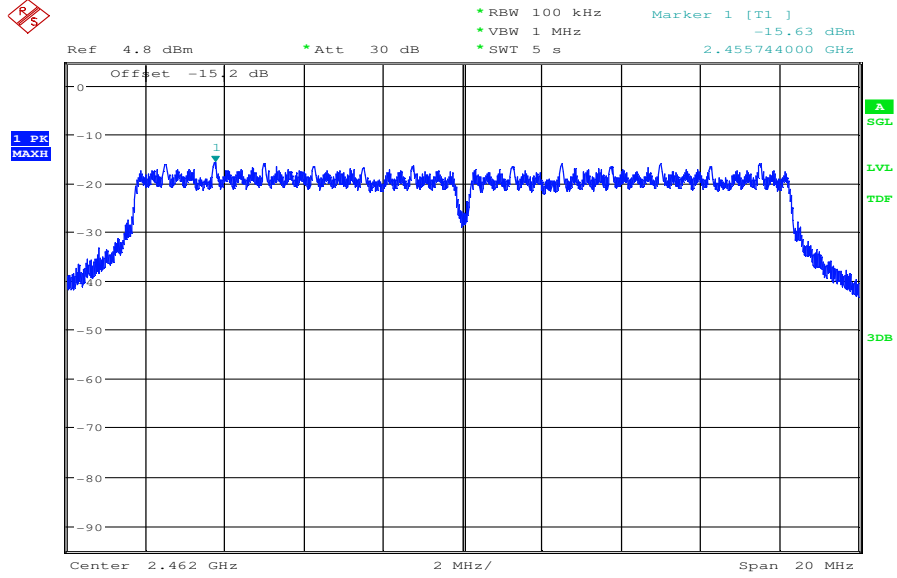

Date: 18.OCT.2012 17:30:38


Plots: OFDM / n – mode

Plot 1: TX mode, lowest channel

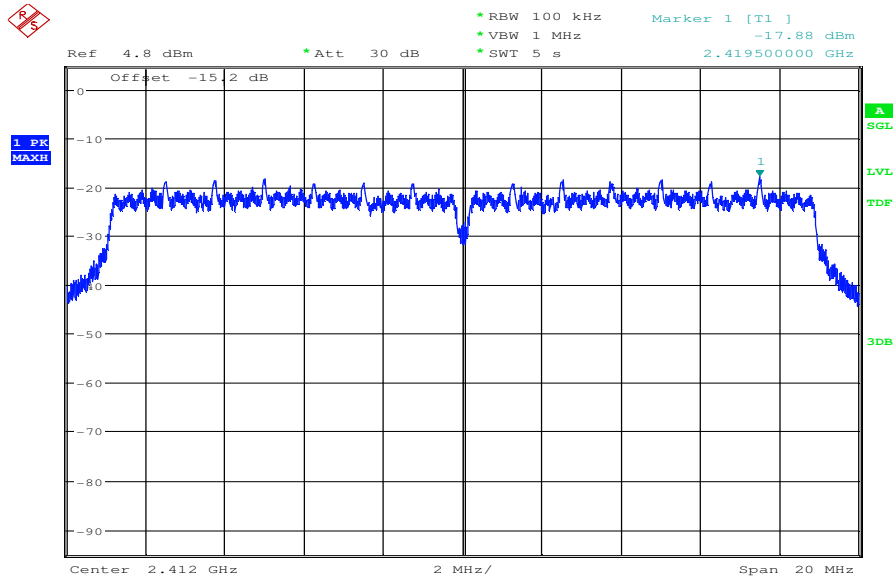


Date: 18.OCT.2012 17:44:22

Plot 2: TX mode, middle channel

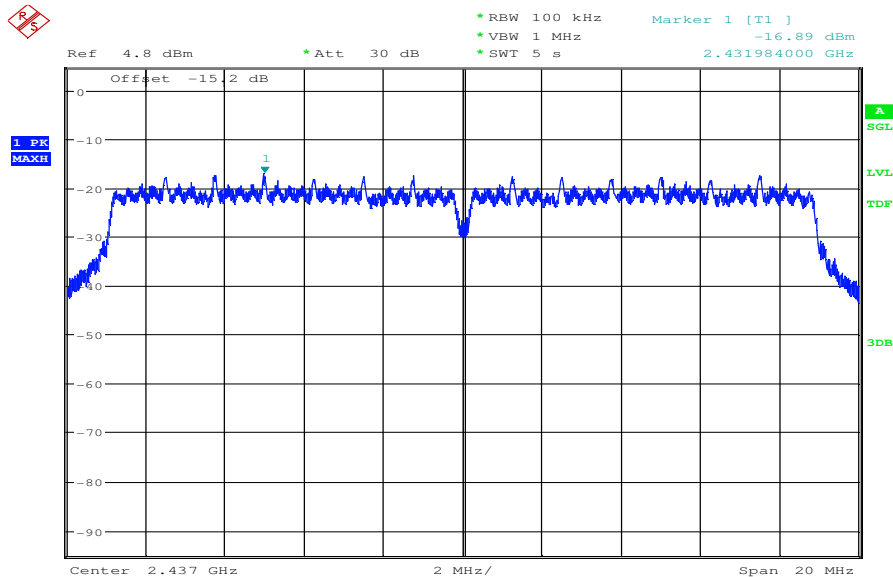

Date: 19.OCT.2012 07:48:19

Plot 3: TX mode, highest channel

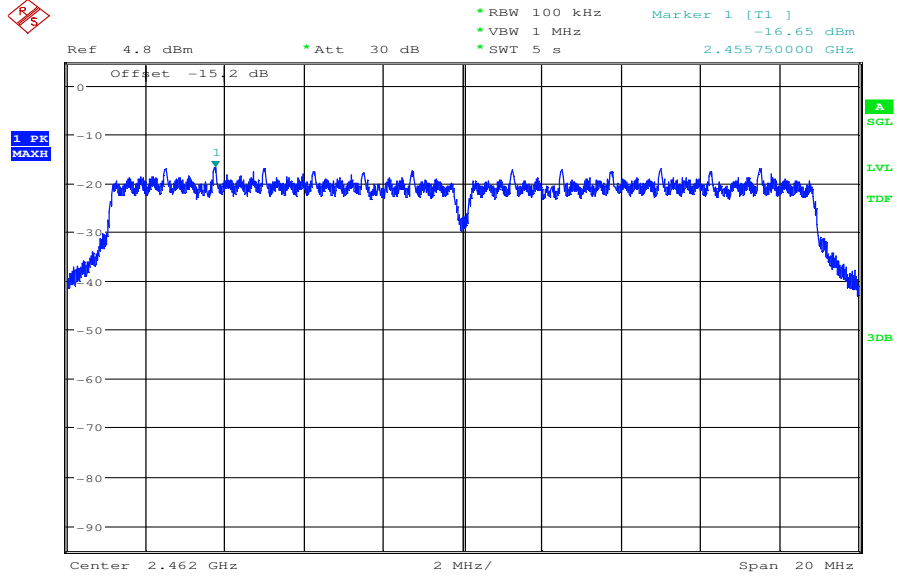

Date: 19.OCT.2012 08:05:24

9.5 Spectrum bandwidth – 6 dB / 75 % power bandwidth (EBW)

Description:

Measurement of the 6 dB / 75 % power bandwidth of the modulated signal.

Measurement:

| Measurement parameter | |
|-----------------------|---|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 1 - 5% of emission bandwidth |
| Video bandwidth: | ≥ 3 x RBW |
| Span: | > complete emission |
| Trace-Mode: | Max hold (allow trace to stabilize) |
| Measurement option: | Automatic bandwidth measurement (75% power) |

Limits:

| FCC | IC |
|---|----|
| Spectrum Bandwidth – 6 dB / 75 % power bandwidth (EBW) | |
| Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz. | |


Results:

| Modulation Frequency | 6 dB / 75 % power bandwidth [MHz] (EBW) | | |
|-------------------------|---|----------|----------|
| | 2412 MHz | 2437 MHz | 2462 MHz |
| DSSS / b – mode | 6.13 | 6.15 | 6.14 |
| OFDM / g – mode | 12.61 | 12.60 | 12.62 |
| OFDM / n – mode | 13.45 | 13.43 | 13.46 |
| Measurement uncertainty | ± RBW | | |

Result: Passed


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel

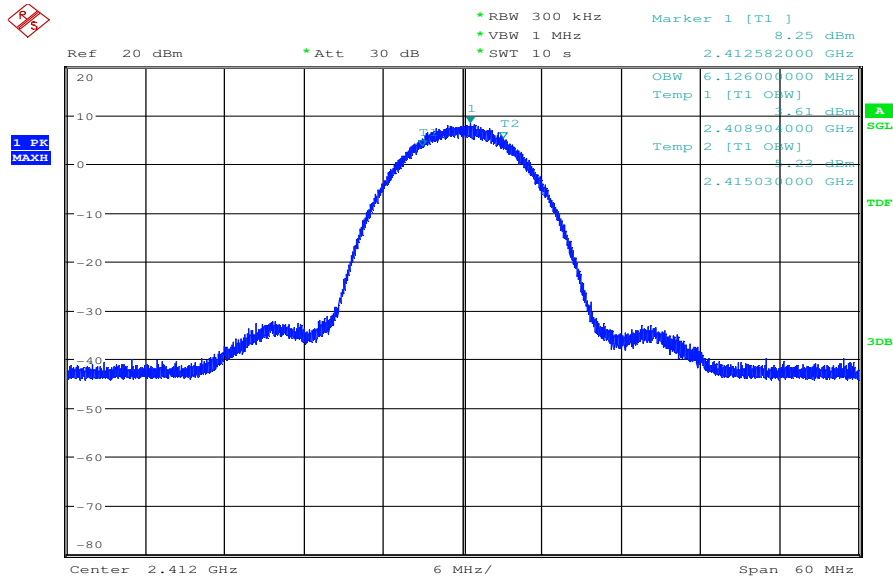


Date: 18.OCT.2012 14:29:29

Plot 2: TX mode, middle channel

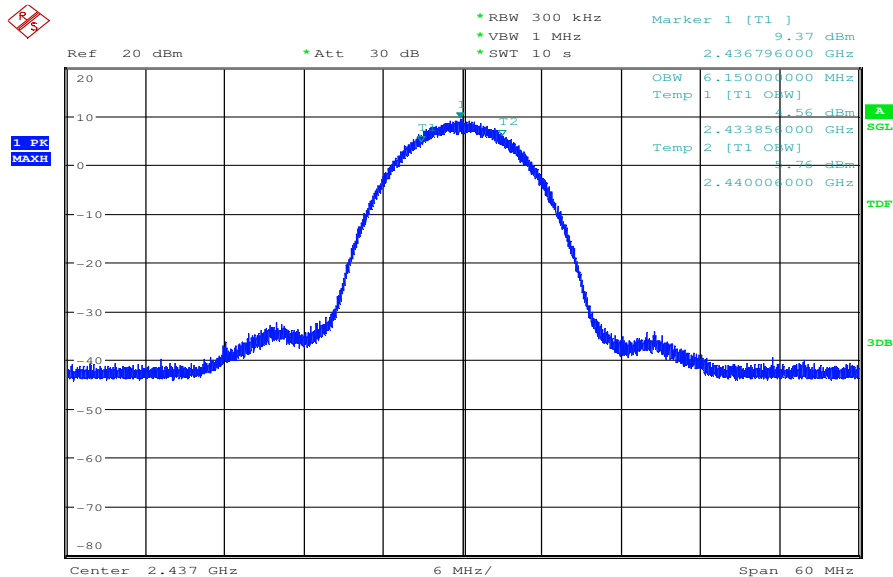

Date: 18.OCT.2012 14:44:18


Plot 3: TX mode, highest channel

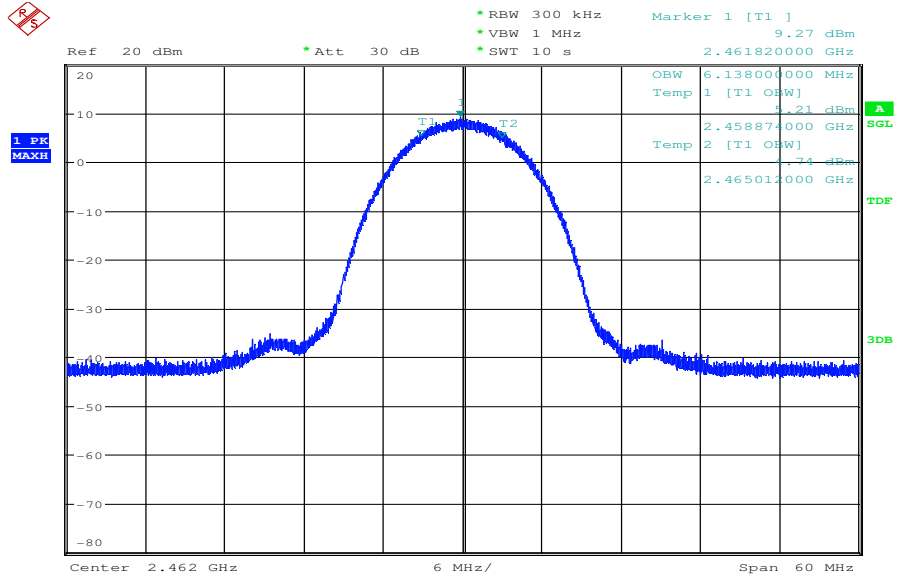

Date: 18.OCT.2012 14:56:11


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel

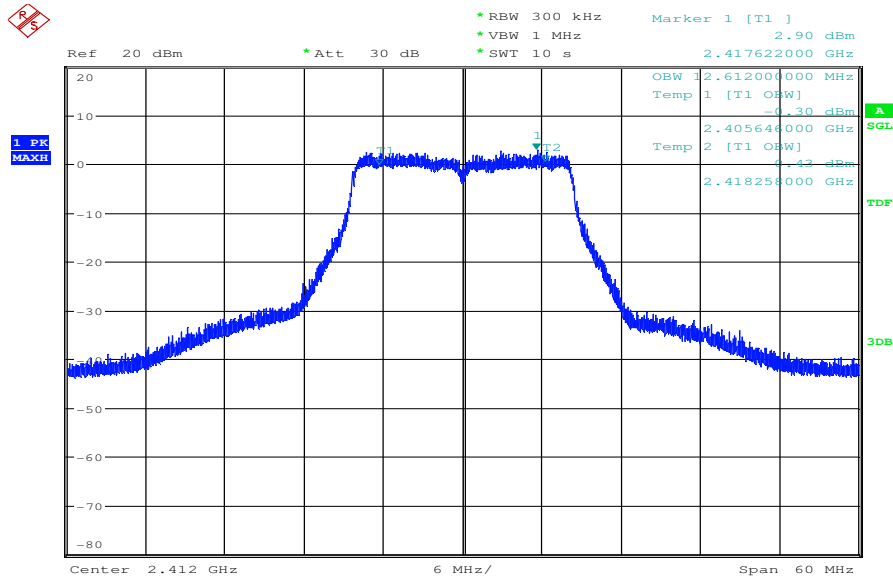


Date: 18.OCT.2012 16:43:01

Plot 2: TX mode, middle channel

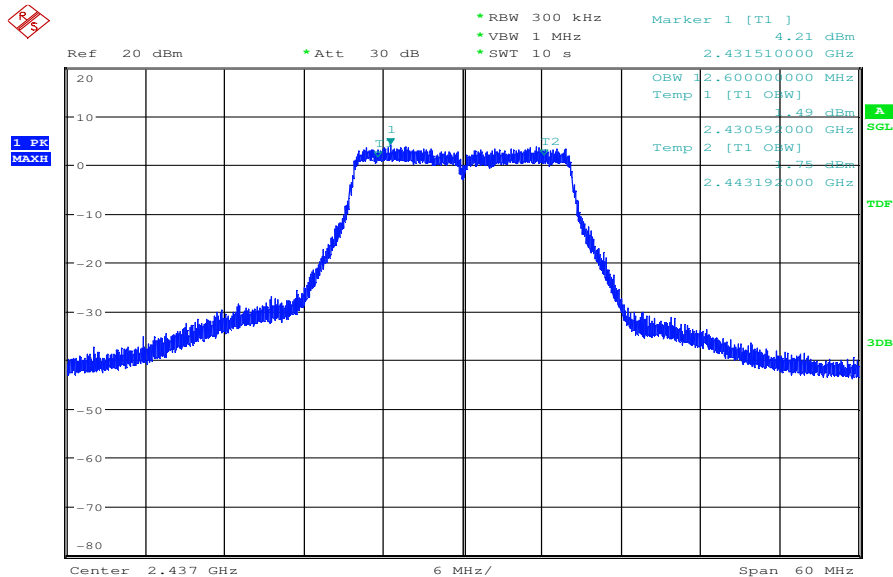

Date: 18.OCT.2012 17:07:40


Plot 3: TX mode, highest channel

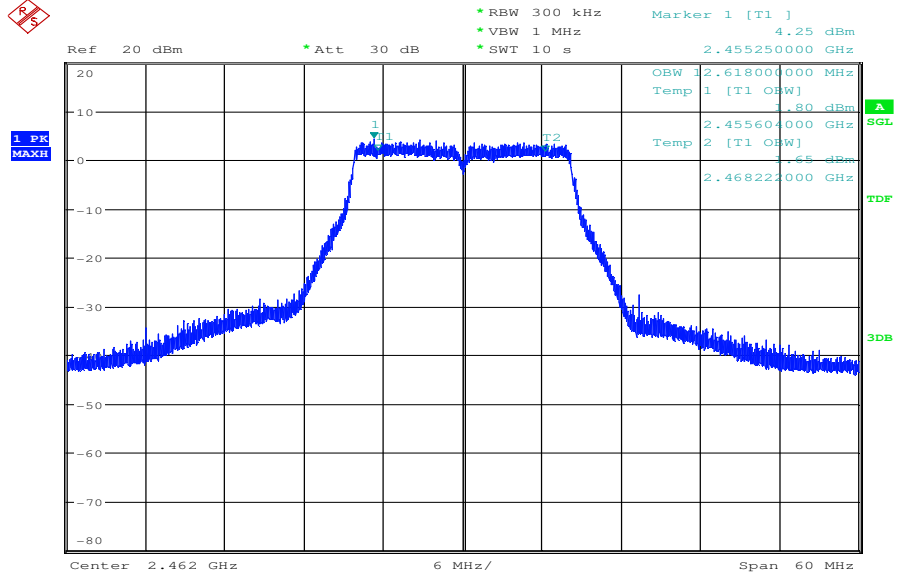

Date: 18.OCT.2012 17:31:17


Plots: OFDM / n – mode

Plot 1: TX mode, lowest channel

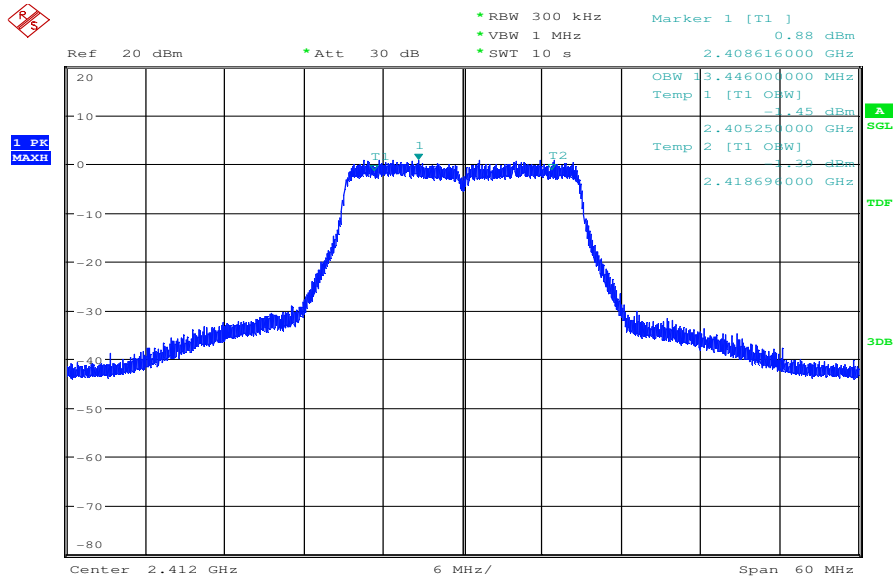


Date: 18.OCT.2012 17:45:01

Plot 2: TX mode, middle channel

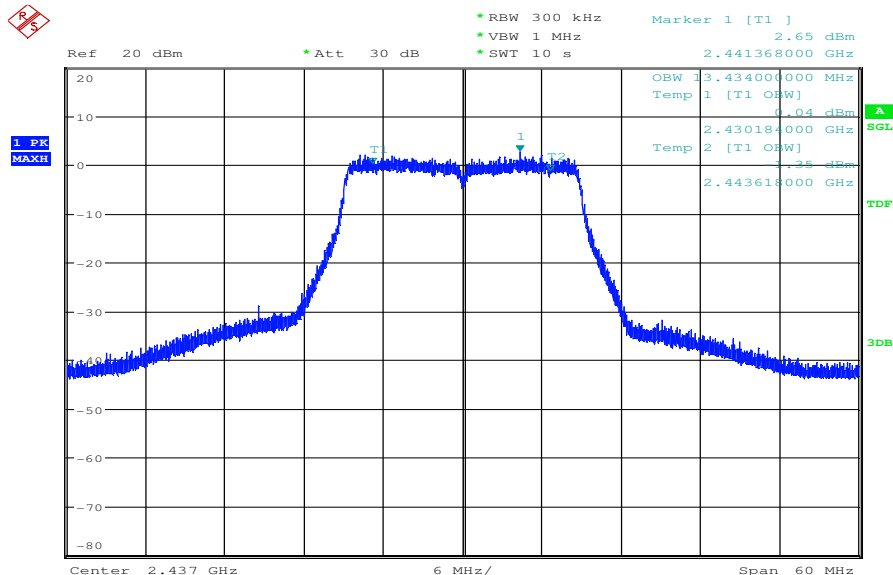

Date: 19.OCT.2012 07:48:58

Plot 3: TX mode, highest channel

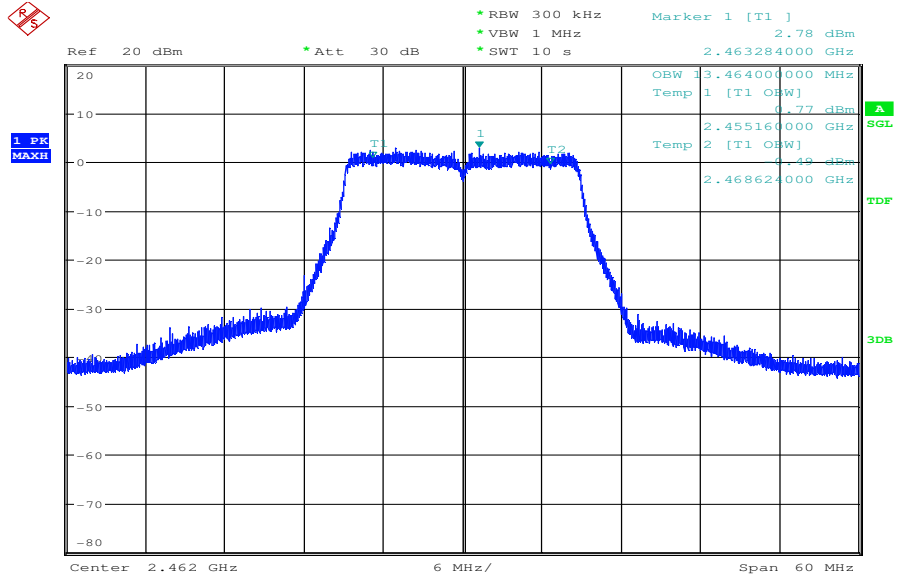

Date: 19.OCT.2012 08:06:03

9.6 Spectrum bandwidth – 20 dB / 99 % power bandwidth

Description:

Measurement of the 20 dB / 99% power bandwidth of the modulated signal.

Measurement:

| Measurement parameter | |
|-----------------------|---|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 1 - 5% of emission bandwidth |
| Video bandwidth: | ≥ 3 x RBW |
| Span: | > complete emission |
| Trace-Mode: | Max hold (allow trace to stabilize) |
| Measurement option: | Automatic bandwidth measurement (99% power) |

Limits:

| FCC | IC |
|---|----|
| Spectrum Bandwidth – 20 dB / 99 % power bandwidth | |
| Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz. | |


Results:

| Modulation Frequency | 20 dB / 99 % power bandwidth [MHz] | | |
|-------------------------|------------------------------------|----------|----------|
| | 2412 MHz | 2437 MHz | 2462 MHz |
| DSSS / b – mode | 12.83 | 12.85 | 12.88 |
| OFDM / g – mode | 17.08 | 17.06 | 17.06 |
| OFDM / n – mode | 18.09 | 18.07 | 18.07 |
| Measurement uncertainty | ± RBW | | |

Result: Passed


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel

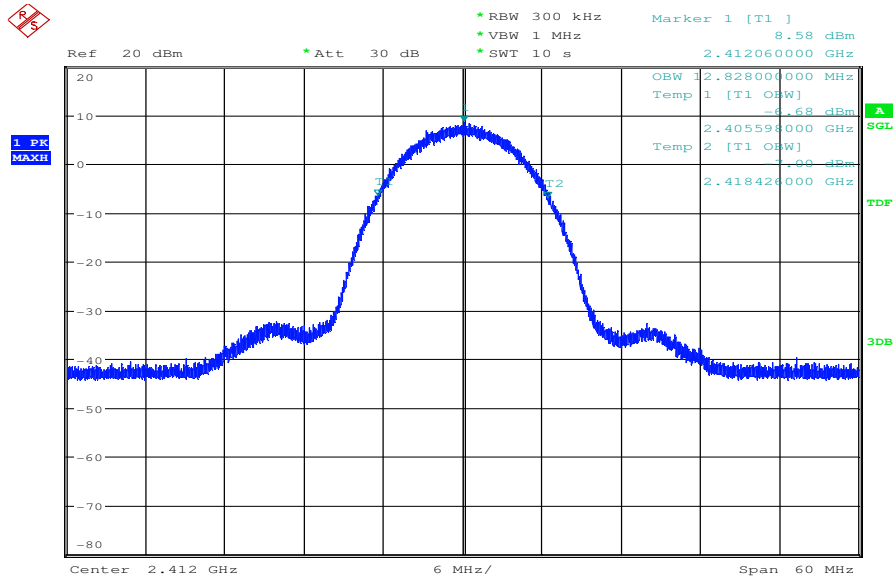


Date: 18.OCT.2012 14:30:08

Plot 2: TX mode, middle channel

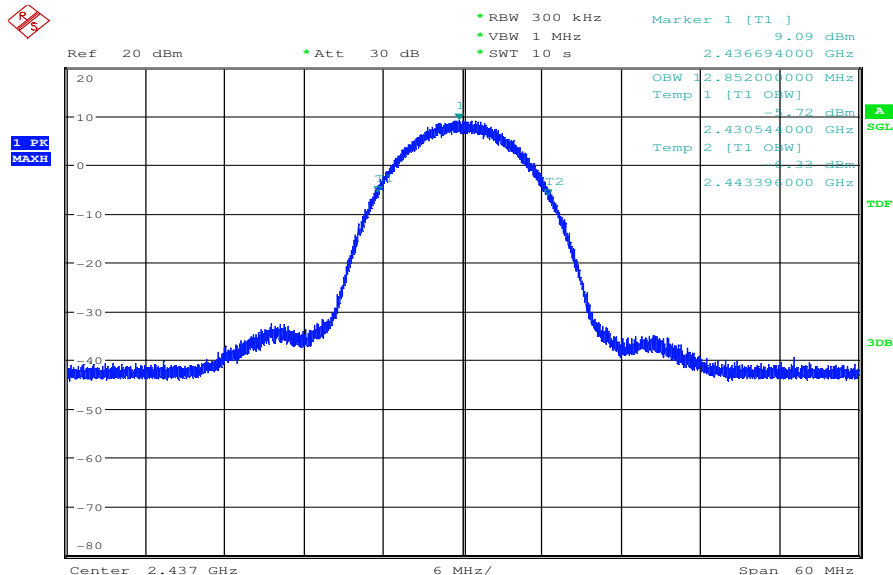

Date: 18.OCT.2012 14:44:58


Plot 3: TX mode, highest channel

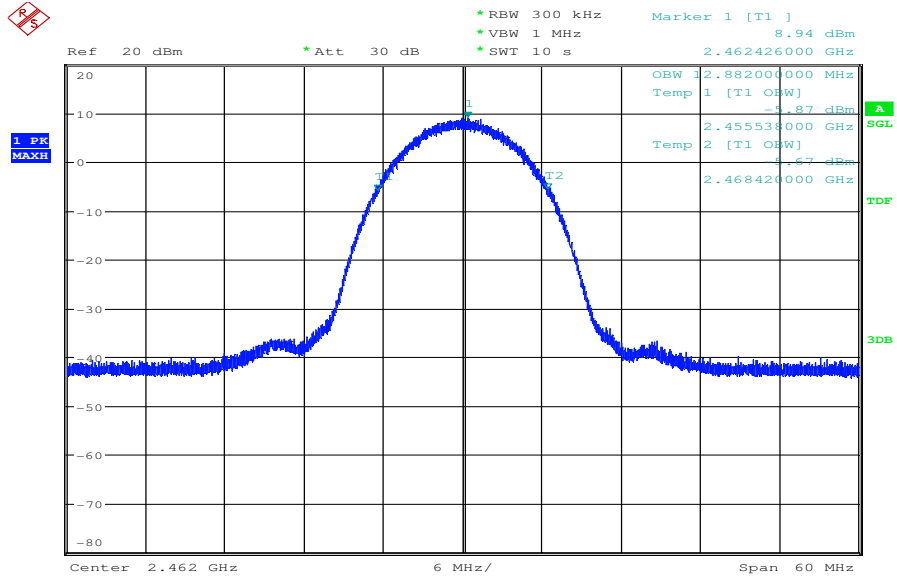

Date: 18.OCT.2012 14:56:51


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel

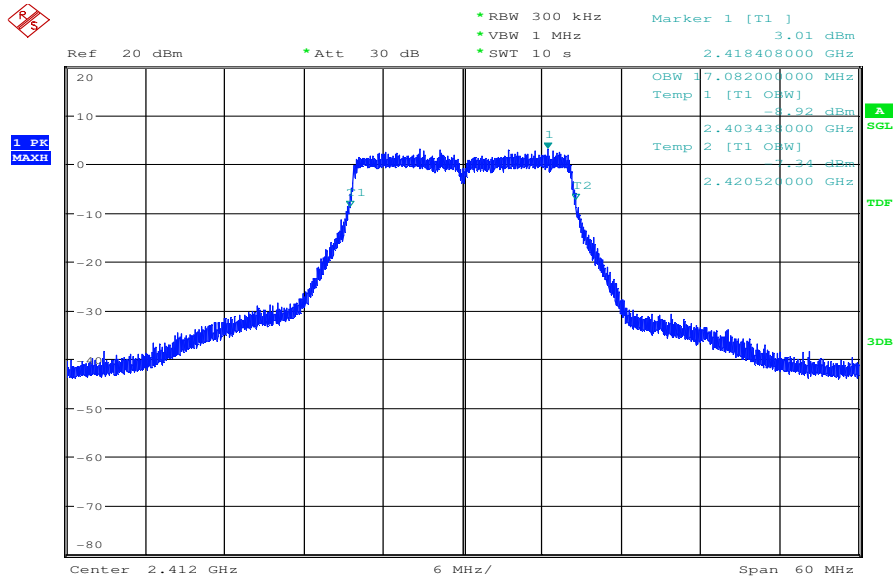


Date: 18.OCT.2012 16:43:40

Plot 2: TX mode, middle channel

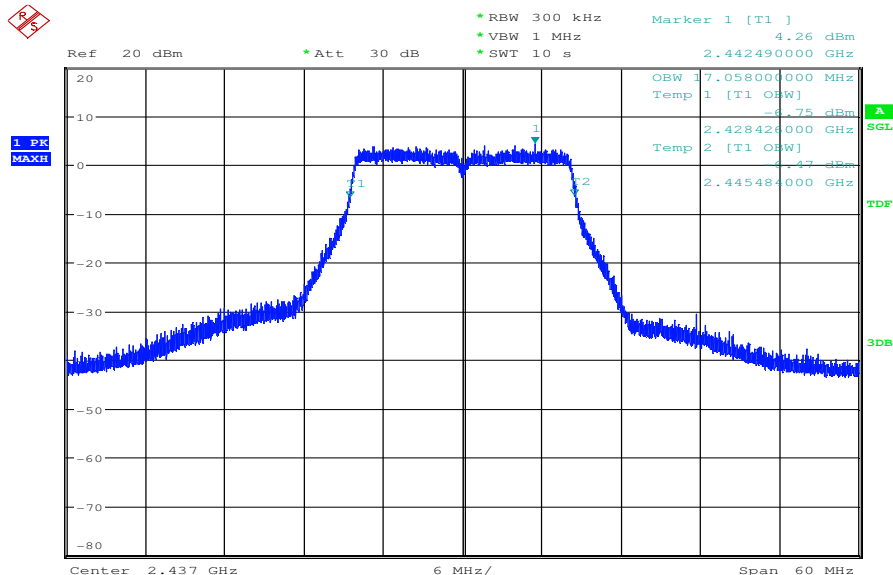

Date: 18.OCT.2012 17:08:19


Plot 3: TX mode, highest channel

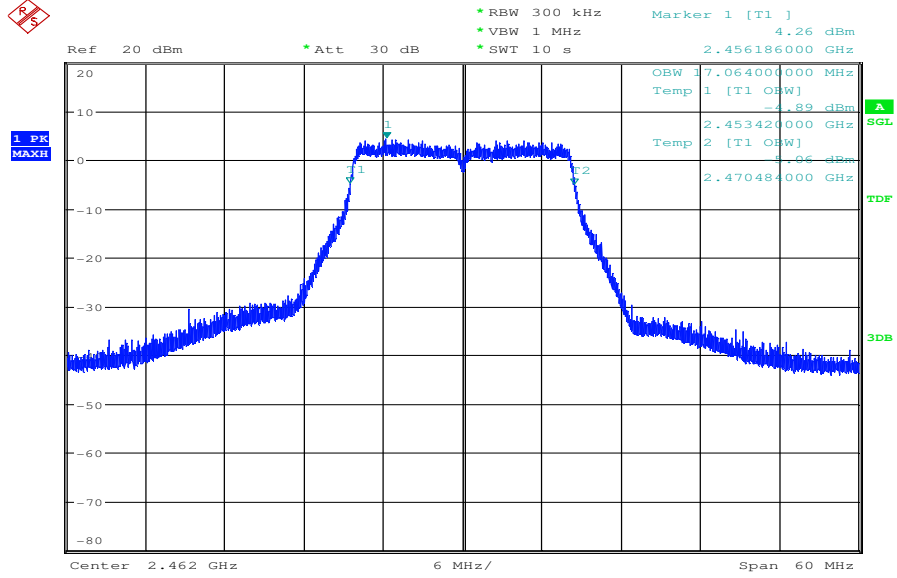

Date: 18.OCT.2012 17:31:56


Plots: OFDM / n – mode

Plot 1: TX mode, lowest channel

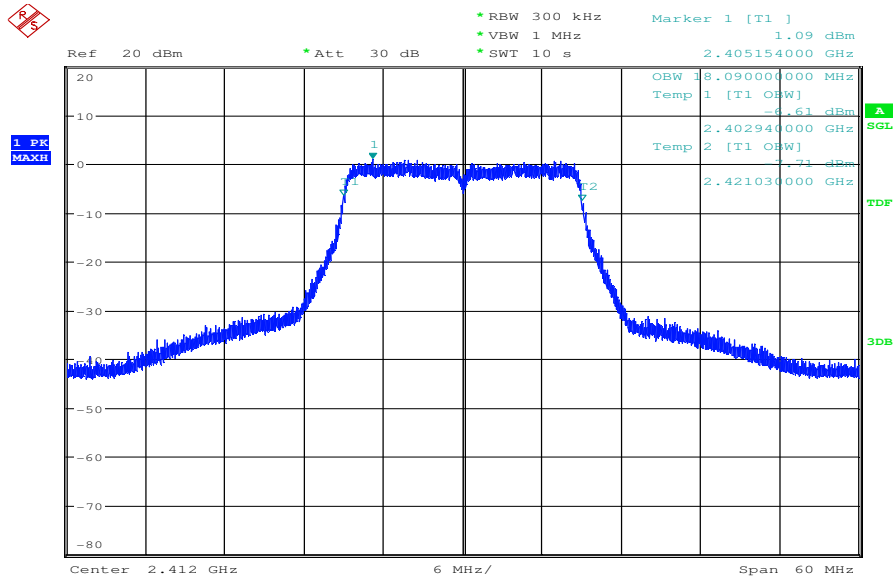


Date: 18.OCT.2012 17:45:40

Plot 2: TX mode, middle channel

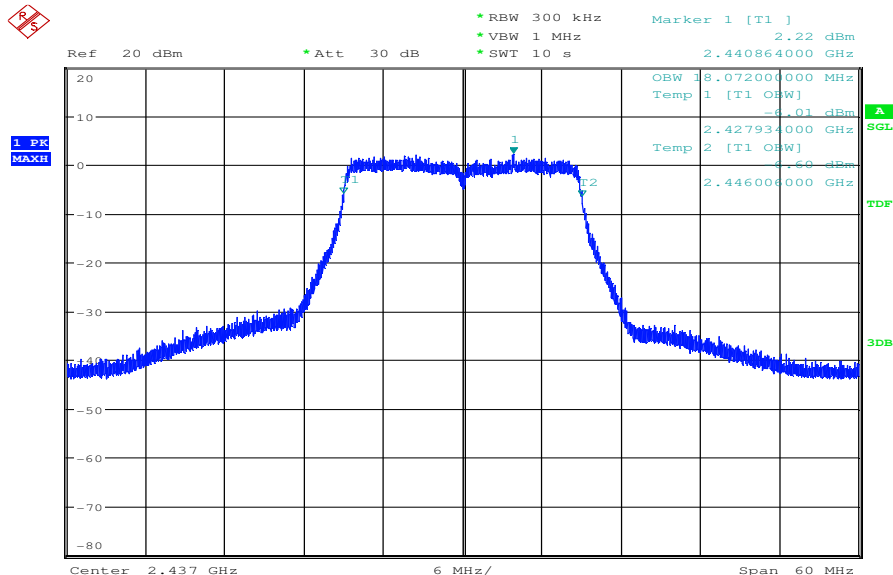

Date: 19.OCT.2012 07:49:37

Plot 3: TX mode, highest channel

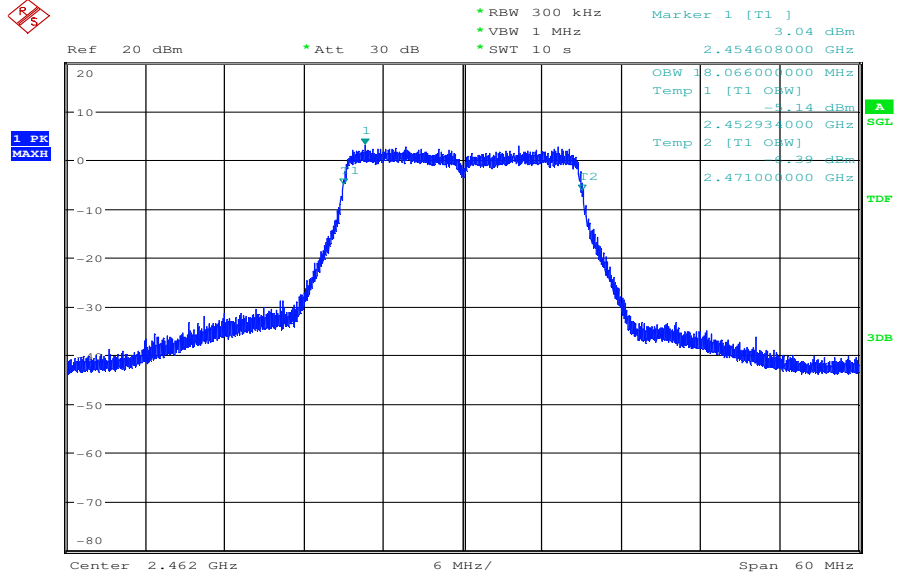

Date: 19.OCT.2012 08:06:42

9.7 Band edge compliance conducted

Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in both modes.

Measurement:

| Measurement parameter | |
|-----------------------|--|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 500 kHz |
| Span: | Lower Band Edge: 2300 – 2425 MHz Upper Band Edge: 2450 – 2550 MHz |
| Trace-Mode: | Max hold |

Limits:

| FCC | IC |
|--|----|
| Band Edge Compliance Conducted | |
| <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.</p> | |


Results:

| Scenario Modulation | Band Edge Compliance Conducted [dB] | | |
|------------------------------|-------------------------------------|----------------------|----------------------|
| | DSSS / b – mode | OFDM / g – mode | OFDM / n – mode |
| Lower Band Edge – Channel 1 | > 20 dB (see plot 1) | > 20 dB (see plot 3) | > 20 dB (see plot 5) |
| Upper Band Edge – Channel 11 | > 20 dB (see plot 2) | > 20 dB (see plot 4) | > 20 dB (see plot 6) |
| Measurement uncertainty | ± 1.5 dB | | |

Result: Passed


Plots: DSSS / b – mode

Plot 1: TX mode, lower band edge

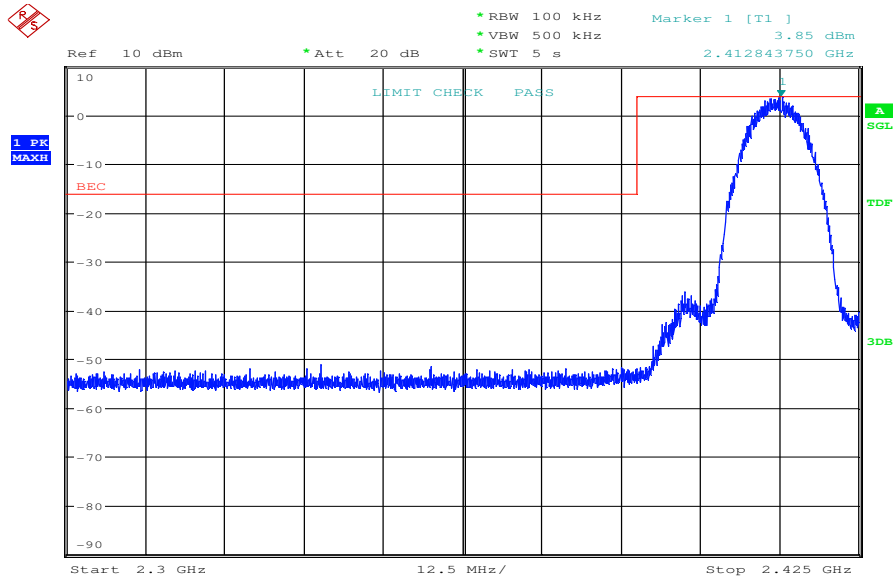

Date: 18.OCT.2012 14:30:24


Plot 2: TX mode, upper band edge

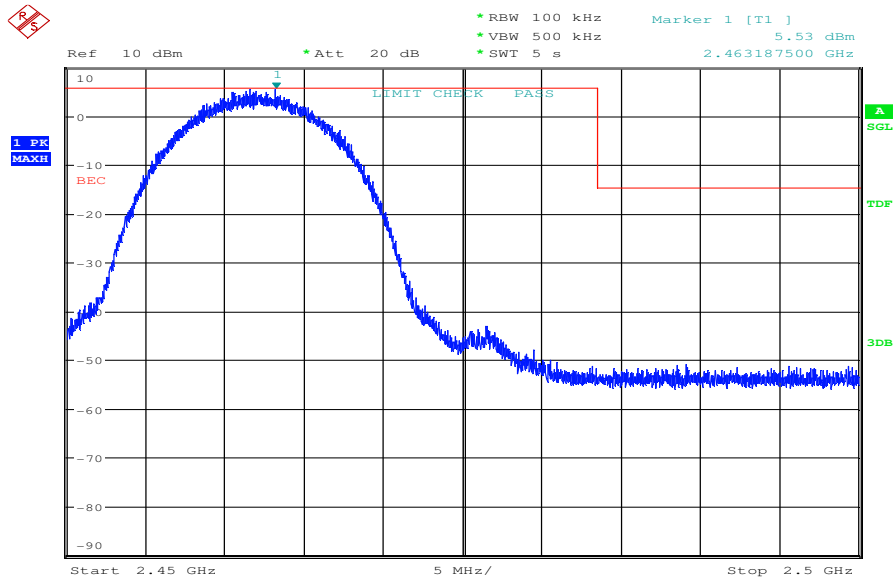

Date: 18.OCT.2012 14:57:07


Plots: OFDM / g – mode

Plot 1: TX mode, lower band edge

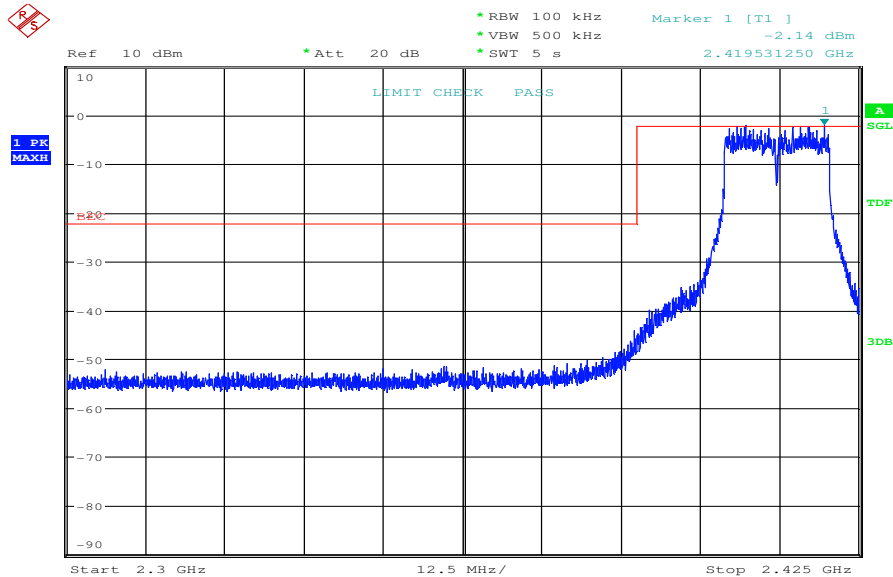

Date: 18.OCT.2012 16:43:56


Plot 2: TX mode, upper band edge

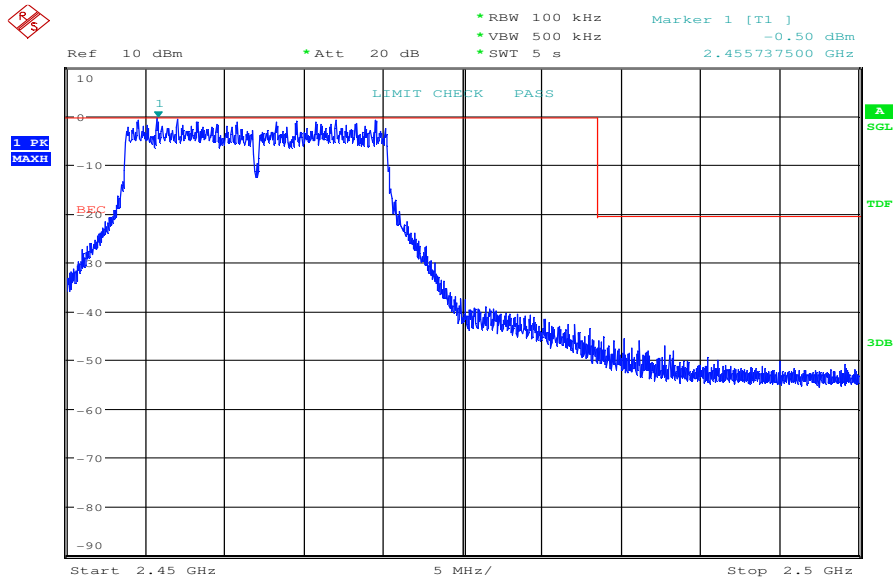

Date: 18.OCT.2012 17:32:12


Plots: OFDM / n – mode

Plot 1: TX mode, lower band edge

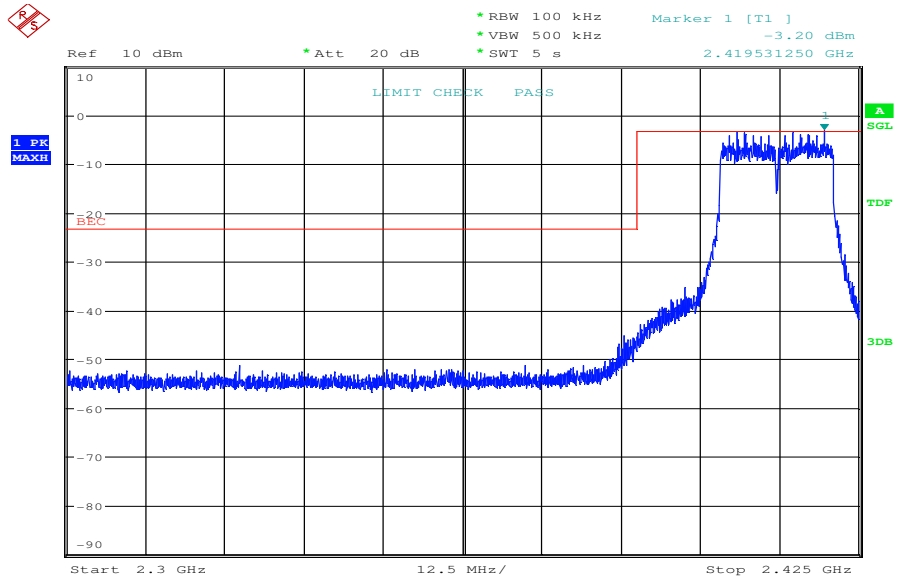

Date: 18.OCT.2012 17:45:56

Plot 2: TX mode, upper band edge

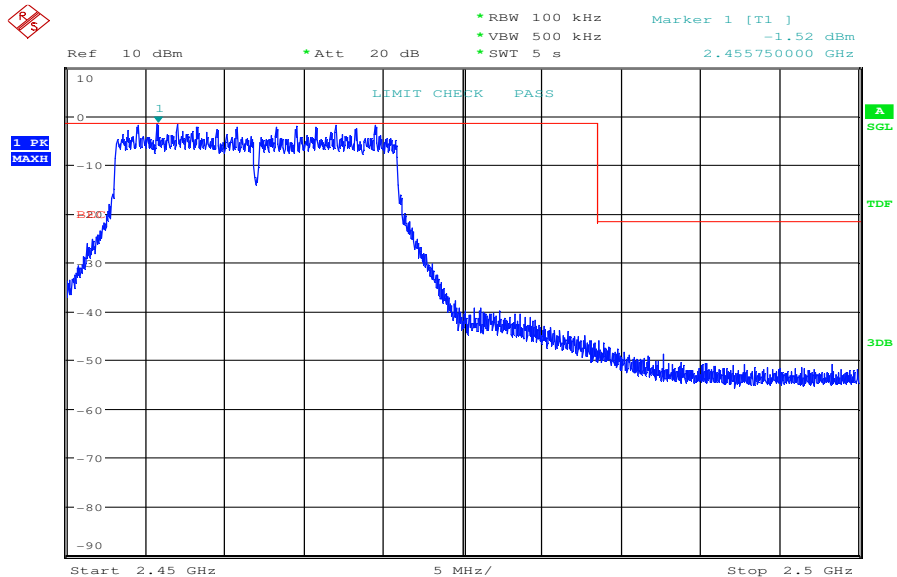

Date: 19.OCT.2012 08:06:58

9.8 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

Measurement:

| Measurement parameter | |
|-----------------------|-----------|
| Detector: | Peak |
| Sweep time: | Auto |
| Video bandwidth: | 10 Hz |
| Resolution bandwidth: | 1 MHz |
| Span: | See plot! |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|---|----|
| Band Edge Compliance Radiated | |
| <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).</p> | |
| 54 dB μ V/m AVG | |

Results:


| Scenario Modulation | Band Edge Compliance Conducted [dB] | | |
|------------------------------|-------------------------------------|-----------------|-----------------|
| | DSSS / b – mode | OFDM / g – mode | OFDM / n – mode |
| Lower Band Edge – Channel 1 | > 20 dB | > 20 dB | > 20 dB |
| Upper Band Edge – Channel 11 | > 20 dB | > 20 dB | > 20 dB |
| Measurement uncertainty | \pm 3 dB | | |

Result: **Passed**


Results of the DSSS / b – mode and OFDM / n HT20 – mode are added to show the behaviour of the EUT.

Plots: DSSS / b – mode

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

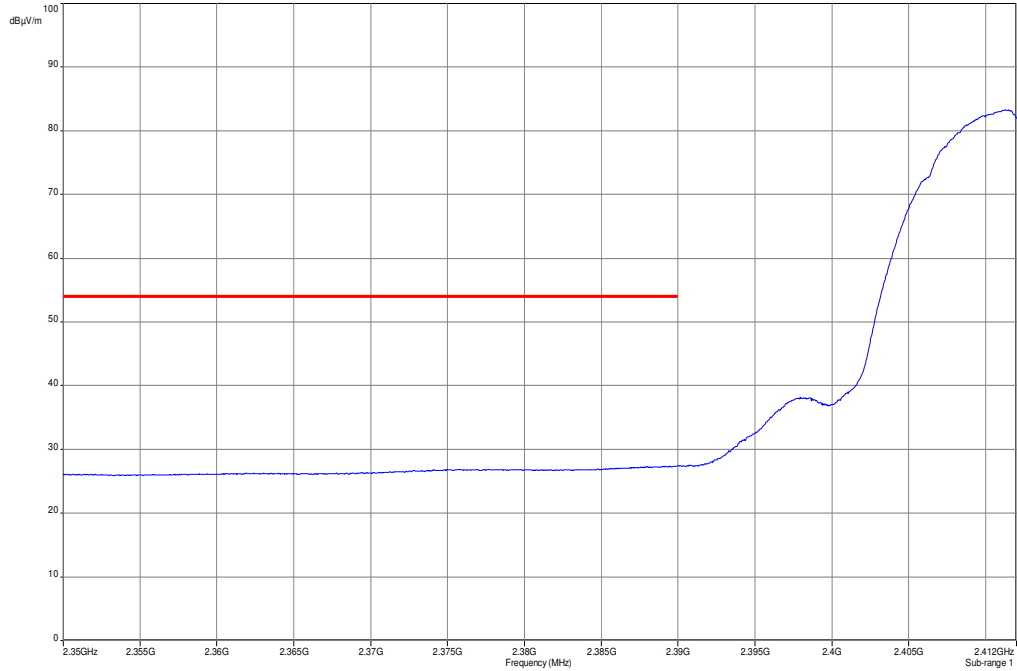


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

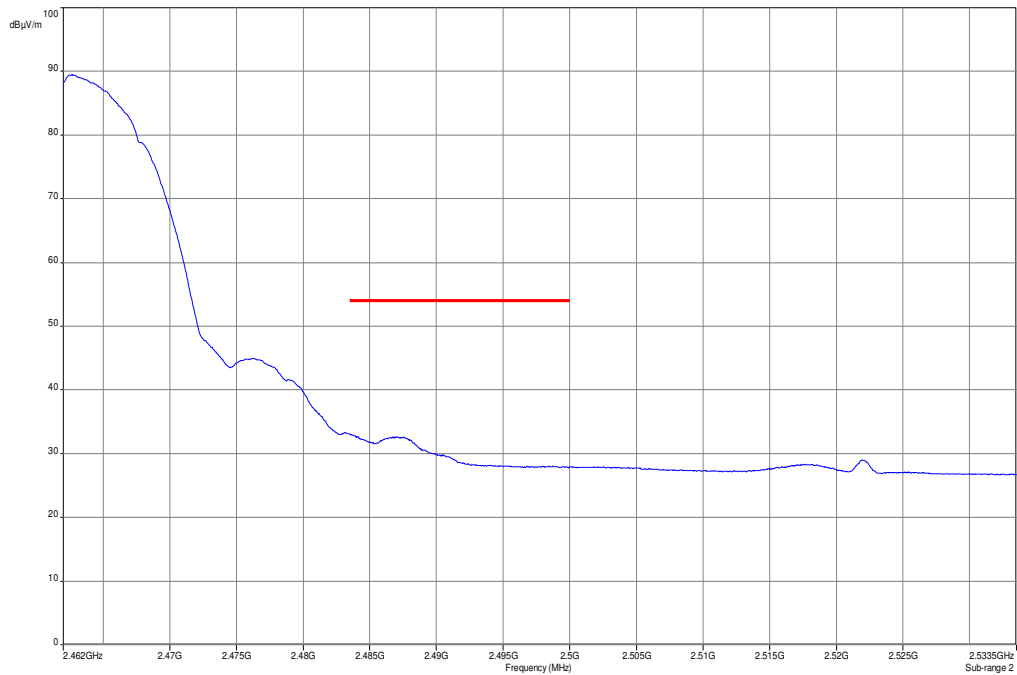


Plots: OFDM / n – mode

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

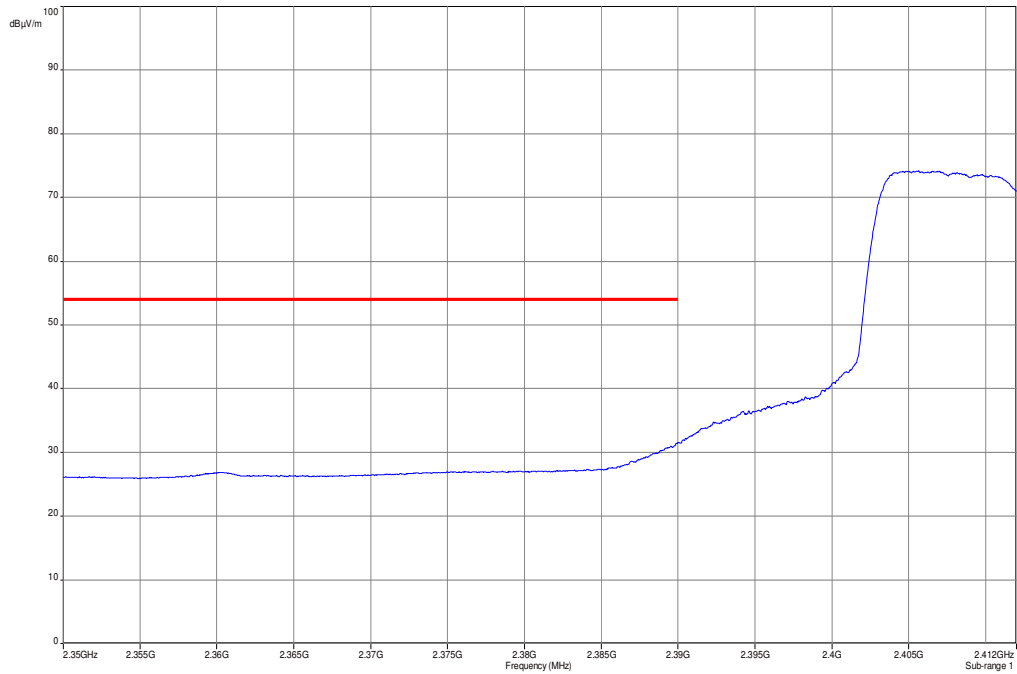

Plot 2: TX mode, upper band edge, vertical & horizontal polarization

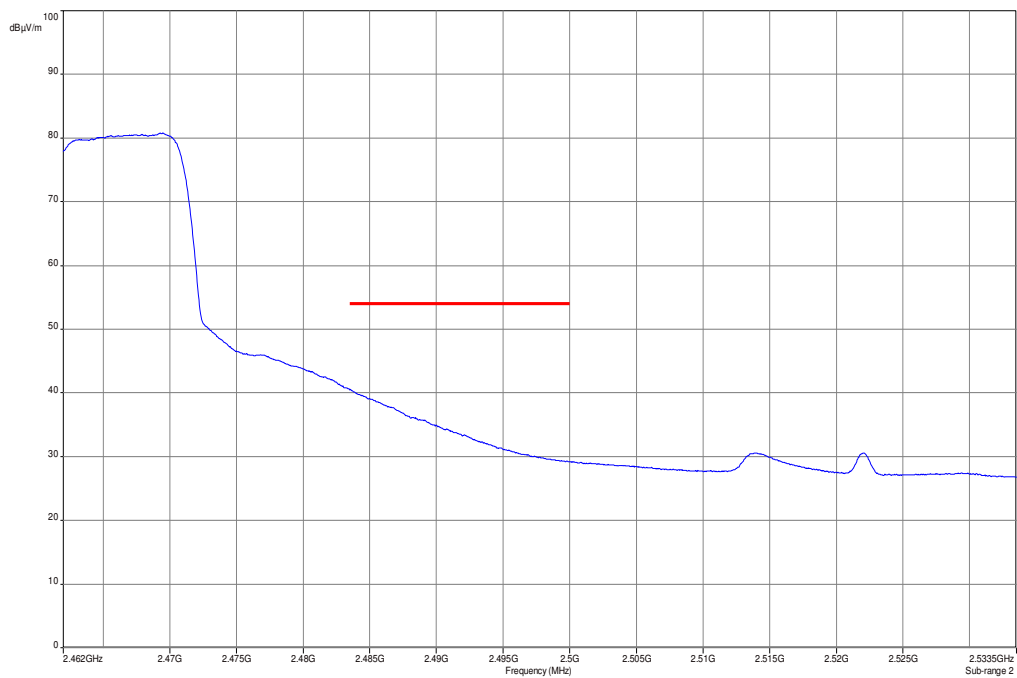

9.9 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

| Measurement parameter | |
|-----------------------|-----------------|
| Detector: | Peak |
| Sweep time: | 1s / 100 MHz |
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 500 kHz |
| Span: | 9 kHz to 25 GHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|---|----|
| TX Spurious Emissions Conducted | |
| <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required</p> | |

Results: DSSS / b – mode

| TX Spurious Emissions Conducted | | | | | |
|--|--|-----------------------------|-------------------------------------|--|---------------------|
| DSSS / b – mode | | | | | |
| f [MHz] | | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results |
| 2412 | | 4.21 | 30 dBm | | Operating frequency |
| No critical peaks detected. All detected emissions are below the -20 dBc criteria. | | | -20 dBc (peak) -30 dBc (average) | | complies |
| 2437 | | 5.03 | 30 dBm | | Operating frequency |
| No critical peaks detected. All detected emissions are below the -20 dBc criteria. | | | -20 dBc (peak) -30 dBc (average) | | complies |
| 2462 | | 4.31 | 30 dBm | | Operating frequency |
| No critical peaks detected. All detected emissions are below the -20 dBc criteria. | | | -20 dBc (peak) -30 dBc (average) | | complies |
| Measurement uncertainty | | ± 3 dB | | | |

Result: Passed

Results: OFDM / g – mode

| TX Spurious Emissions Conducted | | | | | |
|--|--|-----------------------------|-------------------------------------|--|---------------------|
| OFDM / g – mode | | | | | |
| f [MHz] | | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results |
| 2412 | | -1.94 | 30 dBm | | Operating frequency |
| No critical peaks detected. All detected emissions are below the -20 dBc criteria. | | | -20 dBc (peak) -30 dBc (average) | | complies |
| 2437 | | -0.73 | 30 dBm | | Operating frequency |
| No critical peaks detected. All detected emissions are below the -20 dBc criteria. | | | -20 dBc (peak) -30 dBc (average) | | complies |
| 2462 | | -0.46 | 30 dBm | | Operating frequency |
| No critical peaks detected. All detected emissions are below the -20 dBc criteria. | | | -20 dBc (peak) -30 dBc (average) | | complies |
| Measurement uncertainty | | ± 3 dB | | | |

Result: Passed


Results: OFDM / n – mode

| TX Spurious Emissions Conducted | | | | | |
|--|--|-----------------------------|-------------------------------------|--|---------------------|
| OFDM / n – mode | | | | | |
| f [MHz] | | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results |
| 2412 | | -3.32 | 30 dBm | | Operating frequency |
| No critical peaks detected. All detected emissions are below the -20 dBc criteria. | | | -20 dBc (peak) -30 dBc (average) | | complies |
| 2437 | | -2.38 | 30 dBm | | Operating frequency |
| No critical peaks detected. All detected emissions are below the -20 dBc criteria. | | | -20 dBc (peak) -30 dBc (average) | | complies |
| 2462 | | -1.83 | 30 dBm | | Operating frequency |
| No critical peaks detected. All detected emissions are below the -20 dBc criteria. | | | -20 dBc (peak) -30 dBc (average) | | complies |
| Measurement uncertainty | | ± 3 dB | | | |

Result: Passed


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel, up to 25 GHz

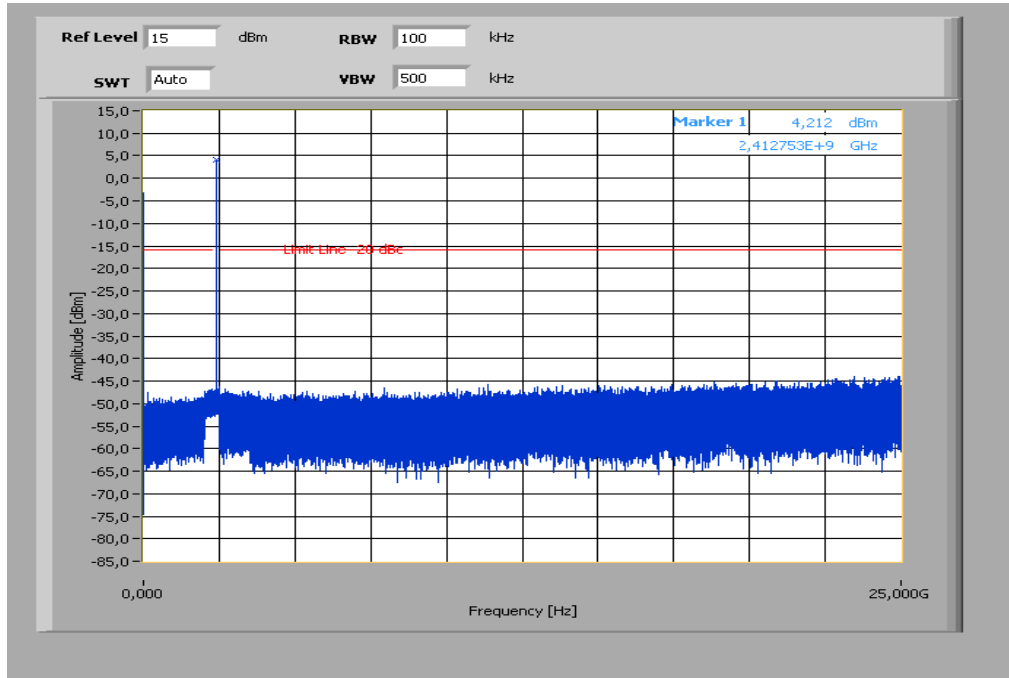


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 25 GHz

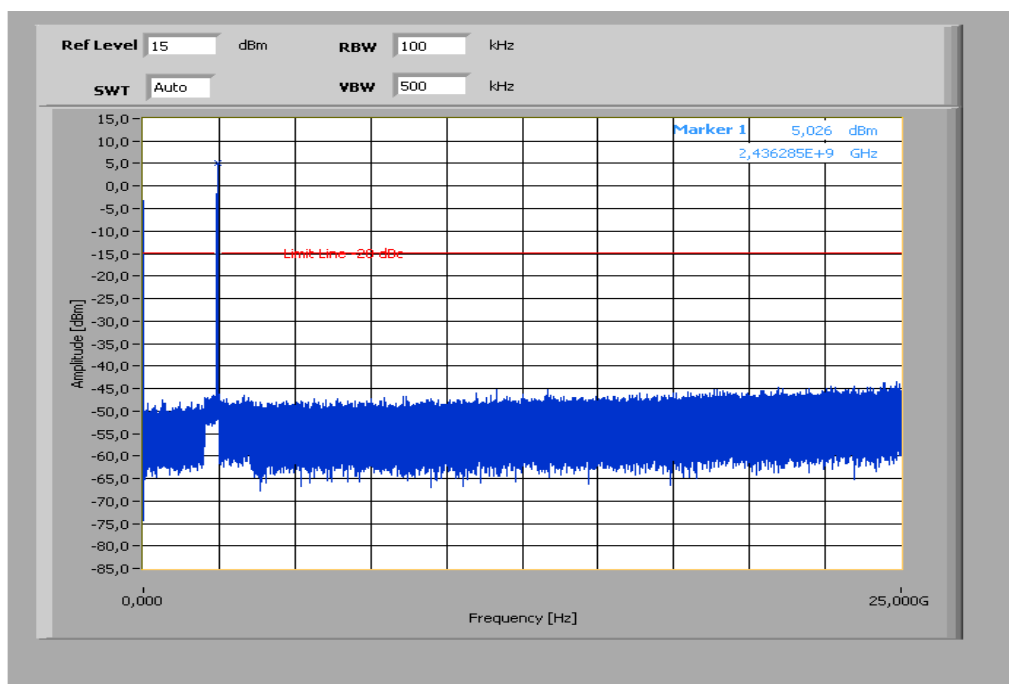

The peak at the beginning of the plot is the LO from the SA.


Plot 3: TX mode, highest channel, up to 25 GHz

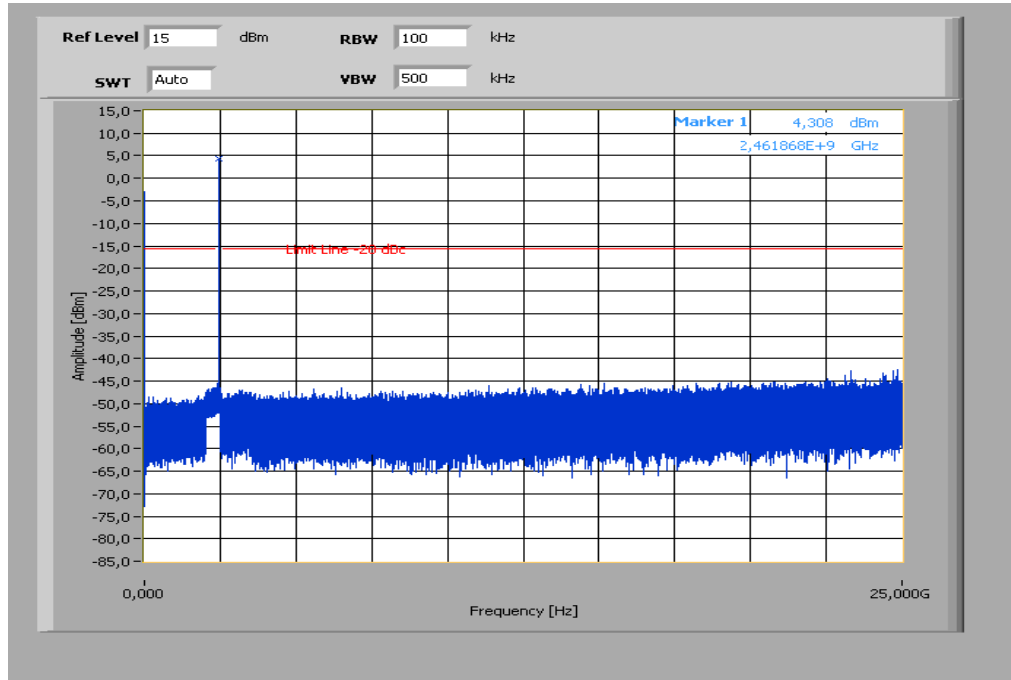

The peak at the beginning of the plot is the LO from the SA.


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel, up to 25 GHz

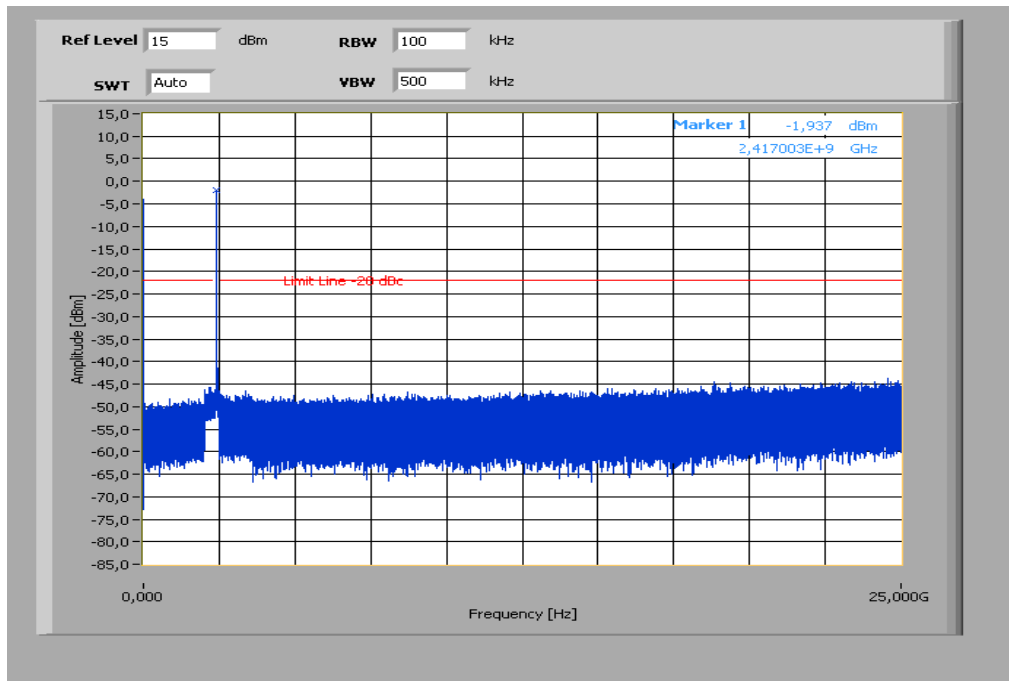


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 25 GHz

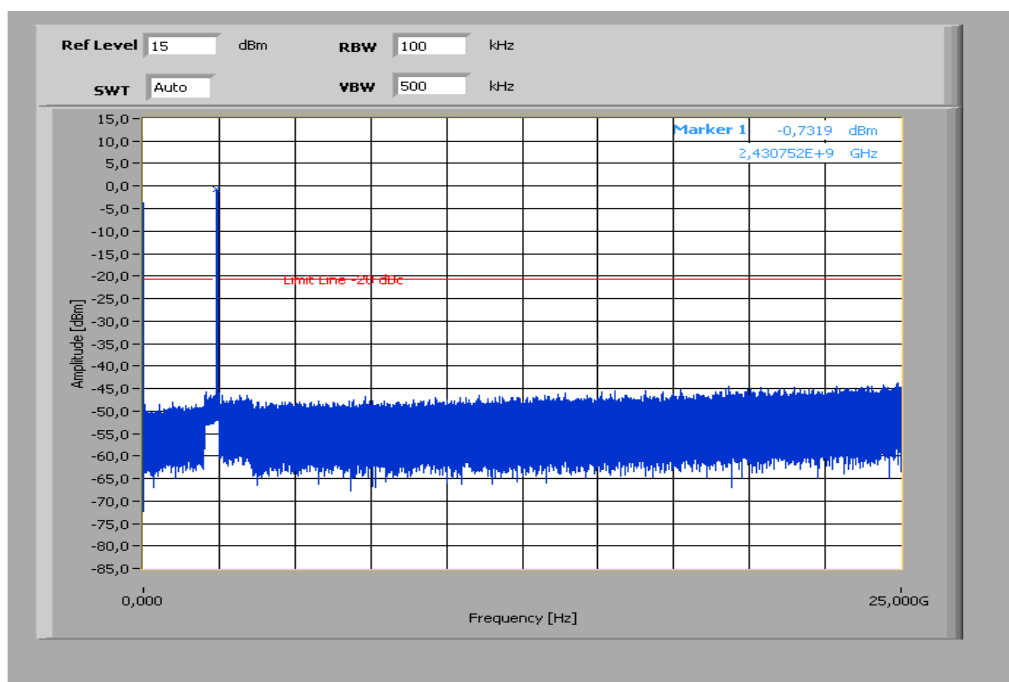

The peak at the beginning of the plot is the LO from the SA.


Plot 3: TX mode, highest channel, up to 25 GHz

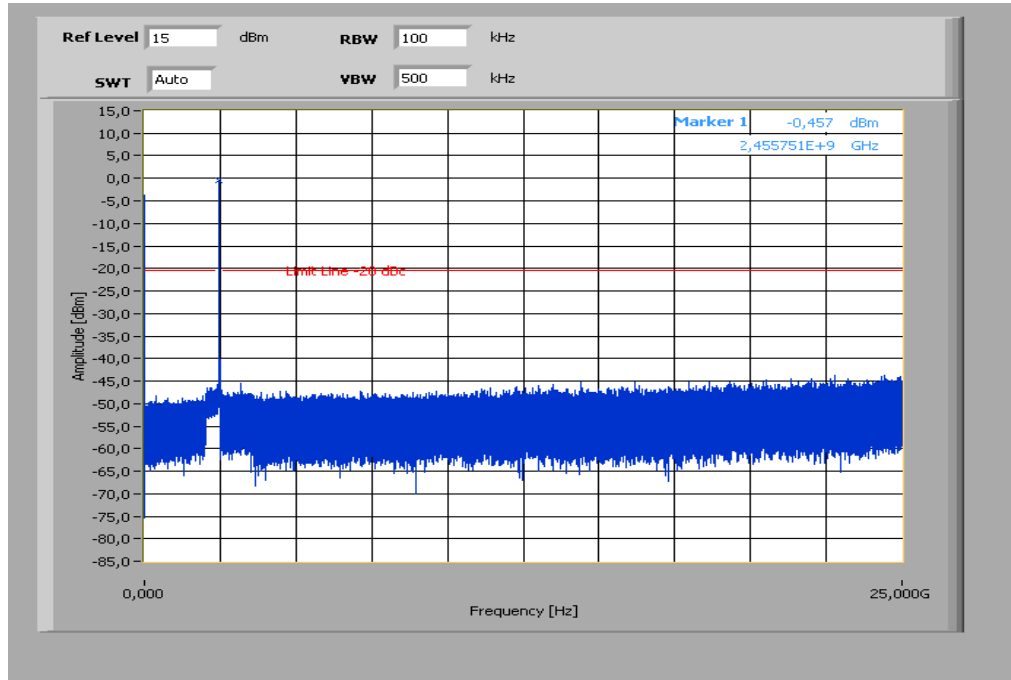

The peak at the beginning of the plot is the LO from the SA.


Plots: OFDM / n – mode

Plot 1: TX mode, lowest channel, up to 25 GHz

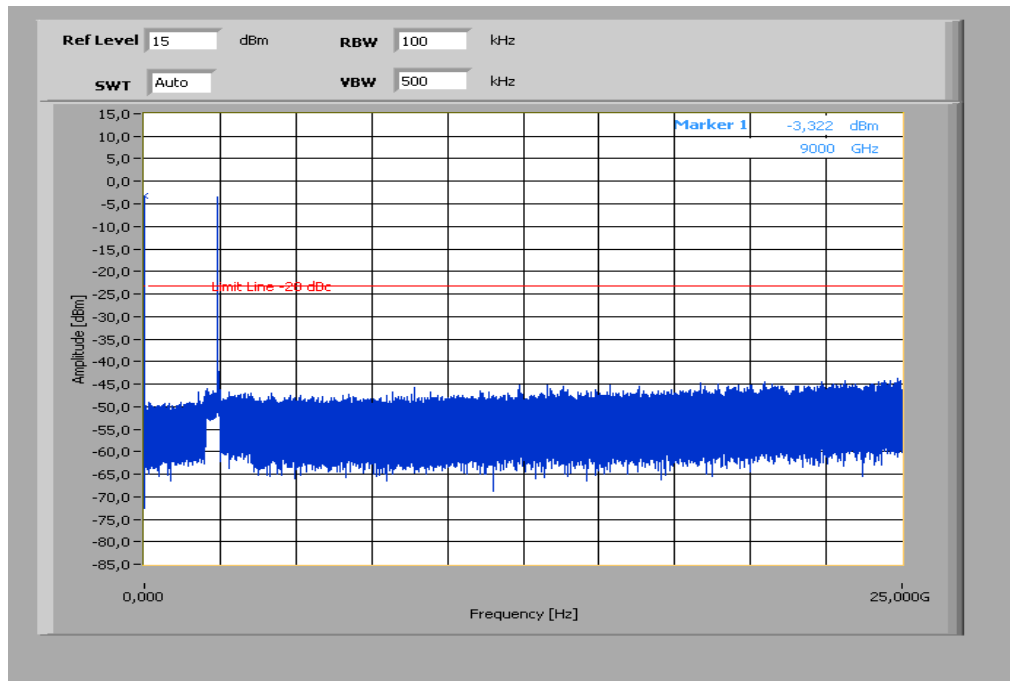


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 25 GHz

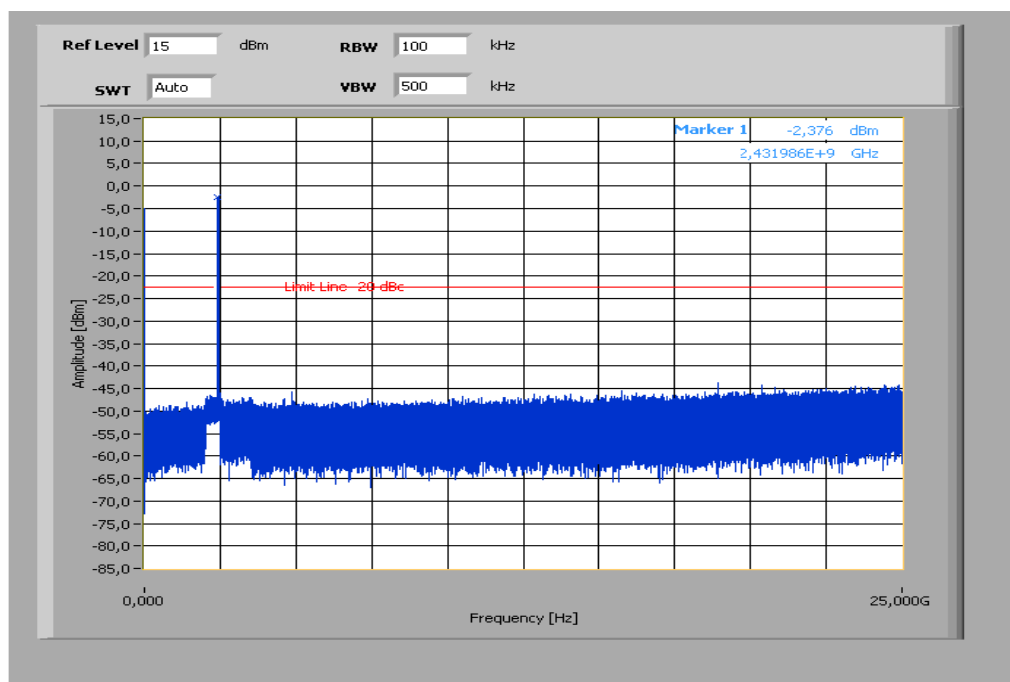

The peak at the beginning of the plot is the LO from the SA.

Plot 3: TX mode, highest channel, up to 25 GHz

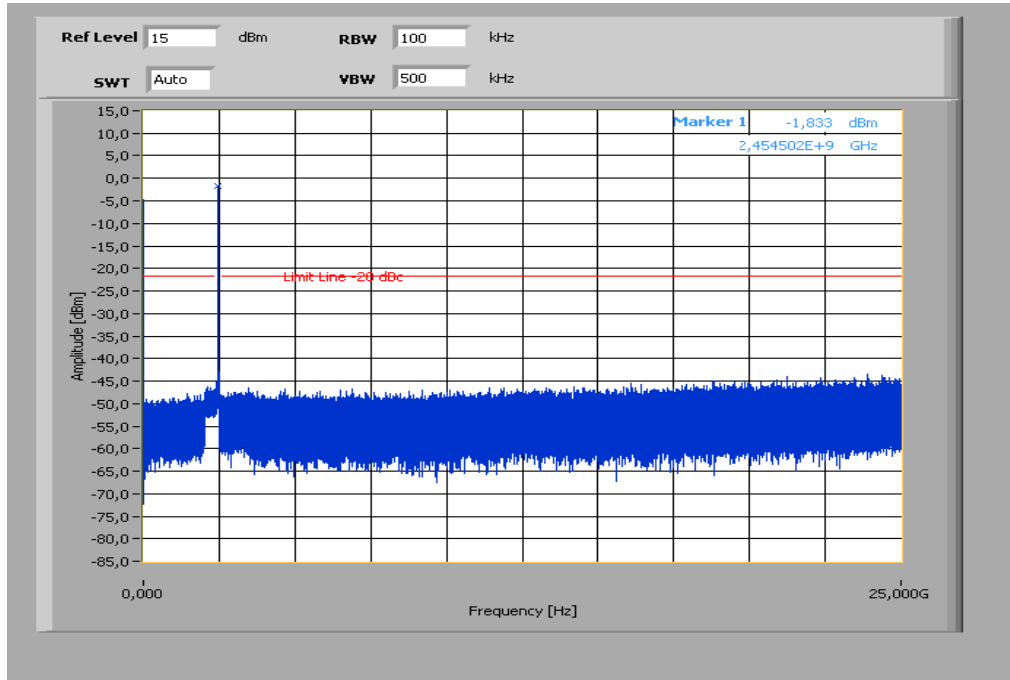

The peak at the beginning of the plot is the LO from the SA.

9.10 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

| Measurement parameter | |
|-----------------------|---|
| Detector: | Peak / Quasi Peak / RMS |
| Sweep time: | Auto |
| Resolution bandwidth: | F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz |
| Video bandwidth: | Sweep: 100 kHz Remeasurement: 10 Hz / 3 MHz |
| Span: | 30 MHz to 25 GHz |
| Trace-Mode: | Max Hold |
| Measured Modulation | <input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input checked="" type="checkbox"/> OFDM n – mode |

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

| FCC | IC | |
|---|-------------------------|----------------------|
| TX Spurious Emissions Radiated | | |
| <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p> | | |
| Frequency (MHz) | Field Strength (dBµV/m) | Measurement distance |
| 30 - 88 | 30.0 | 10 |
| 88 – 216 | 33.5 | 10 |
| 216 – 960 | 36.0 | 10 |
| Above 960 | 54.0 | 3 |

Results: DSSS / b – mode

| TX Spurious Emissions Radiated [dBµV/m] | | | | | | | | |
|--|----------|----------------|--|----------|----------------|--|----------|----------------|
| DSSS / b – mode | | | | | | | | |
| 2412 MHz | | | 2437 MHz | | | 2462 MHz | | |
| F [MHz] | Detector | Level [dBµV/m] | F [MHz] | Detector | Level [dBµV/m] | F [MHz] | Detector | Level [dBµV/m] |
| For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | |
| No emissions detected above 1 GHz. | | | No emissions detected above 1 GHz. | | | No emissions detected above 1 GHz. | | |
| | | | | | | | | |
| Measurement uncertainty | | | ± 3 dB | | | | | |

Result: Passed

Results: OFDM / g – mode

| TX Spurious Emissions Radiated [dBµV/m] | | | | | | | | |
|--|----------|----------------|--|----------|----------------|--|----------|----------------|
| OFDM / g – mode | | | | | | | | |
| 2412 MHz | | | 2437 MHz | | | 2462 MHz | | |
| F [MHz] | Detector | Level [dBµV/m] | F [MHz] | Detector | Level [dBµV/m] | F [MHz] | Detector | Level [dBµV/m] |
| For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | |
| No emissions detected above 1 GHz. | | | No emissions detected above 1 GHz. | | | No emissions detected above 1 GHz. | | |
| | | | | | | | | |
| Measurement uncertainty | | | ± 3 dB | | | | | |

Result: Passed

Results: OFDM / n – mode

| TX Spurious Emissions Radiated [dBµV/m] | | | | | | | | |
|--|----------|----------------|--|----------|----------------|--|----------|----------------|
| OFDM / n – mode | | | | | | | | |
| 2412 MHz | | | 2437 MHz | | | 2462 MHz | | |
| F [MHz] | Detector | Level [dBµV/m] | F [MHz] | Detector | Level [dBµV/m] | F [MHz] | Detector | Level [dBµV/m] |
| For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | |
| No emissions detected above 1 GHz. | | | No emissions detected above 1 GHz. | | | No emissions detected above 1 GHz. | | |
| | | | | | | | | |
| Measurement uncertainty | | | ± 3 dB | | | | | |

Result: Passed

Results of the DSSS / b – mode and OFDM / n HT20 – mode are added to show the behaviour of the EUT.

Plots: DSSS / b – mode

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0220-BV
 Serial Number: CB5A1LN5W1
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: w-lan b-mode, CH 1
 Operator Name: Medrow
 Comment: AC 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|----------------|-----------|-----------|---------|------------|--------|
| 30 MHz - 2 GHz | 60 kHz | QPK | 120 kHz | 1 s | 20 dB |

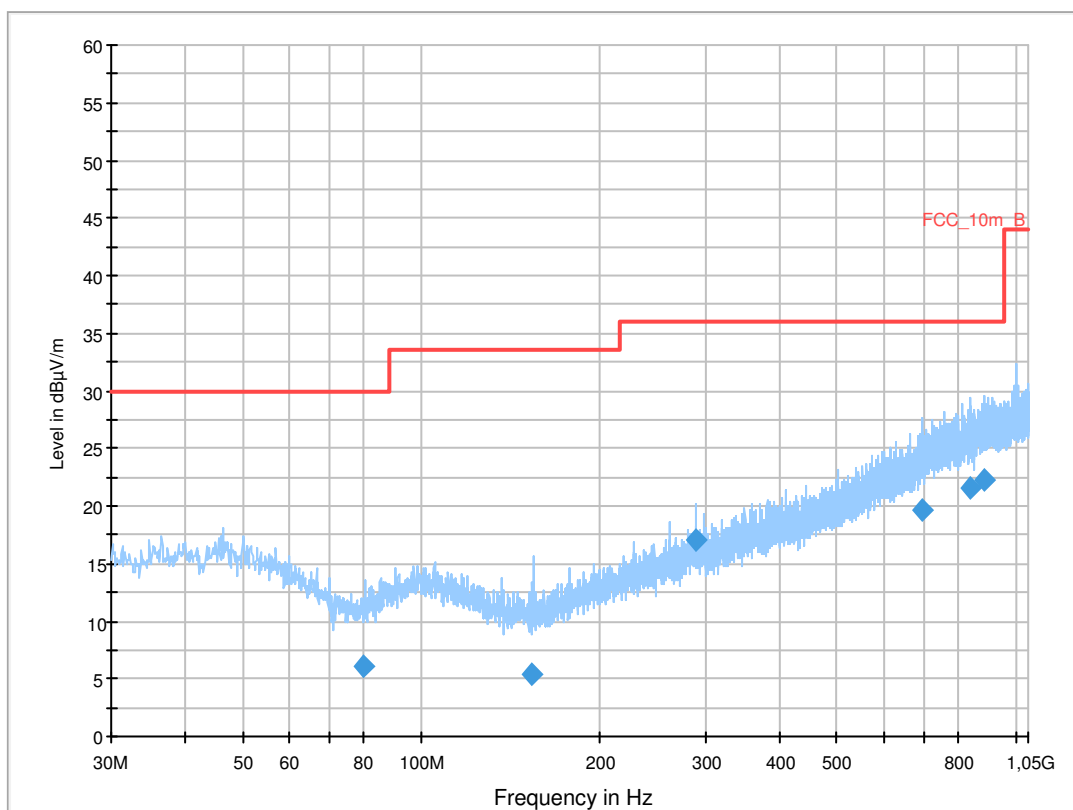

Final Result 1


| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|---------|
| 79.975200 | 6.1 | 1000.0 | 120.000 | 132.0 | V | -2.0 | 9.1 | 23.9 | 30.0 | |
| 153.605550 | 5.4 | 1000.0 | 120.000 | 170.0 | V | 265.0 | 9.0 | 28.1 | 33.5 | |
| 289.989000 | 17.0 | 1000.0 | 120.000 | 170.0 | V | 190.0 | 14.3 | 19.0 | 36.0 | |
| 693.907800 | 19.6 | 1000.0 | 120.000 | 98.0 | V | 180.0 | 22.3 | 16.4 | 36.0 | |
| 838.455300 | 21.6 | 1000.0 | 120.000 | 170.0 | V | -2.0 | 24.4 | 14.4 | 36.0 | |
| 886.896600 | 22.2 | 1000.0 | 120.000 | 120.0 | H | 261.0 | 25.0 | 13.8 | 36.0 | |

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

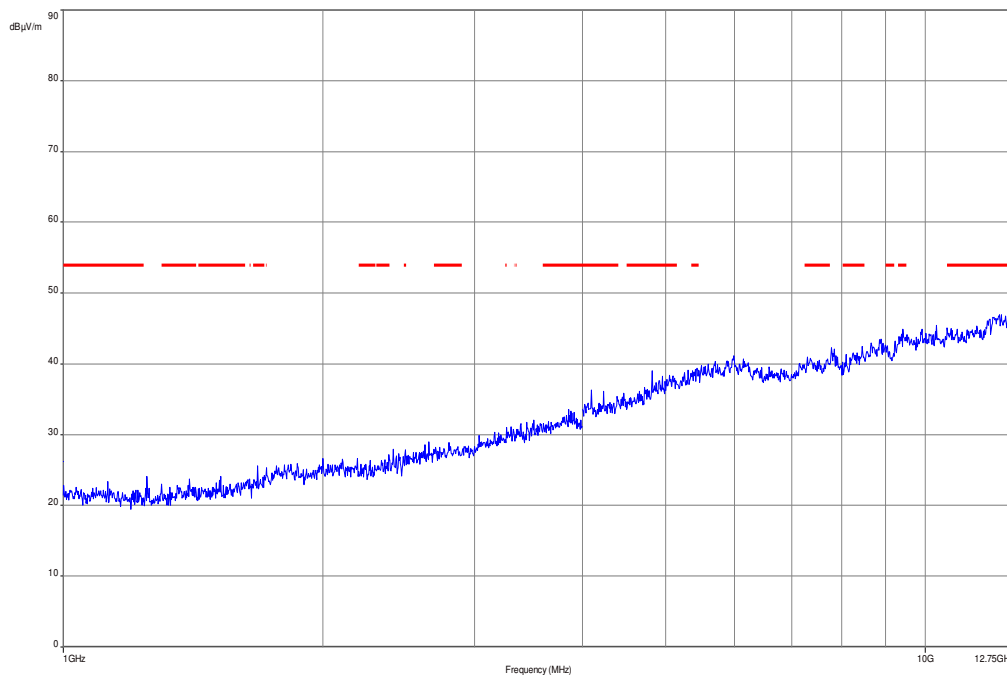


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

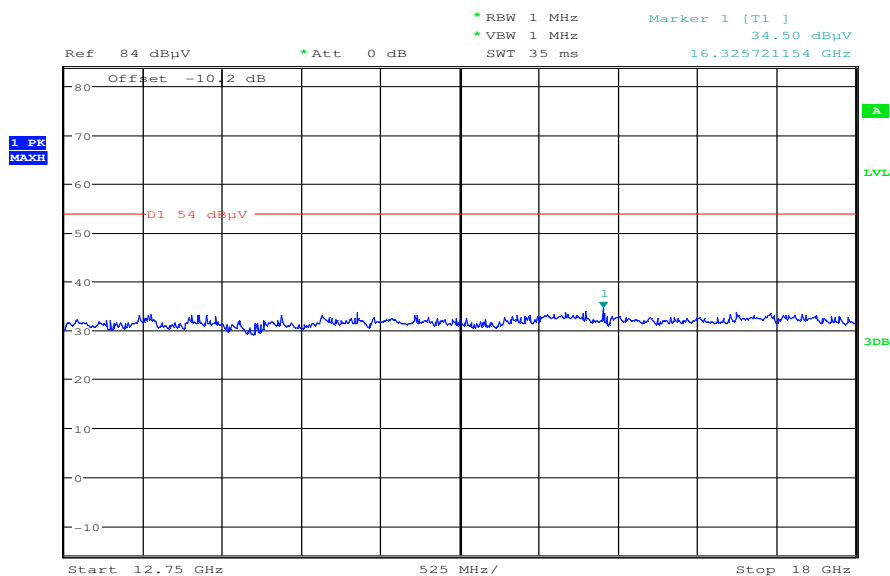

Date: 25.OCT.2012 14:47:10

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

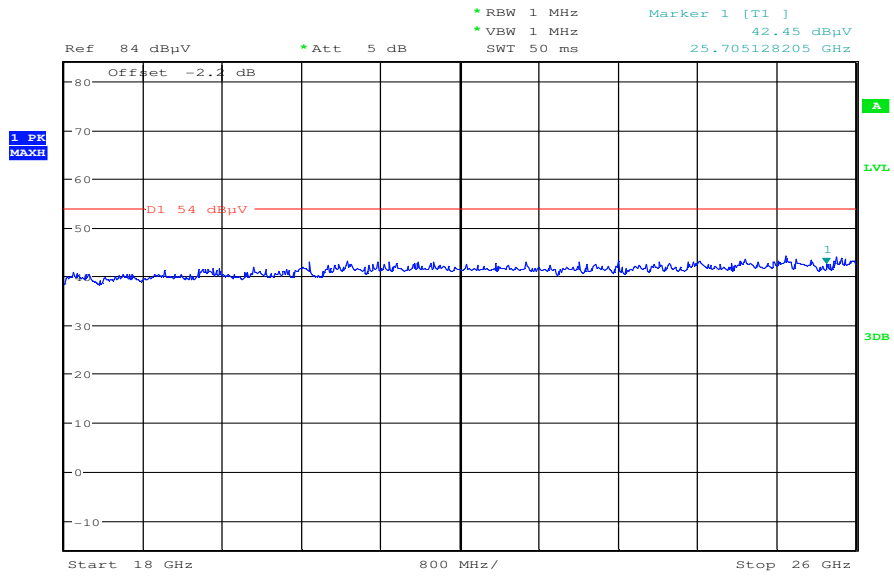

Date: 25.OCT.2012 15:12:53

Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0220-BV
 Serial Number: CB5A1LN5WE
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: w-lan b-mode, CH 6
 Operator Name: Medrow
 Comment: AC 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|----------------|-----------|-----------|---------|------------|--------|
| 30 MHz - 2 GHz | 60 kHz | QPK | 120 kHz | 1 s | 20 dB |

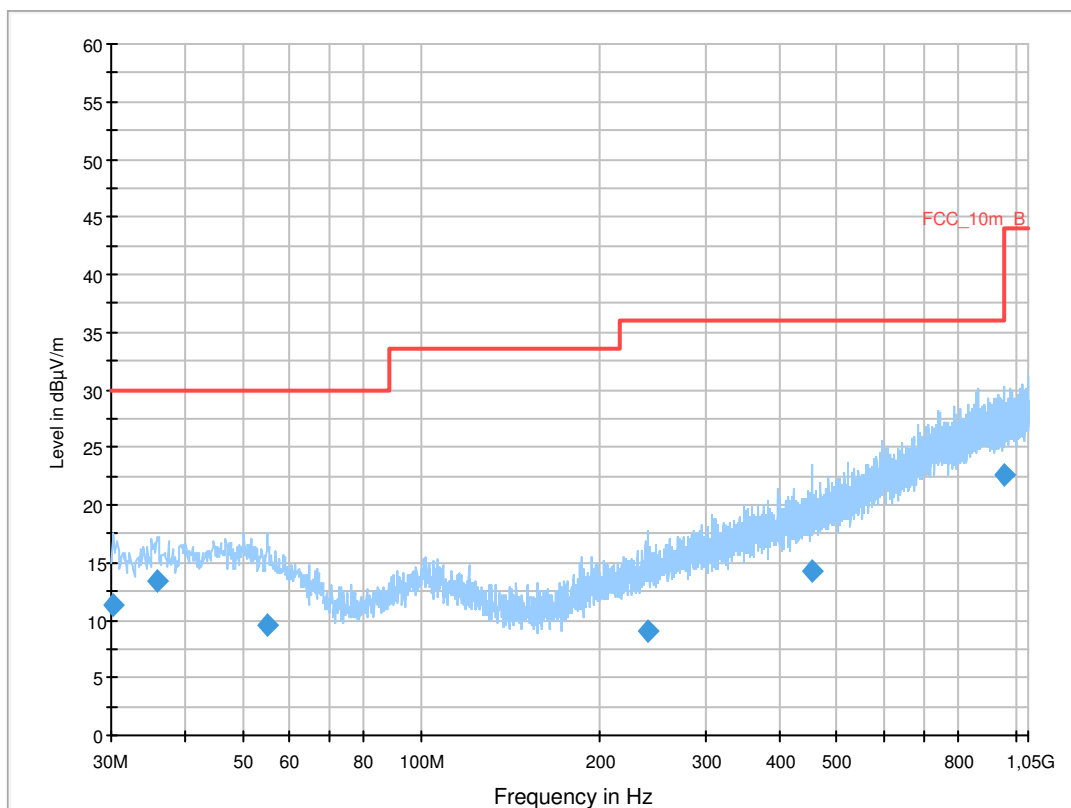

Final Result 1


| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|---------|
| 30.297000 | 11.4 | 1000.0 | 120.000 | 98.0 | V | 183.0 | 12.5 | 18.6 | 30.0 | |
| 35.821950 | 13.4 | 1000.0 | 120.000 | 170.0 | V | 100.0 | 13.1 | 16.6 | 30.0 | |
| 55.050300 | 9.6 | 1000.0 | 120.000 | 111.0 | V | -2.0 | 12.9 | 20.4 | 30.0 | |
| 240.929250 | 9.1 | 1000.0 | 120.000 | 162.0 | H | -2.0 | 13.0 | 26.9 | 36.0 | |
| 453.531150 | 14.3 | 1000.0 | 120.000 | 170.0 | H | 190.0 | 17.7 | 21.7 | 36.0 | |
| 956.338500 | 22.5 | 1000.0 | 120.000 | 170.0 | V | 100.0 | 25.4 | 13.5 | 36.0 | |

Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

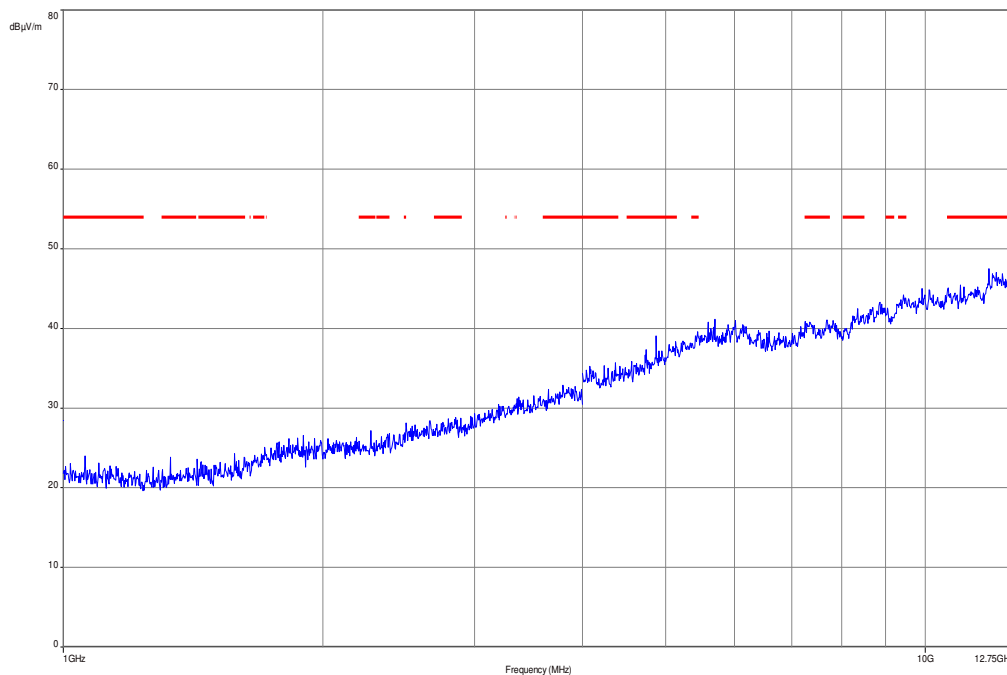


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

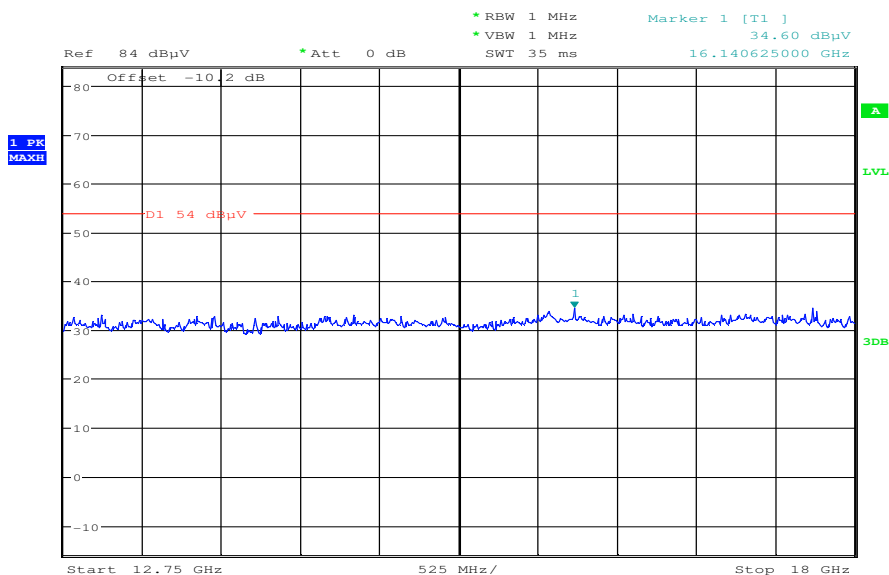

Date: 25.OCT.2012 14:48:36

Plot 8: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

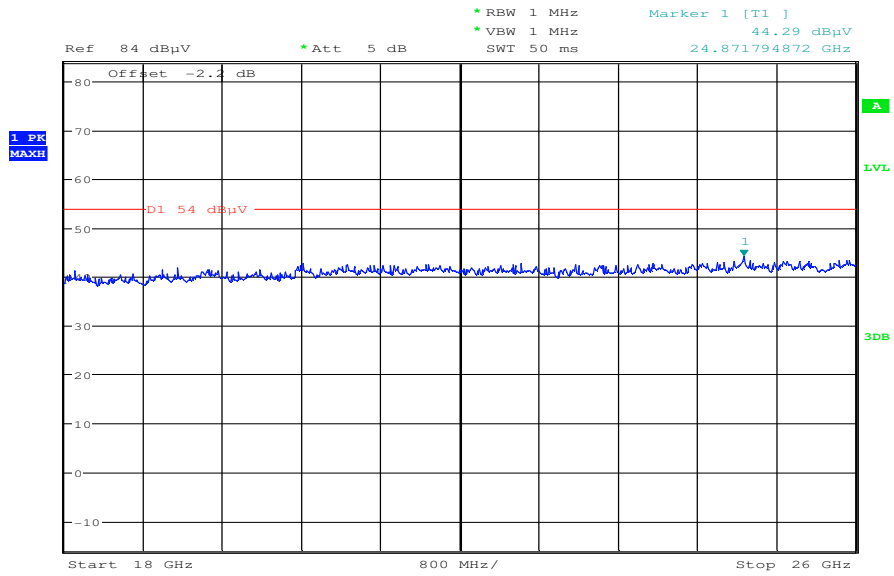

Date: 25.OCT.2012 15:13:57

Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0220-BV
 Serial Number: CB5A1LN5WE
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: w-lan b-mode, CH 11
 Operator Name: Medrow
 Comment: AC 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|----------------|-----------|-----------|---------|------------|--------|
| 30 MHz - 2 GHz | 60 kHz | QPK | 120 kHz | 1 s | 20 dB |

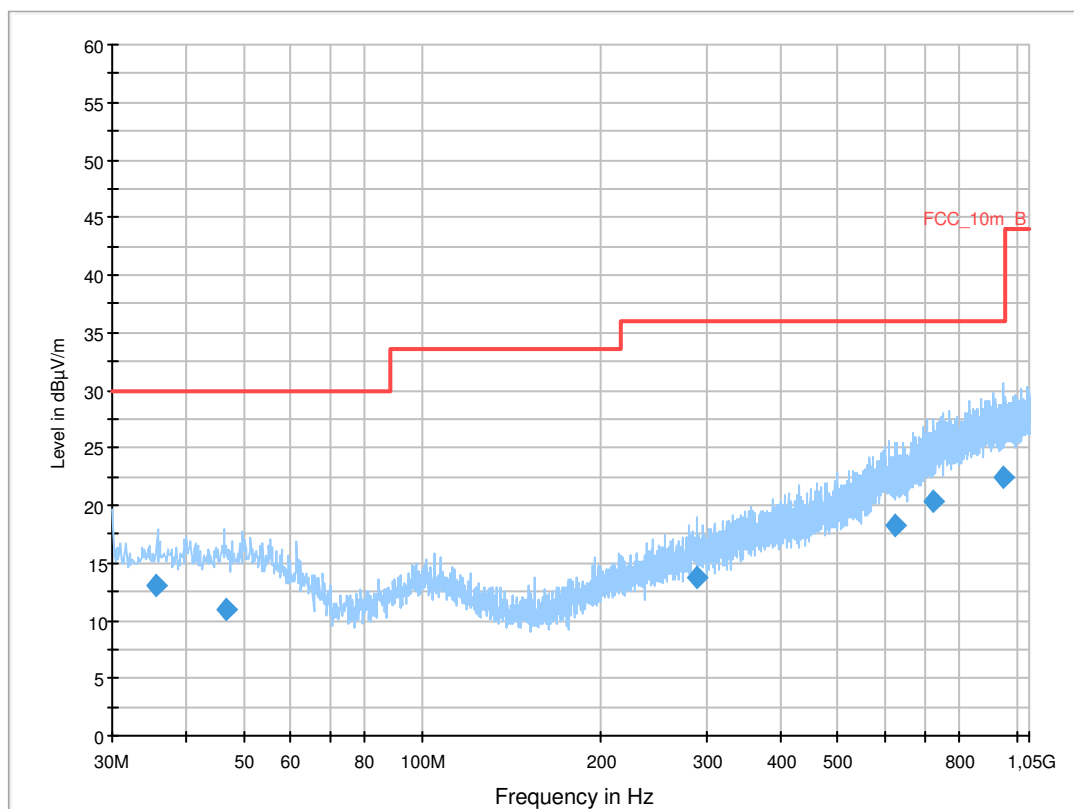

Final Result 1


| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|---------|
| 35.455500 | 13.0 | 1000.0 | 120.000 | 170.0 | V | -5.0 | 13.1 | 17.0 | 30.0 | |
| 46.727250 | 10.9 | 1000.0 | 120.000 | 170.0 | V | 190.0 | 13.3 | 19.1 | 30.0 | |
| 290.044800 | 13.7 | 1000.0 | 120.000 | 170.0 | V | 190.0 | 14.3 | 22.3 | 36.0 | |
| 623.637600 | 18.2 | 1000.0 | 120.000 | 98.0 | H | 190.0 | 20.9 | 17.8 | 36.0 | |
| 725.589150 | 20.4 | 1000.0 | 120.000 | 170.0 | H | 190.0 | 23.1 | 15.6 | 36.0 | |
| 946.577850 | 22.5 | 1000.0 | 120.000 | 170.0 | H | 171.0 | 25.3 | 13.5 | 36.0 | |

Plot 10: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

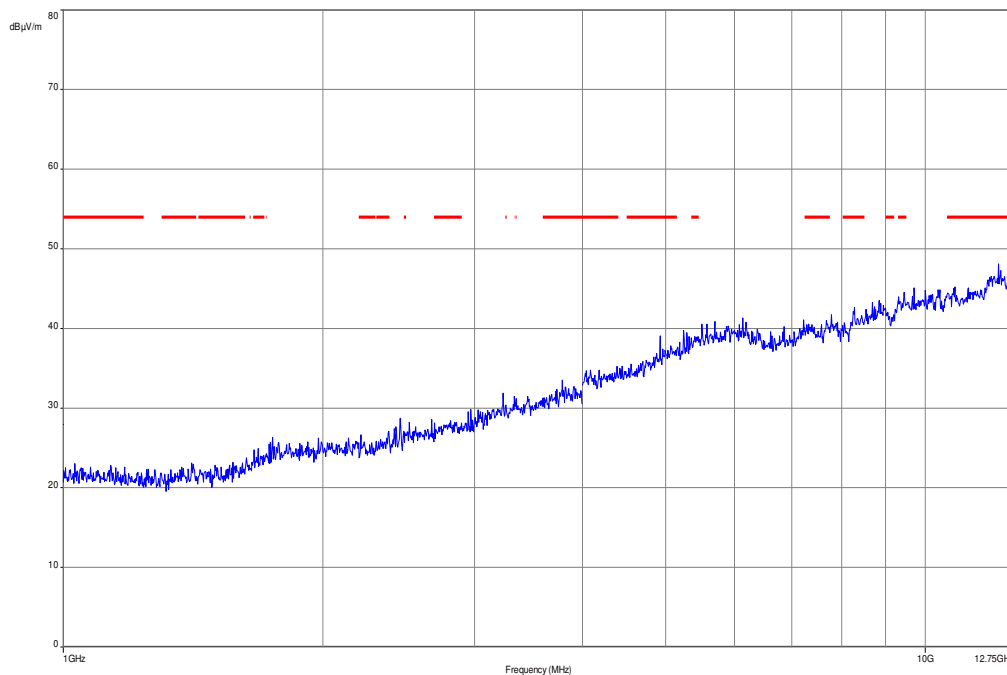


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

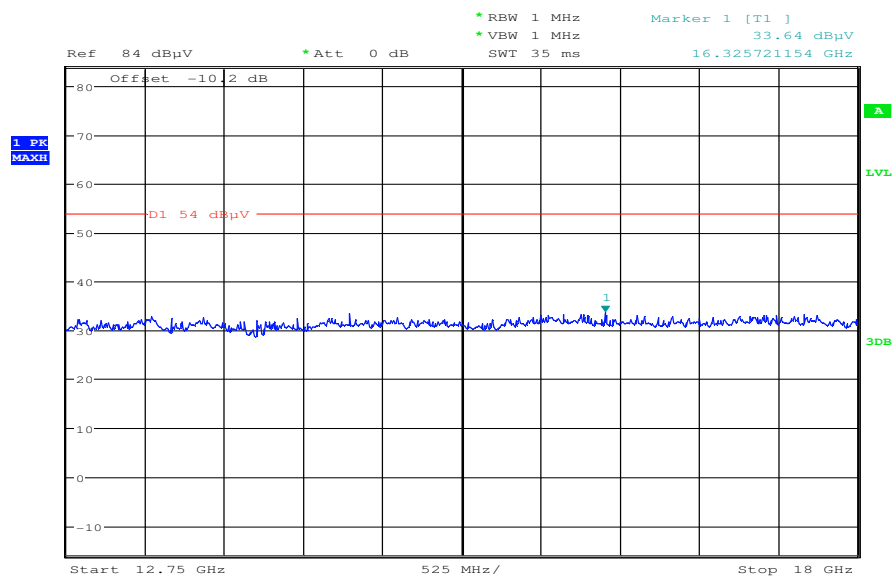

Date: 25.OCT.2012 14:49:56

Plot 12: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

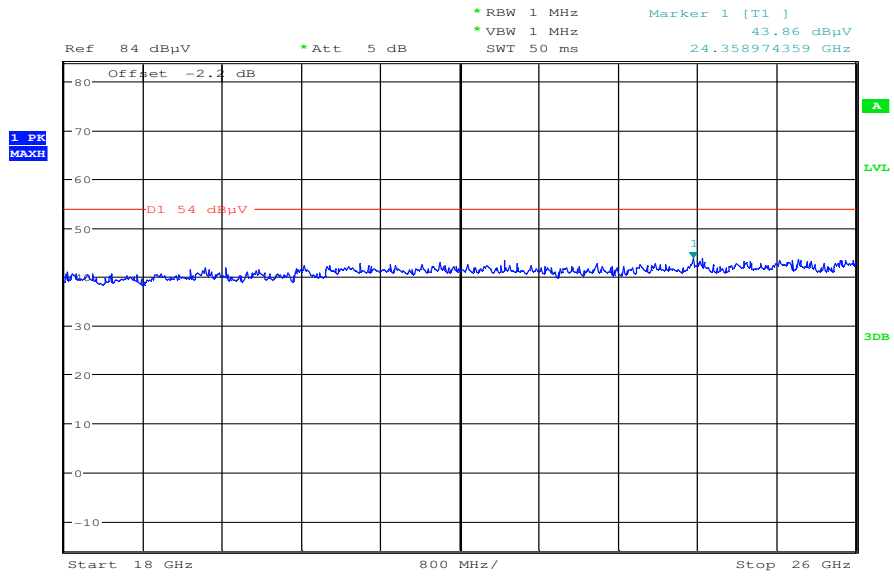

Date: 25.OCT.2012 15:15:10

Plots: OFDM / n – mode

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0220-BV
 Serial Number: CB5A1LN5WE
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: w-lan n-mode, CH 1
 Operator Name: Medrow
 Comment: AC 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|----------------|-----------|-----------|---------|------------|--------|
| 30 MHz - 2 GHz | 60 kHz | QPK | 120 kHz | 1 s | 20 dB |

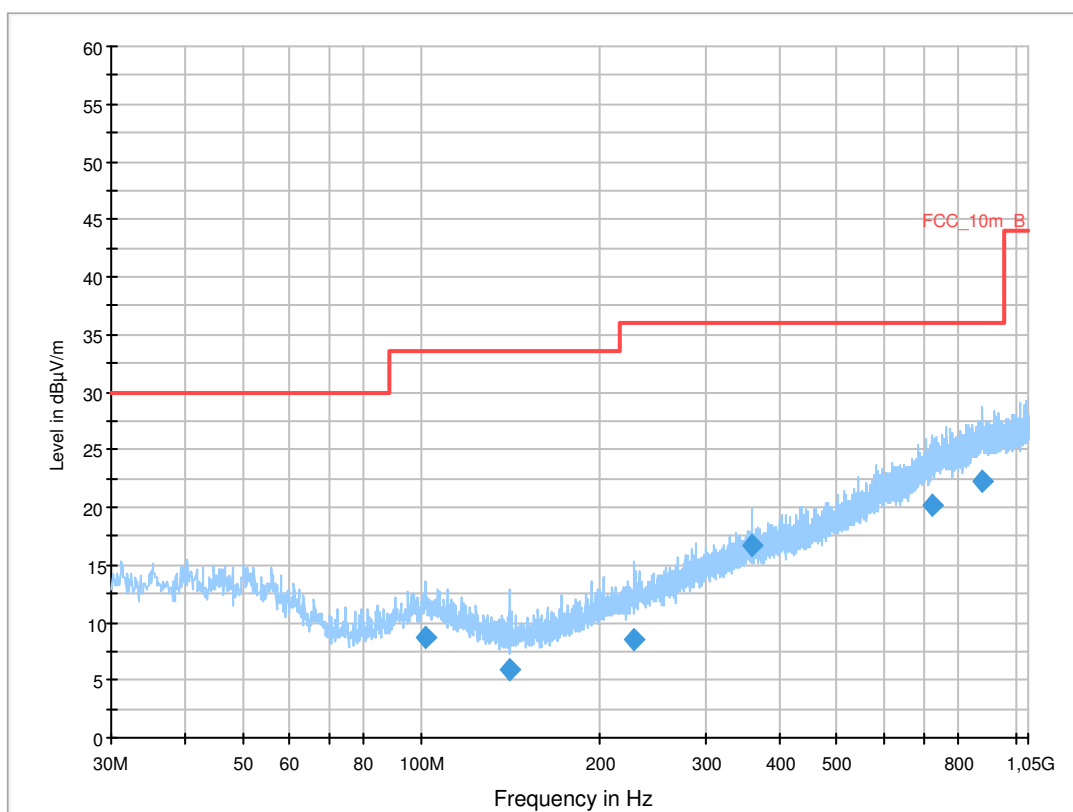

Final Result 1


| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|---------|
| 101.760000 | 8.7 | 1000.0 | 120.000 | 225.0 | V | 236.0 | 11.7 | 24.8 | 33.5 | |
| 140.400000 | 5.9 | 1000.0 | 120.000 | 131.0 | V | 229.0 | 8.7 | 27.6 | 33.5 | |
| 228.360000 | 8.5 | 1000.0 | 120.000 | 270.0 | V | 344.0 | 12.7 | 27.5 | 36.0 | |
| 360.000000 | 16.8 | 1000.0 | 120.000 | 111.0 | V | 117.0 | 16.2 | 19.2 | 36.0 | |
| 720.600000 | 20.2 | 1000.0 | 120.000 | 227.0 | V | 229.0 | 23.0 | 15.8 | 36.0 | |
| 878.040000 | 22.3 | 1000.0 | 120.000 | 236.0 | H | 81.0 | 24.9 | 13.7 | 36.0 | |

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

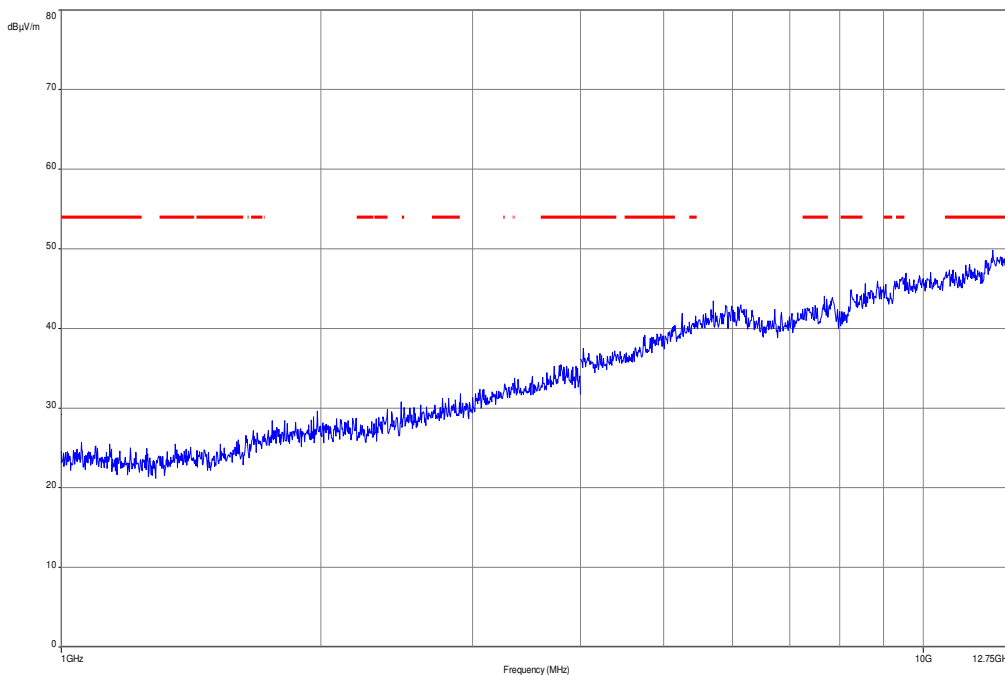


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

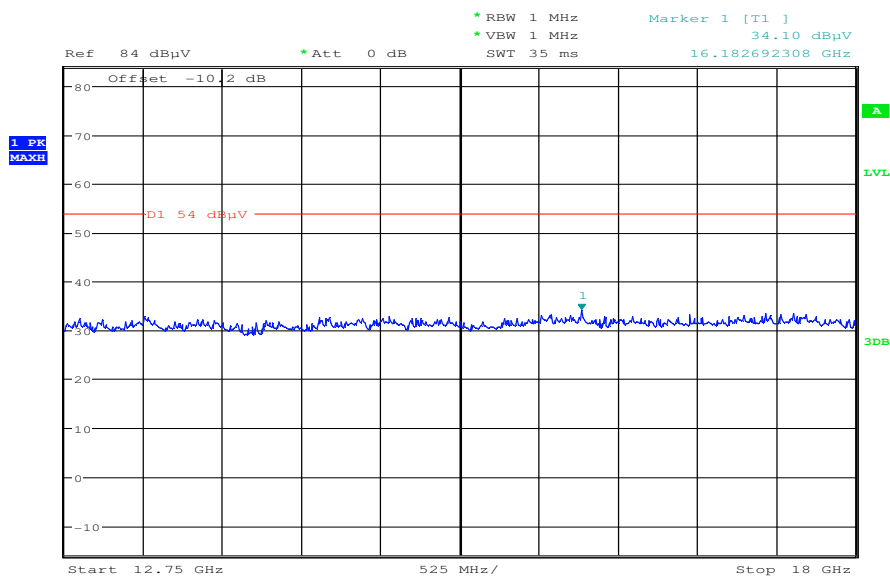

Date: 25.OCT.2012 14:51:38

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

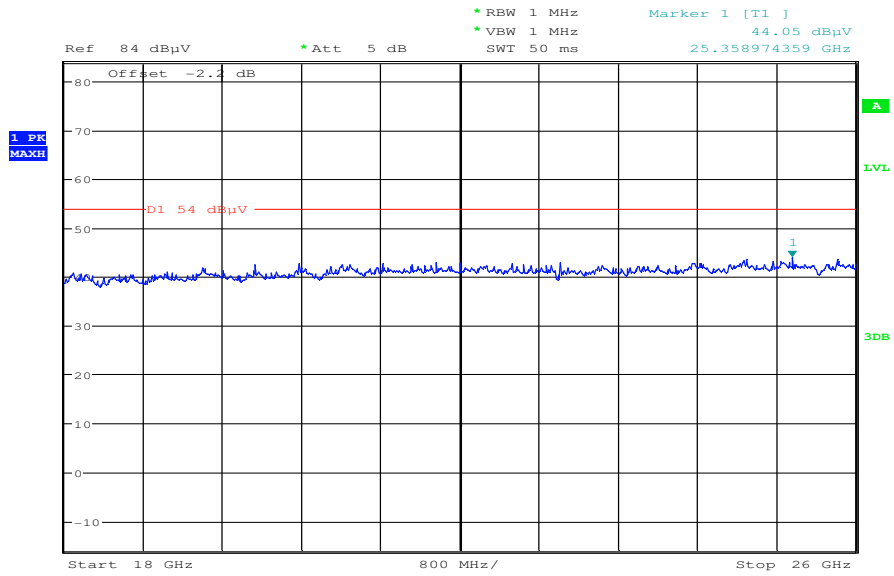

Date: 25.OCT.2012 15:20:44

Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0220-BV
 Serial Number: CB5A1LN5WE
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: w-lan n-mode, CH 6
 Operator Name: Medrow
 Comment: AC 115V/60Hz,

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m


| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|----------------|-----------|-----------|---------|------------|--------|
| 30 MHz - 2 GHz | 60 kHz | QPK | 120 kHz | 1 s | 20 dB |

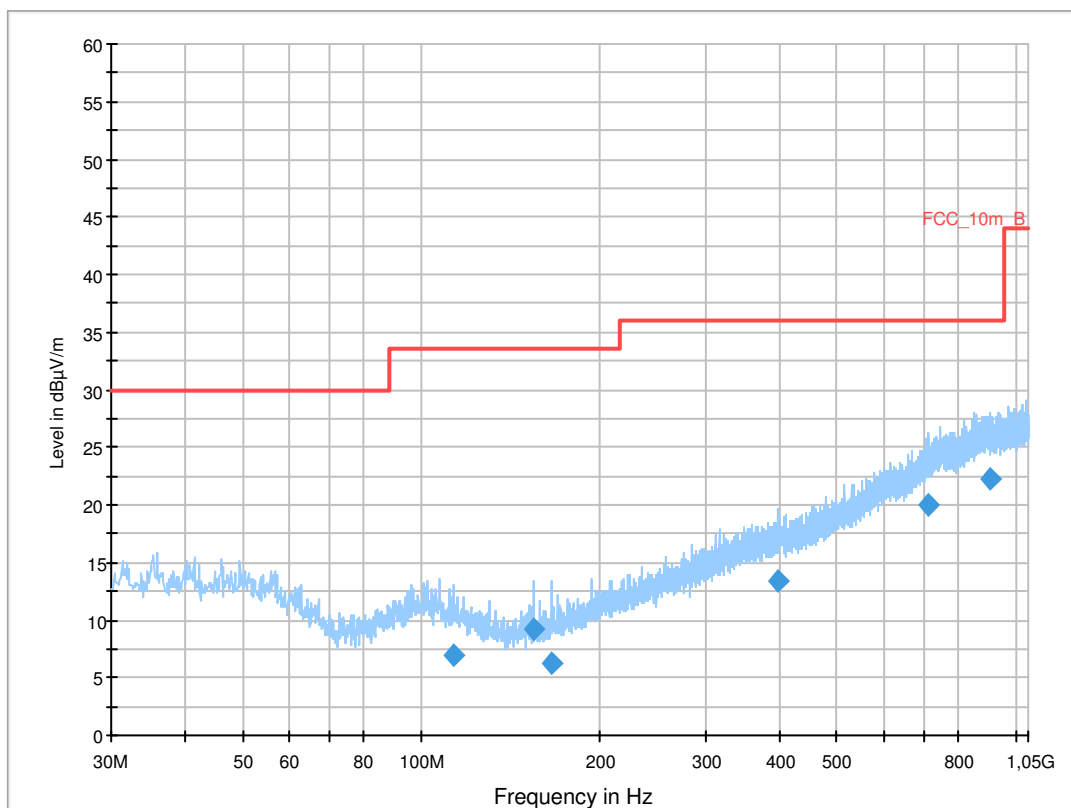

Final Result 1


| Frequency (MHz) | QuasiPeak (dB μ V/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) | Comment |
|-----------------|--------------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------------|---------|
| 113.280000 | 7.0 | 1000.0 | 120.000 | 209.0 | H | 8.0 | 10.8 | 26.6 | 33.5 | |
| 154.080000 | 9.2 | 1000.0 | 120.000 | 170.0 | V | 330.0 | 9.0 | 24.3 | 33.5 | |
| 165.600000 | 6.3 | 1000.0 | 120.000 | 157.0 | V | 236.0 | 9.5 | 27.2 | 33.5 | |
| 398.520000 | 13.3 | 1000.0 | 120.000 | 270.0 | H | 0.0 | 16.9 | 22.7 | 36.0 | |
| 714.240000 | 20.0 | 1000.0 | 120.000 | 131.0 | H | 214.0 | 22.8 | 16.0 | 36.0 | |
| 906.120000 | 22.3 | 1000.0 | 120.000 | 270.0 | H | 37.0 | 25.2 | 13.7 | 36.0 | |

Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

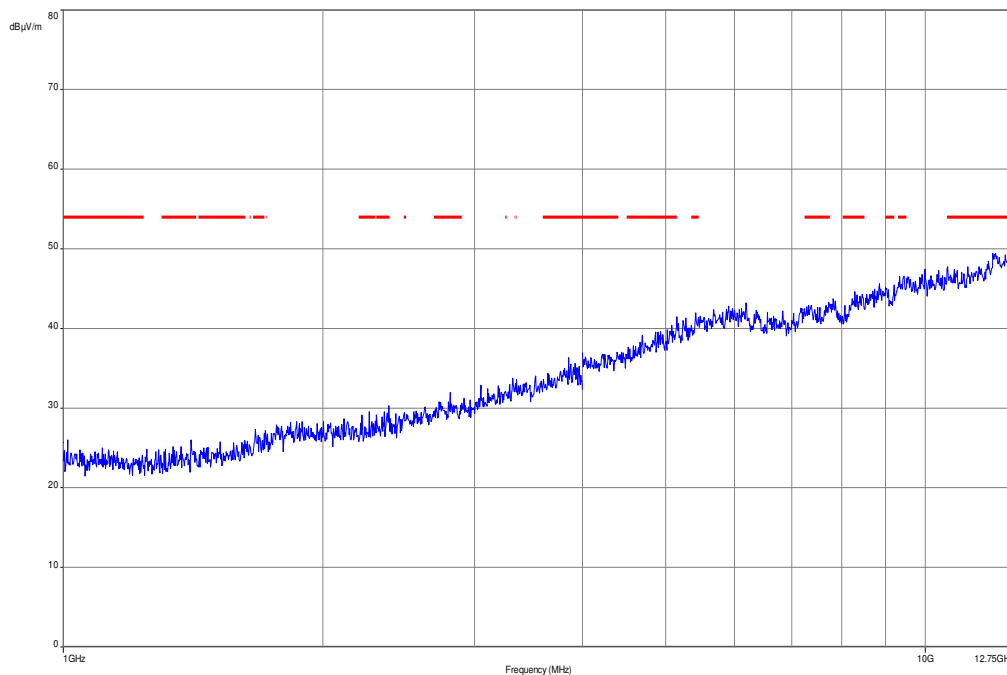


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

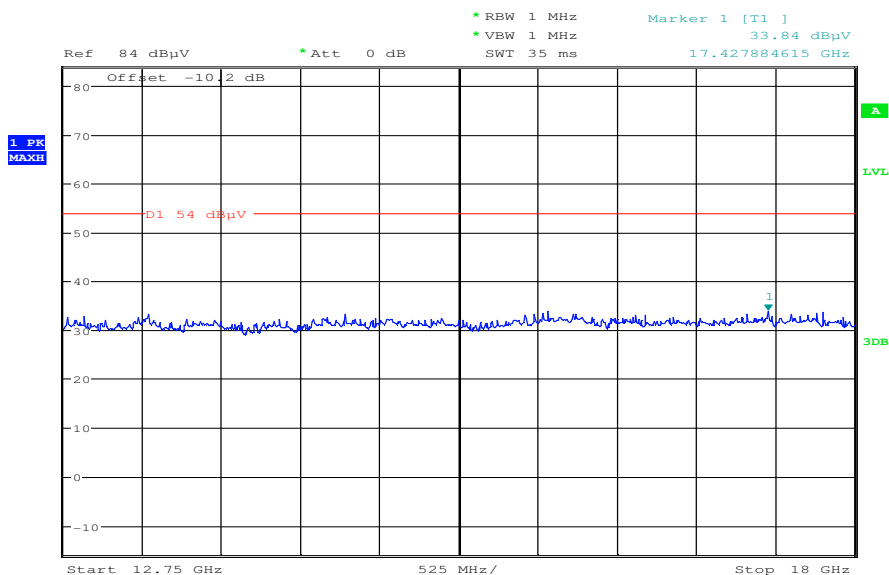

Date: 25.OCT.2012 14:52:53

Plot 8: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

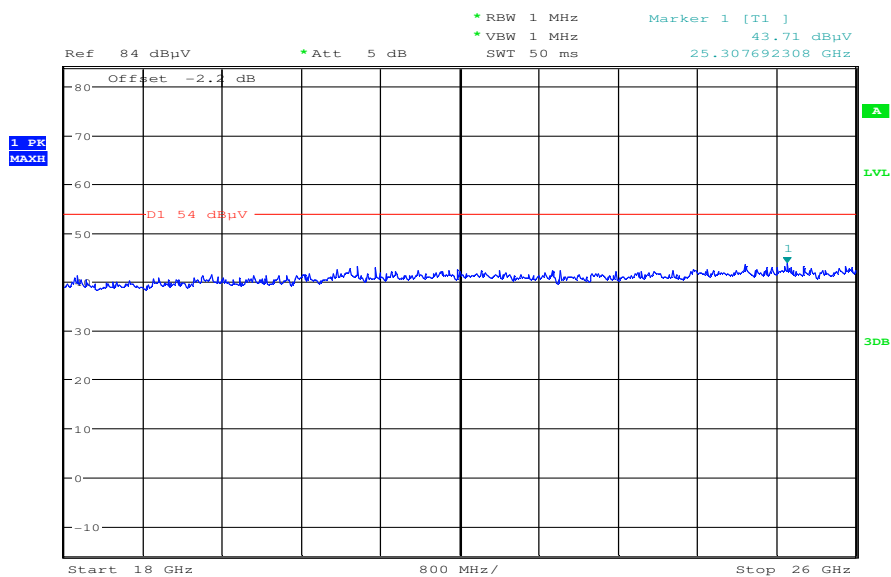

Date: 25.OCT.2012 15:21:45

Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0220-BV
 Serial Number: CB5A1LN5WE
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: w-lan n-mode, CH 11
 Operator Name: Medrow
 Comment: AC 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m


| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|----------------|-----------|-----------|---------|------------|--------|
| 30 MHz - 2 GHz | 60 kHz | QPK | 120 kHz | 1 s | 20 dB |

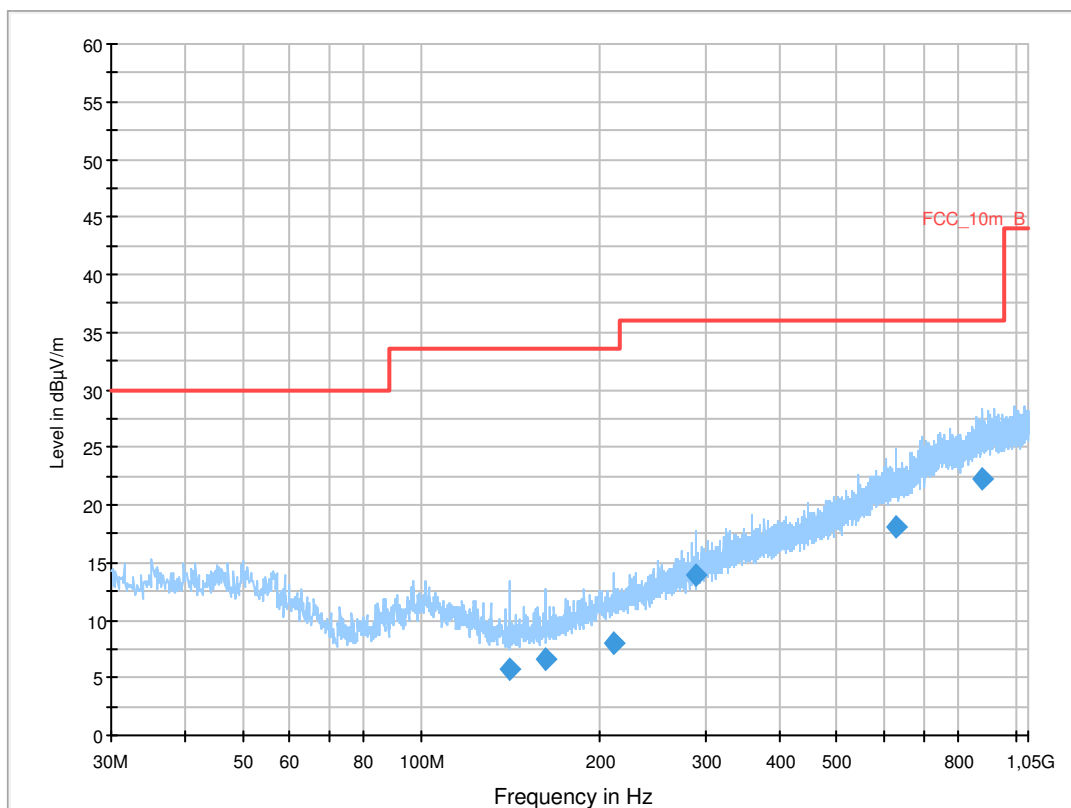

Final Result 1


| Frequency (MHz) | QuasiPeak (dB μ V/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) | Comment |
|-----------------|--------------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------------|---------|
| 140.400000 | 5.8 | 1000.0 | 120.000 | 270.0 | V | 250.0 | 8.7 | 27.7 | 33.5 | |
| 162.000000 | 6.7 | 1000.0 | 120.000 | 165.0 | V | 45.0 | 9.3 | 26.8 | 33.5 | |
| 210.960000 | 8.0 | 1000.0 | 120.000 | 270.0 | H | 315.0 | 12.1 | 25.5 | 33.5 | |
| 290.040000 | 13.8 | 1000.0 | 120.000 | 121.0 | V | 276.0 | 14.3 | 22.2 | 36.0 | |
| 629.640000 | 18.1 | 1000.0 | 120.000 | 270.0 | V | 170.0 | 21.0 | 17.9 | 36.0 | |
| 878.760000 | 22.3 | 1000.0 | 120.000 | 270.0 | V | 82.0 | 24.9 | 13.7 | 36.0 | |

Plot 10: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

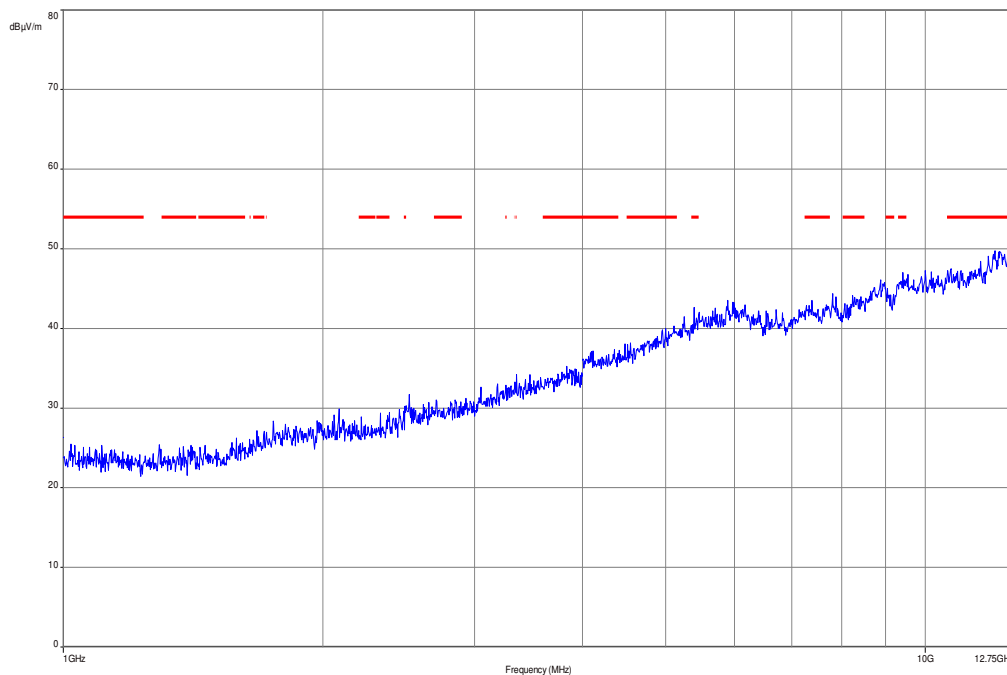


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

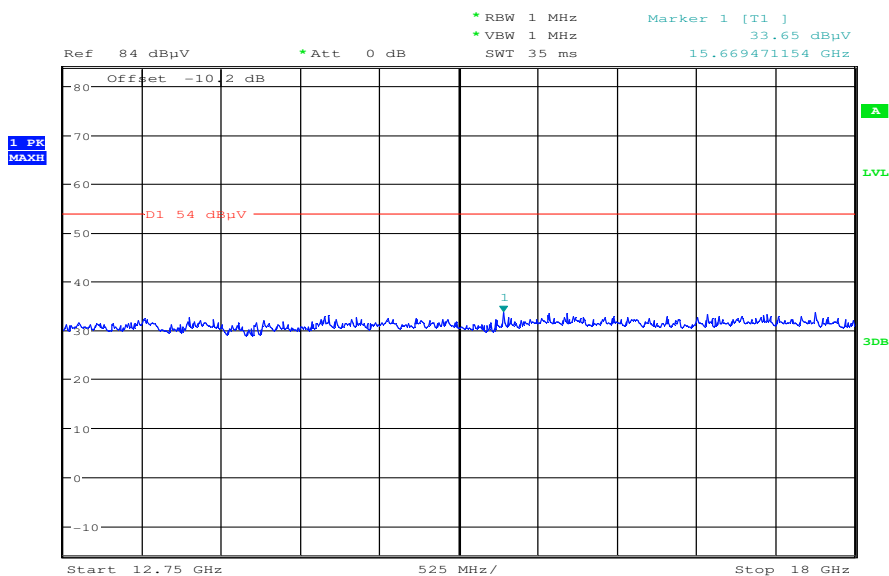

Date: 25.OCT.2012 14:53:57

Plot 12: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

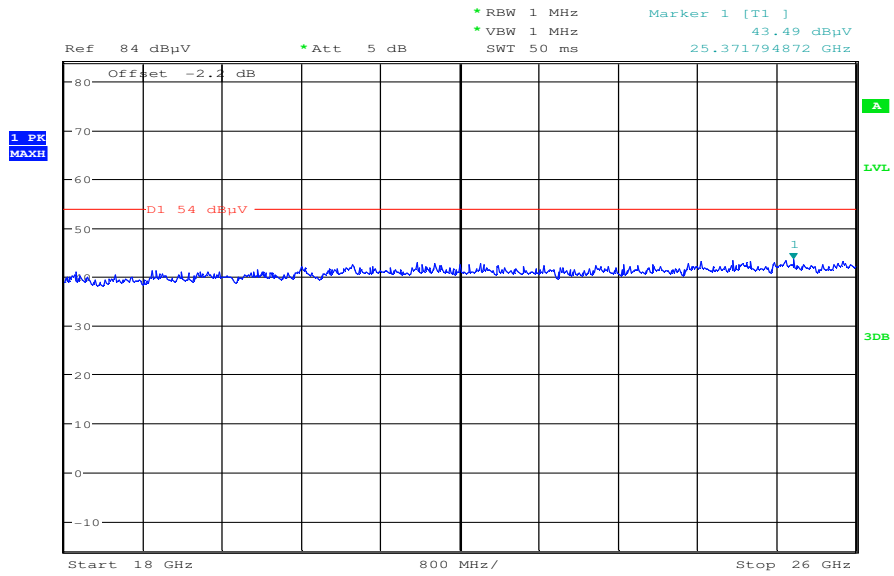

Date: 25.OCT.2012 15:23:00

9.11 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode. The results are valid for both modes.

Measurement:

| Measurement parameter | |
|-----------------------|--|
| Detector: | Peak / Quasi Peak / RMS |
| Sweep time: | Auto |
| Resolution bandwidth: | F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz |
| Video bandwidth: | Sweep: 100 kHz Remeasurement: 10 Hz / 3 MHz |
| Span: | 30 MHz to 25 GHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | | IC |
|--------------------------------|-------------------------------|----------------------|
| RX Spurious Emissions Radiated | | |
| Frequency (MHz) | Field Strength (dB μ V/m) | Measurement distance |
| 30 - 88 | 30.0 | 10 |
| 88 – 216 | 33.5 | 10 |
| 216 – 960 | 36.0 | 10 |
| Above 960 | 54.0 | 3 |

Results:

| RX Spurious Emissions Radiated [dB μ V/m] | | |
|--|----------|----------------------|
| F [MHz] | Detector | Level [dB μ V/m] |
| For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. | | |
| No emissions detected above 1 GHz. | | |
| Measurement uncertainty | ± 3 dB | |

Result: Passed

Plots: RX / Idle – mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0220-BV
 Serial Number: CB5A1LN5WE
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: IDLE + charging
 Operator Name: Medrow
 Comment: AC 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|----------------|-----------|-----------|---------|------------|--------|
| 30 MHz - 2 GHz | 60 kHz | QPK | 120 kHz | 1 s | 20 dB |

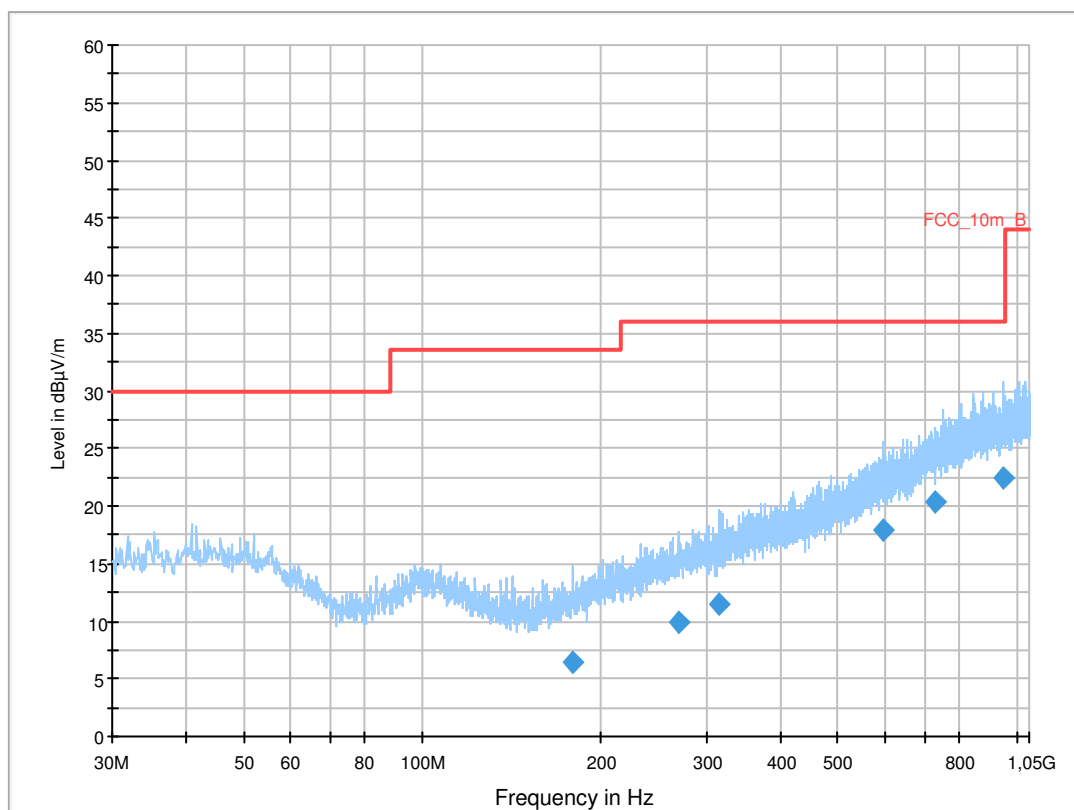


Final Result 1

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|---------|
| 179.319900 | 6.4 | 1000.0 | 120.000 | 170.0 | H | -2.0 | 10.4 | 27.1 | 33.5 | |
| 269.817450 | 9.9 | 1000.0 | 120.000 | 170.0 | V | 3.0 | 13.8 | 26.1 | 36.0 | |
| 316.387200 | 11.5 | 1000.0 | 120.000 | 170.0 | H | 280.0 | 15.0 | 24.5 | 36.0 | |
| 597.644100 | 17.9 | 1000.0 | 120.000 | 98.0 | H | 80.0 | 20.7 | 18.1 | 36.0 | |
| 730.390050 | 20.4 | 1000.0 | 120.000 | 111.0 | V | 178.0 | 23.2 | 15.6 | 36.0 | |
| 947.912700 | 22.4 | 1000.0 | 120.000 | 170.0 | H | 3.0 | 25.3 | 13.6 | 36.0 | |

Plot 2: 1 GHz to 12.75 GHz, vertical & horizontal polarization

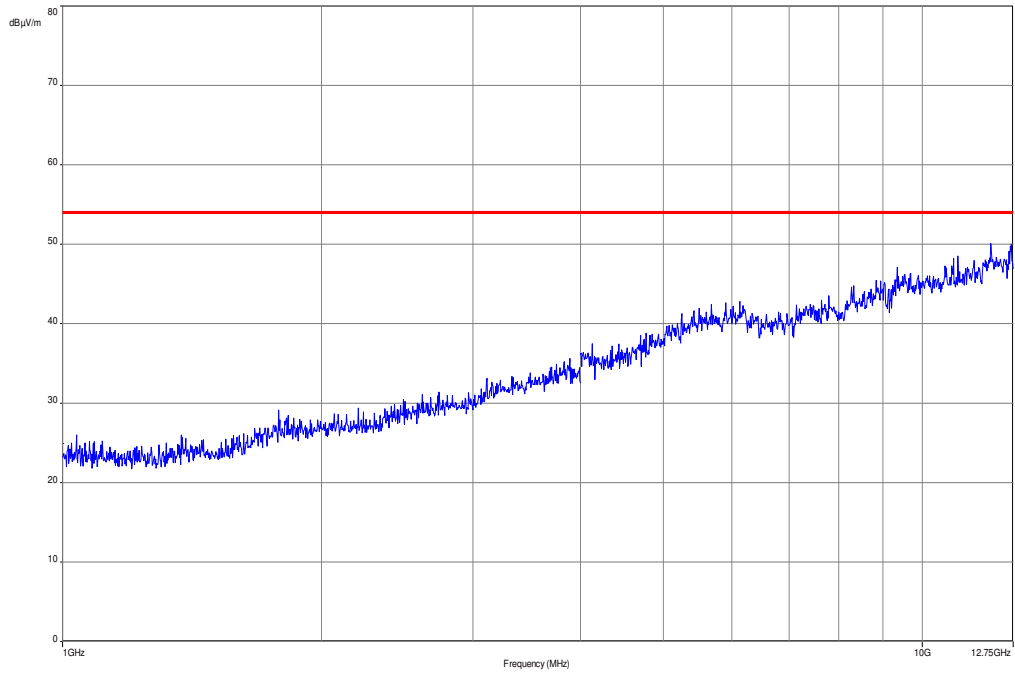


Plot 3: 12.75 GHz to 18 GHz, vertical & horizontal polarization

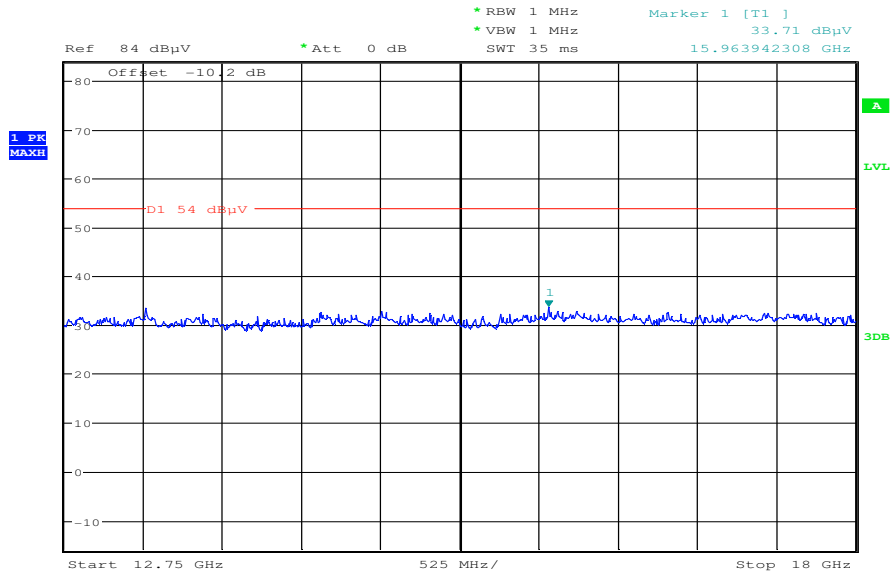

Date: 25.OCT.2012 15:09:56

Plot 4: 18 GHz to 26 GHz, vertical & horizontal polarization

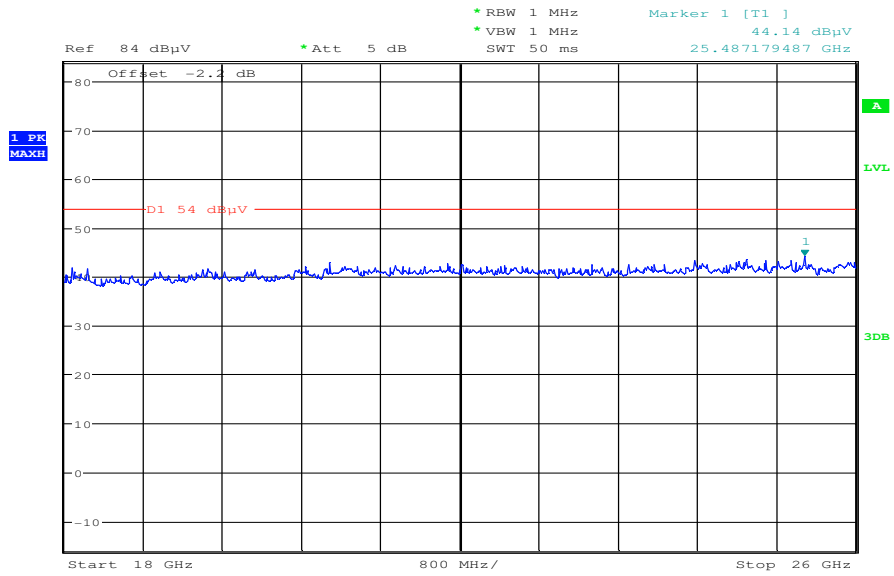

Date: 25.OCT.2012 15:24:14

9.12 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is representative for all channels and modes. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

| Measurement parameter | |
|-----------------------|--|
| Detector: | Peak / Quasi Peak |
| Sweep time: | Auto |
| Video bandwidth: | F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz |
| Resolution bandwidth: | F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz |
| Span: | 9 kHz to 30 MHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | | IC |
|---|-------------------------|----------------------|
| TX Spurious Emissions Radiated < 30 MHz | | |
| Frequency (MHz) | Field Strength (dBµV/m) | Measurement distance |
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |


Results:

| TX Spurious Emissions Radiated < 30 MHz [dBµV/m] | | |
|--|----------|----------------|
| F [MHz] | Detector | Level [dBµV/m] |
| No peaks found. | | |
| | | |
| | | |
| Measurement uncertainty | ± 3 dB | |

Result: Passed


Plots: TX mode

Plot 1: 9 kHz to 30 MHz

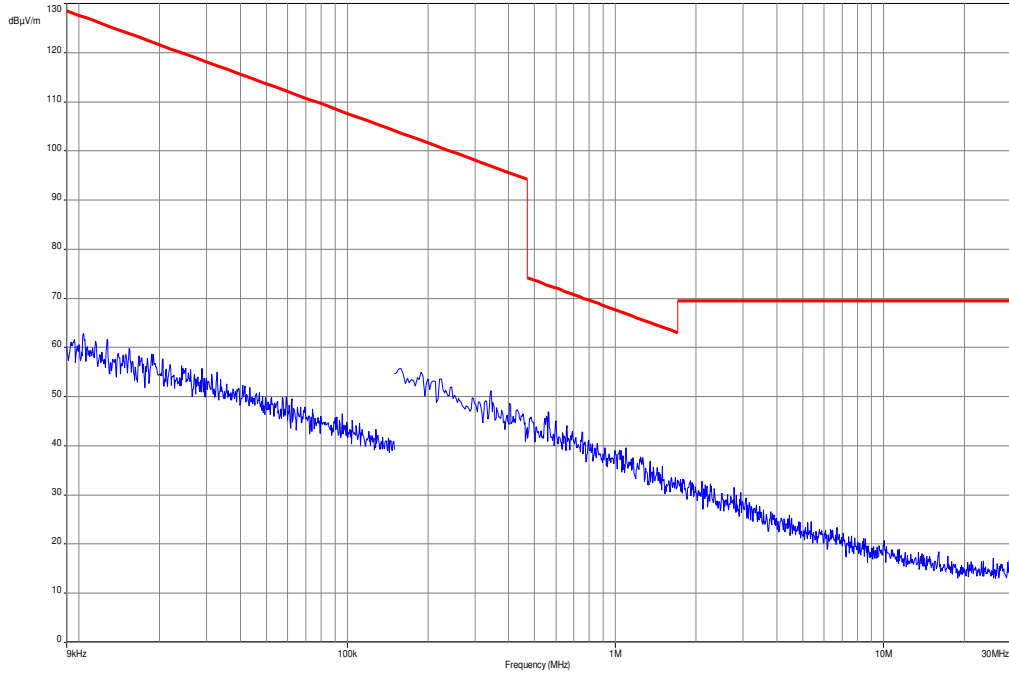

Plots: RX / Idle – mode

Plot 1: 9 kHz to 30 MHz

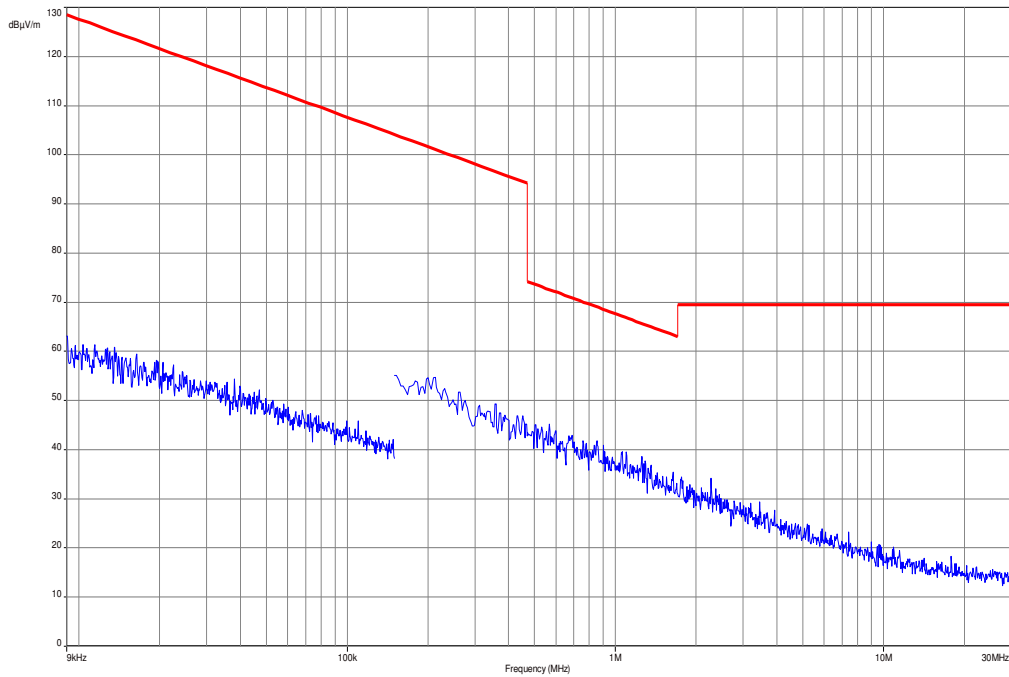

9.13 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

| Measurement parameter | |
|-----------------------|--|
| Detector: | Peak - Quasi Peak / Average |
| Sweep time: | Auto |
| Video bandwidth: | F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz |
| Resolution bandwidth: | F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz |
| Span: | 9 kHz to 30 MHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | | IC |
|--|---------------------|------------------|
| TX Spurious Emissions Conducted < 30 MHz | | |
| Frequency (MHz) | Quasi-Peak (dBµV/m) | Average (dBµV/m) |
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30.0 | 60 | 50 |

*Decreases with the logarithm of the frequency


Results:

| TX Spurious Emissions Conducted < 30 MHz [dBµV/m] | | |
|--|----------|----------------|
| F [MHz] | Detector | Level [dBµV/m] |
| No critical peaks detected. All detected peak values are below the average limits. | | |
| Measurement uncertainty | ± 3 dB | |


Result: Passed

Plots:


Plot 1: TX mode, 9 kHz to 30 MHz, phase line

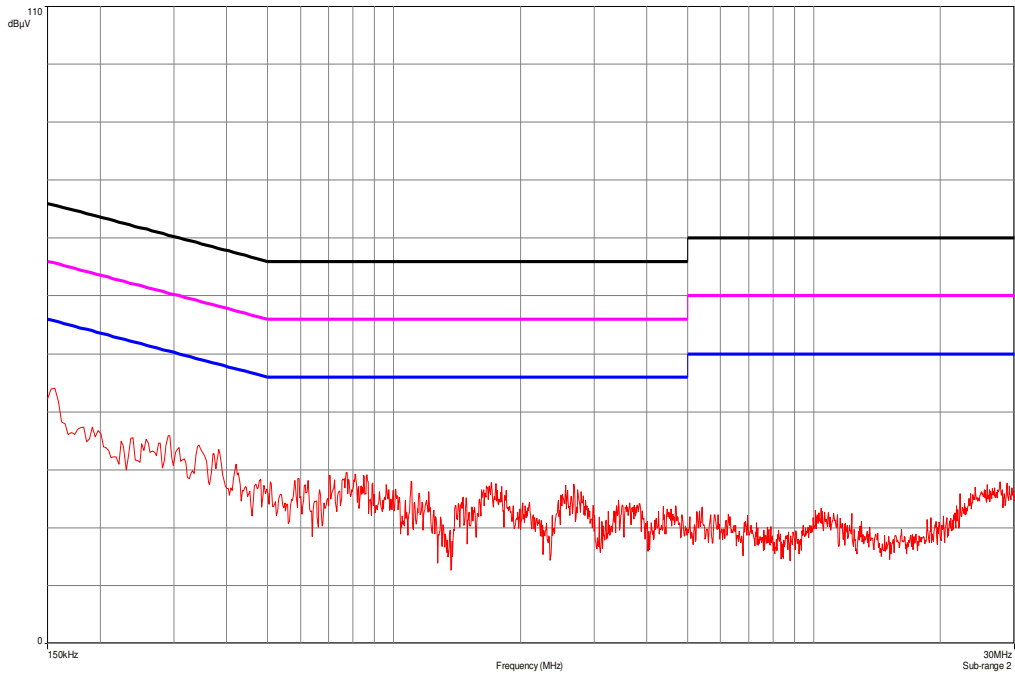


Plot 2: TX mode, 9 kHz to 30 MHz, neutral line

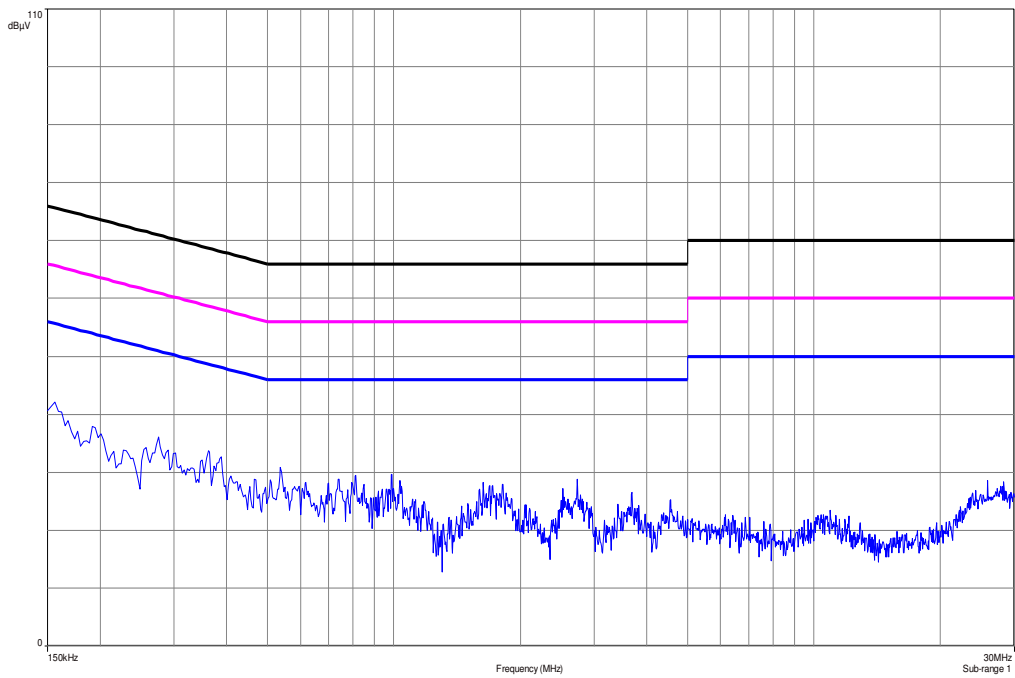

Plot 3: RX / Idle – mode, 9 kHz to 30 MHz, phase line

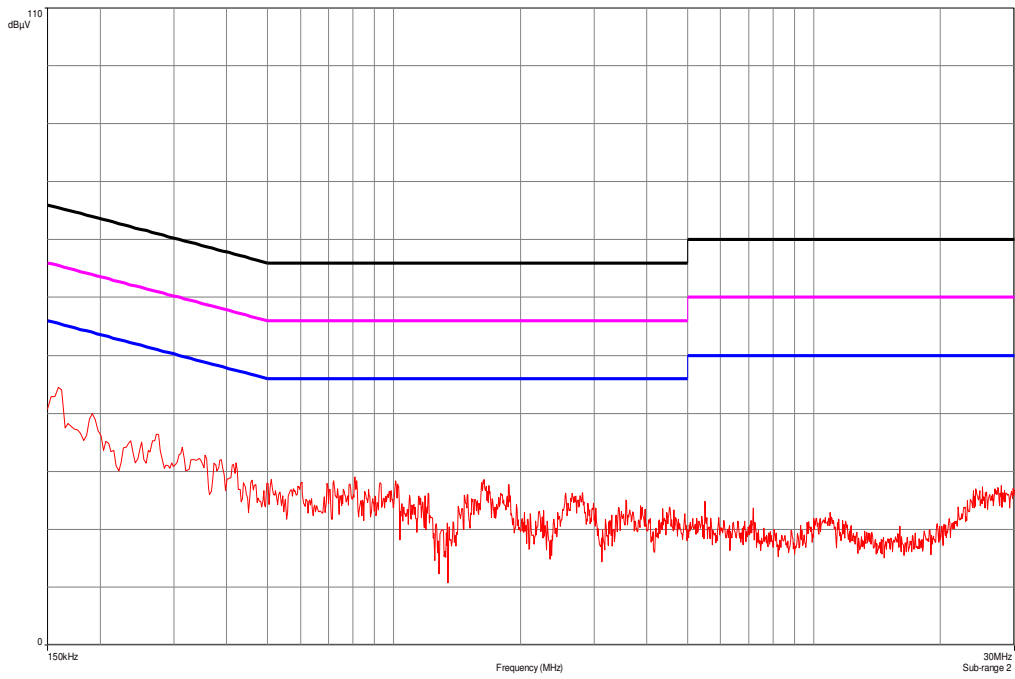

Plot 4: RX / Idle – mode, 9 kHz to 30 MHz, neutral line

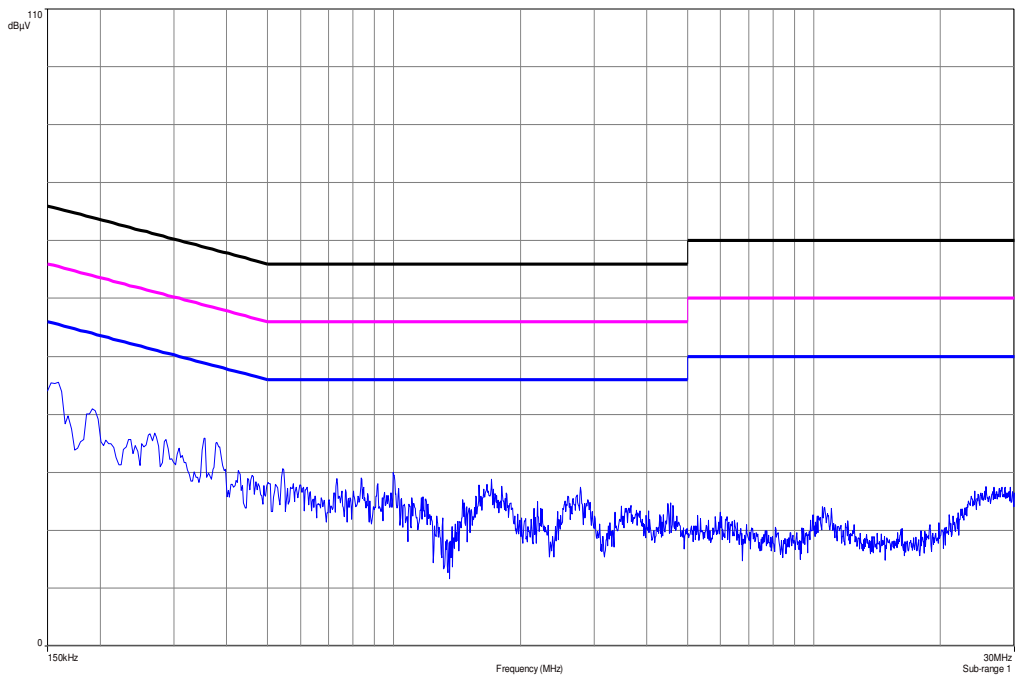

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

| No. | Lab / Item | Equipment | Type | Manufact. | Serial No. | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|---|---|------------------------|----------------------------|--------------------|------------------------|---------------------|---------------------|
| 1 | 45 | Switch-Unit | 3488A | HP Meßtechnik | 2719A14505 | 300000368 | g | | |
| 2 | 50 | DC power supply, 60Vdc, 50A, 1200 W | 6032A | HP Meßtechnik | 2920A04466 | 300000580 | ne | | |
| 3 | n. a. | software | SPS_PHE 1.4f | Spitzberger & Spieß | B5981; 5D1081;B597 9 | 300000210 | ne | | |
| 4 | n. a. | EMI Test Receiver | ESCI 1166.5950. 03 | R&S | 100083 | 300003312 | k | 04.01.2012 | 04.01.2013 |
| 5 | n. a. | Analyzer- Reference- System (Harmonics and Flicker) | ARS 16/1 | SPS | A3509 07/0 0205 | 300003314 | k | 14.07.2011 | 14.07.2013 |
| 6 | n. a. | Amplifier | JS42- 00502650- 28-5A | MITEQ | 1084532 | 300003379 | ev | | |
| 7 | n. a. | Antenna Tower | Model 2175 | ETS- LINDGREN | 64762 | 300003745 | izw | | |
| 8 | n. a. | Positioning Controller | Model 2090 | ETS- LINDGREN | 64672 | 300003746 | izw | | |
| 9 | n. a. | Turntable Interface-Box | Model 105637 | ETS- LINDGREN | 44583 | 300003747 | izw | | |
| 10 | n. a. | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163 | Schwarzbe ck | 295 | 300003787 | k | 12.04.2012 | 12.04.2014 |
| 11 | n. a. | Spectrum- Analyzer | FSU26 | R&S | 200809 | 300003874 | k | 06.01.2012 | 06.01.2014 |
| 12 | n. a. | Isolating Transformer | RT5A | Grundig | 8041 | 300001626 | g | | |
| 13 | n. a. | DC power supply, 60Vdc, 50A, 1200 W | 6032A | HP Meßtechnik | 2818A03450 | 300001040 | Ve | 12.01.2012 | 12.01.2015 |
| 14 | n. a. | Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115 | EMCO | 8812-3088 | 300001032 | vIKI! | 11.05.2011 | 11.05.2013 |
| 15 | n. a. | Active Loop Antenna | 6502 | EMCO | 2210 | 300001015 | ne | | |
| 16 | n. a. | Anechoic chamber | FAC 3/5m | MWB / TDK | 87400/02 | 300000996 | ev | | |
| 17 | n. a. | Relais Matrix | 3488A | HP Meßtechnik | 2719A15013 | 300001156 | ne | | |
| 18 | n. a. | Relais Matrix | PSU | R&S | 890167/024 | 300001168 | ne | | |
| 19 | n. a. | Isolating Transformer | RT5A | Grundig | 9242 | 300001263 | ne | | |
| 20 | n. a. | Three-Way Power Splitter, 50 Ohm | 11850C | HP Meßtechnik | | 300000997 | ne | | |
| 21 | n. a. | Switch / Control Unit | 3488A | HP | 2605e08770 | 300001443 | ne | | |
| 22 | n. a. | Amplifier | js42- 00502650- 28-5a | Parzich GMBH | 928979 | 300003143 | ne | | |
| 23 | n. a. | Band Reject filter | WRCG240 0/2483- 2375/2505- 50/10SS | Wainwright | 11 | 300003351 | ev | | |
| 24 | n. a. | TRILOG | VULB9163 | Schwarzbe | 371 | 300003854 | vIKI! | 14.10.2011 | 14.10.2014 |

| | | | | | | | | | |
|----|-------|--|-----------------|----------------------|------------|-----------|----|------------|------------|
| | | Broadband Test-Antenna 30 MHz - 3 GHz | | ck | | | | | |
| 25 | n. a. | MXE EMI Receiver 20 Hz bis 26.5 GHz | N9038A | Agilent Technologies | MY51210197 | 300004405 | k | 19.12.2011 | 19.12.2012 |
| 26 | A026 | Std. Gain Horn Antenna 12.4 to 18.0 GHz | 639 | Narda | | 300000787 | ne | | |
| 27 | A029 | Std. Gain Horn Antenna 18.0 to 26.5 GHz | 638 | Narda | | 300002442 | ne | | |
| 28 | CR 79 | Std. Gain Horn Antenna 26.5-40.0 GHz | V637 | Narda | 7911 | 300001751 | ne | | |
| 29 | 11b | Microwave System Amplifier, 0.5-26.5 GHz | 83017A | HP Meßtechnik | 00419 | 300002268 | ev | | |
| 30 | n. a. | Broadband Low Noise Amplifier 18-50 GHz | CBL18503 070-XX | CERNEX | 19338 | 300004273 | ne | | |

Agenda: Kind of Calibration

| | | | |
|------|--|-----|--|
| k | calibration / calibrated | EK | limited calibration |
| ne | not required (k, ev, izw, zw not required) | zw | cyclical maintenance (external cyclical maintenance) |
| ev | periodic self verification | izw | internal cyclical maintenance |
| Ve | long-term stability recognized | g | blocked for accredited testing |
| vkI! | Attention: extended calibration interval | *) | next calibration ordered / currently in progress |
| NK! | Attention: not calibrated | | |

11 Observations

No observations exceeding those reported with the single test cases have been made.