



TEST REPORT

Test report no.: 1-5831/13-05-07-A



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 1 08 00 24 41
Contact: Fredrik Björk
e-mail: Fredrik.Bjork@sonymobile.com
Phone: +46 10 80 14 67 5
Mobile: +46 70 32 40 14 0

Manufacturer

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN

Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I
Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VI/XIX; LTE FDD1/19/21; WLAN a/b/g/n; BT 3.1; RFID; FM Rx; A-GPS
Model name: PM-0320-BV
FCC ID: PY7PM-0320
IC: -/-
Frequency: ISM band 2400 MHz to 2483.5 MHz
(lowest channel 01 – 2412 MHz; highest channel 11 – 2462 MHz)
Technology tested: WLAN (DSSS / b – mode, OFDM / g – and n HT20 – mode)
Antenna: Integrated antenna
Power Supply: 3.7V DC by Li - Ion battery
Temperature Range: -20°C to +55°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

Andreas Luckenbill
Expert

Test performed:

p.o.

Marco Bertolino
Testing Manager

1 Table of contents	
1	Table of contents2
2	General information3
2.1	Notes and disclaimer3
2.2	Application details.....3
3	Test standard/s3
3.1	Measurement guidance.....3
4	Test environment.....4
5	Test item4
5.1	Additional information4
6	Test laboratories sub-contracted4
7	Summary of measurement results5
8	RF measurements6
8.1	Description of test setup6
8.1.1	Radiated measurements.....6
8.1.2	Conducted measurements.....7
8.2	Additional comments7
9	Measurement results.....8
9.1	Antenna gain8
9.2	Maximum output power11
9.3	Power spectral density14
9.4	Spectrum bandwidth – 6 dB21
9.5	Spectrum bandwidth – 20 dB24
9.6	Band edge compliance conducted31
9.7	Band edge compliance radiated35
9.8	TX spurious emissions conducted38
9.9	TX spurious emissions radiated47
9.10	RX spurious emissions radiated67
9.11	Spurious emissions radiated < 30 MHz71
9.12	Spurious emissions conducted < 30 MHz73
10	Test equipment and ancillaries used for tests76
11	Observations77
Annex A	Document history78
Annex B	Further information.....78
Annex C	Accreditation Certificate79

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2013-01-15
Date of receipt of test item:	2013-02-12
Start of test:	2013-02-12
End of test:	2013-04-29
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices

3.1 Measurement guidance

DTS : KDB 558074	2013-04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
------------------	---------	---

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		42 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li - Ion battery
	V_{max}	4.1 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VI/XIX; LTE FDD1/19/21; WLAN a/b/g/n; BT 3.1; RFID; FM Rx; A-GPS
Type identification	:	PM-0320-BV
S/N serial number	:	Conducted units: CB5A1NUBTB, CB5A1NUBM6 Radiated units: CB5A1NUBMJ, CB5A1NUBMY
HW hardware status	:	AP1
SW software status	:	atp_dogo_dcm_0_0_36_0_d
Frequency band [MHz]	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412 MHz; highest channel 11 – 2462 MHz)
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	BPSK, QPSK, 16 – QAM and 64 – QAM
Number of channels	:	11
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li - Ion battery
Temperature range	:	-20°C to +55 °C

5.1 Additional information

Test setup - and EUT - photos are included in the following test reports:

External EUT photos: 1-5831/13-05-01_AnnexA
 Internal EUT photos: 1-5831/13-05-01_AnnexB
 Test setup: 1-5831/13-05-01_AnnexD

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8	Passed	2013-04-30	-/-

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	-/-	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	KDB 558074 DTS clause: 10.2	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth – 6 dB bandwidth	KDB 558074 DTS clause: 8.2	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(b)(3) RSS-210 / A8.4(4)	Maximum output power	KDB 558074 DTS clause: 9.1.2	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	KDB 558074 DTS clause: 13.2.1	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	-/-	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	KDB 558074 DTS clause: 11.1 & 11.2	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	-/-	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.109 RSS-Gen	RX spurious emissions radiated	-/-	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.107(a)	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

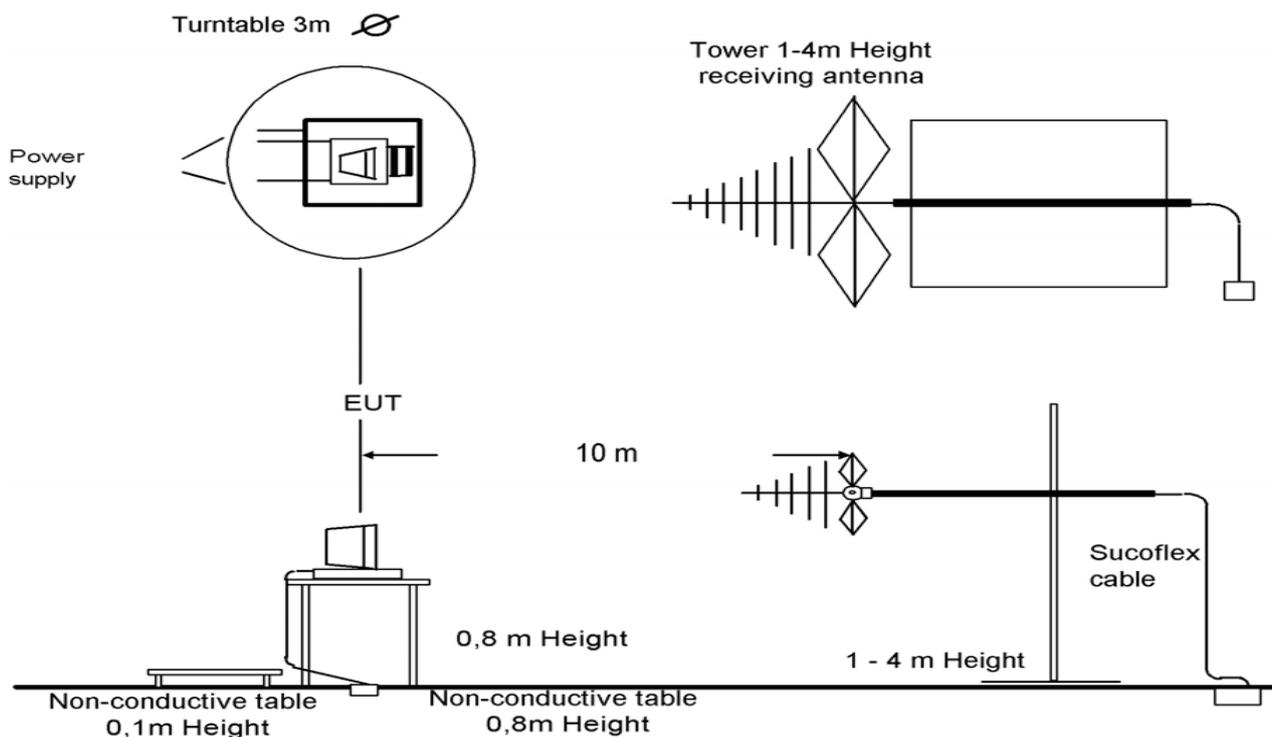


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

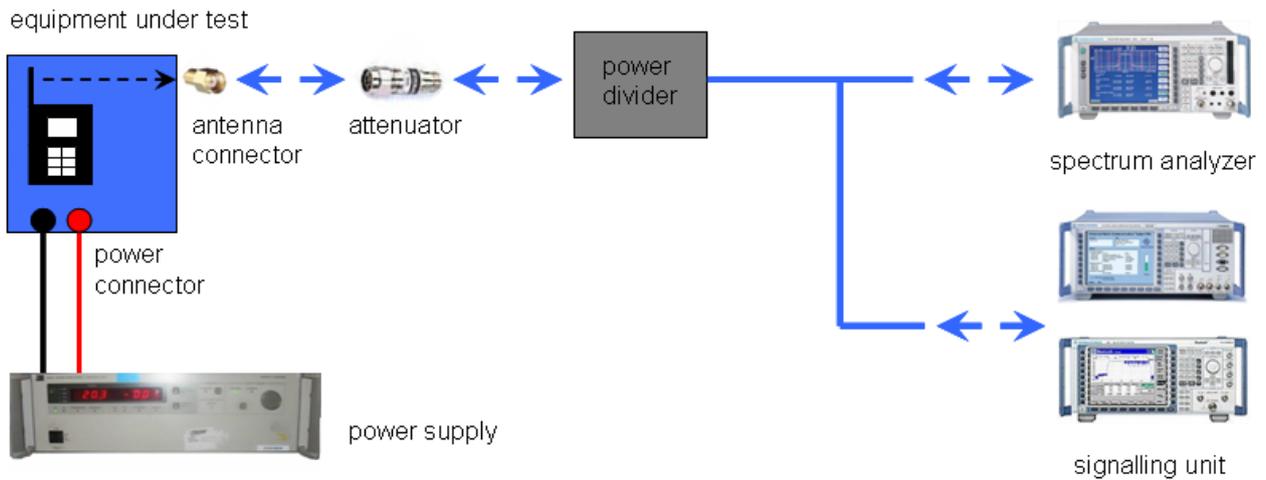

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: RF Fixture- Antenna Port Information

Special test descriptions: None

Configuration descriptions: None

Test mode:

- No test mode available.
lperf was used to ping another device with the largest support packet size
- Special software is used.
EUT is transmitting pseudo random data by itself

9 Measurement results

9.1 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max hold

Limits:

FCC	IC
Antenna Gain	
6 dBi	


Results:

T_{nom}	V_{nom}	lowest channel 2412 MHz	middle channel 2437 MHz	highest channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		15.87	16.01	16.25
Radiated power [dBm] Measured with DSSS modulation		18.02	17.75	18.15
Gain [dBi] Calculated		2.15	1.74	1.90
Measurement uncertainty			± 1.5 dB (cond.) / ± 3 dB (rad.)	


Result: Passed

Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel

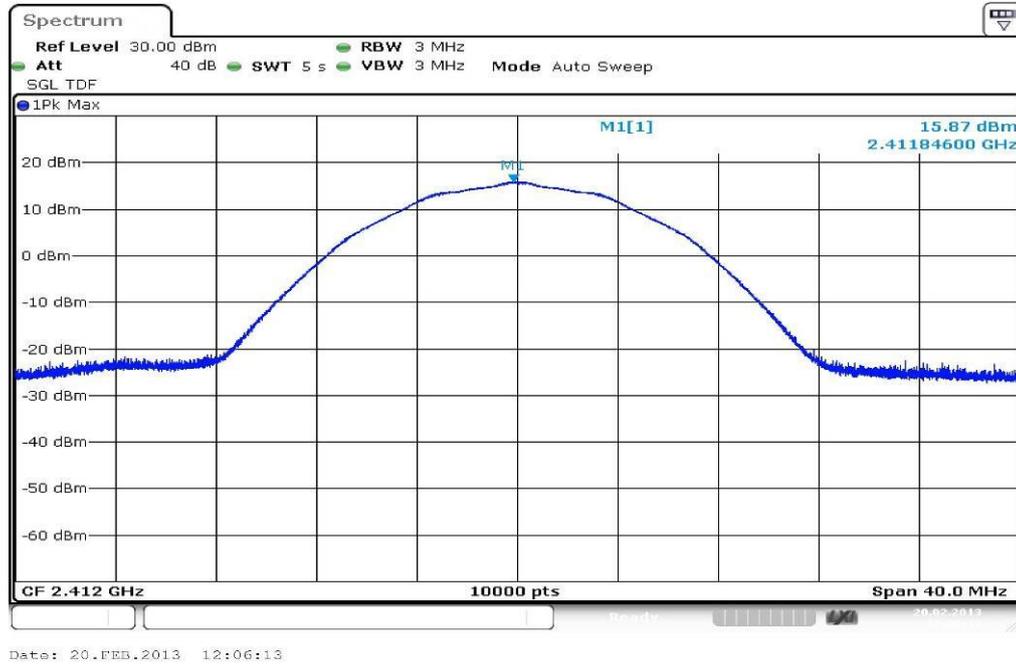

Plot 2: TX mode, middle channel

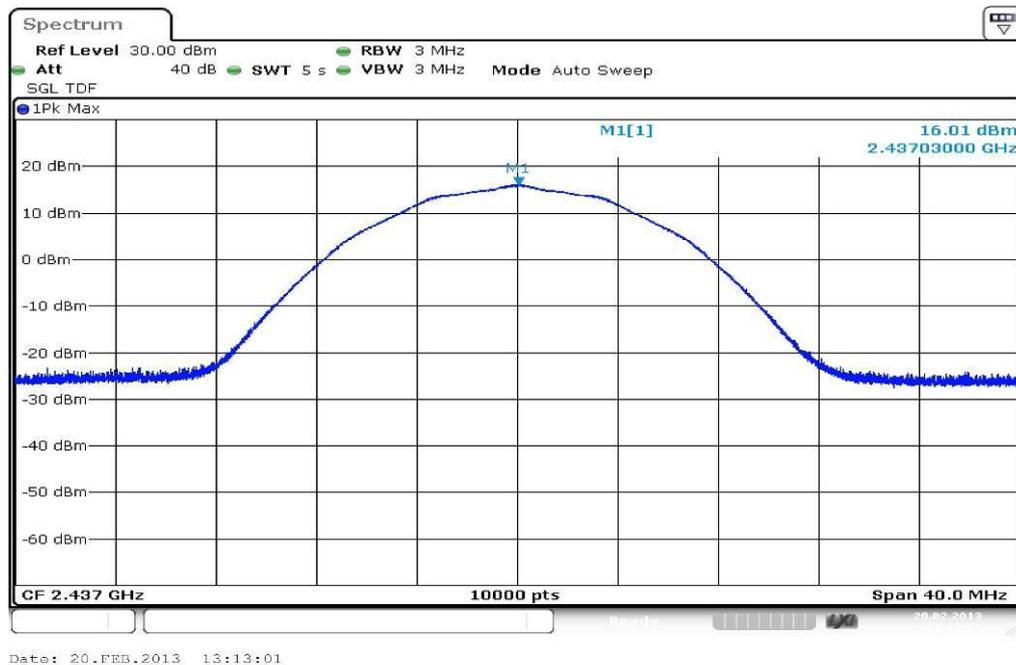

Plot 3: TX mode, highest channel

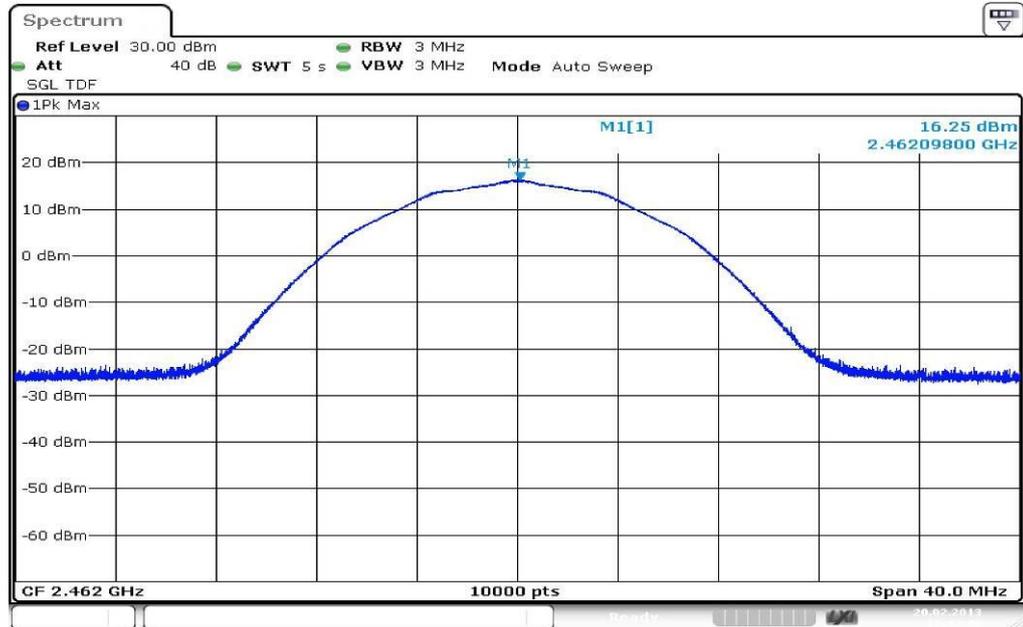

Date: 20.FEB.2013 13:42:46

9.2 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power. The determination of these data rates was performed at the beginning of the tests.

Measurement:

Measurement parameter	
According to DTS clause: 9.1.2	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	40 MHz
Integration bandwidth:	75 % power - bandwidth (DTS BW)
Trace-Mode:	Max hold (allow trace to fully stabilize)
Measurement function:	Channel power with DTS BW

Limits:

FCC	IC
Maximum Output Power	
Conducted: 1.0 W – Antenna Gain max. 6 dBi	

Results: DSSS / b – mode

DSSS / b – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak output power conducted 1 MBit/s	15.1	14.6	14.8
Peak output power conducted 2 MBit/s	15.3	14.9	15.5
Peak output power conducted 5.5 MBit/s	16.8	16.4	17.2
Peak output power conducted 11 MBit/s	18.5	18.1	18.9
Output Power Radiated – EIRP*) Worst case	20.7	19.8	20.8
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed

Results: OFDM / g – mode

OFDM / g – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak output power conducted 6 MBit/s	16.5	15.8	17.0
Peak output power conducted 9 MBit/s	16.6	15.8	17.0
Peak output power conducted 12 MBit/s	16.4	15.6	16.8
Peak output power conducted 18 MBit/s	16.4	15.6	16.8
Peak output power conducted 24 MBit/s	16.9	16.6	17.3
Peak output power conducted 36 MBit/s	16.8	16.1	17.3
Peak output power conducted 48 MBit/s	16.9	16.2	17.3
Peak output power conducted 54 MBit/s	16.9	16.2	17.3
Output Power Radiated – EIRP*) Worst case	19.1	18.3	19.2
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed

Results: OFDM / n – mode HT 20

OFDM / n – mode HT20 Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak output power conducted MCS0	16.1	15.9	16.1
Peak output power conducted MCS1	16.0	15.7	15.9
Peak output power conducted MCS2	15.9	15.7	15.9
Peak output power conducted MCS3	16.4	16.2	16.4
Peak output power conducted MCS4	16.4	16.1	16.3
Peak output power conducted MCS5	16.4	16.2	16.4
Peak output power conducted MCS6	16.5	16.0	16.4
Peak output power conducted MCS7	16.5	16.2	16.4
Output Power Radiated – EIRP*) Worst case	18.7	17.9	18.3
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed**Result: Selected data rate for all measurements:**

DSSS / b – mode:

OFDM / g – mode:

OFDM / n – mode:

11 MBit/s

24 MBit/s

MCS7

9.3 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to DTS clause: 10.2	
Detector:	Peak
Sweep time:	5s
Resolution bandwidth:	3 kHz
Video bandwidth:	10 kHz
Span:	20 MHz
Trace-Mode:	Max hold (allow trace to fully stabilize)

Limits:

FCC	IC
Power Spectral Density	
8 dBm (conducted)	


Results:

Modulation	Power Spectral density [dBm]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	-9.79	-9.06	-8.97
OFDM / g – mode	-15.13	-14.75	-13.86
OFDM / n – mode	-16.33	-16.45	-14.23
Measurement uncertainty	± 1.5 dB		


Result: **Passed**

Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel

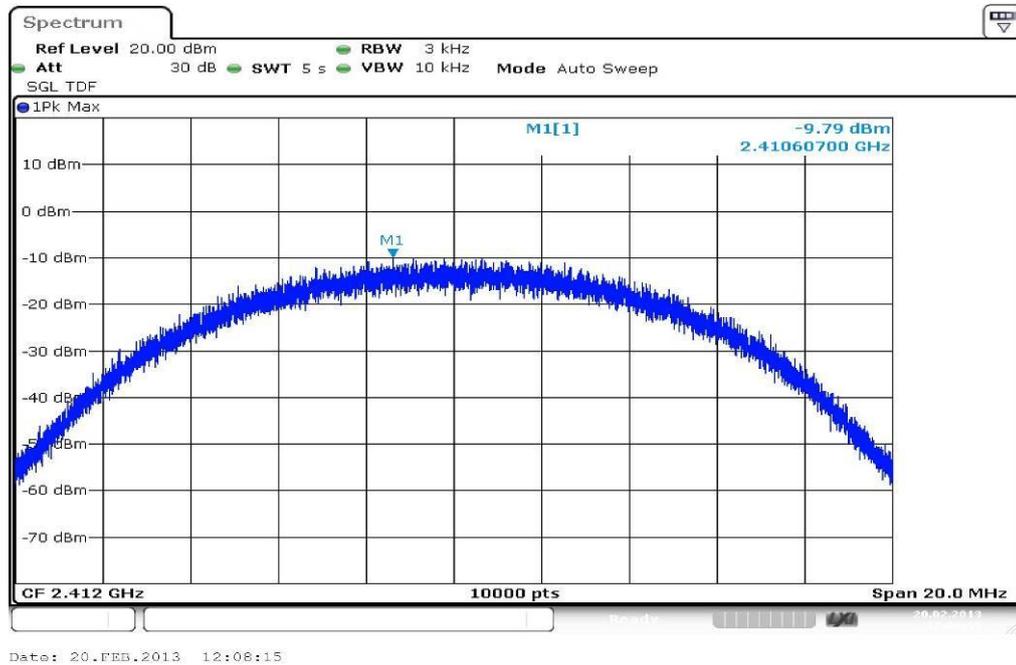

Plot 2: TX mode, middle channel

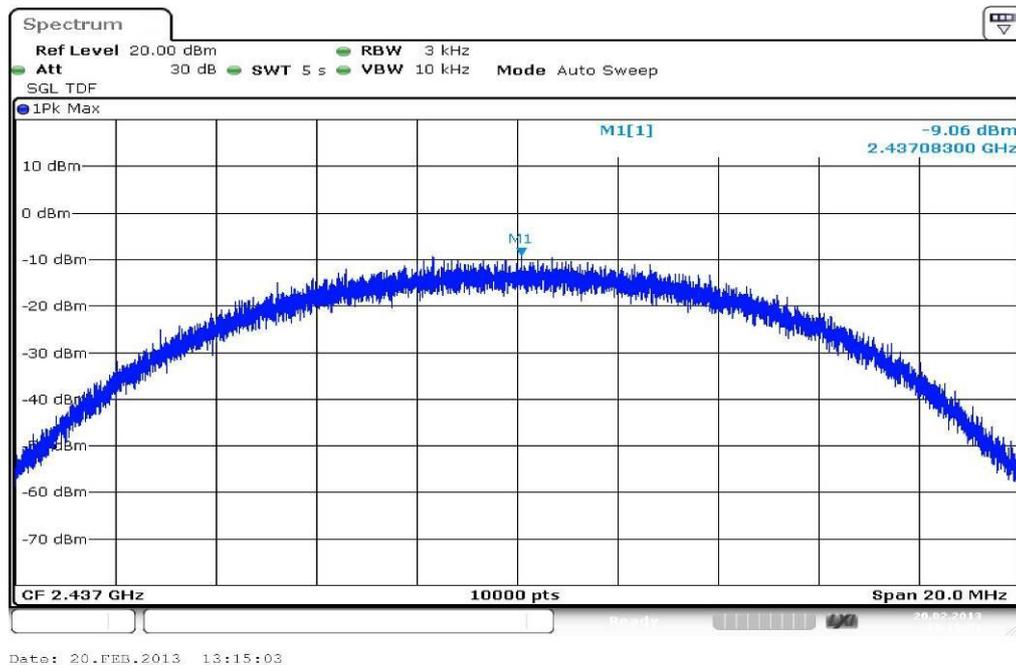


Plot 3: TX mode, highest channel

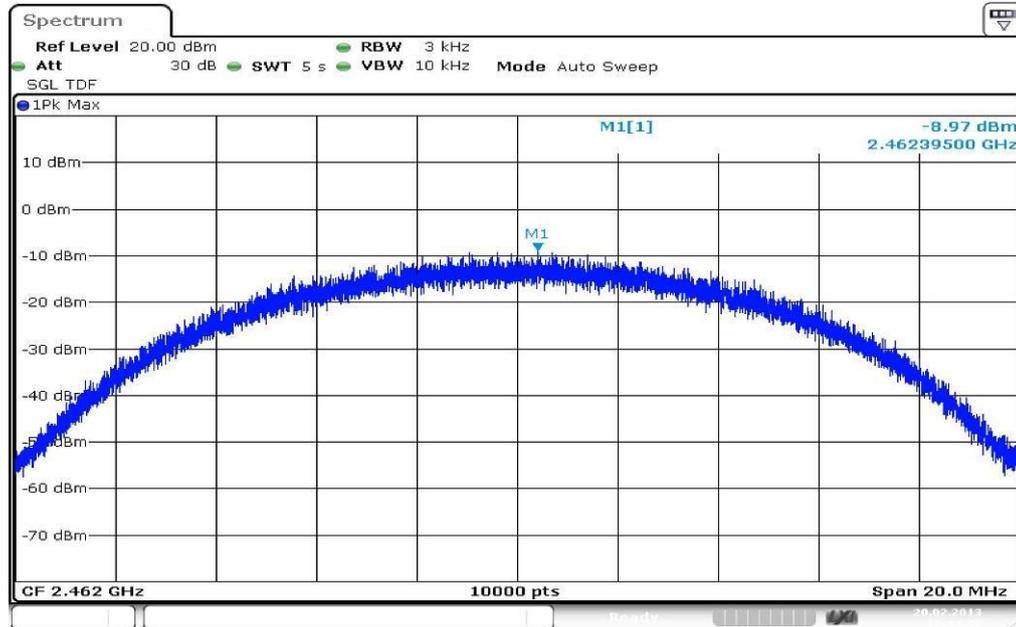


Date: 20.FEB.2013 13:44:48

Plots: OFDM / g – mode


Plot 1: TX mode, lowest channel

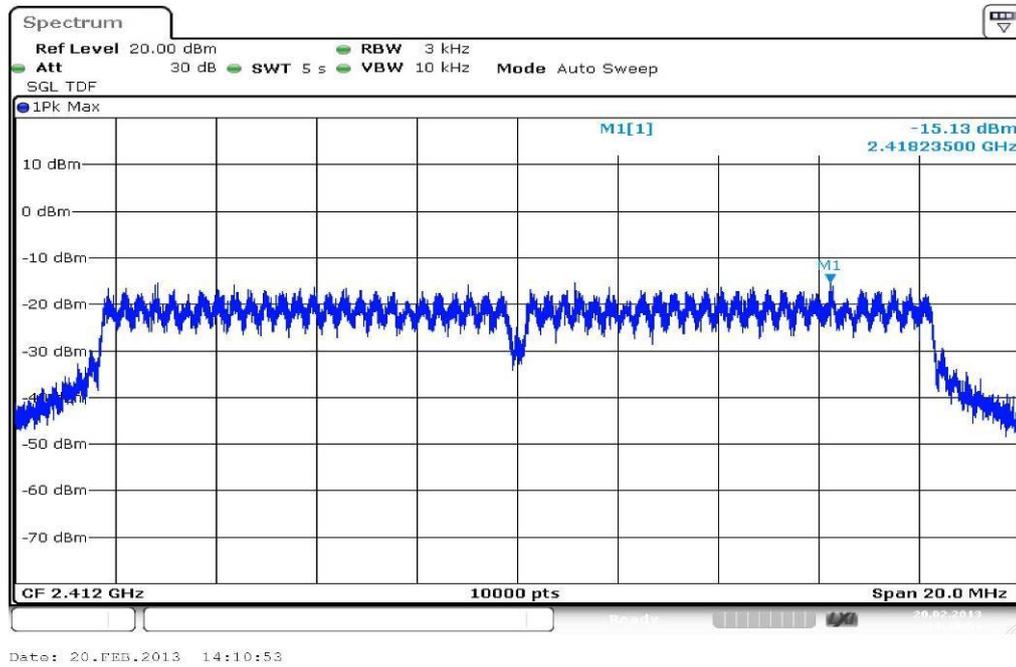

Plot 2: TX mode, middle channel

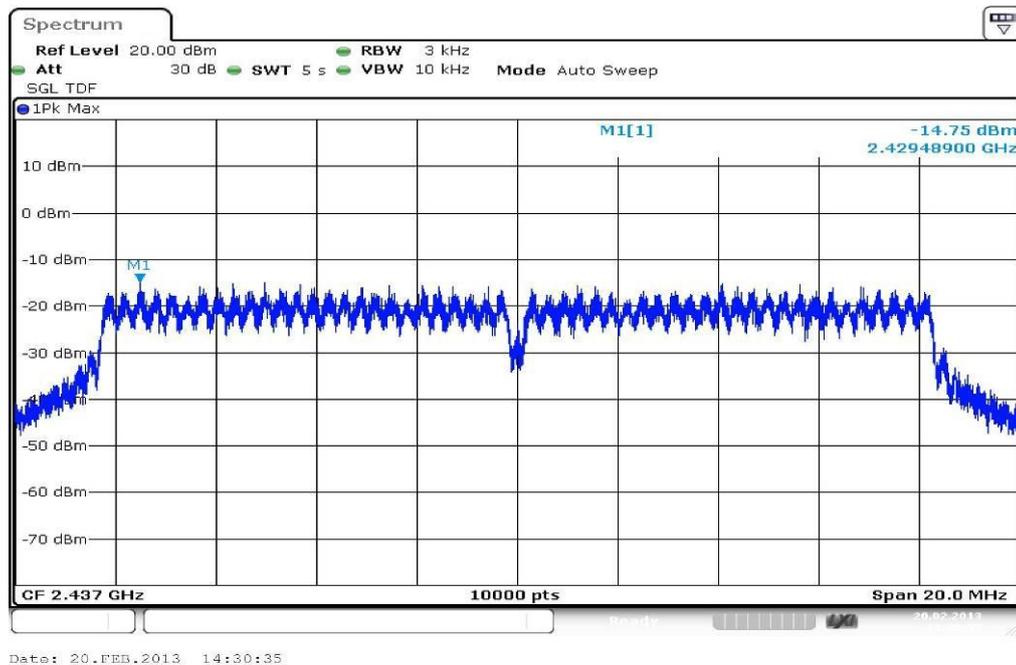


Plot 3: TX mode, highest channel

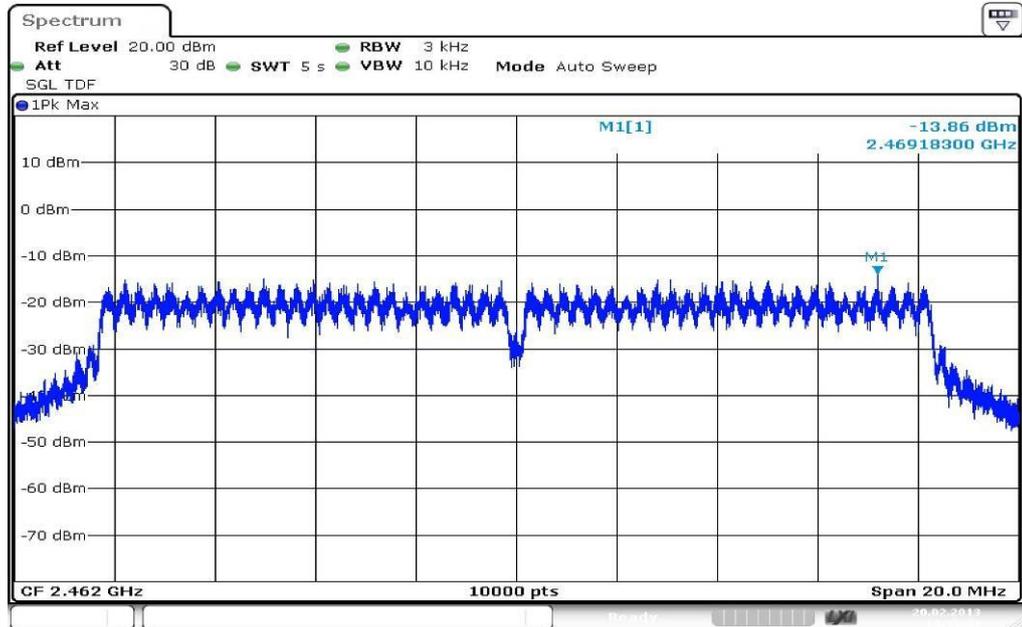


Plots: OFDM / n – mode

Plot 1: TX mode, lowest channel

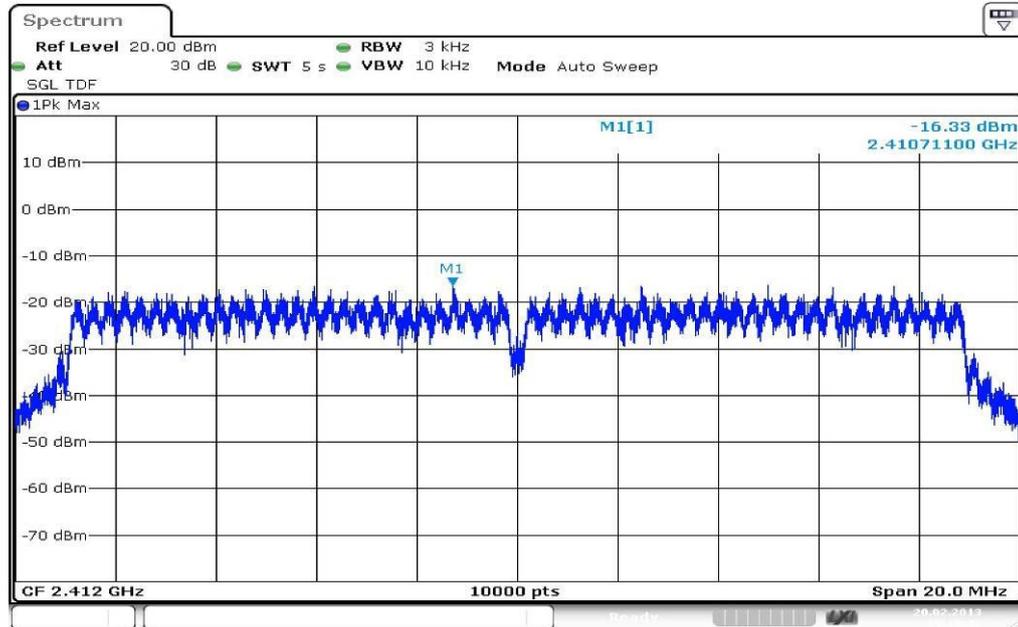


Date: 20.FEB.2013 15:19:42

Plot 2: TX mode, middle channel

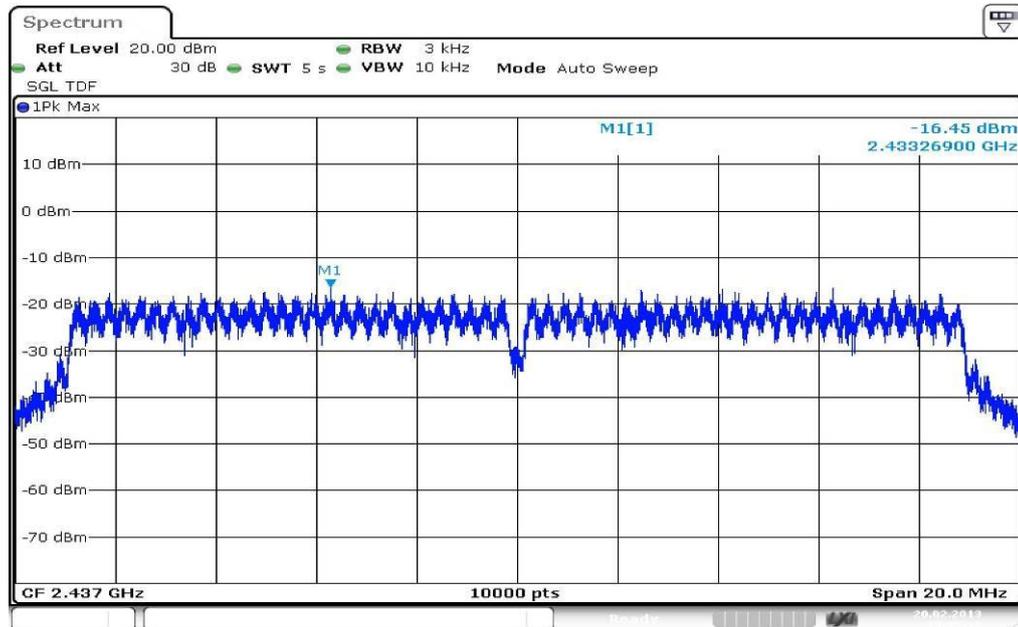

Date: 20.FEB.2013 15:35:10

Plot 3: TX mode, highest channel

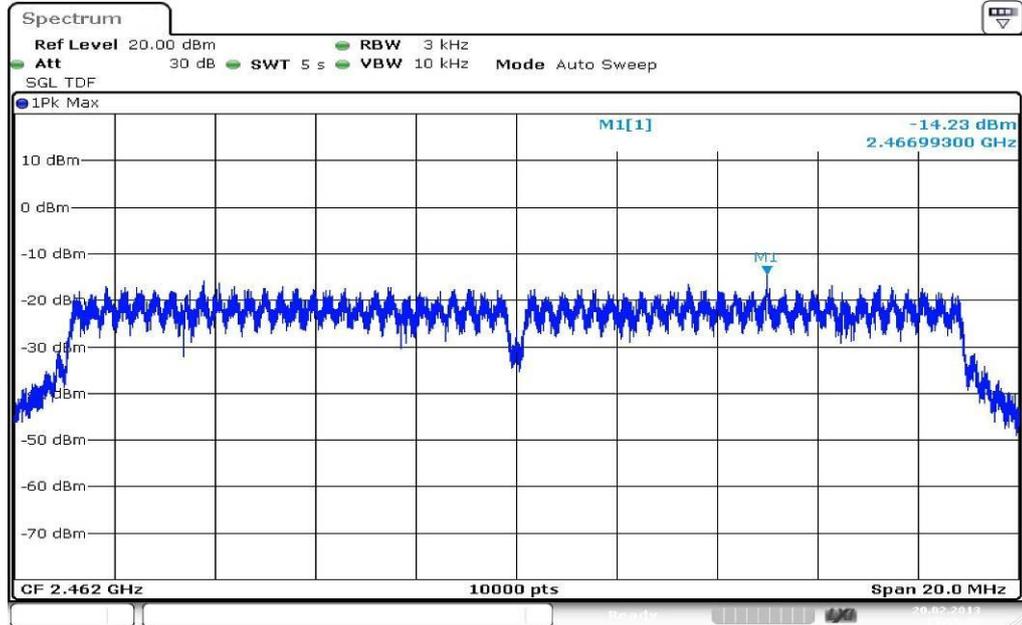

Date: 20.FEB.2013 15:55:06

9.4 Spectrum bandwidth – 6 dB

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to DTS clause: 8.2	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	40 MHz
Measurement procedure:	Measurement of the 75% bandwidth using the integration function of the analyzer
Trace-Mode:	Max hold (allow trace to stabilize)

Limits:

FCC	IC
Spectrum Bandwidth – 6 dB	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results: DSSS / b – mode

Modulation	6 dB bandwidth [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode 1 Mbit/s	6.16	6.23	6.18
DSSS / b – mode 2 Mbit/s	6.22	6.28	6.24
DSSS / b – mode 5.5 Mbit/s	6.13	6.18	6.18
DSSS / b – mode 11 Mbit/s	6.14	6.11	6.15
Measurement uncertainty	± RBW		

Results: OFDM / g – mode

Modulation Frequency	6 dB bandwidth [MHz]		
	2412 MHz	2437 MHz	2462 MHz
OFDM / g – mode 6 Mbit/s	12.46	12.48	12.50
OFDM / g – mode 9 Mbit/s	12.51	12.51	12.49
OFDM / g – mode 12 Mbit/s	12.48	12.46	12.53
OFDM / g – mode 18 Mbit/s	12.49	12.45	12.50
OFDM / g – mode 24 Mbit/s	12.47	12.44	12.54
OFDM / g – mode 36 Mbit/s	12.46	12.46	12.51
OFDM / g – mode 48 Mbit/s	12.48	12.51	12.48
OFDM / g – mode 54 Mbit/s	12.48	12.49	12.50
Measurement uncertainty	± RBW		

Result: Passed

Results: OFDM / n – mode

Modulation Frequency	6 dB bandwidth [MHz]		
	2412 MHz	2437 MHz	2462 MHz
OFDM / n – mode HT20 MCS0	13.14	13.10	13.23
OFDM / n – mode HT20 MCS1	13.21	13.29	13.30
OFDM / n – mode HT20 MCS2	13.22	13.24	13.29
OFDM / n – mode HT20 MCS3	13.30	13.44	13.50
OFDM / n – mode HT20 MCS4	13.23	13.38	13.38
OFDM / n – mode HT20 MCS5	13.35	13.36	13.46
OFDM / n – mode HT20 MCS6	13.24	13.42	13.45
OFDM / n – mode HT20 MCS7	13.36	13.40	13.28
Measurement uncertainty	± RBW		

Result: Passed

9.5 Spectrum bandwidth – 20 dB

Description:

Measurement of the 20 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 - 5% of the DTS BW but not exceed 100 kHz
Video bandwidth:	≥ 3 x RBW
Span:	Complete signal
Trace-Mode:	Max hold (allow trace to stabilize)

Limits:

FCC	IC
Spectrum Bandwidth – 20 dB	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation	20 dB bandwidth [MHz]		
	2412 MHz	2437 MHz	2462 MHz
Frequency			
DSSS / b – mode	12.84	12.92	12.92
OFDM / g – mode	16.47	16.47	16.48
OFDM / n – mode	17.67	17.67	17.67
Measurement uncertainty	± RBW		

Result: **Passed**


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel

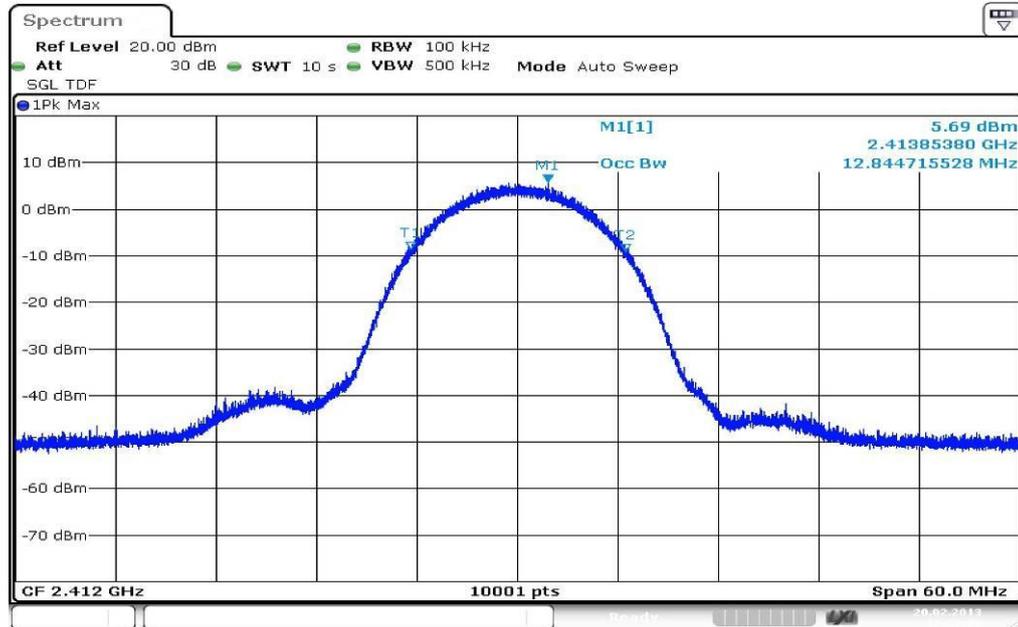


Date: 20.FEB.2013 12:07:26

Plot 2: TX mode, middle channel

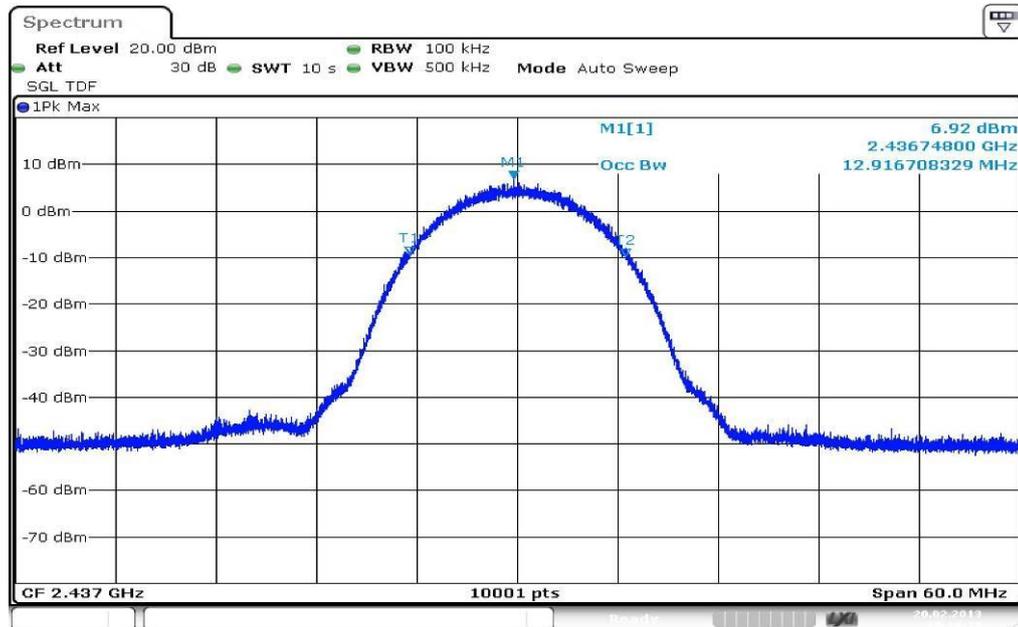

Date: 20.FEB.2013 13:14:14


Plot 3: TX mode, highest channel

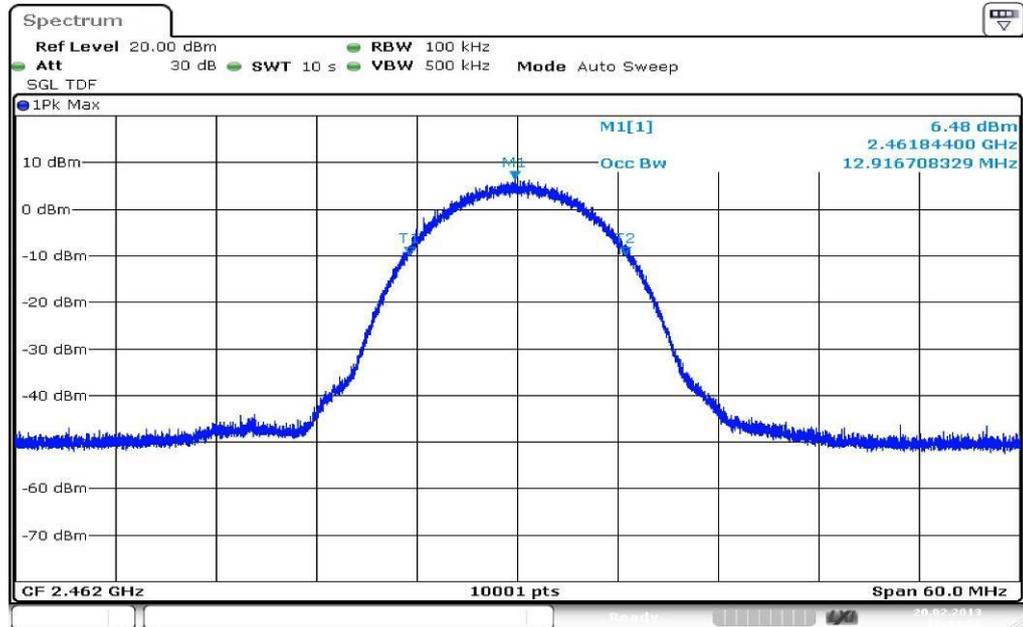


Date: 20.FEB.2013 13:44:00

Plots: OFDM / g - mode


Plot 1: TX mode, lowest channel

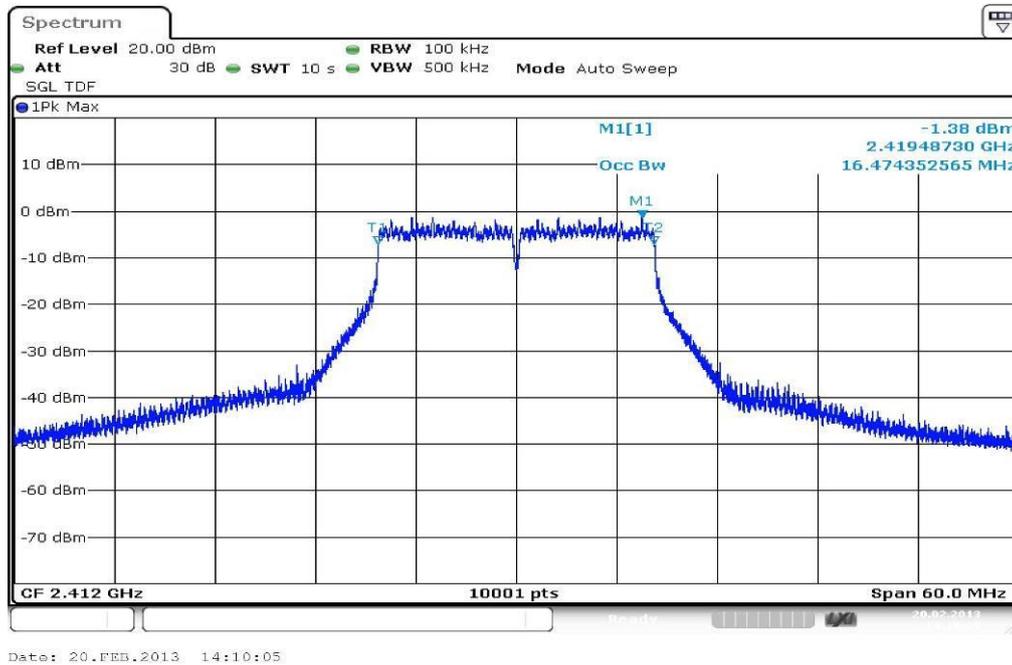

Plot 2: TX mode, middle channel

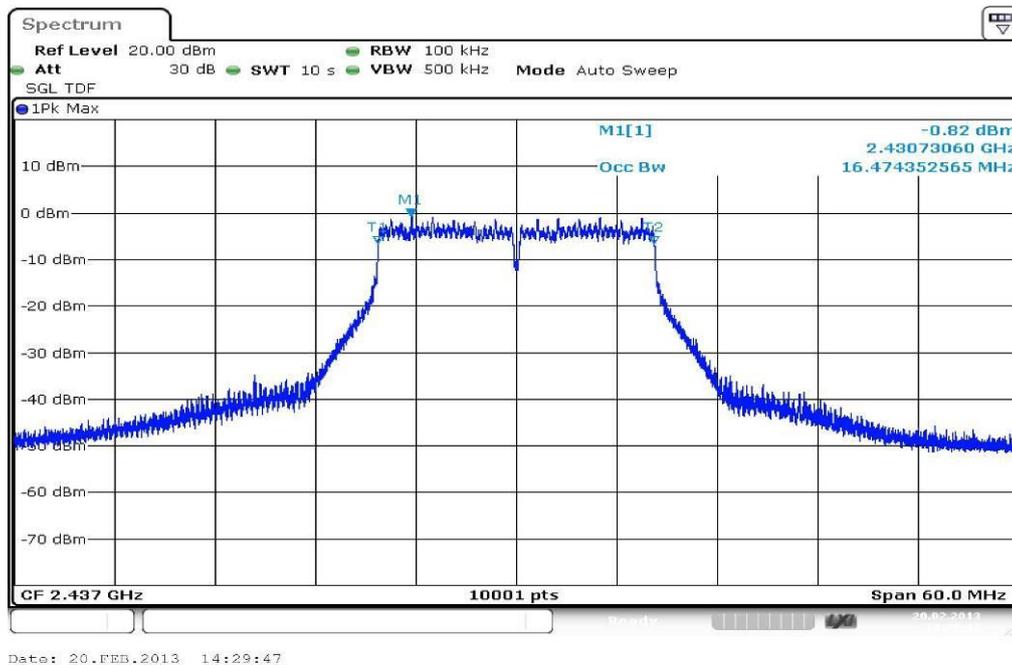


Plot 3: TX mode, highest channel

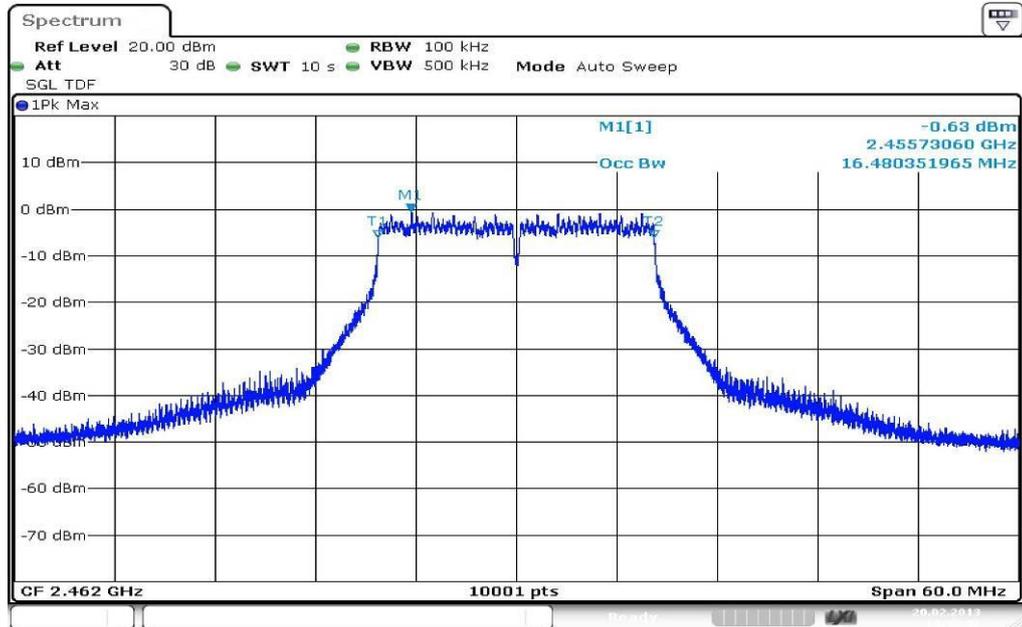


Date: 20.FEB.2013 14:52:42

Plots: OFDM / n - mode


Plot 1: TX mode, lowest channel

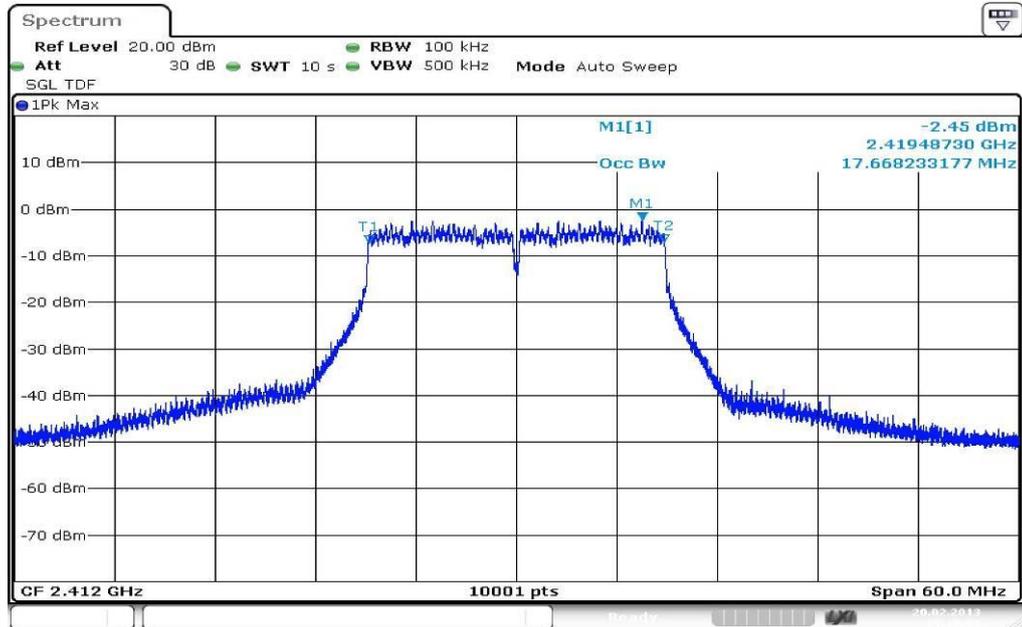

Plot 2: TX mode, middle channel

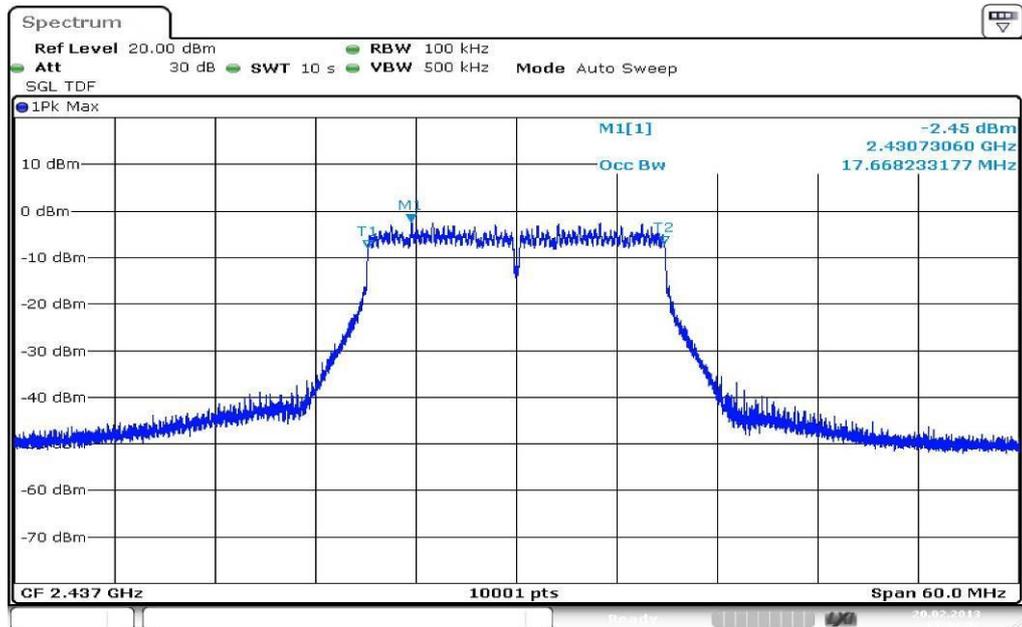

Plot 3: TX mode, highest channel

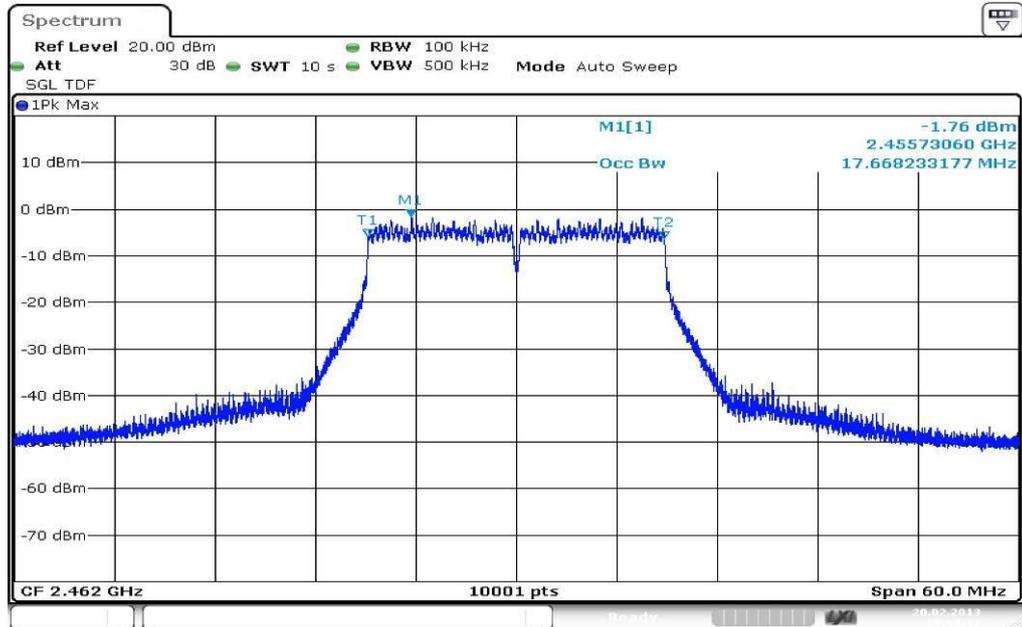

Date: 20.FEB.2013 15:54:17

9.6 Band edge compliance conducted

Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in both modes.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	500 kHz
Span:	Lower Band Edge: 2300 – 2425 MHz Upper Band Edge: 2450 – 2550 MHz
Trace-Mode:	Max hold

Limits:

FCC	IC
Band Edge Compliance Conducted	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.</p>	


Results:

Scenario Modulation	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB (see plot 1)	> 20 dB (see plot 3)	> 20 dB (see plot 5)
Upper Band Edge – Channel 11	> 20 dB (see plot 2)	> 20 dB (see plot 4)	> 20 dB (see plot 6)
Measurement uncertainty	± 1.5 dB		


Result: Passed

Plots: DSSS / b – mode

Plot 1: TX mode, lower band edge

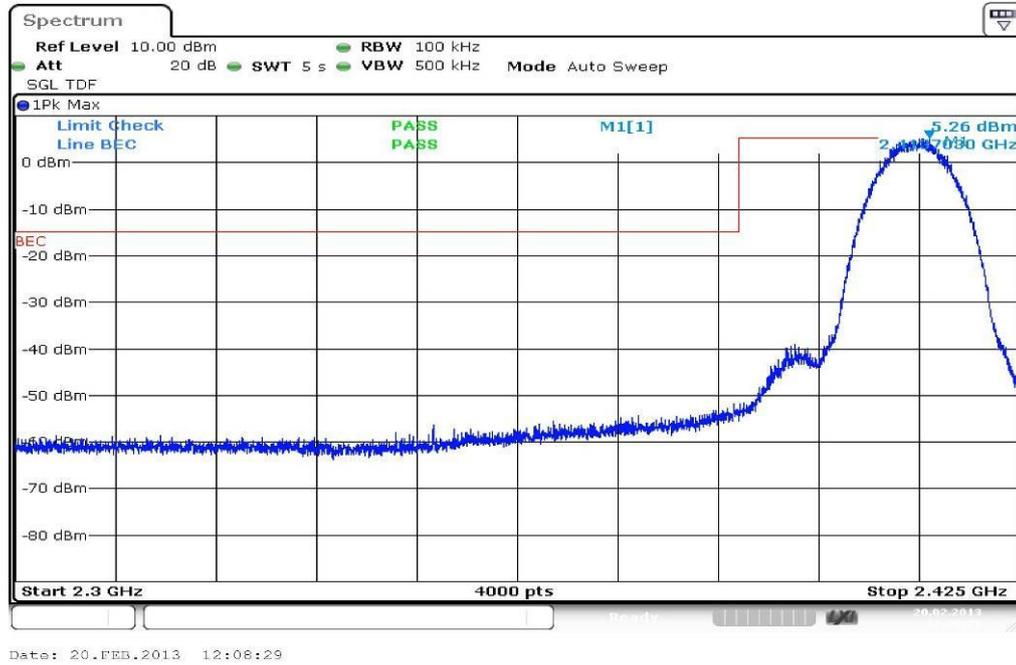


Plot 2: TX mode, upper band edge

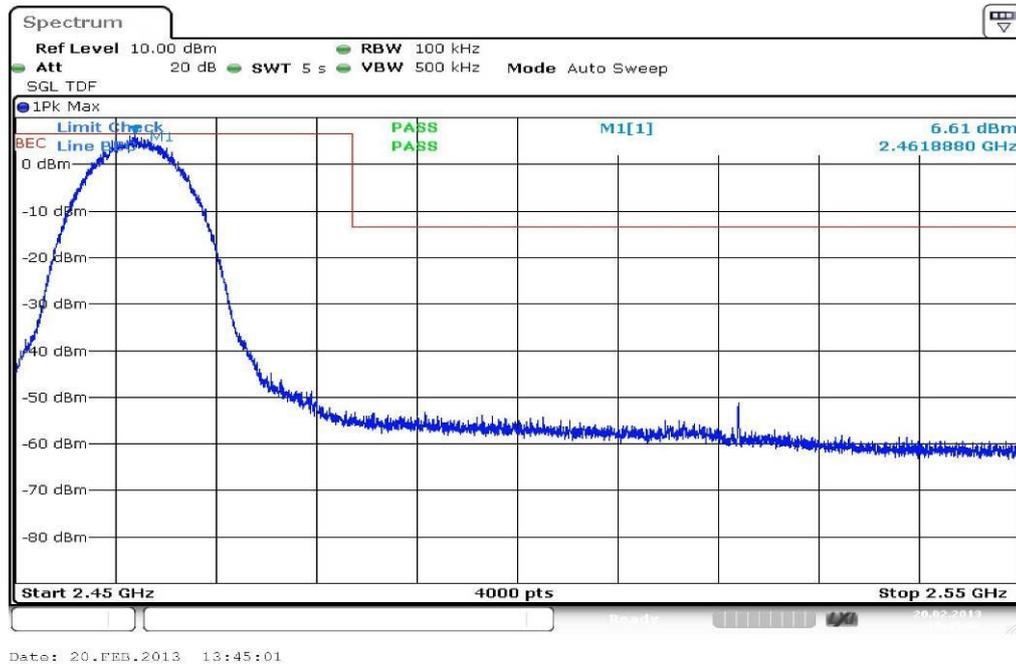


Plots: OFDM / g - mode

Plot 1: TX mode, lower band edge

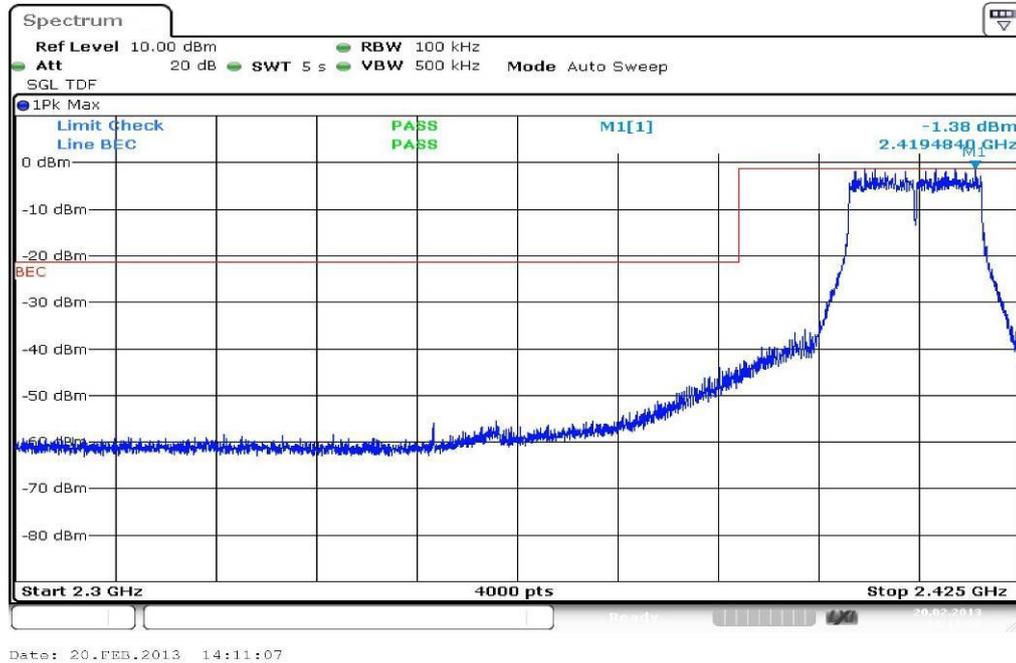


Plot 2: TX mode, upper band edge

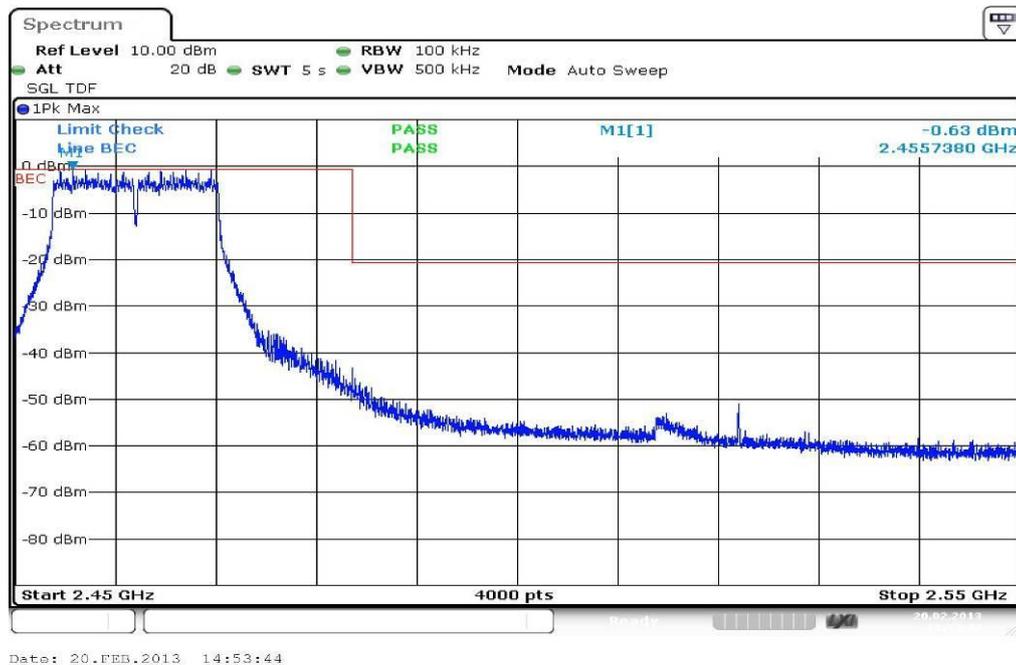


Plots: OFDM / n – mode

Plot 1: TX mode, lower band edge

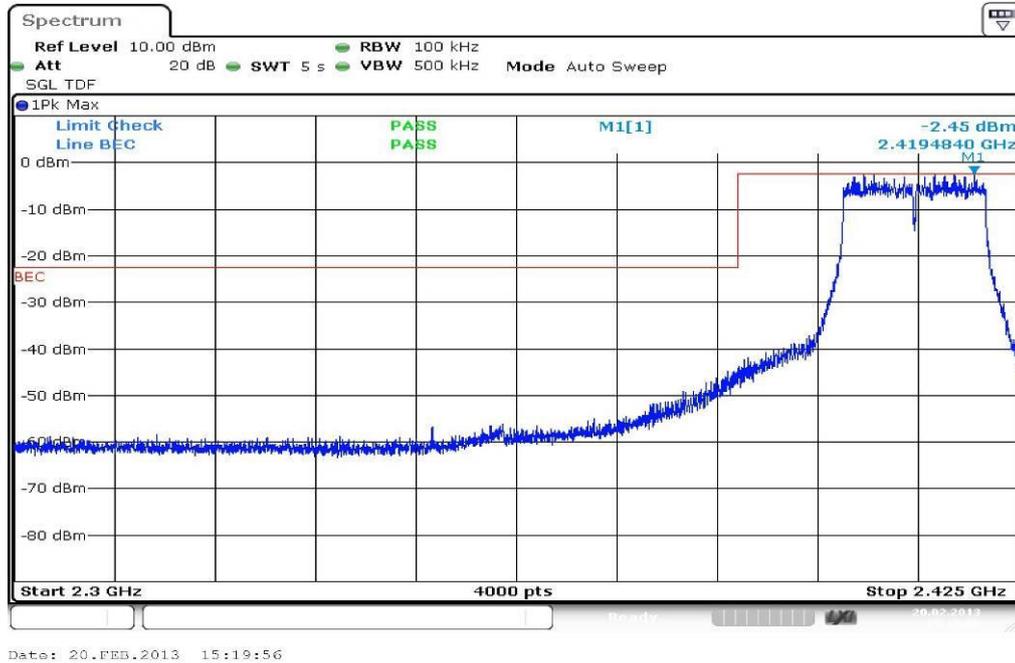

Plot 2: TX mode, upper band edge

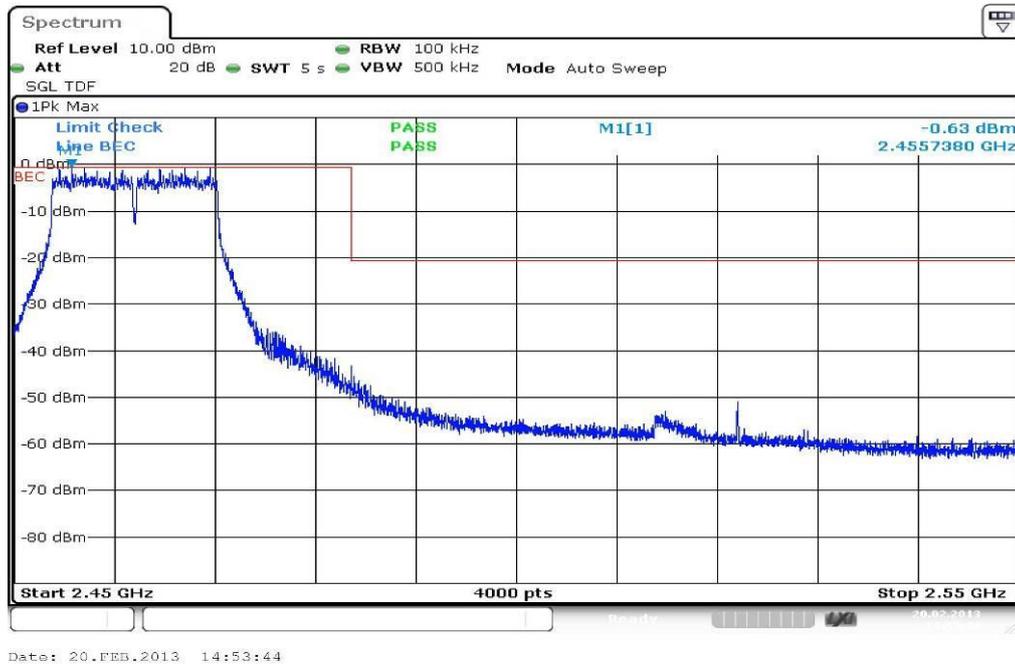

9.7 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz / 1 MHz
Video bandwidth:	1 MHz / 10 Hz
Span:	See plot!
Trace-Mode:	Max Hold

Limits:

FCC	IC
Band Edge Compliance Radiated	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).</p>	
54 dB μ V/m AVG	


Results:

Scenario Modulation	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB (Peak) > 20 dB (AVG)	> 10 dB (Peak) > 10 dB (AVG)	> 10 dB (Peak) > 10 dB (AVG)
Upper Band Edge – Channel 11	> 20 dB (Peak) > 20 dB (AVG)	> 4 dB (Peak) > 10 dB (AVG)	> 6 dB (Peak) > 10 dB (AVG)
Measurement uncertainty	± 3 dB		


Result: Passed

Plots: DSSS peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

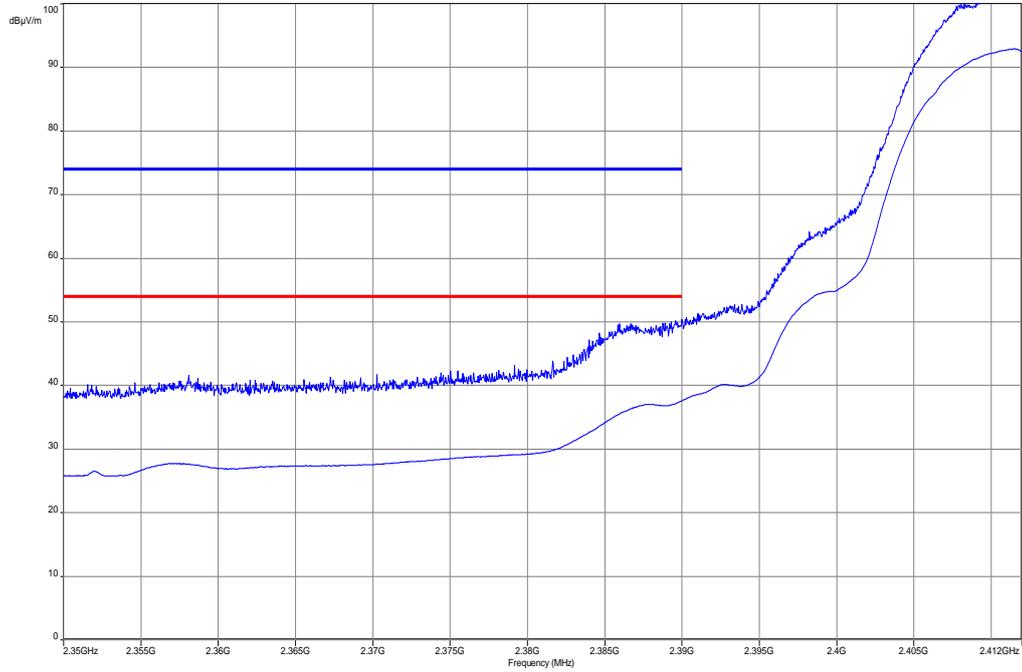


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

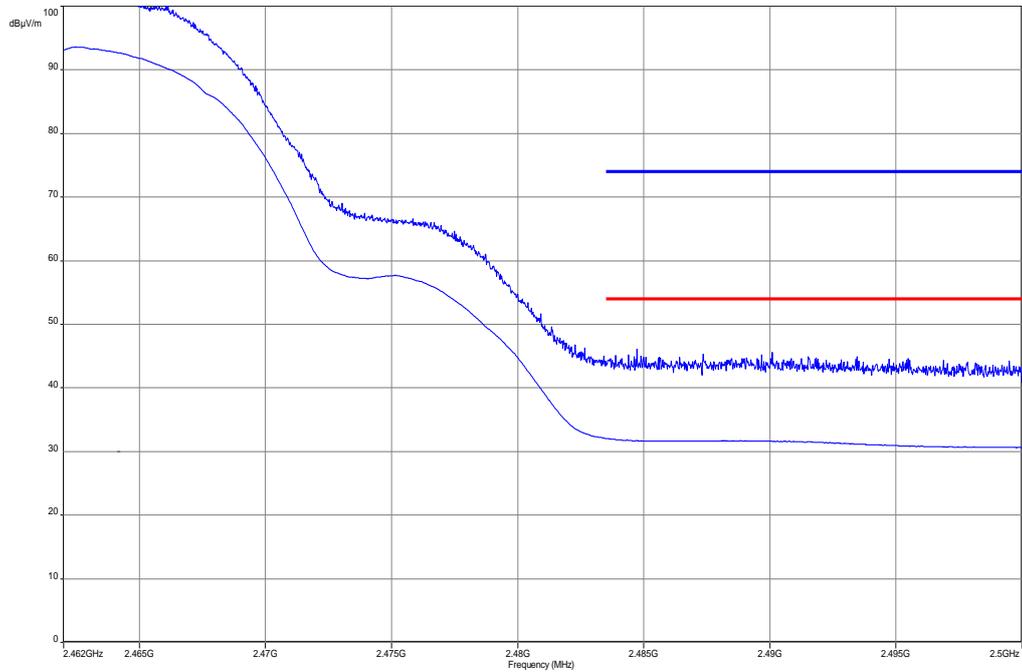


Plots: OFDM peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

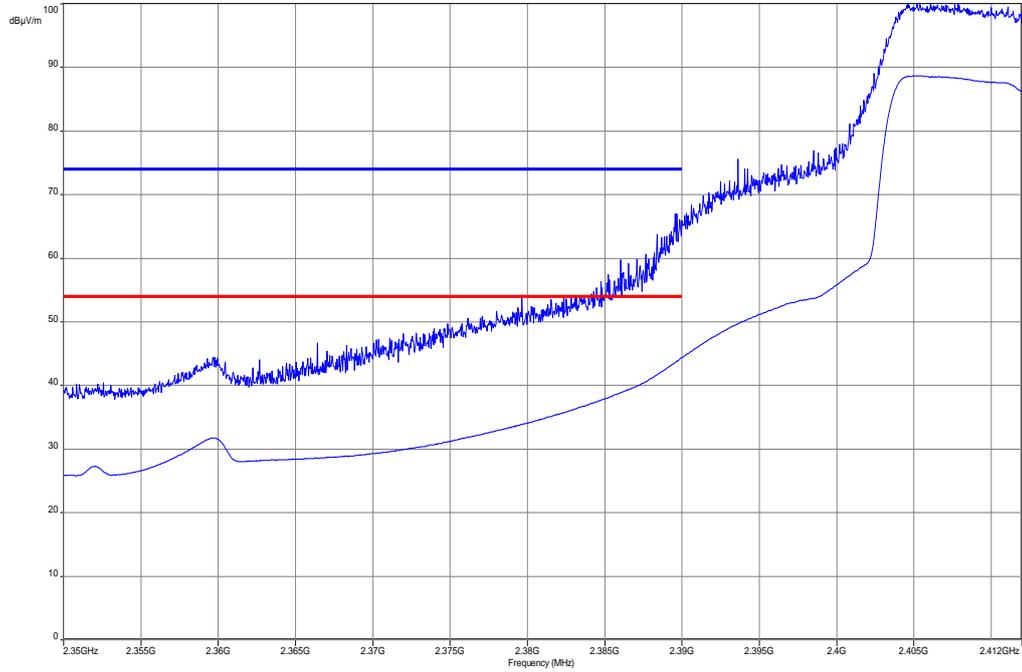

Plot 2: TX mode, upper band edge, vertical & horizontal polarization

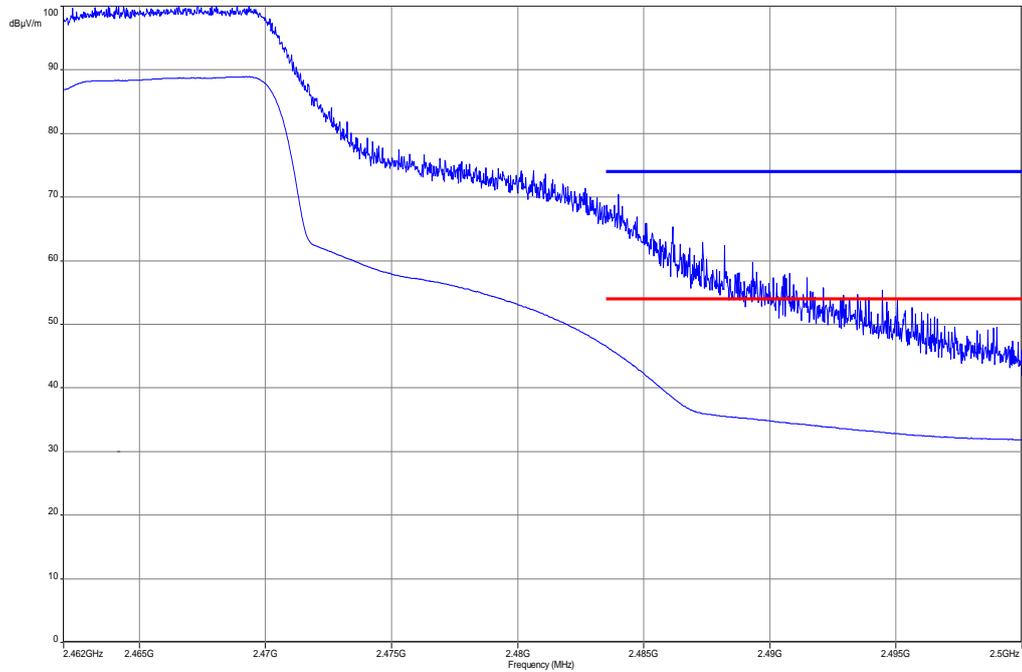

9.8 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	1s / 100 MHz
Resolution bandwidth:	100 kHz
Video bandwidth:	500 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
TX Spurious Emissions Conducted	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required</p>	

Results: DSSS / b – mode

TX Spurious Emissions Conducted					
DSSS / b – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		5.55	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
2437		5.61	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
2462		6.08	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
Measurement uncertainty		± 3 dB			

Result: Passed

Results: OFDM / g – mode

TX Spurious Emissions Conducted					
OFDM / g – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		-1.46	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
2437		-0.96	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
2462		-0.65	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
Measurement uncertainty		± 3 dB			

Result: Passed


Results: OFDM / n – mode

TX Spurious Emissions Conducted					
OFDM / n – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		-2.53	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
2437		-2.48	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
2462		-1.76	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
Measurement uncertainty		± 3 dB			

Result: Passed


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel, up to 25 GHz

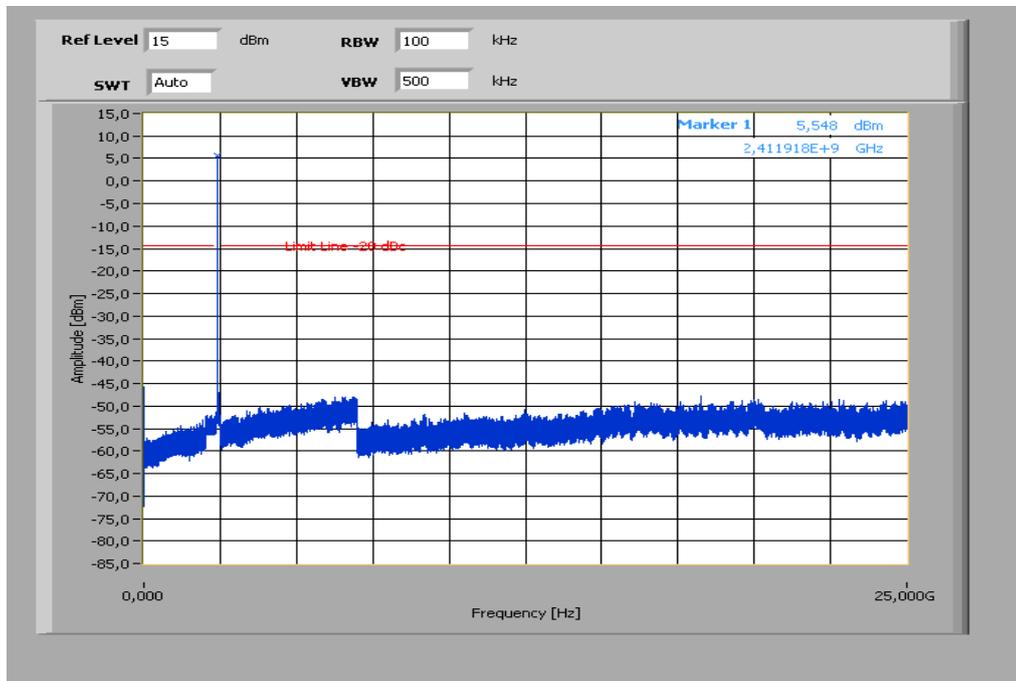


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 25 GHz

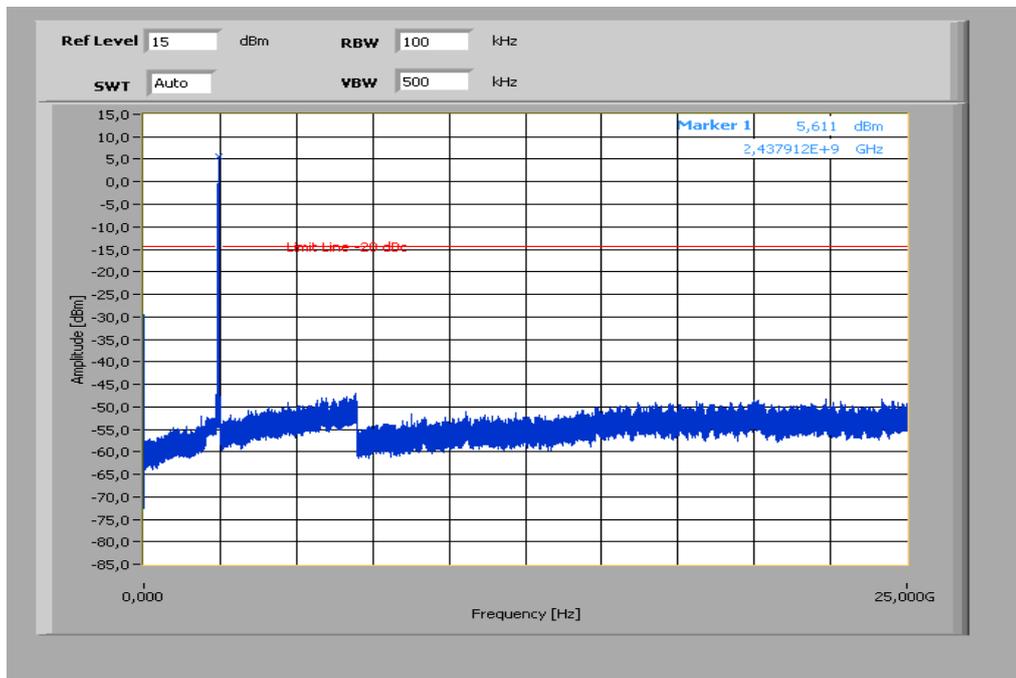

The peak at the beginning of the plot is the LO from the SA.


Plot 3: TX mode, highest channel, up to 25 GHz

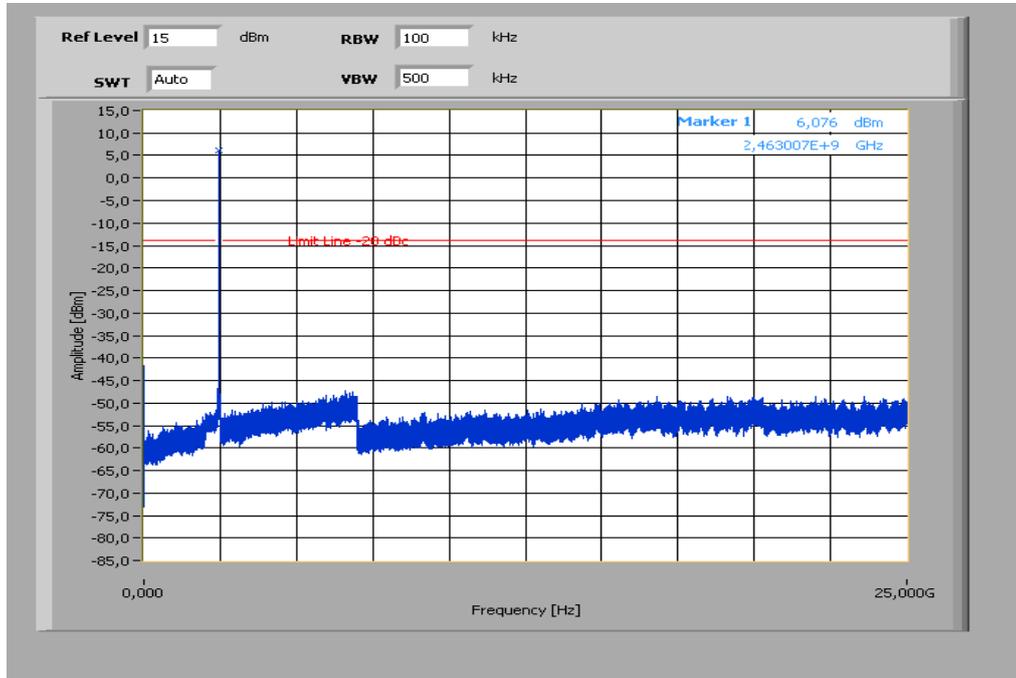

The peak at the beginning of the plot is the LO from the SA.


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel, up to 25 GHz

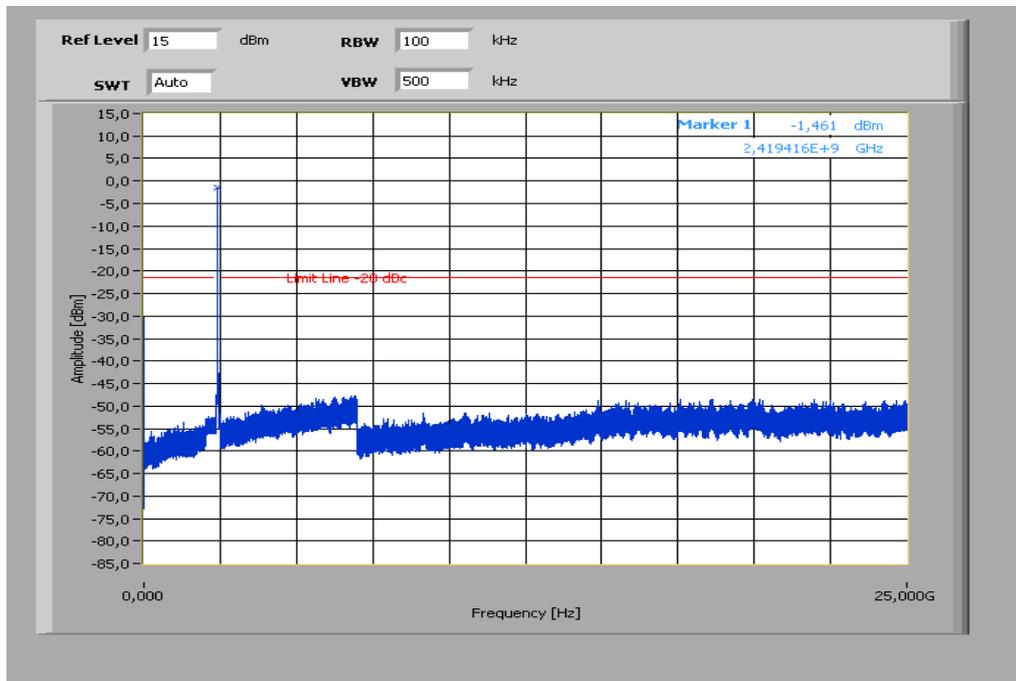


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 25 GHz

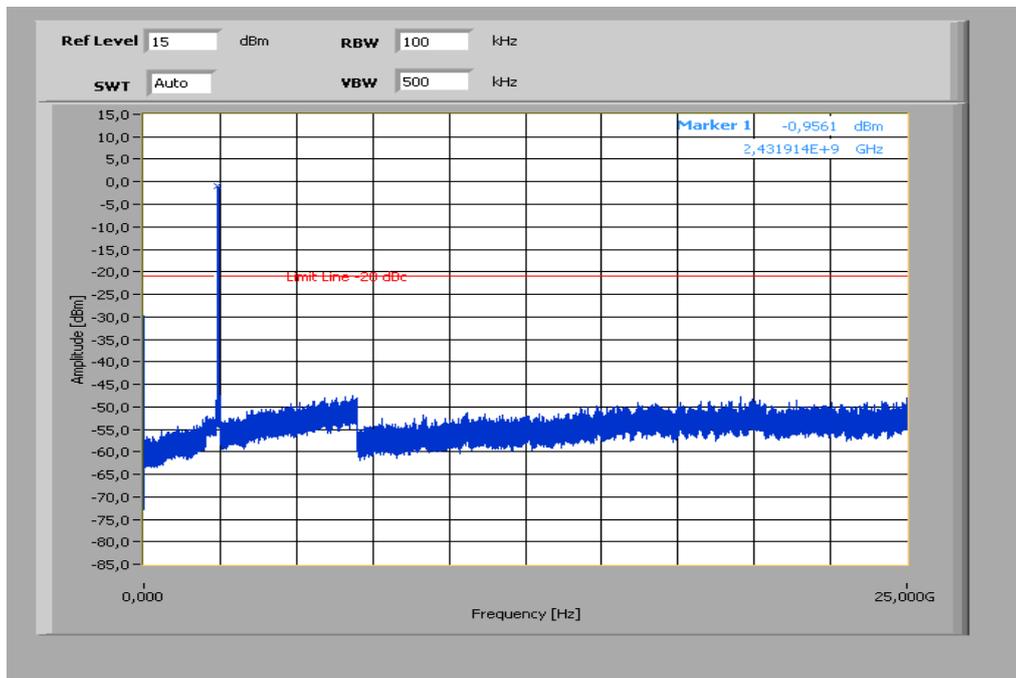

The peak at the beginning of the plot is the LO from the SA.


Plot 3: TX mode, highest channel, up to 25 GHz

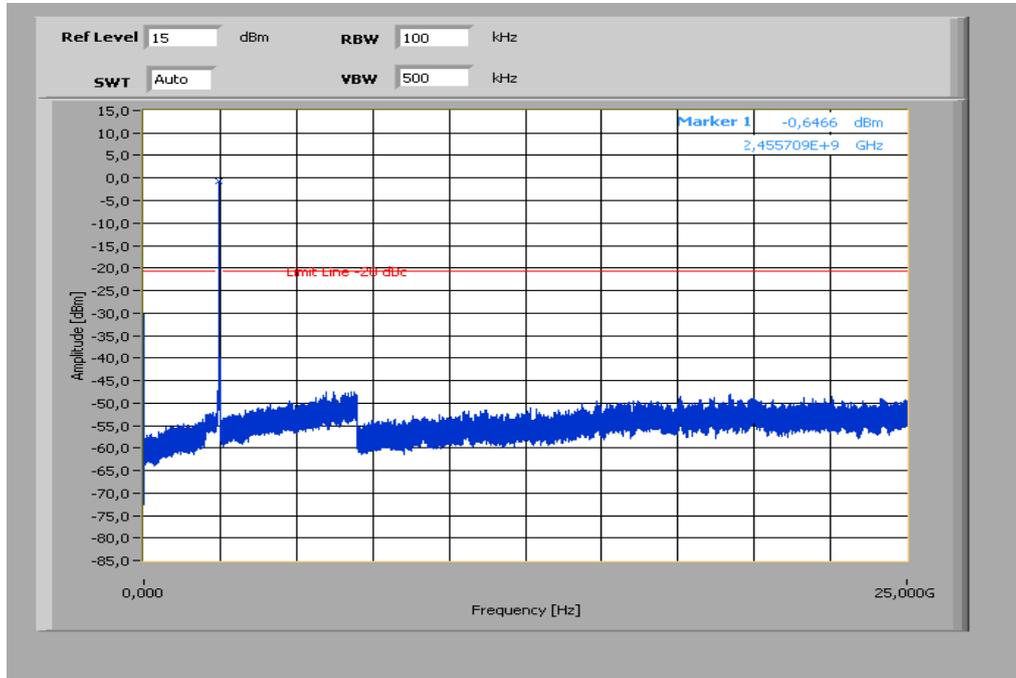

The peak at the beginning of the plot is the LO from the SA.


Plots: OFDM / n – mode

Plot 1: TX mode, lowest channel, up to 25 GHz

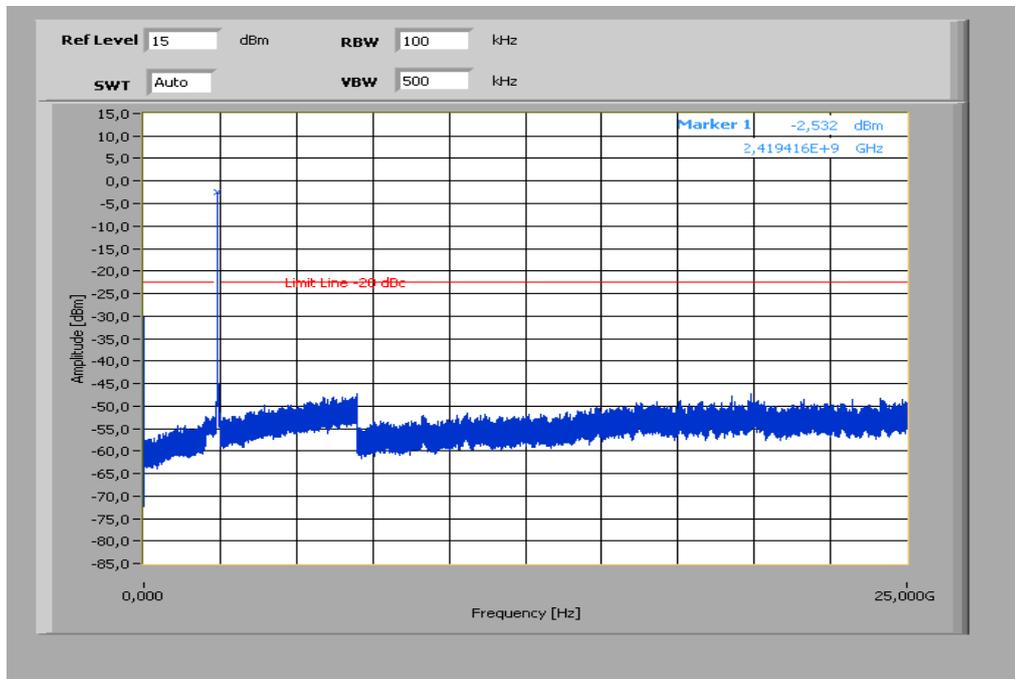


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 25 GHz

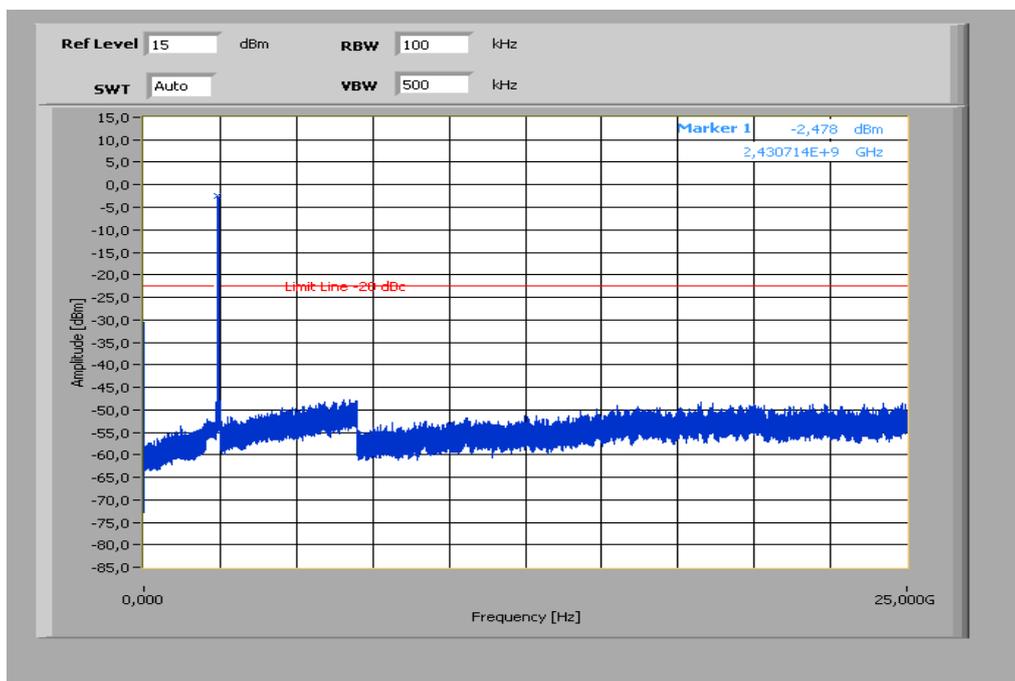

The peak at the beginning of the plot is the LO from the SA.

Plot 3: TX mode, highest channel, up to 25 GHz

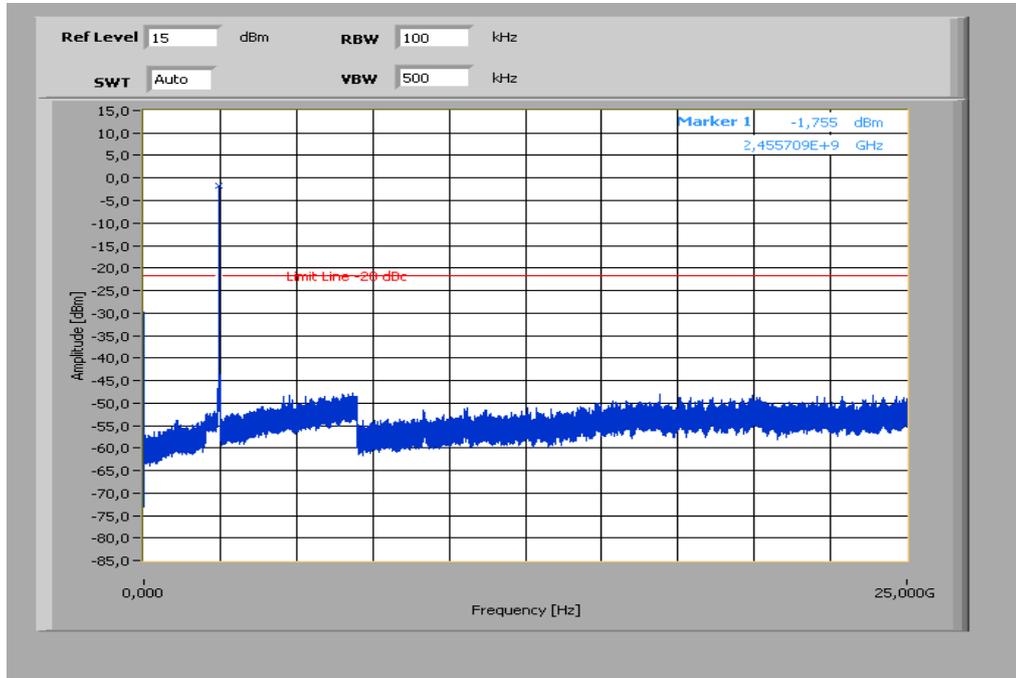

The peak at the beginning of the plot is the LO from the SA.

9.9 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz / 3 MHz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold
Measured Modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input checked="" type="checkbox"/> OFDM n – mode

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

The OFDM g mode plots are added to show the behaviour for all OFDM modes!

Limits:

FCC	IC	
TX Spurious Emissions Radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results: DSSS / b – mode

TX Spurious Emissions Radiated [dB μ V/m]								
DSSS / b – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
No emissions detected above 1 GHz.			No emissions detected above 1 GHz.			No emissions detected above 1 GHz.		
Measurement uncertainty			± 3 dB					

Result: Passed

Results: OFDM / g – mode

TX Spurious Emissions Radiated [dB μ V/m]								
OFDM / g – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
No emissions detected above 1 GHz.			No emissions detected above 1 GHz.			No emissions detected above 1 GHz.		
Measurement uncertainty			± 3 dB					

Result: Passed

Results: OFDM / n – mode

TX Spurious Emissions Radiated [dB μ V/m]								
OFDM / n – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
No emissions detected above 1 GHz.			No emissions detected above 1 GHz.			No emissions detected above 1 GHz.		
Measurement uncertainty			± 3 dB					

Result: Passed

Plots: DSSS

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN DSSS CH1 + charging
 Operator Name: Medrow
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

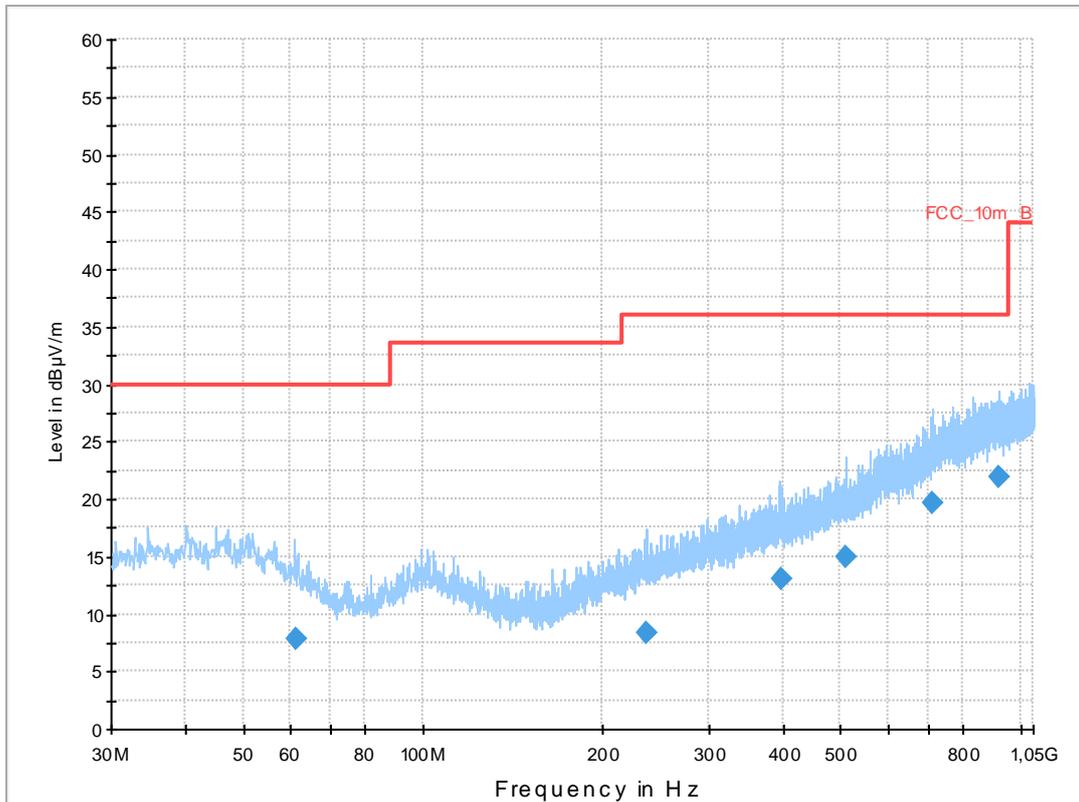

Fnal Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
61.087050	7.9	1000.0	120.000	105.0	V	-2.0	11.3	22.1	30.0	
236.765700	8.3	1000.0	120.000	104.0	H	0.0	12.9	27.7	36.0	
398.296500	13.0	1000.0	120.000	170.0	H	268.0	16.9	23.0	36.0	
511.082700	15.0	1000.0	120.000	170.0	V	85.0	18.9	21.0	36.0	
710.887350	19.6	1000.0	120.000	144.0	V	261.0	22.8	16.4	36.0	
920.683200	21.9	1000.0	120.000	170.0	V	190.0	25.3	14.1	36.0	

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

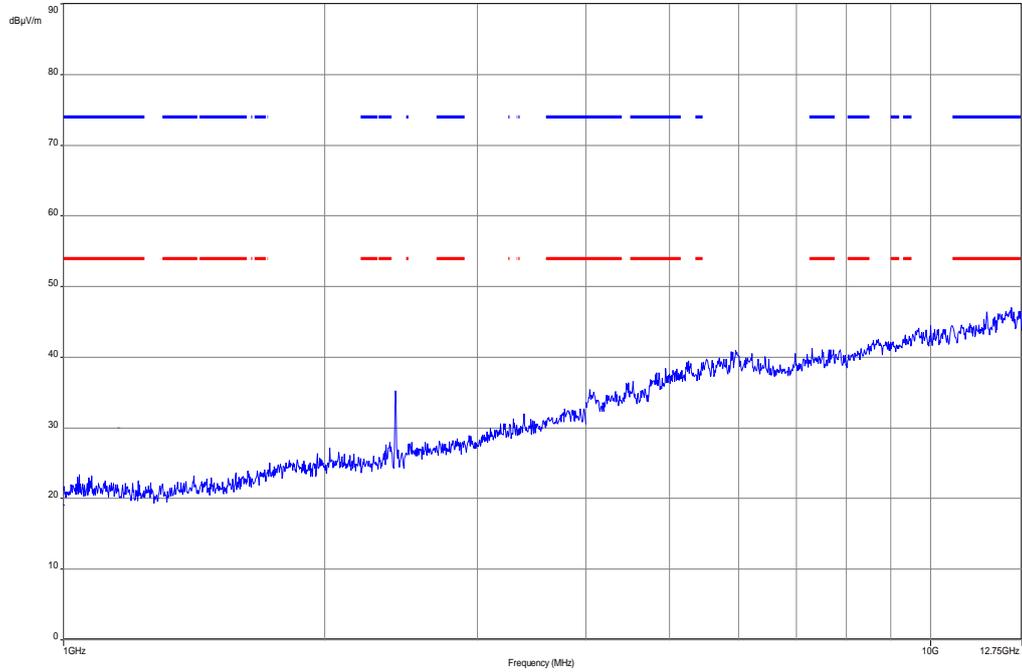


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

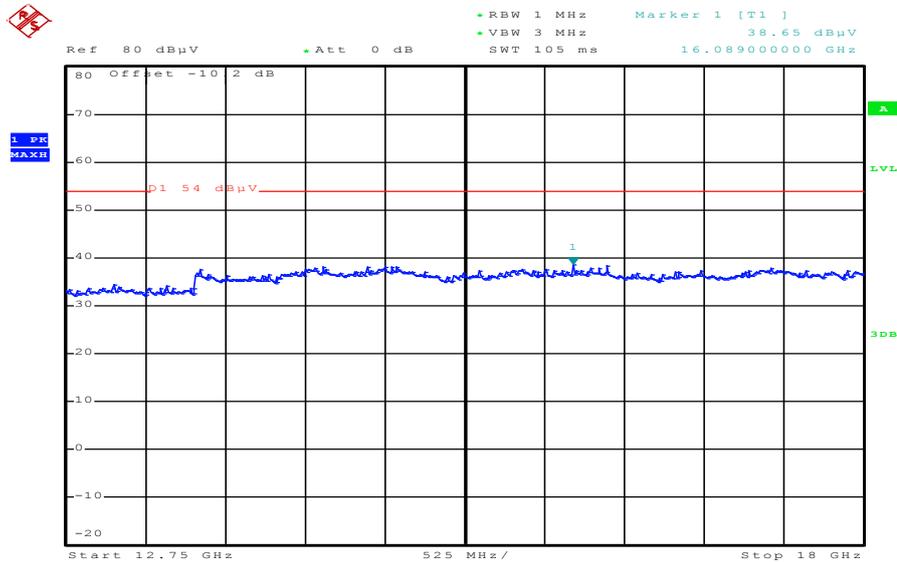

Date: 22.FEB.2013 07:50:22

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

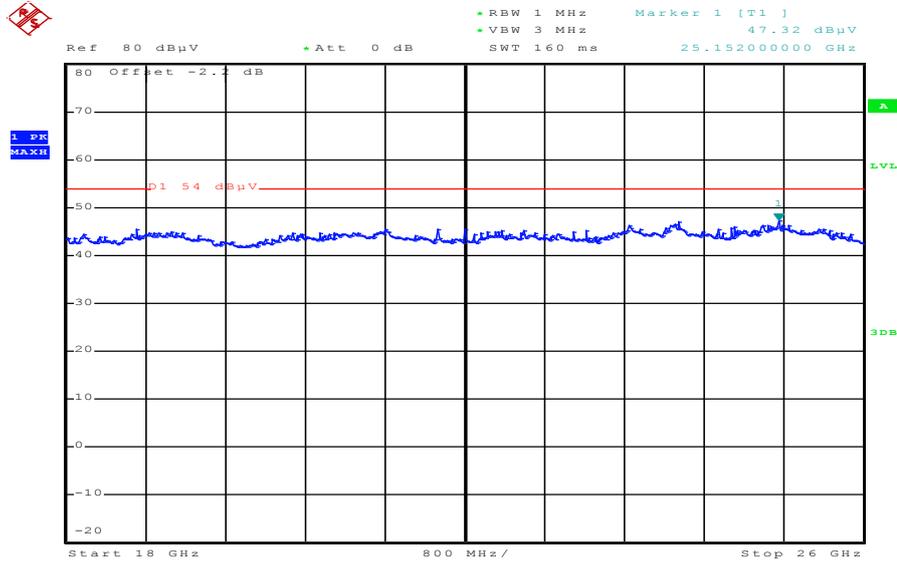

Date: 22.FEB.2013 08:19:46

Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN DSSS CH6 + charging
 Operator Name: Medrow
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

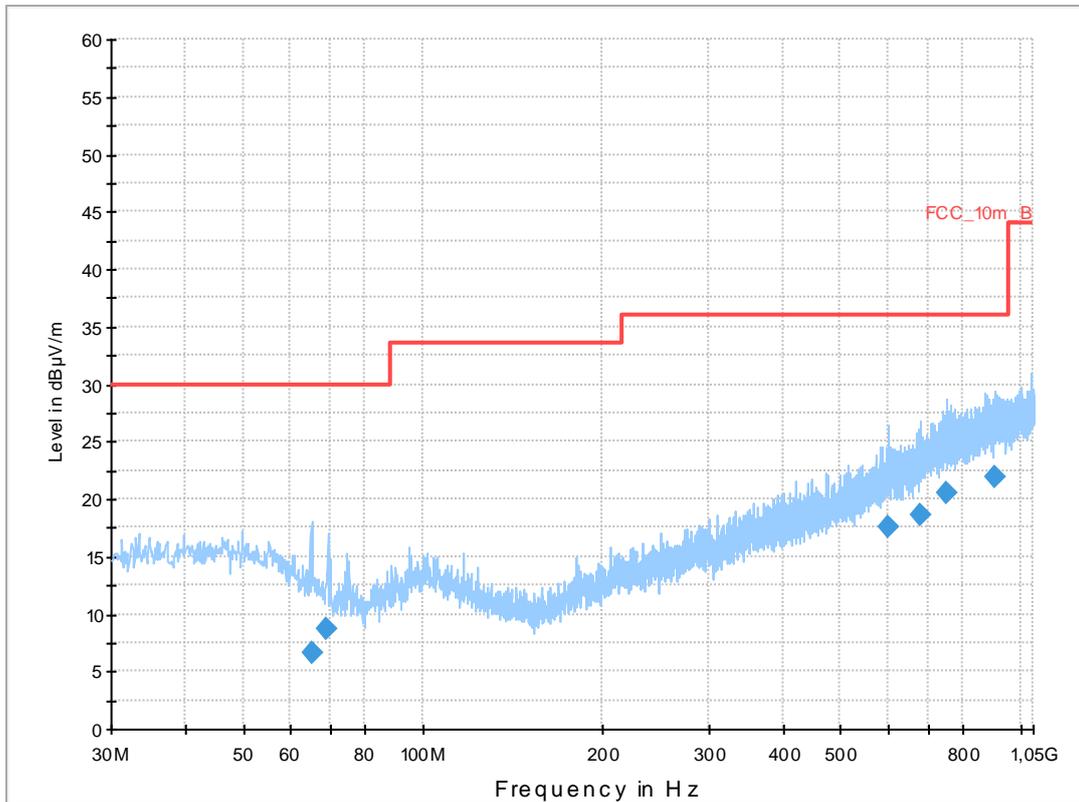

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
64.987800	6.6	1000.0	120.000	170.0	V	88.0	10.4	23.4	30.0	
68.591250	8.7	1000.0	120.000	170.0	V	88.0	9.6	21.3	30.0	
602.265300	17.6	1000.0	120.000	111.0	V	171.0	20.8	18.4	36.0	
677.352150	18.6	1000.0	120.000	120.0	H	-3.0	21.9	17.4	36.0	
749.608950	20.5	1000.0	120.000	170.0	H	268.0	23.6	15.5	36.0	
909.016800	21.9	1000.0	120.000	170.0	H	88.0	25.2	14.1	36.0	

Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

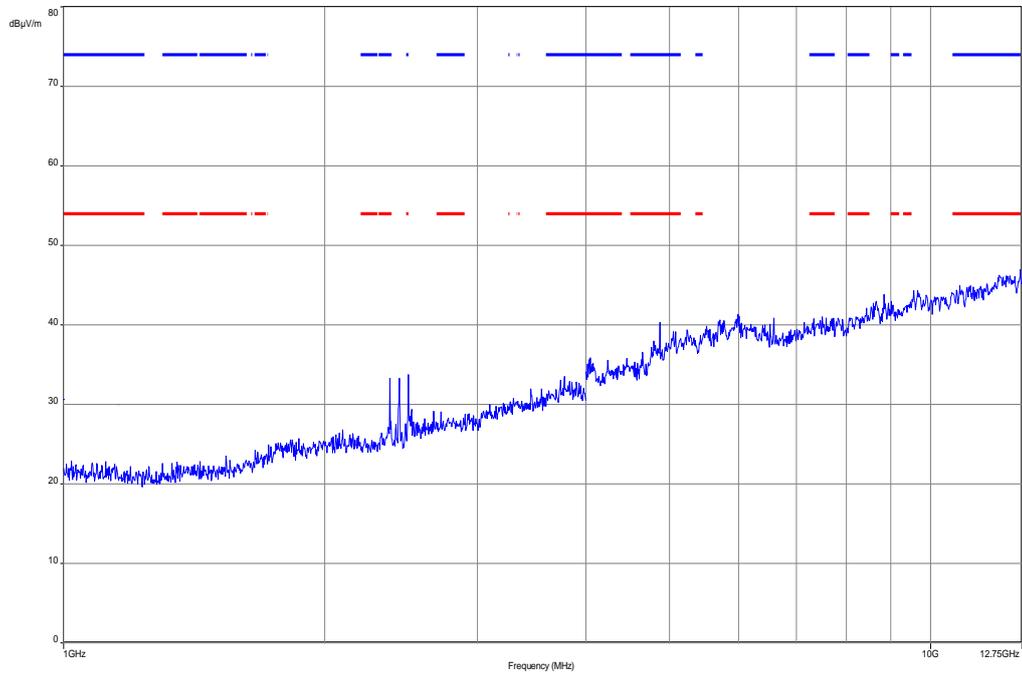


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

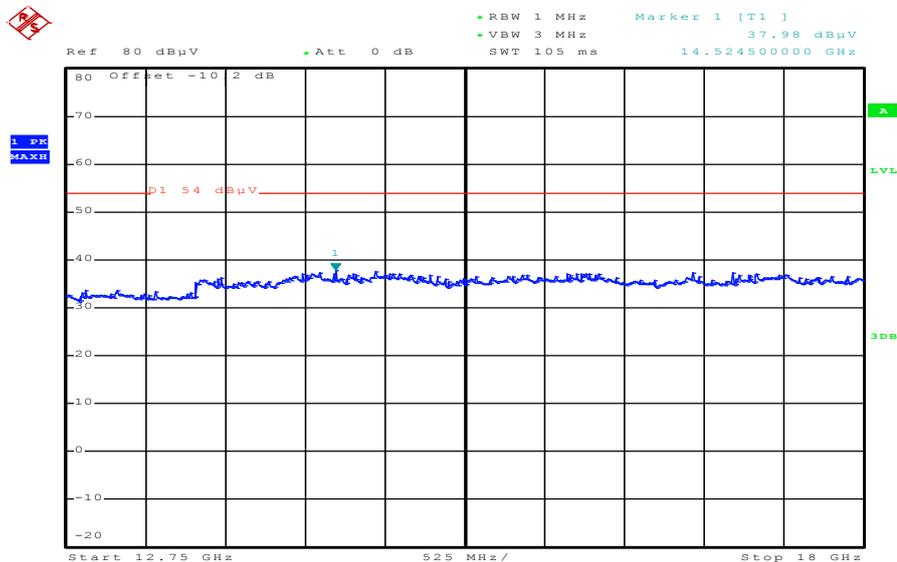

Date: 22.FEB.2013 07:52:03

Plot 8: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

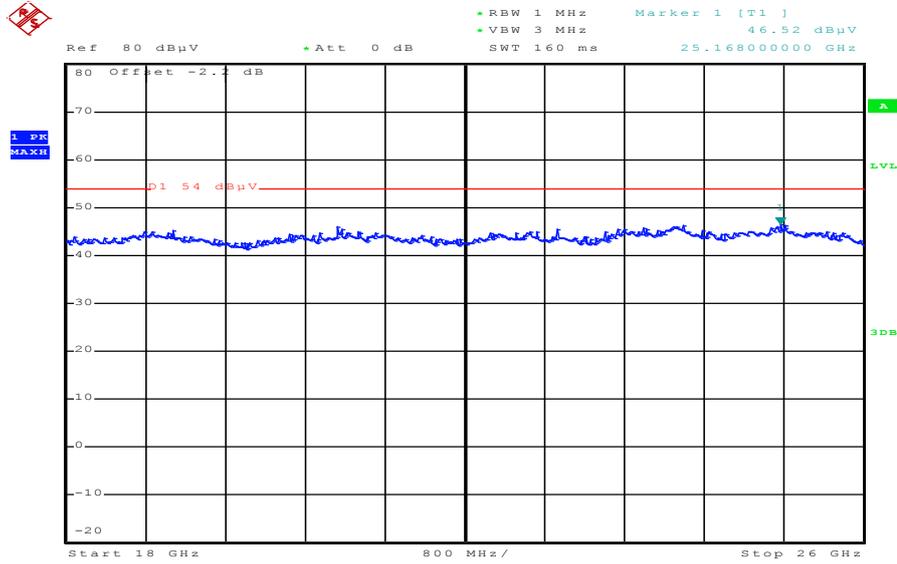

Date: 22.FEB.2013 08:20:36

Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN DSSS CH11 + charging
 Operator Name: Medrow
 Comment: AC: 115 V / 60 Hz


Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)

Receiver:

Level Unit: dB μ V/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

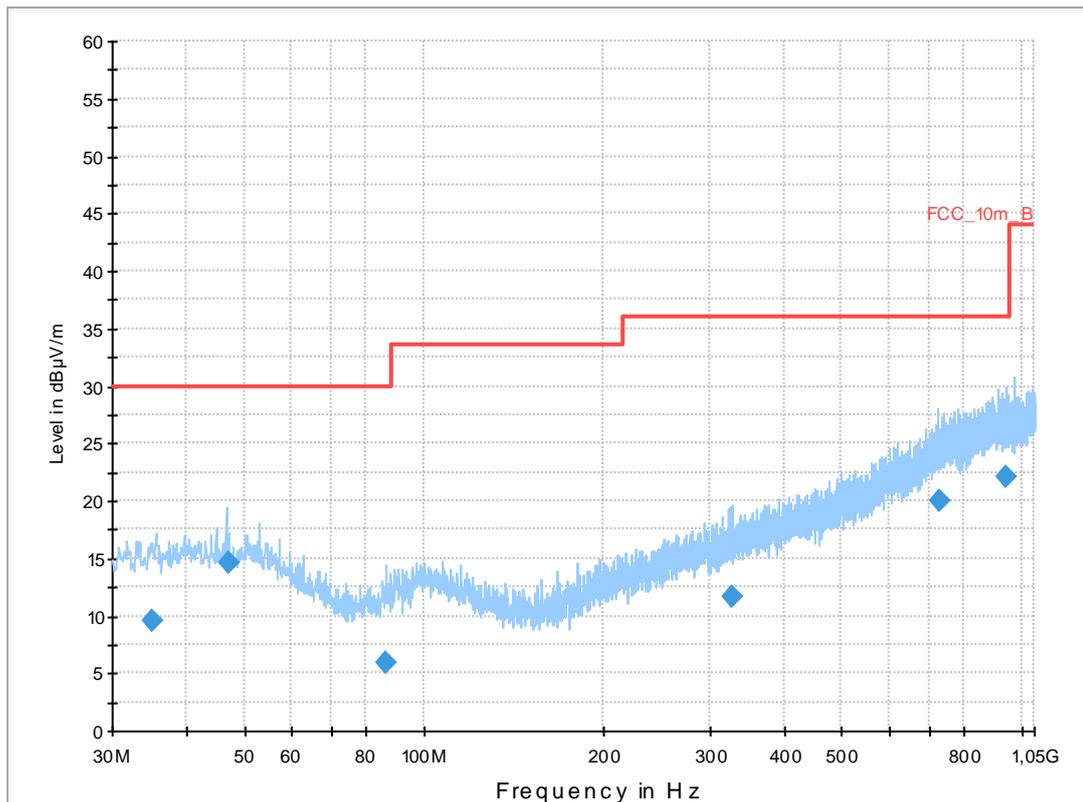

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
35.084700	9.6	1000.0	120.000	170.0	V	175.0	13.0	20.4	30.0	
47.002650	14.6	1000.0	120.000	98.0	V	175.0	13.3	15.4	30.0	
86.210700	5.9	1000.0	120.000	170.0	H	180.0	10.0	24.1	30.0	
326.931300	11.6	1000.0	120.000	170.0	V	268.0	15.4	24.4	36.0	
726.334800	20.0	1000.0	120.000	105.0	V	90.0	23.1	16.0	36.0	
942.798150	22.1	1000.0	120.000	170.0	V	260.0	25.3	13.9	36.0	

Plot 10: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

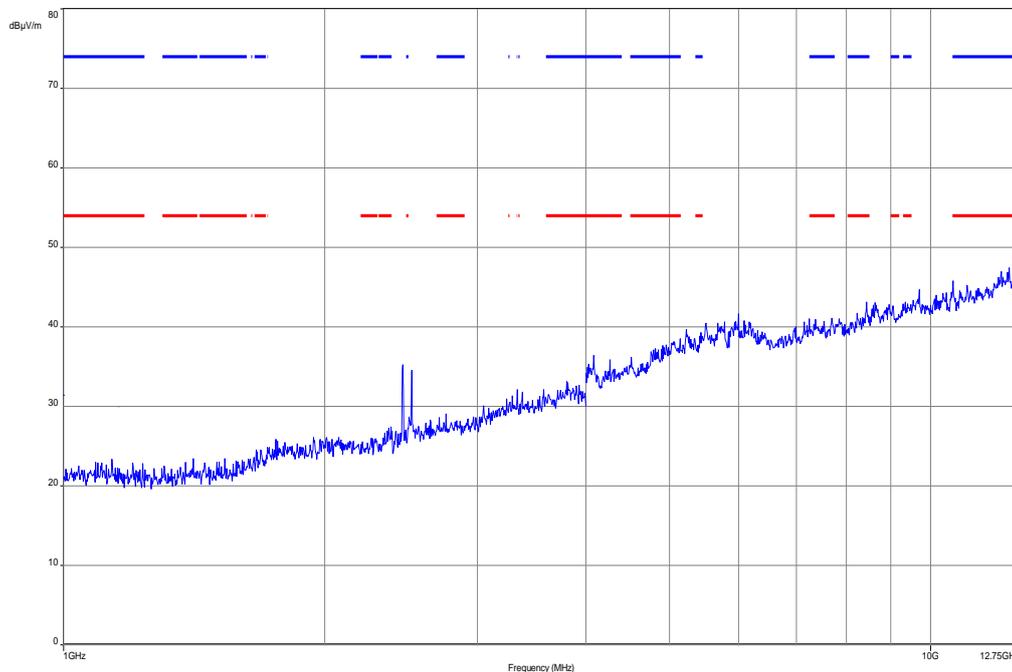


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

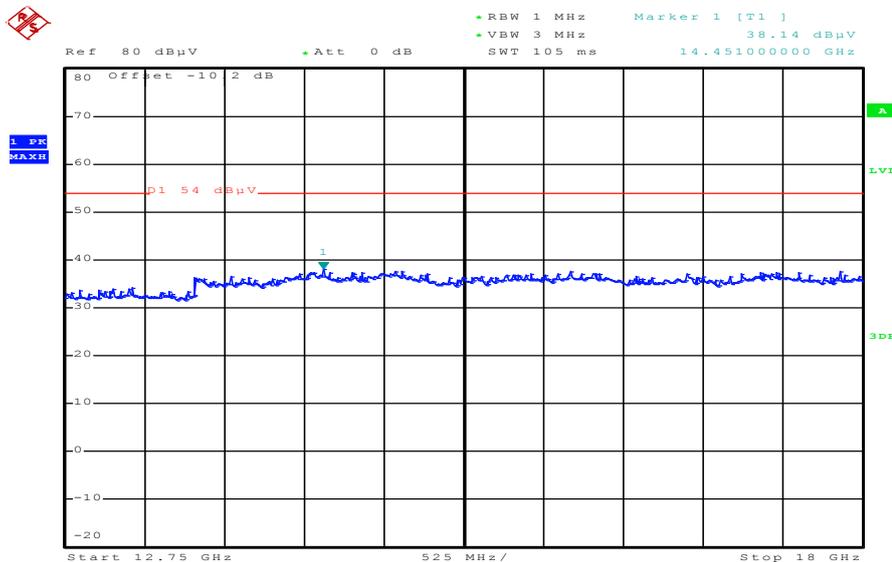

Date: 22.FEB.2013 07:53:06

Plot 12: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

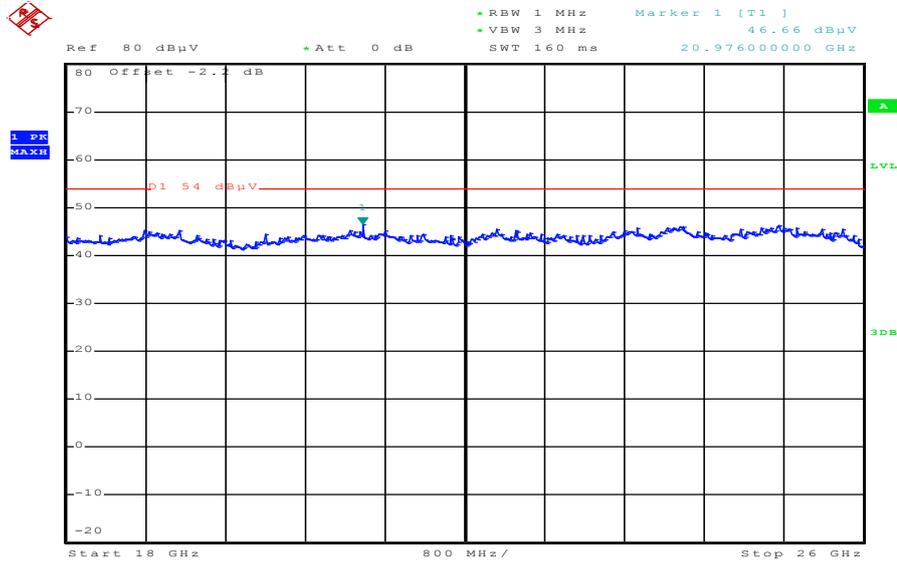

Date: 22.FEB.2013 08:21:19

Plots: OFDM

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN OFDM CH1 + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

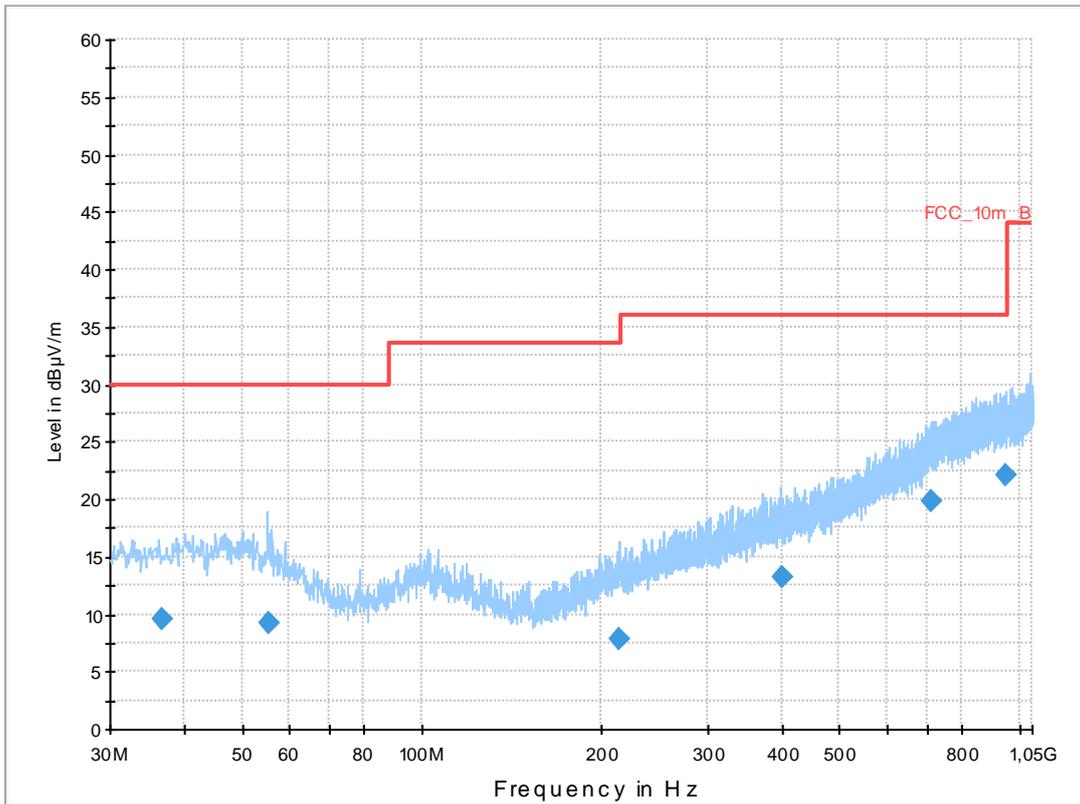

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
36.776100	9.6	1000.0	120.000	170.0	H	175.0	13.2	20.4	30.0	
55.248600	9.3	1000.0	120.000	104.0	H	10.0	12.8	20.7	30.0	
214.074000	7.9	1000.0	120.000	170.0	V	190.0	12.2	25.6	33.5	
399.717600	13.3	1000.0	120.000	170.0	H	-5.0	16.9	22.8	36.0	
709.679850	19.8	1000.0	120.000	170.0	H	81.0	22.7	16.2	36.0	
947.428050	22.1	1000.0	120.000	170.0	H	81.0	25.3	13.9	36.0	

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

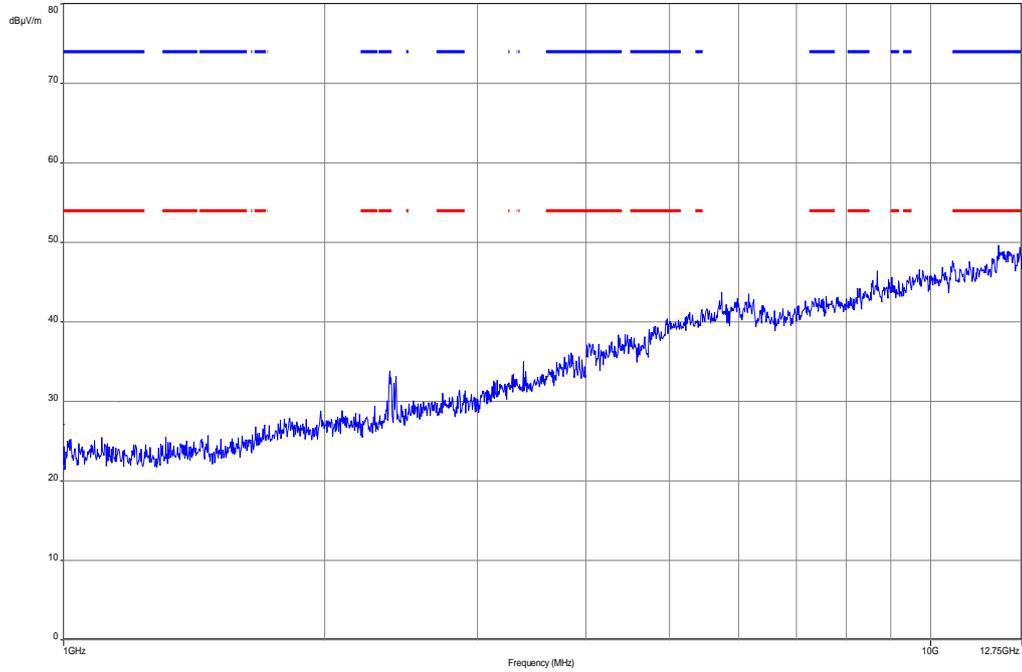


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

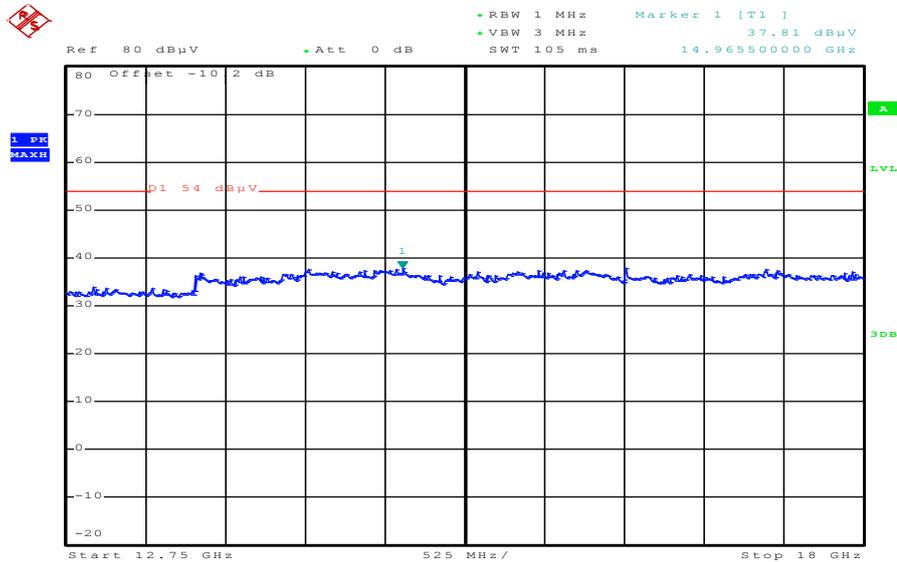

Date: 22.FEB.2013 07:55:59

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

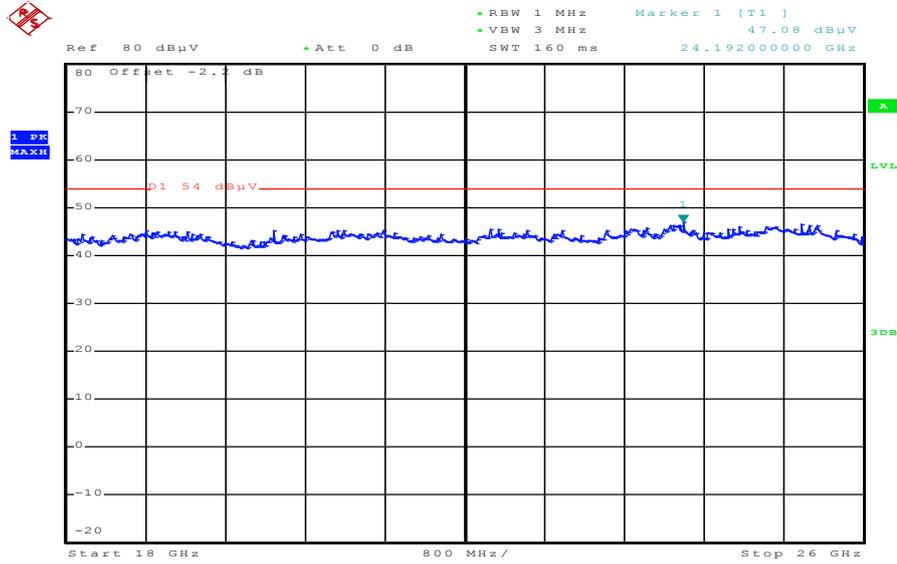

Date: 22.FEB.2013 08:18:33

Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 B class B @ 10 m
 Operating Conditions: W-LAN OFDM CH6 + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

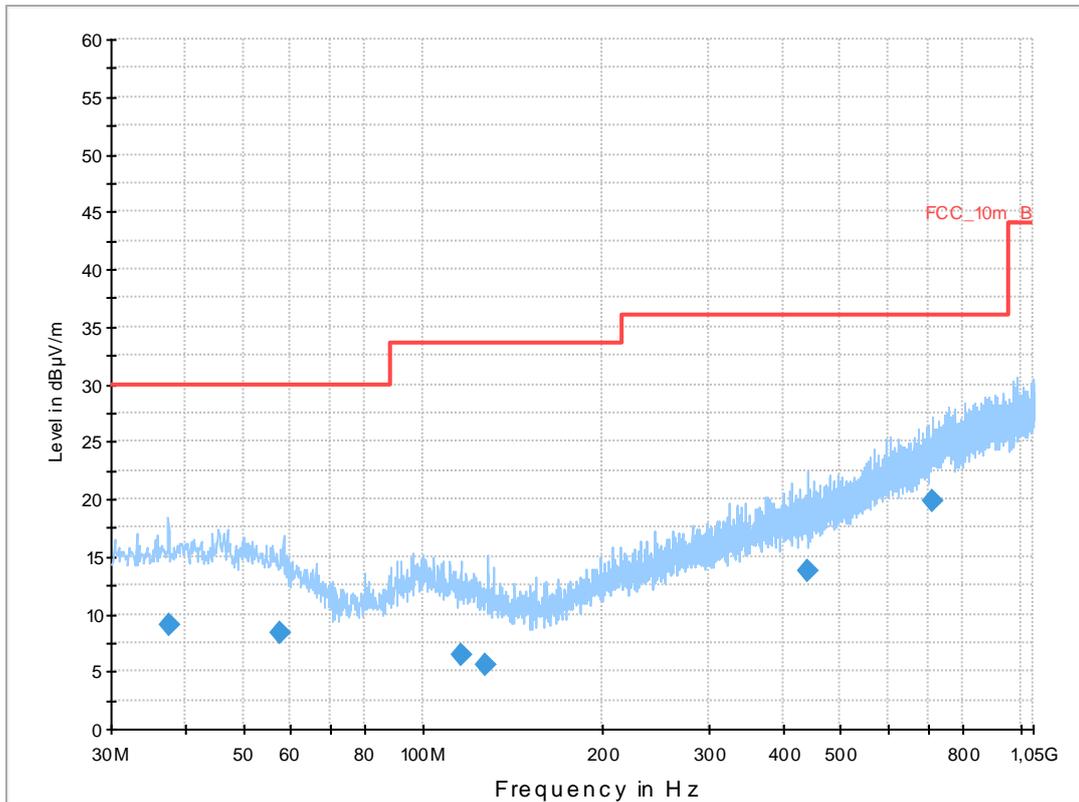

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
37.697550	9.0	1000.0	120.000	170.0	H	80.0	13.3	21.0	30.0	
57.767550	8.3	1000.0	120.000	98.0	V	280.0	12.2	21.7	30.0	
116.120250	6.4	1000.0	120.000	170.0	H	100.0	10.5	27.1	33.5	
127.482450	5.6	1000.0	120.000	98.0	H	171.0	9.6	27.9	33.5	
440.987850	13.7	1000.0	120.000	153.0	H	-10.0	17.5	22.3	36.0	
713.769300	19.8	1000.0	120.000	170.0	V	100.0	22.8	16.2	36.0	

Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

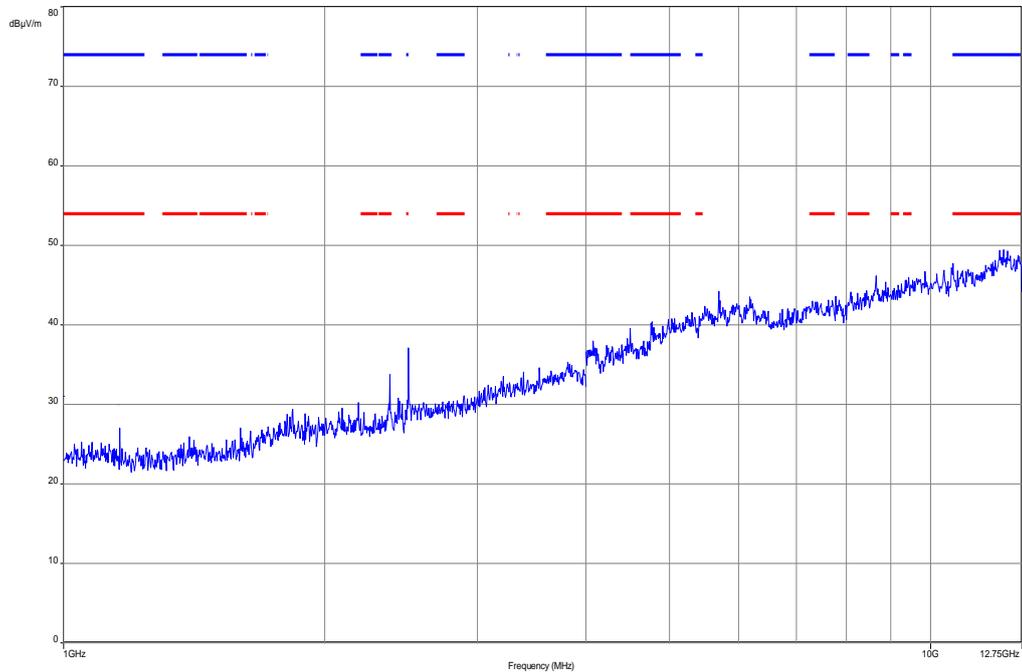


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

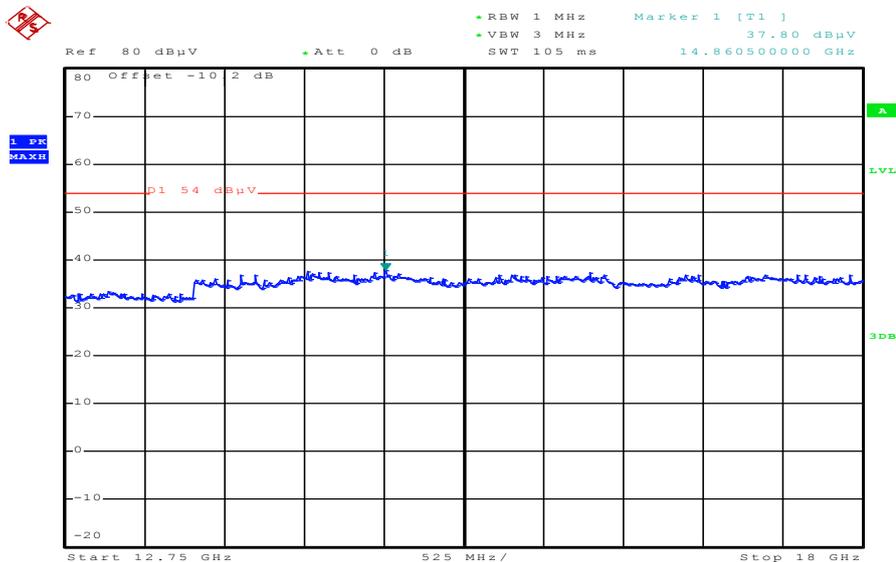

Date: 22.FEB.2013 08:03:49

Plot 8: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

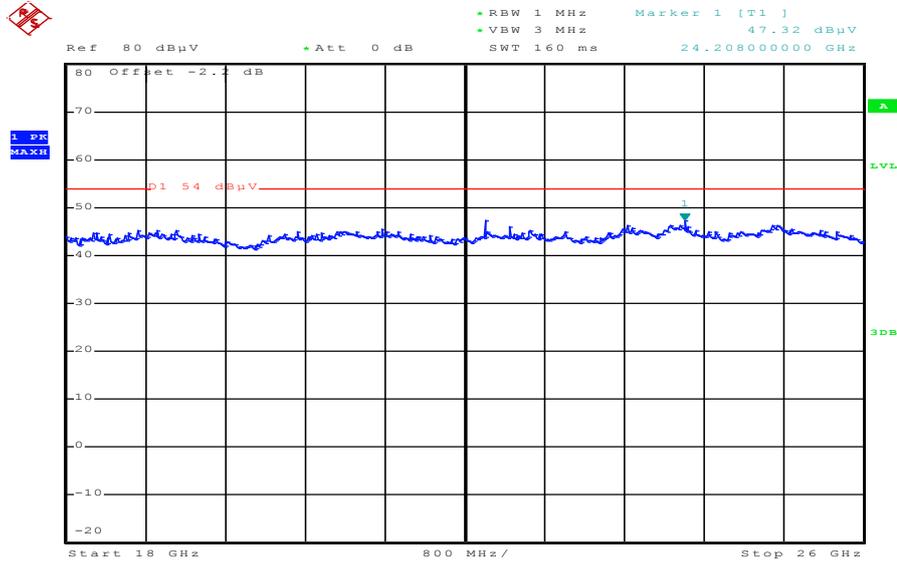

Date: 22.FEB.2013 08:17:04

Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: W-LAN OFDM CH11 + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

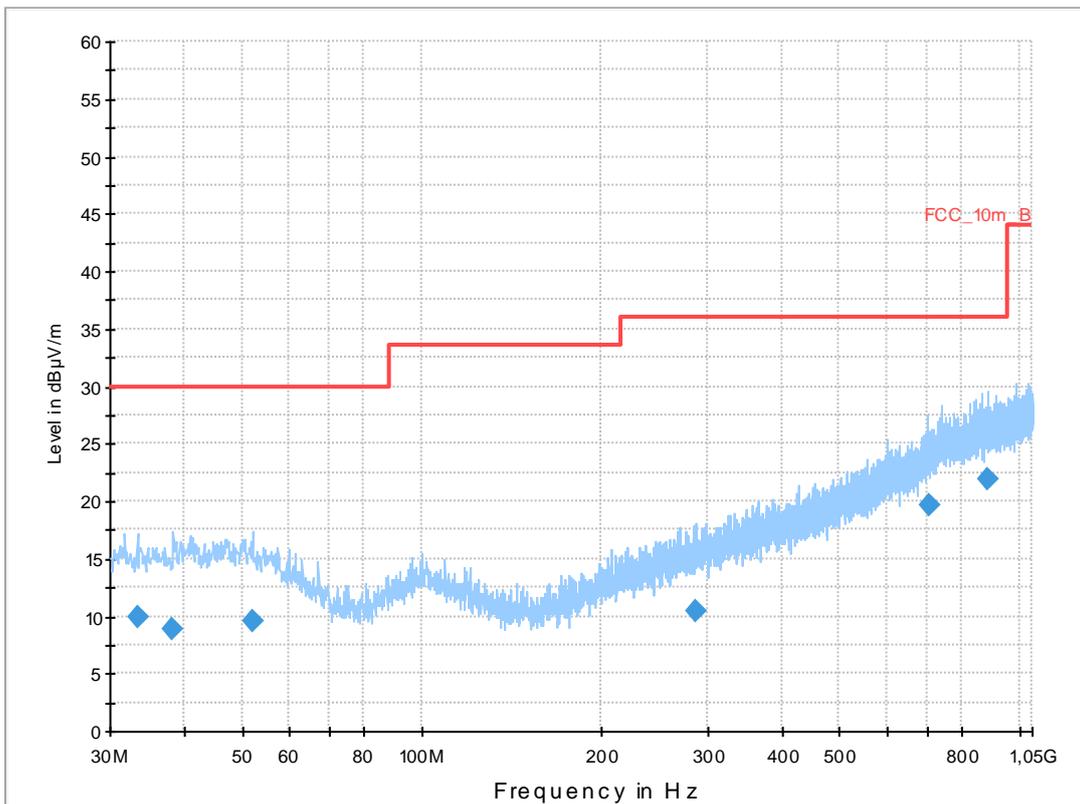

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
33.410700	9.9	1000.0	120.000	170.0	V	170.0	12.9	20.1	30.0	
38.171700	8.9	1000.0	120.000	170.0	H	272.0	13.3	21.1	30.0	
52.250400	9.5	1000.0	120.000	105.0	V	10.0	13.1	20.5	30.0	
288.022500	10.4	1000.0	120.000	152.0	H	280.0	14.2	25.6	36.0	
704.251650	19.6	1000.0	120.000	104.0	H	190.0	22.6	16.4	36.0	
882.976950	21.9	1000.0	120.000	120.0	H	190.0	25.0	14.1	36.0	

Plot 10: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

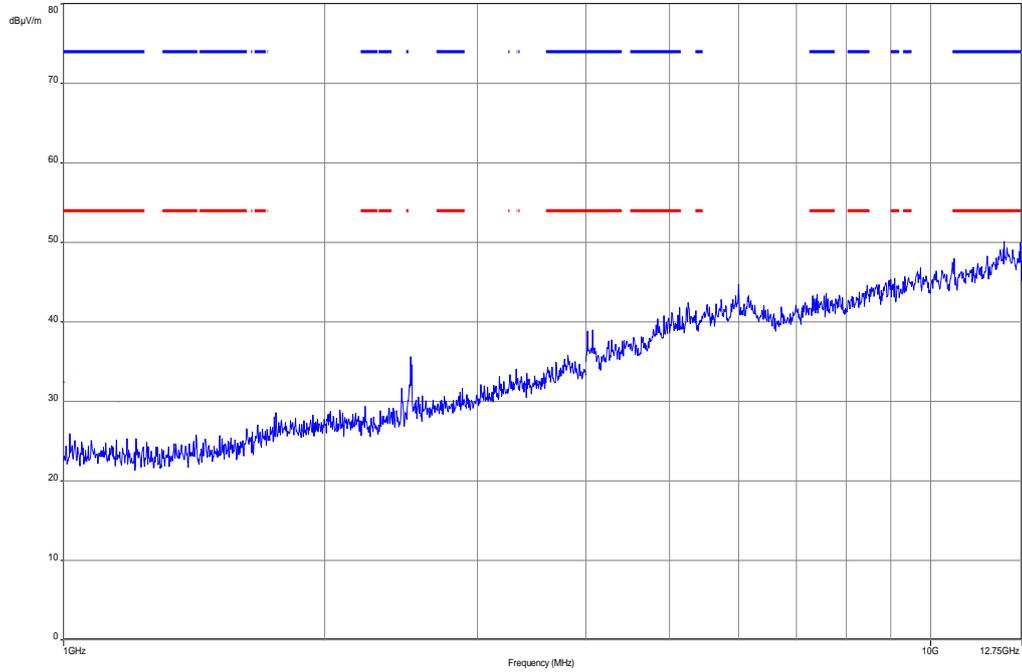


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

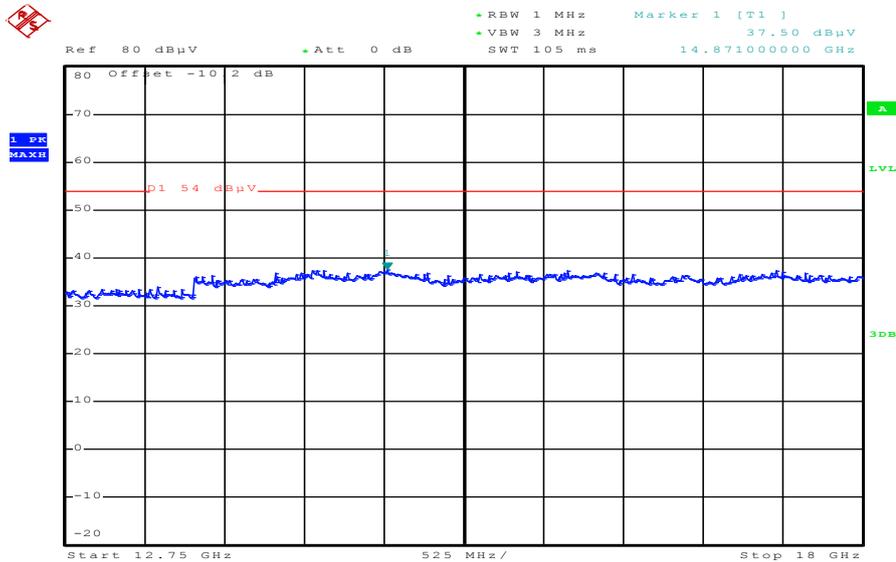

Date: 22.FEB.2013 08:04:39

Plot 12: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

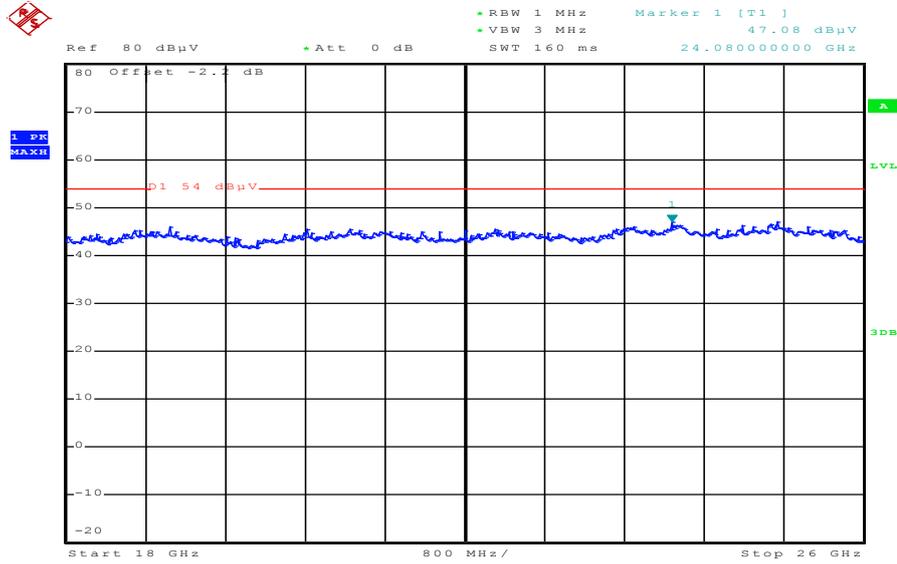

Date: 22.FEB.2013 08:15:53

9.10 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode. The results are valid for both modes.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz / 3 MHz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
No emissions detected above 1 GHz.		
Measurement uncertainty	± 3 dB	

Result: Passed.

Plots: RX / Idle – mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 class B @ 10m
 Operating Conditions: W-LAN idle + charging
 Operator Name: Medrow
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

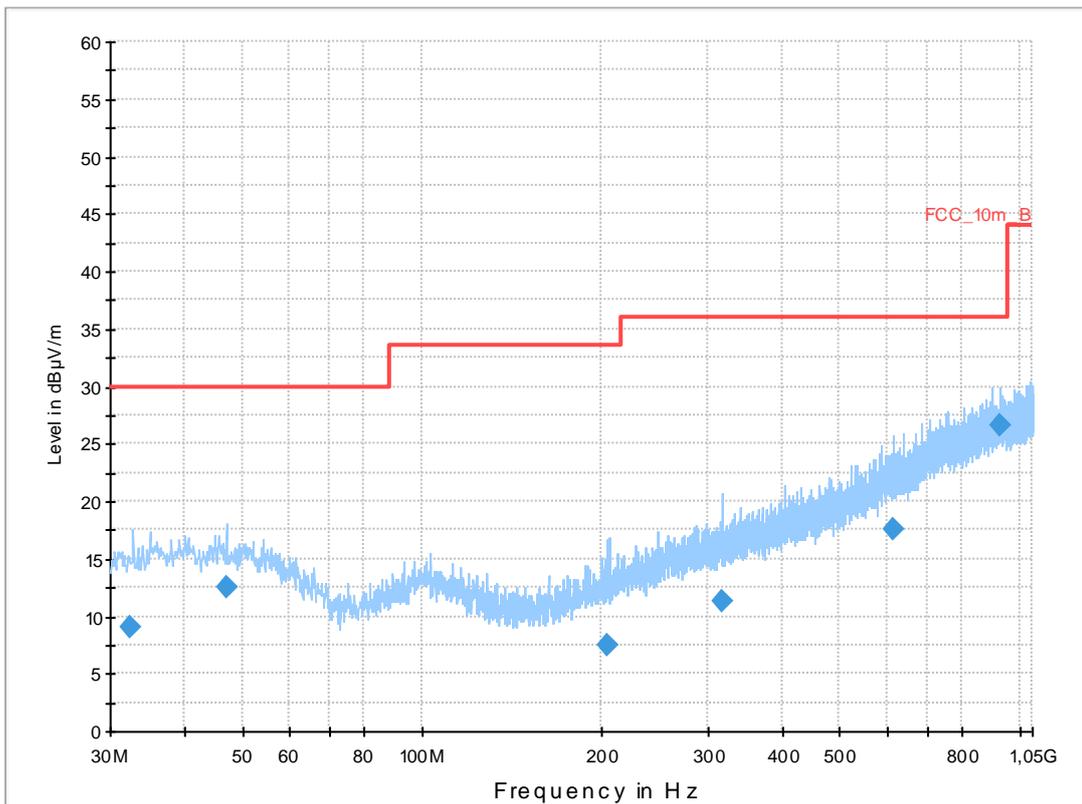


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
32.355000	9.1	1000.0	120.000	133.0	H	190.0	12.8	20.9	30.0	
46.981800	12.5	1000.0	120.000	133.0	V	10.0	13.3	17.5	30.0	
204.253350	7.4	1000.0	120.000	170.0	H	100.0	11.9	26.1	33.5	
318.557250	11.3	1000.0	120.000	106.0	H	100.0	15.1	24.7	36.0	
613.815150	17.6	1000.0	120.000	170.0	V	-10.0	20.9	18.4	36.0	
927.407250	26.7	1000.0	120.000	170.0	V	280.0	25.3	9.3	36.0	

Plot 2: 1 GHz to 12.75 GHz, vertical & horizontal polarization

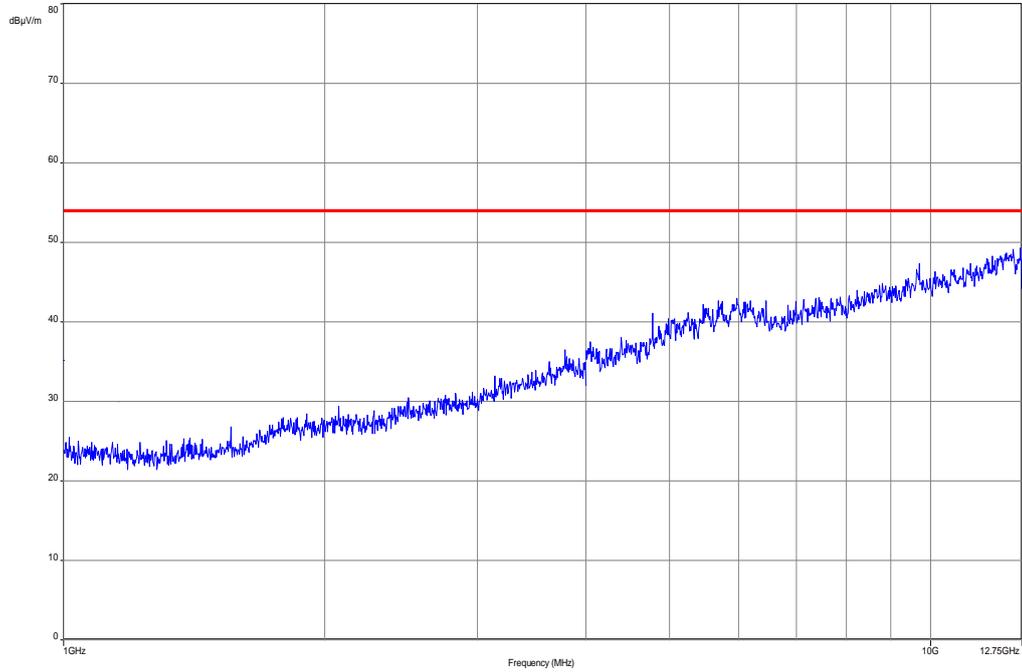


Plot 3: 12.75 GHz to 18 GHz, vertical & horizontal polarization

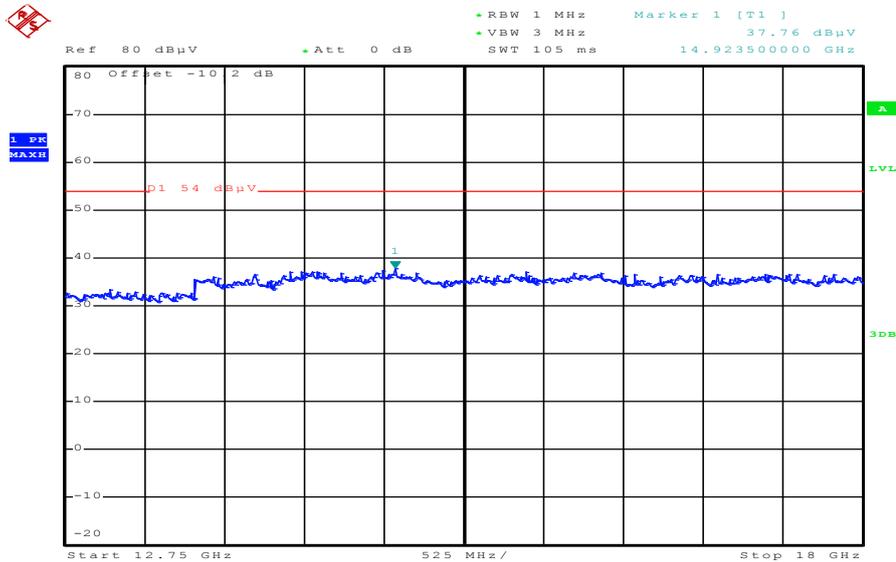

Date: 22.FEB.2013 08:05:09

Plot 4: 18 GHz to 26 GHz, vertical & horizontal polarization

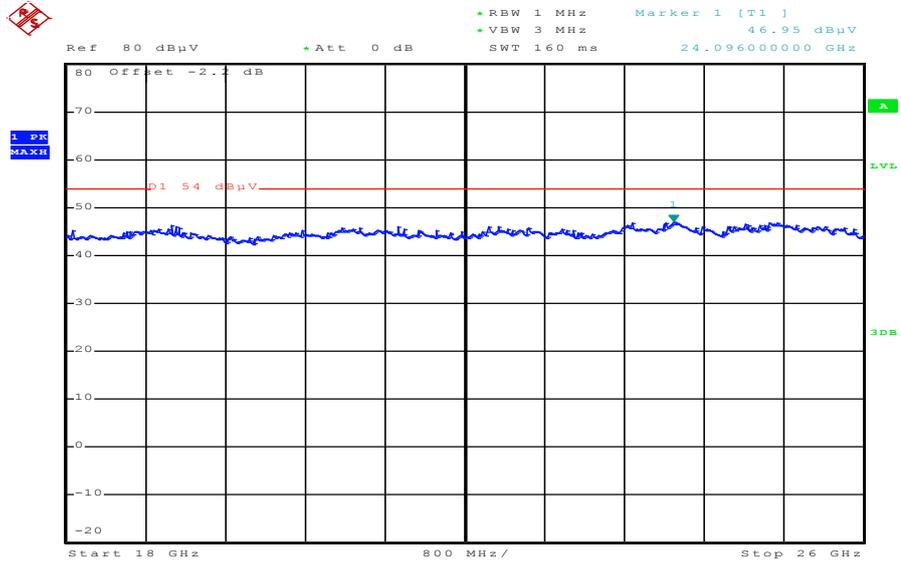

Date: 22.FEB.2013 08:08:22

9.11 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is representative for all channels and modes. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
TX Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


Results:

TX Spurious Emissions Radiated < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No peaks found.		
Measurement uncertainty	± 3 dB	

Result: Passed


Plots: TX mode

Plot 1: 9 kHz to 30 MHz

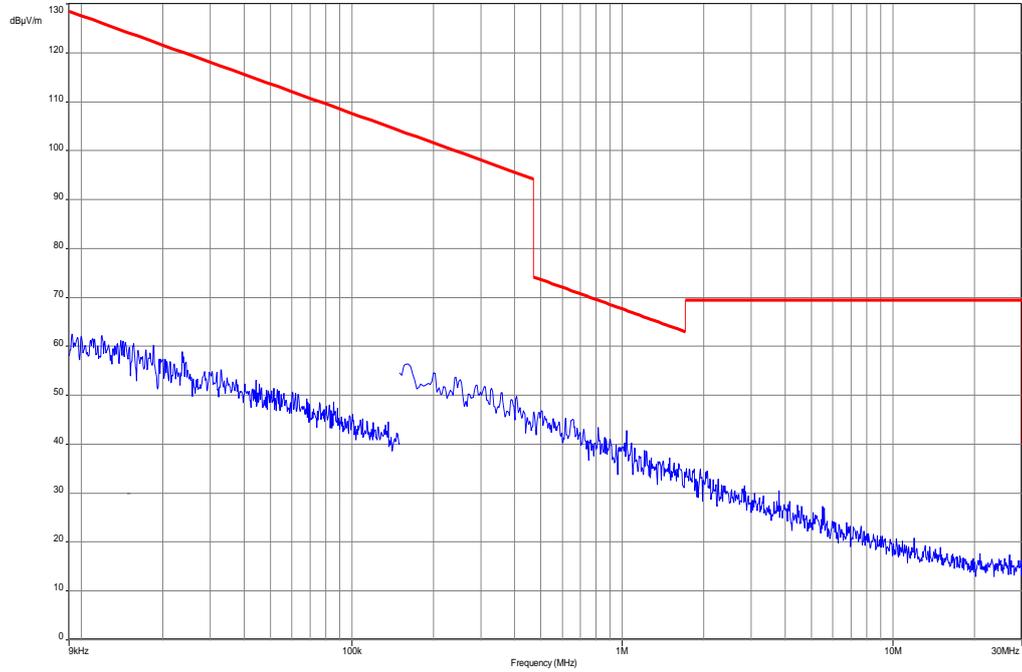

Plots: RX / Idle – mode

Plot 1: 9 kHz to 30 MHz

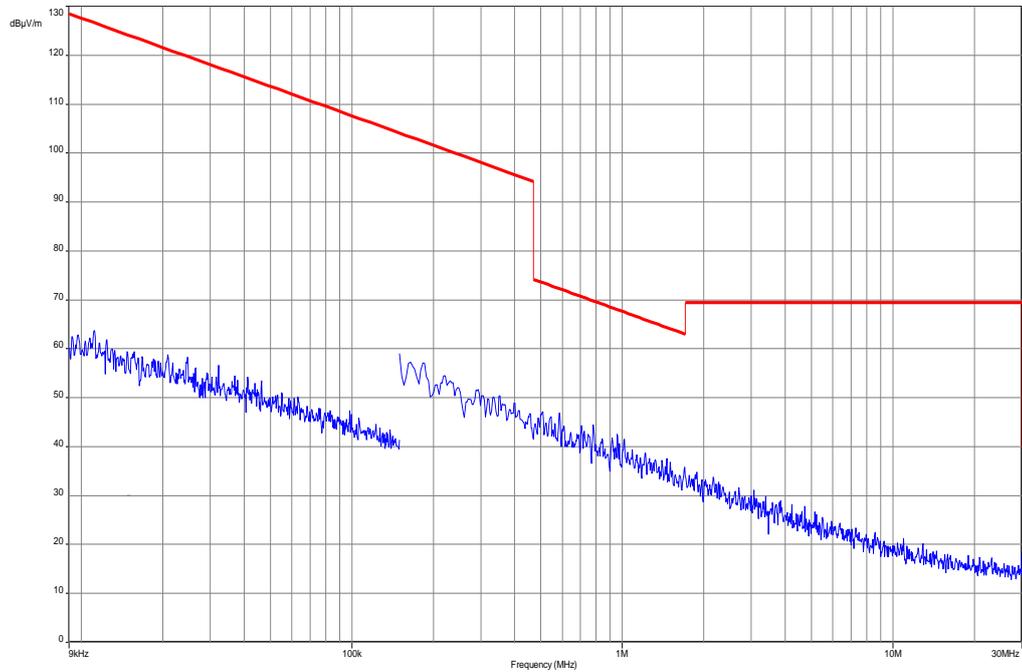

9.12 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
TX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dB μ V/m)	Average (dB μ V/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	

*Decreases with the logarithm of the frequency


Results:

TX Spurious Emissions Conducted < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No peaks detected. All detected peak values are below the average limits.		
Measurement uncertainty	± 3 dB	


Result: Passed

Plots:


Plot 1: TX mode, 150 kHz to 30 MHz, phase line

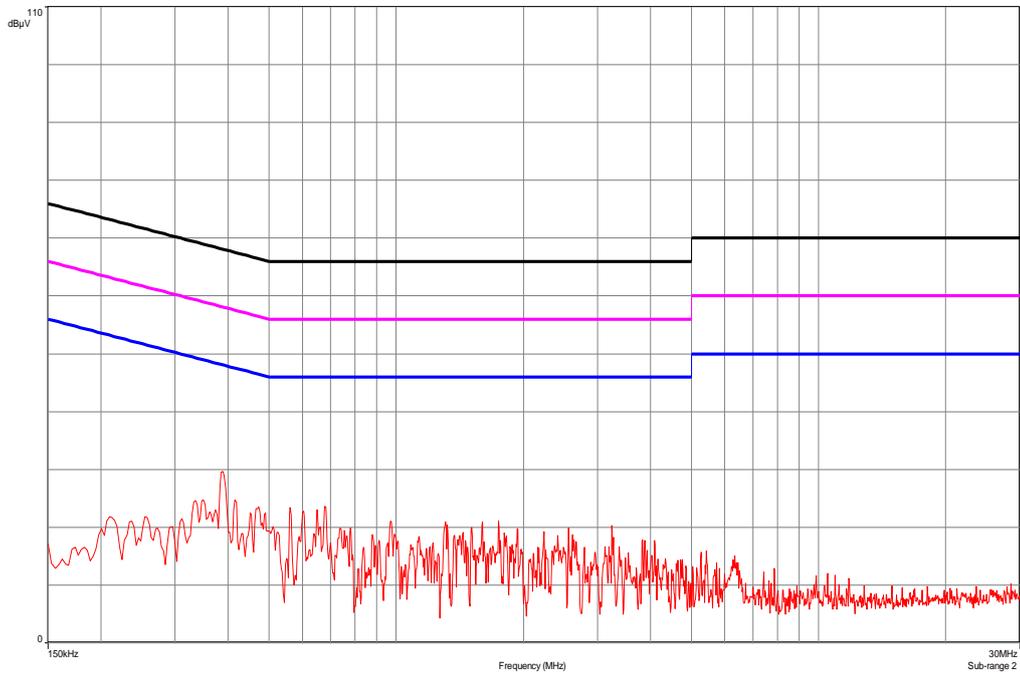


Plot 2: TX mode, 150 kHz to 30 MHz, neutral line

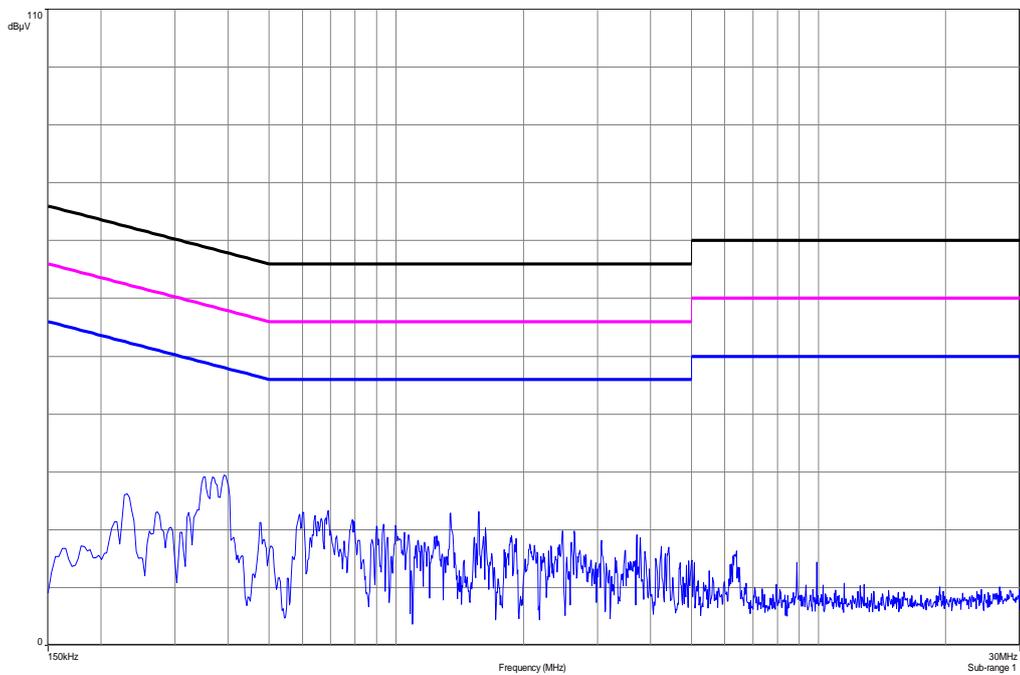

Plot 3: RX / Idle – mode, 150 kHz to 30 MHz, phase line

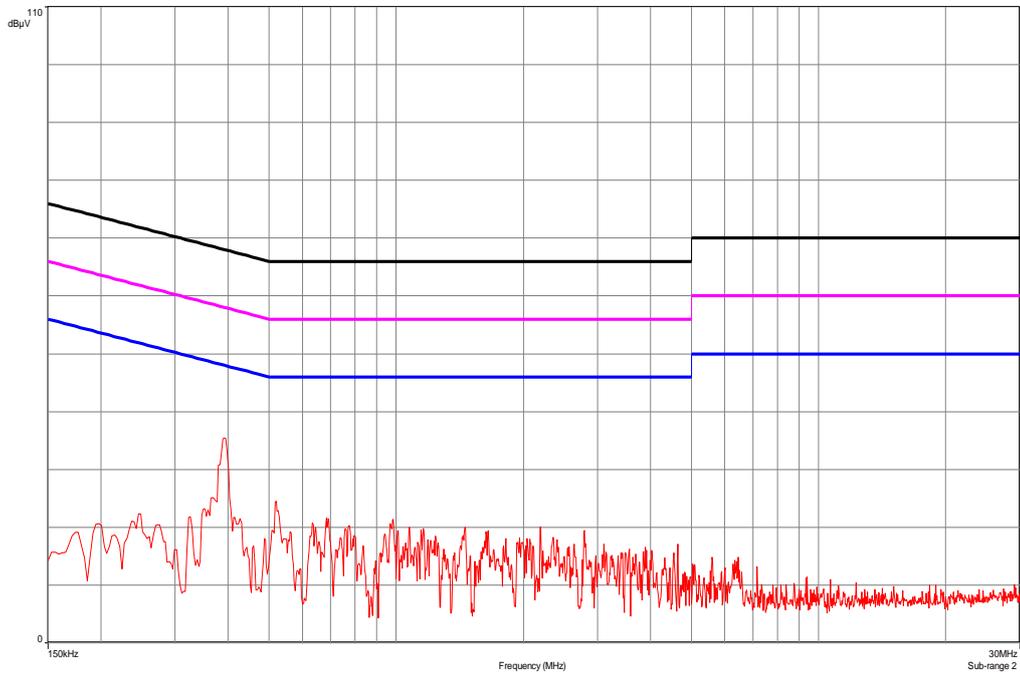

Plot 4: RX / Idle – mode, 150 kHz to 30 MHz, neutral line

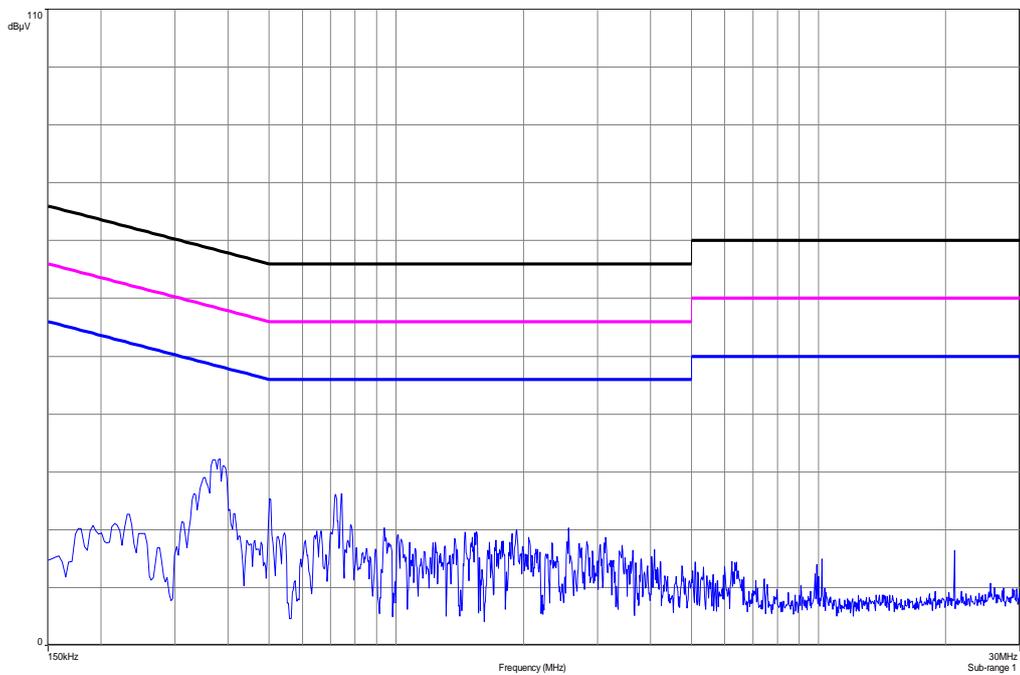

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B597 9	300000210	ne		
4	n. a.	EMI Test Receiver	ESCI 1166.5950. 03	R&S	100083	300003312	k	09.01.2013	09.01.2014
5	n. a.	Analyzer- Reference- System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013
6	n. a.	Amplifier	JS42- 00502650- 28-5A	MITEQ	1084532	300003379	ev		
7	n. a.	Antenna Tower	Model 2175	ETS- LINDGREN	64762	300003745	izw		
8	n. a.	Positioning Controller	Model 2090	ETS- LINDGREN	64672	300003746	izw		
9	n. a.	Turntable Interface-Box	Model 105637	ETS- LINDGREN	44583	300003747	izw		
10	n. a.	TRIOLOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbe ck	295	300003787	k	12.04.2012	12.04.2014
11	n. a.	Spectrum- Analyzer	FSU26	R&S	200809	300003874	k	16.01.2013	16.01.2015
12	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	12.01.2012	12.01.2015
13	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	11.05.2011	11.05.2013
14	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
15	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
16	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
17	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
18	9	Isolating Transformer	MPL IEC625 Bus Regeltrennt ravo	Erfi	91350	300001155	ne		
19	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
20	n. a.	Amplifier	js42- 00502650- 28-5a	Parzich GMBH	928979	300003143	ne		
21	n. a.	Band Reject filter	WRGG240 0/2483- 2375/2505- 50/10SS	Wainwright	11	300003351	ev		
22	n. a.	TRIOLOG Broadband Test-Antenna	VULB9163	Schwarzbe ck	371	300003854	vIKI!	14.10.2011	14.10.2014

		30 MHz - 3 GHz							
23	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k		
24	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
25	A025	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000786	ne		
26	A027	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300000486	ne		
27	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	Ve	09.10.2012	09.10.2014
28	n. a.	Spectrum Analyzer 9kHz to 30GHz - 140..+30dBm	FSP30	R&S	100886	300003575	k	22.08.2012	22.08.2014
29	n. a.	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004xxx	k	22.10.2012	22.10.2013

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

11 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
1.0	Initial release	2013-02-22
-A	Remeasurements acc. new DTS from April 2013	2013-04-30

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate

Front side of certificate



Deutsche Akkreditierungsstelle GmbH
 Beleihene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
 Unterzeichnerin der Multilateralen Abkommen
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium
CETECOM ICT Services GmbH
 Untertürkheimer Straße 6-10, 66117 Saarbrücken
 die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen
 durchzuführen:
Drahtgebundene Kommunikation einschließlich xDSL
VoIP und DECT
Akustik
Funk einschließlich WLAN
Short Range Devices (SRD)
RFID
WiMax und Richtfunk
Mobilfunk (GSM / GPRS, Over the Air (OTA) Performance)
Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive
Produktsicherheit
SAR und Hearing Aid Compatibility (HAC)
Umweltsimulation
Smart Card Terminals
Bluetooth
Wi-Fi Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 18.01.2013 mit der
 Akkreditierungsnummer D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der
 Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 80 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt am Main, 18.01.2013
 Seite 1/10 weiter auf der Rückseite

[Signature]
 Im Auftrag
 Dr. Ingrid (FRI) Böttger
 Abteilungsleiter

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin Spittelmarkt 10 10117 Berlin	Standort Frankfurt am Main Gartenstraße 6 60594 Frankfurt am Main	Standort Braunschweig Rundesallee 100 38116 Braunschweig
--	---	--

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen
 Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAKKS). Ausgenommen davon ist die separate
 Weiterverbreitung des Deckblatts durch die umseitig genannte Konformitätsbewertungsstelle in
 unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt,
 die über den durch die DAKKS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom
 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments
 und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung
 im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30).
 Die DAKKS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der
 European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und
 der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen
 erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
 EA: www.european-accreditation.org
 ILAC: www.ilac.org
 IAF: www.iaf.nu

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>