



# FCC PART 15C TEST REPORT No. 2013TAR075

for

**Sony Mobile Communications (China) Co. Ltd**

**GSM/UMTS/LTE mobile phone**

**Type: PM-0350-BV**

**FCC ID: PY7PM-0350**

**IC ID: 4170B-PM0350**

**With**

**Hardware Version: A**

**Software Version: 12.0.A.1.18**

**Issued Date: 2013-05-02**



***DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629B***

**Note:**The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China 100191

Tel:+86(0)10-62304633-2678, Fax:+86(0)10-62304793 Email:welcom@emcite.com. www.emcite.com

## **CONTENTS**

<b>CONTENTS .....</b>	<b>2</b>
<b>1. TEST LABORATORY .....</b>	<b>4</b>
1.1. TESTING LOCATION .....	4
1.2. TESTING ENVIRONMENT.....	4
1.3. PROJECT DATA .....	4
1.4. SIGNATURE .....	4
<b>2. CLIENT INFORMATION.....</b>	<b>5</b>
2.1. APPLICANT INFORMATION .....	5
2.2. MANUFACTURER INFORMATION .....	5
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
3.1. ABOUT EUT .....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	6
3.4. NORMAL ACCESSORY SETTING .....	7
3.5. GENERAL DESCRIPTION.....	7
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
6.1. SUMMARY OF TEST RESULTS.....	10
6.2. STATEMENTS.....	11
6.3. TEST CONDITIONS .....	11
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>12</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>13</b>
A.1. MEASUREMENT METHOD .....	13
A.2. PEAK OUTPUT POWER .....	15
A.2.1 Antenna gain .....	15
A.2.2 Conducted Output Power .....	15
A.2.3 Radiated Output Power .....	15
A.3. FREQUENCY BAND EDGES - CONDUCTED.....	17
A.4. CONDUCTED EMISSION.....	24
A.5. RADIATED EMISSION.....	48
A.6. TIME OF OCCUPANCY (DWELL TIME) .....	70
A.7. 20dB BANDWIDTH.....	80
A.8. CARRIER FREQUENCY SEPARATION .....	86
A.9. NUMBER OF HOPPING CHANNELS.....	88

A.10. AC POWERLINE CONDUCTED EMISSION ..... 92

A.11 RECEIVER RADIATION EMISSION ..... 95

**ANNEX B: PHOTOGRAPHS OF THE TEST SET-UP ..... 98**

**ANNEX C: PHOTOGRAPHS OF THE EUT ..... 99**

## 1. Test Laboratory

### 1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: Shouxiang Science Building, No 51, Xueyuan Road, Haidian District,  
Beijing, P.R.China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304793

### 1.2. Testing Environment

Normal Temperature: 15-35°C  
Extreme Temperature: -20/+55°C  
Relative Humidity: 30-60%  
Air Pressure 990hPa-1040hPa

Note: The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

### 1.3. Project data

Project Leader: Zi Xiaogang  
Testing Start Date: 2013-02-05  
Testing End Date: 2013-03-16

### 1.4. Signature



---

Zi Xiaogang

(Prepared this test report)



---

Sun Xiangqian

(Reviewed this test report)



---

Song Chongwen

Deputy Director of the laboratory

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Sony Mobile Communications (China) Co. Ltd  
Address /Post: Sony Mobile R&D Center, No. 16, Guangshun South Street,  
Chaoyang District  
City: Beijing  
Postal Code: 100102  
Country: China  
Contact: Ma, Gang  
Telephone: +86-10-58656312  
Fax: +86-10-58659049

### **2.2. Manufacturer Information**

Company Name: Sony Mobile Communications (China) Co. Ltd  
Address /Post: Sony Mobile R&D Center, No. 16, Guangshun South Street,  
Chaoyang District  
City: Beijing  
Postal Code: 100102  
Country: China  
Contact: Ma, Gang  
Telephone: +86-10-58656312  
Fax: +86-10-58659049

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	GSM/UMTS/LTE mobile phone
Type	PM-0350-BV
FCC ID	PY7PM-0350
IC ID	4170B-PM0350
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
Cellular Frequency Band	GSM 850/GSM900/DCS1800/PCS1900 UMTS BAND I/V/VIII LTE BAND I/III/V/VII/VIII/XX
Support Functions	NFC,MP3, camera, FM radio, USB memory, GPS receiver, Mobile High-Definition Link (MHL),Bluetooth (EDR and Bluetooth Low Energy), WLAN (802.11 a/b/g/n) and Wi-Fi hotspot functions
Antenna	Integrated Antenna
MAX Radiated Power	6.94dBm EIRP(8DPSK)
MAX Conducted Power	7.93dBm(8DPSK)
Power Supply	3.7V DC by Battery

Note: Photographs of EUT are shown in ANNEX D of this test report.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	S/N	IMEI	HW Version	SW Version
#23595	CB5123BN2D	004402450616176	A	12.0.A.1.18
#23593	CB5123BN3A	004402450615822	A	12.0.A.1.18

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Revision
#22972	Travel Charger	8512W19100199	1
#22533	USB Cable	121607D20003CD2	SP1

#22972

commercial name	EP880
Type	AC-0400-EU
Manufacturer	SALCOMP

#22533

Commercial name	EC801
Type	AI-0401
Manufacturer	Sony Mobile
Length of cable	96.5cm

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. Normal Accessory Setting**

1. Fully charged battery was used during the test;
2. A microSD card was being installed in the device during the test

### **3.5. General Description**

The Equipment Under Test (EUT) is a model of GSM/UMTS/LTE mobile phone with integrated antenna and inbuilt Li-Polymer battery.

The EUT supports GSM 850/GSM900/DCS1800/PCS1900 bands, UMTS BAND I/V/VIII and LTE FDD BAND I/III/V/VII/VIII/XX. It also supports GPRS service with multi-slots class 33 and EGPRS service with multi-slots class 33. The HSDPA and HSUPA features are also supported.

It has NFC, MP3, camera, FM radio, USB memory, GPS receiver, Mobile High-Definition Link (MHL), Bluetooth (EDR and Bluetooth Low Energy), WLAN (802.11 a/b/g/n) and Wi-Fi hotspot functions.

It includes normal options: travel charger and USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	10-1-12
FCC Part15	15.209 Radiated emission limits, general requirements;	Edition
	15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
FCC Public Notice DA 00-705	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems	March 2000
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
RSS - Gen Issue3	Spectrum Management and Telecommunications - Radio Standards Specification General Requirements and Information for the Certification of Radiocommunication Equipment	2010-12
RSS -210 Issue8	Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment	2010-12



## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

**Control room/ conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Fully-anechoic chamber2** (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

**Fully-anechoic chamber3** (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz

**Additional Humidity Requirements for Electrostatic Discharge Test:** Min. = 30%, Max. = 60%.

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Modulation	Sub-clause of Part15C	IC	Verdict
Peak Output Power (Conducted)	GFSK/	15.247 (b)(1)	RSS-210 A8.4 (2)	P
	$\pi/4$ DQPSK			P
	8DPSK			P
Peak Output Power(Radiated)	GFSK	15.247 (b)(1)	RSS-210 A8.4 (2)	P
Antenna Gain	GFSK/	None		P
Frequency Band Edges	GFSK	15.247 (d)	RSS-210 A8.5	P
	$\pi/4$ DQPSK			P
	8DPSK			P
Conducted Emission	GFSK	15.247 (d)	RSS-210 A8.5	P
	$\pi/4$ DQPSK			P
	8DPSK			P
Radiated Emission	GFSK	15.247(d), 15.205, 15.209, 15.109	RSS-210 A8.5	P
	$\pi/4$ DQPSK			P
	8DPSK			P
Time of Occupancy (Dwell Time)	GFSK	15.247 (a) (1)(iii)	RSS-210 A8.1 (4)	P
	$\pi/4$ DQPSK			P
	8DPSK			P
20dB Bandwidth	GFSK	15.247 (a)(1)	RSS-210 A8.1 (1)	P
	$\pi/4$ DQPSK			P
	8DPSK			P
Carrier Frequency Separation	GFSK	15.247 (a)(1)	RSS-210 A8.1 (2)	P
	$\pi/4$ DQPSK			P
	8DPSK			P
Number of hopping channels	GFSK	15.247 (a)(1)(iii)	RSS-210 A8.1 (4)	P
	$\pi/4$ DQPSK			P
	8DPSK			P
AC Powerline Conducted Emission	GFSK	15.107, 15.207	RSS-Gen 7.2.2	P

Please refer to **ANNEX A** for detail.

The measurement is made according to Public notice DA 00-705 and ANSI C63.4.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by TMC
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

## 6.2. Statements

The test cases as listed in section 6.1 of this report for the EUT specified in section 3 was performed by TMC and according to the standards or reference documents listed in section 4.2 The EUT met all requirements of the standards or reference documents.

This report only deals with the Bluetooth including EDR functions among the features described in section 3.

## 6.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage
V min	Low Voltage
V max	High Voltage
H nom	Norm Humidity
A nom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T nom	24°C
Voltage	V nom	3.7V(By battery)
Humidity	H nom	37%
Air Pressure	A nom	1020hPa

## 7. Test Equipments Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSU26	200030	Rohde & Schwarz	2013-12-18
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	2014-02-03

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	2013-11-07
2	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
3	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	2014-06-30
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	2014-06-30
6	Universal Radio Communication Tester	CMU200	109914	Rohde & Schwarz	2014-04-18
7	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2014-04-15
8	Pre-amplifier(18GHz)	SCU18	1005277	Rohde & Schwarz	/
9	Pre-amplifier(26.5GHz)	SCU26	1006788	Rohde & Schwarz	/

### Anechoic chamber

Fully anechoic chamber by Frankonia German.

Note : The pre amplifiers is calibrated with routes calibration every time before test, therefore no need for the calibration date.


## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

The measurement is made according to Public notice DA 00-705 and ANSI C63.4.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

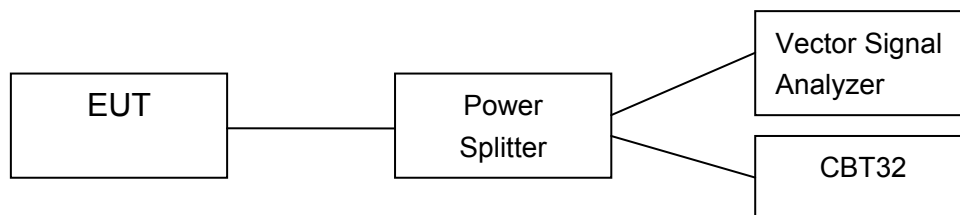

#### A.1.2. Radiated Emission Measurements


The measurement is made according to Public notice DA 00-705 and ANSI C63.4

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

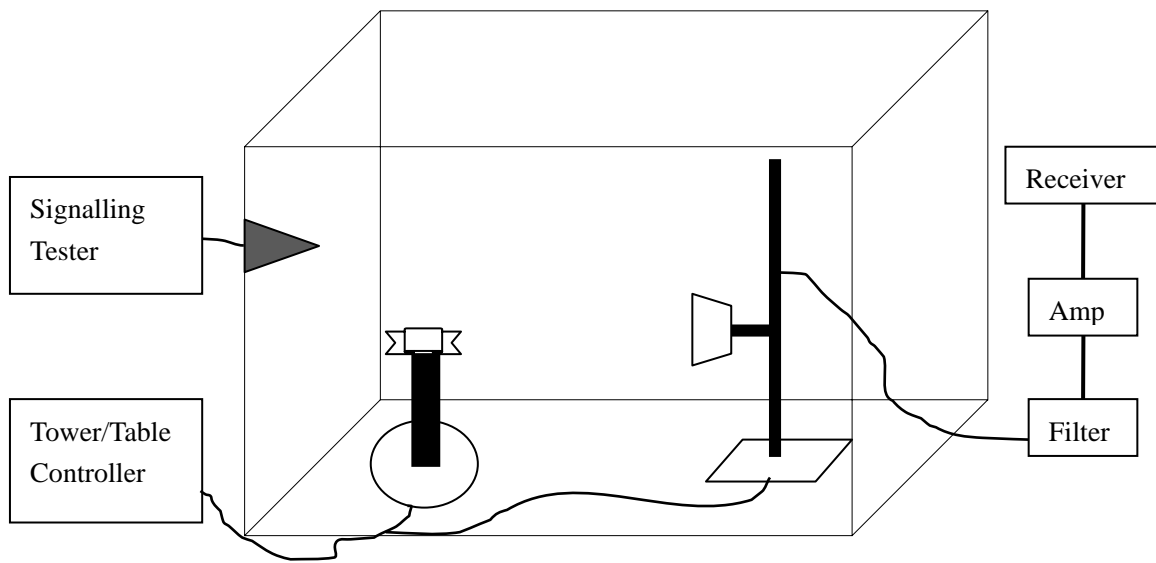

## A.2. Peak Output Power

### Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)/ / RSS-210 A8.4 (2)	< 30

The measurement is made according to Public notice DA 00-705 and ANSI C63.4.

### Measurement Results:

#### A.2.1 Antenna gain

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the EUT.

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz
GFSK (Conducted)	6.10	6.75	4.01
GFSK (Radiated)	5.60	5.72	3.42
Gain(dBi)	-0.50	-1.03	-0.59

**Conclusion: PASS**

#### A.2.2 Conducted Output Power

EUT ID: #23595

Peak(RBW=VBW=1MHz; SPAN=5MHz; Detector: Peak)

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
GFSK (dBm)	6.10	6.75	4.01	P
$\pi/4$ DQPSK (dBm)	7.06	7.65	5.01	P
8DPSK (dBm)	7.44	7.93	5.39	P

Average(RBW=VBW=1MHz; SPAN=5MHz; Detector: RMS)

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
GFSK (dBm)	5.72	6.34	3.62	P
$\pi/4$ DQPSK (dBm)	4.30	4.86	2.15	P
8DPSK (dBm)	4.31	4.87	2.16	P

**Measurement Uncertainty:  $\pm 1.17$ dB**

**Conclusion: PASS**

#### A.2.3 Radiated Output Power

EUT ID: #23593

Peak(RBW=VBW=1MHz; SPAN=5MHz; Detector: Peak)

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
GFSK (dBm)	5.60	5.72	3.42	P
$\pi/4$ DQPSK* (dBm)	6.56	6.62	4.42	P
8DPSK* (dBm)	6.94	6.90	4.80	P

Average

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
GFSK * (dBm)	5.22	5.31	3.03	P
$\pi/4$ DQPSK * (dBm)	3.80	3.83	1.56	P
8DPSK * (dBm)	3.81	3.84	1.57	P

Note:\* These values are calculated with the antenna gain

**Measurement Uncertainty:  $\pm 1.98$ dB****Conclusion: PASS**



### A.3. Frequency Band Edges - Conducted

#### Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d) RSS-210 A8.4(2)	<-20  Note: The measurement results are calculated as power measured in any 100KHz bandwidth outside the frequency band in dBm minus power measured in the 100 kHz bandwidth within the band that contains the highest level of the desired power

The measurement is made according to Public notice DA 00-705 and ANSI C63.4.

#### Measurement Result:

##### For GFSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.1	-58.95	P
	Hopping ON	Fig.2	-58.68	P
78	Hopping OFF	Fig.3	-63.16	P
	Hopping ON	Fig.4	-62.46	P

##### For $\pi/4$ DQPSK


Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.5	-57.52	P
	Hopping ON	Fig.6	-61.81	P
78	Hopping OFF	Fig.7	-61.97	P
	Hopping ON	Fig.8	-61.93	P

##### For 8DPSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.9	-58.28	P
	Hopping ON	Fig.10	-57.66	P
78	Hopping OFF	Fig.11	-62.51	P
	Hopping ON	Fig.12	-61.50	P


**Conclusion: PASS**

**Test graphs as below**

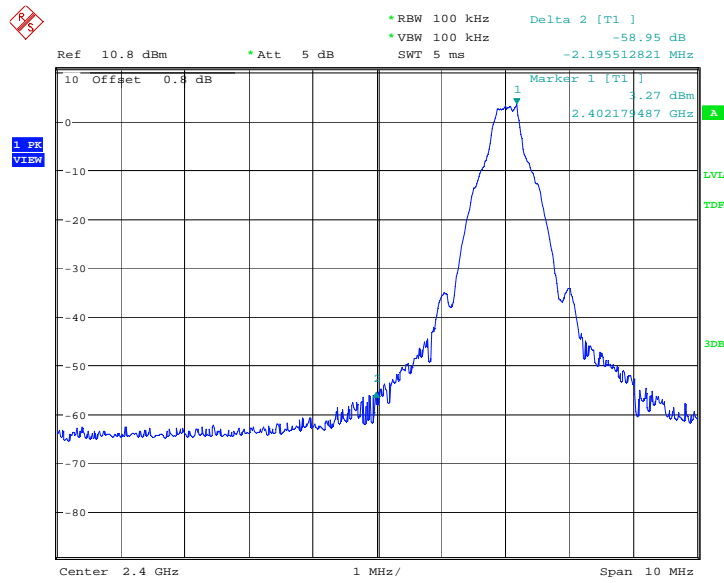


Date: 7.FEB.2013 01:30:34

Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

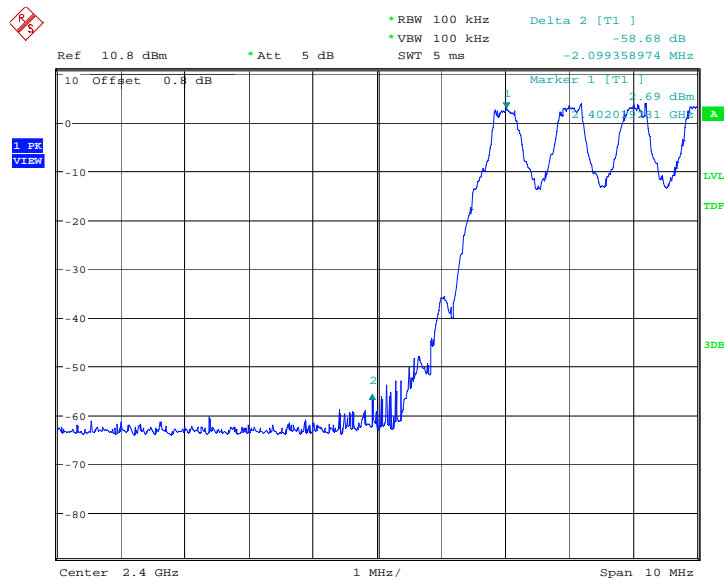


Date: 7.FEB.2013 01:32:54

Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

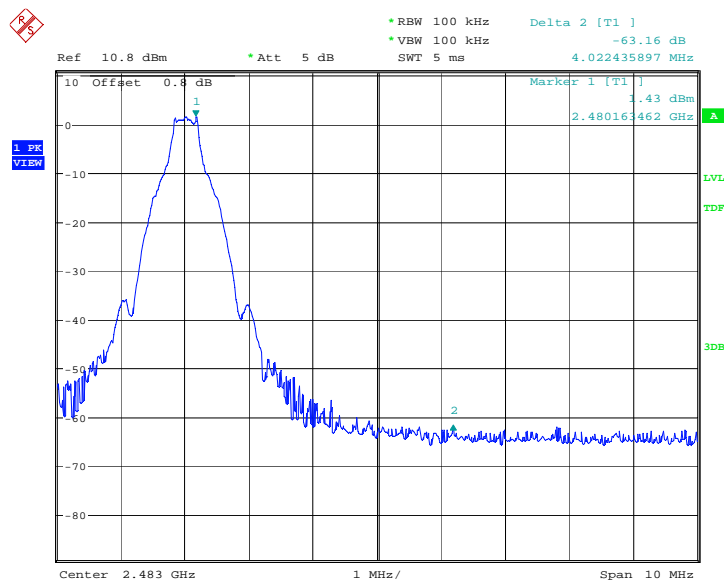


Date: 7.FEB.2013 01:30:51

Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

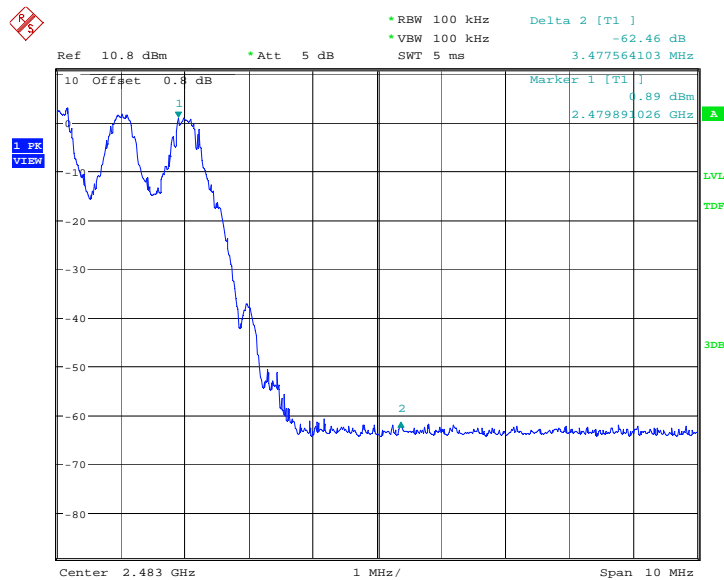


Date: 7.FEB.2013 01:34:56

Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

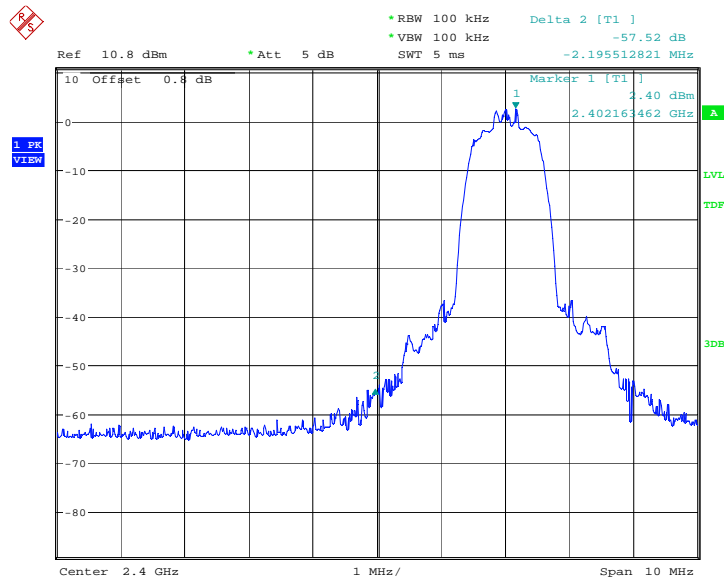


Date: 7.FEB.2013 01:52:01

Fig.5. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping Off

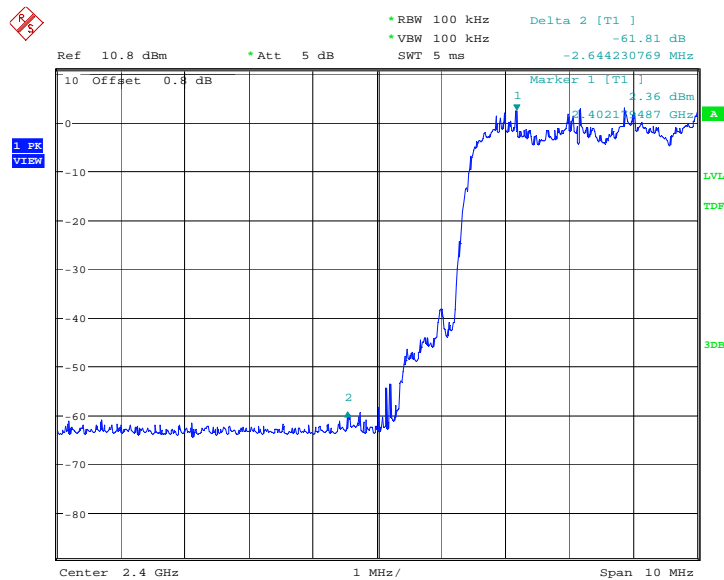


Date: 7.FEB.2013 01:54:21

Fig.6. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping On

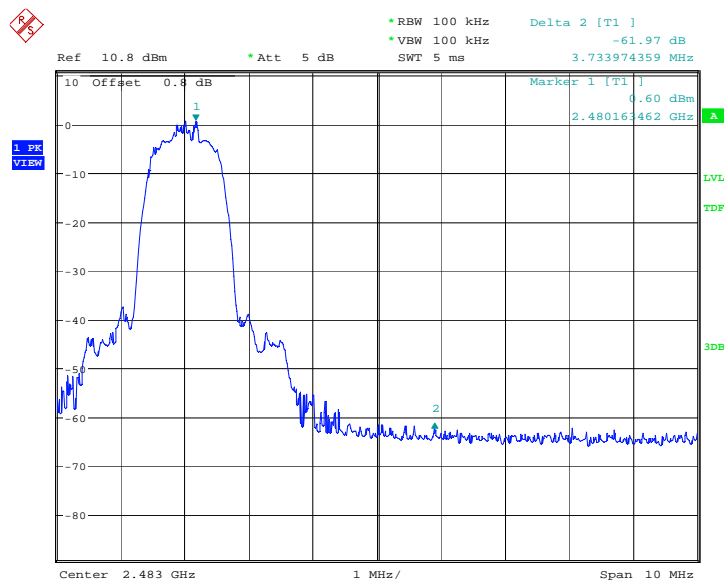


Date: 7.FEB.2013 01:52:18

Fig.7. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping Off

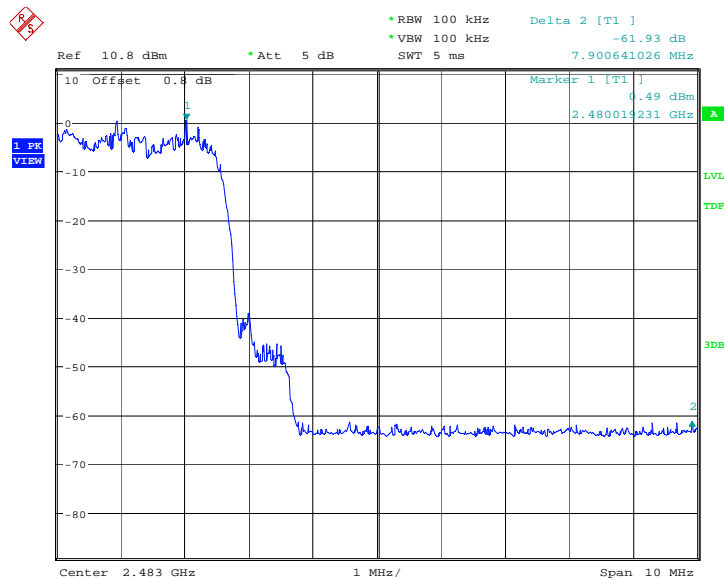


Date: 7.FEB.2013 01:56:23

Fig.8. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping On

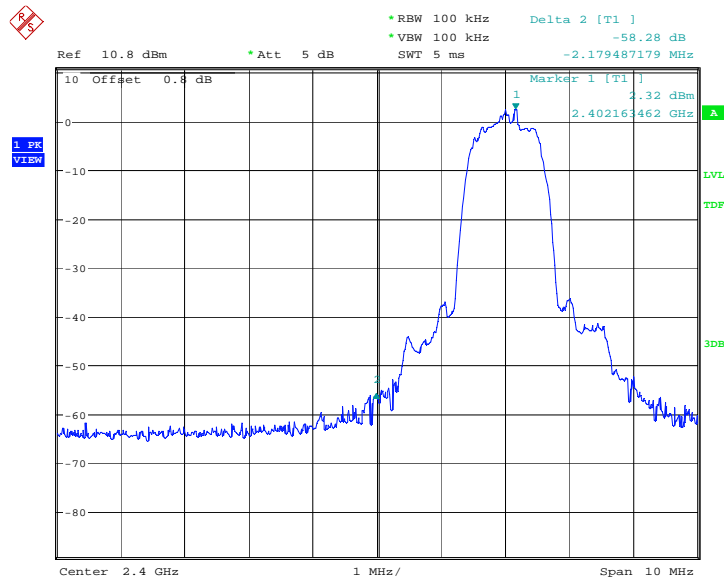


Date: 7.FEB.2013 02:13:26

Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

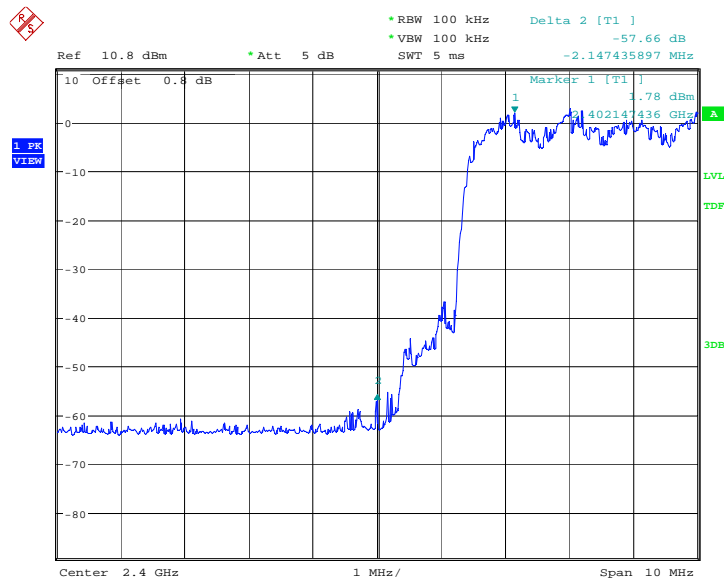


Date: 7.FEB.2013 02:15:46

Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

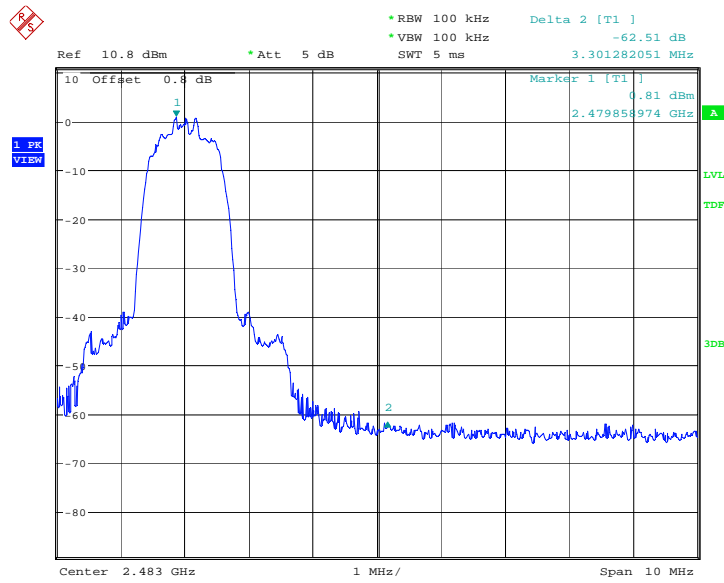

Date: 7.FEB.2013 02:13:43

Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

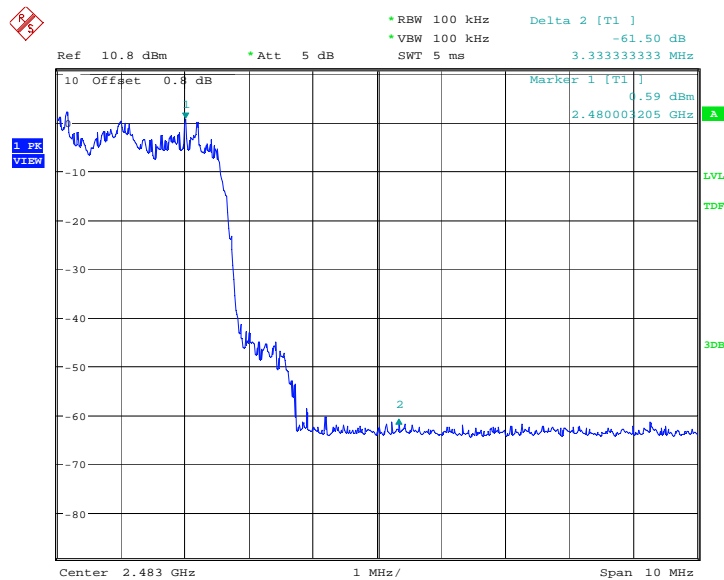

Date: 7.FEB.2013 02:17:48

Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On

#### A.4. Conducted Emission

##### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) RSS-210 A8.5	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

##### Measurement Results:

###### For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.13	P
	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3 GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P
Ch 39 2441 MHz	Center Frequency	Fig.18	P
	30 MHz ~ 1 GHz	Fig.19	P
	1 GHz ~ 3 GHz	Fig.20	P
	3 GHz ~ 10 GHz	Fig.21	P
	10 GHz ~ 26 GHz	Fig.22	P
Ch 78 2480 MHz	Center Frequency	Fig.23	P
	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 10 GHz	Fig.26	P
	10 GHz ~ 26 GHz	Fig.27	P

###### For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.28	P
	30 MHz ~ 1 GHz	Fig.29	P
	1 GHz ~ 3 GHz	Fig.30	P
	3 GHz ~ 10 GHz	Fig.31	P
	10 GHz ~ 26 GHz	Fig.32	P
Ch 39 2441 MHz	Center Frequency	Fig.33	P
	30 MHz ~ 1 GHz	Fig.34	P
	1 GHz ~ 3 GHz	Fig.35	P
	3 GHz ~ 10 GHz	Fig.36	P
	10 GHz ~ 26 GHz	Fig.37	P
Ch 78 2480 MHz	Center Frequency	Fig.38	P
	30 MHz ~ 1 GHz	Fig.39	P




	1 GHz ~ 3 GHz	Fig.40	P
	3 GHz ~ 10 GHz	Fig.41	P
	10 GHz ~ 26 GHz	Fig.42	P

**For 8DPSK**

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	P
	30 MHz ~ 1 GHz	Fig.44	P
	1 GHz ~ 3 GHz	Fig.45	P
	3 GHz ~ 10 GHz	Fig.46	P
	10 GHz ~ 26 GHz	Fig.47	P
Ch 39 2441 MHz	Center Frequency	Fig.48	P
	30 MHz ~ 1 GHz	Fig.49	P
	1 GHz ~ 3 GHz	Fig.50	P
	3 GHz ~ 10 GHz	Fig.51	P
	10 GHz ~ 26 GHz	Fig.52	P
Ch 78 2480 MHz	Center Frequency	Fig.53	P
	30 MHz ~ 1 GHz	Fig.54	P
	1 GHz ~ 3 GHz	Fig.55	P
	3 GHz ~ 10 GHz	Fig.56	P
	10 GHz ~ 26 GHz	Fig.57	P


**Conclusion: PASS**

**Test graphs as below**

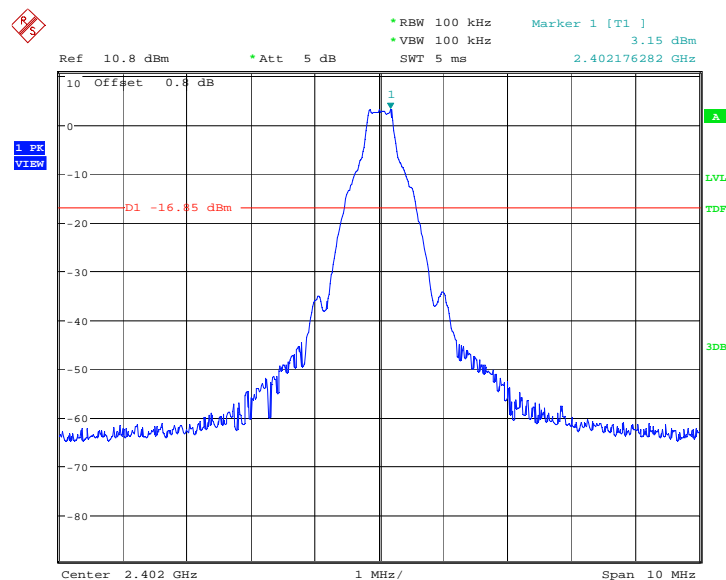


Date: 7.FEB.2013 01:35:15

Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz

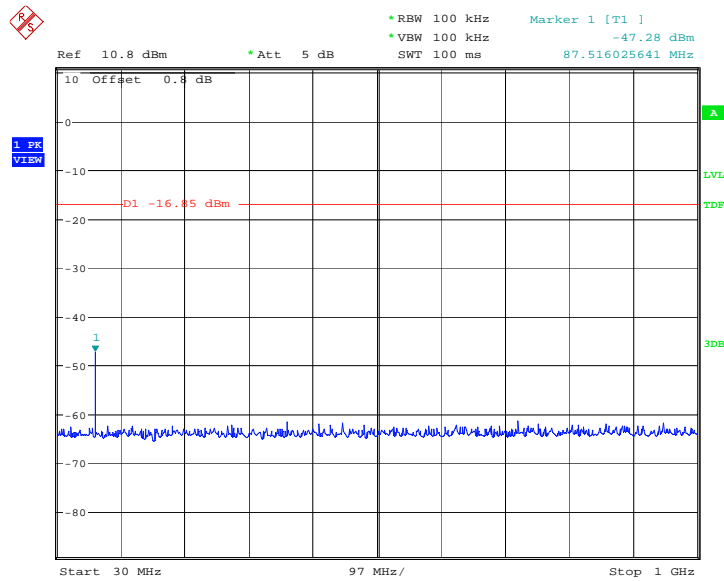


Date: 7.FEB.2013 01:35:31

Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

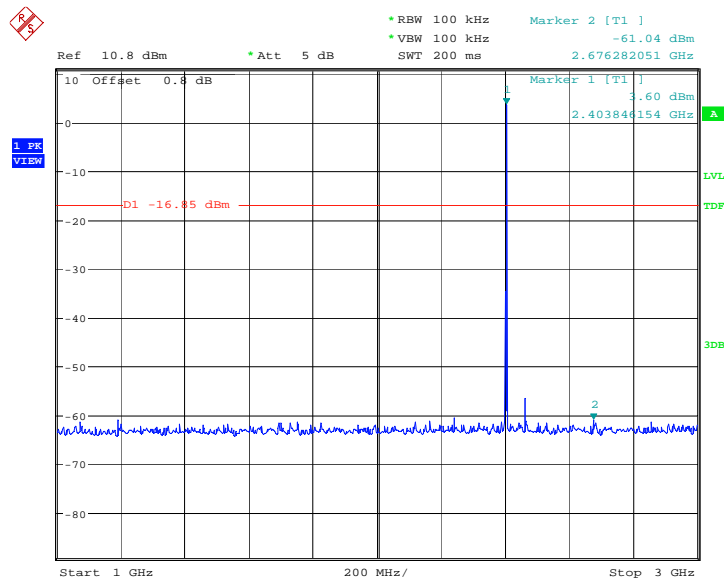


Date: 7.FEB.2013 01:36:03

Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

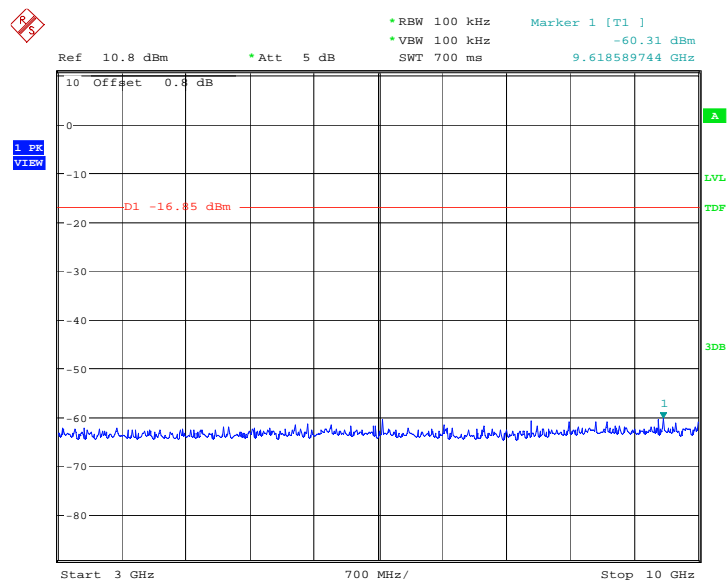


Date: 7.FEB.2013 01:36:20

Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

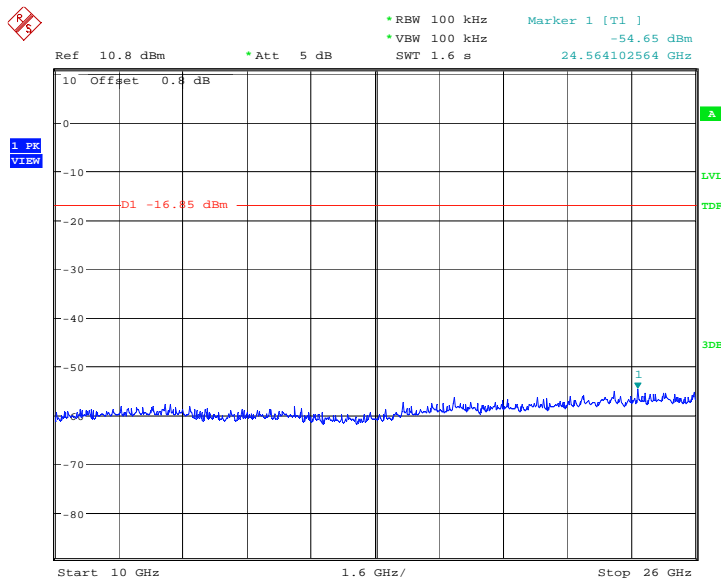


Date: 7.FEB.2013 01:36:36

Fig.17. Conducted spurious emission: GFSK, Channel 0, 10GHz - 26GHz

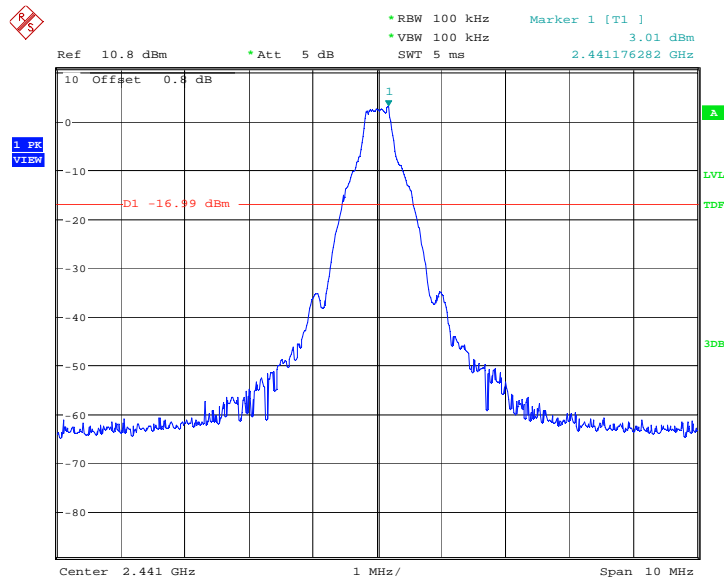


Date: 7.FEB.2013 01:36:53

Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

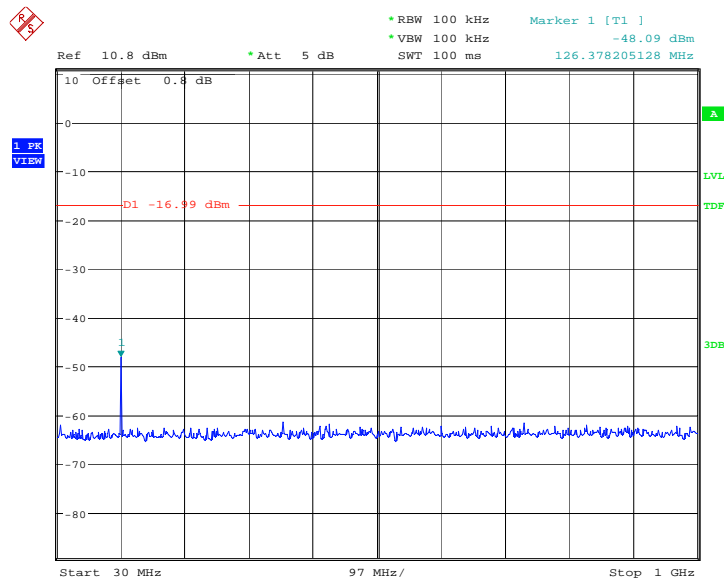


Date: 7.FEB.2013 01:37:10

Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

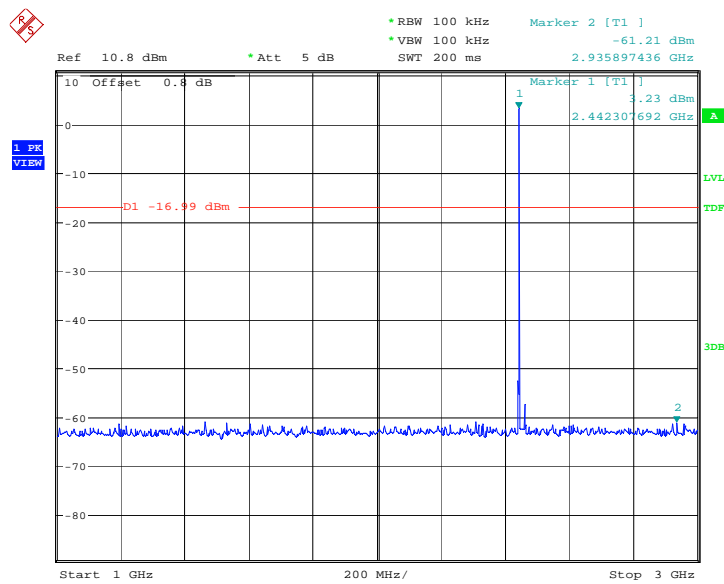


Date: 7.FEB.2013 01:37:41

Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

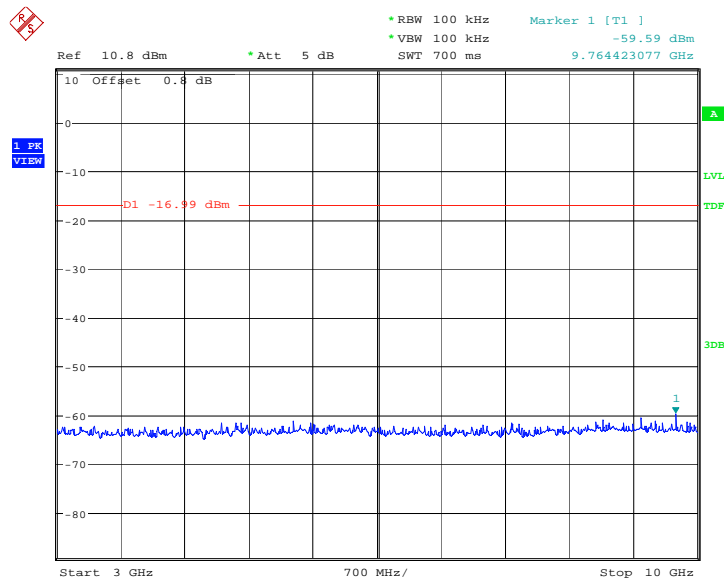


Date: 7.FEB.2013 01:37:58

Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

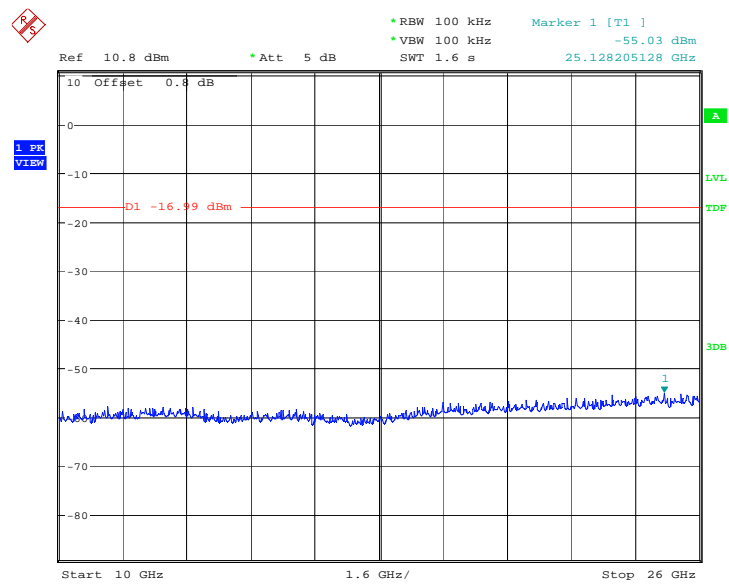


Date: 7.FEB.2013 01:38:14

Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

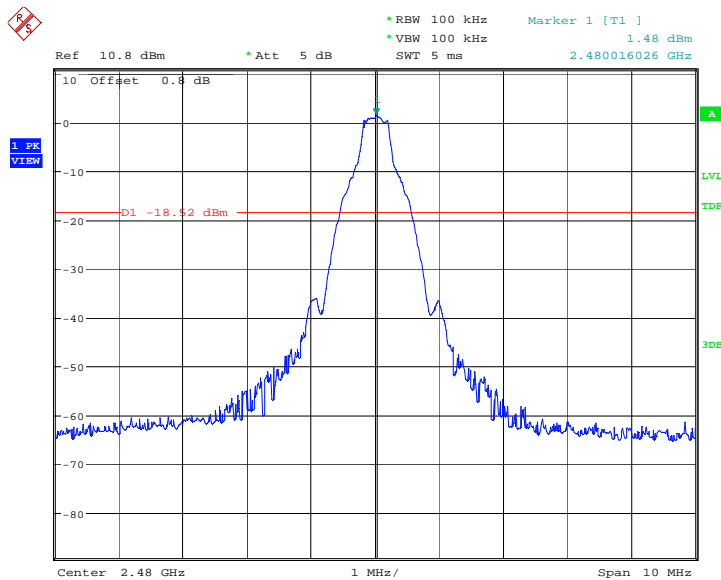


Date: 7.FEB.2013 01:38:31

Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz

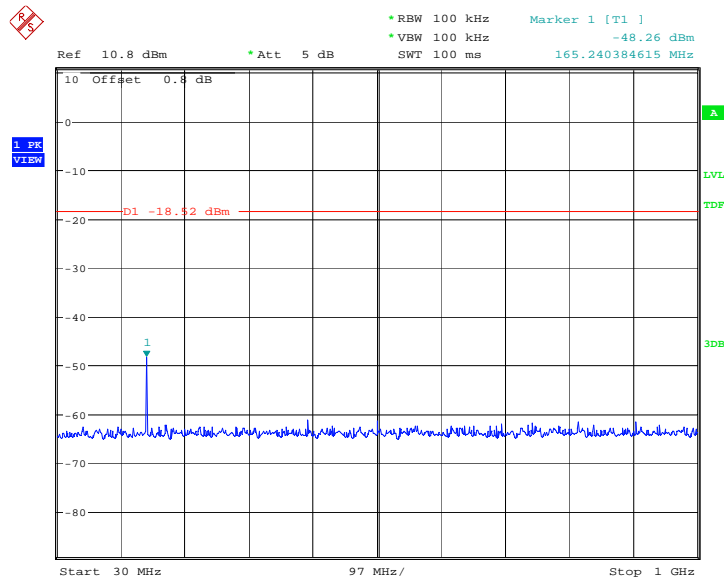


Date: 7.FEB.2013 01:38:48

Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

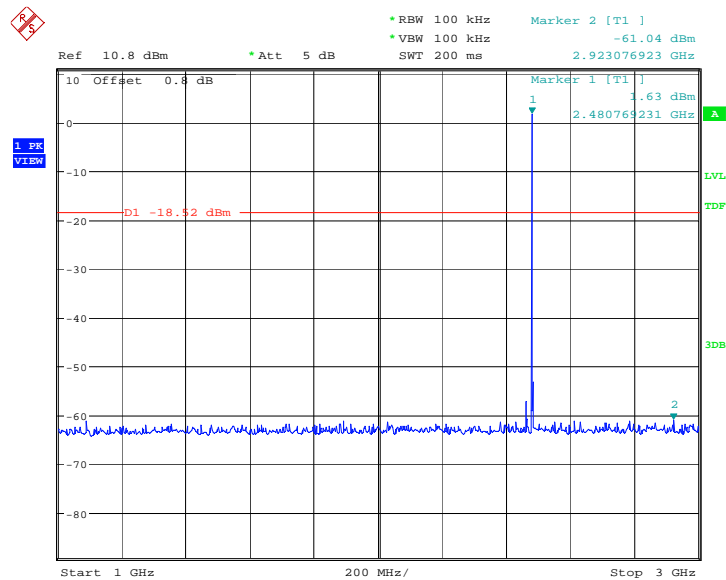


Date: 7.FEB.2013 01:39:19

Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

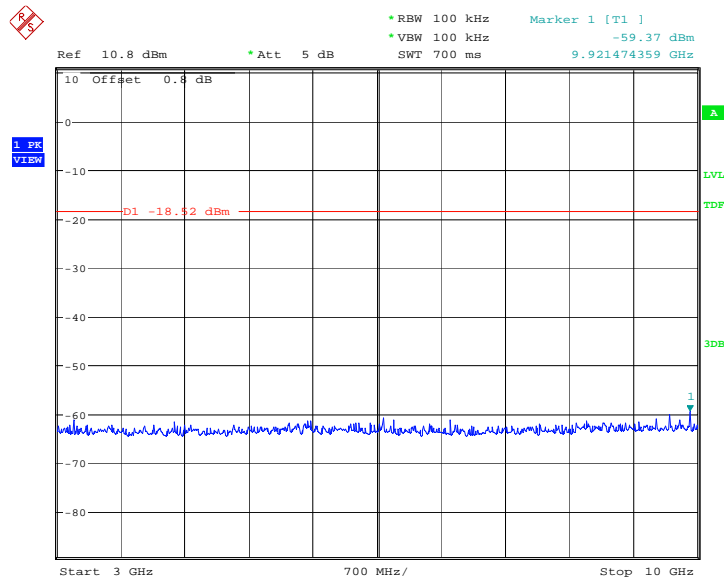

Date: 7.FEB.2013 01:39:36


Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

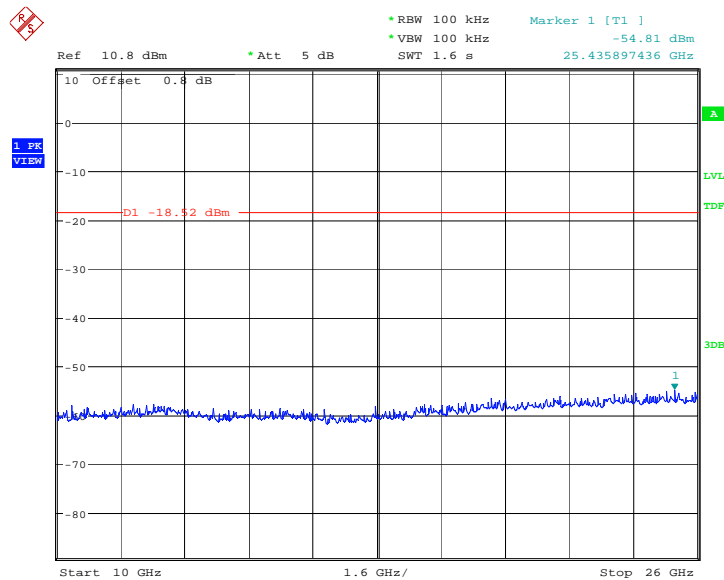

Date: 7.FEB.2013 01:39:52


Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz



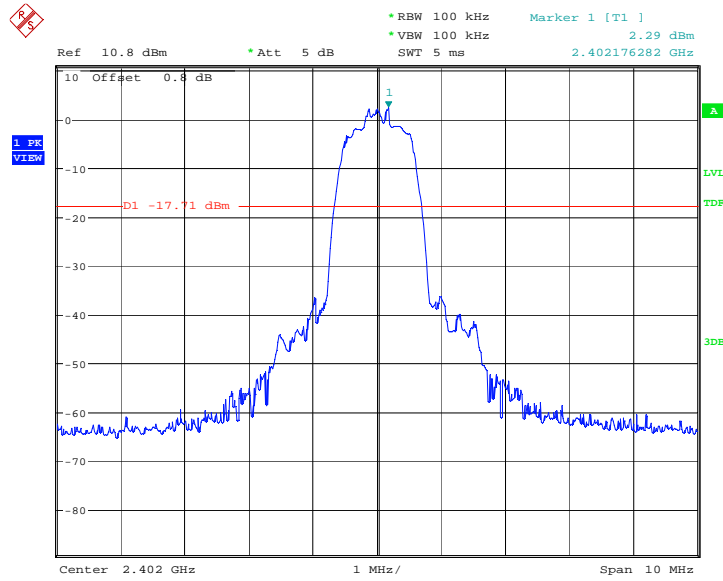


Date: 7.FEB.2013 01:56:43

Fig.28. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0,2402MHz

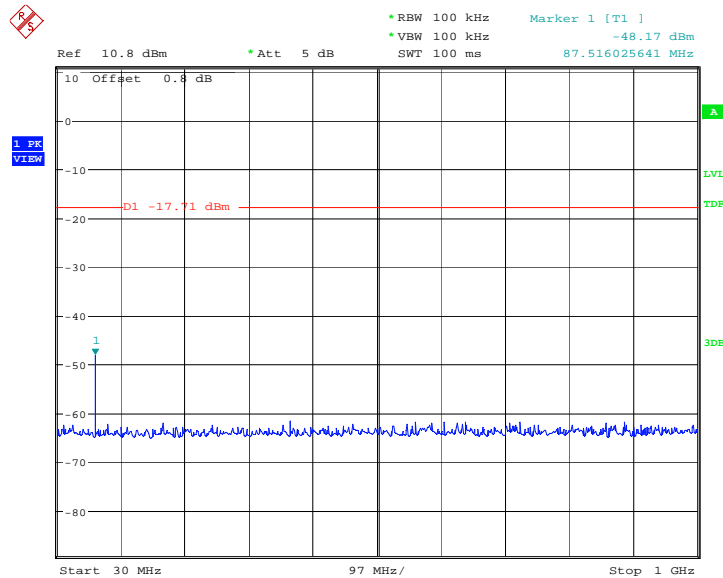


Date: 7.FEB.2013 01:56:59

Fig.29. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 30MHz - 1GHz

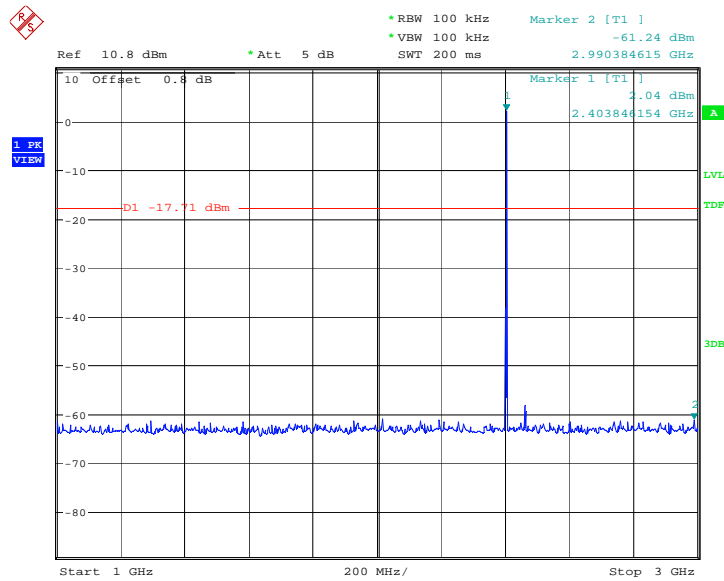


Date: 7.FEB.2013 01:57:31

Fig.30. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 1GHz - 3GHz

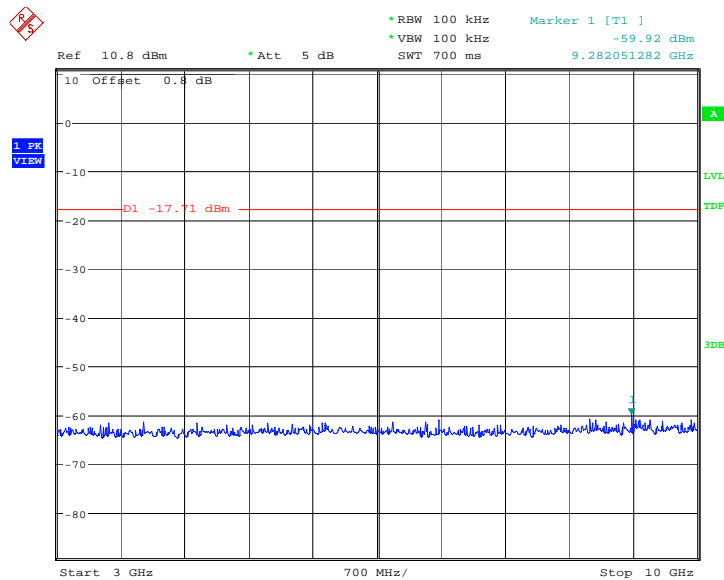


Date: 7.FEB.2013 01:57:47

Fig.31. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 3GHz - 10GHz

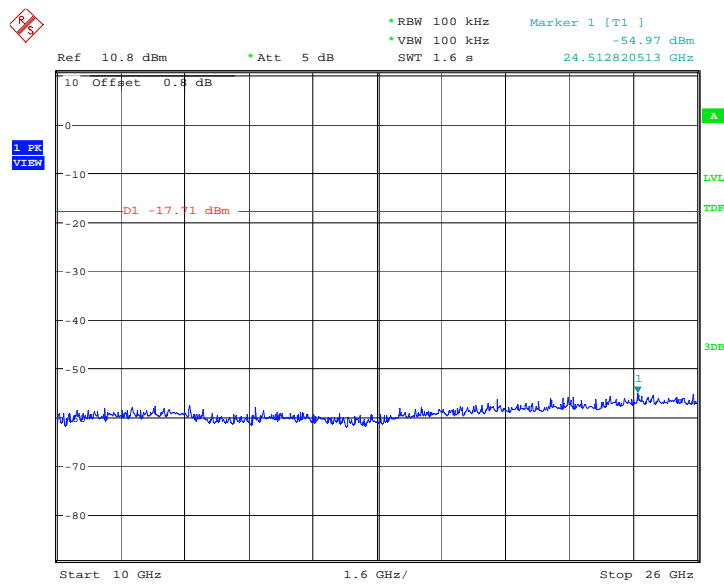


Date: 7.FEB.2013 01:58:04

Fig.32. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 10GHz - 26GHz

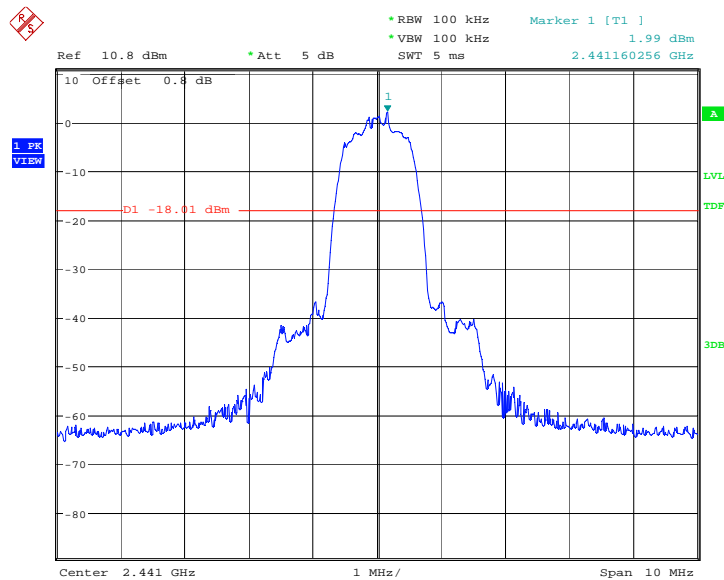


Date: 7.FEB.2013 01:58:21

Fig.33. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 2441MHz

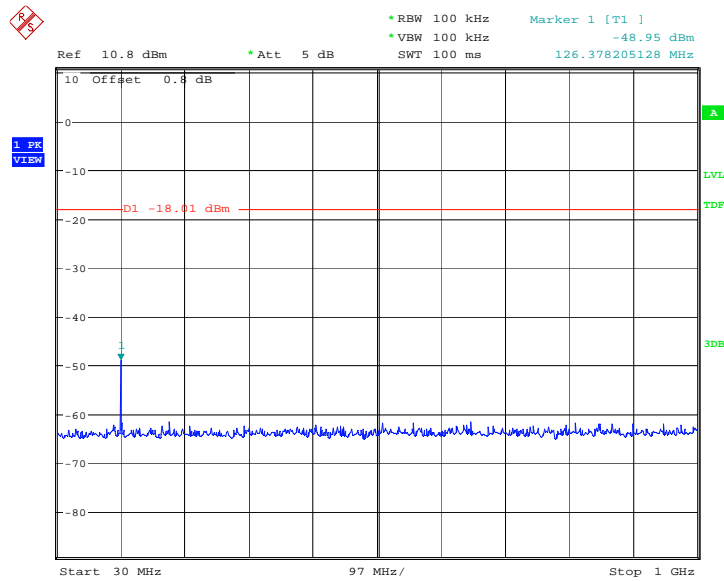


Date: 7.FEB.2013 01:58:37

Fig.34. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 30MHz - 1GHz

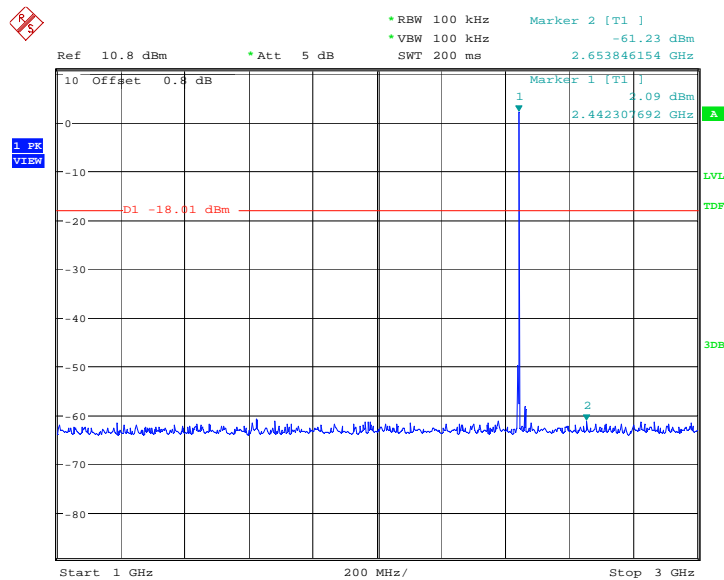


Date: 7.FEB.2013 01:59:09

Fig.35. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 1GHz - 3GHz

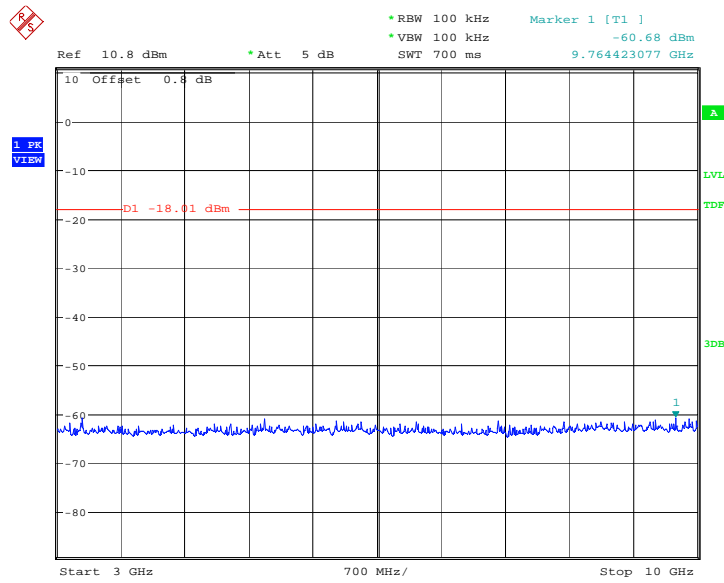


Date: 7.FEB.2013 01:59:25

Fig.36. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 3GHz - 10GHz

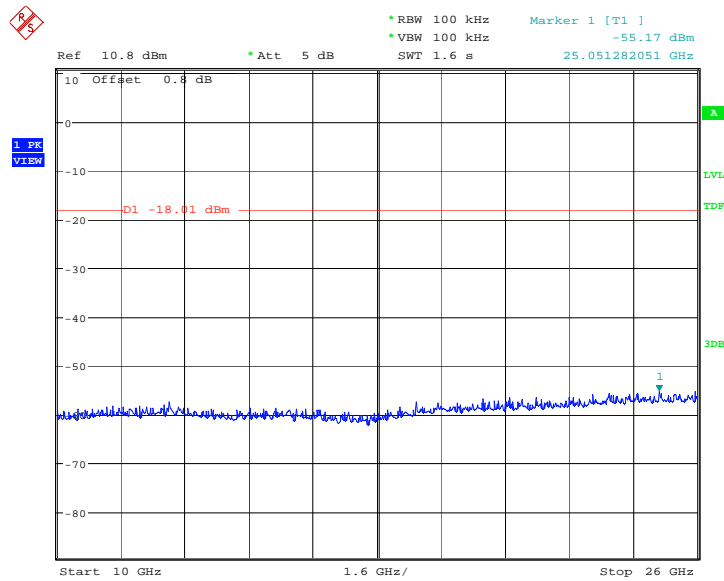


Date: 7.FEB.2013 01:59:42

Fig.37. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 10GHz – 26GHz

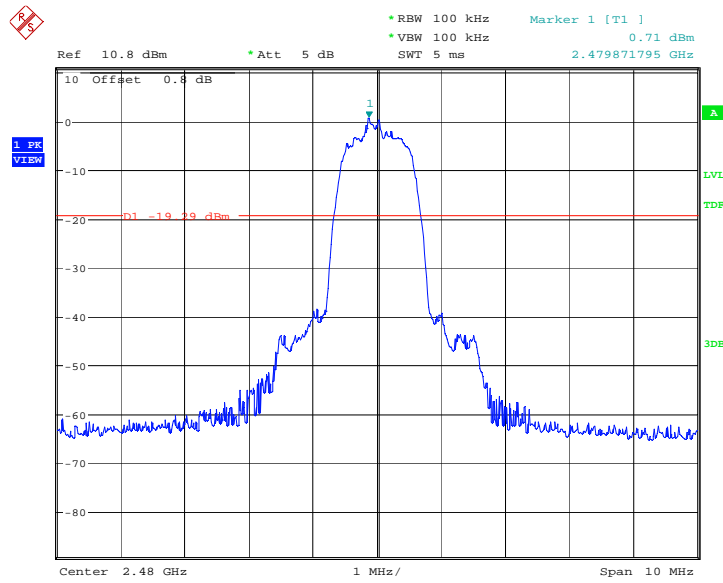


Date: 7.FEB.2013 01:59:59

Fig.38. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 2480MHz

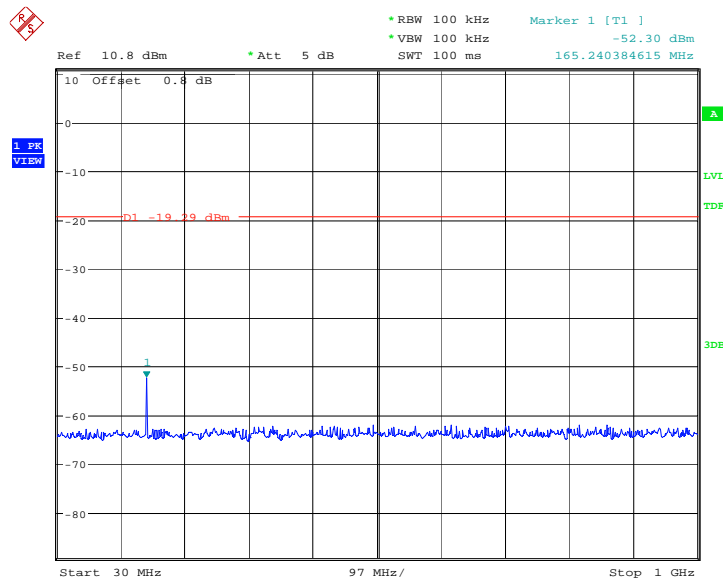


Date: 7.FEB.2013 02:00:15

Fig.39. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 30MHz - 1GHz

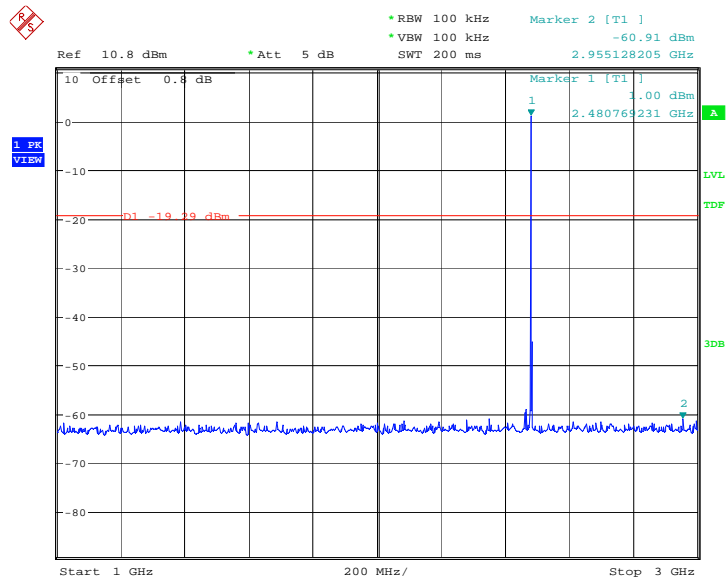


Date: 7.FEB.2013 02:00:47

Fig.40. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 1GHz - 3GHz

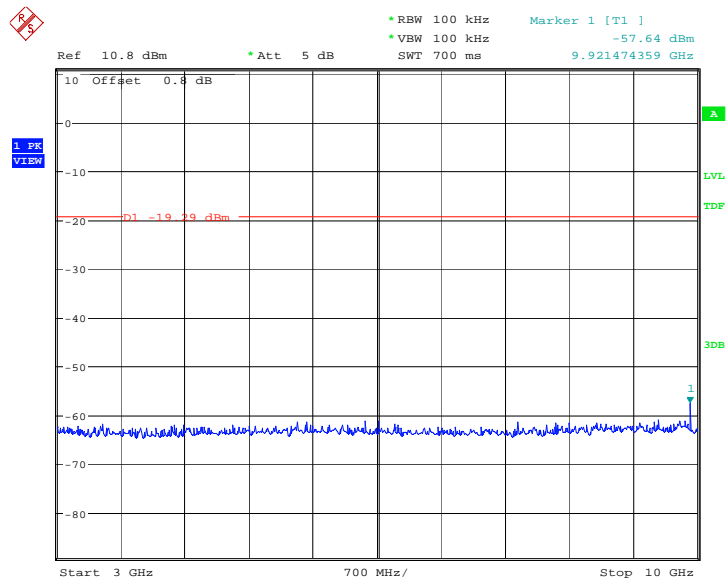


Date: 7.FEB.2013 02:01:03

Fig.41. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 3GHz - 10GHz

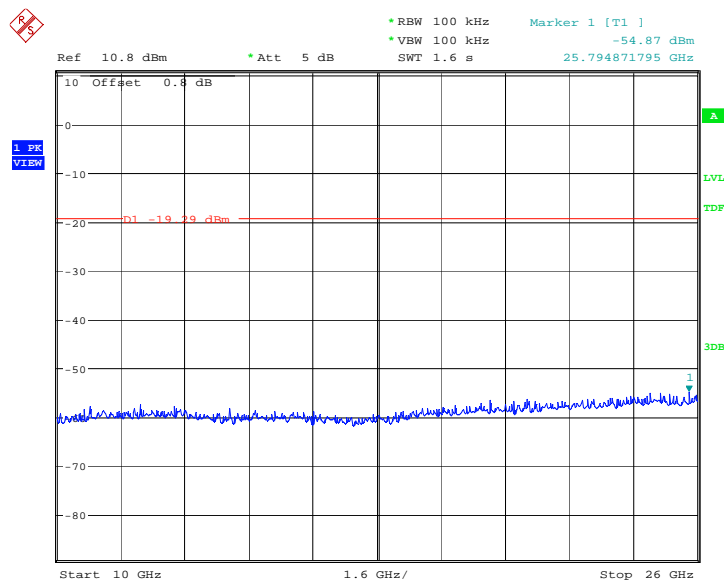

Date: 7.FEB.2013 02:01:20


Fig.42. Fig.30 Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 10GHz - 26GHz

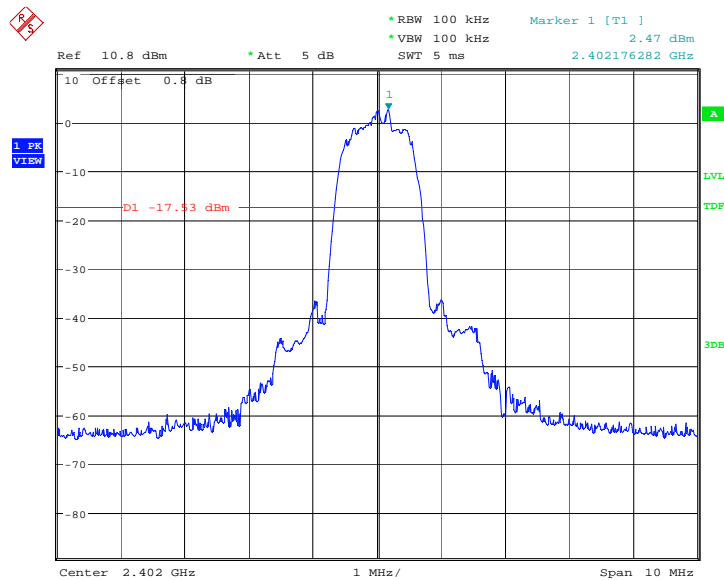

Date: 7.FEB.2013 02:18:07


Fig.43. Conducted spurious emission: 8DPSK, Channel 0,2402MHz



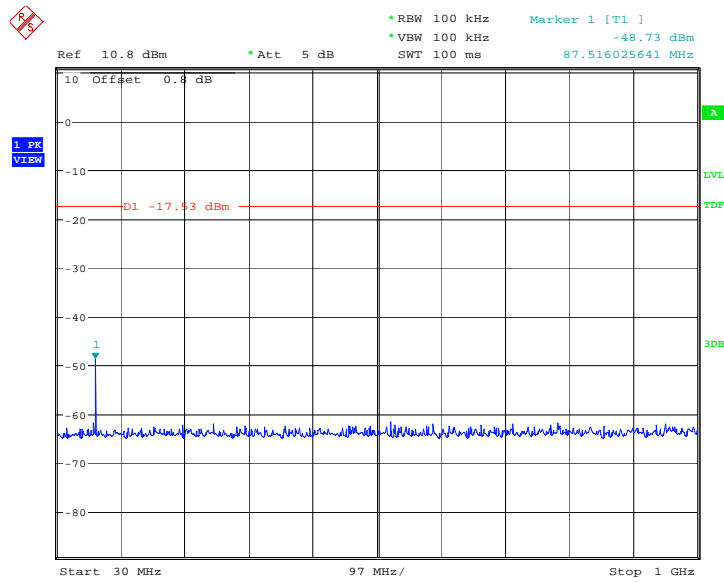


Date: 7.FEB.2013 02:18:24

Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

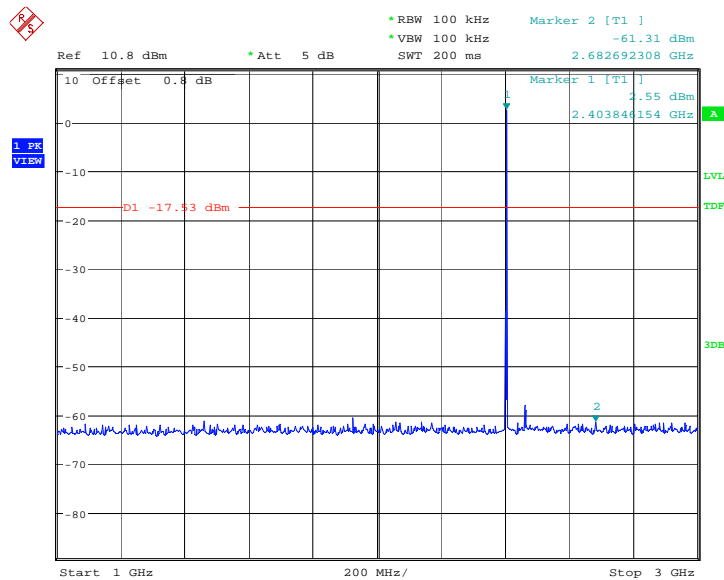


Date: 7.FEB.2013 02:18:56

Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

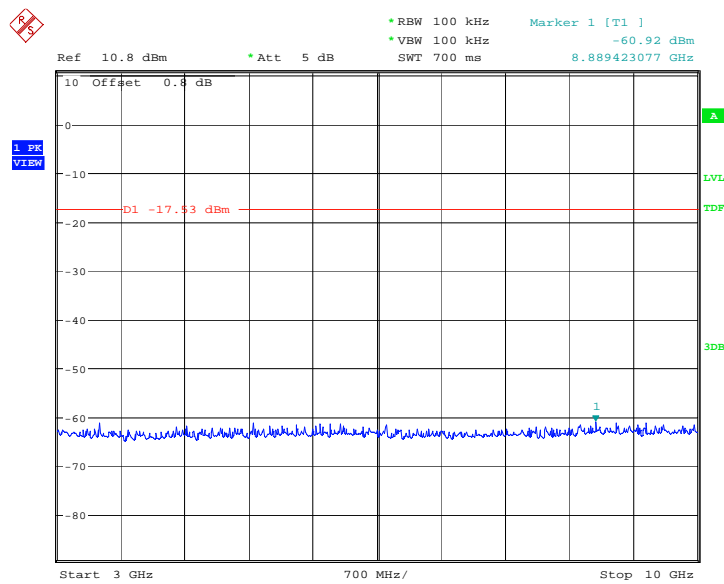


Date: 7.FEB.2013 02:19:12

Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

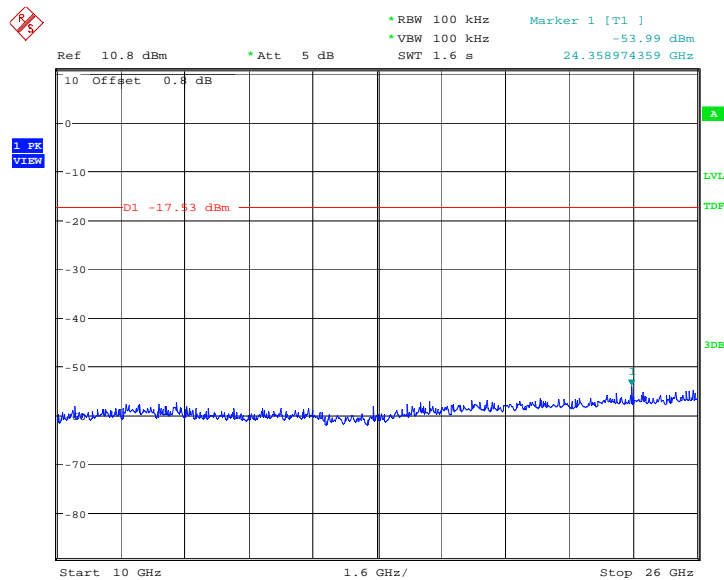


Date: 7.FEB.2013 02:19:29

Fig.47. Conducted spurious emission: 8DPSK, Channel 0, 10GHz - 26GHz

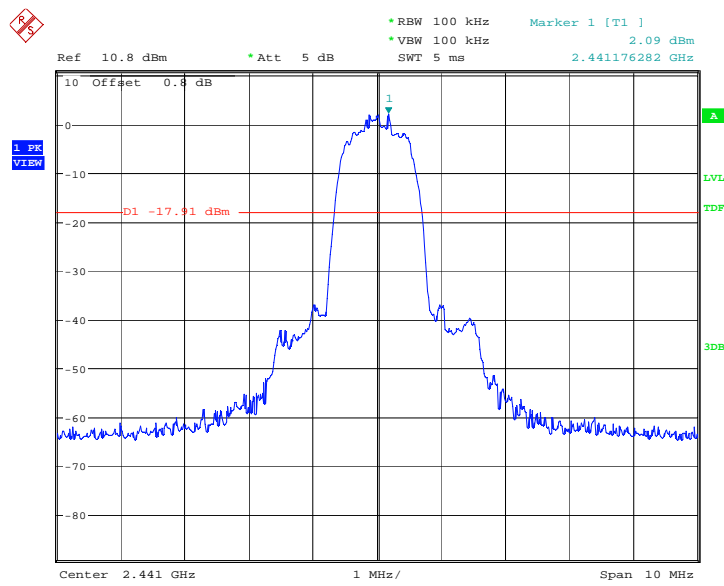


Date: 7.FEB.2013 02:19:46

Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

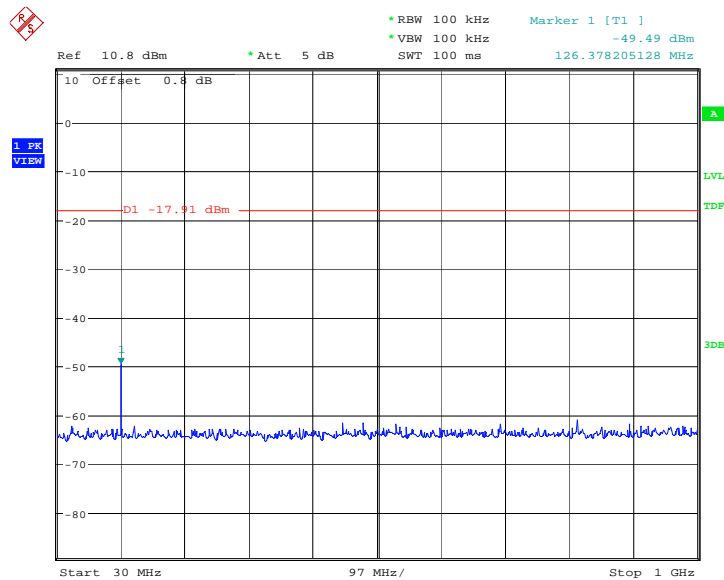


Date: 7.FEB.2013 02:20:02

Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

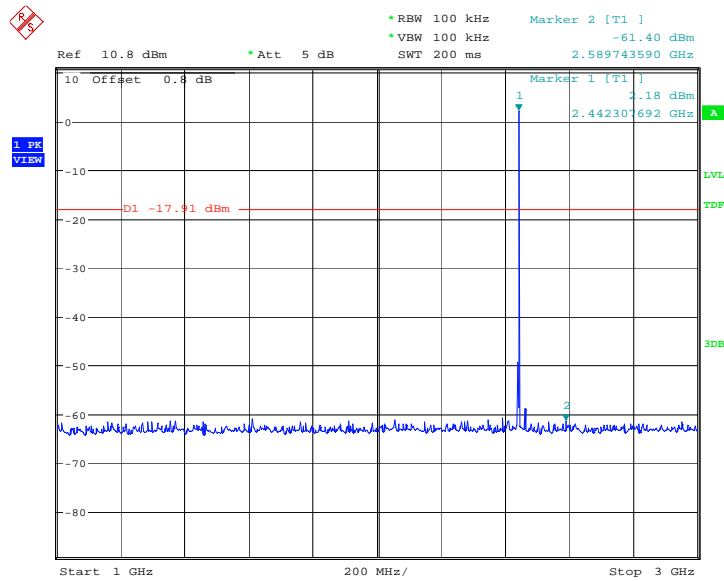


Date: 7.FEB.2013 02:20:34

Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

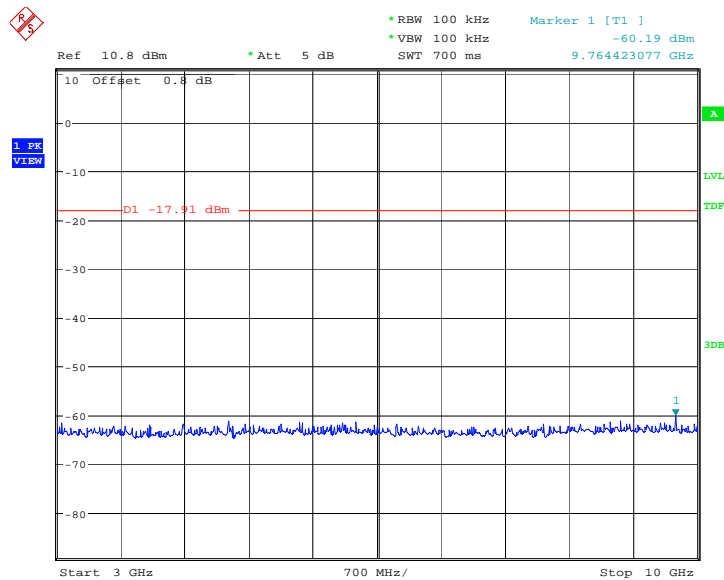


Date: 7.FEB.2013 02:20:50

Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

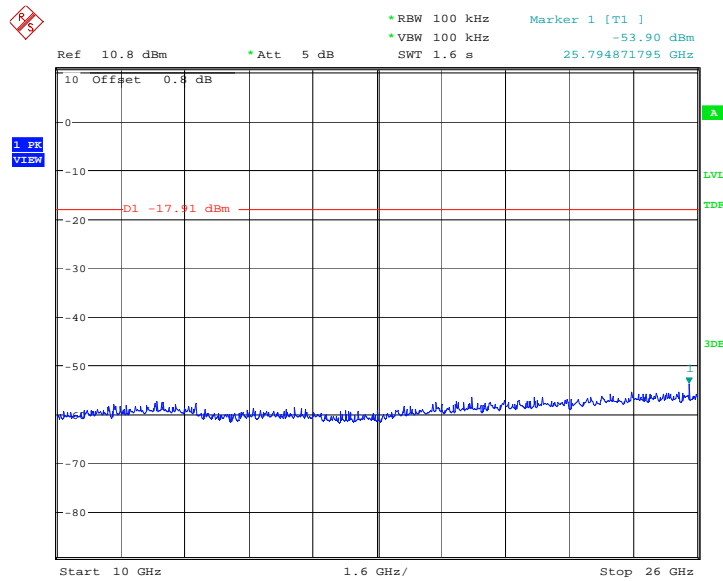


Date: 7.FEB.2013 02:21:07

Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

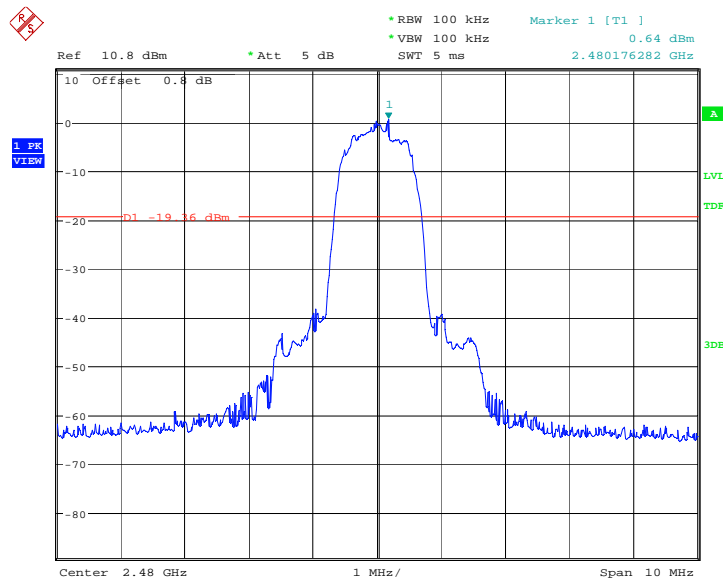


Date: 7.FEB.2013 02:21:24

Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

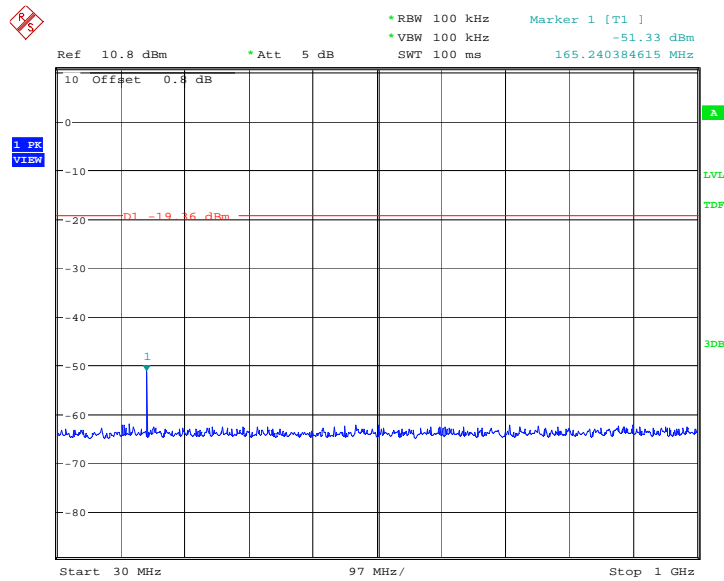


Date: 7.FEB.2013 02:21:40

Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

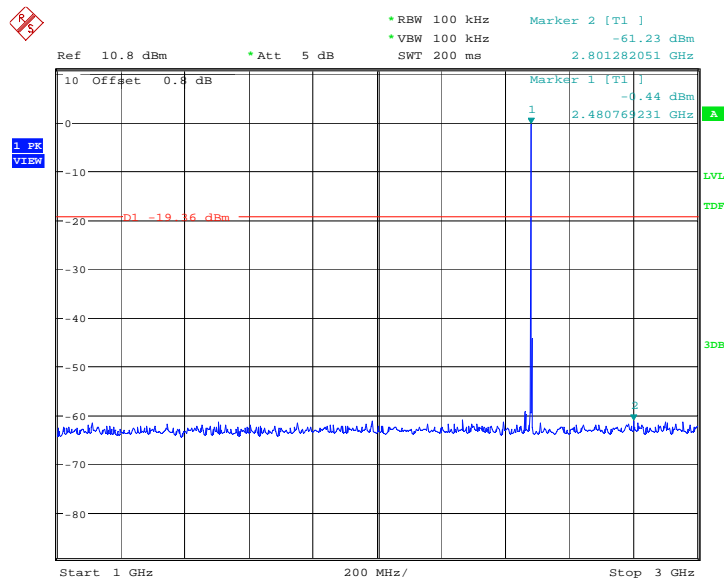


Date: 7.FEB.2013 02:22:12

Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

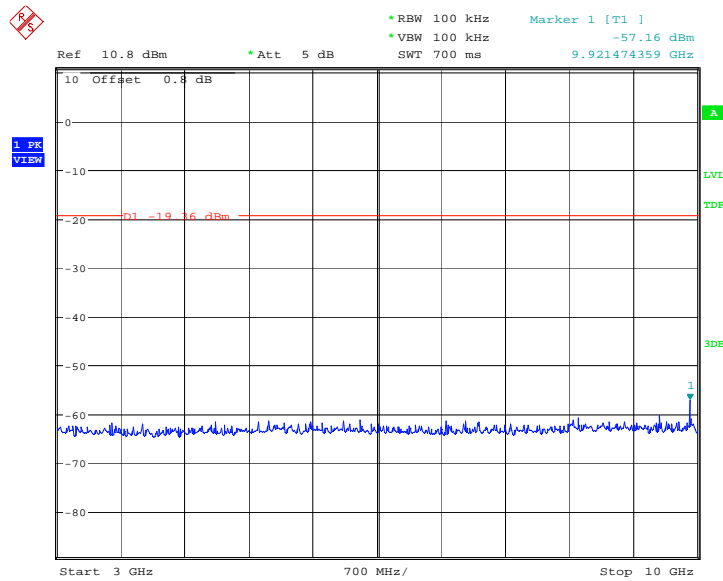

Date: 7.FEB.2013 02:22:28

Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

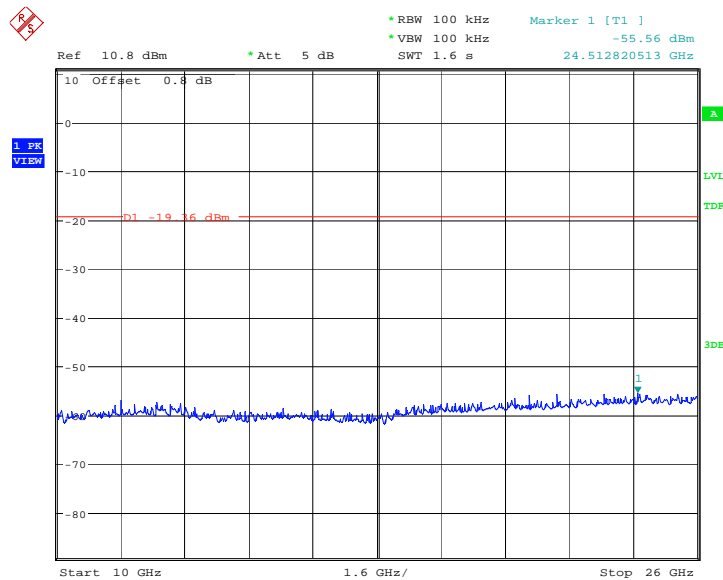

Date: 7.FEB.2013 02:22:45

Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

### A.5. Radiated Emission

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	Listed as follows
RSS-210 A8.5	

Frequency (MHz) Field strength	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

#### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

#### Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
0.009-30	100KHz/300KHz	5
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20



**Measurement Results:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable los.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

**For GFSK**

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	30 MHz ~ 1 GHz	Fig.58	P
	1 GHz ~ 3 GHz	Fig.59	P
	3 GHz ~ 18 GHz	Fig.60	P
Ch 39 2441 MHz	9k Hz ~ 30M Hz	Fig.61	P
	30 MHz ~ 1 GHz	Fig.62	P
	1 GHz ~ 3 GHz	Fig.63	P
	3 GHz ~ 18 GHz	Fig.64	P
Ch 78 2480 MHz	30 MHz ~ 1 GHz	Fig.65	P
	1 GHz ~ 3 GHz	Fig.66	P
	3 GHz ~ 18 GHz	Fig.67	P
Power	2.38GHz~2.4GHz---L	Fig.68	P
Power	2.45GHz~2.5GHz---H	Fig.69	P
For all channels	18 GHz ~ 26 GHz	Fig.70	P

**For  $\pi/4$  DQPSK**

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	30 MHz ~ 1 GHz	Fig.71	P
	1 GHz ~ 3 GHz	Fig.72	P
	3 GHz ~ 18 GHz	Fig.73	P
Ch 39 2441 MHz	9k Hz ~ 30M Hz	Fig.74	P
	30 MHz ~ 1 GHz	Fig.75	P
	1 GHz ~ 3 GHz	Fig.76	P
	3 GHz ~ 18 GHz	Fig.77	P
Ch 78 2480 MHz	30 MHz ~ 1 GHz	Fig.78	P
	1 GHz ~ 3 GHz	Fig.79	P
	3 GHz ~ 18 GHz	Fig.80	P
Power	2.38GHz~2.4GHz---L	Fig.81	P
Power	2.45GHz~2.5GHz---H	Fig.82	P
For all channels	18 GHz ~ 26 GHz	Fig.83	P

**For 8DPSK**

Channel	Frequency Range	Test Results	Conclusion
Ch 0	30 MHz ~ 1 GHz	Fig.84	P

2402 MHz	1 GHz ~ 3 GHz	Fig.85	P
	3 GHz ~ 18 GHz	Fig.86	P
Ch 39 2441 MHz	9k Hz ~ 30M Hz	Fig.87	P
	30 MHz ~ 1 GHz	Fig.88	P
	1 GHz ~ 3 GHz	Fig.89	P
	3 GHz ~ 18 GHz	Fig.90	P
Ch 78 2480 MHz	30 MHz ~ 1 GHz	Fig.91	P
	1 GHz ~ 3 GHz	Fig.92	P
	3 GHz ~ 18 GHz	Fig.93	P
Power	2.38GHz~2.4GHz---L	Fig.94	P
Power	2.45GHz~2.5GHz---H	Fig.95	P
For all channels	18 GHz ~ 26 GHz	Fig.96	P

Note: Only worst case result is given.

Test graphs as below:

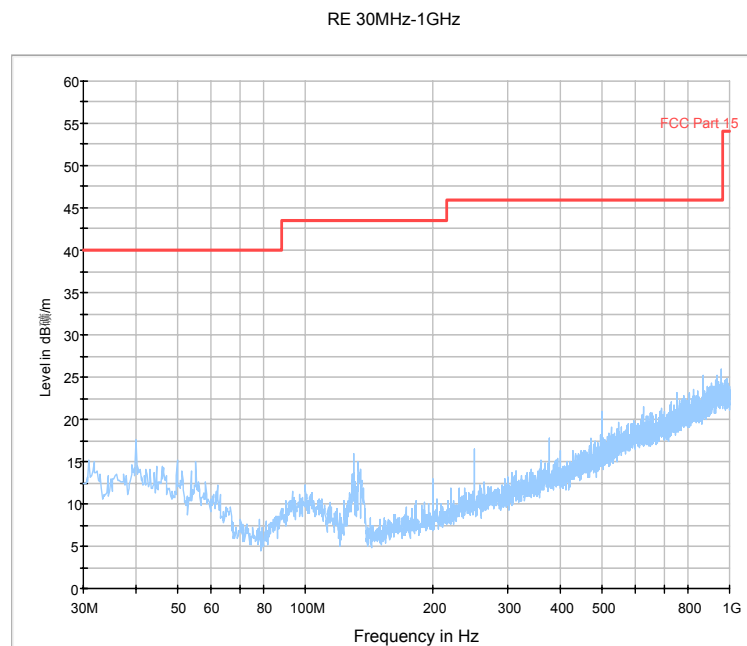


Fig.58. Radiated emission: GFSK, Channel 0, 30 MHz - 1 GHz

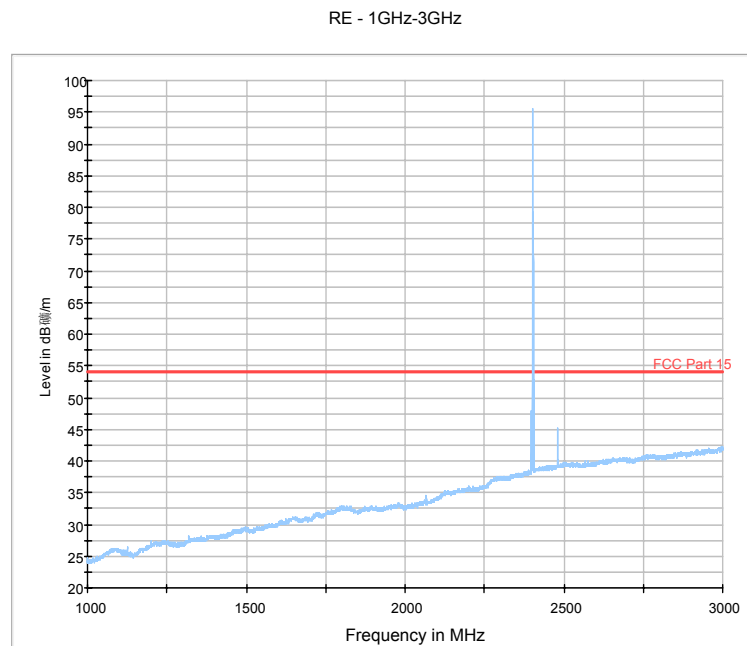


Fig.59. Radiated emission: GFSK, Channel 0, 1 GHz - 3 GHz

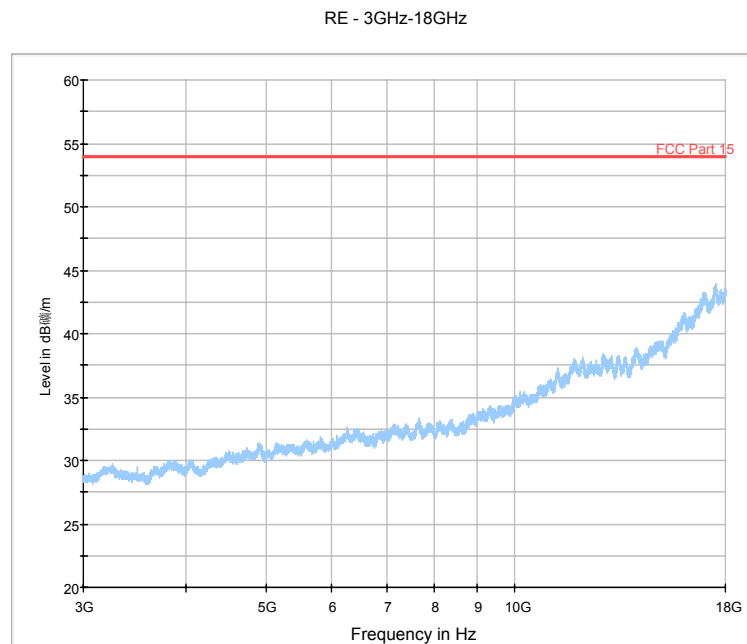


Fig.60. Radiated emission: GFSK, Channel 0, 3 GHz - 18 GHz

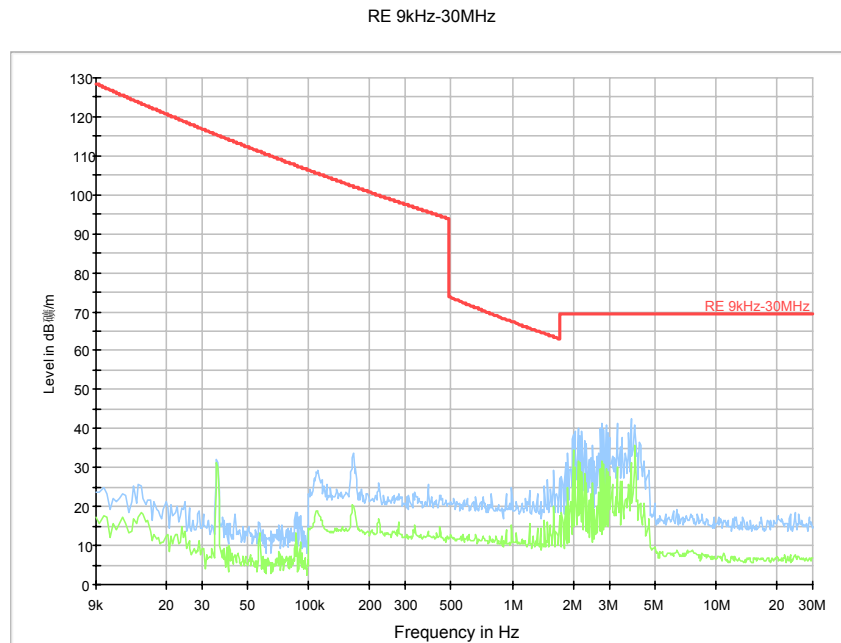


Fig.61. Radiated emission: GFSK, Channel 39, 9 kHz - 30 MHz

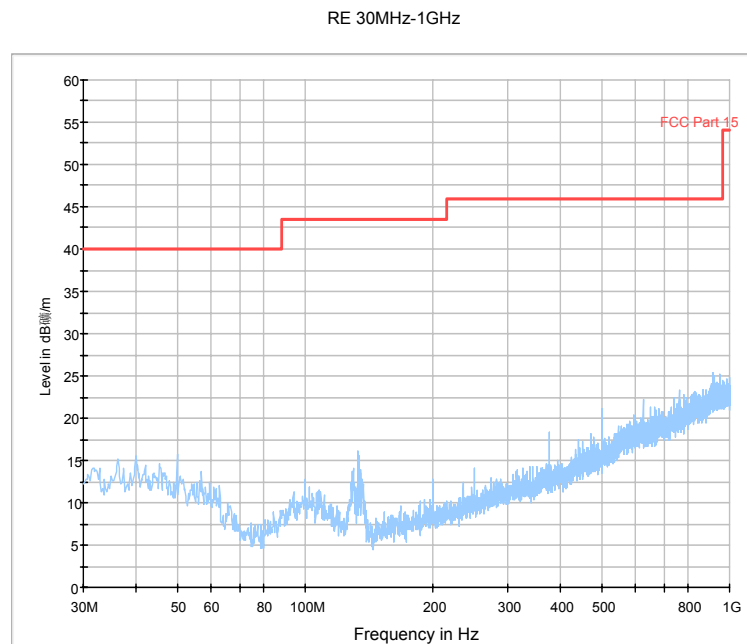


Fig.62. Radiated emission: GFSK, Channel 39, 30 MHz - 1 GHz

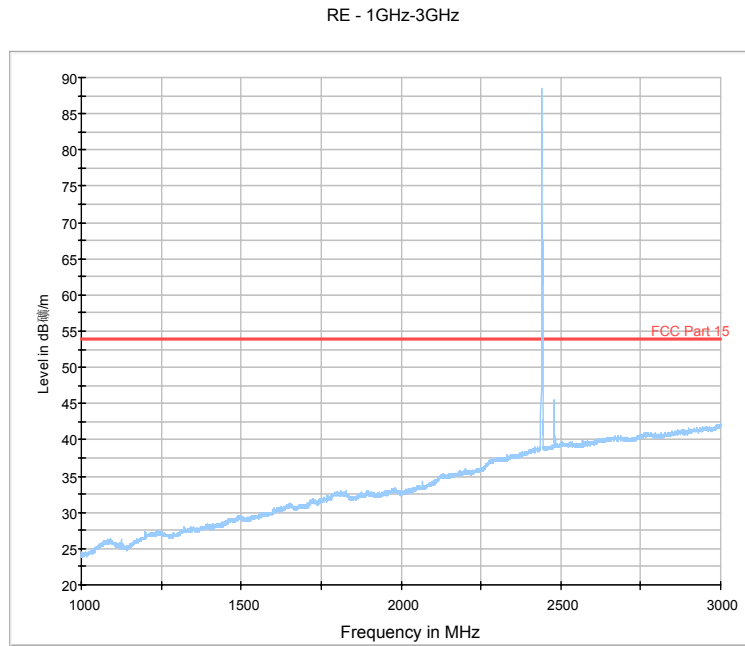


Fig.63. Radiated emission: GFSK, Channel 39, 1 GHz - 3 GHz

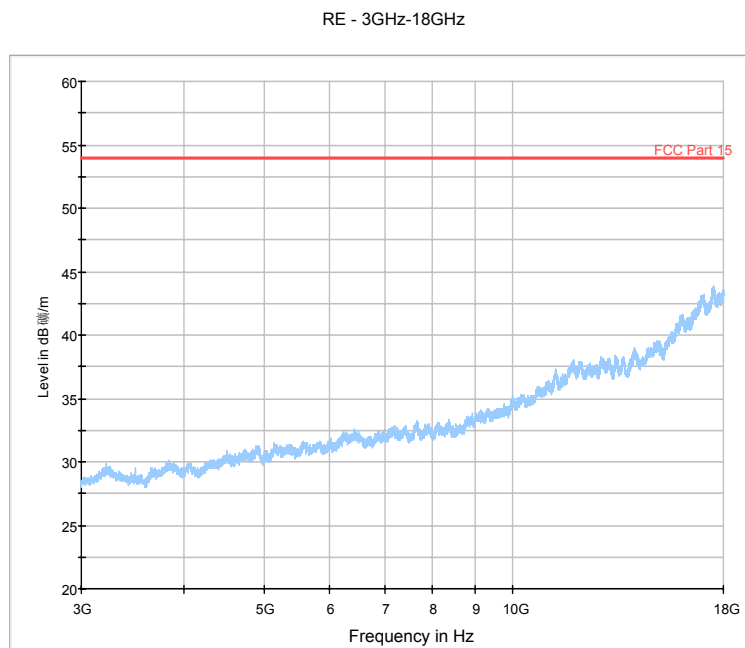


Fig.64. Radiated emission: GFSK, Channel 39, 3 GHz - 18 GHz

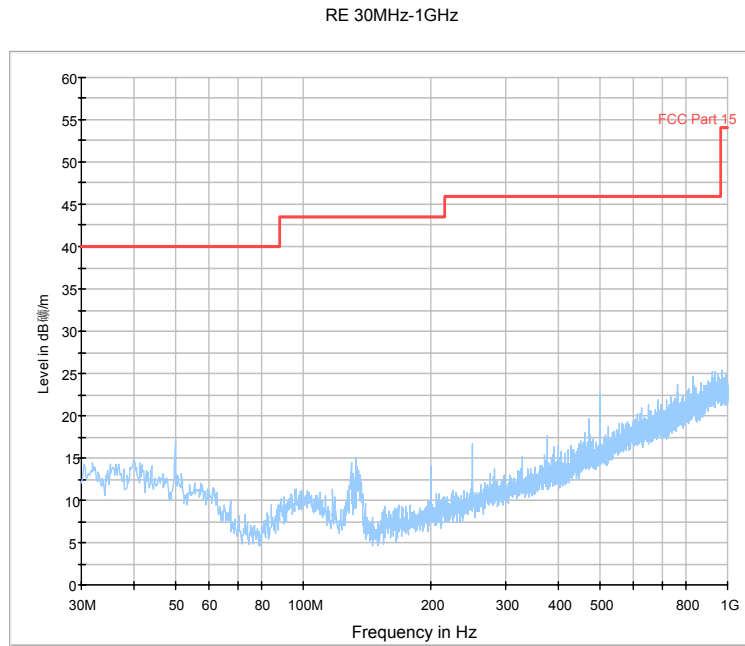


Fig.65. Radiated emission: GFSK, Channel 78, 30 MHz - 1 GHz

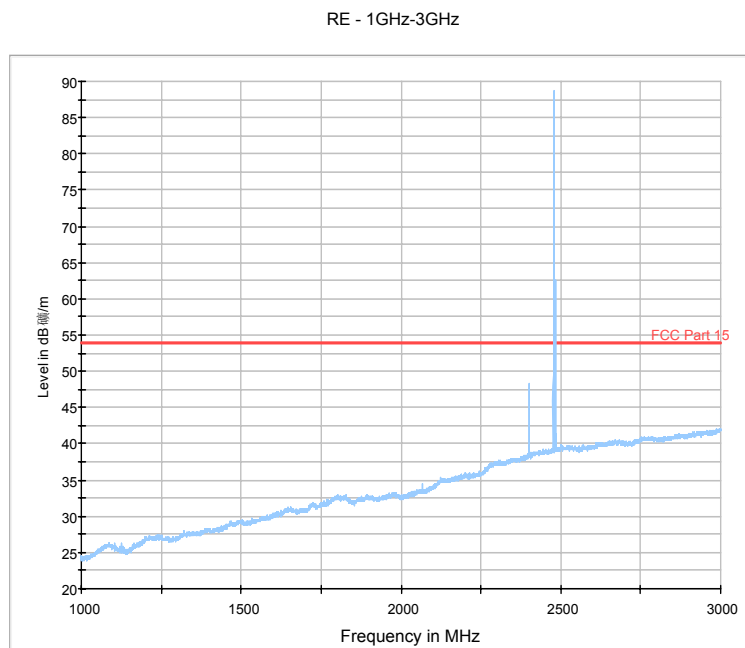


Fig.66. Fig.47 Radiated emission: GFSK, Channel 78, 1 GHz - 3 GHz

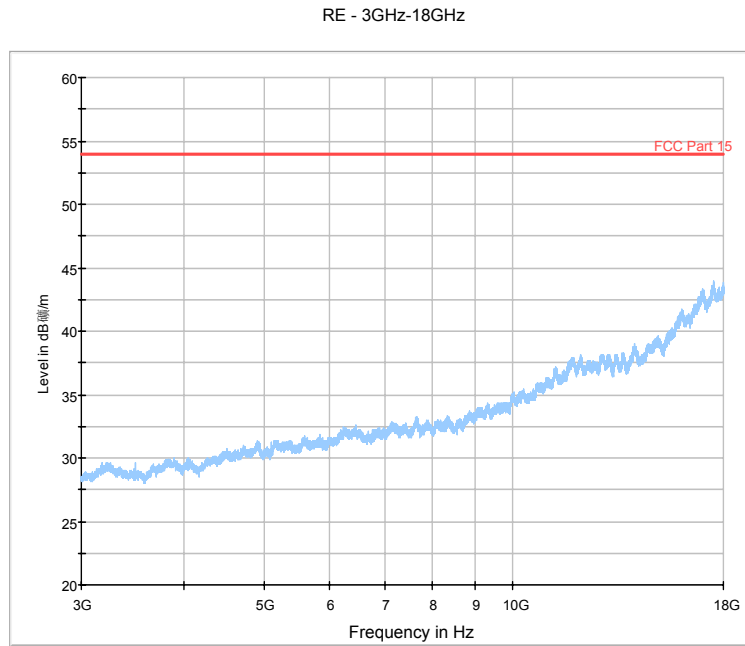


Fig.67. Radiated emission: GFSK, Channel 78, 3 GHz - 18 GHz

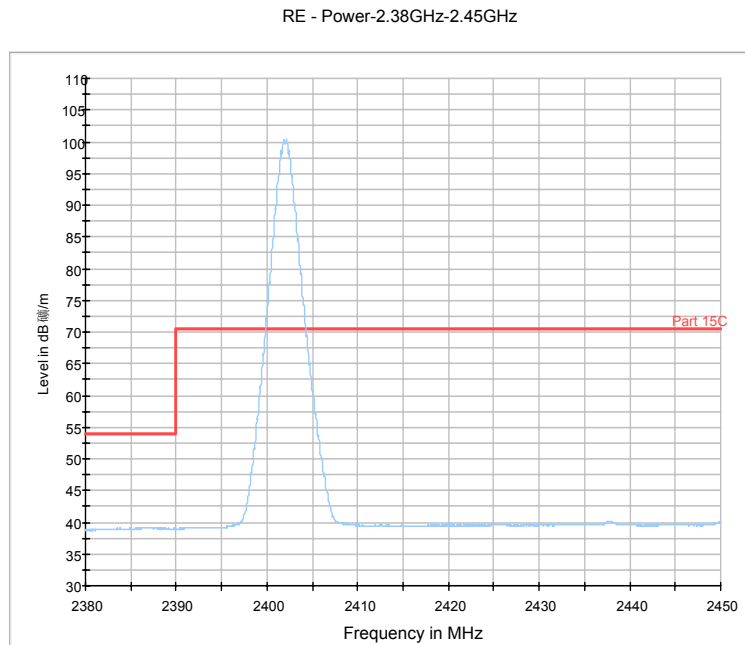


Fig.68. Radiated emission (Power): GFSK, low channel

RE - Power-2.45GHz-2.5GHz

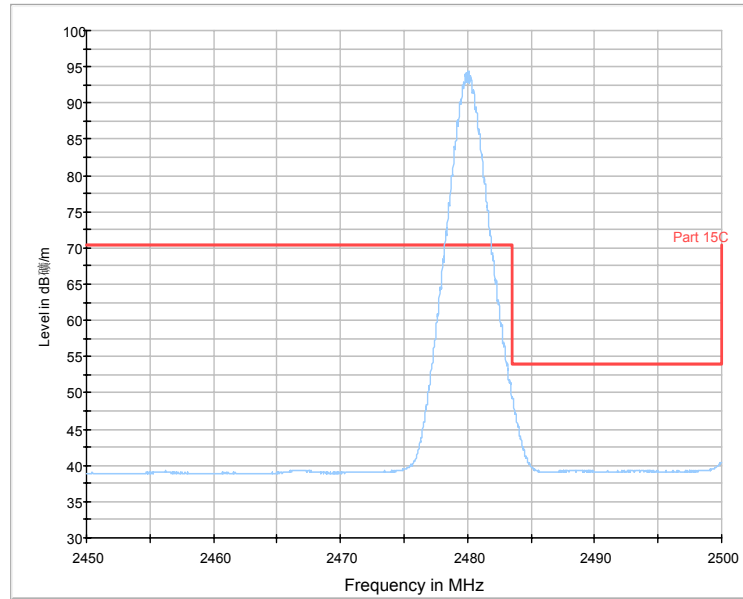


Fig.69. Radiated emission (Power) GFSK, high channel

EMI 18GHz-26.5GHz

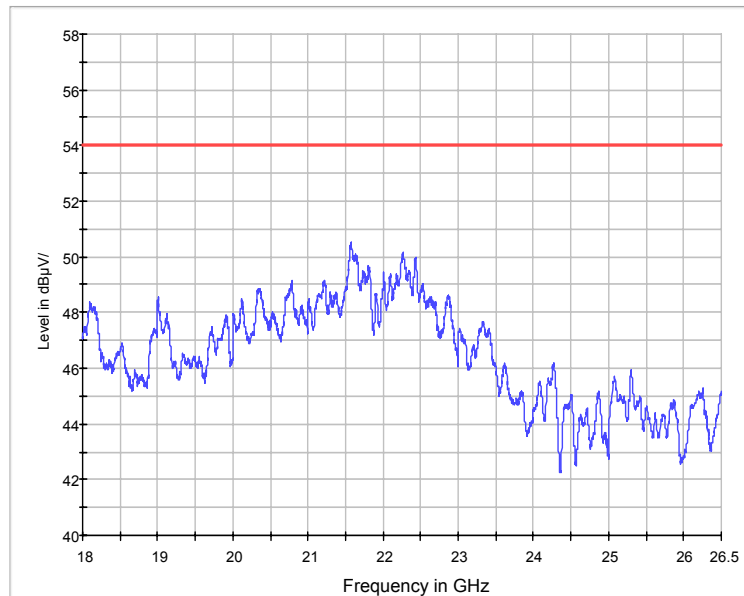


Fig.70. Radiated emission: GFSK, 18 GHz - 26 GHz



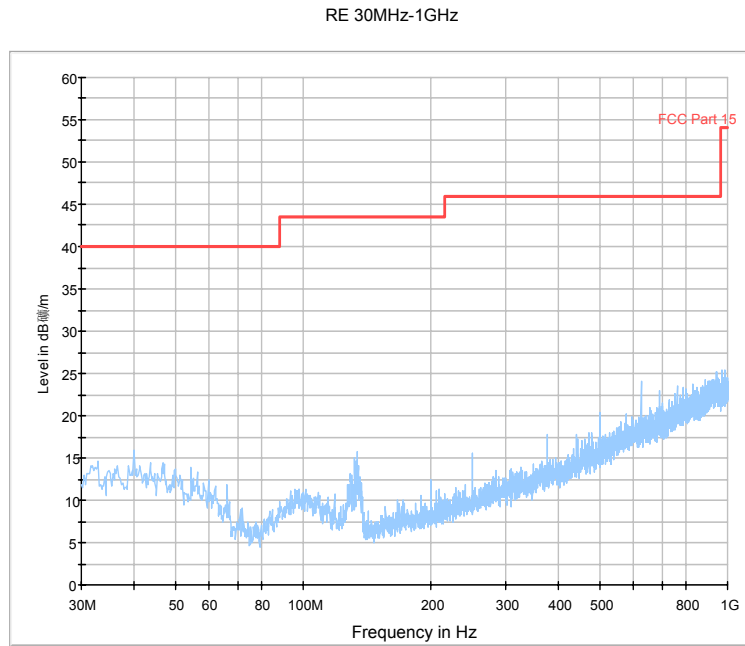


Fig.71. Radiated emission:  $\pi/4$  DQPSK, Channel 0, 30 MHz - 1 GHz

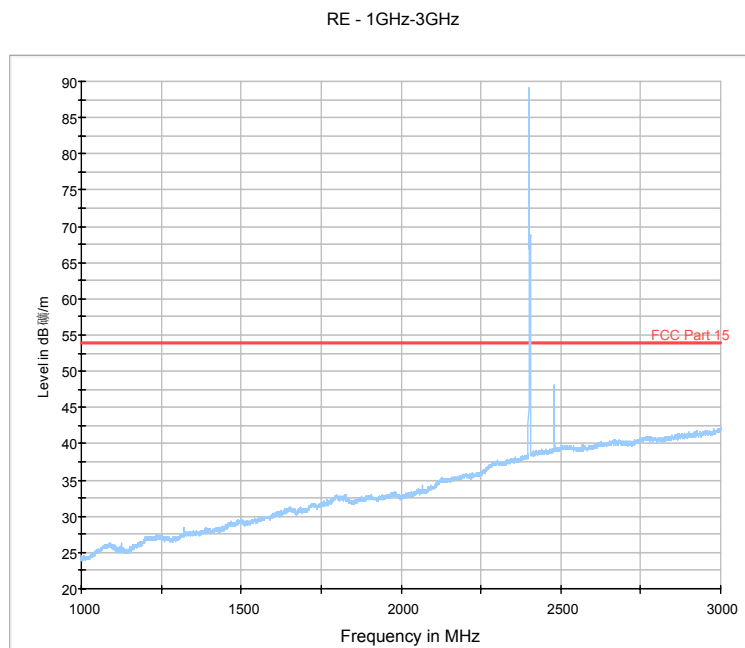


Fig.72. Radiated emission:  $\pi/4$  DQPSK, Channel 0, 1 GHz - 3 GHz

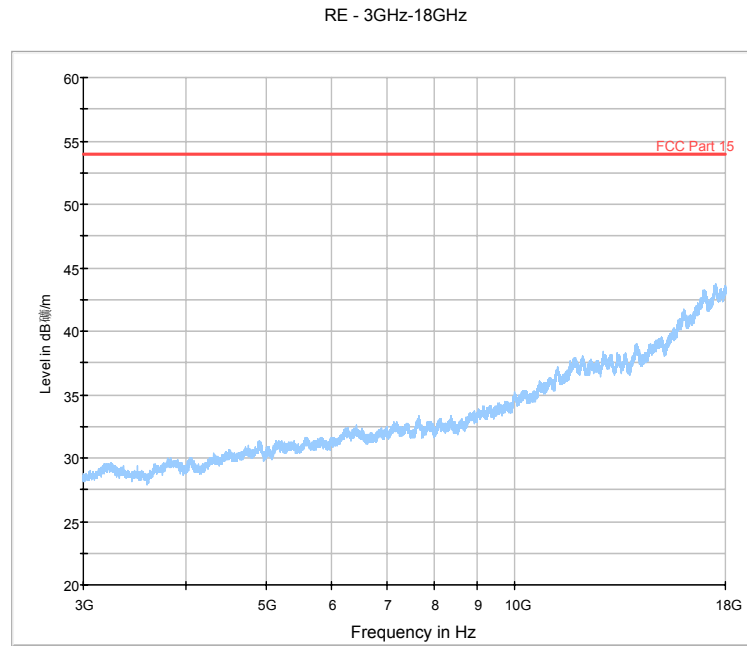


Fig.73. Radiated emission:  $\pi/4$  DQPSK, Channel 0, 3 GHz - 18 GHz

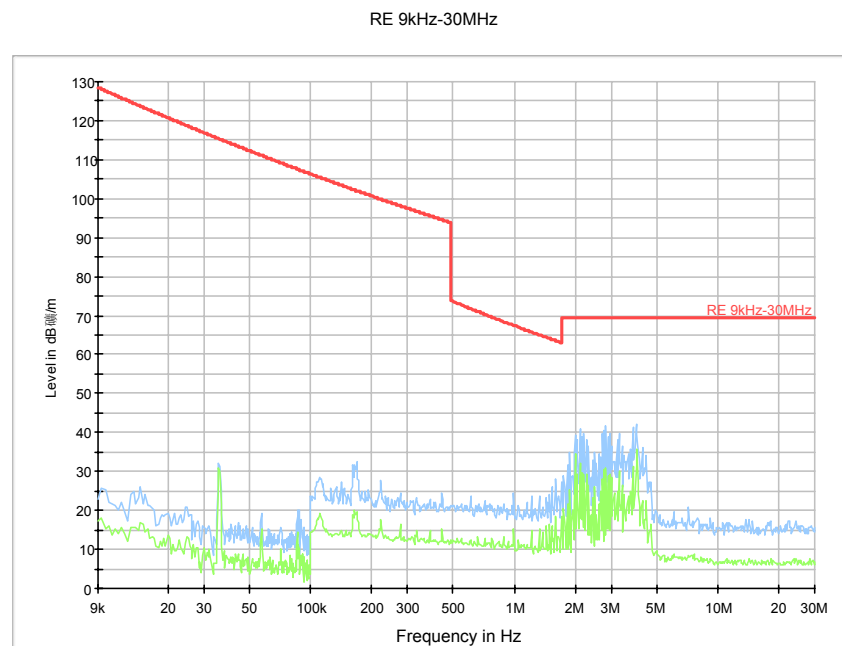


Fig.74. Radiated emission:  $\pi/4$  DQPSK, Channel 39, 9k Hz – 30 MHz

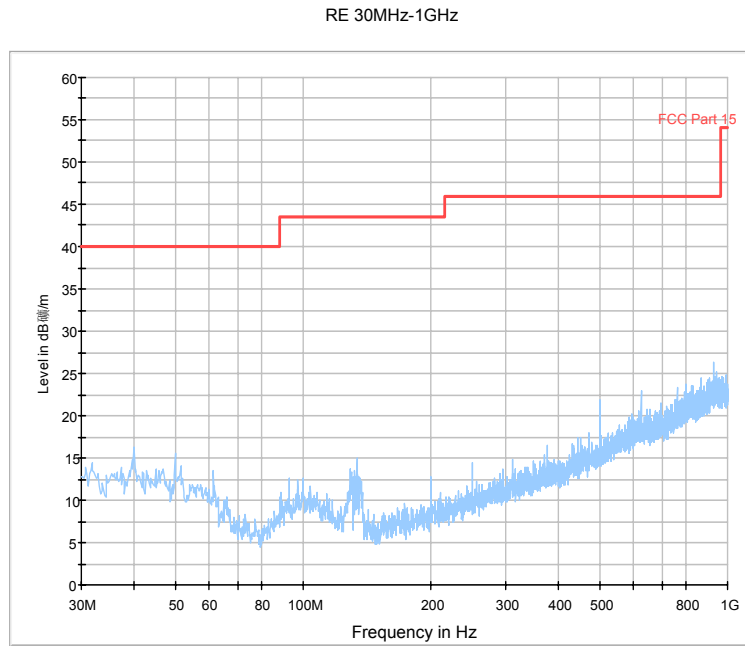


Fig.75. Radiated emission:  $\pi/4$  DQPSK, Channel 39, 30 MHz - 1 GHz

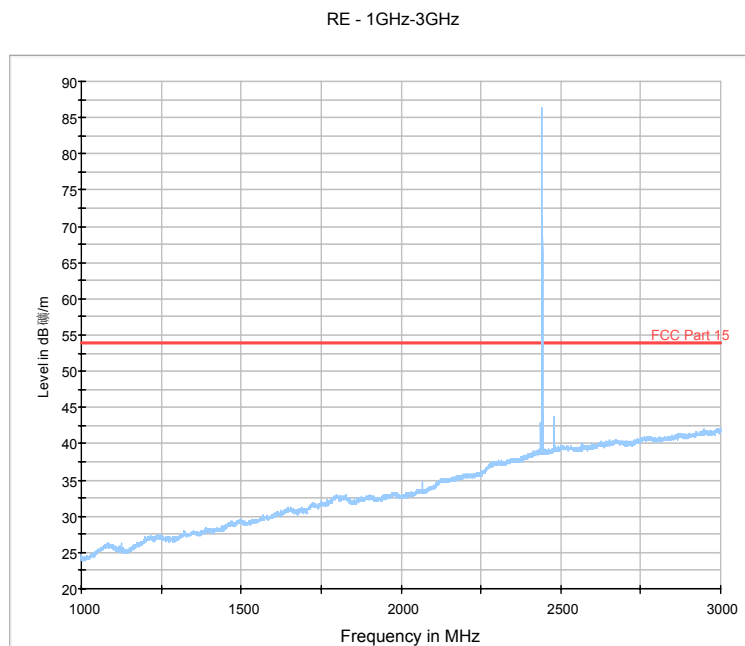


Fig.76. Radiated emission:  $\pi/4$  DQPSK, Channel 39, 1 GHz - 3 GHz

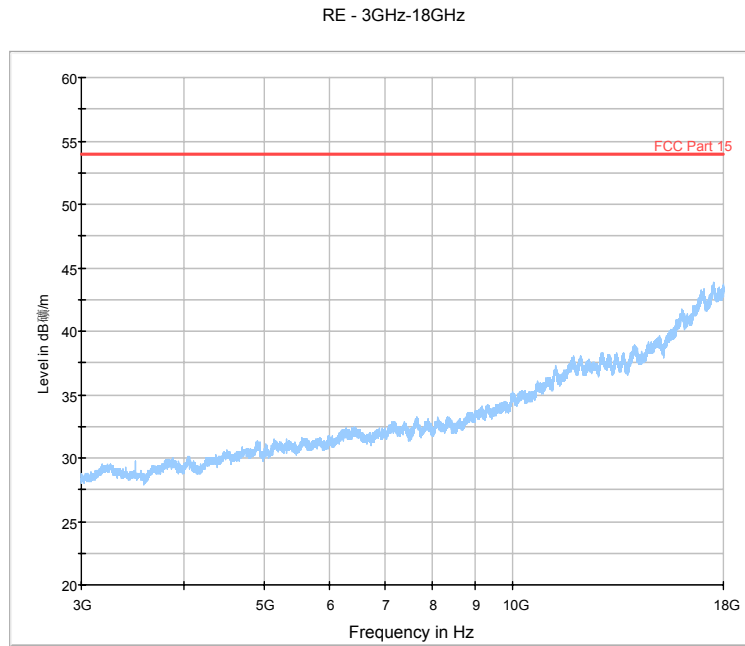


Fig.77. Radiated emission:  $\pi/4$  DQPSK, Channel 39, 3 GHz - 18 GHz

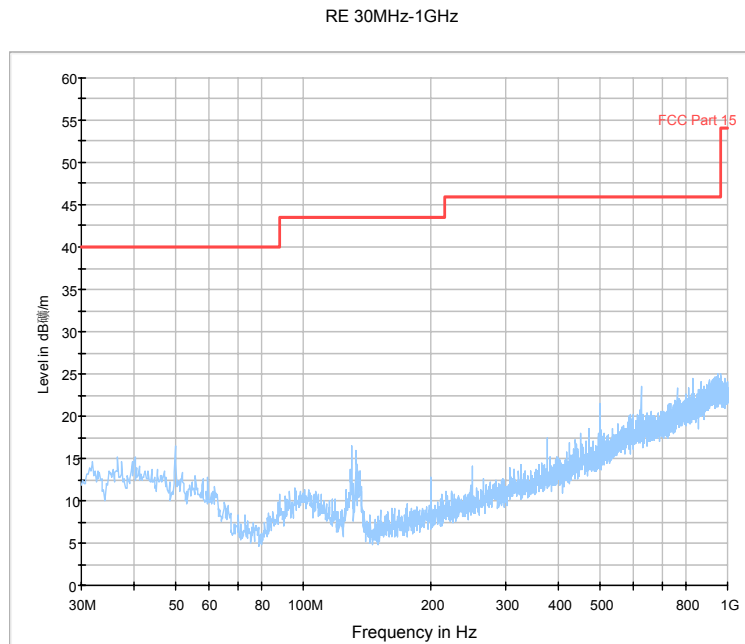


Fig.78. Radiated emission:  $\pi/4$  DQPSK, Channel 78, 30 MHz - 1 GHz

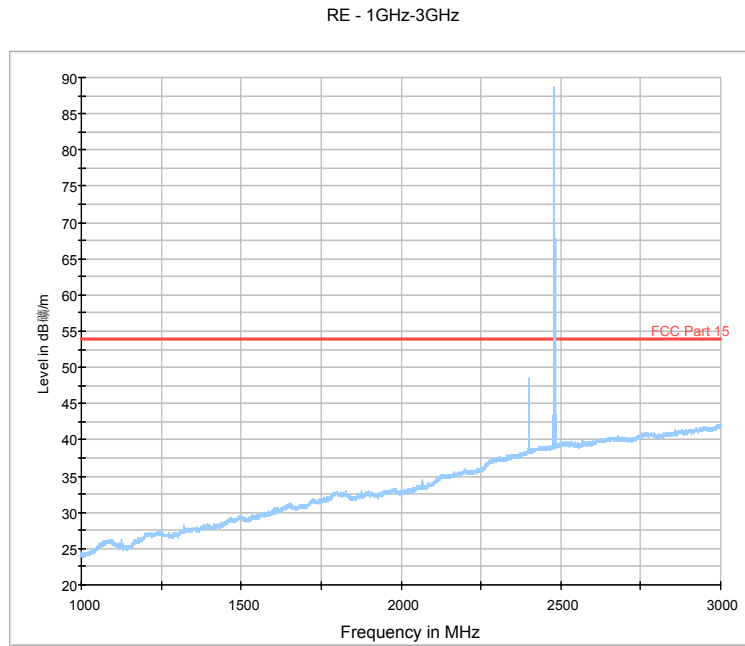


Fig.79. Radiated emission:  $\pi/4$  DQPSK, Channel 78, 1 GHz - 3 GHz

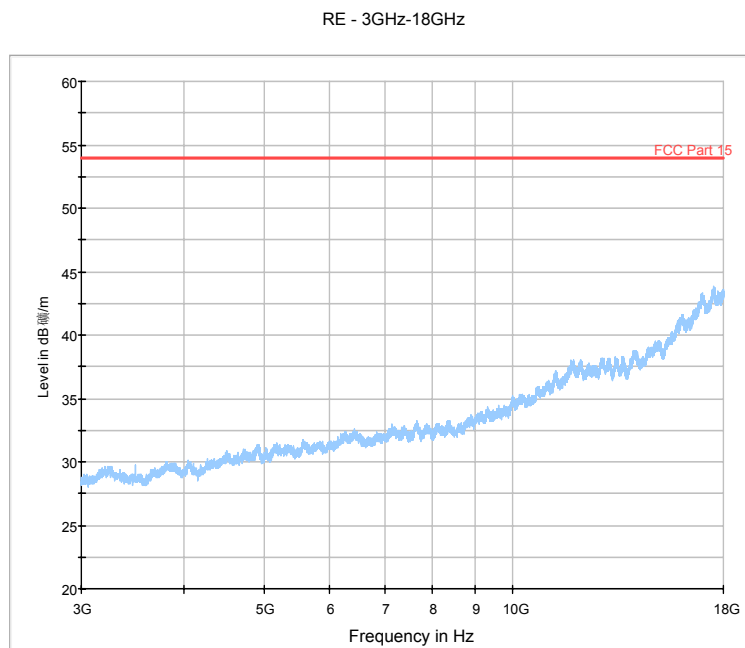


Fig.80. Radiated emission:  $\pi/4$  DQPSK, Channel 78, 3 GHz - 18 GHz

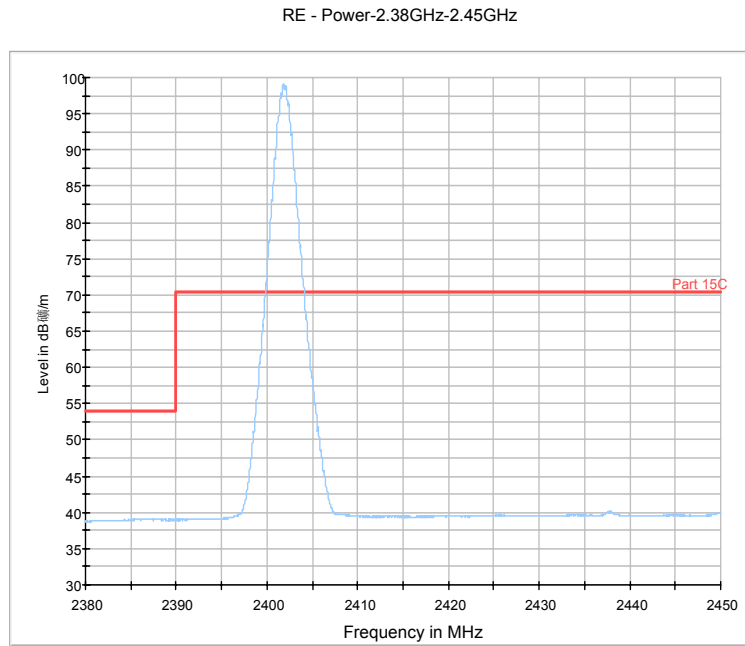


Fig.81. Radiated emission (Power):  $\pi/4$  DQPSK, low channel

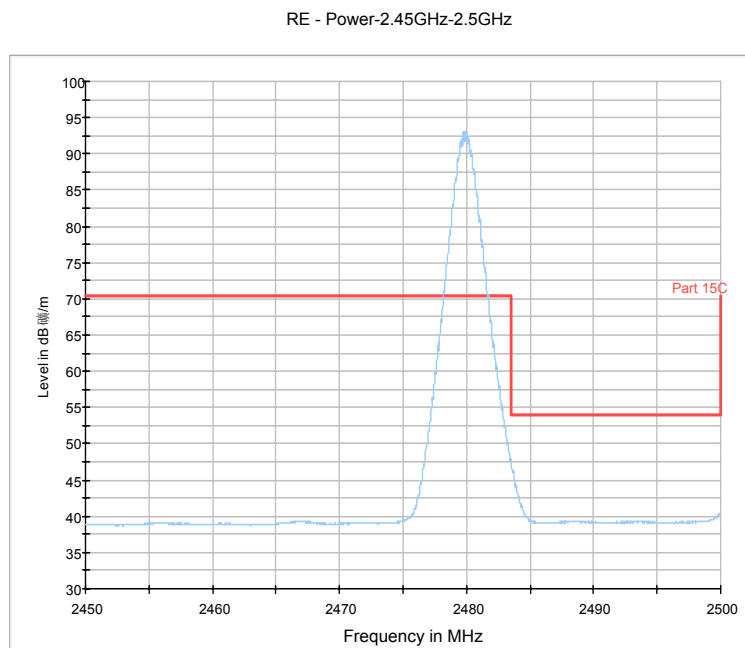


Fig.82. Radiated emission (Power):  $\pi/4$  DQPSK, high channel

EMI 18GHz-26.5GHz

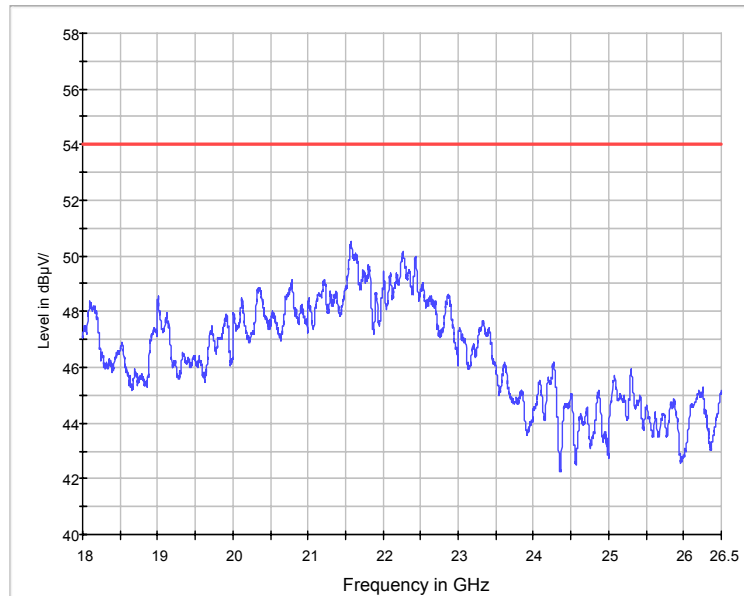


Fig.83. Radiated emission:  $\pi/4$  DQPSK, 18 GHz - 26 GHz

RE 30MHz-1GHz

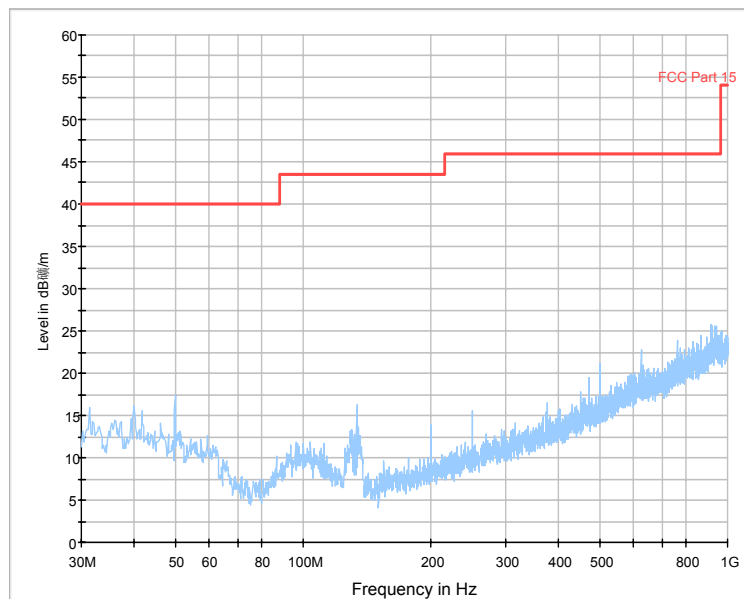


Fig.84. Radiated emission: 8DPSK, Channel 0, 30 MHz - 1 GHz

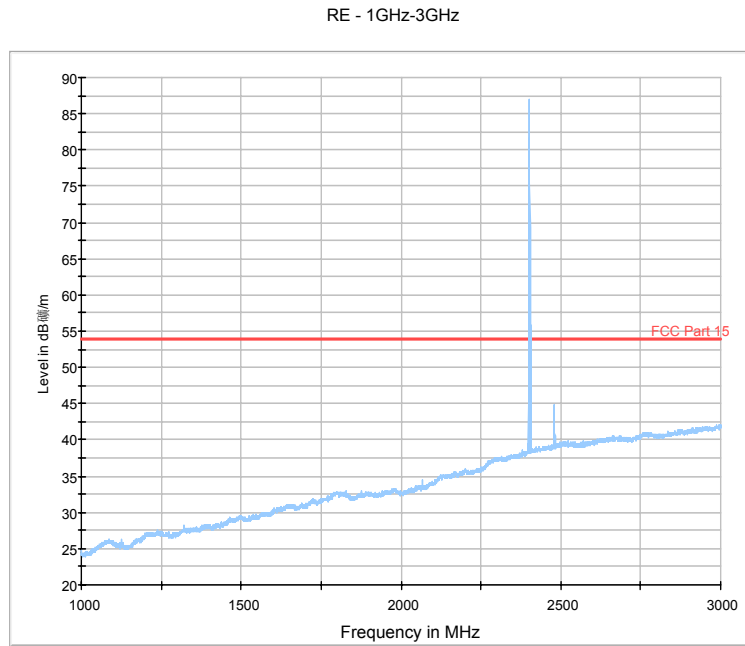


Fig.85. Radiated emission: 8DPSK, Channel 0, 1 GHz - 3 GHz

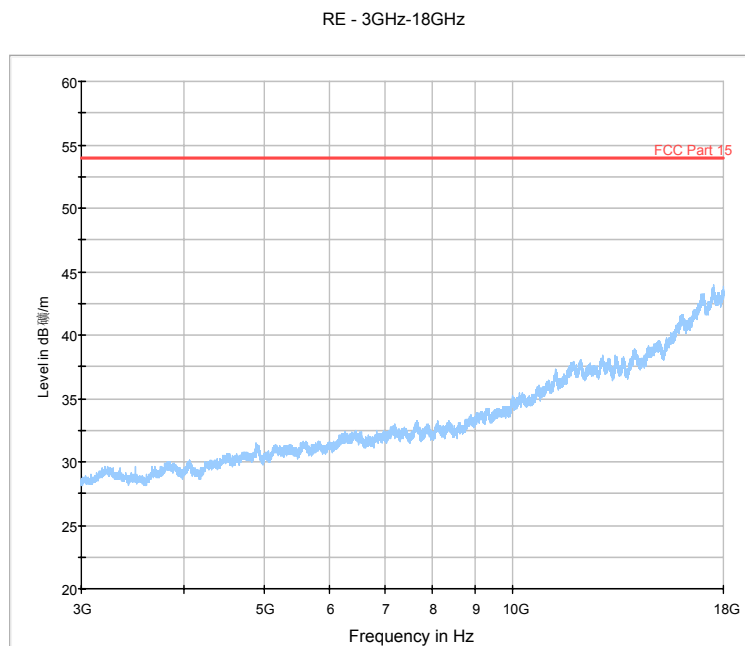


Fig.86. Radiated emission: 8DPSK, Channel 0, 3 GHz - 18 GHz



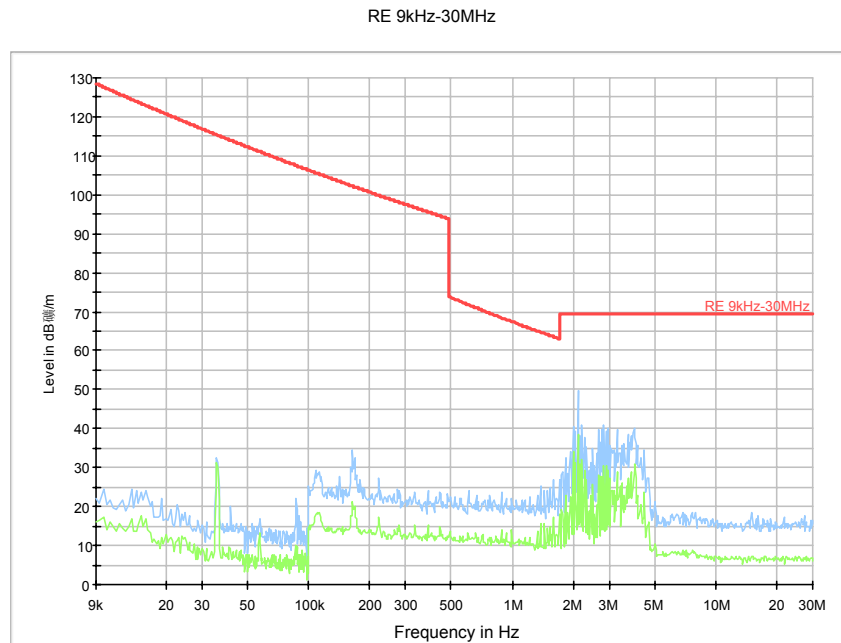


Fig.87. Radiated emission: 8DPSK, Channel 39, 9 kHz - 30 MHz

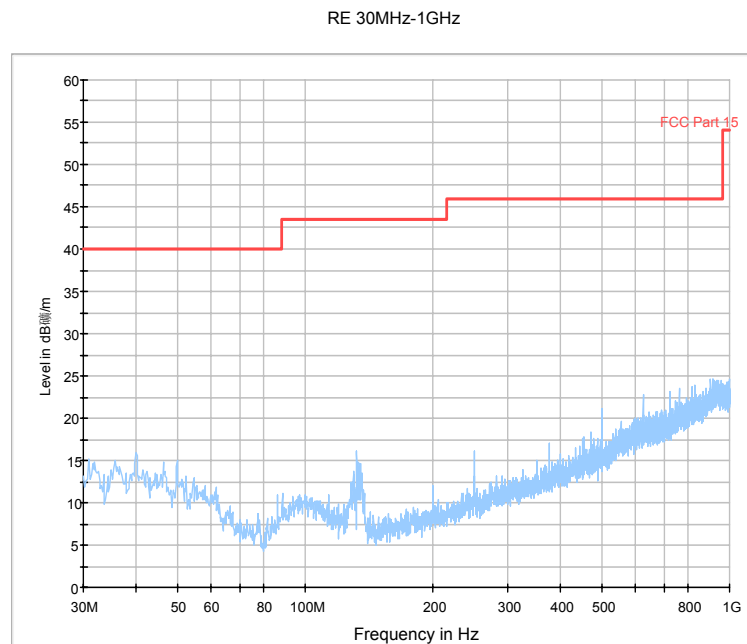


Fig.88. Radiated emission: 8DPSK, Channel 39, 30 MHz - 1 GHz

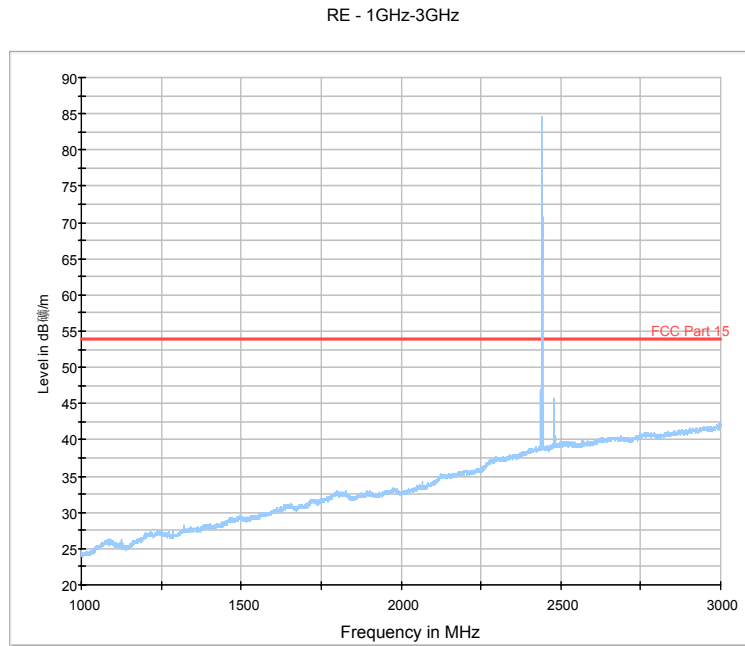


Fig.89. Radiated emission: 8DPSK, Channel 39, 1 GHz - 3 GHz

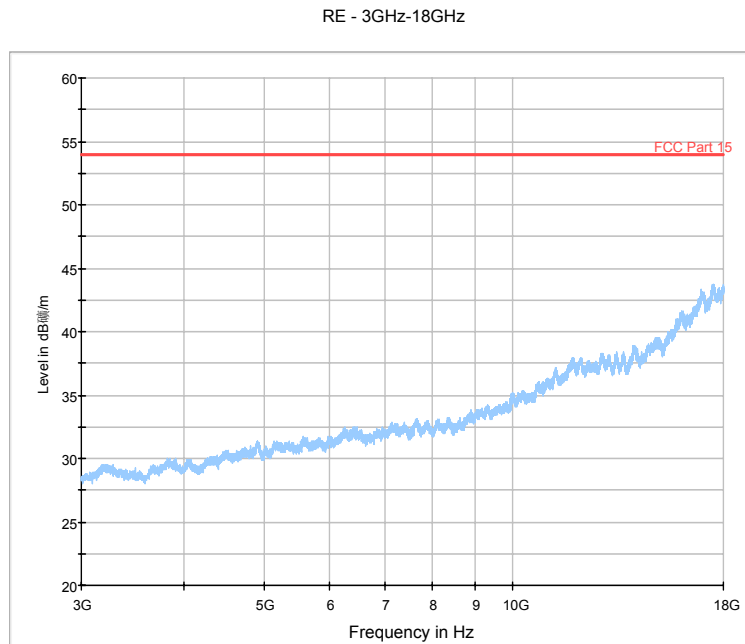


Fig.90. Radiated emission: 8DPSK, Channel 39, 3 GHz - 18 GHz

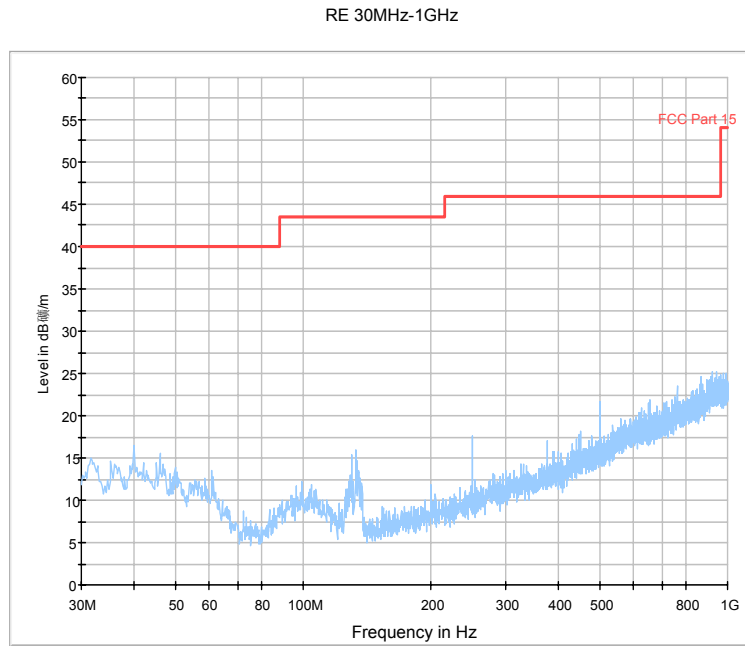


Fig.91. Radiated emission: 8DPSK, Channel 78, 30 MHz - 1 GHz

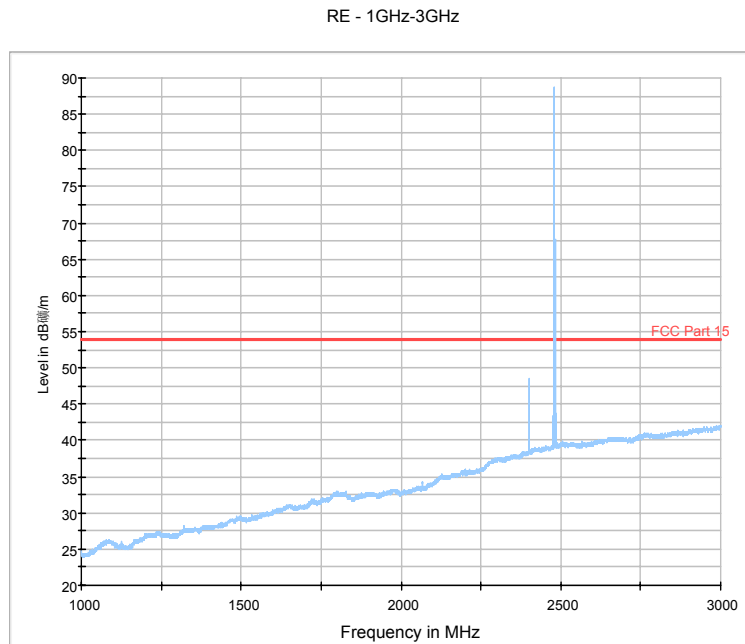


Fig.92. Radiated emission: 8DPSK, Channel 78, 1 GHz - 3 GHz

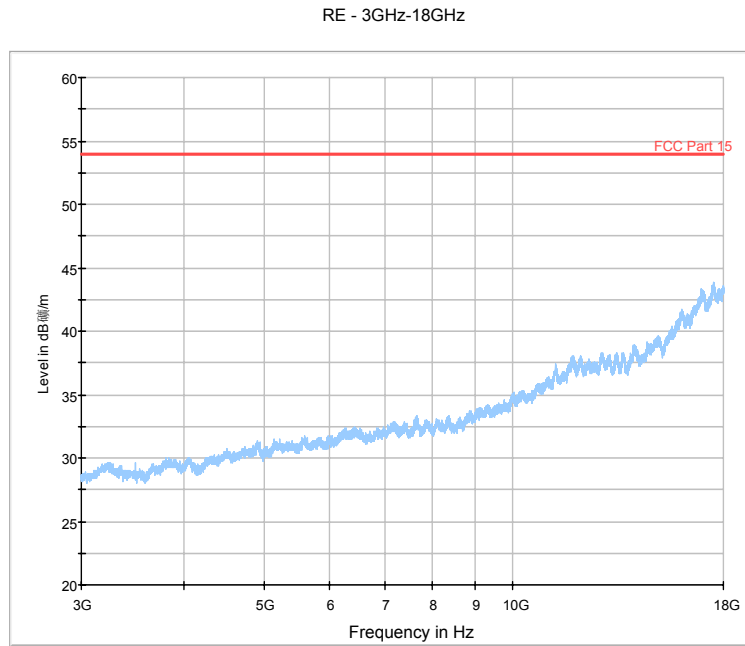


Fig.93. Radiated emission: 8DPSK, Channel 78, 3 GHz - 18 GHz

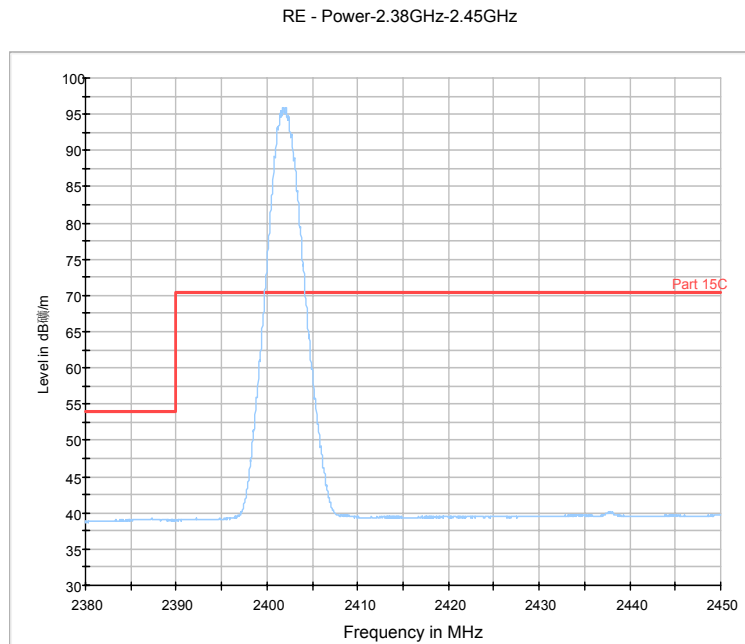


Fig.94. Radiated emission (Power): 8DPSK, low channel

RE - Power-2.45GHz-2.5GHz

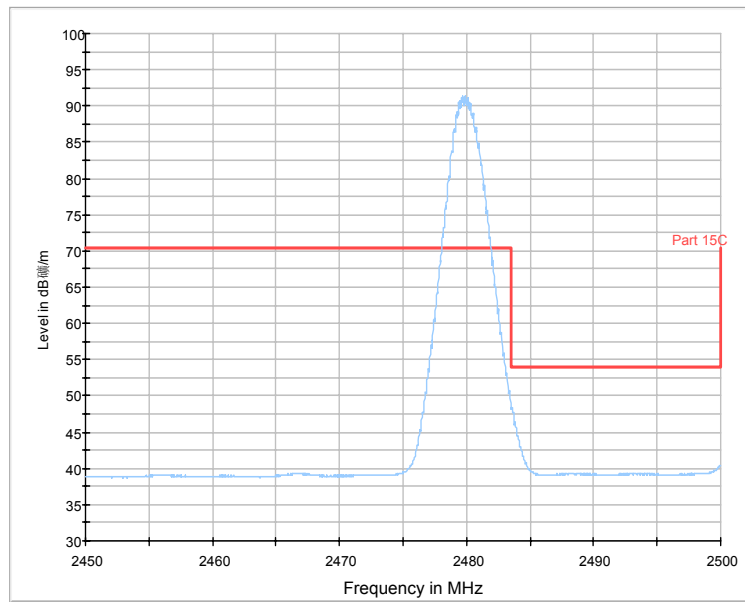


Fig.95. Radiated emission (Power): 8DPSK, high channel

EMI 18GHz-26.5GHz

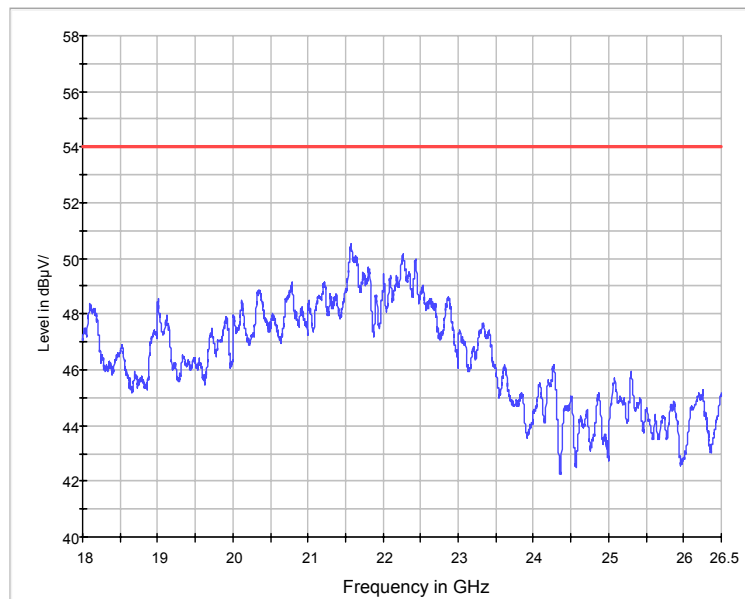


Fig.96. Radiated emission: 8DPSK, 18 GHz - 26 GHz

### A.6. Time of Occupancy (Dwell Time)

#### Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii) RSS-210 A8.1 (4)	< 400

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

#### Measurement Result:

##### For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.97	106.55	P
		Fig.98		
	DH3	Fig.99	169.95	P
		Fig.100		
	DH5	Fig.101	174.52	P
		Fig.102		

##### For $\pi/4$ DQPSK


Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.103	105.66	P
		Fig.104		
	DH3	Fig.105	160.05	P
		Fig.106		
	DH5	Fig.107	209.42	P
		Fig.108		

##### For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.109	108.40	P
		Fig.110		
	DH3	Fig.111	178.20	P
		Fig.112		
	DH5	Fig.113	180.34	P
		Fig.114		


**Conclusion: PASS**

Test graphs as below:

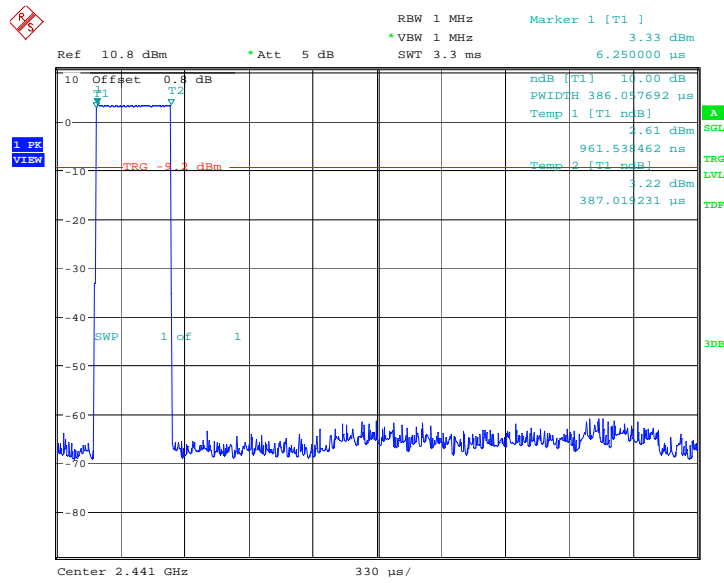


Date: 7.FEB.2013 01:41:18

Fig.97. Time of occupancy (Dwell Time): Channel 39, GFSK-DH1

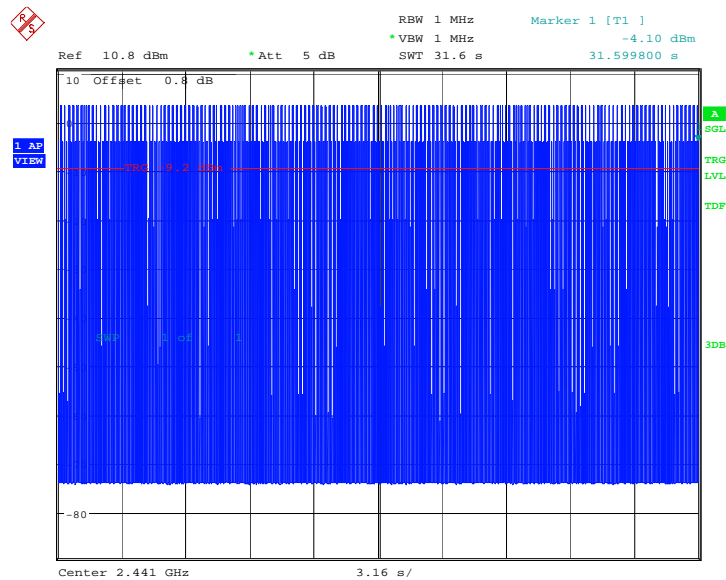


Date: 7.FEB.2013 01:41:06

Fig.98. Number of Transmissions Measurement: Channel 39, GFSK-DH1

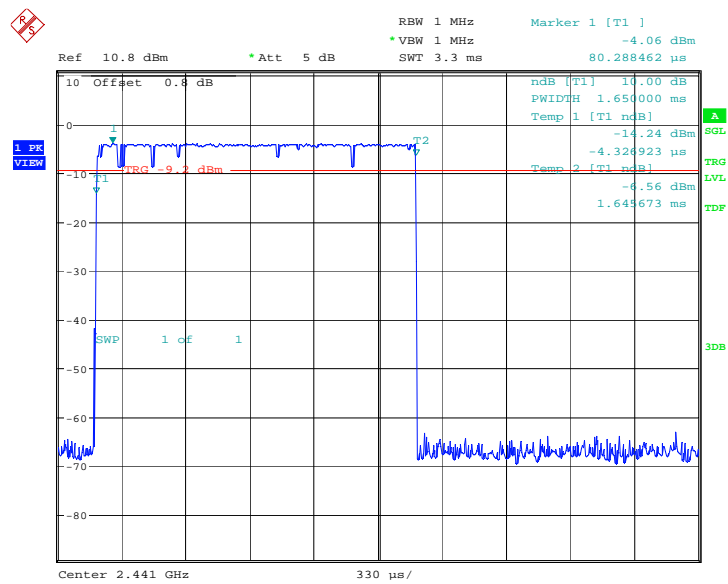

Date: 7.FEB.2013 01:42:37


Fig.99. Time of occupancy (Dwell Time): Channel 39, GFSK-DH3

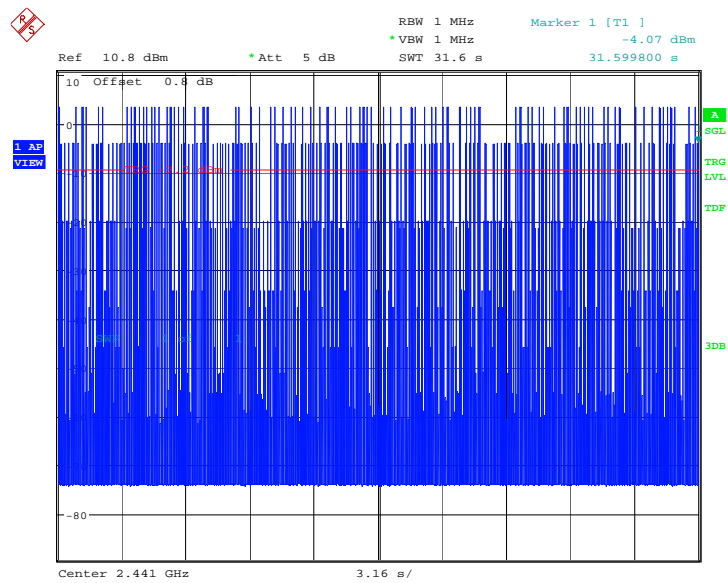

Date: 7.FEB.2013 01:42:25


Fig.100. Number of Transmissions Measurement: Channel 39, GFSK-DH3



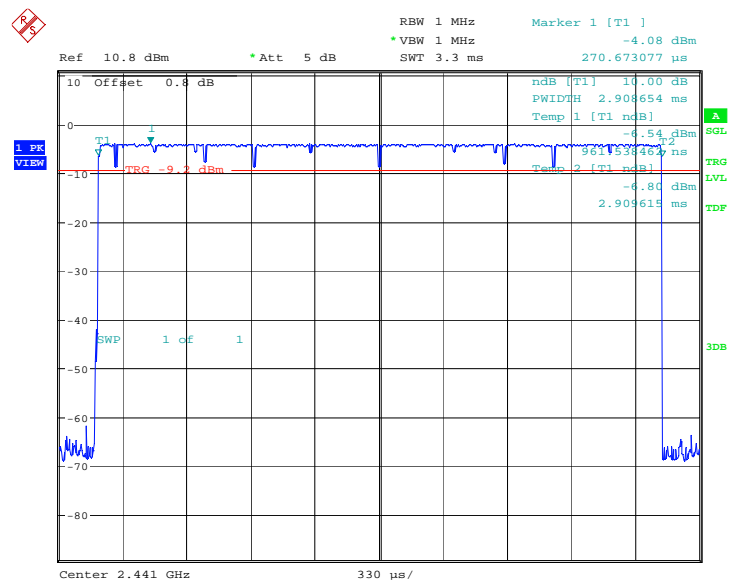


Date: 7.FEB.2013 01:43:54

Fig.101. Time of occupancy (Dwell Time): Channel 39, GFSK-DH5

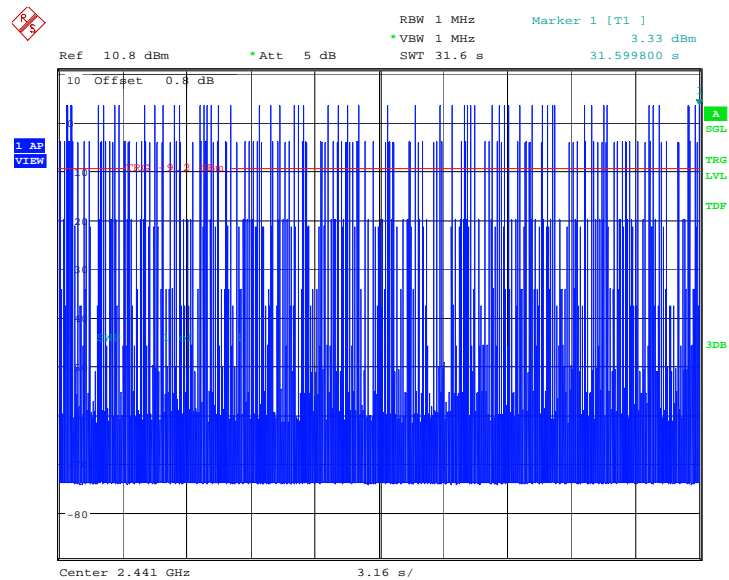


Date: 7.FEB.2013 01:43:42

Fig.102. Number of Transmissions Measurement: Channel 39, GFSK-DH5

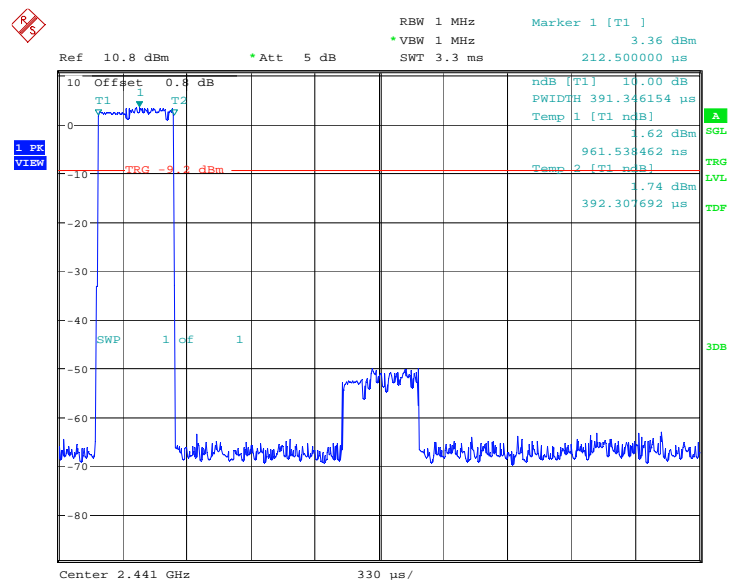


Date: 7.FEB.2013 02:02:44

Fig.103. Time of occupancy (Dwell Time): Channel 39,  $\pi/4$  DQPSK -DH1

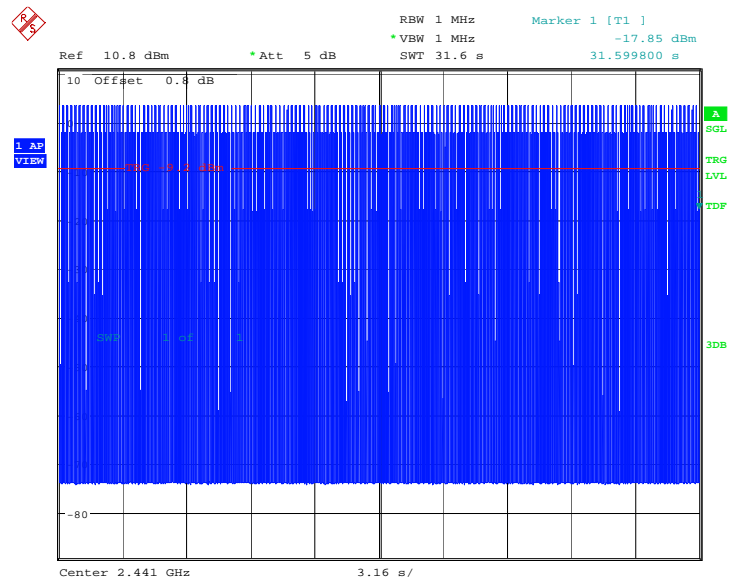


Date: 7.FEB.2013 02:02:32

Fig.104. Number of Transmissions Measurement: Channel 39,  $\pi/4$  DQPSK -DH1

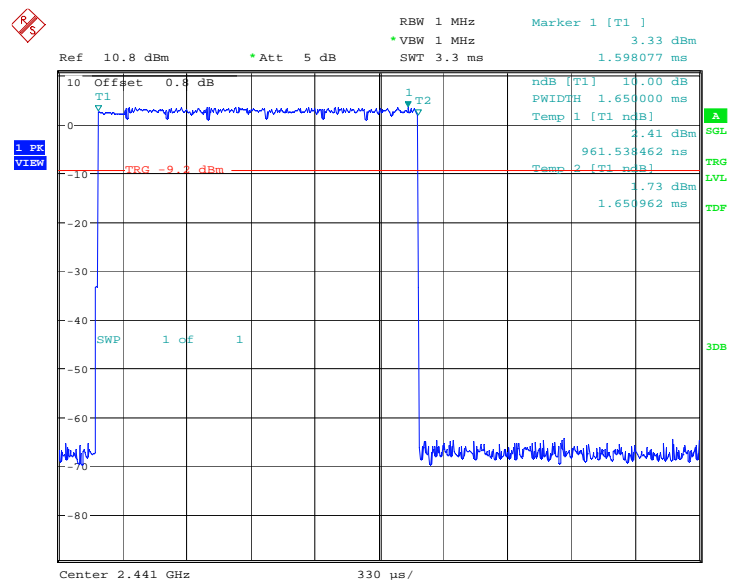


Date: 7.FEB.2013 02:04:03

Fig.105. Time of occupancy (Dwell Time): Channel 39,  $\pi/4$  DQPSK -DH3

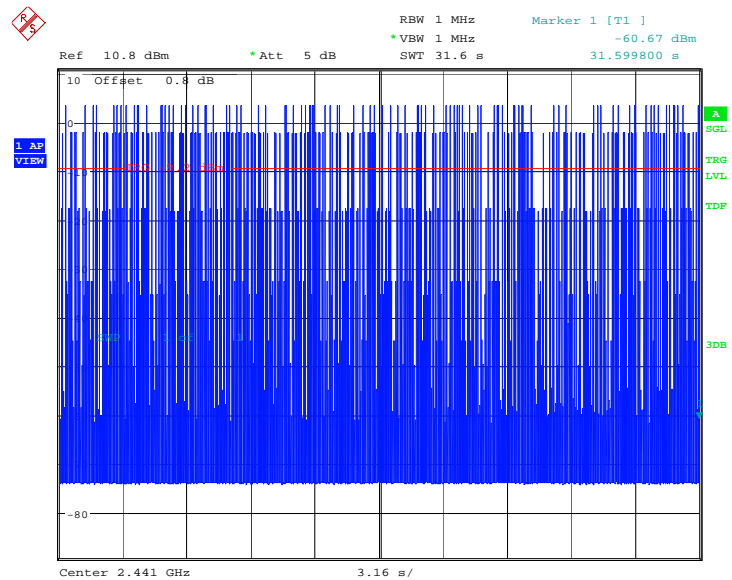


Date: 7.FEB.2013 02:03:51

Fig.106. Number of Transmissions Measurement: Channel 39,  $\pi/4$  DQPSK -DH3

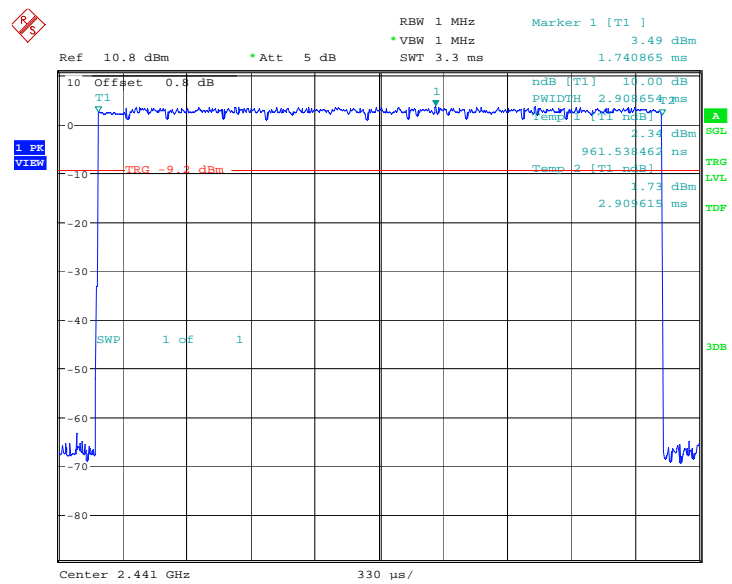


Date: 7.FEB.2013 02:05:19

Fig.107. Time of occupancy (Dwell Time): Channel 39,  $\pi/4$  DQPSK -DH5

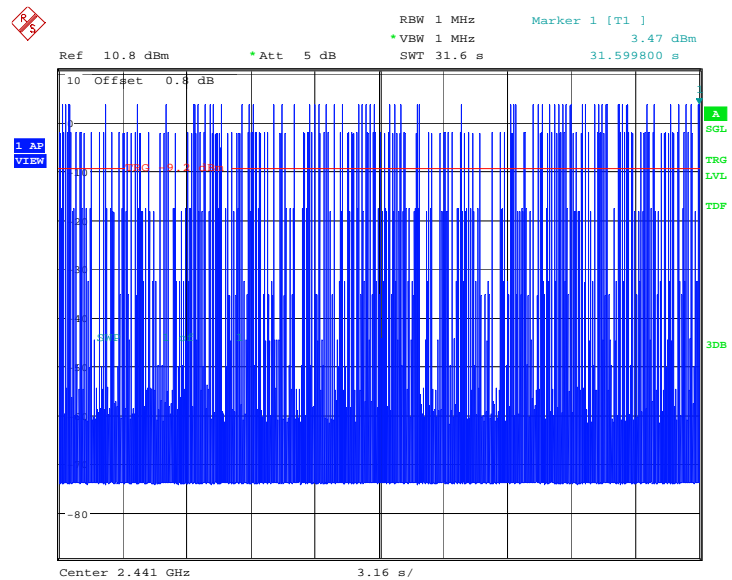


Date: 7.FEB.2013 02:05:07

Fig.108. Number of Transmissions Measurement: Channel 39,  $\pi/4$  DQPSK -DH5

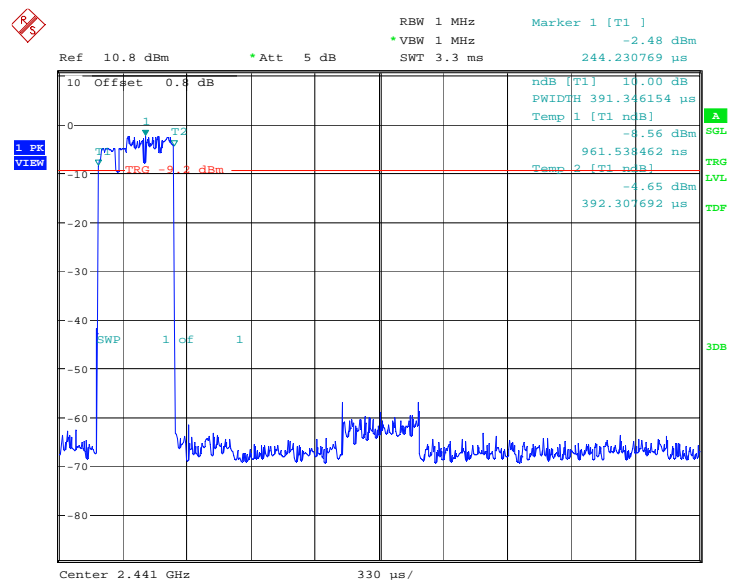


Date: 7.FEB.2013 02:24:08

Fig.109. Time of occupancy (Dwell Time): Channel 39, 8DPSK-DH1

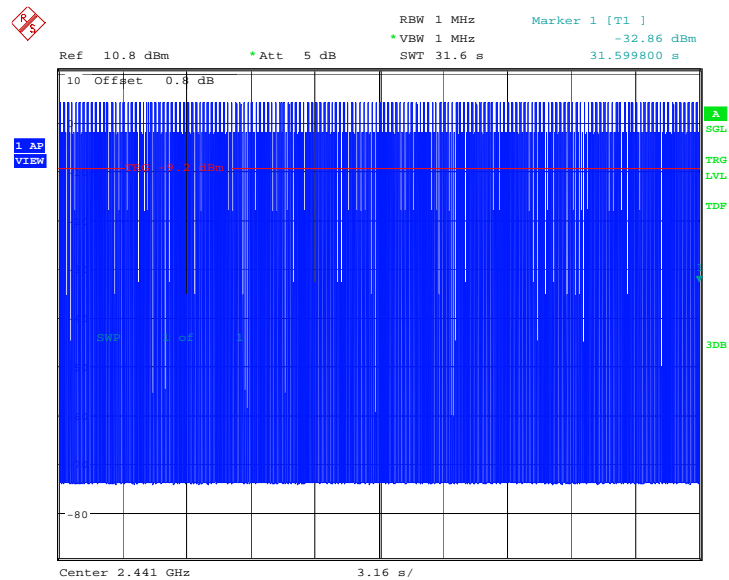


Date: 7.FEB.2013 02:23:57

Fig.110. Number of Transmissions Measurement: Channel 39, 8DPSK -DH1

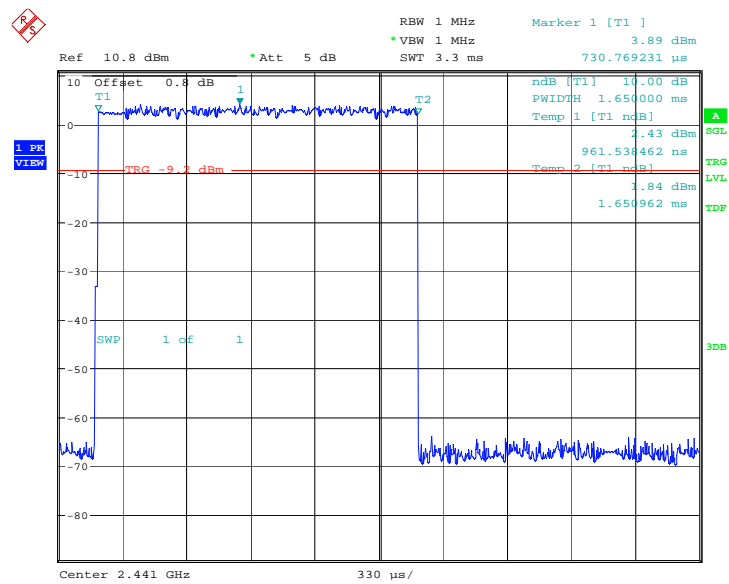


Date: 7.FEB.2013 02:25:25

Fig.111. Time of occupancy (Dwell Time): Channel 39, 8DPSK -DH3

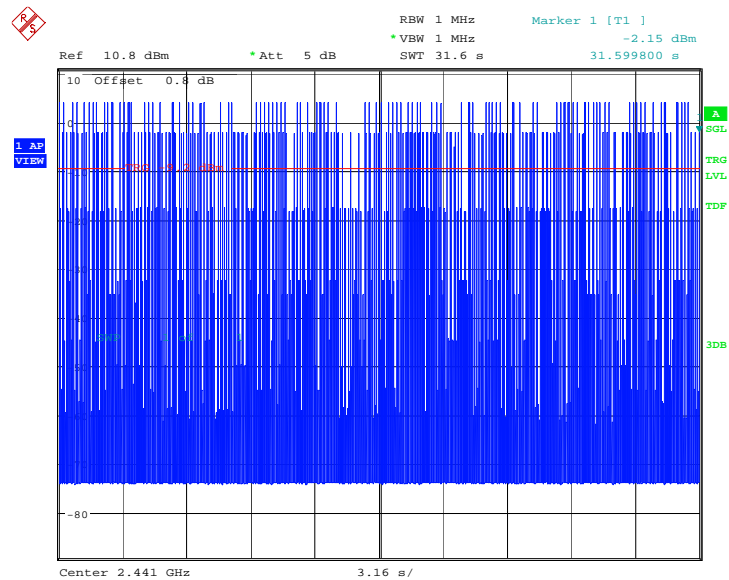


Date: 7.FEB.2013 02:25:14

Fig.112. Number of Transmissions Measurement: Channel 39, 8DPSK -DH3

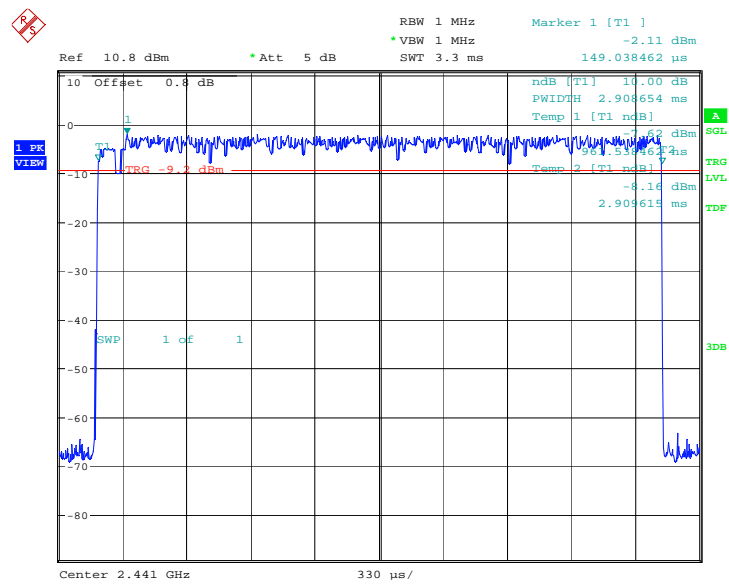

Date: 7.FEB.2013 02:26:43

Fig.113. Time of occupancy (Dwell Time): Channel 39, 8DPSK -DH5

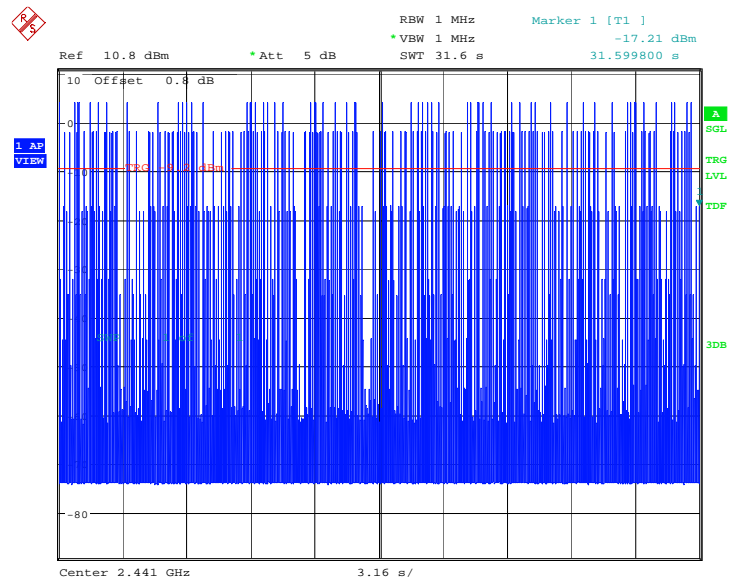

Date: 7.FEB.2013 02:26:31

Fig.114. Number of Transmissions Measurement: Channel 39, 8DPSK -DH5

### A.7. 20dB Bandwidth

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1) RSS-210 A8.1 (1)	NA *

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

\* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

#### Measurement Results:

##### For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.115	865.38	NA
39	Fig.116	865.38	NA
78	Fig.117	865.38	NA

##### For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.118	1264.42	NA
39	Fig.119	1293.27	NA
78	Fig.120	1269.23	NA


##### For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.121	1293.27	NA
39	Fig.122	1259.62	NA
78	Fig.123	1274.04	NA

**Conclusion: NA**


**Test graphs as below:**



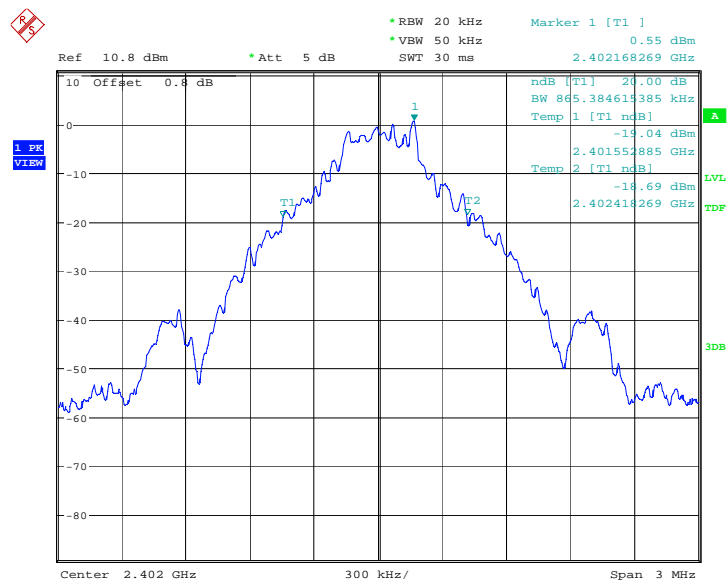


Date: 7.FEB.2013 01:44:28

Fig.115. 20dB Bandwidth: GFSK, Channel 0

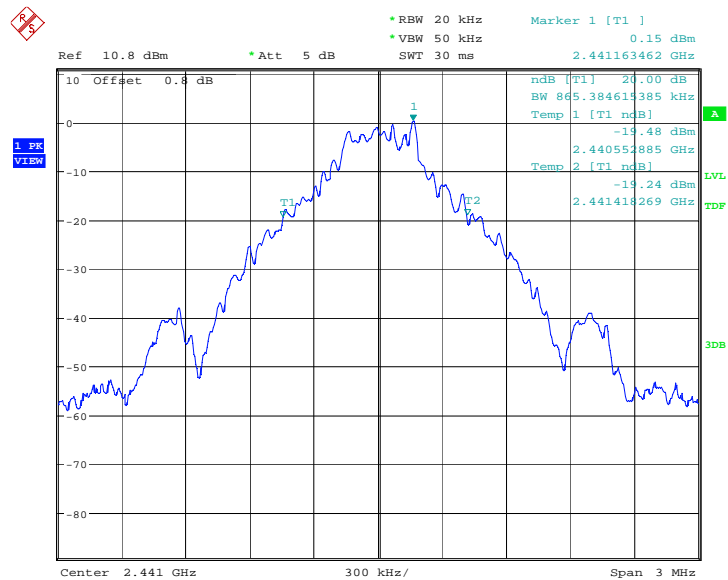


Date: 7.FEB.2013 01:45:00

Fig.116. 20dB Bandwidth: GFSK, Channel 39

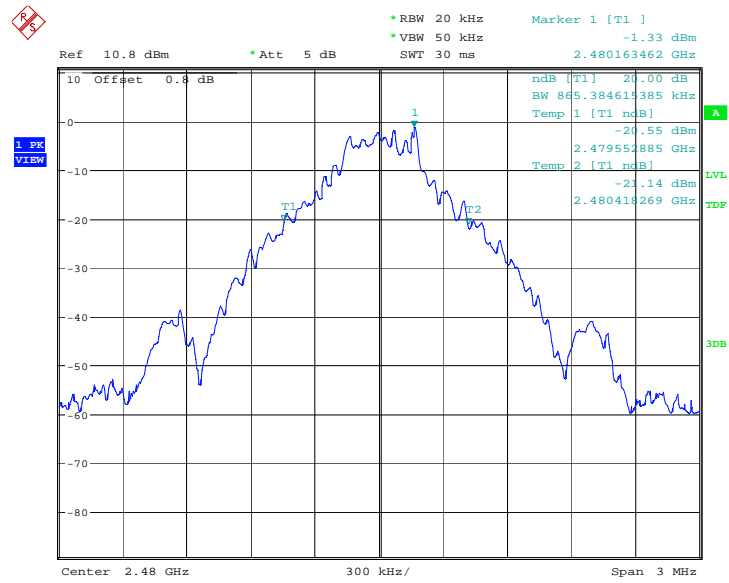


Date: 7.FEB.2013 01:45:31

Fig.117. 20dB Bandwidth: GFSK, Channel 78

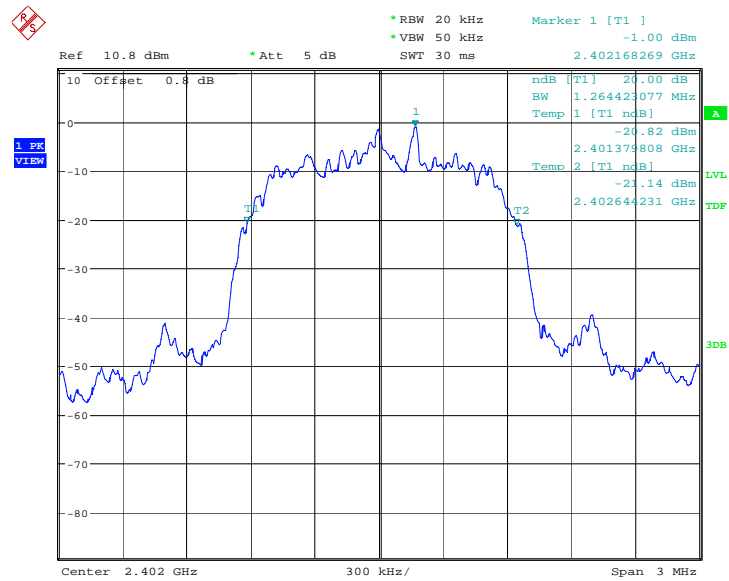


Date: 7.FEB.2013 02:05:52

Fig.118. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 0

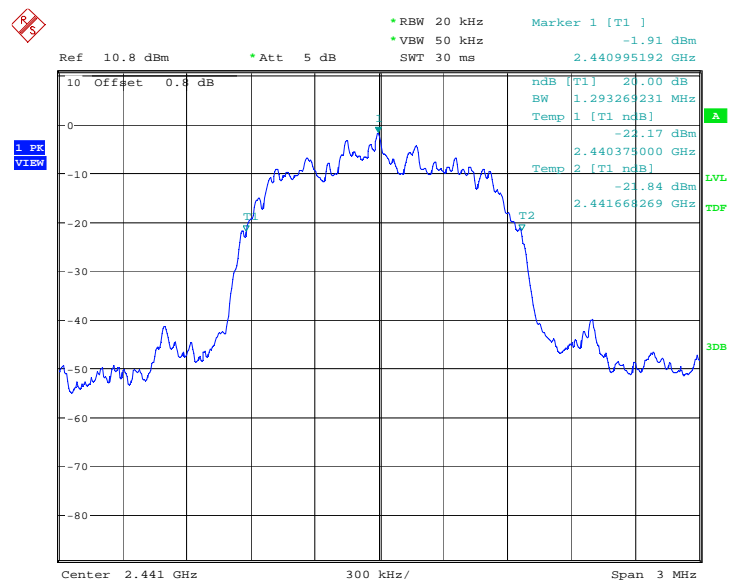


Date: 7.FEB.2013 02:06:24

Fig.119. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 39

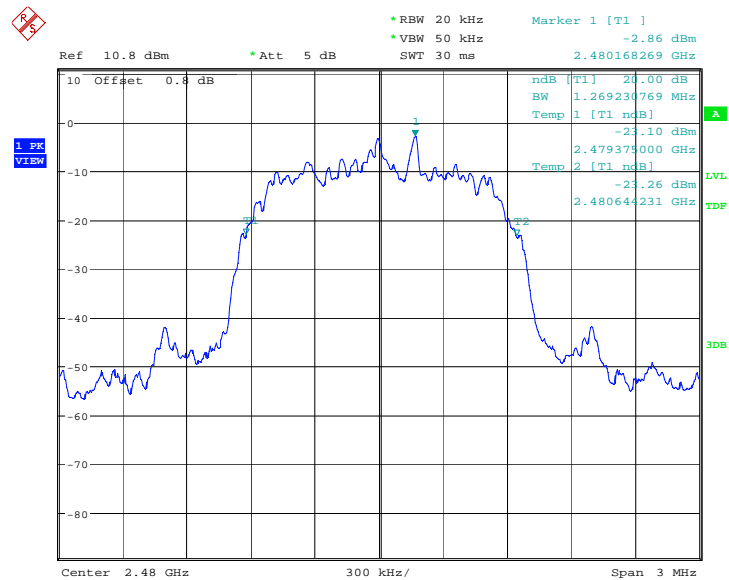


Date: 7.FEB.2013 02:06:56

Fig.120. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 78

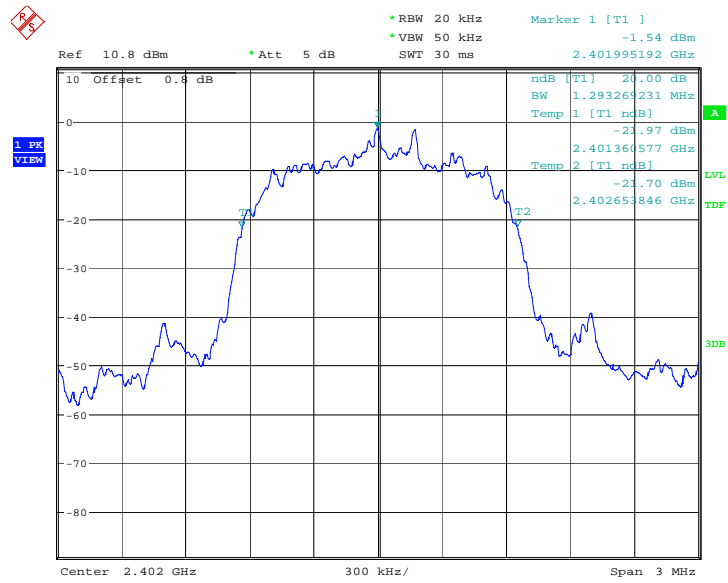


Date: 7.FEB.2013 02:27:17

Fig.121. 20dB Bandwidth: 8DPSK, Channel 0

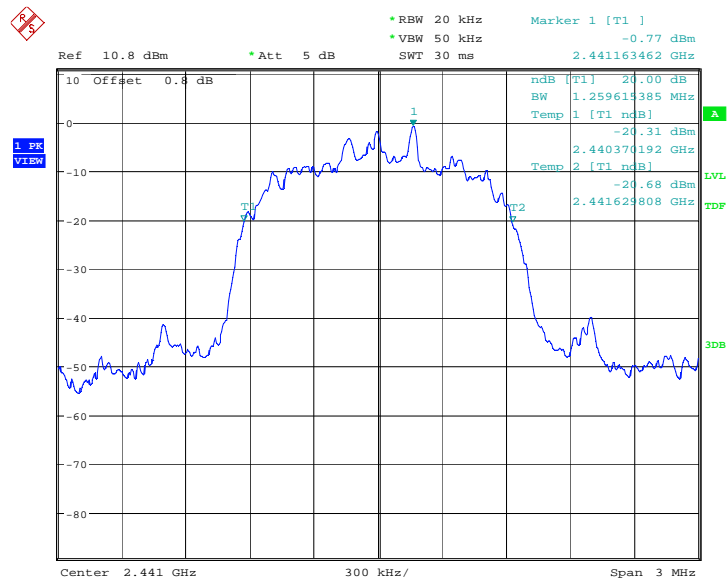

Date: 7.FEB.2013 02:27:49

Fig.122. 20dB Bandwidth: 8DPSK, Channel 39

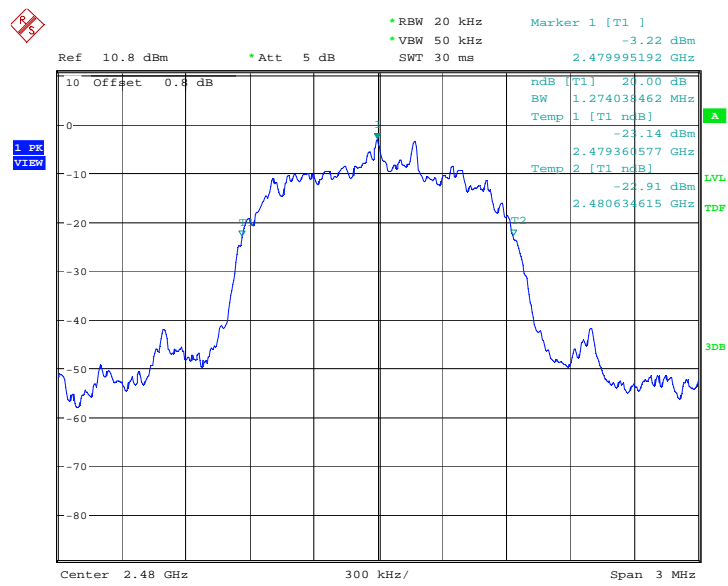

Date: 7.FEB.2013 02:28:21

Fig.123. 20dB Bandwidth: 8DPSK, Channel 78

### A.8. Carrier Frequency Separation

#### Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1) RSS-210 A8.1 (2)	over 25 kHz or $(2/3) * 20\text{dB bandwidth}$

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

\* Comment: This limit should be over 25 kHz or  $(2/3) * 20\text{dB bandwidth}$ , whichever is greater.

#### Measurement Result:

##### For GFSK

Channel	Carrier frequency separation (kHz)	Conclusion
39	Fig.124	P

##### For $\pi/4$ DQPSK


Channel	Carrier frequency separation (kHz)	Conclusion
39	Fig.125	P

##### For 8DPSK

Channel	Carrier frequency separation (kHz)	Conclusion
39	Fig.126	P


**Conclusion: PASS**

Test graphs as below:

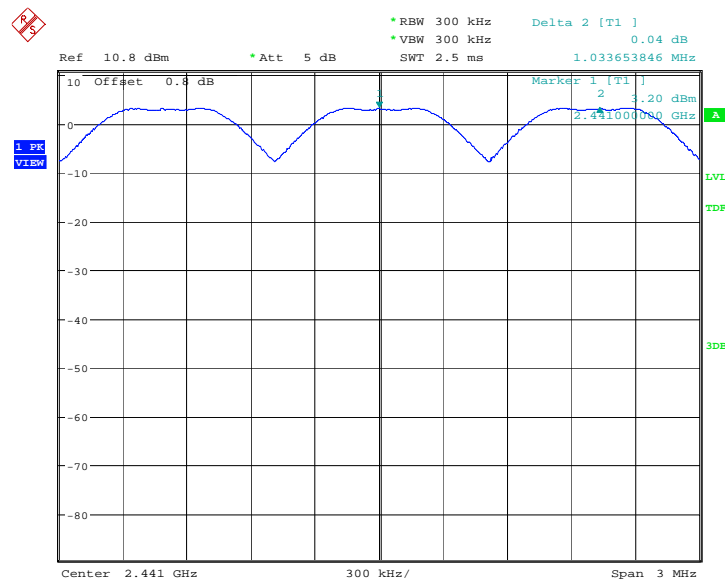


Date: 7.FEB.2013 01:47:36

Fig.124. Carrier frequency separation measurement: GFSK, Channel 39

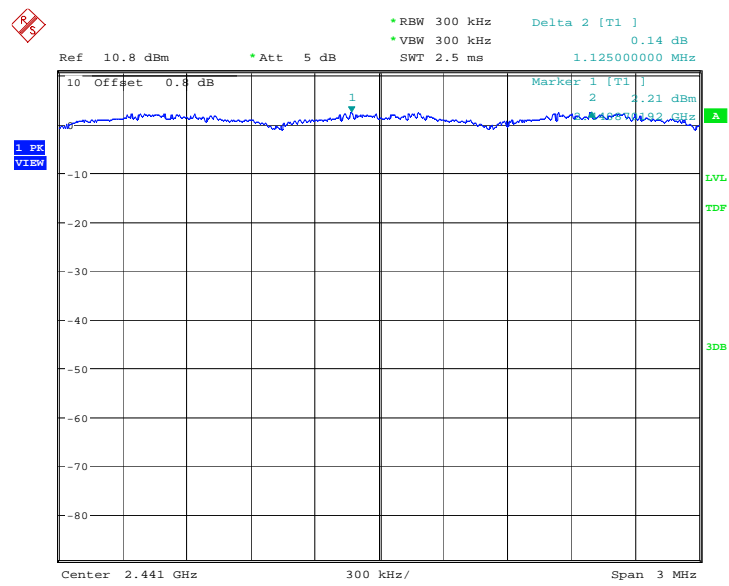

Date: 7.FEB.2013 02:09:00

Fig.125. Carrier frequency separation measurement:  $\pi/4$  DQPSK, Channel 39

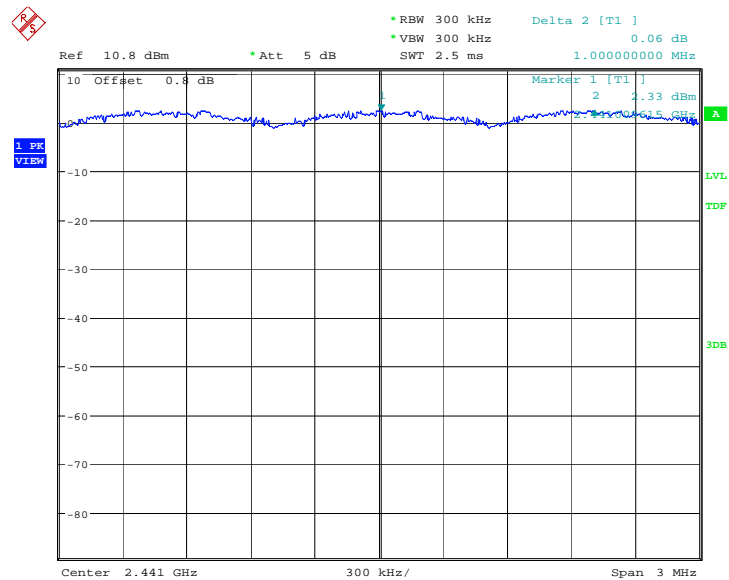

Date: 7.FEB.2013 02:30:25

Fig.126. Carrier frequency separation measurement: 8DPSK, Channel 39

### A.9. Number of Hopping Channels

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii) RSS-210 A8.1 (4)	At least 15 non-overlapping channels

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

**Measurement Result:**

**For GFSK**

Channel	Number of hopping channels	Conclusion
0~39	Fig.127	P
40~78	Fig.128	

**For  $\pi/4$  DQPSK**


Channel	Number of hopping channels	Conclusion
0~39	Fig.129	P
40~78	Fig.130	

**For 8DPSK**

Channel	Number of hopping channels	Conclusion
0~39	Fig.131	P
40~78	Fig.132	

**Conclusion: PASS**


**Test graphs as below:**

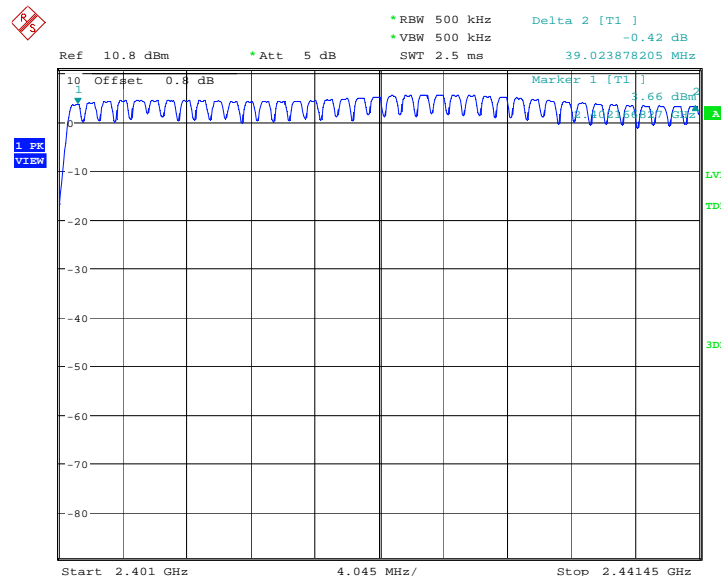

Date: 7.FEB.2013 01:49:40


Fig.127. Number of hopping frequencies: GFSK, Channel 0 - 39



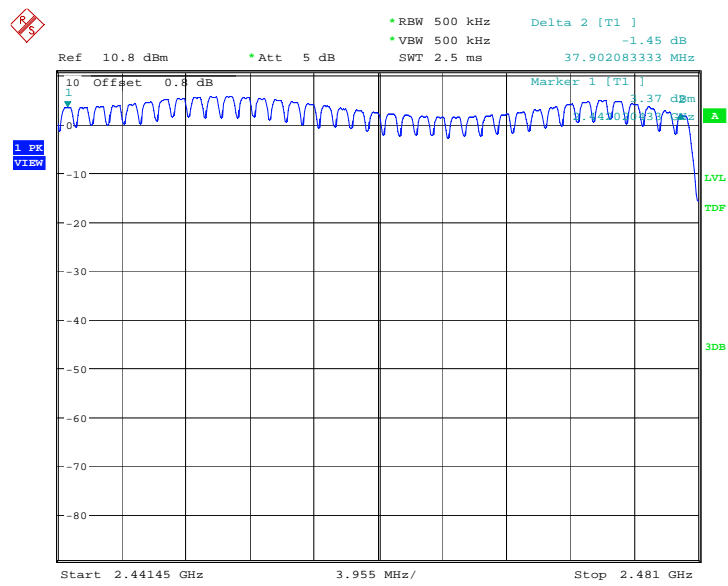


Date: 7.FEB.2013 01:51:42

Fig.128. Number of hopping frequencies: GFSK, Channel 40 - 78

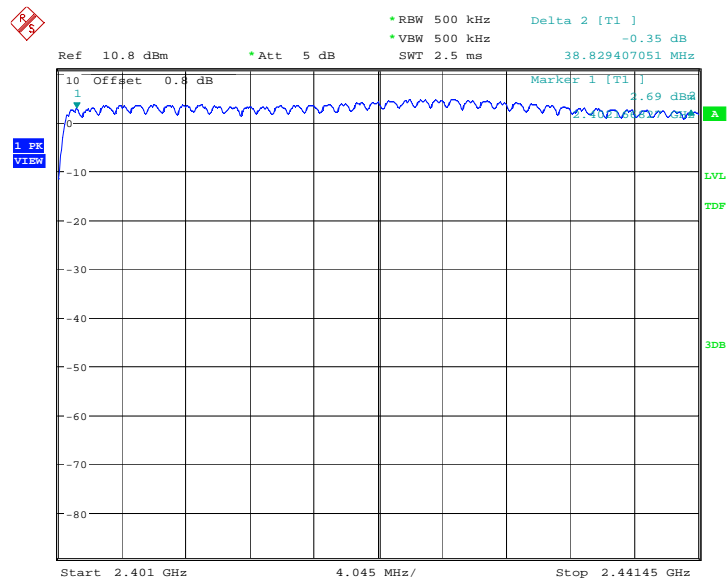


Date: 7.FEB.2013 02:11:04

Fig.129. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 0 - 39

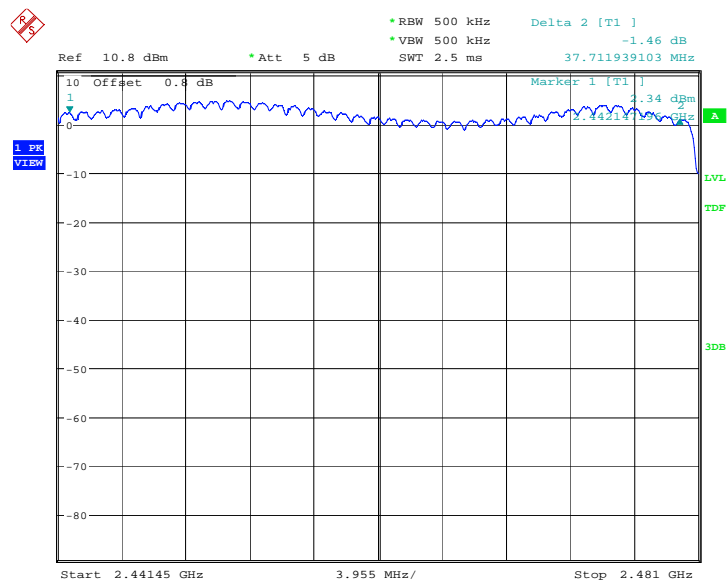


Date: 7.FEB.2013 02:13:07

Fig.130. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 40 - 78

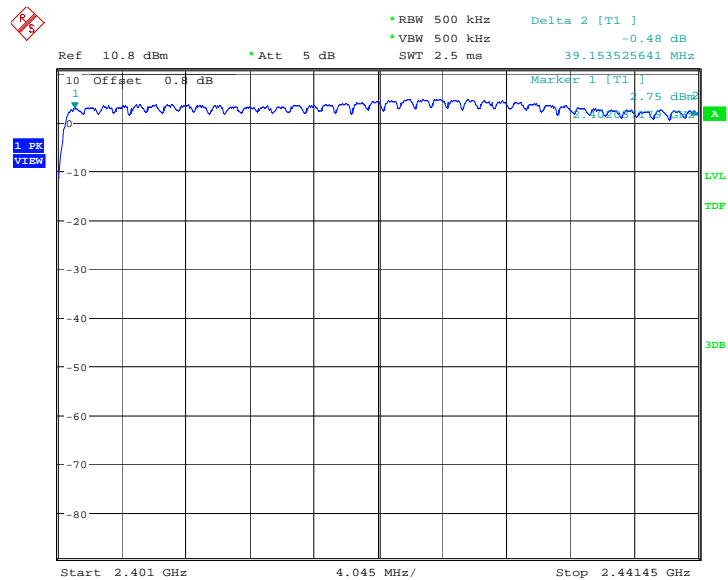

Date: 7.FEB.2013 02:32:29

Fig.131. Number of hopping frequencies: 8DPSK, Channel 0 - 39

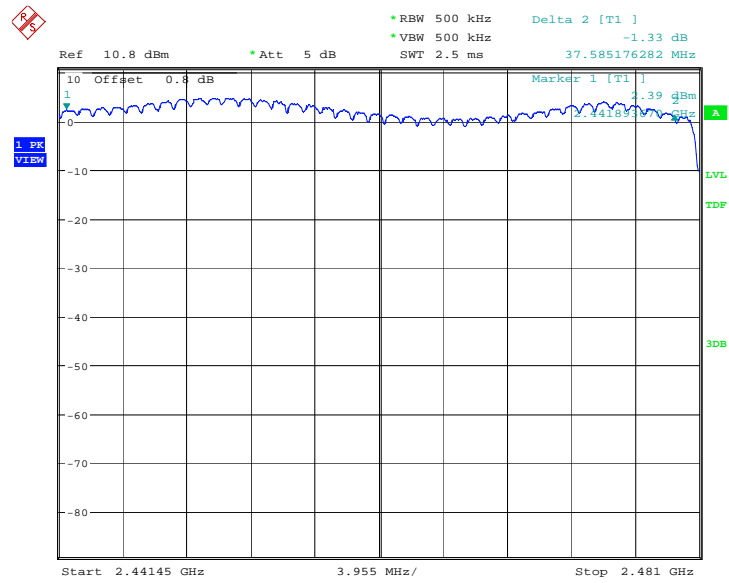

Date: 7.FEB.2013 02:34:31

Fig.132. Number of hopping frequencies: 8DPSK, Channel 40 - 78

## A.10. AC Powerline Conducted Emission

### Test Condition

Voltage (V)	Frequency (Hz)
120	60

### Measurement Result and limit:

#### Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

#### Bluetooth (Average Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

**Conclusion: PASS**

**Test graphs as below:**

Traffic

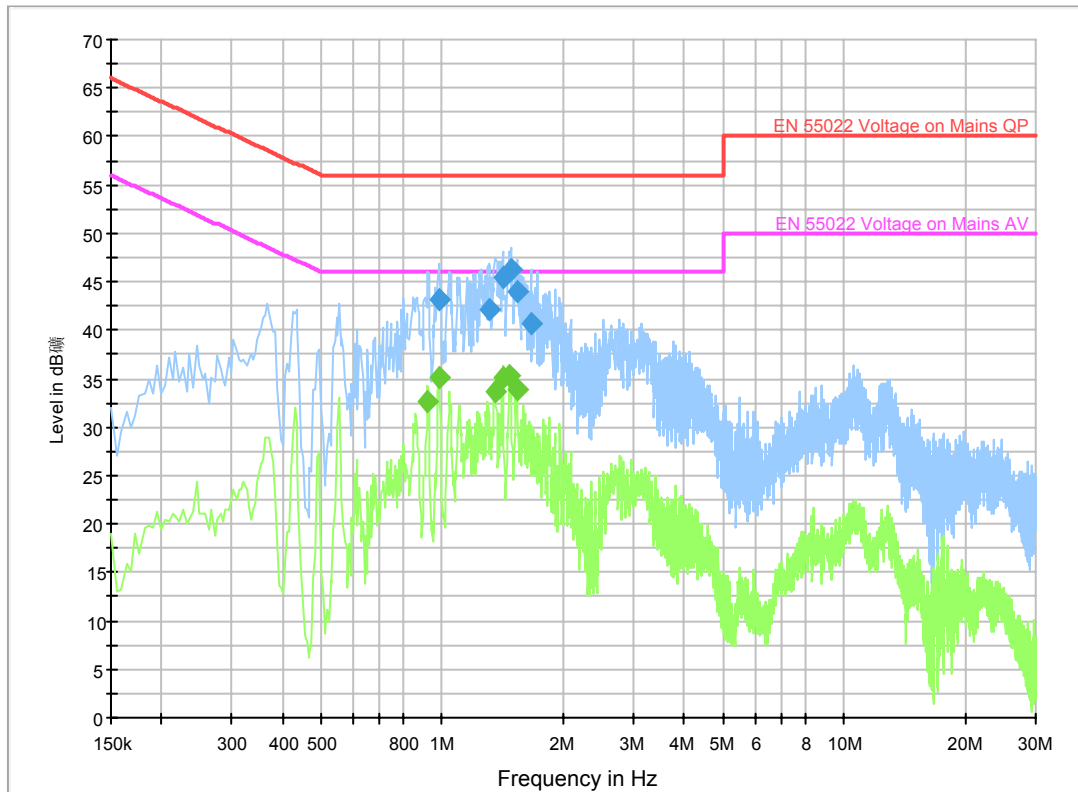


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.982500	43.2	GND	L1	10.0	12.8	56.0
1.306500	42.1	GND	L1	10.0	13.9	56.0
1.414500	45.4	GND	L1	10.0	10.6	56.0
1.482000	46.3	GND	L1	10.0	9.7	56.0
1.531500	44.0	GND	L1	10.0	12.0	56.0
1.662000	40.7	GND	L1	10.0	15.3	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.919500	32.6	GND	L1	10.0	13.4	46.0
0.982500	35.2	GND	L1	10.0	10.8	46.0
1.351500	33.6	GND	L1	10.0	12.4	46.0
1.414500	35.1	GND	L1	10.0	10.9	46.0
1.473000	35.2	GND	L1	10.0	10.8	46.0
1.531500	34.0	GND	L1	10.0	12.0	46.0

Idle:

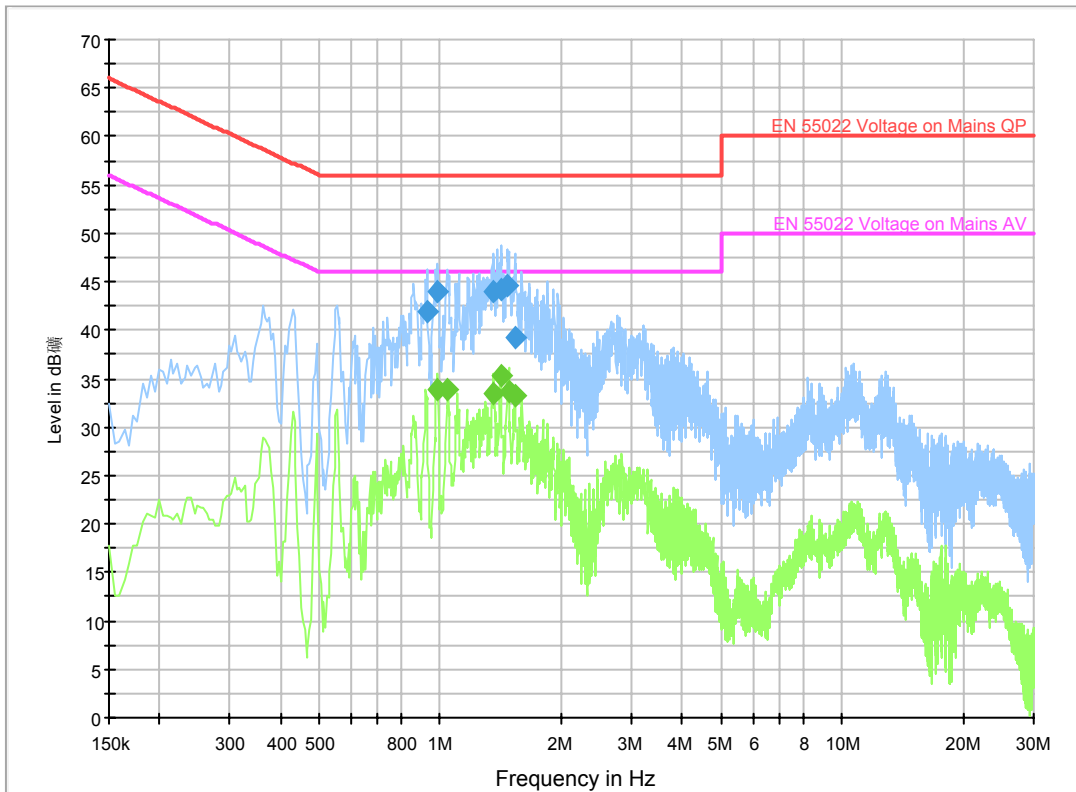

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.928500	42.0	GND	L1	10.0	14.0	56.0
0.987000	44.1	GND	L1	10.0	11.9	56.0
1.360500	44.1	GND	L1	10.0	11.9	56.0
1.423500	44.1	GND	L1	10.0	11.9	56.0
1.473000	44.5	GND	L1	10.0	11.5	56.0
1.531500	39.2	GND	N	10.0	16.8	56.0

### Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.987000	33.8	GND	L1	10.0	12.2	46.0
1.045500	33.8	GND	L1	10.0	12.2	46.0
1.360500	33.5	GND	L1	10.0	12.5	46.0
1.414500	35.3	GND	L1	10.0	10.7	46.0
1.482000	33.8	GND	L1	10.0	12.2	46.0
1.540500	33.2	GND	L1	10.0	12.8	46.0

## A.11 RECEIVER RADIATION EMISSION

### Reference

FCC: CFR Part 15.109, 2.1053/ RSS-Gen 7.2.2

#### A.11.1 Method of Measurement

The measurement procedure in ANSI C64.4-2003 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without CMU200's signaling.

#### A.11.2 Method of Measurement


Frequency of Emission (MHz)	Limit (dB $\mu$ V/m)	Measurement Distance (m)
30-88	30	10
88-216	33.5	10
216-960	36	10
960-1000	44	10
>1000	54	3

**A. 11.3 Measurement results**

IF bandwidth: 120 kHz

**Idle Mode: 30MHz-1GHz**


RE 30MHz-1GHz

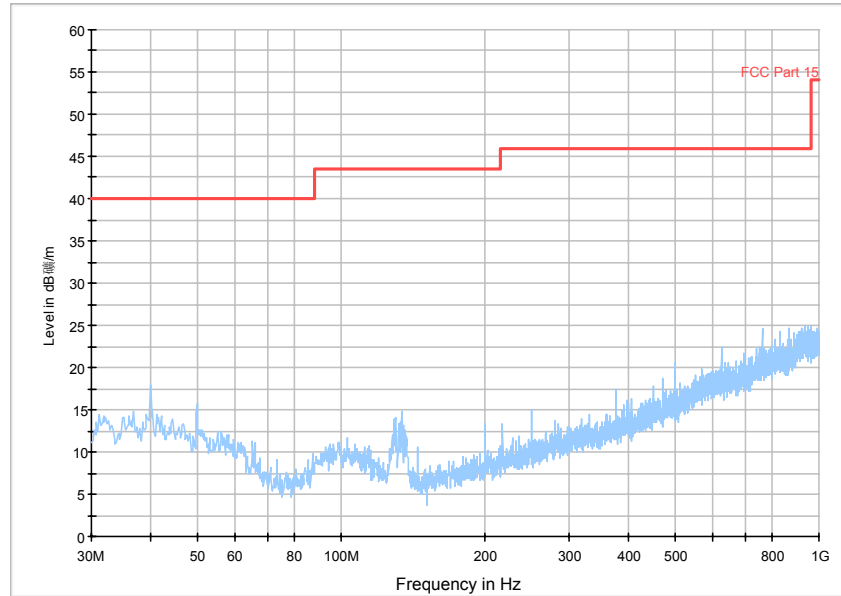

RBW / VBW 1 MHz

**Idle Mode: 1GHz-3GHz**

RE - 1GHz-3GHz

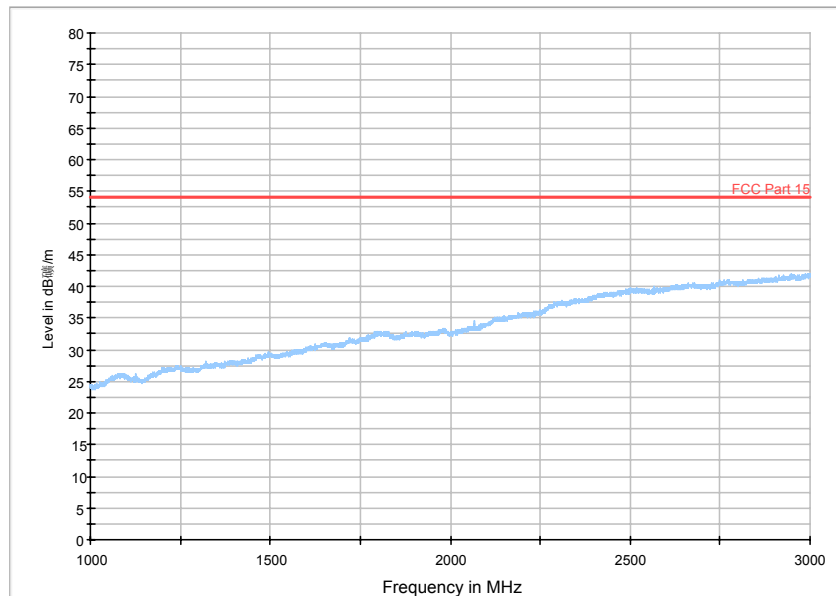



RBW / VBW 1 MHz



### Idle Mode: 3GHz-18GHz

RE - 3GHz-18GHz

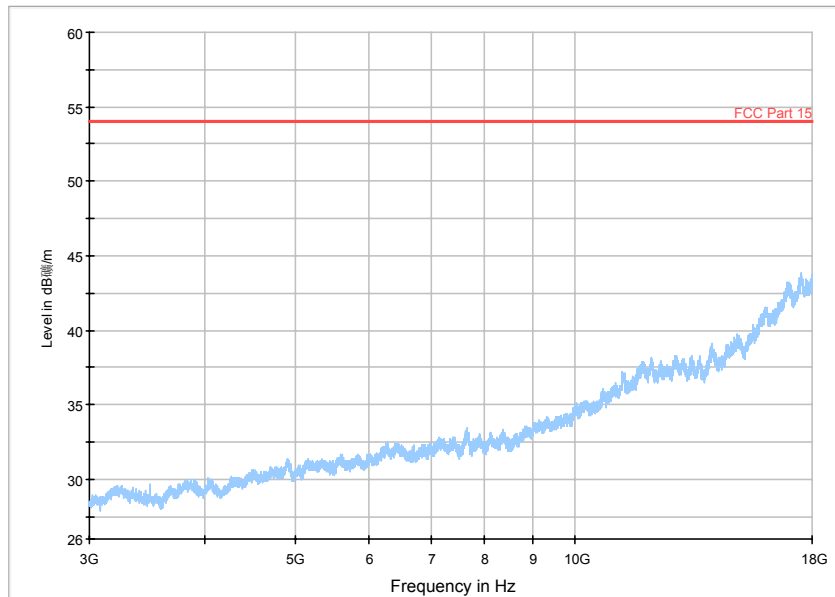

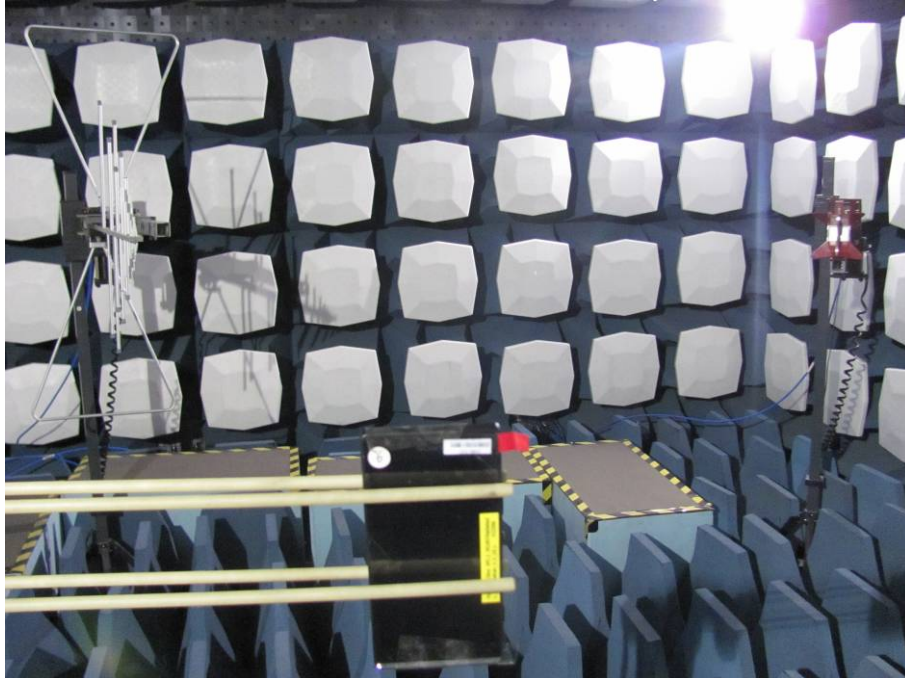**ANNEX B: Photographs of the Test Set-up****Photo 1:****Photo 2:**

**ANNEX C: Photographs of the EUT**



**Mobile Phone**



**Mobile Phone**



**Mobile Phone**



**Mobile Phone**



**Mobile Phone**



**Mobile Phone**



**Label of Mobile Phone**



**Mobile Phone Disassembly**



**Mobile Phone Disassembly**



**Mobile Phone Disassembly**



**Mobile Phone Disassembly**




**Mobile Phone Disassembly**





**Mobile Phone Disassembly**

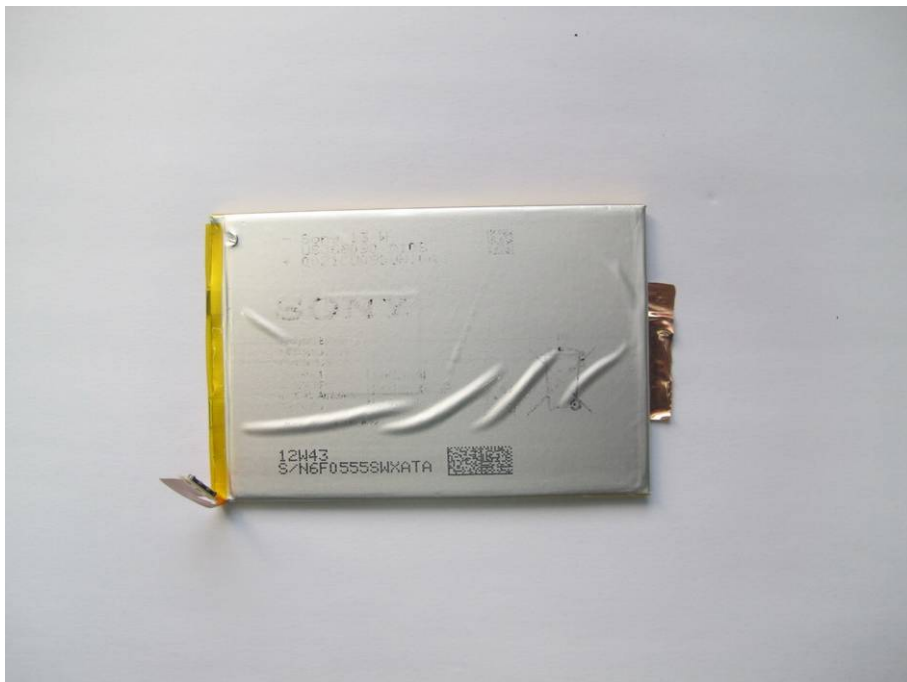

**Li-Polymer Battery**



Travel Charger



Label of Travel Charger



**USB Cable**

**\*\*\* END OF REPORT BODY \*\*\***