


050: Touch Left UMTS FDD 5 CH4183

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

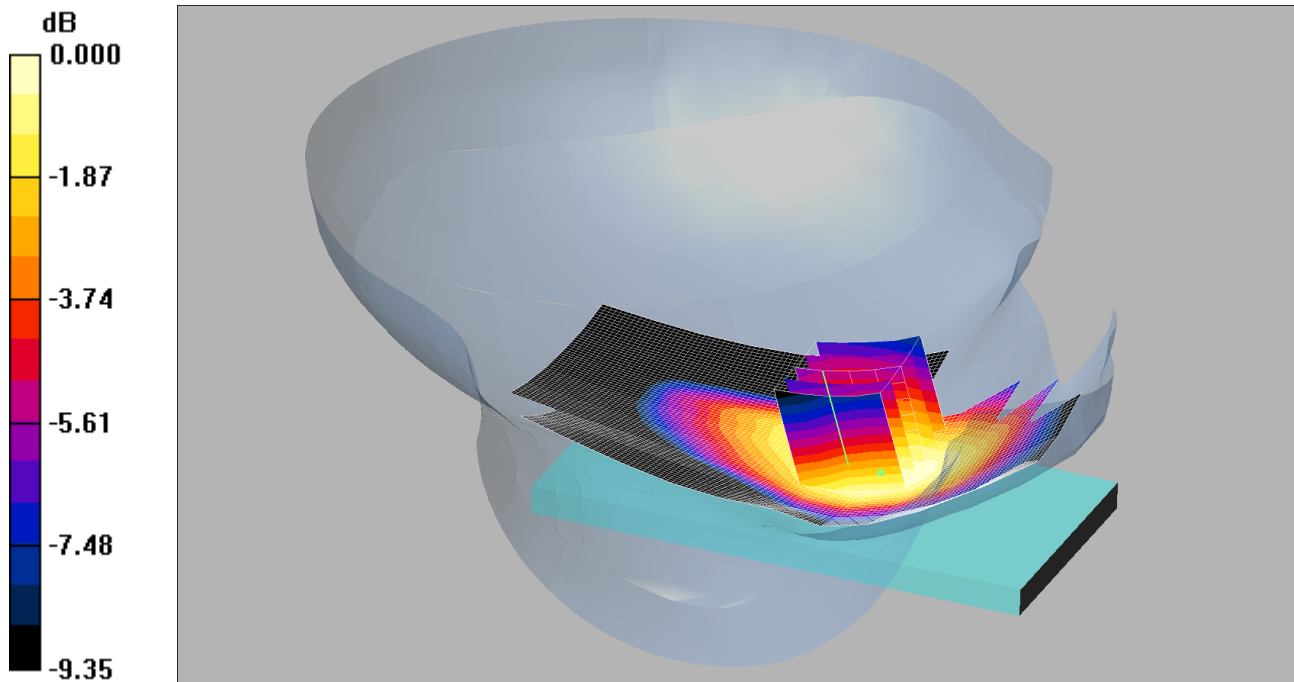

0 dB = 0.620mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.618 mW/g

Touch Left - Middle 2 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.717 W/kg


SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.461 mW/g

Maximum value of SAR (measured) = 0.620 mW/g

051: Tilt Left UMTS FDD 5 CH4183

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

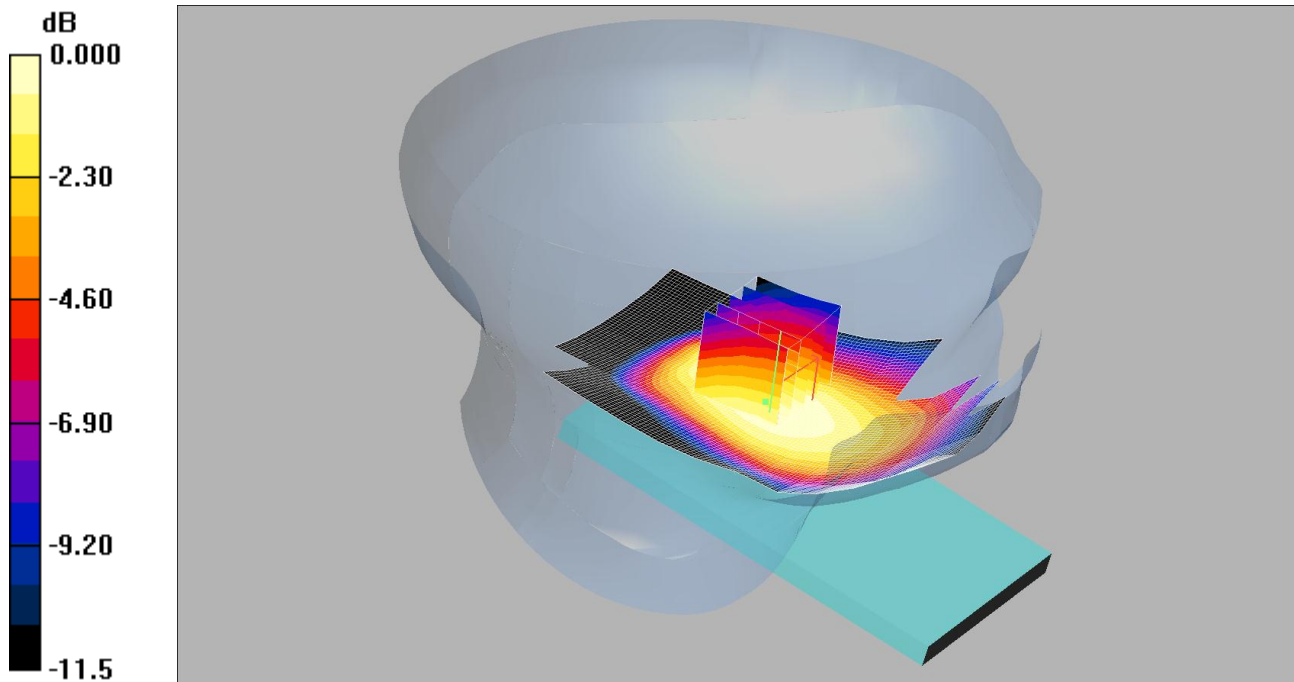

0 dB = 0.319mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.330 mW/g

Tilt Left - Middle 2 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 0.363 W/kg


SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.319 mW/g

052: Touch Right UMTS FDD 5 CH4183

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

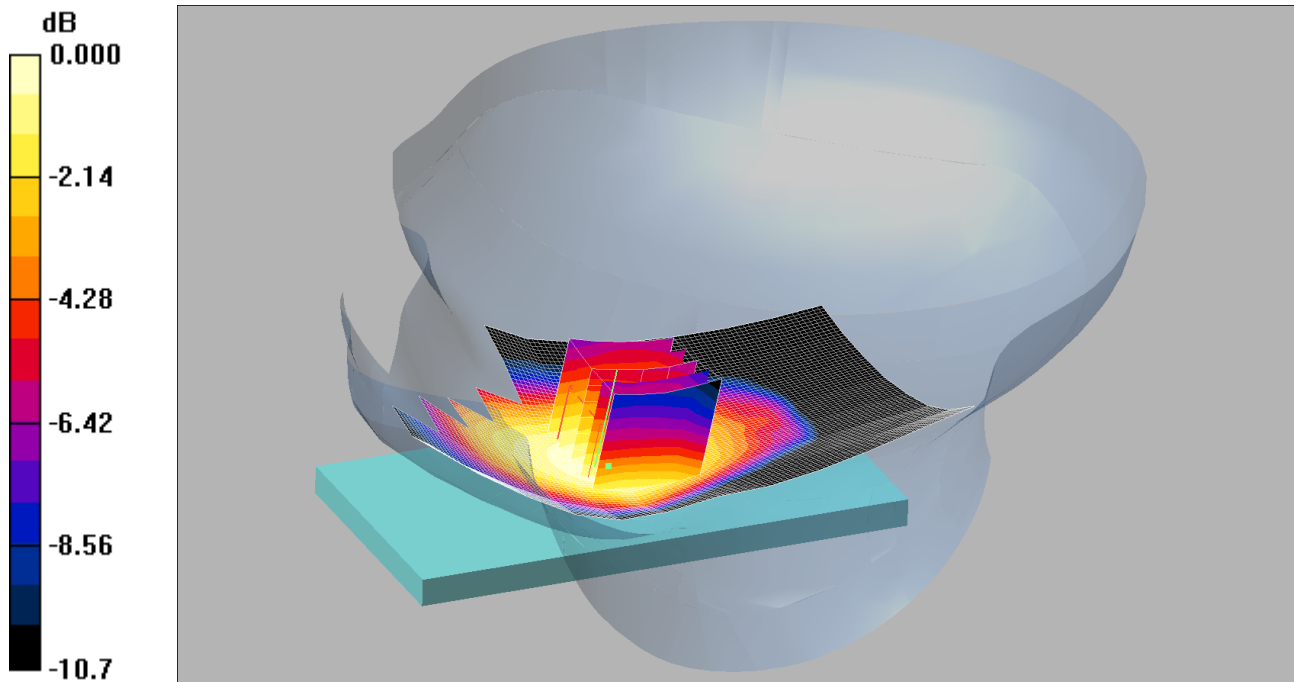

0 dB = 0.660mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.669 mW/g

Touch Right - Middle 2 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.773 W/kg


SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.495 mW/g

Maximum value of SAR (measured) = 0.660 mW/g

053: Tilt Right UMTS FDD 5 CH4183

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

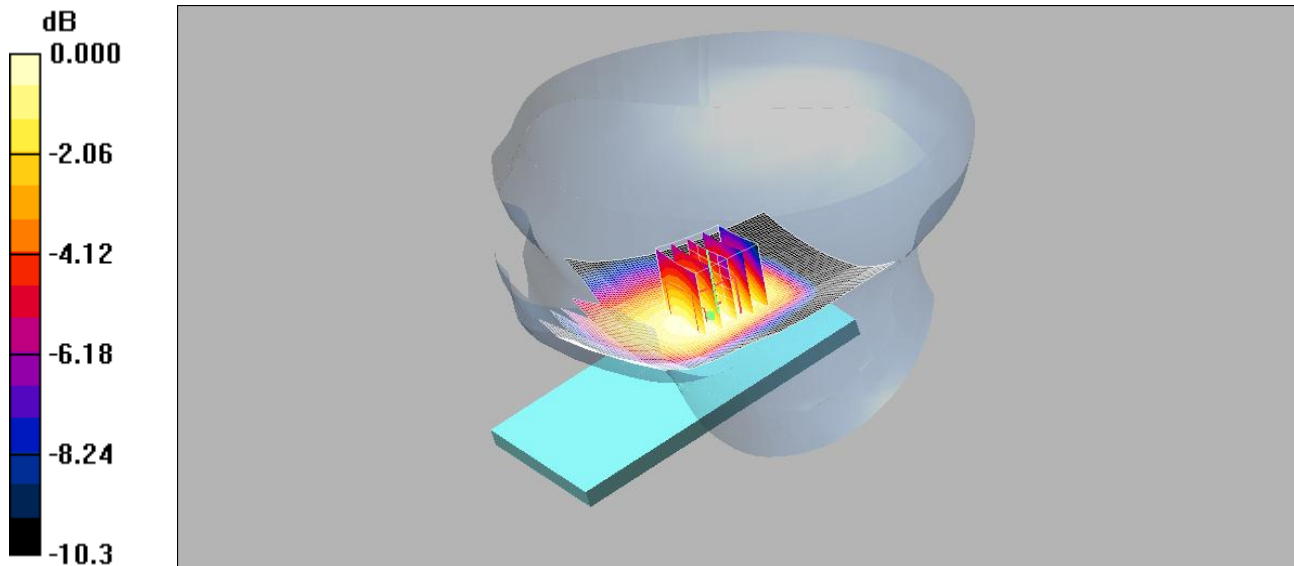

0 dB = 0.301mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Right - Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.305 mW/g

Tilt Right - Middle 2 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.333 W/kg


SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.301 mW/g

054: Touch Right UMTS FDD 5 CH4132

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

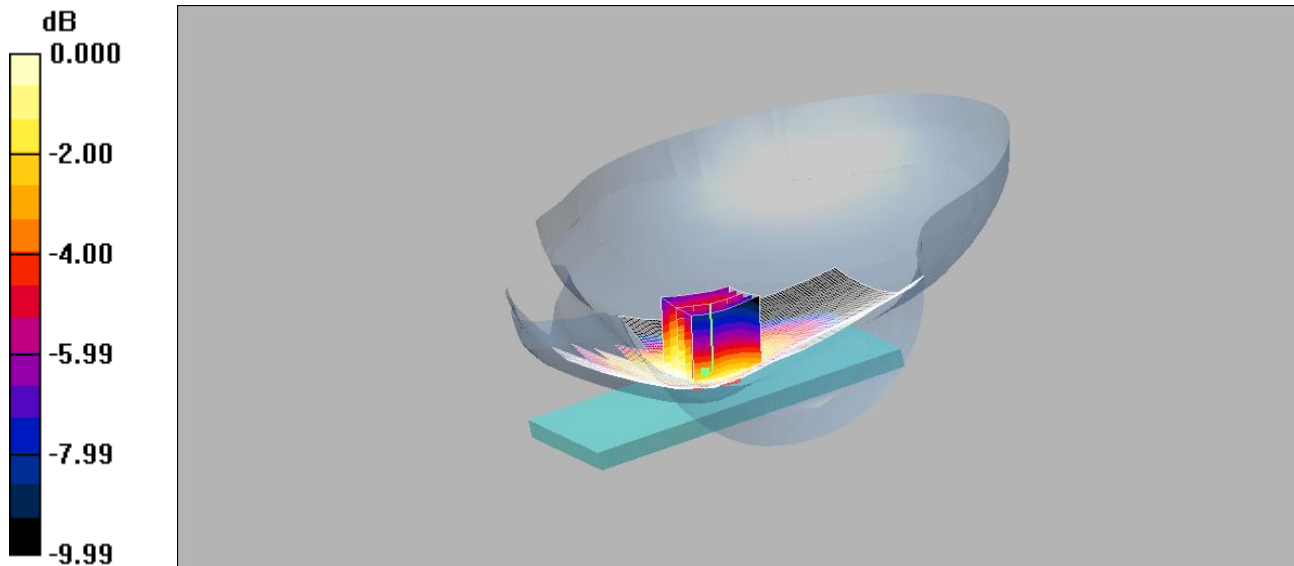

0 dB = 0.615mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle 2 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.638 mW/g

Touch Right - Middle 2 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.723 W/kg


SAR(1 g) = 0.593 mW/g; SAR(10 g) = 0.466 mW/g

Maximum value of SAR (measured) = 0.615 mW/g

055: Touch Right UMTS FDD 5 CH4233

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

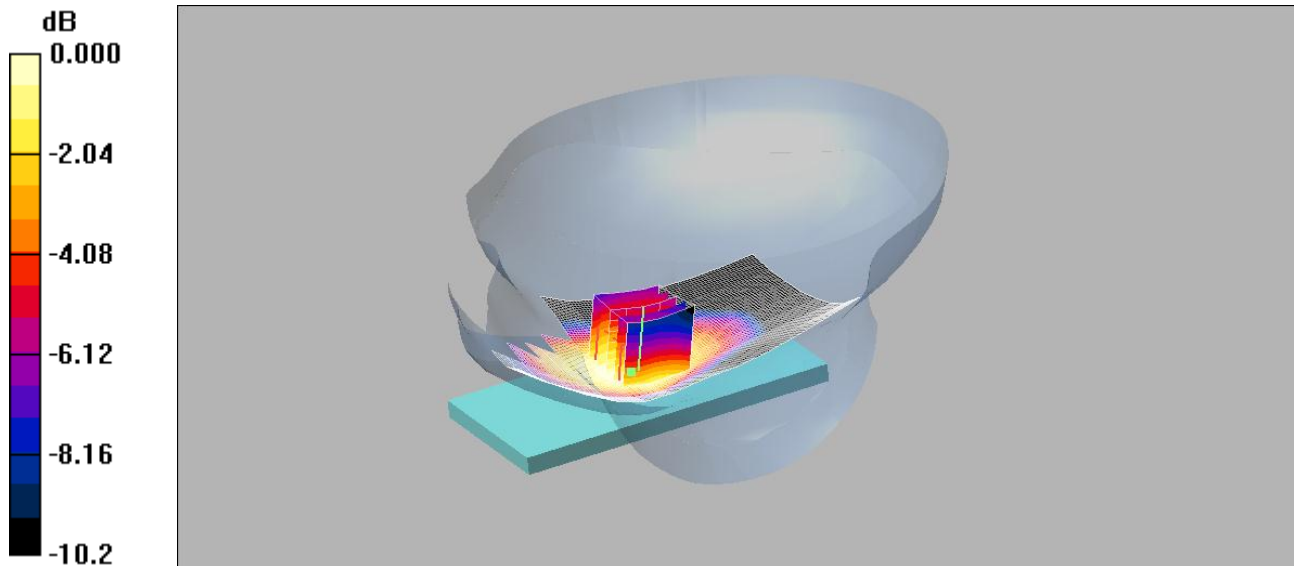

0 dB = 0.702mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.719 mW/g

Touch Right - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.830 W/kg


SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.530 mW/g

Maximum value of SAR (measured) = 0.702 mW/g

056: Front of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

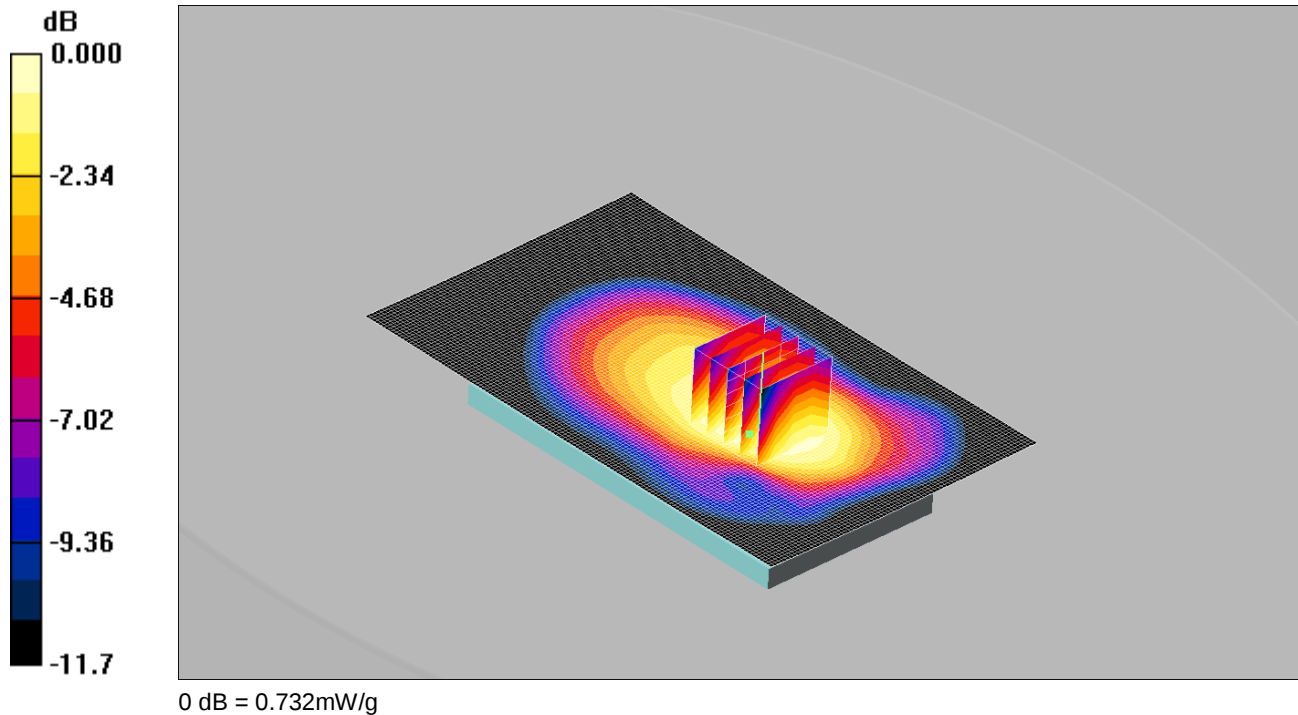

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.754 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.852 W/kg


SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.548 mW/g

Maximum value of SAR (measured) = 0.732 mW/g

057: Back of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

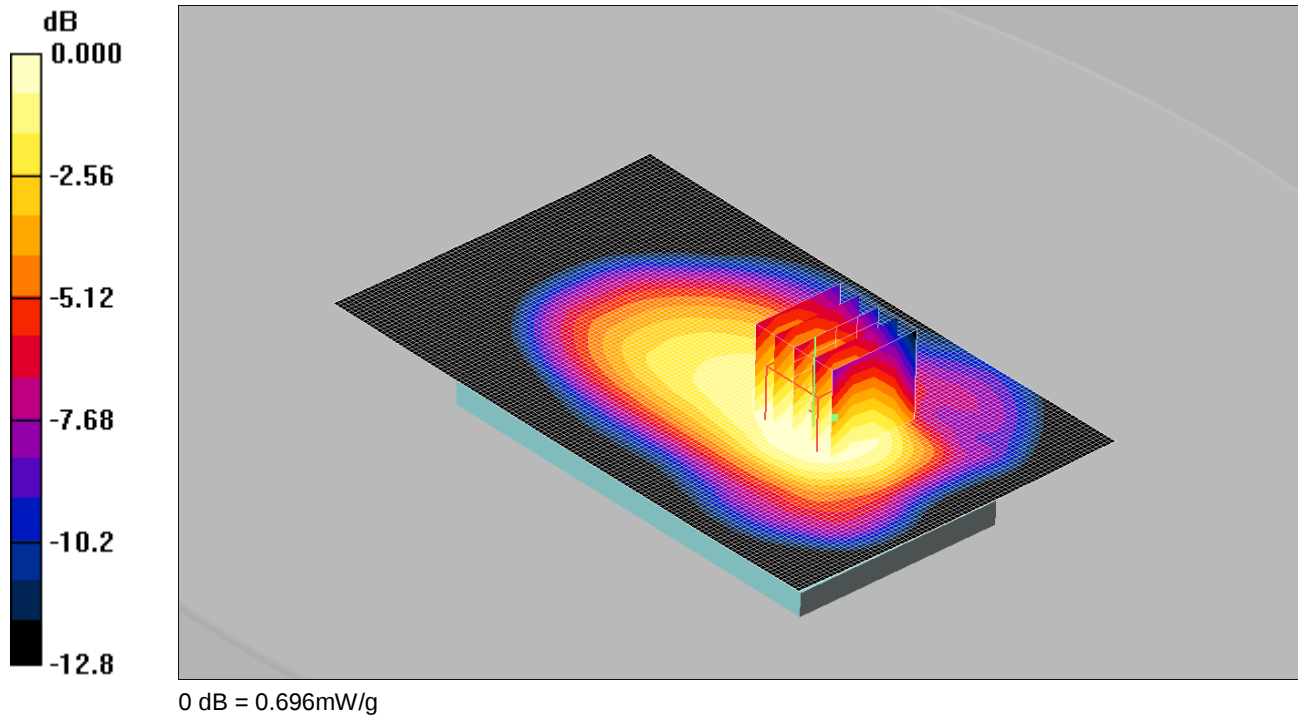

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.742 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.8 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.797 W/kg


SAR(1 g) = 0.674 mW/g; SAR(10 g) = 0.528 mW/g

Maximum value of SAR (measured) = 0.696 mW/g

058: Left hand side of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

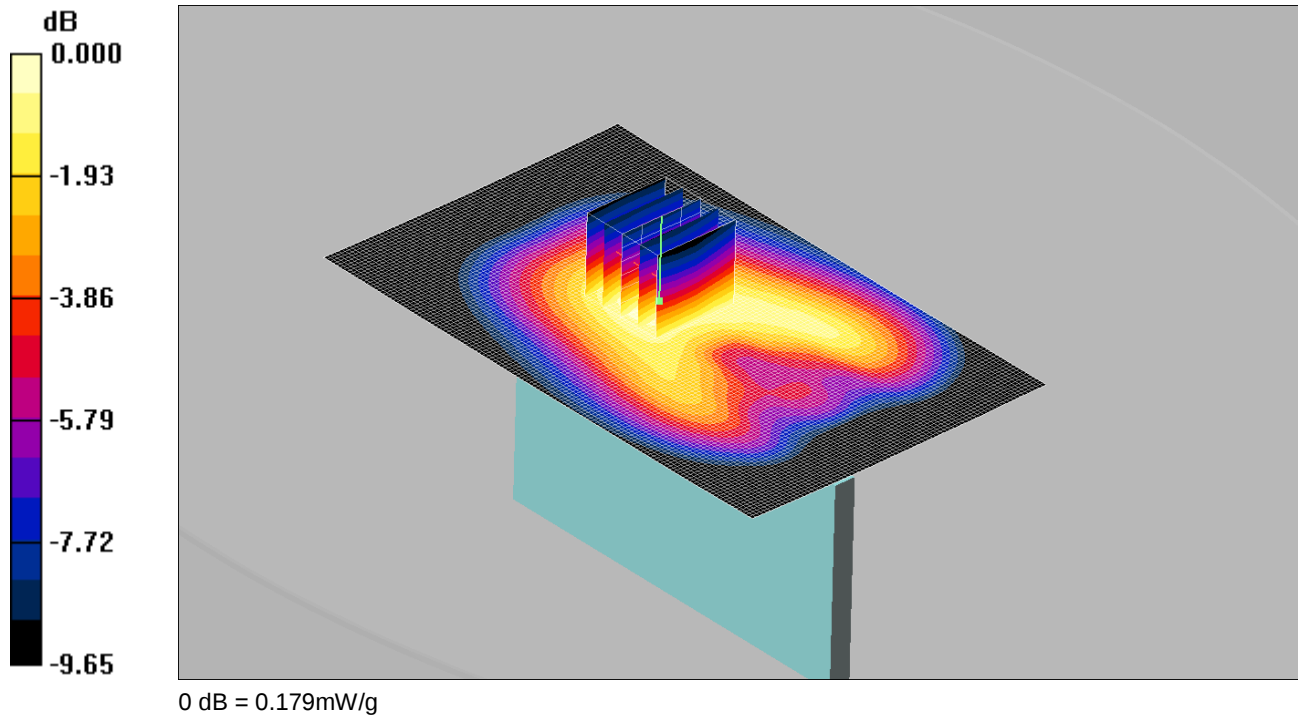

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 22/01/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left hand side of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.178 mW/g

Left hand side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.232 W/kg


SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.179 mW/g

059: Right hand side of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

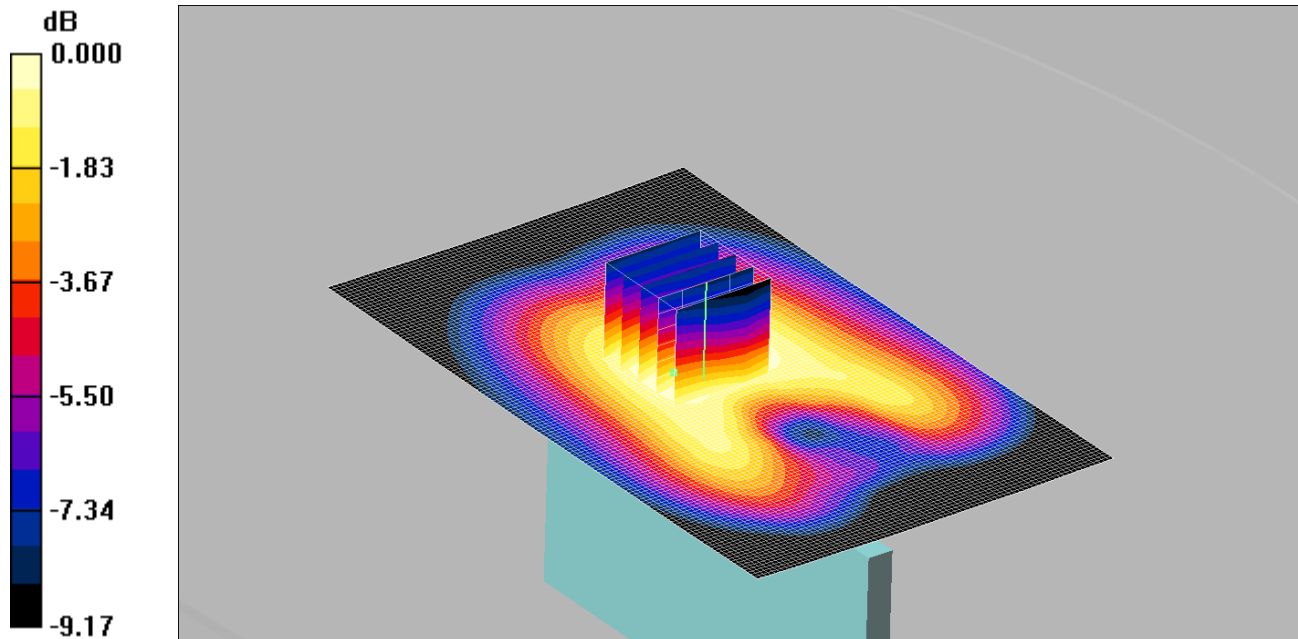

0 dB = 0.132mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right hand side of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.133 mW/g

Right hand side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.165 W/kg


SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.132 mW/g

060: Bottom of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

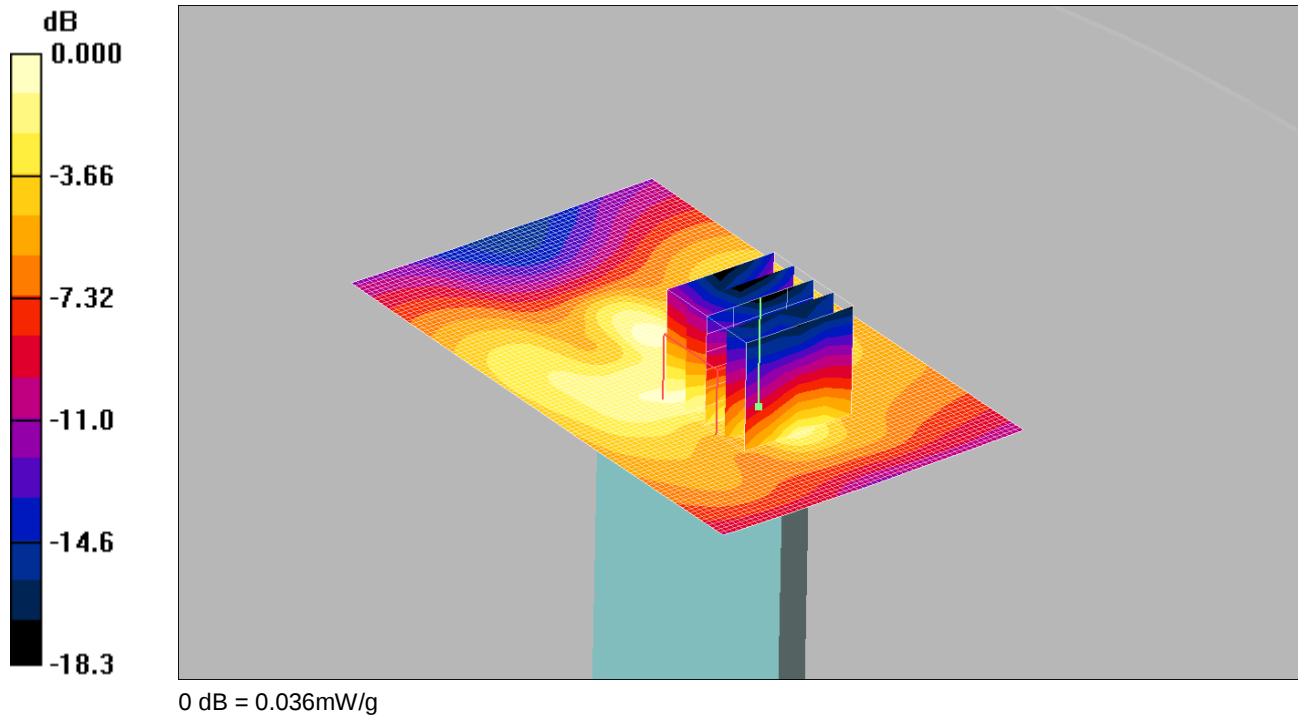

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Middle 2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.038 mW/g

Bottom of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.58 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 0.076 W/kg


SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.036 mW/g

061: Front of EUT Facing Phantom UMTS FDD 5 CH4132

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial:

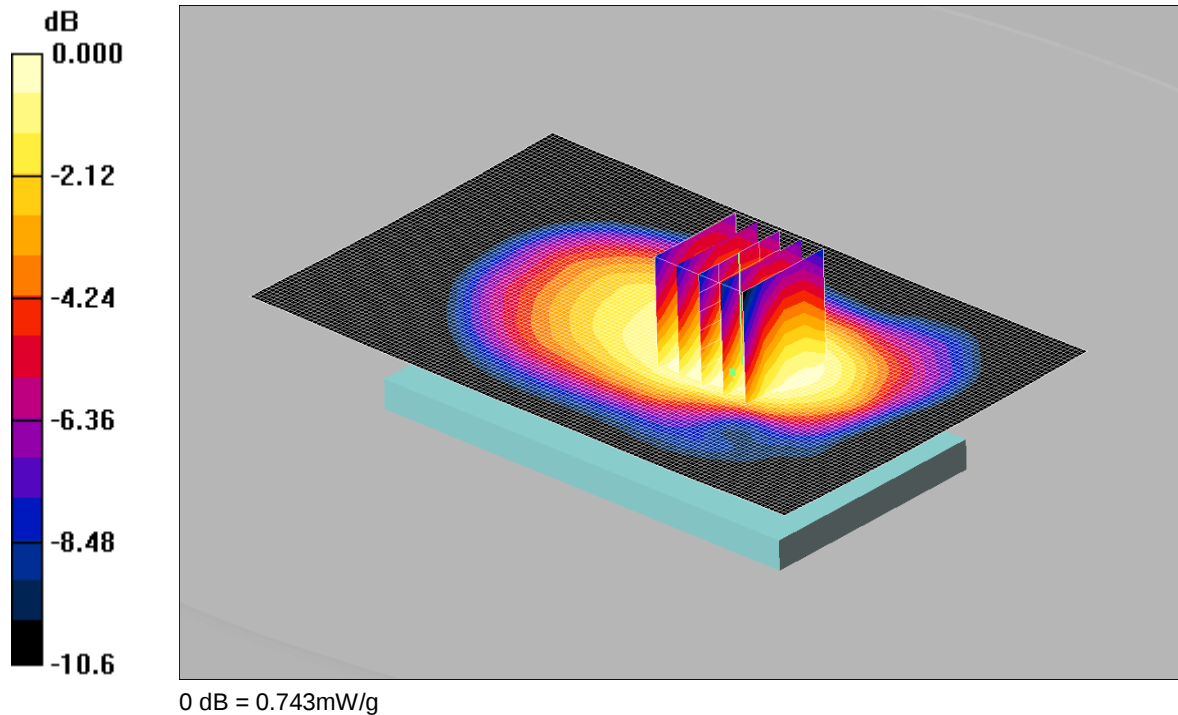

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.762 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.841 W/kg


SAR(1 g) = 0.713 mW/g; SAR(10 g) = 0.563 mW/g

Maximum value of SAR (measured) = 0.743 mW/g

062: Front of EUT Facing Phantom UMTS FDD 5 CH4233

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Maki; Serial:

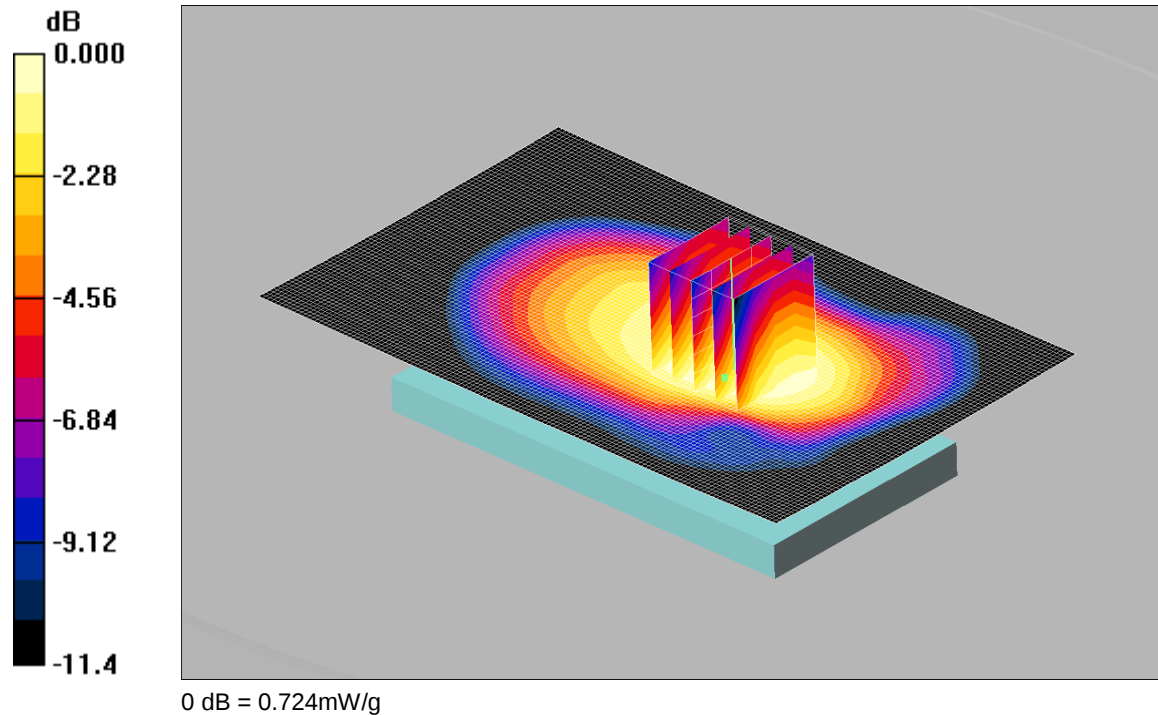

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.748 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.3 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.832 W/kg


SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.546 mW/g

Maximum value of SAR (measured) = 0.724 mW/g

063: Front of EUT Facing Phantom at 15mm UMTS FDD 5 CH4132

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial:

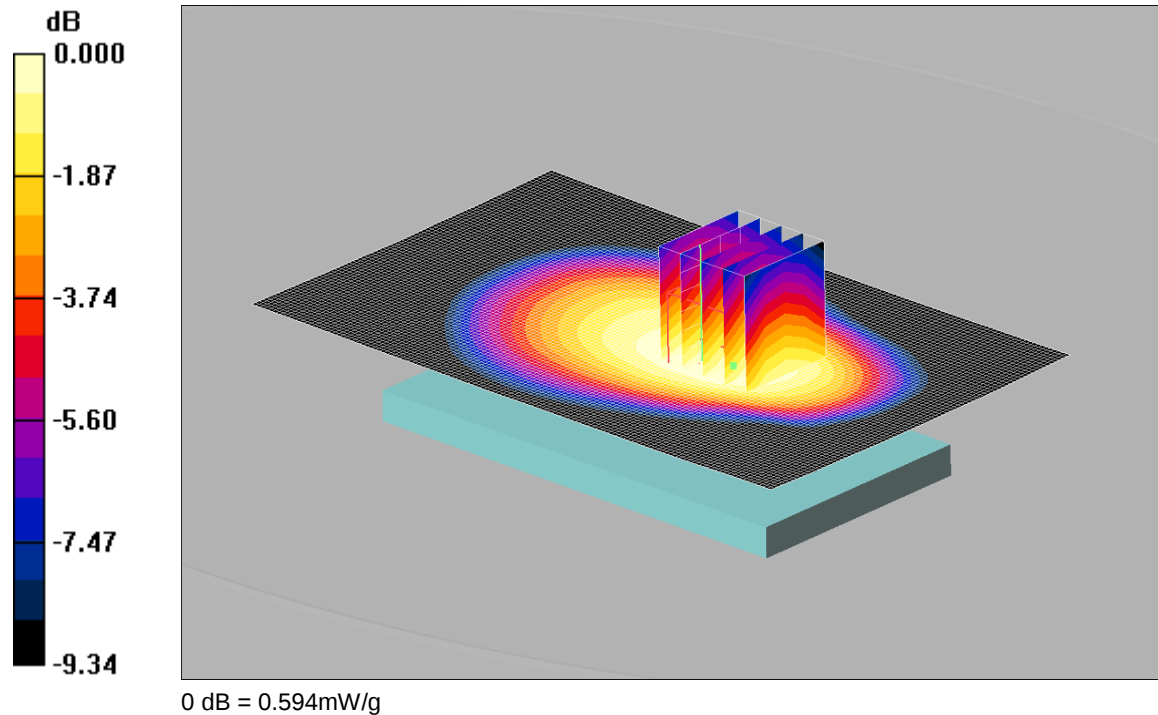

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.596 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.1 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.680 W/kg


SAR(1 g) = 0.571 mW/g; SAR(10 g) = 0.443 mW/g

Maximum value of SAR (measured) = 0.594 mW/g

064: Back of EUT Facing Phantom at 15mm UMTS FDD 5 CH4132

Date: 17/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial:

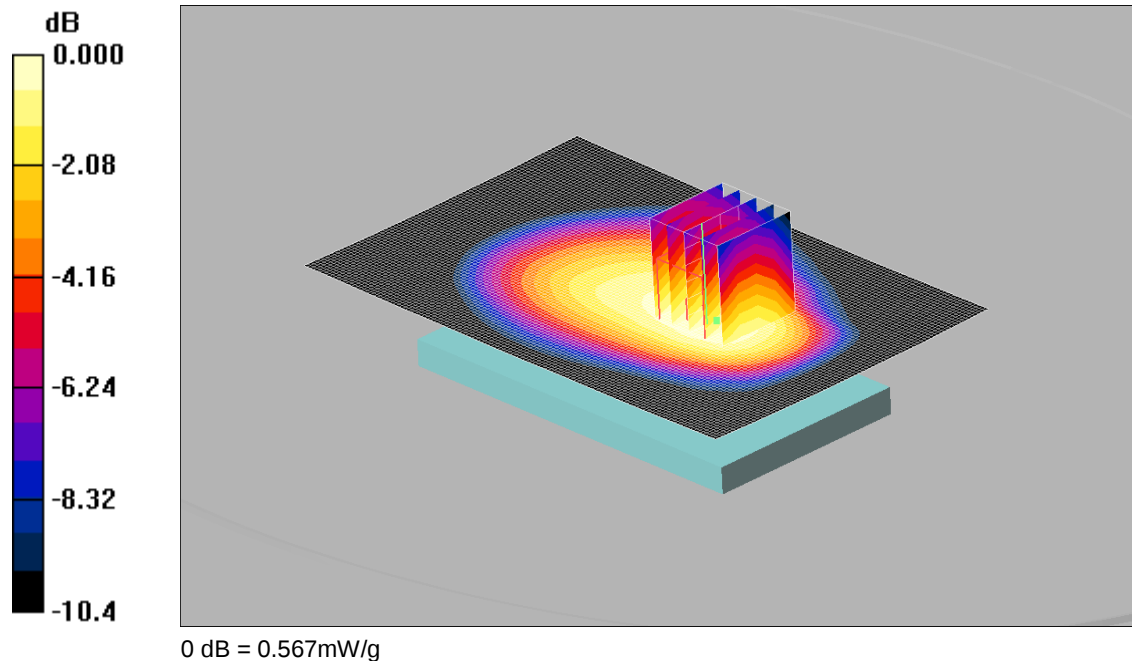

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.16, 6.16, 6.16); Calibrated: 22/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 22/01/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low 2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.568 mW/g

Back of EUT Facing Phantom - Low 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.3 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.650 W/kg


SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.418 mW/g

Maximum value of SAR (measured) = 0.567 mW/g

065: Touch Left WiFi 802.11b 11Mbps CH6

Date: 24/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

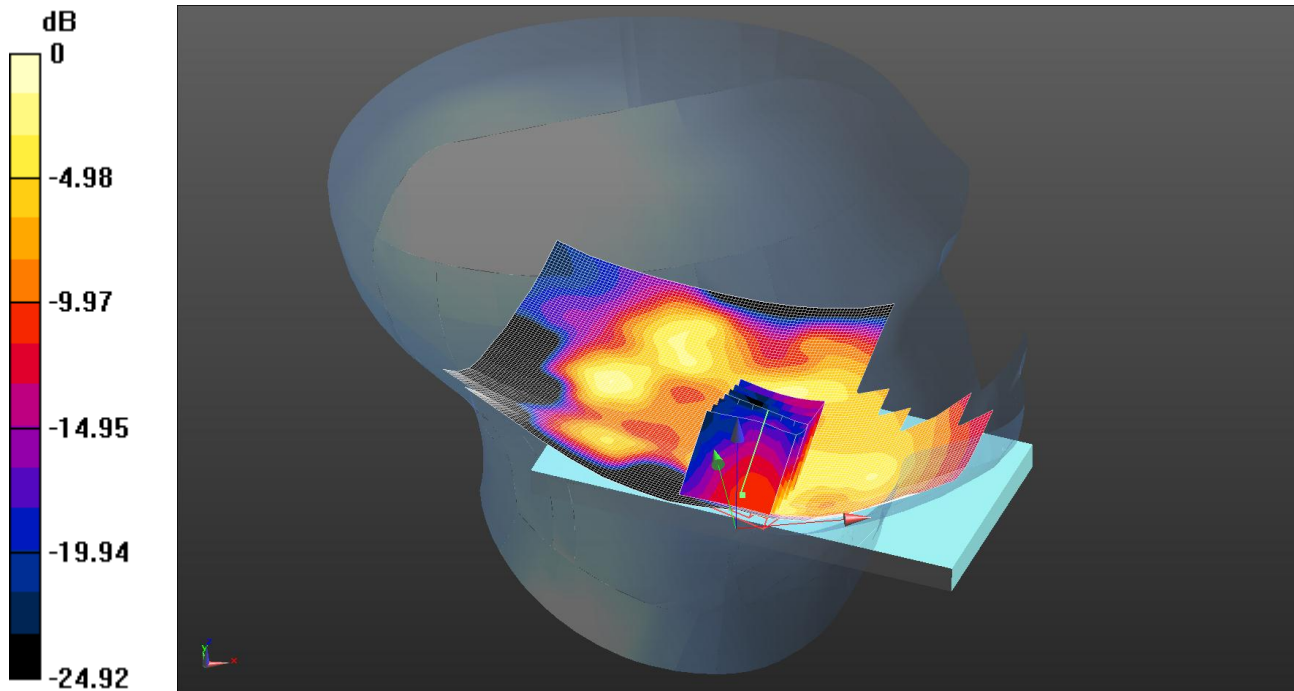

0 dB = 0.170 W/kg = -7.70 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.59, 4.59, 4.59); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left- Middle/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.155 W/kg

Configuration/Touch Left- Middle/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.700 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.392 W/kg


SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

066: Tilt Left WiFi 802.11b 1Mbps CH6

Date: 24/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

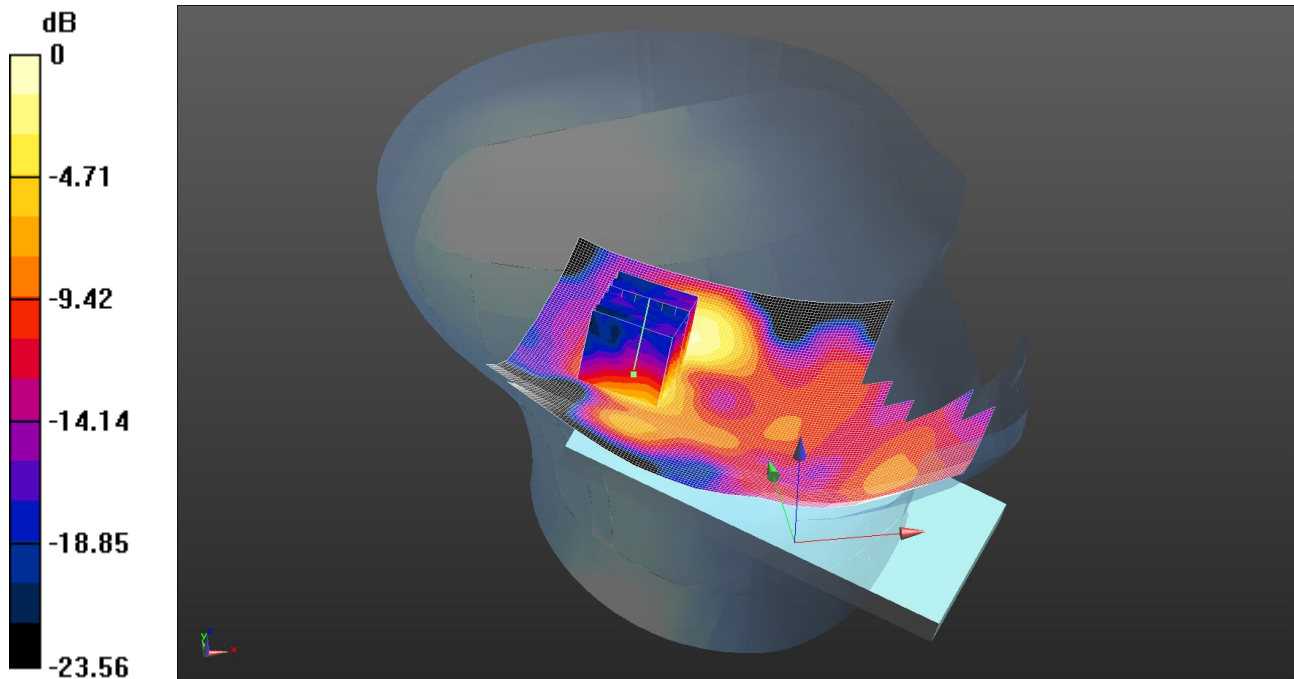

0 dB = 0.111 W/kg = -9.55 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.59, 4.59, 4.59); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Left- Middle/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.118 W/kg

Configuration/Tilt Left- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.414 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.232 W/kg


SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

067: Touch Right WiFi 802.11b 1Mbps CH6

Date: 24/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

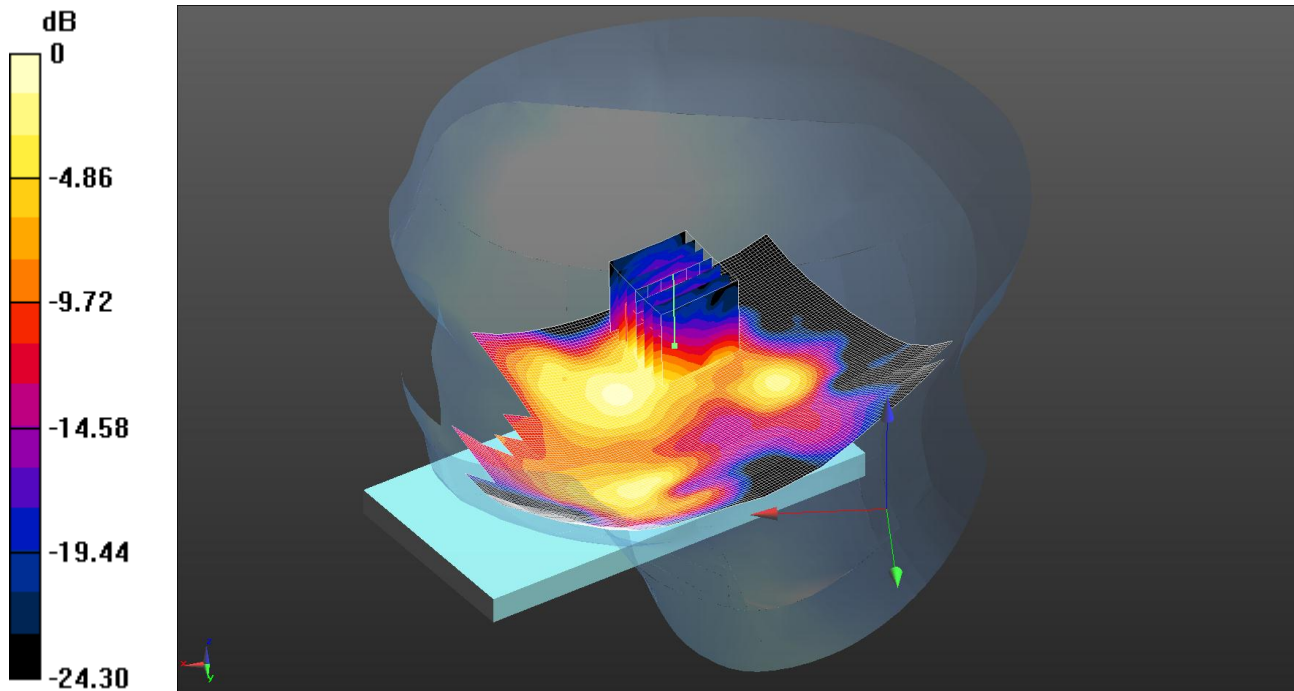

0 dB = 0.215 W/kg = -6.68 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.59, 4.59, 4.59); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right- Middle/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.239 W/kg

Configuration/Touch Right- Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.284 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.449 W/kg


SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

068: Tilt Right WiFi 802.11b 1Mbps CH6

Date: 24/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

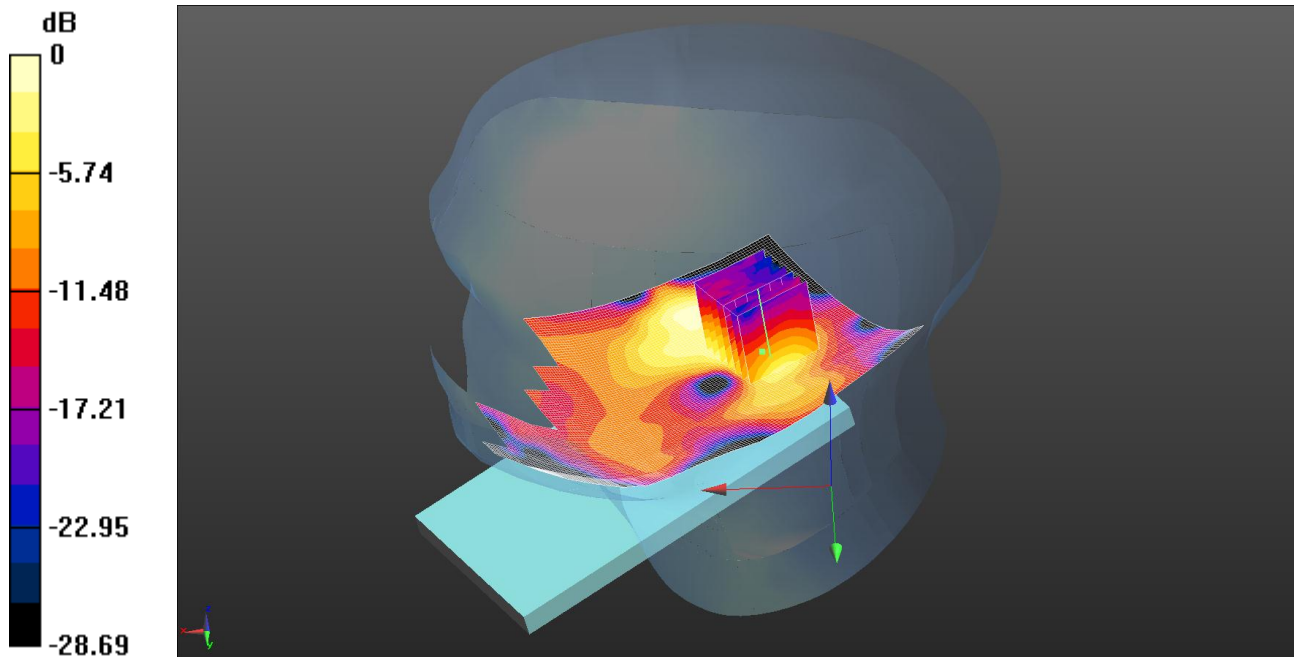

0 dB = 0.116 W/kg = -9.36 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.59, 4.59, 4.59); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Right- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.130 W/kg

Configuration/Tilt Right- Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.763 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.256 W/kg


SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

069: Touch Right WiFi 802.11b 1Mbps CH1

Date: 24/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

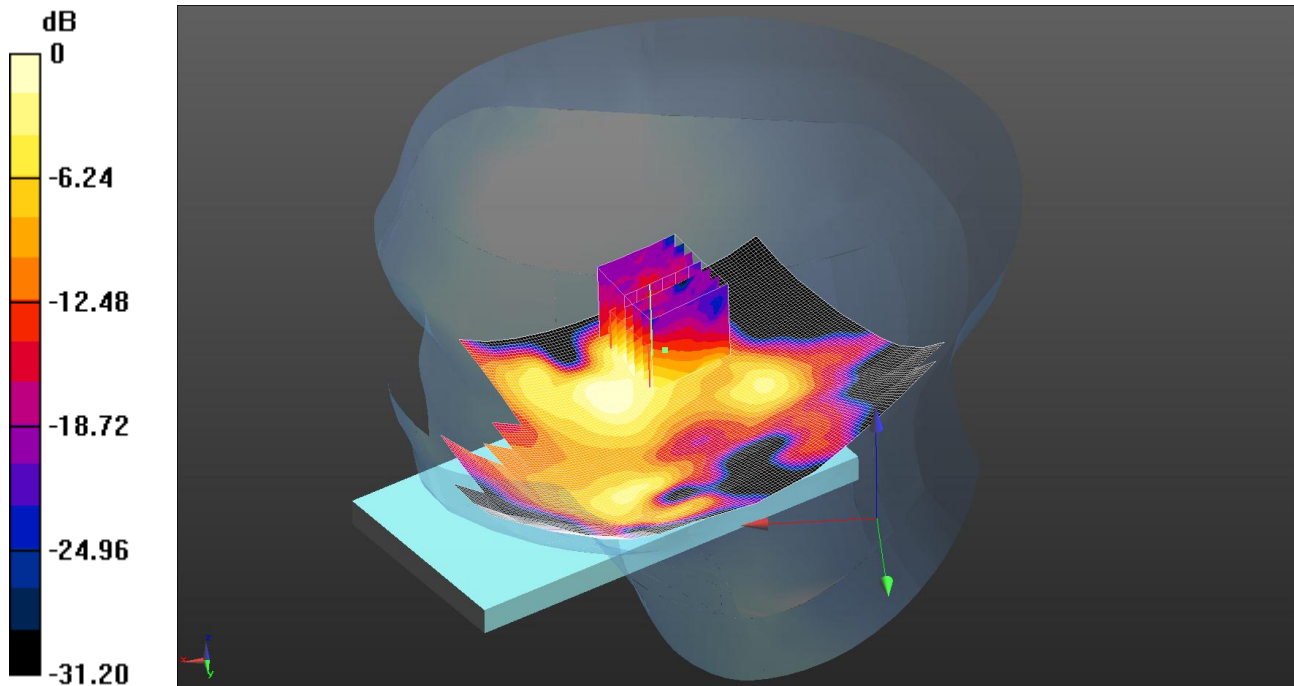

0 dB = 0.100 W/kg = -10.00 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 40.046$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.59, 4.59, 4.59); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right- Middle/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.108 W/kg

Configuration/Touch Right- Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.008 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.220 W/kg


SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.100 W/kg

070: Touch Right WiFi 802.11b 1Mbps CH11

Date: 24/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

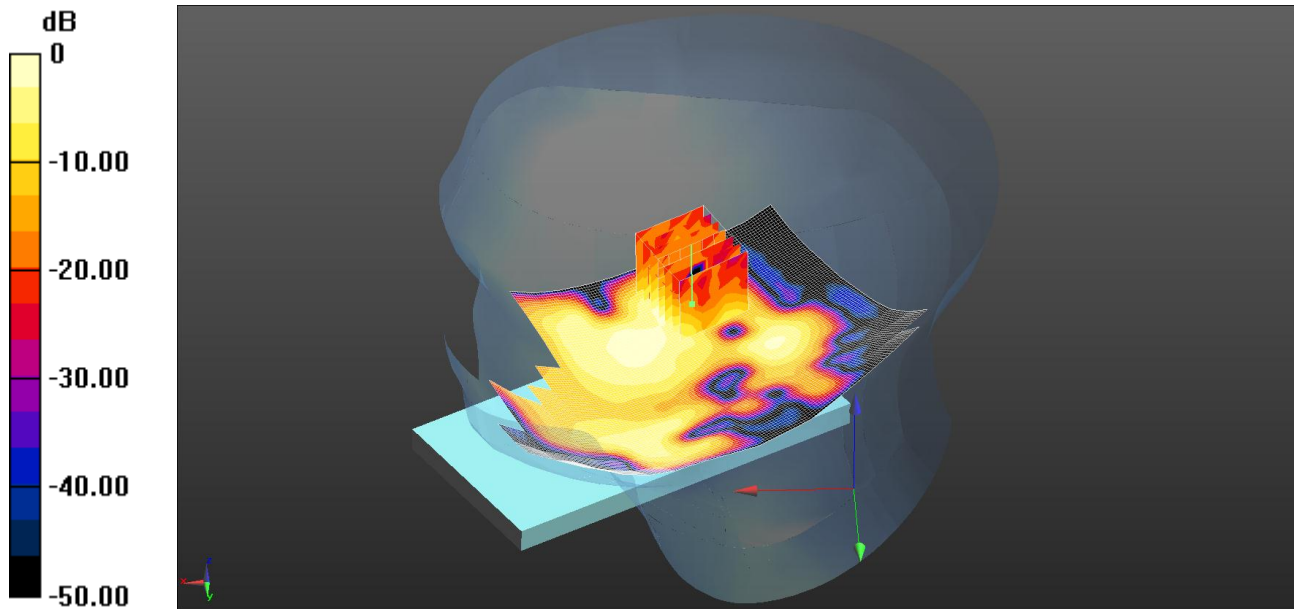

0 dB = 0.0889 W/kg = -10.51 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.866$ S/m; $\epsilon_r = 39.884$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.59, 4.59, 4.59); Calibrated: 31/08/2012;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right- Middle/Area Scan (101x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0959 W/kg

Configuration/Touch Right- Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.411 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.187 W/kg


SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0889 W/kg

071: Front of EUT Facing Phantom 802.11b 1Mbps CH6

Date: 25/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

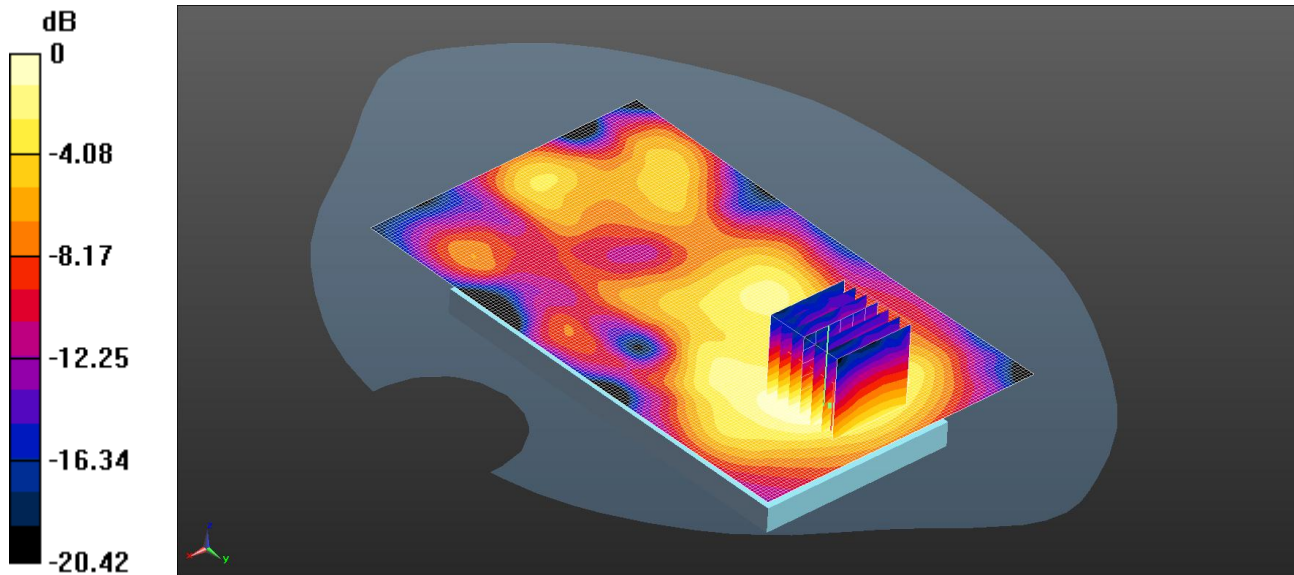

0 dB = 0.135 W/kg = -8.70 dBW/kg

Communication System: UID 0 - n/a, WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 50.857$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.32, 4.32, 4.32); Calibrated: 31/08/2012;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.138 W/kg

Configuration/Front of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.390 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.240 W/kg


SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.135 W/kg

072: Back of EUT Facing Phantom 802.11b 1Mbps CH6

Date: 25/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

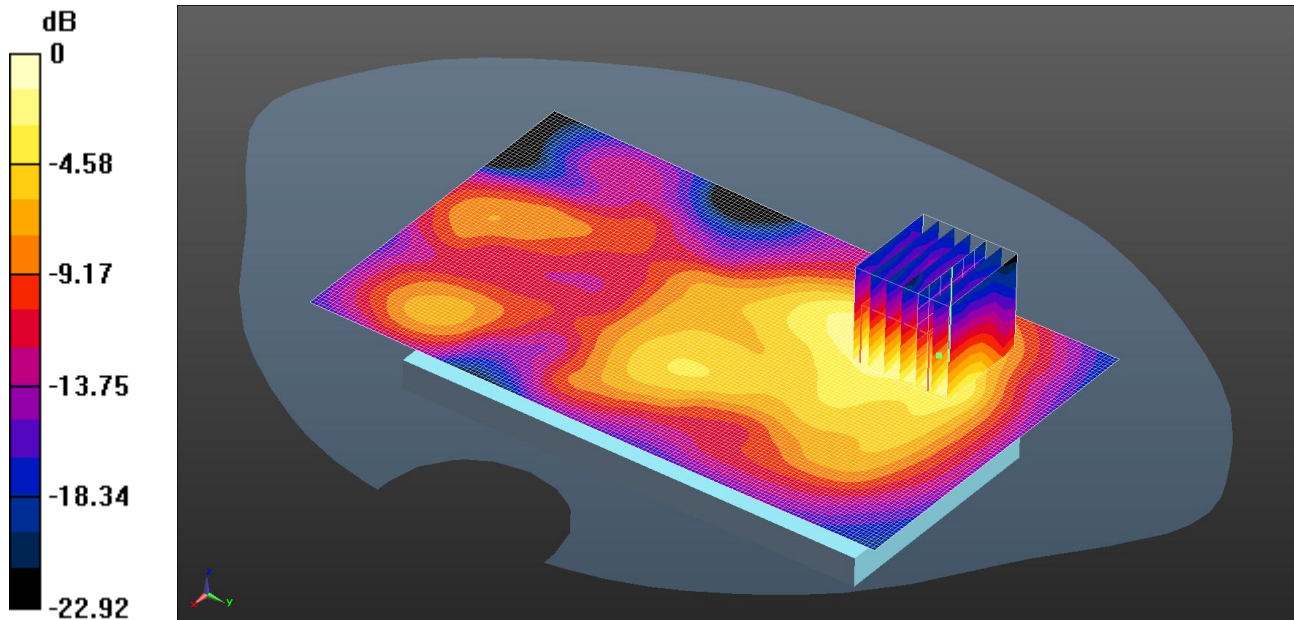

0 dB = 0.353 W/kg = -4.52 dBW/kg

Communication System: UID 0 - n/a, WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 50.857$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.32, 4.32, 4.32); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.353 W/kg

Configuration/Back of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.352 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.682 W/kg


SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.353 W/kg

073: Left hand side of EUT Facing Phantom 802.11b 1Mbps CH6

Date: 25/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

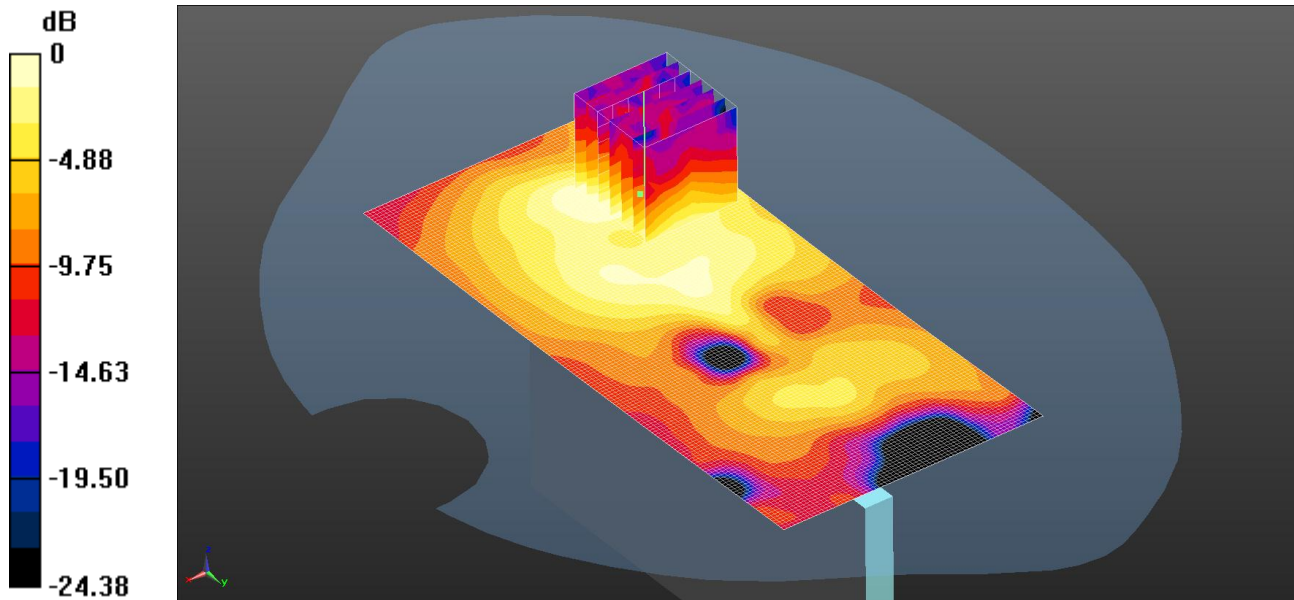

0 dB = 0.0350 W/kg = -14.56 dBW/kg

Communication System: UID 0 - n/a, WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 50.857$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.32, 4.32, 4.32); Calibrated: 31/08/2012;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Left hand side of EUT Facing Phantom- Middle/Area Scan (71x151x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0323 W/kg

Configuration/Left hand side of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.697 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0650 W/kg


SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0350 W/kg

074: Bottom of EUT Facing Phantom 802.11b 1Mbps CH6

Date: 25/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

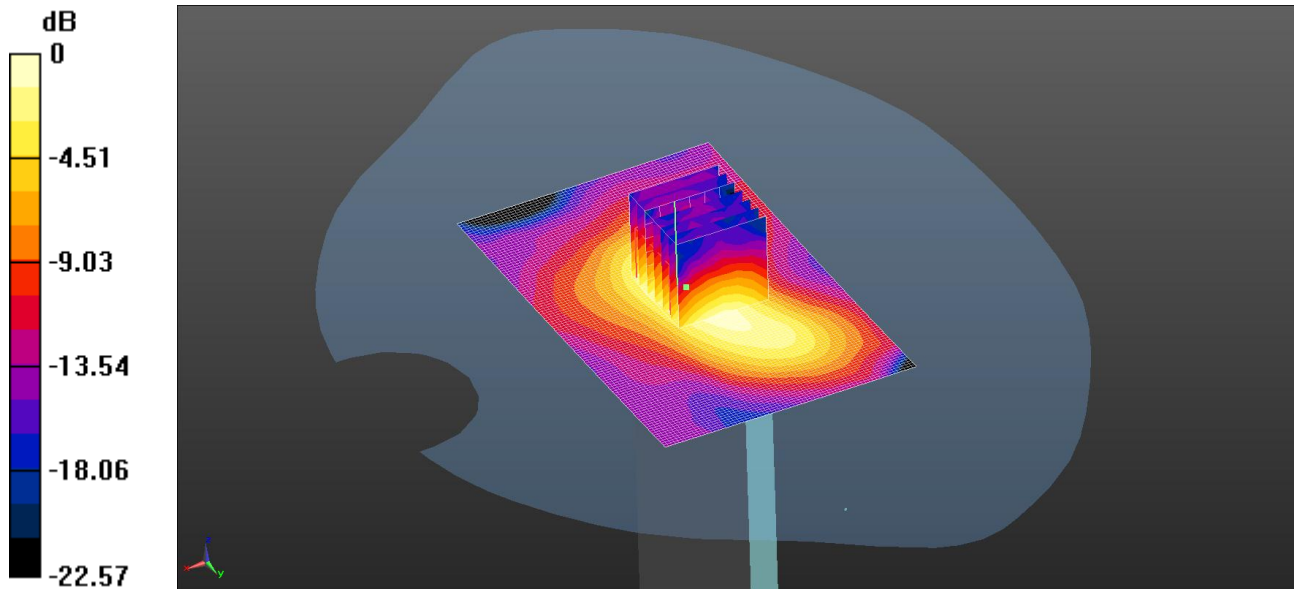

0 dB = 0.0905 W/kg = -10.43 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 50.857$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.32, 4.32, 4.32); Calibrated: 31/08/2012;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Bottom of EUT Facing Phantom- Middle/Area Scan (71x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0976 W/kg

Configuration/Bottom of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.263 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.165 W/kg


SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0905 W/kg

075: Back of EUT Facing Phantom 802.11b 1Mbps CH1

Date: 25/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

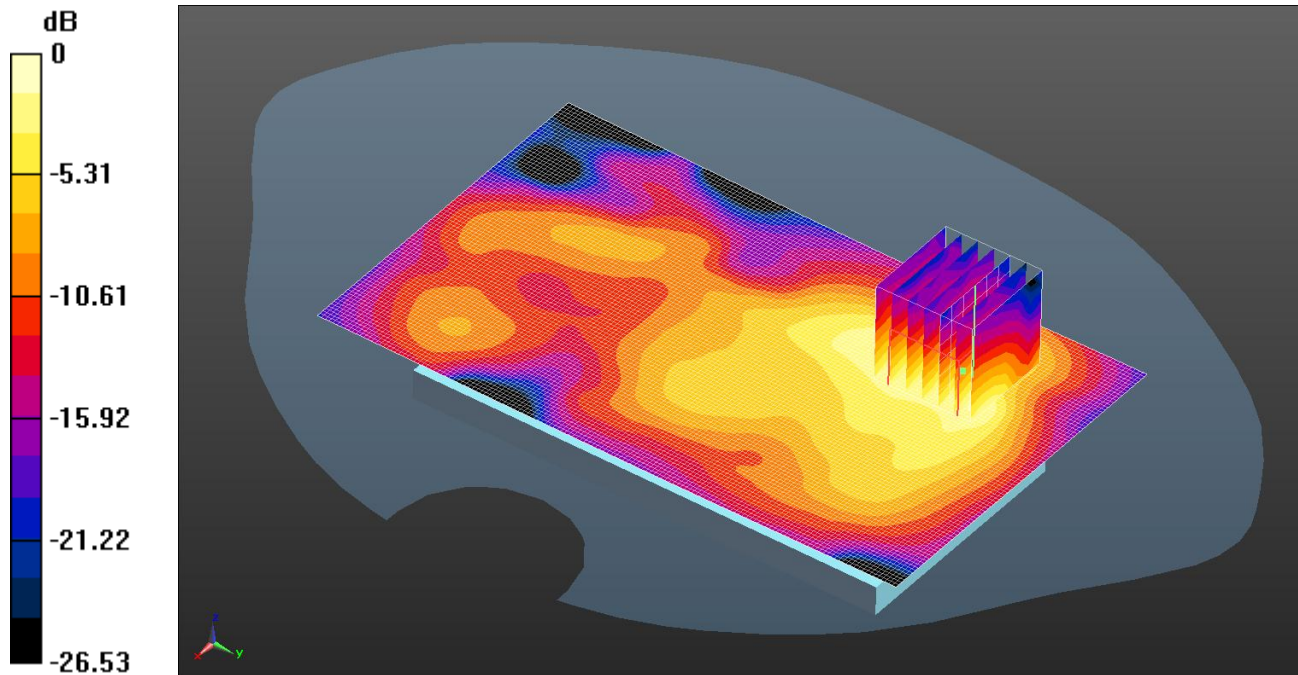

0 dB = 0.158 W/kg = -8.01 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 50.961$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.32, 4.32, 4.32); Calibrated: 31/08/2012;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom- Low/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.142 W/kg

Configuration/Back of EUT Facing Phantom- Low/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.193 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.320 W/kg


SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

076: Back of EUT Facing Phantom 802.11b 1Mbps CH11

Date: 26/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

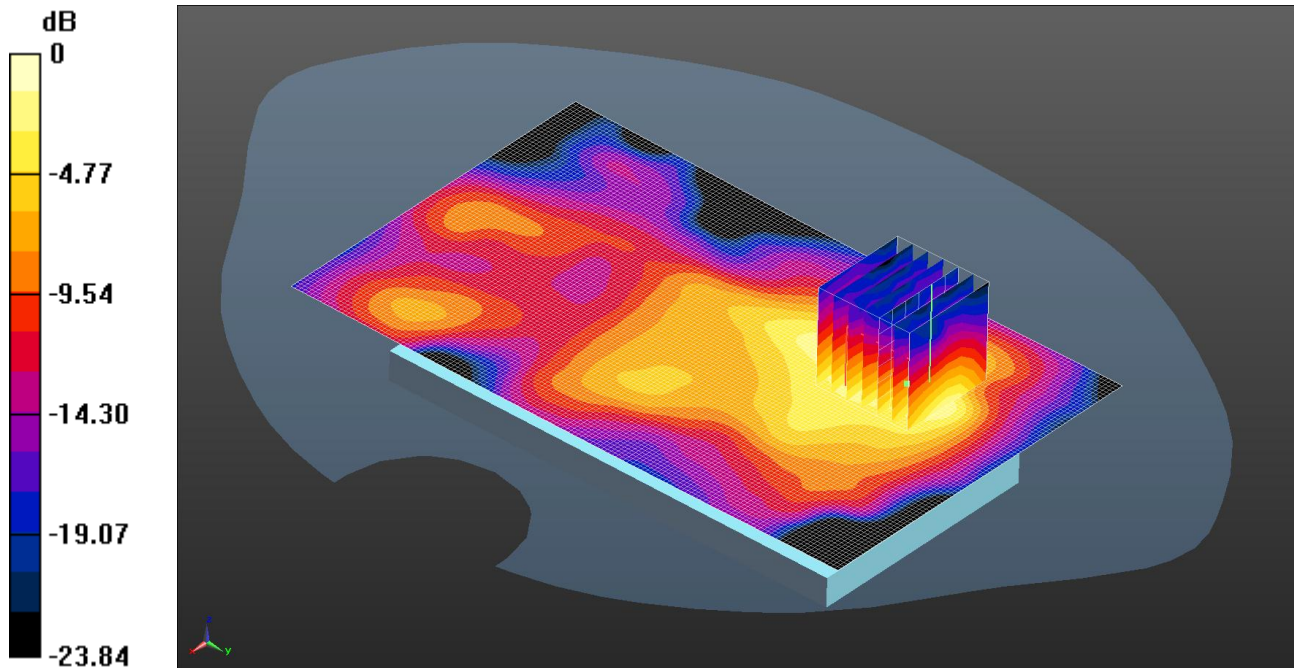

0 dB = 0.169 W/kg = -7.72 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2.012$ S/m; $\epsilon_r = 50.775$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.32, 4.32, 4.32); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom- High 2/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.143 W/kg

Configuration/Back of EUT Facing Phantom- High 2/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.650 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.330 W/kg


SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.169 W/kg

077: Front of EUT Facing Phantom at 15mm 802.11b 1Mbps CH6

Date: 26/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

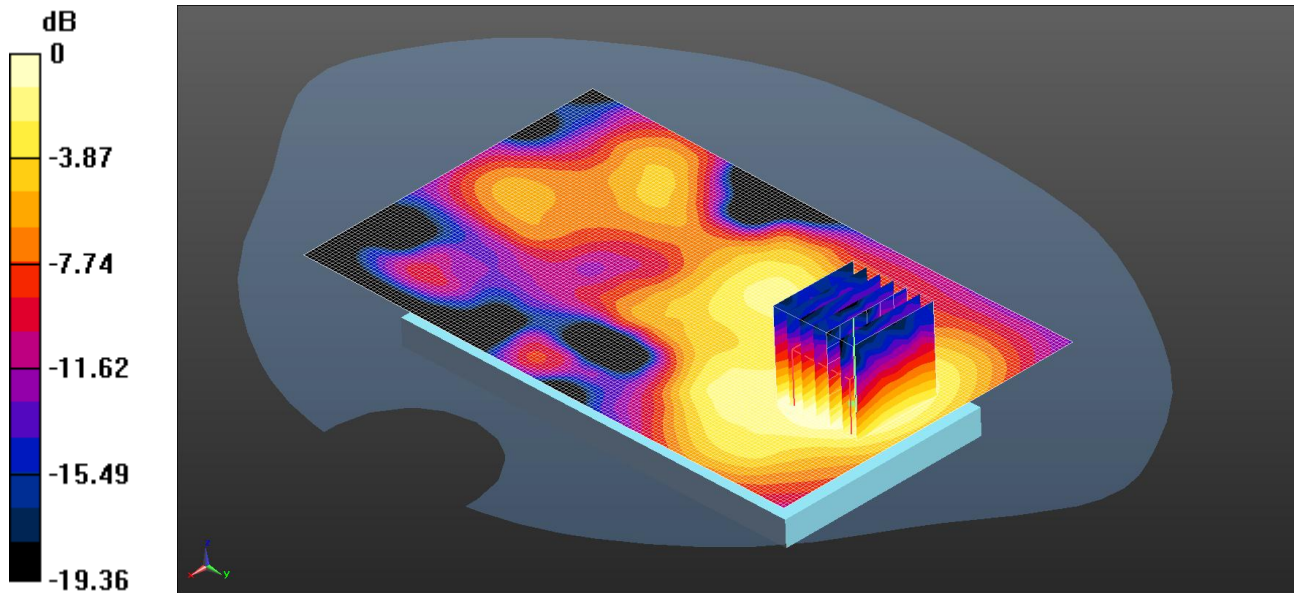

0 dB = 0.0785 W/kg = -11.05 dBW/kg

Communication System: UID 0 - n/a, WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 50.857$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.32, 4.32, 4.32); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0787 W/kg

Configuration/Front of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.725 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.138 W/kg


SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0785 W/kg

078: Back of EUT Facing Phantom at 15mm 802.11b 1Mbps CH6

Date: 26/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

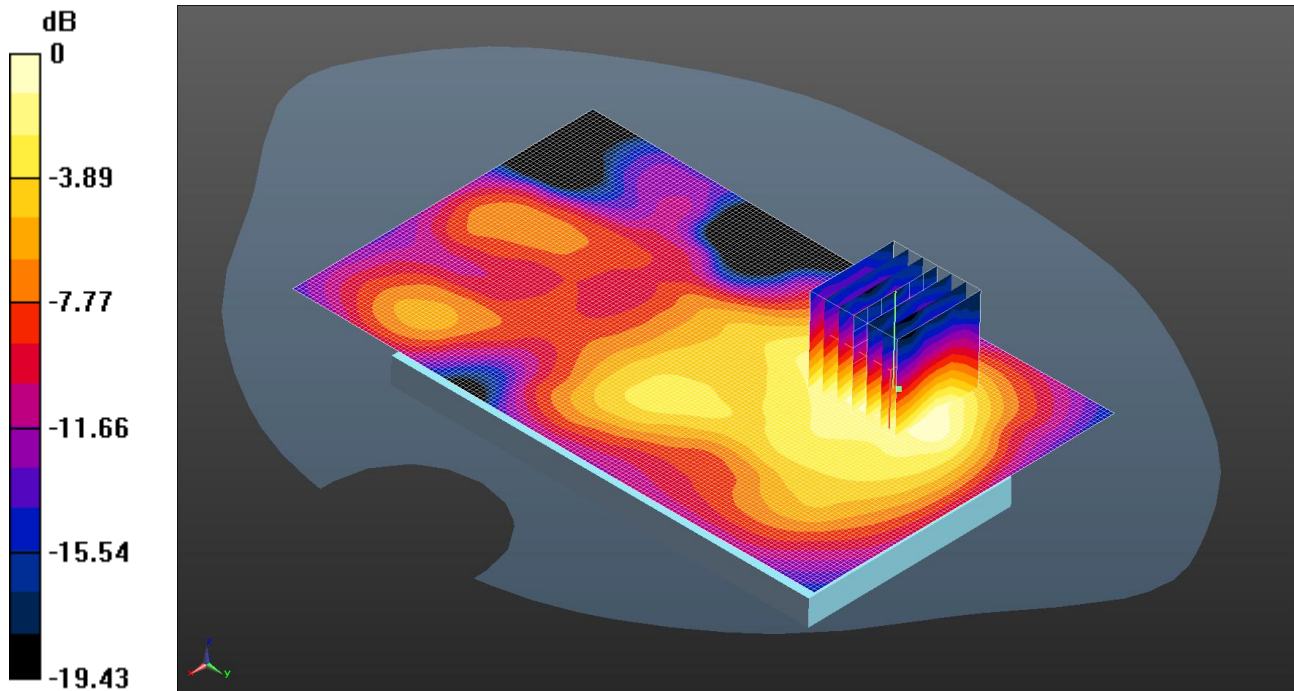

0 dB = 0.148 W/kg = -8.30 dBW/kg

Communication System: UID 0 - n/a, WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 50.857$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.32, 4.32, 4.32); Calibrated: 31/08/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom- Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200

Maximum value of SAR (interpolated) = 0.143 W/kg

Configuration/Back of EUT Facing Phantom- Middle/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.233 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.271 W/kg


SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

079: Touch Left 802.11a CH48

Date: 31/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

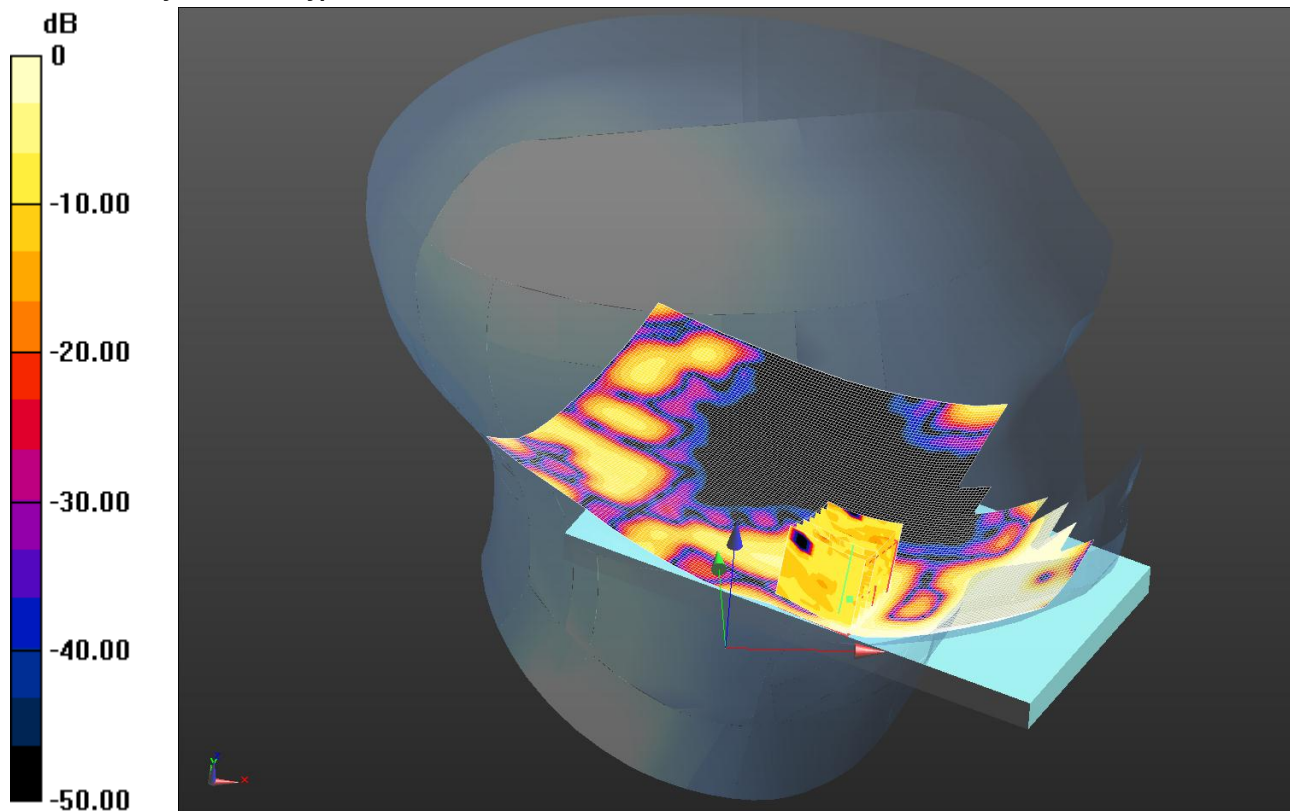

0 dB = 0.0479 W/kg = -13.20 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5200 MHz HSL Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 35.885$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(5.06, 5.06, 5.06); Calibrated: 24/09/2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left- Middle/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0607 W/kg

Configuration/Touch Left- Middle/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.926 V/m; Power Drift = -0.68 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00659 W/kg

Maximum value of SAR (measured) = 0.0479 W/kg


Note: SAR level measured is very low as equivalent to noise floor.

Prior to the assessment, the system was verified in the flat region of the phantom, 5.0 GHz dipole was used. A forward power of 100 mW was applied to 5.0 GHz dipole and the system was verified to a tolerance of $\pm 5\%$ for the 5.0 GHz dipole.

080: Tilt Left 802.11a CH48

Date: 31/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

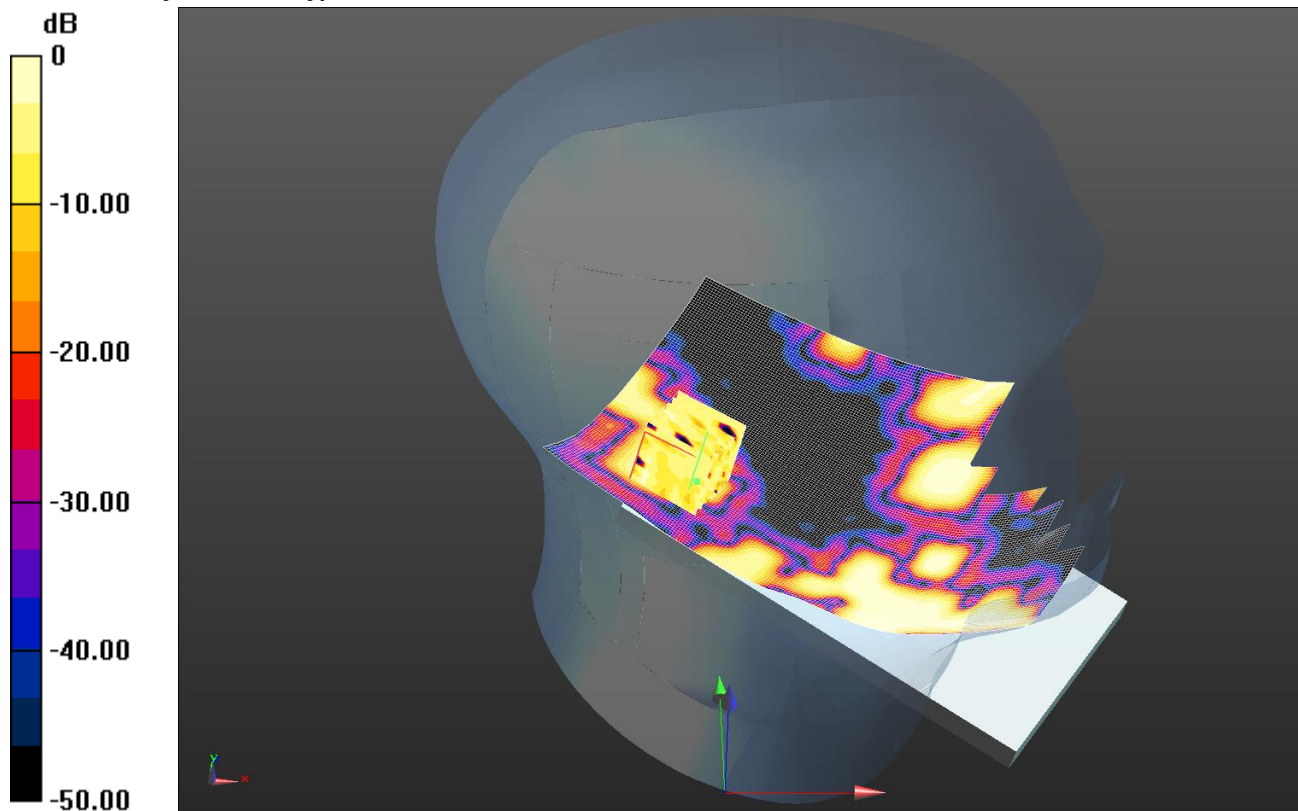

0 dB = 0.0188 W/kg = -17.26 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5200 MHz HSL Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 35.885$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(5.06, 5.06, 5.06); Calibrated: 24/09/2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Left- Middle/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0198 W/kg

Configuration/Tilt Left- Middle/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.229 V/m; Power Drift = -1.09 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.00952 W/kg; SAR(10 g) = 0.00328 W/kg

Maximum value of SAR (measured) = 0.0188 W/kg


Note: SAR level measured is very low as equivalent to noise floor.

Prior to the assessment, the system was verified in the flat region of the phantom, 5.0 GHz dipole was used. A forward power of 100 mW was applied to 5.0 GHz dipole and the system was verified to a tolerance of $\pm 5\%$ for the 5.0 GHz dipole.

081: Touch Right 802.11a CH48

Date: 31/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

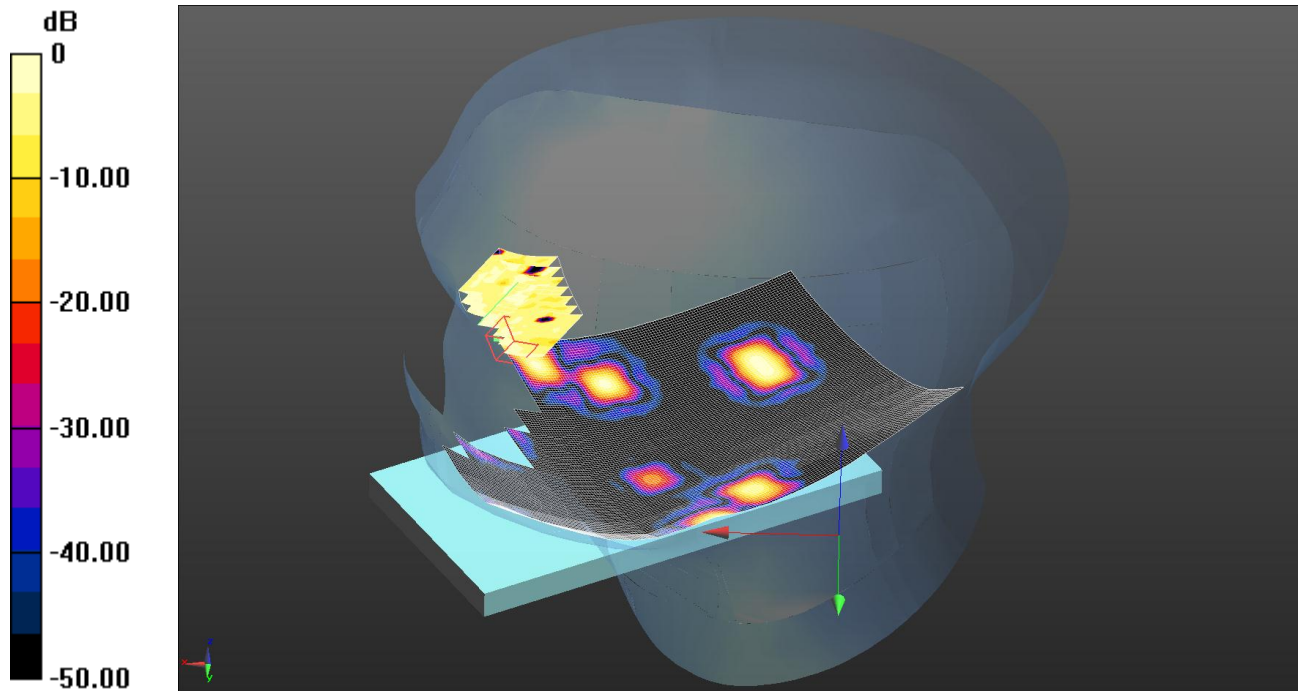

0 dB = 0.0182 W/kg = -17.40 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5200 MHz HSL Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 35.885$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(5.06, 5.06, 5.06); Calibrated: 24/09/2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right- Middle/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0145 W/kg

Configuration/Touch Right- Middle/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.996 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.00873 W/kg; SAR(10 g) = n.a.

Maximum value of SAR (measured) = 0.0182 W/kg


Note: SAR level measured is very low as equivalent to noise floor.

Prior to the assessment, the system was verified in the flat region of the phantom, 5.0 GHz dipole was used. A forward power of 100 mW was applied to 5.0 GHz dipole and the system was verified to a tolerance of $\pm 5\%$ for the 5.0 GHz dipole.

082: Tilt Right 802.11a CH48

Date: 31/07/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

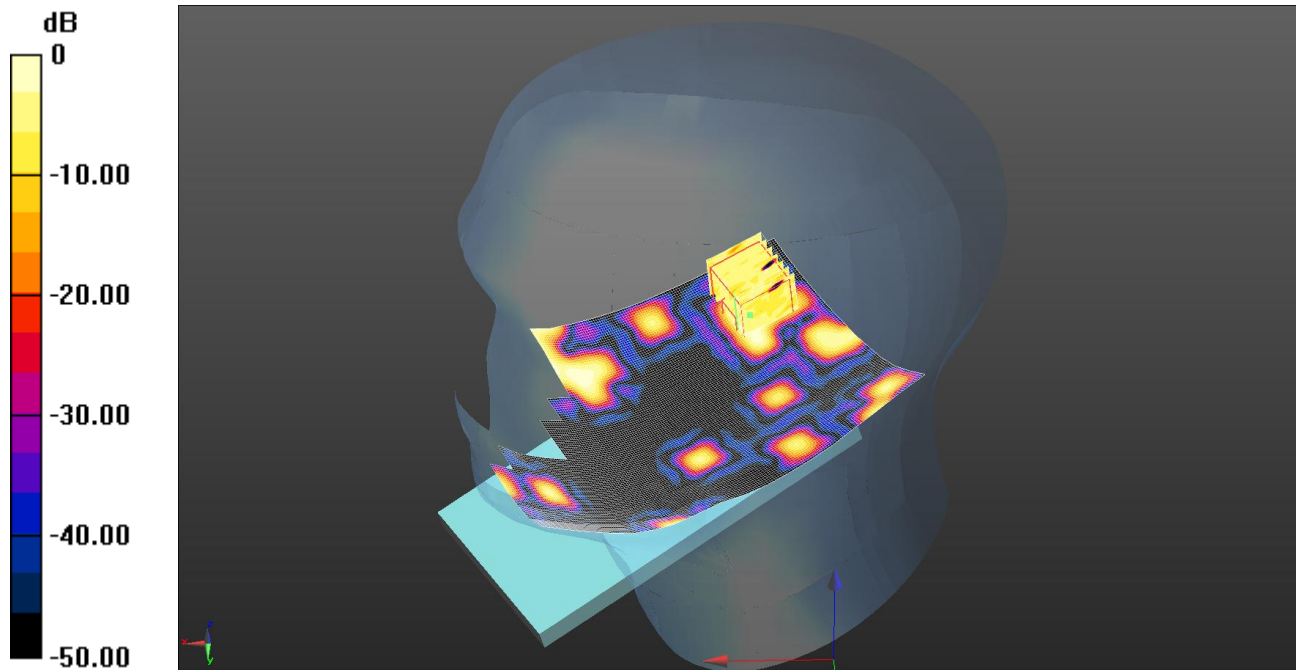

0 dB = 0.0228 W/kg = -16.42 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5200 MHz HSL Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 35.885$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(5.06, 5.06, 5.06); Calibrated: 24/09/2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Right- Middle/Area Scan (111x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0434 W/kg

Configuration/Tilt Right- Middle/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.372 V/m; Power Drift = 0.74 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.0085 W/kg; SAR(10 g) = 0.00309 W/kg

Maximum value of SAR (measured) = 0.0228 W/kg


Note: SAR level measured is very low as equivalent to noise floor.

Prior to the assessment, the system was verified in the flat region of the phantom, 5.0 GHz dipole was used. A forward power of 100 mW was applied to 5.0 GHz dipole and the system was verified to a tolerance of $\pm 5\%$ for the 5.0 GHz dipole.

083: Touch Left 802.11a CH52

Date: 01/08/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

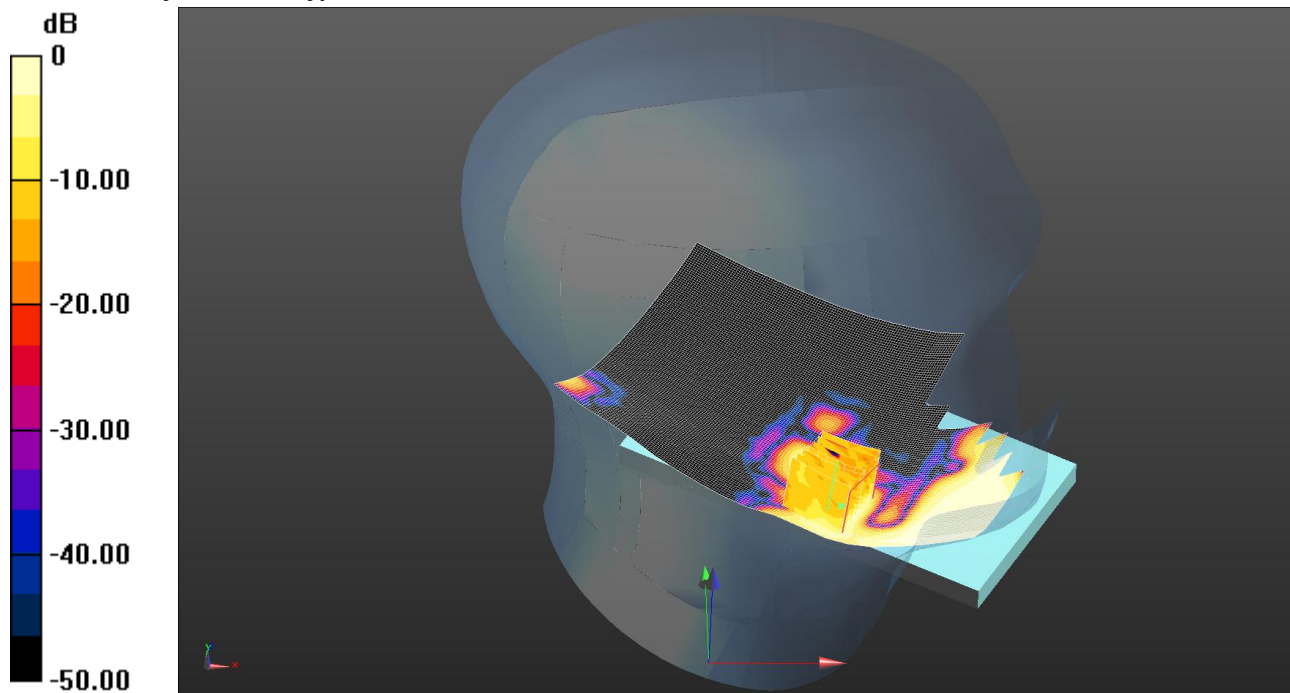

0 dB = 0.118 W/kg = -9.28 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5200 MHz HSL Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.763$ S/m; $\epsilon_r = 35.862$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.73, 4.73, 4.73); Calibrated: 24/09/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left- Middle/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.142 W/kg

Configuration/Touch Left- Middle/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.055 V/m; Power Drift = 0.38 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.118 W/kg


Note: SAR level measured is very low as equivalent to noise floor.

Prior to the assessment, the system was verified in the flat region of the phantom, 5.0 GHz dipole was used. A forward power of 100 mW was applied to 5.0 GHz dipole and the system was verified to a tolerance of $\pm 5\%$ for the 5.0 GHz dipole.

084: Touch Left 802.11a CH104

Date: 01/08/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

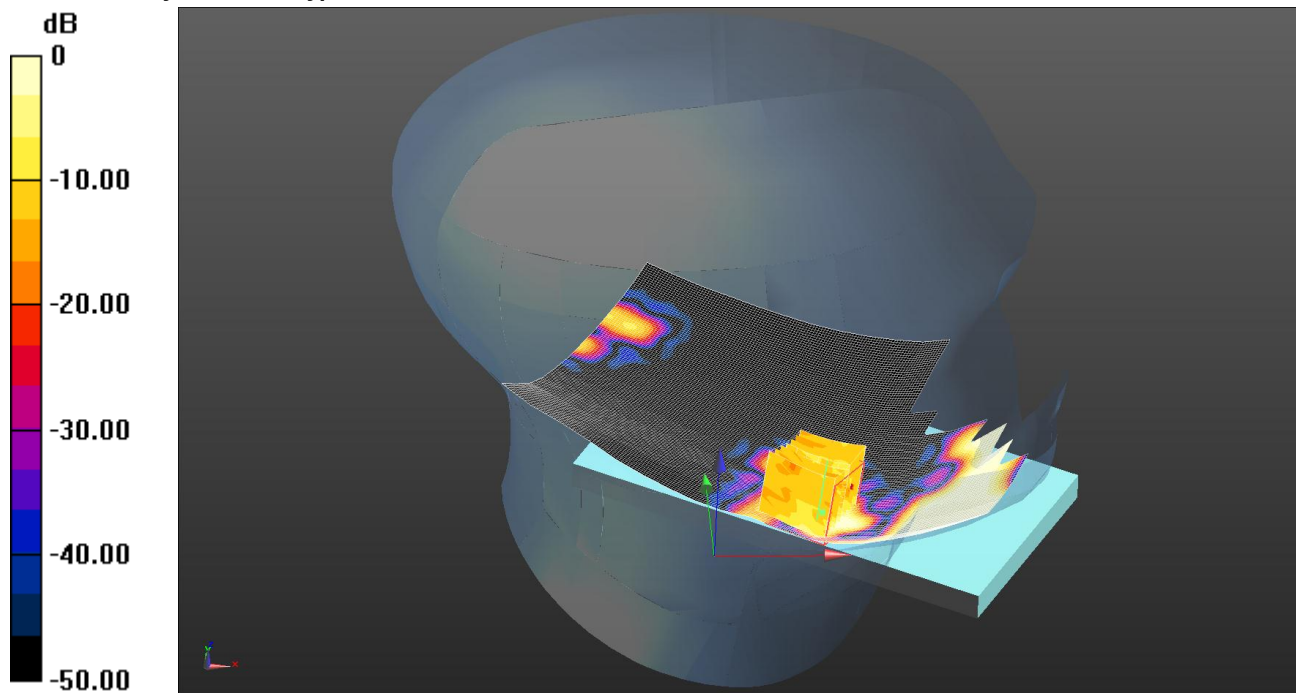

0 dB = 0.102 W/kg = -9.91 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 5520 MHz; Duty Cycle: 1:1

Medium: 5200 MHz HSL Medium parameters used (interpolated): $f = 5520$ MHz; $\sigma = 5.036$ S/m; $\epsilon_r = 35.474$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.54, 4.54, 4.54); Calibrated: 24/09/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left- Middle/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.181 W/kg

Configuration/Touch Left- Middle/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.568 V/m; Power Drift = 0.47 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.102 W/kg


Note: SAR level measured is very low as equivalent to noise floor.

Prior to the assessment, the system was verified in the flat region of the phantom, 5.0 GHz dipole was used. A forward power of 100 mW was applied to 5.0 GHz dipole and the system was verified to a tolerance of $\pm 5\%$ for the 5.0 GHz dipole.

085: Touch Left 802.11a CH157

Date: 01/08/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

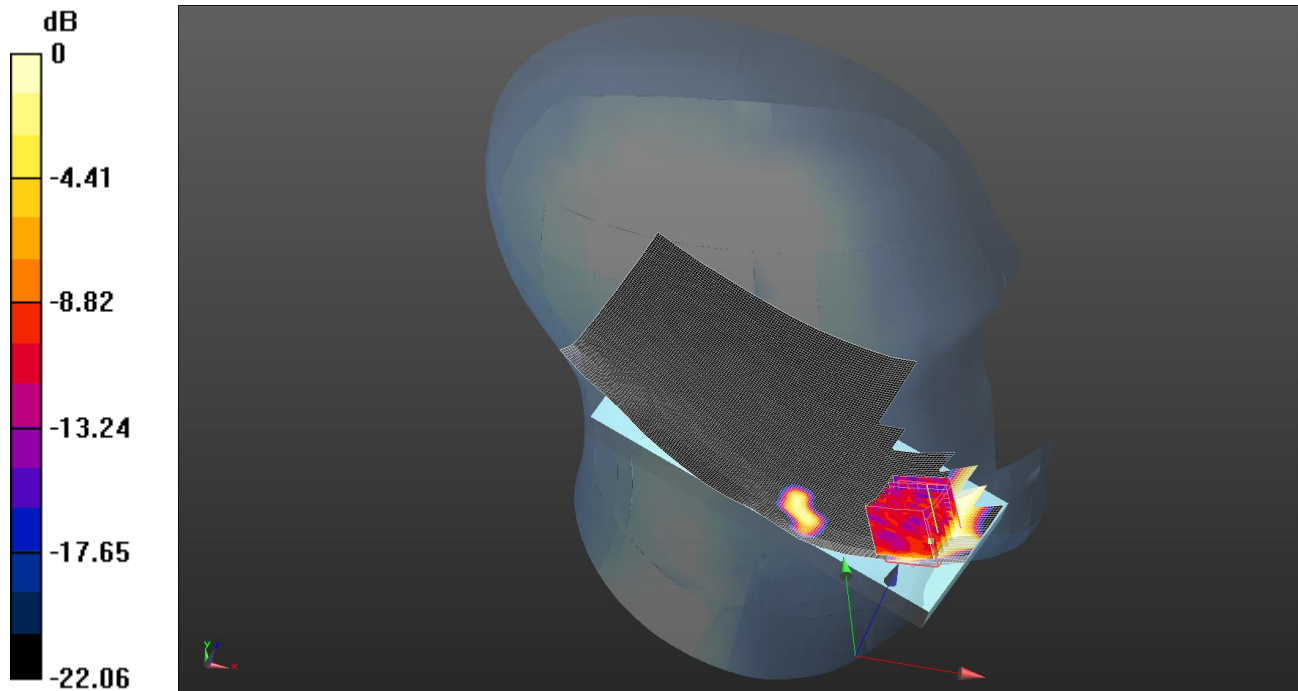

0 dB = 0.0870 W/kg = -10.60 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 5520 MHz; Duty Cycle: 1:1

Medium: 5200 MHz HSL Medium parameters used (interpolated): $f = 5520$ MHz; $\sigma = 5.036$ S/m; $\epsilon_r = 35.474$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.54, 4.54, 4.54); Calibrated: 24/09/2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left- Middle/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.180 W/kg

Configuration/Touch Left- Middle/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.146 V/m; Power Drift = 0.37 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0870 W/kg


Note: SAR level measured is very low as equivalent to noise floor.

Prior to the assessment, the system was verified in the flat region of the phantom, 5.0 GHz dipole was used. A forward power of 100 mW was applied to 5.0 GHz dipole and the system was verified to a tolerance of $\pm 5\%$ for the 5.0 GHz dipole.

086: Touch Left 802.11ac CH38

Date 01/08/2013

DUT: Sony Honami ; Type: Honami Anna; Serial: PM-0470-BV

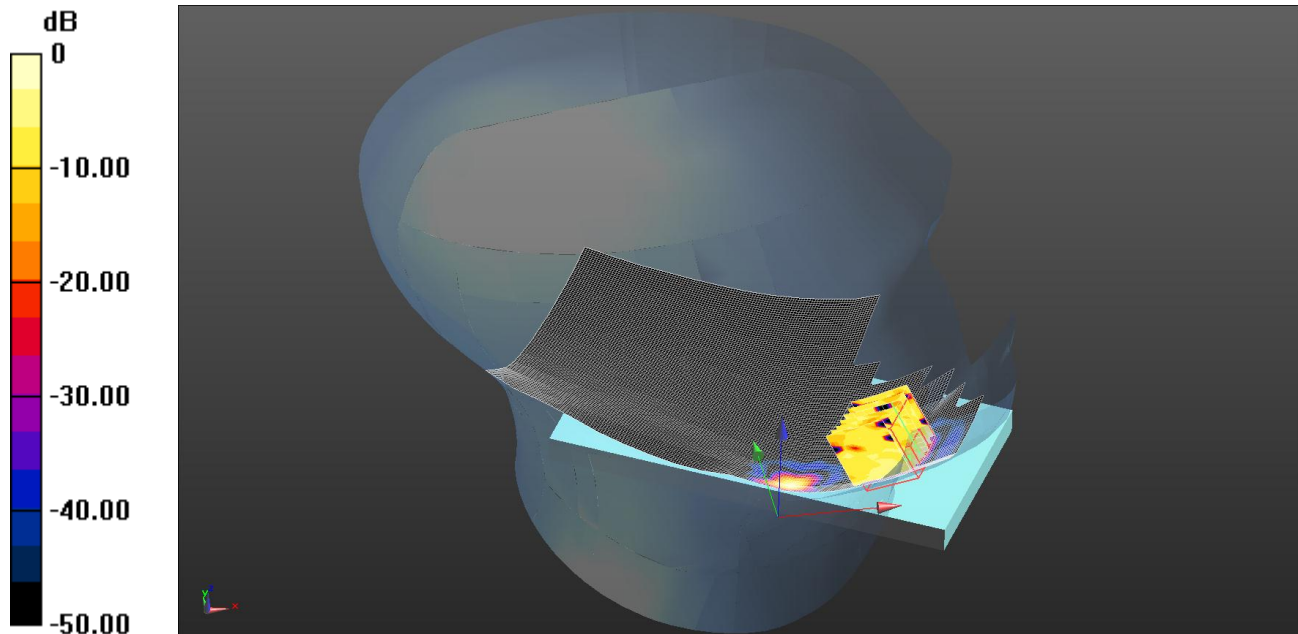

0 dB = 0.0243 W/kg = -16.14 dBW/kg

Communication System: UID 0 - n/a, WLAN 802.11; Frequency: 5190 MHz; Duty Cycle: 1:1

Medium: 5200 MHz HSL Medium parameters used (interpolated): $f = 5190$ MHz; $\sigma = 4.689$ S/m; $\epsilon_r = 35.959$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(5.06, 5.06, 5.06); Calibrated: 24/09/2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 17/04/2013

- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left- Middle/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0293 W/kg

Configuration/Touch Left- Middle/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.055 V/m; Power Drift = -0.68 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00579 W/kg

Maximum value of SAR (measured) = 0.0243 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

Prior to the assessment, the system was verified in the flat region of the phantom, 5.0 GHz dipole was used. A forward power of 100 mW was applied to 5.0 GHz dipole and the system was verified to a tolerance of $\pm 5\%$ for the 5.0 GHz dipole.