

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

OF

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF		
Product Name:	PDA Phone		
Brand Name:	Sony		
Model No.:	C1905		
Type No.:	PM-0490-BV		
Model Difference:	N/A		
FCC ID:	PY7PM-0490		
Report No.:	EH/2013/40020		
Issue Date:	Jun. 06, 2013		
FCC Rule Part:	§15.225		
Prepared for:	Sony Mobile Communications AB Nya Vattentornet 22188 Lund/SWEDEN		
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803		
Taff Bac-MRA Desting Laboratory 0513	<b>Note:</b> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## VERIFICATION OF COMPLIANCE

Applicant:	Sony Mobile Communications AB Nya Vattentornet 22188 Lund/SWEDEN
Product Name:	PDA Phone
Brand Name:	Sony
Model No.:	C1905
Type No.:	PM-0490-BV
Model Difference:	N/A
FCC ID:	PY7PM-0490
File Number:	EH/2013/40020
Date of test:	Apr. 01, 2013 ~ May. 18, 2013
Date of EUT Received:	Apr. 01, 2013

## We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 & ANSI C63.10:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Nick Lin	Date:	Jun. 06, 2013
Prepared By:	Nick Lin / Engineer Uroletta Tang	Date:	Jun. 06, 2013
Approved By	Violetta Tang / Clerk Tim Ch ang	Date:	Jun. 06, 2013

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **Revision History**

Report Number	Revision	Description	Issue Date
EH/2013/40020	Rev.01	Initial creation of document	May. 29, 2013
EH/2013/40020	Rev.02	<ol> <li>Update Product Description "Marketing Name" into "Model No." and update "Model No." into "Type No." on Page 1, 2 and 6.</li> <li>Update Product Description "M/N: PM-0490-BV" into "M/N: C1905" on Page 20 and 21.</li> </ol>	Jun. 06, 2013

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## **Table of Contents**

1 (	GENERAL INFORMATION	6
1.1	PRODUCT DESCRIPTION	6
1.2	RELATED SUBMITTAL(S) / GRANT (S)	11
1.3	Test Methodology	11
1.4	TEST FACILITY	11
1.5	SPECIAL ACCESSORIES	11
1.6	EQUIPMENT MODIFICATIONS	11
2 8	SYSTEM TEST CONFIGURATION	
2.1	EUT CONFIGURATION	
2.2	EUT Exercise	
2.3	Test Procedure	
2.4	LIMITATION	
2.5	CONFIGURATION OF TESTED SYSTEM	15
3 8	SUMMARY OF TEST RESULTS	
4 ]	DESCRIPTION OF TEST MODES	
5 1	MEASUREMENT UNCERTAINTY	
6	CONDUCTED EMISSIONS TEST	
6.1	MEASUREMENT PROCEDURE:	
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
6.3	MEASUREMENT EQUIPMENT USED:	19
6.4	MEASUREMENT RESULT:	
7 1	RADIATED EMISSION TEST	22
7.1	MEASUREMENT PROCEDURE	
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3	MEASUREMENT EQUIPMENT USED:	
7.4	FIELD STRENGTH CALCULATION	24
7.5	FIELD STRENGTH OF FUNDAMENTAL EMISSION	24
8 1	FREQUENCY TOLERANCE	
8.1	Measurement Procedure	
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3	MEASUREMENT EQUIPMENT USED:	
8.4	MEASUREMENT RESULTS	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



9 20	0 DB OCCUPIED BANDWIDTH MEASUREMENT	
9.1	STANDARD APPLICABLE:	40
9.2	LIMIT:	
9.3	Test Set-up	
9.4	MEASUREMENT PROCEDURE	
9.5	MEASUREMENT EQUIPMENT USED:	
10 A	NTENNA REQUIREMENT	42
10.1.	STANDARD APPLICABLE:	
10.2.	ANTENNA CONNECTED CONSTRUCTION:	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **GENERAL INFORMATION** 1

#### 1.1 **Product Description**

General:

Product Name:	PDA Phone		
Brand Name:	Sony		
Model No.:	C1905		
Type No.:	PM-0490-1	BV	
Model Difference:	N/A		
Data Cable (USB):		: EC450, Supplier: K-one 242-6715.3, Length: 100 cm	
Simple Hands-Free (SHF-White):	Model No.: MH410c, Supplier: Foster Electric Type No.: AG-1100		
Simple Hands-Free (SHF-Black):	Model No.: MH410c, Supplier: Foster Electric Type No.: CCA-0004017		
Car Charger:	Model No.: AN400, Supplier: Salcomp Type No.: CAA-0003013		
Hi-Fi Wireless Headset:	Model No.: MW600, Supplier: BALDA Type No.: DDA-0002029.B coupling with Simple Hands Free (Model No.: MH755, Supplier: BALDA Type No.: AG-0502)		
Hardware Version:	A		
Software Version:	15.1.A.1.3		
	3.7Vdc		
Power Supply:	Battery:	Model No.: BA900, Supplier: Sony Type No.: AB-0500	
	Adapter:	Model No.: EP800, Supplier: Salcomp Type No.: CAA-0002016-US	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Bluetooth BR+EDR:

Bluetooth Version:	V3.0+HS	
Channel number:	79 channels	
Modulation type:	Frequency Hopping Spread Spectrum	
Transmit Power:	9.22dBm	
Frequency Range:	2.402GHz – 2.480GHz	
Dwell Time:	<= 0.4s	
Antenna Designation:	PIFA Antenna, Gain: 2.55dBi	

### Bluetooth Low Energy:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V4.0 Dual mode
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	1.46dBm (Peak)
Antenna Designation:	PIFA Antenna, Gain: 2.55dBi

NFC:

Operating Frequency:	13.56MHz
Transmit Power:	< 123dBuV/m at 3m.
Number of Channels:	1
Antenna Type:	Loop Antenna
Modulation Type:	ASK, BPSK

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



WLAN 2.4GHz+5.7GHz:

Wi-Fi	Frequency Range	Channels	Rated Power	Modulation Technology
11b/g	2412-2462	11	b: 17.61dBm g: 21.00dBm	DSSS, OFDM
11n	HT20 2412-2462	11	HT20: 21.11dBm	OFDM
11a	5725-5850	5	a: 20.12dBm	
11n (5GHz)	HT20 5725-5850	5	HT20: 20.13dBm	OFDM
11n (5GHz)	HT40 5725-5850	2	HT40: 19.66dBm	
Antenna	Designation:	PIFA Antenna, 2.4GHz Gain: 2.55dBi 5GHz Gain: 1.66dBi (5725MHz-5850MHz)		
Modulation type:		CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM		
Transition Rate:		802.11 a: 6/9/12/18/24/36/48/54 Mbps 802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 65.0Mbps 802.11 n_40MHz: 13.5 – 135.0Mbps		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### WLAN 5GHz:

Wi-Fi	Frequency Range	Channels	Rated Power (Avg)	Modulation Technology
	5150~5250	4	12.85dBm	
11a	5250~5350	4	12.81dBm	OFDM
	5470~5725	11	12.94dBm	
	HT20 5150~5250	4	HT20: 12.87dBm	
11n	HT20 5250~5350	4	HT20: 12.87dBm	OFDM
	HT20 5470~5725	8	HT20: 12.94dBm	
	HT40 5150~5250	2	HT40: 11.77dBm	
11n	HT40 5250~5350	2	HT40: 11.83dBm	OFDM
	HT40 5470~5725	3	HT40: 11.88dBm	
Antenna Designation		PIFA Antenna, 5GHz Gain: -0.74dBi (5150MHz-5250MHz) 5GHz Gain: 1.01dBi (5250MHz-5350MHz) 5GHz Gain: 2.70dBi (5470MHz-5725MHz)		
Modulation type		CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM		
Transition Rate:		802.11 a: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 65.0Mbps 802.11 n_40MHz: 13.5 – 135.0Mbps		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



GSM:

	Operating Frequency		Rated Power
Cellular Phone	GSM/GPRS 850, Class 12	824.2 MHz- 848.8 MHz	33dBm
Standards Frequency	EDGE 850, Class 12	824.2 MHz- 848.8 MHz	27dBm
Range and Power:	GSM/GPRS 1900, Class 12	1850.2MHz - 1909.8MHz	30dBm
	EDGE 1900, Class 12	1850.2MHz – 1909.8MHz	26dBm
Type of Emission:	GSM 850: 248KGXW, GSM 19 GPRS 850: 246KGXW, GPRS 1 EDGE 850: 249KG7W, EDGE	900: 247KGXW	
IMEI:	004402146593334		

The report applied for NFC Standard.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 1.2 **Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: **PY7PM-0490** filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.

#### 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:2009. & ANSI C63.10:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 1.4 **Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. & ANSI C63.10:2009. FCC Registration Number are: 990257.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

#### 1.5 **Special Accessories**

There is no special accessory used while test was conducted.

#### 1.6 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless onfermise stated the results showing in this resister only to the sample() tester and son sample() tester and son sample(). The state is the state of the electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### **System Test Configuration** 2

#### **EUT Configuration** 2.1

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### **Test Procedure** 2.3

## 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009 & 6.2 ANSI 63.10:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 & 6.2.2, and 6.2.3 in ANSI 63.10:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

## 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 8 and 13 and of ANSI C63.4:2009, & Section 6.3, 6.4, 6.5, and 6.6 of ANSI 63.10:2009.ANSI C63.10:2009.

Unless onfermise stated the results showing in this resister only to the sample() tester and son sample() tester and son sample(). The state is the state of the electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### Limitation 2.4

## (1) Conducted Emission

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range		Limits B (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		
1. The lower limit shall ap	ply at the transition frequencies	
2.The limit decreases line	early with the logarithm of the frequer	ncy in the range 0.15 MHz to 0.50 MHz.

## (2) Radiated Emission

- a. The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- b. Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d. The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 (Intentional Radiators general limit) as below.

Frequency (MHz)	Field strength $\mu V/m$	Distance (m)	Field strength at 3m dBµV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Remark: 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor =  $40 \log$  (required distance/ test distance) (dB);
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.  $Ex.20*\log(30)+40*\log(30/3) = 69.54$ dBuV/m
- 5. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205.
- 6. The general radiated emission limits in  $\xi$  15.209 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

## (3) Frequency Tolerance


The frequency tolerance of the carrier signal shall be maintained within +-0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 2.5 **Configuration of Tested System**

## Fig. 2-1 Radiated Emission

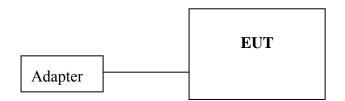

## Fig. 2-2 Conducted (Antenna Port) Configuration

EUT


### **Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test Software	N/A	NxpSecureElement	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## Fig. 2-3 AC Power Line Conducted Emission



**Table 2-2 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test Software	N/A	NxpSecureElement	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 3 **Summary of Test Results**

FCC Rules	Description Of Test	Result
<b>§</b> 15.207	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d)	Radiated Emission	Compliant
§15.209	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	Frequency Stability	Compliant
§2.1049 §15.215 (c)	20 dB OCCUPIED BANDWIDTH	Compliant
§15.203	Antenna Requirement	Compliant

#### **Description of test modes** 4

The EUT stay in continuous transmitting mode. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case E1 position was reported.

The data rate as the lowest supported is selected while tests are conducted.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **MEASUREMENT UNCERTAINTY** 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 123.36 Hz
20 dB OCCUPIED BANDWIDTH	+/- 123.36 Hz
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC=+/-1%, AC=+/-0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : <b>Vertical</b> )	0.417GHz-1GHz: +/- 3.19dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




#### **Conducted Emissions Test** 6

#### 6.1 **Measurement Procedure:**

- The EUT was placed on a table which is 0.8m above ground plane. 1.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance. 2.
- Sweep frequency starting from 150 kHz to 30 MHz for phase L1. 3.
- Repeating the measurement as lists above for phase neutral. 4.

#### **Test SET-UP (Block Diagram of Configuration)** 6.2

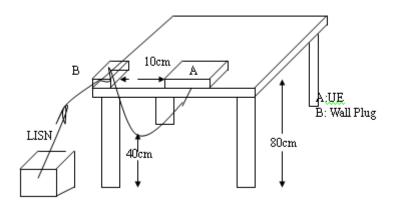

#### 6.3 **Measurement Equipment Used:**

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
EMI Test Receiver	R&S	ESCI7	100759	05/20/2011	05/19/2013					
EMI Receiver	R&S	ESCS 30	828985/004	09/23/2012	09/22/2013					
LISN	Rolf-Heine	NNB-2/16Z	99012	03/23/2013	03/22/2014					
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/23/2013	03/22/2014					
Coaxial Cables	N/A	WK CE Cable	N/A	01/05/2013	01/04/2014					

#### 6.4 **Measurement Result:**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation 1	Mode:	Operatio	n mode					Test Date:	Apr. 24, 2013
Temperatu	re:	26		Humid	lity:	6	50 %	Test By:	Marcus
	PDA Pho C1905	ss B Conduction	on(QP)		Phas Pow Dista	er: AC	L1 120V/60Hz tionmode	Temperatur Humidity:	re: 26 °C 60%
				Cond	ucted	Emissi	on		
	File :EH-20	13-40003-13	Da	ita:#2	aotoa		le: 2013/4/24	Time:下午 06:07	:44
	80.0 dBuV								
	10	M	. Jum	May	Mur	лћ.v		C Class B Conduction	
	0.0 0.150	Reading aq. Level	0.5 Correct Factor	Measure- ment	(MHz) Limit	Over	5	N	30.000
	MH	iz dBuV	dB	dBuV	dBuV	ďB	Detector	Comment	
1	0.46	81 37.79	0.07	37.86	56.55	-18.69	QP		
2	0.46	81 27.37	0.07	27.44	46.55	-19.11	AVG		
3	0.57	03 22.96	0.08	23.04	56.00	-32.96	QP		
4	0.57	03 18.65	0.08	18.73	46.00	-27.27	AVG		
5	* 1.14	06 41.78	0.08	41.86	56.00	-14.14	QP		
6	2.93	36 31.45	0.10	31.55	56.00	-24.45	QP		
7	2.93	36 20.71	0.10	20.81	46.00	-25.19	AVG		
8	4.14	06 33.27	0.12	33.39	56.00	-22.61	QP		
9	4.14		0.12	21.97	46.00	-24.03	AVG		
10	4.65		0.13	33.26	56.00	-22.74	QP		
11	4.65		0.13	23.72	46.00	-22.28	AVG		


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





### Report No: EH/2013/40020 Issue Date: Jun. 06, 2013 Page: 21 of 42

#### Site ConductionRoom Phase: N Temperature: 26 °C AC 120V/60Hz Humidity: 60% Limit: FCC Class B Conduction(QP) Power: EUT: Distance: PDA Phone M/N: C1905 Mode: Operation mode Note:

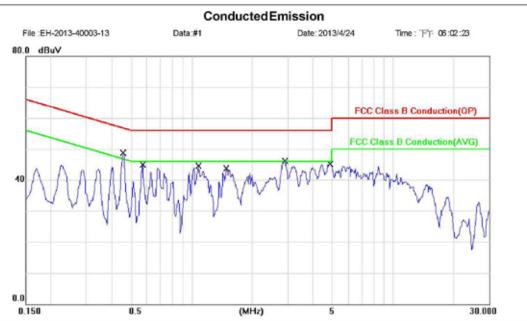

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBulV	dB	Detector	Comment	
1		0.4586	47.21	0.12	47.33	56.72	-9.39	QP		
2	•	0.4586	41.62	0.12	41.74	46.72	-4.98	AVG		
3		0.5703	42.78	0.14	42.92	56.00	-13.08	QP		
4		0.5703	37.22	0.14	37.36	46.00	-8.64	AVG		
5		1.0781	38.71	0.16	38.87	56.00	-17.13	QP		
6		1.0781	30.31	0.16	30.47	46.00	-15.53	AVG		
7		1.4805	38.88	0.16	39.04	56.00	-16.96	QP		
8		1.4805	29.48	0.16	29.64	46.00	-16.36	AVG		
9		2.9141	40.99	0.17	41.16	56.00	-14.84	QP		
10		2.9141	31.72	0.17	31.89	46.00	-14.11	AVG		
11		4.8711	38.96	0.20	39.16	56.00	-16.84	QP		
12		4.8711	29.23	0.20	29.43	46.00	-16.57	AVG		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




#### **Radiated Emission Test** 7

#### 7.1 **Measurement Procedure**


- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

#### 7.2 **Test SET-UP (Block Diagram of Configuration)**

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

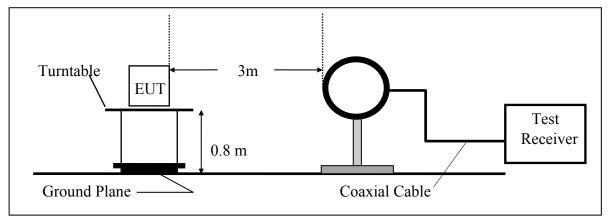

Radiated Emission Test Set-Up, Frequency Below 1000MHz **(B)** 

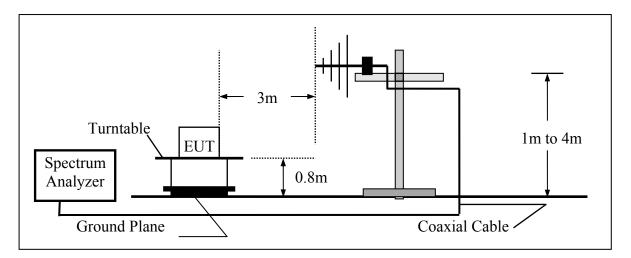

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample state state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample state of the results of the results and conditions.htm and, for This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for This document is issued by the Company subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and a sample electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 7.3 **Measurement Equipment Used:**

	966 Chamber									
EQUIPMENT MFR MODEL SERIAL LAST CAL D										
TYPE		NUMBER	NUMBER	CAL.						
EMI Test Receiver	R&S	ESCI7	100759	02/08/2013	02/07/2014					
Spectrum Analyzer	Agilent	E4446A	MY51100003	04/15/2013	04/14/2014					
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	02/06/2013	02/07/2014					
Bilog Antenna	Bilog Antenna SCHWAZBECK		378	01/10/2012	01/09/2014					
Loop Antenna	ETS.LINDGREN	6502	00148045	06/09/2012	06/08/2014					
Pre-Amplifier	Agilent	8447D	2944A07676	01/04/2013	01/03/2014					
Turn Table	HD	DT420	N/A	N.C.R	N.C.R					
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R					
Controller	HD	HD100	N/A	N.C.R	N.C.R					
Low Loss Cable	Huber Suhner	966_Rx	9	01/04/2013	01/03/2014					
3m Site NSA	SGS	966 chamber	N/A	07/15/2012	07/14/2013					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 7.4 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

## FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### 7.5 **Field Strength of Fundamental Emission**

#### 7.5.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 123.90dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation =  $40 \times \log(30/3) = 40 \text{ dB}$ 

Limit is re-adjusted in terms of limit taken in 3m = 20 \*log (15848 uV/m) + 40 = 124.00 dBuV/m

## Note:

Actual FS ( $dB\mu V/m$ ) = Spectrum. Reading level ( $dB\mu V$ ) + Factor (dB)

Factor (dB) = Antenna Factor (dB $\mu$ V/m) + Cable Loss (dB) – Pre Amplifier Gain (dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless onlerives stated the testitis and with in this cart reportion only to the ample of cart beample of and beample of the state of conditions.htm and, for and electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instruction, if any. The Company's colleresponsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No: EH/2013/40020 Issue Date: Jun. 06, 2013 Page: 25 of 42

Operation Band		:NFC		Test Date		:2013-05-14		
Fundamental Frequency		:13.56 MHz		Temp./Humi.		:22.6 deg C / 70 RH		
Operation Me	ode	:TX MAIN		Engineer		:JJ		
EUT Pol.		:E1 Plane		Measurement Antenna Pol.		:VERTICA	:VERTICAL	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
13.56	F	Peak	44.53	10.66	55.19	123.90	-68.71	
19.50	Ť	i cur	11.55	10.00	00.17	123.90	00.71	

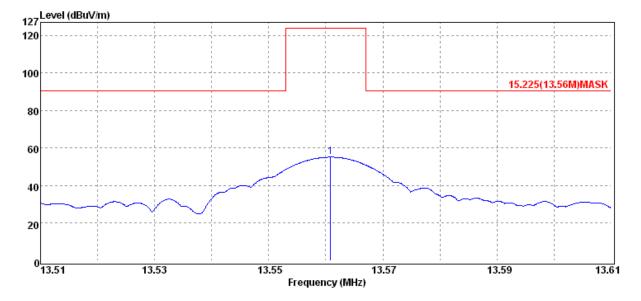


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No: EH/2013/40020 Issue Date: Jun. 06, 2013 Page: 26 of 42

Operation Band		:NFC		Test Date :2013-05-14		4	
Fundamental Frequency		:13.56 MHz		Temp./Humi.		:22.6 deg C / 70 RH	
Operation M	ode	:TX MAIN		Engineer		:JJ	
EUT Pol.		:E1 Plane		Measurement	Antenna Pol.	:HORIZOI	NTAL
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.56	F	Peak	44.58	10.66	55.24	123.90	-68.66

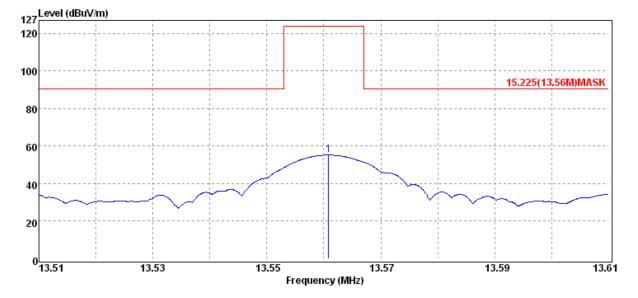

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

SGS Taiwall Llu.	NO. 134, WUKUNYKUAU, NEW TAI	JennuusinaiPark, wukuDisinci, wew raipeiCity,	,IdWd11240U3/初近中五版画利	北座耒園區五上路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com	



## 7.5.2 Radiated Mask


- (a) 15.848 millivolts/m (84 dB $\mu$ V/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dB $\mu$ V/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dB $\mu$ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.

Distance extrapolation =  $40 \times \log(30/3) = 40 \text{ dB}$ 

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:

- a)  $20 * \log (15848 \text{uV/m}) + 40 \text{dB} = 124.00 \text{dBuV/m}$
- b)  $20 * \log(334 \text{uV/m}) + 40 \text{dB} = 90.47 \text{dBuV/m}$
- c)  $20*\log(106uV/m) + 40dB = 80.50dBuV/m$


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample state state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to the sample state of the results of the results and conditions.htm and, for This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for This document is issued by the Company subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and a sample electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

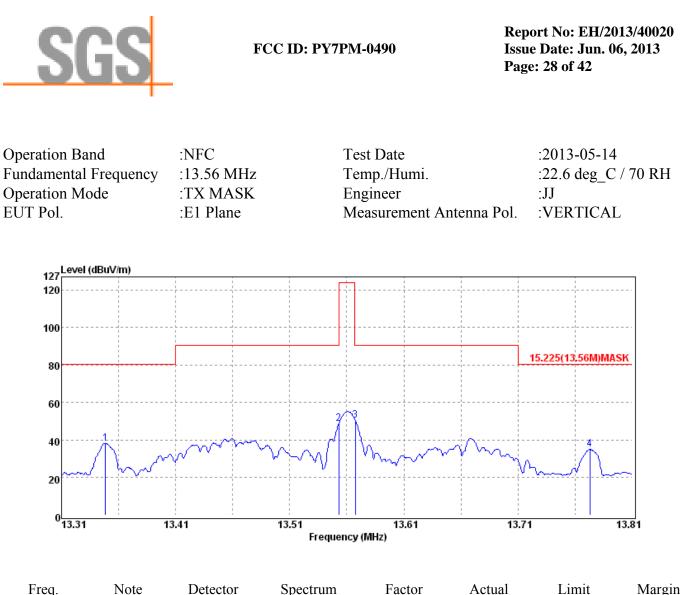

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.35	S	Peak	27.65	10.67	38.32	80.50	-42.18
13.55	S	Peak	38.18	10.66	48.84	90.47	-41.63
13.57	S	Peak	39.87	10.66	50.53	90.47	-39.94
13.77	S	Peak	24.31	10.64	34.95	80.50	-45.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefs 5 activities stated the estates shown in this test report relation only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非方式或明,此報告就是僅對測試之樣品負責,同時此樣品僅依留的天。本報告未遂年公司書面許可,不可部份複复。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or properties of the idoputed to elevery of falsification of the content or properties of a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or properties of the idoputed to elevery the provide the test of the low. appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

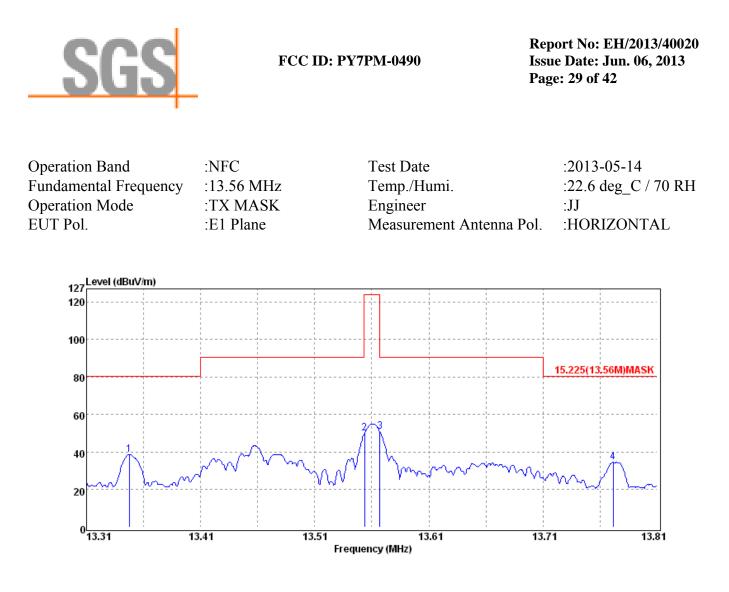

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.35	S	Peak	28.06	10.67	38.73	80.50	-41.77
13.55	S	Peak	39.38	10.66	50.04	123.90	-73.86
13.57	S	Peak	40.45	10.66	51.11	90.47	-39.36
13.77	S	Peak	23.93	10.64	34.57	80.50	-45.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefs 5 activities stated the estates shown in this test report relation only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非方式或明,此報告就是僅對測試之樣品負責,同時此樣品僅依留的天。本報告未遂年公司書面許可,不可部份複复。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or properties of the idoputed to elevery of falsification of the content or properties of a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or properties of the idoputed to elevery the provide the test of the low. appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 7.5.3 Radiated Emission – General Requirement:

Limit:

- § 15.225
  - (d) 30 microvolts/m (29.4 dB $\mu$ V/m) at 30 m, outside the band 13.110-14.010 MHz.


Limit is converted by adding the distance extrapolation factor as the measurement distance was taken place at 3m.

Operation Band Fundamental Frequency Operation Mode EUT Pol.	:NFC :13.56 MHz :TX :E1 Plane	Test Date Temp./Humi. Engineer Measurement Anter		ntenna Pol.	:2013-05-14 :22.6 deg_C / 70 RH :JJ :VERTICAL	
Freq. Note	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Leve	el	FS	@3m	
MHz F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10.74 S	Peak	14.33	11.07	25.40	69.54	-44.14
13.04 S	Peak	15.18	10.69	25.87	69.54	-43.67
16.86 S	Peak	13.75	10.64	24.39	69.54	-45.15
17.84 S	Peak	15.06	10.60	25.66	69.54	-43.88
19.42 S	Peak	12.53	10.47	23.00	69.54	-46.54
23.92 S	Peak	11.69	9.76	21.45	69.54	-48.09
27.12 Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **Measurement Plot**

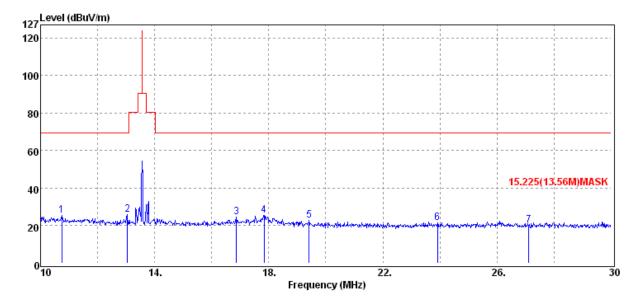

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

台灣

ilawiu and onenders may be prosecuted to the fullest extent of the law.								
SGS Taiwan Ltd.	No.134,WuKungRoad,NewTaipeilr	dustrialPark,WukuDistrict,NewTaipeiCi	ity,Taiwan24803/新北市五股區新北。	產業園區五工路134號				
檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com					




Report No: EH/2013/40020 Issue Date: Jun. 06, 2013 Page: 32 of 42

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :E1 Plane	Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2013-05-14 :22.6 deg_C / 70 RH :JJ :HORIZONTAL		
Freq.	Note	Detector Mode	Spectrum Reading Leve	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10.14	S	Peak	13.47	11.17	24.64	69.54	-44.90
11.84	S	Peak	12.56	10.86	23.42	69.54	-46.12
17.56	S	Peak	11.51	10.62	22.13	69.54	-47.41
20.78	S	Peak	11.31	10.25	21.56	69.54	-47.98
23.76	S	Peak	12.22	9.77	21.99	69.54	-47.55
25.28	S	Peak	12.23	9.59	21.82	69.54	-47.72
27.12	Н	Peak	11.03	9.24	20.27	69.54	-49.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **Measurement Plot**

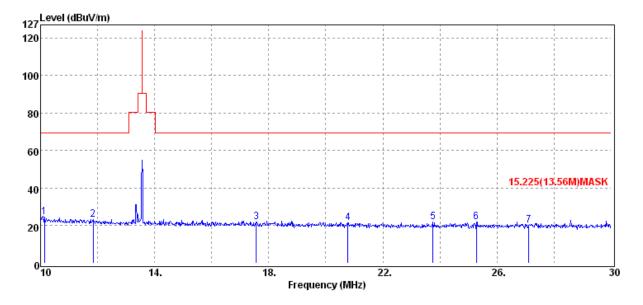

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

台灣

ilawiu and onenders may be prosecuted to the fullest extent of the law.								
SGS Taiwan Ltd.	No.134,WuKungRoad,NewTaipeilr	dustrialPark,WukuDistrict,NewTaipeiCi	ity,Taiwan24803/新北市五股區新北。	產業園區五工路134號				
檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com					




Report No: EH/2013/40020 Issue Date: Jun. 06, 2013 Page: 34 of 42

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :E1 Plane	Engineer		:2013-05-14 :22.6 deg_C / 70 RH :JJ :VERTICAL		
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Leve	el	FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
47.46	S	Peak	44.77	-13.85	30.92	40.00	-9.08
99.84	S	Peak	33.56	-16.84	16.72	43.50	-26.78
114.39	S	Peak	34.10	-15.22	18.88	43.50	-24.62
343.31	S	Peak	26.90	-11.76	15.14	46.00	-30.86
604.24	S	Peak	28.33	-7.47	20.86	46.00	-25.14
904.94	S	Peak	27.80	-2.70	25.10	46.00	-20.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **Measurement Plot:**

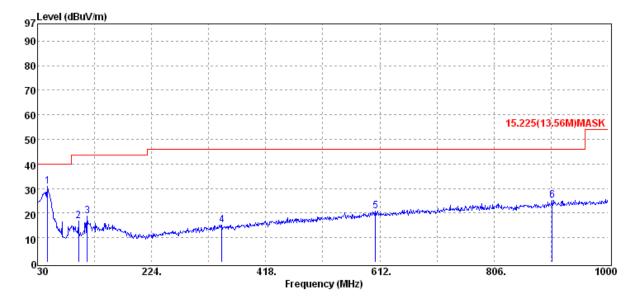

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No: EH/2013/40020 Issue Date: Jun. 06, 2013 Page: 36 of 42

Operation Band Fundamental Frequency Operation Mode EUT Pol.	al Frequency :13.56 MHz Temp./Humi.		ntenna Pol.	:2013-05-14 :22.6 deg_C / 70 RH :JJ :HORIZONTAL		
Freq. Note	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Leve	el	FS	@3m	
MHz F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
43.58 S	Peak	31.51	-13.70	17.81	40.00	-22.19
114.39 S	Peak	31.54	-15.22	16.32	43.50	-27.18
154.16 S	Peak	28.07	-12.30	15.77	43.50	-27.73
526.64 S	Peak	28.03	-9.05	18.98	46.00	-27.02
613.94 S	Peak	27.97	-7.25	20.72	46.00	-25.28
878.75 S	Peak	27.61	-3.22	24.39	46.00	-21.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **Measurement Plot:**

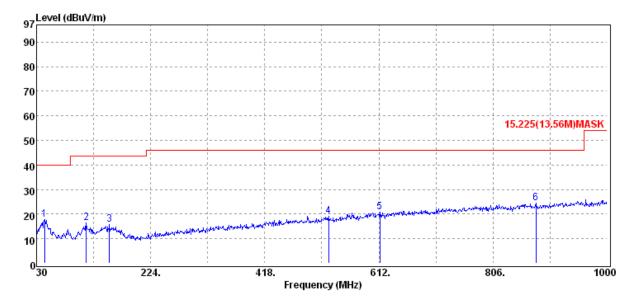

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





#### **Frequency Tolerance** 8

#### 8.1 **Measurement Procedure**

- The EUT was placed on a turn table which is 0.8m above ground plane. 1
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span = 100kHz.
- 4. Set SPA Max hold. Mark peak.

#### 8.2 **Test SET-UP (Block Diagram of Configuration)**



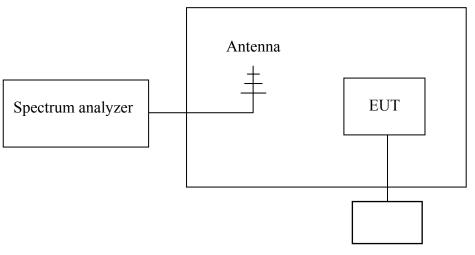

Variable AC Power Supply

#### **Measurement Equipment Used:** 8.3

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Spectrum Analyzer	Agilent	E4446A	MY51100003	04/15/2011	04/14/2014		
Temperature Chamber	TERCHY	MHG-120LF	911009	04/16/2012	04/15/2014		
AC Power Supply	APW-105N	887592	All Power	N/A	N/A		

#### 8.4 **Measurement Results**

Refer to attached data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this lest report reterion in the amprecipate stated the results snown in this lest report reterion in the state state and soon sample of an state electronic format documents, subject to Terrors and Conditions for Electronic Documents at <u>www.sqs.com/terrors</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## A. Temperature Variation

Power Supply	Environment	Frequency	Dolto (Uz)	Limit (KHz)	
Vdc	Temperature ( )	(MHz)	Delta (Hz)	Linit (KIIZ)	
3.7	-20	13.560451	-296.00	+/- 1.356	
3.7	-10	13.560387	-232.00	+/- 1.356	
3.7	0	13.560314	-159.00	+/- 1.356	
3.7	10	13.560238	-83.00	+/- 1.356	
3.7	20	13.560155	0.00	+/- 1.356	
3.7	30	13.560232	-77.00	+/- 1.356	
3.7	40	13.560301	-146.00	+/- 1.356	
3.7	50	13.560375	-220.00	+/- 1.356	

## **B.** Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (KHz)	
Vdc	Temperature ()	(MHz)	Della (IIZ)	LIIIII (KIIZ)	
4.2	20	13.560175	-14.00	+/- 1.356	
3.7	20	13.560161	0.00	+/- 1.356	
3.2	20	13.560149	12.00	+/- 1.356	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **20 dB OCCUPIED BANDWIDTH MEASUREMENT** 9

#### 9.1 **Standard Applicable:**

§2.1049 & 15.215 (c)

#### 9.2 Limit:

None

#### **Test Set-up** 9.3

Refer to section 6.2 in this report

#### 9.4 **Measurement Procedure**

20dB bandwidth

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.


#### **Measurement Equipment Used:** 9.5

Refer to section 6.3 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### -20dB Bandwidth

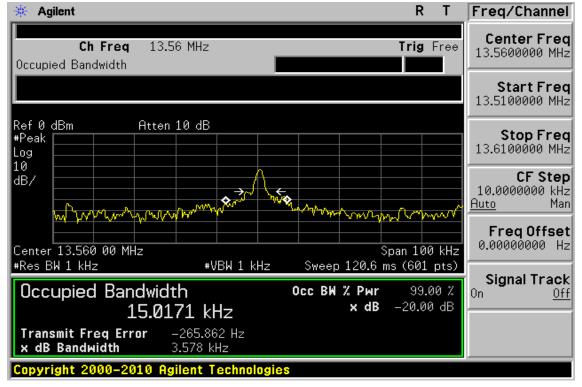

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## **10 ANTENNA REQUIREMENT**

## **10.1. Standard Applicable:**

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits.

### **10.2.** Antenna Connected Construction:

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.