



The Photos of SAR test

No. 2013SAR00133

For

Sony Mobile Communications AB

GSM/UMTS/LTE mobile phone

Type number: PM-0590-BV

Marketing name: C6916

With

Hardware Version: A (Main antenna) / AP2 (WLAN antenna)

Software Version: 14.1.F.0.158 (Main antenna)

s_atp_honami_us_1_30_5_9_b (WLAN antenna)

FCC ID: PY7PM-0590

Issued Date: 2013-10-14



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of MIIT


No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com


©Copyright. All rights reserved by TMC Beijing.




Picture 1: Constituents of the sample

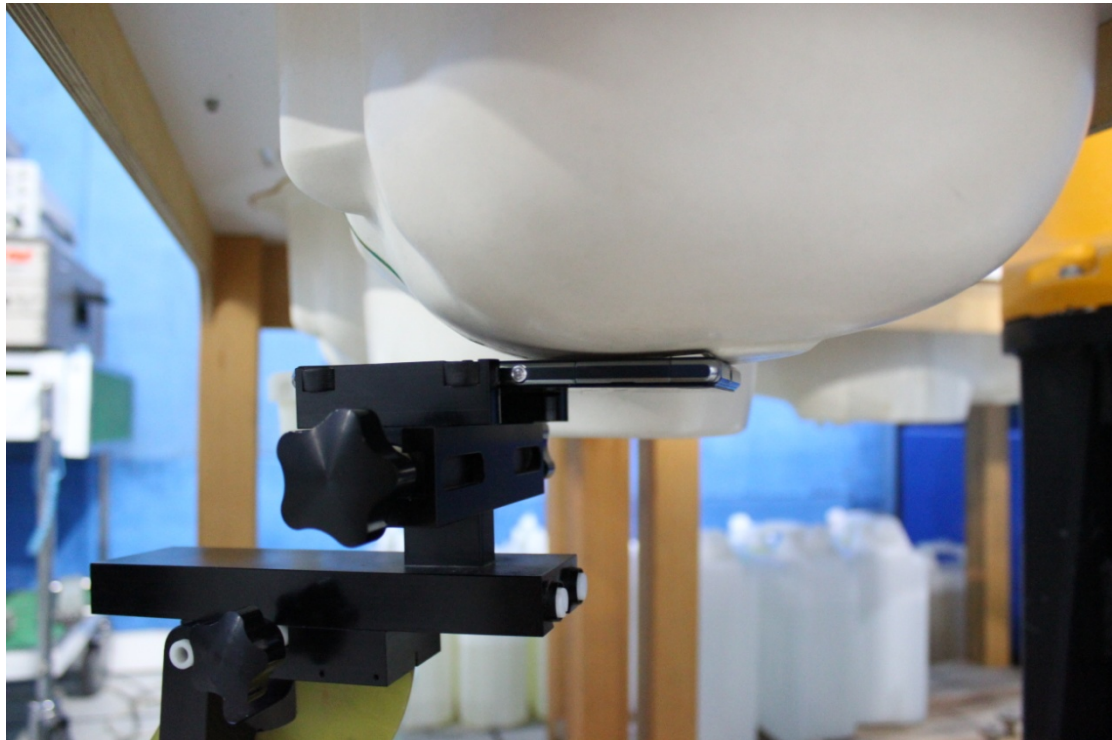

Picture 2: Left Hand Touch Cheek Position

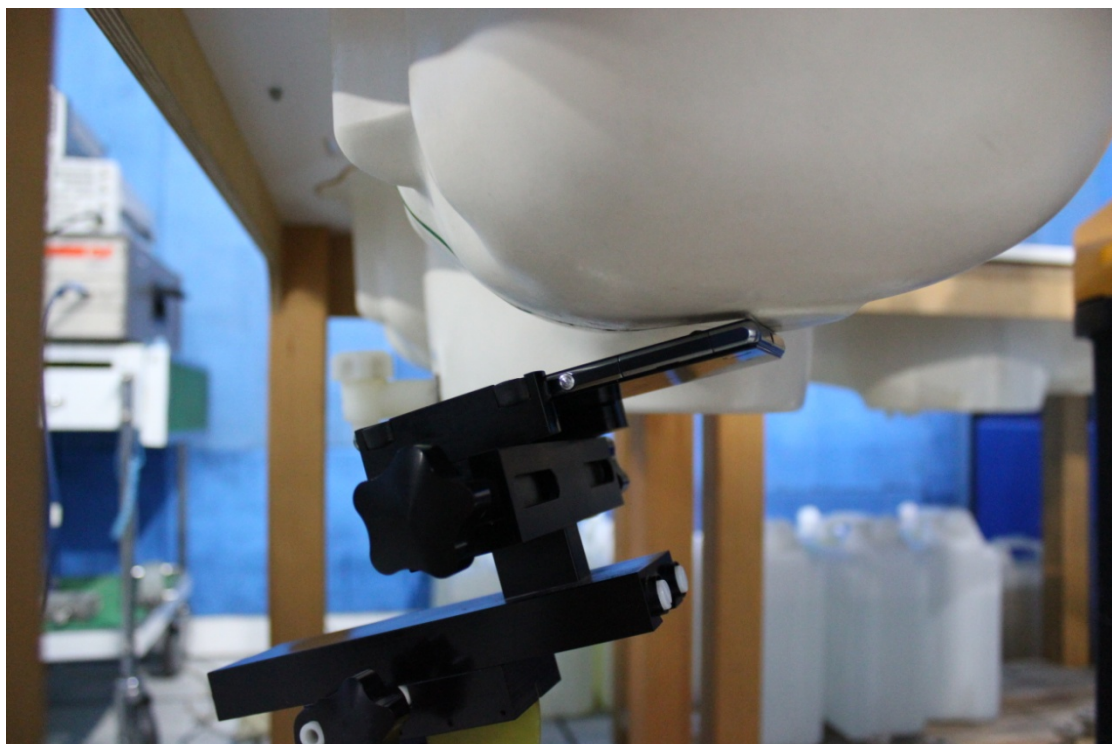

Picture 3: Left Hand Tilt 15° Position

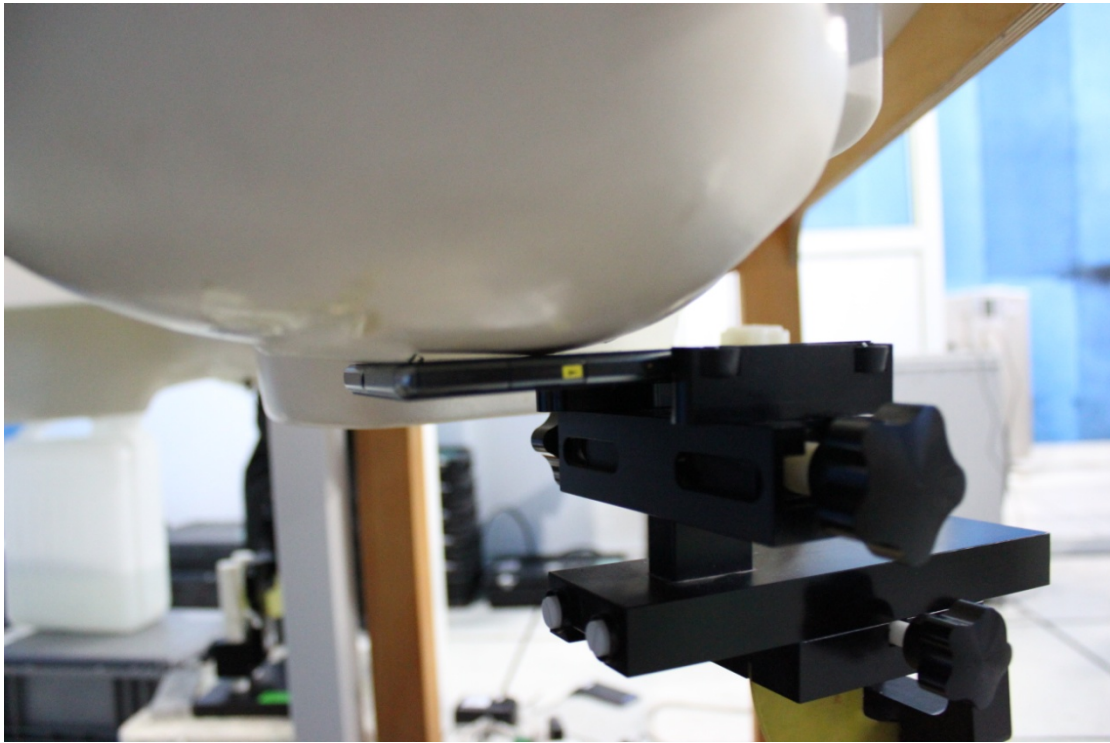



Picture 4: Right Hand Touch Cheek Position





Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10mm or 15mm between the EUT and the phantom bottom:

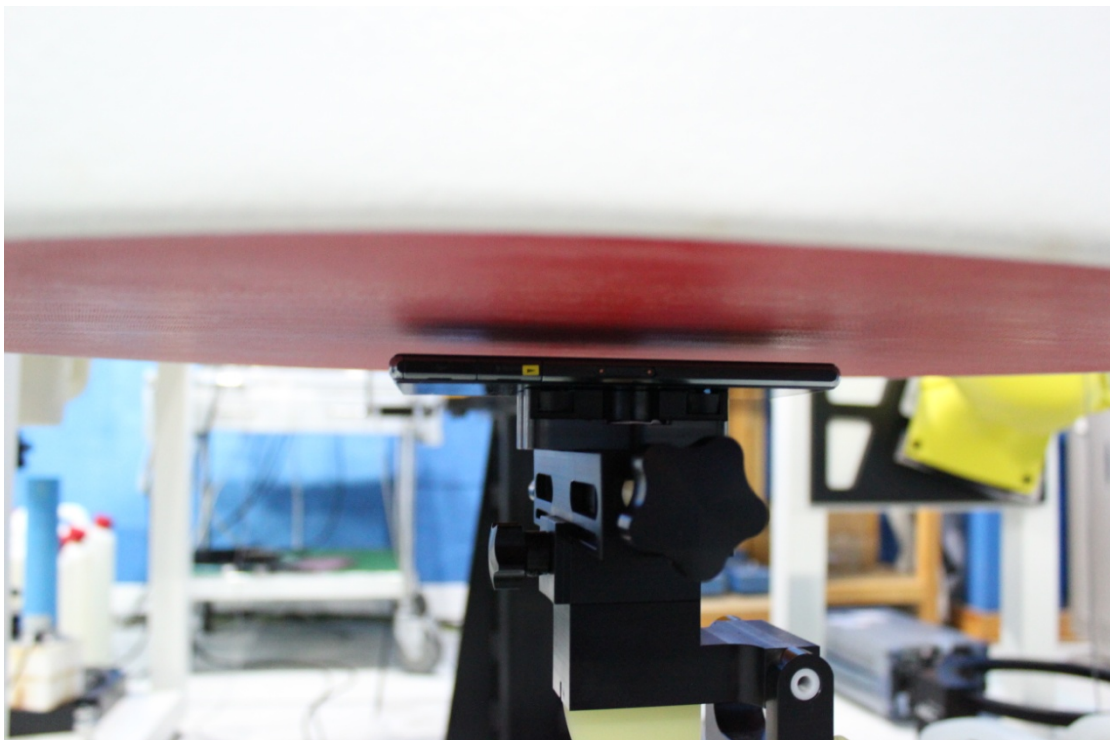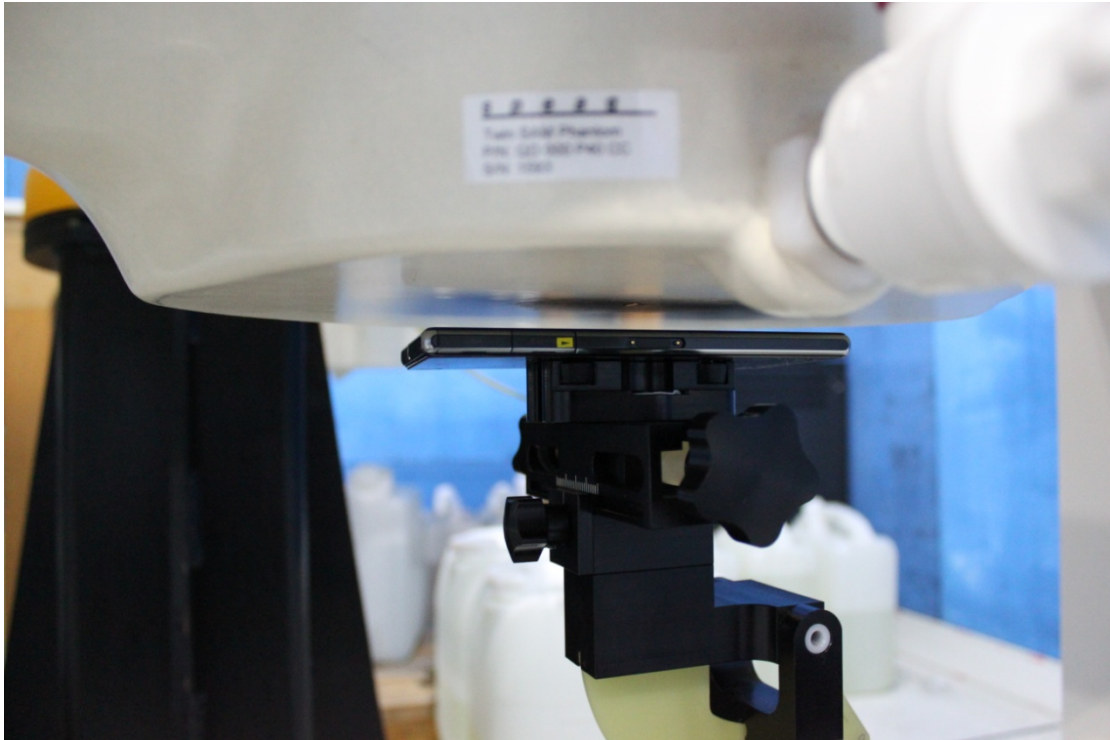


Picture 6: Front – 10mm

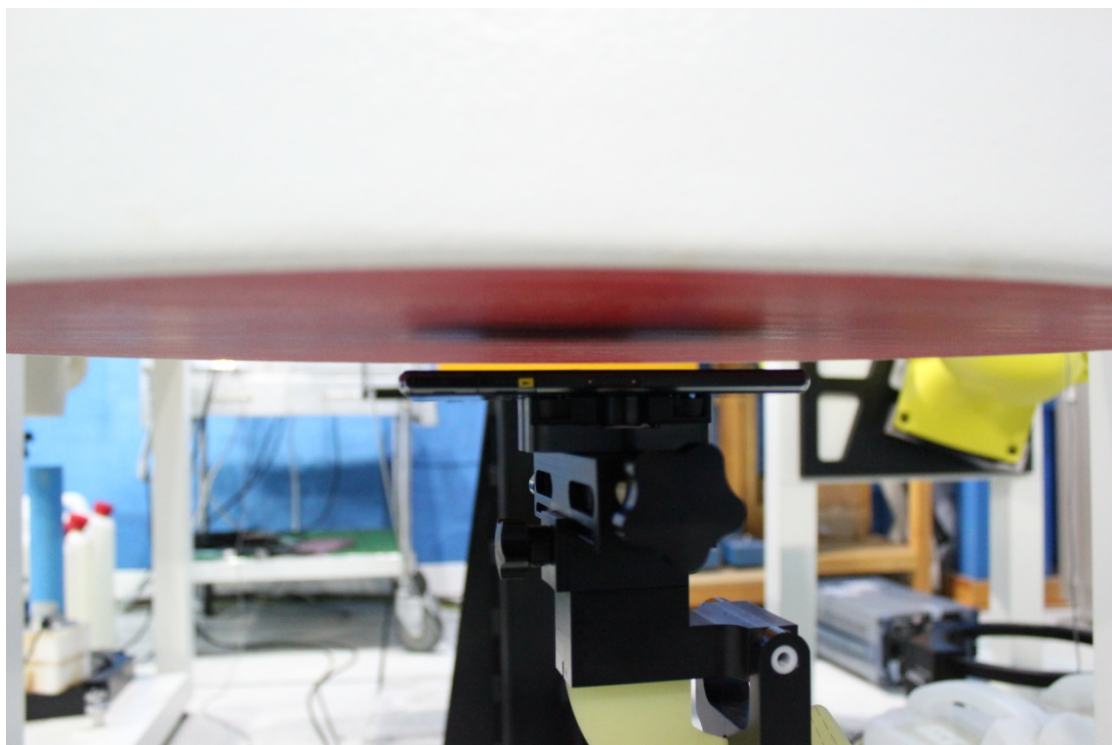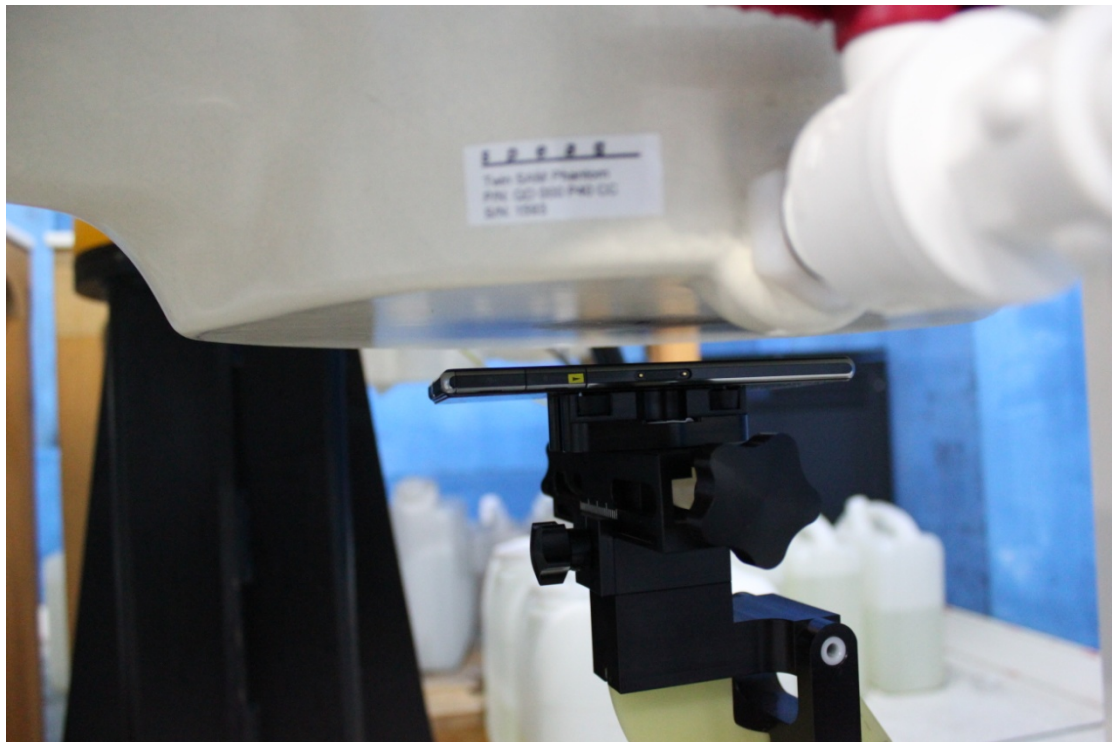



Picture 6-1: Front – 15mm

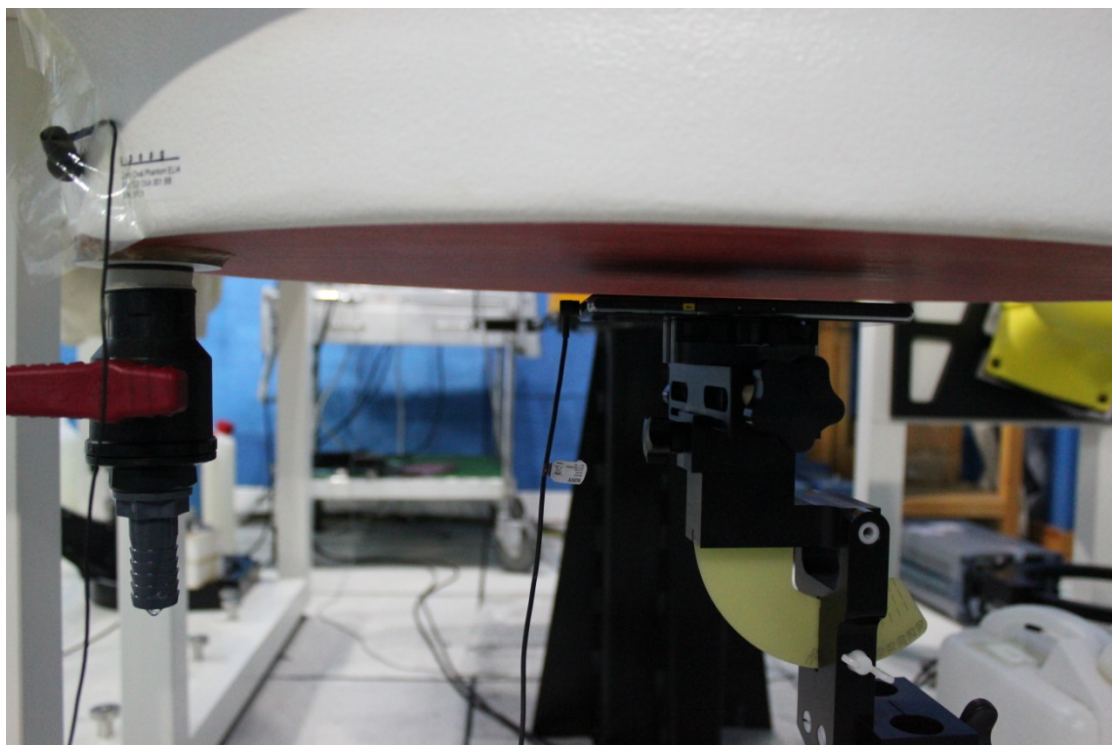



Picture 6-2: Front with headset – 15mm

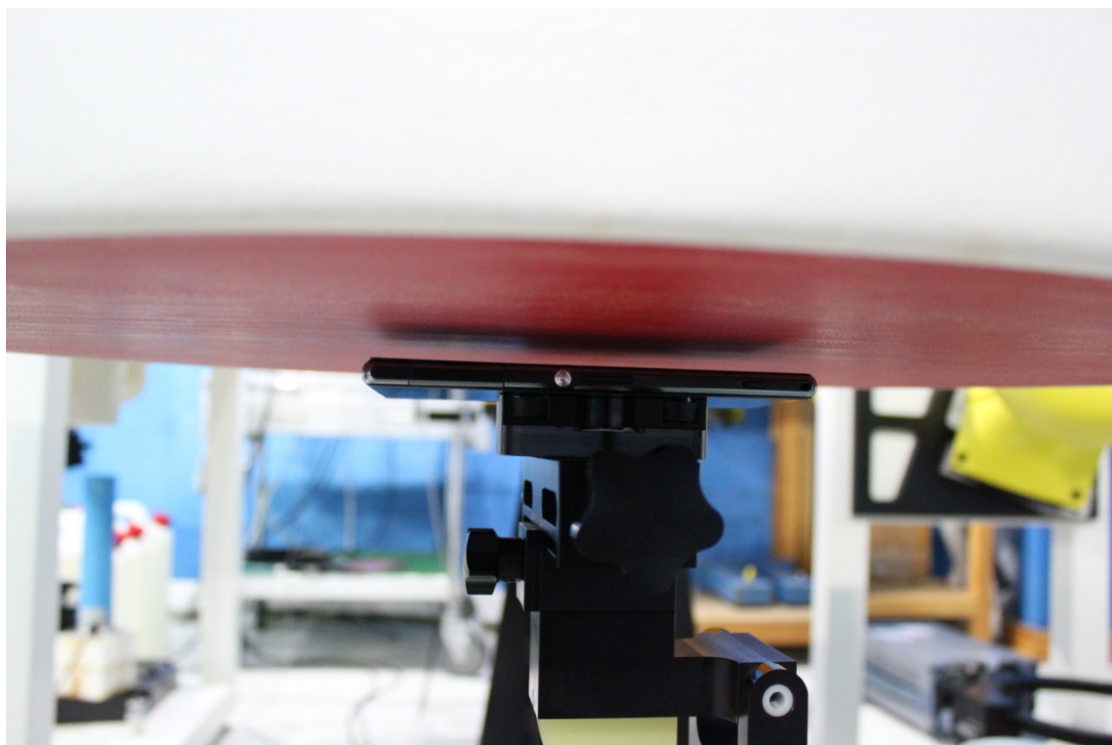



Picture 7: Rear – 10mm

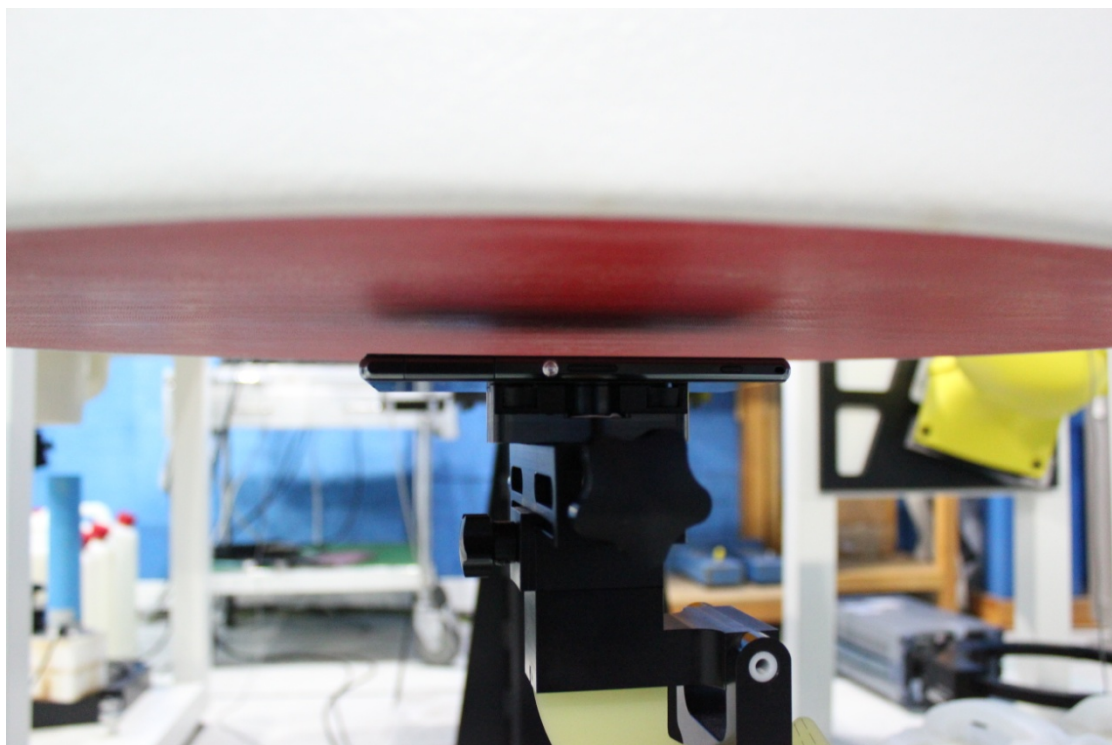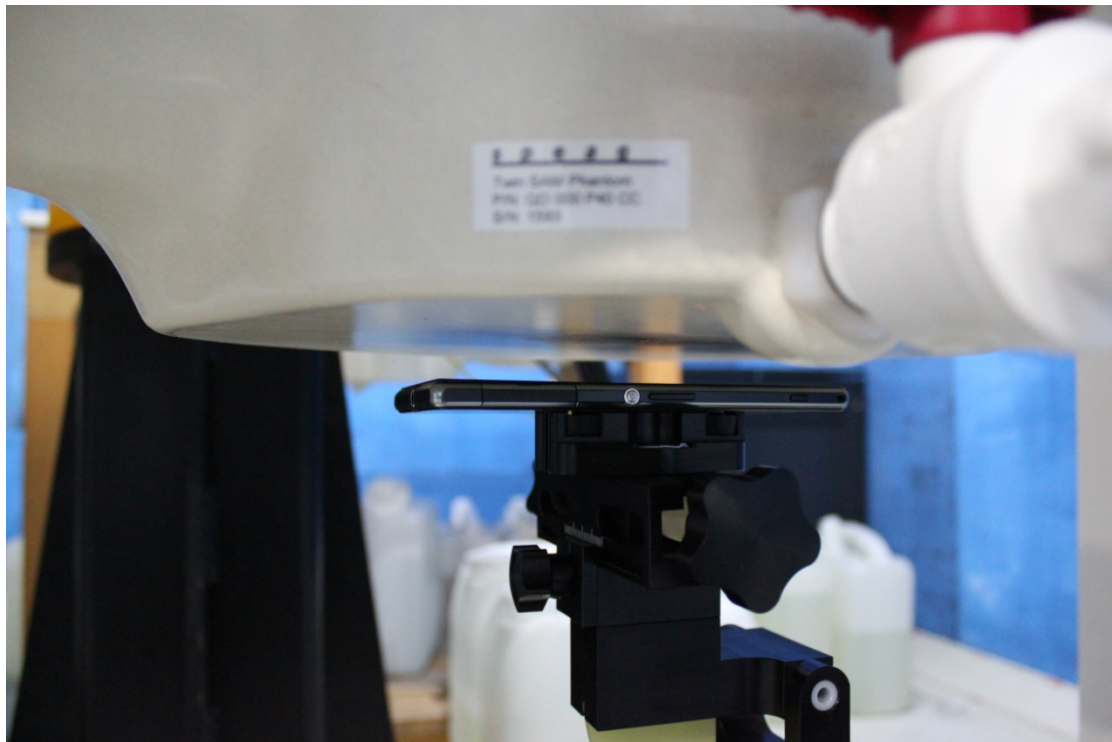


Picture 7-1: Rear – 15mm

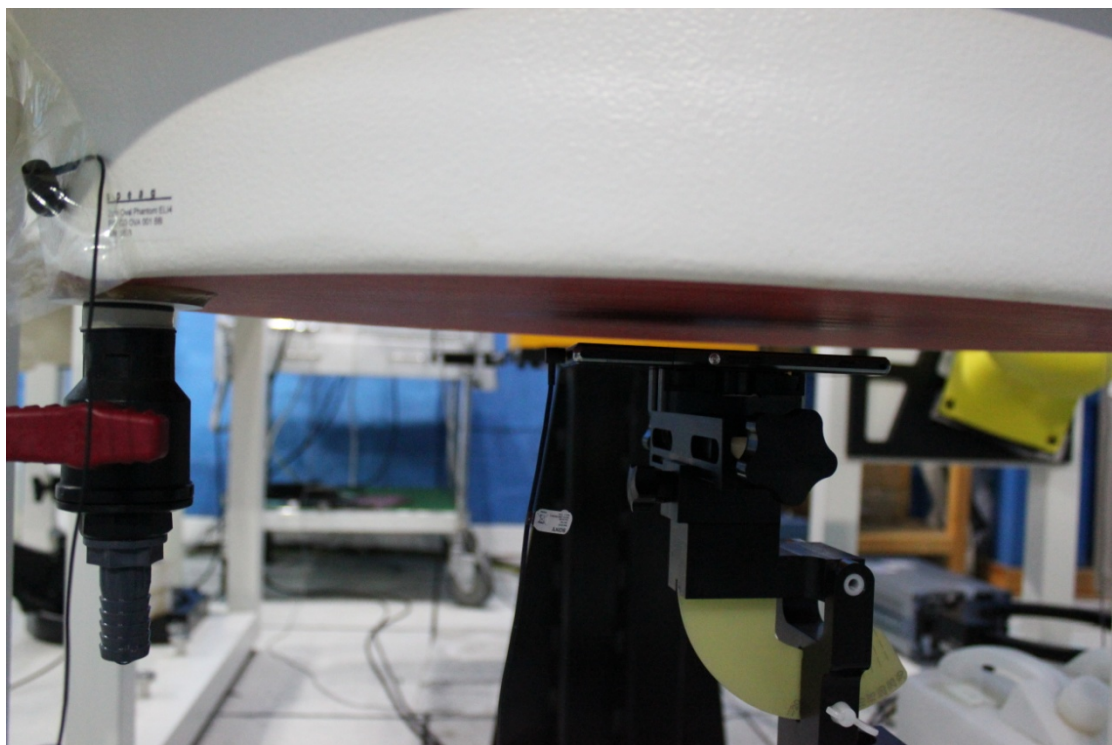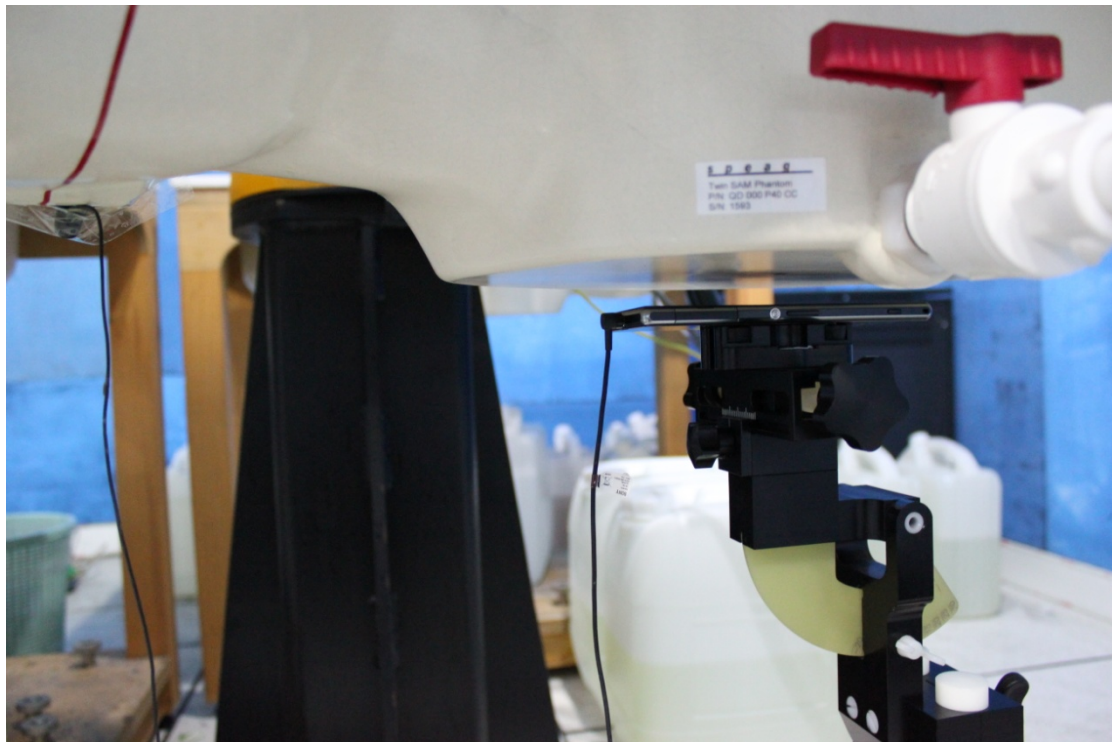

Picture 7-2: Rear with headset -15mm

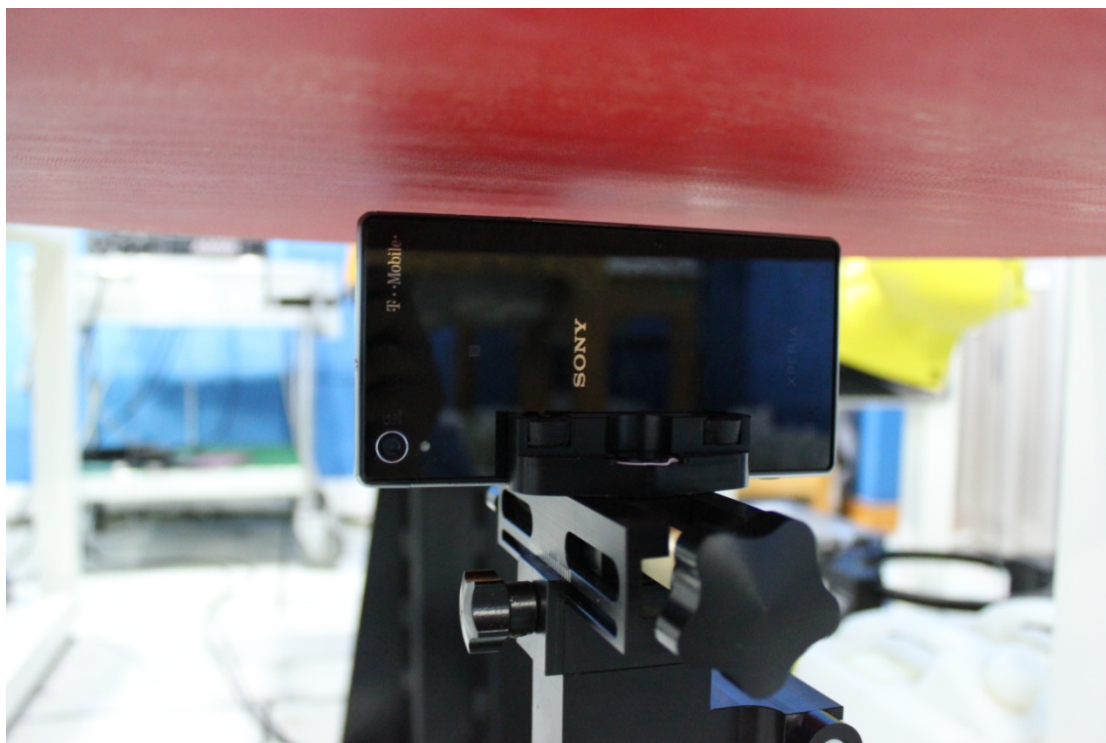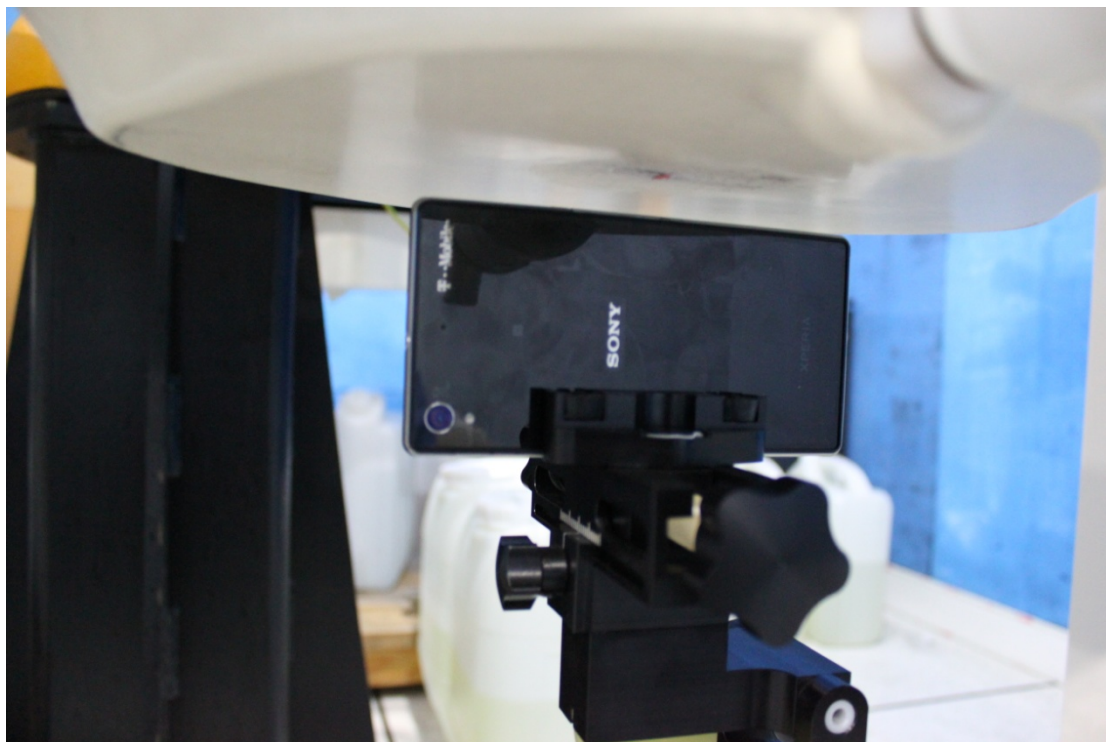

Picture 8: Left Edge – 10mm

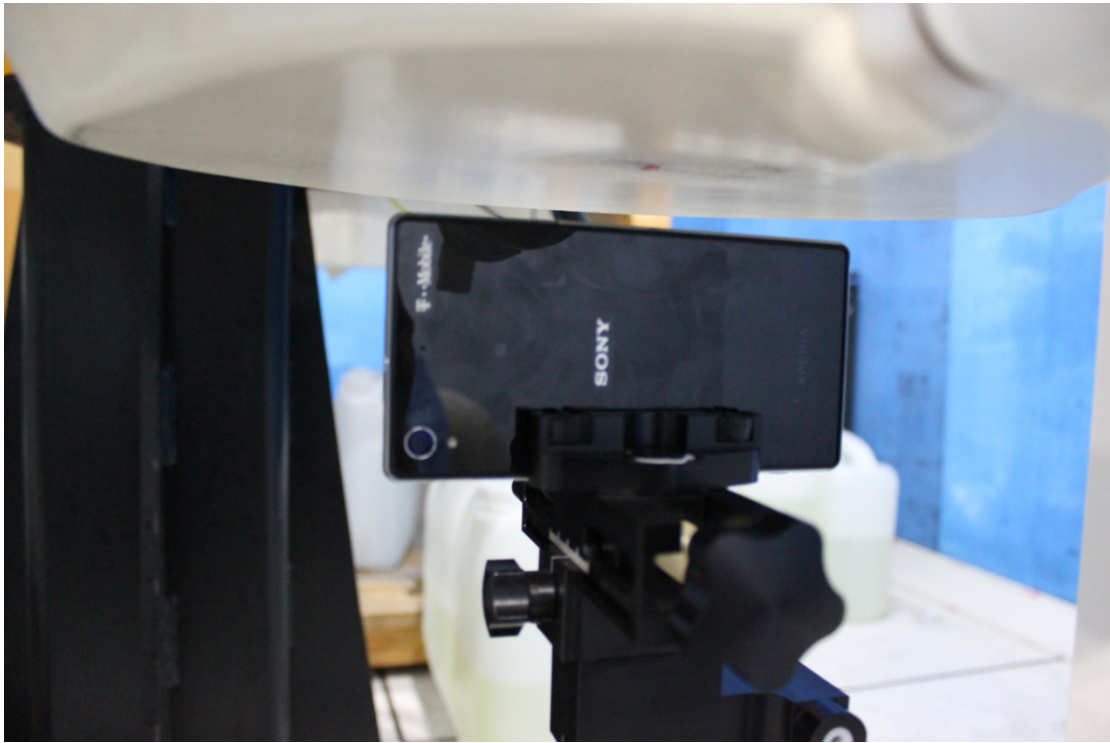

Picture 8-1: Left Edge – 15mm