


110: Touch Left LTE Band 2 1.4MHz BW 1RB Middle CH18900

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

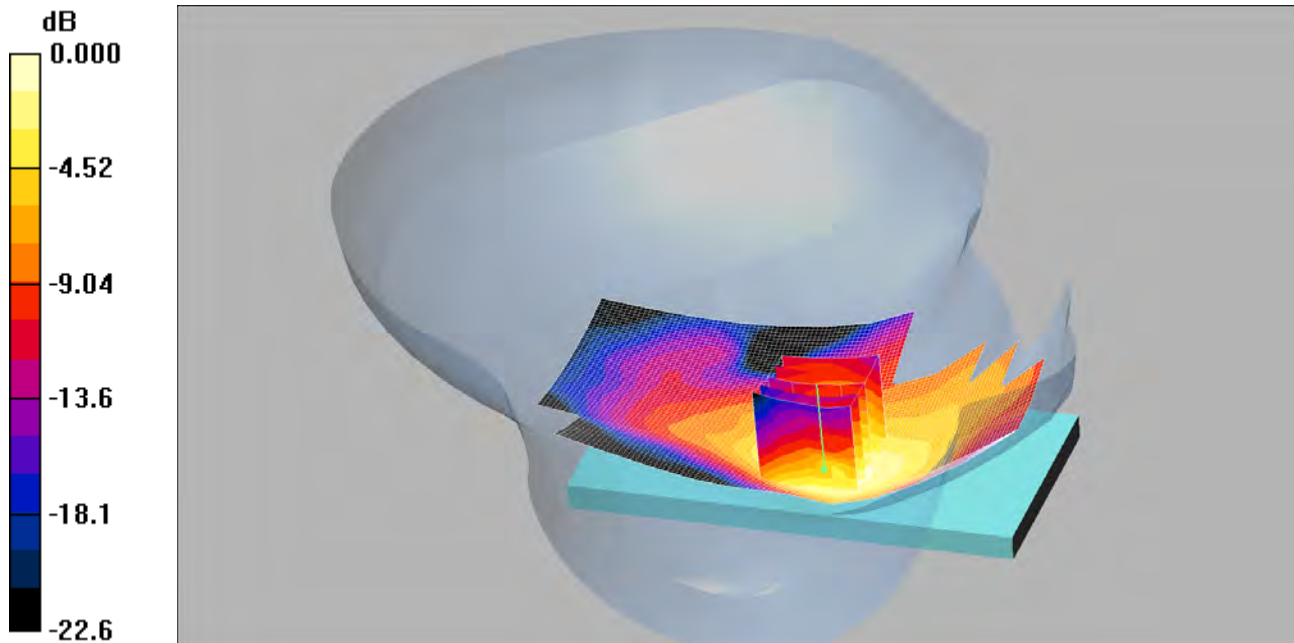

0 dB = 0.604mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.651 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.59 V/m; Power Drift = -0.138 dB

Peak SAR (extrapolated) = 0.778 W/kg


SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.343 mW/g

Maximum value of SAR (measured) = 0.604 mW/g

111: Touch Left LTE Band 2 1.4MHz BW 50% RB Middle CH18900

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

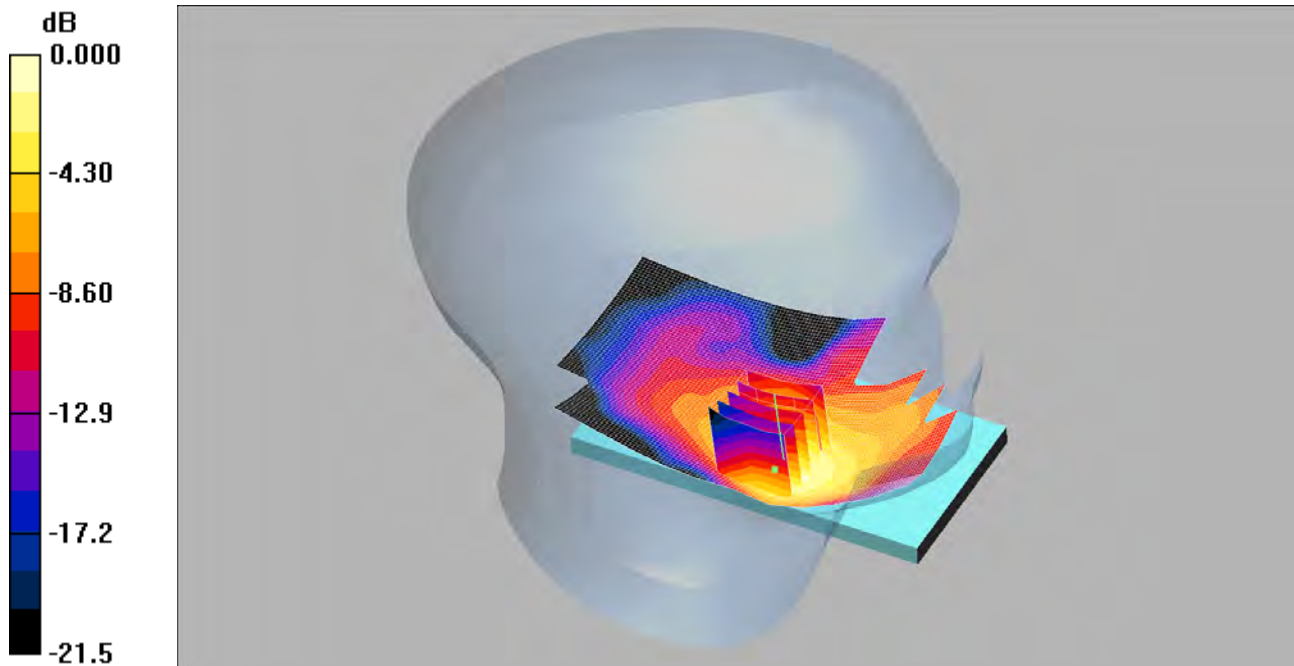

0 dB = 0.598mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.620 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.25 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.798 W/kg


SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.598 mW/g

112: Tilt Left LTE Band 2 1.4MHz BW 1RB Middle CH18900

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

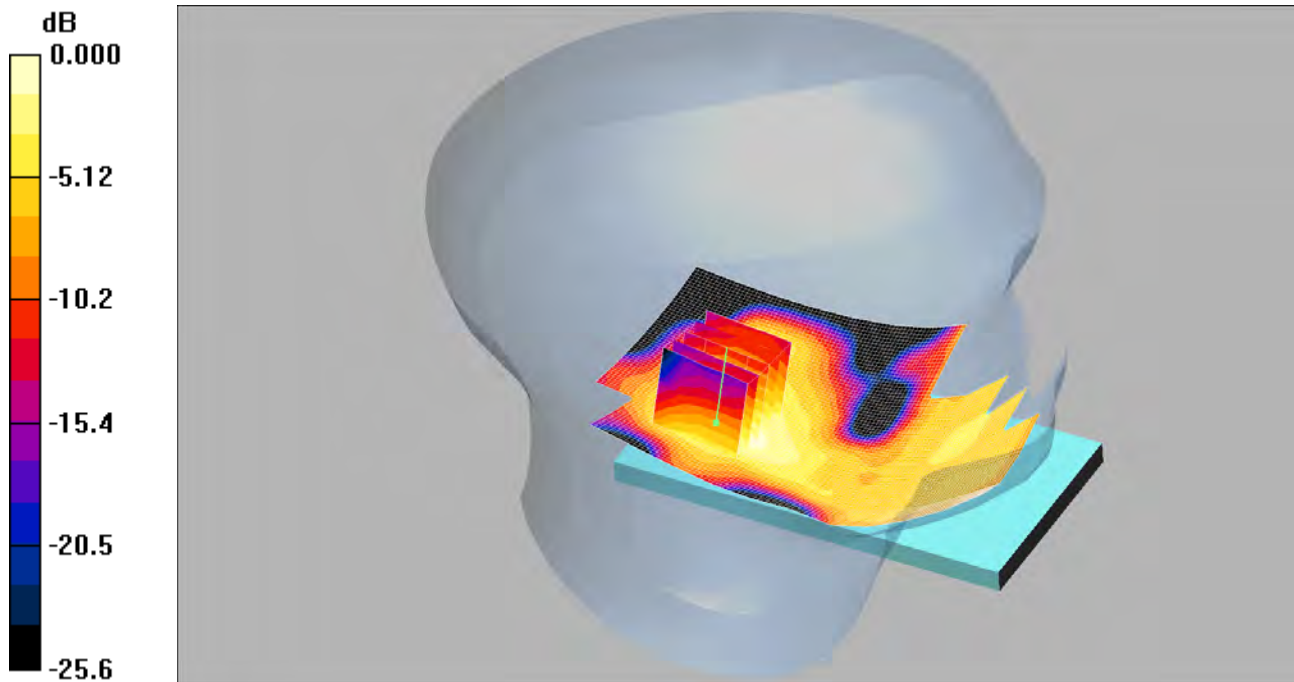

0 dB = 0.195mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Middle 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.196 mW/g

Tilt Left - Middle 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.277 W/kg


SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.195 mW/g

113: Tilt Left LTE Band 2 1.4MHz BW 50% RB Middle CH18900

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

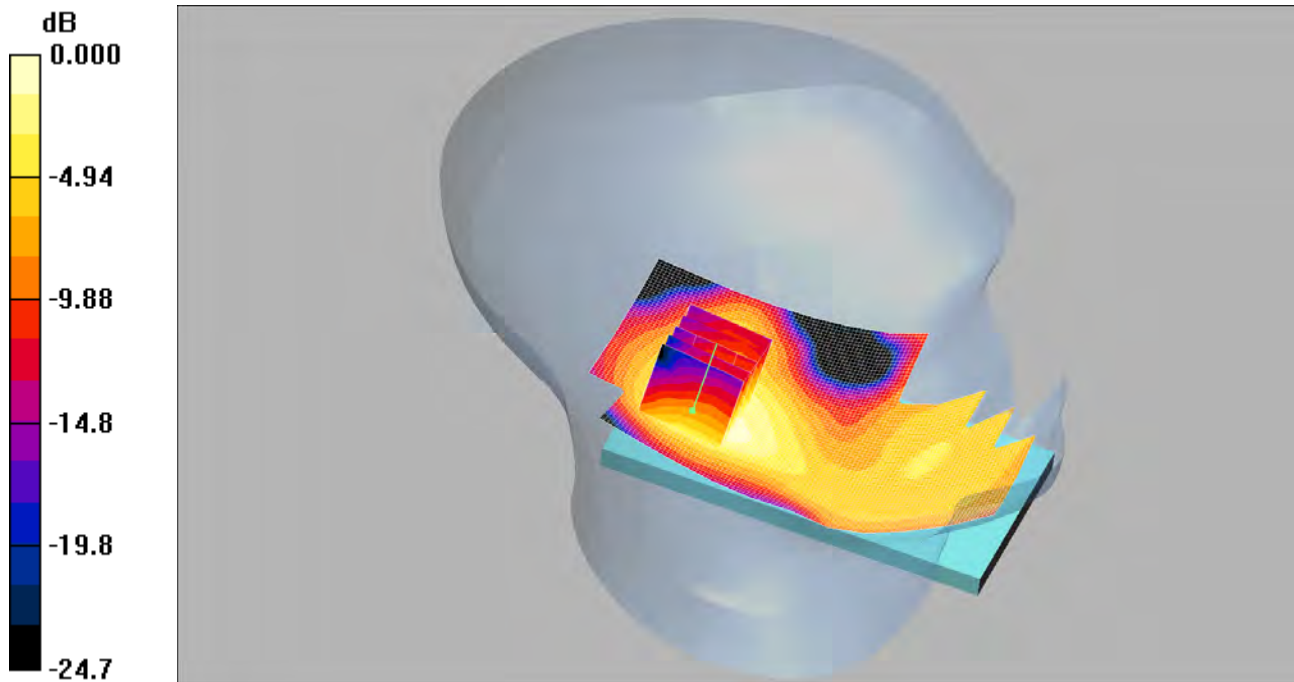

0 dB = 0.187mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.205 mW/g

Tilt Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.265 W/kg


SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

114: Touch Right LTE Band 2 1.4MHz BW 1RB Middle CH18900

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

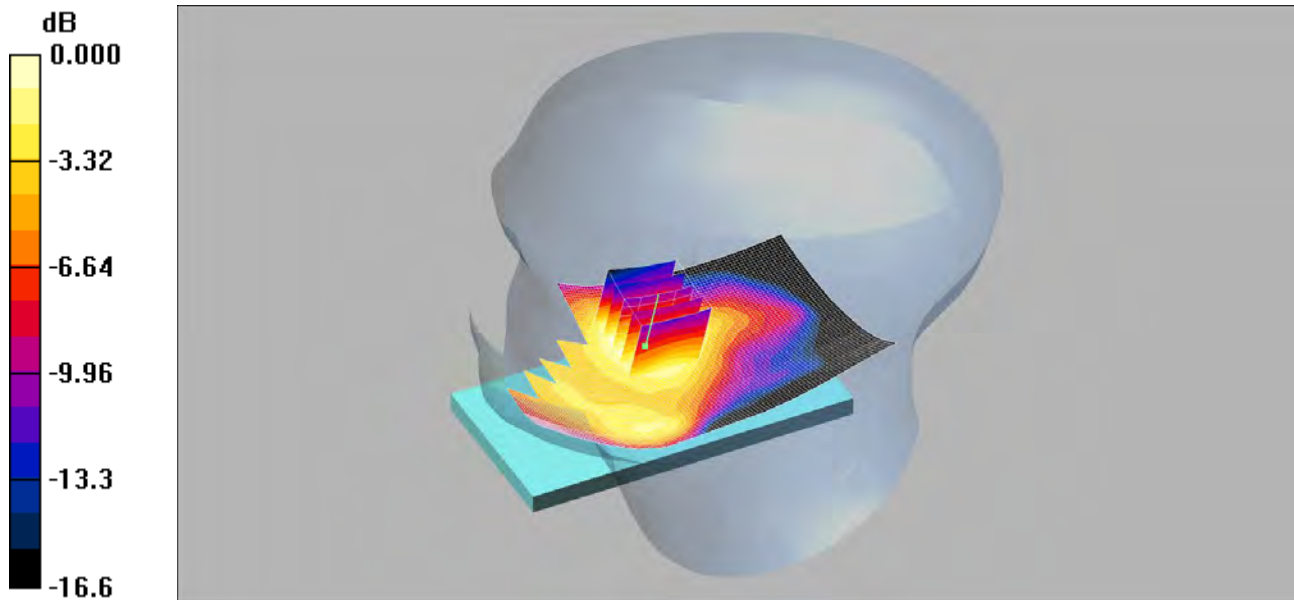

0 dB = 0.380mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.389 mW/g

Touch Right - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.57 V/m; Power Drift = 0.098 dB

Peak SAR (extrapolated) = 0.510 W/kg


SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.380 mW/g

115: Touch Right LTE Band 2 1.4MHz BW 50%RB Middle CH18900

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

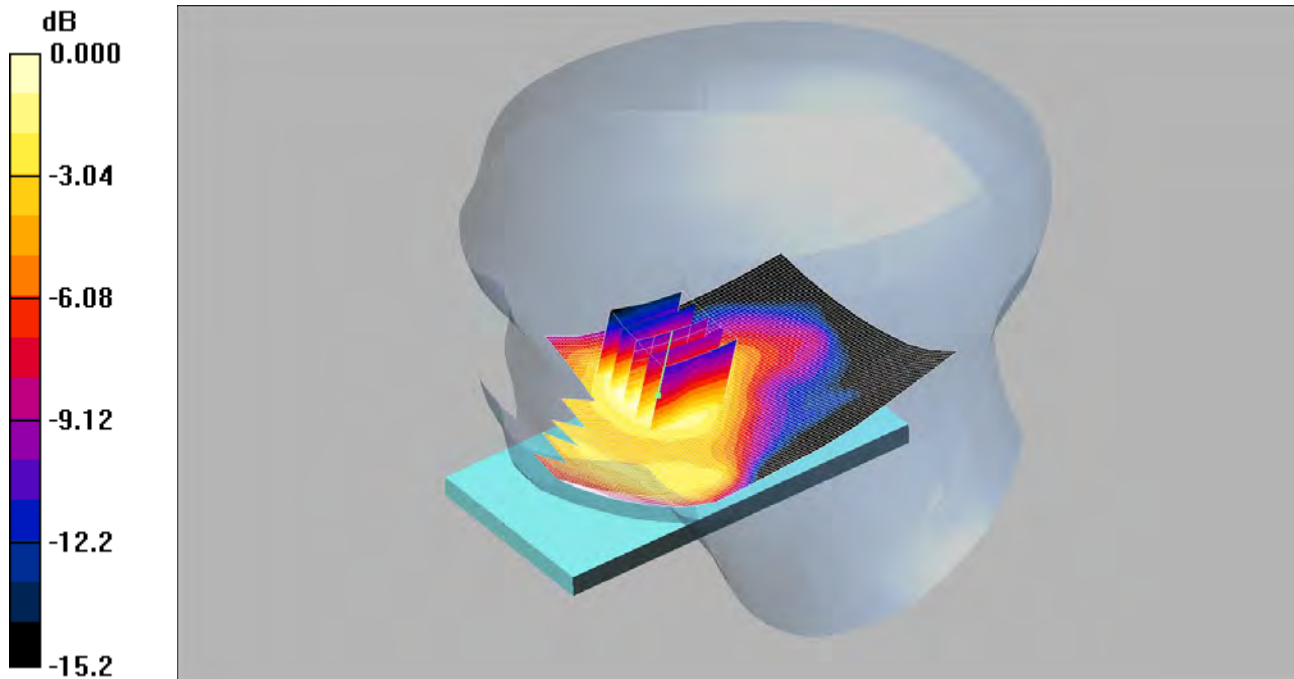

0 dB = 0.365mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.389 mW/g

Touch Right - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.97 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 0.475 W/kg


SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.365 mW/g

116: Tilt Right LTE Band 2 1.4MHz BW 1RB Middle CH18900

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

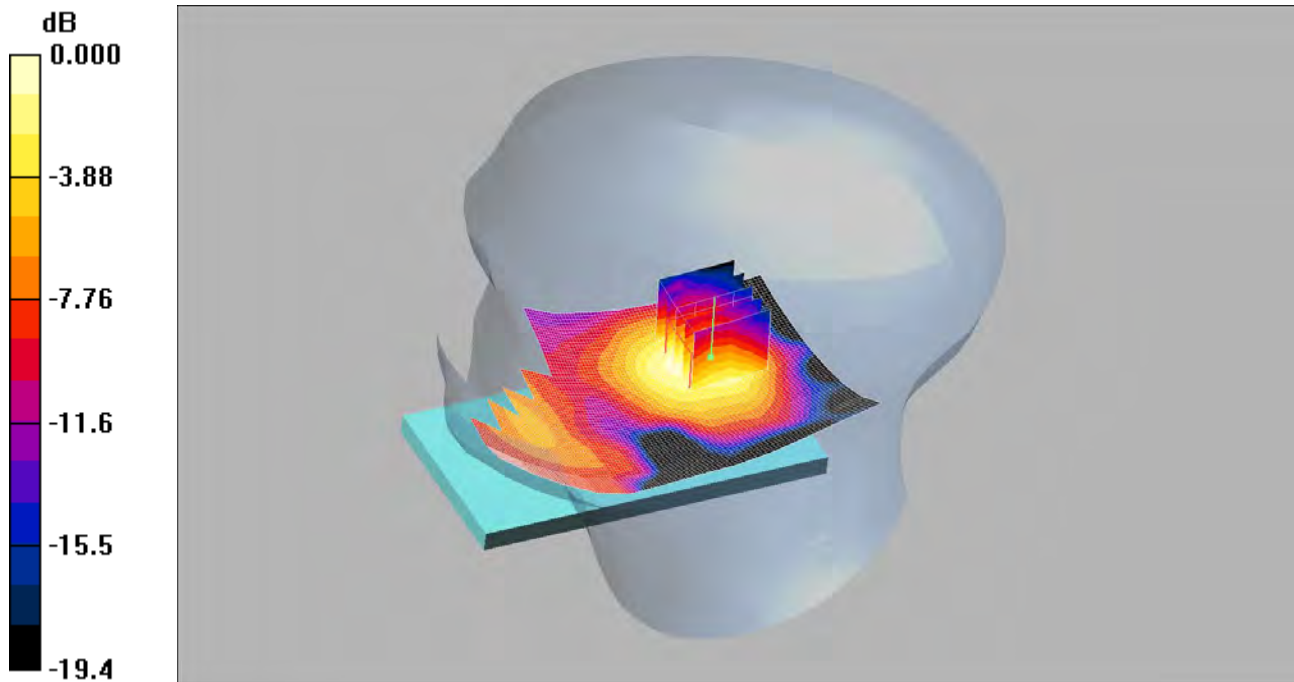

0 dB = 0.254mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.273 mW/g

Touch Right - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.58 V/m; Power Drift = 0.092 dB

Peak SAR (extrapolated) = 0.374 W/kg


SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.254 mW/g

117: Tilt Right LTE Band 2 1.4MHz BW 50% RB Middle CH18900

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

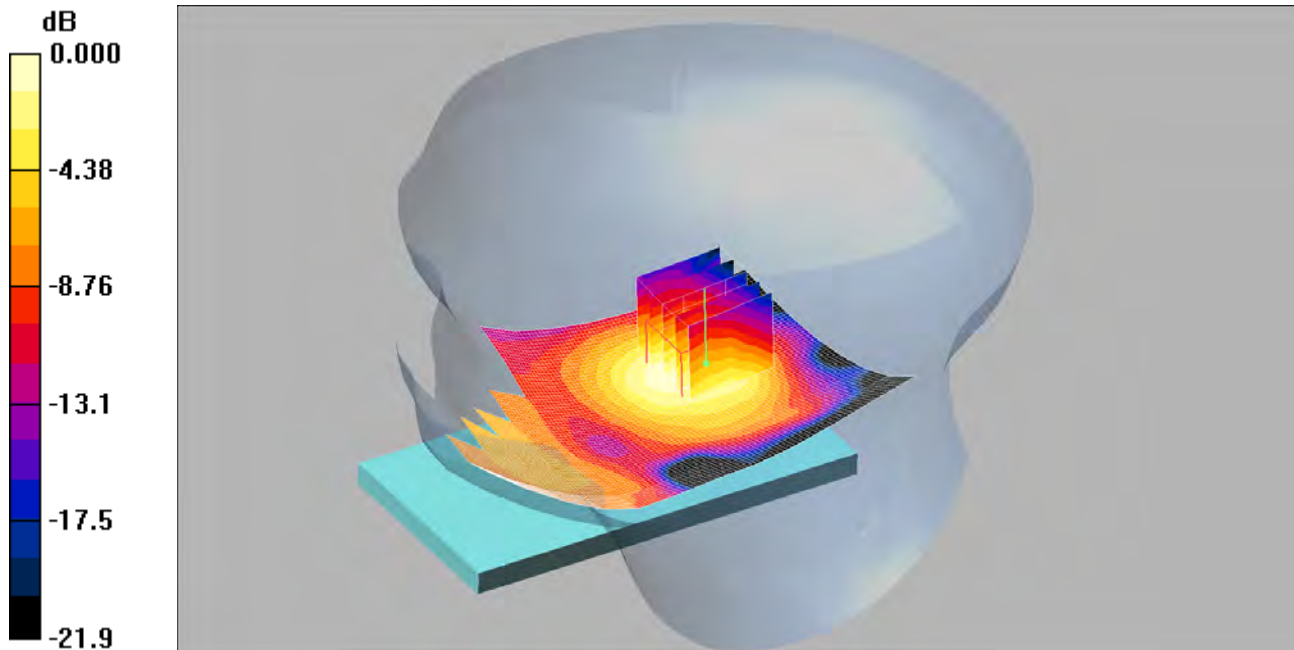

0 dB = 0.255mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.287 mW/g

Touch Right - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.76 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.369 W/kg


SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.255 mW/g

118: Touch Left LTE Band 2 1.4MHz BW 1RB Middle CH18607

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

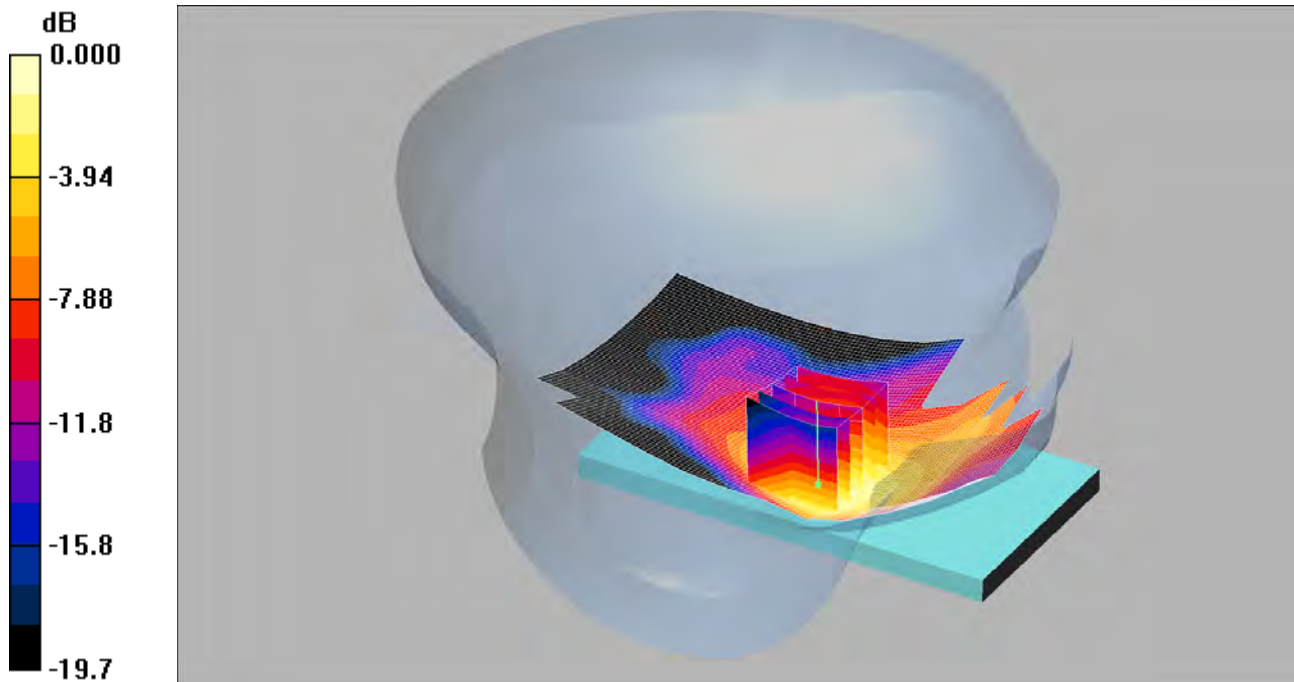

0 dB = 0.627mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1850.7 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1850.7$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.653 mW/g

Touch Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.17 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.826 W/kg


SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.356 mW/g

Maximum value of SAR (measured) = 0.627 mW/g

119: Touch Left LTE Band 2 1.4MHz BW 1RB Middle CH19193

Date: 21/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

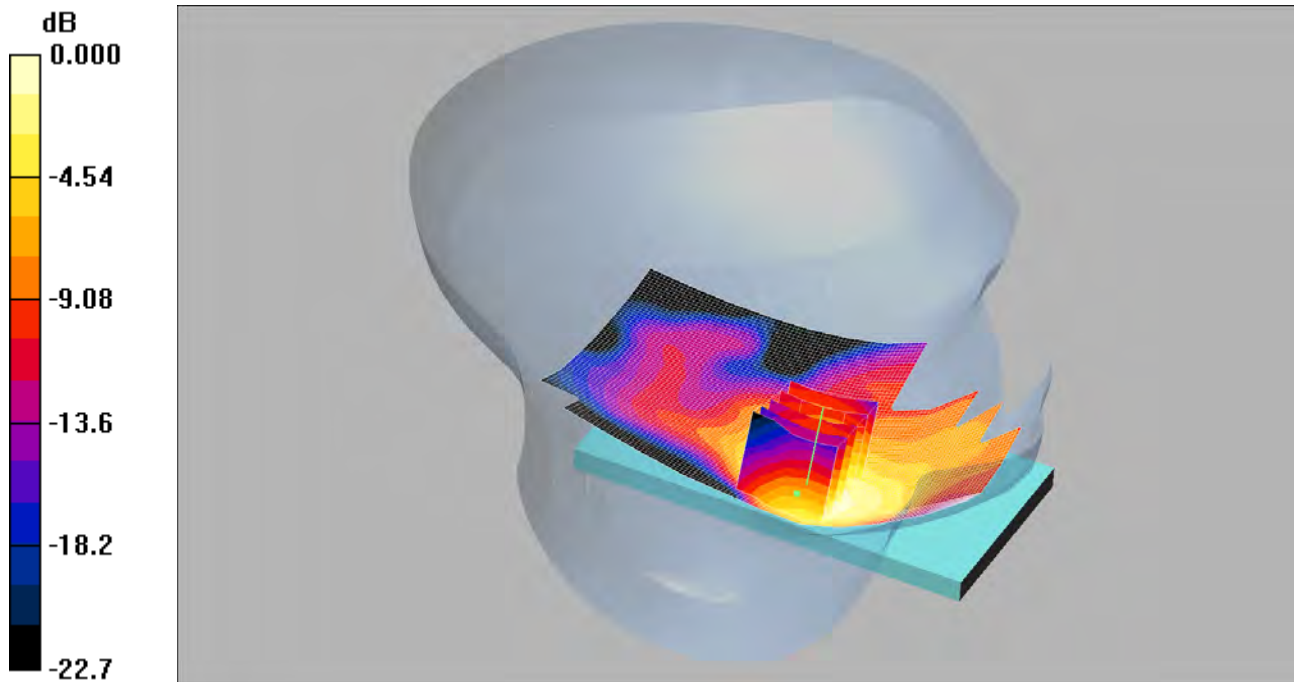

0 dB = 0.398mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1909.3 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1909.3$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.486 mW/g

Touch Left - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.97 V/m; Power Drift = 0.145 dB

Peak SAR (extrapolated) = 0.582 W/kg


SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.398 mW/g

120: Front of EUT Facing Phantom LTE Band 2 1.4MHz BW 1RB Middle CH18900

Date: 22/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

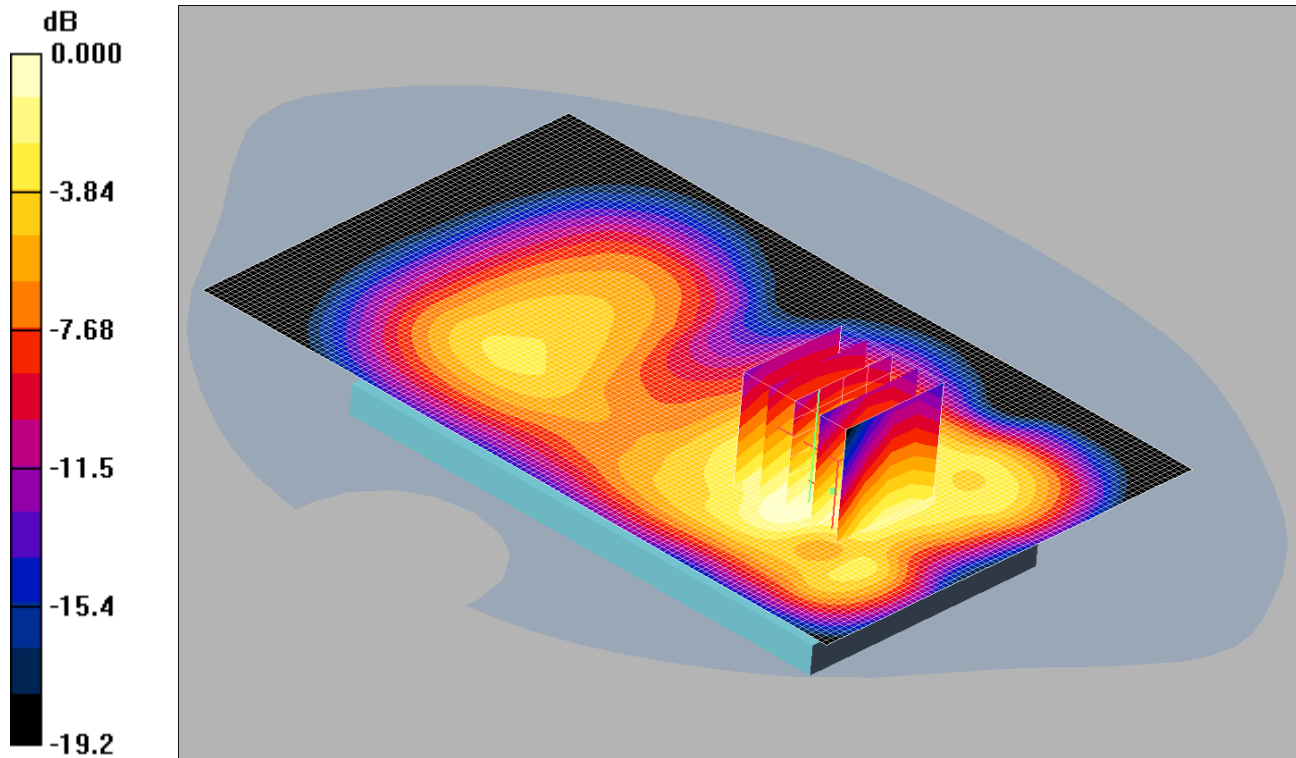

0 dB = 0.822mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.852 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.72 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.10 W/kg


SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.512 mW/g

Maximum value of SAR (measured) = 0.822 mW/g

121: Front of EUT Facing Phantom LTE Band 2 1.4MHz BW 1RB Middle CH18607

Date: 22/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

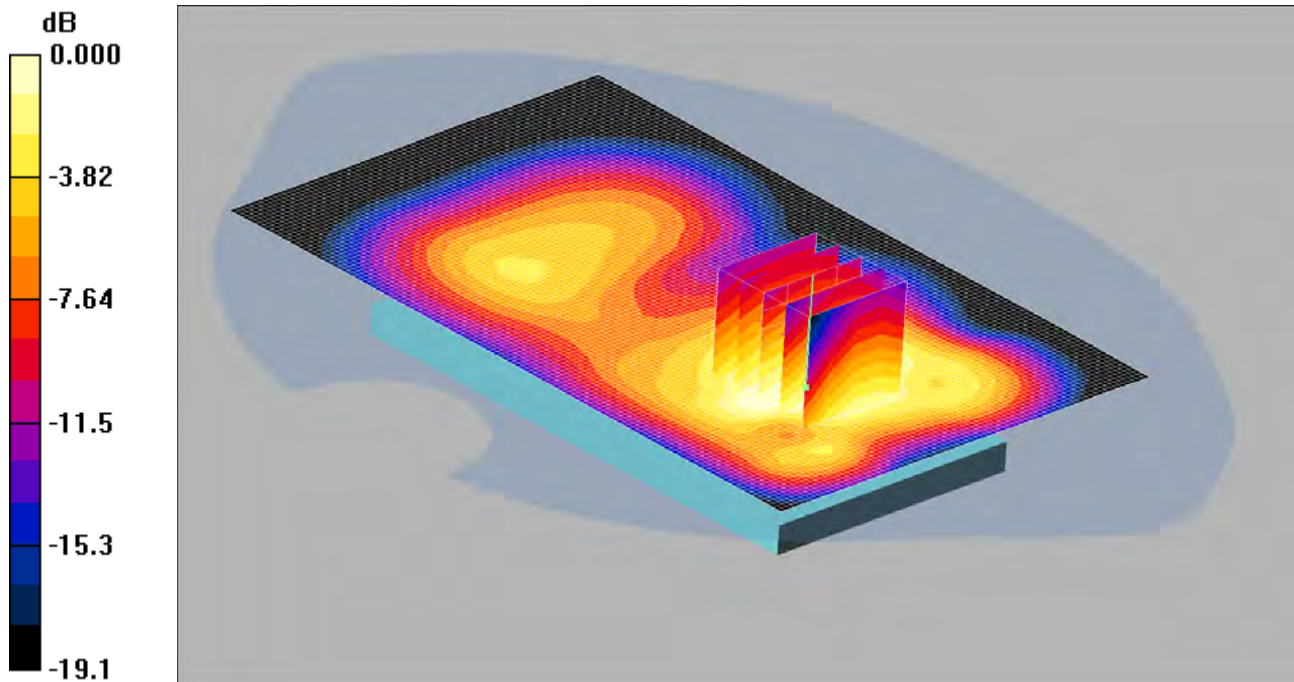

0 dB = 0.851mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1850.7 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.7$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.901 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.99 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.13 W/kg


SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.535 mW/g

Maximum value of SAR (measured) = 0.851 mW/g

122: Front of EUT Facing Phantom LTE Band 2 1.4MHz BW 1RB Middle CH19193

Date: 22/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

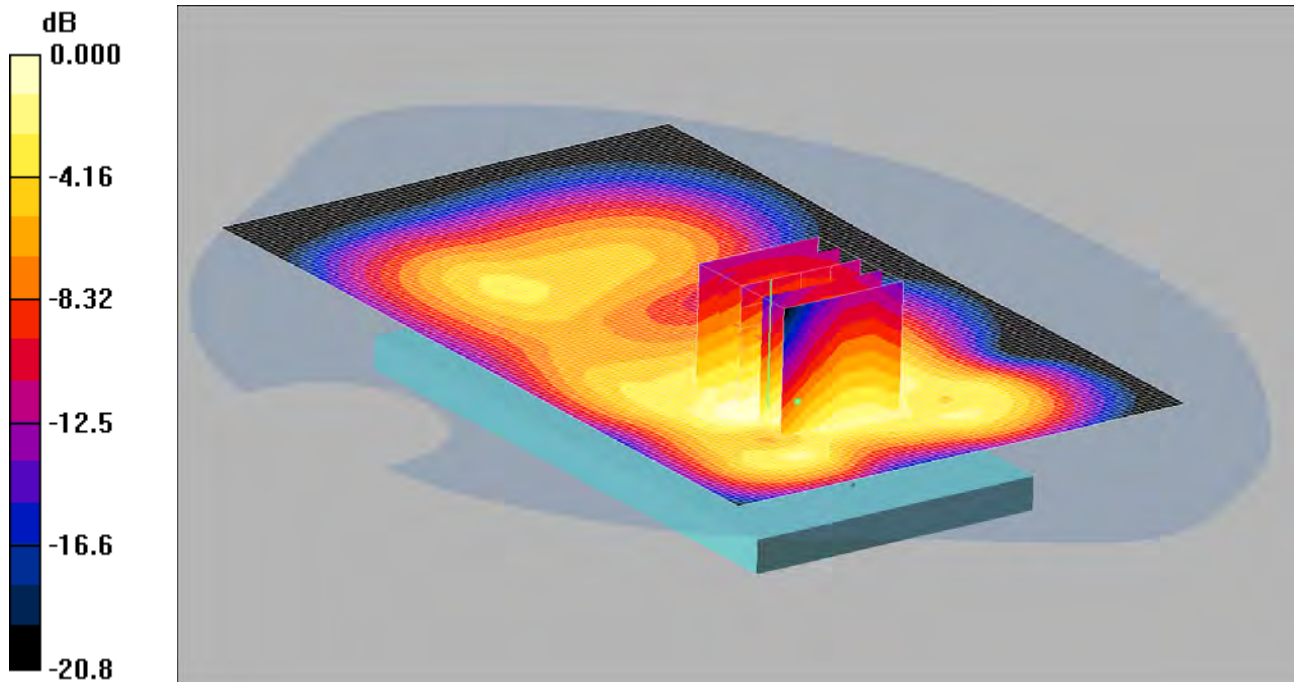

0 dB = 0.550mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1909.3 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.3$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - high/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.551 mW/g

Front of EUT Facing Phantom - high/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.05 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.747 W/kg


SAR(1 g) = 0.524 mW/g; SAR(10 g) = 0.335 mW/g

Maximum value of SAR (measured) = 0.550 mW/g

123: Front of EUT Facing Phantom LTE Band 2 1.4MHz BW 50%RB Middle CH18900

Date: 22/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

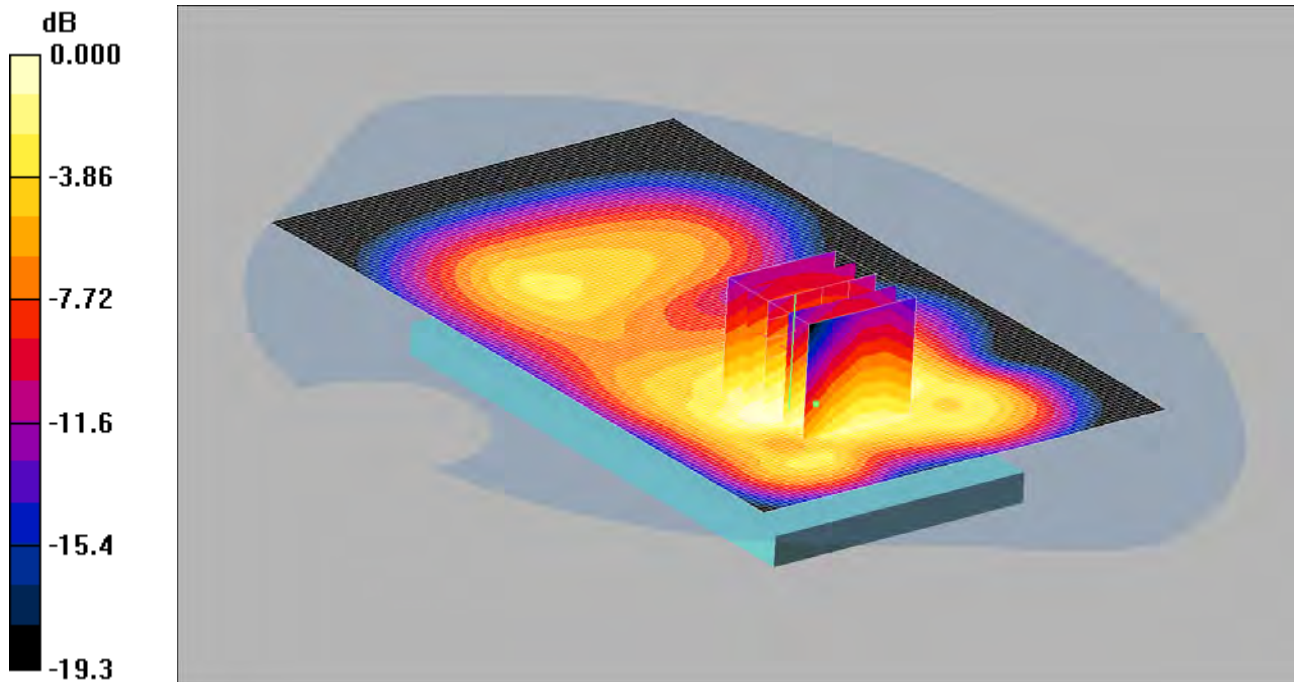

0 dB = 0.810mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.842 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.90 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 1.10 W/kg


SAR(1 g) = 0.779 mW/g; SAR(10 g) = 0.509 mW/g

Maximum value of SAR (measured) = 0.810 mW/g

124: Front of EUT Facing Phantom LTE Band 2 1.4MHz BW 50%RB Middle CH18607

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

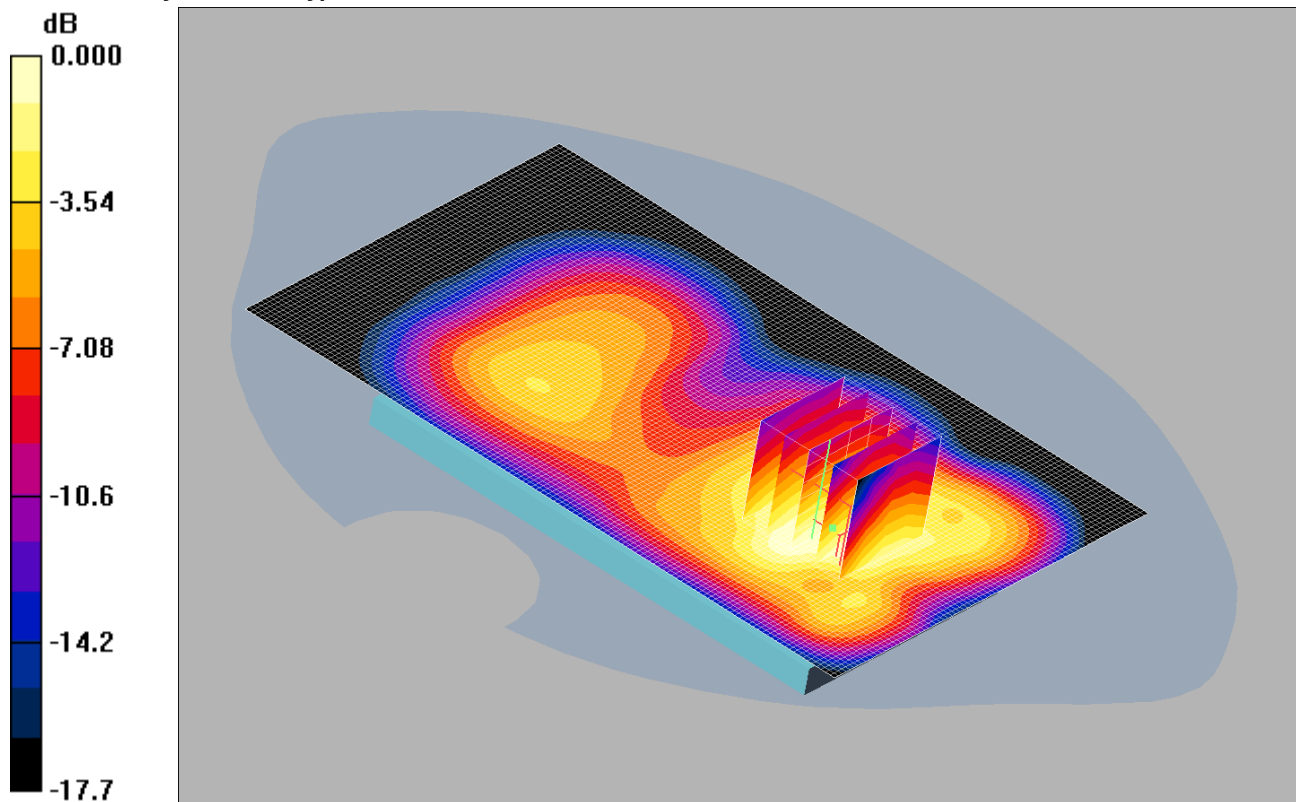

0 dB = 0.863mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1850.7 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.7$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.902 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.69 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 1.15 W/kg


SAR(1 g) = 0.832 mW/g; SAR(10 g) = 0.544 mW/g

Maximum value of SAR (measured) = 0.863 mW/g

125: Front of EUT Facing Phantom LTE Band 2 1.4MHz BW 50%RB Middle CH19193

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

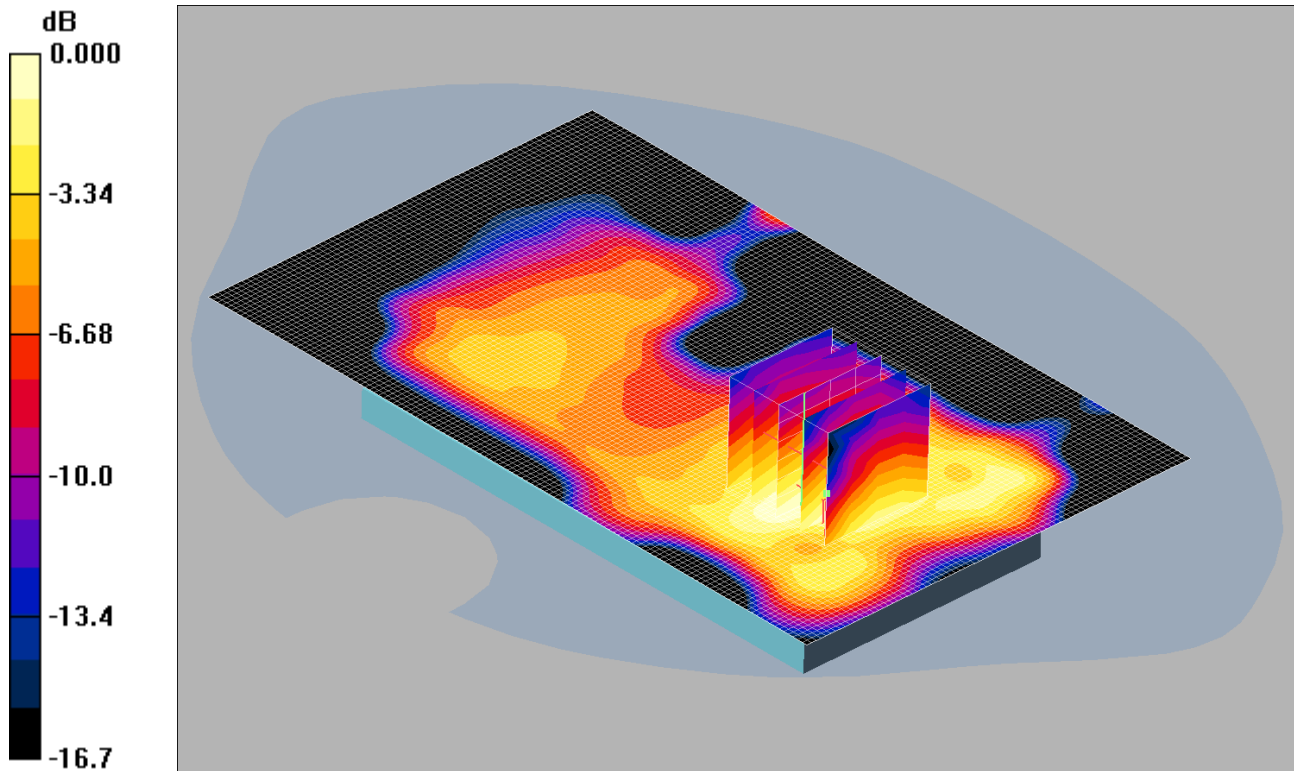

0 dB = 0.561mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1909.3 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.3$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.553 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.00 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 0.774 W/kg


SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.343 mW/g

Maximum value of SAR (measured) = 0.561 mW/g

126: Front of EUT Facing Phantom LTE Band 2 1.4MHz BW 100%RB Middle CH18607

Date: 22/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

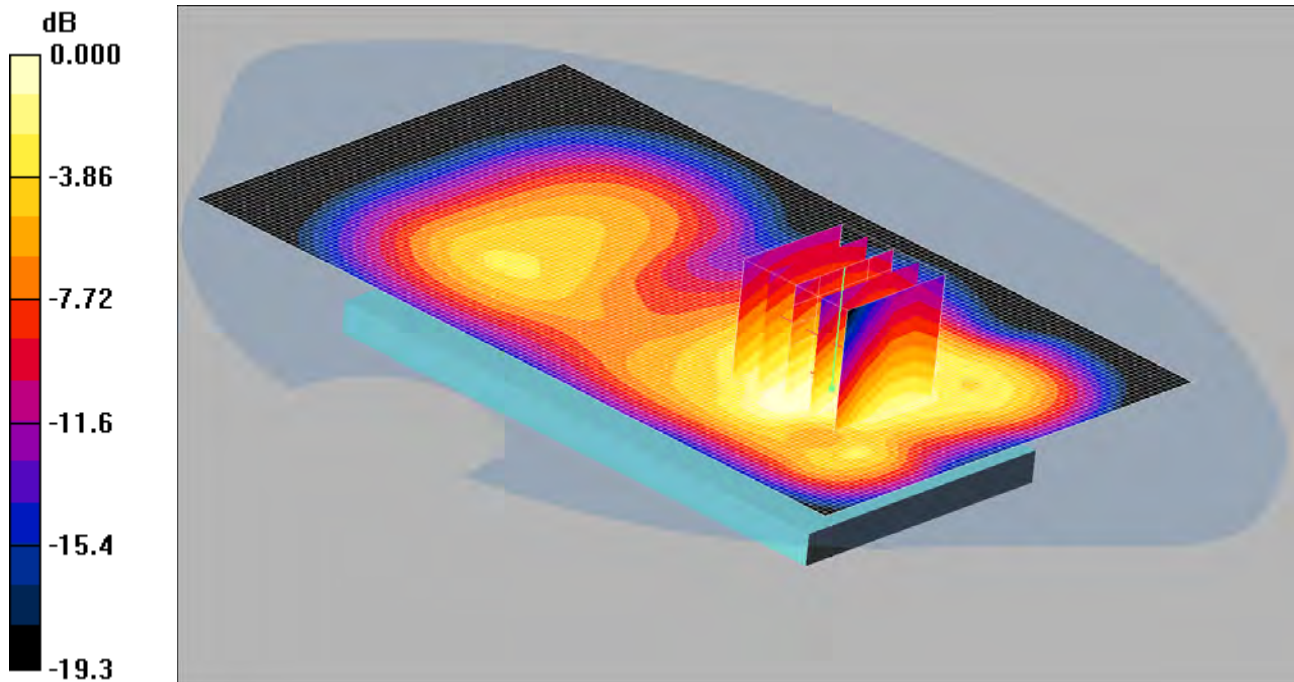

0 dB = 0.680mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1850.7 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.7$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.713 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.17 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.905 W/kg


SAR(1 g) = 0.654 mW/g; SAR(10 g) = 0.430 mW/g

Maximum value of SAR (measured) = 0.680 mW/g

127: Back of EUT Facing Phantom LTE Band 2 1.4MHz BW 1RB Middle CH18900

Date: 22/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

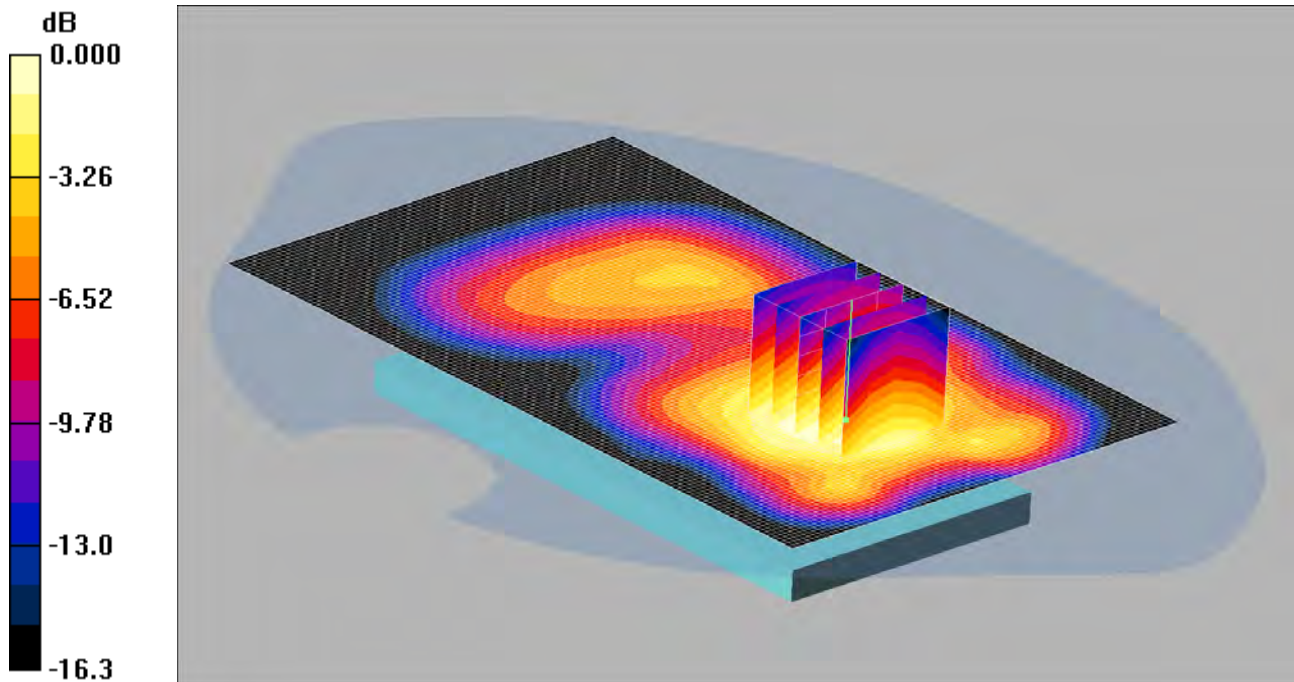

0 dB = 0.903mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.926 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.91 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 1.21 W/kg


SAR(1 g) = 0.871 mW/g; SAR(10 g) = 0.570 mW/g

Maximum value of SAR (measured) = 0.903 mW/g

128: Back of EUT Facing Phantom LTE Band 2 1.4MHz BW 1RB Middle CH18607

Date: 22/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

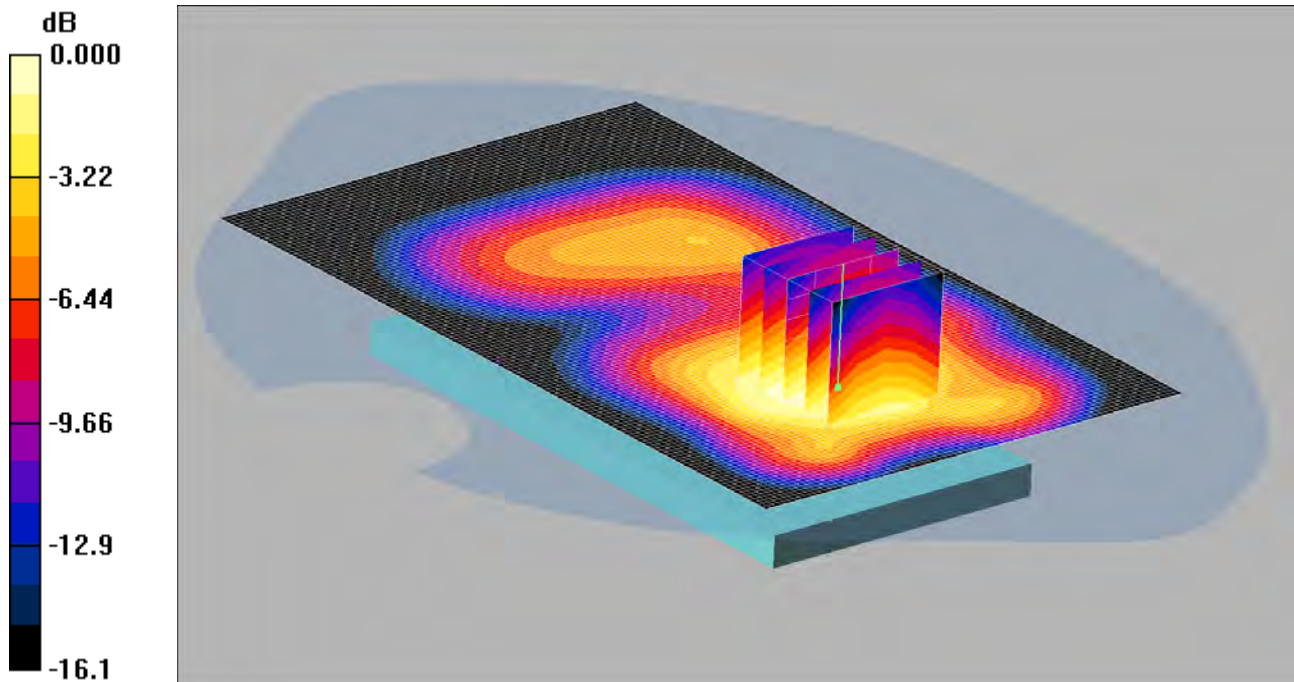

0 dB = 0.958mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1850.7 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.7$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.981 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.69 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 1.28 W/kg


SAR(1 g) = 0.925 mW/g; SAR(10 g) = 0.608 mW/g

Maximum value of SAR (measured) = 0.958 mW/g

129: Back of EUT Facing Phantom LTE Band 2 1.4MHz BW 1RB Middle CH19193

Date: 22/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

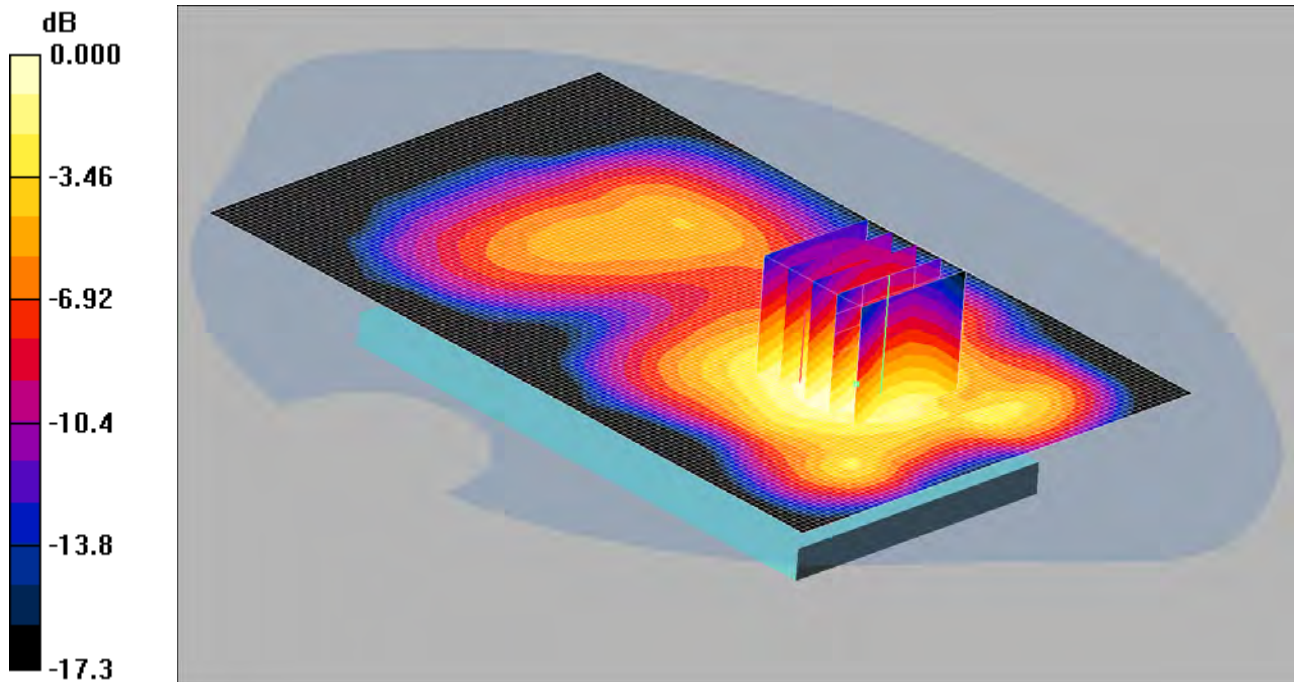

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1909.3 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.3$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.649 mW/g

Back of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.52 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.851 W/kg


SAR(1 g) = 0.603 mW/g; SAR(10 g) = 0.390 mW/g

Maximum value of SAR (measured) = 0.627 mW/g

130: Back of EUT Facing Phantom LTE Band 2 1.4MHz BW 50%RB Middle CH18900

Date: 22/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

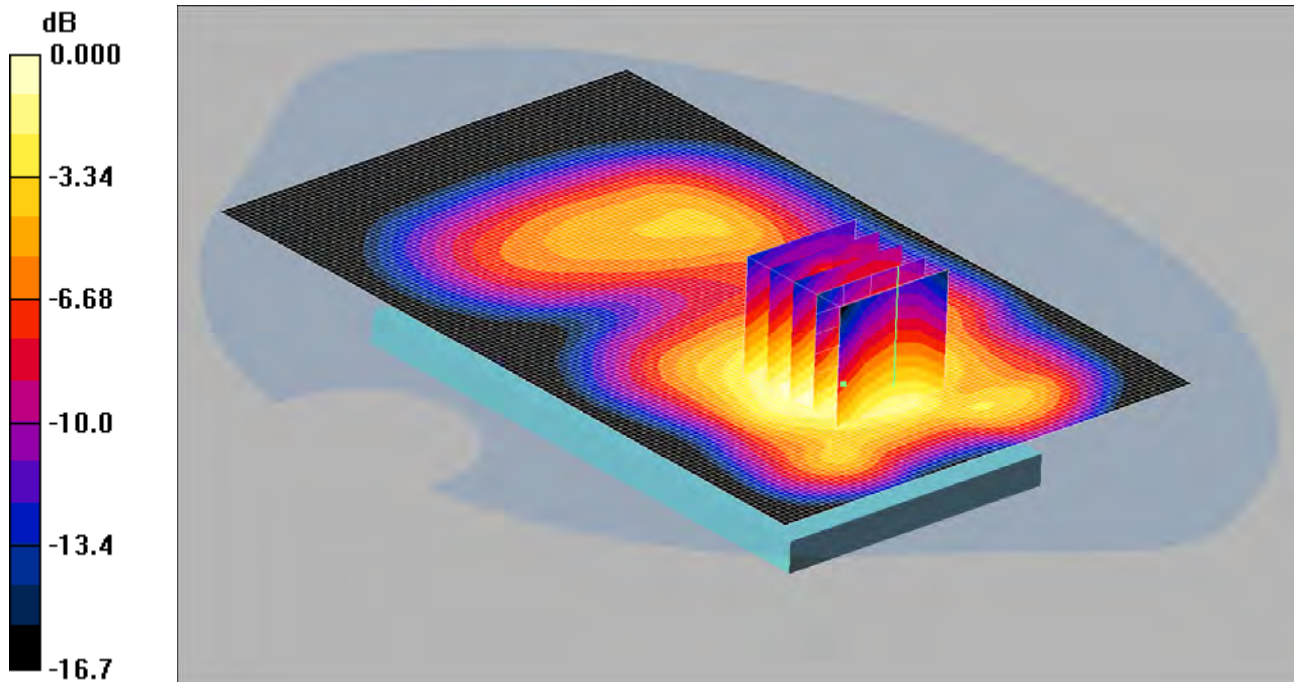

0 dB = 0.906mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.926 mW/g

Back of EUT Facing Phantom -Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 1.22 W/kg


SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.571 mW/g

Maximum value of SAR (measured) = 0.906 mW/g

131: Back of EUT Facing Phantom LTE Band 2 1.4MHz BW 5 50%RB Middle CH18607

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

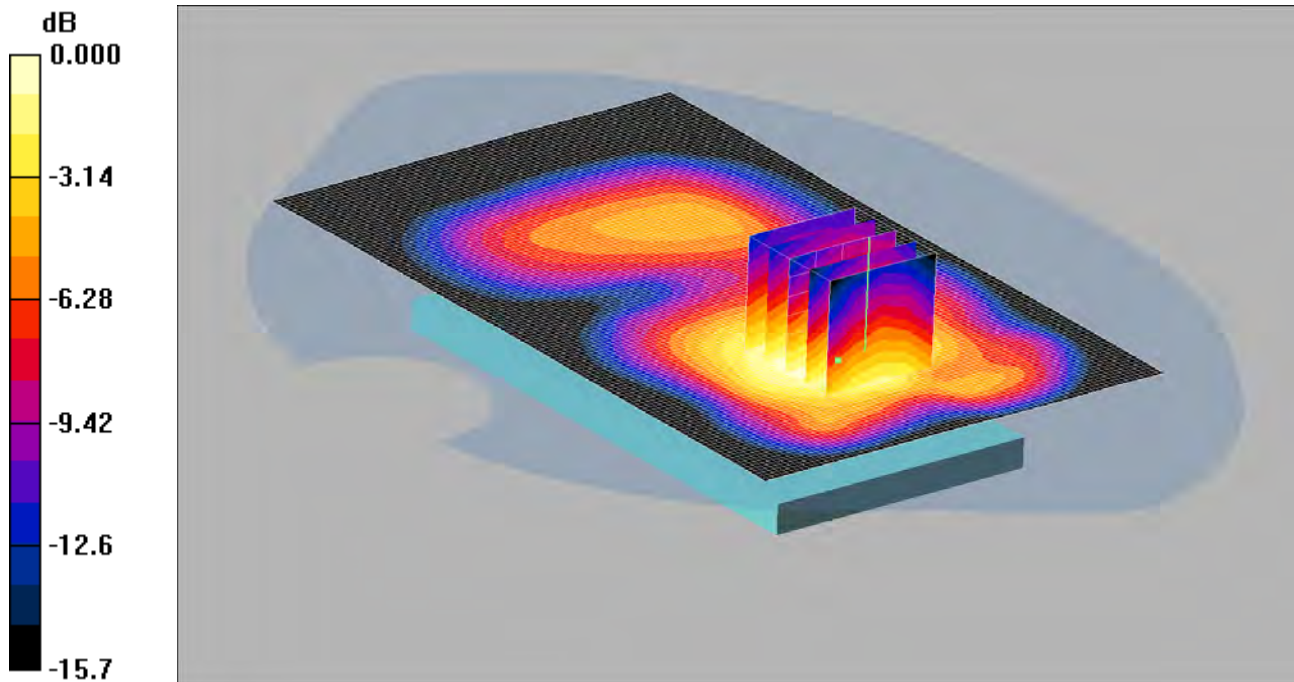

0 dB = 1.01mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1850.7 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.7$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -Low 2 2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.03 mW/g

Back of EUT Facing Phantom -Low 2 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 1.33 W/kg


SAR(1 g) = 0.962 mW/g; SAR(10 g) = 0.625 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

132: Back of EUT Facing Phantom LTE Band 2 1.4MHz BW 50%RB Middle CH19193

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

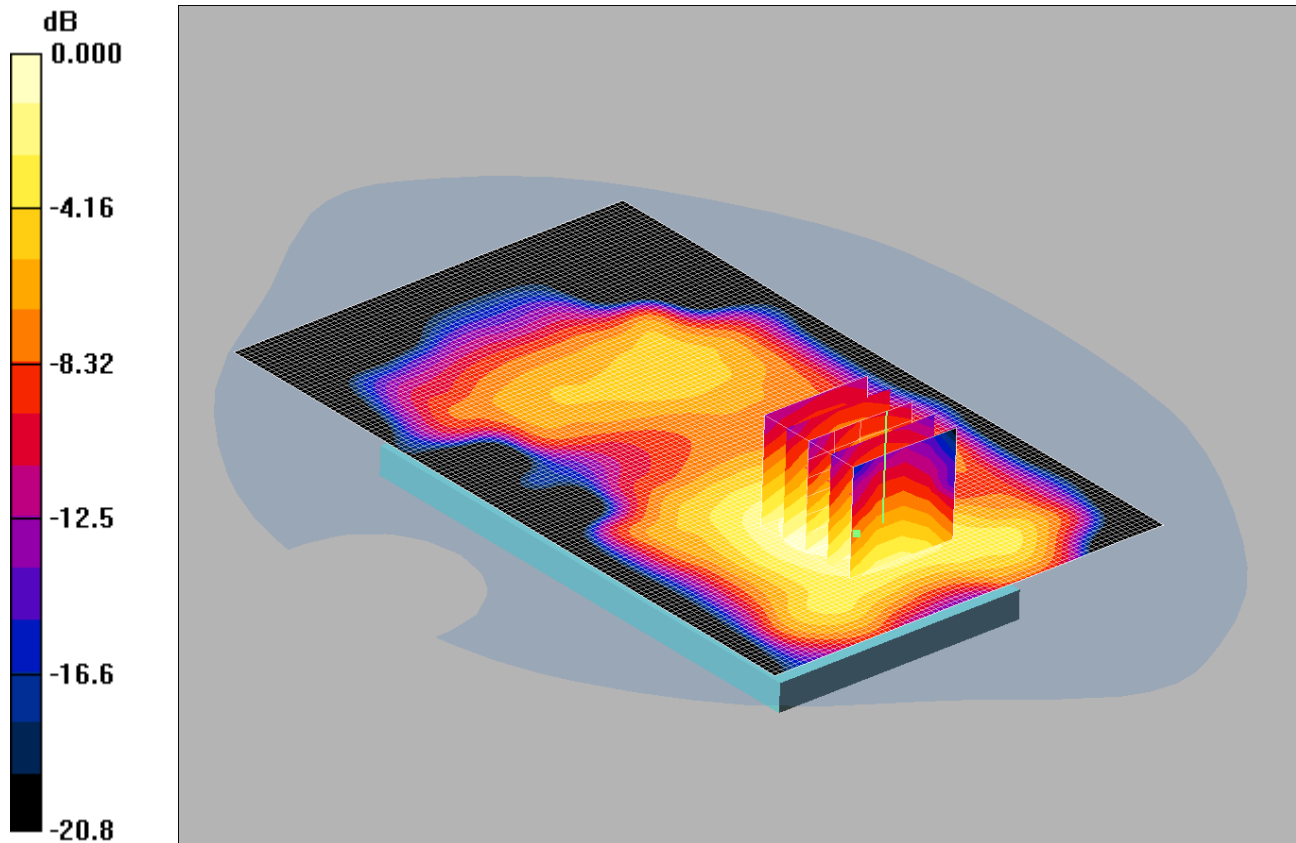

0 dB = 0.642mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1909.3 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.3$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.628 mW/g

Back of EUT Facing Phantom -High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.41 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 0.852 W/kg


SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.397 mW/g

Maximum value of SAR (measured) = 0.642 mW/g

133: Back of EUT Facing Phantom LTE Band 2 1.4MHz BW 100%RB Middle CH18607

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

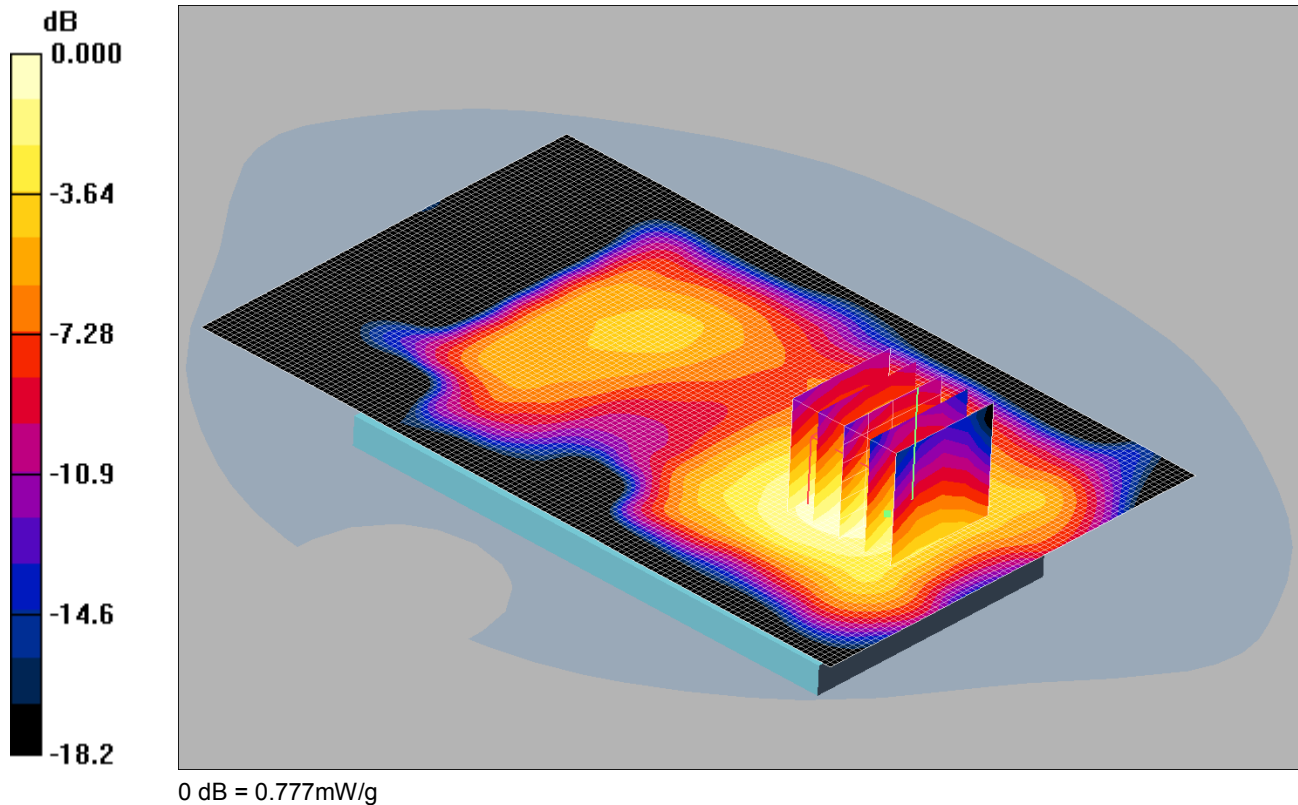

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1850.7 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.7$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.775 mW/g

Back of EUT Facing Phantom -Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.87 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 1.00 W/kg


SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.485 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

134: Left Hand Side of EUT Facing Phantom LTE Band 2 1.4MHz BW 1RB Middle CH18900

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

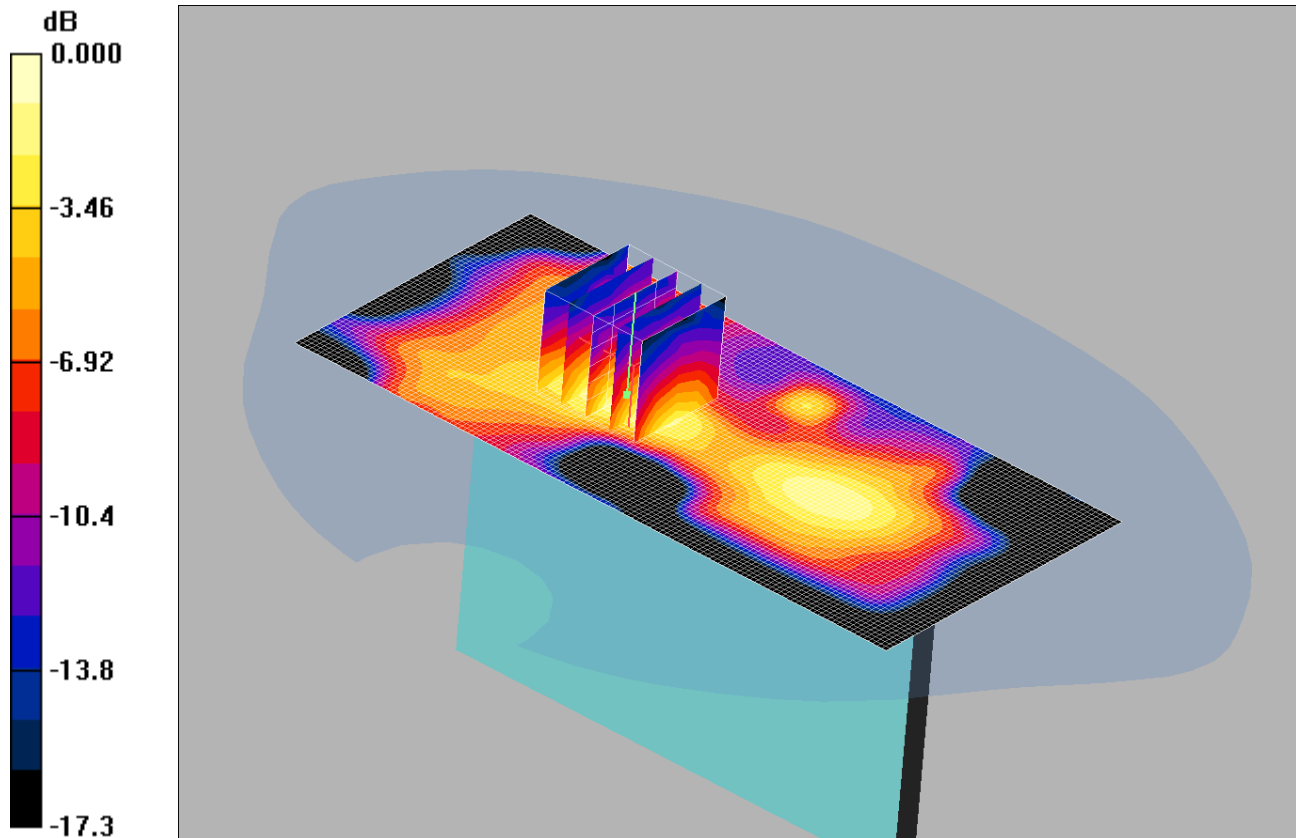

0 dB = 0.305mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom -Middle/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.311 mW/g

Left Hand Side of EUT Facing Phantom -Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.09 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 0.469 W/kg


SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.305 mW/g

135: Left Hand Side of EUT Facing Phantom LTE Band 2 1.4MHz BW 50%RB Middle CH18900

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

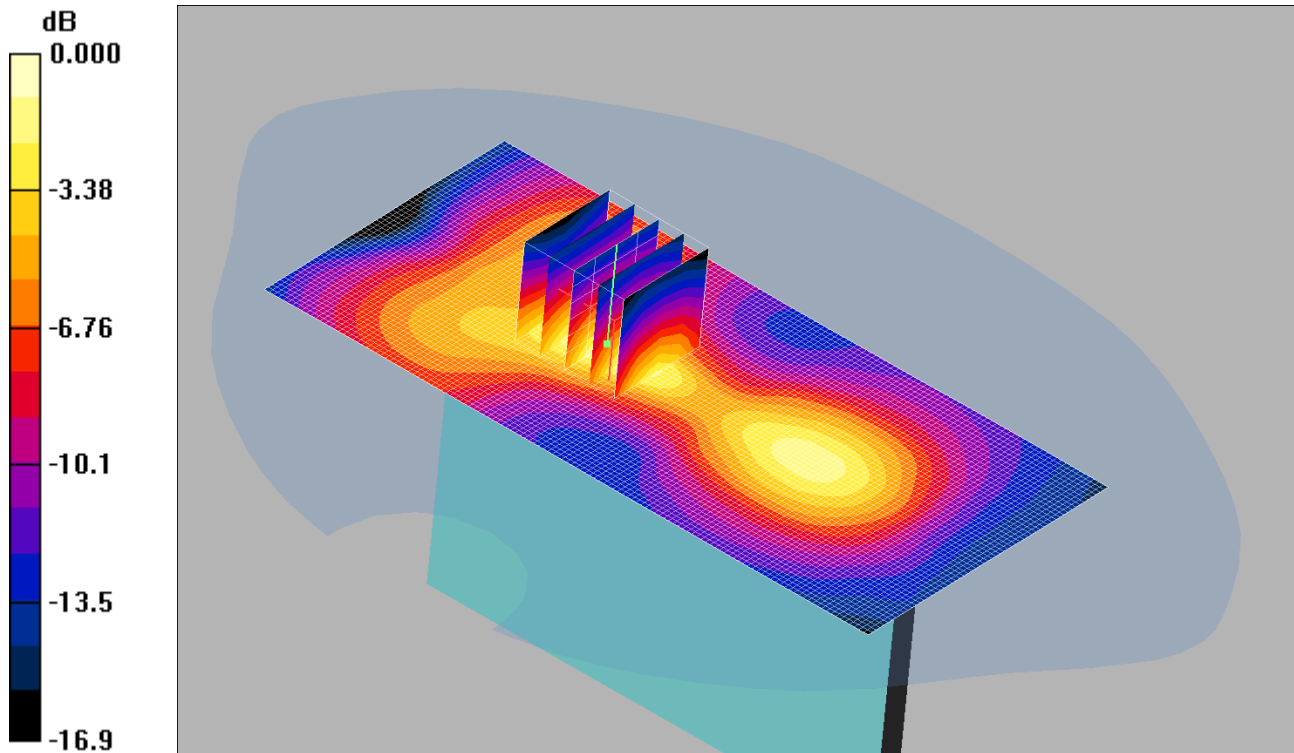

0 dB = 0.299mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom -Middle/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.300 mW/g

Left Hand Side of EUT Facing Phantom -Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.97 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.455 W/kg


SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.138 mW/g

Maximum value of SAR (measured) = 0.299 mW/g

136: Right Hand Side of EUT Facing Phantom LTE Band 2 1.4MHz BW 1RB Middle CH18900

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

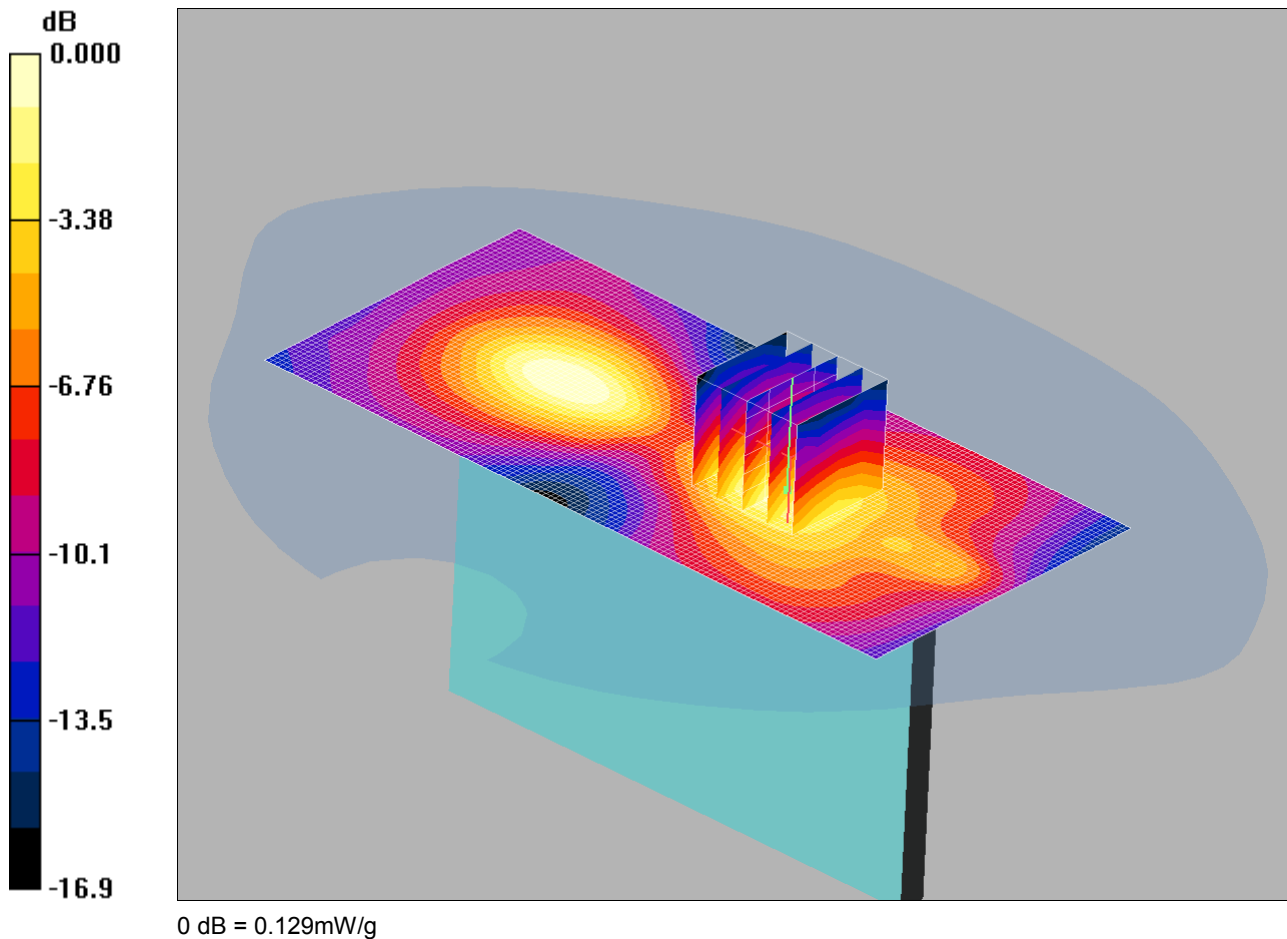

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom -Middle/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.134 mW/g

Right Hand Side of EUT Facing Phantom -Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.41 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.182 W/kg


SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.129 mW/g

137: Right Hand Side of EUT Facing Phantom LTE Band 2 1.4MHz BW 50%RB Middle CH18900

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

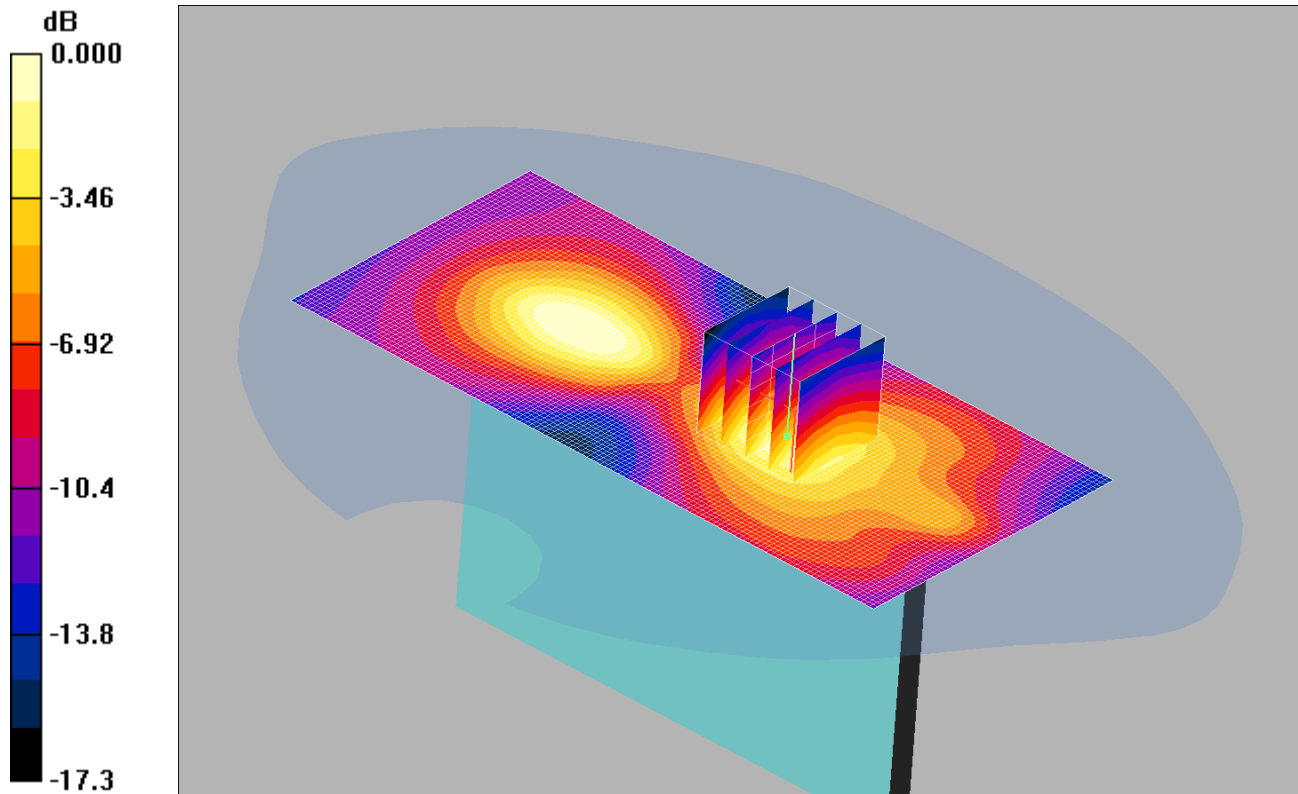

0 dB = 0.128mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom -Middle/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.137 mW/g

Right Hand Side of EUT Facing Phantom -Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.10 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.180 W/kg


SAR(1 g) = 0.115 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.128 mW/g

138: Bottom of EUT Facing Phantom LTE Band 2 1.4MHz BW 1RB Middle CH18900

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

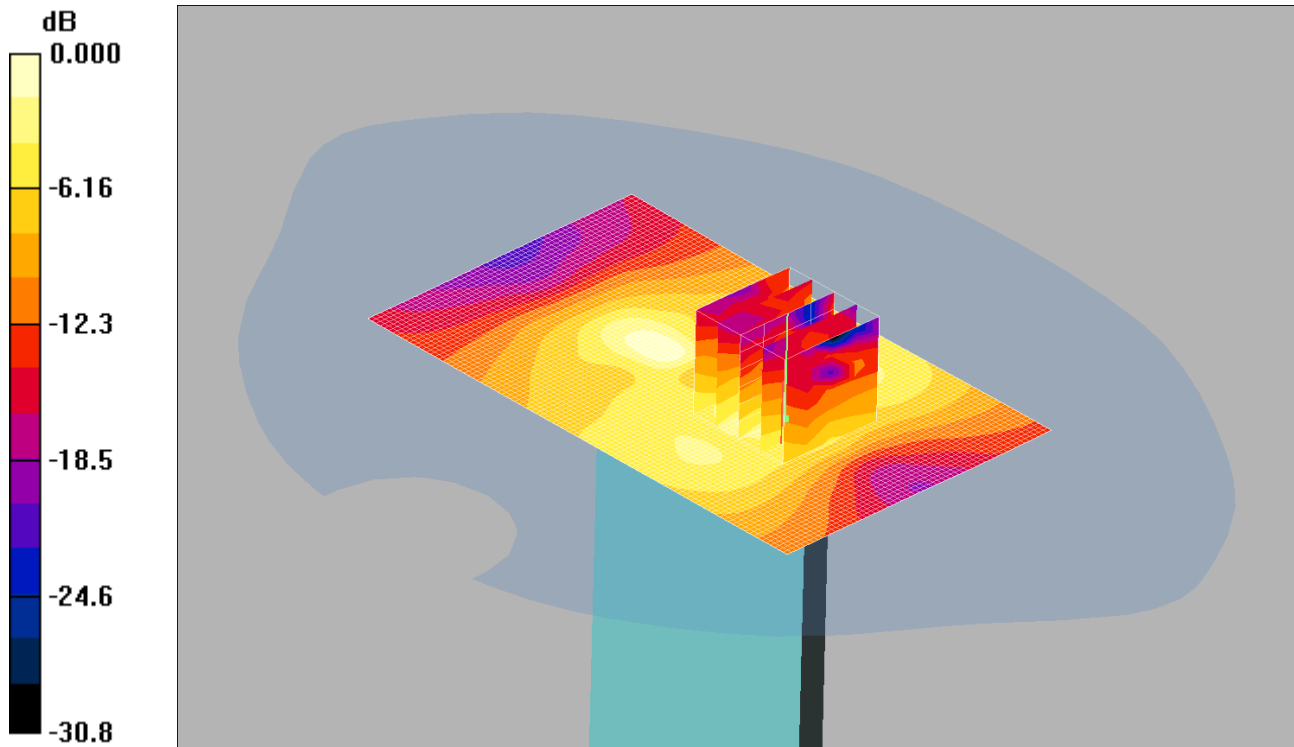

0 dB = 0.196mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom -Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.186 mW/g

Bottom of EUT Facing Phantom -Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.81 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.364 W/kg


SAR(1 g) = 0.158 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.196 mW/g

139: Bottom of EUT Facing Phantom LTE Band 2 1.4MHz BW 50%RB Middle CH18900

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

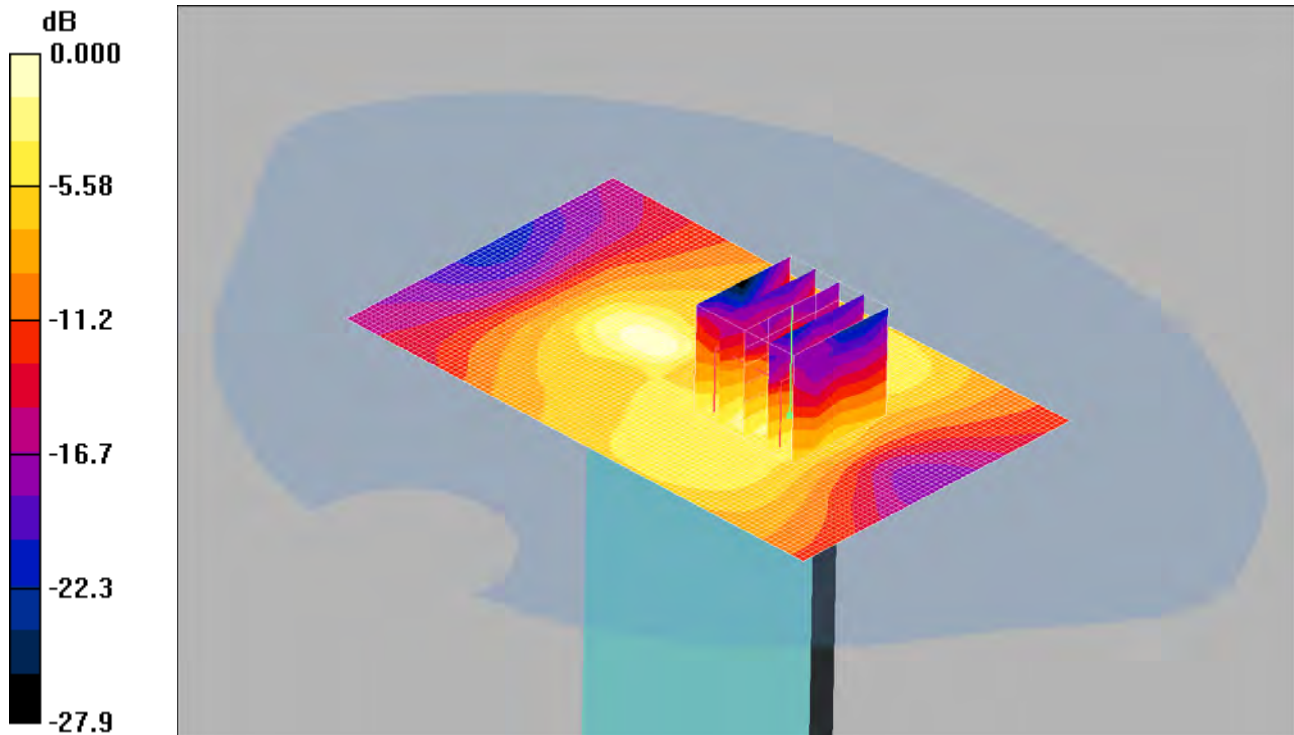

0 dB = 0.196mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom -Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.191 mW/g

Bottom of EUT Facing Phantom -Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.88 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 0.343 W/kg


SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.196 mW/g

140: Front of EUT Facing Phantom at 15mm LTE Band 2 1.4MHz BW 50%RB Middle CH18607

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

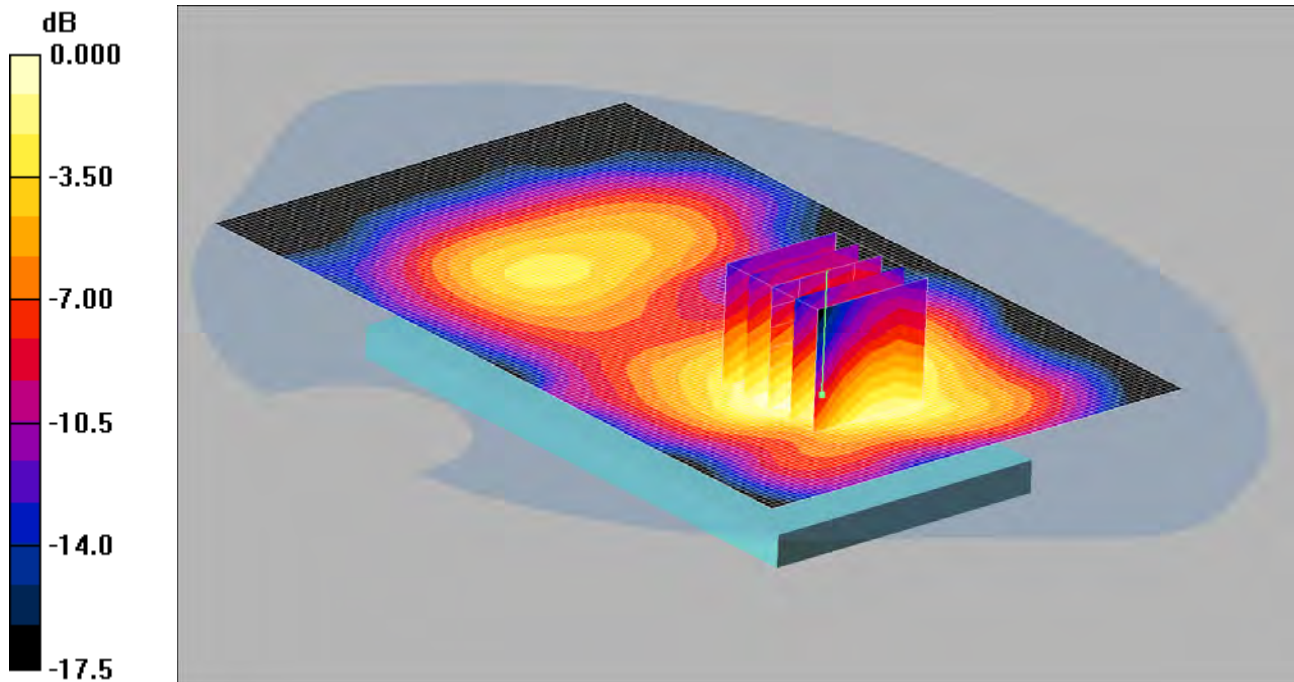

0 dB = 0.584mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1850.7 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.7$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom -Low 2 2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.617 mW/g

Front of EUT Facing Phantom -Low 2 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.34 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 0.777 W/kg


SAR(1 g) = 0.549 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.584 mW/g

141: Back of EUT Facing Phantom at 15mm LTE Band 2 1.4MHz BW 50%RB Middle CH18607

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

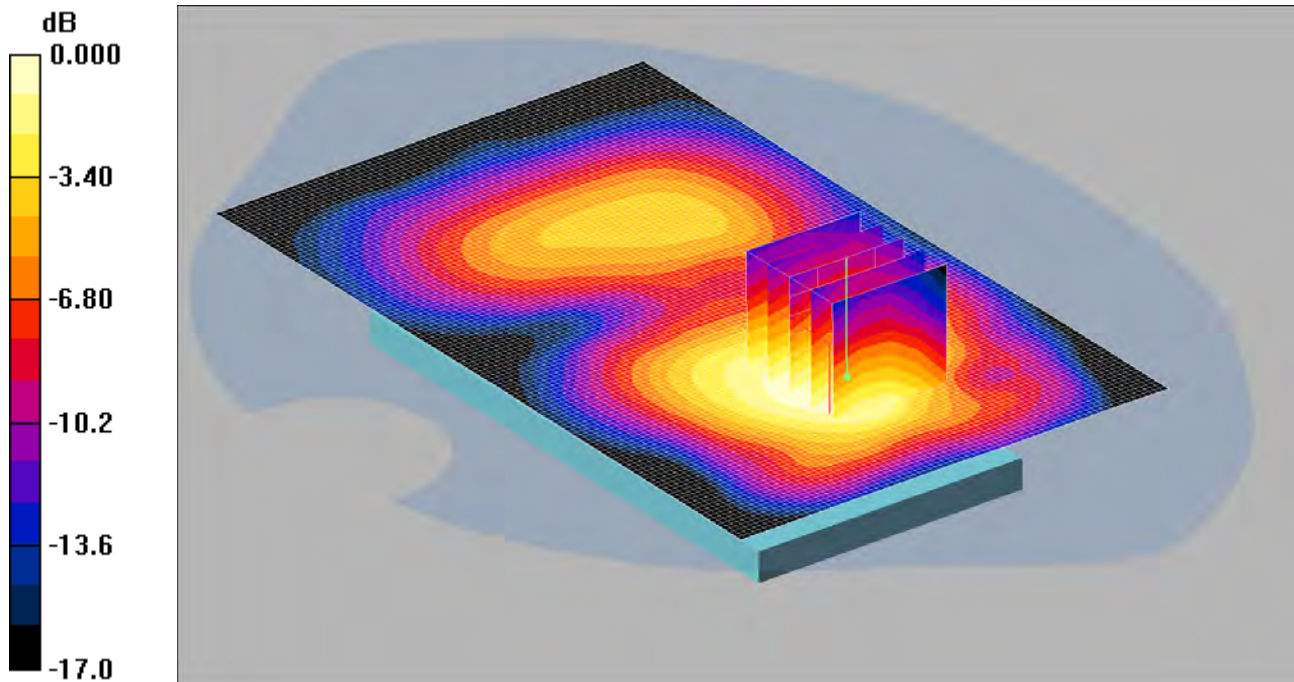

0 dB = 0.598mW/g

Communication System: LTE - Band 2 / 1.4MHz Channel; Frequency: 1850.7 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.7$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom -Low 2 2/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.618 mW/g

Back of EUT Facing Phantom -Low 2 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.94 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.788 W/kg


SAR(1 g) = 0.566 mW/g; SAR(10 g) = 0.369 mW/g

Maximum value of SAR (measured) = 0.598 mW/g

142: Touch Left LTE Band 4 20MHz BW 1RB Low End CH20175

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

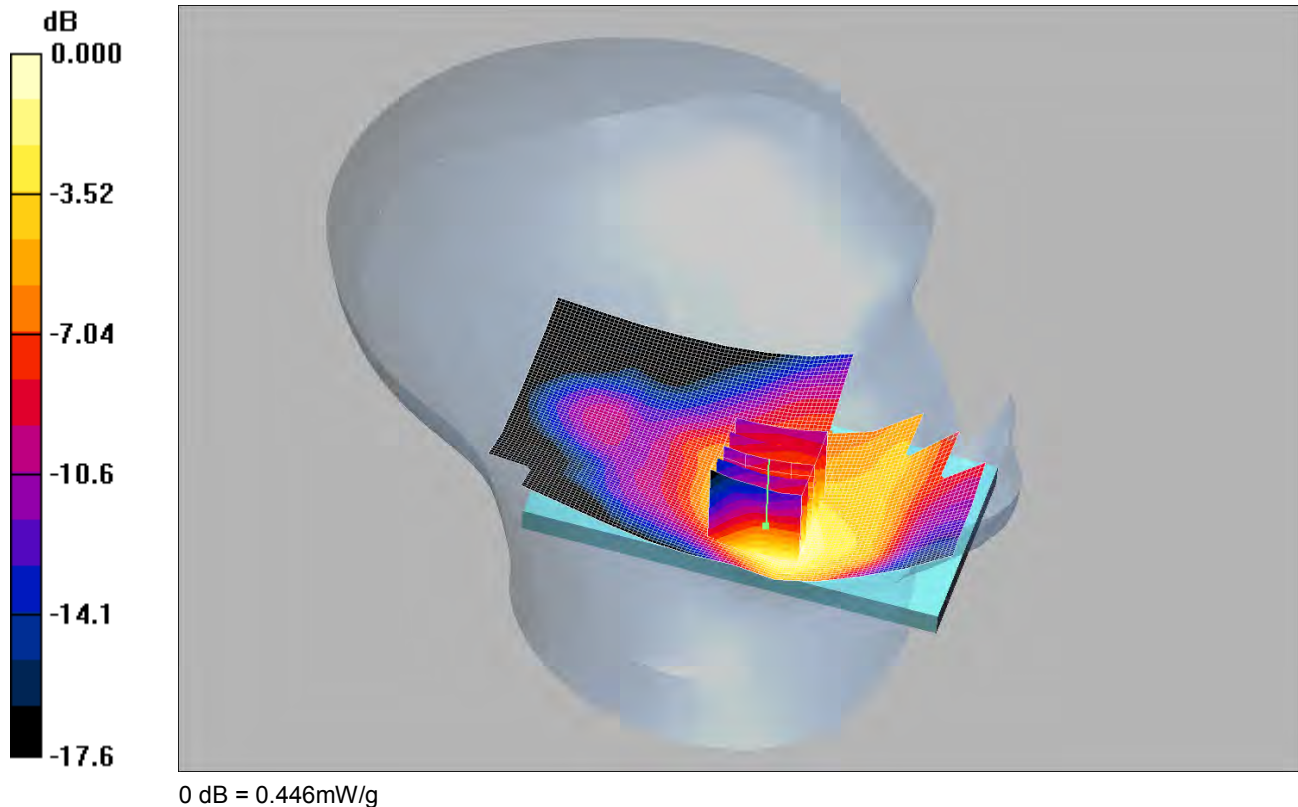

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.467 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.54 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.553 W/kg


SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.446 mW/g

143: Touch Left LTE Band 4 20MHz BW 50%RB Low End CH20050

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

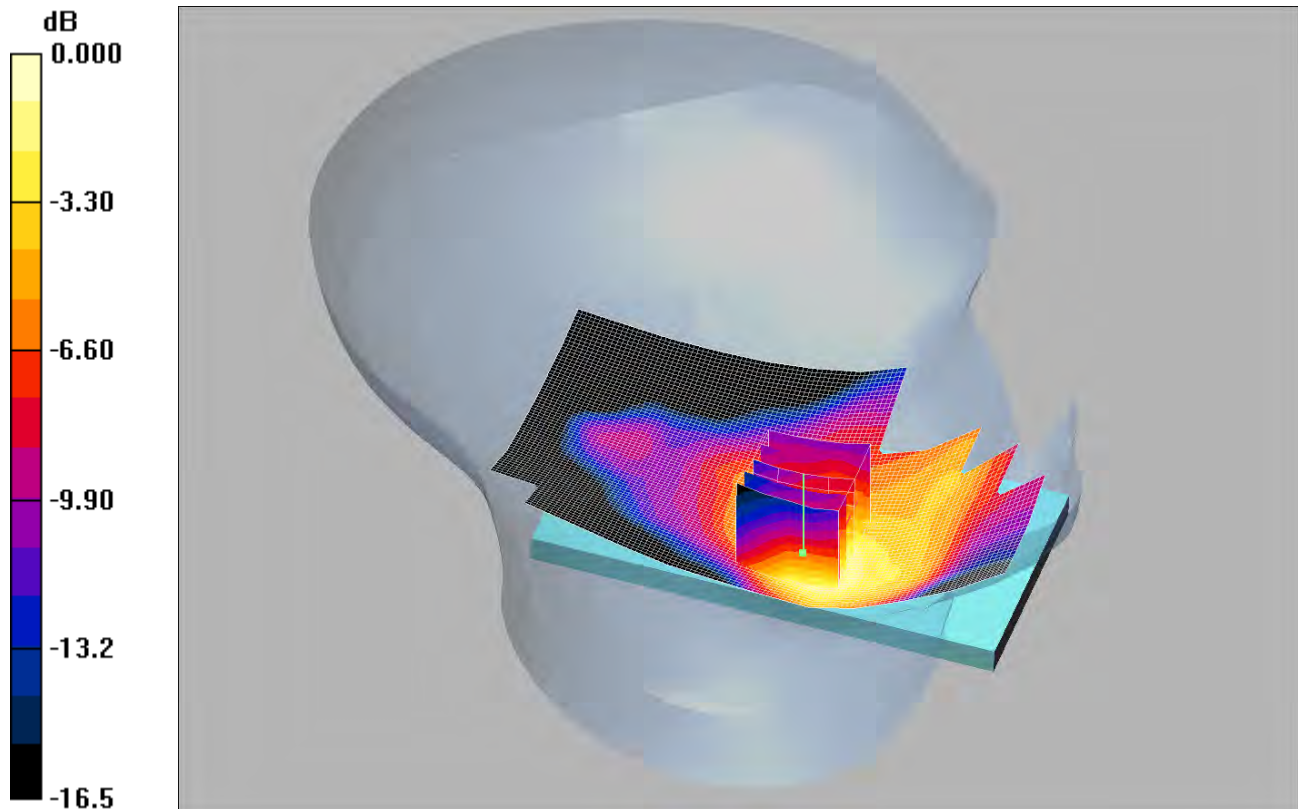

0 dB = 0.318mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.332 mW/g

Touch Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.63 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.391 W/kg


SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.318 mW/g

144: Tilt Left LTE Band 4 20MHz BW 1RB Low End CH20175

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

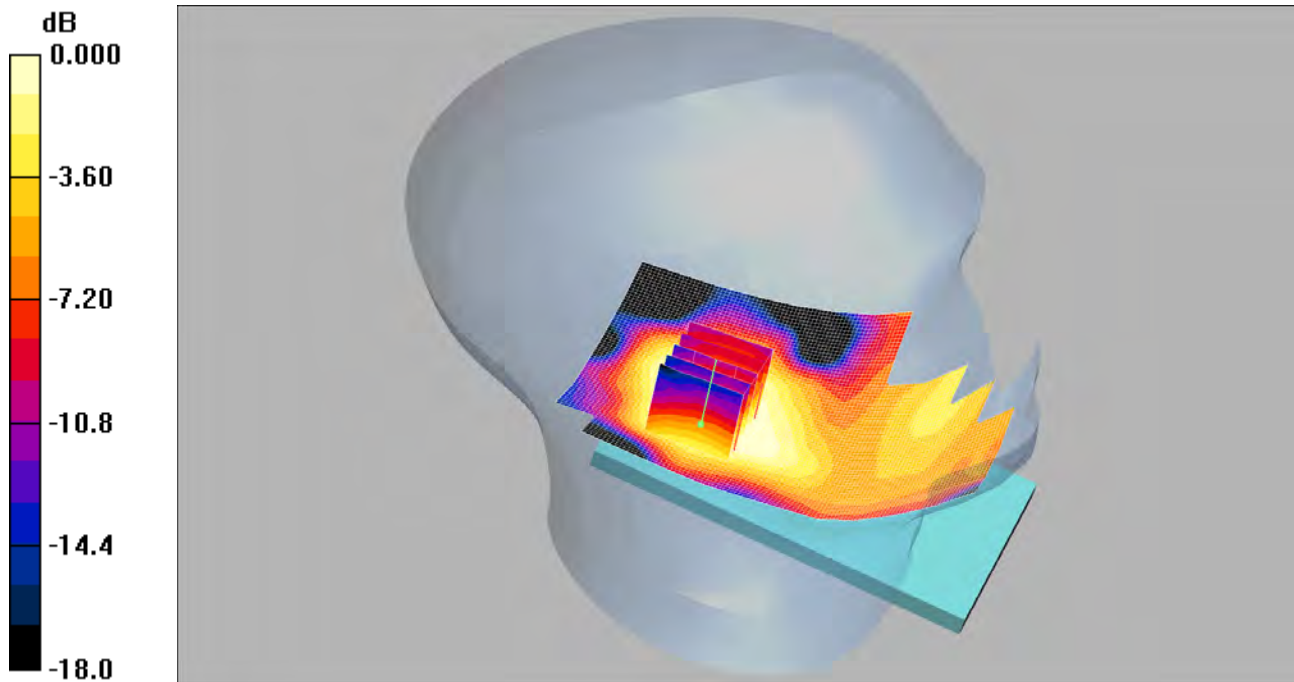

0 dB = 0.108mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.125 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.94 V/m; Power Drift = -0.166 dB

Peak SAR (extrapolated) = 0.144 W/kg


SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.108 mW/g

145: Tilt Left LTE Band 4 20MHz BW 50%RB Low End CH20050

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

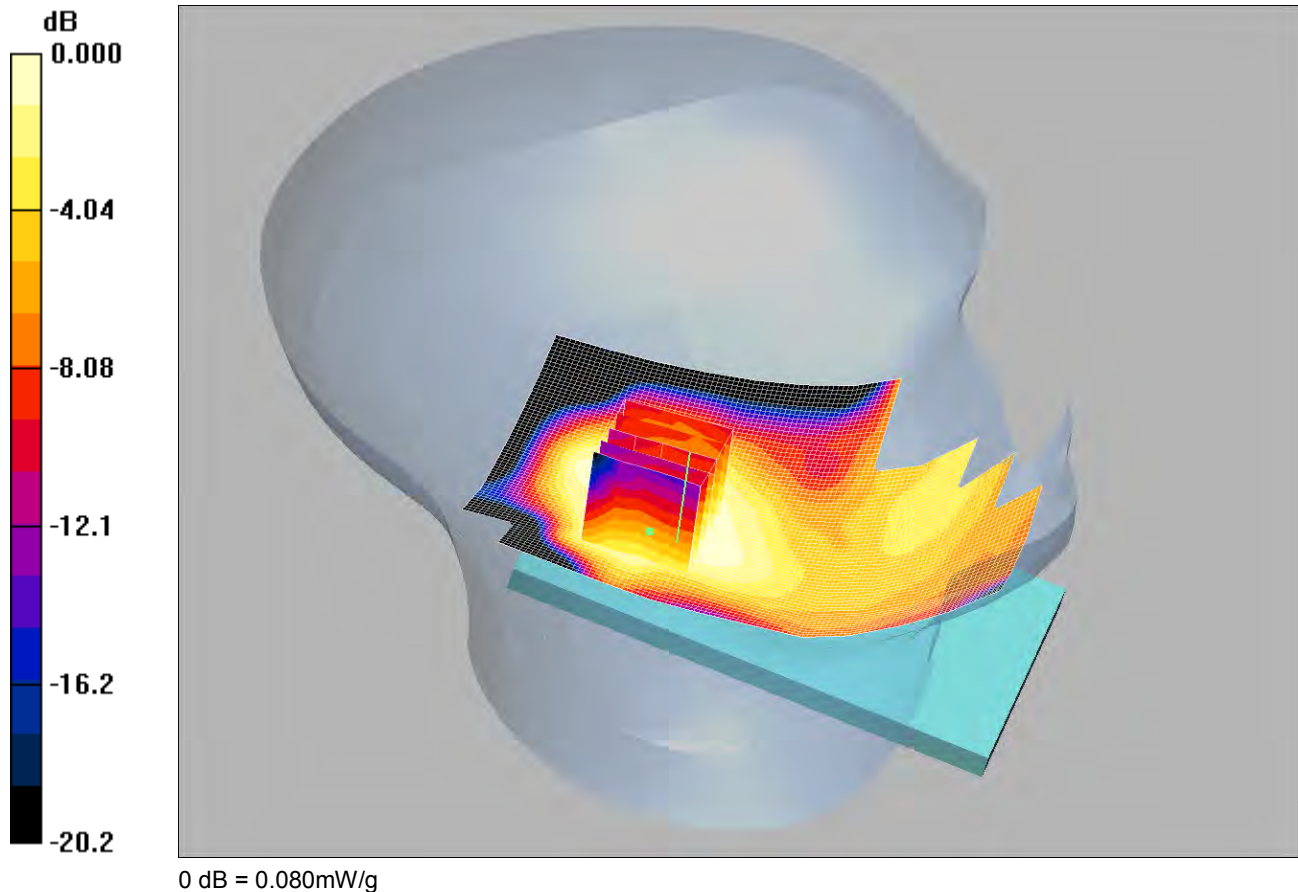

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.088 mW/g

Tilt Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.71 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.106 W/kg


SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.080 mW/g

146: Touch Right LTE Band 4 20MHz BW 1RB Low End CH20175

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

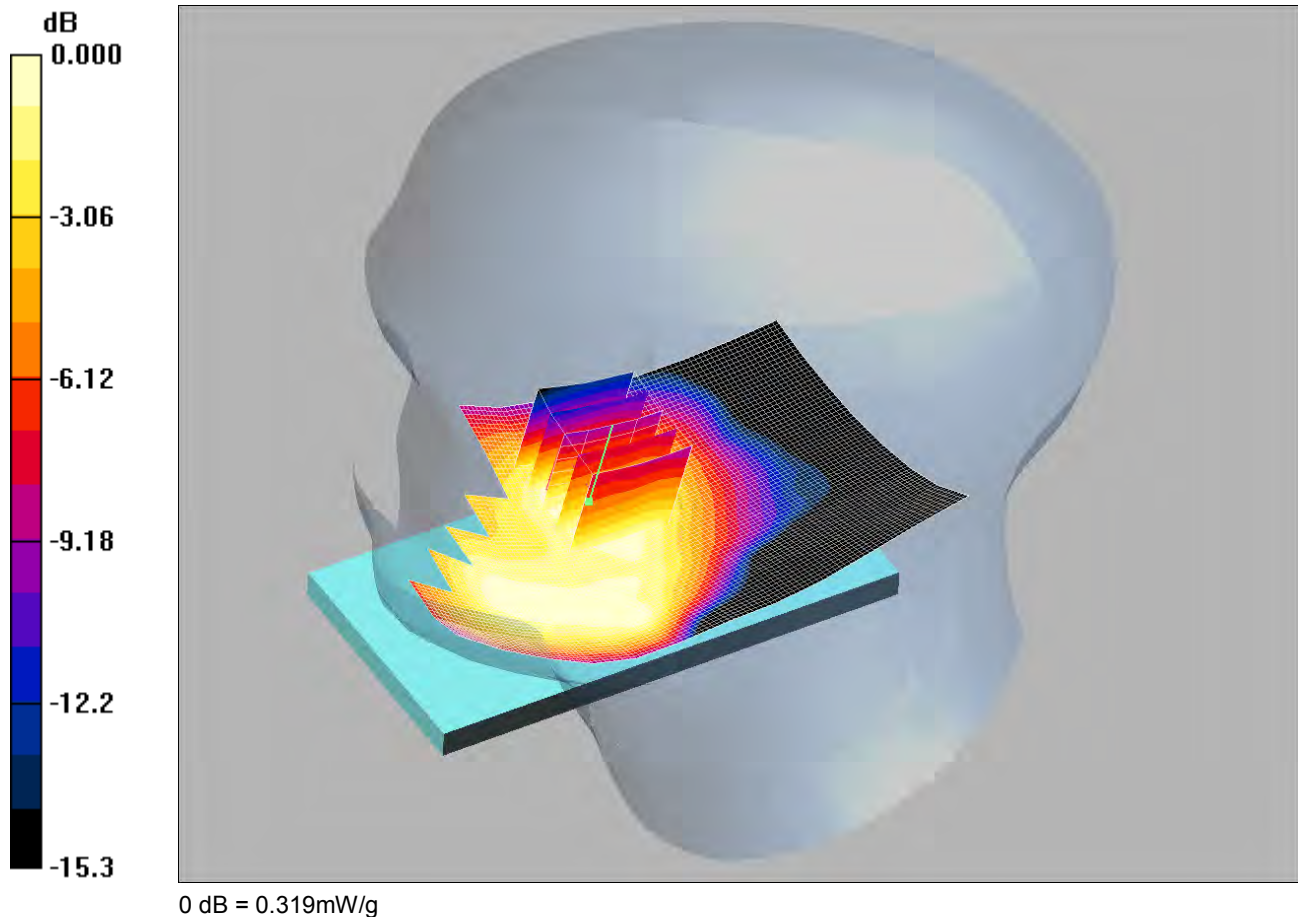

0 dB = 0.319mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.321 mW/g

Touch Right - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.55 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.378 W/kg


SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.319 mW/g

147: Touch Right LTE Band 4 20MHz BW 50%RB Low End CH20050

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

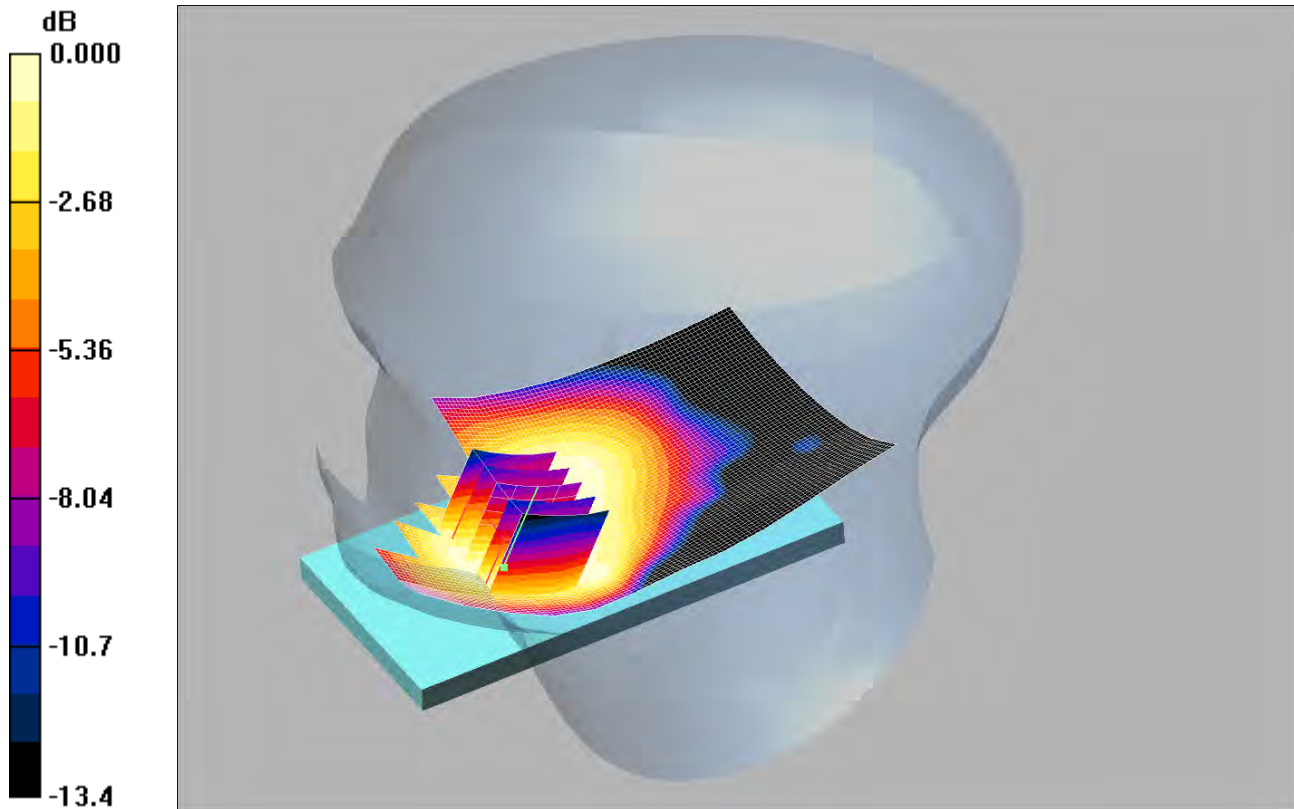

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.222 mW/g

Touch Right - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.89 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.274 W/kg


SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

148: Tilt Right LTE Band 4 20MHz BW 1%RB Low End CH20175

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

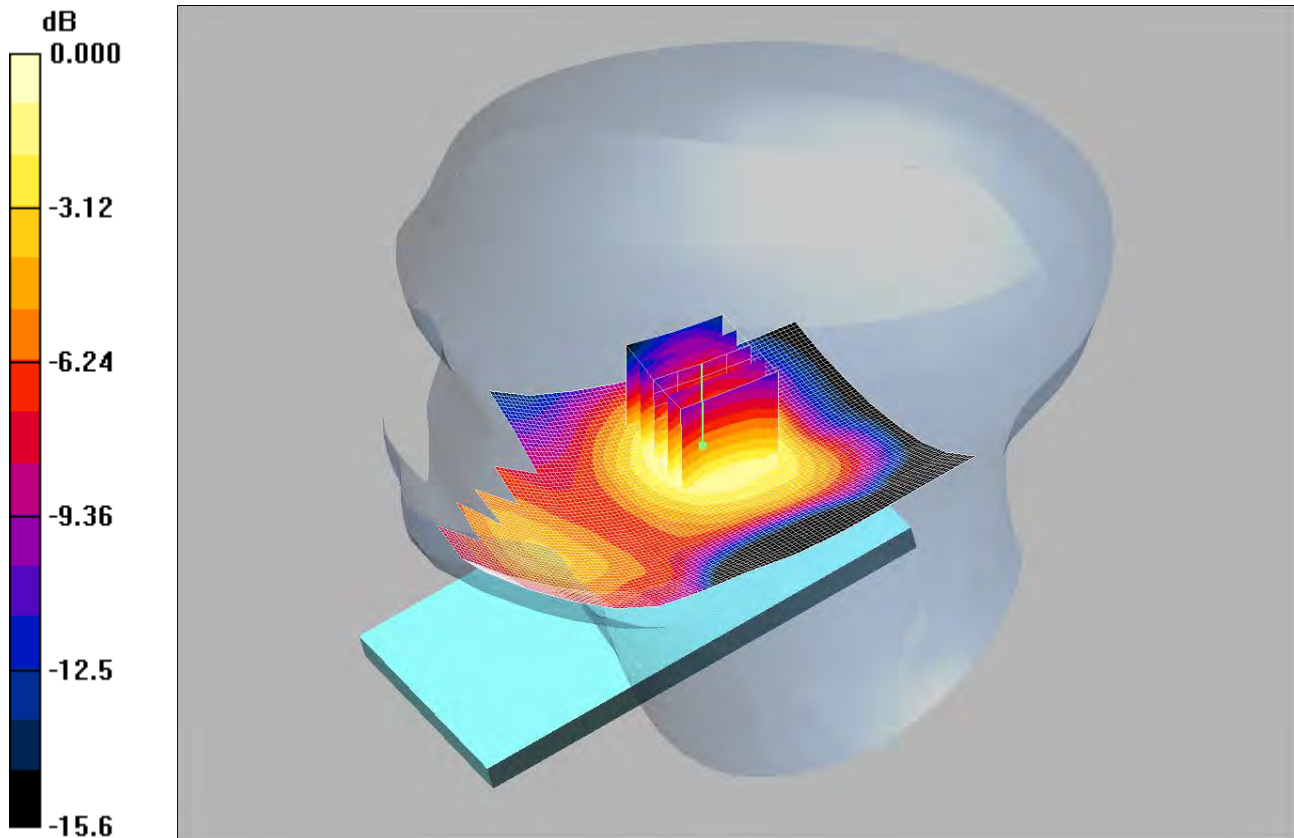

0 dB = 0.182mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.189 mW/g

Tilt Right - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.43 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.231 W/kg


SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

149: Tilt Right LTE Band 4 20MHz BW 50%RB Low End CH20050

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

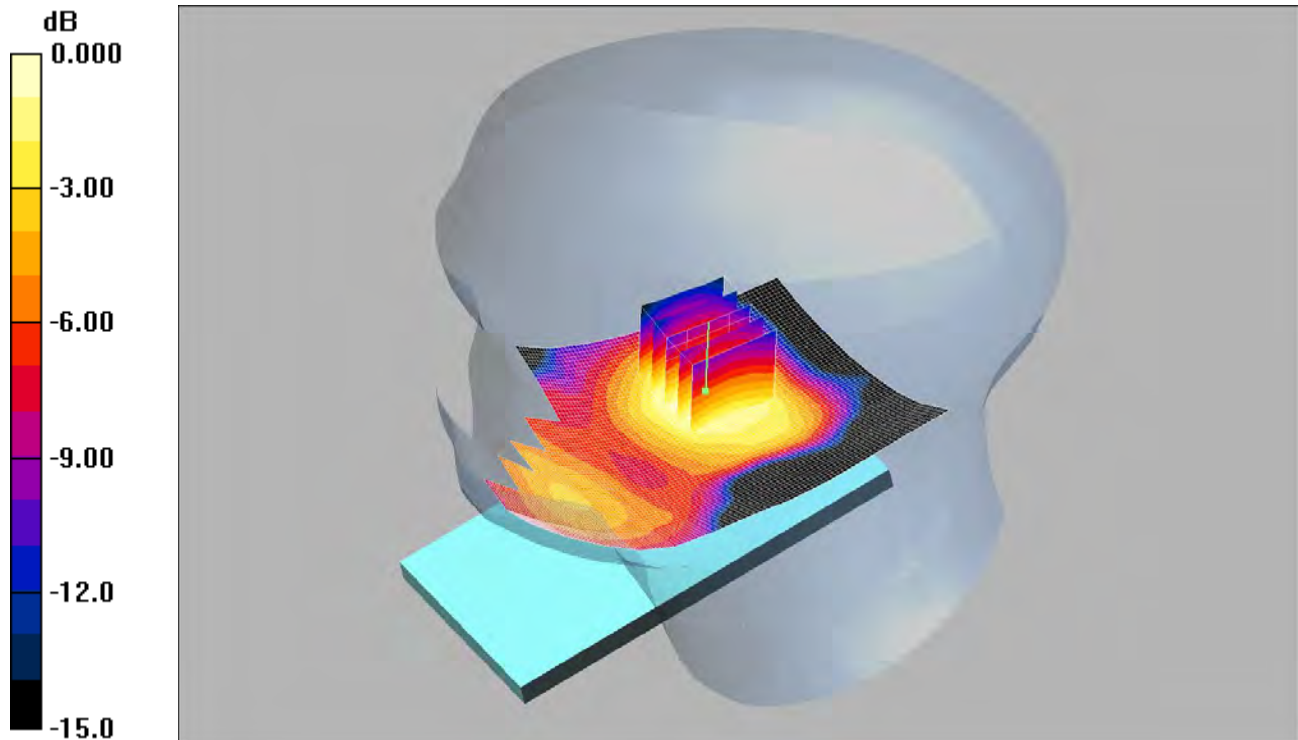

0 dB = 0.116mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Right - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.119 mW/g

Tilt Right - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.91 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.146 W/kg


SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.116 mW/g

150: Touch Left LTE Band 4 20MHz BW 1RB Low End CH20050

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

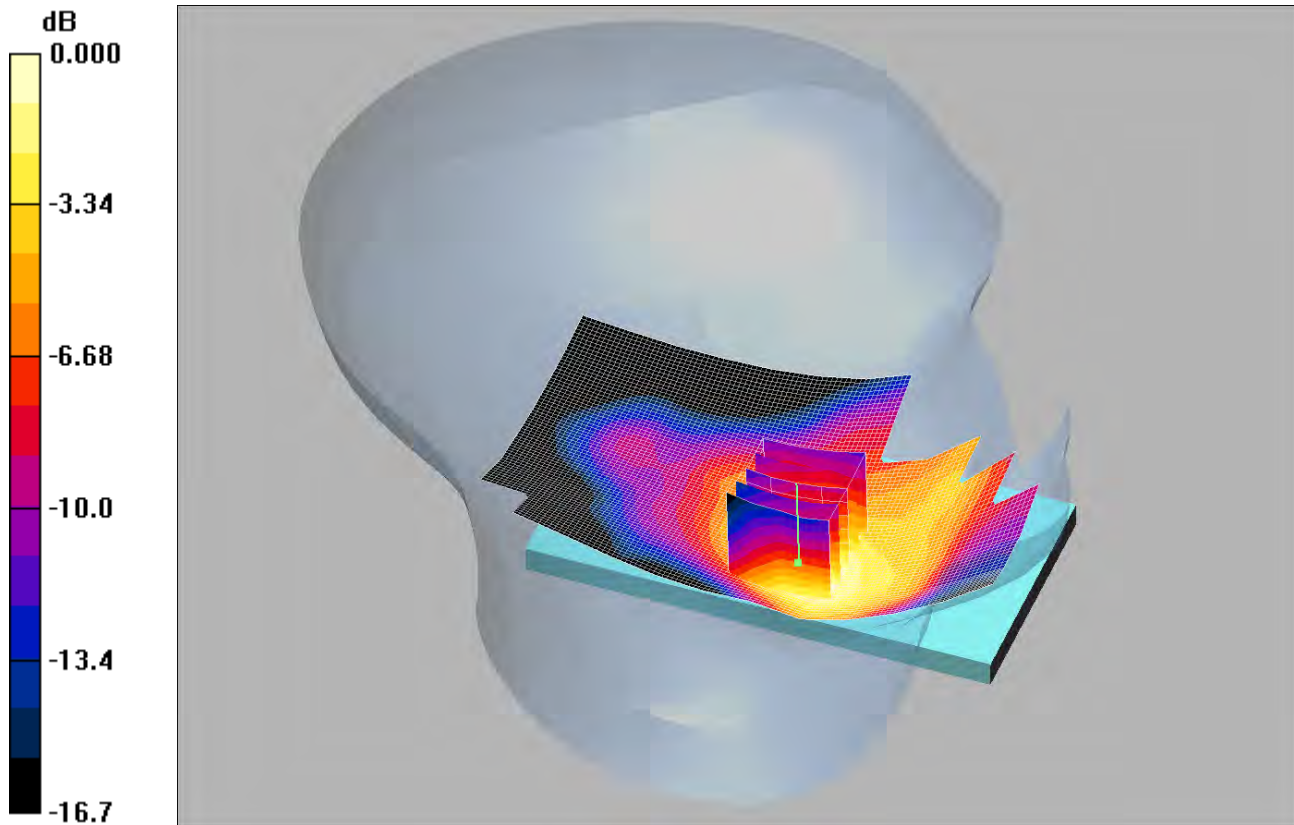

0 dB = 0.408mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.425 mW/g

Touch Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.50 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.507 W/kg


SAR(1 g) = 0.369 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.408 mW/g

151: Touch Left LTE Band 4 20MHz BW 1RB Low End CH20300

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

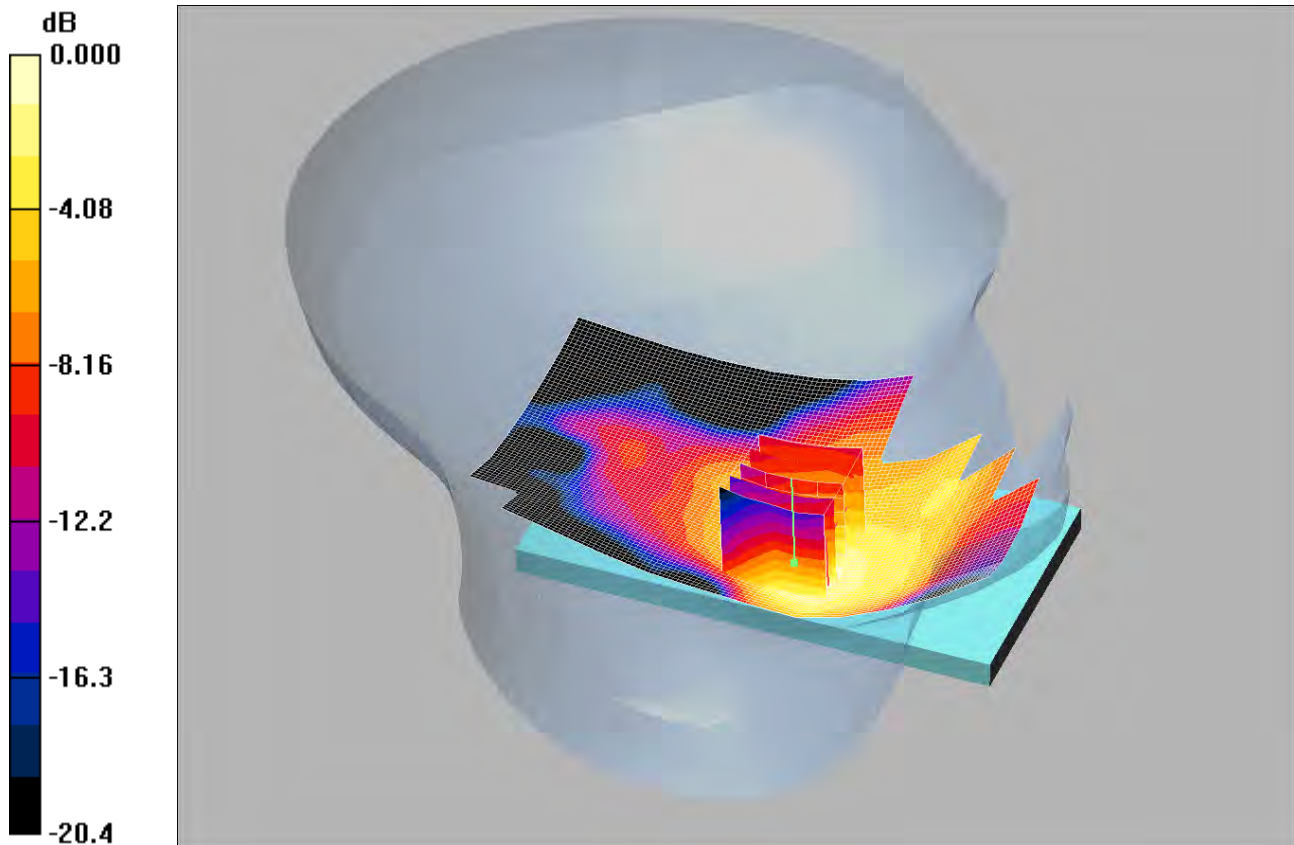

0 dB = 0.417mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.421 mW/g

Touch Left - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.18 V/m; Power Drift = 0.183 dB

Peak SAR (extrapolated) = 0.519 W/kg


SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

152: Front of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Low End CH20175

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

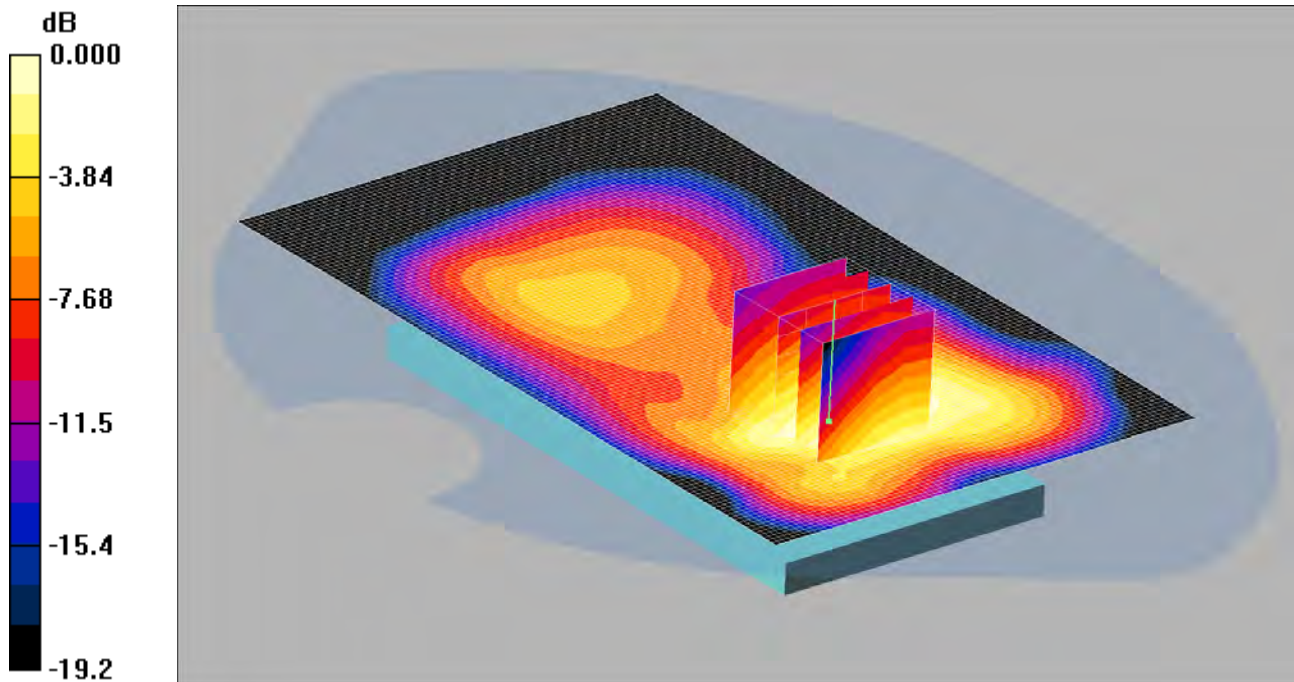

0 dB = 0.926mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.922 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 1.17 W/kg


SAR(1 g) = 0.887 mW/g; SAR(10 g) = 0.575 mW/g

Maximum value of SAR (measured) = 0.926 mW/g

153: Front of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Low End CH20050

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

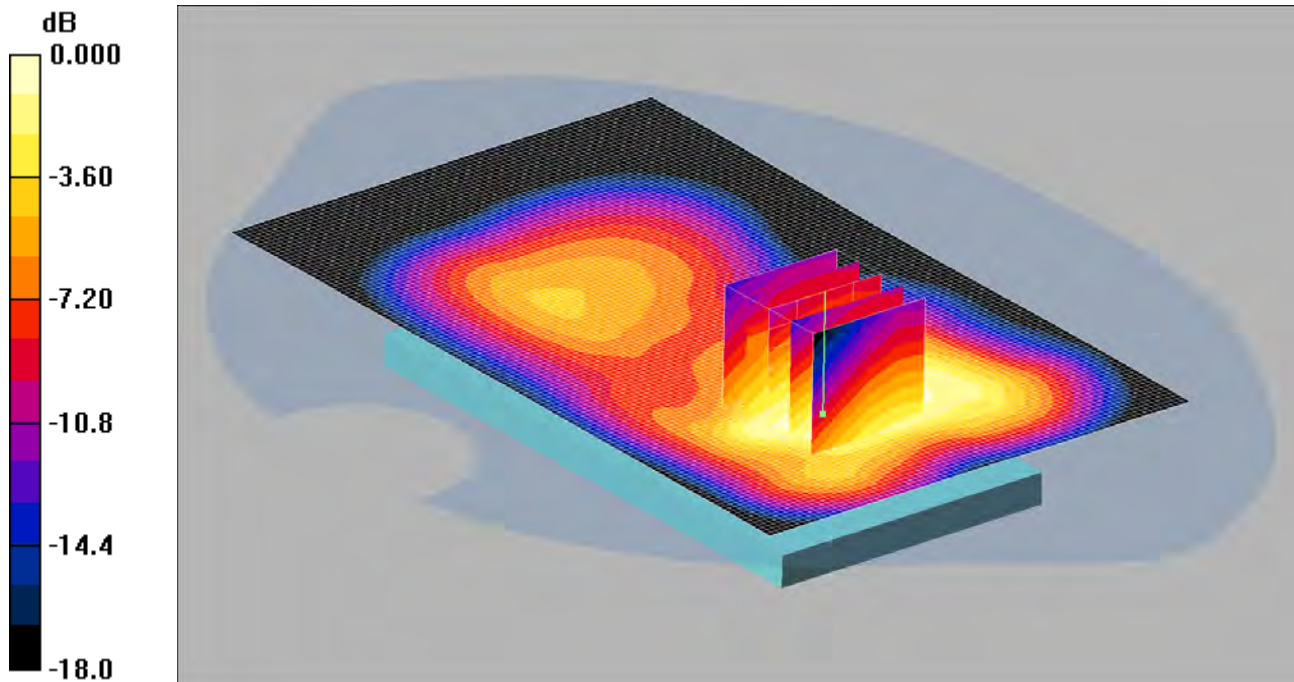

0 dB = 0.903mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom -Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.889 mW/g

Front of EUT Facing Phantom -Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 1.13 W/kg


SAR(1 g) = 0.860 mW/g; SAR(10 g) = 0.561 mW/g

Maximum value of SAR (measured) = 0.903 mW/g

154: Front of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Low End CH20300

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

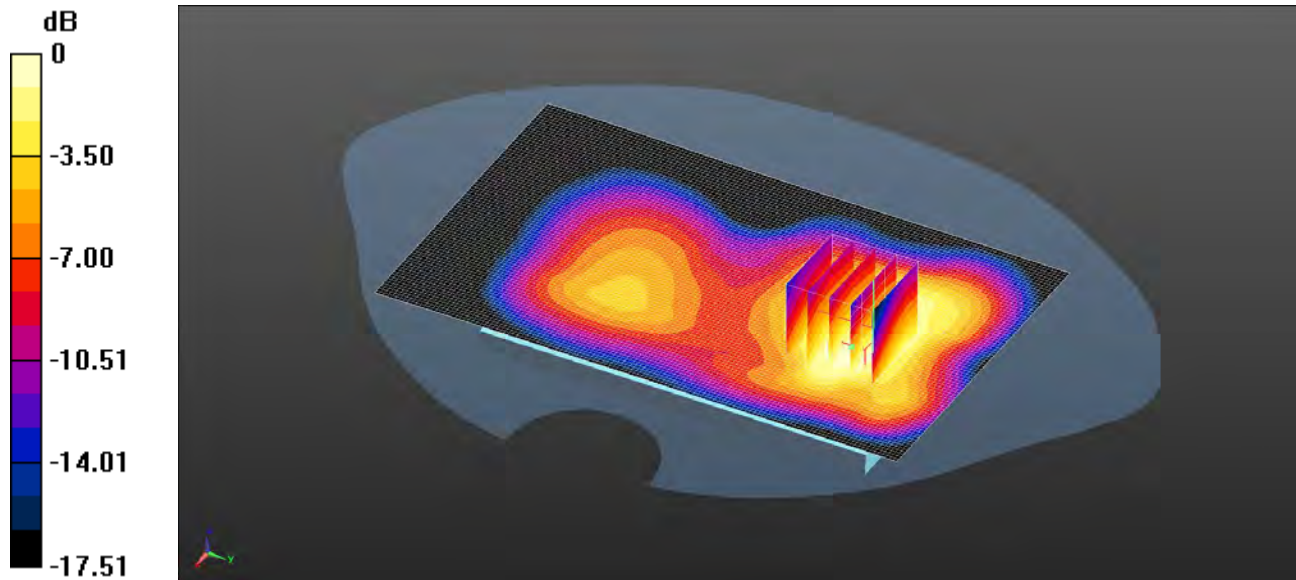

0 dB = 0.939 W/kg = -0.27 dBW/kg

Communication System: UID 0 - n/a, LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.503$ S/m; $\epsilon_r = 51.817$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.932 W/kg

Configuration/Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.690 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.18 W/kg


SAR(1 g) = 0.900 W/kg; SAR(10 g) = 0.584 W/kg

Maximum value of SAR (measured) = 0.939 W/kg

155: Front of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Low End CH20050

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

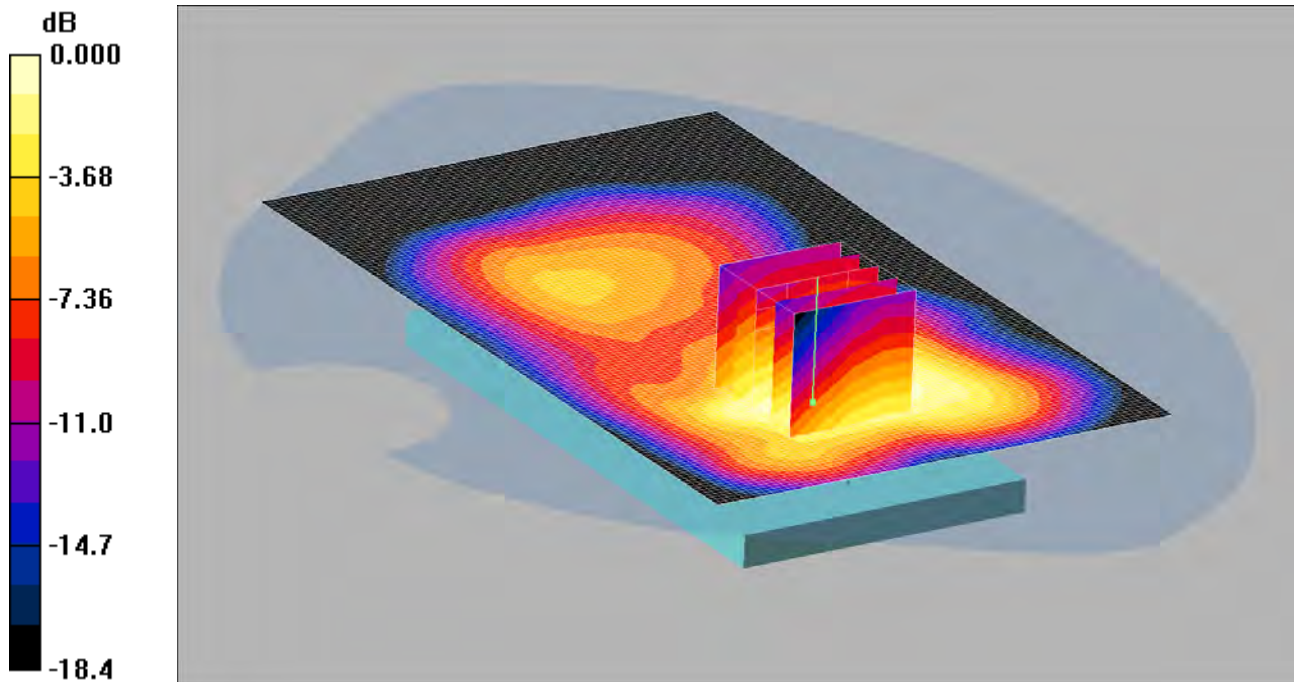

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.674 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.54 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 0.868 W/kg


SAR(1 g) = 0.659 mW/g; SAR(10 g) = 0.430 mW/g

Maximum value of SAR (measured) = 0.691 mW/g

156: Front of EUT Facing Phantom LTE Band 4 20MHz BW 100%RB CH20175

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

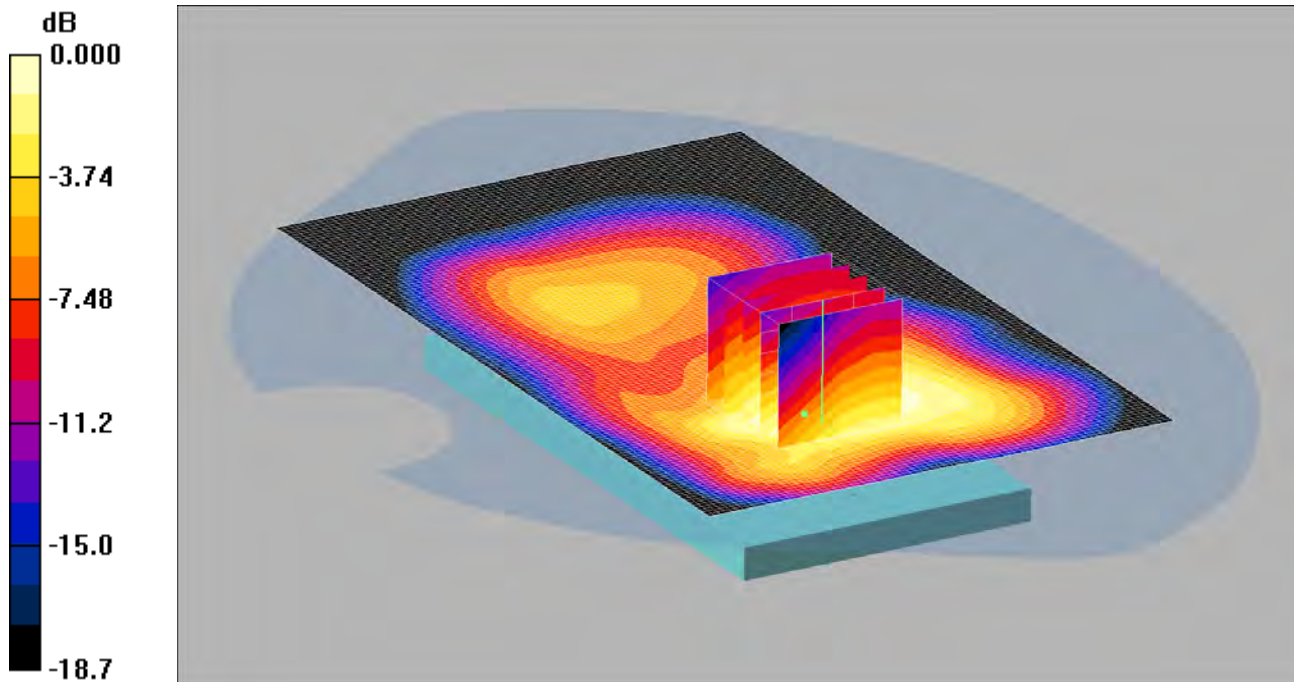

0 dB = 0.720mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.712 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.55 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 0.908 W/kg


SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.446 mW/g

Maximum value of SAR (measured) = 0.720 mW/g

157: Back of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Low End CH20175

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

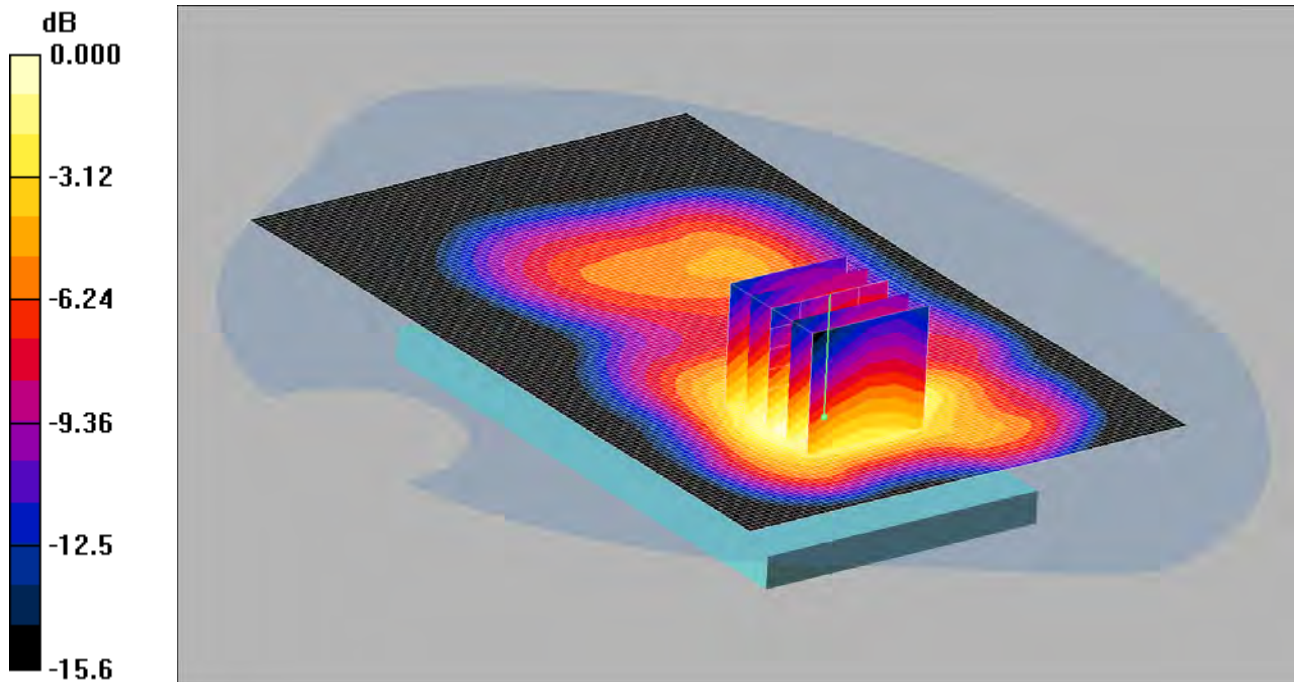

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.16 W/kg


SAR(1 g) = 0.891 mW/g; SAR(10 g) = 0.610 mW/g

Maximum value of SAR (measured) = 0.950 mW/g

158: Back of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Low End CH20050

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

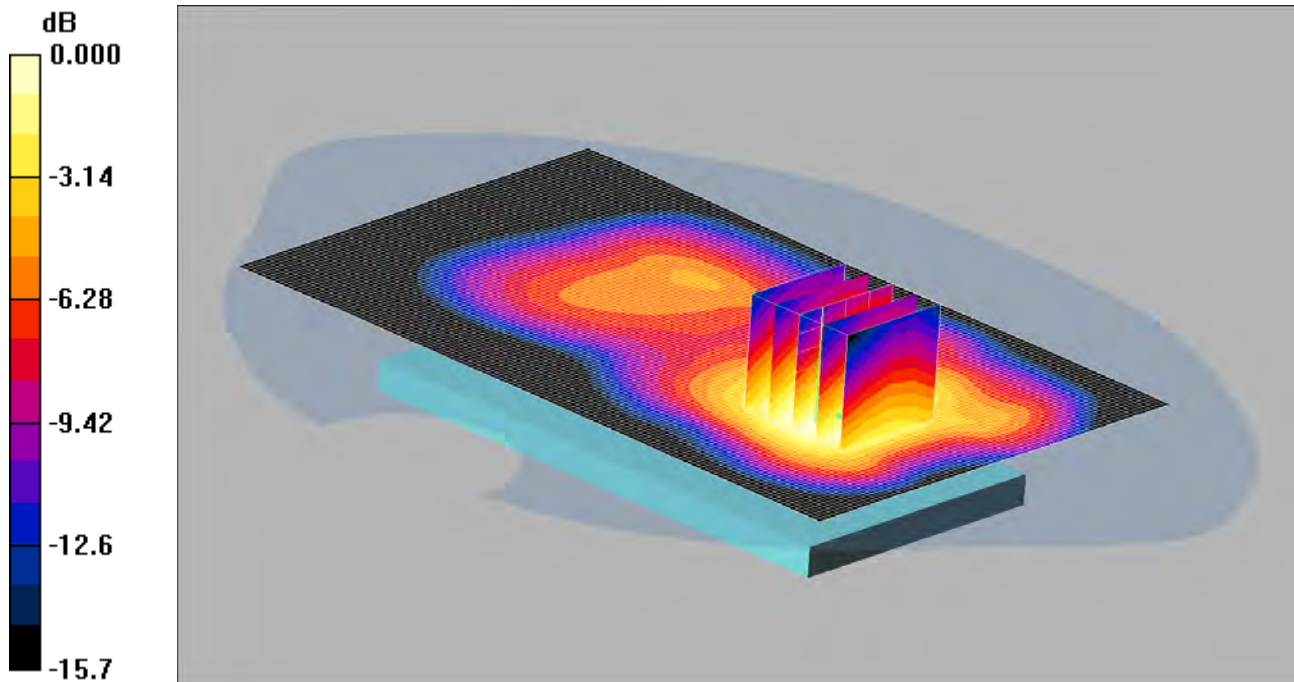

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.961 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 1.11 W/kg


SAR(1 g) = 0.841 mW/g; SAR(10 g) = 0.577 mW/g

Maximum value of SAR (measured) = 0.895 mW/g

159: Back of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Low End CH20300

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

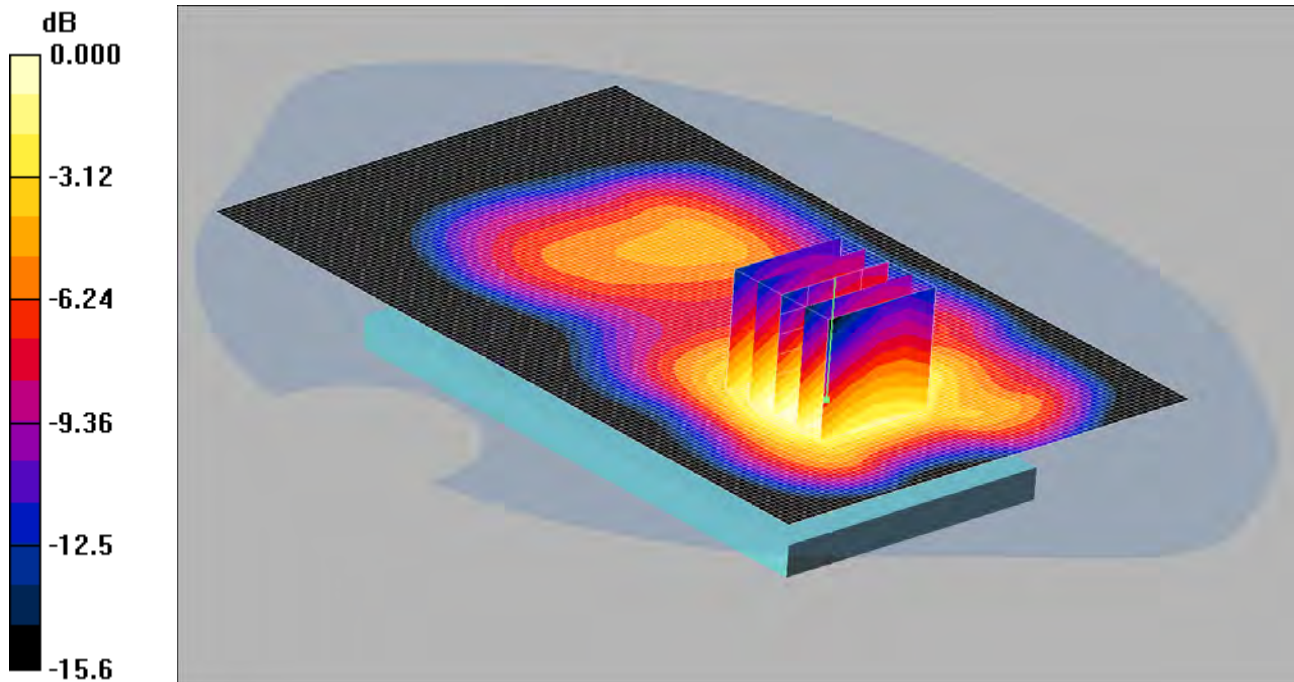

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 1.15 W/kg


SAR(1 g) = 0.879 mW/g; SAR(10 g) = 0.601 mW/g

Maximum value of SAR (measured) = 0.931 mW/g

160: Back of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Low End CH20050

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

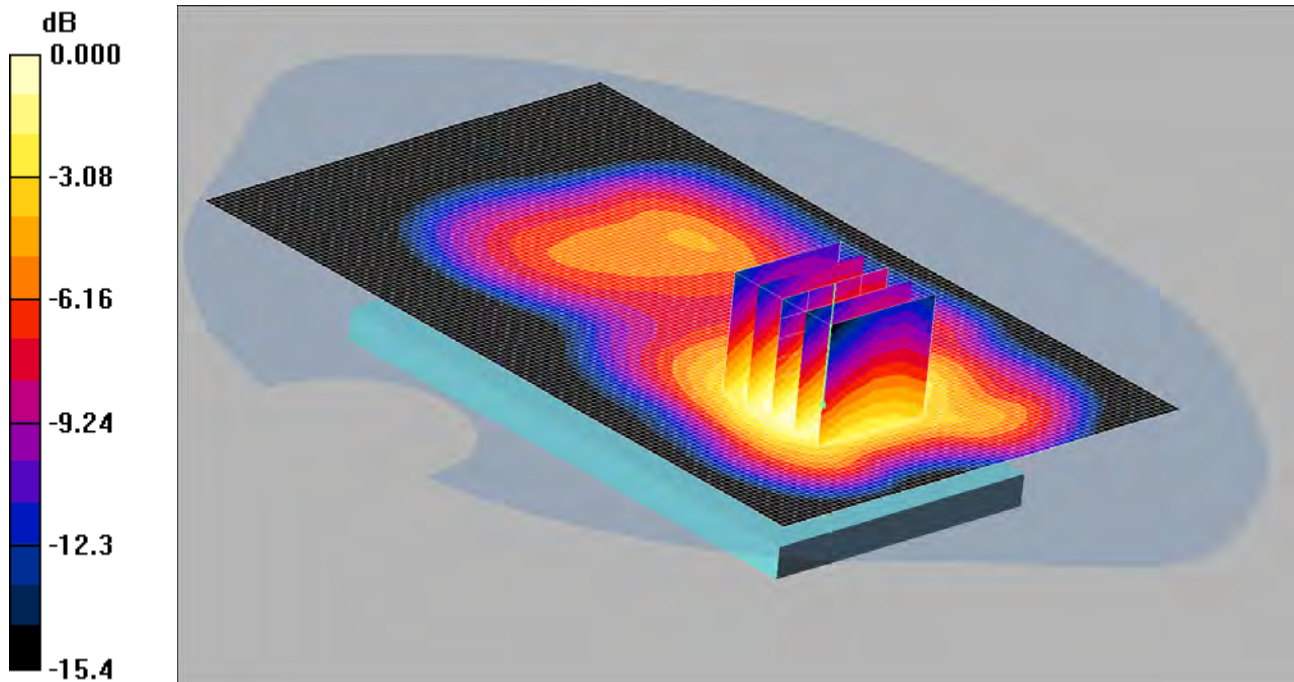

0 dB = 0.689mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.736 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.79 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.855 W/kg


SAR(1 g) = 0.648 mW/g; SAR(10 g) = 0.444 mW/g

Maximum value of SAR (measured) = 0.689 mW/g

161: Back of EUT Facing Phantom LTE Band 4 20MHz BW 100%RB CH20175

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

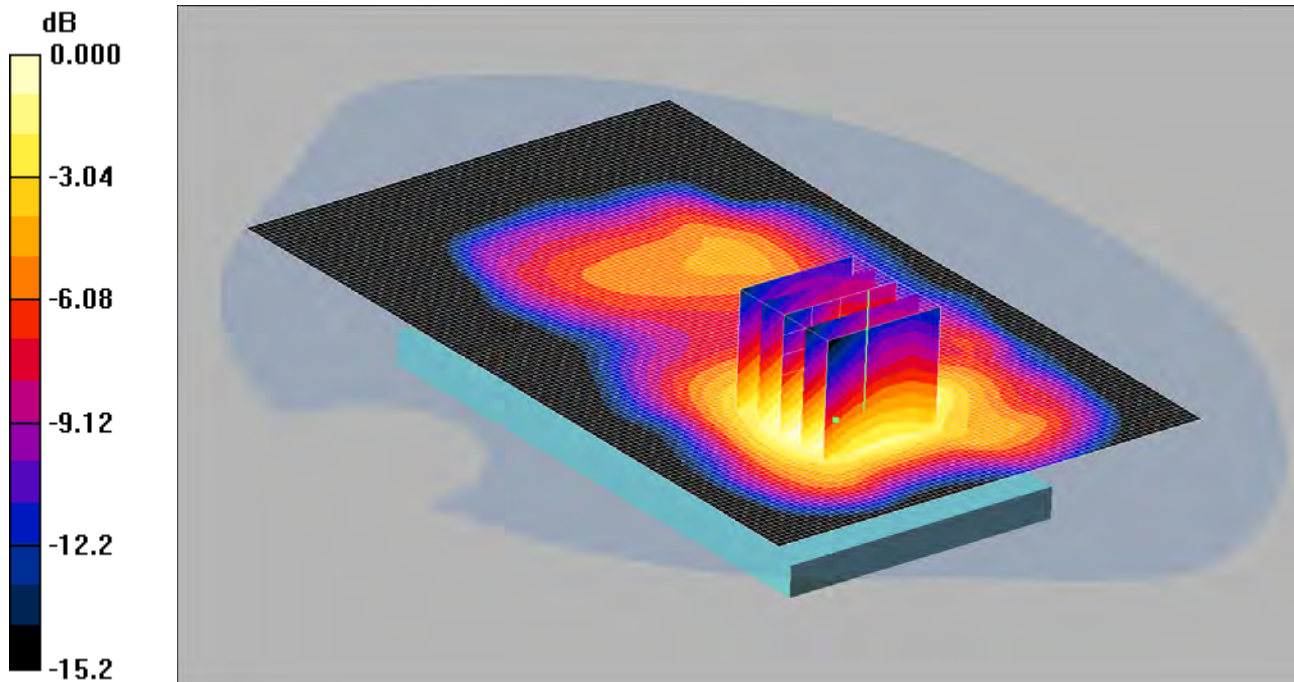

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.784 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.92 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.924 W/kg


SAR(1 g) = 0.685 mW/g; SAR(10 g) = 0.471 mW/g

Maximum value of SAR (measured) = 0.721 mW/g

162: Left Hand Side of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Low End CH20175

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

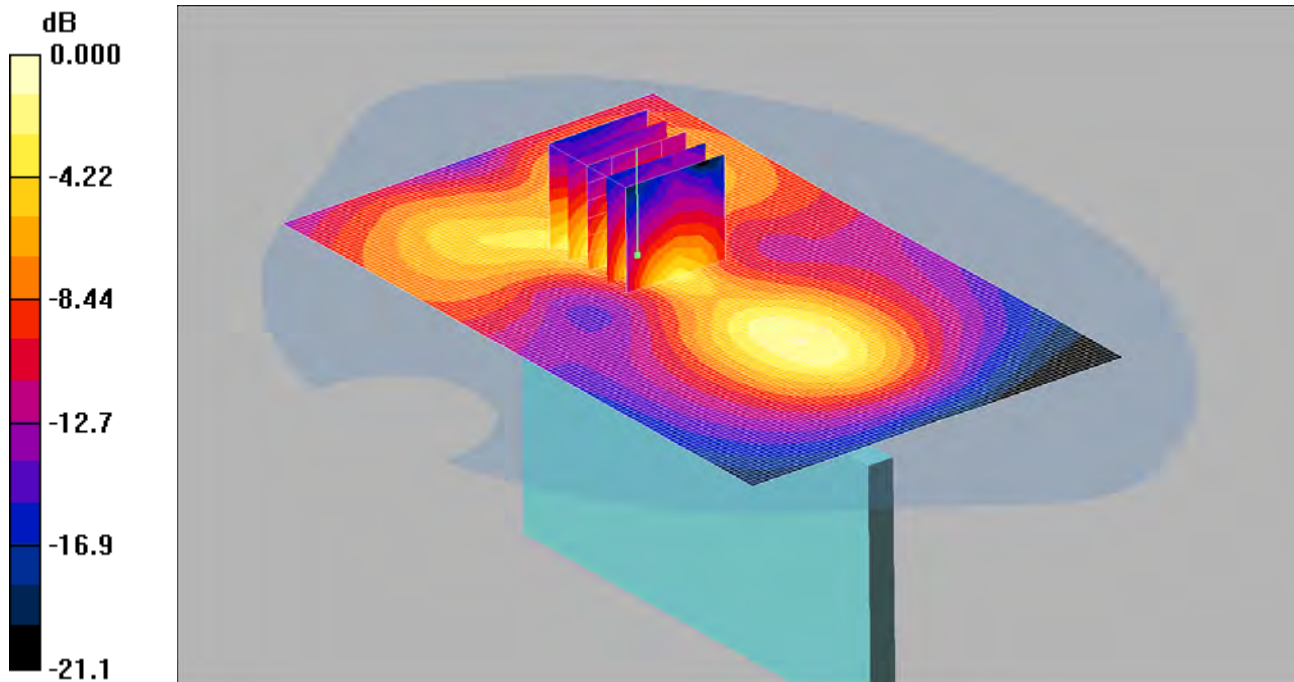

0 dB = 0.193mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.183 mW/g

Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.22 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 0.281 W/kg


SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.193 mW/g

163: Left Hand Side of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Low End CH20050

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

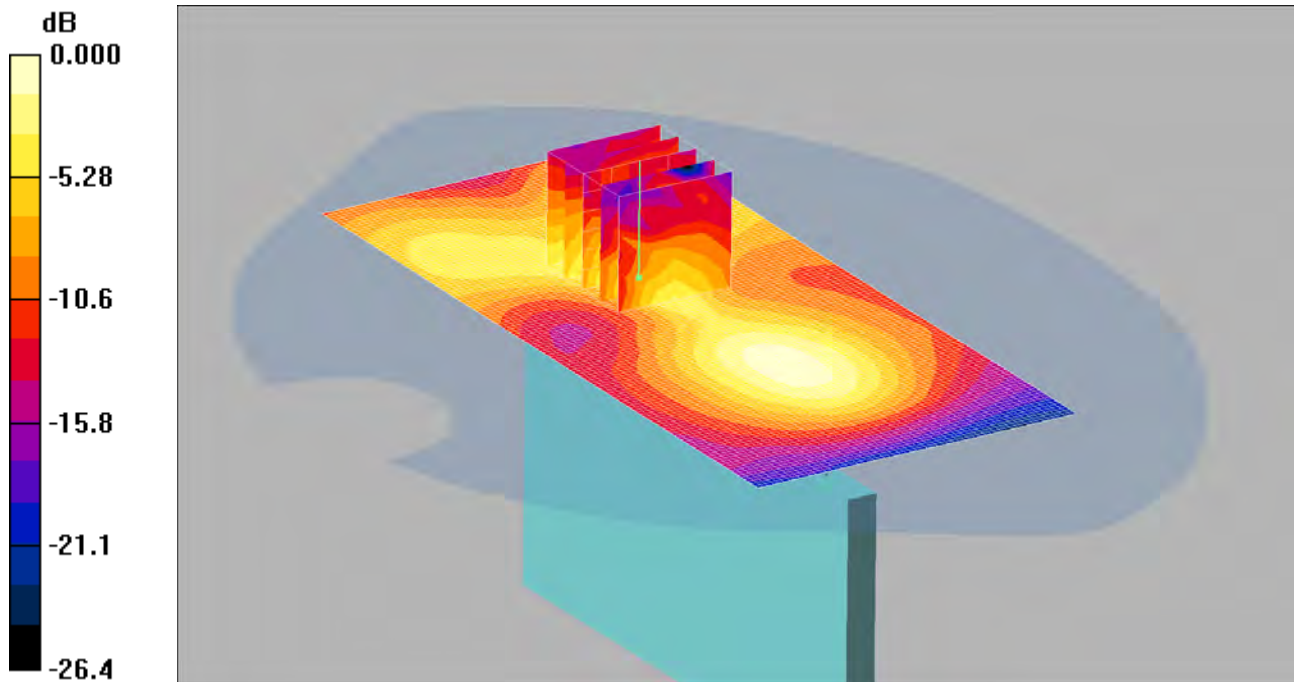

0 dB = 0.125mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom -Low/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.120 mW/g

Left Hand Side of EUT Facing Phantom -Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.30 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.182 W/kg


SAR(1 g) = 0.106 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.125 mW/g

164: Right Hand Side of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Low End CH20175

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

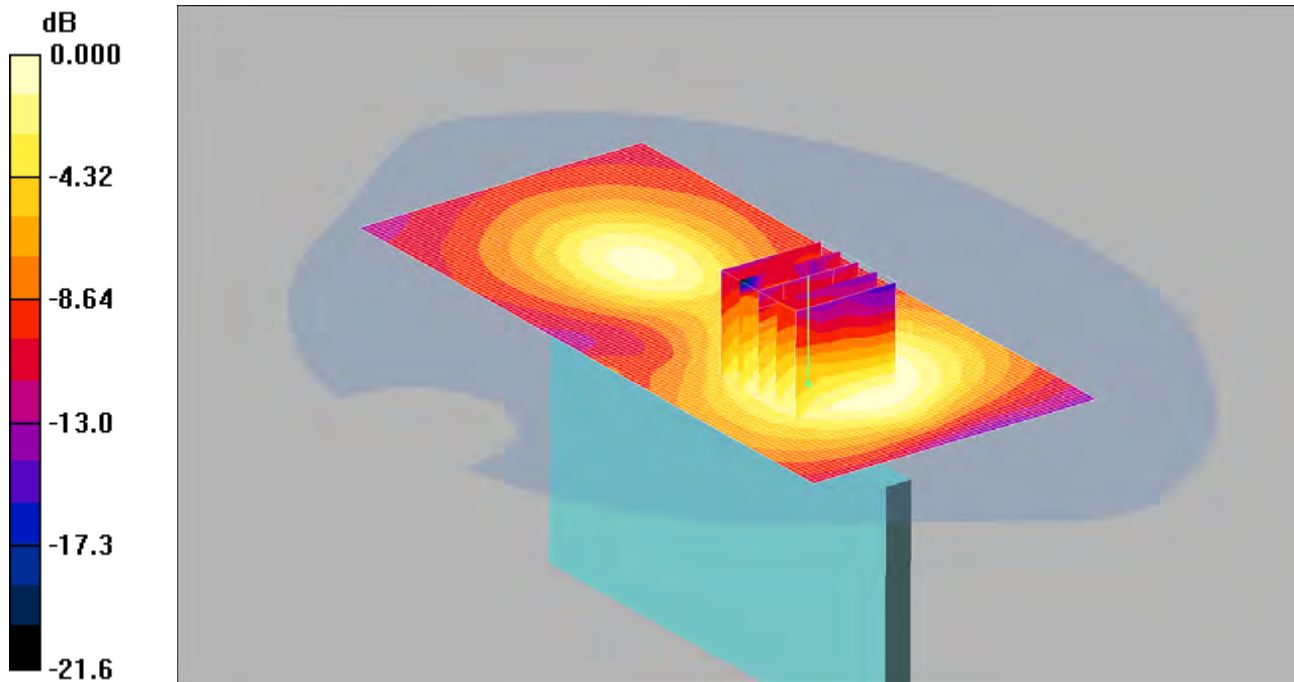

0 dB = 0.143mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom- Middle/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.149 mW/g

Right Hand Side of EUT Facing Phantom- Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.14 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.205 W/kg


SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.143 mW/g

165: Right Hand Side of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Low End CH20050

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

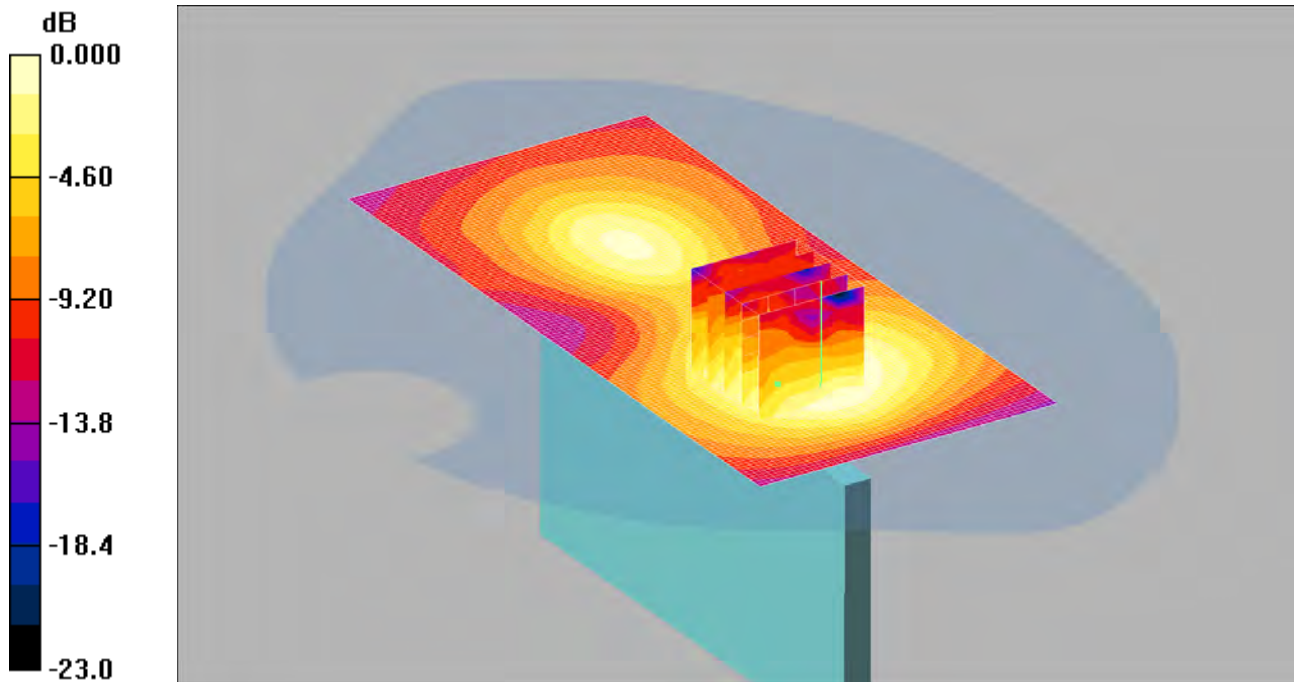

0 dB = 0.113mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom- Low/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.117 mW/g

Right Hand Side of EUT Facing Phantom- Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.41 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.165 W/kg


SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.113 mW/g

166: Bottom of EUT Facing Phantom LTE Band 4 20MHz BW 1RB Low End CH20175

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

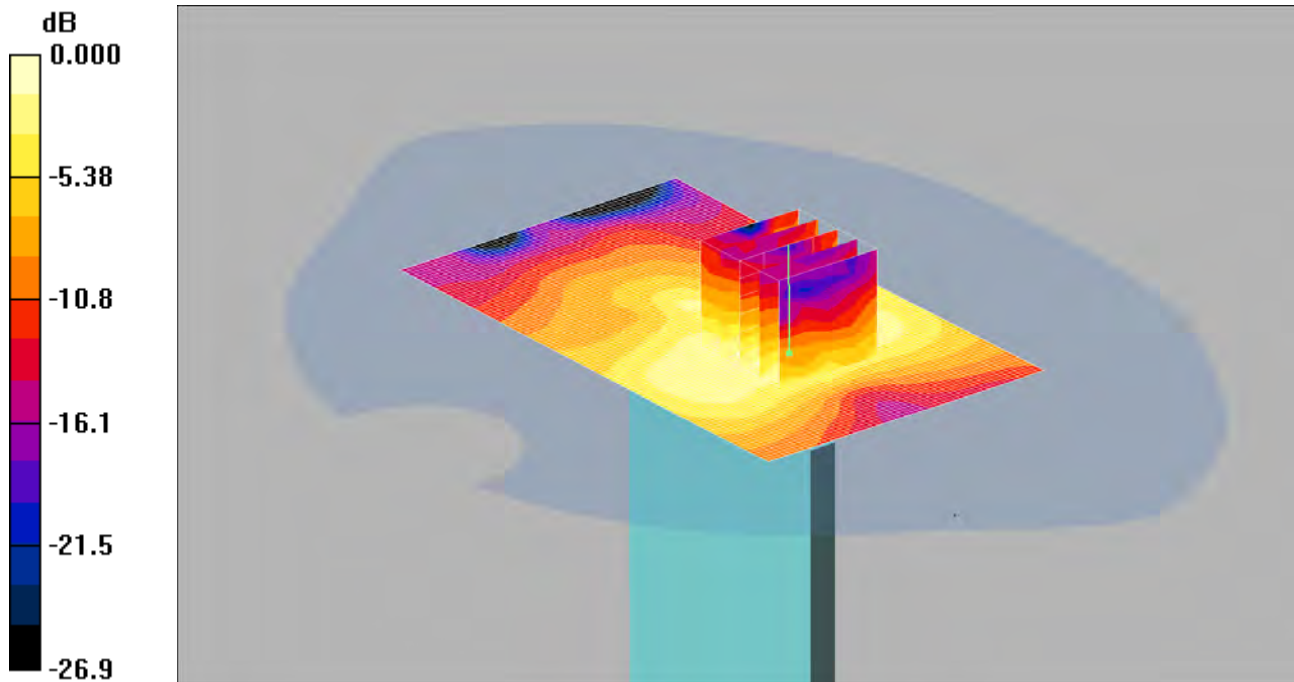

0 dB = 0.176mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom- Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.186 mW/g

Bottom of EUT Facing Phantom- Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.74 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 0.286 W/kg


SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.079 mW/g

Maximum value of SAR (measured) = 0.176 mW/g

167: Bottom of EUT Facing Phantom LTE Band 4 20MHz BW 50%RB Low End CH20050

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

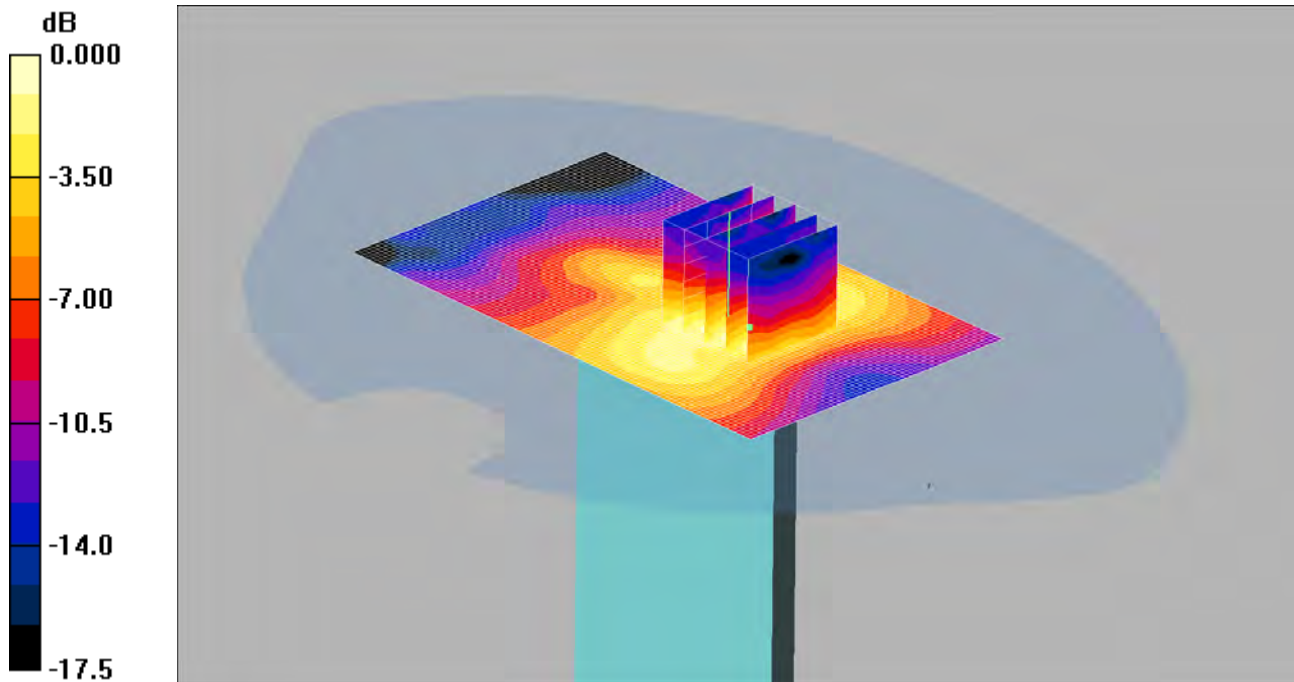

0 dB = 0.117mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom- Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.136 mW/g

Bottom of EUT Facing Phantom- Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.69 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.141 W/kg


SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.117 mW/g

168: Front of EUT Facing Phantom at 15mm LTE Band 4 20MHz BW 1RB Low End CH20300

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

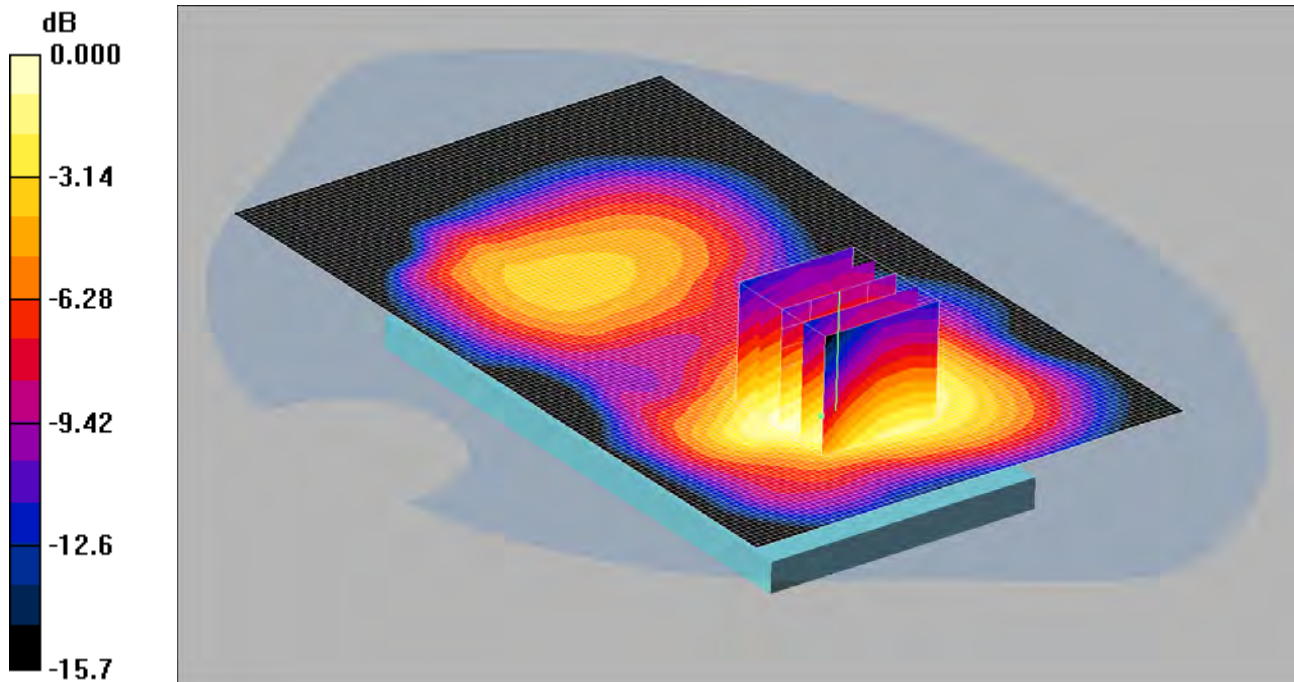

0 dB = 0.617mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom at 15mm- High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.622 mW/g

Front of EUT Facing Phantom at 15mm- High/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.50 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 0.755 W/kg


SAR(1 g) = 0.577 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.617 mW/g

169: Back of EUT Facing Phantom at 15mm LTE Band 4 20MHz BW 1RB Low End CH20300

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

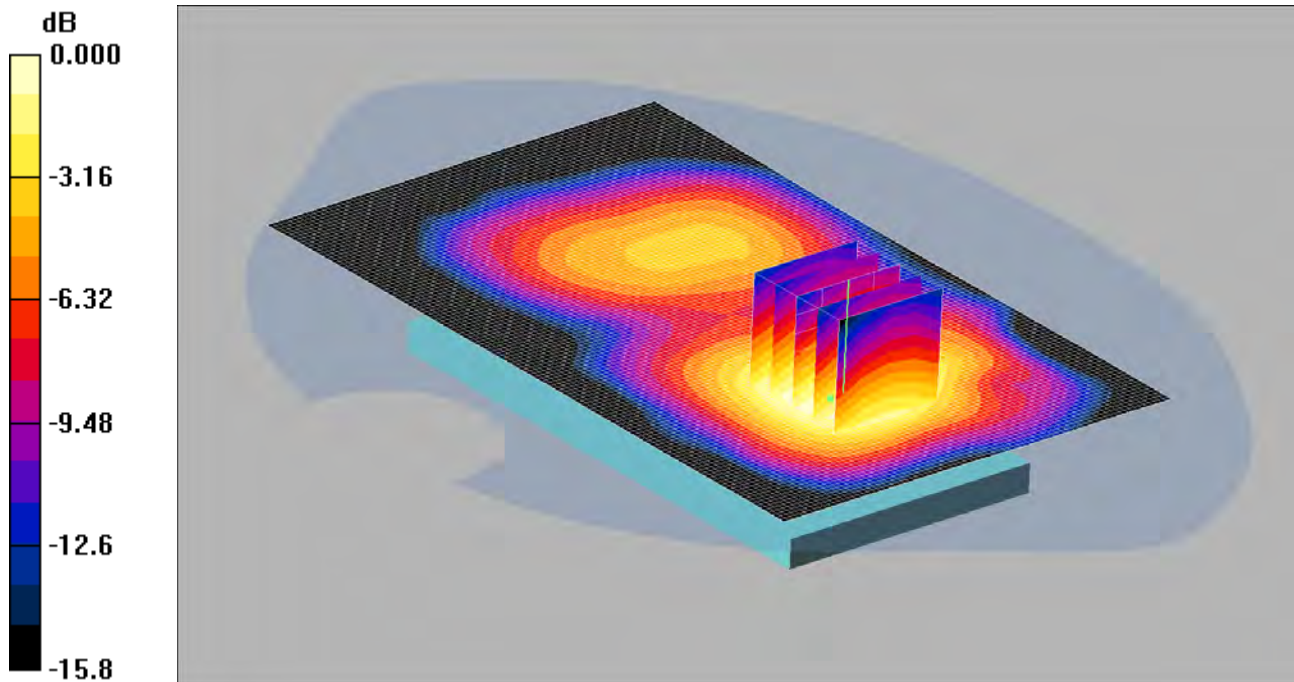

0 dB = 0.640mW/g

Communication System: LTE - Band 4 / 20MHz Channel; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom at 15mm- High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.659 mW/g

Back of EUT Facing Phantom at 15mm- High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.20 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.784 W/kg


SAR(1 g) = 0.602 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 0.640 mW/g

170: Touch Left LTE Band 4 1.4MHz BW 1RB Middle CH19957

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

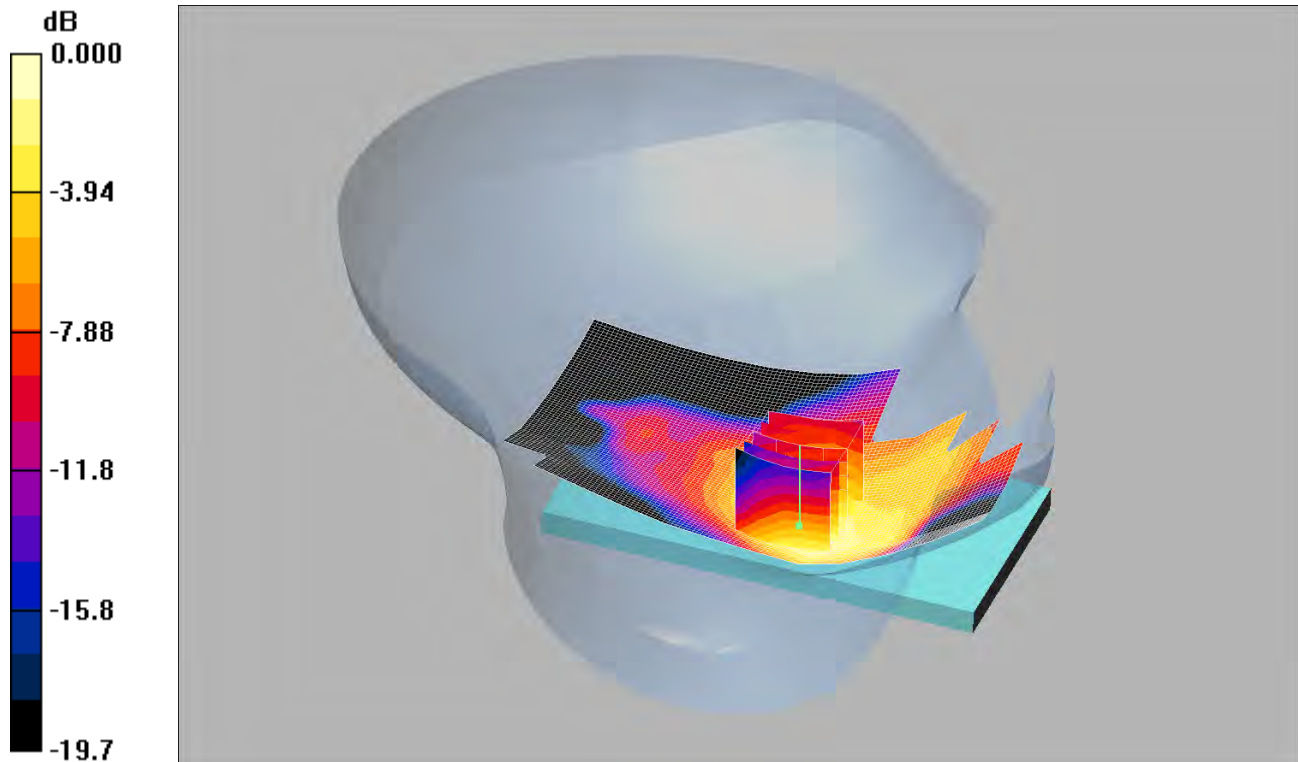

0 dB = 0.431mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.412 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.37 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 0.539 W/kg


SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.431 mW/g

171: Touch Left LTE Band 4 1.4MHz BW 50%RB Middle CH19957

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

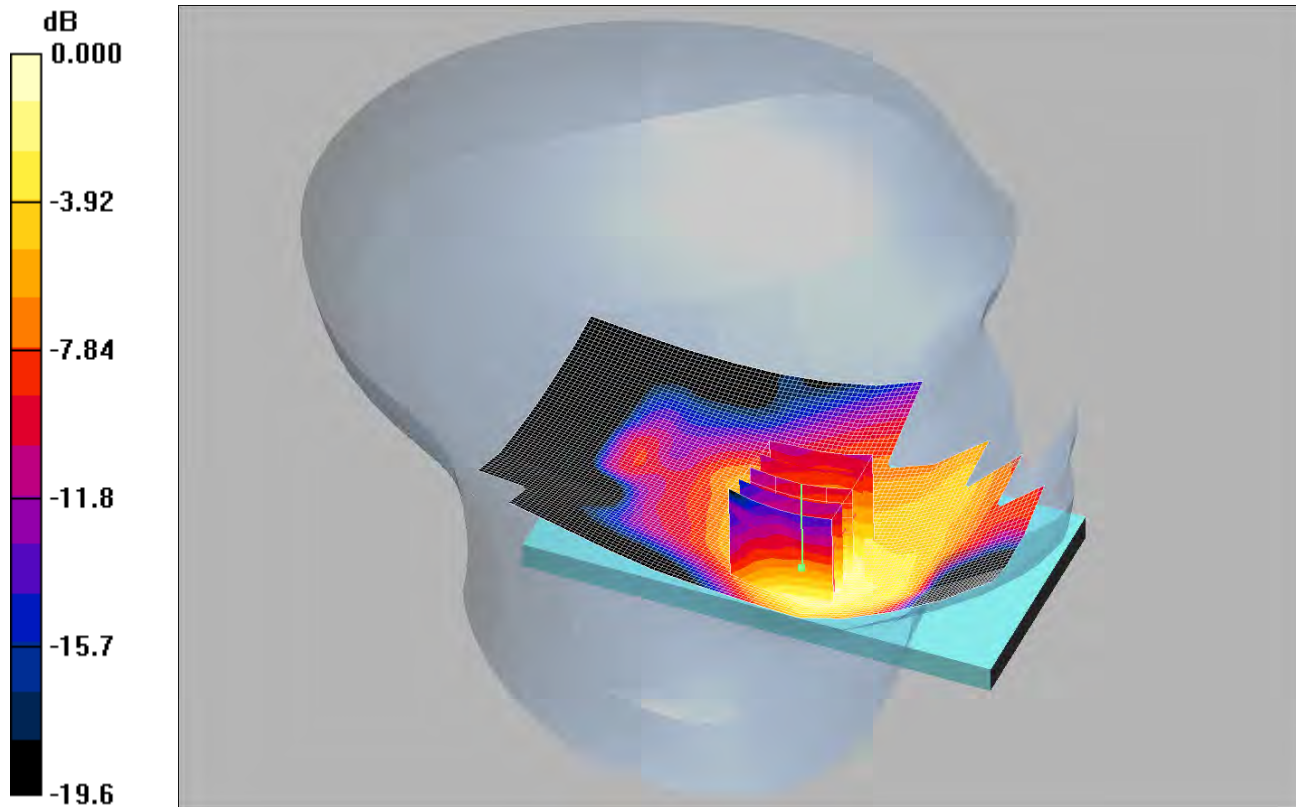

0 dB = 0.424mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.414 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.83 V/m; Power Drift = -0.197 dB

Peak SAR (extrapolated) = 0.543 W/kg


SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.239 mW/g

Maximum value of SAR (measured) = 0.424 mW/g

172: Tilt Left LTE Band 4 1.4MHz BW 1RB Middle CH19957

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

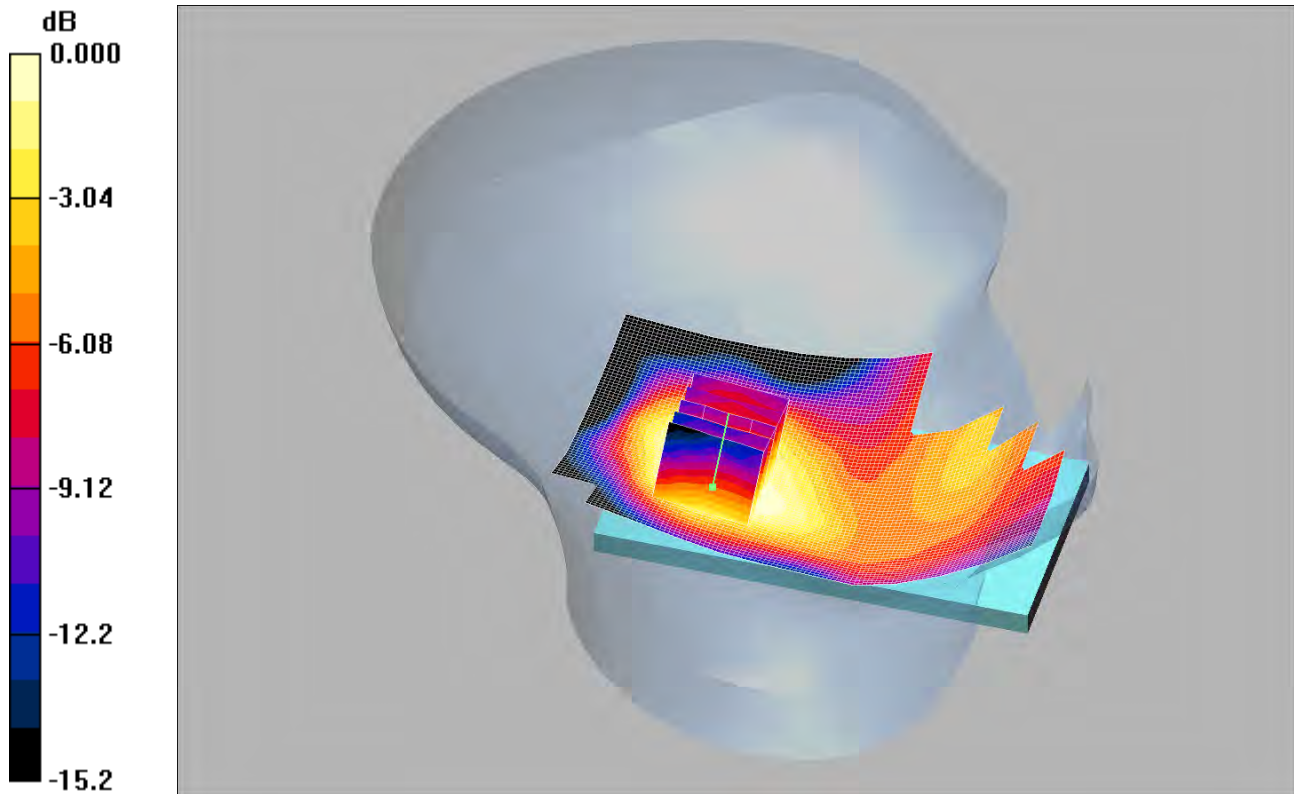

0 dB = 0.120mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1710.7 \text{ MHz}$; $\sigma = 1.31 \text{ mho/m}$; $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Low/Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.133 mW/g

Tilt Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.77 V/m; Power Drift = 0.115 dB

Peak SAR (extrapolated) = 0.151 W/kg


SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.120 mW/g

173: Tilt Left LTE Band 4 1.4MHz BW 50%RB Middle CH19957

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

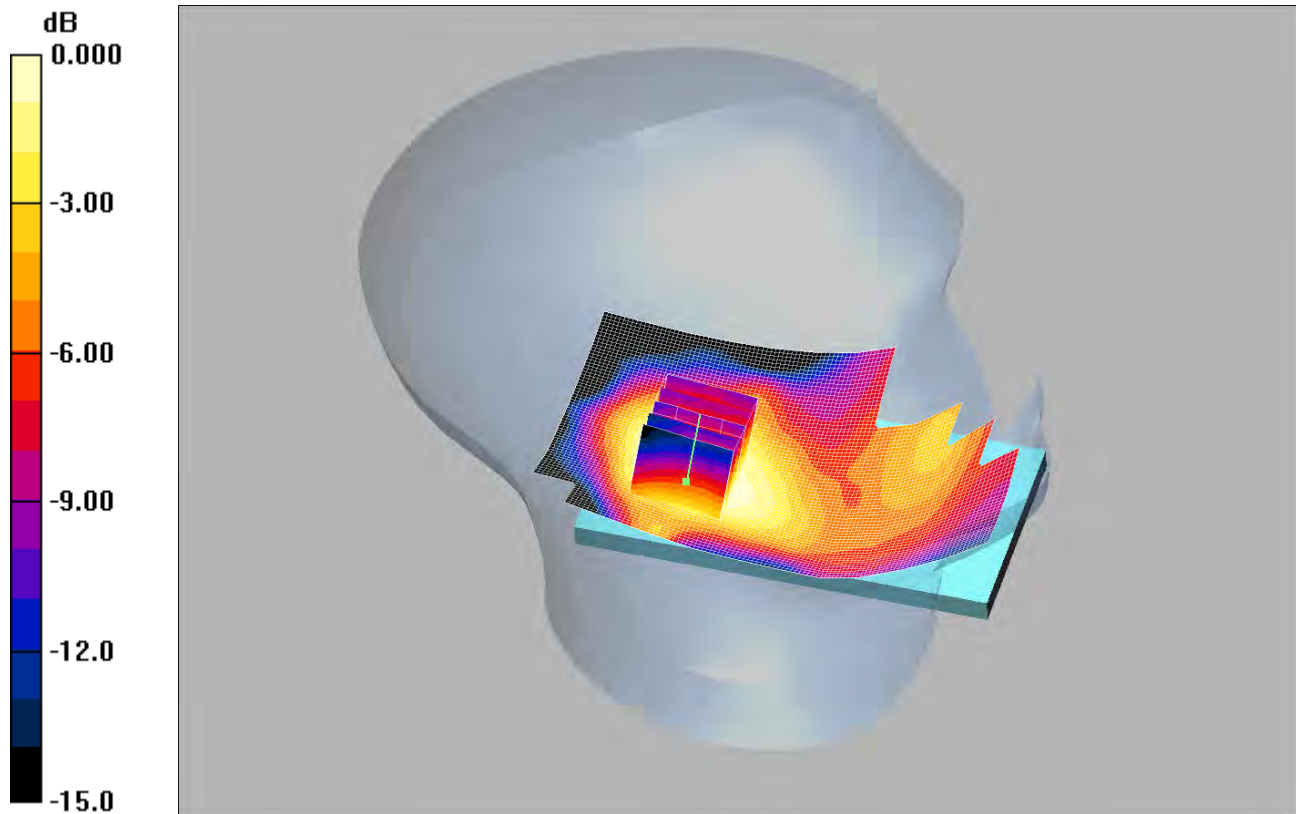

0 dB = 0.121mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.130 mW/g

Tilt Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.20 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.151 W/kg


SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.121 mW/g

174: Touch Right LTE Band 4 1.4MHz BW 1RB Middle CH19957

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

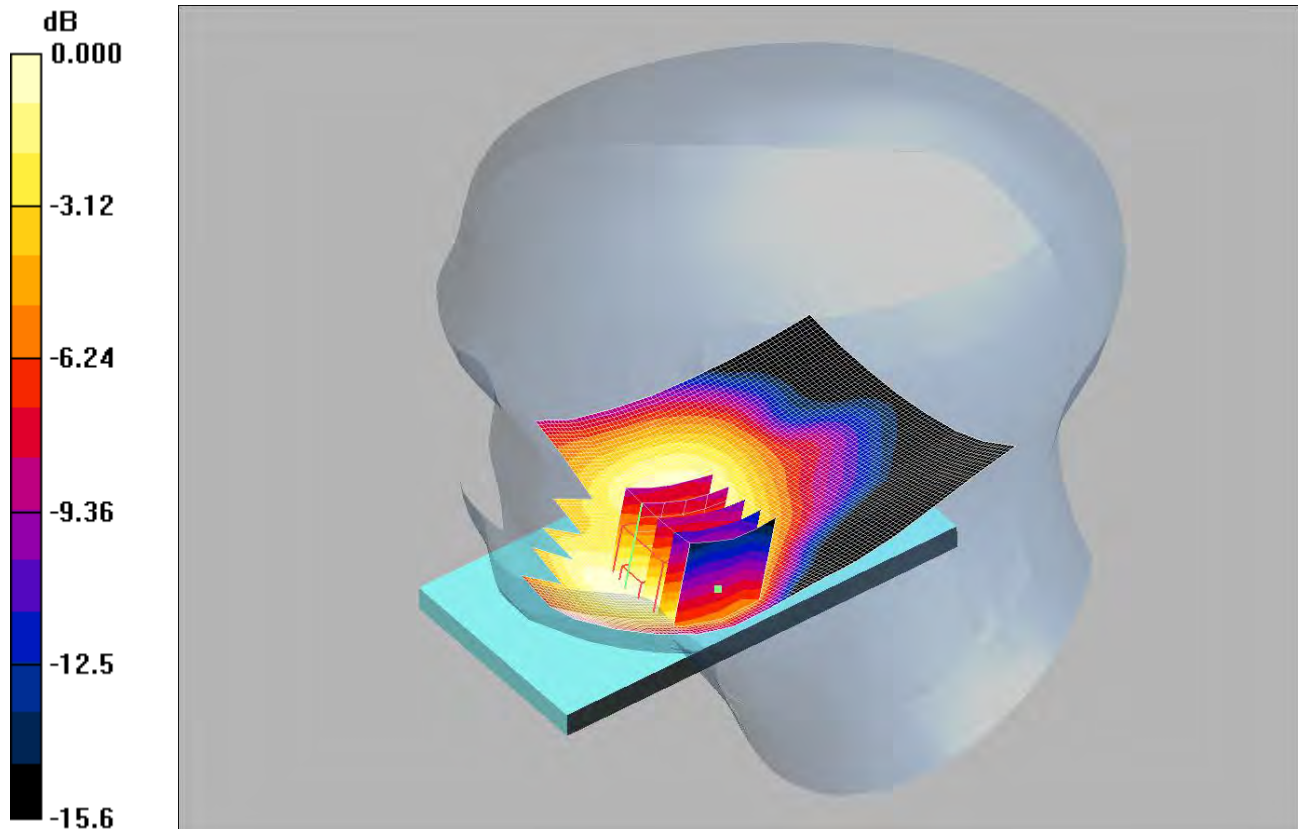

0 dB = 0.285mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.286 mW/g

Touch Right- Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.77 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 0.359 W/kg


SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.285 mW/g

175: Touch Right LTE Band 4 1.4MHz BW 50%RB Middle CH19957

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

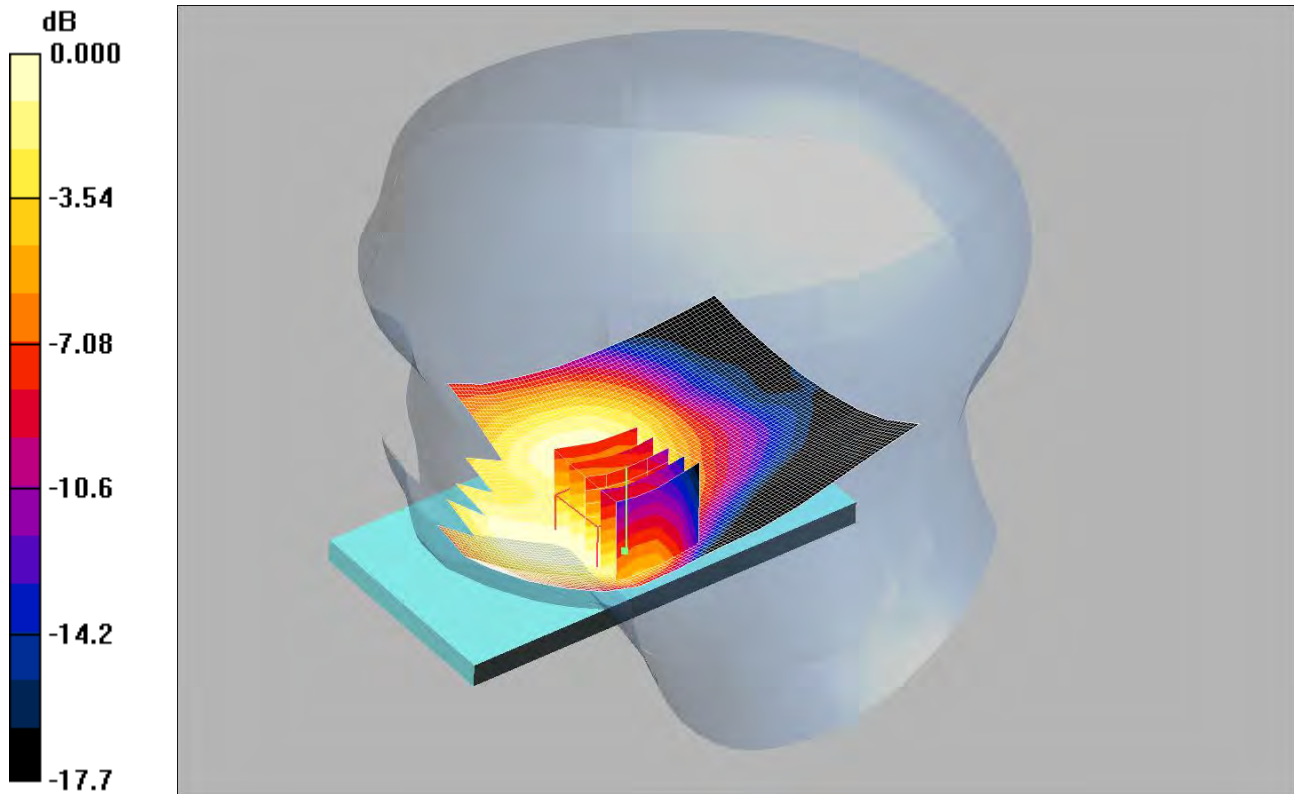

0 dB = 0.275mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.302 mW/g

Touch Right- Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.44 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.345 W/kg


SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.275 mW/g

176: Tilt Right LTE Band 4 1.4MHz BW 1RB Middle CH19957

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

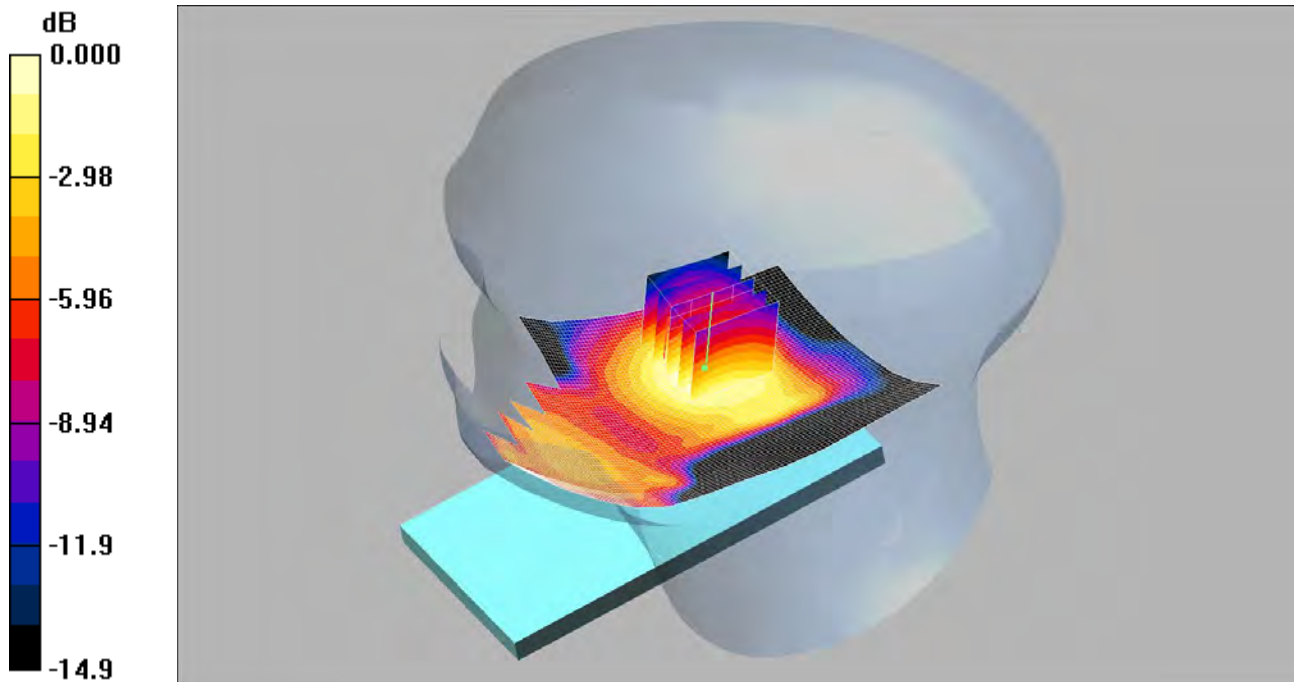

0 dB = 0.164mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Right- Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.168 mW/g

Tilt Right- Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.21 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.205 W/kg


SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.164 mW/g

177: Tilt Right LTE Band 4 1.4MHz BW 50%RB Middle CH19957

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

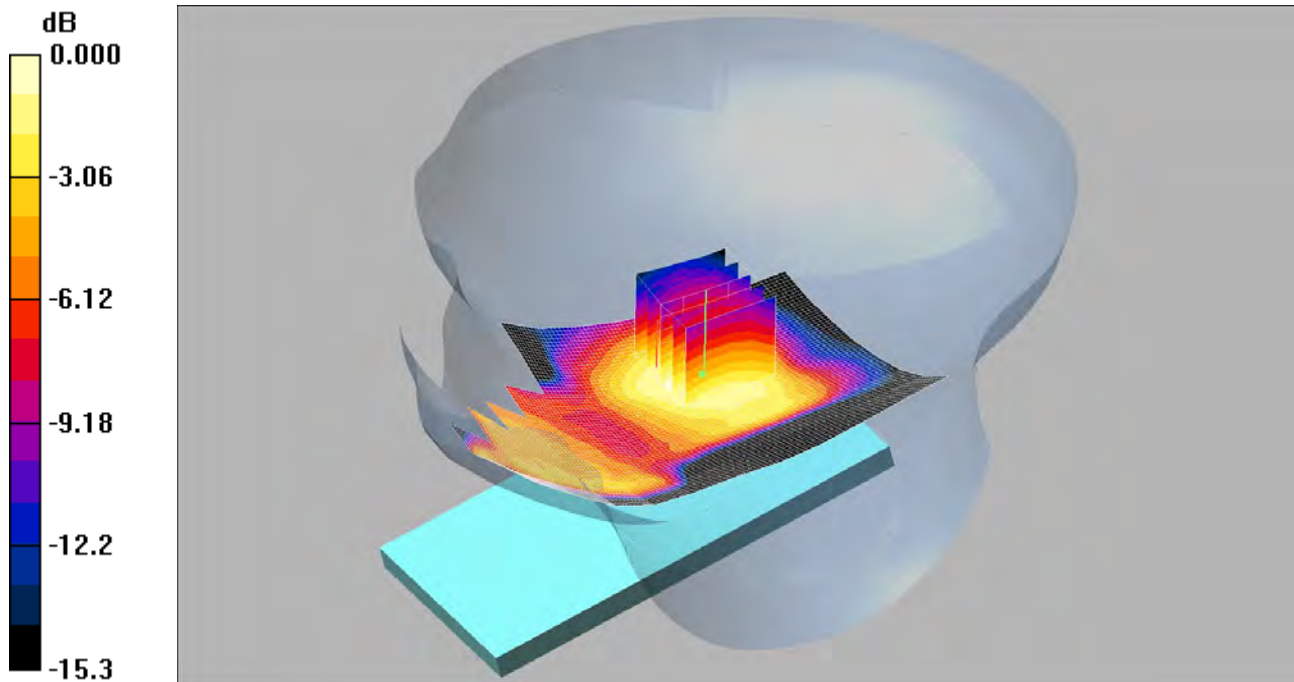

0 dB = 0.165mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Right- Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.165 mW/g

Tilt Right- Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.20 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.208 W/kg


SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

178: Touch Left LTE Band 4 1.4MHz BW 1RB Middle CH20175

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

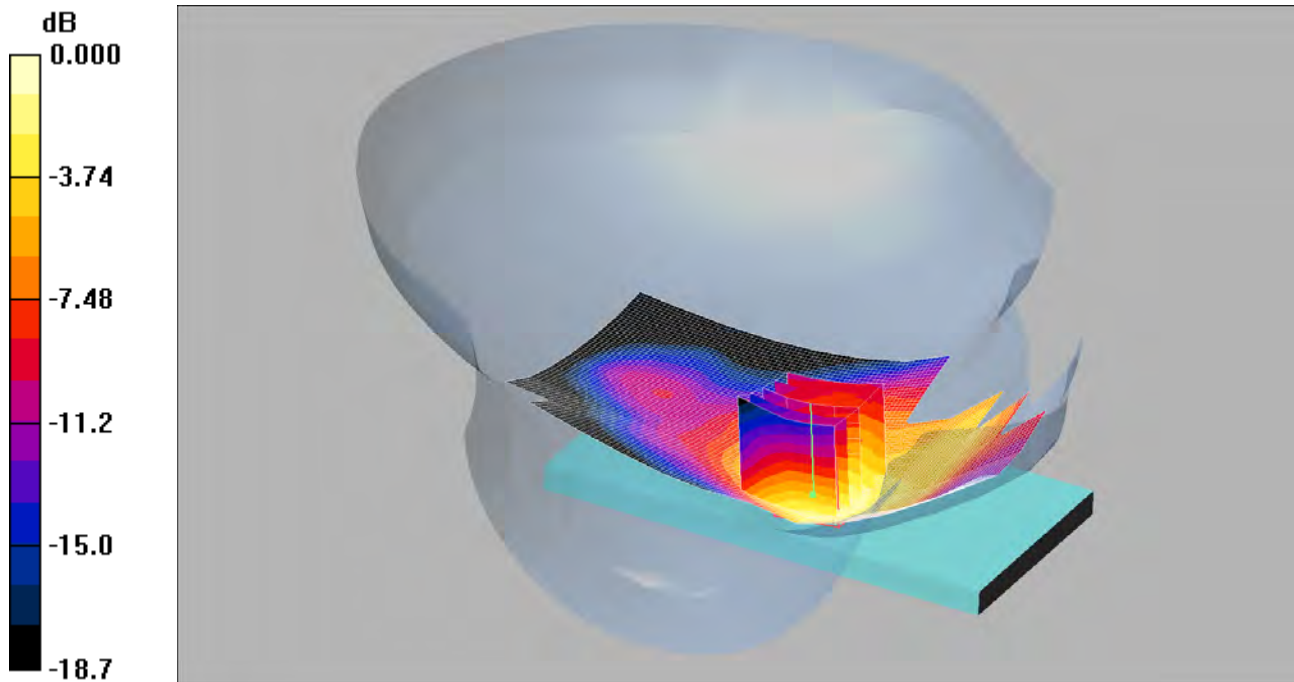

0 dB = 0.480mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.465 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.41 V/m; Power Drift = 0.138 dB

Peak SAR (extrapolated) = 0.599 W/kg


SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.272 mW/g

Maximum value of SAR (measured) = 0.480 mW/g

179: Touch Left LTE Band 4 1.4MHz BW 1RB Middle CH20393

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

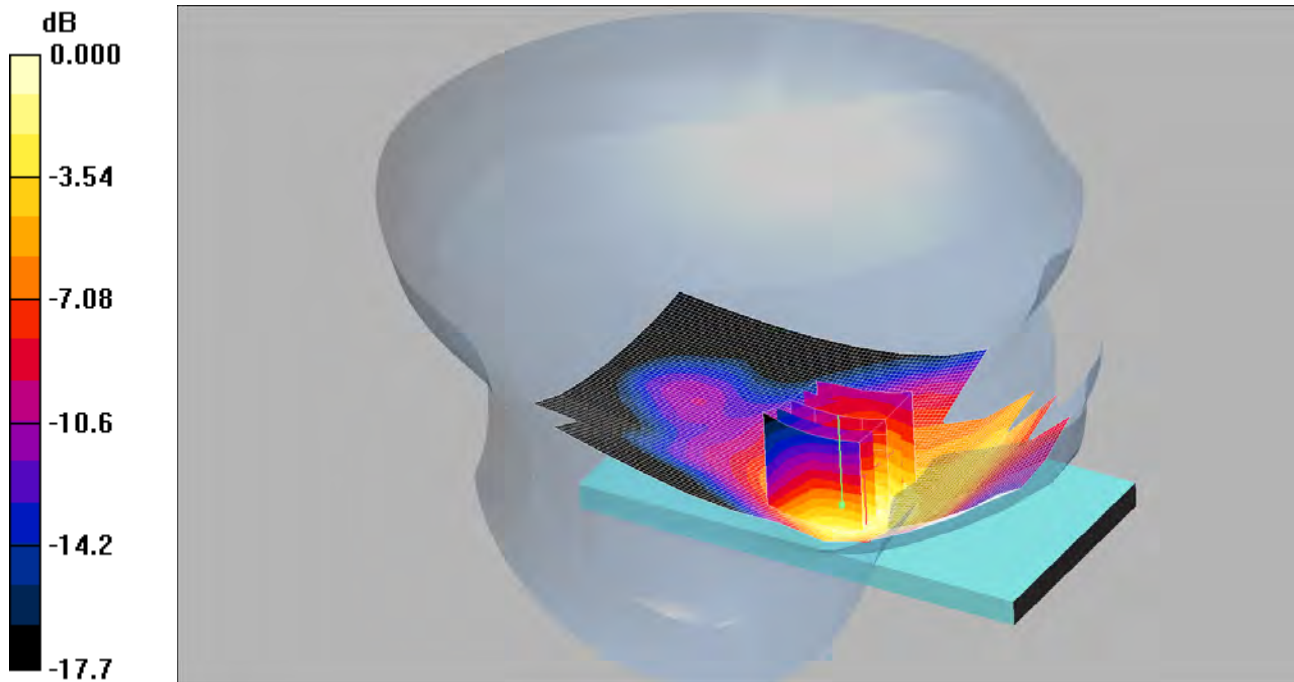

0 dB = 0.515mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1754.3 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1754.3$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.12, 5.12, 5.12); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.498 mW/g

Touch Left - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.37 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.638 W/kg


SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.292 mW/g

Maximum value of SAR (measured) = 0.515 mW/g

180: Front of EUT Facing Phantom LTE Band 4 1.4MHz BW 1RB Middle CH19957

Date: 17/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

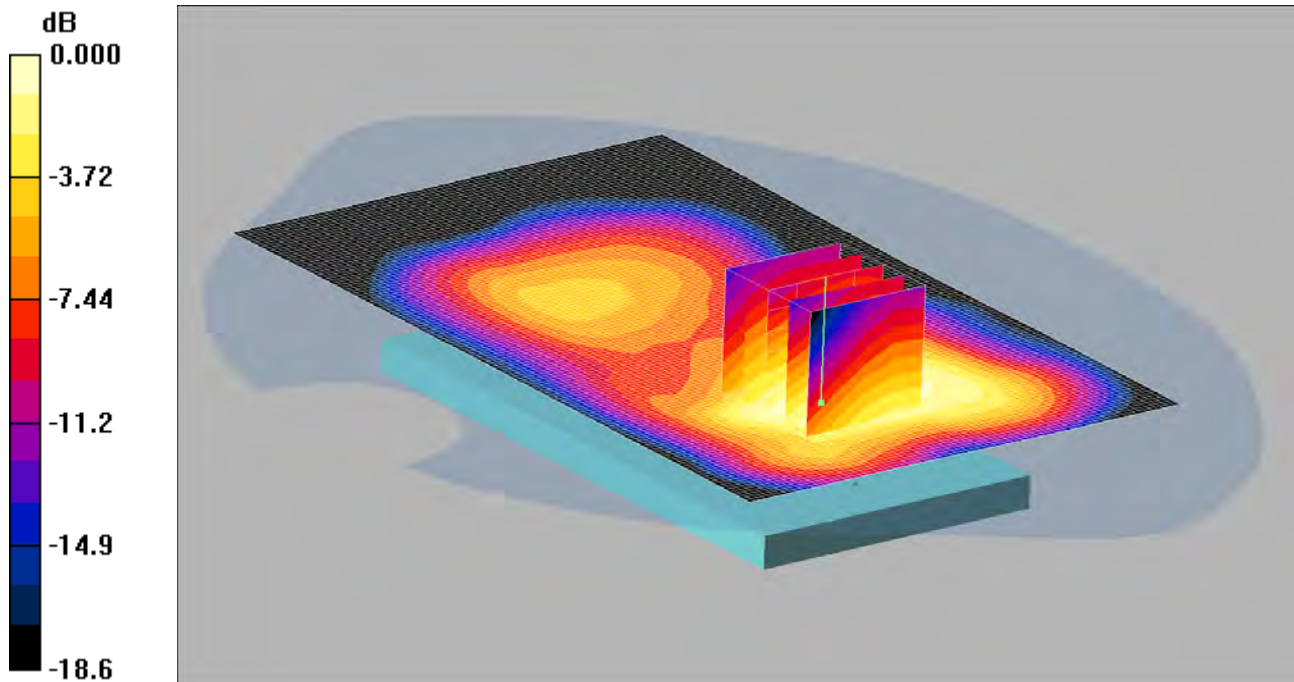

0 dB = 0.863mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.840 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 1.06 W/kg


SAR(1 g) = 0.819 mW/g; SAR(10 g) = 0.538 mW/g

Maximum value of SAR (measured) = 0.863 mW/g

181: Front of EUT Facing Phantom LTE Band 4 1.4MHz BW 1RB Middle CH20175

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

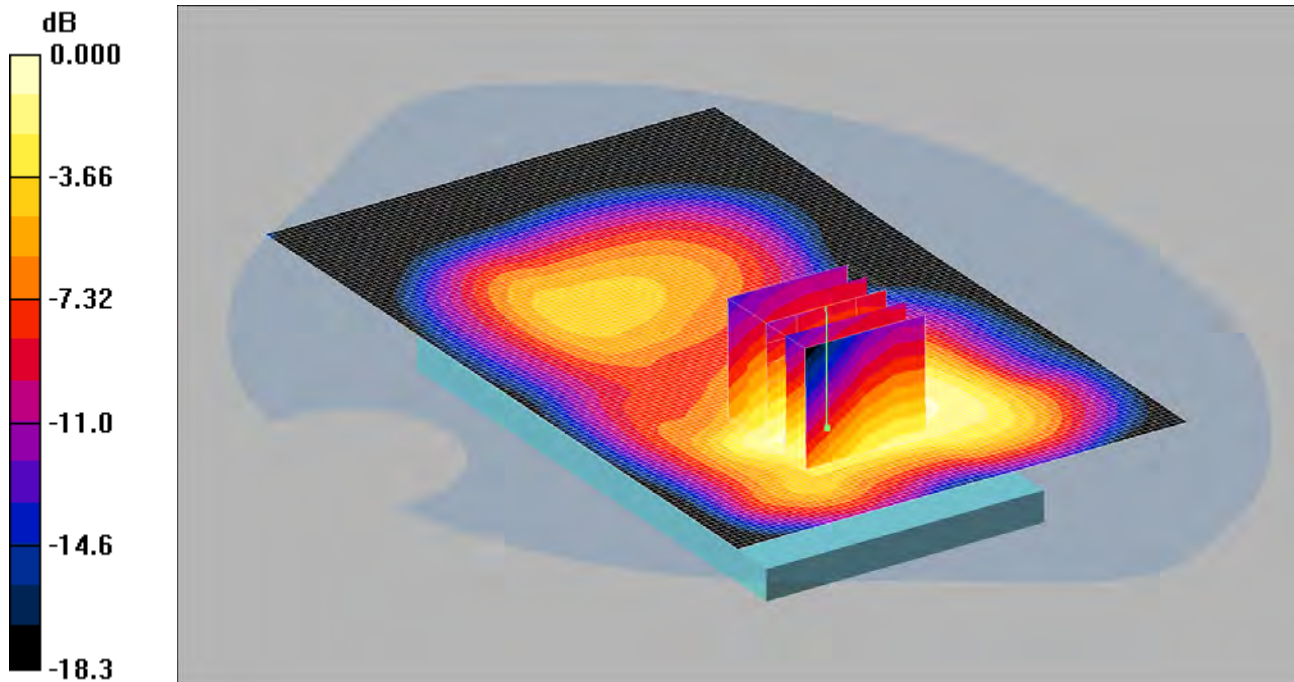

0 dB = 0.912mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.897 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 1.14 W/kg


SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.570 mW/g

Maximum value of SAR (measured) = 0.912 mW/g

182: Front of EUT Facing Phantom LTE Band 4 1.4MHz BW 1RB Middle CH20393

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

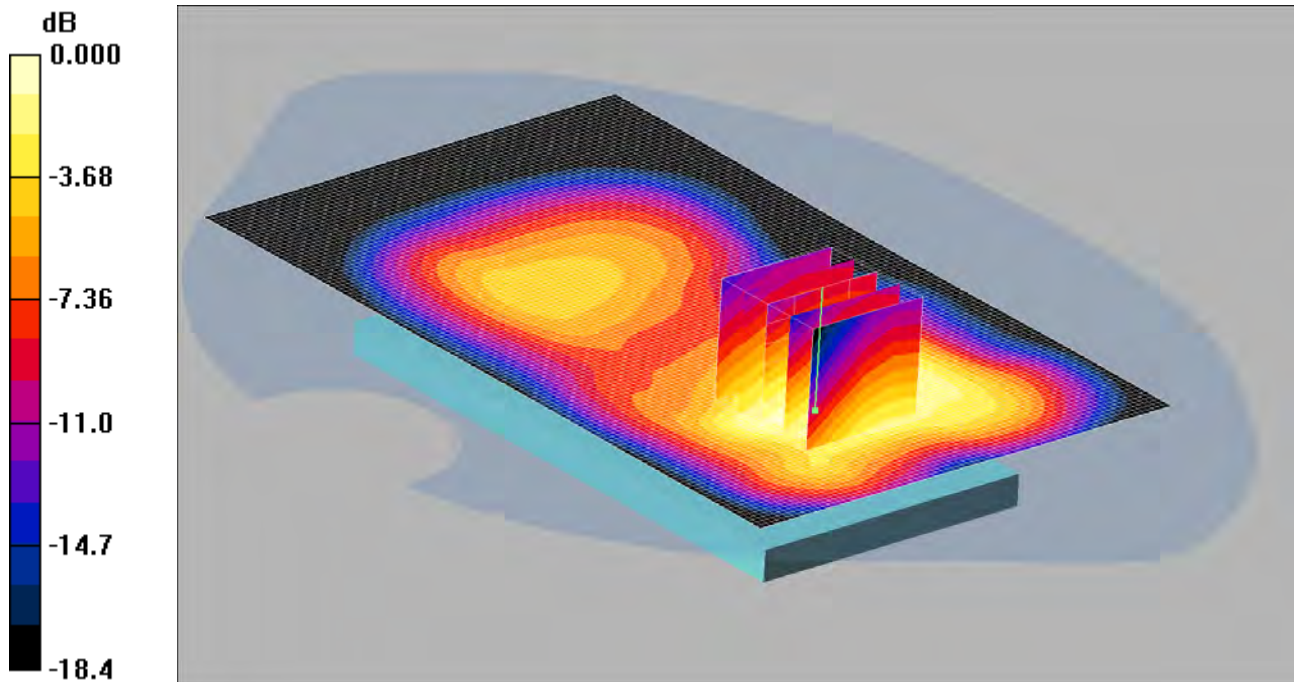

0 dB = 0.928mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1754.3 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1754.3$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.899 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 1.16 W/kg


SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.572 mW/g

Maximum value of SAR (measured) = 0.928 mW/g

183: Front of EUT Facing Phantom LTE Band 4 1.4MHz BW 50%RB Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

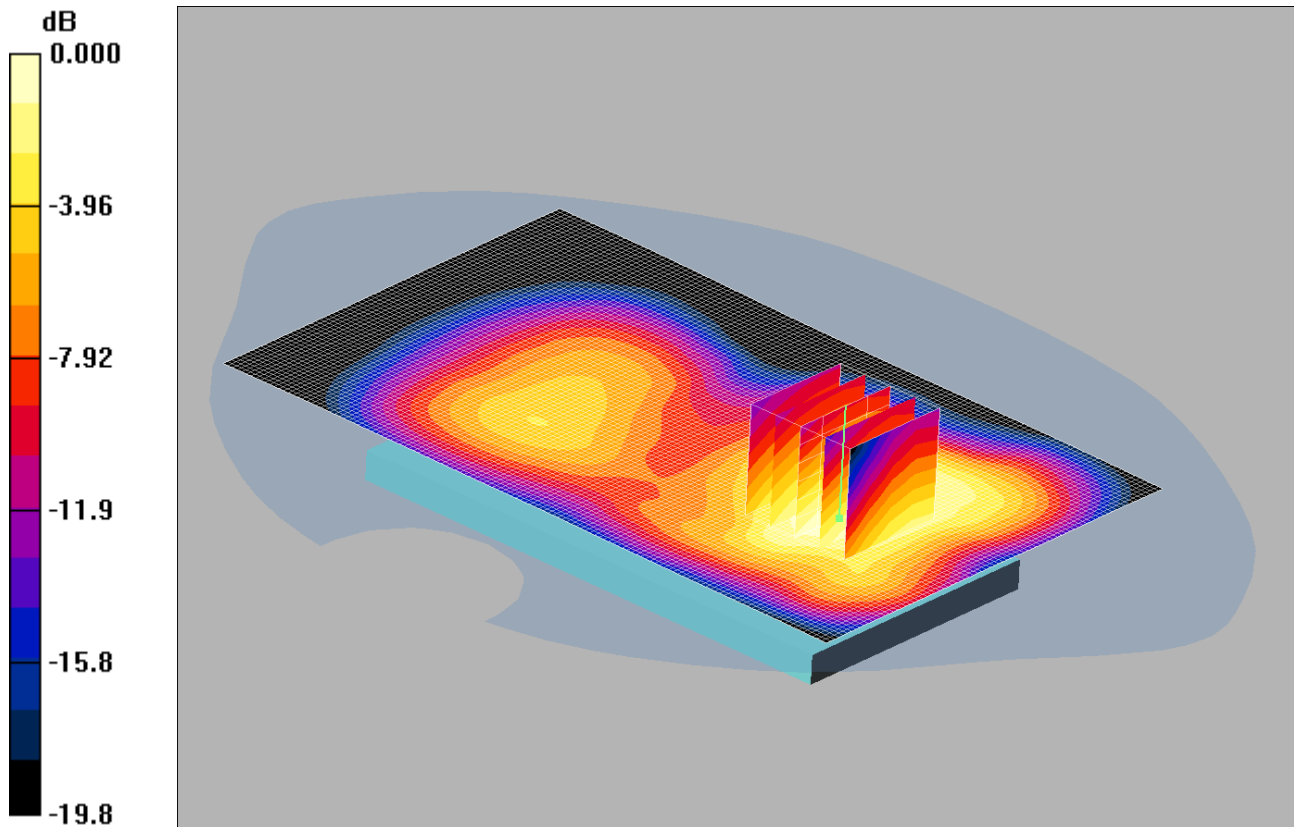

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1
Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.850 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.33 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 1.09 W/kg


SAR(1 g) = 0.819 mW/g; SAR(10 g) = 0.547 mW/g

Maximum value of SAR (measured) = 0.867 mW/g

184: Front of EUT Facing Phantom LTE Band 4 1.4MHz BW 50%RB Middle CH20175

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

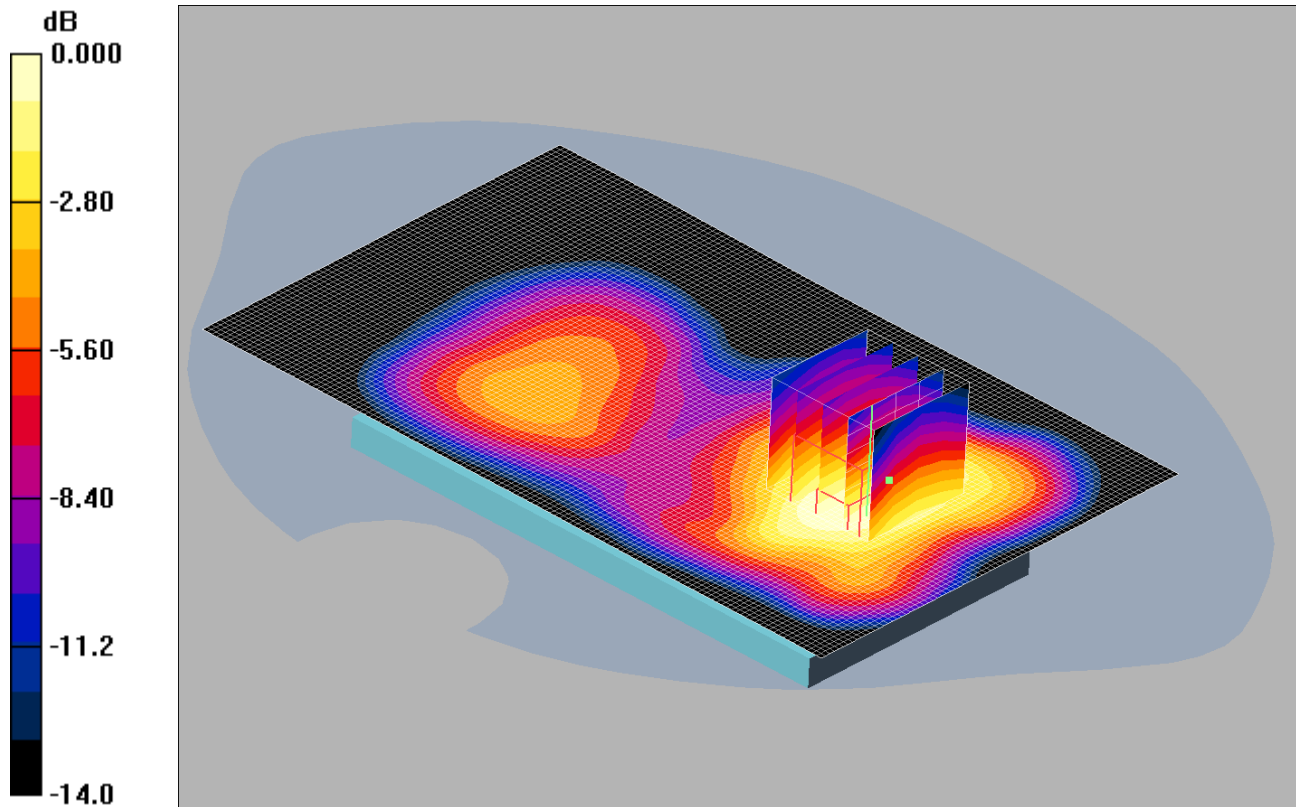

0 dB = 0.846mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.856 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.14 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.06 W/kg


SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.539 mW/g

Maximum value of SAR (measured) = 0.846 mW/g

185: Front of EUT Facing Phantom LTE Band 4 1.4MHz BW 50%RB Middle CH20393

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

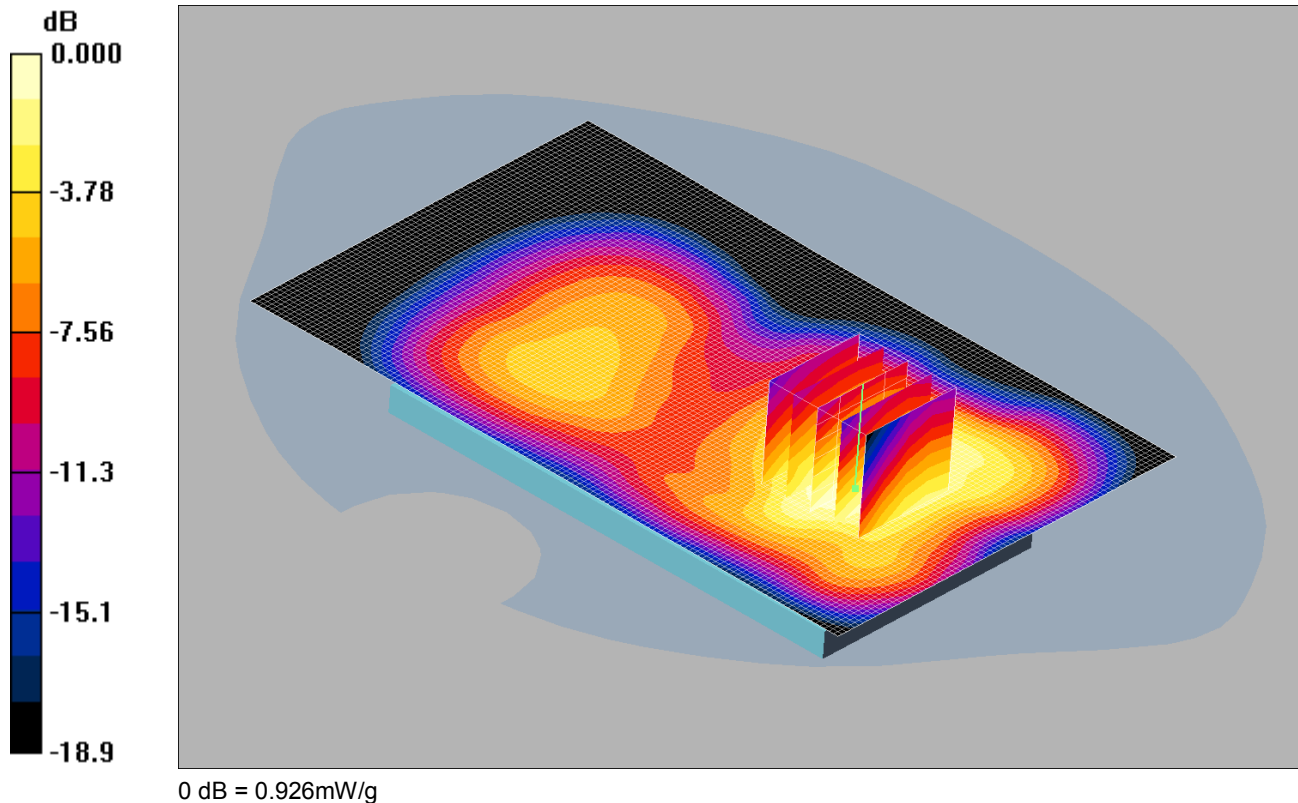

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1754.3 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1754.3$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.916 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.38 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.16 W/kg


SAR(1 g) = 0.874 mW/g; SAR(10 g) = 0.584 mW/g

Maximum value of SAR (measured) = 0.926 mW/g

186: Front of EUT Facing Phantom LTE Band 4 1.4MHz BW 100% Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

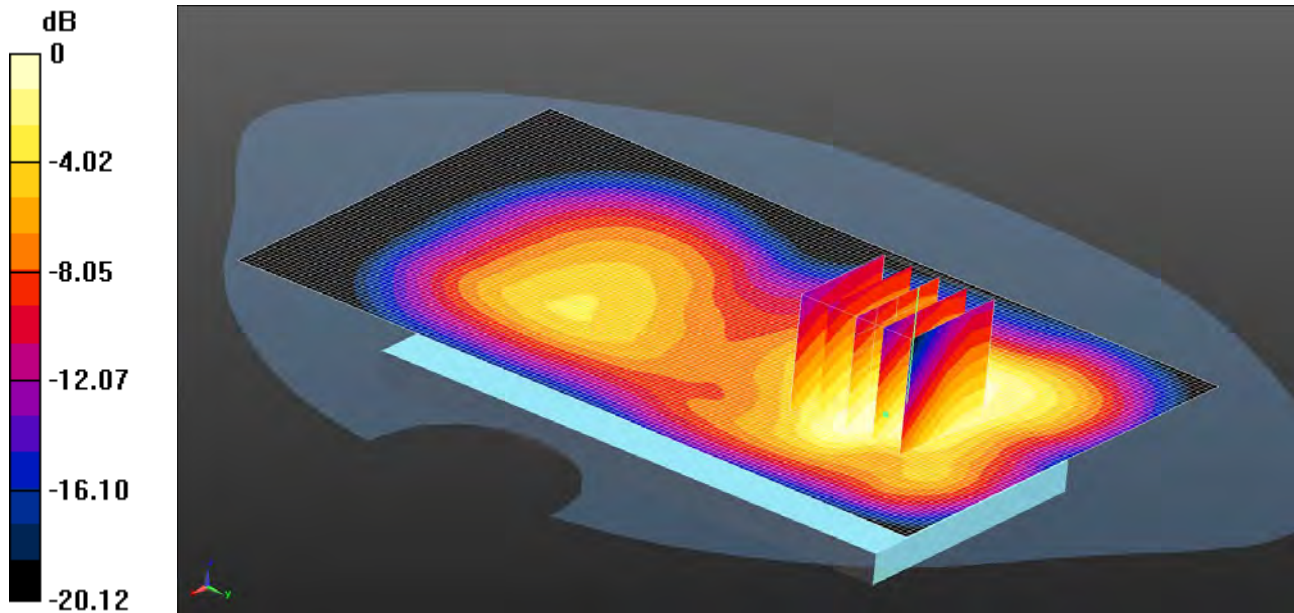

0 dB = 0.634 W/kg = -1.98 dBW/kg

Communication System: UID 0 - n/a, LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1
Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.453$ S/m; $\epsilon_r = 51.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 20/09/2012
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.659 W/kg

Configuration/Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.511 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.790 W/kg


SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.407 W/kg

Maximum value of SAR (measured) = 0.634 W/kg

187: Back of EUT Facing Phantom LTE Band 4 1.4MHz BW 1RB Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

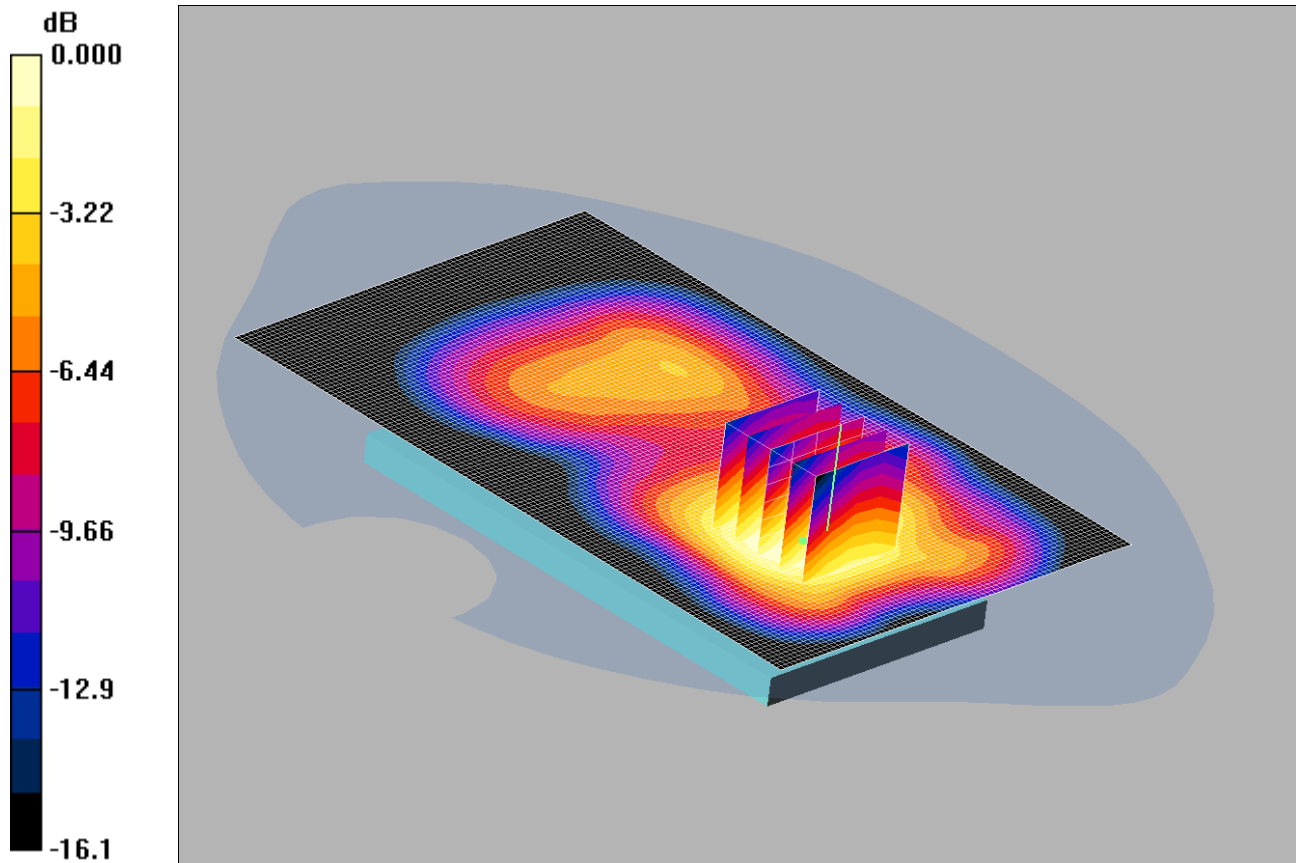

0 dB = 0.885mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.947 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 1.08 W/kg


SAR(1 g) = 0.836 mW/g; SAR(10 g) = 0.570 mW/g

Maximum value of SAR (measured) = 0.885 mW/g

188: Back of EUT Facing Phantom LTE Band 4 1.4MHz BW 1RB Middle CH20175

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

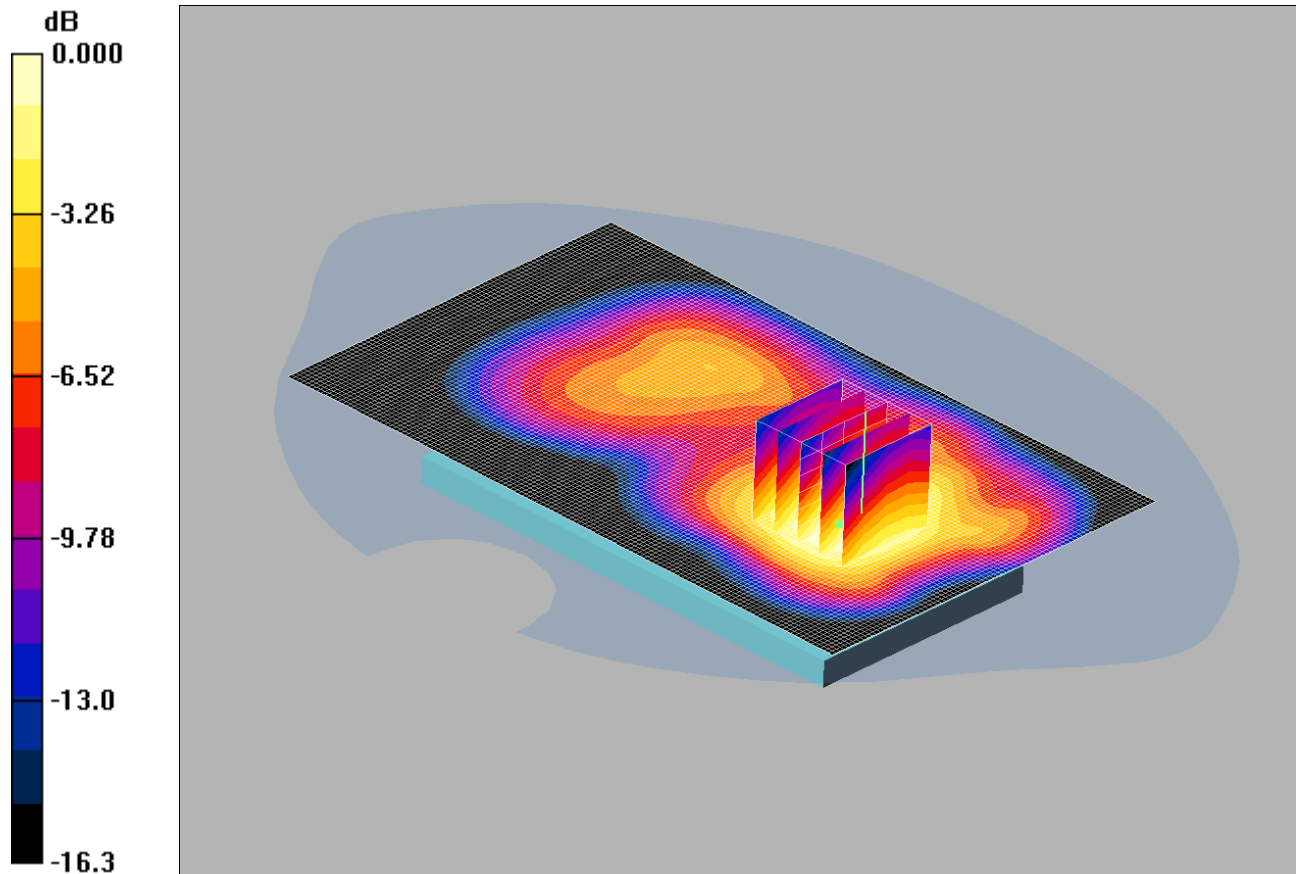

0 dB = 0.912mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.999 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.12 W/kg


SAR(1 g) = 0.865 mW/g; SAR(10 g) = 0.594 mW/g

Maximum value of SAR (measured) = 0.912 mW/g

189: Back of EUT Facing Phantom LTE Band 4 1.4MHz BW 1RB Middle CH20393

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

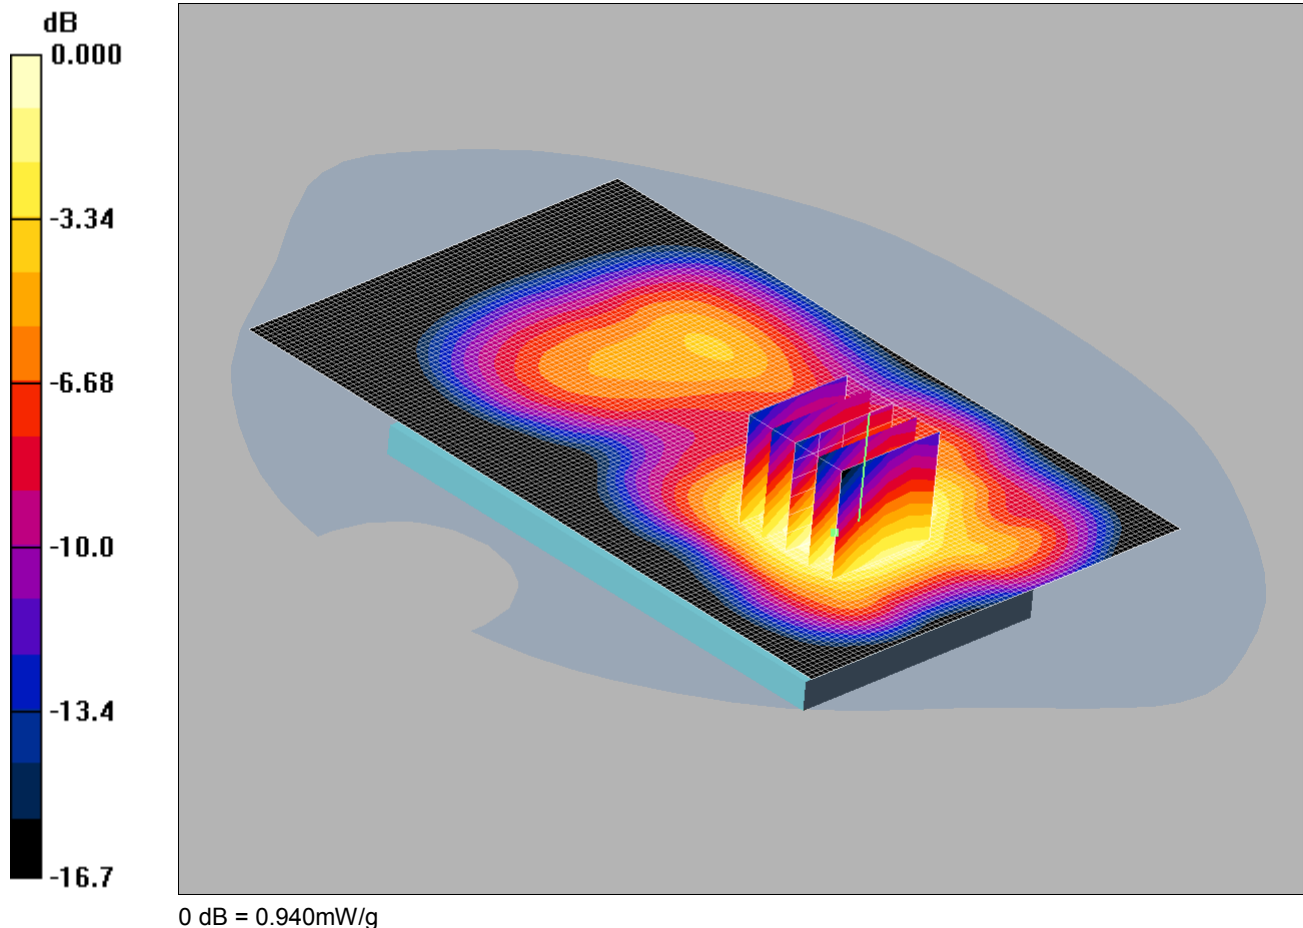

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1754.3 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1754.3$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.00 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 1.16 W/kg


SAR(1 g) = 0.892 mW/g; SAR(10 g) = 0.607 mW/g

Maximum value of SAR (measured) = 0.940 mW/g

190: Back of EUT Facing Phantom LTE Band 4 1.4MHz BW 50%RB Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

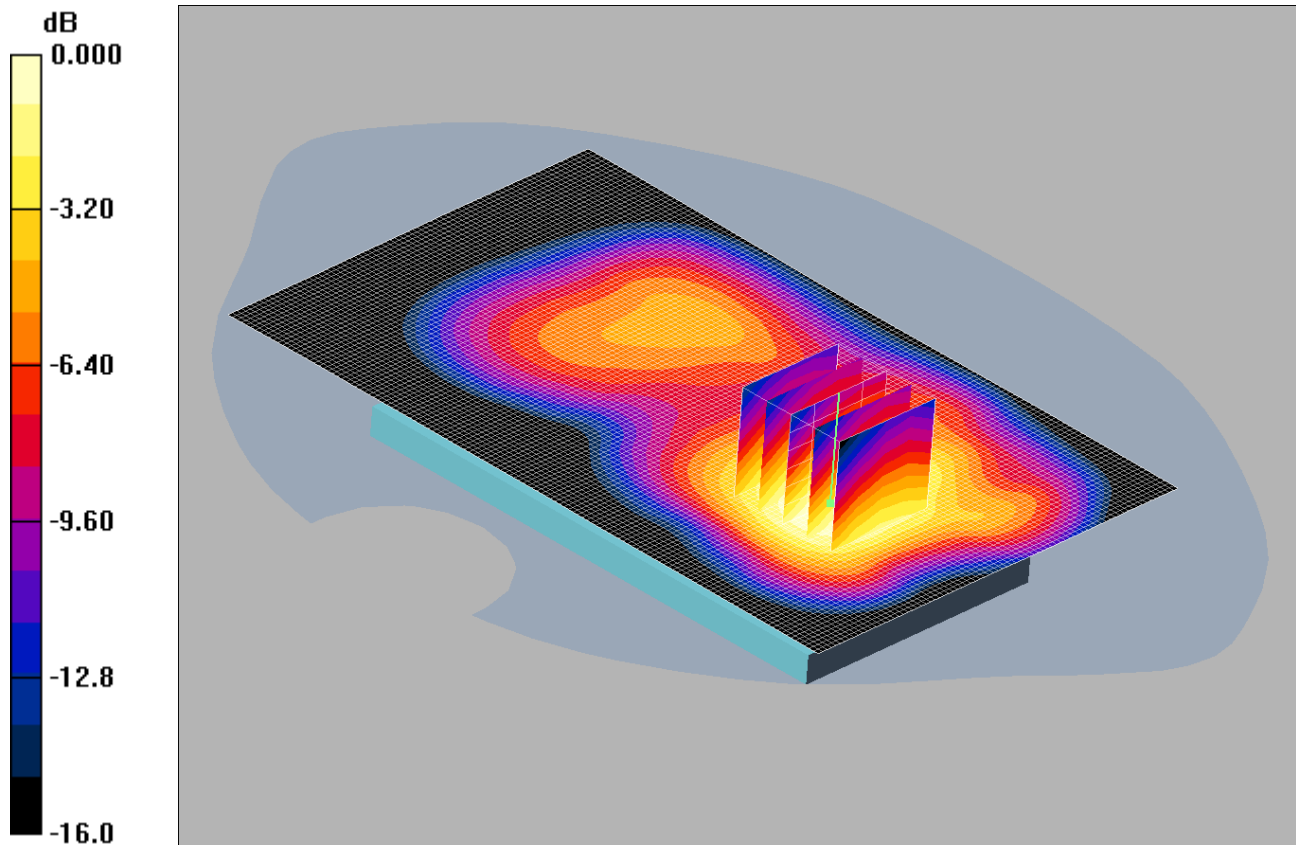

0 dB = 0.879mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.950 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.07 W/kg


SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 0.879 mW/g

191: Back of EUT Facing Phantom LTE Band 4 1.4MHz BW 50%RB Middle CH20175

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

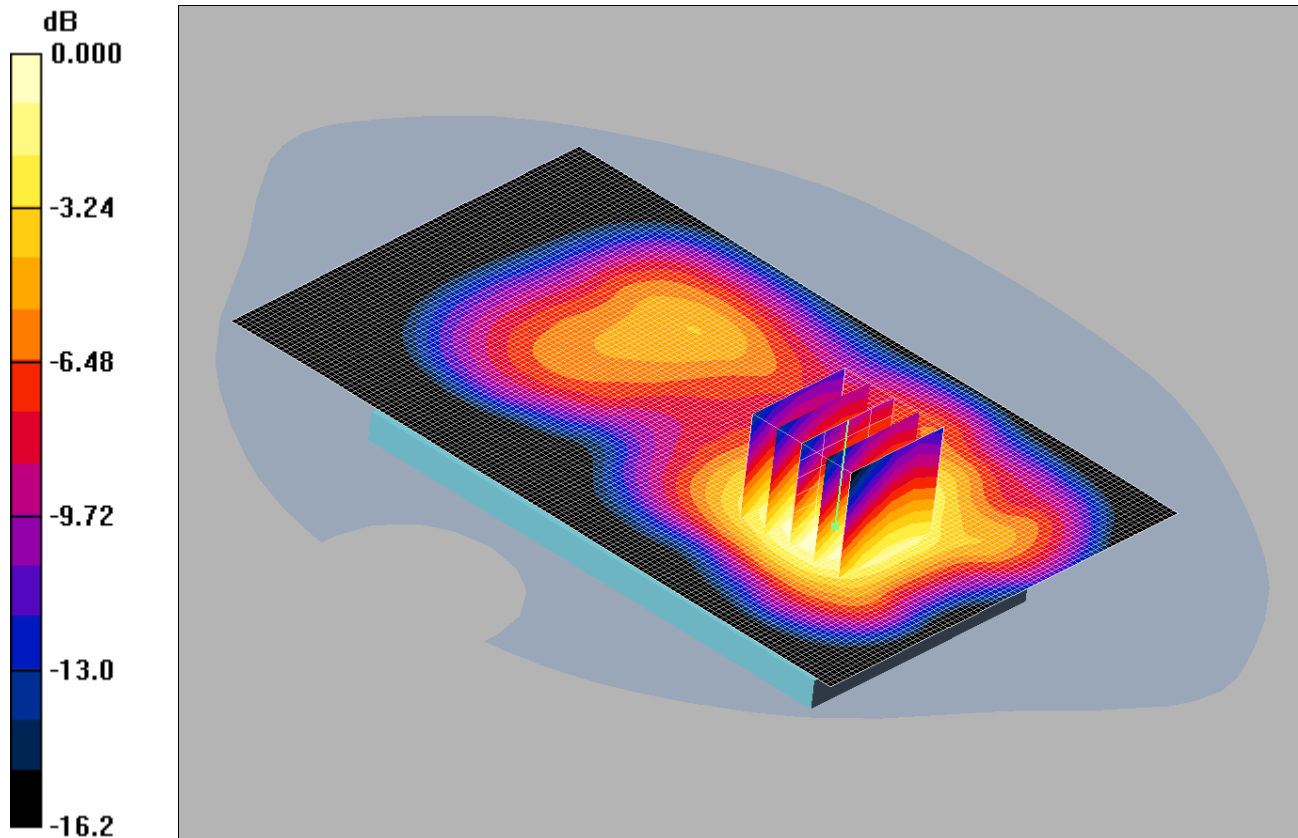

0 dB = 0.888mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.976 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 1.08 W/kg


SAR(1 g) = 0.842 mW/g; SAR(10 g) = 0.577 mW/g

Maximum value of SAR (measured) = 0.888 mW/g

192: Back of EUT Facing Phantom LTE Band 4 1.4MHz BW 50%RB Middle CH20393

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

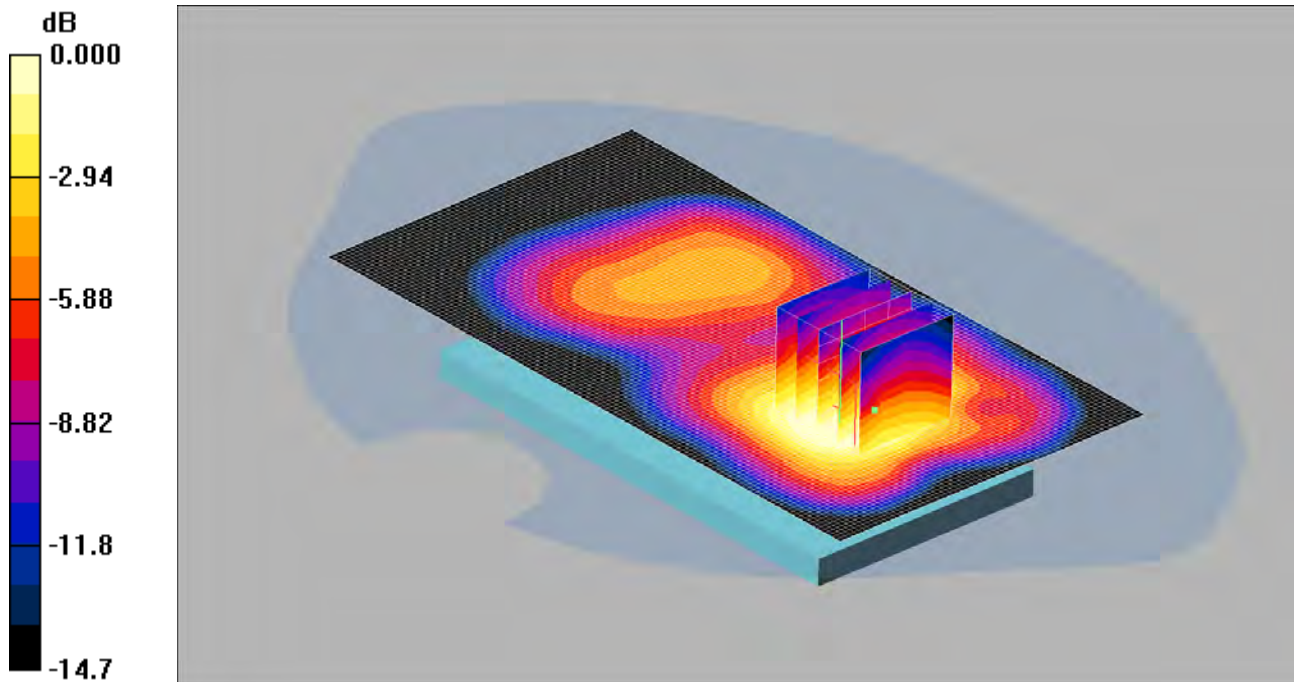

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1754.3 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1754.3$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - High/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 1.23 W/kg


SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.627 mW/g

Maximum value of SAR (measured) = 0.985 mW/g

193: Back of EUT Facing Phantom LTE Band 4 1.4MHz BW 100%RB CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

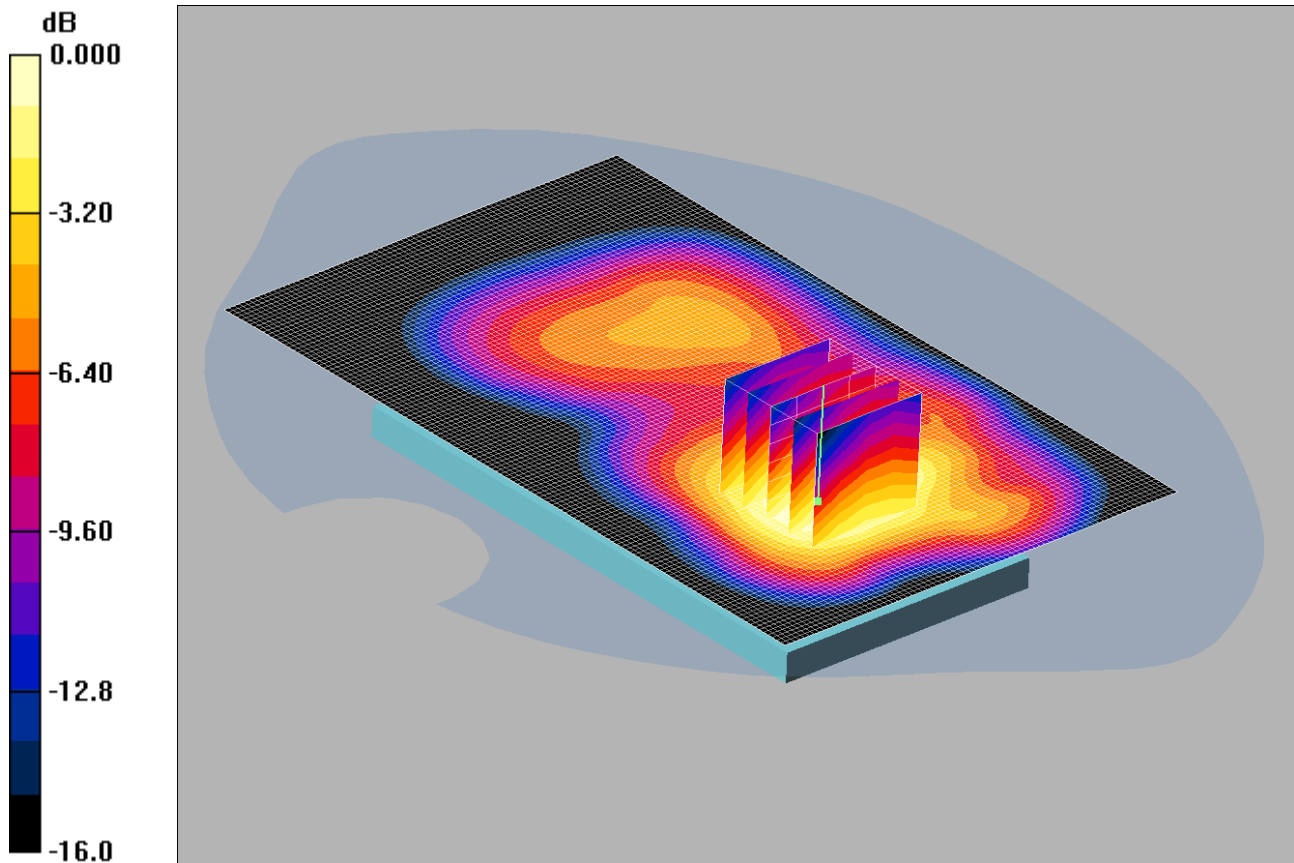

0 dB = 0.697mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.763 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.39 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.873 W/kg


SAR(1 g) = 0.658 mW/g; SAR(10 g) = 0.449 mW/g

Maximum value of SAR (measured) = 0.697 mW/g

194: Left Hand Side of EUT Facing Phantom LTE Band 4 1.4MHz BW 1RB Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

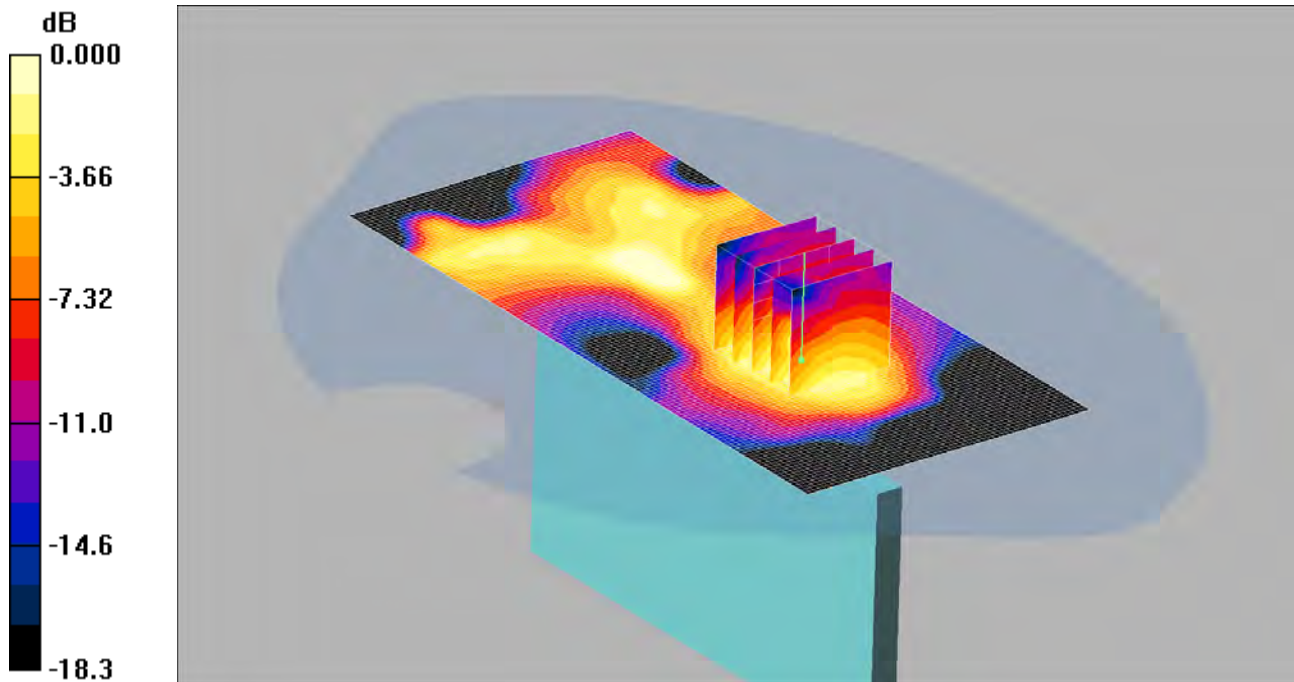

0 dB = 0.139mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Low/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.143 mW/g

Left Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.59 V/m; Power Drift = 0.191 dB

Peak SAR (extrapolated) = 0.180 W/kg


SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.079 mW/g

Maximum value of SAR (measured) = 0.139 mW/g

195: Left Hand Side of EUT Facing Phantom LTE Band 4 1.4MHz BW 50%RB Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

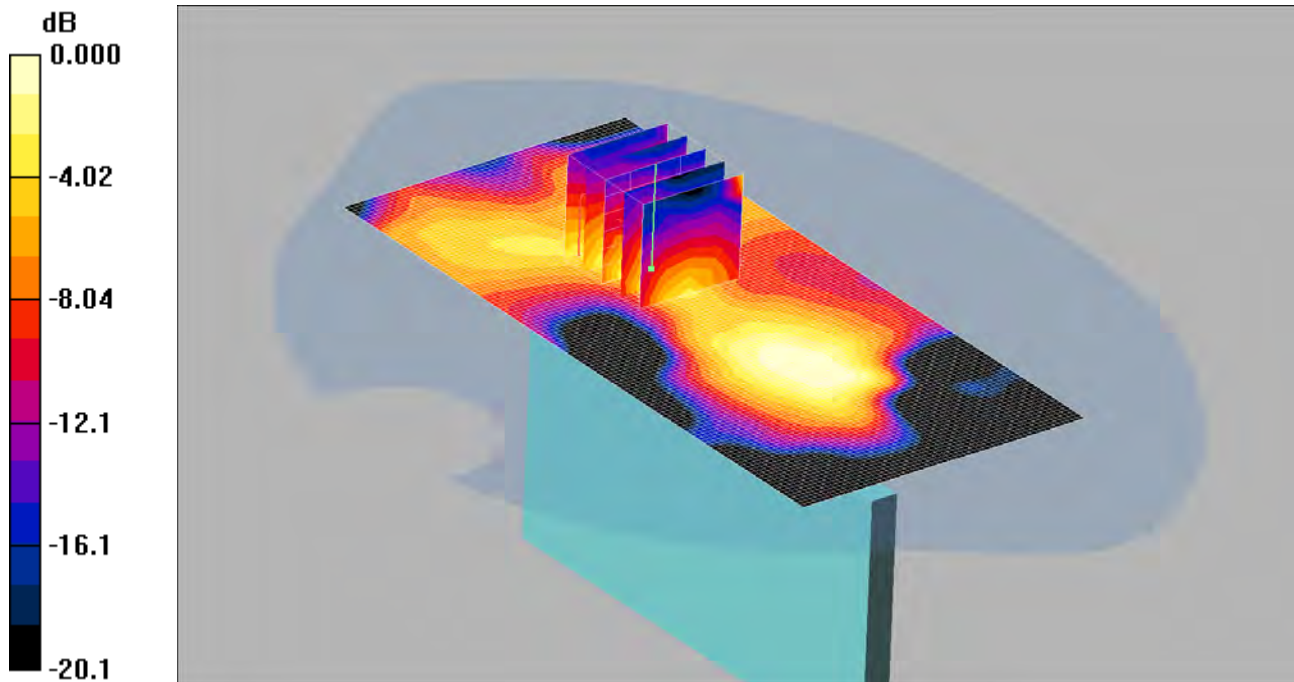

0 dB = 0.155mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Low/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.146 mW/g

Left Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.56 V/m; Power Drift = 0.115 dB

Peak SAR (extrapolated) = 0.159 W/kg


SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.155 mW/g

196: Right Hand Side of EUT Facing Phantom LTE Band 4 1.4MHz BW 1RB Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

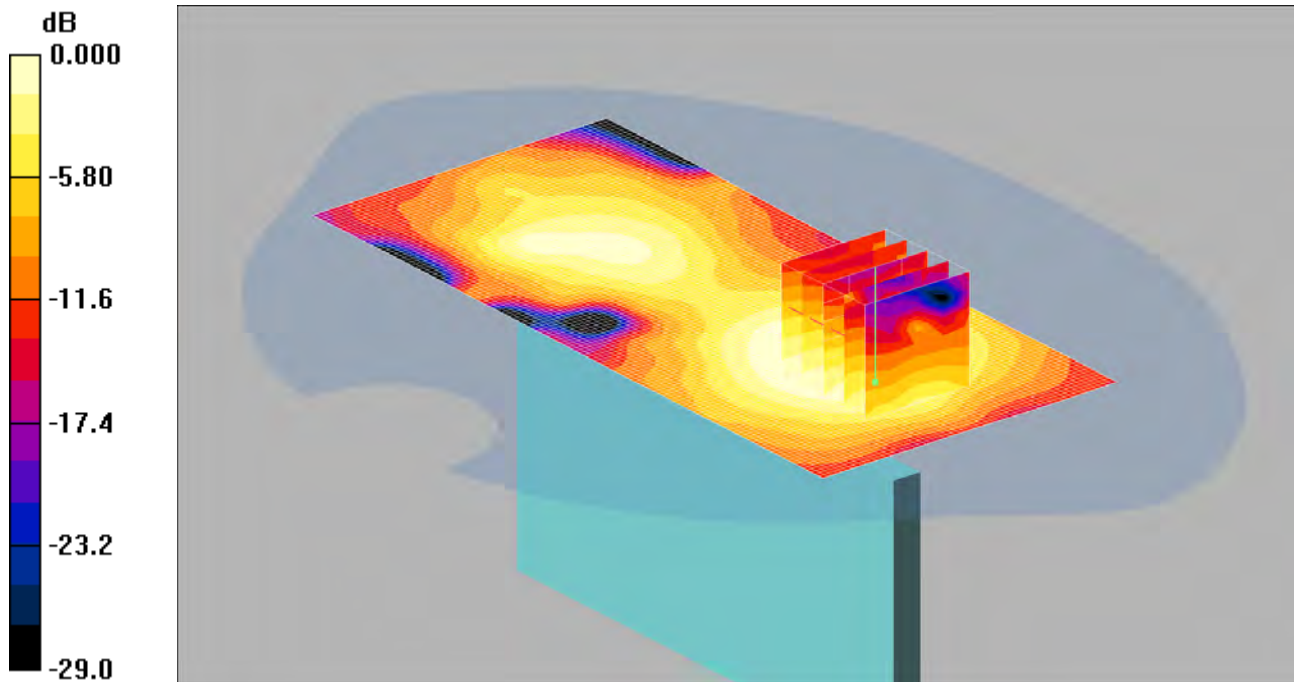

0 dB = 0.143mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Low/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.152 mW/g

Right Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.85 V/m; Power Drift = 0.168 dB

Peak SAR (extrapolated) = 0.480 W/kg


SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.143 mW/g

197: Right Hand Side of EUT Facing Phantom LTE Band 4 1.4MHz BW 50%RB Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

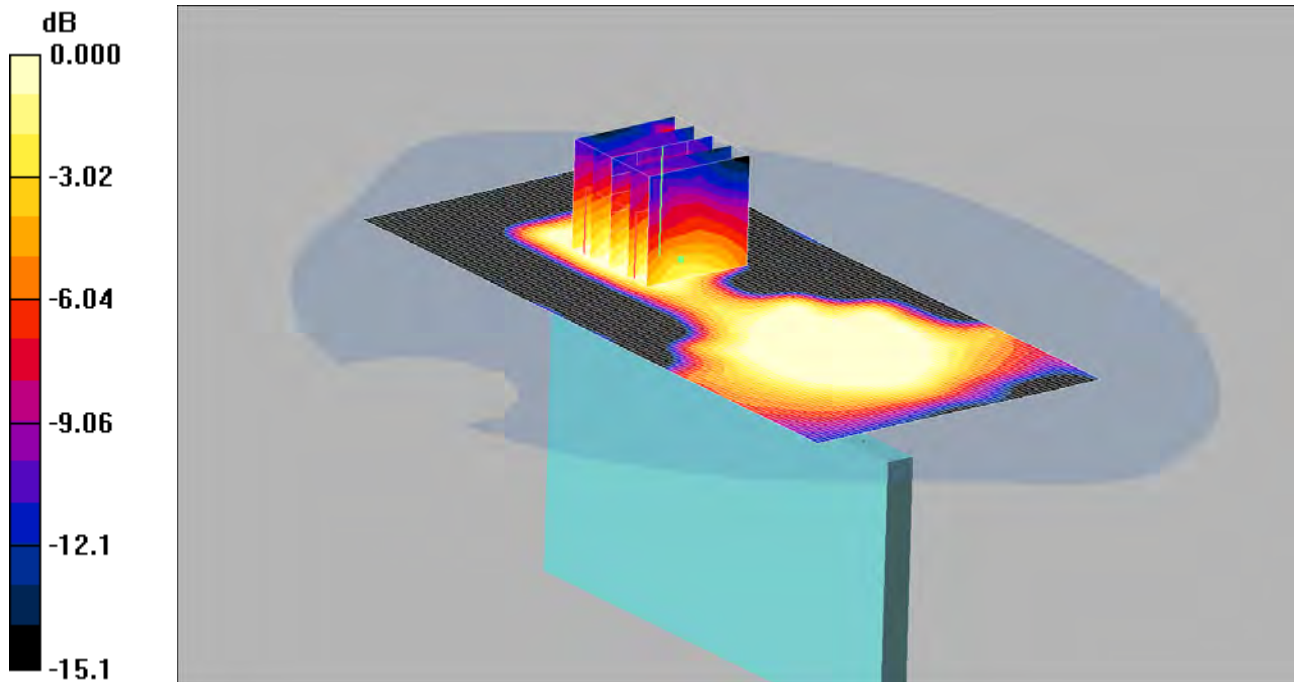

0 dB = 0.104mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Low/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.144 mW/g

Right Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.04 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.133 W/kg


SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.104 mW/g

198: Bottom of EUT Facing Phantom LTE Band 4 1.4MHz BW 1RB Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

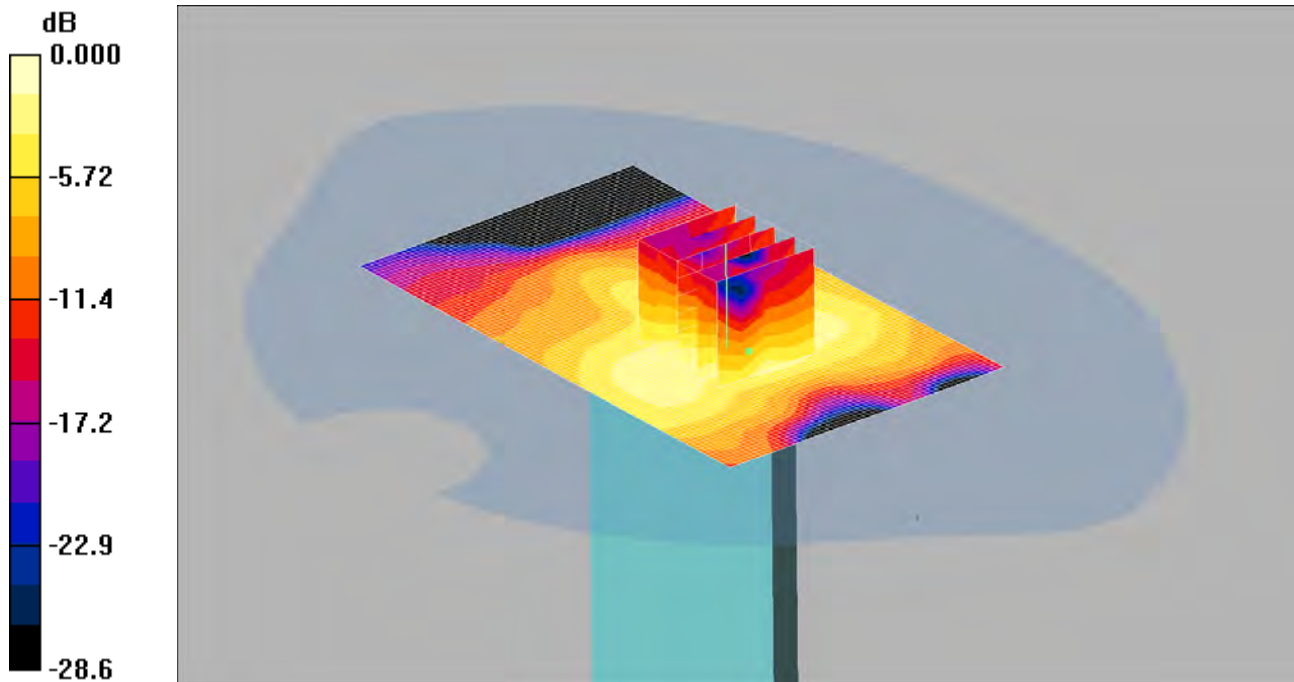

0 dB = 0.188mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.172 mW/g

Bottom of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.11 V/m; Power Drift = 0.172 dB

Peak SAR (extrapolated) = 0.311 W/kg


SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.188 mW/g

199: Bottom of EUT Facing Phantom LTE Band 4 1.4MHz BW 50%RB Middle CH19957

Date: 18/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

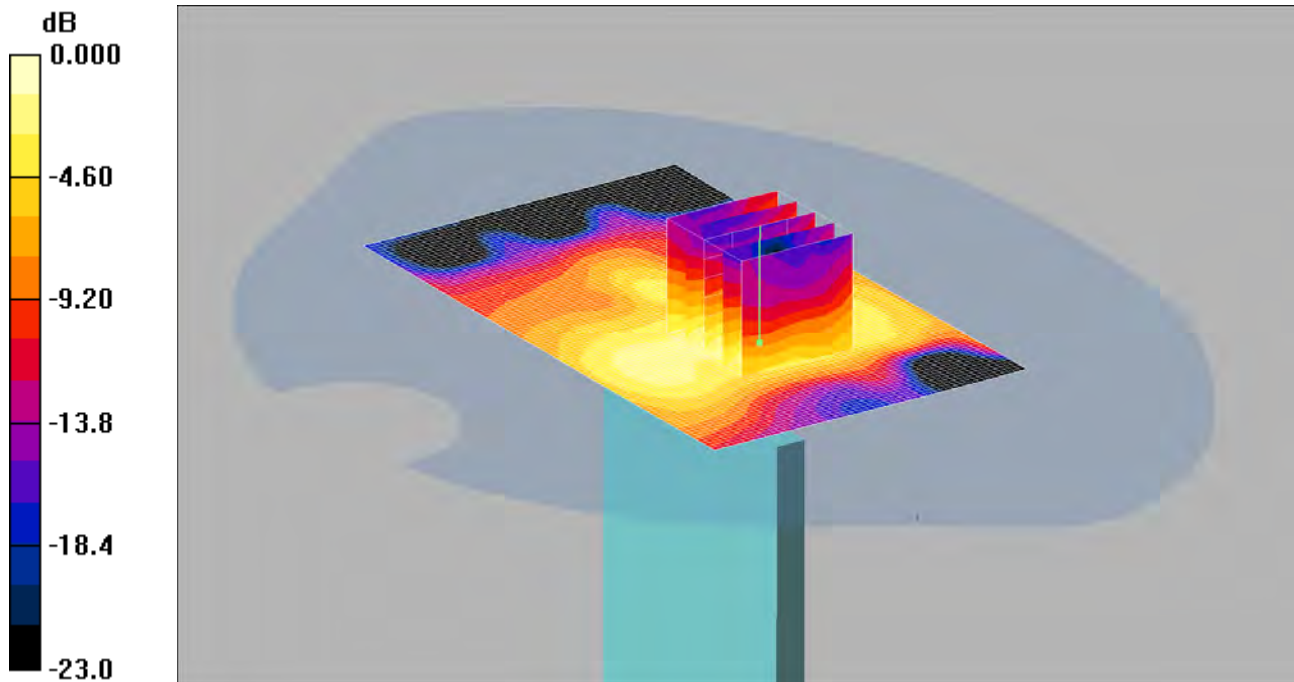

0 dB = 0.166mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1710.7 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1710.7$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.180 mW/g

Bottom of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.88 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.247 W/kg


SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.166 mW/g

200: Front of EUT Facing Phantom at 15mm LTE Band 4 1.4MHz BW 50%RB Middle CH20393

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

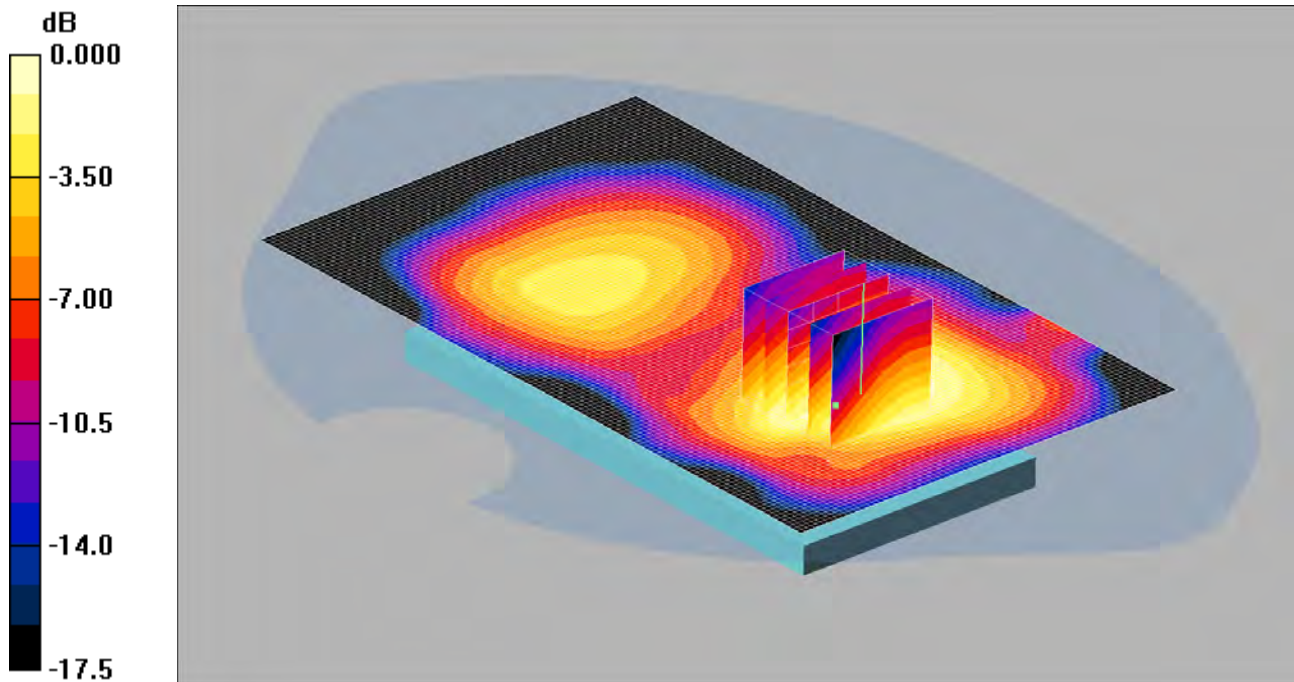

0 dB = 0.609mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1754.3 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1754.3$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom at 15mm- High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.603 mW/g

Front of EUT Facing Phantom at 15mm- High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.26 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 0.763 W/kg


SAR(1 g) = 0.574 mW/g; SAR(10 g) = 0.385 mW/g

Maximum value of SAR (measured) = 0.609 mW/g

201: Back of EUT Facing Phantom at 15mm LTE Band 4 1.4MHz BW 50%RB Middle CH20393

Date: 19/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

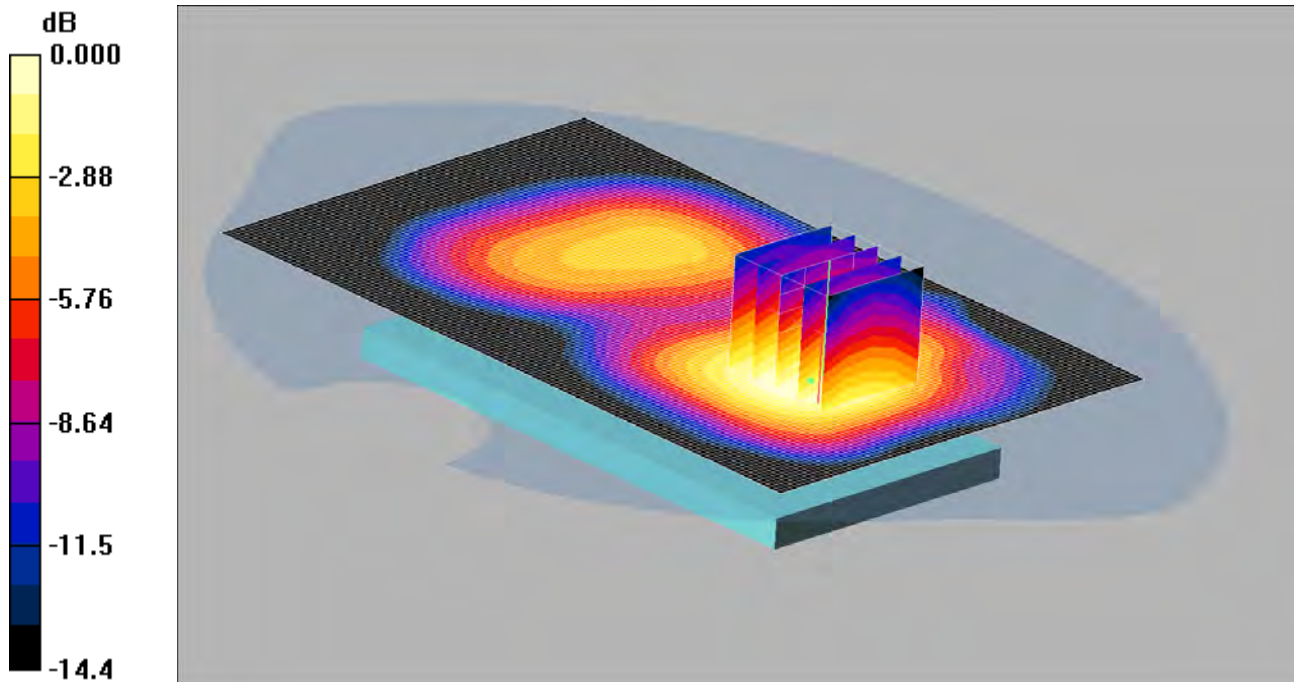

0 dB = 0.650mW/g

Communication System: LTE - Band 4 / 1.4MHz Channel; Frequency: 1754.3 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1754.3$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom at 15mm- High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.686 mW/g

Back of EUT Facing Phantom at 15mm- High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.27 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.801 W/kg


SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 0.650 mW/g

202: Touch Left LTE Band 5 10MHz BW 1RB High End CH20525

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

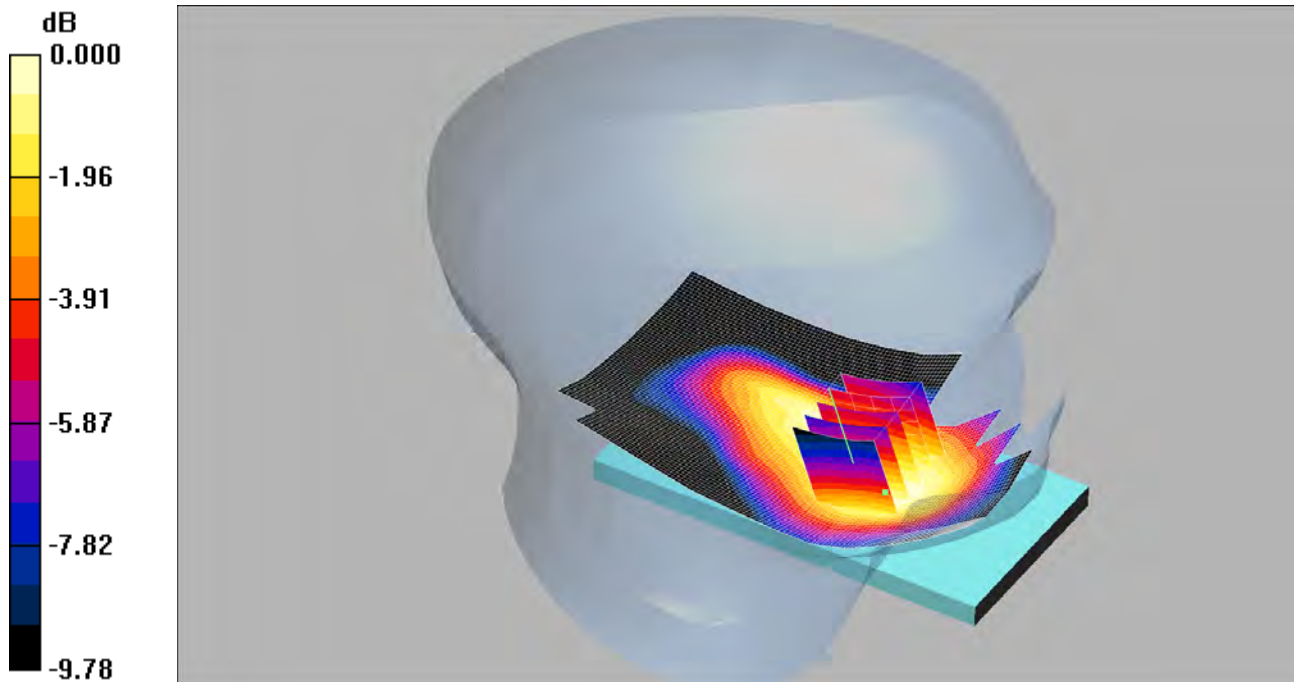

0 dB = 0.349mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.350 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.403 W/kg


SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.265 mW/g

Maximum value of SAR (measured) = 0.349 mW/g

203: Touch Left LTE Band 5 10MHz BW 50%RB Low End CH20600

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

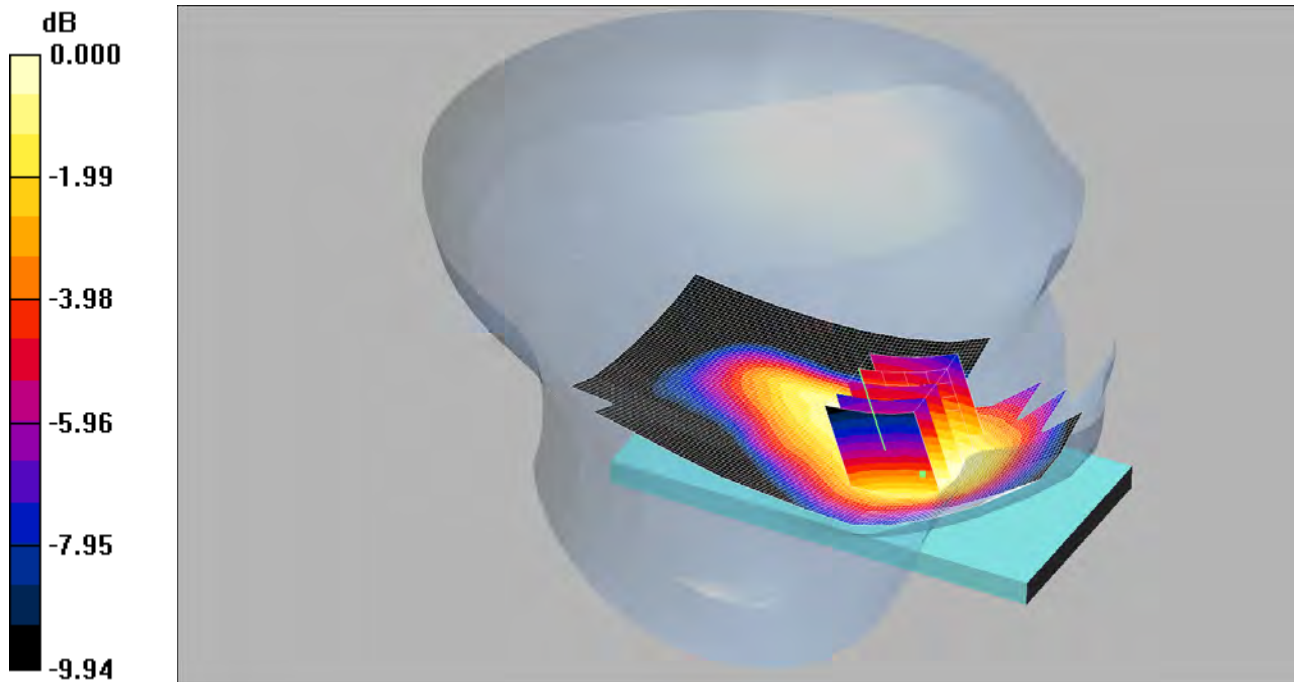

0 dB = 0.287mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.293 mW/g

Touch Left - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.93 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.335 W/kg


SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.216 mW/g

Maximum value of SAR (measured) = 0.287 mW/g

204: Tilt Left LTE Band 5 10MHz BW 1RB High End CH20525

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

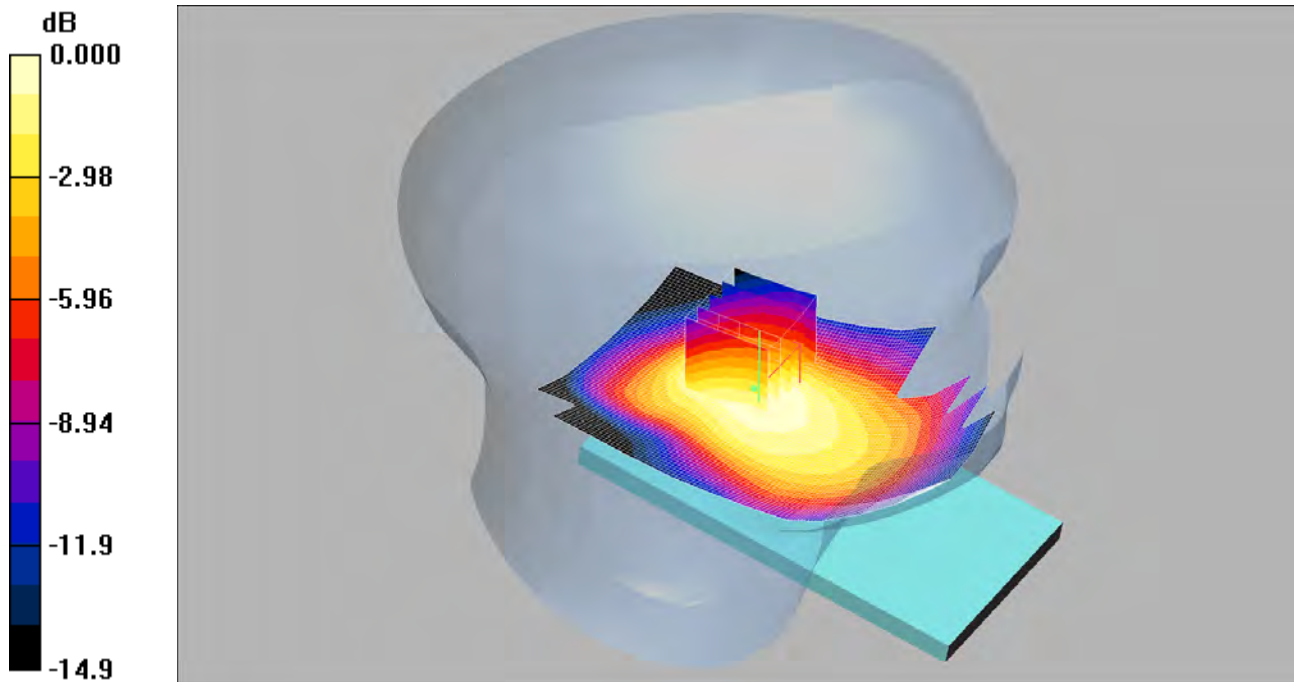

0 dB = 0.219mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.220 mW/g

Tilt Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.256 W/kg


SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

205: Tilt Left LTE Band 5 10MHz BW 50%RB Low End CH20600

Date: 24/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

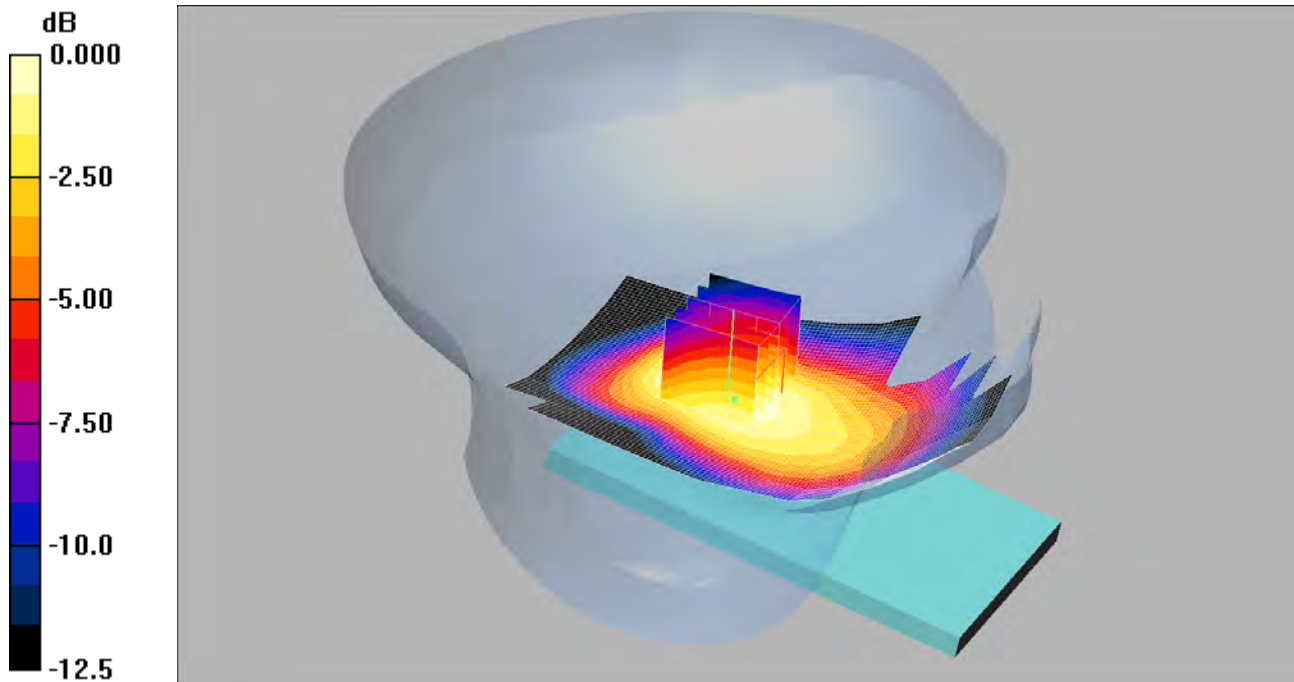

0 dB = 0.177mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz;Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.175 mW/g

Tilt Left - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.206 W/kg


SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.124 mW/g

Maximum value of SAR (measured) = 0.177 mW/g

206: Touch Right LTE Band 5 10MHz BW 1RB High End CH20525

Date: 25/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

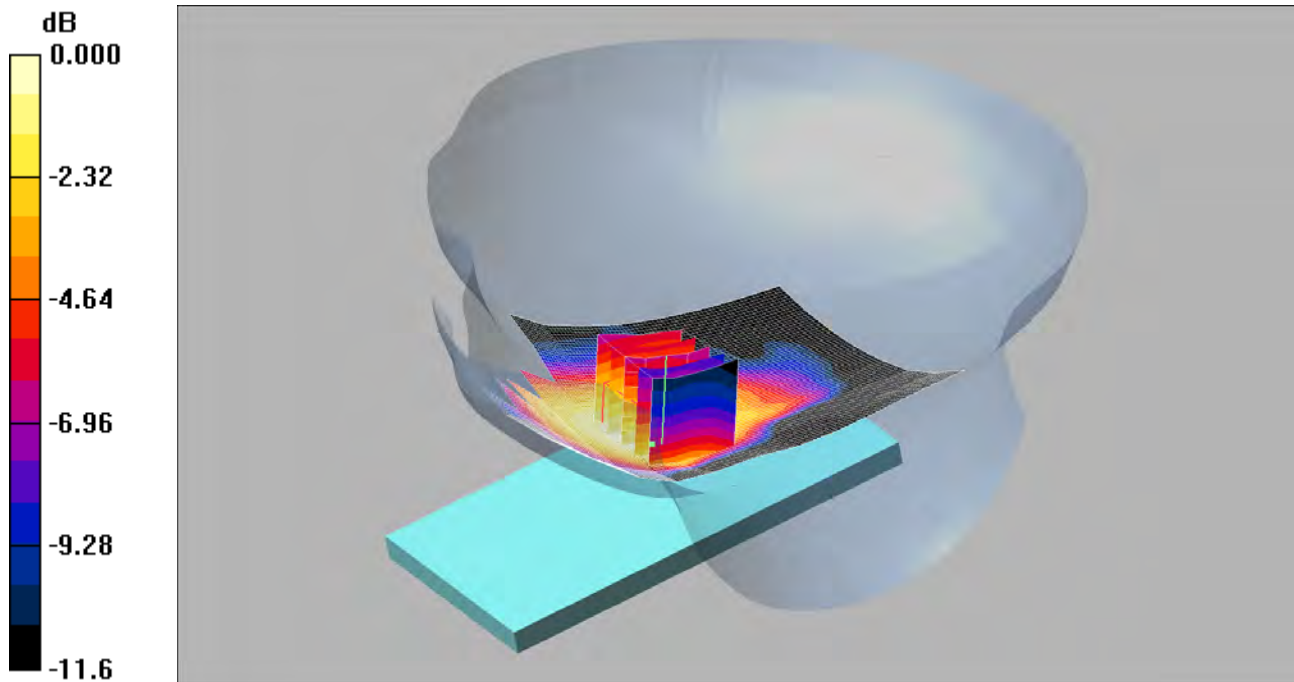

0 dB = 0.360mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.380 mW/g

Touch Right- High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.89 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.455 W/kg


SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.256 mW/g

Maximum value of SAR (measured) = 0.360 mW/g

207: Touch Right LTE Band 5 10MHz BW 50%RB Low End CH20600

Date: 25/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

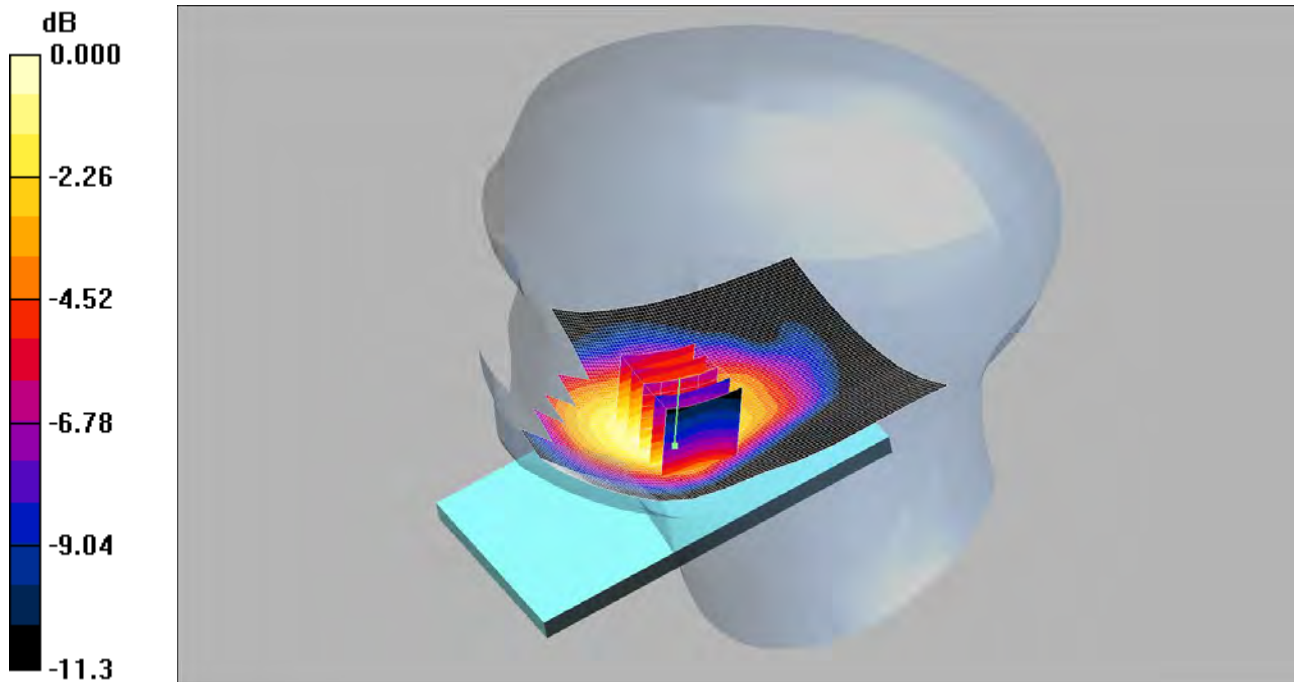

0 dB = 0.464mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.483 mW/g

Touch Right- Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.584 W/kg


SAR(1 g) = 0.438 mW/g; SAR(10 g) = 0.327 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

208: Tilt Right LTE Band 5 10MHz BW 1RB High End CH20525

Date: 25/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

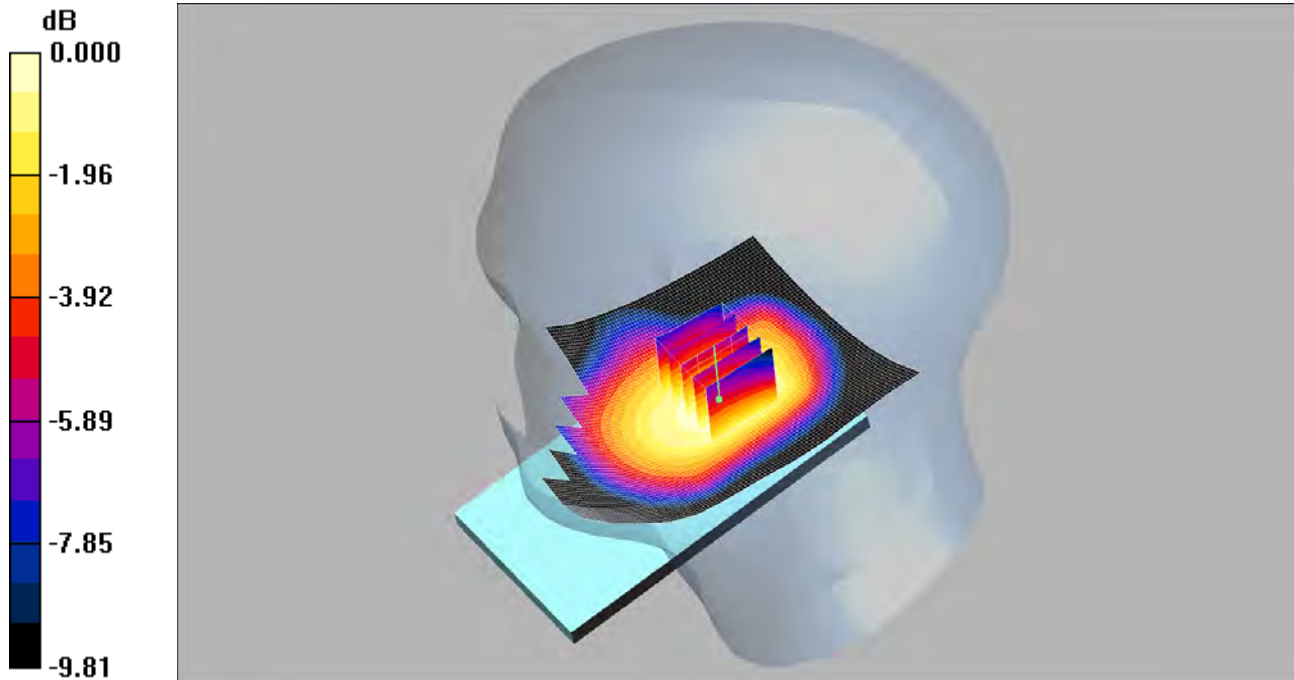

0 dB = 0.200mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Right- Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 mW/g

Tilt Right- Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.224 W/kg


SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.200 mW/g

209: Tilt Right LTE Band 5 10MHz BW 50%RB Low End CH20600

Date: 25/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

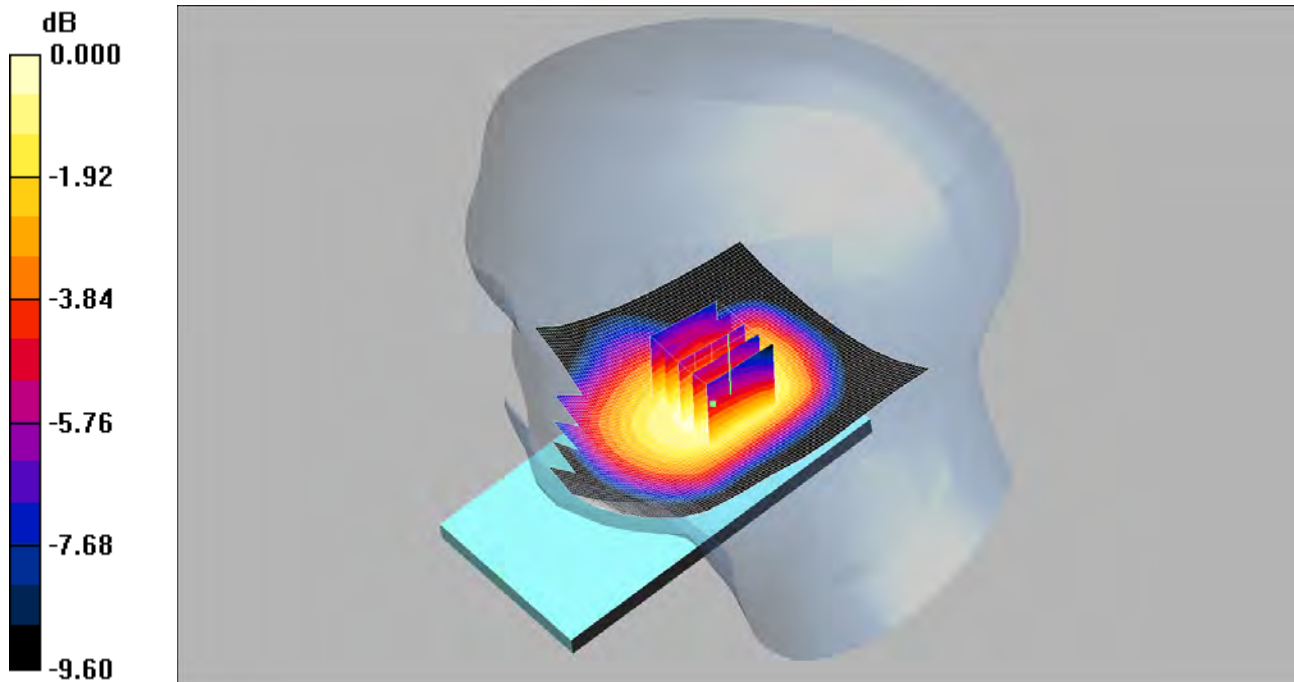

0 dB = 0.161mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Right- High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.161 mW/g

Tilt Right- High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.181 W/kg


SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.161 mW/g

210: Touch Right LTE Band 5 10MHz BW 1RB High End CH20450

Date: 25/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

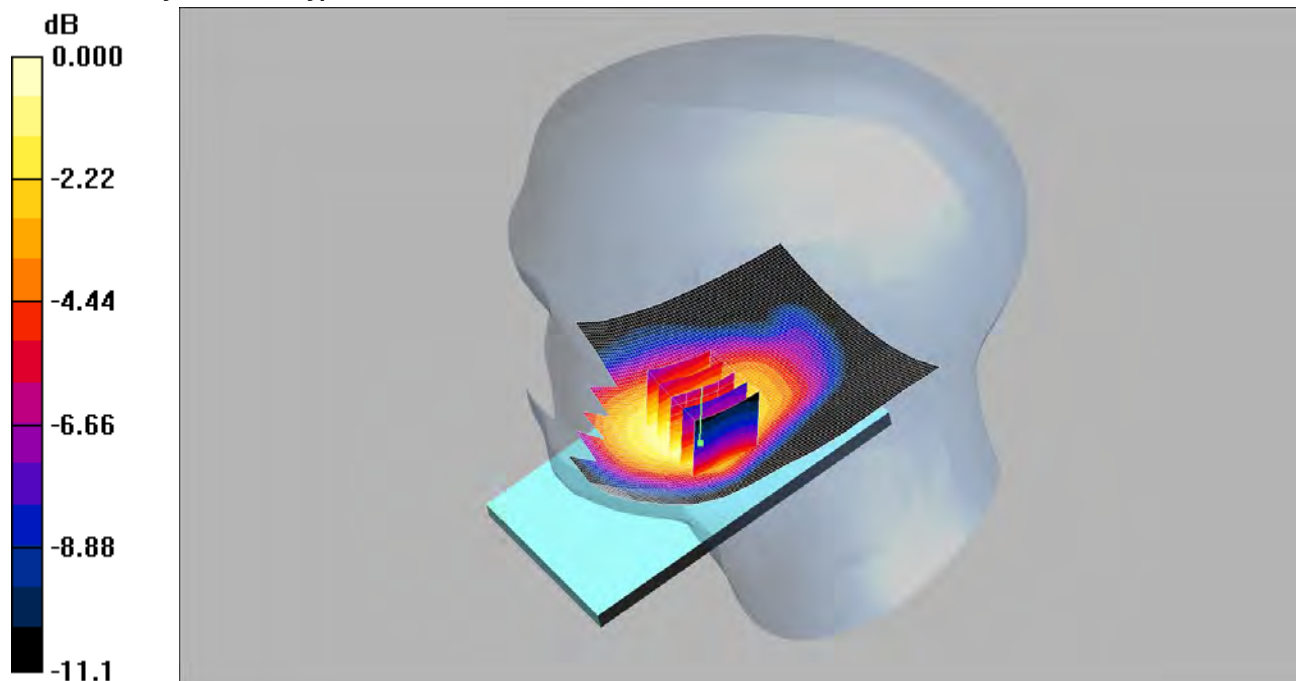

0 dB = 0.440mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.452 mW/g

Touch Right- Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.551 W/kg


SAR(1 g) = 0.416 mW/g; SAR(10 g) = 0.310 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

211: Touch Right LTE Band 5 10MHz BW 1RB High End CH20600

Date: 25/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

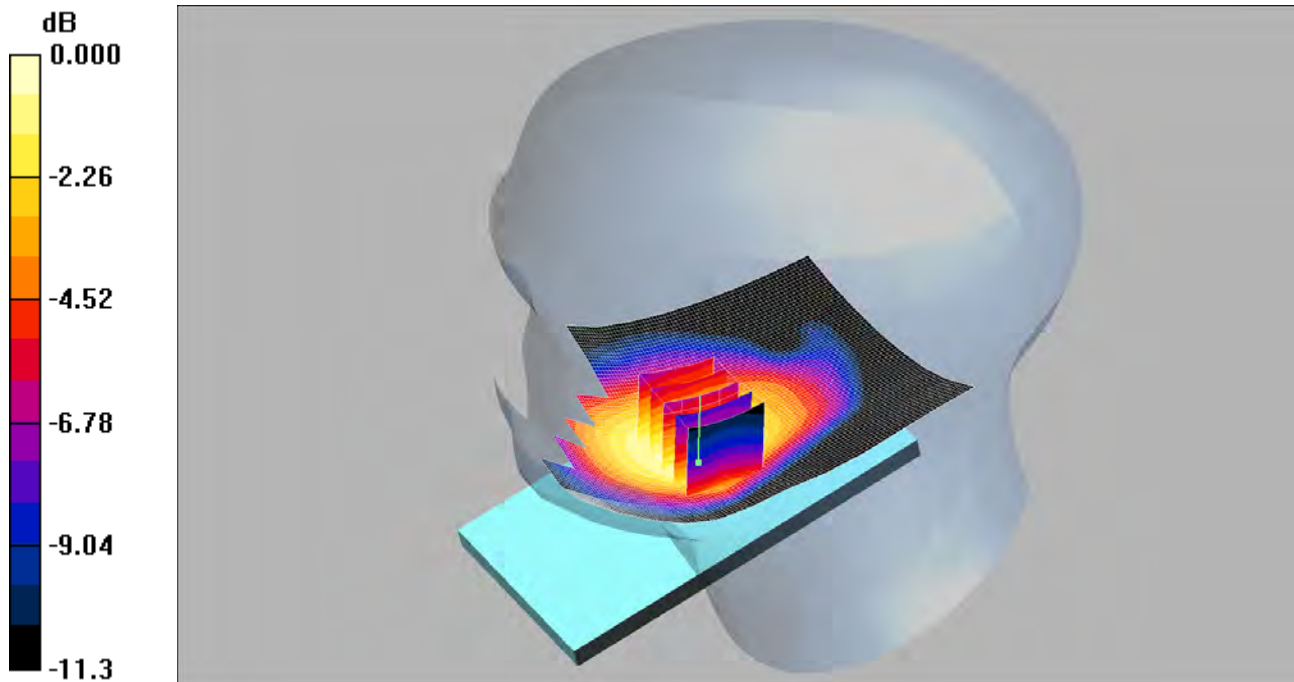

0 dB = 0.483mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.498 mW/g

Touch Right- High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.602 W/kg


SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.483 mW/g

212: Front of EUT Facing Phantom LTE Band 5 10MHz BW 1RB High End CH20525

Date: 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

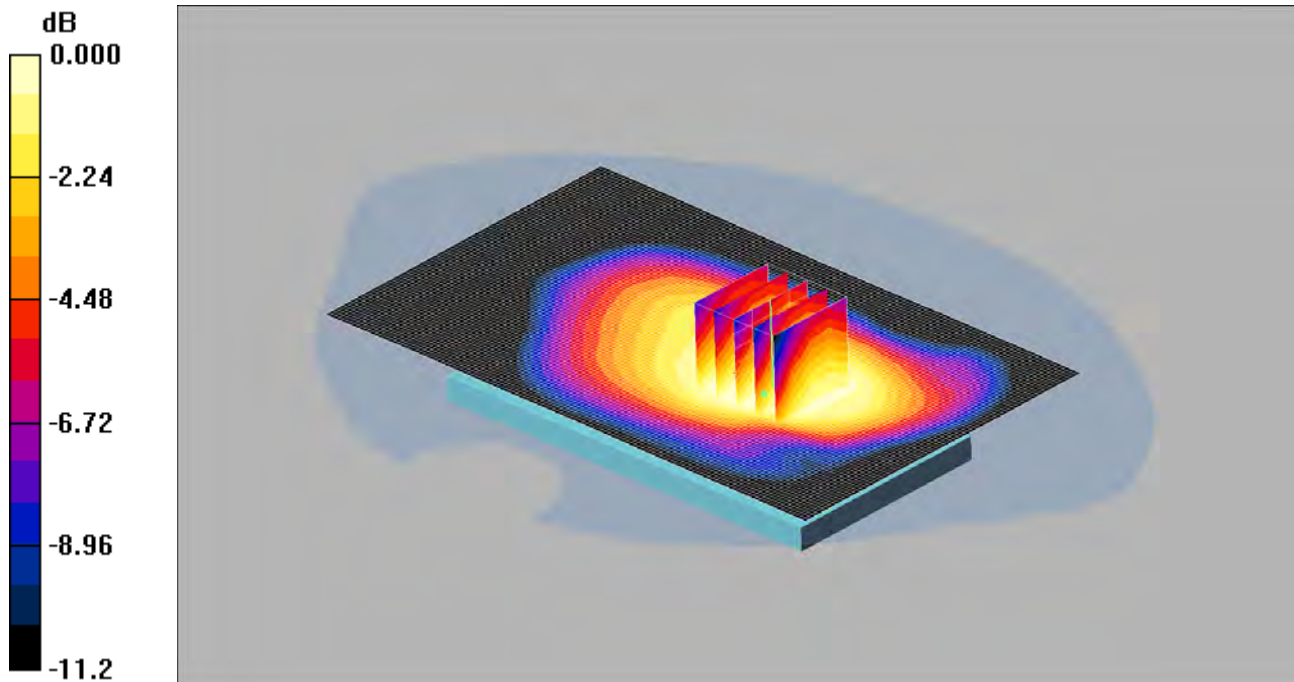

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.558 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.0 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.891 W/kg


SAR(1 g) = 0.498 mW/g; SAR(10 g) = 0.394 mW/g

Maximum value of SAR (measured) = 0.516 mW/g

213: Front of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Low End CH20600

Date: 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

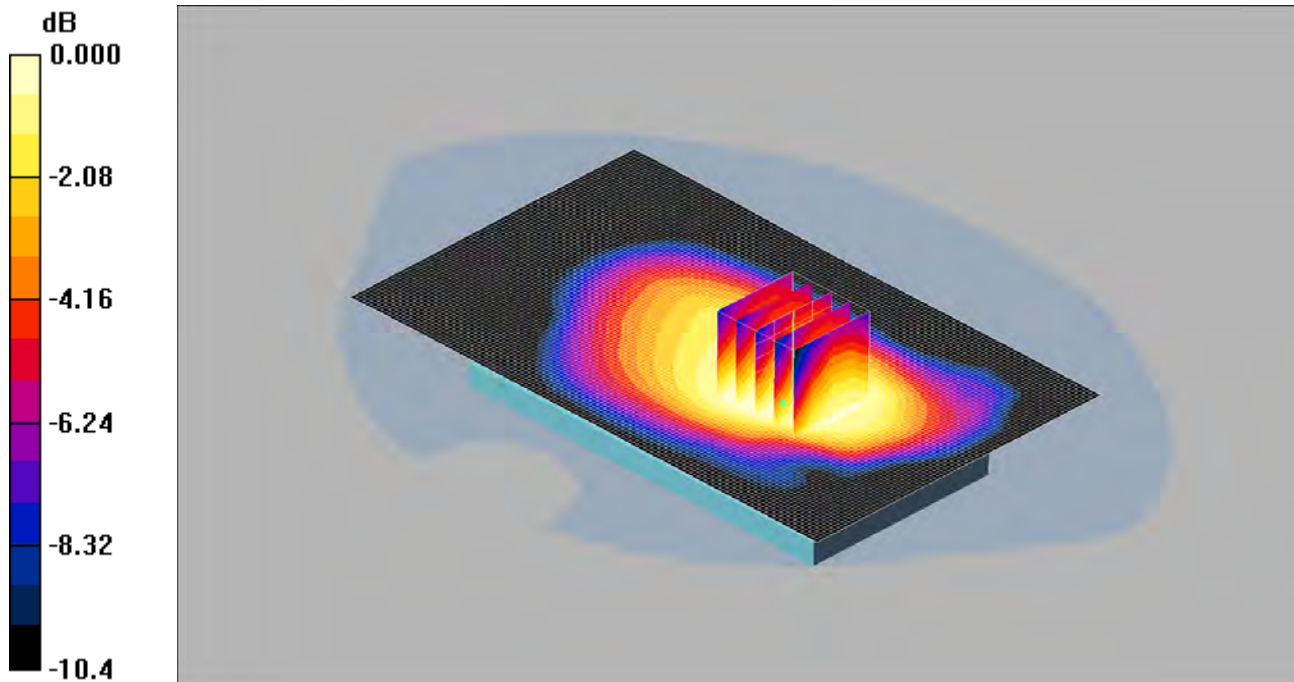

0 dB = 0.405mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High 2/Area Scan (81x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.429 mW/g

Front of EUT Facing Phantom - High 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.6 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.463 W/kg


SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.311 mW/g

Maximum value of SAR (measured) = 0.405 mW/g

214: Back of EUT Facing Phantom LTE Band 5 10MHz BW 1RB High End CH20525

Date: 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

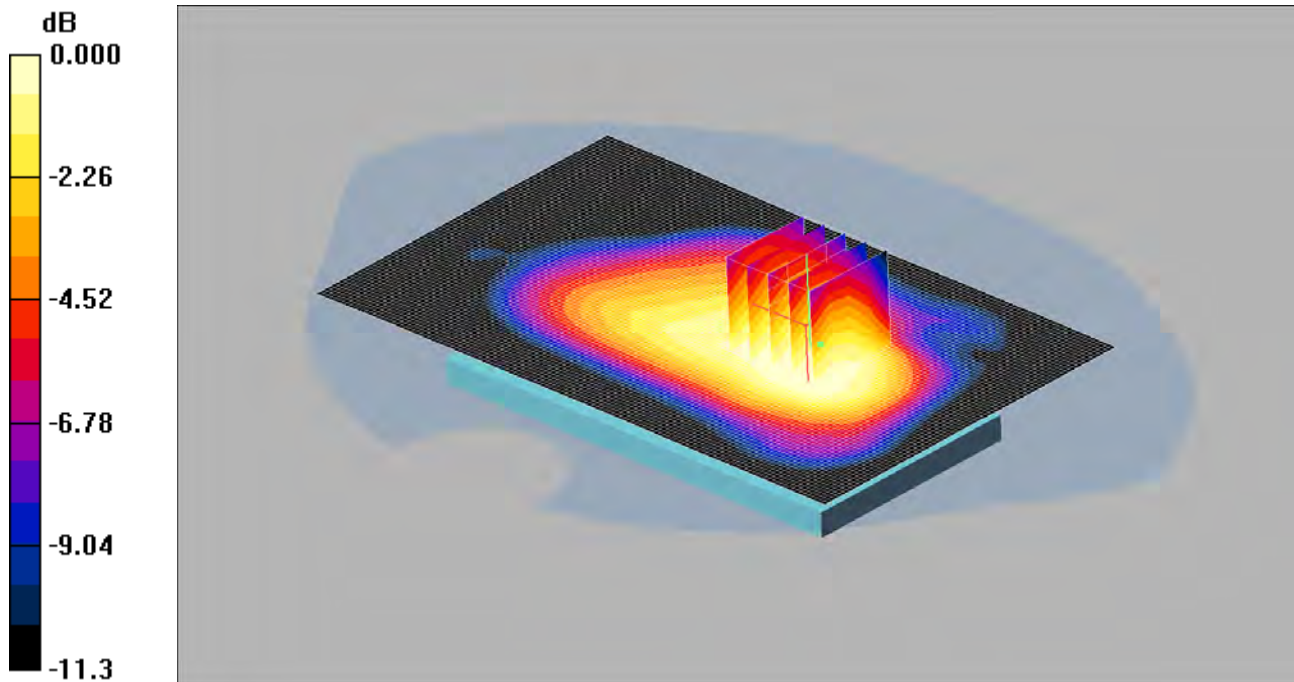

0 dB = 0.513mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.527 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.570 W/kg


SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 0.513 mW/g

215: Back of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Low End CH20600

Date: 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

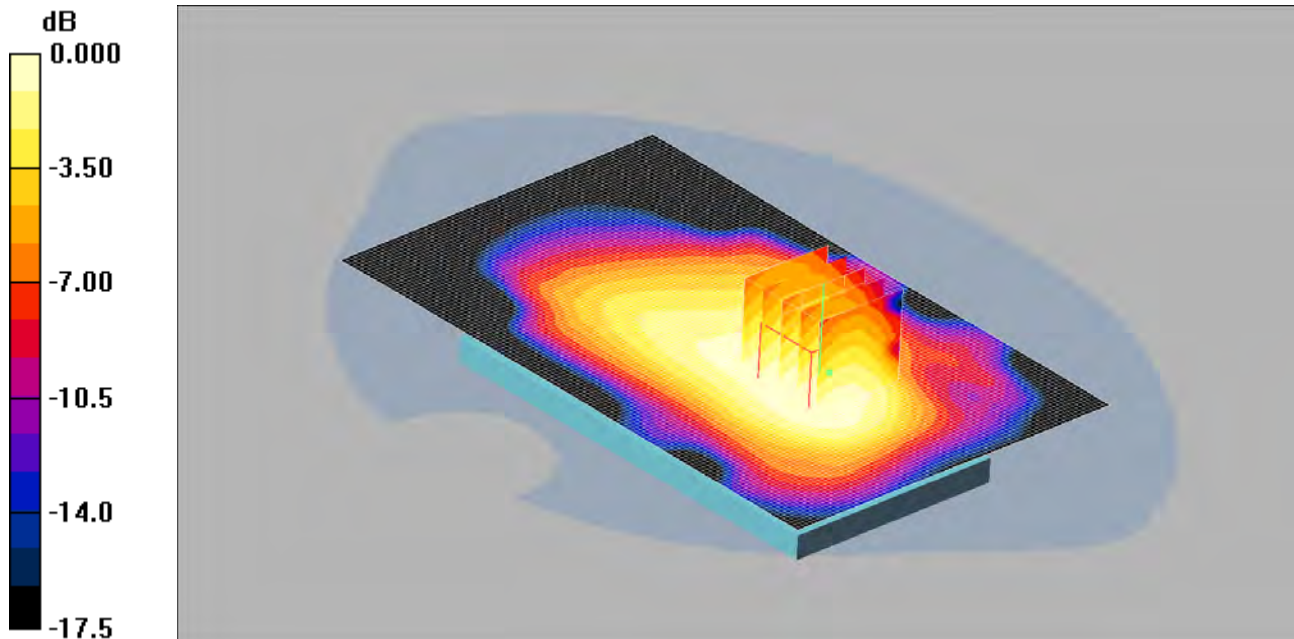

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.412 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.4 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.451 W/kg


SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.399 mW/g

216: Left Hand Side of EUT Facing Phantom LTE Band 5 10MHz BW 1RB High End CH20525

Date 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

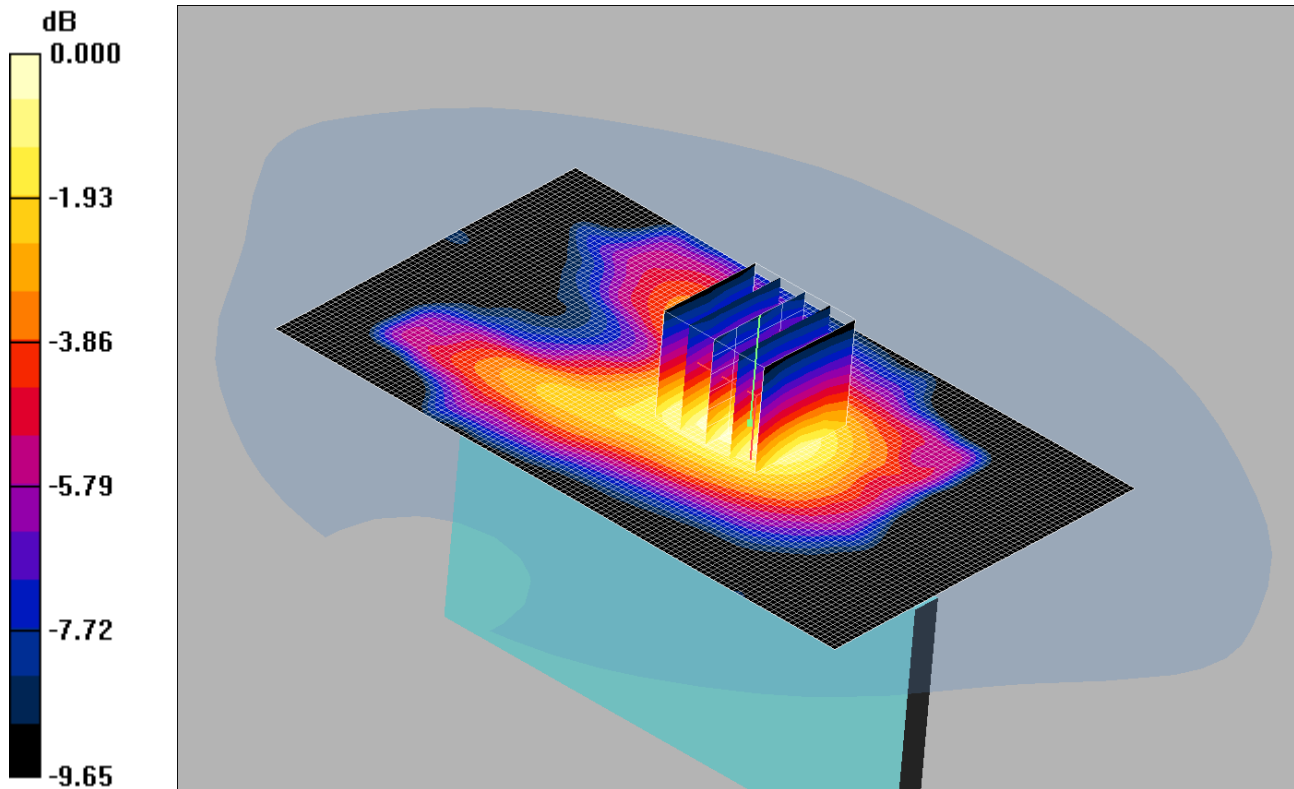

0 dB = 0.196mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.197 mW/g

Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.255 W/kg


SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.196 mW/g

217: Left Hand Side of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Low End CH20600

Date: 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

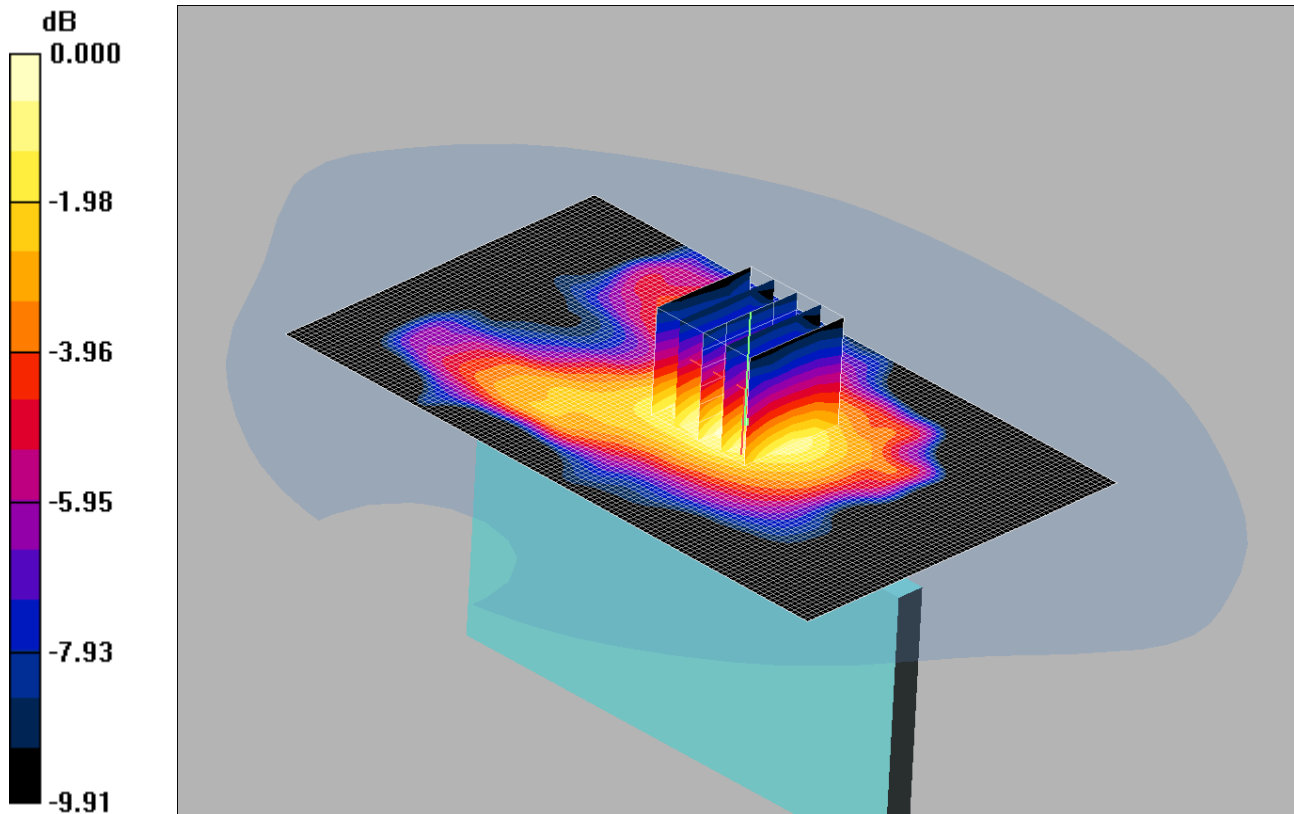

0 dB = 0.165mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.163 mW/g

Left Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.216 W/kg


SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

218: Right Hand Side of EUT Facing Phantom LTE Band 5 10MHz BW 1RB High End CH20525

Date 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

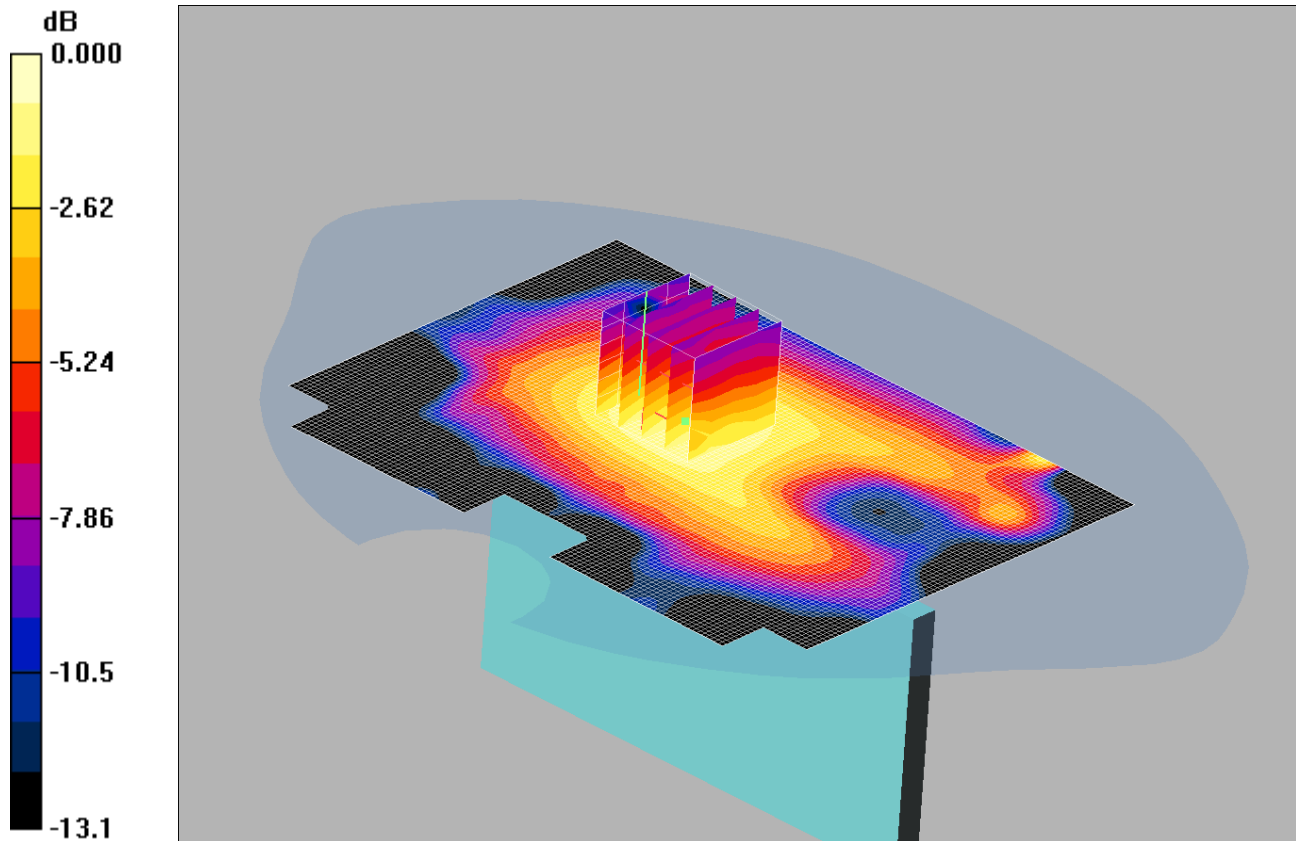

0 dB = 0.164mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Middle 2/Area Scan (91x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.136 mW/g

Right Hand Side of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.172 W/kg


SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.164 mW/g

219: Right Hand Side of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Low End CH20600

Date 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

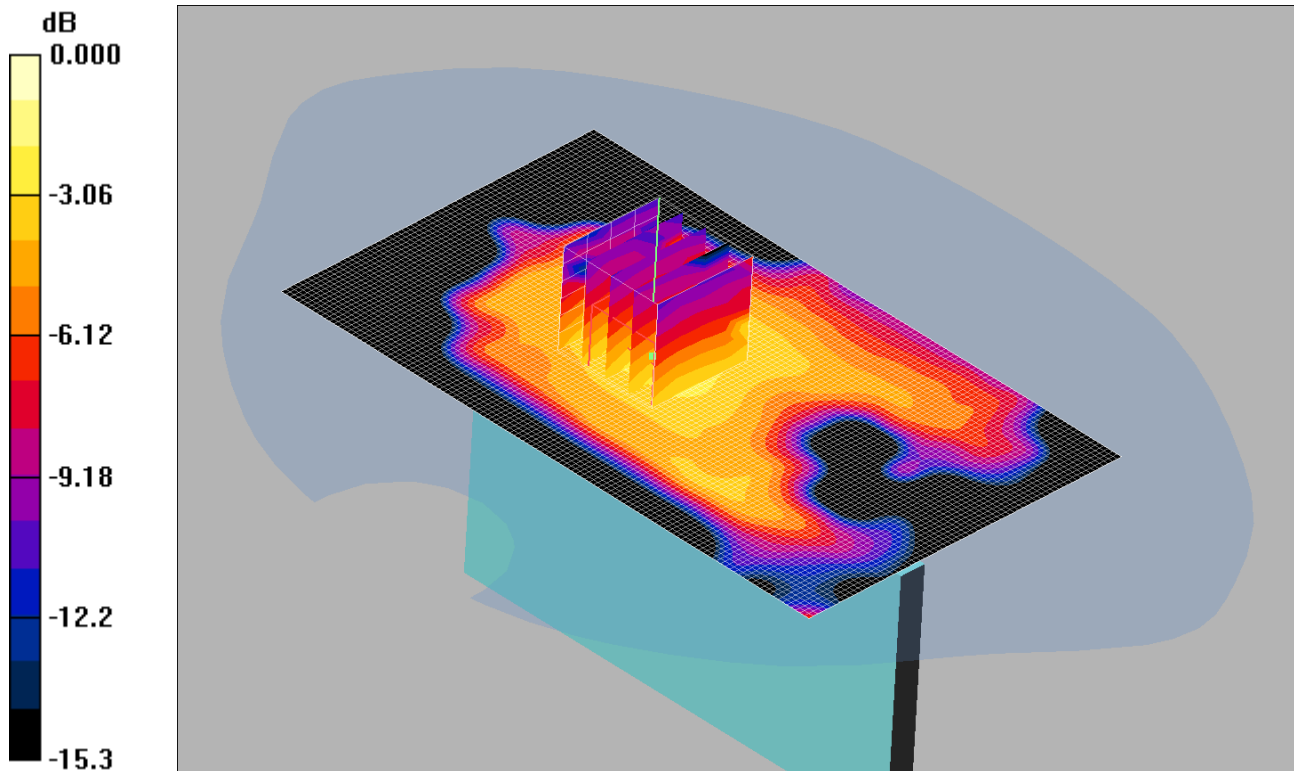

0 dB = 0.178mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.103 mW/g

Right Hand Side of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.96 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 0.178 W/kg


SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.178 mW/g

220: Bottom of EUT Facing Phantom LTE Band 5 10MHz BW 1RB High End CH20525

Date 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

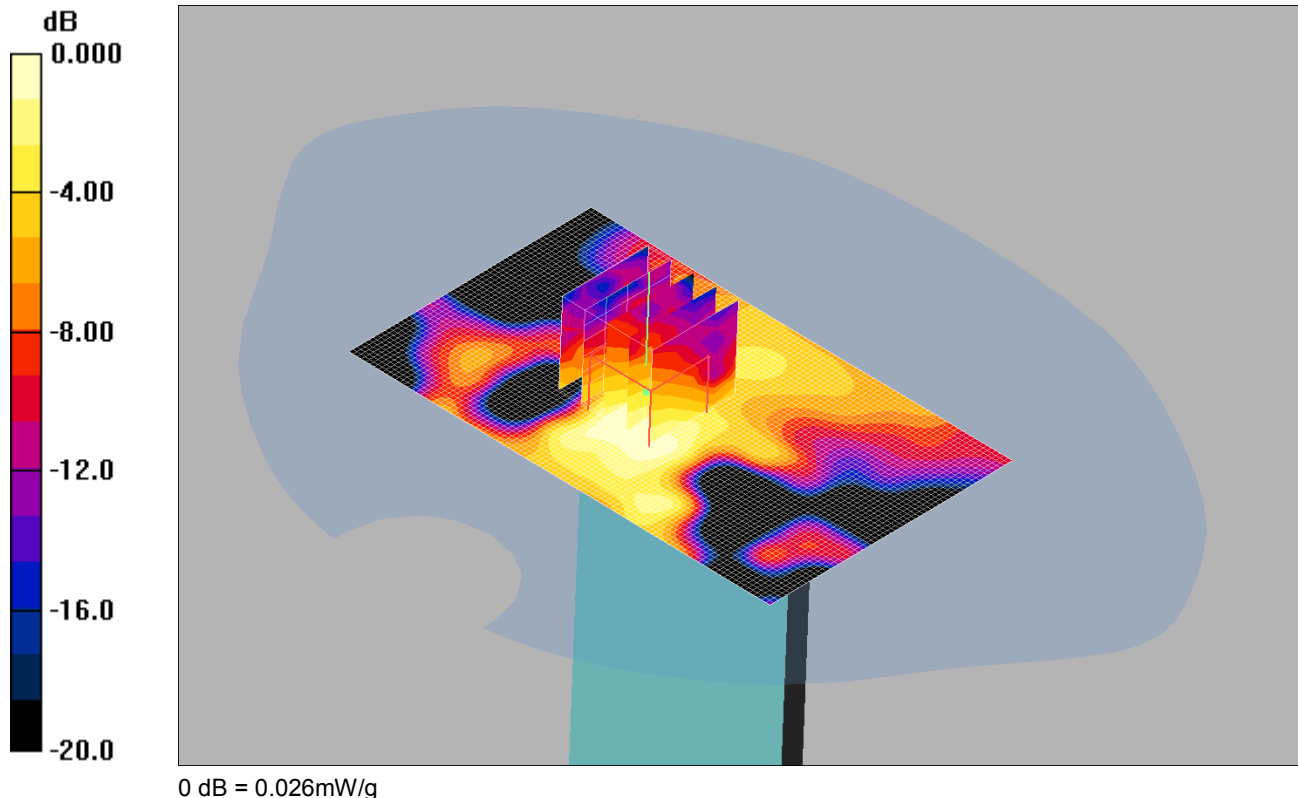

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.023 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.87 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.046 W/kg


SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.026 mW/g

221: Bottom of EUT Facing Phantom LTE Band 5 10MHz BW 50%RB Low End CH20600

Date 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

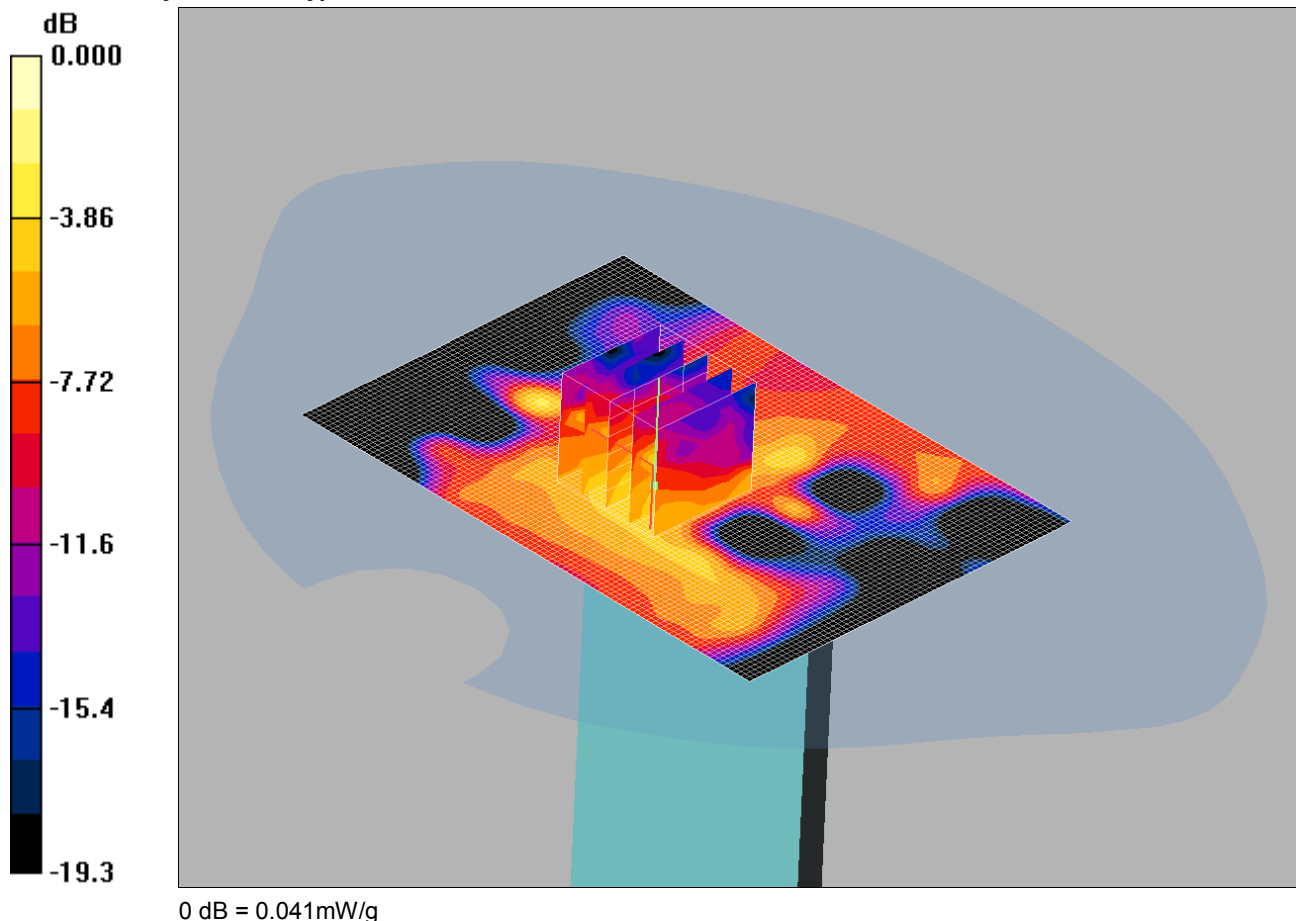

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - High 2/Area Scan 2 (71x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.019 mW/g

Bottom of EUT Facing Phantom - High 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.46 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.052 W/kg


SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.041 mW/g

222: Front of EUT Facing Phantom LTE Band 5 10MHz BW 1RB High End CH20450

Date: 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

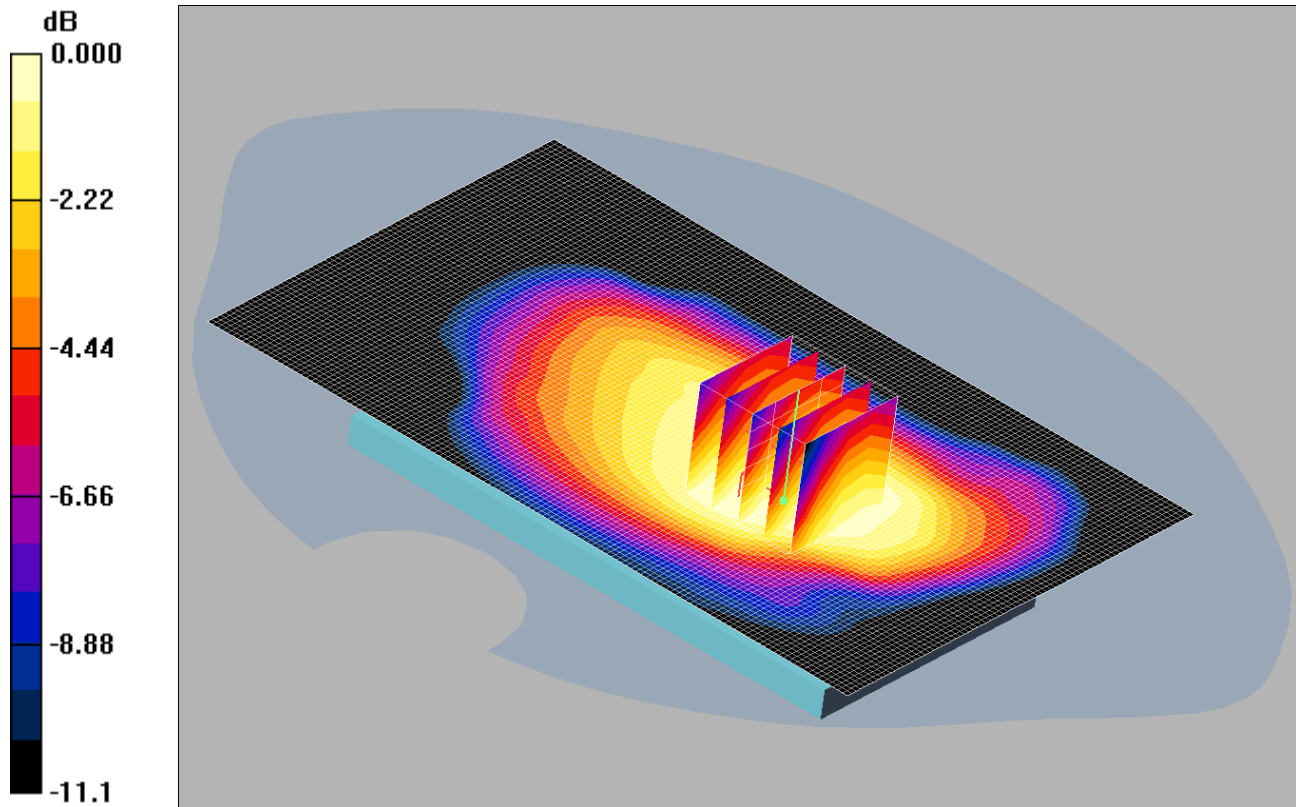

0 dB = 0.479mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Low/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.504 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.5 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 0.547 W/kg


SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.373 mW/g

Maximum value of SAR (measured) = 0.479 mW/g

223: Front of EUT Facing Phantom LTE Band 5 10MHz BW 1RB High End CH20600

Date: 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

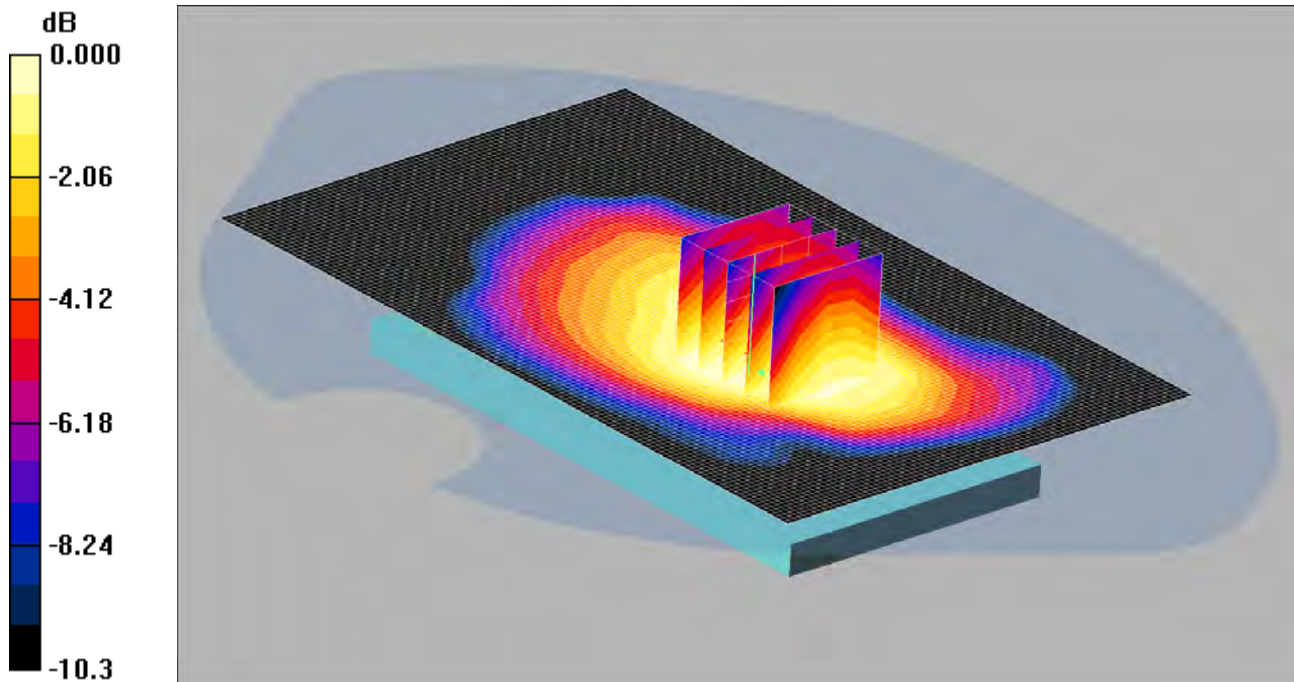

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.536 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.599 W/kg


SAR(1 g) = 0.503 mW/g; SAR(10 g) = 0.402 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

224: Front of EUT Facing Phantom at 15mm LTE Band 5 10MHz BW 1RB High End CH20600

Date: 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

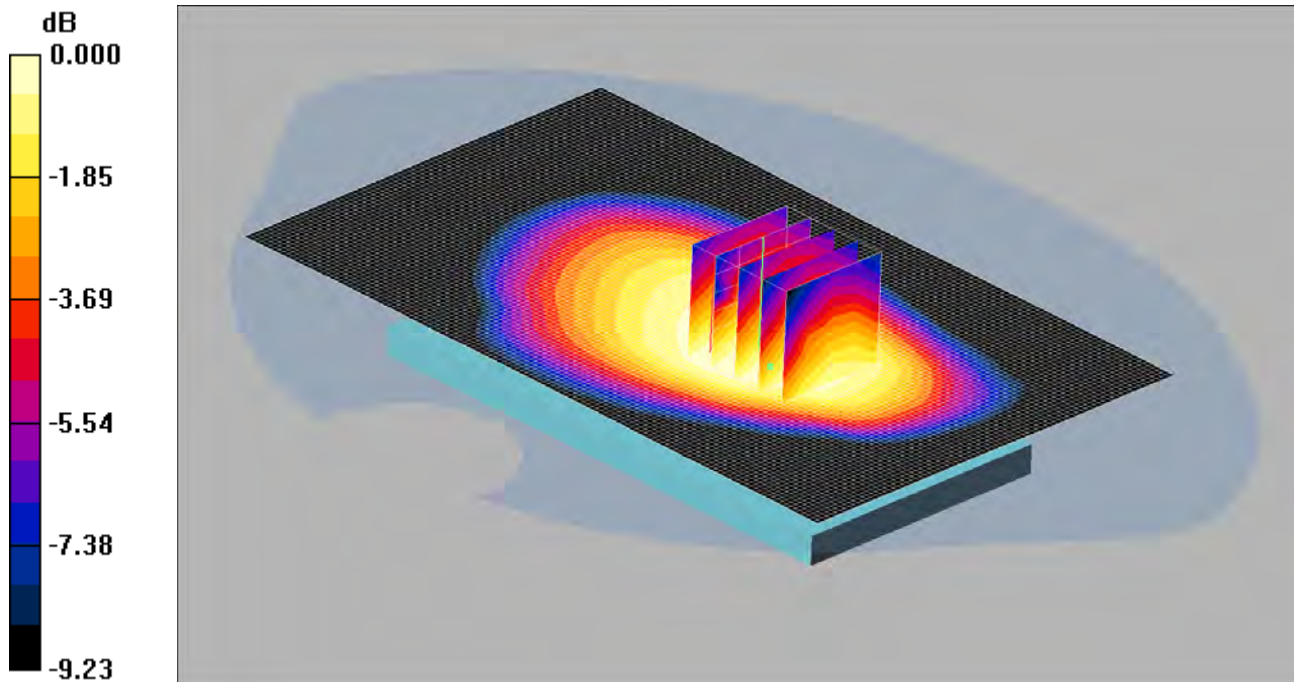

0 dB = 0.407mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz;Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom at 15mm - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.419 mW/g

Front of EUT Facing Phantom at 15mm - High/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.450 W/kg


SAR(1 g) = 0.391 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.407 mW/g

225: Back of EUT Facing Phantom at 15mm LTE Band 5 10MHz BW 1RB High End CH20600

Date: 26/06/2013

DUT: Sony Honami ; Type: Honami Gina; Serial: PM-0450-BV

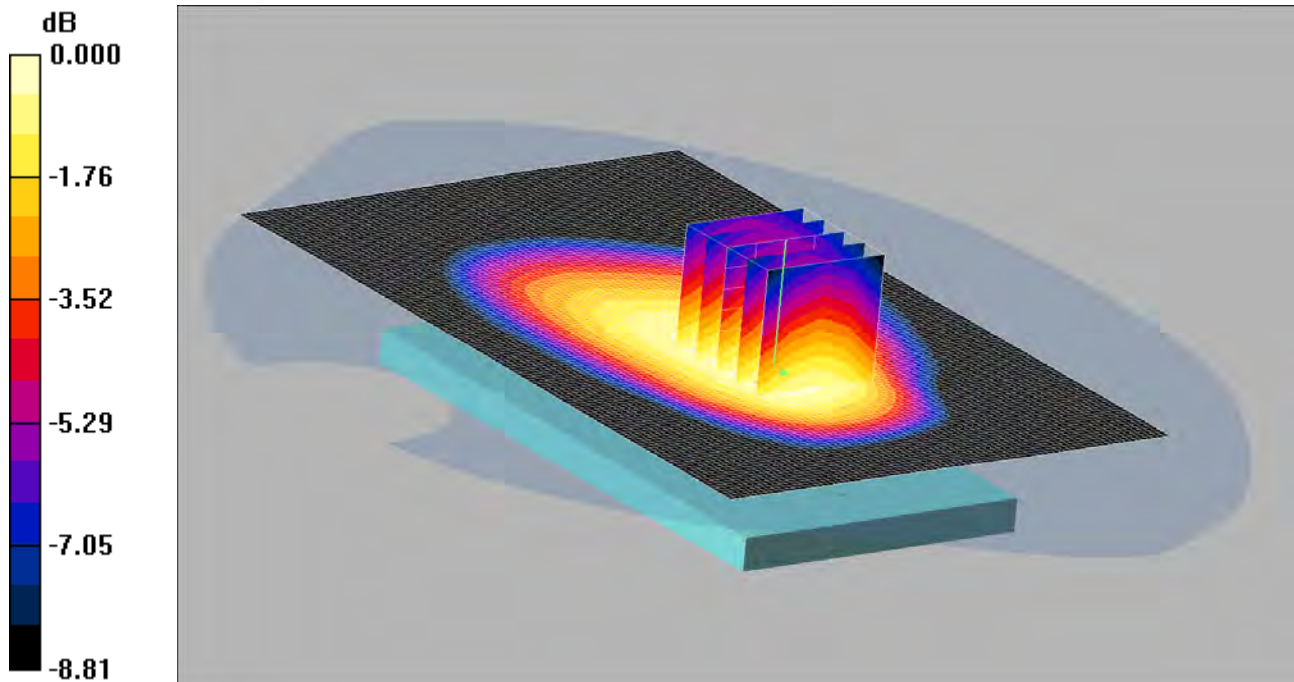

0 dB = 0.413mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.99, 5.99, 5.99); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 20/09/2012

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom at 15mm - High/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.405 mW/g

Back of EUT Facing Phantom at 15mm - High/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.2 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.308 mW/g

Maximum value of SAR (measured) = 0.413 mW/g