



# FCC RF Test Report

**APPLICANT** : Sony Mobile Communications AB  
**EQUIPMENT** : Smart phone  
**BRAND NAME** : Sony  
**MODEL NAME** : C2304  
**TYPE NAME** : PM-0710-BV  
**FCC ID** : PY7PM-0710  
**STANDARD** : FCC 47 CFR Part 2, 22(H), 24(E)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Aug. 06, 2013 and testing was completed on Sep. 16, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.  
TEL : 886-3-327-3456  
FAX : 886-3-328-4978  
FCC ID : PY7PM-0710

Page Number : 1 of 131  
Report Issued Date : Oct. 14, 2013  
Report Version : Rev. 01



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test..... 5

    1.4 Details of Tested Sample (EUT) Information ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ..... 7

    1.7 Testing Site..... 7

    1.8 Applied Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Test Mode..... 9

    2.2 Connection Diagram of Test System ..... 11

    2.3 Support Unit used in test configuration and system..... 11

    2.4 Measurement Results Explanation Example ..... 11

**3 TEST RESULT ..... 12**

    3.1 Conducted Output Power Measurement..... 12

    3.2 Peak-to-Average Ratio ..... 14

    3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... 28

    3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 34

    3.5 Band Edge Measurement..... 54

    3.6 Conducted Spurious Emission Measurement..... 67

    3.7 Field Strength of Spurious Radiation Measurement ..... 86

    3.8 Frequency Stability Measurement..... 124

**4 LIST OF MEASURING EQUIPMENT ..... 129**

**5 UNCERTAINTY OF EVALUATION ..... 131**





## SUMMARY OF TEST RESULT

| Report Section | FCC Rule                            | Description                                   | Limit                               | Result | Remark                                     |
|----------------|-------------------------------------|---|-------------------------------------|--------|--|
| 3.1            | §2.1046                             | Conducted Output Power                        | N/A                                 | PASS   | -  |
| 3.2            | §24.232(d)                          | Peak-to-Average Ratio                         | < 13 dB                             | PASS   | -  |
| 3.3            | §22.913(a)(2)                       | Effective Radiated Power                      | < 7 Watts                           | PASS   | -  |
| 3.3            | §24.232(c)                          | Equivalent Isotropic Radiated Power           | < 2 Watts                           | PASS   | -  |
| 3.4            | §2.1049<br>§22.917(a)<br>§24.238(b) | Occupied Bandwidth                            | N/A                                 | PASS   | -  |
| 3.5            | §2.1051<br>§22.917(a)<br>§24.238(a) | Band Edge Measurement                         | < 43+10log <sub>10</sub> (P[Watts]) | PASS   | -  |
| 3.6            | §2.1051<br>§22.917(a)<br>§24.238(a) | Conducted Spurious Emission                   | < 43+10log <sub>10</sub> (P[Watts]) | PASS   | -  |
| 3.7            | §2.1053<br>§22.917(a)<br>§24.238(a) | Field Strength of Spurious Radiation          | < 43+10log <sub>10</sub> (P[Watts]) | PASS   | Under limit<br>22.25 dB at<br>1649.000 MHz |
| 3.8            | §2.1055<br>§22.355<br>§24.235       | Frequency Stability for Temperature & Voltage | < 2.5 ppm                           | PASS   | -  |



# 1 General Description

## 1.1 Applicant

Sony Mobile Communications AB  
Nya Vattentorget, 22188 Lund, Sweden

## 1.2 Manufacturer

Arima Communications Corp.  
6F., No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

## 1.3 Feature of Equipment Under Test

| Product Feature               |                                    |
|-------------------------------|------------------------------------|
| Equipment                     | Smart phone                        |
| Brand Name                    | Sony                               |
| Model Name                    | C2304                              |
| Type Name                     | PM-0710-BV                         |
| FCC ID                        | PY7PM-0710                         |
| GSM Operating Band(s)         | GSM 850/900/1800/1900MHz           |
| WCDMA Operating Band(s)       | FDD Band I / II / V                |
| WCDMA Rel. Version            | Rel. 8                             |
| GPRS / EGPRS Multi Slot Class | GPRS Class 12 , EGPRS Class 12     |
| Wi-Fi Specification           | 802.11b/g/n (HT20/HT40)            |
| Bluetooth Version             | V3.0+EDR/ V4.0-LE                  |
| Power Supply                  | Battery / AC Adapter / Car Charger |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Details of Tested Sample (EUT) Information

| Product Specification subjective to this Test Standard |  |
|--|--|
| <b>Transmitter Frequency Range</b>                     | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz  |
| <b>Receiver Frequency Range</b>                        | GSM850: 869.2 MHz ~ 893.8 MHz<br>GSM1900: 1930.2 MHz ~ 1989.8 MHz<br>WCDMA Band V: 871.4 MHz ~ 891.6 MHz<br>WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz |
| <b>Maximum Output Power to Antenna</b>                 | GSM850 : 32.42 dBm<br>GSM1900 : 29.20 dBm<br>WCDMA Band V : 23.86 dBm<br>WCDMA Band II : 23.39 dBm   |
| <b>Antenna Type</b>                                    | PIFA Antenna   |
| <b>Type of Modulation</b>                              | GSM: GMSK<br>GPRS: GMSK<br>EDGE: GMSK / 8PSK<br>WCDMA: QPSK (Uplink)<br>HSDPA: QPSK (Uplink)<br>HSUPA: QPSK (Uplink)                               |
| <b>EUT # 8</b>   | IMEI : 004402146957356<br>S/N : WUJ5875008   |
| <b>EUT # 12</b>  | IMEI : 004402146957430<br>S/N : WUJ5875012   |
| <b>H/W</b>   | AP   |
| <b>S/W</b>   | 16.0.B.1.3   |
| <b>EUT Stage</b>                                       | Production Unit  |

| Accessory List    |                              |
|-------------------|------------------------------|
| <b>AC Adapter</b> | Model No. : EP800            |
|                   | Type No. : AC-0300-CN        |
| <b>Battery</b>    | Model No. : N/A              |
| <b>Earphone</b>   | Model No. : MH410c           |
|                   | Type No. : AG-1100           |
| <b>USB Cable</b>  | Model No. : EC450            |
|                   | Part No. : 1242-6715.2 12W22 |

**Note:**

- Above EUT list and accessory list used are electrically identical per declared by manufacturer.
- Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report.
- For other wireless features of this EUT, test report will be issued separately.



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

| FCC Rule | System                     | Type of Modulation | Maximum ERP/EIRP (W) | Frequency Tolerance (ppm) | Emission Designator |
|----------|----------------------------|--------------------|----------------------|---------------------------|---------------------|
| Part 22  | GSM850 GSM                 | GMSK               | 0.89                 | 0.04 ppm                  | 250KGXW             |
| Part 22  | GSM850 EDGE class 8        | 8PSK               | 0.31                 | 0.03 ppm                  | 246KG7W             |
| Part 22  | WCDMA Band V RMC 12.2Kbps  | QPSK               | 0.11                 | 0.02 ppm                  | 4M18F9W             |
| Part 24  | GSM1900 GSM                | GMSK               | 1.15                 | 0.03 ppm                  | 248KGXW             |
| Part 24  | GSM1900 EDGE class 8       | 8PSK               | 0.51                 | 0.03 ppm                  | 250KG7W             |
| Part 24  | WCDMA Band II RMC 12.2Kbps | QPSK               | 0.22                 | 0.01 ppm                  | 4M18F9W             |

### 1.7 Testing Site

|                    |   |           |                         |
|--------------------|---|-----------|-------------------------|
| Test Site          | SPORTON INTERNATIONAL INC.  |           |                         |
| Test Site Location | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |           |                         |
| Test Site No.      | Sporton Site No.  |           | FCC/IC Registration No. |
|                    | TH02-HY   | 03CH07-HY | 722060/4086B-1          |



## 1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

- a. Preliminary tests were performed in different radio applications and recorded the RF output power in the following table:

| Conducted Power (*Unit: dBm) |        |       |       |         |        |        |
|------------------------------|--------|-------|-------|---------|--------|--------|
| Band                         | GSM850 |       |       | GSM1900 |        |        |
| Channel                      | 128    | 189   | 251   | 512     | 661    | 810    |
| Frequency                    | 824.2  | 836.4 | 848.8 | 1850.2  | 1880.0 | 1909.8 |
| GSM                          | 32.40  | 32.41 | 32.42 | 28.82   | 29.18  | 29.20  |
| GPRS class 8                 | 32.39  | 32.40 | 32.41 | 28.81   | 29.17  | 29.19  |
| GPRS class 10                | 31.21  | 31.22 | 31.23 | 27.59   | 27.99  | 28.01  |
| GPRS class 11                | 29.21  | 29.22 | 29.24 | 25.57   | 25.98  | 26.02  |
| GPRS class 12                | 28.45  | 28.47 | 28.49 | 24.90   | 25.20  | 25.24  |
| EGPRS class 8                | 26.94  | 26.95 | 26.96 | 24.52   | 24.99  | 25.11  |
| EGPRS class 10               | 25.64  | 25.65 | 25.77 | 23.34   | 23.87  | 23.95  |
| EGPRS class 11               | 23.34  | 23.35 | 23.37 | 21.07   | 21.52  | 21.59  |
| EGPRS class 12               | 22.09  | 22.12 | 22.14 | 19.90   | 20.43  | 20.62  |

| Conducted Power (*Unit: dBm) |              |       |       |               |        |        |
|------------------------------|--------------|-------|-------|---------------|--------|--------|
| Band                         | WCDMA Band V |       |       | WCDMA Band II |        |        |
| Channel                      | 4132         | 4182  | 4233  | 9262          | 9400   | 9538   |
| Frequency                    | 826.4        | 836.4 | 846.6 | 1852.4        | 1880.0 | 1907.6 |
| RMC 12.2K                    | 23.86        | 23.78 | 23.76 | 23.39         | 23.34  | 23.06  |
| HSDPA Subtest-1              | 22.86        | 22.82 | 22.76 | 22.39         | 22.37  | 22.16  |
| HSDPA Subtest-2              | 22.84        | 22.78 | 22.74 | 22.38         | 22.34  | 22.14  |
| HSDPA Subtest-3              | 22.38        | 22.32 | 22.29 | 21.94         | 21.89  | 21.65  |
| HSDPA Subtest-4              | 22.36        | 22.31 | 22.26 | 21.91         | 21.88  | 21.63  |
| HSUPA Subtest-1              | 22.28        | 22.27 | 22.05 | 22.70         | 22.68  | 22.67  |
| HSUPA Subtest-2              | 20.86        | 20.76 | 20.74 | 20.44         | 20.42  | 20.23  |
| HSUPA Subtest-3              | 21.99        | 21.82 | 21.75 | 21.50         | 21.41  | 21.29  |
| HSUPA Subtest-4              | 20.49        | 20.25 | 20.23 | 19.91         | 19.86  | 19.67  |
| HSUPA Subtest-5              | 22.88        | 22.80 | 22.75 | 22.44         | 22.26  | 22.13  |



b. During all testing, EUT was in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and the EUT was rotated on three test axes planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:


- 1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
- 2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

| Test Modes    |  |  |
|---------------|--|--|
| Band          | Radiated TCs   | Conducted TCs  |
| GSM 850       | <ul style="list-style-type: none"><li>■ GSM Link</li><li>■ EDGE class 8 Link</li></ul> | <ul style="list-style-type: none"><li>■ GSM Link</li><li>■ EDGE class 8 Link</li></ul> |
| GSM 1900      | <ul style="list-style-type: none"><li>■ GSM Link</li><li>■ EDGE class 8 Link</li></ul> | <ul style="list-style-type: none"><li>■ GSM Link</li><li>■ EDGE class 8 Link</li></ul> |
| WCDMA Band V  | <ul style="list-style-type: none"><li>■ RMC 12.2Kbps Link</li></ul>                    | <ul style="list-style-type: none"><li>■ RMC 12.2Kbps Link</li></ul>                    |
| WCDMA Band II | <ul style="list-style-type: none"><li>■ RMC 12.2Kbps Link</li></ul>                    | <ul style="list-style-type: none"><li>■ RMC 12.2Kbps Link</li></ul>                    |

**Note:**

- 1. The maximum power levels of GSM, EDGE 8PSK class 8 mode, and WCDMA RMC 12.2Kbps mode are chosen for all tests. All of all modes evaluated in report are demonstrated in compliance with FCC test standard.
- 2. Because there are individual antennas for each WWAN, WLAN, and Bluetooth, the co-location test modes are not required.

## 2.2 Connection Diagram of Test System

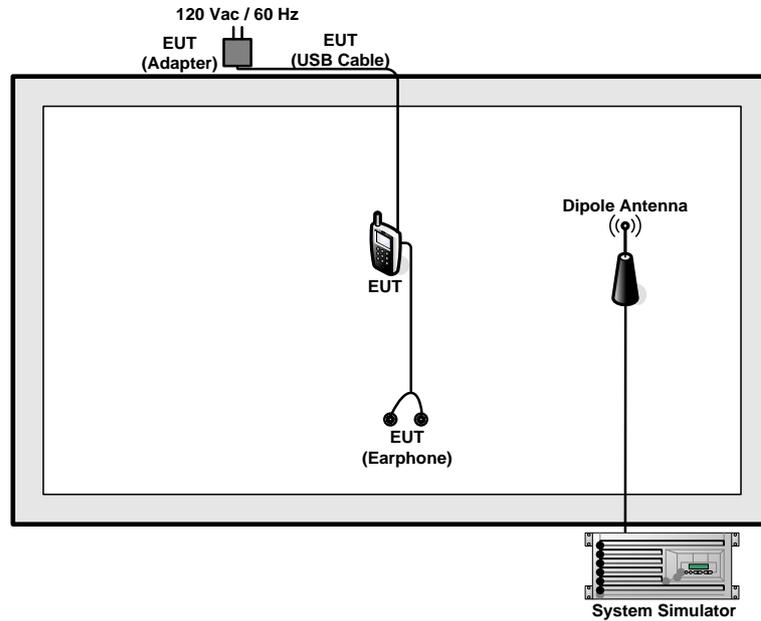

## 2.3 Support Unit used in test configuration and system

| Item | Equipment        | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200   | N/A    | N/A        | Unshielded, 1.8 m |

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup

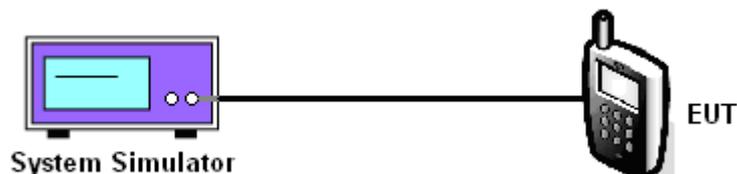



3.1.5 Test Result of Conducted Output Power

| Cellular Band           |              |              |               |                       |              |               |                             |               |                |
|-------------------------|--------------|--------------|---------------|-----------------------|--------------|---------------|-----------------------------|---------------|----------------|
| Modes                   | GSM850 (GSM) |              |               | GSM850 (EDGE class 8) |              |               | WCDMA Band V (RMC 12.2Kbps) |               |                |
| Channel                 | 128<br>(Low) | 189<br>(Mid) | 251<br>(High) | 128<br>(Low)          | 189<br>(Mid) | 251<br>(High) | 4132<br>(Low)               | 4182<br>(Mid) | 4233<br>(High) |
| Frequency (MHz)         | 824.2        | 836.4        | 848.8         | 824.2                 | 836.4        | 848.8         | 826.4                       | 836.4         | 846.6          |
| Conducted Power (dBm)   | 32.40        | 32.41        | 32.42         | 26.94                 | 26.95        | 26.96         | 23.86                       | 23.78         | 23.76          |
| Conducted Power (Watts) | 1.74         | 1.74         | 1.75          | 0.49                  | 0.50         | 0.50          | 0.24                        | 0.24          | 0.24           |

| PCS Band                |               |              |               |                        |              |               |                              |               |                |
|-------------------------|---------------|--------------|---------------|------------------------|--------------|---------------|------------------------------|---------------|----------------|
| Modes                   | GSM1900 (GSM) |              |               | GSM1900 (EDGE class 8) |              |               | WCDMA Band II (RMC 12.2Kbps) |               |                |
| Channel                 | 512<br>(Low)  | 661<br>(Mid) | 810<br>(High) | 512<br>(Low)           | 661<br>(Mid) | 810<br>(High) | 9262<br>(Low)                | 9400<br>(Mid) | 9538<br>(High) |
| Frequency (MHz)         | 1850.2        | 1880         | 1909.8        | 1850.2                 | 1880         | 1909.8        | 1852.4                       | 1880          | 1907.6         |
| Conducted Power (dBm)   | 28.82         | 29.18        | 29.20         | 24.52                  | 24.99        | 25.11         | 23.39                        | 23.34         | 23.06          |
| Conducted Power (Watts) | 0.76          | 0.83         | 0.83          | 0.28                   | 0.32         | 0.32          | 0.22                         | 0.22          | 0.20           |

**Note:** maximum burst average power for GSM, and maximum average power for WCDMA.

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and System Simulator via power divider.
2. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector in spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector in spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator synchronized with the spectrum analyzer.
3. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

### 3.2.4 Test Setup

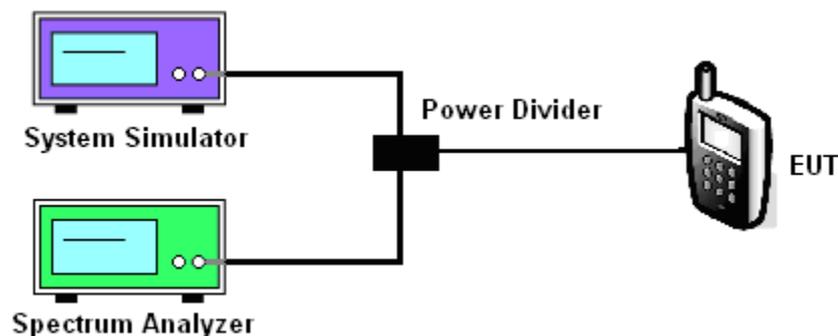



3.2.5 Test Result of Peak-to-Average Ratio

| Cellular Band              |              |           |            |                       |           |            |                             |            |             |
|----------------------------|--------------|-----------|------------|-----------------------|-----------|------------|-----------------------------|------------|-------------|
| Modes                      | GSM850 (GSM) |           |            | GSM850 (EDGE class 8) |           |            | WCDMA Band V (RMC 12.2Kbps) |            |             |
| Channel                    | 128 (Low)    | 189 (Mid) | 251 (High) | 128 (Low)             | 189 (Mid) | 251 (High) | 4132 (Low)                  | 4182 (Mid) | 4233 (High) |
| Frequency (MHz)            | 824.2        | 836.4     | 848.8      | 824.2                 | 836.4     | 848.8      | 826.4                       | 836.4      | 846.6       |
| Peak-to-Average Ratio (dB) | 0.18         | 0.19      | 0.18       | 2.66                  | 2.80      | 2.74       | 3.16                        | 2.84       | 2.96        |


| PCS Band                   |               |           |            |                        |           |            |                              |            |             |
|----------------------------|---------------|-----------|------------|------------------------|-----------|------------|------------------------------|------------|-------------|
| Modes                      | GSM1900 (GSM) |           |            | GSM1900 (EDGE class 8) |           |            | WCDMA Band II (RMC 12.2Kbps) |            |             |
| Channel                    | 512 (Low)     | 661 (Mid) | 810 (High) | 512 (Low)              | 661 (Mid) | 810 (High) | 9262 (Low)                   | 9400 (Mid) | 9538 (High) |
| Frequency (MHz)            | 1850.2        | 1880      | 1909.8     | 1850.2                 | 1880      | 1909.8     | 1852.4                       | 1880       | 1907.6      |
| Peak-to-Average Ratio (dB) | 0.19          | 0.20      | 0.21       | 2.62                   | 2.69      | 2.50       | 2.72                         | 2.76       | 2.96        |



### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio


|        |         |             |                 |
|--------|---------|-------------|-----------------|
| Band : | GSM 850 | Test Mode : | GSM Link (GMSK) |
|--------|---------|-------------|-----------------|

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

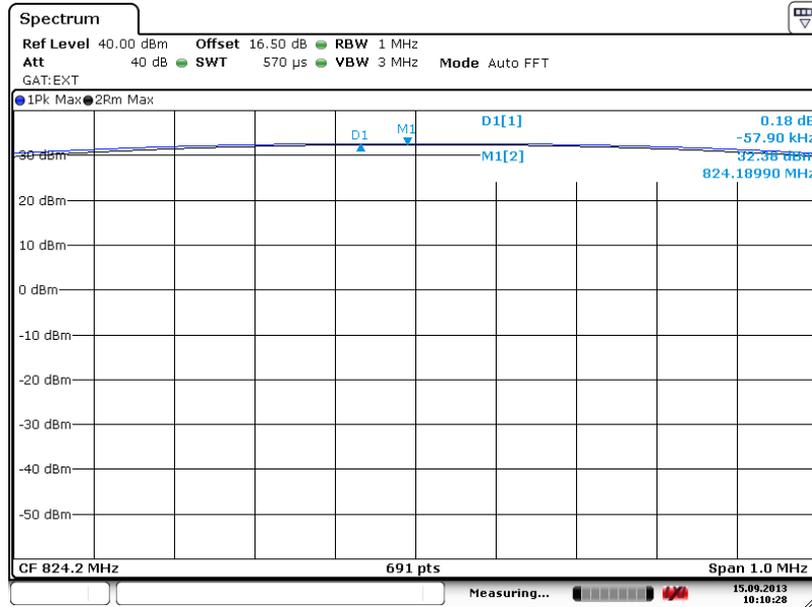

Date: 15.SEP.2013 10:10:27


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

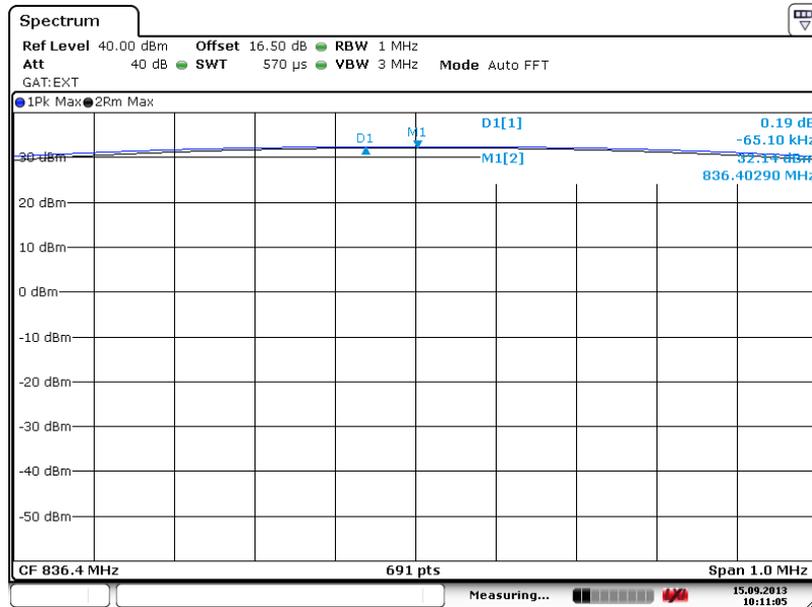

Date: 15.SEP.2013 10:11:05



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

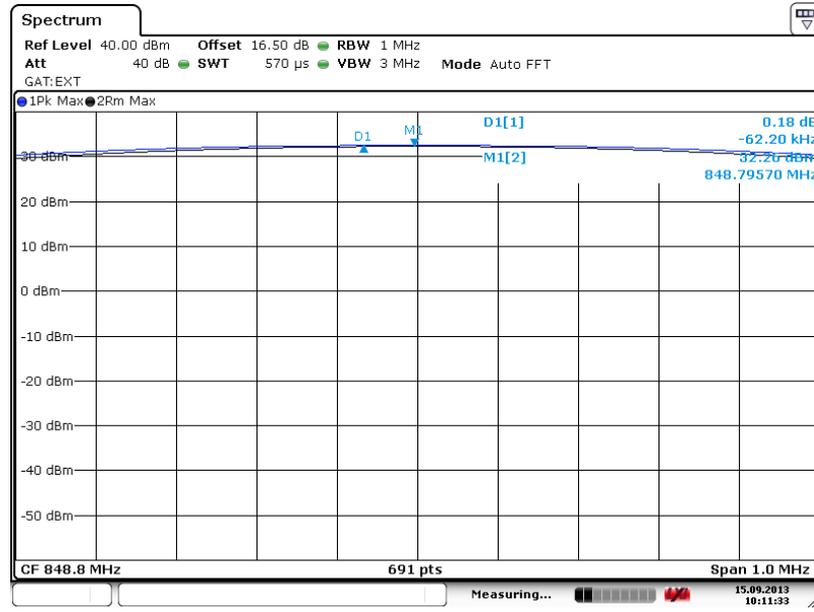


Date: 15.SEP.2013 10:11:33

**Note:** The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|---------|-------------|--------------------------|

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

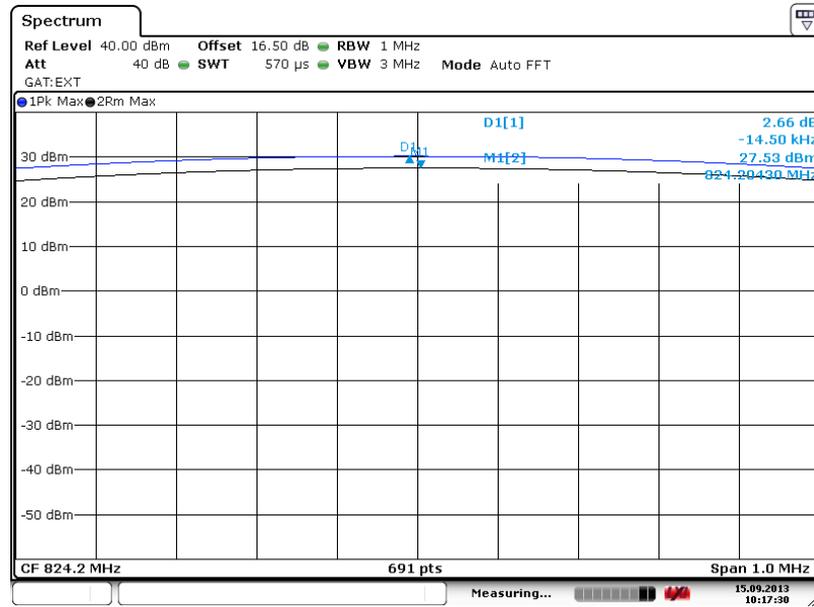

Date: 15.SEP.2013 10:17:30


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

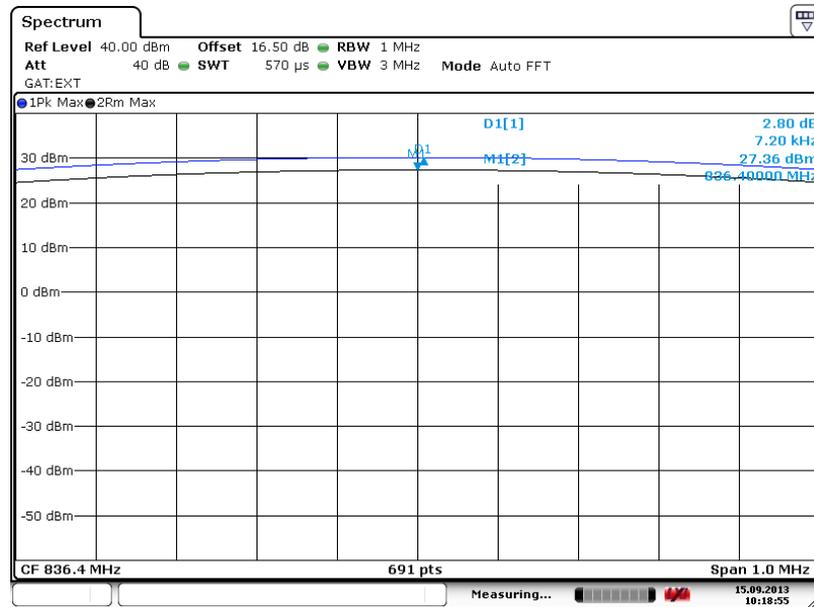

Date: 15.SEP.2013 10:18:55



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

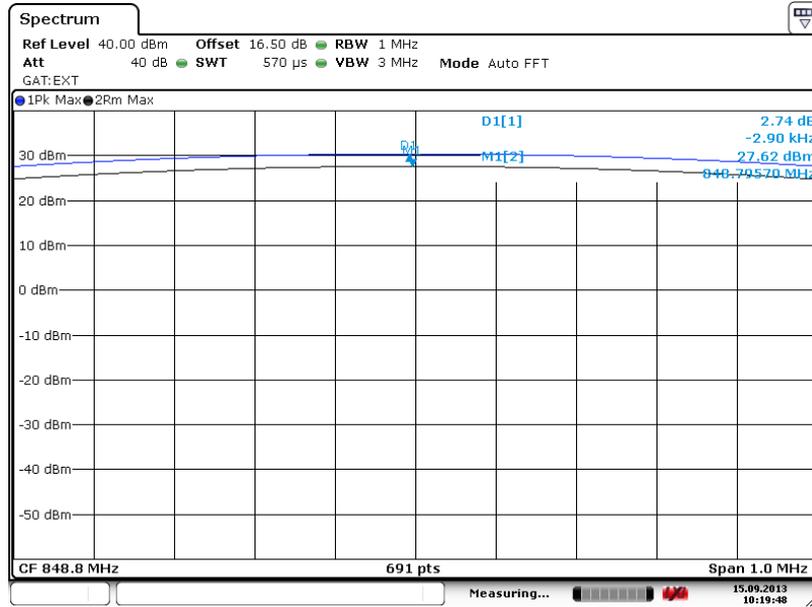


Date: 15.SEP.2013 10:19:48

**Note:** The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




|        |          |             |                 |
|--------|----------|-------------|-----------------|
| Band : | GSM 1900 | Test Mode : | GSM Link (GMSK) |
|--------|----------|-------------|-----------------|

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

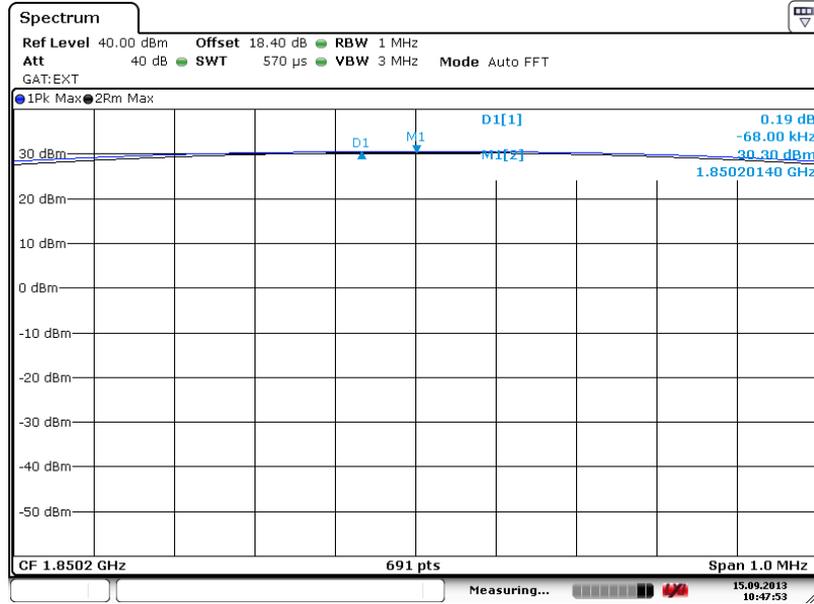

Date: 15.SEP.2013 10:47:53


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

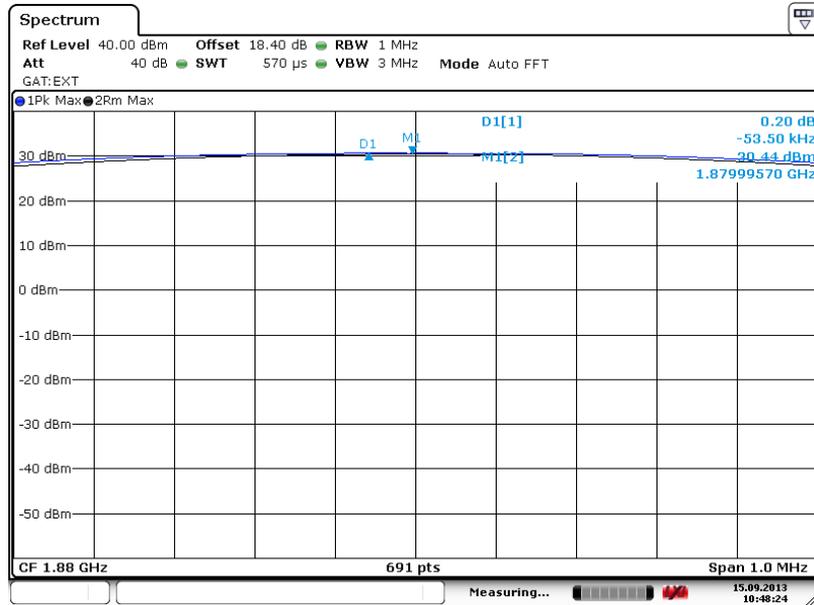

Date: 15.SEP.2013 10:48:24



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

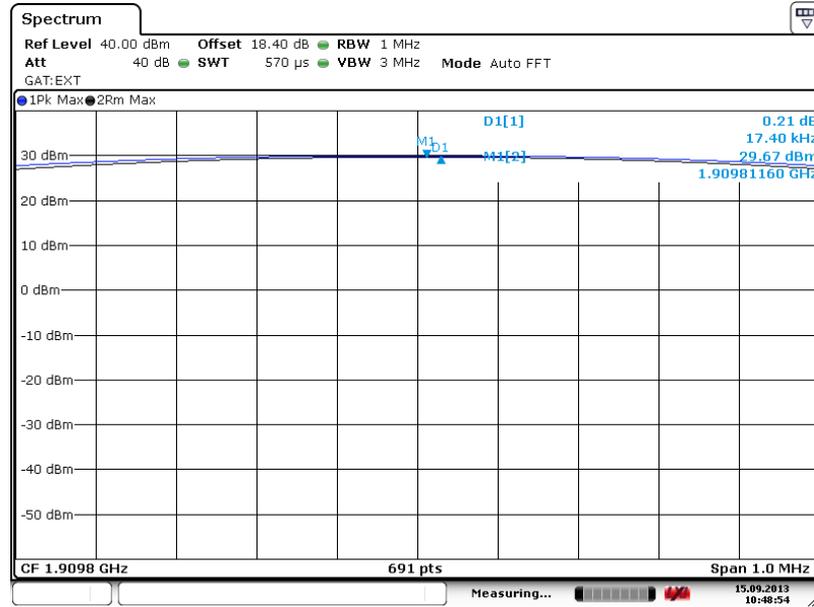


Date: 15.SEP.2013 10:48:54

**Note:** The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




|               |          |                    |                          |
|---------------|----------|--------------------|--------------------------|
| <b>Band :</b> | GSM 1900 | <b>Test Mode :</b> | EDGE class 8 Link (8PSK) |
|---------------|----------|--------------------|--------------------------|

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

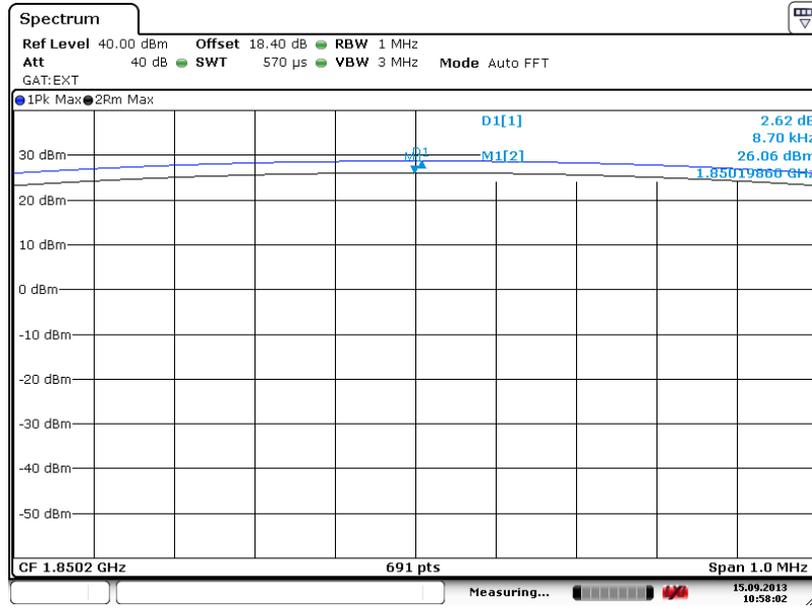


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

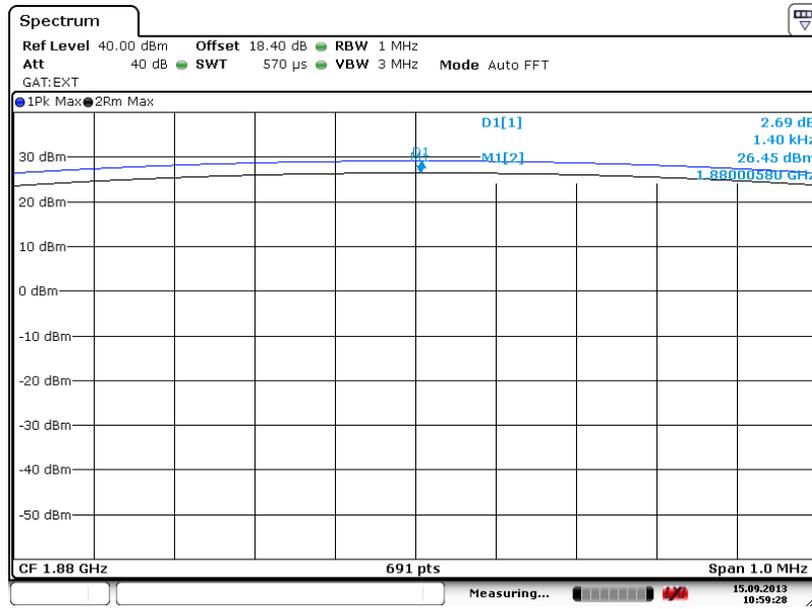



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

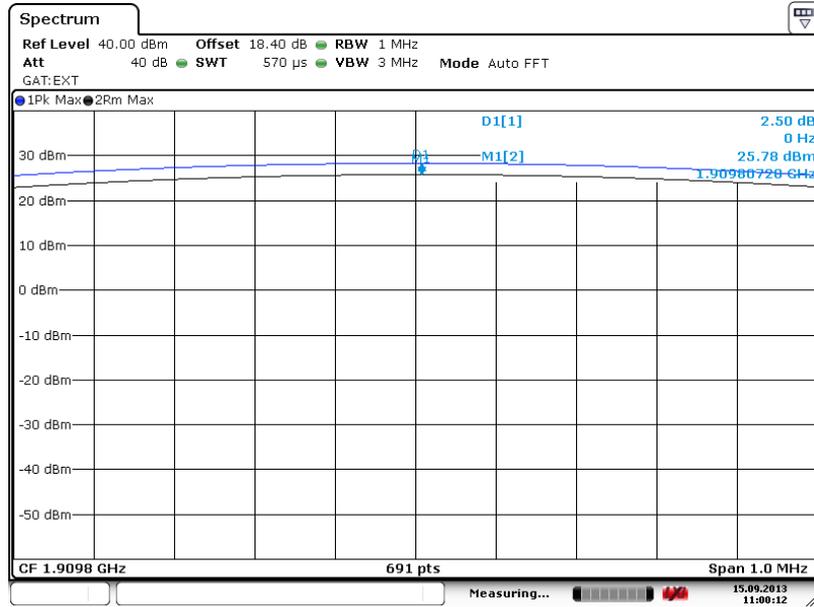


Date: 15.SEP.2013 11:00:12

**Note:** The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|               |              |                    |                          |
|---------------|--------------|--------------------|--------------------------|
| <b>Band :</b> | WCDMA Band V | <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) |
|---------------|--------------|--------------------|--------------------------|

**Peak-to-Average Ratio on Channel 4132 (826.4 MHz)**

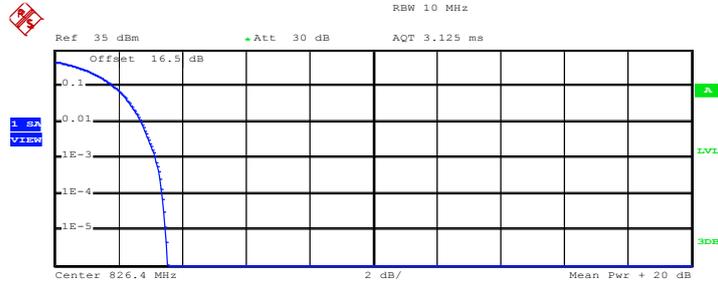

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean 23.52 dBm  
 Peak 27.07 dBm  
 Crest 3.55 dB

10 % 1.88 dB  
 1 % 2.72 dB  
 .1 % 3.16 dB  
 .01 % 3.40 dB

Date: 12.SEP.2013 19:26:00

**Peak-to-Average Ratio on Channel 4182 (836.4 MHz)**

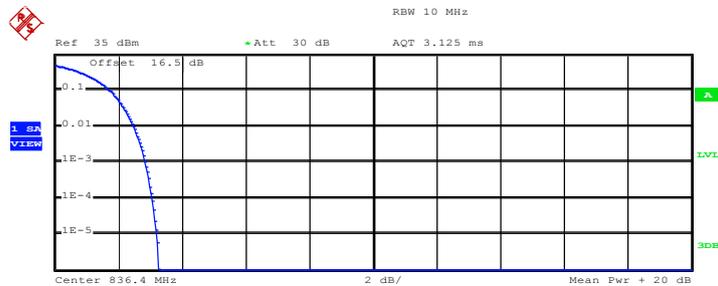

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean 22.88 dBm  
 Peak 26.15 dBm  
 Crest 3.28 dB

10 % 1.76 dB  
 1 % 2.48 dB  
 .1 % 2.84 dB  
 .01 % 3.08 dB

Date: 12.SEP.2013 19:27:55



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

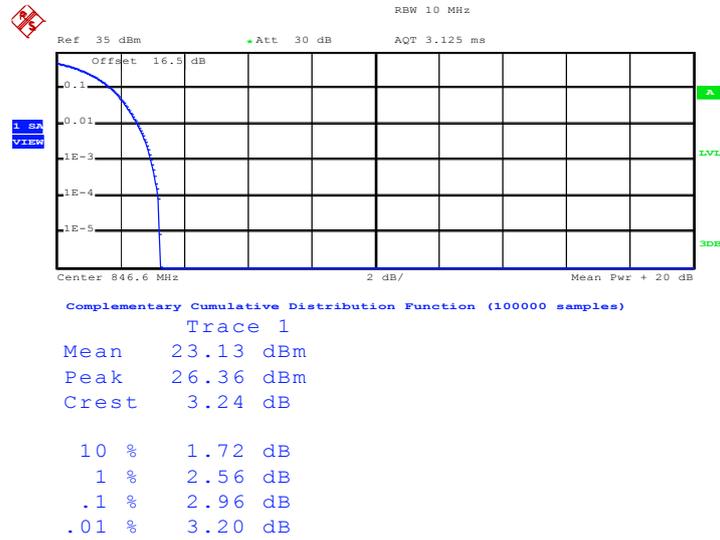


Date: 12.SEP.2013 19:28:54

**Note:** The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|               |               |                    |                          |
|---------------|---------------|--------------------|--------------------------|
| <b>Band :</b> | WCDMA Band II | <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) |
|---------------|---------------|--------------------|--------------------------|

**Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)**

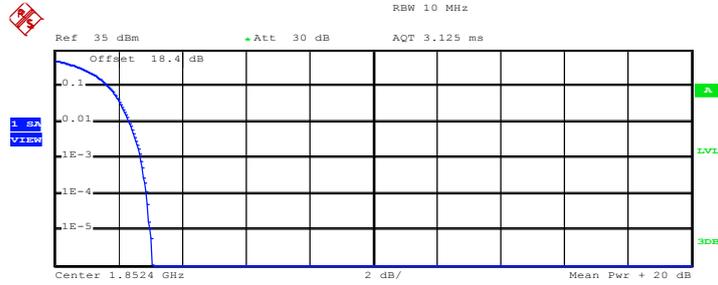


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

|       |           |
|-------|-----------|
| Mean  | 24.06 dBm |
| Peak  | 27.14 dBm |
| Crest | 3.08 dB   |
| 10 %  | 1.68 dB   |
| 1 %   | 2.36 dB   |
| .1 %  | 2.72 dB   |
| .01 % | 2.88 dB   |

Date: 12.SEP.2013 18:54:46

**Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)**

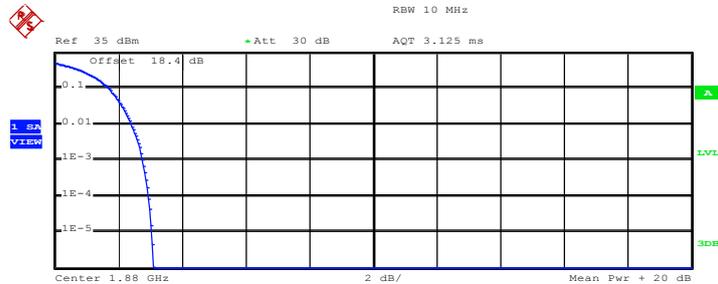

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

|       |           |
|-------|-----------|
| Mean  | 24.05 dBm |
| Peak  | 27.14 dBm |
| Crest | 3.09 dB   |
| 10 %  | 1.72 dB   |
| 1 %   | 2.44 dB   |
| .1 %  | 2.76 dB   |
| .01 % | 2.96 dB   |

Date: 12.SEP.2013 18:55:39



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

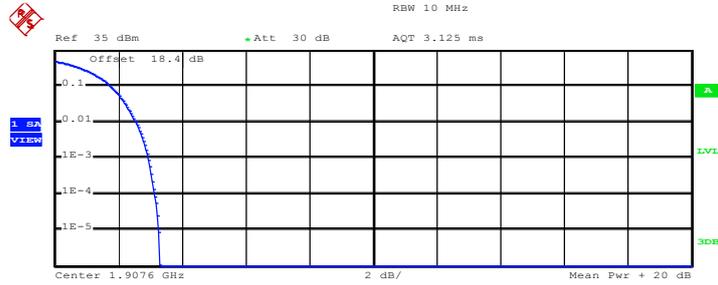

Complementary Cumulative Distribution Function (100000 samples)

| Trace 1 |           |
|---------|-----------|
| Mean    | 23.28 dBm |
| Peak    | 26.58 dBm |
| Crest   | 3.30 dB   |
| 10 %    | 1.76 dB   |
| 1 %     | 2.56 dB   |
| .1 %    | 2.96 dB   |
| .01 %   | 3.16 dB   |

Date: 12.SEP.2013 18:56:26

**Note:** The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The EUT was placed on a non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 1MHz, VBW= 3MHz for GSM, RBW= 100 kHz, VBW= 300 kHz, used channel power option with bandwidth=5MHz for WCDMA, and RMS detector settings per KDB 971168 D01.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ .

### 3.3.4 Test Setup

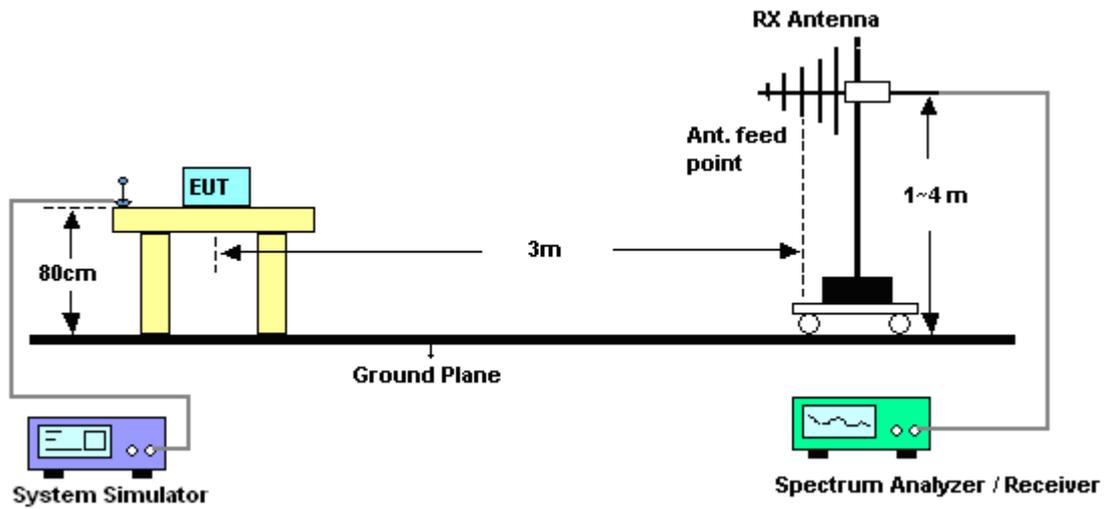



3.3.5 Test Result of ERP

| GSM850 (GSM) Radiated Power ERP |           |                        |           |         |
|---------------------------------|-----------|------------------------|-----------|---------|
| Horizontal Polarization         |           |                        |           |         |
| Frequency (MHz)                 | LVL (dBm) | Correction Factor (dB) | ERP (dBm) | ERP (W) |
| 824.2                           | 0.11      | 31.54                  | 29.50     | 0.89    |
| 836.4                           | -0.52     | 32.04                  | 29.37     | 0.86    |
| 848.8                           | -1.66     | 32.59                  | 28.78     | 0.76    |
| Vertical Polarization           |           |                        |           |         |
| Frequency (MHz)                 | LVL (dBm) | Correction Factor (dB) | ERP (dBm) | ERP (W) |
| 824.2                           | -8.04     | 32.93                  | 22.74     | 0.19    |
| 836.4                           | -9.29     | 32.82                  | 21.38     | 0.14    |
| 848.8                           | -9.41     | 33.62                  | 22.06     | 0.16    |

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

| GSM850 (EDGE class 8) Radiated Power ERP |           |                        |           |         |
|--|-----------|------------------------|-----------|---------|
| Horizontal Polarization                  |           |                        |           |         |
| Frequency (MHz)                          | LVL (dBm) | Correction Factor (dB) | ERP (dBm) | ERP (W) |
| 824.2                                    | -4.71     | 31.54                  | 24.68     | 0.29    |
| 836.4                                    | -5.03     | 32.04                  | 24.86     | 0.31    |
| 848.8                                    | -6.44     | 32.59                  | 24.00     | 0.25    |
| Vertical Polarization                    |           |                        |           |         |
| Frequency (MHz)                          | LVL (dBm) | Correction Factor (dB) | ERP (dBm) | ERP (W) |
| 824.2                                    | -12.66    | 32.93                  | 18.12     | 0.06    |
| 836.4                                    | -13.98    | 32.82                  | 16.69     | 0.05    |
| 848.8                                    | -13.53    | 33.62                  | 17.94     | 0.06    |

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15



| WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP |           |                        |           |         |
|--|-----------|------------------------|-----------|---------|
| Horizontal Polarization                        |           |                        |           |         |
| Frequency (MHz)                                | LVL (dBm) | Correction Factor (dB) | ERP (dBm) | ERP (W) |
| 826.40   | -9.85     | 31.44                  | 19.44     | 0.09    |
| 836.40   | -11.03    | 32.04                  | 18.86     | 0.08    |
| 846.60   | -10.24    | 32.63                  | 20.24     | 0.11    |
| Vertical Polarization                          |           |                        |           |         |
| Frequency (MHz)                                | LVL (dBm) | Correction Factor (dB) | ERP (dBm) | ERP (W) |
| 826.40   | -20.27    | 32.78                  | 10.36     | 0.01    |
| 836.40   | -19.40    | 32.82                  | 11.27     | 0.01    |
| 846.60   | -19.19    | 33.4                   | 12.06     | 0.02    |

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15



3.3.6 Test Result of EIRP

| GSM1900 (GSM) Radiated Power EIRP |           |                        |            |          |
|-----------------------------------|-----------|------------------------|------------|----------|
| Horizontal Polarization           |           |                        |            |          |
| Frequency (MHz)                   | LVL (dBm) | Correction Factor (dB) | EIRP (dBm) | EIRP (W) |
| 1850.2                            | -15.48    | 43.69                  | 28.21      | 0.66     |
| 1880.0                            | -15.69    | 44.79                  | 29.10      | 0.81     |
| 1909.8                            | -15.32    | 43.59                  | 28.27      | 0.67     |
| Vertical Polarization             |           |                        |            |          |
| Frequency (MHz)                   | LVL (dBm) | Correction Factor (dB) | EIRP (dBm) | EIRP (W) |
| 1850.2                            | -17.33    | 45.72                  | 28.39      | 0.69     |
| 1880.0                            | -16.92    | 46.78                  | 29.86      | 0.97     |
| 1909.8                            | -16.16    | 46.77                  | 30.61      | 1.15     |

\* EIRP = LVL (dBm) + Correction Factor (dB)

| GSM1900 (EDGE class 8) Radiated Power EIRP |           |                        |            |          |
|--|-----------|------------------------|------------|----------|
| Horizontal Polarization                    |           |                        |            |          |
| Frequency (MHz)                            | LVL (dBm) | Correction Factor (dB) | EIRP (dBm) | EIRP (W) |
| 1850.2                                     | -20.03    | 43.69                  | 23.66      | 0.23     |
| 1880.0                                     | -19.31    | 44.79                  | 25.48      | 0.35     |
| 1909.8                                     | -18.63    | 43.59                  | 24.96      | 0.31     |
| Vertical Polarization                      |           |                        |            |          |
| Frequency (MHz)                            | LVL (dBm) | Correction Factor (dB) | EIRP (dBm) | EIRP (W) |
| 1850.2                                     | -20.92    | 45.72                  | 24.80      | 0.30     |
| 1880.0                                     | -20.33    | 46.78                  | 26.45      | 0.44     |
| 1909.8                                     | -19.72    | 46.77                  | 27.05      | 0.51     |

\* EIRP = LVL (dBm) + Correction Factor (dB)



| WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP |           |                        |            |          |
|--|-----------|------------------------|------------|----------|
| Horizontal Polarization                          |           |                        |            |          |
| Frequency (MHz)                                  | LVL (dBm) | Correction Factor (dB) | EIRP (dBm) | EIRP (W) |
| 1852.40  | -22.67    | 43.69                  | 21.02      | 0.13     |
| 1880.00  | -23.11    | 44.79                  | 21.68      | 0.15     |
| 1907.60  | -23.48    | 43.59                  | 20.11      | 0.10     |
| Vertical Polarization                            |           |                        |            |          |
| Frequency (MHz)                                  | LVL (dBm) | Correction Factor (dB) | EIRP (dBm) | EIRP (W) |
| 1852.40  | -23.26    | 45.72                  | 22.46      | 0.18     |
| 1880.00  | -23.36    | 46.78                  | 23.42      | 0.22     |
| 1907.60  | -23.28    | 46.77                  | 23.49      | 0.22     |

\* EIRP = LVL (dBm) + Correction Factor (dB)

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.4.4 Test Setup

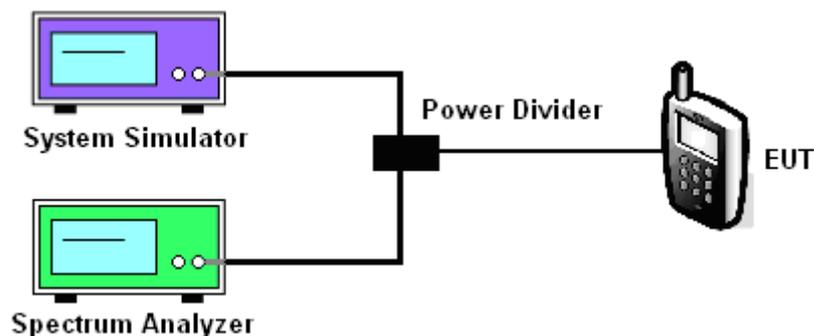



3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

| Cellular Band   |              |              |               |                       |              |               |
|-----------------|--------------|--------------|---------------|-----------------------|--------------|---------------|
| Modes           | GSM850 (GSM) |              |               | GSM850 (EDGE class 8) |              |               |
| Channel         | 128<br>(Low) | 189<br>(Mid) | 251<br>(High) | 128<br>(Low)          | 189<br>(Mid) | 251<br>(High) |
| Frequency (MHz) | 824.2        | 836.4        | 848.8         | 824.2                 | 836.4        | 848.8         |
| 99% OBW (kHz)   | 250.00       | 244.00       | 248.00        | 242.00                | 246.00       | 242.00        |
| 26dB BW (kHz)   | 304.00       | 310.00       | 314.00        | 312.00                | 312.00       | 288.00        |

| PCS Band        |               |              |               |                        |              |               |
|-----------------|---------------|--------------|---------------|------------------------|--------------|---------------|
| Modes           | GSM1900 (GSM) |              |               | GSM1900 (EDGE class 8) |              |               |
| Channel         | 512<br>(Low)  | 661<br>(Mid) | 810<br>(High) | 512<br>(Low)           | 661<br>(Mid) | 810<br>(High) |
| Frequency (MHz) | 1850.2        | 1880         | 1909.8        | 1850.2                 | 1880         | 1909.8        |
| 99% OBW (kHz)   | 246.00        | 248.00       | 246.00        | 250.00                 | 250.00       | 248.00        |
| 26dB BW (kHz)   | 312.00        | 310.00       | 310.00        | 294.00                 | 306.00       | 312.00        |

| Cellular Band   |                             |            |             |
|-----------------|-----------------------------|------------|-------------|
| Modes           | WCDMA Band V (RMC 12.2Kbps) |            |             |
| Channel         | 4132 (Low)                  | 4182 (Mid) | 4233 (High) |
| Frequency (MHz) | 826.4                       | 836.4      | 846.6       |
| 99% OBW (MHz)   | 4.18                        | 4.18       | 4.14        |
| 26dB BW (MHz)   | 4.70                        | 4.70       | 4.68        |


| PCS Band        |                              |            |             |
|-----------------|------------------------------|------------|-------------|
| Modes           | WCDMA Band II (RMC 12.2Kbps) |            |             |
| Channel         | 9262 (Low)                   | 9400 (Mid) | 9538 (High) |
| Frequency (MHz) | 1852.4                       | 1880       | 1907.6      |
| 99% OBW (MHz)   | 4.16                         | 4.18       | 4.18        |
| 26dB BW (MHz)   | 4.70                         | 4.70       | 4.70        |



3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


|        |         |             |                 |
|--------|---------|-------------|-----------------|
| Band : | GSM 850 | Test Mode : | GSM Link (GMSK) |
|--------|---------|-------------|-----------------|

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

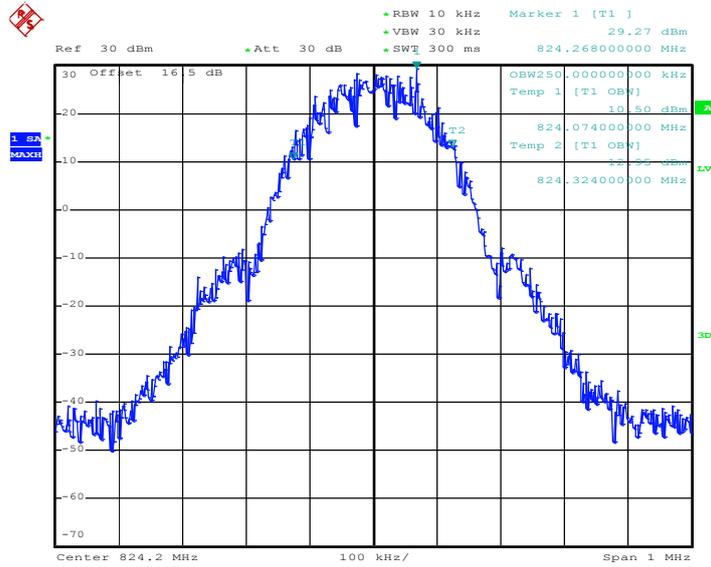

Date: 12.SEP.2013 09:54:17


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

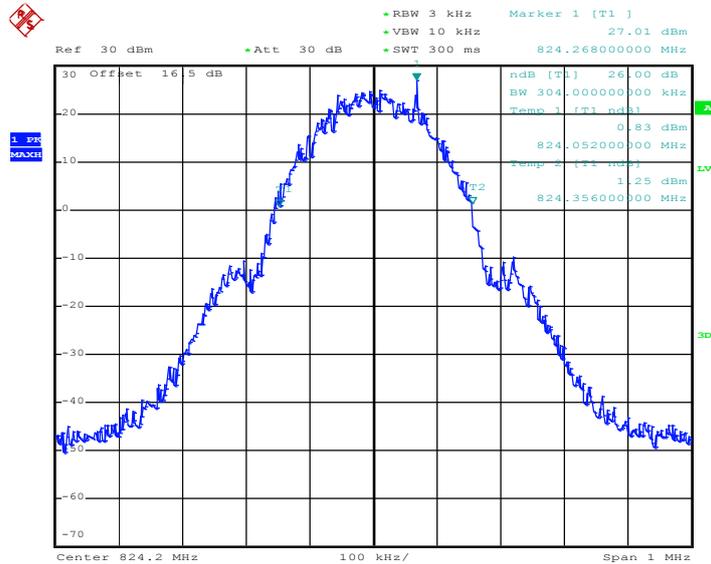

Date: 12.SEP.2013 09:52:59




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

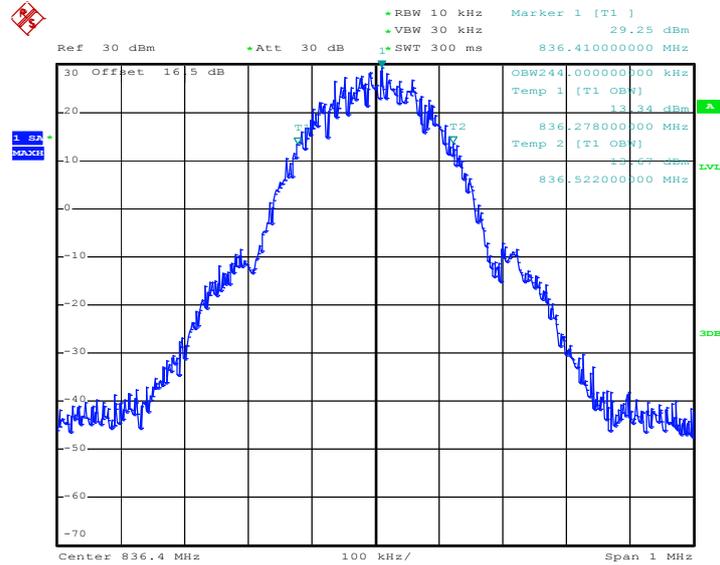

Date: 12.SEP.2013 09:54:43


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

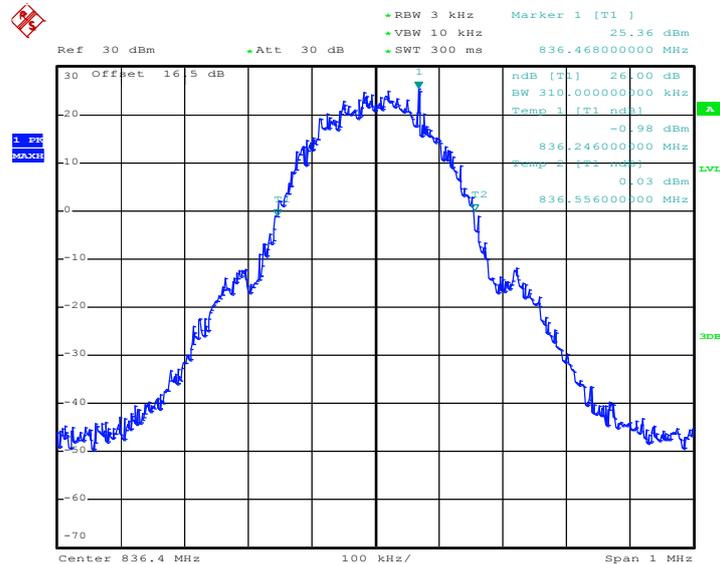

Date: 12.SEP.2013 09:53:25




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

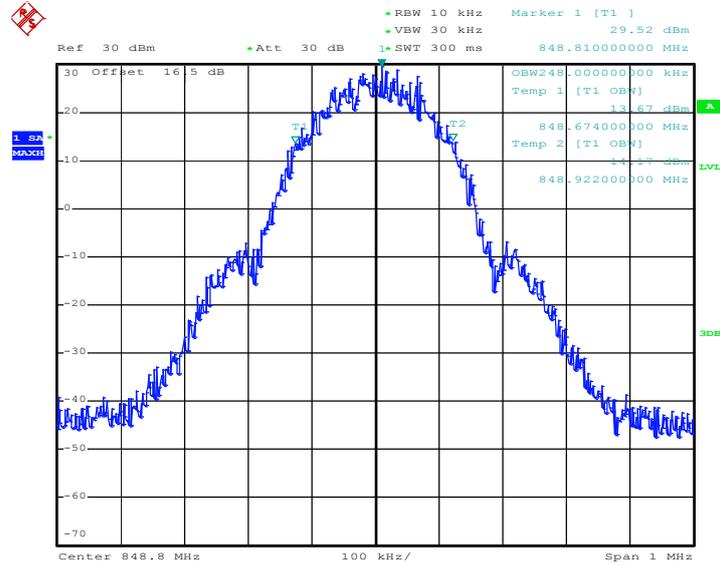

Date: 12.SEP.2013 09:55:09

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

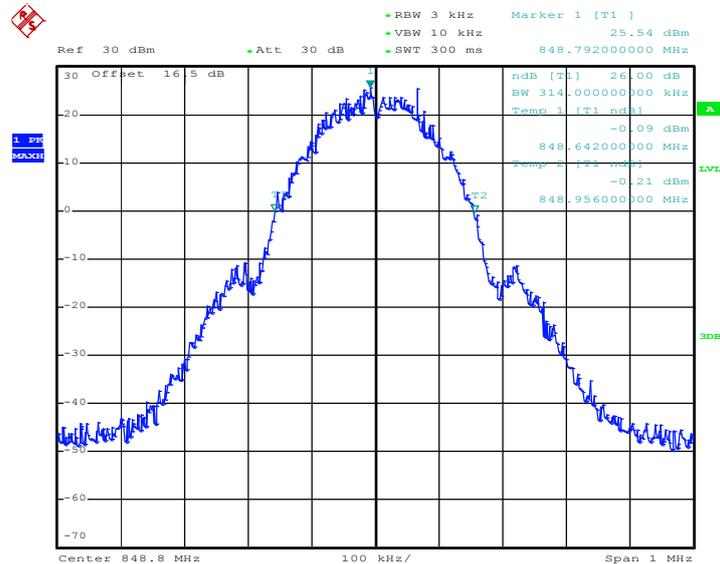


Date: 12.SEP.2013 09:53:51

**Note:** The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




|               |         |                    |                          |
|---------------|---------|--------------------|--------------------------|
| <b>Band :</b> | GSM 850 | <b>Test Mode :</b> | EDGE class 8 Link (8PSK) |
|---------------|---------|--------------------|--------------------------|

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

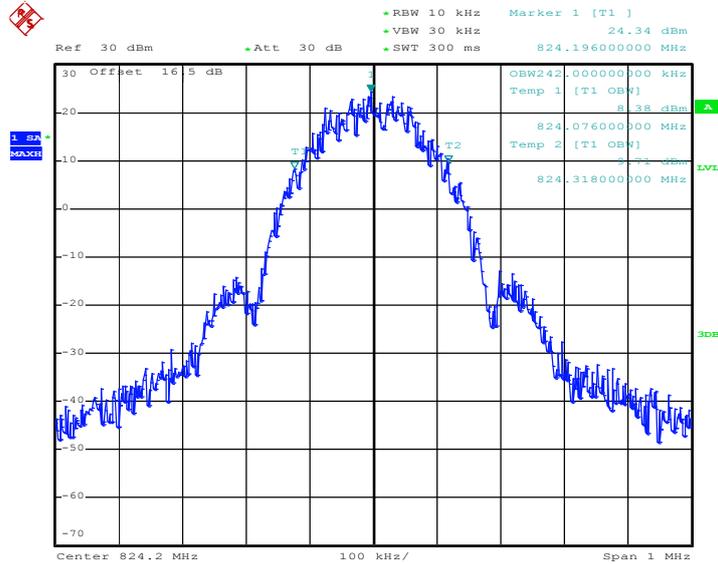

Date: 12.SEP.2013 10:18:32


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

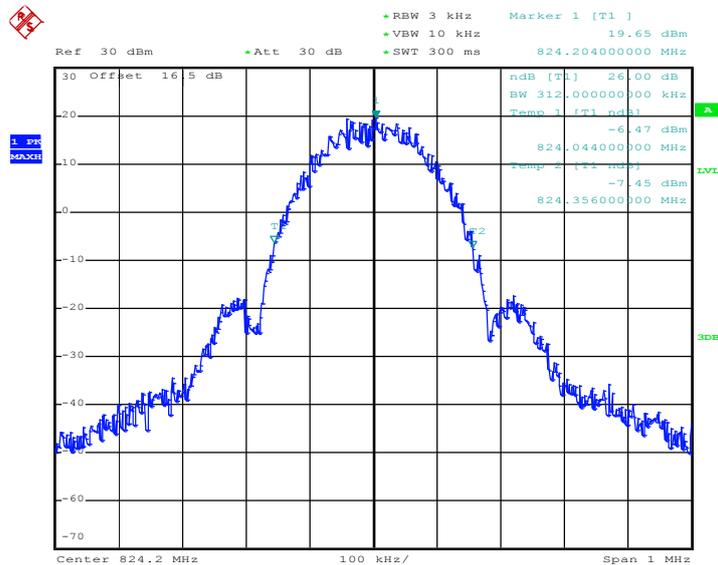

Date: 12.SEP.2013 10:17:13




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

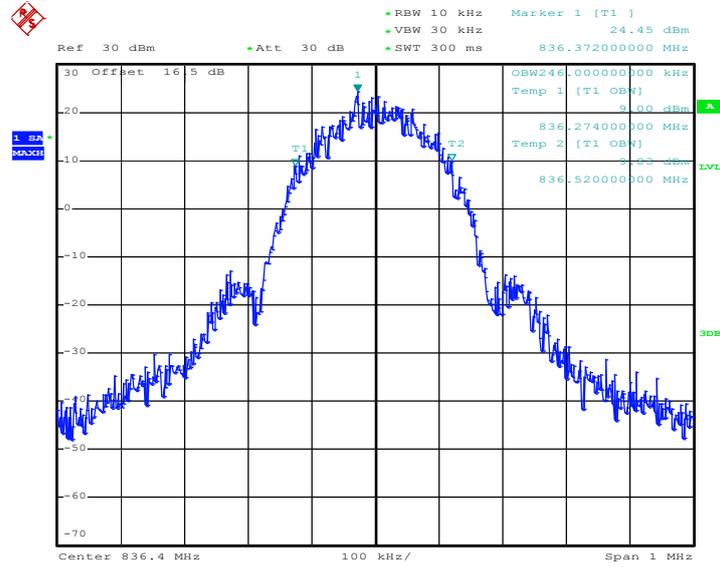

Date: 12.SEP.2013 10:18:58


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

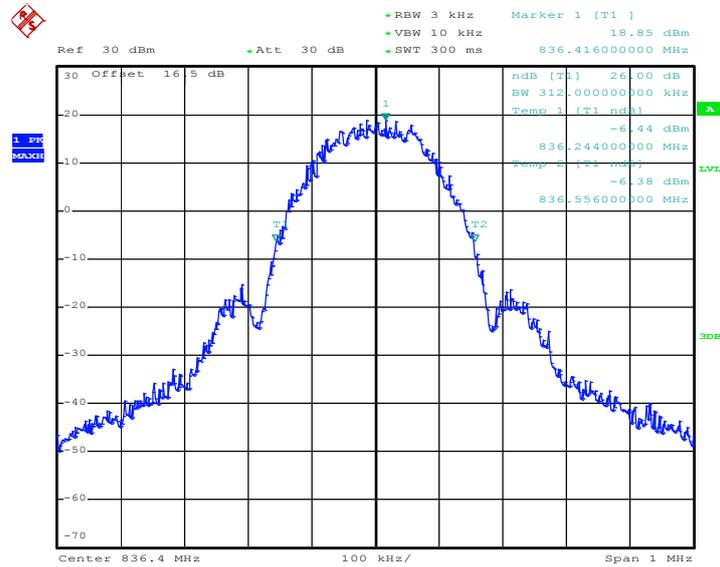

Date: 12.SEP.2013 10:17:39




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

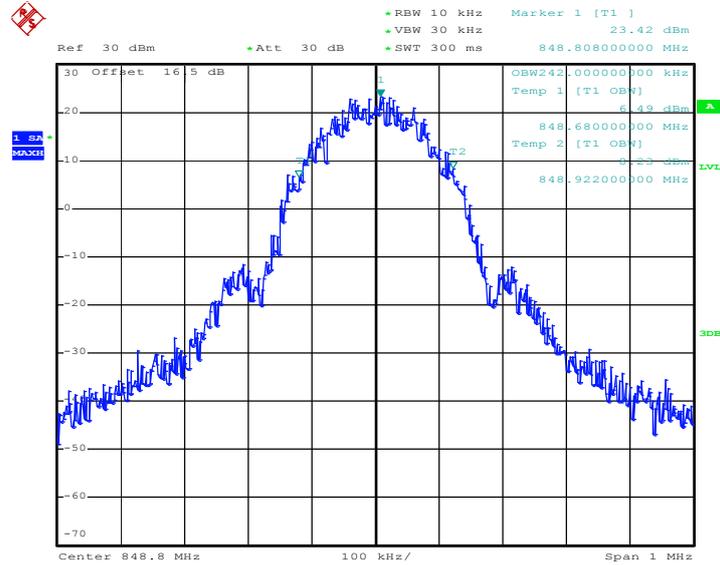

Date: 12.SEP.2013 10:19:23

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

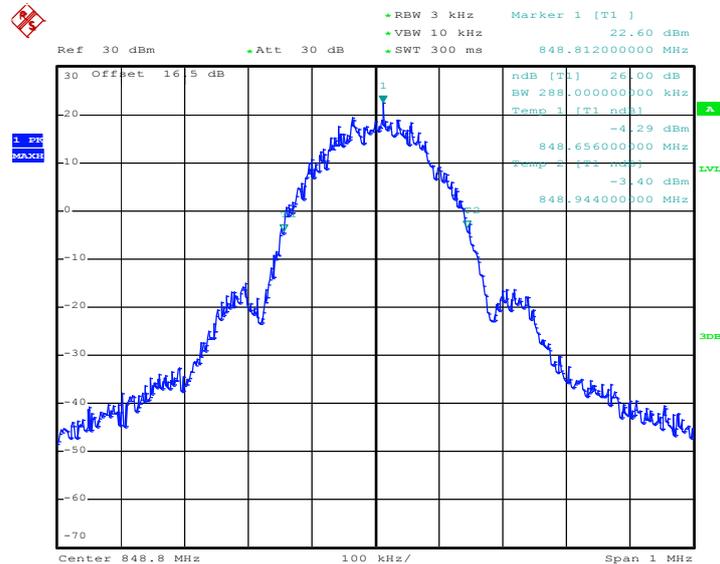


Date: 12.SEP.2013 10:18:05

**Note:** The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




|        |          |             |                 |
|--------|----------|-------------|-----------------|
| Band : | GSM 1900 | Test Mode : | GSM Link (GMSK) |
|--------|----------|-------------|-----------------|

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

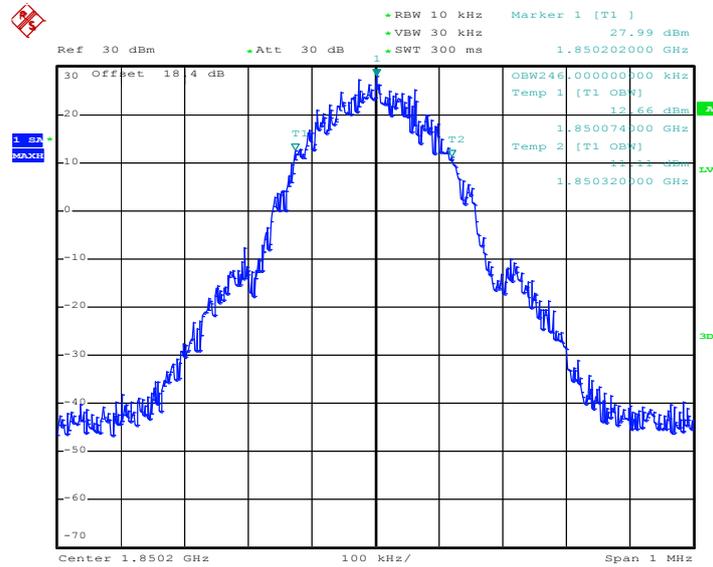

Date: 12.SEP.2013 17:53:30


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

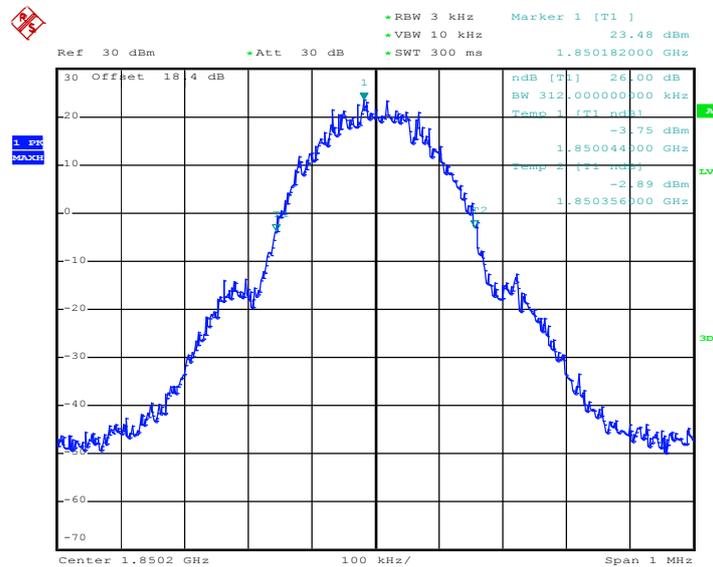

Date: 12.SEP.2013 17:52:11




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

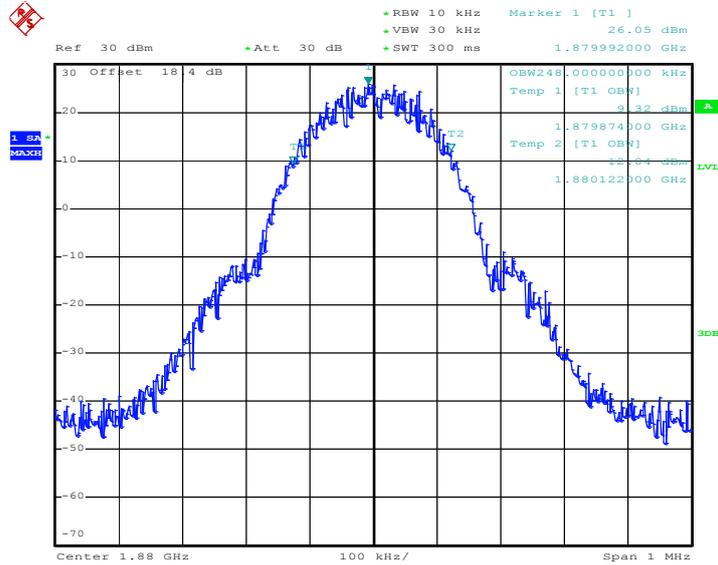

Date: 12.SEP.2013 17:53:56


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

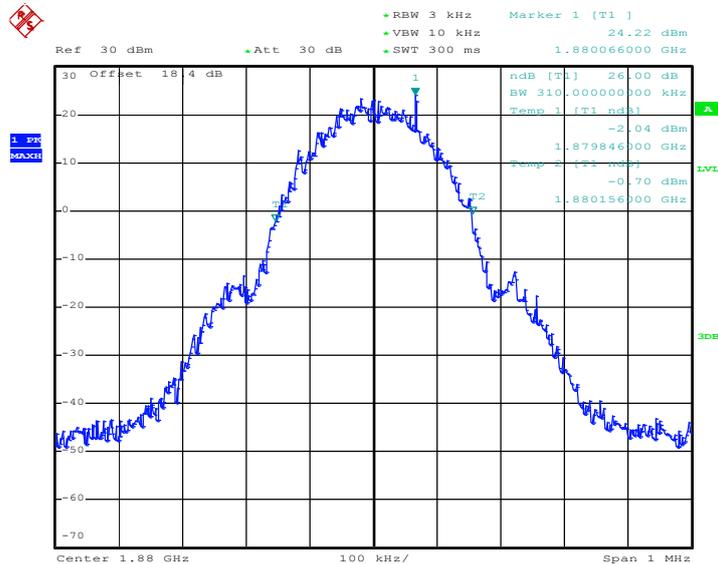

Date: 12.SEP.2013 17:52:38




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

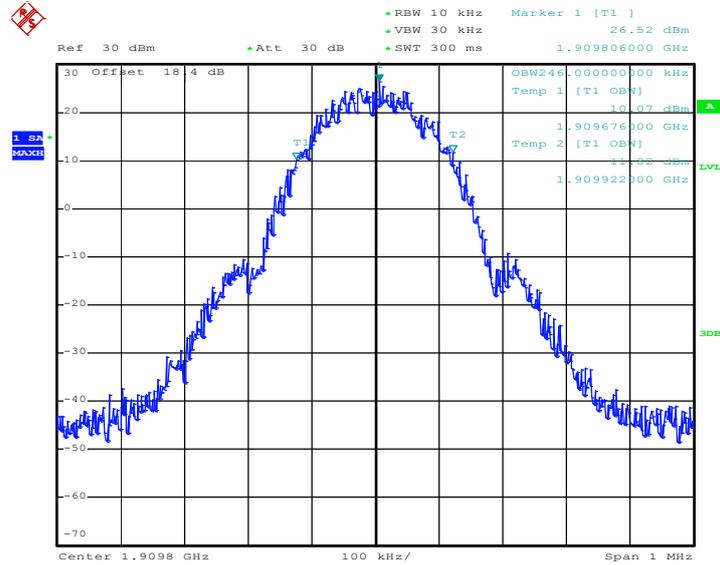

Date: 12.SEP.2013 17:54:22

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

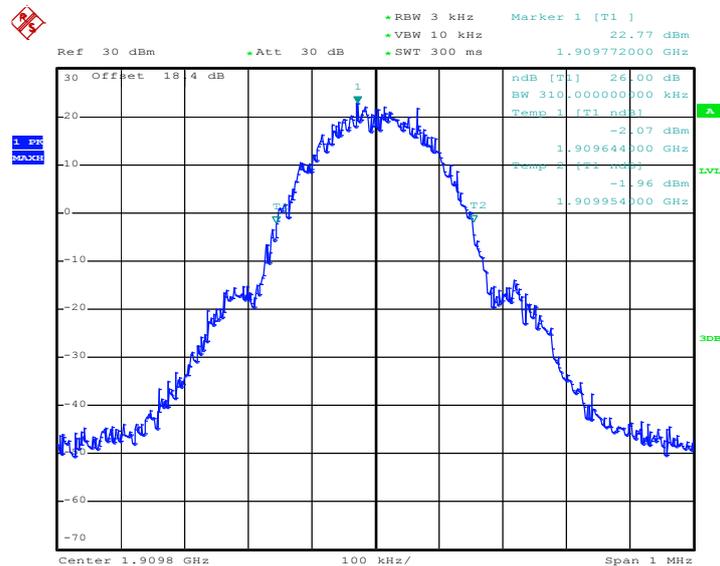


Date: 12.SEP.2013 17:53:04

Note: The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|----------|-------------|--------------------------|

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

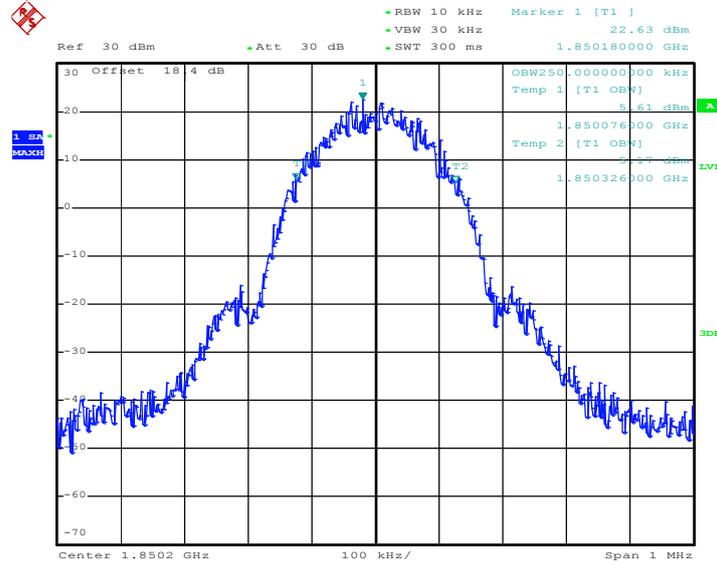

Date: 12.SEP.2013 18:16:29


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

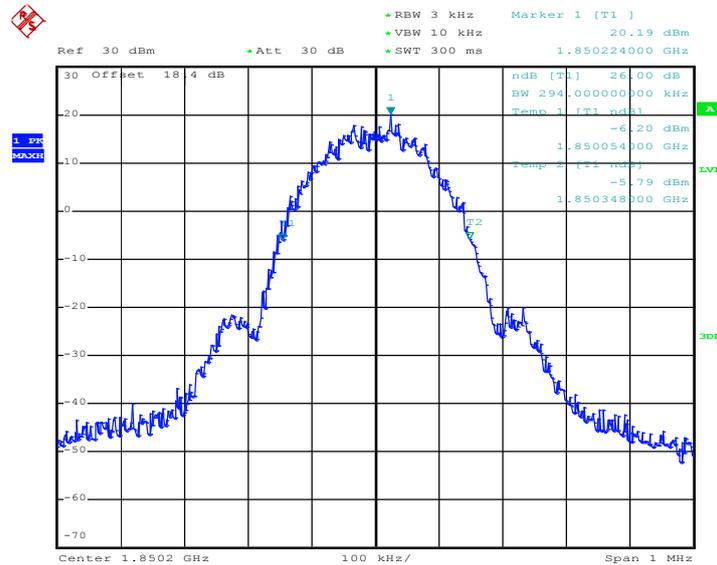

Date: 12.SEP.2013 18:09:42




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

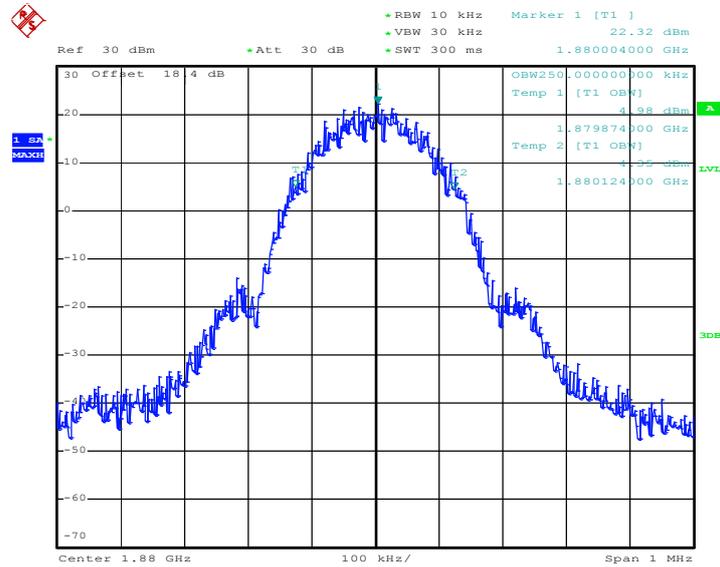

Date: 12.SEP.2013 18:16:55


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

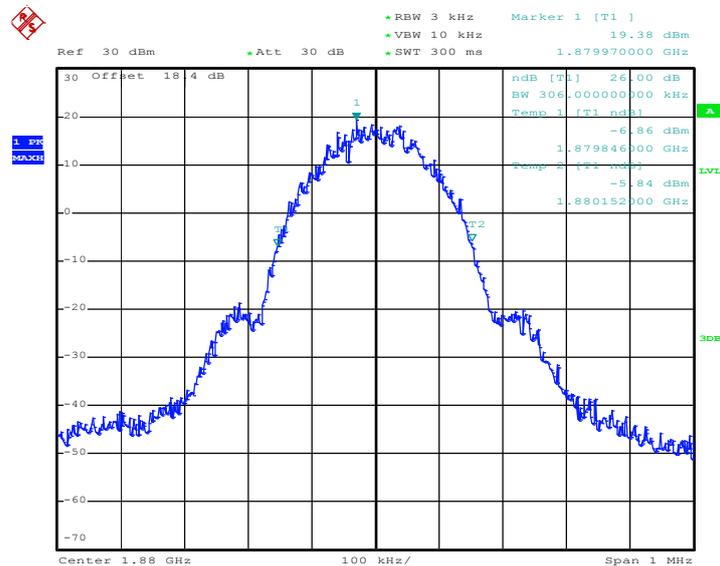

Date: 12.SEP.2013 18:10:08




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

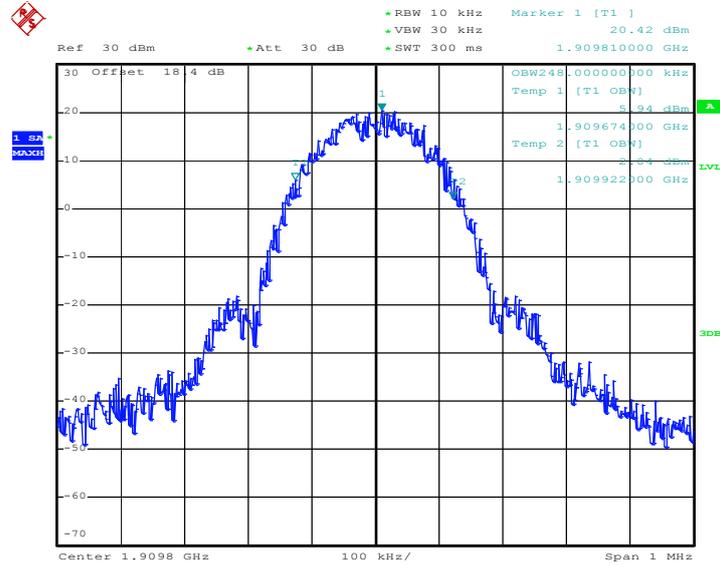

Date: 12.SEP.2013 18:17:21

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

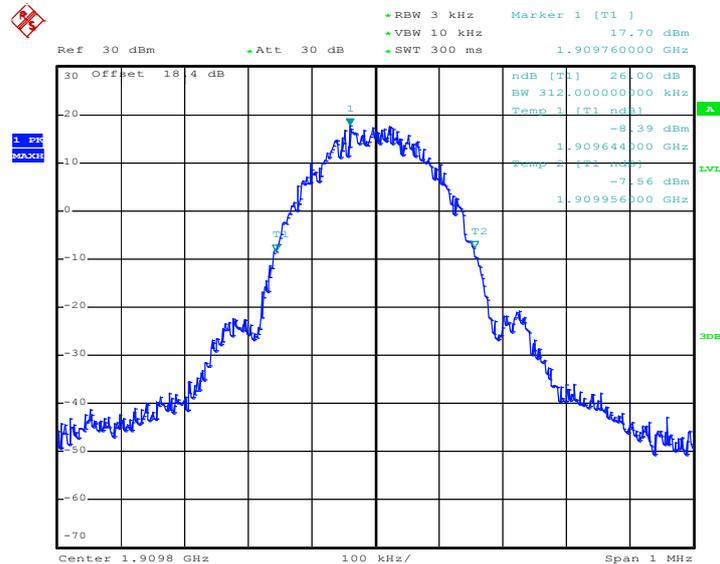


Date: 12.SEP.2013 18:10:35

**Note:** The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




|        |              |             |                          |
|--------|--------------|-------------|--------------------------|
| Band : | WCDMA Band V | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|--------------|-------------|--------------------------|

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

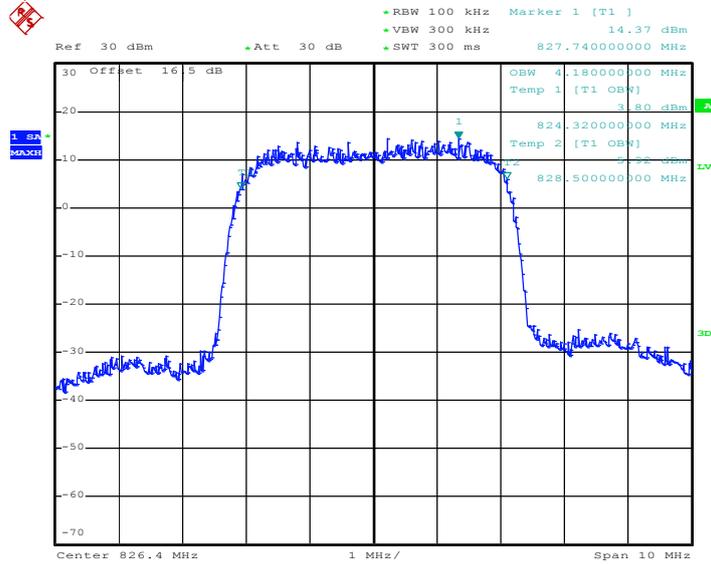

Date: 12.SEP.2013 19:06:13


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

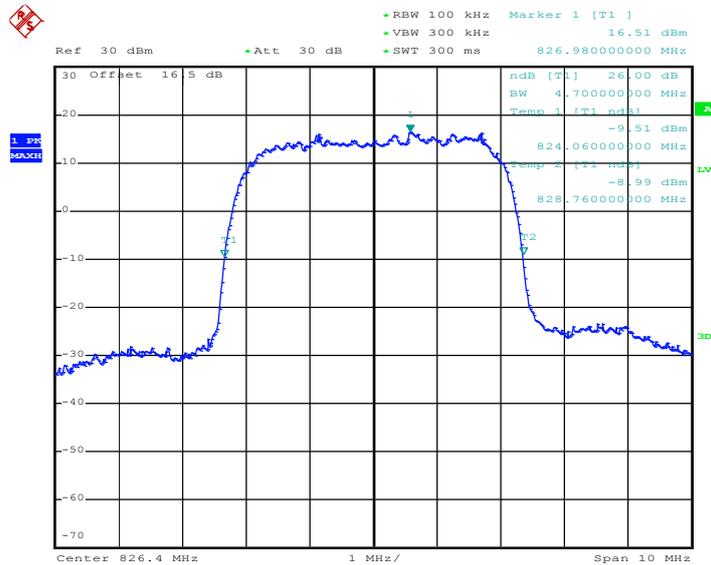

Date: 12.SEP.2013 19:04:55




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

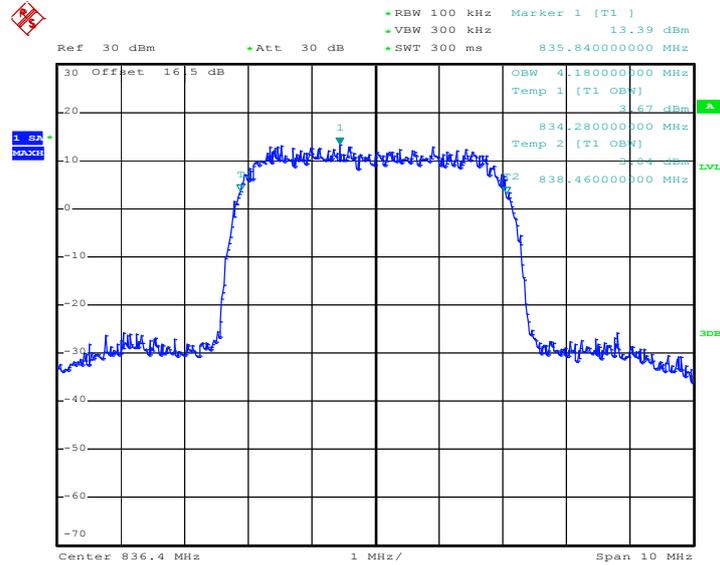

Date: 12.SEP.2013 19:06:39


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

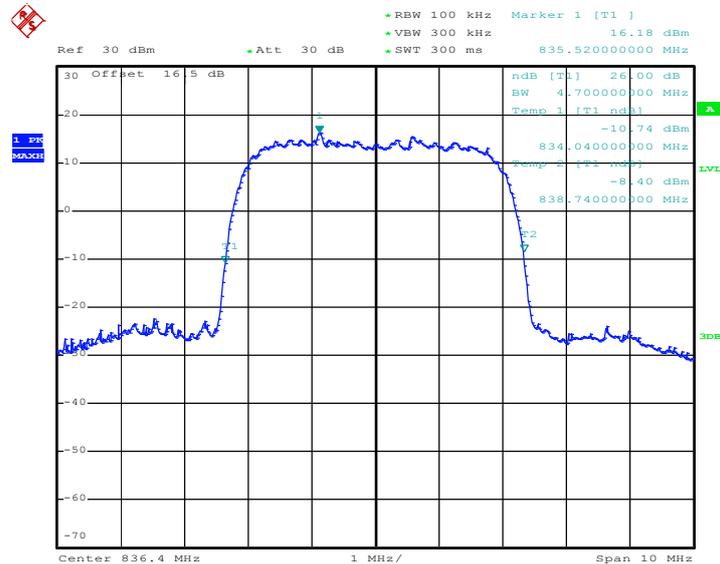

Date: 12.SEP.2013 19:05:21




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

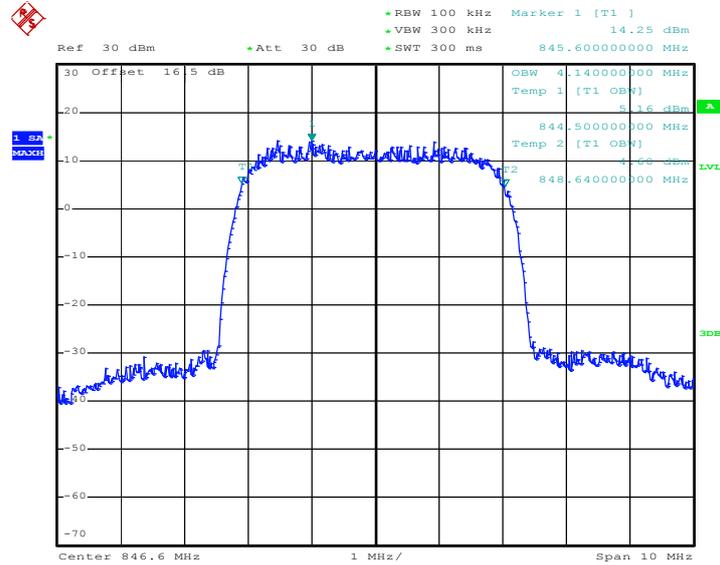

Date: 12.SEP.2013 19:07:05

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

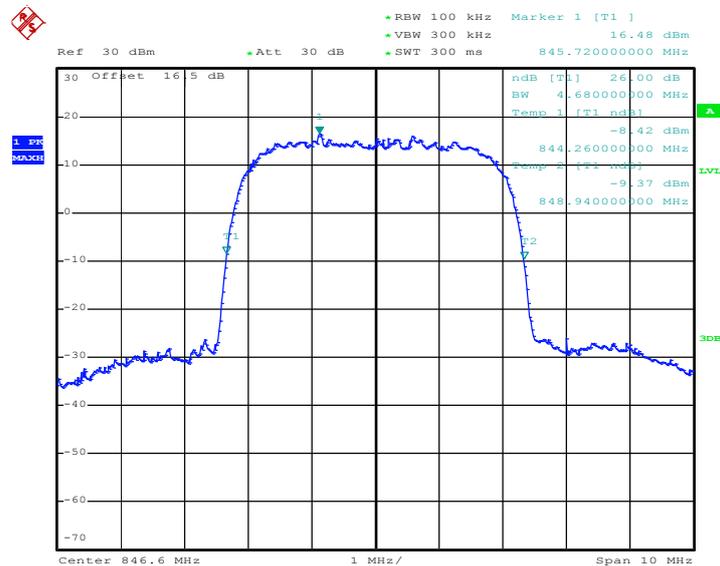


Date: 12.SEP.2013 19:05:47

**Note:** The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




|               |               |                    |                          |
|---------------|---------------|--------------------|--------------------------|
| <b>Band :</b> | WCDMA Band II | <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) |
|---------------|---------------|--------------------|--------------------------|

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

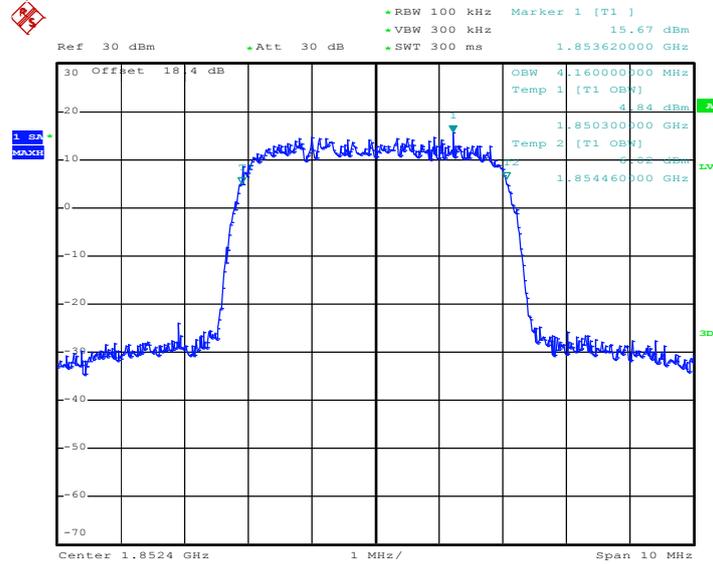

Date: 12.SEP.2013 18:48:31


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

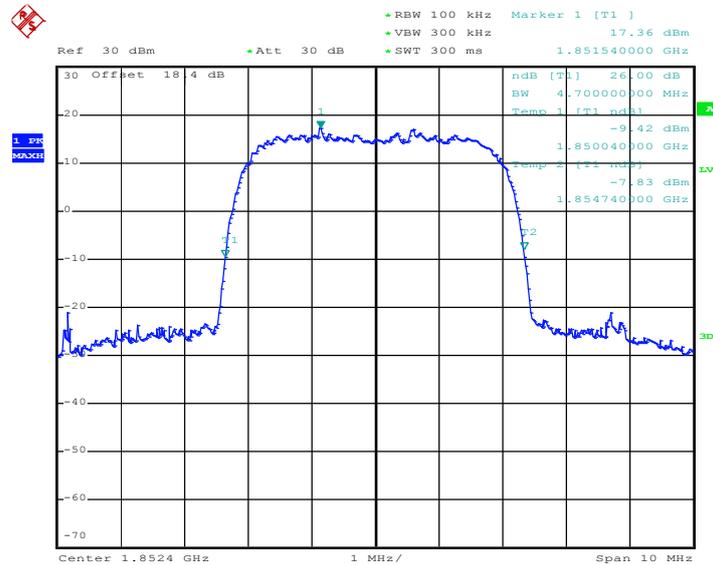

Date: 12.SEP.2013 18:47:12




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

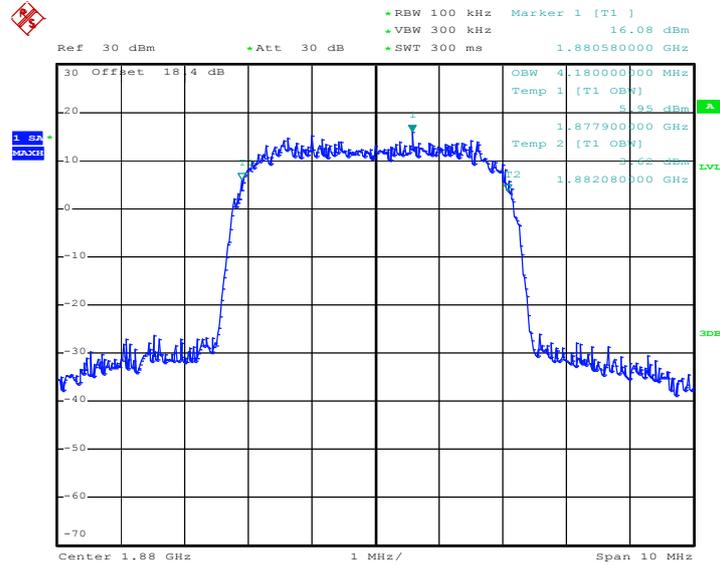

Date: 12.SEP.2013 18:48:57


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

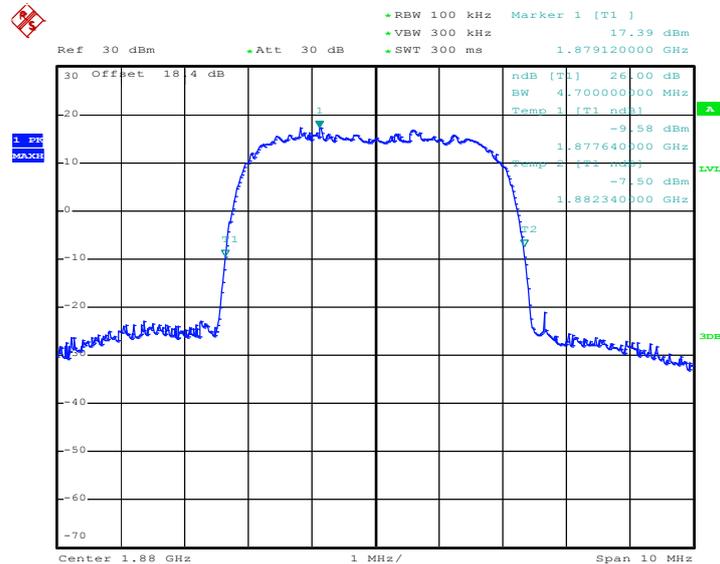

Date: 12.SEP.2013 18:47:38




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

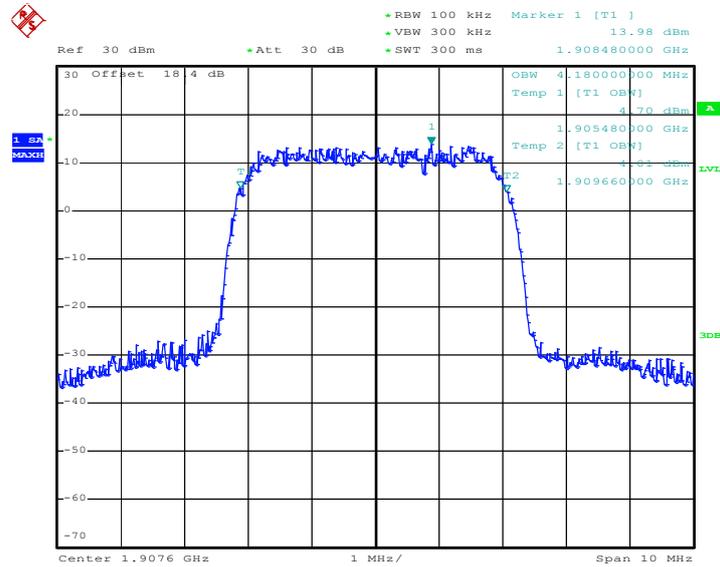

Date: 12.SEP.2013 18:49:23

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

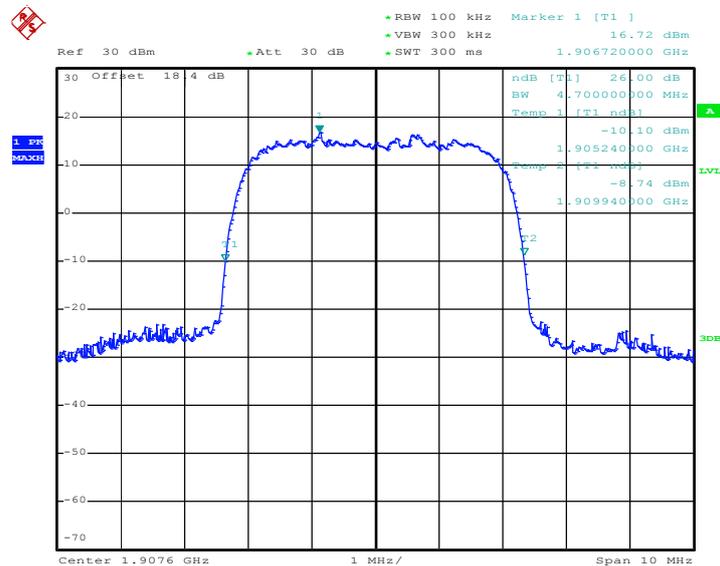

Date: 12.SEP.2013 18:48:04

**Note:** The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

## 3.5 Band Edge Measurement

### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.5.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly  $BW/100$ .
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.5.4 Test Setup

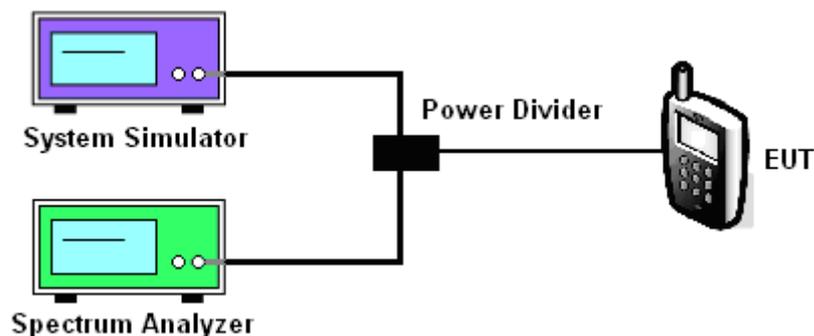




3.5.5 Test Result (Plots) of Conducted Band Edge

|                     |           |                          |                 |
|---------------------|-----------|--------------------------|-----------------|
| Band :              | GSM850    | Test Mode :              | GSM Link (GMSK) |
| Correction Factor : | 0.20dB    | Maximum 26dB Bandwidth : | 0.314MHz        |
| Band Edge :         | -17.79dBm | Measurement Value :      | -17.99dBm       |

Lower Band Edge Plot on Channel 128 (824.2 MHz)

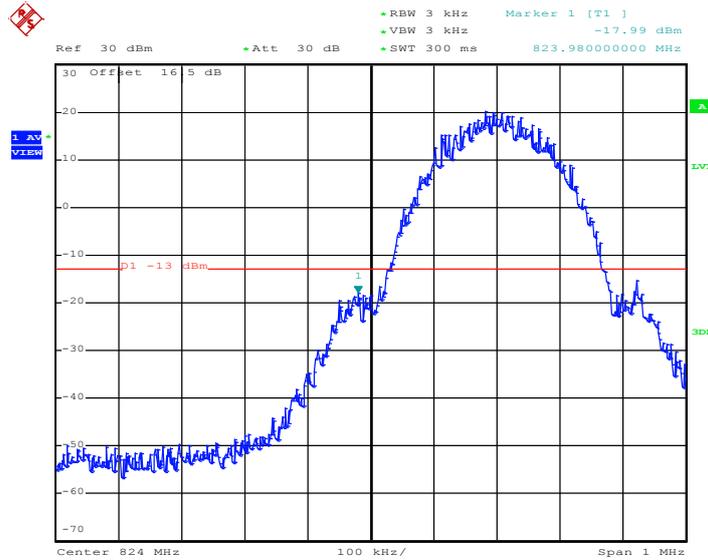


Date: 12.SEP.2013 09:55:36

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)  
For example,  $-17.99\text{dBm} + 0.20\text{dB} = -17.79\text{dBm}$
3. The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                     |           |                          |                 |
|---------------------|-----------|--------------------------|-----------------|
| Band :              | GSM850    | Test Mode :              | GSM Link (GMSK) |
| Correction Factor : | 0.20dB    | Maximum 26dB Bandwidth : | 0.314MHz        |
| Band Edge :         | -16.58dBm | Measurement Value :      | -16.78dBm       |

Higher Band Edge Plot on Channel 251 (848.8 MHz)

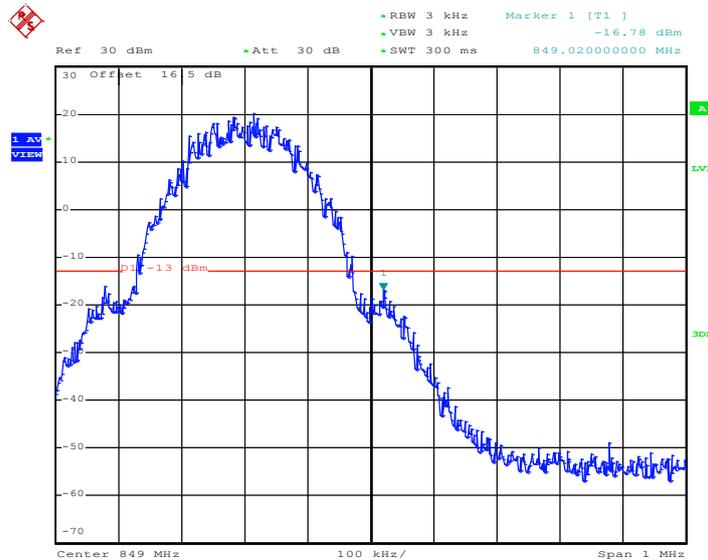


Date: 12.SEP.2013 09:56:02

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                     |           |                          |                          |
|---------------------|-----------|--------------------------|--------------------------|
| Band :              | GSM850    | Test Mode :              | EDGE class 8 Link (8PSK) |
| Correction Factor : | 0.17dB    | Maximum 26dB Bandwidth : | 0.312MHz                 |
| Band Edge :         | -23.43dBm | Measurement Value :      | -23.60dBm                |

Lower Band Edge Plot on Channel 128 (824.2 MHz)

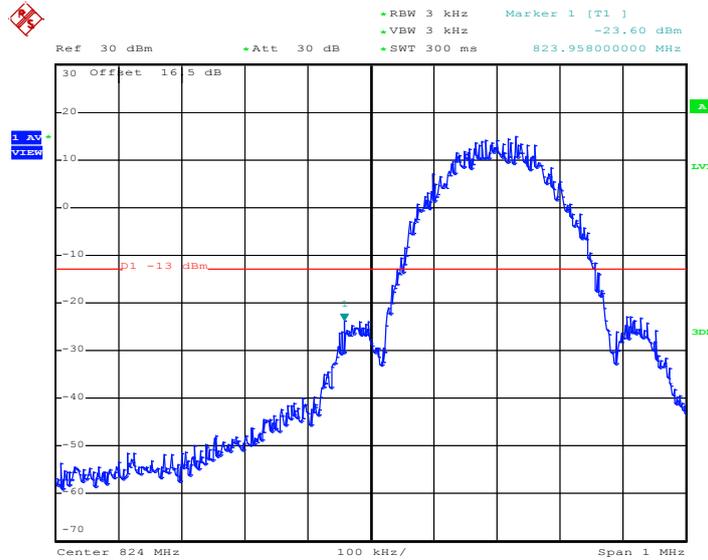


Date: 12.SEP.2013 10:19:50

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                     |           |                          |                          |
|---------------------|-----------|--------------------------|--------------------------|
| Band :              | GSM850    | Test Mode :              | EDGE class 8 Link (8PSK) |
| Correction Factor : | 0.17dB    | Maximum 26dB Bandwidth : | 0.312MHz                 |
| Band Edge :         | -21.99dBm | Measurement Value :      | -22.16dBm                |

Higher Band Edge Plot on Channel 251 (848.8 MHz)

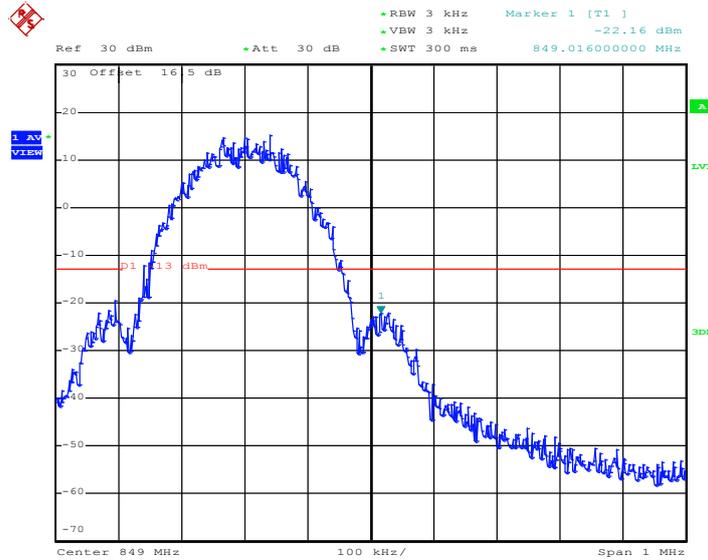


Date: 12.SEP.2013 10:20:16

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                     |           |                          |                 |
|---------------------|-----------|--------------------------|-----------------|
| Band :              | GSM1900   | Test Mode :              | GSM Link (GMSK) |
| Correction Factor : | 0.17dB    | Maximum 26dB Bandwidth : | 0.312MHz        |
| Band Edge :         | -19.33dBm | Measurement Value :      | -19.50dBm       |

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

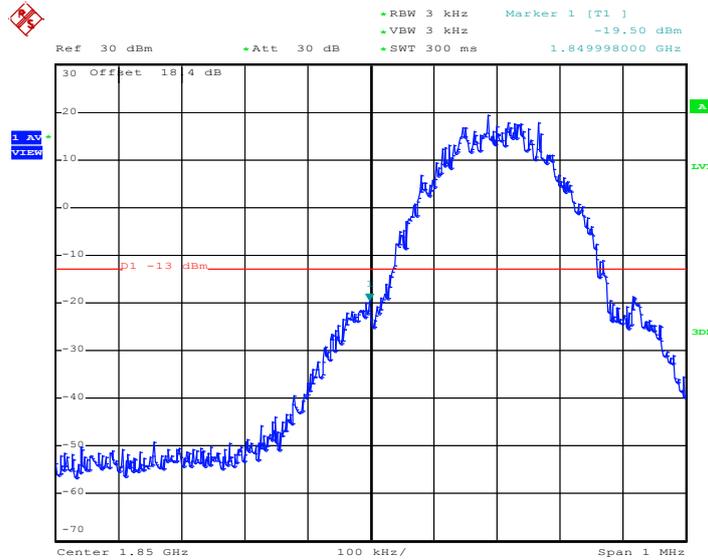


Date: 12.SEP.2013 17:56:49

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                            |           |                                 |                 |
|----------------------------|-----------|---------------------------------|-----------------|
| <b>Band :</b>              | GSM1900   | <b>Test Mode :</b>              | GSM Link (GMSK) |
| <b>Correction Factor :</b> | 0.17dB    | <b>Maximum 26dB Bandwidth :</b> | 0.312MHz        |
| <b>Band Edge :</b>         | -17.64dBm | <b>Measurement Value :</b>      | -17.81dBm       |

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

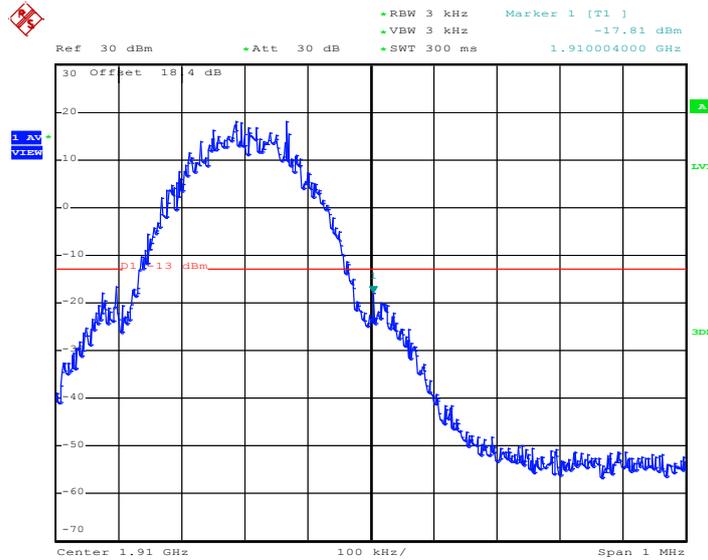


Date: 12.SEP.2013 17:57:15

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                     |           |                          |                          |
|---------------------|-----------|--------------------------|--------------------------|
| Band :              | GSM1900   | Test Mode :              | EDGE class 8 Link (8PSK) |
| Correction Factor : | 0.17dB    | Maximum 26dB Bandwidth : | 0.312MHz                 |
| Band Edge :         | -25.39dBm | Measurement Value :      | -25.56dBm                |

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

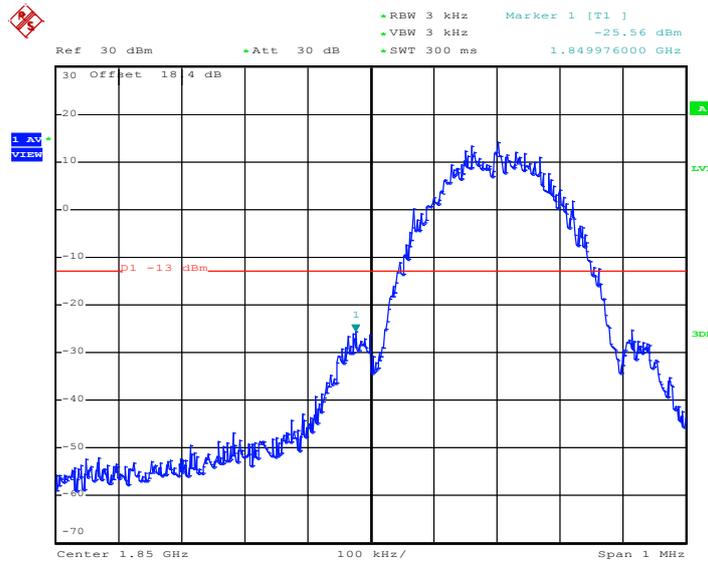


Date: 12.SEP.2013 18:15:14

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                     |           |                          |                          |
|---------------------|-----------|--------------------------|--------------------------|
| Band :              | GSM1900   | Test Mode :              | EDGE class 8 Link (8PSK) |
| Correction Factor : | 0.17dB    | Maximum 26dB Bandwidth : | 0.312MHz                 |
| Band Edge :         | -26.67dBm | Measurement Value :      | -26.84dBm                |

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

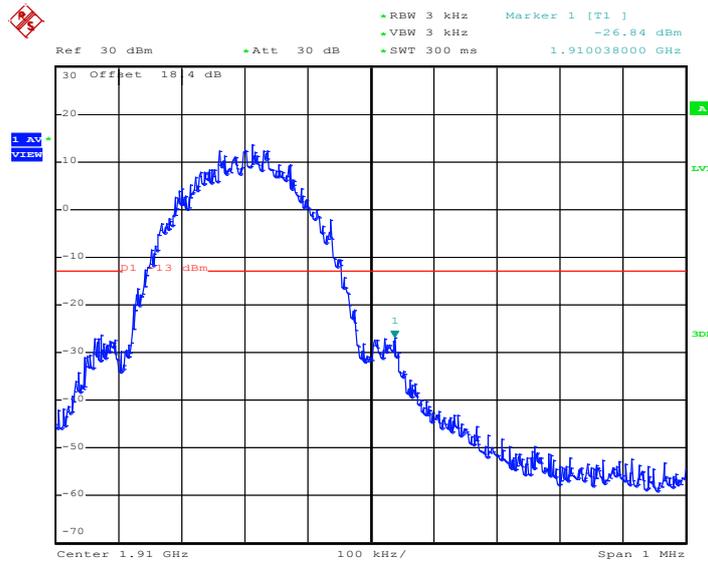


Date: 12.SEP.2013 18:15:40

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                     |              |                          |                          |
|---------------------|--------------|--------------------------|--------------------------|
| Band :              | WCDMA Band V | Test Mode :              | RMC 12.2Kbps Link (QPSK) |
| Correction Factor : | -3.28dB      | Maximum 26dB Bandwidth : | 4.700MHz                 |
| Band Edge :         | -31.26dBm    | Measurement Value :      | -27.98dBm                |

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

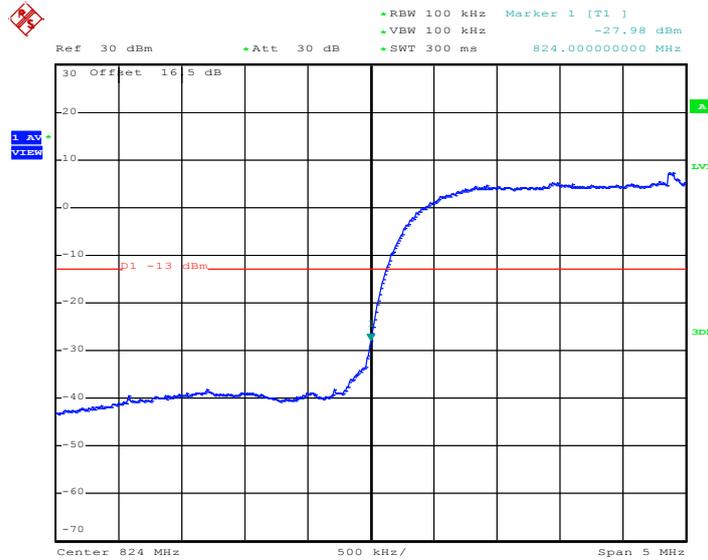


Date: 12.SEP.2013 19:07:32

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                     |              |                          |                          |
|---------------------|--------------|--------------------------|--------------------------|
| Band :              | WCDMA Band V | Test Mode :              | RMC 12.2Kbps Link (QPSK) |
| Correction Factor : | -3.28dB      | Maximum 26dB Bandwidth : | 4.700MHz                 |
| Band Edge :         | -30.31dBm    | Measurement Value :      | -27.03dBm                |

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

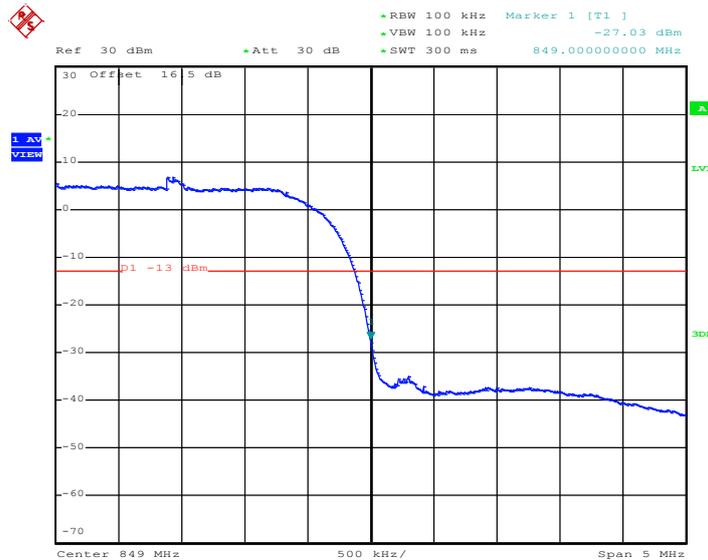


Date: 12.SEP.2013 19:07:58

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.50 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                     |               |                          |                          |
|---------------------|---------------|--------------------------|--------------------------|
| Band :              | WCDMA Band II | Test Mode :              | RMC 12.2Kbps Link (QPSK) |
| Correction Factor : | -3.28dB       | Maximum 26dB Bandwidth : | 4.700MHz                 |
| Band Edge :         | -28.35dBm     | Measurement Value :      | -25.07dBm                |

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

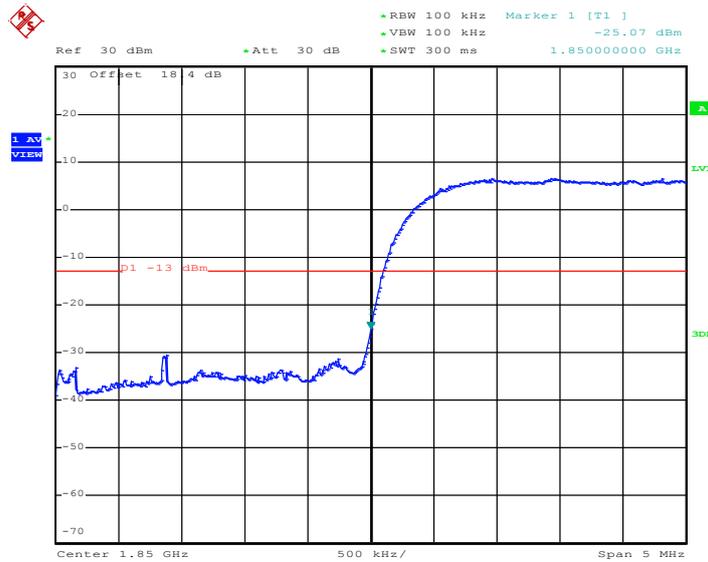


Date: 12.SEP.2013 18:49:49

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



|                            |               |                                 |                          |
|----------------------------|---------------|---------------------------------|--------------------------|
| <b>Band :</b>              | WCDMA Band II | <b>Test Mode :</b>              | RMC 12.2Kbps Link (QPSK) |
| <b>Correction Factor :</b> | -3.28dB       | <b>Maximum 26dB Bandwidth :</b> | 4.700MHz                 |
| <b>Band Edge :</b>         | -29.93dBm     | <b>Measurement Value :</b>      | -26.65dBm                |

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

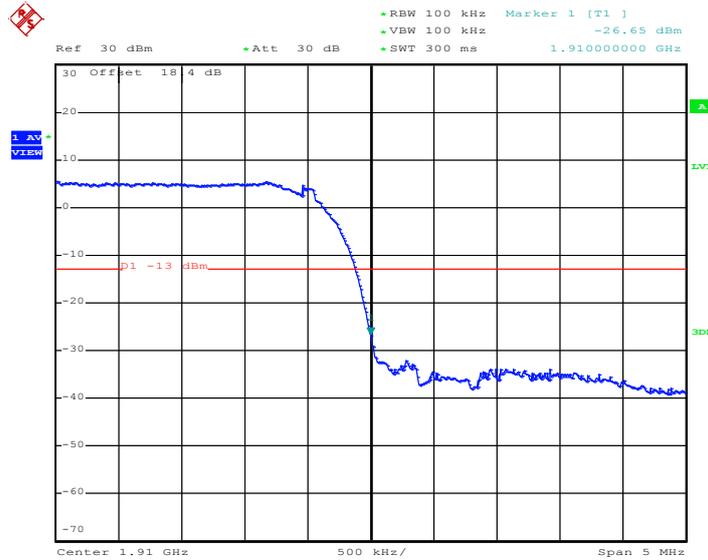

Date: 12.SEP.2013 18:50:16

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.40 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

### 3.6 Conducted Spurious Emission Measurement

#### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)
  - =  $P(W) - [43 + 10\log(P)]$  (dB)
  - =  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)
  - = -13dBm

#### 3.6.4 Test Setup

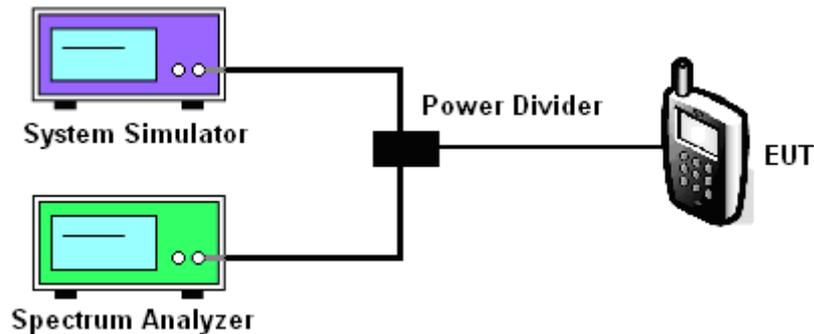




### 3.6.5 Test Result (Plots) of Conducted Spurious Emission

|             |                 |             |           |
|-------------|-----------------|-------------|-----------|
| Band :      | GSM850          | Channel :   | CH189     |
| Test Mode : | GSM Link (GMSK) | Frequency : | 836.4 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

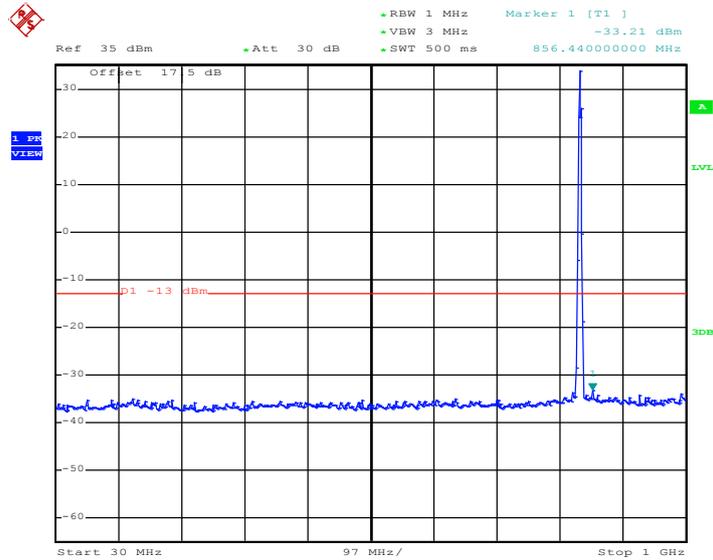


Date: 12.SEP.2013 09:45:37

**Note:** The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

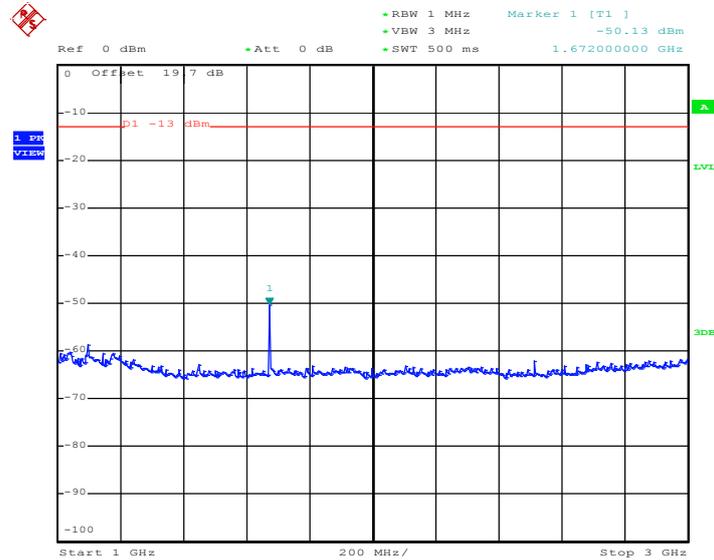

Date: 12.SEP.2013 09:45:54


### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

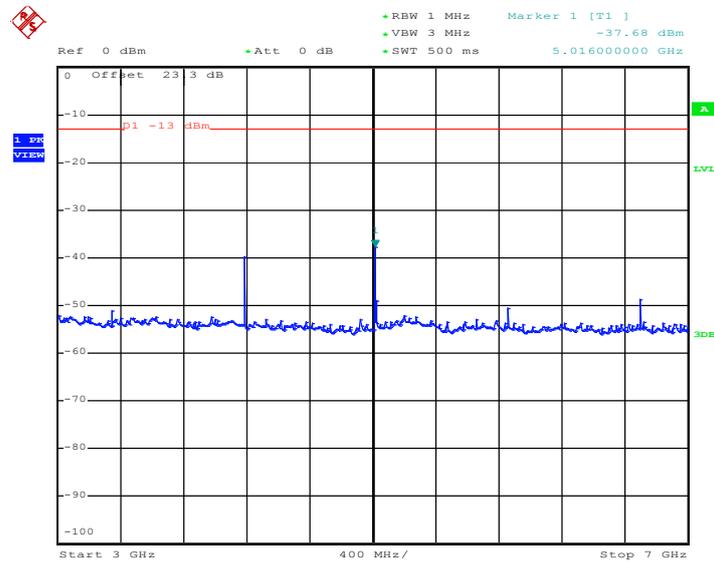

Date: 12.SEP.2013 09:48:03



Conducted Spurious Emission Plot between 7GHz ~ 9GHz

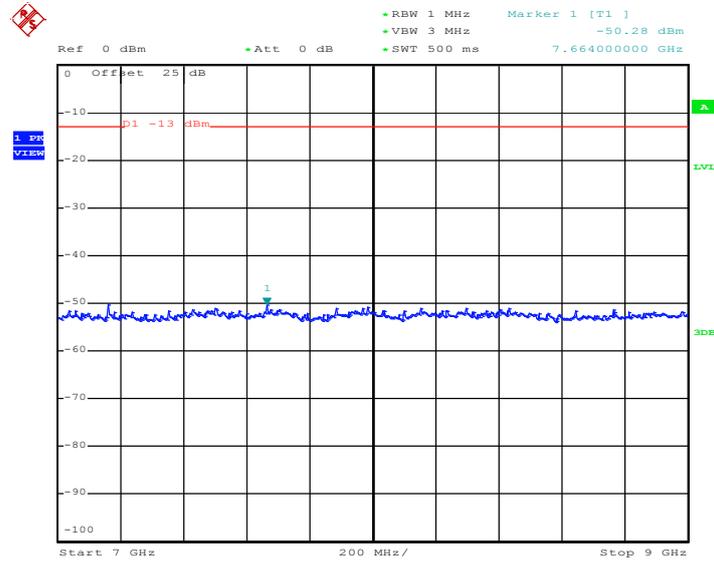


Date: 12.SEP.2013 09:46:19



|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | GSM850                   | Channel :   | CH189     |
| Test Mode : | EDGE class 8 Link (8PSK) | Frequency : | 836.4 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

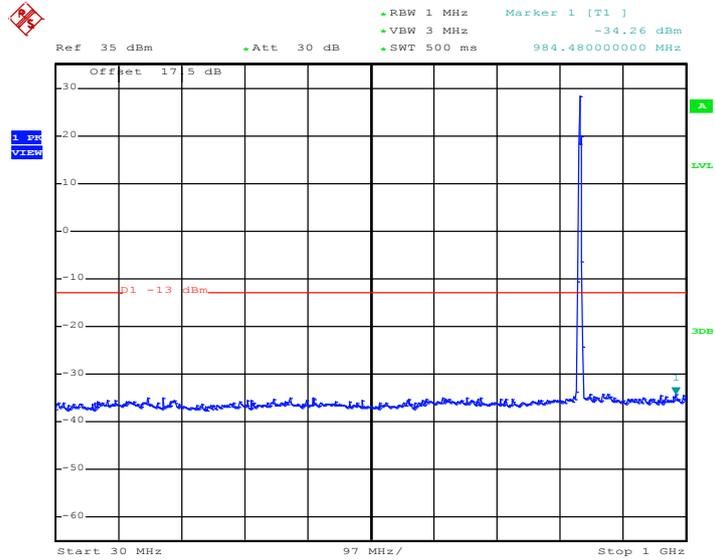


Date: 12.SEP.2013 10:00:09

**Note:** The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

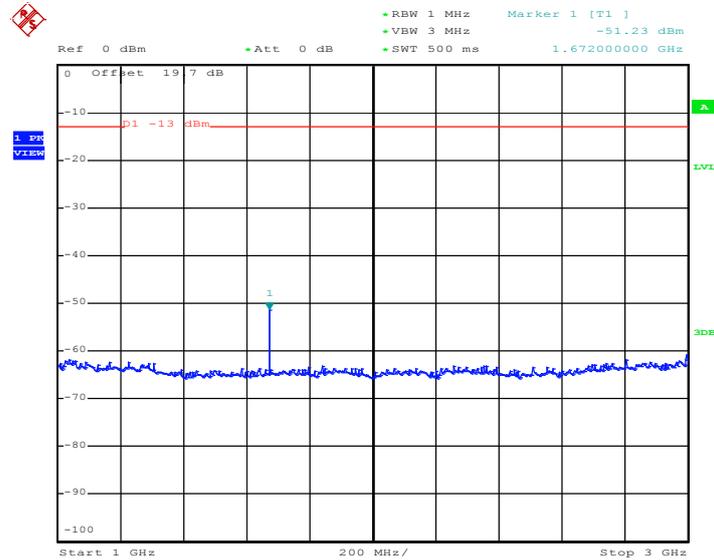

Date: 12.SEP.2013 10:00:25


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

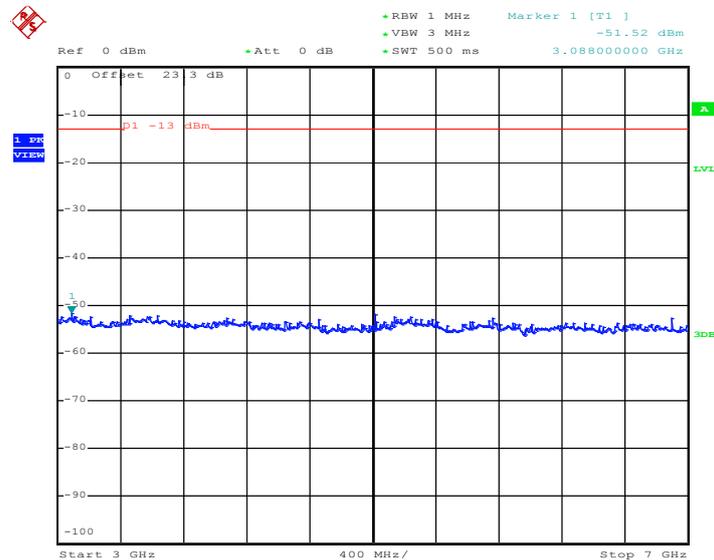

Date: 12.SEP.2013 10:00:37



Conducted Spurious Emission Plot between 7GHz ~ 9GHz

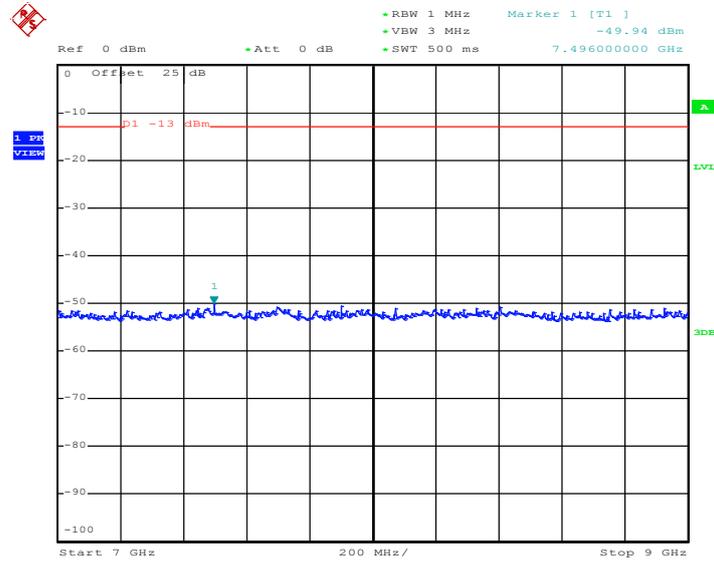


Date: 12.SEP.2013 10:00:50



|             |                 |             |            |
|-------------|-----------------|-------------|------------|
| Band :      | GSM1900         | Channel :   | CH661      |
| Test Mode : | GSM Link (GMSK) | Frequency : | 1880.0 MHz |


Conducted Spurious Emission Plot between 30MHz ~ 1GHz

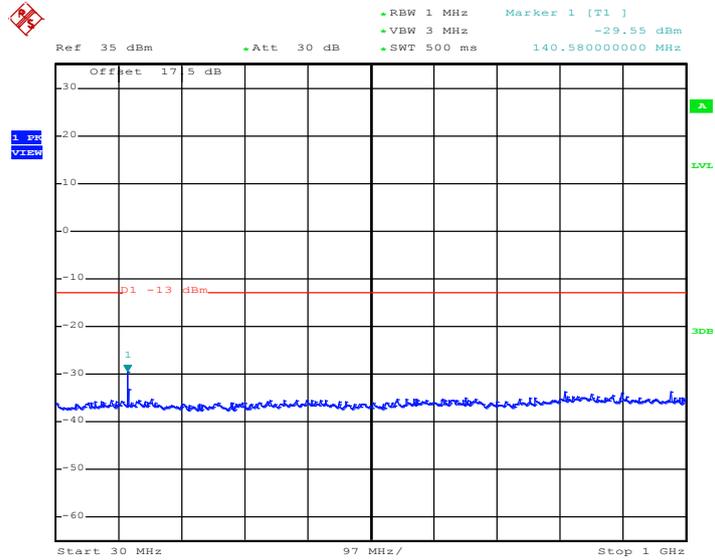

Date: 12.SEP.2013 17:43:56




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

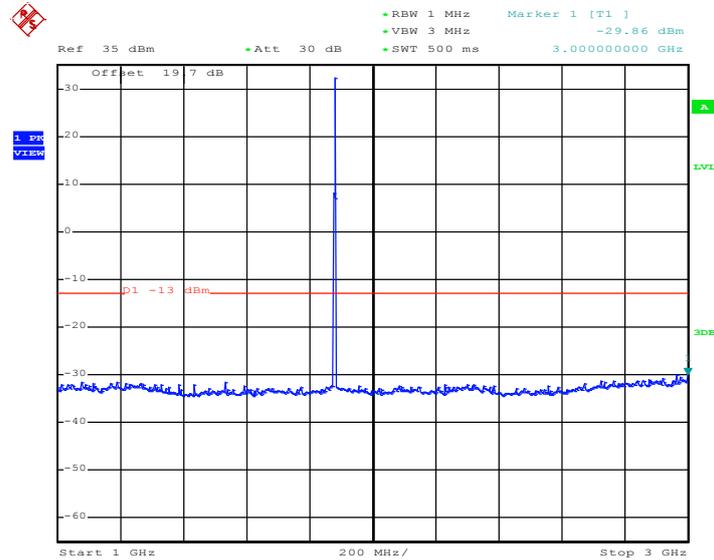

Date: 12.SEP.2013 17:44:08

**Note:** The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

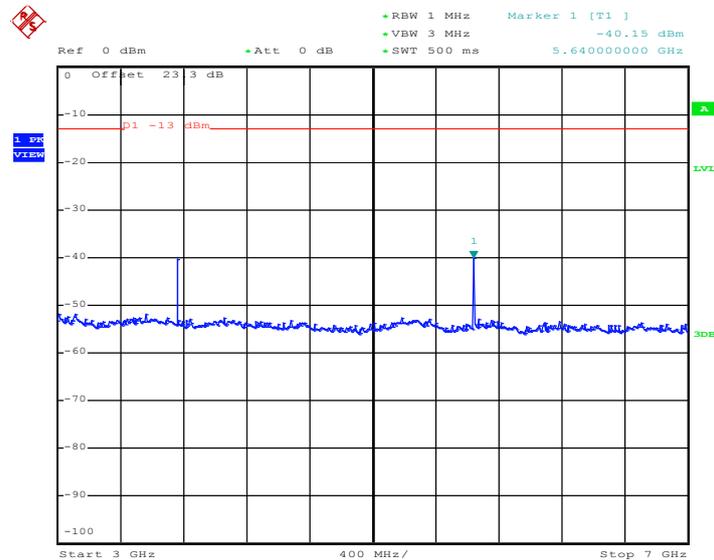

Date: 12.SEP.2013 17:44:25




### Conducted Emission Plot between 7GHz ~ 13.6GHz

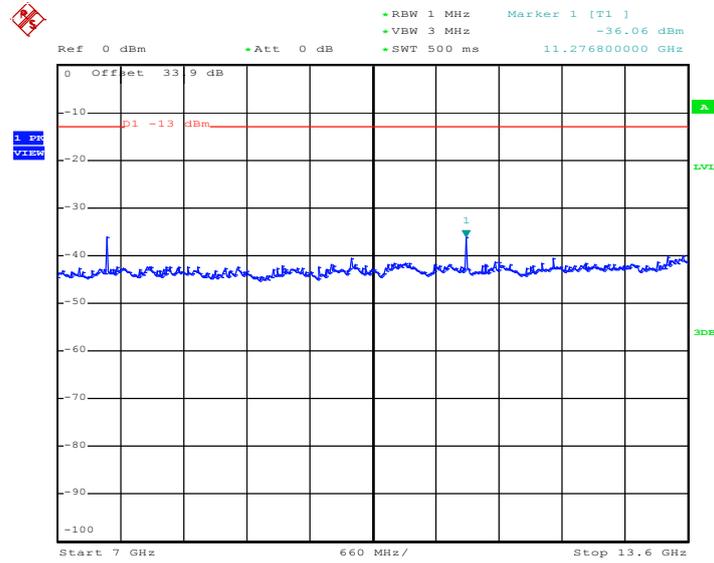

Date: 12.SEP.2013 17:44:38

### Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

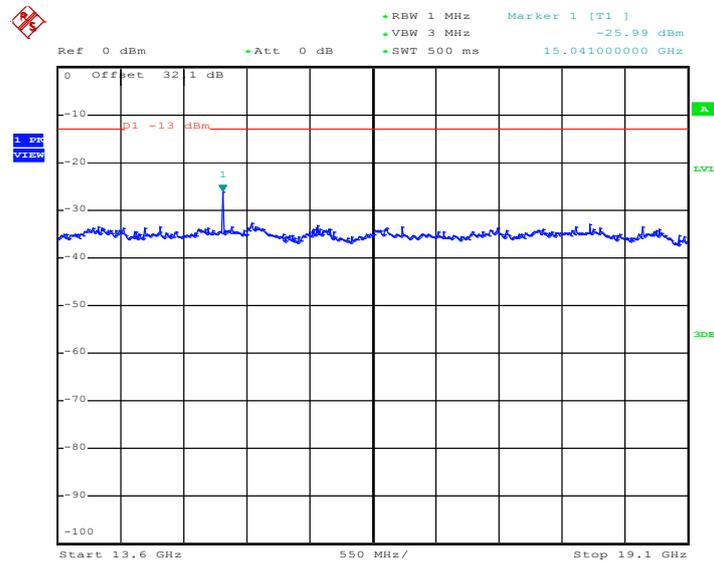


Date: 12.SEP.2013 17:44:50



|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | GSM1900                  | Channel :   | CH661      |
| Test Mode : | EDGE class 8 Link (8PSK) | Frequency : | 1880.0 MHz |


Conducted Spurious Emission Plot between 30MHz ~ 1GHz

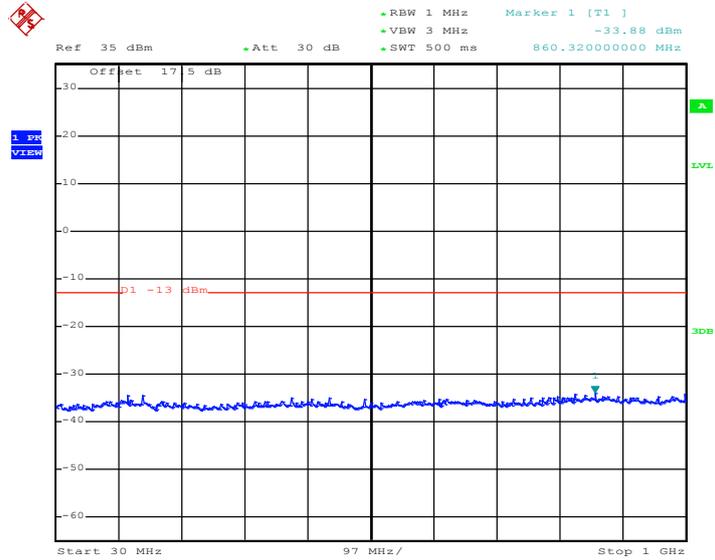

Date: 12.SEP.2013 18:02:15




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

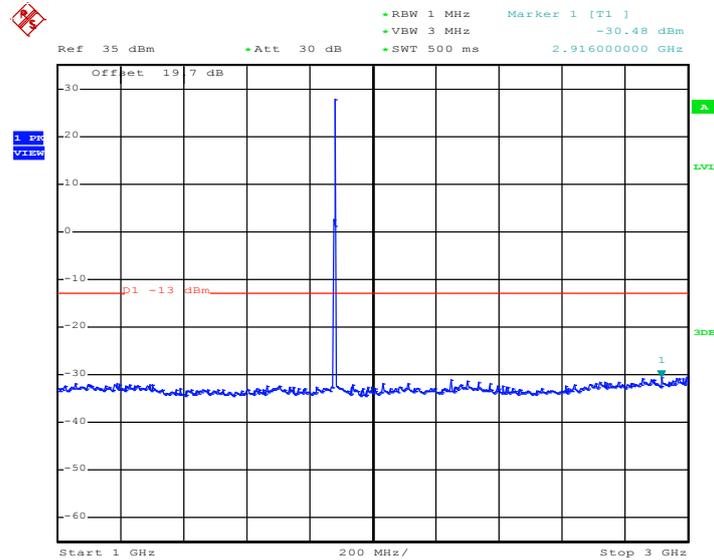

Date: 12.SEP.2013 18:02:27

**Note:** The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

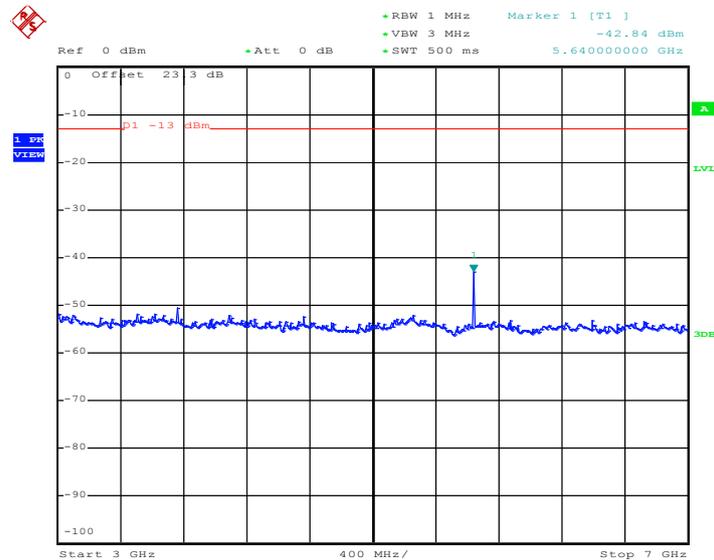

Date: 12.SEP.2013 18:02:44




### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

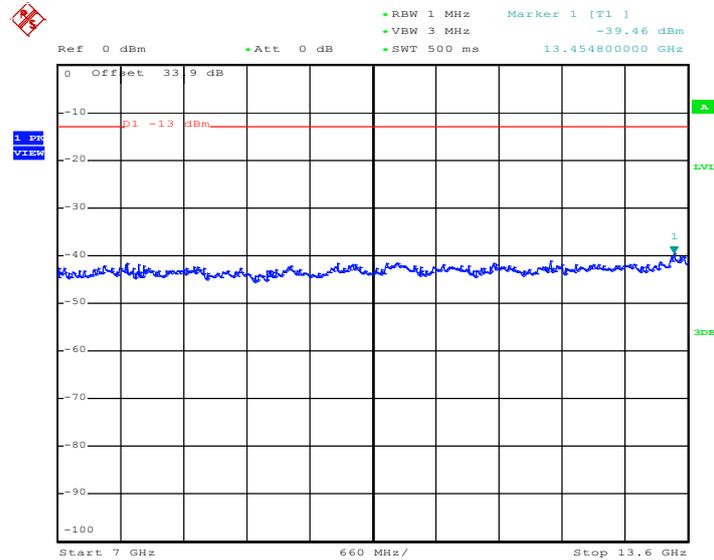

Date: 12.SEP.2013 18:02:56

### Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

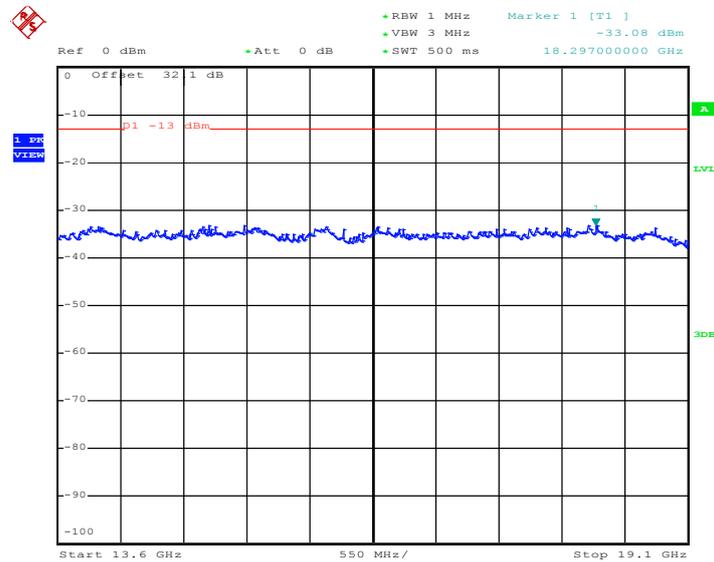


Date: 12.SEP.2013 18:03:09



|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | WCDMA Band V             | Channel :   | CH4182    |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 836.4 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

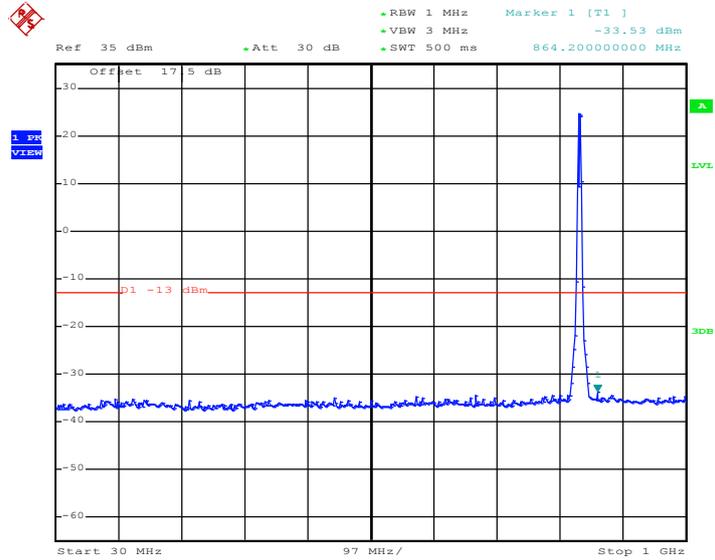


Date: 12.SEP.2013 19:02:41

**Note:** The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




### Conducted Spurious Emission Plot between 1GHz ~ 3GHz

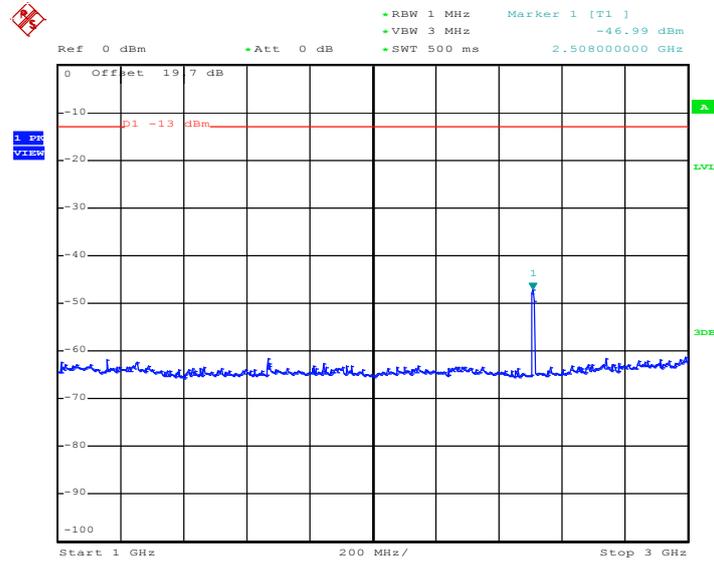

Date: 12.SEP.2013 19:02:58


### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

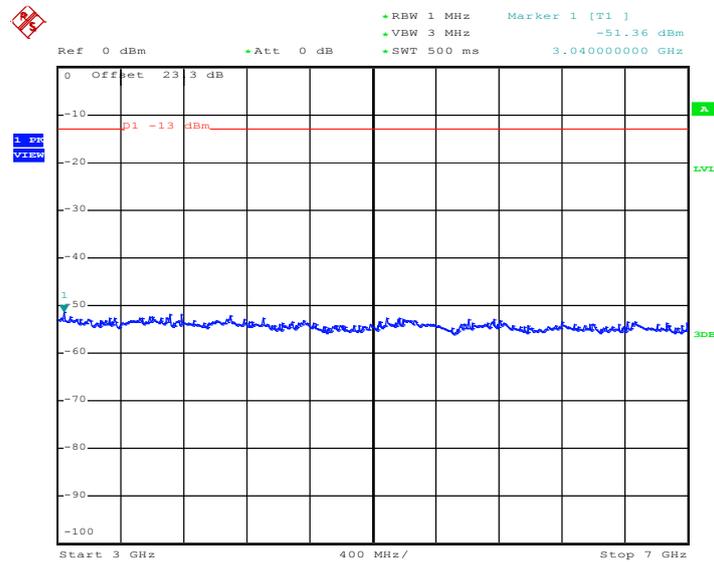

Date: 12.SEP.2013 19:03:10



Conducted Spurious Emission Plot between 7GHz ~ 9GHz

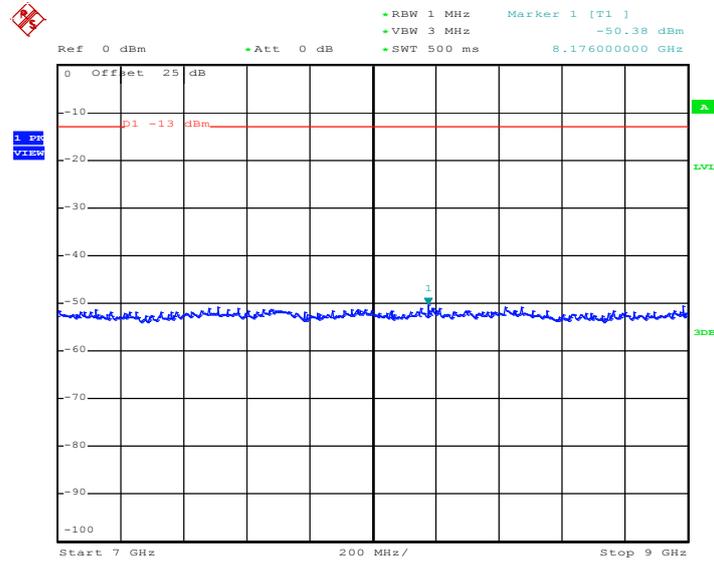


Date: 12.SEP.2013 19:03:23



|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | WCDMA Band II            | Channel :   | CH9400     |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 1880.0 MHz |


Conducted Spurious Emission Plot between 30MHz ~ 1GHz

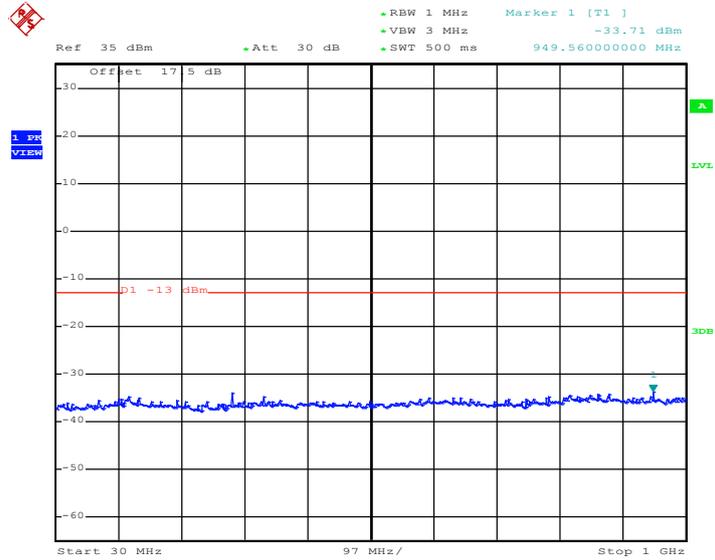

Date: 12.SEP.2013 18:44:01




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

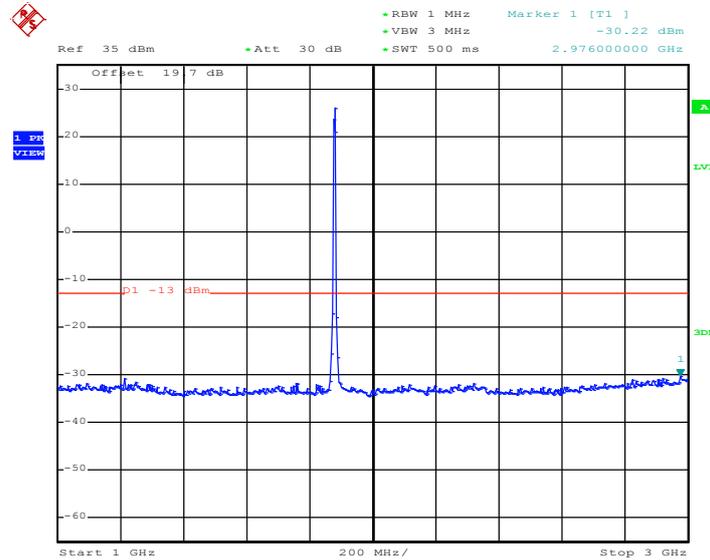

Date: 12.SEP.2013 18:44:13

**Note:** The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

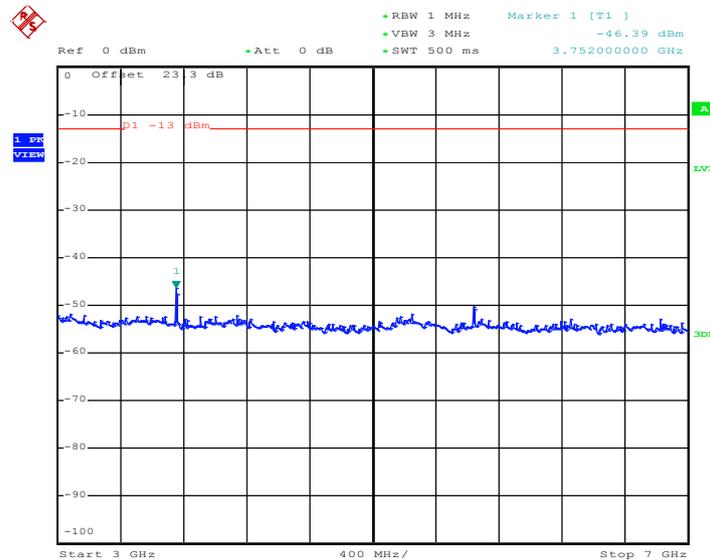

Date: 12.SEP.2013 18:44:30




### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

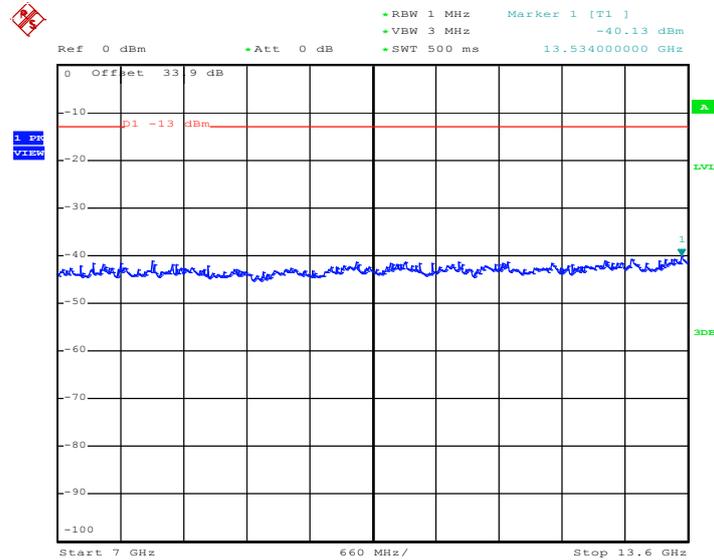

Date: 12.SEP.2013 18:44:42

### Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

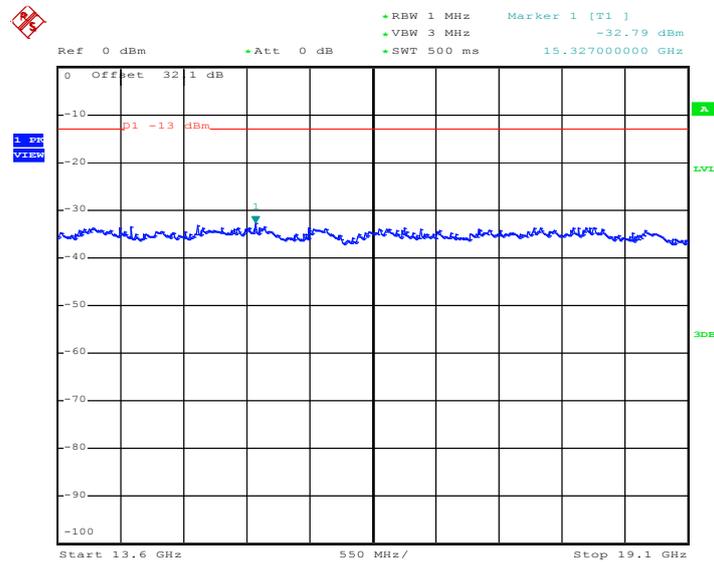

Date: 12.SEP.2013 18:44:55



### 3.7 Field Strength of Spurious Radiation Measurement

#### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.7.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.
12. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
13. ERP (dBm) = EIRP - 2.15

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

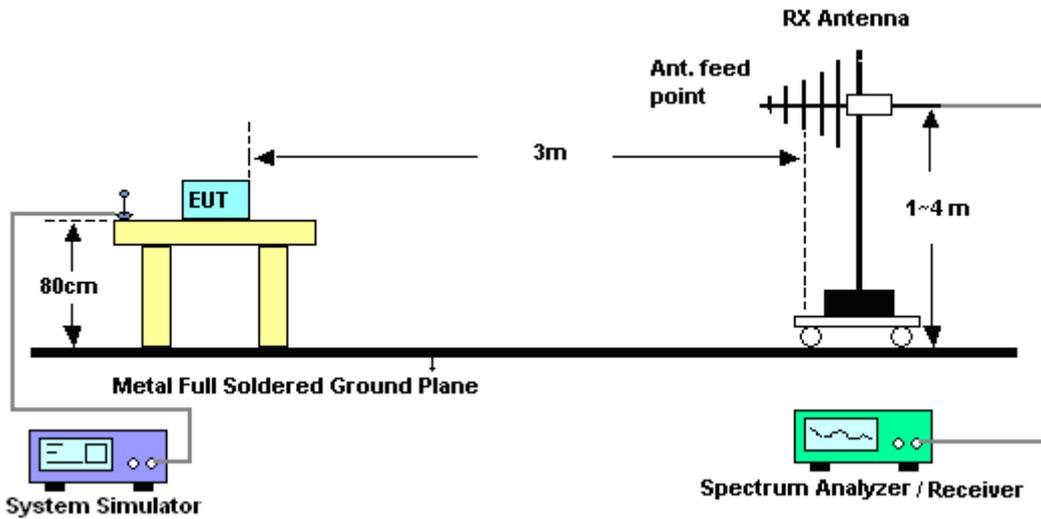

For radiated emissions above 1GHz

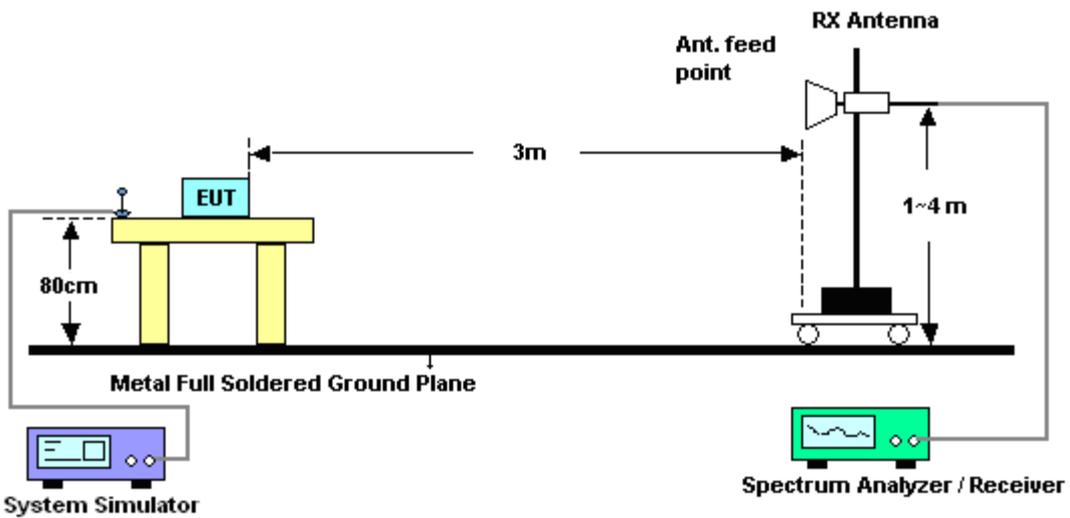




3.7.5 Test Result of Field Strength of Spurious Radiated

<Low Channel>

|                 |                 |                     |            |
|-----------------|-----------------|---------------------|------------|
| Band :          | GSM850          | Temperature :       | 22~24°C    |
| Test Mode :     | GSM Link (GMSK) | Relative Humidity : | 51~53%     |
| Channel :       | 128             | Polarization :      | Horizontal |
| Test Engineer : | Eric Shih       |                     |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 7<sup>th</sup>, 8<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

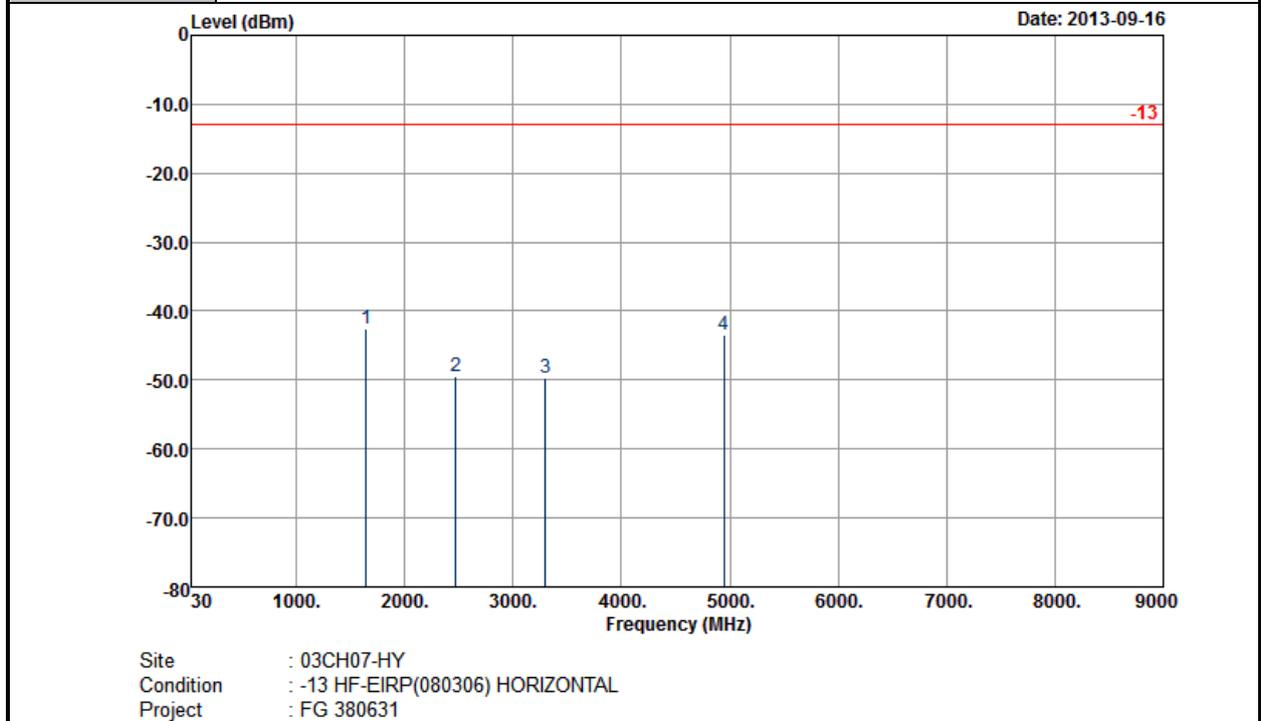

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1648              | -42.65      | -13           | -29.65            | -51.34              | -44.5              | 1.53                 | 5.53                    | H                    | Pass   |
| 2473              | -49.36      | -13           | -36.36            | -62.87              | -51.3              | 2.06                 | 6.15                    | H                    | Pass   |
| 3298              | -49.80      | -13           | -36.80            | -63.87              | -53.1              | 2.48                 | 7.93                    | H                    | Pass   |
| 4945              | -43.53      | -13           | -30.53            | -61.34              | -48.9              | 2.74                 | 10.26                   | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                 |                            |          |
|------------------------|-----------------|----------------------------|----------|
| <b>Band :</b>          | GSM850          | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | GSM Link (GMSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 128             | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih       |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 7<sup>th</sup>, 8<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

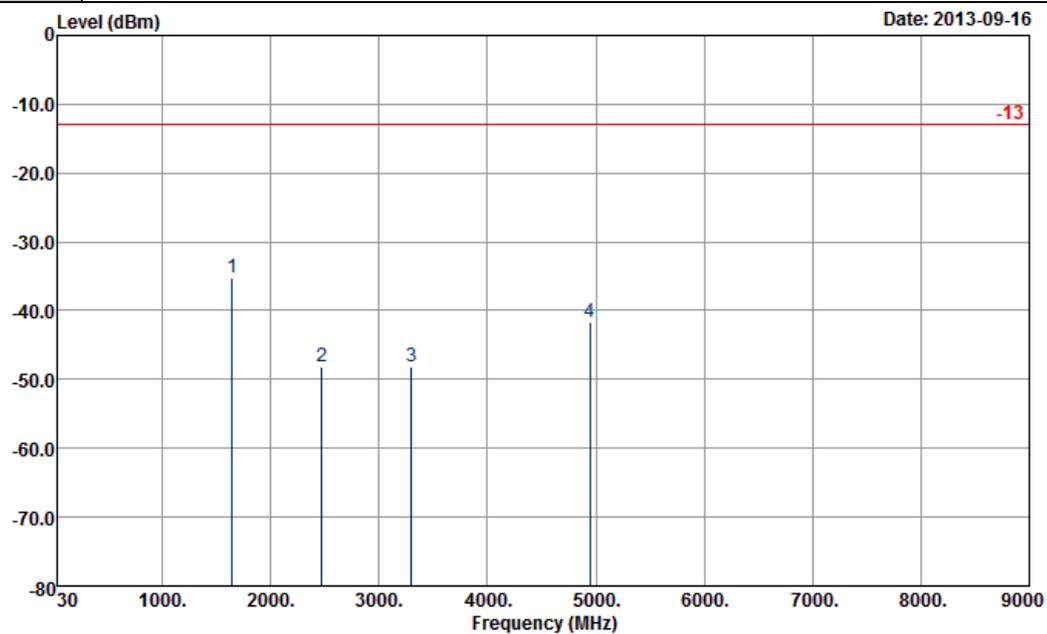

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1649              | -35.25      | -13           | -22.25            | -46.52              | -37.1              | 1.53                 | 5.53                    | V                    | Pass   |
| 2474              | -48.06      | -13           | -35.06            | -61.69              | -50                | 2.06                 | 6.15                    | V                    | Pass   |
| 3298              | -48.10      | -13           | -35.10            | -63.87              | -51.4              | 2.48                 | 7.93                    | V                    | Pass   |
| 4948              | -41.73      | -13           | -28.73            | -59.74              | -47.1              | 2.74                 | 10.26                   | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM850                   | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 128                      | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

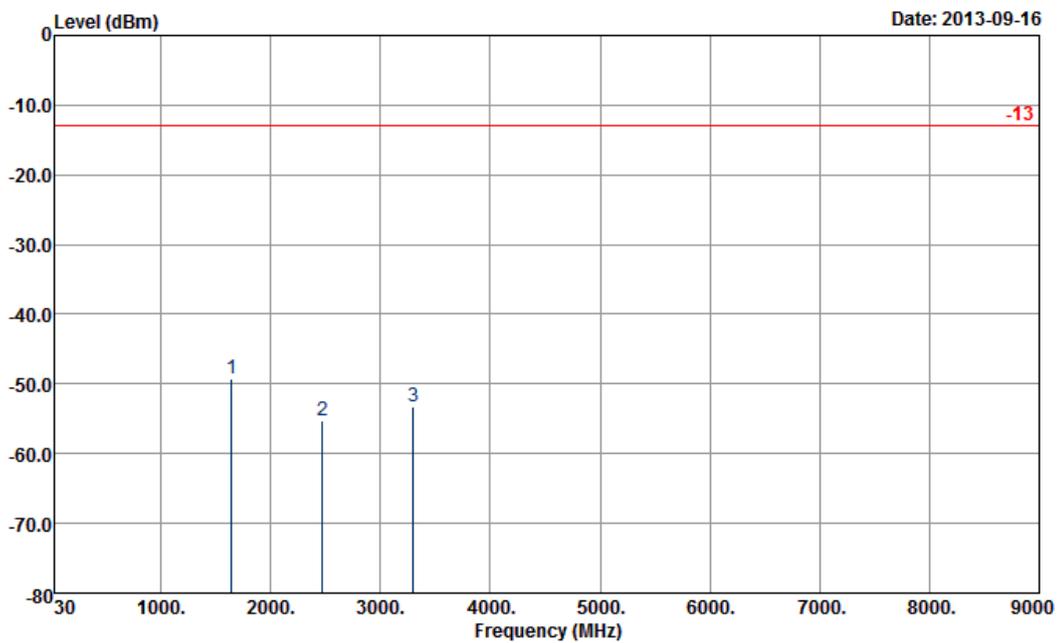

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1648              | -49.35      | -13           | -36.35            | -58.3               | -51.2              | 1.53                 | 5.53                    | H                    | Pass   |
| 2473              | -55.26      | -13           | -42.26            | -68.76              | -57.2              | 2.06                 | 6.15                    | H                    | Pass   |
| 3298              | -53.30      | -13           | -40.30            | -67.8               | -56.6              | 2.48                 | 7.93                    | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM850                   | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 128                      | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

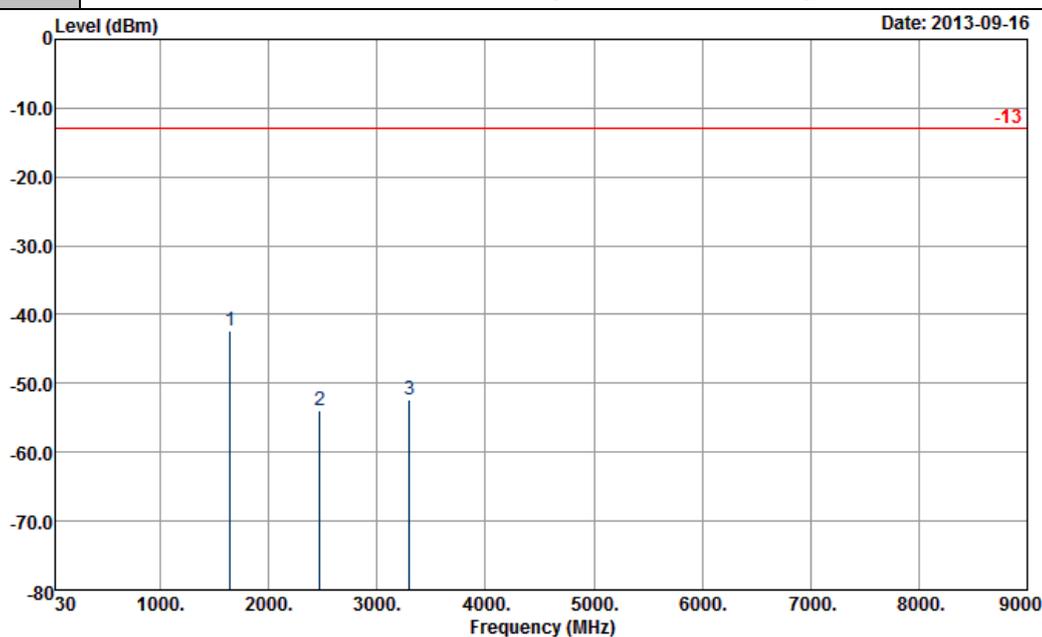

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1648              | -42.25      | -13           | -29.25            | -53.4               | -44.1              | 1.53                 | 5.53                    | V                    | Pass   |
| 2474              | -53.96      | -13           | -40.96            | -67.66              | -55.9              | 2.06                 | 6.15                    | V                    | Pass   |
| 3298              | -52.30      | -13           | -39.30            | -68.03              | -55.6              | 2.48                 | 7.93                    | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                 |                            |            |
|------------------------|-----------------|----------------------------|------------|
| <b>Band :</b>          | GSM1900         | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | GSM Link (GMSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 512             | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih       |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

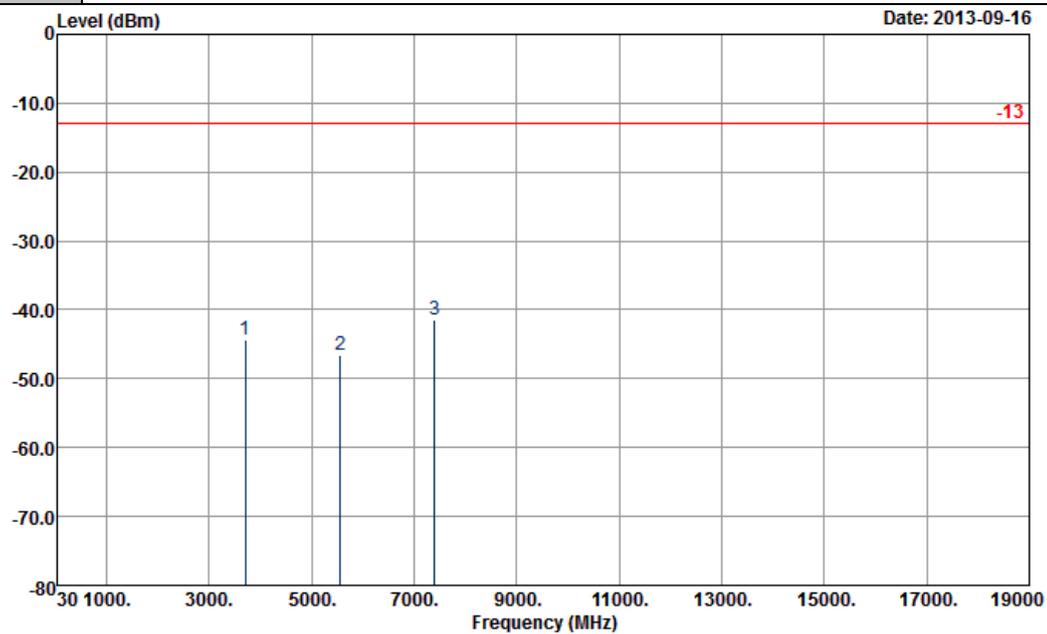


Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3700              | -44.45       | -13           | -31.45            | -59.52              | -50.6              | 2.59                 | 8.74                    | H                    | Pass   |
| 5552              | -46.54       | -13           | -33.54            | -67.36              | -54.2              | 3.04                 | 10.70                   | H                    | Pass   |
| 7402              | -41.36       | -13           | -28.36            | -68.69              | -50.1              | 3.28                 | 12.02                   | H                    | Pass   |

Other harmonics are lower than background noise



|                        |   |                            |          |
|------------------------|---|----------------------------|----------|
| <b>Band :</b>          | GSM1900   | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | GSM Link (GMSK)   | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 512   | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih   |                            |          |
| <b>Remark :</b>        | 1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.<br>2. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise. |                            |          |

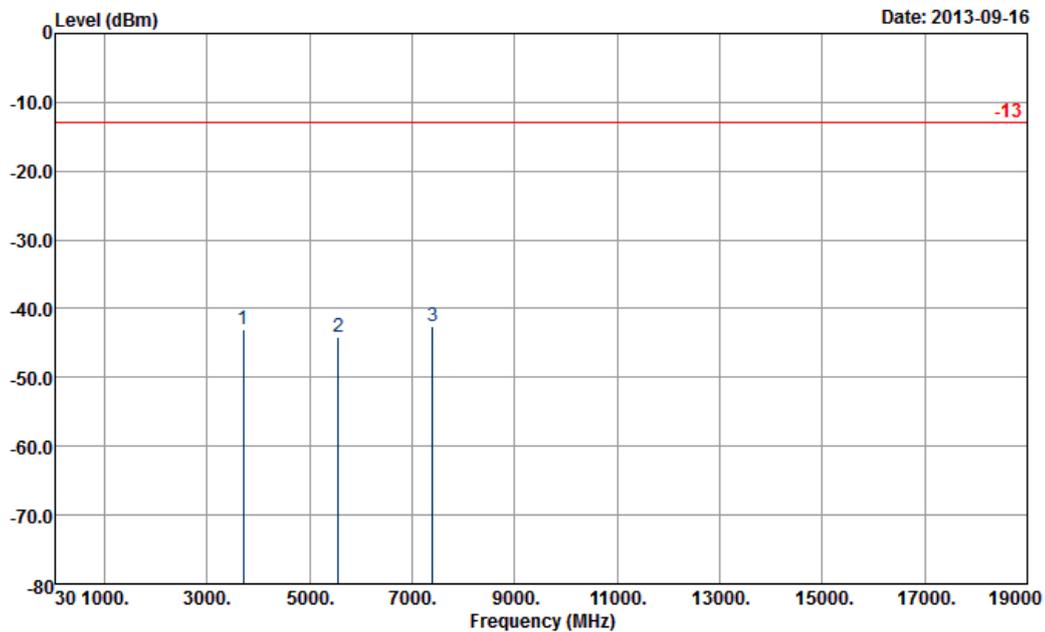

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3700              | -43.05       | -13           | -30.05            | -59.28              | -49.2              | 2.59                 | 8.74                    | V                    | Pass   |
| 5552              | -44.04       | -13           | -31.04            | -64.32              | -51.7              | 3.04                 | 10.70                   | V                    | Pass   |
| 7402              | -42.46       | -13           | -29.46            | -69.65              | -51.2              | 3.28                 | 12.02                   | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM1900                  | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 512                      | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

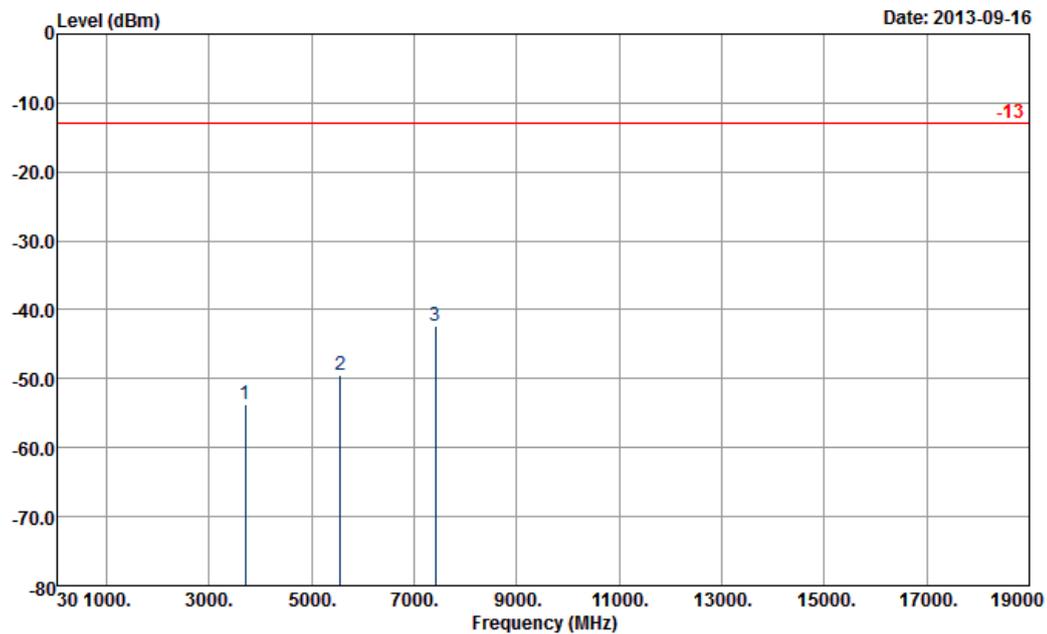


Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>( dBm ) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>( dBi ) | Polarization<br>( H/V ) | Result |
|----------------------|-----------------|------------------|-------------------------|---------------------------|--------------------------|----------------------------|-------------------------------|-------------------------|--------|
| 3702                 | -53.71          | -13              | -40.71                  | -68.18                    | -59.86                   | 2.59                       | 8.74                          | H                       | Pass   |
| 5553                 | -49.36          | -13              | -36.36                  | -68.84                    | -57.02                   | 3.04                       | 10.70                         | H                       | Pass   |
| 7405                 | -42.38          | -13              | -29.38                  | -69.42                    | -51.12                   | 3.28                       | 12.02                         | H                       | Pass   |

Other harmonics are lower than background noise



|                        |   |                            |          |
|------------------------|---|----------------------------|----------|
| <b>Band :</b>          | GSM1900   | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)  | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 512   | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih   |                            |          |
| <b>Remark :</b>        | 1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.<br>2. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise. |                            |          |

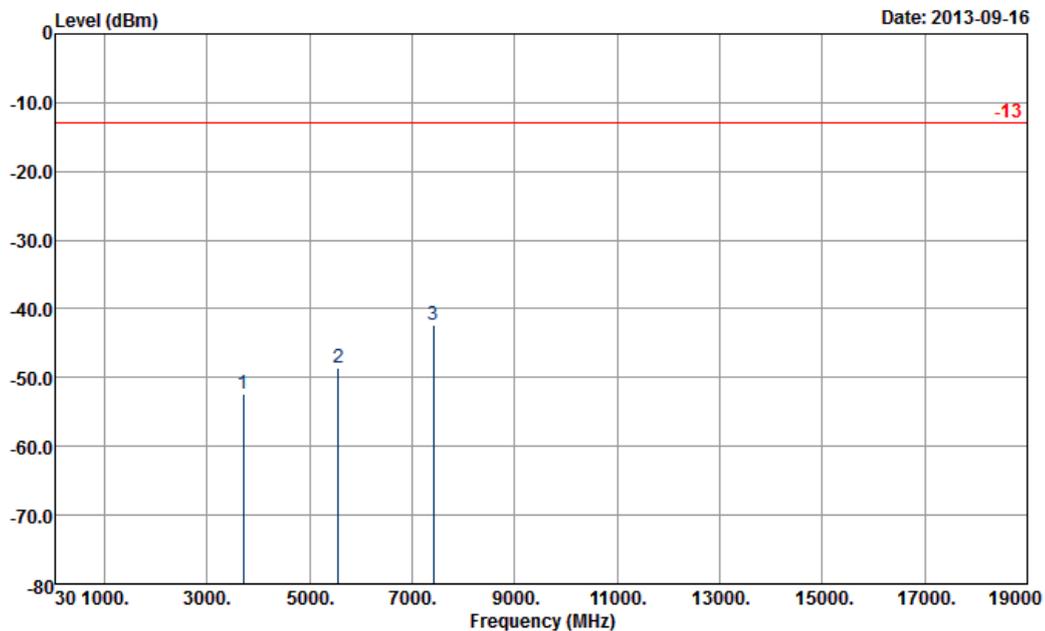

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3702              | -52.26       | -13           | -39.26            | -68.18              | -58.41             | 2.59                 | 8.74                    | V                    | Pass   |
| 5553              | -48.50       | -13           | -35.50            | -68.68              | -56.16             | 3.04                 | 10.70                   | V                    | Pass   |
| 7405              | -42.33       | -13           | -29.33            | -69.32              | -51.07             | 3.28                 | 12.02                   | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | WCDMA Band V             | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 4132                     | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

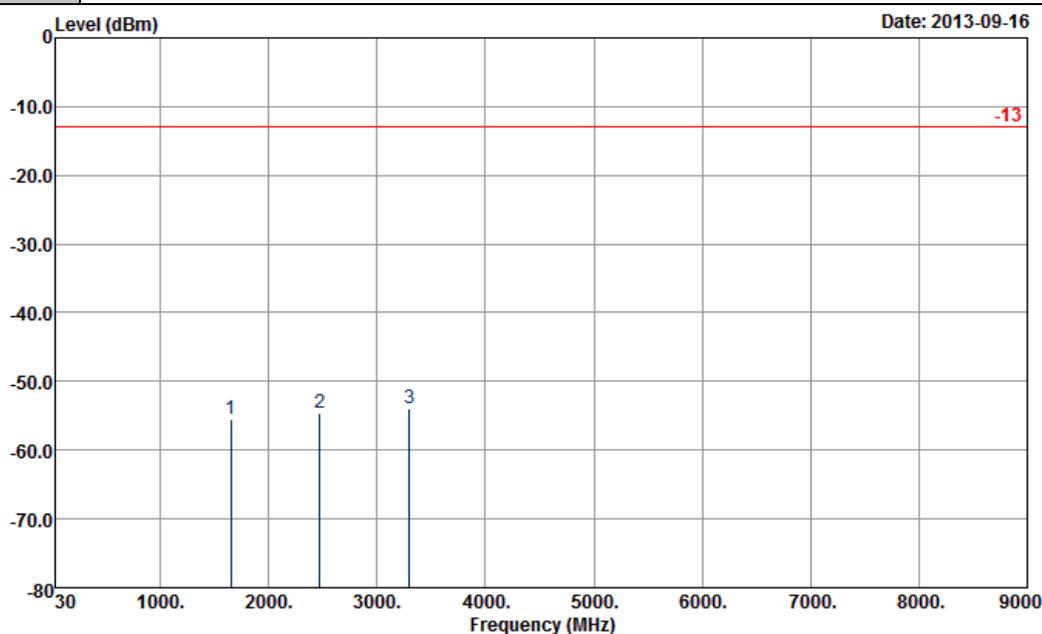

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1649              | -55.45      | -13           | -42.45            | -64.62              | -57.3              | 1.53                 | 5.53                    | H                    | Pass   |
| 2474              | -54.66      | -13           | -41.66            | -67.92              | -56.6              | 2.06                 | 6.15                    | H                    | Pass   |
| 3298              | -53.90      | -13           | -40.90            | -68.07              | -57.2              | 2.48                 | 7.93                    | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | WCDMA Band V             | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 4132                     | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

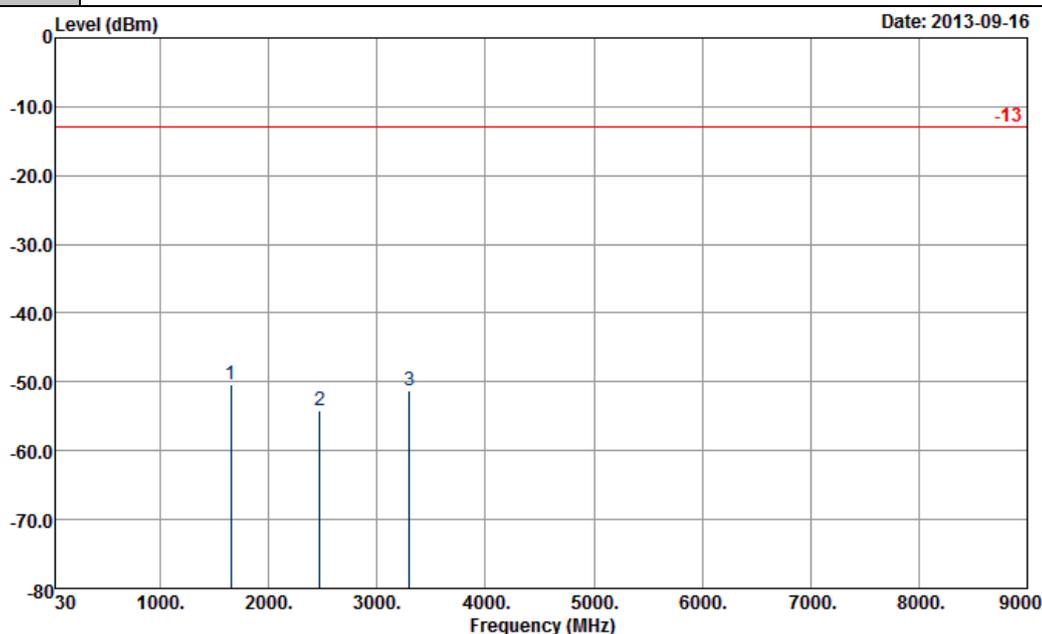

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1649              | -50.35      | -13           | -37.35            | -61.4               | -52.2              | 1.53                 | 5.53                    | V                    | Pass   |
| 2474              | -54.06      | -13           | -41.06            | -67.78              | -56                | 2.06                 | 6.15                    | V                    | Pass   |
| 3298              | -51.30      | -13           | -38.30            | -67.01              | -54.6              | 2.48                 | 7.93                    | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | WCDMA Band II            | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 9262                     | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

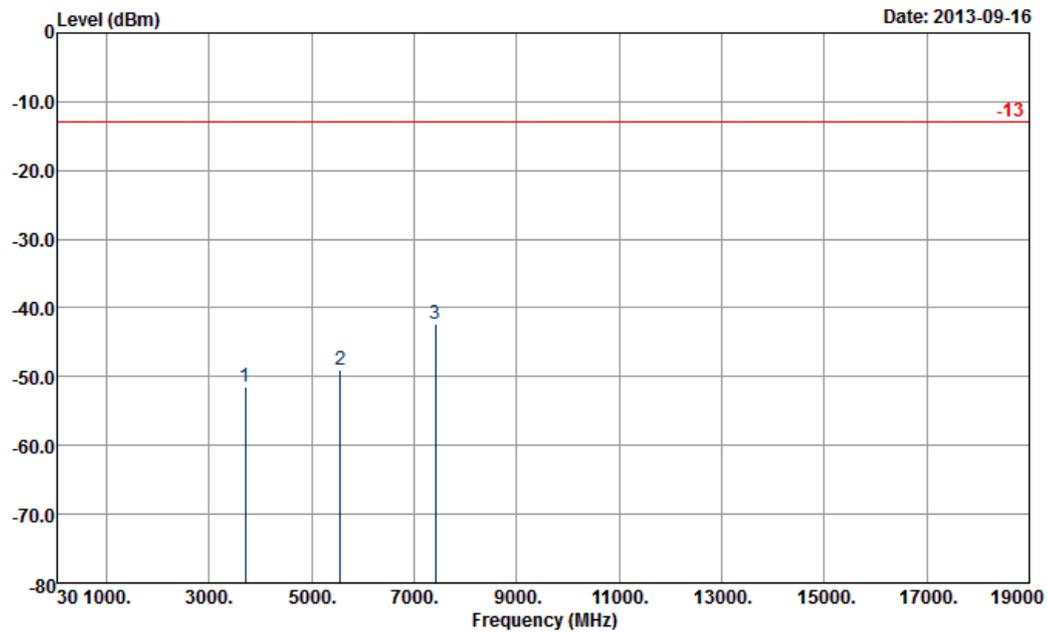

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3704              | -51.45       | -13           | -38.45            | -66.12              | -57.6              | 2.59                 | 8.74                    | H                    | Pass   |
| 5553              | -48.98       | -13           | -35.98            | -69.1               | -56.64             | 3.04                 | 10.70                   | H                    | Pass   |
| 7404              | -42.45       | -13           | -29.45            | -69.47              | -51.19             | 3.28                 | 12.02                   | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | WCDMA Band II            | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 9262                     | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

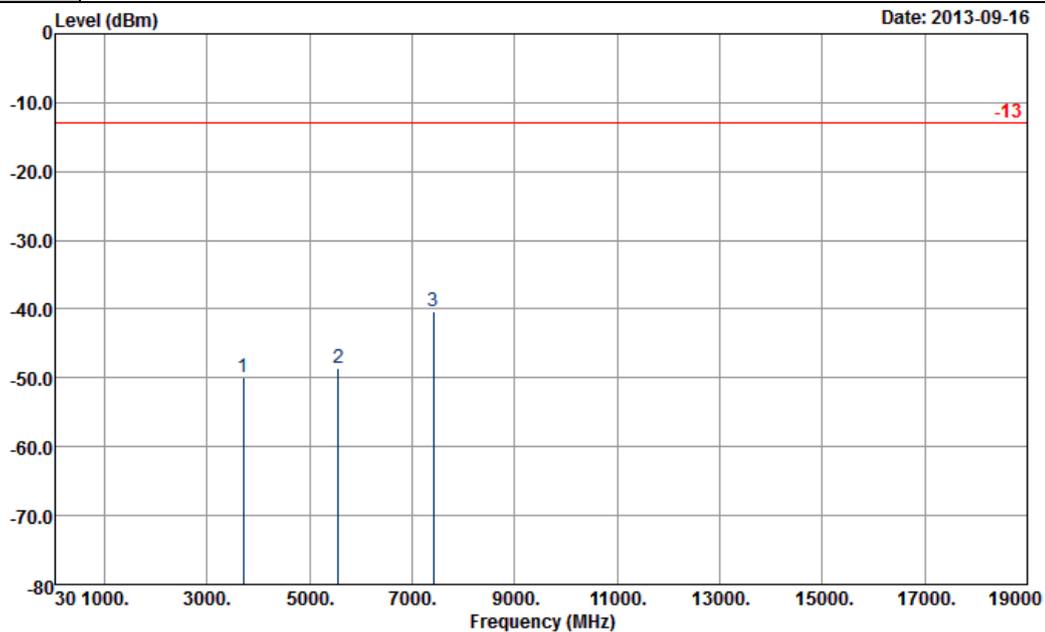

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3704              | -49.98       | -13           | -36.98            | -65.36              | -56.13             | 2.59                 | 8.74                    | V                    | Pass   |
| 5553              | -48.50       | -13           | -35.50            | -67.77              | -56.16             | 3.04                 | 10.70                   | V                    | Pass   |
| 7412              | -40.30       | -13           | -27.30            | -66.36              | -49.04             | 3.28                 | 12.02                   | V                    | Pass   |

Other harmonics are lower than background noise




<Middle Channel>

|                 |                 |                     |            |
|-----------------|-----------------|---------------------|------------|
| Band :          | GSM850          | Temperature :       | 22~24°C    |
| Test Mode :     | GSM Link (GMSK) | Relative Humidity : | 51~53%     |
| Channel :       | 189             | Polarization :      | Horizontal |
| Test Engineer : | Eric Shih       |                     |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 7<sup>th</sup>, 8<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

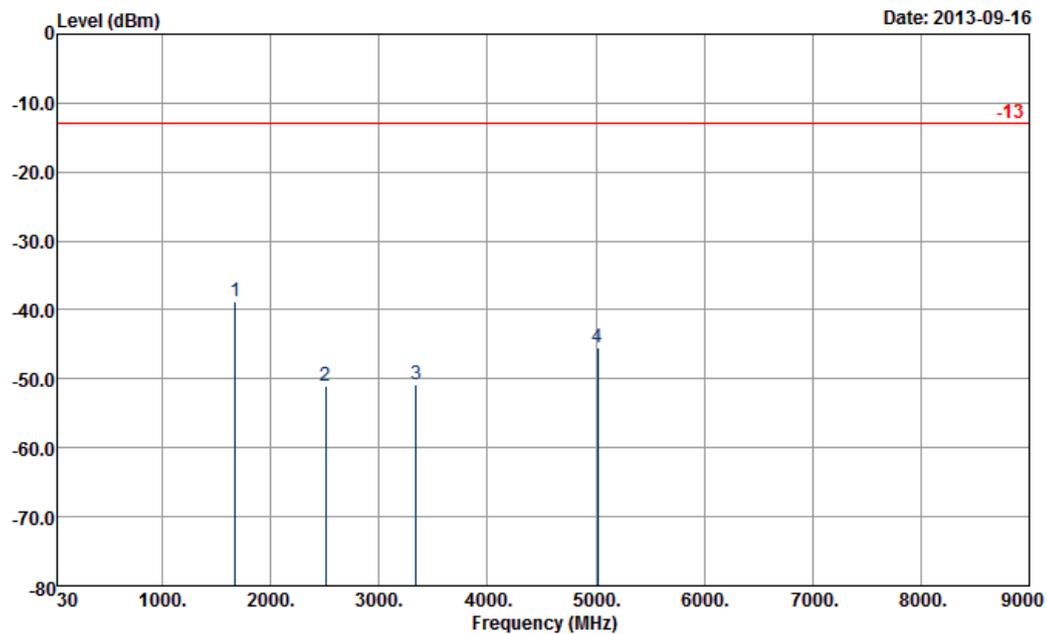

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1672              | -38.88      | -13           | -25.88            | -47.74              | -40.6              | 1.62                 | 5.49                    | H                    | Pass   |
| 2509              | -51.13      | -13           | -38.13            | -64.39              | -53.1              | 2.1                  | 6.22                    | H                    | Pass   |
| 3345              | -50.91      | -13           | -37.91            | -65.06              | -53.8              | 3.03                 | 8.07                    | H                    | Pass   |
| 5015              | -45.45      | -13           | -32.45            | -63.77              | -50.9              | 3.1                  | 10.70                   | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                 |                            |          |
|------------------------|-----------------|----------------------------|----------|
| <b>Band :</b>          | GSM850          | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | GSM Link (GMSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 189             | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih       |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 7<sup>th</sup>, 8<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

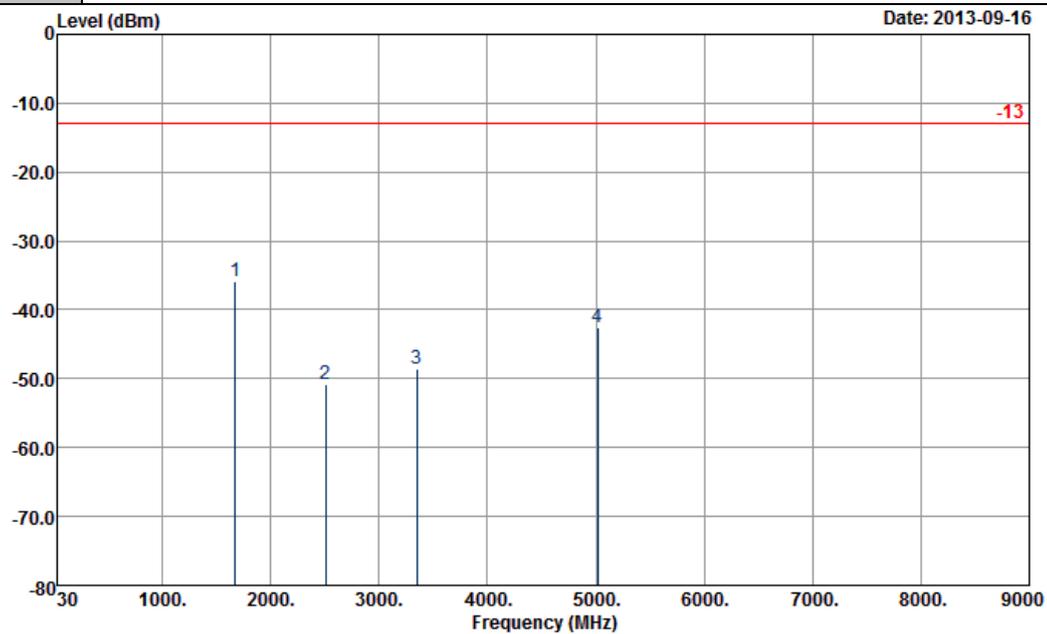

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1672              | -35.78      | -13           | -22.78            | -47.05              | -37.5              | 1.62                 | 5.49                    | V                    | Pass   |
| 2509              | -50.83      | -13           | -37.83            | -64.58              | -52.8              | 2.1                  | 6.22                    | V                    | Pass   |
| 3346              | -48.51      | -13           | -35.51            | -64.37              | -51.4              | 3.03                 | 8.07                    | V                    | Pass   |
| 5015              | -42.65      | -13           | -29.65            | -60.84              | -48.1              | 3.1                  | 10.70                   | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM850                   | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 189                      | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

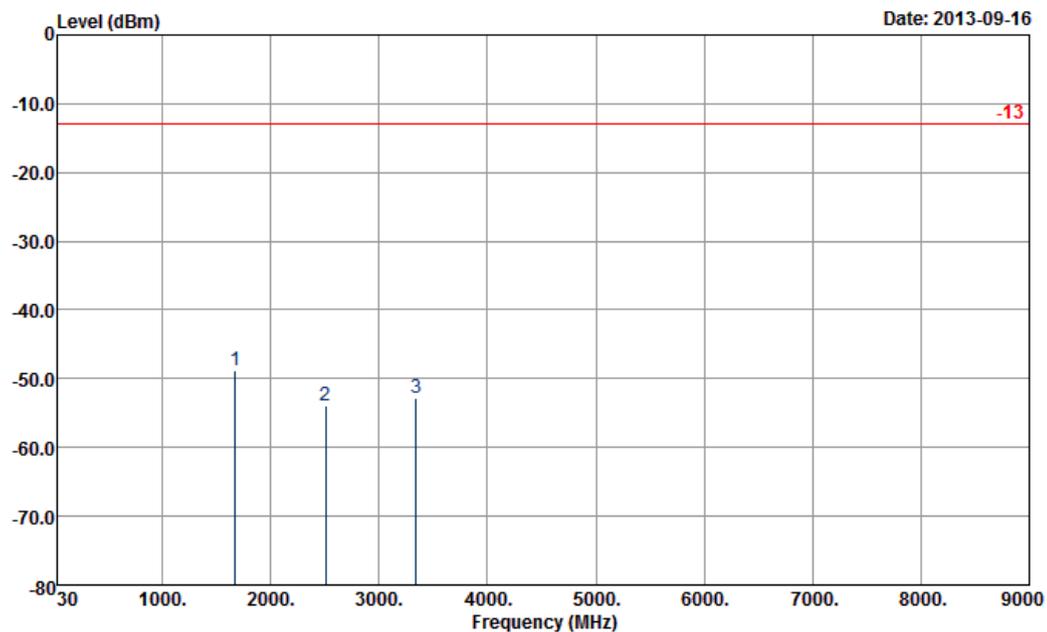

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1672              | -48.78      | -13           | -35.78            | -57.76              | -50.5              | 1.62                 | 5.49                    | H                    | Pass   |
| 2509              | -53.93      | -13           | -40.93            | -67.31              | -55.9              | 2.1                  | 6.22                    | H                    | Pass   |
| 3345              | -52.91      | -13           | -39.91            | -67.39              | -55.8              | 3.03                 | 8.07                    | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM850                   | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 189                      | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

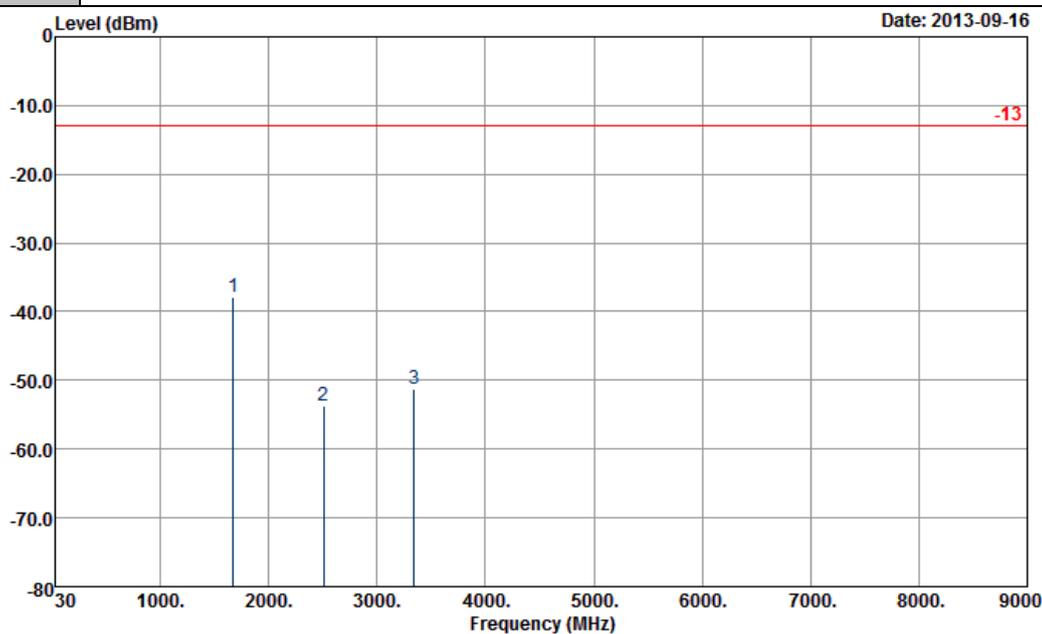

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1672              | -37.88      | -13           | -24.88            | -49.05              | -39.6              | 1.62                 | 5.49                    | V                    | Pass   |
| 2509              | -53.73      | -13           | -40.73            | -67.54              | -55.7              | 2.1                  | 6.22                    | V                    | Pass   |
| 3345              | -51.31      | -13           | -38.31            | -67.01              | -54.2              | 3.03                 | 8.07                    | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                 |                            |            |
|------------------------|-----------------|----------------------------|------------|
| <b>Band :</b>          | GSM1900         | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | GSM Link (GMSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 661             | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih       |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

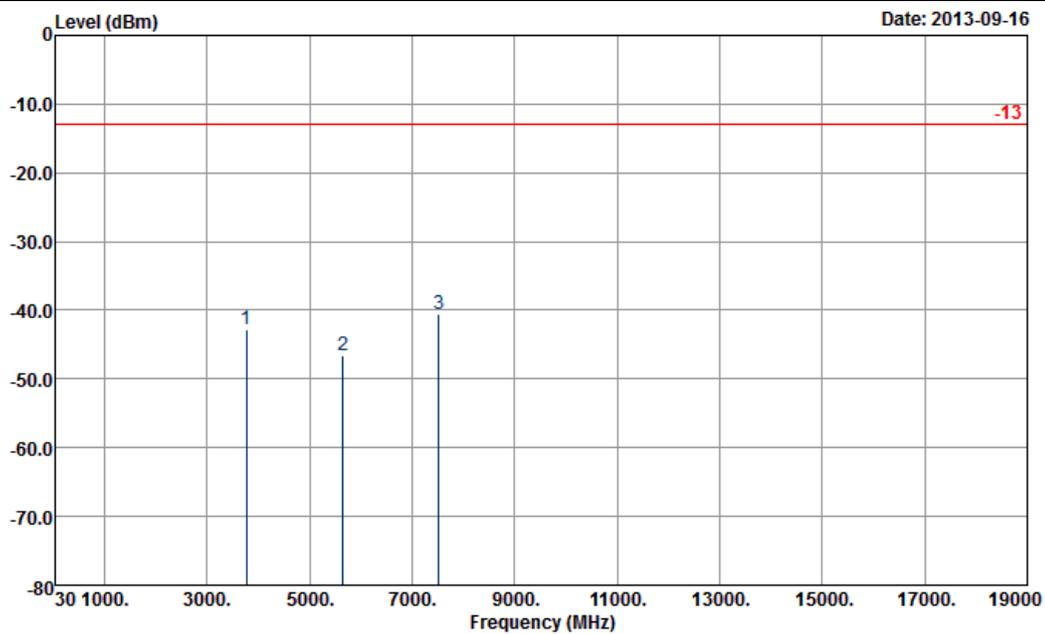

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3760              | -42.70       | -13           | -29.70            | -58.06              | -49                | 2.51                 | 8.81                    | H                    | Pass   |
| 5640              | -46.59       | -13           | -33.59            | -67.53              | -54.3              | 2.99                 | 10.70                   | H                    | Pass   |
| 7520              | -40.57       | -13           | -27.57            | -68.11              | -49.1              | 3.59                 | 12.12                   | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                 |                            |          |
|------------------------|-----------------|----------------------------|----------|
| <b>Band :</b>          | GSM1900         | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | GSM Link (GMSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 661             | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih       |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

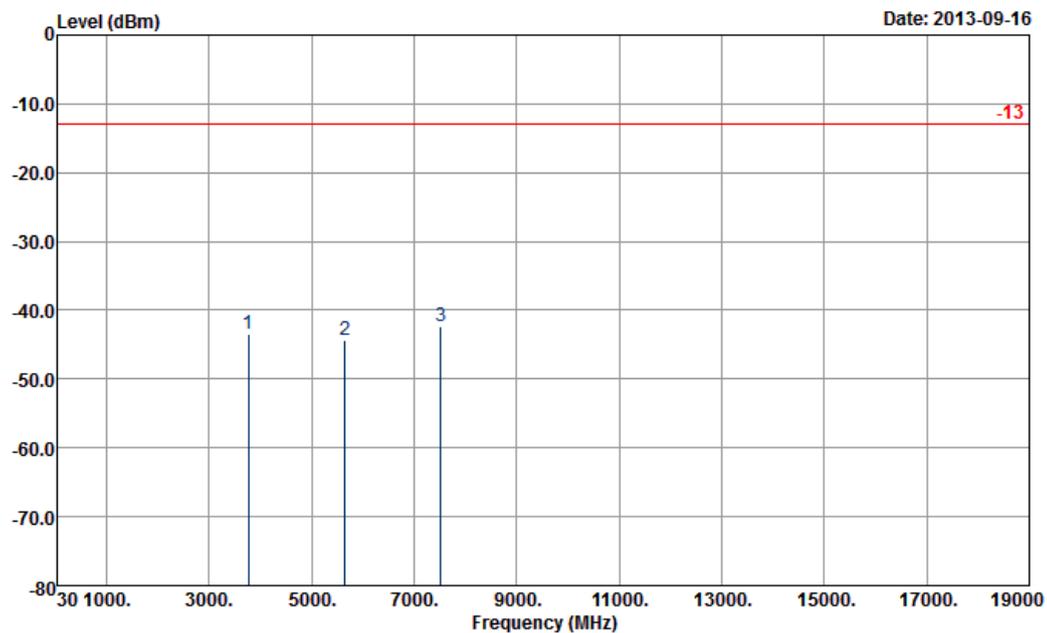

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3760              | -43.40       | -13           | -30.40            | -59.69              | -49.7              | 2.51                 | 8.81                    | V                    | Pass   |
| 5640              | -44.39       | -13           | -31.39            | -65.09              | -52.1              | 2.99                 | 10.70                   | V                    | Pass   |
| 7520              | -42.37       | -13           | -29.37            | -69.46              | -50.9              | 3.59                 | 12.12                   | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM1900                  | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 661                      | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

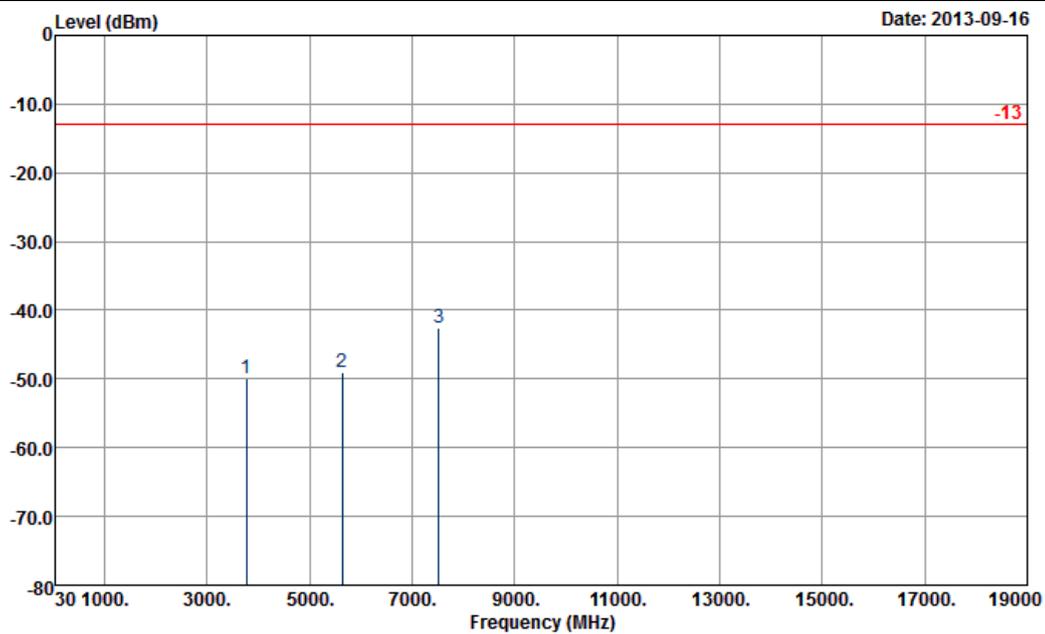

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3760              | -49.81       | -13           | -36.81            | -64.39              | -56.11             | 2.51                 | 8.81                    | H                    | Pass   |
| 5636              | -49.03       | -13           | -36.03            | -69.22              | -56.74             | 2.99                 | 10.70                   | H                    | Pass   |
| 7520              | -42.57       | -13           | -29.57            | -69.22              | -51.1              | 3.59                 | 12.12                   | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM1900                  | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 661                      | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

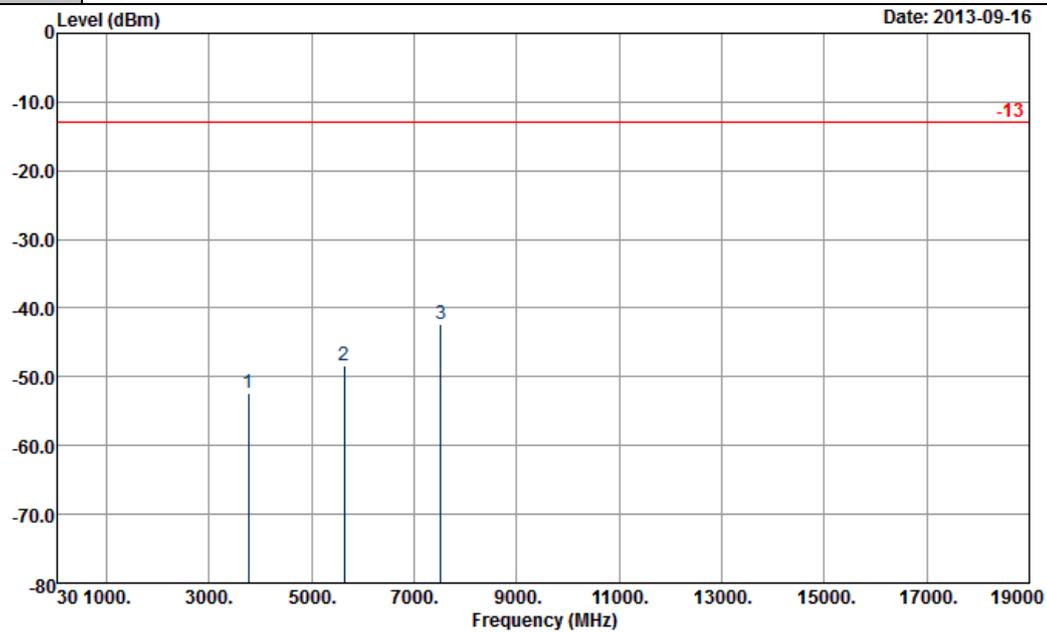

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3760              | -52.44       | -13           | -39.44            | -67.82              | -58.74             | 2.51                 | 8.81                    | V                    | Pass   |
| 5636              | -48.44       | -13           | -35.44            | -69.27              | -56.15             | 2.99                 | 10.70                   | V                    | Pass   |
| 7520              | -42.23       | -13           | -29.23            | -69.25              | -50.76             | 3.59                 | 12.12                   | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | WCDMA Band V             | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 4182                     | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

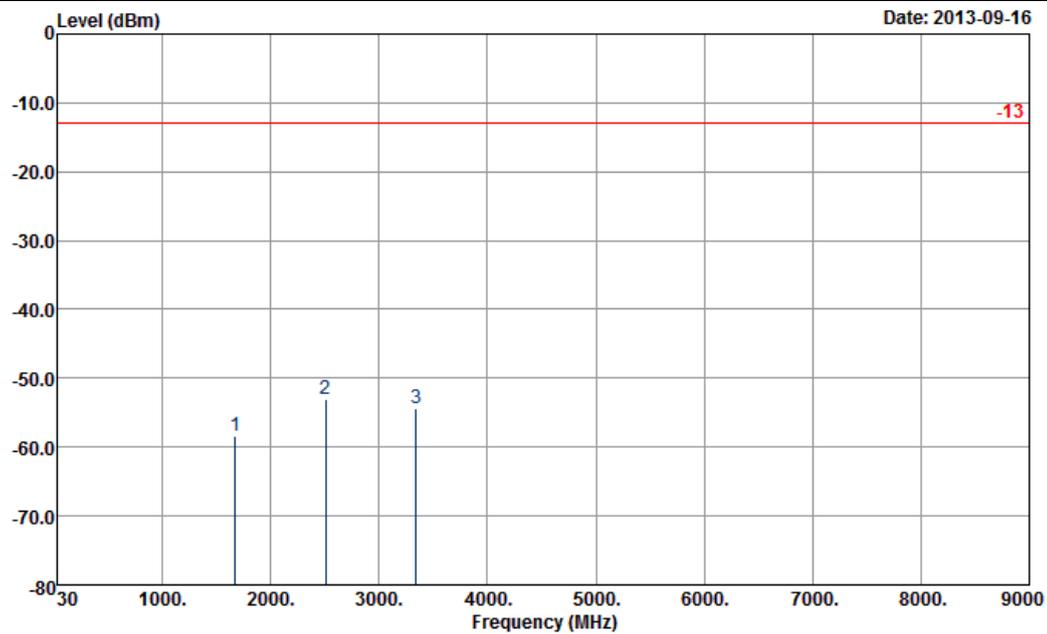

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1672              | -58.38      | -13           | -45.38            | -67.52              | -60.1              | 1.62                 | 5.49                    | H                    | Pass   |
| 2509              | -53.13      | -13           | -40.13            | -68.67              | -55.1              | 2.1                  | 6.22                    | H                    | Pass   |
| 3345              | -54.31      | -13           | -41.31            | -68.67              | -57.2              | 3.03                 | 8.07                    | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | WCDMA Band V             | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 4182                     | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

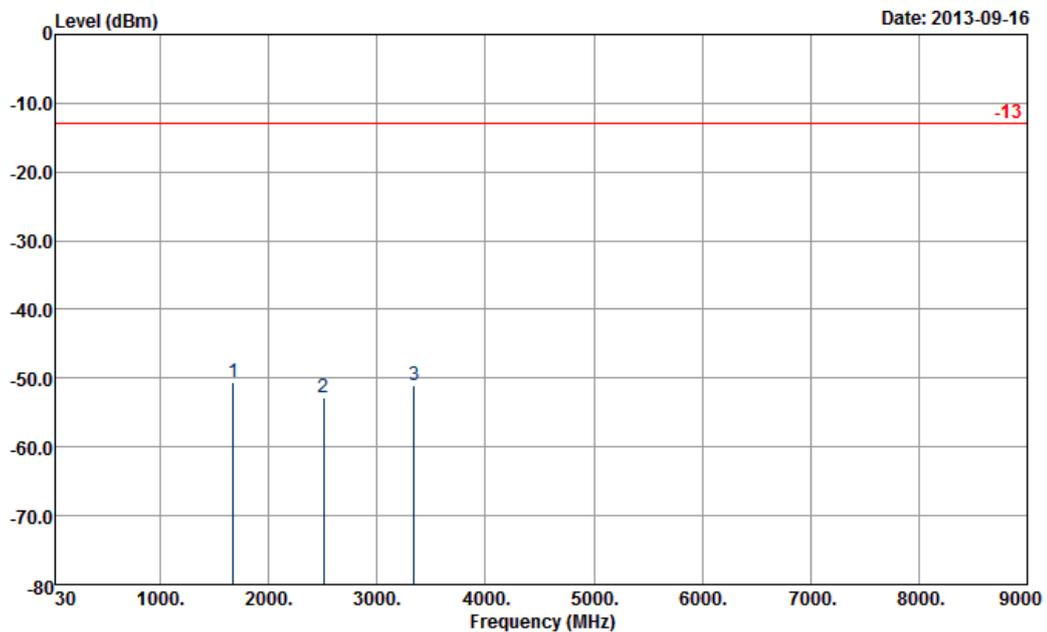


Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency (MHz) | ERP (dBm) | Limit (dBm) | Over Limit (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) | Result |
|-----------------|-----------|-------------|-----------------|-------------------|------------------|--------------------|-----------------------|--------------------|--------|
| 1672            | -50.68    | -13         | -37.68          | -62.04            | -52.4            | 1.62               | 5.49                  | V                  | Pass   |
| 2509            | -52.73    | -13         | -39.73          | -66.43            | -54.7            | 2.1                | 6.22                  | V                  | Pass   |
| 3345            | -51.11    | -13         | -38.11          | -66.94            | -54              | 3.03               | 8.07                  | V                  | Pass   |

Other harmonics are lower than background noise



|                        |   |                            |            |
|------------------------|---|----------------------------|------------|
| <b>Band :</b>          | WCDMA Band II   | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK)  | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 9400  | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih   |                            |            |
| <b>Remark :</b>        | 1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.<br>2. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise. |                            |            |

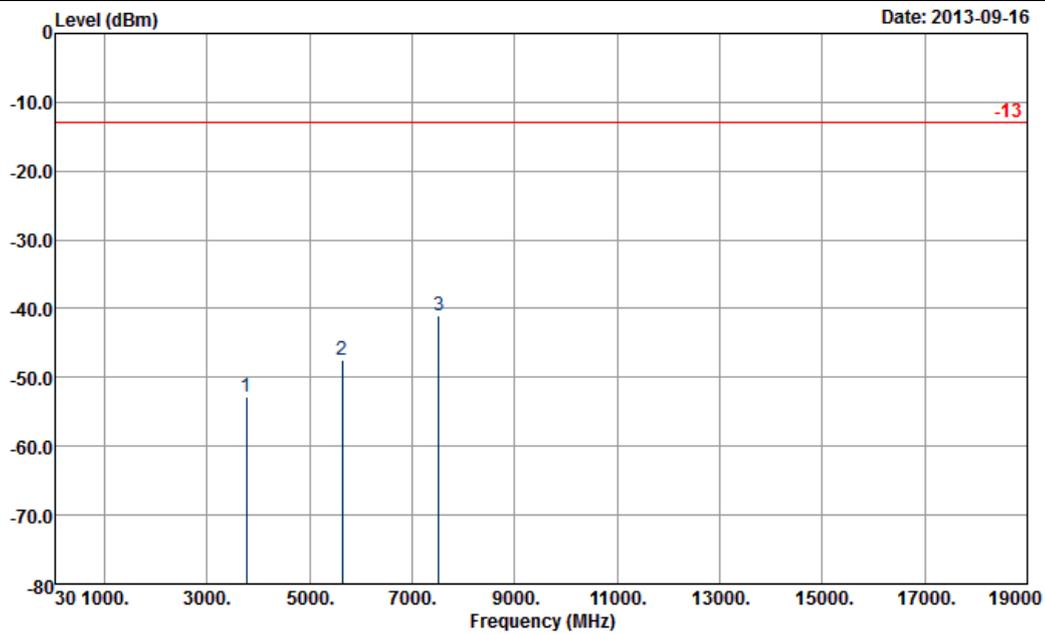

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3760              | -52.89       | -13           | -39.89            | -67.06              | -59.19             | 2.51                 | 8.81                    | H                    | Pass   |
| 5636              | -47.42       | -13           | -34.42            | -68.12              | -55.13             | 2.99                 | 10.70                   | H                    | Pass   |
| 7520              | -41.10       | -13           | -28.10            | -69.71              | -49.63             | 3.59                 | 12.12                   | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | WCDMA Band II            | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 9400                     | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

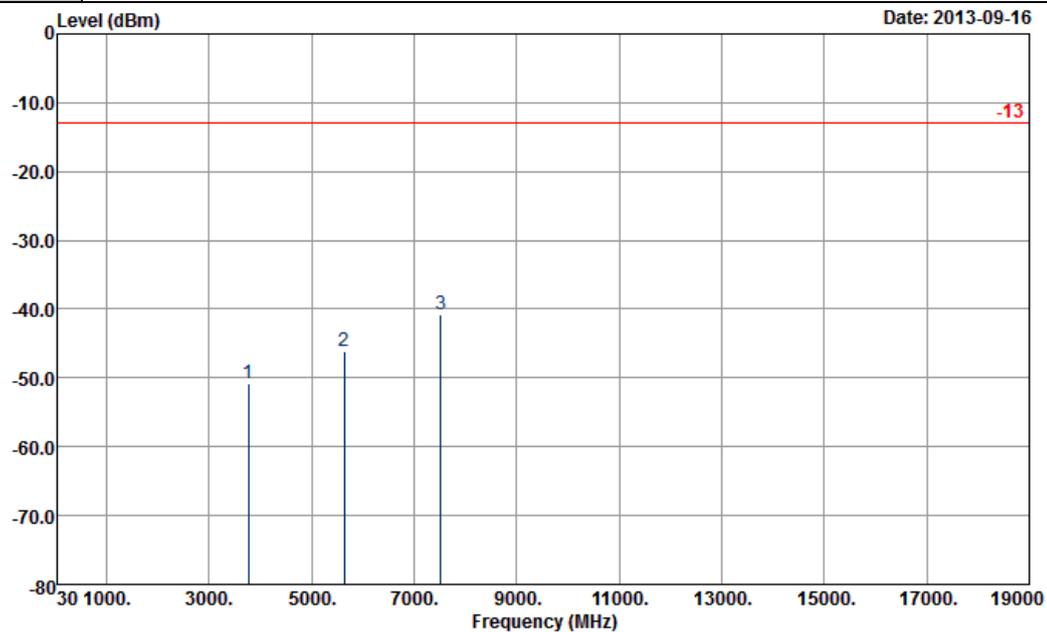

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3760              | -50.84       | -13           | -37.84            | -66.79              | -57.14             | 2.51                 | 8.81                    | V                    | Pass   |
| 5636              | -46.10       | -13           | -33.10            | -66.07              | -53.81             | 2.99                 | 10.70                   | V                    | Pass   |
| 7520              | -40.75       | -13           | -27.75            | -68.75              | -49.28             | 3.59                 | 12.12                   | V                    | Pass   |

Other harmonics are lower than background noise




<High Channel>

|                        |                 |                            |            |
|------------------------|-----------------|----------------------------|------------|
| <b>Band :</b>          | GSM850          | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | GSM Link (GMSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 251             | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih       |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 7<sup>th</sup>, 8<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

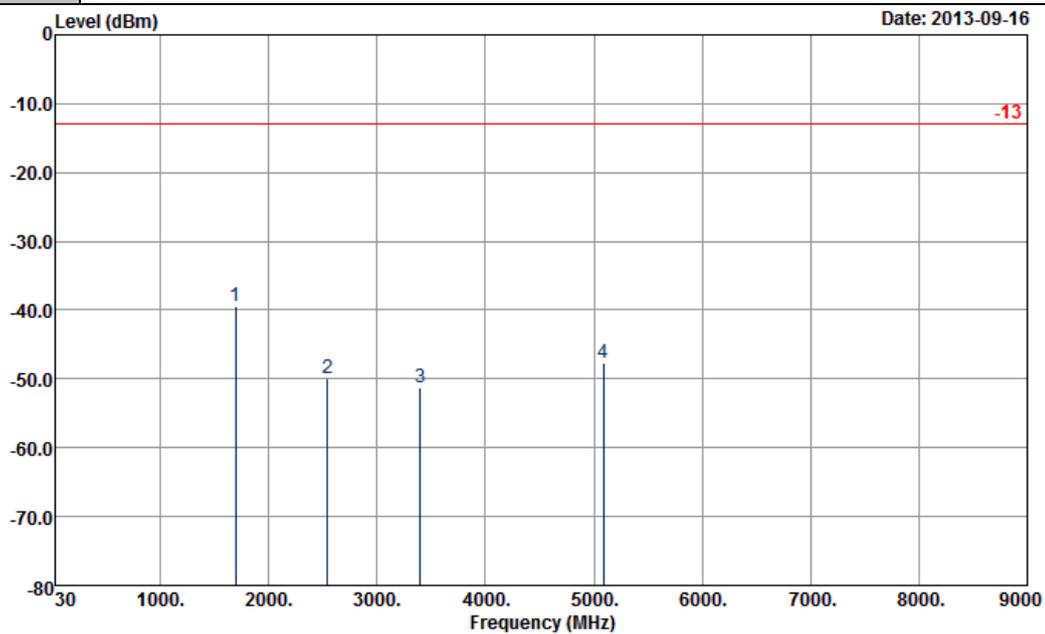

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1696              | -39.37      | -13           | -26.37            | -48.5               | -41.1              | 1.57                 | 5.45                    | H                    | Pass   |
| 2545              | -49.99      | -13           | -36.99            | -63.31              | -52.1              | 2.02                 | 6.28                    | H                    | Pass   |
| 3397              | -51.25      | -13           | -38.25            | -65.73              | -55                | 2.3                  | 8.20                    | H                    | Pass   |
| 5090              | -47.73      | -13           | -34.73            | -66.2               | -53.2              | 2.75                 | 10.37                   | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                 |                            |          |
|------------------------|-----------------|----------------------------|----------|
| <b>Band :</b>          | GSM850          | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | GSM Link (GMSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 251             | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih       |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 7<sup>th</sup>, 8<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

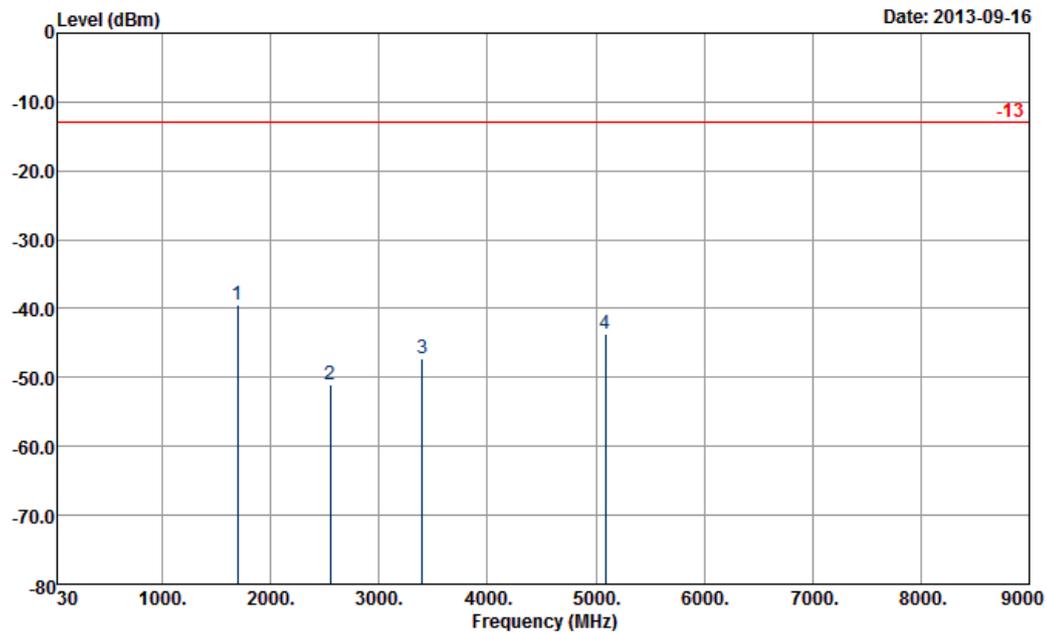

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency (MHz) | ERP (dBm) | Limit (dBm) | Over Limit (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) | Result |
|-----------------|-----------|-------------|-----------------|-------------------|------------------|--------------------|-----------------------|--------------------|--------|
| 1696            | -39.47    | -13         | -26.47          | -50.84            | -41.2            | 1.57               | 5.45                  | V                  | Pass   |
| 2548            | -50.99    | -13         | -37.99          | -64.91            | -53.1            | 2.02               | 6.28                  | V                  | Pass   |
| 3397            | -47.35    | -13         | -34.35          | -62.91            | -51.1            | 2.3                | 8.20                  | V                  | Pass   |
| 5090            | -43.73    | -13         | -30.73          | -62.25            | -49.2            | 2.75               | 10.37                 | V                  | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM850                   | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 251                      | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

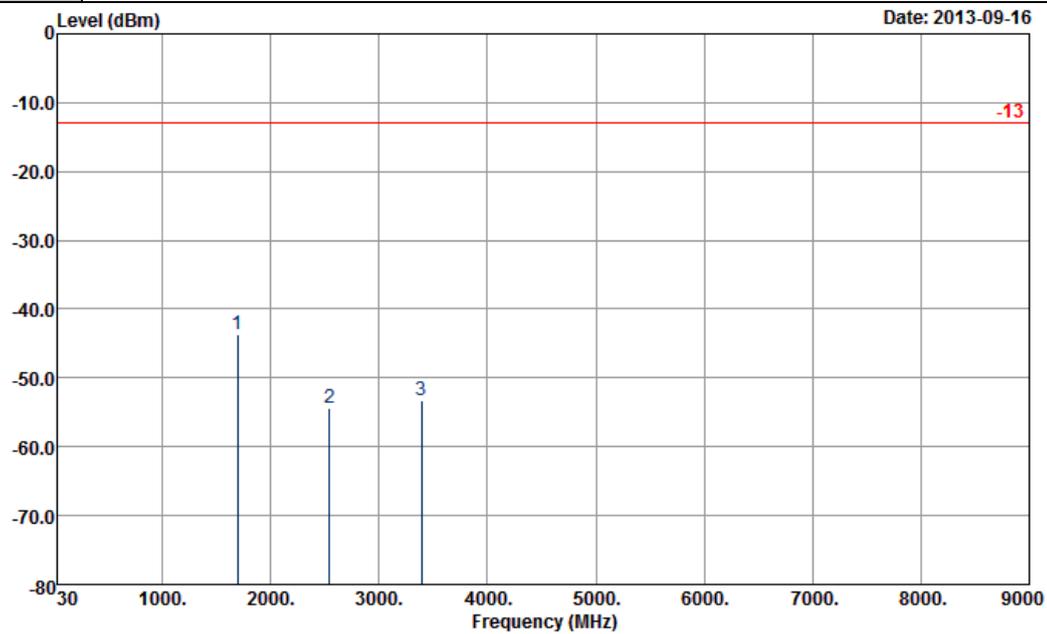

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1696              | -43.57      | -13           | -30.57            | -52.74              | -45.3              | 1.57                 | 5.45                    | H                    | Pass   |
| 2544              | -54.39      | -13           | -41.39            | -67.72              | -56.5              | 2.02                 | 6.28                    | H                    | Pass   |
| 3393              | -53.35      | -13           | -40.35            | -67.6               | -57.1              | 2.3                  | 8.20                    | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM850                   | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 251                      | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

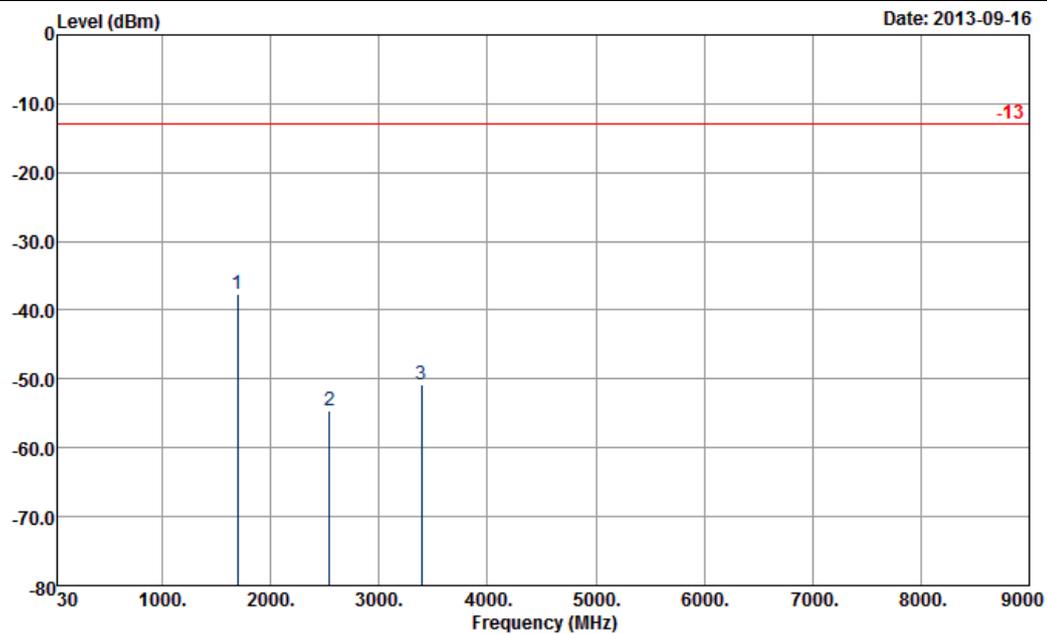

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1696              | -37.77      | -13           | -24.77            | -49.04              | -39.5              | 1.57                 | 5.45                    | V                    | Pass   |
| 2544              | -54.49      | -13           | -41.49            | -68.47              | -56.6              | 2.02                 | 6.28                    | V                    | Pass   |
| 3393              | -50.85      | -13           | -37.85            | -66.45              | -54.6              | 2.3                  | 8.20                    | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                 |                            |            |
|------------------------|-----------------|----------------------------|------------|
| <b>Band :</b>          | GSM1900         | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | GSM Link (GMSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 810             | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih       |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

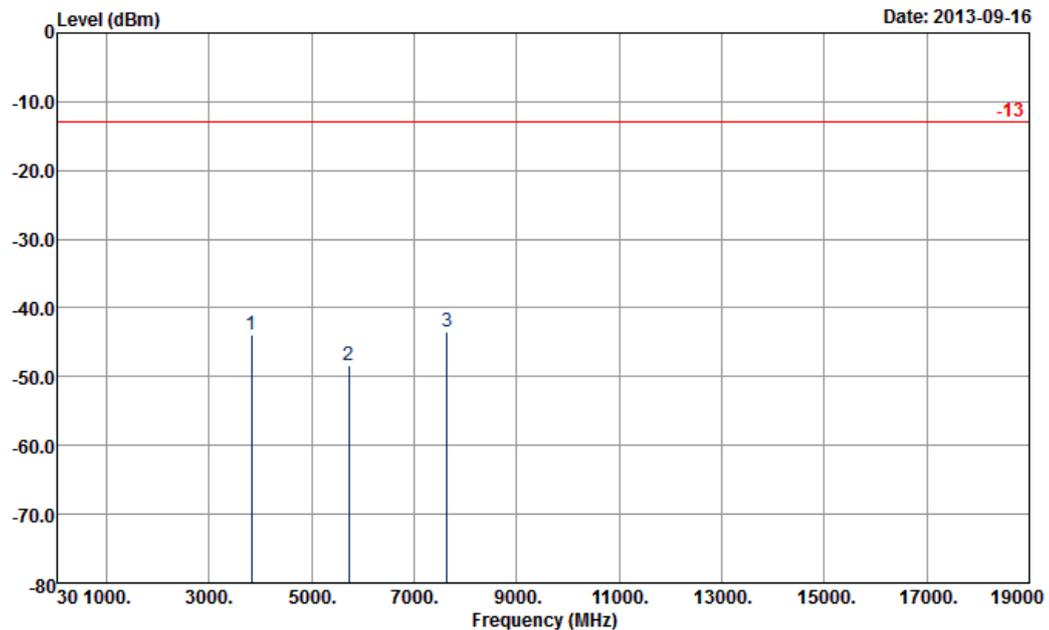


Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3820              | -43.99       | -13           | -30.99            | -59.79              | -50.4              | 2.47                 | 8.88                    | H                    | Pass   |
| 5730              | -48.40       | -13           | -35.40            | -69.82              | -56.1              | 3                    | 10.70                   | H                    | Pass   |
| 7640              | -43.42       | -13           | -30.42            | -69.89              | -52.2              | 3.43                 | 12.21                   | H                    | Pass   |

Other harmonics are lower than background noise



|                        |   |                            |          |
|------------------------|---|----------------------------|----------|
| <b>Band :</b>          | GSM1900   | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | GSM Link (GMSK)   | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 810   | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih   |                            |          |
| <b>Remark :</b>        | 1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.<br>2. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise. |                            |          |

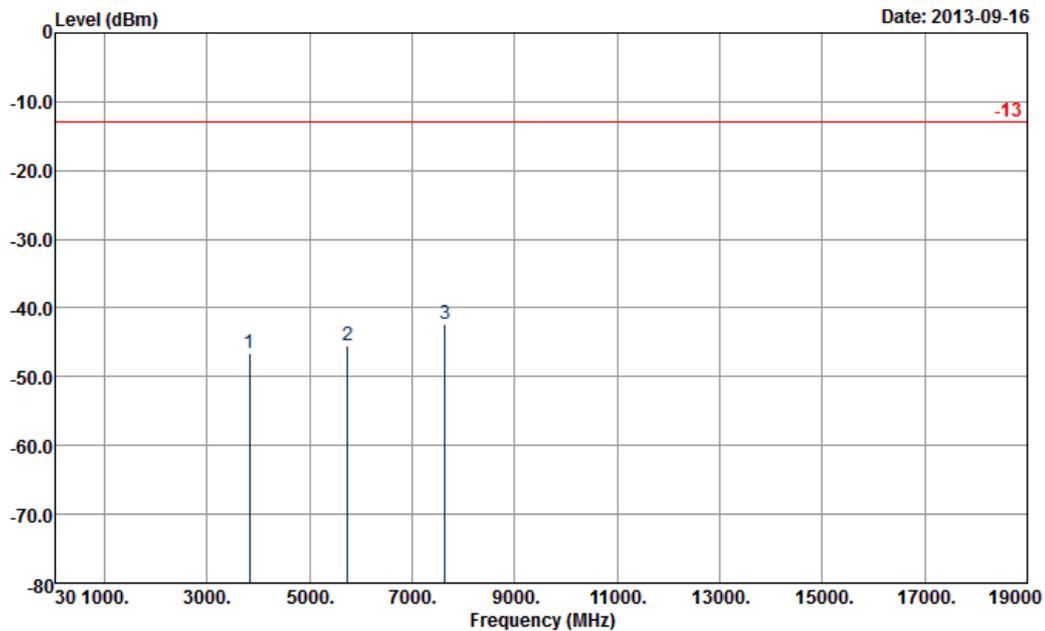


Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3820              | -46.49       | -13           | -33.49            | -63.16              | -52.9              | 2.47                 | 8.88                    | V                    | Pass   |
| 5732              | -45.40       | -13           | -32.40            | -66.51              | -53.1              | 3                    | 10.70                   | V                    | Pass   |
| 7640              | -42.42       | -13           | -29.42            | -68.68              | -51.2              | 3.43                 | 12.21                   | V                    | Pass   |

Other harmonics are lower than background noise



|                        |   |                            |            |
|------------------------|---|----------------------------|------------|
| <b>Band :</b>          | GSM1900   | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)  | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 810   | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih   |                            |            |
| <b>Remark :</b>        | 1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.<br>2. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise. |                            |            |

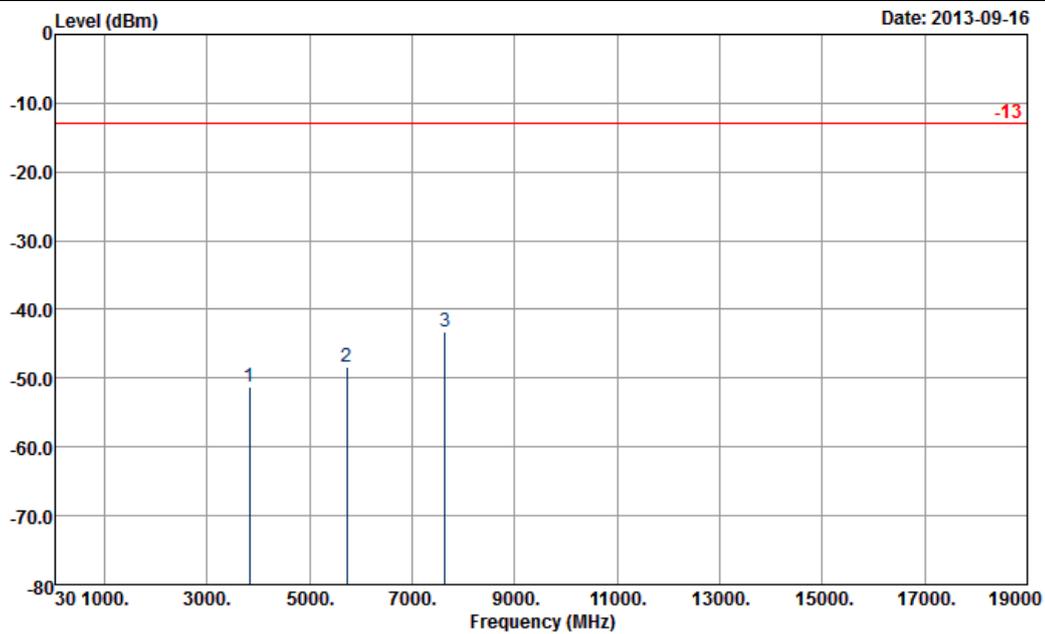

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3817              | -51.22       | -13           | -38.22            | -66.5               | -57.63             | 2.47                 | 8.88                    | H                    | Pass   |
| 5726              | -48.44       | -13           | -35.44            | -69.81              | -56.14             | 3                    | 10.70                   | H                    | Pass   |
| 7635              | -43.34       | -13           | -30.34            | -69.84              | -52.12             | 3.43                 | 12.21                   | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM1900                  | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 810                      | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

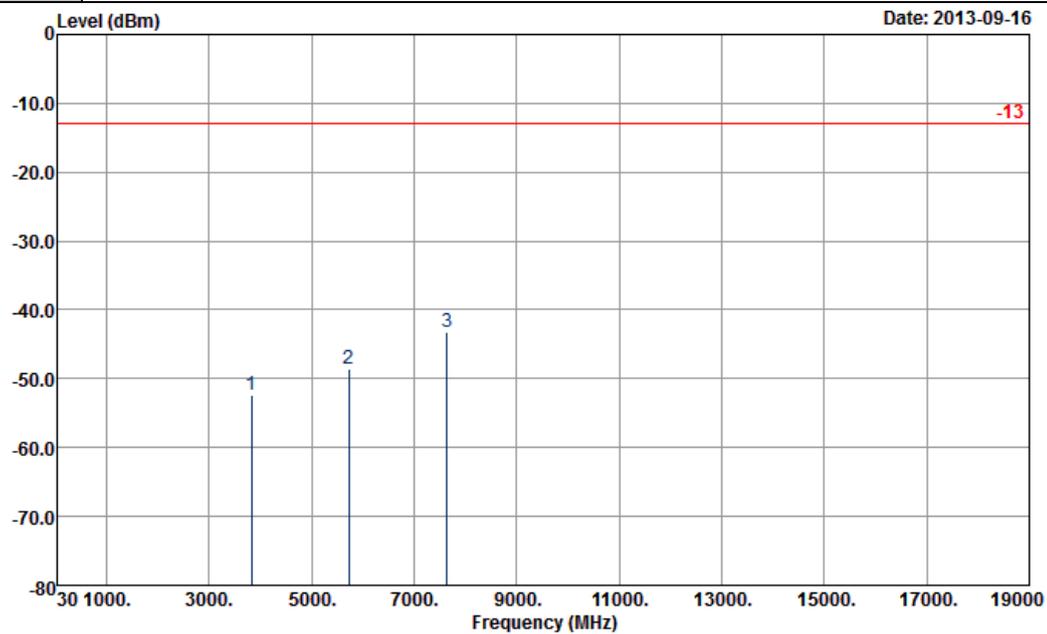

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3817              | -52.34       | -13           | -39.34            | -68.48              | -58.75             | 2.47                 | 8.88                    | V                    | Pass   |
| 5726              | -48.57       | -13           | -35.57            | -69.66              | -56.27             | 3                    | 10.70                   | V                    | Pass   |
| 7635              | -43.26       | -13           | -30.26            | -69.12              | -52.04             | 3.43                 | 12.21                   | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | WCDMA Band V             | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 4233                     | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

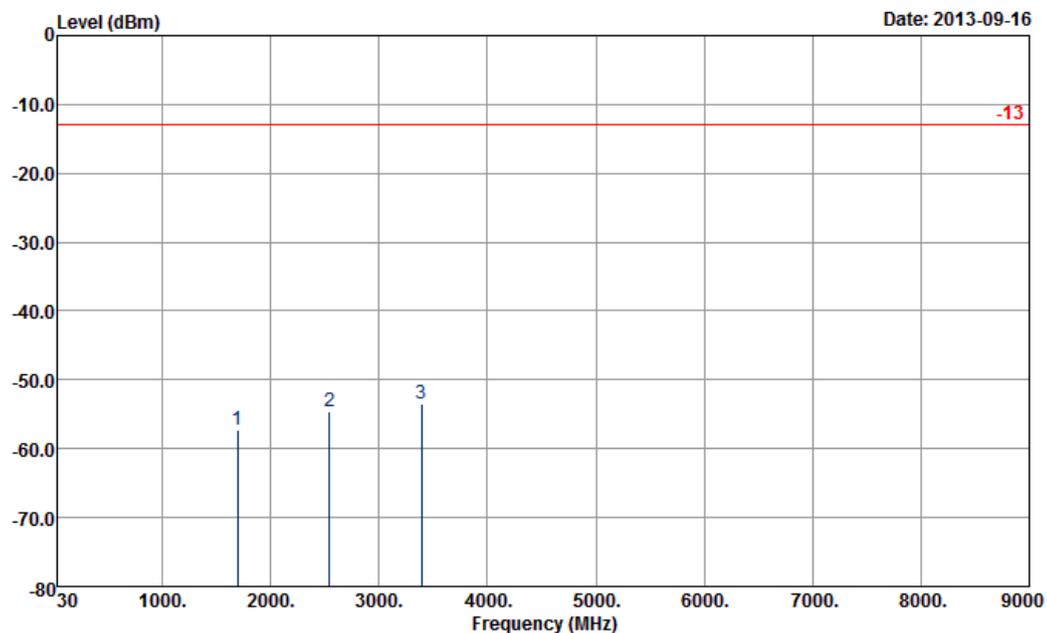

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1696              | -57.37      | -13           | -44.37            | -66.43              | -59.1              | 1.57                 | 5.45                    | H                    | Pass   |
| 2544              | -54.69      | -13           | -41.69            | -68.11              | -56.8              | 2.02                 | 6.28                    | H                    | Pass   |
| 3393              | -53.45      | -13           | -40.45            | -67.61              | -57.2              | 2.3                  | 8.20                    | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | WCDMA Band V             | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 4233                     | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

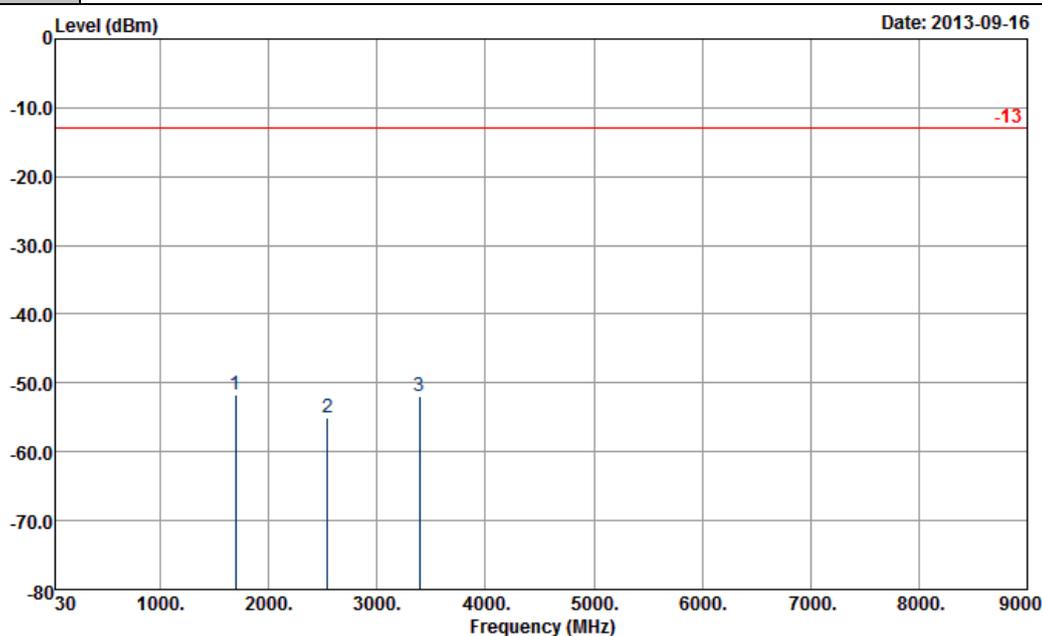

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|-------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 1696              | -51.77      | -13           | -38.77            | -63.17              | -53.5              | 1.57                 | 5.45                    | V                    | Pass   |
| 2544              | -54.99      | -13           | -41.99            | -68.83              | -57.1              | 2.02                 | 6.28                    | V                    | Pass   |
| 3393              | -51.85      | -13           | -38.85            | -67.57              | -55.6              | 2.3                  | 8.20                    | V                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |            |
|------------------------|--------------------------|----------------------------|------------|
| <b>Band :</b>          | WCDMA Band II            | <b>Temperature :</b>       | 22~24°C    |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%     |
| <b>Channel :</b>       | 9538                     | <b>Polarization :</b>      | Horizontal |
| <b>Test Engineer :</b> | Eric Shih                |                            |            |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

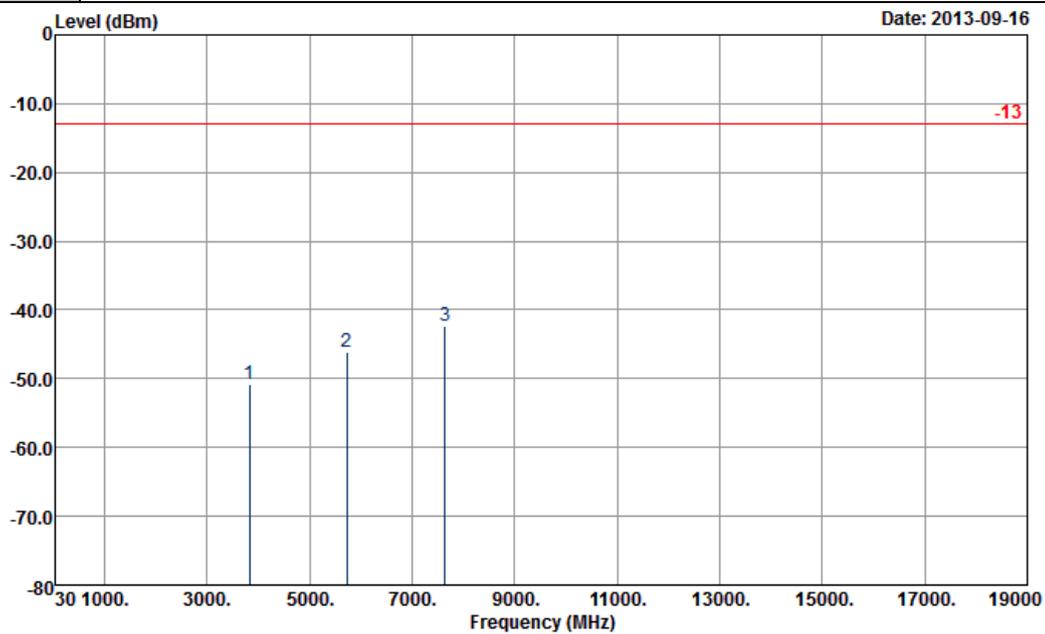

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) HORIZONTAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3817              | -50.71       | -13           | -37.71            | -66.32              | -57.12             | 2.47                 | 8.88                    | H                    | Pass   |
| 5726              | -46.17       | -13           | -33.17            | -66.41              | -53.87             | 3                    | 10.70                   | H                    | Pass   |
| 7635              | -42.45       | -13           | -29.45            | -69.37              | -51.23             | 3.43                 | 12.21                   | H                    | Pass   |


Other harmonics are lower than background noise



|                        |                          |                            |          |
|------------------------|--------------------------|----------------------------|----------|
| <b>Band :</b>          | WCDMA Band II            | <b>Temperature :</b>       | 22~24°C  |
| <b>Test Mode :</b>     | RMC 12.2Kbps Link (QPSK) | <b>Relative Humidity :</b> | 51~53%   |
| <b>Channel :</b>       | 9538                     | <b>Polarization :</b>      | Vertical |
| <b>Test Engineer :</b> | Eric Shih                |                            |          |

**Remark :**

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

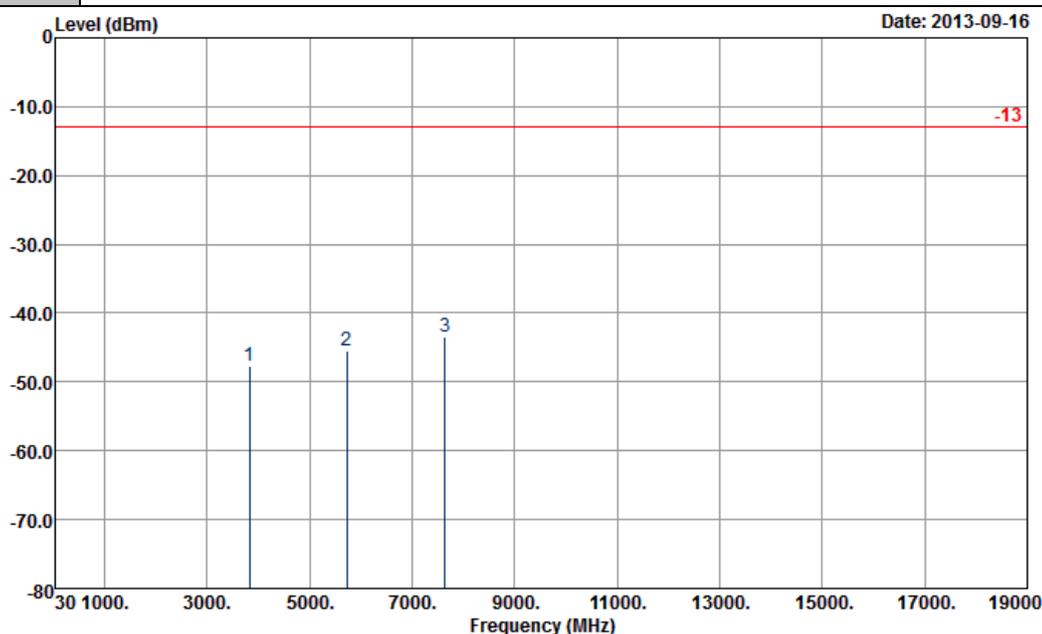

Site : 03CH07-HY  
 Condition : -13 HF-EIRP(080306) VERTICAL  
 Project : FG 380631

| Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading ( dBm ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain ( dBi ) | Polarization ( H/V ) | Result |
|-------------------|--------------|---------------|-------------------|---------------------|--------------------|----------------------|-------------------------|----------------------|--------|
| 3817              | -47.72       | -13           | -34.72            | -63.42              | -54.13             | 2.47                 | 8.88                    | V                    | Pass   |
| 5726              | -45.47       | -13           | -32.47            | -66.53              | -53.17             | 3                    | 10.70                   | V                    | Pass   |
| 7635              | -43.40       | -13           | -30.40            | -68.87              | -52.18             | 3.43                 | 12.21                   | V                    | Pass   |

Other harmonics are lower than background noise



## **3.8 Frequency Stability Measurement**

### **3.8.1 Description of Frequency Stability Measurement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### **3.8.2 Measuring Instruments**

The section 4.0 of List of Measuring Equipment of this test report is used for test.


### **3.8.3 Test Procedures for Temperature Variation**

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### **3.8.4 Test Procedures for Voltage Variation**

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

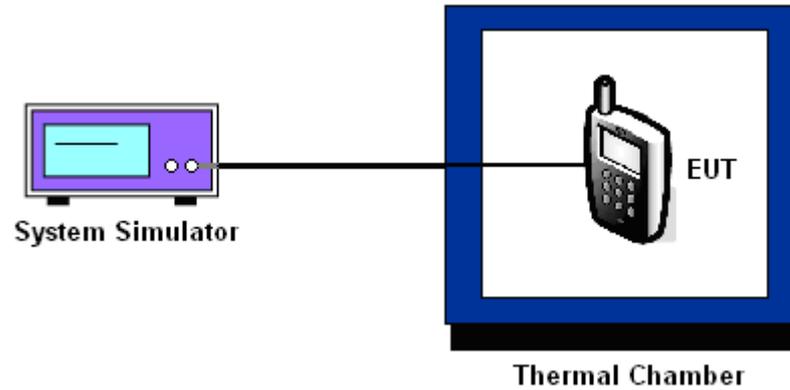



3.8.6 Test Result of Temperature Variation

|               |         |             |           |
|---------------|---------|-------------|-----------|
| Band :        | GSM 850 | Channel :   | 189       |
| Limit (ppm) : | 2.5     | Frequency : | 836.4 MHz |

| Temperature (°C) | GSM             |                 | EDGE class 8    |                 | Result |
|------------------|-----------------|-----------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) | Freq. Dev. (Hz) | Deviation (ppm) |        |
| -30              | -27             | -0.03           | -29             | -0.03           | PASS   |
| -20              | -30             | -0.04           | -24             | -0.03           |        |
| -10              | -25             | -0.03           | -22             | -0.03           |        |
| 0                | -24             | -0.03           | -20             | -0.02           |        |
| 10               | -25             | -0.03           | -18             | -0.02           |        |
| 20               | 23              | 0.03            | -19             | -0.02           |        |
| 30               | 21              | 0.02            | -22             | -0.03           |        |
| 40               | 25              | 0.03            | -23             | -0.03           |        |
| 50               | 28              | 0.03            | -26             | -0.03           |        |

|               |          |             |            |
|---------------|----------|-------------|------------|
| Band :        | GSM 1900 | Channel :   | 661        |
| Limit (ppm) : | 2.5      | Frequency : | 1880.0 MHz |

| Temperature (°C) | GSM             |                 | EDGE class 8    |                 | Result |
|------------------|-----------------|-----------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) | Freq. Dev. (Hz) | Deviation (ppm) |        |
| -30              | -57             | -0.03           | -61             | -0.03           | PASS   |
| -20              | -53             | -0.03           | -46             | -0.02           |        |
| -10              | -50             | -0.03           | -40             | -0.02           |        |
| 0                | -46             | -0.02           | -42             | -0.02           |        |
| 10               | -38             | -0.02           | -32             | -0.02           |        |
| 20               | -40             | -0.02           | -37             | -0.02           |        |
| 30               | -37             | -0.02           | -38             | -0.02           |        |
| 40               | -47             | -0.02           | -46             | -0.02           |        |
| 50               | -55             | -0.03           | -53             | -0.03           |        |



|                      |              |                    |           |
|----------------------|--------------|--------------------|-----------|
| <b>Band :</b>        | WCDMA Band V | <b>Channel :</b>   | 4182      |
| <b>Limit (ppm) :</b> | 2.5          | <b>Frequency :</b> | 836.4 MHz |

| Temperature (°C) | RMC 12.2Kbps    |                 | Result |
|------------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) |        |
| -30              | 14              | 0.02            | PASS   |
| -20              | 13              | 0.02            |        |
| -10              | 11              | 0.01            |        |
| 0                | 12              | 0.01            |        |
| 10               | 10              | 0.01            |        |
| 20               | 12              | 0.01            |        |
| 30               | 11              | 0.01            |        |
| 40               | 13              | 0.02            |        |
| 50               | 14              | 0.02            |        |

|                      |               |                    |            |
|----------------------|---------------|--------------------|------------|
| <b>Band :</b>        | WCDMA Band II | <b>Channel :</b>   | 9400       |
| <b>Limit (ppm) :</b> | 2.5           | <b>Frequency :</b> | 1880.0 MHz |

| Temperature (°C) | RMC 12.2Kbps    |                 | Result |
|------------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) |        |
| -30              | -26             | -0.01           | PASS   |
| -20              | -24             | -0.01           |        |
| -10              | -21             | -0.01           |        |
| 0                | -19             | -0.01           |        |
| 10               | -18             | -0.01           |        |
| 20               | -20             | -0.01           |        |
| 30               | 19              | 0.01            |        |
| 40               | 22              | 0.01            |        |
| 50               | 24              | 0.01            |        |



3.8.7 Test Result of Voltage Variation

| Band & Channel          | Mode            | Voltage (Volt) | Freq. Dev. (Hz) | Deviation (ppm) | Limit (ppm) | Result |
|-------------------------|-----------------|----------------|-----------------|-----------------|-------------|--------|
| GSM 850<br>CH189        | GSM             | 3.7            | -20             | -0.02           | 2.5         | PASS   |
|                         |                 | BEP            | -19             | -0.02           |             |        |
|                         |                 | 4.1            | -19             | -0.02           |             |        |
|                         | EDGE<br>class 8 | 3.7            | -19             | -0.02           |             |        |
|                         |                 | BEP            | -21             | -0.02           |             |        |
|                         |                 | 4.1            | -20             | -0.02           |             |        |
| GSM 1900<br>CH661       | GSM             | 3.7            | -44             | -0.02           |             |        |
|                         |                 | BEP            | -40             | -0.02           |             |        |
|                         |                 | 4.1            | -36             | -0.02           |             |        |
|                         | EDGE<br>class 8 | 3.7            | -43             | -0.02           |             |        |
|                         |                 | BEP            | -38             | -0.02           |             |        |
|                         |                 | 4.1            | -41             | -0.02           |             |        |
| WCDMA Band V<br>CH4182  | RMC<br>12.2Kbps | 3.7            | 12              | 0.01            |             |        |
|                         |                 | BEP            | 14              | 0.02            |             |        |
|                         |                 | 4.1            | 13              | 0.02            |             |        |
| WCDMA Band II<br>CH9400 | RMC<br>12.2Kbps | 3.7            | 22              | 0.01            |             |        |
|                         |                 | BEP            | 22              | 0.01            |             |        |
|                         |                 | 4.1            | 23              | 0.01            |             |        |

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.5 V.



## 4 List of Measuring Equipment

| Instrument                | Manufacturer    | Model No.                          | Serial No.         | Characteristics   | Calibration Date | Test Date                      | Due Date      | Remark                |
|---------------------------|-----------------|------------------------------------|--------------------|-------------------|------------------|--------------------------------|---------------|-----------------------|
| System Simulator          | Rohde & Schwarz | CMU200                             | 117591             | N/A               | Oct. 21, 2011    | Sep.12, 2013~<br>Sep. 15, 2013 | Oct. 20, 2013 | Conducted (TH02-HY)   |
| Spectrum Analyzer         | Rohde & Schwarz | FSP40                              | 100055             | 9kHz~40GHz        | Jun. 07, 2013    | Sep.12, 2013~<br>Sep. 15, 2013 | Jun. 06, 2014 | Conducted (TH02-HY)   |
| Thermal Chamber           | Ten Billion     | TTH-D3SP                           | TBN-9307<br>01     | N/A               | Jul. 19, 2013    | Sep.12, 2013~<br>Sep. 15, 2013 | Jul. 18, 2014 | Conducted (TH02-HY)   |
| Thermometer               | Wisewind        | 410                                | N/A                | N/A               | Nov. 20, 2012    | Sep.12, 2013~<br>Sep. 15, 2013 | Nov. 19, 2013 | Conducted (TH02-HY)   |
| Filter                    | WAINWRIGHT      | whkx2..0/18g                       | N/A                | 2GHighPass Filter | Nov. 26, 2012    | Sep.12, 2013~<br>Sep. 15, 2013 | Nov. 25, 2013 | Conducted (TH02-HY)   |
| RF cable                  | HONOVA          | MF86                               | N/A                | N/A               | Nov. 26, 2012    | Sep.12, 2013~<br>Sep. 15, 2013 | Nov. 25, 2013 | Conducted (TH02-HY)   |
| RF cable                  | HONOVA          | MF86                               | N/A                | N/A               | Nov. 26, 2012    | Sep.12, 2013~<br>Sep. 15, 2013 | Nov. 25, 2013 | Conducted (TH02-HY)   |
| Spectrum Analyzer         | Rohde & Schwarz | FSP30                              | 101067             | 9kHz~30GHz        | Nov. 30, 2012    | Sep.16, 2013                   | Nov. 29, 2013 | Radiation (03CH07-HY) |
| Bilog Antenna             | Schaffner       | CBL6111C                           | 2726               | 30MHz~1GHz        | Oct. 06, 2012    | Sep.16, 2013                   | Oct. 05, 2013 | Radiation (03CH07-HY) |
| Double Ridge Horn Antenna | ESCO            | 3117                               | 75962              | 1GHz~18GHz        | Aug. 22, 2013    | Sep.16, 2013                   | Aug. 21, 2014 | Radiation (03CH07-HY) |
| SHF-EHF Horn Antenna      | SCHWARZBECK     | BBHA 9170                          | BBHA9170<br>251    | 18GHz ~ 40GHz     | Sep. 28, 2012    | Sep.16, 2013                   | Sep. 27, 2013 | Radiation (03CH07-HY) |
| Preamplifier              | COM-POWER       | PA-103A                            | 161241             | 30MHz~1GHz        | Feb. 26, 2013    | Sep.16, 2013                   | Feb. 25, 2014 | Radiation (03CH07-HY) |
| Preamplifier              | Agilent         | 8449B                              | 3008A023<br>62     | 1GHz~26.5GHz      | Dec. 01, 2012    | Sep.16, 2013                   | Nov. 30, 2013 | Radiation (03CH07-HY) |
| Turn Table                | ChainTek        | ChainTek 3000                      | N/A                | 0 ~ 360 degree    | N/A              | Sep.16, 2013                   | N/A           | Radiation (03CH07-HY) |
| Antenna Mast              | ChainTek        | ChainTek 3000                      | N/A                | N/A               | N/A              | Sep.16, 2013                   | N/A           | Radiation (03CH07-HY) |
| Notch Filter              | Wainwright      | WRCT<br>800/960-0.2/40<br>8ssk     | SN22               | LTE Band 5        | Nov. 26, 2012    | Sep.16, 2013                   | Nov. 25, 2013 | Radiation (03CH07-HY) |
| Notch Filter              | Wainwright      | WRCG<br>824/849/814/859-<br>40 8SS | SN35               | WCDMA 850         | Nov. 26, 2012    | Sep.16, 2013                   | Nov. 25, 2013 | Radiation (03CH07-HY) |
| High Pass Filter          | Woken           | 1000-12750MHz<br>SMA               | 0100V1H0<br>10001G | 1GHz HPF          | Nov. 26, 2012    | Sep.16, 2013                   | Nov. 25, 2013 | Radiation (03CH07-HY) |



| Instrument       | Manufacturer            | Model No.                              | Serial No.            | Characteristics  | Calibration Date | Test Date    | Due Date      | Remark                   |
|------------------|-------------------------|--|-----------------------|--|------------------|--------------|---------------|--------------------------|
| Notch Filter     | Wainwright              | WRCG<br>1850/1910-1835-<br>1925-40/8ss | SN21                  | WCDMA 1900   | Nov. 26, 2012    | Sep.16, 2013 | Nov. 25, 2013 | Radiation<br>(03CH07-HY) |
| Notch Filter     | Wainwright              | WRCT<br>1800/2000-20/40-<br>10ssk      | SN1                   | GSM 1900 /<br>WCDMA Band 1,2 /<br>LTE Band<br>2,25,33,35,36,37 | Nov. 26, 2012    | Sep.16, 2013 | Nov. 25, 2013 | Radiation<br>(03CH07-HY) |
| High Pass Filter | Microwave               | H03G18G3                               | N/A                   | 3GHz HPF   | Nov. 26, 2012    | Sep.16, 2013 | Nov. 25, 2013 | Radiation<br>(03CH07-HY) |
| HF RF Cable      | HUBER SUHNER            | SUCOFLEX 104                           | 38411/6               | 1GHz ~ 18GHz   | Dec.04 , 2012    | Sep.16, 2013 | Dec.03,2013   | Radiation<br>(03CH07-HY) |
| LF RF Cable      | Warison+HUBER<br>SUHNER | WCBA-WC04NM.<br>NM2                    | N/A                   | 30MHz ~ 1GHz   | Dec.04 , 2012    | Sep.16, 2013 | Dec.03,2013   | Radiation<br>(03CH07-HY) |
| Test Software    | Audix                   | E3                                     | Version<br>6.2009-08- | N/A  | N/A              | Sep.16, 2013 | N/A           | Radiation<br>(03CH07-HY) |
| Hygrometer       | Testo                   | 608-H1                                 | 34897197              | N/A  | Nov. 20, 2012    | Sep.16, 2013 | Nov. 19, 2013 | Radiation<br>(03CH07-HY) |

**Note:** Test equipment calibration is traceable to the procedure of ISO17025.



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|   |      |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.54 |
|---|------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

|   |      |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.72 |
|---|------|