

# FCC/IC RF Test Report


APPLICANT : Sony Mobile Communications AB  
EQUIPMENT : Smart phone  
BRAND NAME : SONY  
MODEL NAME : D2306  
TYPE NAME : PM-0723-BV  
FCC ID : PY7PM-0723  
IC : 4170B-PM0723  
STANDARD : FCC Part 15 Subpart C §15.247  
IC RSS-210 issue 8  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Nov. 15, 2013 and testing was completed on Dec. 12, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7PM-0723

IC : 4170B-PM0723

Page Number : 1 of 115

Report Issued Date : Jan. 24, 2014

Report Version : Rev. 01



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Site..... 7

    1.7 Applied Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

    2.1 Descriptions of Test Mode ..... 8

    2.2 Test Mode..... 9

    2.3 Connection Diagram of Test System..... 10

    2.4 Support Unit used in test configuration and system ..... 12

    2.5 EUT Operation Test Setup ..... 12

    2.6 Measurement Results Explanation Example..... 12

**3 TEST RESULT ..... 13**

    3.1 Number of Channel Measurement ..... 13

    3.2 Hopping Channel Separation Measurement ..... 15

    3.3 Dwell Time Measurement..... 22

    3.4 20dB and 99% Bandwidth Measurement ..... 25

    3.5 Peak Output Power Measurement ..... 38

    3.6 Conducted Band Edges Measurement..... 40

    3.7 Conducted Spurious Emission Measurement ..... 47

    3.8 Radiated Band Edges and Spurious Emission Measurement ..... 66

    3.9 AC Conducted Emission Measurement..... 106

    3.10 Antenna Requirements..... 112

**4 LIST OF MEASURING EQUIPMENT..... 113**

**5 UNCERTAINTY OF EVALUATION..... 115**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3N1535A	Rev. 01	Initial issue of report	Jan. 24, 2014



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	RSS-210 A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	RSS-210 A8.1(b)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	RSS-210 A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	RSS-210 A8.1(a)	20dB Bandwidth	NA	Pass	-
3.4	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	RSS-210 A8.5	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	RSS-210 A8.5	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 8.76 dB at 30.000 MHz
3.9	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 8.70 dB at 0.190 MHz
3.10	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Sony Mobile Communications AB**  
Nya Vattentorget, 22188 Lund, Sweden

## 1.2 Manufacturer

**Compal Communications, INC.**  
No. 385, Yangguang Street, Neihu, Taipei 11491, Taiwan

## 1.3 Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is smart phone supporting, GSM / WCDMA / LTE, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, Bluetooth with FM Receiver, GPS, and NFC features, and below is details of information.

General Information of Equipment Under Test	
Equipment	Smart phone
Brand Name	SONY
Model Name	D2306
Type Name	PM-0723-BV
FCC ID	PY7PM-0723
IC	4170B-PM0723
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS / EGPRS Multi Slot Class	GPRS Class 33, EGPRS Class 33
WCDMA Operating Band(s)	FDD Band I / II / IV / V
WCDMA Rel. Version	Rel. 8
LTE Operating Band(s)	FDD Band IV / VII / XVII
Wi-Fi Specification	802.11b/g/n (HT20) 802.11a/n (HT20/HT40)
Bluetooth Version	v3.0+EDR / v4.0-LE
NFC Specification	ISO14443A / ISO14443B / Felica
Power Supply	Battery / AC Adapter / Car Charger

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	79
<b>Carrier Frequency of Each Channel</b>	2402+n*1 MHz; n=0~78
<b>Maximum Output Power to Antenna</b>	Bluetooth BR(1Mbps) : 8.59 dBm (0.0072 W) Bluetooth EDR (2Mbps) : 9.48 dBm (0.0089 W) Bluetooth EDR (3Mbps) : 9.94 dBm (0.0099 W)
<b>99% Occupied Bandwidth</b>	Bluetooth BR(1Mbps) : 0.892MHz Bluetooth EDR (2Mbps) : 1.184MHz Bluetooth EDR (3Mbps) : 1.180MHz
<b>Antenna Type</b>	PIFA Antenna type with gain 1.55 dBi
<b>Type of Modulation</b>	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
<b>EUT #1</b>	IMEI : 004402451442879 S/N : ZH8001NA38
<b>EUT #2</b>	IMEI : 004402451650869 S/N : 468191348BB
<b>EUT #3</b>	IMEI : 004402451443497 S/N : ZH8001NA4U
<b>HW Version</b>	A
<b>SW Version</b>	18.0.C.0.30
<b>EUT Stage</b>	Production Unit

Accessory List	
<b>AC Adapter</b>	Model No. : EP800
	Type No. : CAA-0002016-US B
<b>Battery</b>	Model No. : LIS1502ERPC
	Type No. : LIS1502ERPC
<b>Earphone</b>	Model No. : MH410c
	Type No. : AG-1100
<b>USB Cable</b>	Model No. : AHAB EC450
	Part No. : 1242-6715.4

**Note:**

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report.
3. For other wireless features of this EUT, test report will be issued separately.



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.			
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH02-HY	CO05-HY	03CH06-HY	722060/4086B-1

**Note:** The test site complies with ANSI C63.4 2003 requirement.

### 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003
- IC RSS-210 Issue 8
- IC RSS-Gen Issue 3
- NOTICE 2012-DRS0126

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, “ Receivers Excluded from Industry Canada Requirements”, only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	7.04 dBm	7.87 dBm	8.40 dBm
Ch39	2441MHz	8.59 dBm	9.48 dBm	9.94 dBm
Ch78	2480MHz	6.20 dBm	7.01 dBm	7.41 dBm

**Remark:** All the test data for each data rate were verified, but only the worst case was reported.

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.




## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
AC Conducted Emission	Mode 1 :GSM1900 Idle + Bluetooth Link + WLAN Idle + GPS Rx + Earphone + Battery + USB Cable (Data Link with Notebook)		
	Mode 2 :GSM1900 Idle + Bluetooth Idle + WLAN Link + GPS Rx + Earphone + Battery + USB Cable (Data Link with Notebook)		

## 2.3 Connection Diagram of Test System


<Bluetooth Tx Mode>

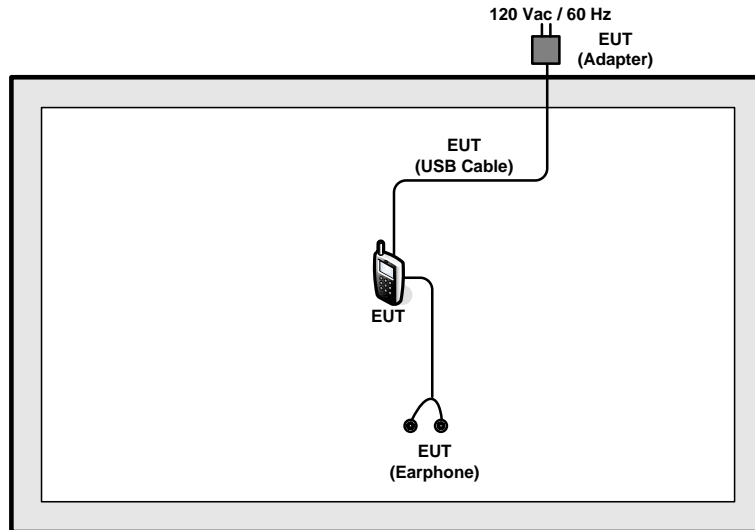

<AC Conducted Emission Mode in WLAN Idle>

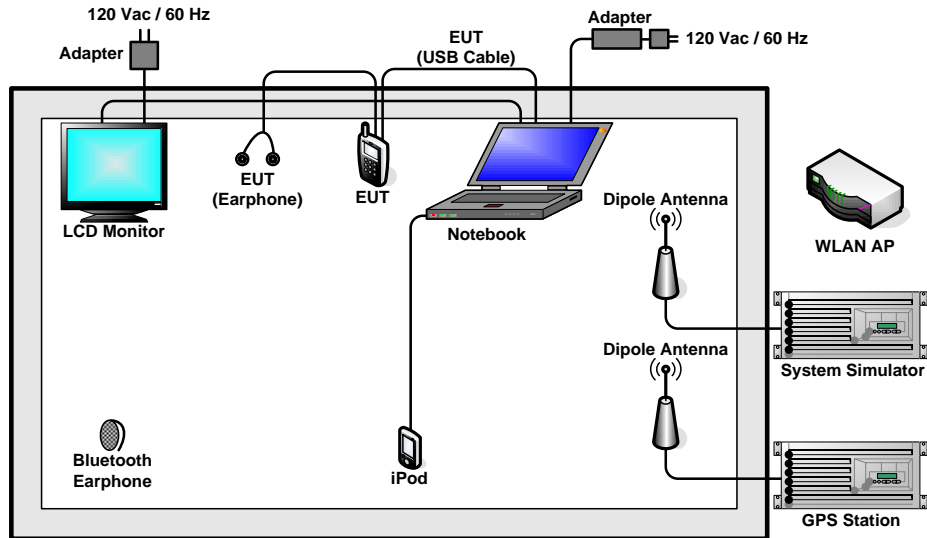

<AC Conducted Emission Mode in WLAN Link>

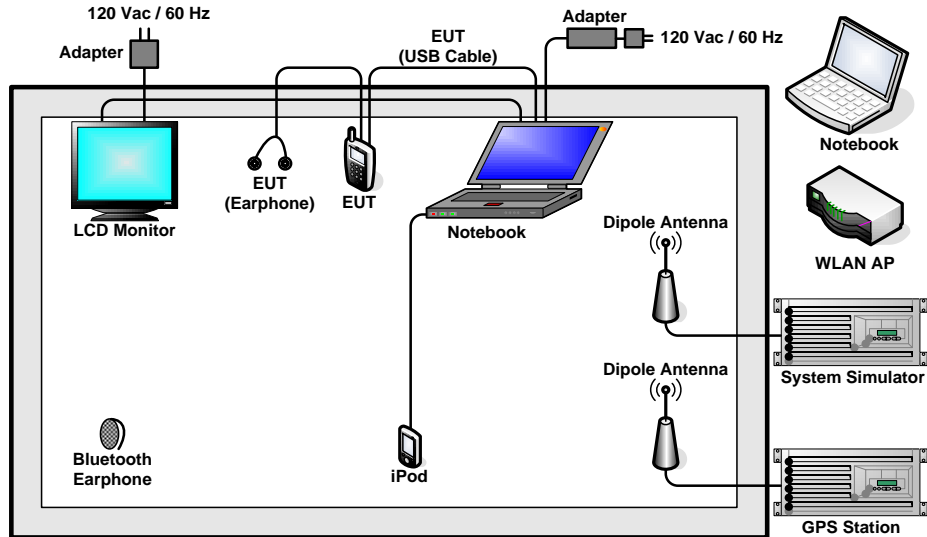

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
6.	Bluetooth Earphone	Sony Ericsson	MH755	FCC Doc	N/A	N/A
7.	Bluetooth Body	Sony Ericsson	SBH20	PY7-RD0010	N/A	N/A
8.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
9.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

## 2.5 EUT Operation Test Setup

For Bluetooth function, the RF utility, “QPST” was installed in EUT which was programmed in order to make the EUT get into the engineering modes for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

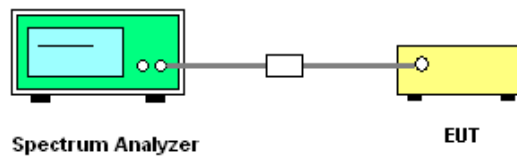


##### 3.1.5 Test Result of Number of Hopping Frequency


<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Citta Ke	<b>Relative Humidity :</b>	48~51%
<b>Number of Hopping (Channel)</b>	<b>Adaptive Frequency Hopping (Channel)</b>	<b>Limits (Channel)</b>	<b>Pass/Fail</b>
79	20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

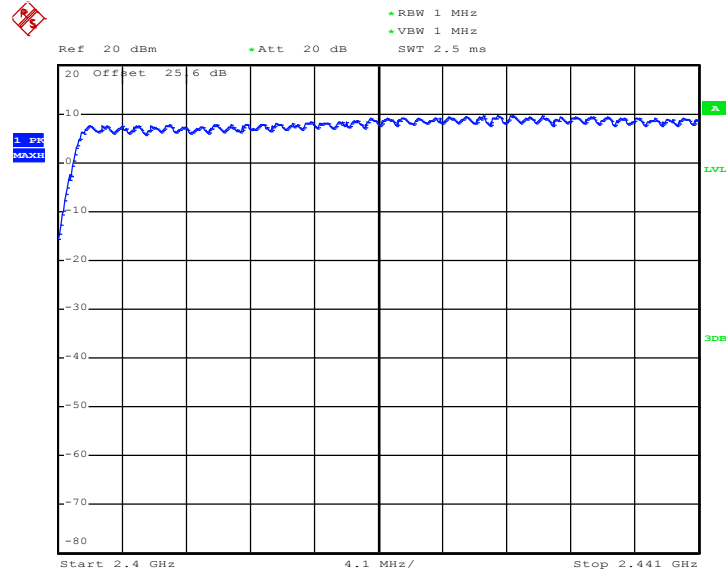

Date: 12.DEC.2013 11:08:19

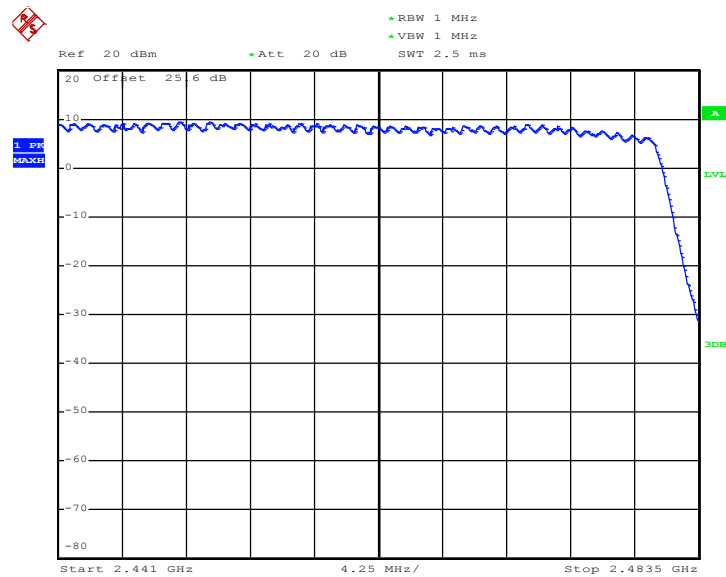

Date: 12.DEC.2013 11:09:33

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels; RBW  $\geq$  1% of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

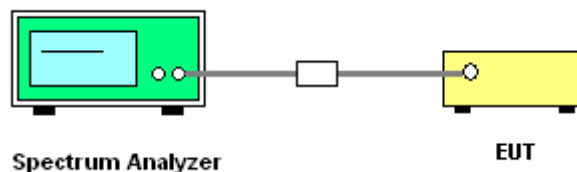




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.014	0.6133	Pass
39	2441	1.008	0.6133	Pass
78	2480	1.008	0.6347	Pass

Channel Separation Plot on Channel 00 - 01

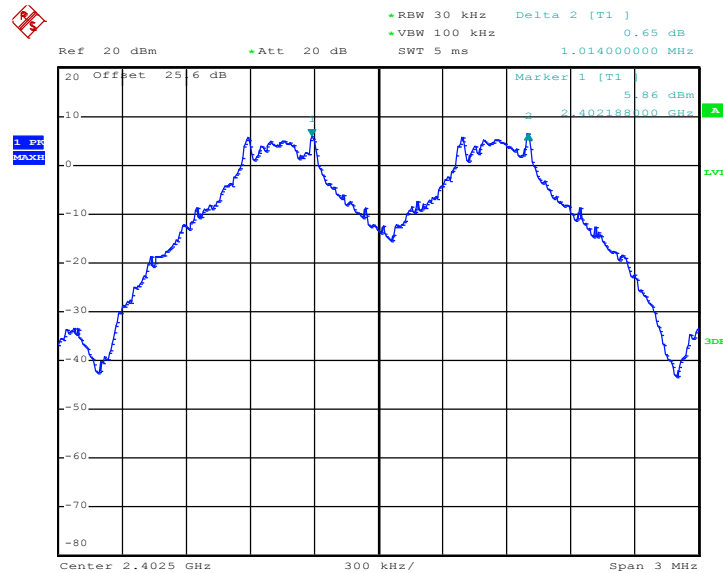


Date: 12.DEC.2013 09:59:48

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.






Channel Separation Plot on Channel 39 - 40

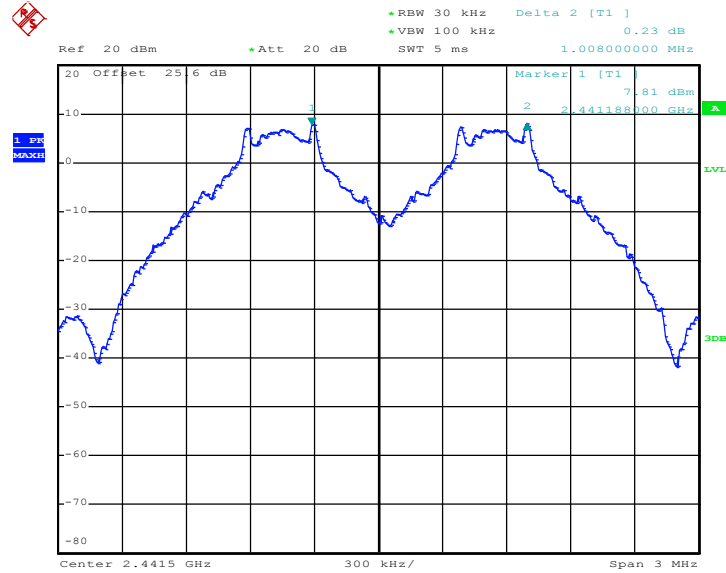

Date: 12.DEC.2013 10:07:41

Channel Separation Plot on Channel 77 - 78

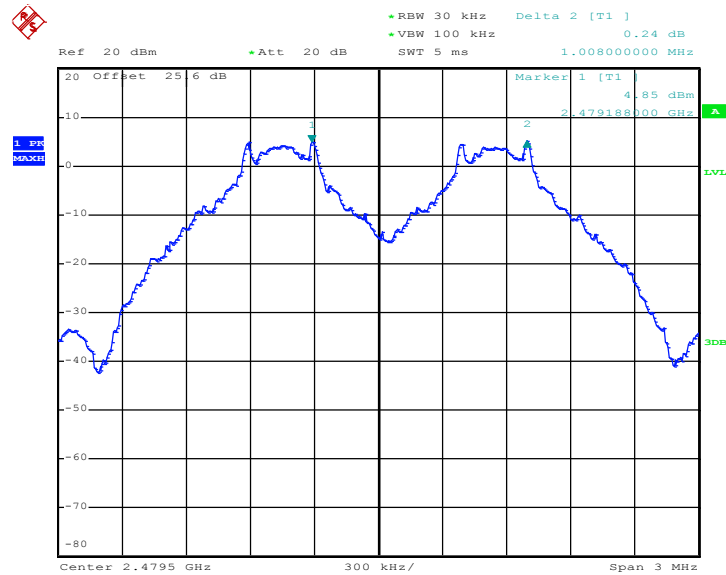


Date: 12.DEC.2013 10:12:11



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8520	Pass
39	2441	1.008	0.8560	Pass
78	2480	1.002	0.8480	Pass

Channel Separation Plot on Channel 00 - 01

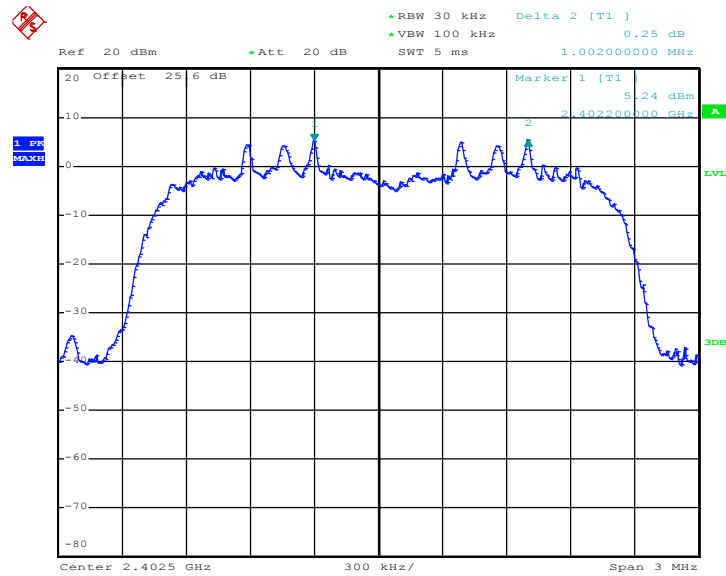


Date: 12.DEC.2013 10:19:29

Note: The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Channel Separation Plot on Channel 39 - 40

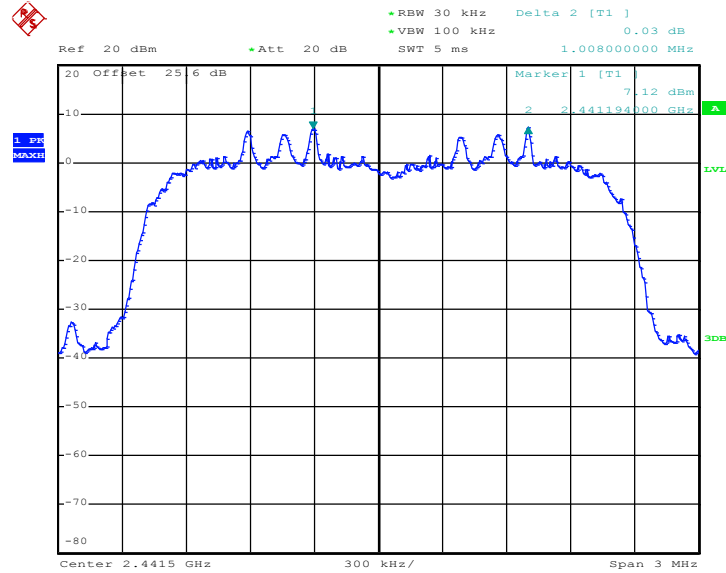

Date: 12.DEC.2013 10:22:26

Channel Separation Plot on Channel 77 - 78

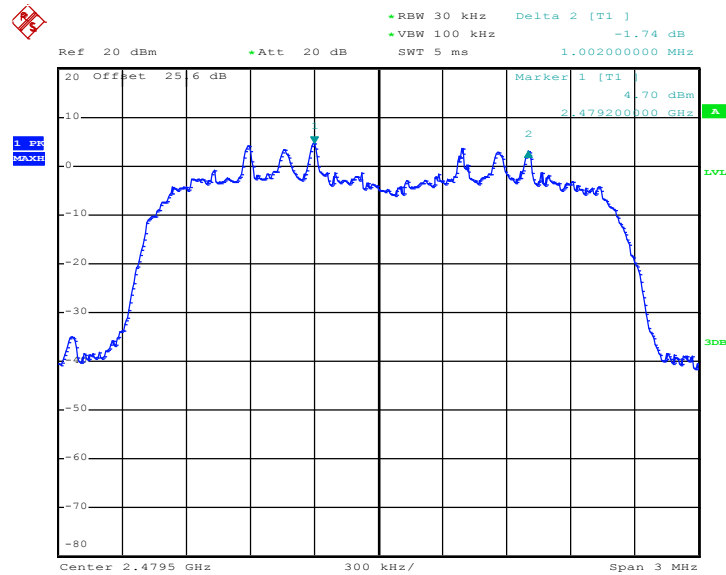


Date: 12.DEC.2013 10:25:20



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8640	Pass
39	2441	1.008	0.8560	Pass
78	2480	1.008	0.8560	Pass

Channel Separation Plot on Channel 00 - 01

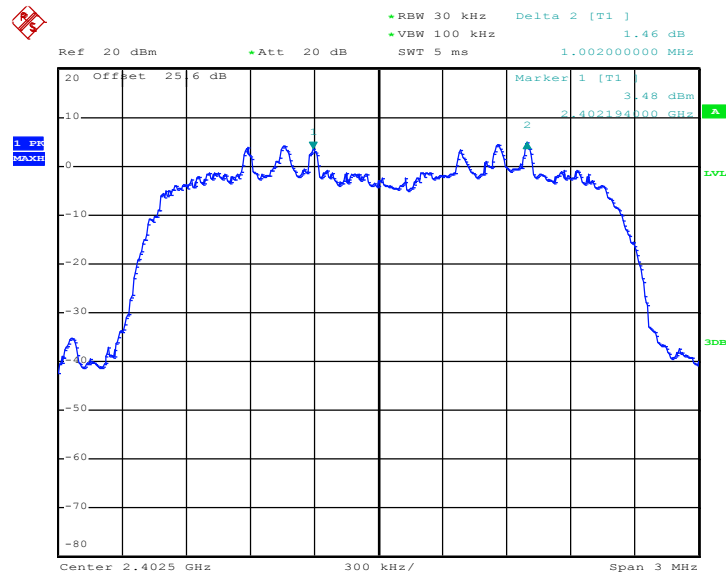


Date: 12.DEC.2013 10:52:13

Note: The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Channel Separation Plot on Channel 39 - 40

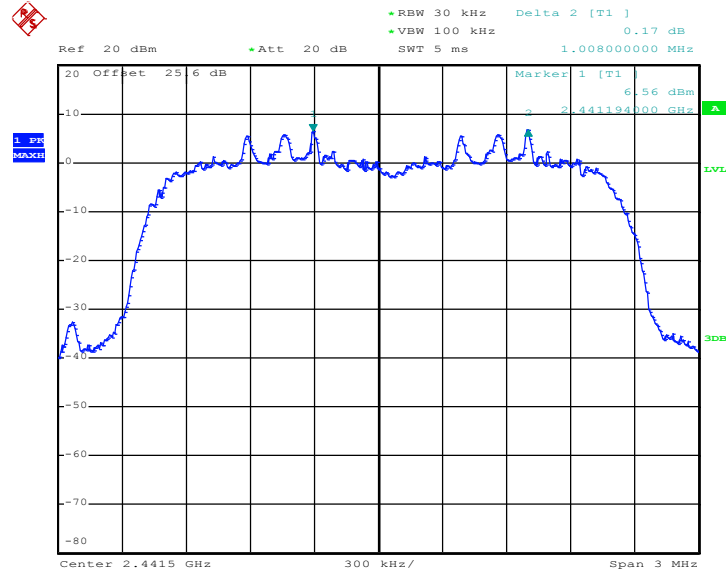

Date: 12.DEC.2013 10:29:10

Channel Separation Plot on Channel 77 - 78

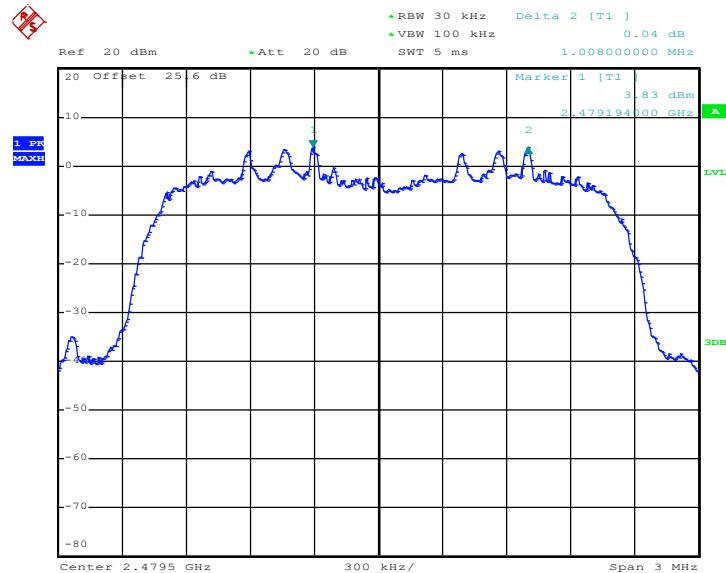

Date: 12.DEC.2013 10:34:13

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

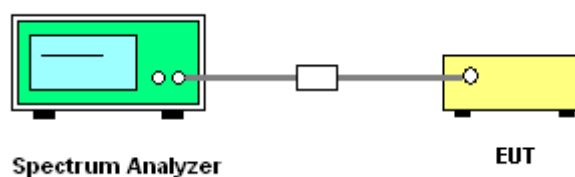



3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

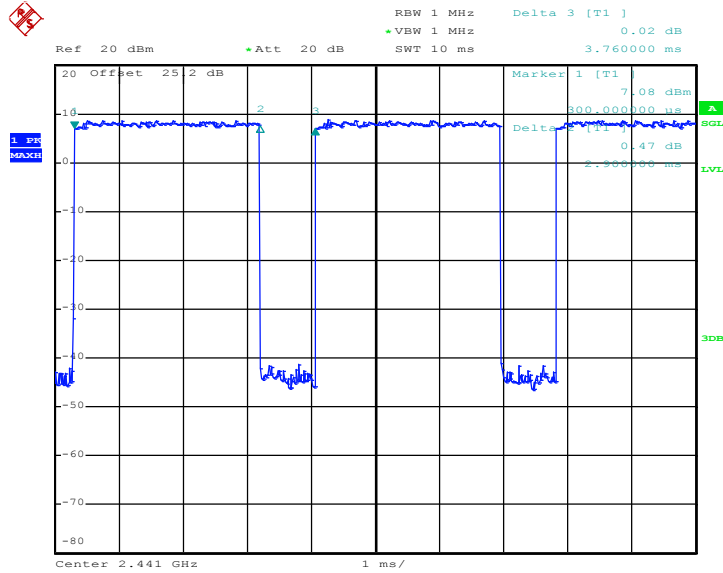

Date : 2.DEC.2013 20:22:13



### 3.4 20dB and 99% Bandwidth Measurement

#### 3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
For 99% Bandwidth measurement, the RBW=30kHz, and VBW = 100kHz. Sweep = auto ;  
Detector function = sample. Trace = max hold.
6. Measure and record the results in the test report.

#### 3.4.4 Test Setup

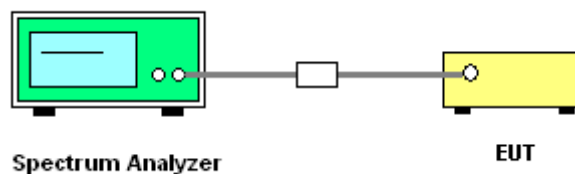




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.920
39	2441	0.920
78	2480	0.952

20 dB Bandwidth Plot on Channel 00

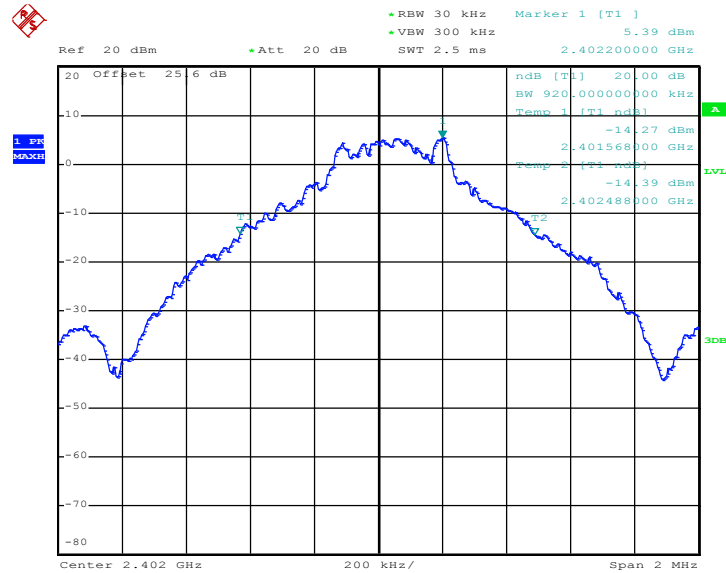


Date: 12.DEC.2013 10:43:01

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




20 dB Bandwidth Plot on Channel 39

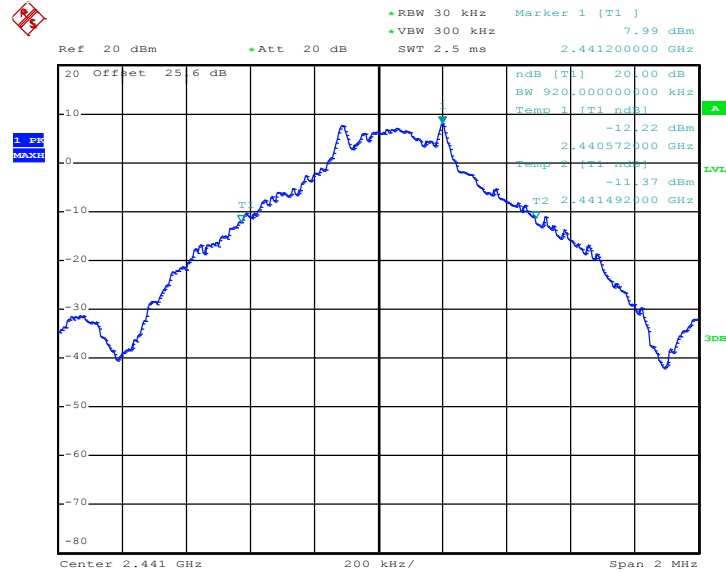

Date: 12.DEC.2013 10:43:31

20 dB Bandwidth Plot on Channel 78

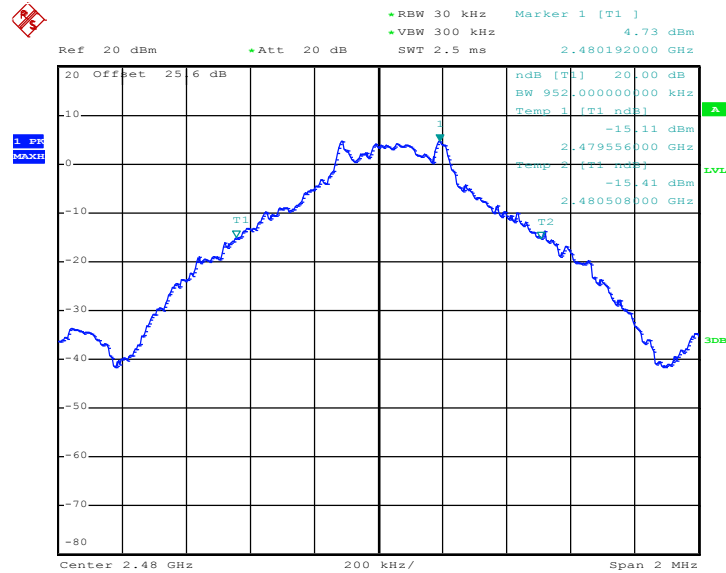


Date: 12.DEC.2013 10:44:04



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.278
39	2441	1.284
78	2480	1.272

20 dB Bandwidth Plot on Channel 00

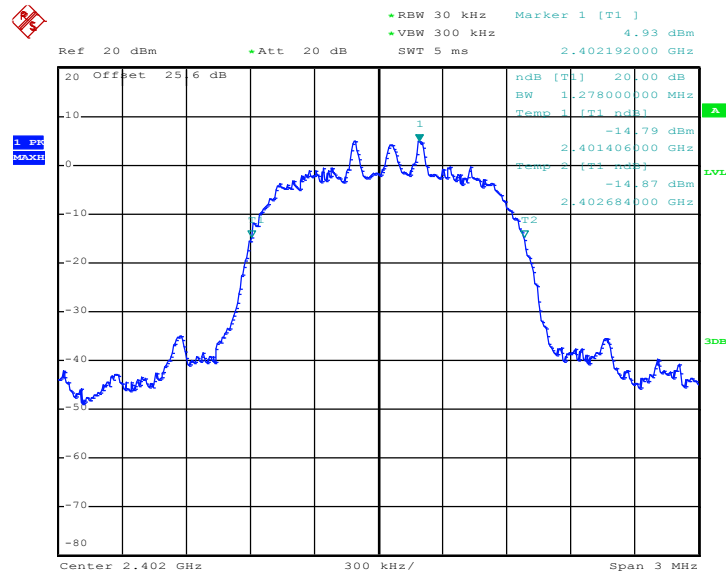


Date: 12.DEC.2013 10:44:53

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




20 dB Bandwidth Plot on Channel 39

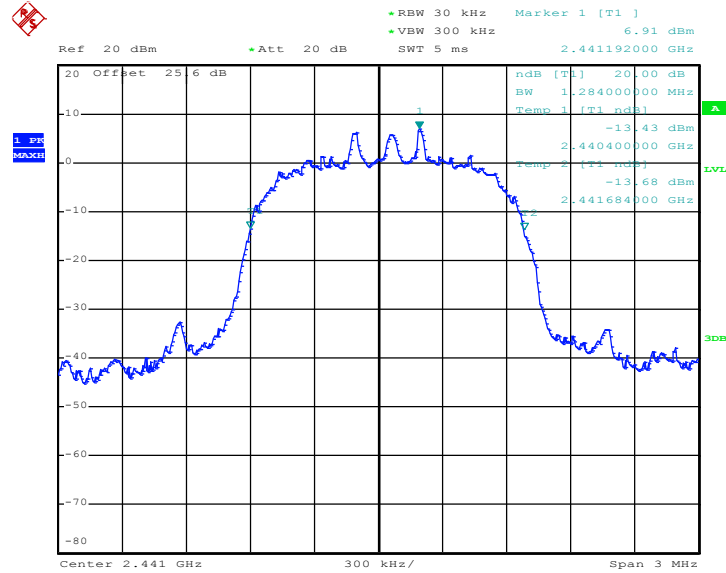

Date: 12.DEC.2013 10:46:01

20 dB Bandwidth Plot on Channel 78

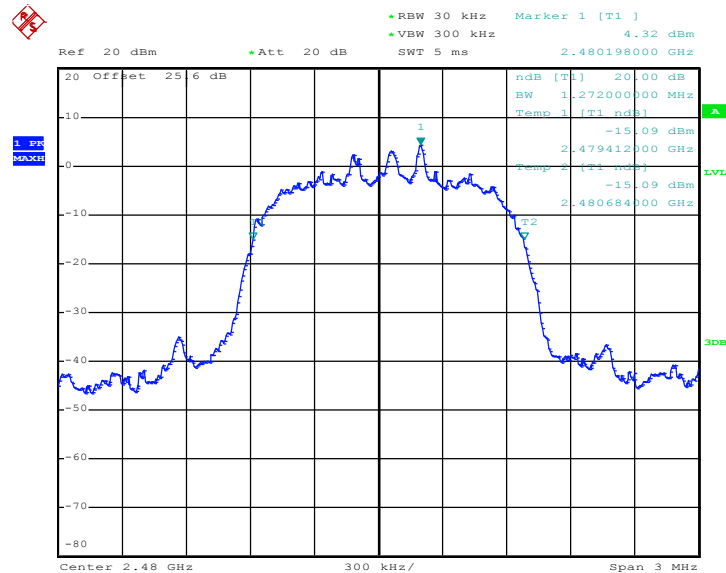


Date: 12.DEC.2013 10:46:42



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.296
39	2441	1.284
78	2480	1.284

20 dB Bandwidth Plot on Channel 00

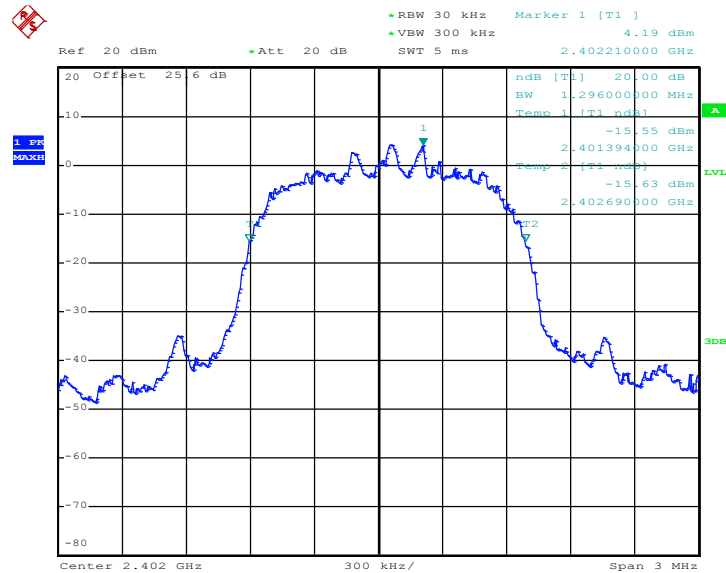


Date: 12.DEC.2013 10:50:43

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




20 dB Bandwidth Plot on Channel 39

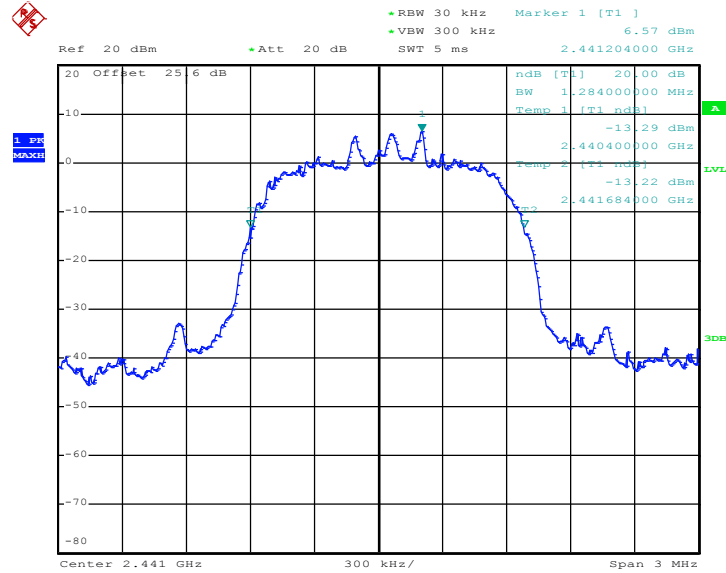

Date: 12.DEC.2013 10:49:00

20 dB Bandwidth Plot on Channel 78

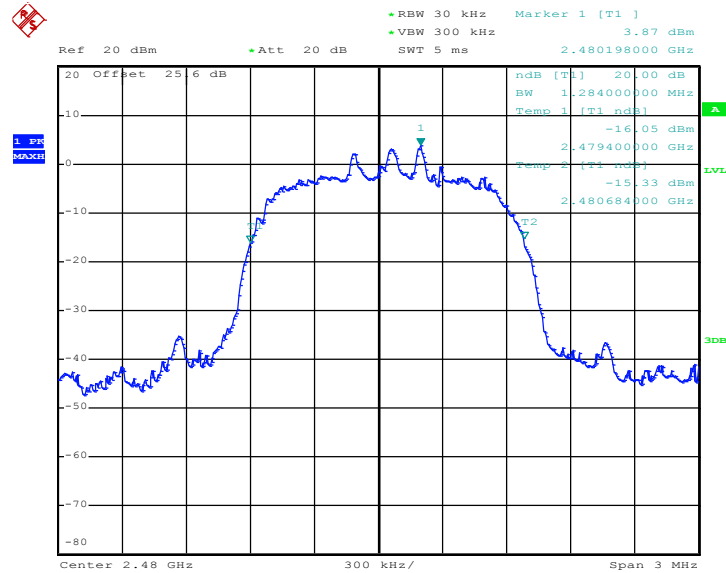


Date: 12.DEC.2013 10:49:44

### 3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.884
39	2441	0.884
78	2480	0.892

99% Occupied Bandwidth Plot on Channel 00

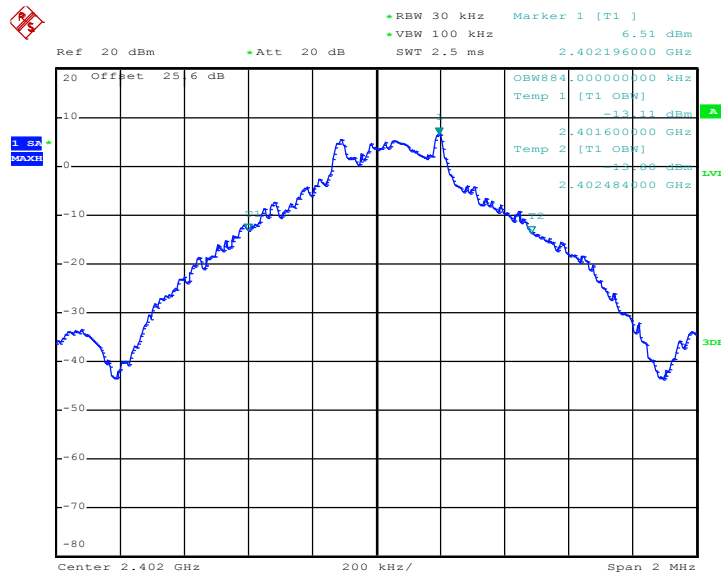


Date: 12.DEC.2013 10:57:21

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.






99% Occupied Bandwidth Plot on Channel 39

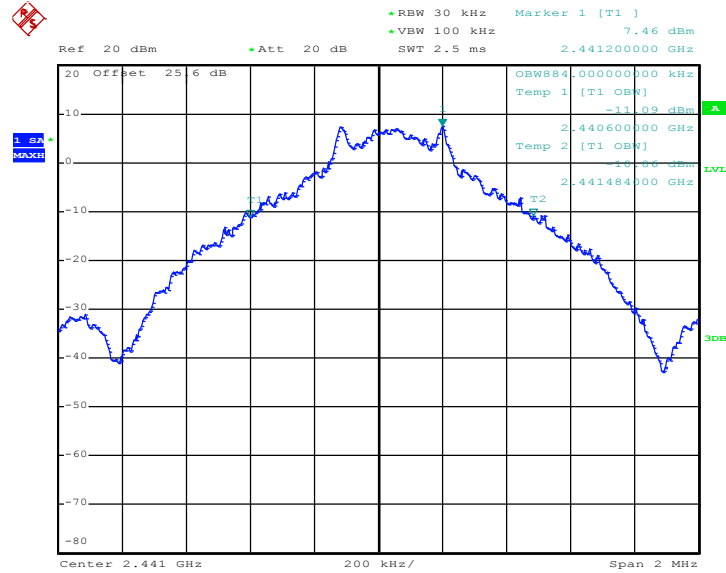

Date: 12.DEC.2013 10:55:33

99% Occupied Bandwidth Plot on Channel 78

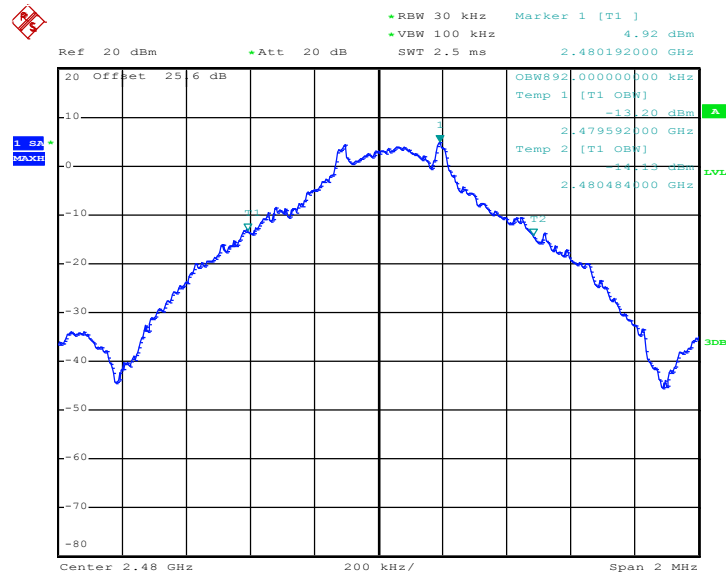


Date: 12.DEC.2013 10:56:25



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.164
39	2441	1.172
78	2480	1.184

99% Occupied Bandwidth Plot on Channel 00

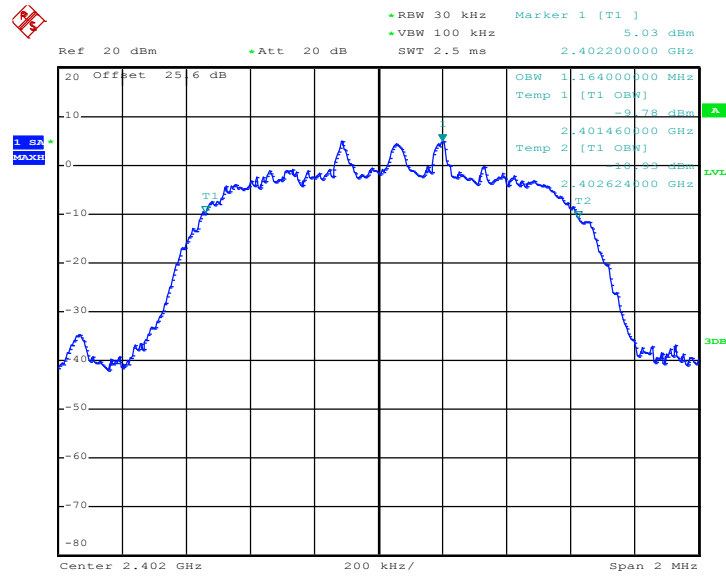


Date: 12.DEC.2013 10:58:20

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




99% Occupied Bandwidth Plot on Channel 39

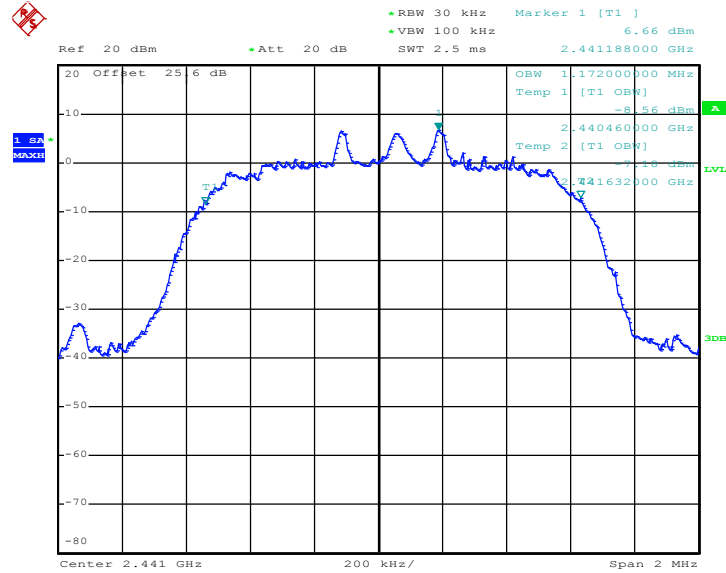

Date: 12.DEC.2013 10:59:17

99% Occupied Bandwidth Plot on Channel 78

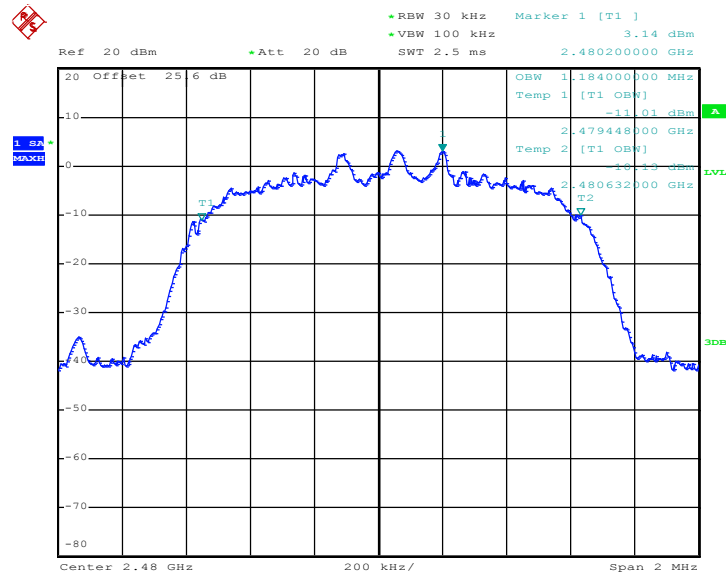


Date: 12.DEC.2013 11:00:52



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.180
39	2441	1.180
78	2480	1.172

99% Occupied Bandwidth Plot on Channel 00

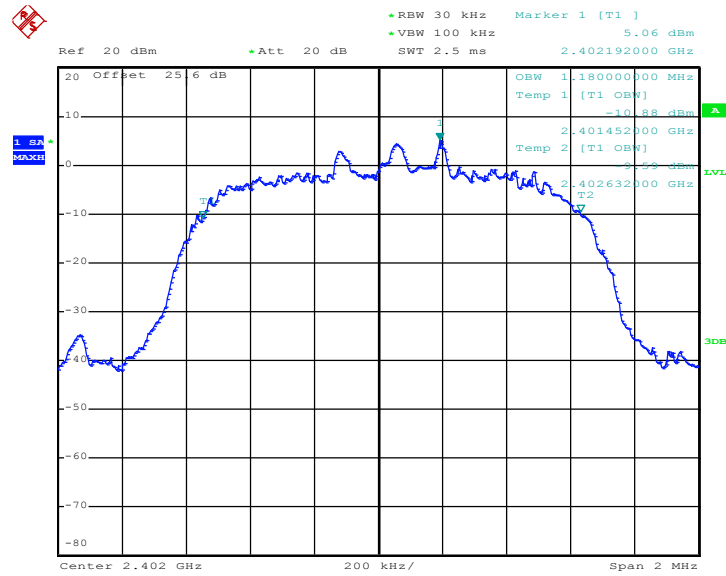


Date: 12.DEC.2013 11:03:06

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




99% Occupied Bandwidth Plot on Channel 39

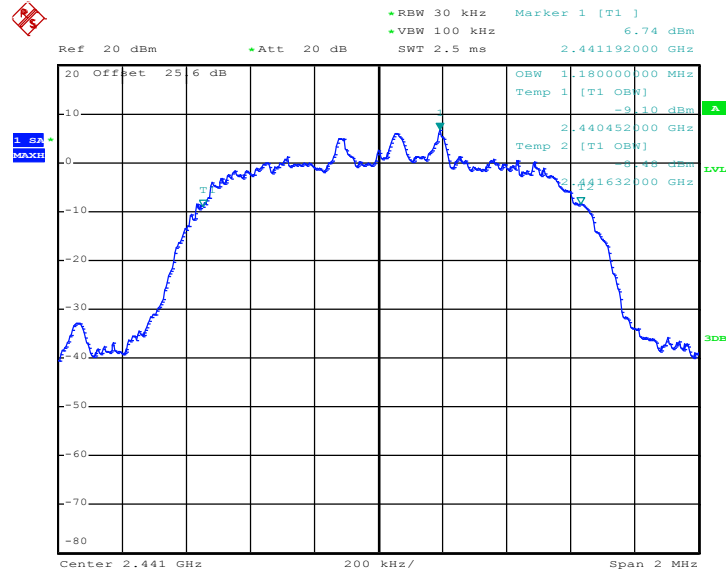

Date: 12.DEC.2013 11:03:51

99% Occupied Bandwidth Plot on Channel 78

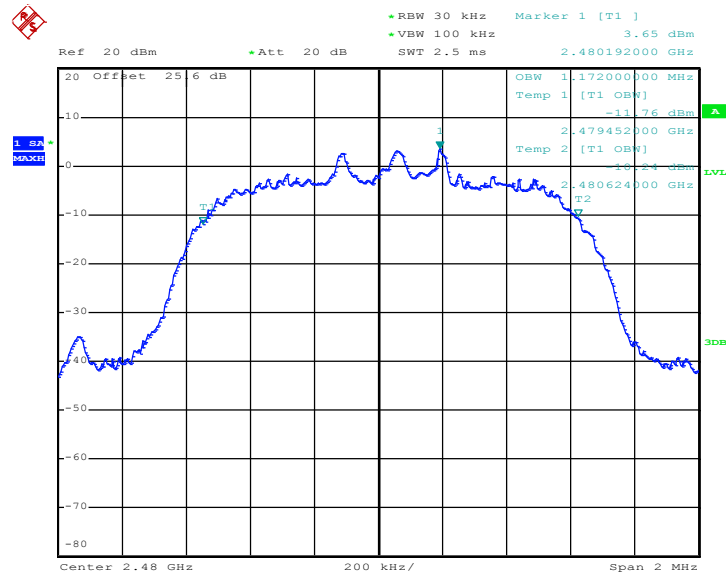

Date: 12.DEC.2013 11:05:32

## 3.5 Peak Output Power Measurement

### 3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

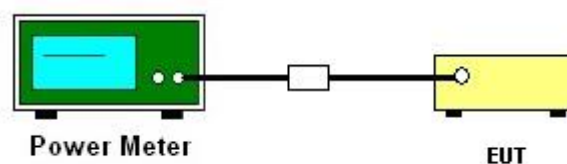



3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	7.04	20.97	Pass
39	2441	8.59	20.97	Pass
78	2480	6.20	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	7.87	20.97	Pass
39	2441	9.48	20.97	Pass
78	2480	7.01	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	8.40	20.97	Pass
39	2441	9.94	20.97	Pass
78	2480	7.41	20.97	Pass

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ( $\geq 1\%$  span=10MHz ), VBW = 300kHz ( $\geq$  RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

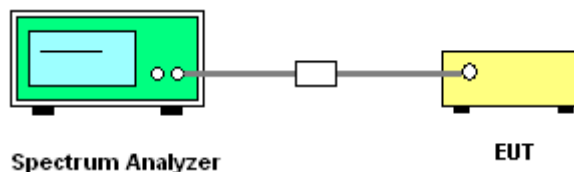






### 3.6.6 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

Low Band Edge Plot on Channel 00

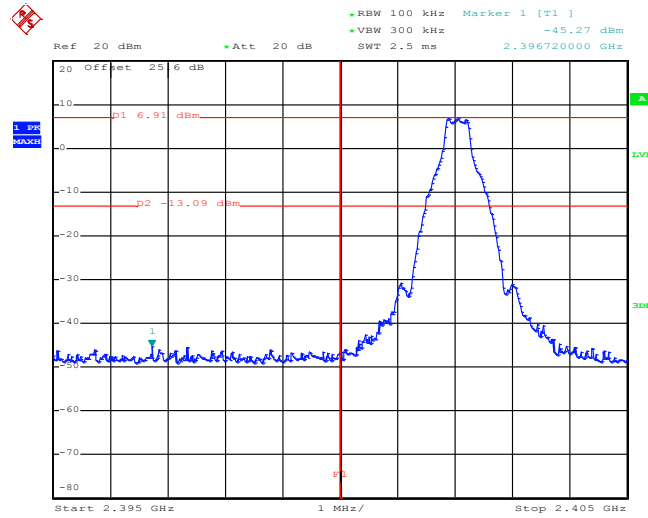

Date: 12.DEC.2013 11:19:14

High Band Edge Plot on Channel 78

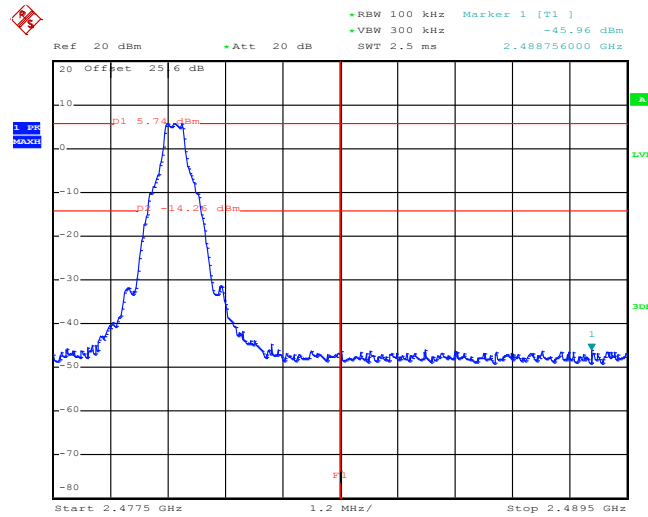


Date: 12.DEC.2013 11:19:59

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

Low Band Edge Plot on Channel 00

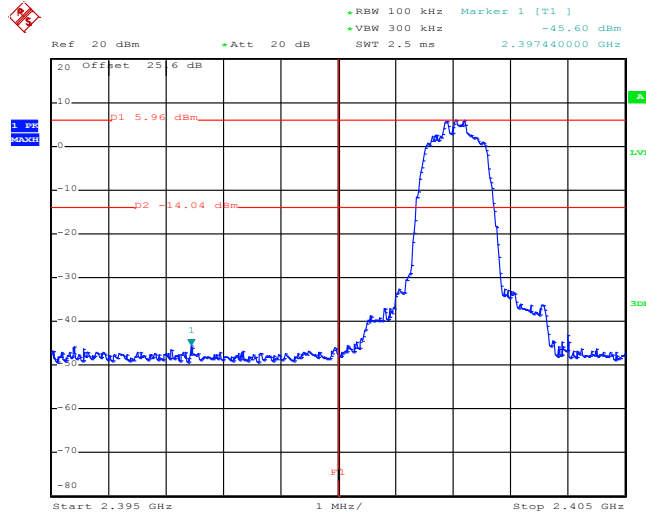

Date: 12.DEC.2013 11:26:31

High Band Edge Plot on Channel 78

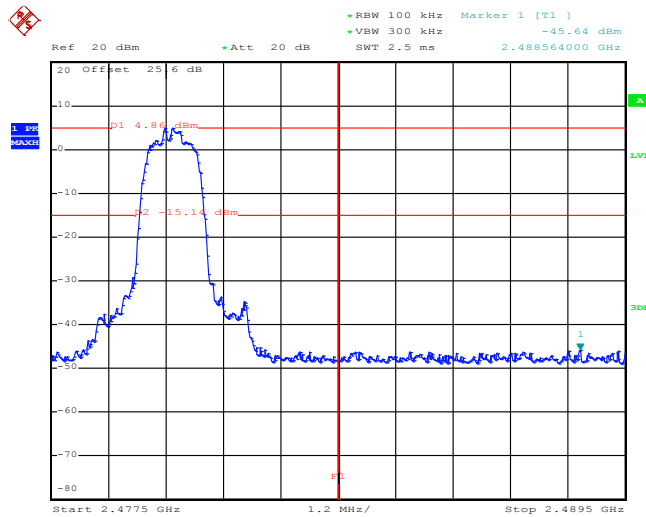


Date: 12.DEC.2013 11:27:05

**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

Low Band Edge Plot on Channel 00

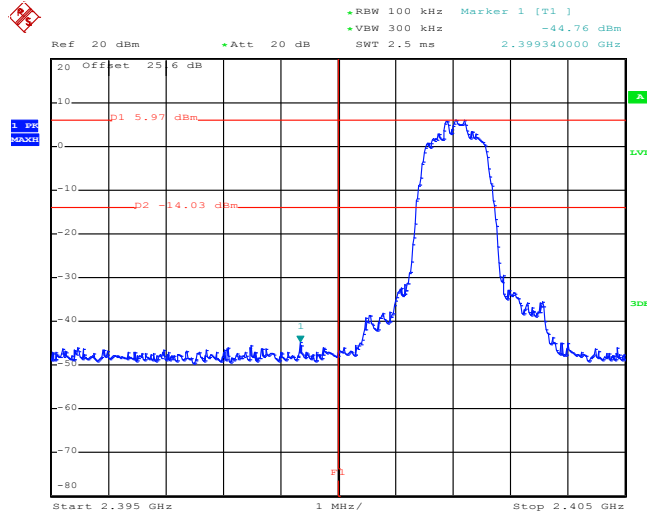

Date: 12.DEC.2013 11:34:16

High Band Edge Plot on Channel 78

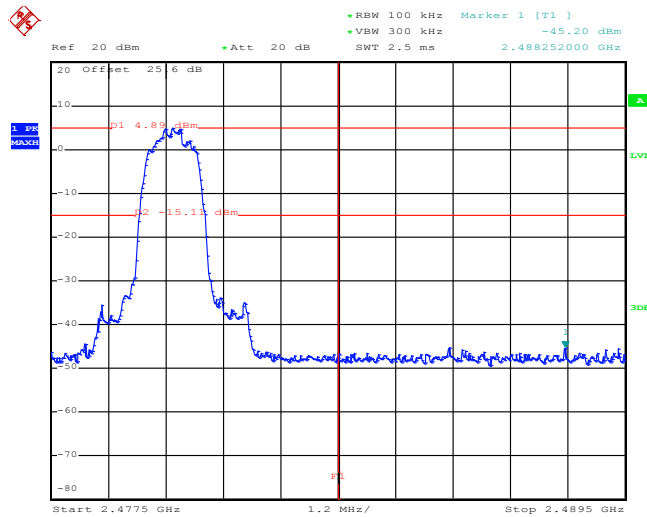

Date: 12.DEC.2013 11:33:40


**Note:** The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



### 3.6.7 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

#### 1Mbps Hopping Mode Low Band Edge Plot

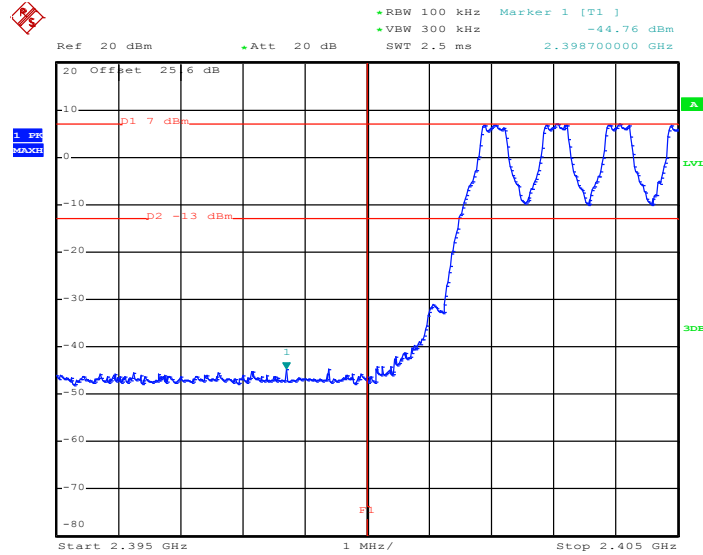

Date: 12.DEC.2013 11:12:56

#### 1Mbps Hopping Mode High Band Edge Plot

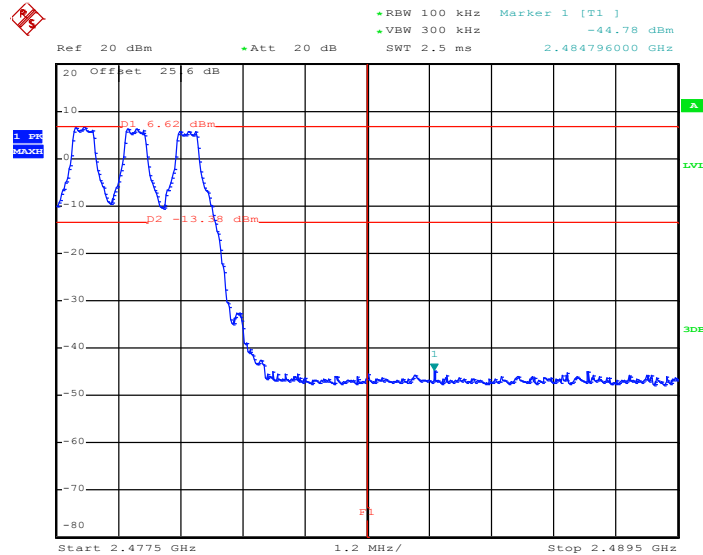


Date: 12.DEC.2013 11:15:00




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

2Mbps Hopping Mode Low Band Edge Plot

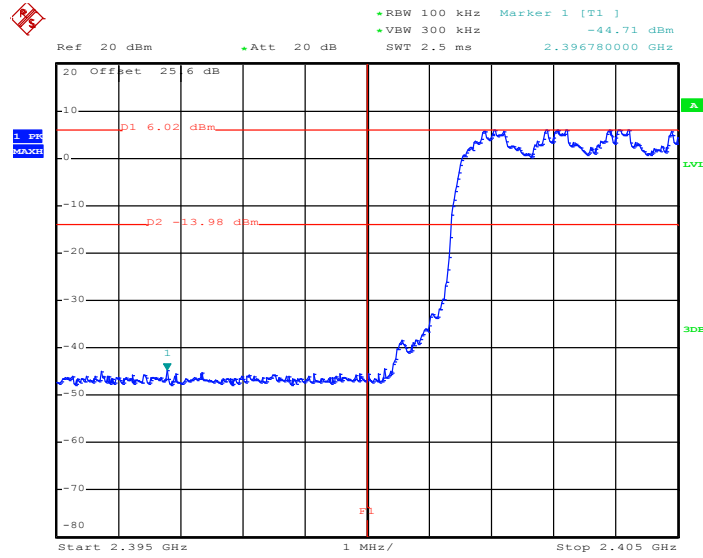

Date: 12.DEC.2013 11:23:49

2Mbps Hopping Mode High Band Edge Plot

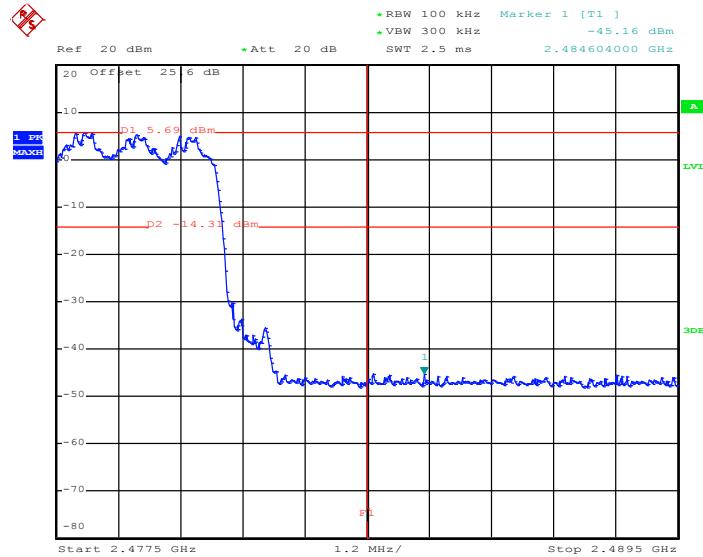


Date: 12.DEC.2013 11:25:39




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Citta Ke	Relative Humidity :	48~51%

3Mbps Hopping Mode Low Band Edge Plot

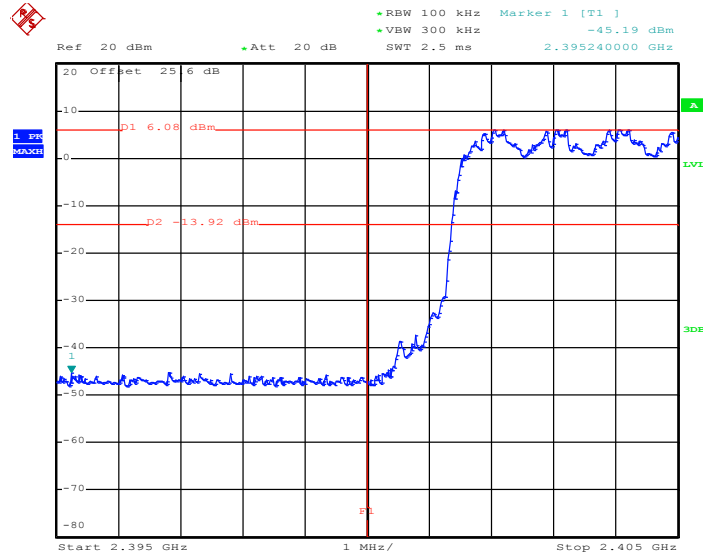

Date: 12.DEC.2013 11:29:46

3Mbps Hopping Mode High Band Edge Plot

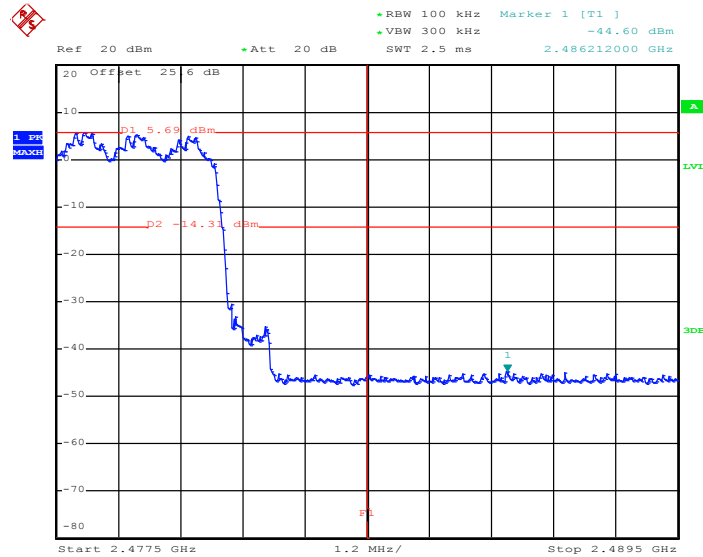

Date: 12.DEC.2013 11:33:07

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup

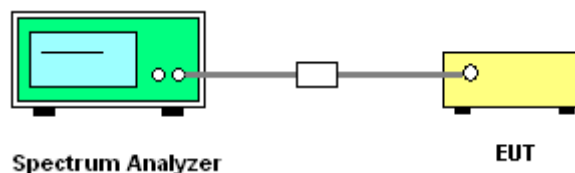




### 3.7.5 Test Result of Conducted Spurious Emission

Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

1Mbps CSE Plot on Ch 00 between 30 MHz ~ 3 GHz

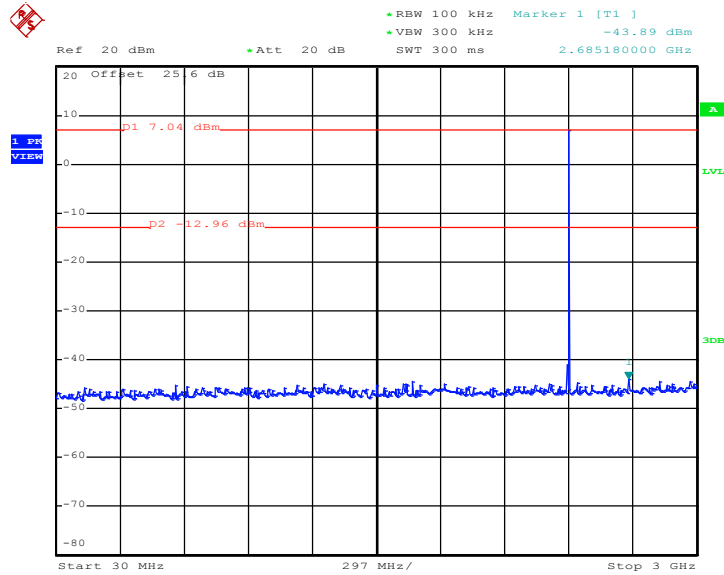

Date: 12.DEC.2013 13:43:07


**Note:**

1. The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.





1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

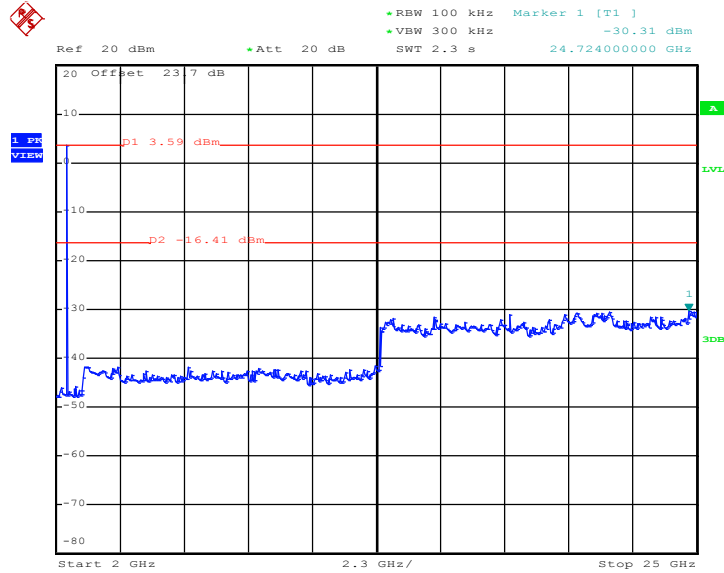

Date: 12.DEC.2013 13:43:28


**Note:**

1. The total loss is 23.7 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

1Mbps CSE Plot on Ch 39 between 30 MHz ~ 3 GHz

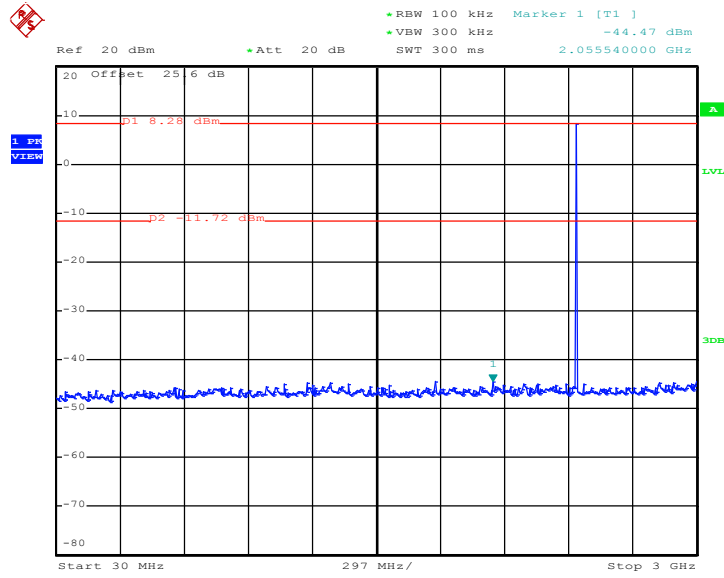


Date: 12.DEC.2013 13:44:29

Note:

1. The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

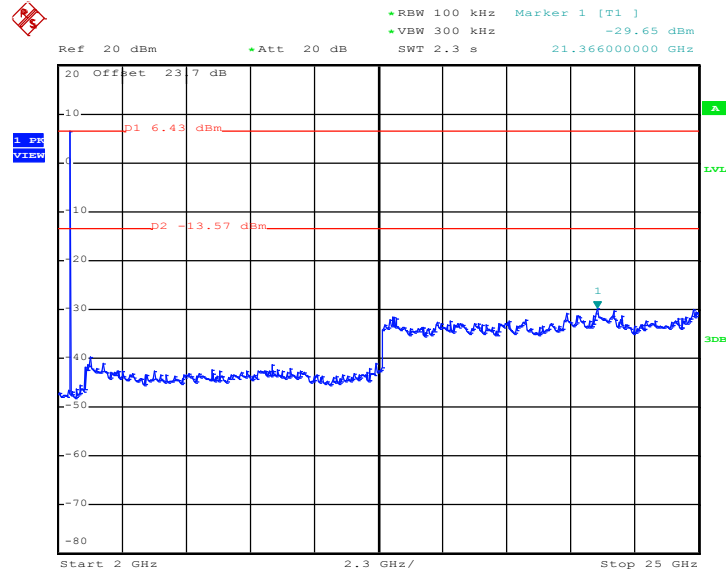

Date: 12.DEC.2013 13:44:51


**Note:**

1. The total loss is 23.7 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

1Mbps CSE Plot on Ch 78 between 30 MHz ~ 3 GHz

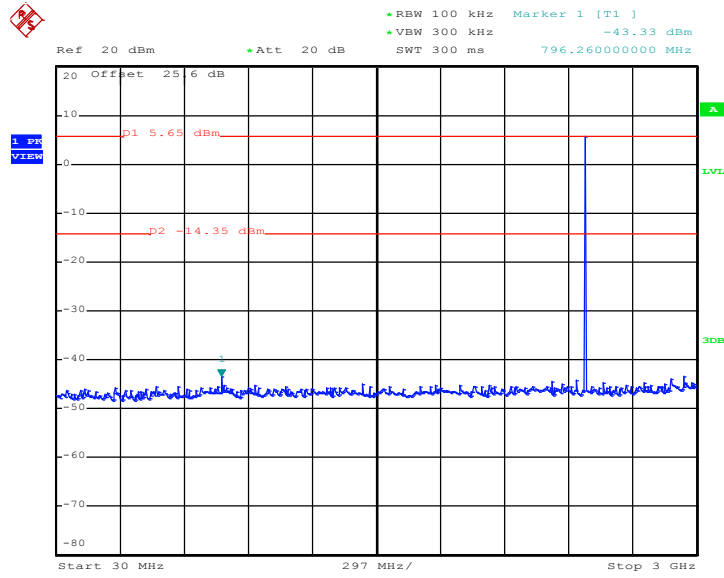


Date: 12.DEC.2013 13:45:51

Note:

1. The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

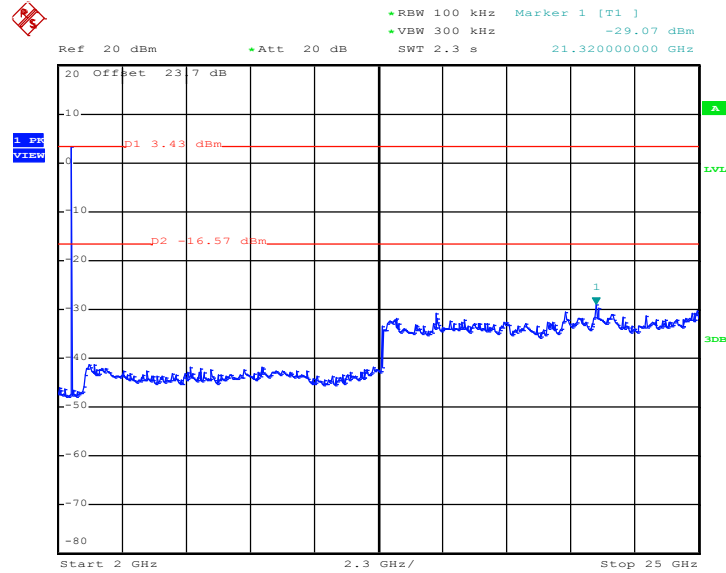

Date: 12.DEC.2013 13:46:13


**Note:**

1. The total loss is 23.7 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

2Mbps CSE Plot on Ch 00 between 30 MHz ~ 3 GHz

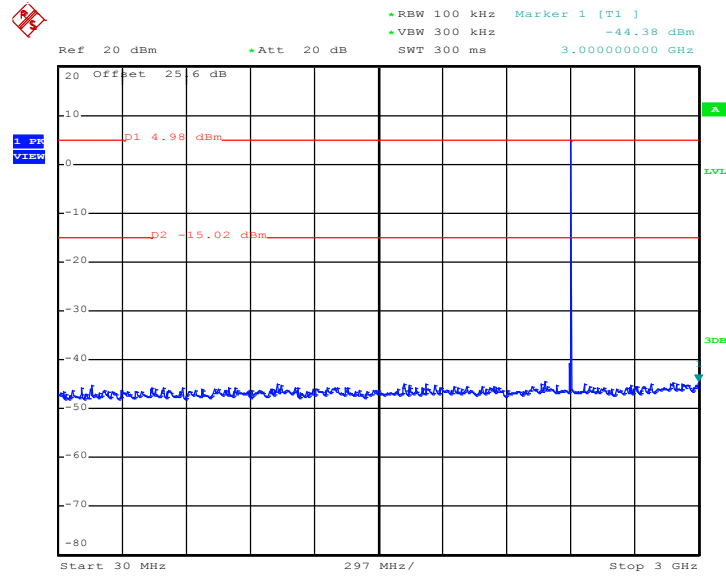


Date: 12.DEC.2013 13:50:52

Note:

1. The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

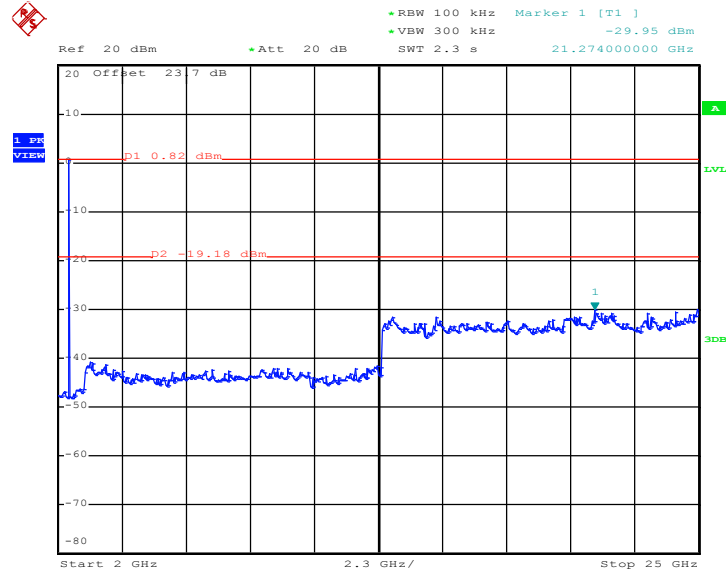

Date: 12.DEC.2013 13:51:14


**Note:**

1. The total loss is 23.7 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

2Mbps CSE Plot on Ch 39 between 30 MHz ~ 3 GHz

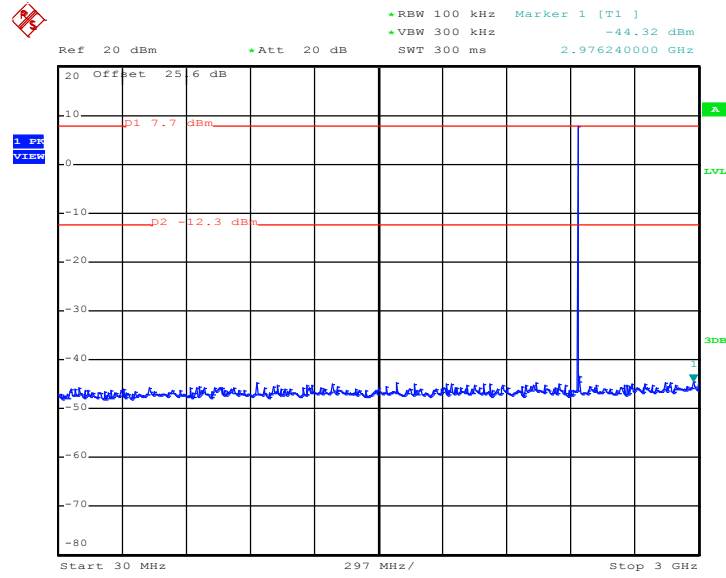

Date: 12.DEC.2013 13:48:33


Note:

1. The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.





2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

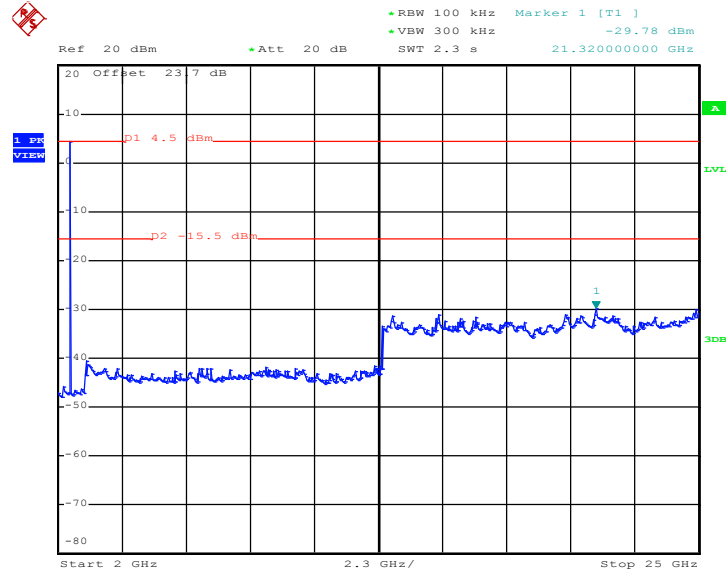

Date: 12.DEC.2013 13:48:54


**Note:**

1. The total loss is 23.7 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

2Mbps CSE Plot on Ch 78 between 30 MHz ~ 3 GHz

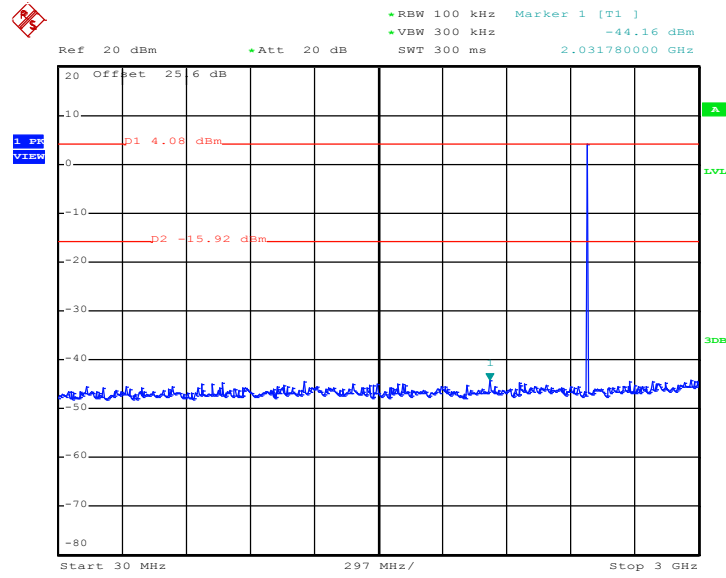


Date: 12.DEC.2013 13:47:18

**Note:**

1. The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

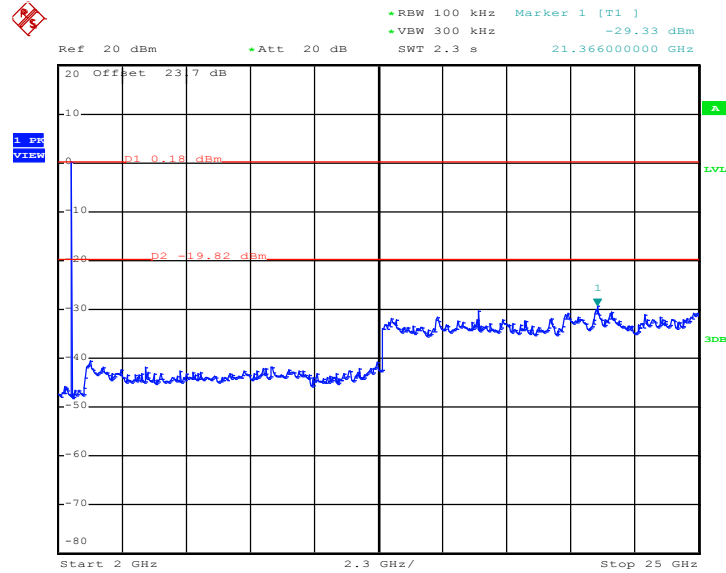

Date: 12.DEC.2013 13:47:40


**Note:**

1. The total loss is 23.7 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

3Mbps CSE Plot on Ch 00 between 30 MHz ~ 3 GHz

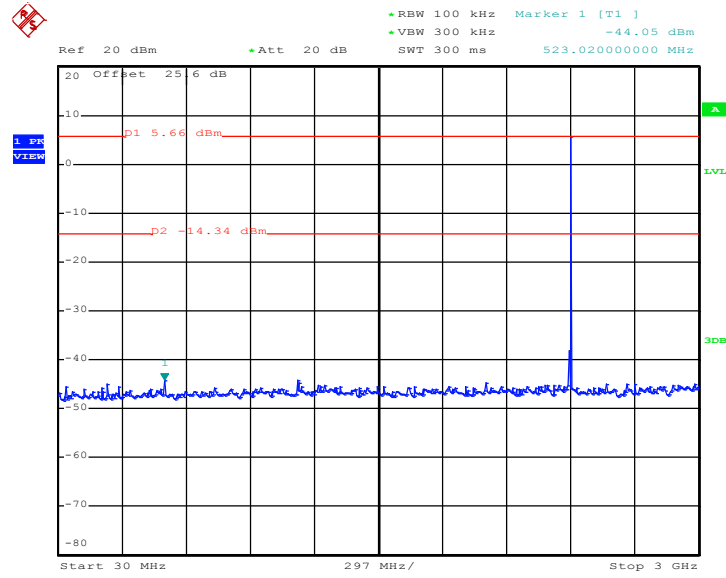


Date: 12.DEC.2013 13:52:59

Note:

1. The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

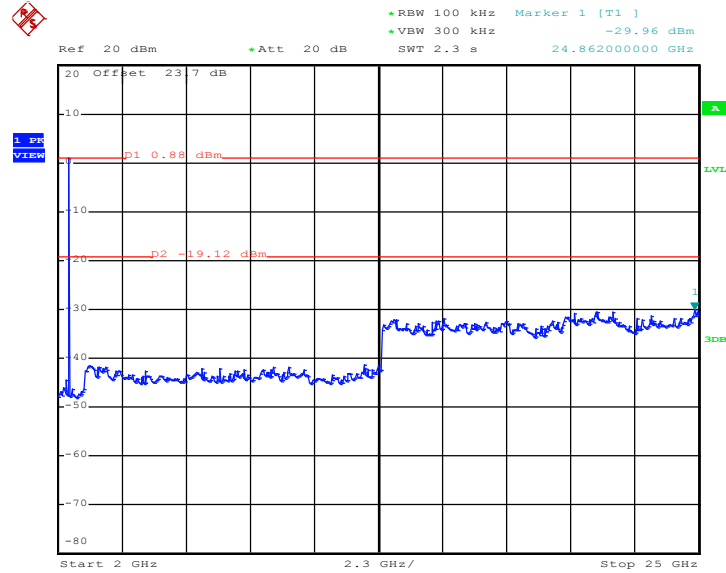

Date: 12.DEC.2013 13:53:21


**Note:**

1. The total loss is 23.7 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

3Mbps CSE Plot on Ch 39 between 30 MHz ~ 3 GHz

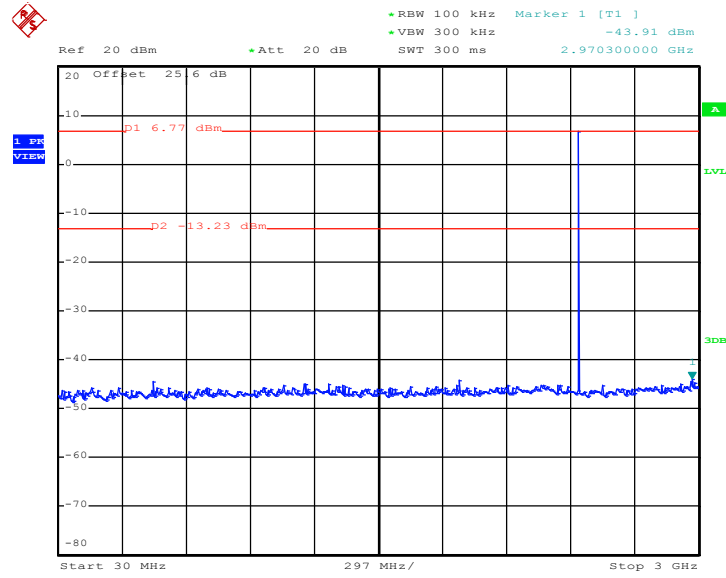


Date: 12.DEC.2013 13:54:13

Note:

1. The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

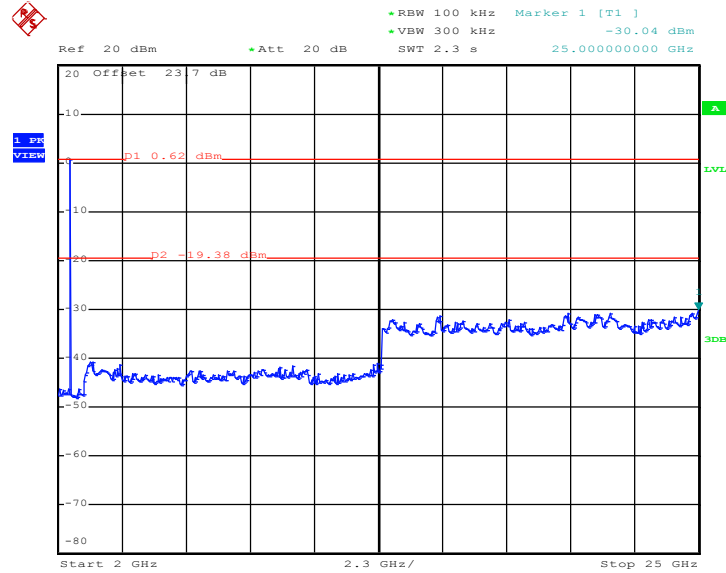

Date: 12.DEC.2013 13:54:35


**Note:**

1. The total loss is 23.7 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
Test Engineer :	Citta Ke		

3Mbps CSE Plot on Ch 78 between 30 MHz ~ 3 GHz

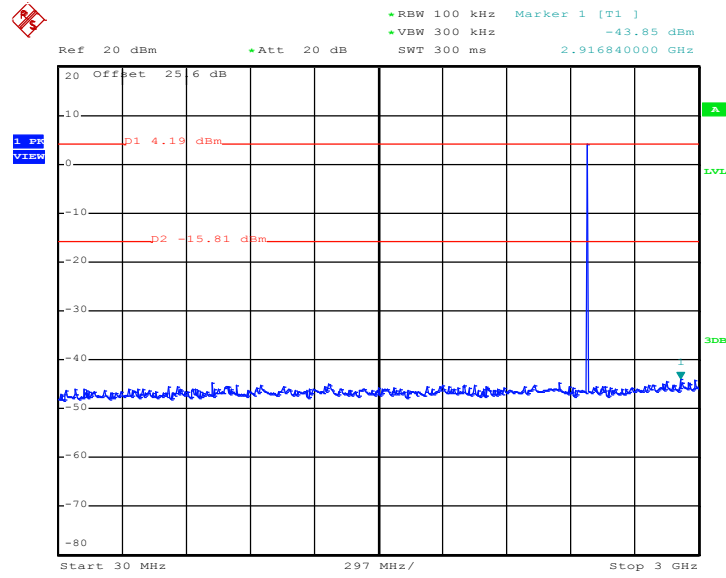

Date: 12.DEC.2013 13:55:48


Note:

1. The total loss is 25.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.





3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

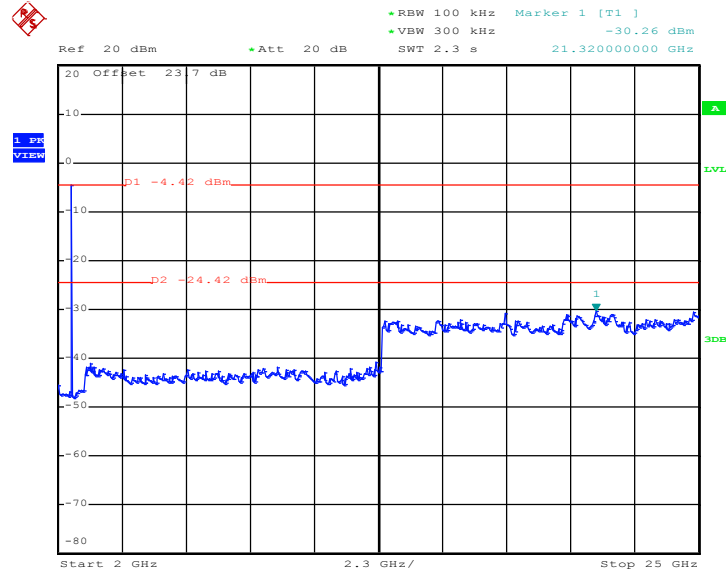

Date: 12.DEC.2013 13:56:10

**Note:**

1. The total loss is 23.7 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB for DH5 / 24.73dB for 2DH5 and 3DH5) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

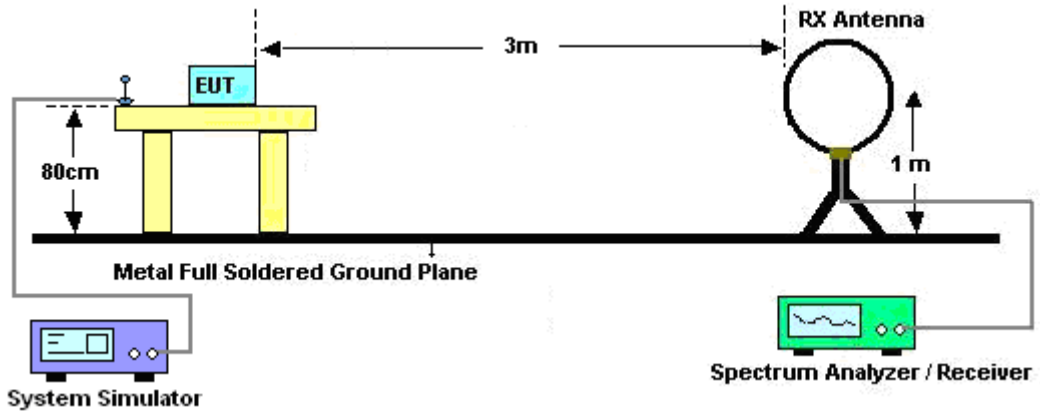

For radiated emissions from 30MHz to 1GHz

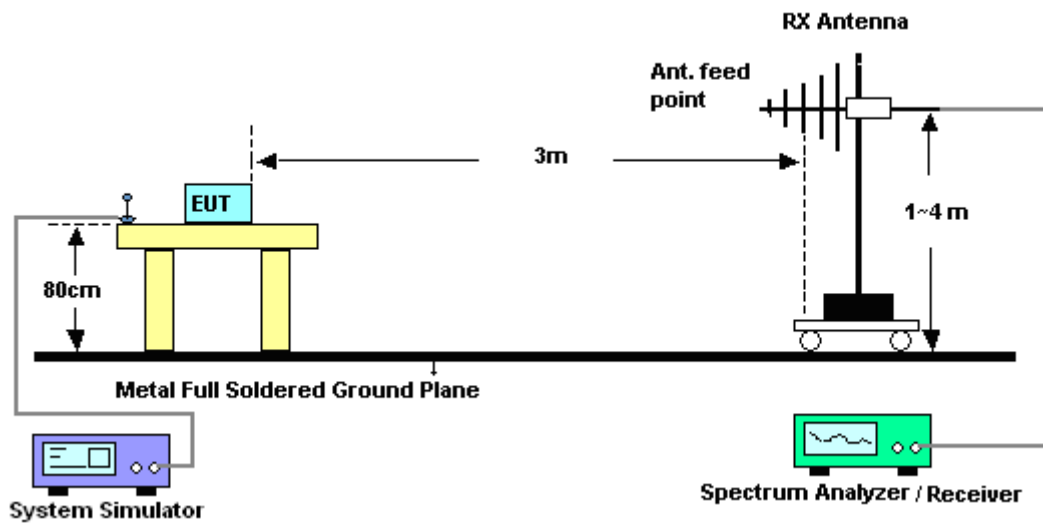

For radiated emissions above 1GHz

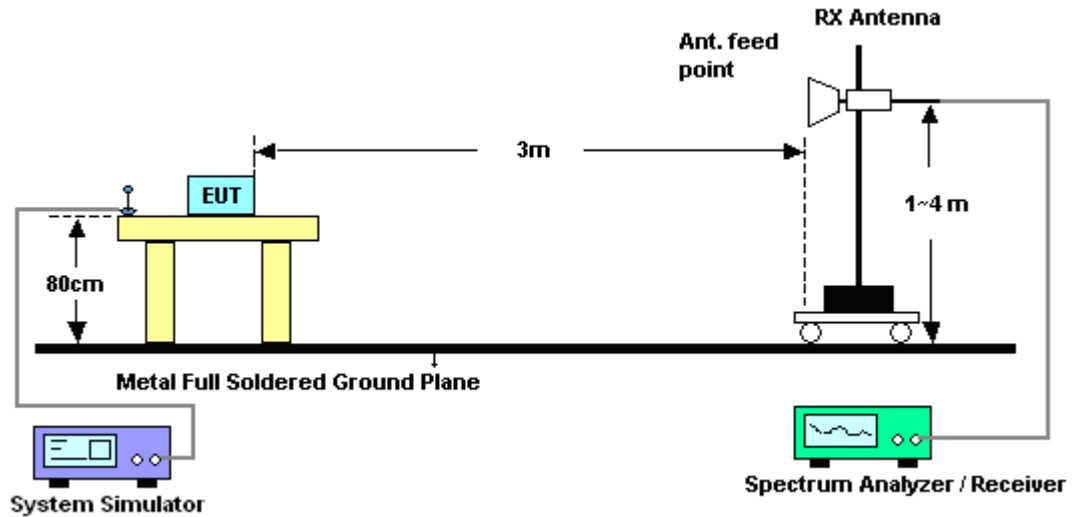


### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


### 3.8.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

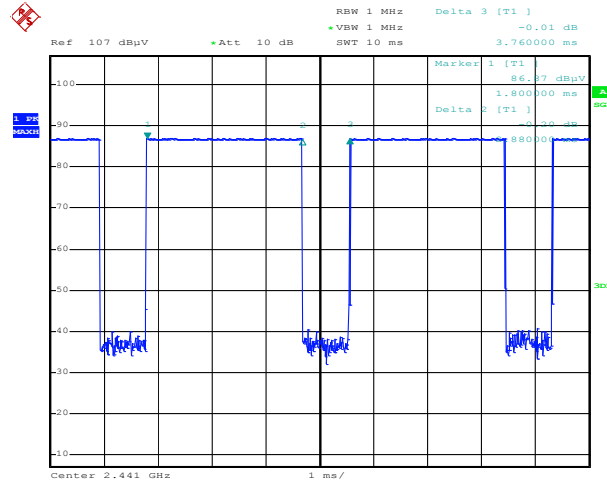

Date: 7.DEC.2013 09:53:36

DH5 on time (Count Pulses) Plot on Channel 39

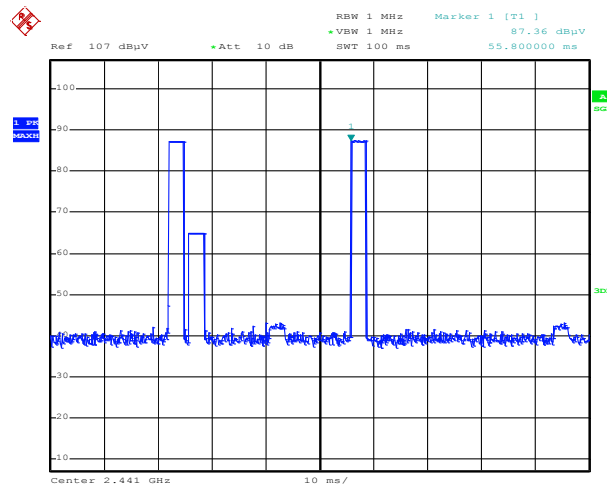


Date: 7.DEC.2013 09:54:38

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.




2DH5 on time (One Pulse) Plot on Channel 39

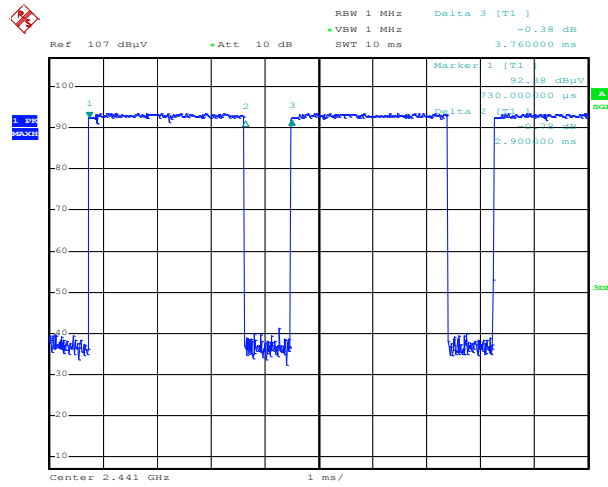

Date: 7.DEC.2013 11:04:38

2DH5 on time (Count Pulses) Plot on Channel 39

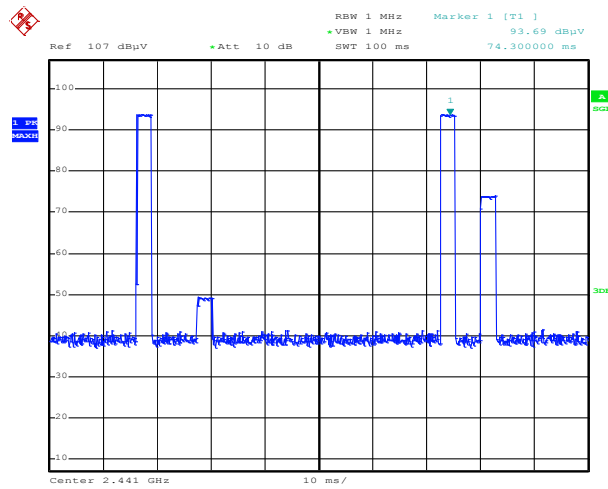


Date: 7.DEC.2013 11:07:06

Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.90 / 100 = 5.80 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.73 \text{ dB}$
3. 2DH5 has the highest duty cycle worst case and is reported.




3DH5 on time (One Pulse) Plot on Channel 39

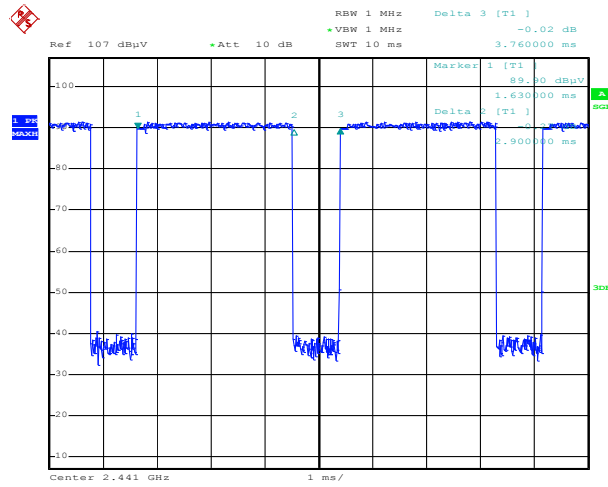

Date: 7.DEC.2013 12:21:00

3DH5 on time (Count Pulses) Plot on Channel 39

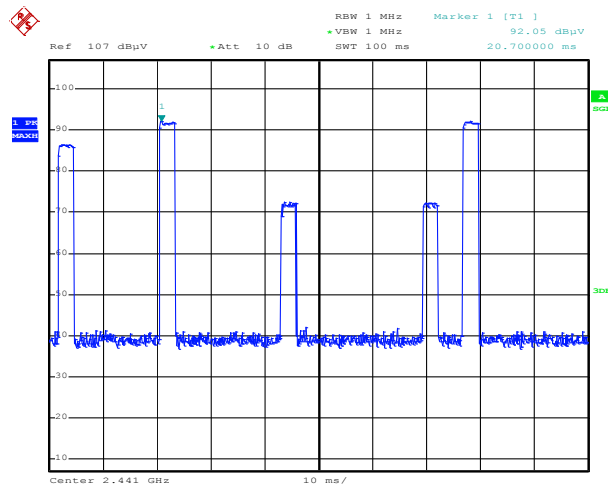

Date: 7.DEC.2013 12:22:23

Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.90 / 100 = 5.80 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.73 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.





**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.90 \text{ ms} \times 20 \text{ channels} = 58.0 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.90 \text{ ms} \times 2 = 5.80 \text{ ms}$$


Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.80 \text{ ms}/100\text{ms}) = -24.73 \text{ dB}$$



3.8.7 Test Result of Radiated Spurious at Band Edges

Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

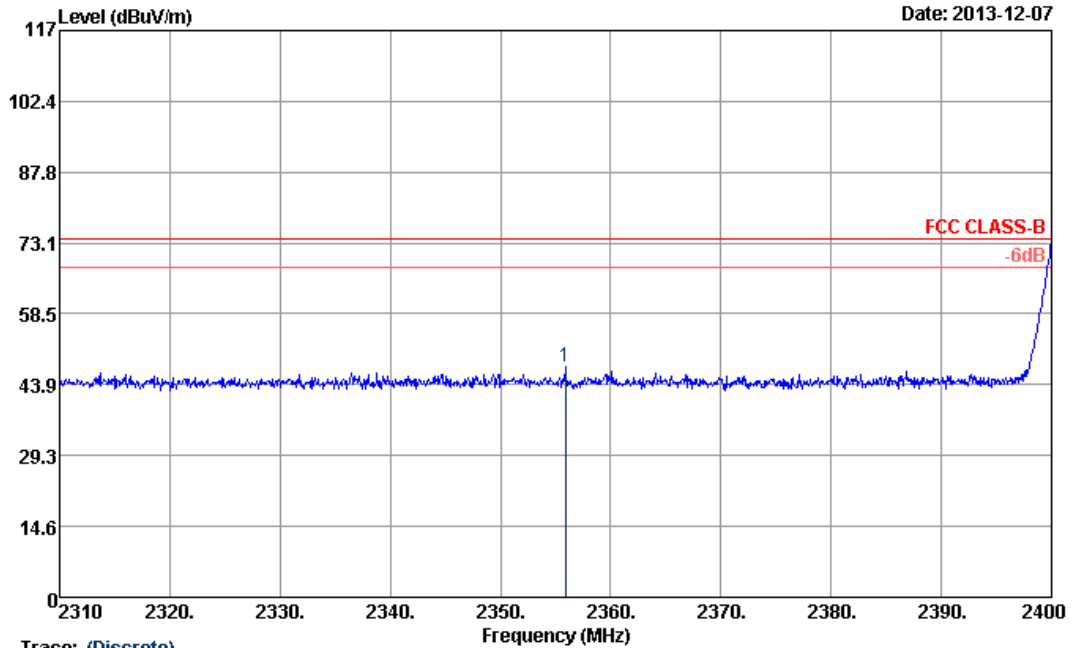

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 HORIZONTAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto

ANTENNA POLARITY : HORIZONTAL


Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2355.9	47.54	-26.46	74	43.61	31.89	6.38	34.34	100	330	Peak
2355.9	22.75	-31.25	54	-	-	-	-	-	-	Average

Note:

- The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from 20log (dwell time/100ms).  
 For example: Average level = 47.54dBuV/m – 24.79 (dB) = 22.75dBuV/m.
- Worst case measurement on 2355.9 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

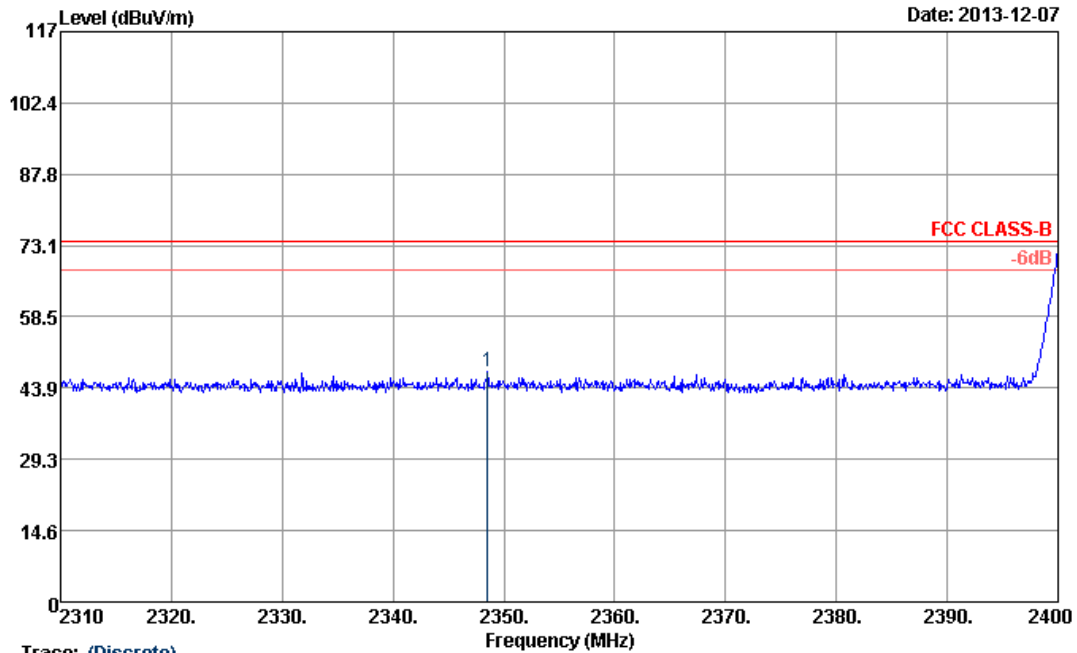

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2348.52	47.12	-26.88	74	43.2	31.88	6.38	34.34	100	275	Peak
2348.52	22.33	-31.67	54	-	-	-	-	-	-	Average

**Note:** Worst case measurement on 2348.52 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

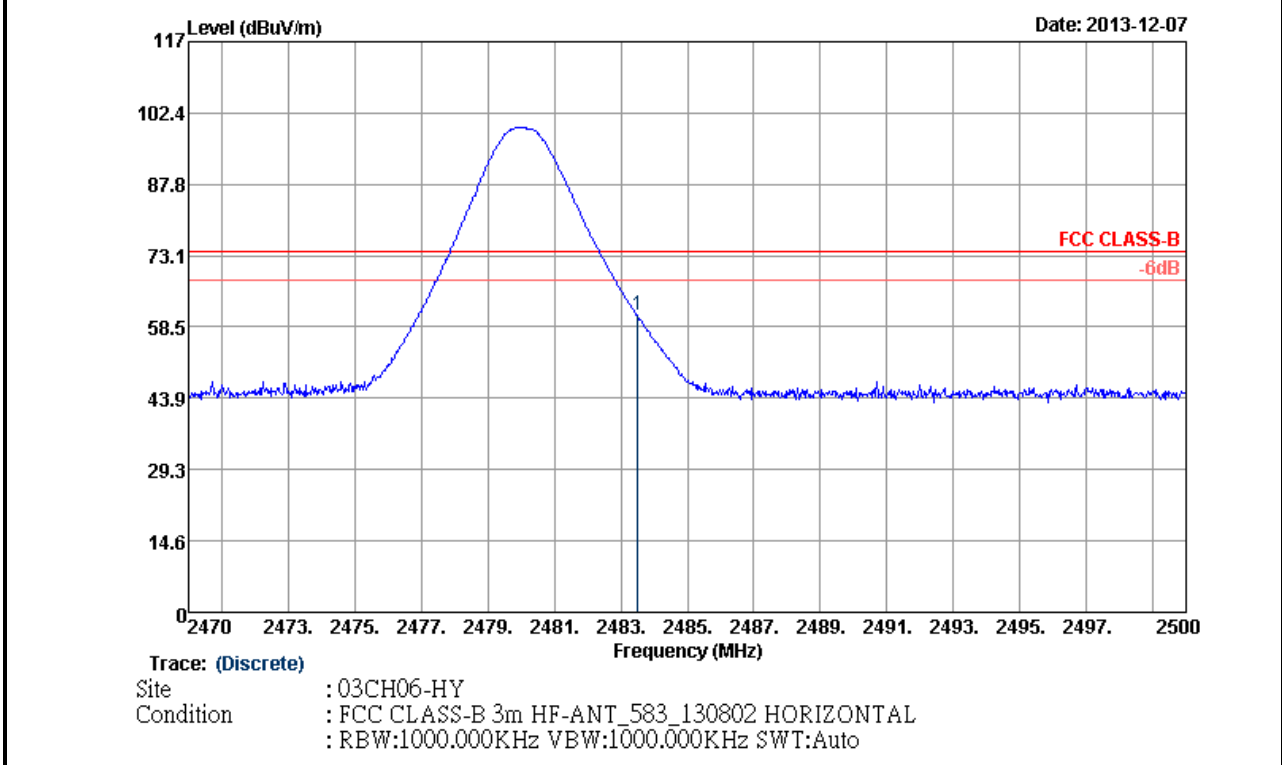


ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	60.92	-13.08	74	56.64	31.99	6.59	34.3	115	319	Peak
2483.5	36.13	-17.87	54	-	-	-	-	-	-	Average

**Note:** Worst case measurement on 2483.5 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.



Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

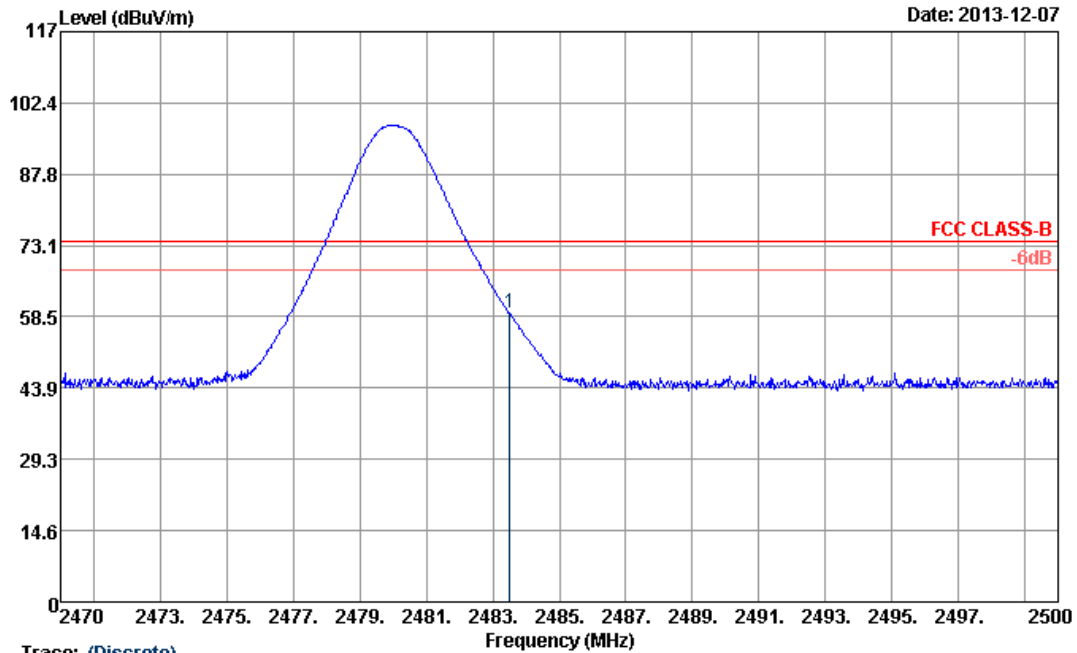

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limity Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	59.16	-14.84	74	54.88	31.99	6.59	34.3	100	277	Peak
2483.5	34.37	-19.63	54	-	-	-	-	-	-	Average

**Note:** Worst case measurement on 2483.5 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.



Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

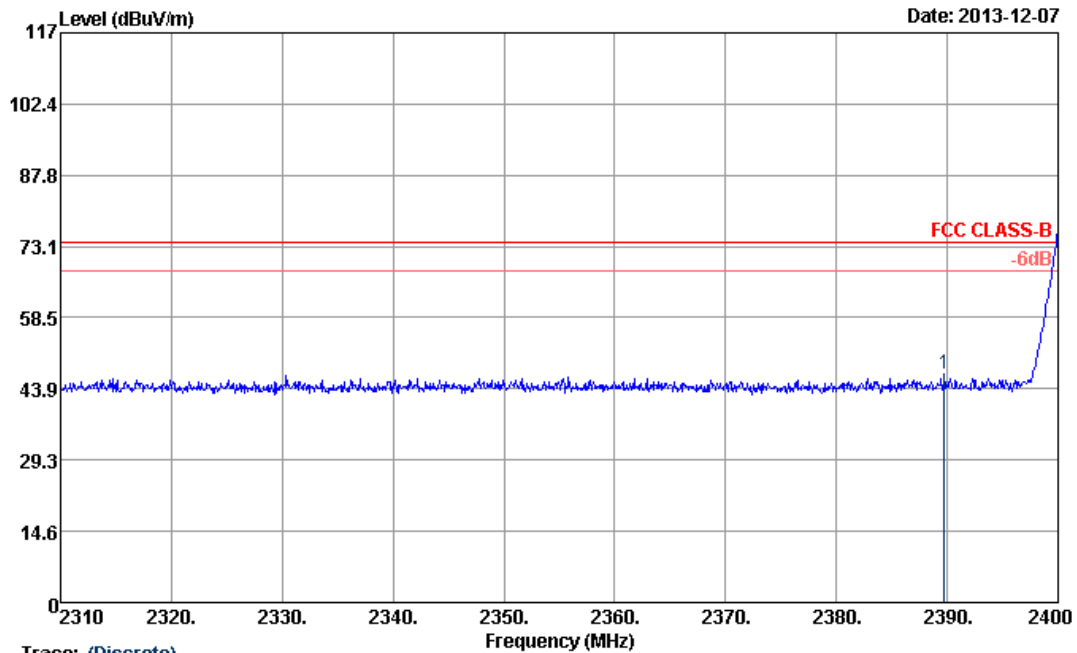

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 HORIZONTAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto

ANTENNA POLARITY : HORIZONTAL


Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.74	46.84	-27.16	74	42.8	31.92	6.45	34.33	122	326	Peak
2389.74	22.11	-31.89	54	-	-	-	-	-	-	Average

Note:

- The average levels were calculated from the peak level corrected with duty cycle correction factor (24.73dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ .  
 For example: Average level = 46.84dBuV/m – 24.73(dB) = 22.11dBuV/m.
- Worst case measurement on 2389.74 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

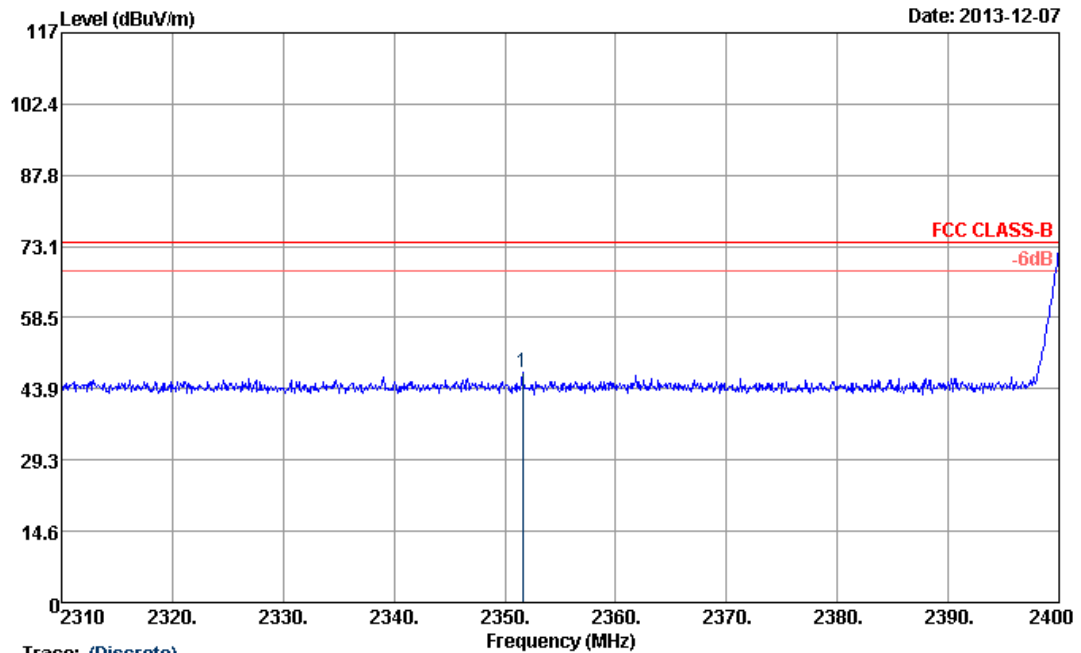


Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2351.58	47.19	-26.81	74	43.26	31.89	6.38	34.34	100	271	Peak
2351.58	22.46	-31.54	54	-	-	-	-	-	-	Average

**Note:** Worst case measurement on 2351.58 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

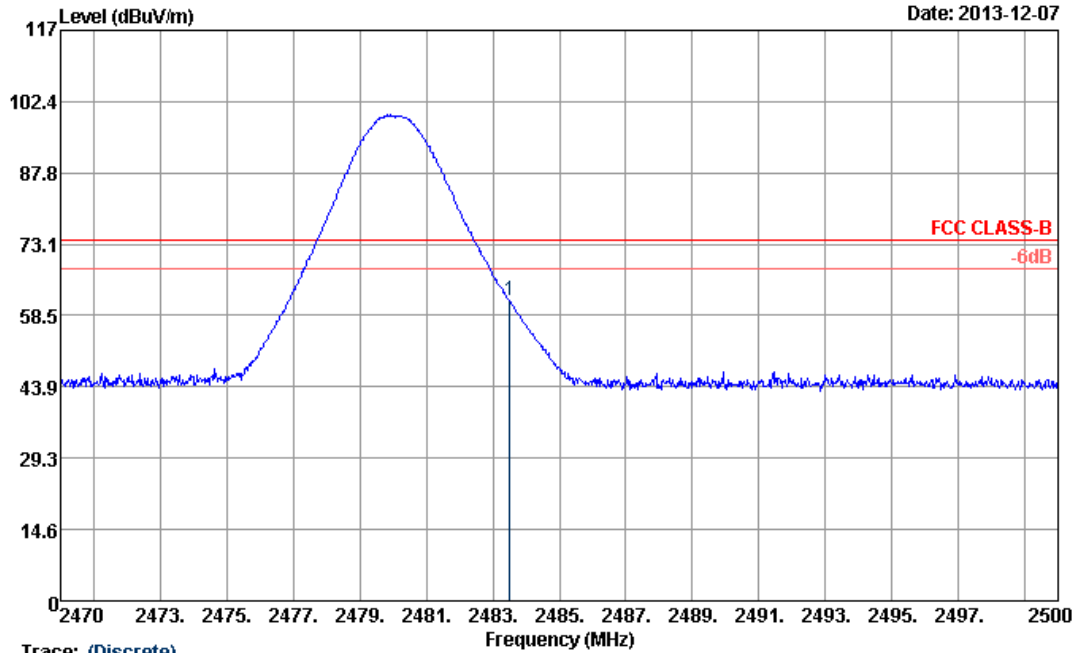

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 HORIZONTAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto

ANTENNA POLARITY : HORIZONTAL


Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	61.44	-12.56	74	57.16	31.99	6.59	34.3	117	325	Peak
2483.5	36.71	-17.29	54	-	-	-	-	-	-	Average

**Note:** Worst case measurement on 2483.5 MHz is compliance with 74/54 dBUV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.





Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

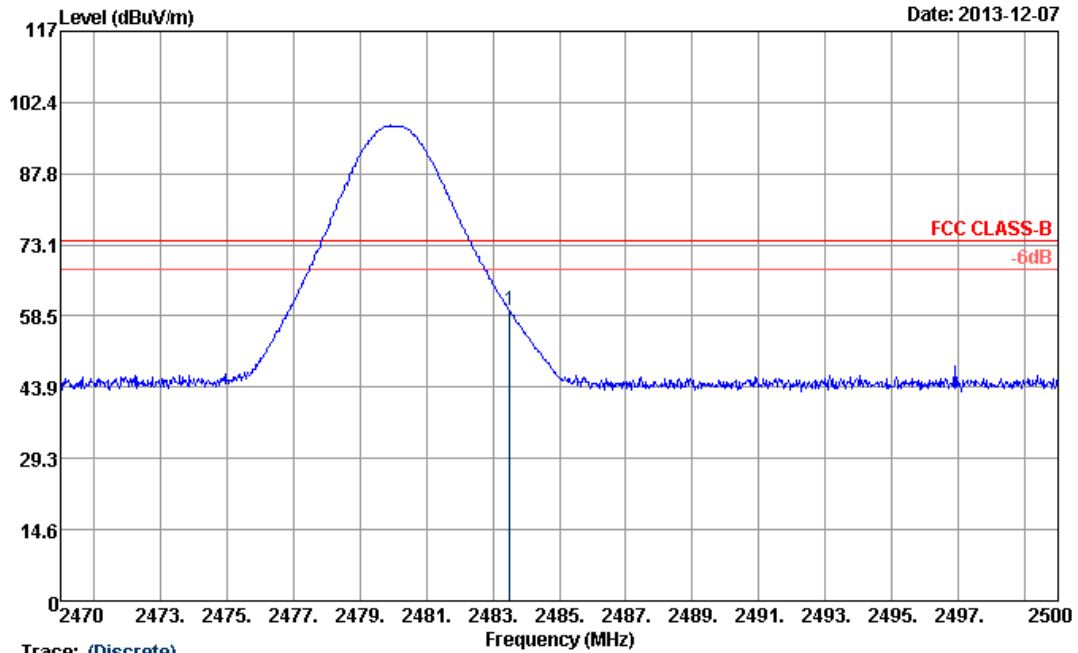

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limity Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	59.76	-14.24	74	55.48	31.99	6.59	34.3	100	278	Peak
2483.5	35.03	-18.97	54	-	-	-	-	-	-	Average

**Note:** Worst case measurement on 2483.5 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.



Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

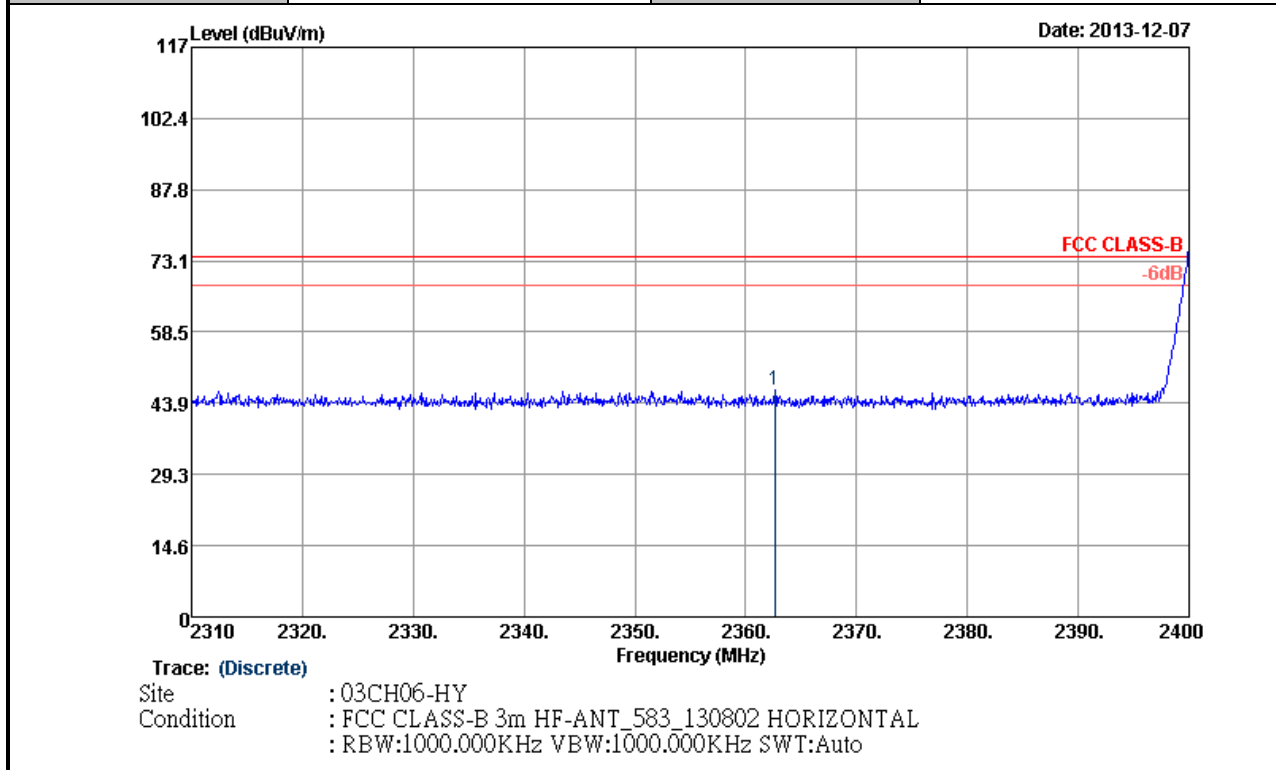


ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2362.65	46.64	-27.36	74	42.67	31.89	6.42	34.34	121	327	Peak
2362.65	21.91	-32.09	54	-	-	-	-	-	-	Average

**Note:**

- The average levels were calculated from the peak level corrected with duty cycle correction factor (24.73dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ .  
For example: Average level = 46.64dBuV/m – 24.73 (dB) = 21.91dBuV/m.
- Worst case measurement on 2362.65 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

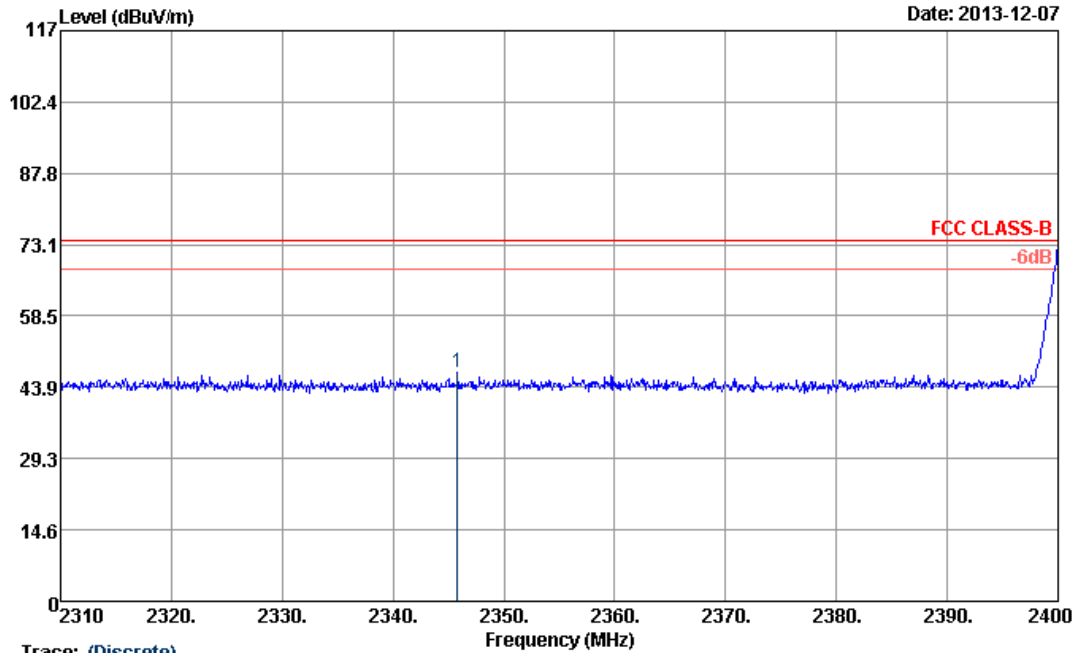

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2345.82	46.87	-27.13	74	42.95	31.88	6.38	34.34	100	272	Peak
2345.82	22.14	-31.86	54	-	-	-	-	-	-	Average

**Note:** Worst case measurement on 2345.82 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

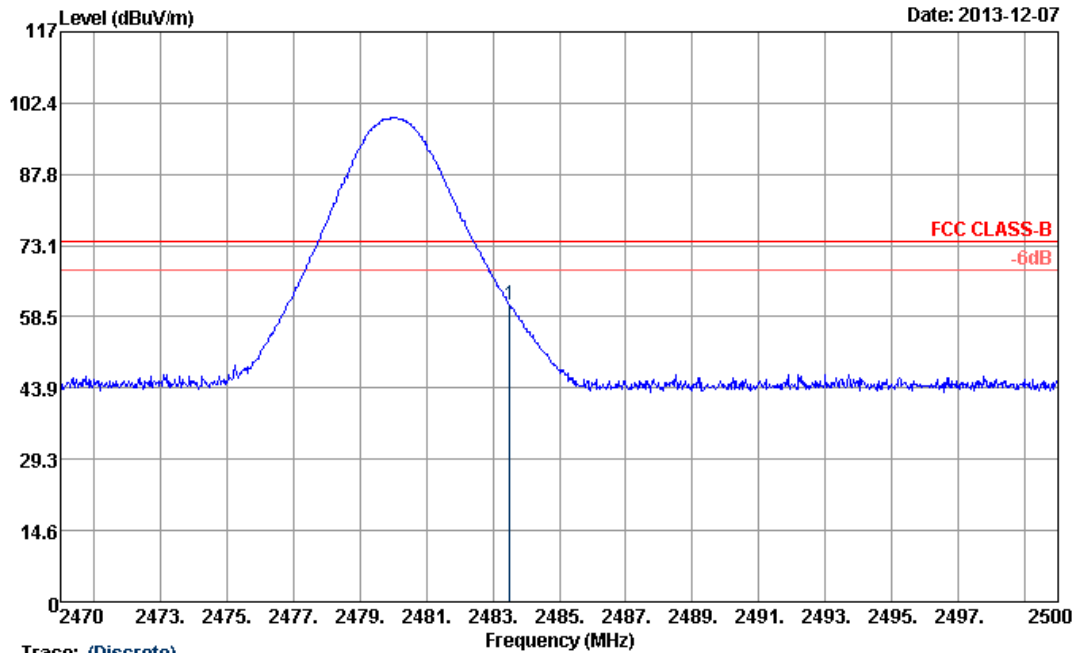

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 HORIZONTAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto


ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	61.07	-12.93	74	56.79	31.99	6.59	34.3	117	327	Peak
2483.5	36.34	-17.66	54	-	-	-	-	-	-	Average

**Note:** Worst case measurement on 2483.5 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.



Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

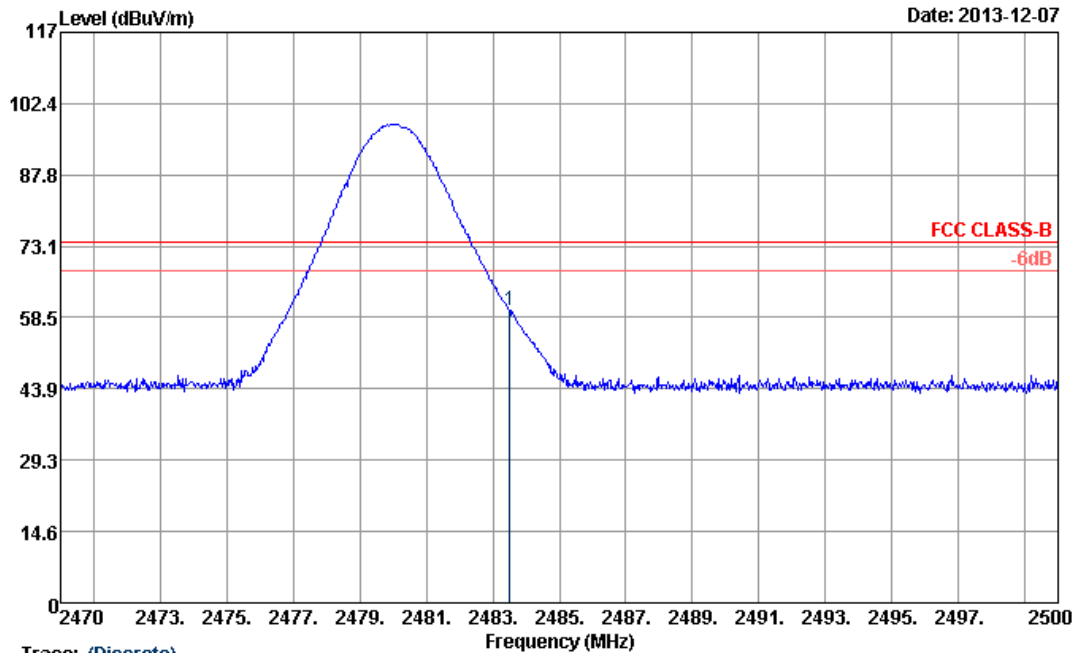

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto

ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limity Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	59.97	-14.03	74	55.69	31.99	6.59	34.3	100	276	Peak
2483.5	35.24	-18.76	54	-	-	-	-	-	-	Average

**Note:** Worst case measurement on 2483.5 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500MHz. And, 2480-2483.5MHz is within the operating band and not within the restricted band. The test result is compliance with the FCC limit line.




3.8.8 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

**Remark :**

- 2402 MHz is fundamental signal which can be ignored.
- 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 99.06dBμV/m - 20dB = 79.06dBμV/m.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

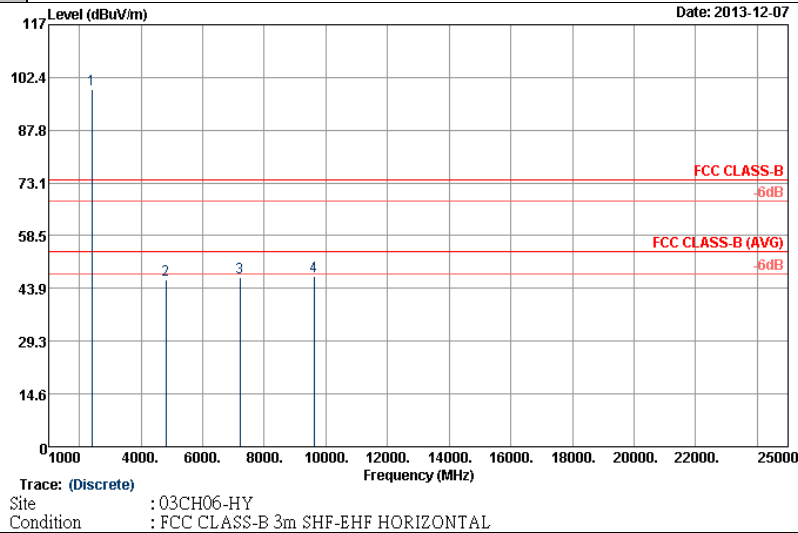

ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	99.06	-	-	95.02	31.92	6.45	34.33	100	330	Peak
2402	74.27	-	-	-	-	-	-	-	-	Average
4803	46.29	-27.71	74	57.28	34.41	10.16	55.56	100	0	Peak
4803	21.5	-32.5	54	-	-	-	-	-	-	Average
7206	47.01	-32.05	79.06	56.85	35.68	10.97	56.49	100	0	Peak
9609	47.18	-31.88	79.06	56.34	36.32	10.56	56.04	100	0	Peak


Other harmonics are lower than background noise

**Note:** The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from 20log (dwell time/100ms).

For example: Average level = 99.06dBuV/m – 24.79 (dB) = 74.27dBuV/m.



Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

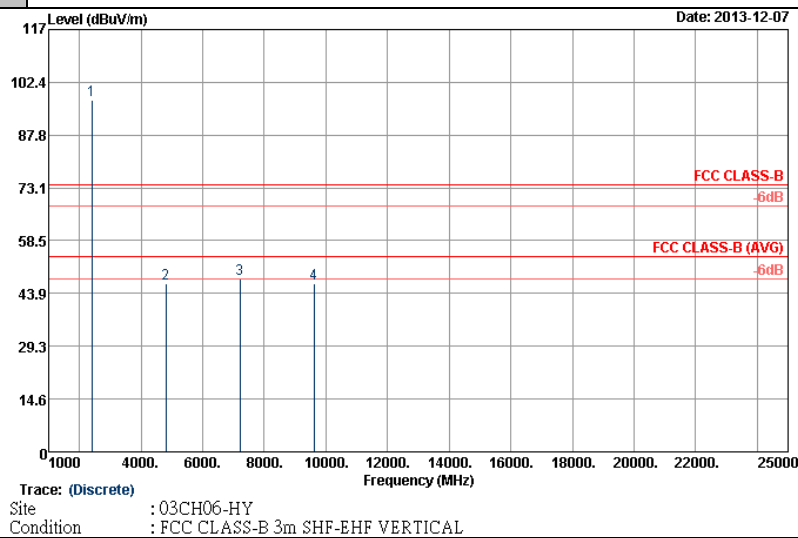


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	97.29	-	-	93.25	31.92	6.45	34.33	100	275	Peak
2402	72.5	-	-	-	-	-	-	-	-	Average
4803	46.47	-27.53	74	57.46	34.41	10.16	55.56	100	0	Peak
4803	21.68	-32.32	54	-	-	-	-	-	-	Average
7206	47.99	-29.3	77.29	57.83	35.68	10.97	56.49	100	0	Peak
9609	46.75	-30.54	77.29	55.91	36.32	10.56	56.04	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2441 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

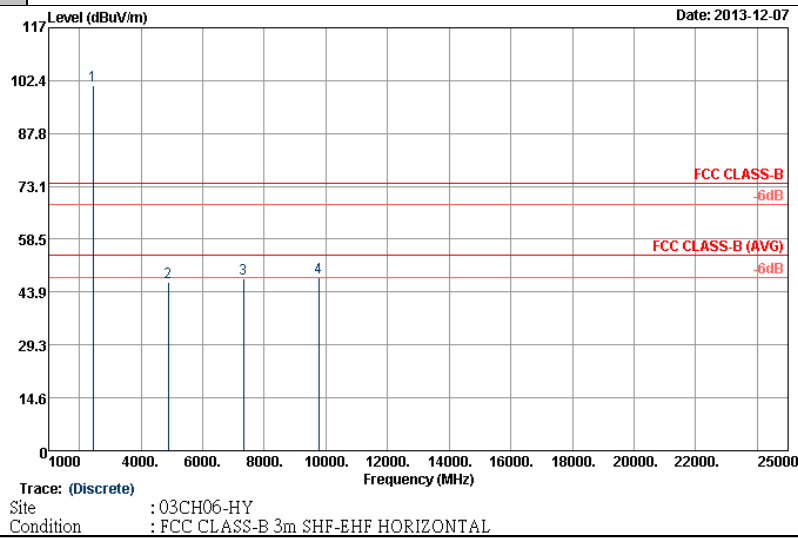

ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	101.12	-	-	96.95	31.96	6.52	34.31	100	330	Peak
2441	76.33	-	-	-	-	-	-	-	-	Average
4881	46.63	-27.37	74	57.75	34.37	10.19	55.68	100	0	Peak
4881	21.84	-32.16	54	-	-	-	-	-	-	Average
7323	47.69	-26.31	74	57.39	35.6	10.94	56.24	100	0	Peak
7323	22.9	-31.1	54	-	-	-	-	-	-	Average
9765	47.8	-33.32	81.12	56.63	36.53	10.57	55.93	100	0	Peak

Other harmonics are lower than background noise






Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		

**Remark :**

- 2441 MHz is fundamental signal which can be ignored.
- 9765 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.
- The harmonic (5<sup>th</sup>, 6<sup>th</sup>, 7<sup>th</sup>,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

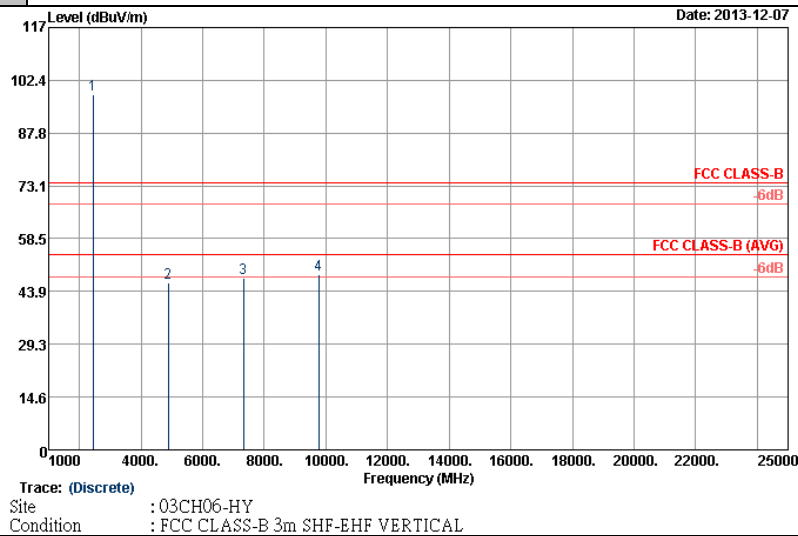


**ANTENNA POLARITY : VERTICAL**

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	98.34	-	-	94.17	31.96	6.52	34.31	100	272	Peak
2441	73.55	-	-	-	-	-	-	-	-	Average
4881	46.2	-27.8	74	57.32	34.37	10.19	55.68	100	0	Peak
4881	21.41	-32.59	54	-	-	-	-	-	-	Average
7323	47.57	-26.43	74	57.27	35.6	10.94	56.24	100	0	Peak
7323	-24.79	-78.79	54	-	-	-	-	-	-	Average
9765	48.42	-29.92	78.34	57.25	36.53	10.57	55.93	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

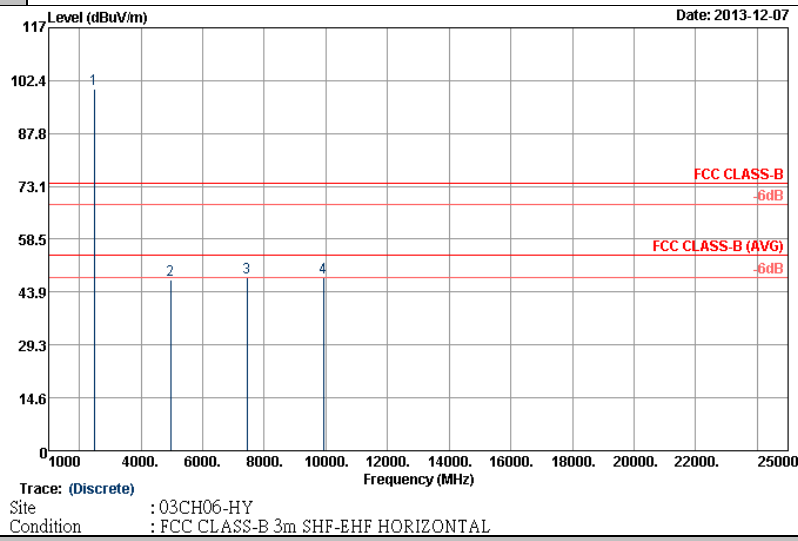


ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2480	100.03	-	-	95.75	31.99	6.59	34.3	115	319	Peak
2480	75.24	-	-	-	-	-	-	-	-	Average
4959	47.21	-26.79	74	58.52	34.32	10.21	55.84	100	0	Peak
4959	22.42	-31.58	54	-	-	-	-	-	-	Average
7440	47.8	-26.2	74	57.37	35.53	10.9	56	100	0	Peak
7440	23.01	-30.99	54	-	-	-	-	-	-	Average
9921	47.84	-32.19	80.03	56.39	36.72	10.57	55.84	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	1Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

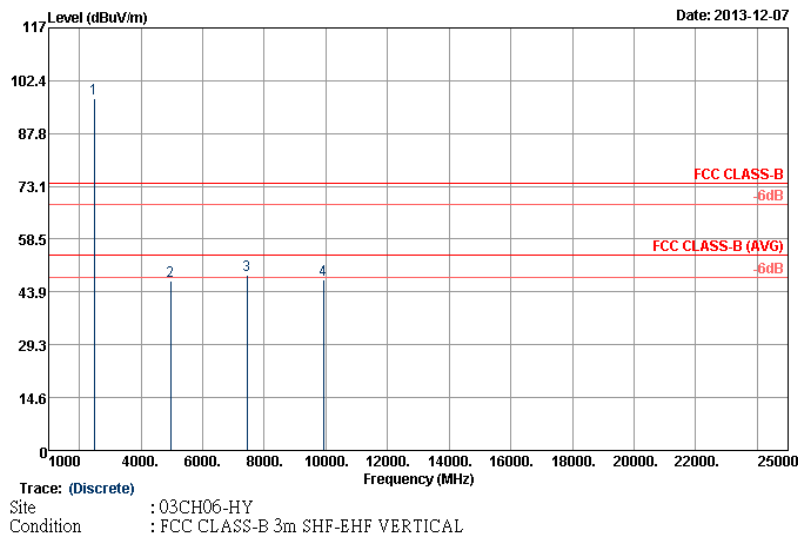


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2480	97.55	-	-	93.27	31.99	6.59	34.3	100	277	Peak
2480	72.76	-	-	-	-	-	-	-	-	Average
4959	46.78	-27.22	74	58.09	34.32	10.21	55.84	100	0	Peak
4959	21.99	-32.01	54	-	-	-	-	-	-	Average
7440	48.46	-25.54	74	58.03	35.53	10.9	56	100	0	Peak
7440	23.67	-30.33	54	-	-	-	-	-	-	Average
9921	47.31	-30.24	77.55	55.86	36.72	10.57	55.84	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9606 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> , ...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

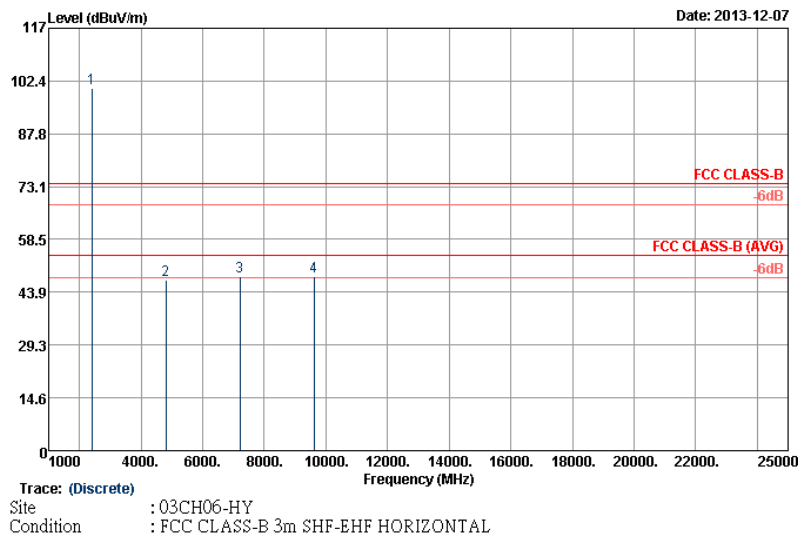

ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	100.33	-	-	96.29	31.92	6.45	34.33	122	326	Peak
2402	75.6	-	-	-	-	-	-	-	-	Average
4803	47.16	-26.84	74	58.15	34.41	10.16	55.56	100	0	Peak
4803	22.43	-31.57	54	-	-	-	-	-	-	Average
7206	48.15	-32.18	80.33	57.99	35.68	10.97	56.49	100	0	Peak
9609	48.22	-32.11	80.33	57.38	36.32	10.56	56.04	100	0	Peak


Other harmonics are lower than background noise

**Note:** The average levels were calculated from the peak level corrected with duty cycle correction factor (24.73dB) derived from 20log (dwell time/100ms).

For example: Average level = 100.33 dBUV/m – 24.73 (dB) = 75.6 dBUV/m.



Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

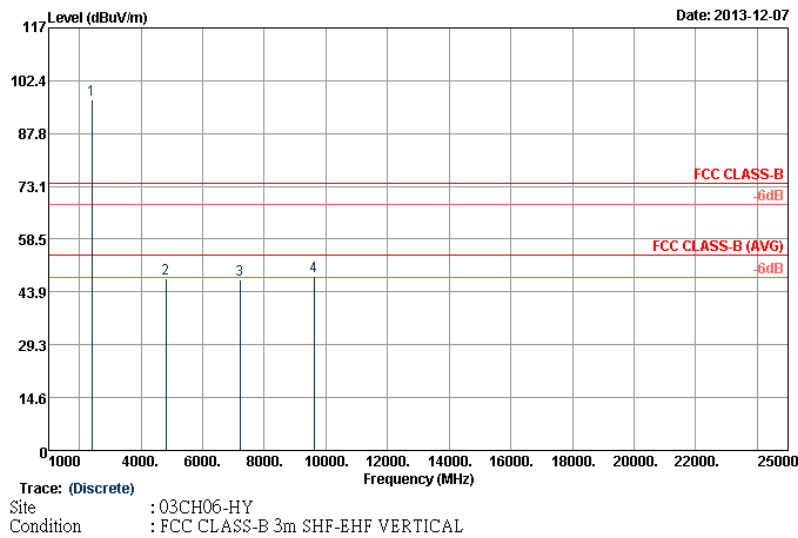


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	97.19	-	-	93.15	31.92	6.45	34.33	100	271	Peak
2402	72.46	-	-	-	-	-	-	-	-	Average
4803	47.56	-26.44	74	58.55	34.41	10.16	55.56	100	0	Peak
4803	22.83	-31.17	54	-	-	-	-	-	-	Average
7206	47.32	-29.87	77.19	57.16	35.68	10.97	56.49	100	0	Peak
9609	48.09	-29.1	77.19	57.25	36.32	10.56	56.04	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2441 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

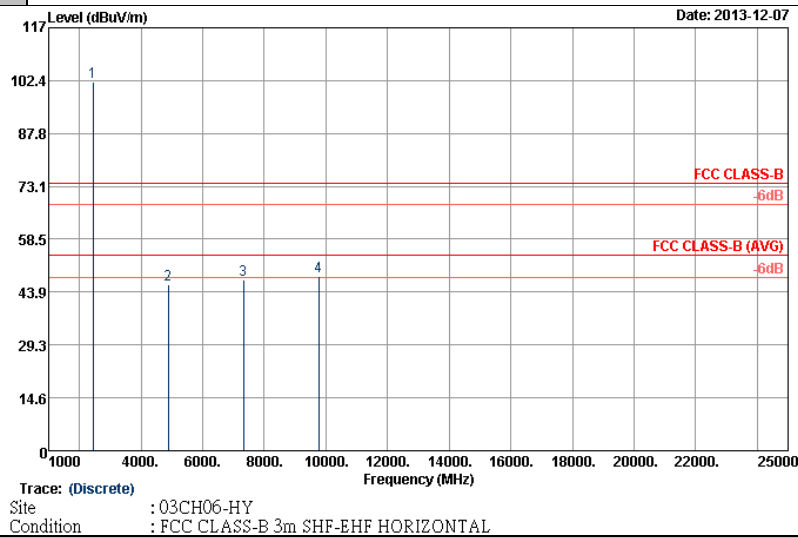


ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	101.97	-	-	97.8	31.96	6.52	34.31	100	334	Peak
2441	77.24	-	-	-	-	-	-	-	-	Average
4881	46.1	-27.9	74	57.22	34.37	10.19	55.68	100	0	Peak
4881	21.37	-32.63	54	-	-	-	-	-	-	Average
7323	47.23	-26.77	74	56.93	35.6	10.94	56.24	100	0	Peak
7323	22.5	-78.73	54	-	-	-	-	-	-	Average
9765	48.22	-33.75	81.97	57.05	36.53	10.57	55.93	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2441 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

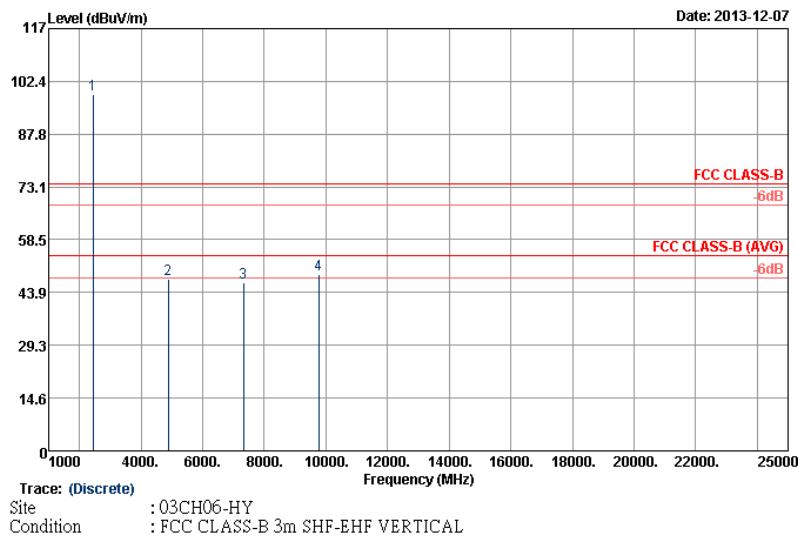


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	98.86	-	-	94.69	31.96	6.52	34.31	100	271	Peak
2441	74.13	-	-	-	-	-	-	-	-	Average
4881	47.73	-26.27	74	58.85	34.37	10.19	55.68	100	0	Peak
4881	23	-31	54	-	-	-	-	-	-	Average
7323	46.76	-27.24	74	56.46	35.6	10.94	56.24	100	0	Peak
7323	22.03	-31.97	54	-	-	-	-	-	-	Average
9765	49.02	-29.84	78.86	57.85	36.53	10.57	55.93	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> , ...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

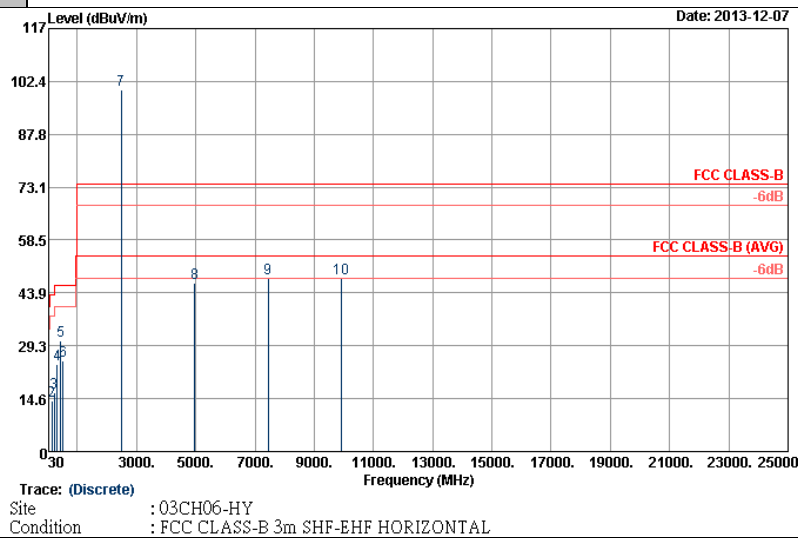

ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	16.8	-23.2	40	29.46	18.5	0.64	31.8	-	-	Peak
130.44	14.03	-29.47	43.5	33.07	11.44	1.27	31.75	-	-	Peak
223.86	16.41	-29.59	46	36.91	9.6	1.64	31.74	-	-	Peak
326.6	24.07	-21.93	46	40.14	13.7	1.98	31.75	-	-	Peak
429.5	30.79	-15.21	46	43.58	16.8	2.26	31.85	100	124	Peak
522.6	25	-21	46	36.36	18.09	2.51	31.96			Peak
2480	100.16	-	-	95.88	31.99	6.59	34.3	117	325	Peak
2480	75.43	-	-	-	-	-	-	-	-	Average






ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
4959	46.54	-27.46	74	57.85	34.32	10.21	55.84	100	0	Peak
4959	21.81	-32.19	54	-	-	-	-	-	-	Average
7440	47.89	-26.11	74	57.46	35.53	10.9	56	100	0	Peak
7440	23.16	-30.84	54	-	-	-	-	-	-	Average
9921	47.87	-32.29	80.16	56.42	36.72	10.57	55.84	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	2Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

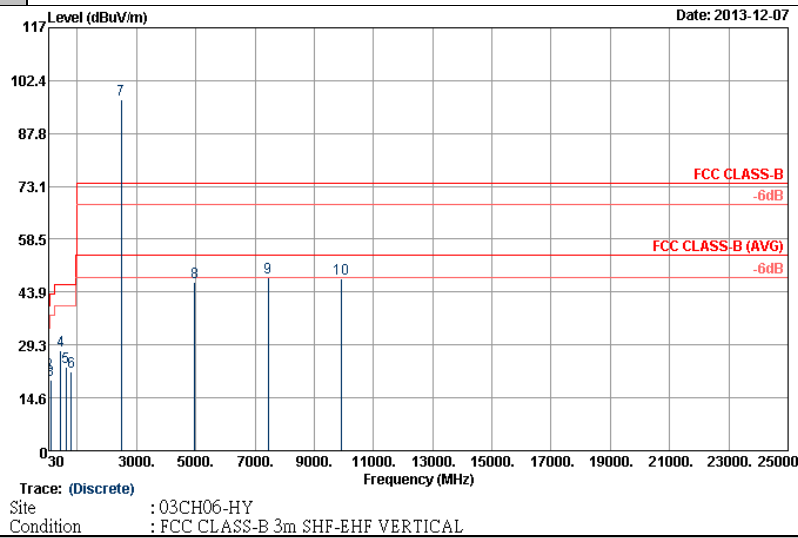

ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	31.24	-8.76	40	43.9	18.5	0.64	31.8	100	271	Peak
42.96	21.52	-18.48	40	41.64	10.92	0.75	31.79	-	-	Peak
91.56	19.43	-24.07	43.5	41.23	8.9	1.06	31.76	-	-	Peak
434.4	27.58	-18.42	46	40.36	16.8	2.28	31.86	-	-	Peak
618.5	23.29	-22.71	46	32.97	19.59	2.78	32.05	-	-	Peak
784.4	21.72	-24.28	46	30.47	20.15	3.06	31.96	-	-	Peak
2480	97.14	-	-	92.86	31.99	6.59	34.3	100	278	Peak
2480	72.41	-	-	-	-	-	-	-	-	Average




ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
4959	46.75	-27.25	74	58.06	34.32	10.21	55.84	100	0	Peak
4959	22.02	-31.98	54	-	-	-	-	-	-	Average
7440	47.97	-26.03	74	57.54	35.53	10.9	56	100	0	Peak
7440	23.24	-30.76	54	-	-	-	-	-	-	Average
9921	47.66	-29.48	77.14	56.21	36.72	10.57	55.84	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

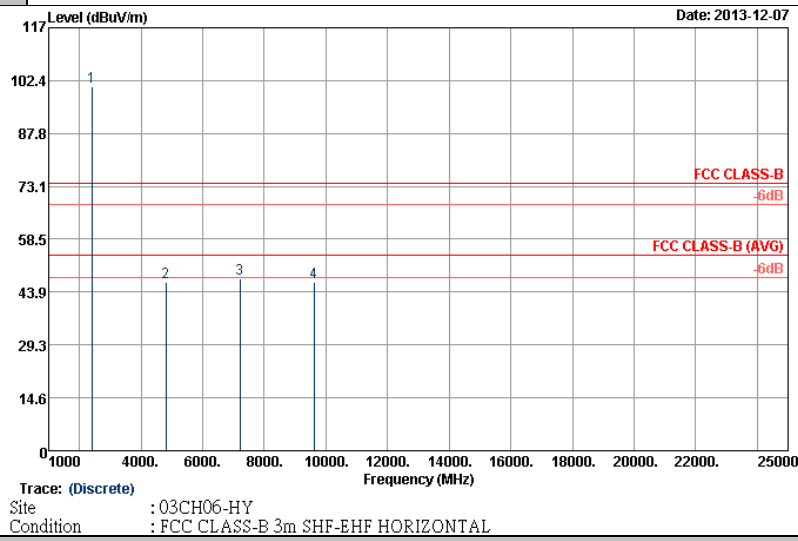

ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	100.58	-	-	96.54	31.92	6.45	34.33	121	327	Peak
2402	75.85	-	-	-	-	-	-	-	-	Average
4803	46.72	-27.28	74	57.71	34.41	10.16	55.56	100	0	Peak
4803	21.99	-32.01	54	-	-	-	-	-	-	Average
7206	47.7	-32.88	80.58	57.54	35.68	10.97	56.49	100	0	Peak
9609	46.48	-34.1	80.58	55.64	36.32	10.56	56.04	100	0	Peak


Other harmonics are lower than background noise

**Note:** The average levels were calculated from the peak level corrected with duty cycle correction factor (24.73dB) derived from 20log (dwell time/100ms).

For example: Average level = 100.58dBuV/m – 24.73 (dB) = 75.85dBuV/m.



Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

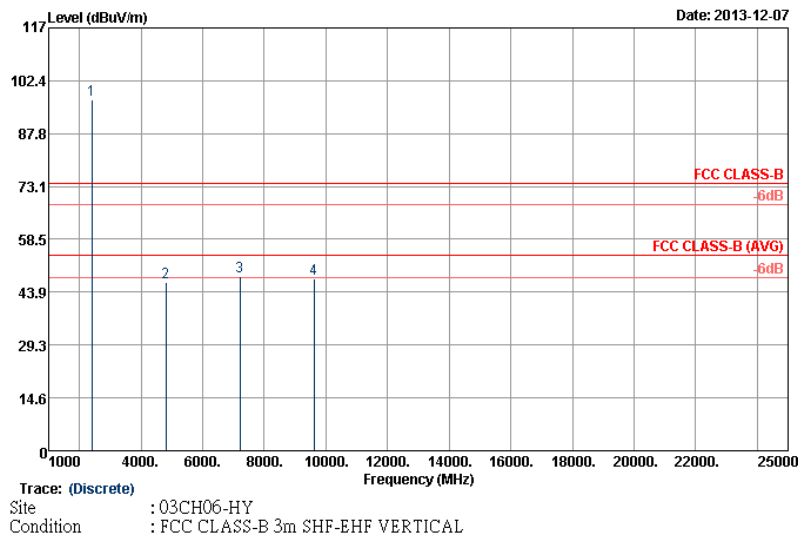


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	97.18	-	-	93.14	31.92	6.45	34.33	100	272	Peak
2402	72.45	-	-	-	-	-	-	-	-	Average
4803	46.51	-27.49	74	57.5	34.41	10.16	55.56	100	0	Peak
4803	21.78	-32.22	54	-	-	-	-	-	-	Average
7206	48.34	-28.84	77.18	58.18	35.68	10.97	56.49	100	0	Peak
9609	47.48	-29.7	77.18	56.64	36.32	10.56	56.04	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2441 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

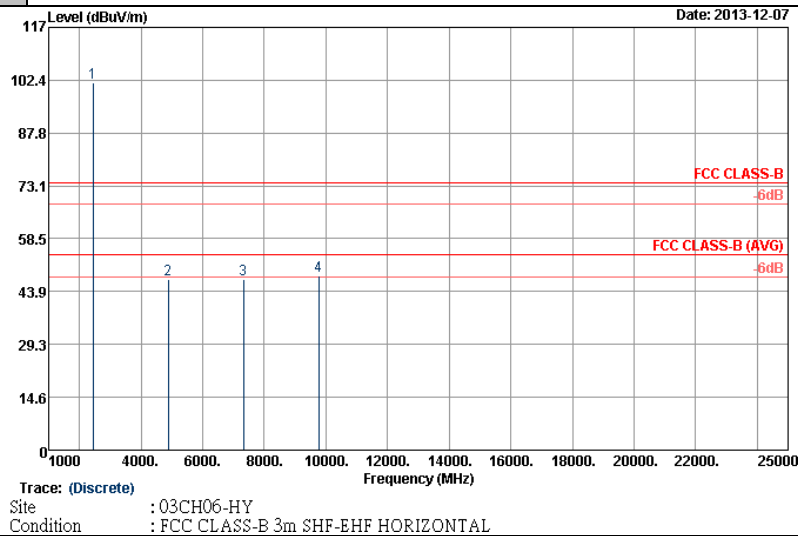


ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	101.65	-	-	97.48	31.96	6.52	34.31	114	312	Peak
2441	76.92	-	-	-	-	-	-	-	-	Average
4882	47.25	-26.75	74	58.37	34.37	10.19	55.68	100	0	Peak
4882	22.52	-31.48	54	-	-	-	-	-	-	Average
7323	47.2	-26.8	74	56.9	35.6	10.94	56.24	100	0	Peak
7323	22.47	-31.53	54	-	-	-	-	-	-	Average
9765	48.38	-33.27	81.65	57.21	36.53	10.57	55.93	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2441 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

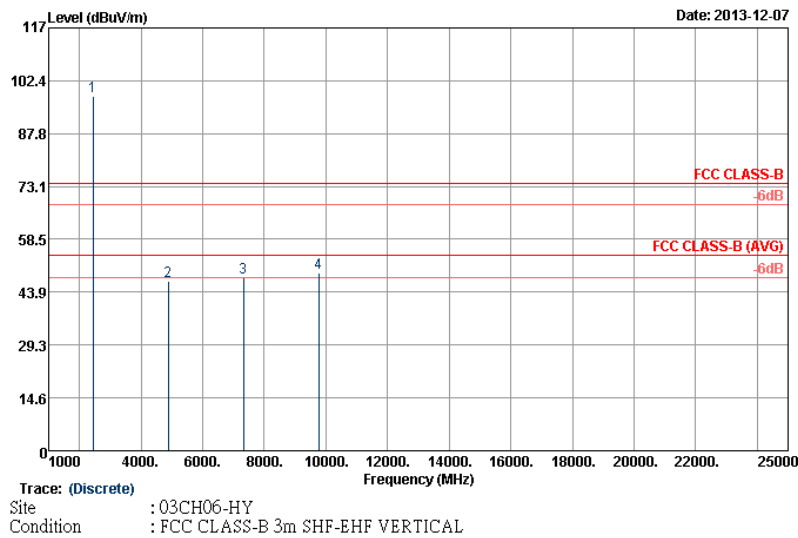


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	98.11	-	-	93.94	31.96	6.52	34.31	100	272	Peak
2441	73.38	-	-	-	-	-	-	-	-	Average
4881	46.88	-27.12	74	58	34.37	10.19	55.68	100	0	Peak
4881	22.15	-31.85	54	-	-	-	-	-	-	Average
7323	47.76	-26.24	74	57.46	35.6	10.94	56.24	100	0	Peak
7323	23.03	-30.97	54	-	-	-	-	-	-	Average
9765	49.09	-29.02	78.11	57.92	36.53	10.57	55.93	100	0	Peak

Other harmonics are lower than background noise



Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

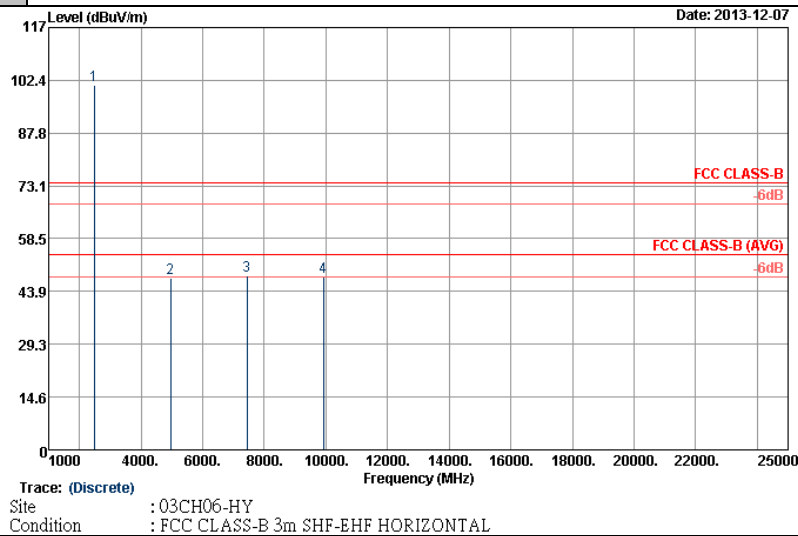

ANTENNA POLARITY : HORIZONTAL


Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2480	101.07	-	-	96.79	31.99	6.59	34.3	117	327	Peak
2480	76.34	-	-	-	-	-	-	-	-	Average
4959	47.62	-26.38	74	58.93	34.32	10.21	55.84	100	0	Peak
4959	22.89	-31.11	54	-	-	-	-	-	-	Average
7440	48.11	-25.89	74	57.68	35.53	10.9	56	100	0	Peak
7440	23.38	-30.62	54	-	-	-	-	-	-	Average
9921	47.9	-33.17	81.07	56.45	36.72	10.57	55.84	100	0	Peak

Other harmonics are lower than background noise





Test Mode :	3Mbps	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	50~52%
Test Engineer :	Marlboro Hsu		
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. The harmonic (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

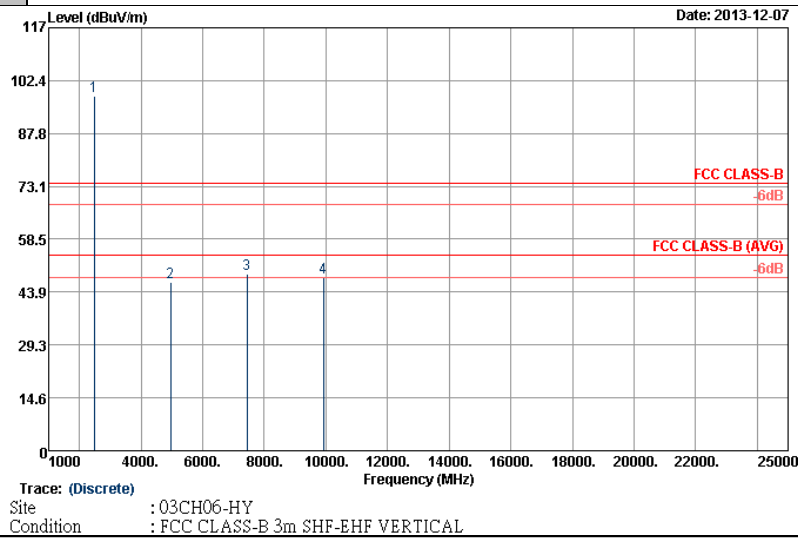

ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2480	98.18	-	-	93.9	31.99	6.59	34.3	100	276	Peak
2480	73.45	-	-	-	-	-	-	-	-	Average
4959	46.73	-27.27	74	58.04	34.32	10.21	55.84	100	0	Peak
4959	22	-32	54	-	-	-	-	-	-	Average
7440	48.9	-25.1	74	58.47	35.53	10.9	56	100	0	Peak
7440	24.17	-29.83	54	-	-	-	-	-	-	Average
9921	47.97	-30.21	78.18	56.52	36.72	10.57	55.84	100	0	Peak

Other harmonics are lower than background noise

### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.9.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.9.4 Test Setup

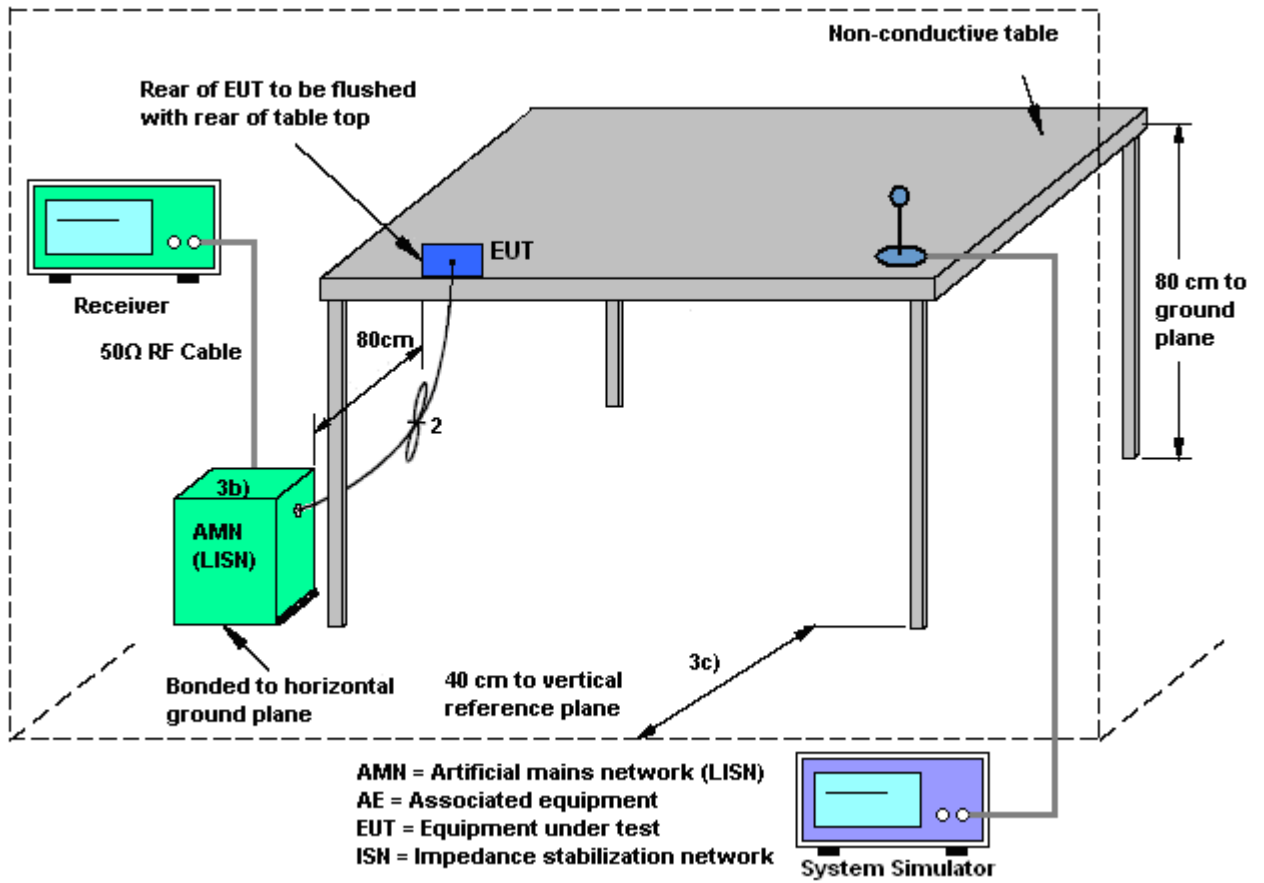

### 3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Idle + GPS Rx + Earphone + Battery + USB Cable (Data Link with Notebook)		

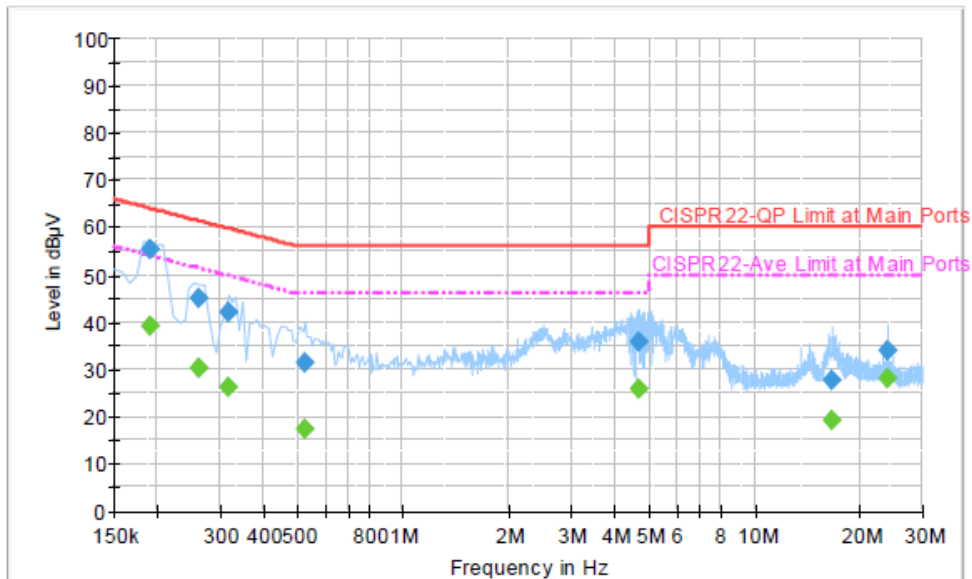

#### Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	55.3	Off	L1	19.4	8.7	64.0
0.262000	45.0	Off	L1	19.4	16.4	61.4
0.318000	42.0	Off	L1	19.4	17.8	59.8
0.526000	31.4	Off	L1	19.4	24.6	56.0
4.662000	35.9	Off	L1	19.6	20.1	56.0
16.646000	27.7	Off	L1	19.8	32.3	60.0
23.862000	34.0	Off	L1	19.9	26.0	60.0

#### Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	39.3	Off	L1	19.4	14.7	54.0
0.262000	30.2	Off	L1	19.4	21.2	51.4
0.318000	26.2	Off	L1	19.4	23.6	49.8
0.526000	17.3	Off	L1	19.4	28.7	46.0
4.662000	25.7	Off	L1	19.6	20.3	46.0
16.646000	19.4	Off	L1	19.8	30.6	50.0
23.862000	28.0	Off	L1	19.9	22.0	50.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Idle + GPS Rx + Earphone + Battery + USB Cable (Data Link with Notebook)		

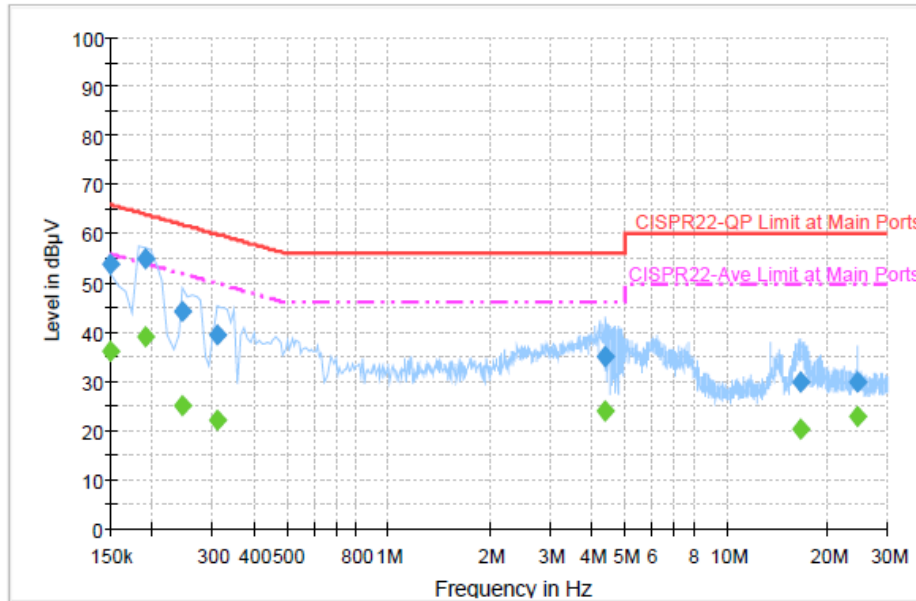

**Final Result : Quasi-Peak**


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	54.0	Off	N	19.4	12.0	66.0
0.190000	54.8	Off	N	19.3	8.9	63.7
0.246000	44.2	Off	N	19.4	17.7	61.9
0.310000	39.5	Off	N	19.4	20.5	60.0
4.398000	35.1	Off	N	19.7	20.9	56.0
16.654000	29.7	Off	N	19.9	30.3	60.0
24.542000	30.0	Off	N	20.0	30.0	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	36.0	Off	N	19.4	20.0	56.0
0.190000	39.0	Off	N	19.3	14.7	53.7
0.246000	24.9	Off	N	19.4	27.0	51.9
0.310000	22.1	Off	N	19.4	27.9	50.0
4.398000	23.9	Off	N	19.7	22.1	46.0
16.654000	20.5	Off	N	19.9	29.5	50.0
24.542000	23.0	Off	N	20.0	27.0	50.0



Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Idle + WLAN Link + GPS Rx + Earphone + Battery + USB Cable (Data Link with Notebook)		

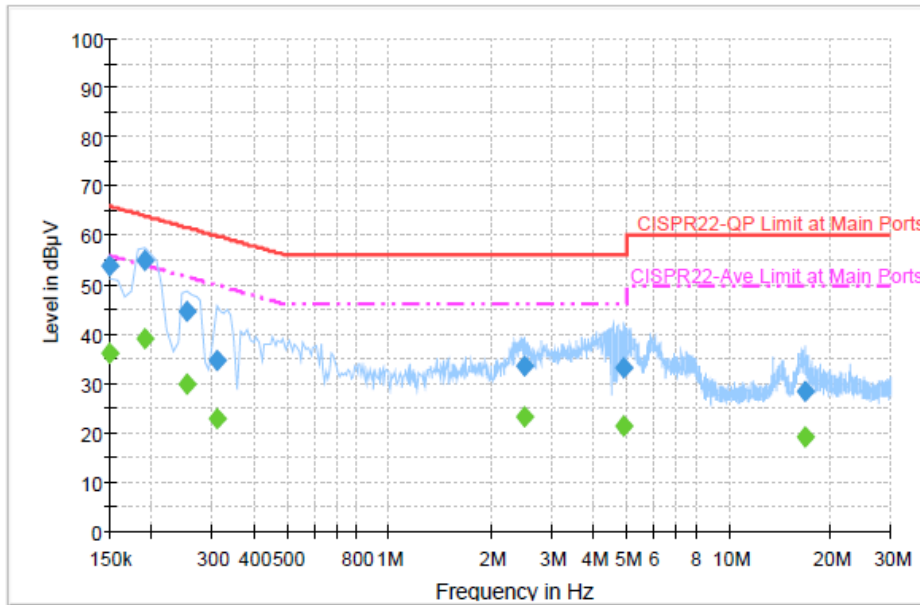

**Final Result : Quasi-Peak**


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	53.7	Off	L1	19.4	12.3	66.0
0.190000	54.8	Off	L1	19.4	9.2	64.0
0.254000	44.7	Off	L1	19.5	16.9	61.6
0.310000	34.7	Off	L1	19.4	25.3	60.0
2.502000	33.7	Off	L1	19.6	22.3	56.0
4.918000	33.4	Off	L1	19.6	22.6	56.0
16.782000	28.5	Off	L1	19.8	31.5	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	36.0	Off	L1	19.4	20.0	56.0
0.190000	39.0	Off	L1	19.4	15.0	54.0
0.254000	30.1	Off	L1	19.5	21.5	51.6
0.310000	22.7	Off	L1	19.4	27.3	50.0
2.502000	23.4	Off	L1	19.6	22.6	46.0
4.918000	21.4	Off	L1	19.6	24.6	46.0
16.782000	19.1	Off	L1	19.8	30.9	50.0



Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Idle + WLAN Link + GPS Rx + Earphone + Battery + USB Cable (Data Link with Notebook)		

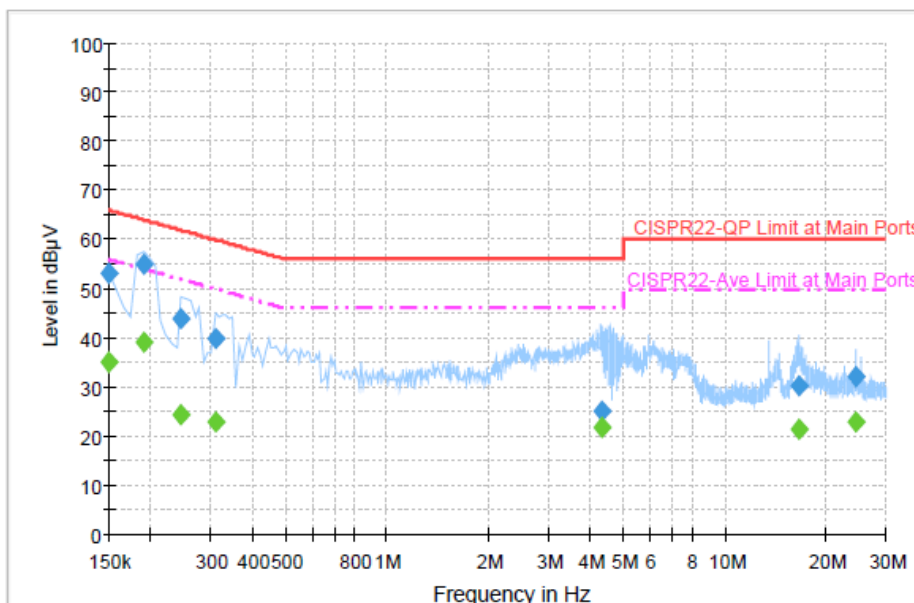

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	53.2	Off	N	19.4	12.8	66.0
0.190000	54.8	Off	N	19.4	9.2	64.0
0.246000	44.0	Off	N	19.4	17.9	61.9
0.310000	40.0	Off	N	19.4	20.0	60.0
4.326000	24.9	Off	N	19.6	31.1	56.0
16.542000	30.3	Off	N	19.9	29.7	60.0
24.542000	32.0	Off	N	20.0	28.0	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	35.0	Off	N	19.4	21.0	56.0
0.190000	39.0	Off	N	19.4	15.0	54.0
0.246000	24.4	Off	N	19.4	27.5	51.9
0.310000	22.8	Off	N	19.4	27.2	50.0
4.326000	21.6	Off	N	19.6	24.4	46.0
16.542000	21.5	Off	N	19.9	28.5	50.0
24.542000	23.0	Off	N	20.0	27.0	50.0



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Dec. 02, 2013 ~ Dec. 12, 2013	Jun. 06, 2014	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Feb. 05, 2013	Dec. 02, 2013 ~ Dec. 12, 2013	Feb. 04, 2014	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Feb. 05, 2013	Dec. 02, 2013 ~ Dec. 12, 2013	Feb. 04, 2014	Conducted (TH02-HY)
Hygrometer	Testo	608-H1	34897199	N/A	May 07, 2013	Dec. 02, 2013 ~ Dec. 12, 2013	May 06, 2014	Conducted (TH02-HY)
RF cable	HONOVA	MF86	N/A	N/A	Nov. 25, 2013	Dec. 02, 2013 ~ Dec. 12, 2013	Nov. 24, 2014	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP30	101067	9kHz ~ 30GHz	Nov. 20, 2013	Dec. 07, 2013	Nov. 19, 2014	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9kHz ~ 26.5GHz	Dec. 02, 2013	Dec. 07, 2013	Dec. 01, 2014	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/0003	20MHz ~ 1000MHz	May 06, 2013	Dec. 07, 2013	May 05, 2014	Radiation (03CH06-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/0001	9kHz ~ 30MHz	Jul. 03, 2012	Dec. 07, 2013	Jul. 02, 2014	Radiation (03CH06-HY)
Bilog Antenna	Schaffner	CBL6112B	2885	30MHz ~ 2GHz	Oct. 10, 2013	Dec. 07, 2013	Oct. 09, 2014	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 02, 2013	Dec. 07, 2013	Aug. 01, 2014	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9kHz ~ 1GHz	Apr. 12, 2013	Dec. 07, 2013	Apr. 11, 2014	Radiation (03CH06-HY)
Pre Amplifier	EMCI	EMC051845	SN980048	1GHz ~ 18GHz	Jul. 18, 2013	Dec. 07, 2013	Jul. 17, 2014	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Oct. 03, 2013	Dec. 07, 2013	Oct. 02, 2014	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A01917	1GHz ~ 26.5GHz	Apr. 12, 2013	Dec. 07, 2013	Apr. 11, 2014	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0 ~ 360 degree	N/A	Dec. 07, 2013	N/A	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208212	1 m ~ 4 m	N/A	Dec. 07, 2013	N/A	Radiation (03CH06-HY)
LF RF Cable	warison	WCBA-WC04NM.NM2	N/A	30MHz~1GHz	Nov. 28, 2013	Dec. 07, 2013	Nov. 27, 2014	Radiation (03CH06-HY)
HF RF Cable	Huber + Suhner	sucoflex 104	286027/4	1GHz~26.5GHz	Nov. 28, 2013	Dec. 07, 2013	Nov. 27, 2014	Radiation (03CH06-HY)
High Pass Filter	Microwave Circuits	H3G018G1	SN477219	3G HPF	Nov. 28, 2013	Dec. 07, 2013	Nov. 27, 2014	Radiation (03CH06-HY)
High Pass Filter	Microwave Circuits	H07G18G3	282388	7G HPF	Nov. 28, 2013	Dec. 07, 2013	Nov. 27, 2014	Radiation (03CH06-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Low Pass Filter	Wainwright	WLKS1500-8SS	SN51	1.5G LPF	Nov. 28, 2013	Dec. 07, 2013	Nov. 27, 2014	Radiation (03CH06-HY)
Hygrometer	WISEWIND	410	BU5004	N/A	May 07, 2013	Dec. 07, 2013	May 06, 2014	Radiation (03CH06-HY)
Test Software	Audix	E3 V6.0	N/A	N/A	N/A	Dec. 07, 2013	N/A	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 15, 2013	Nov. 29, 2013	Nov. 14, 2014	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2012	Nov. 29, 2013	Dec. 11, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 06, 2012	Nov. 29, 2013	Dec. 05, 2013	Conduction (CO05-HY)
AC Power Source	APC	APC-1000 W	N/A	N/A	N/A	Nov. 29, 2013	N/A	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	Nov. 29, 2013	N/A	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 25, 2013,	Nov. 29, 2013	Apr. 24, 2014	Conduction (CO05-HY)
LF Cable	Shuner	RG-402	N/A	N/A	Oct. 17, 2013	Nov. 29, 2013	Oct. 16, 2014	Conduction (CO05-HY)

Note: Test equipment calibration is traceable to the procedure of ISO17025.



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50
---	------