

TEST REPORT

Test Report No.: 1-6965/13-04-24



Testing Laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 – 10
 66117 Saarbrücken/Germany
 Phone: + 49 681 5 98 - 0
 Fax: + 49 681 5 98 - 9075
 Internet: <http://www.cetecom.com>
 e-mail: ict@cetecom.com

Accredited Test Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Applicant

Sony Mobile Communications AB

Nya Vattentorget
 22188 Lund/SWEDEN
 Phone: +46 46 19 30 00

Contact: Mikael Nilsson
 e-mail: Micke.nilsson@sonymobile.com
 Phone: +46 7 03 22 75 03
 Fax: ---

Manufacturer

Sony Mobile Communications AB

Nya Vattentorget
 22188 Lund/SWEDEN

Test Standard/s

IEEE 1528-2003 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
 RSS-102 Issue 4 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
 For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Smart Phone
 Device type: portable device
Model name: **PM-0740-BV**
 S/N serial number: CB5A1W1HQD / CB5A1W1HSZ / CB5A1W1HRG / CB5A1W1HRP
 FCC-ID: PY7PM-0740
 IMEI-Number: 004402451795086 / 004402451795094 / 004402451801686
 Hardware status: AP1.1
 Software status: 17.0.A.0.256
 Frequency: see technical details
 Antenna: integrated antenna
 Battery option: Integrated Li-polymer battery 3.7V
 Accessories: ---
 Test sample status: identical prototype
 Exposure category: general population / uncontrolled environment

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test Report authorised:

Test performed:

Thomas Vogler
 Senior Testing Manager

Oleksandr Hnatovskiy
 Testing Manager

1	Table of contents	2
1	Table of contents.....	2
2	General information	4
2.1	Notes and disclaimer	4
2.2	Application details	4
2.3	Statement of compliance.....	4
2.4	Technical details.....	5
2.5	Transmitter and Antenna Operating Configurations	6
3	Test standards/ procedures references.....	7
3.1	RF exposure limits	9
4	Summary of Measurement Results	10
4.1	SAR measurement variability and measurement uncertainty analysis.....	10
5	Test Environment	10
6	Test Set-up.....	11
6.1	Measurement system.....	11
6.1.1	System Description.....	11
6.1.2	Test environment.....	12
6.1.3	Probe description.....	12
6.1.4	Phantom description.....	13
6.1.5	Device holder description	14
6.1.6	Scanning procedure	15
6.1.7	Spatial Peak SAR Evaluation	16
6.1.8	Data Storage and Evaluation.....	17
6.1.9	Tissue simulating liquids: dielectric properties	19
6.1.10	Tissue simulating liquids: parameters	20
6.1.11	Measurement uncertainty evaluation for SAR test.....	23
6.1.12	Measurement uncertainty evaluation for System Check.....	27
6.1.13	System check	29
6.1.14	System check procedure	31
6.1.15	System validation	32
7	Detailed Test Results	33
7.1	Conducted power measurements.....	33
7.1.1	Conducted power measurements GSM 850 MHz.....	34
7.1.2	Conducted power measurements GSM 1900 MHz.....	35
7.1.3	Justification of SAR measurements in GSM mode	35
7.1.4	Conducted power measurements WCDMA FDD II (1900 MHz)	36
7.1.5	Conducted power measurements WCDMA FDD IV (1700 MHz).....	37
7.1.6	Conducted power measurements WCDMA FDD V (850 MHz).....	38
7.1.7	Test-set-up information for WCDMA / HSPDA / HSUPA	39
7.1.8	Conducted power measurements LTE FDD 2 1900 MHz.....	44
7.1.9	Conducted power measurements LTE FDD 4 1700 MHz.....	47
7.1.10	Conducted power measurements LTE FDD 5 850 MHz.....	50
7.1.11	Conducted power measurements LTE FDD 7 2600 MHz.....	52
7.1.12	Conducted power measurements LTE FDD 13 700 MHz.....	54
7.1.13	Conducted power measurements LTE FDD 17 700 MHz.....	55
7.1.14	Justification of SAR measurements in LTE mode.....	56
7.1.15	MPR information in LTE mode	56
7.2	Conducted power measurements.....	57
7.2.1	Conducted power measurements WLAN 2.4 GHz.....	57
7.2.2	Conducted power measurements WLAN 5 GHz.....	58
7.2.3	Standalone SAR Test Exclusion	61

7.2.4	Hotspot mode SAR measurement positions	64
7.3	SAR test results.....	65
7.3.1	Results overview	65
7.3.2	General description of test procedures	82
7.3.3	Multiple Transmitter Information.....	83
7.3.4	SAR peak location separation	91
8	Test equipment and ancillaries used for tests.....	94
9	Observations	95
Annex A:	System performance check.....	96
Annex B:	DASY5 measurement results.....	123
Annex B.1:	GSM 850	123
Annex B.2:	GSM 1900	127
Annex B.3:	UMTS FDD II.....	130
Annex B.4:	UMTS FDD IV.....	133
Annex B.5:	UMTS FDD V.....	137
Annex B.6:	LTE FDD 2	140
Annex B.7:	LTE FDD 4	143
Annex B.8:	LTE FDD 5	146
Annex B.9:	LTE FDD 7	149
Annex B.10:	LTE FDD 13	152
Annex B.11:	LTE FDD 17	156
Annex B.12:	WLAN 2450GHz.....	160
Annex B.13:	WLAN 5GHz.....	163
Annex B.14:	Bluetooth 2.4GHz	165
Annex B.15:	Volumetric SAR	166
Annex B.16:	Liquid depth.....	172
Annex C:	Photo documentation.....	178
Annex D:	Calibration parameters.....	178
Annex E:	Document History.....	179
Annex F:	Further Information	179

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

2.2 Application details

Date of receipt of order:	2013-11-29
Date of receipt of test item:	2013-12-16
Start of test:	2013-12-16
End of test:	2014-01-02
Person(s) present during the test:	

2.3 Statement of compliance

The SAR values found for the PM-0740-BV Smart Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C 95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Health Canada's Safety Code 6 and the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15 mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

According to KDB pub 941225 D06 this device has been tested with 10 mm distance to the phantom for operation in WLAN hot spot mode.

2.4 Technical details

Band tested for this test report	Technology	Lowest transmit frequency/MHz	Highest transmit frequency/MHz	Lowest receive Frequency/MHz	Highest receive Frequency/MHz	Kind of modulation	Power Class	Tested power control level	GPRS/EGPRS mobile station class	GPRS/EGPRS multislots class	(E)GPRS voice mode or DTM	Test channel low	Test channel middle	Test channel high	Maximum output power(dBm)*
<input type="checkbox"/>	GSM	880.2	914.8	925.2	959.8	GMSK 8-PSK	4 E2	5	B	33	11	975	37	124	--
<input type="checkbox"/>	GSM DCS	1710.2	1784.8	1805.2	1879.8	GMSK 8-PSK	1 E2	0	B	33	11	512	698	885	--
<input checked="" type="checkbox"/>	GSM cellular	824.2	848.8	869.2	893.8	GMSK 8-PSK	4 E2	5	B	33	11	128	190	251	33.3
<input checked="" type="checkbox"/>	GSM PCS	1850.2	1909.8	1930.2	1989.8	GMSK 8-PSK	1 E2	0	B	33	11	512	661	810	30.1
<input type="checkbox"/>	UMTS FDD I	1922.4	1977.6	2112.4	2167.6	QPSK	3	max	--	--	--	9612	9750	9888	--
<input checked="" type="checkbox"/>	UMTS FDD II	1852.4	1907.6	1932.4	1987.6	QPSK	3	max	--	--	--	9262	9400	9538	24.0
<input checked="" type="checkbox"/>	UMTS FDD IV	1712.4	1752.6	2112.4	2152.6	QPSK	3	max	--	--	--	1312	1412	1513	22.5
<input checked="" type="checkbox"/>	UMTS FDD V	826.4	846.6	871.4	891.6	QPSK	3	max	--	--	--	4132	4182	4233	24.4
<input type="checkbox"/>	UMTS FDD VIII	882.4	912.6	927.4	957.6	QPSK	3	max	--	--	--	2712	2788	2863	--
<input type="checkbox"/>	LTE FDD 1	1920	1980	2110	2170	QPSK	3	max	--	--	--	18100	18300	18500	--
<input checked="" type="checkbox"/>	LTE FDD 2	1850	1910	1930	1990	QPSK	3	max	--	--	--	18700	18900	19100	23.7
<input type="checkbox"/>	LTE FDD 3	1710	1785	1805	1880	QPSK	3	max	--	--	--	19300	19575	19850	--
<input checked="" type="checkbox"/>	LTE FDD 4	1710	1755	2110	2155	QPSK	3	max	--	--	--	20050	20175	20300	22.3
<input checked="" type="checkbox"/>	LTE FDD 5	824	849	869	894	QPSK	3	max	--	--	--	20450	20525	20600	23.8
<input checked="" type="checkbox"/>	LTE FDD 7	2500	2570	2620	2690	QPSK	3	max	--	--	--	20850	21100	21350	20.7
<input type="checkbox"/>	LTE FDD 8	880	915	925	960	QPSK	3	max	--	--	--	21500	21625	21750	--
<input checked="" type="checkbox"/>	LTE FDD 13	777	787	746	756	QPSK	3	max	--	--	--	23205	23230	23255	23.9
<input checked="" type="checkbox"/>	LTE FDD 17	704	716	734	746	QPSK	3	max	--	--	--	23780	23790	23800	23.7
<input type="checkbox"/>	LTE FDD 20	832	862	791	821	QPSK	3	max	--	--	--	24250	24300	24350	--
<input type="checkbox"/>	WLAN	2412	2472	2412	2472	CCK	--	max	--	--	--	1	7	13	--
<input checked="" type="checkbox"/>	WLAN US	2412	2462	2412	2462	OFDM	--	max	--	--	--	1	6	11	16.0
<input checked="" type="checkbox"/>	WLAN	5180	5240	5180	5240	OFDM	--	max	--	--	--	36	--	--	15.9
<input checked="" type="checkbox"/>	WLAN	5260	5320	5260	5320	OFDM	--	max	--	--	--	52	60	64	16.0
<input checked="" type="checkbox"/>	WLAN	5500	5700	5500	5700	OFDM	--	max	--	--	--	--	116	--	17.4
<input checked="" type="checkbox"/>	WLAN	5745	5825	5745	5825	OFDM	--	max	--	--	--	--	--	165	14.1
<input checked="" type="checkbox"/>	BT	2402	2480	2402	2480	GFSK	3	max	--	--	--	0	39	78	8.47

)*: measured slotted peak power for GSM, averaged max. RMS power for UMTS, LTE, WLAN and BT.

Features:

GSM bands 2.5	(GPRS, EDGE) class B, Multislot class 33 (max 4 TS Uplink, max 5 TS downlink, max. 6 TS active) DTM class 11 (max 3 TS uplink, max 4 TS downlink, max 5 TS active)
Rel 9 HSDPA UE	cat 24 bands 2, 4, 5 (QPSK, 16QAM, 64QAM, no MIMO, dual cell, 42.2 Mbps)
Rel 9 HSPA UE	cat: 6 bands 2,4,5 (QPSK, no 16QAM, 5.76 Mbps)
Rel 10 LTE UE	cat: 4 bands 2,5,7,13,17 (QPSK, 16QAM, no MIMO, 50Mbps uplink) Maximum TTI bundling: 4
BT BR / BT LE	
ANT+	
RFID 13.56 MHz	

2.5 Transmitter and Antenna Operating Configurations

Simultaneous transmission conditions	
GSM / GPRS / EDGE / DTM	+ BT/BLE ¹
GSM / GPRS / EDGE / DTM	+ WLAN 2.4GHz
GSM / GPRS / EDGE / DTM	+ WLAN 5GHz
UMTS / HSPA	+ BT/BLE
UMTS / HSPA	+ WLAN 2.4GHz
UMTS / HSPA	+ WLAN 5GHz
LTE	+ BT/BLE
LTE	+ WLAN 2.4GHz
LTE	+ WLAN 5GHz
GSM / GPRS / EDGE / DTM	+ BT + WLAN 5GHz
UMTS / HSPA	+ BT + WLAN 5GHz
LTE	+ BT + WLAN 5GHz

Table 1: Simultaneous transmission conditions

Note: BT and WLAN can be active at the same time, but only with interleaving of packages switched on board level. That means that they don't transmit at the same time.

BLE¹ - Bluetooth low energy

3 Test standards/ procedures references

Test Standard	Version	Test Standard Description
IEEE 1528-2003	2003-04	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE 1528-2013	2014-06	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102 Issue 4	2010-03	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
Canada's Safety Code No. 6	99-EHD-237	Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
IEEE Std. C95-3	2002	IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave
IEEE Std. C95-1	1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
IEC 62209-2	2010	Human exposure to radio frequency fields from hand-held and bodymounted wireless communication devices. Human models, instrumentation, and procedures. Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)

FCC KDBs:

KDB 865664D01v01	May 28, 2013	FCC OET SAR measurement requirements 100 MHz to 6 GHz
KDB 865664D02v01	May 28, 2013	RF Exposure Compliance Reporting and Documentation Considerations
KDB 447498D01v05	May 28, 2013	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB 648474D04v01	May 28, 2013	SAR Evaluation Considerations for Wireless Handsets
KDB 941225D01v02	April 10, 2007	SAR Measurements Procedures for 3G Devices
KDB 941225D02v01	December 14, 2009	3GPP R6 HSPA and R7 HSPA+ SAR Guidance
KDB 941225D02v02	May 28, 2013	SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced
KDB 941225D05v02	December 5, 2013	SAR for LTE Devices
KDB 941225D03v01	December, 2008	SAR Test Reduction Procedure for GSM/GPRS/EDGE
KDB 941225D06v01	May 28, 2013	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
KDB 248227D01v01	May, 2007	SAR Measurement Procedures for 802.11 a/b/g Transmitters
KDB 450824D01v01	January, 2007	SAR Probe Calibration and System Verification considerations for measurements from 150 MHz to 3 GHz
KDB 450824D01v01	March 4, 2012	Dipole Requirements for SAR System Validation and Verification

3.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain and Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

4 Summary of Measurement Results

<input checked="" type="checkbox"/>	No deviations from the technical specifications ascertained		
<input type="checkbox"/>	Deviations from the technical specifications ascertained		
Maximum SAR value reported for 1g (W/kg)			
	PCE	DTS	UNII
head	1.338	0.321	0.519
body worn 15 mm distance	0.486	0.166	0.578
hotspot operation 10 mm distance	0.821	0.219	not supported
collocated situations	ΣSAR evaluation	1.579	
	SPLSR_i ≤ 0.040	0.031	

No hotspot mode function on WLAN 5GHz, therefore SAR testing is not necessary

4.1 SAR measurement variability and measurement uncertainty analysis

This analysis is required for worst case results larger than 0.8 W/kg.

frequency band	highest original measurement result at worst case position (W/kg)	repeated measurement result at worst case position (W/kg)	ratio <1.2
UMTS FDD IV	1.170	1.220	1.04
LTE FDD 4	1.040	1.040	1.00
LTE FDD 7	0.998	1.030	1.03

5 Test Environment


Ambient temperature:	20 – 24 °C
Tissue Simulating liquid:	20 – 24 °C
Relative humidity content:	40 – 50 %
Air pressure:	not relevant for this kind of testing
Power supply:	230 V / 50 Hz

Exact temperature values for each test are shown in the table(s) under 7.1 and/or on the measurement plots.

6 Test Set-up

6.1 Measurement system

6.1.1 System Description

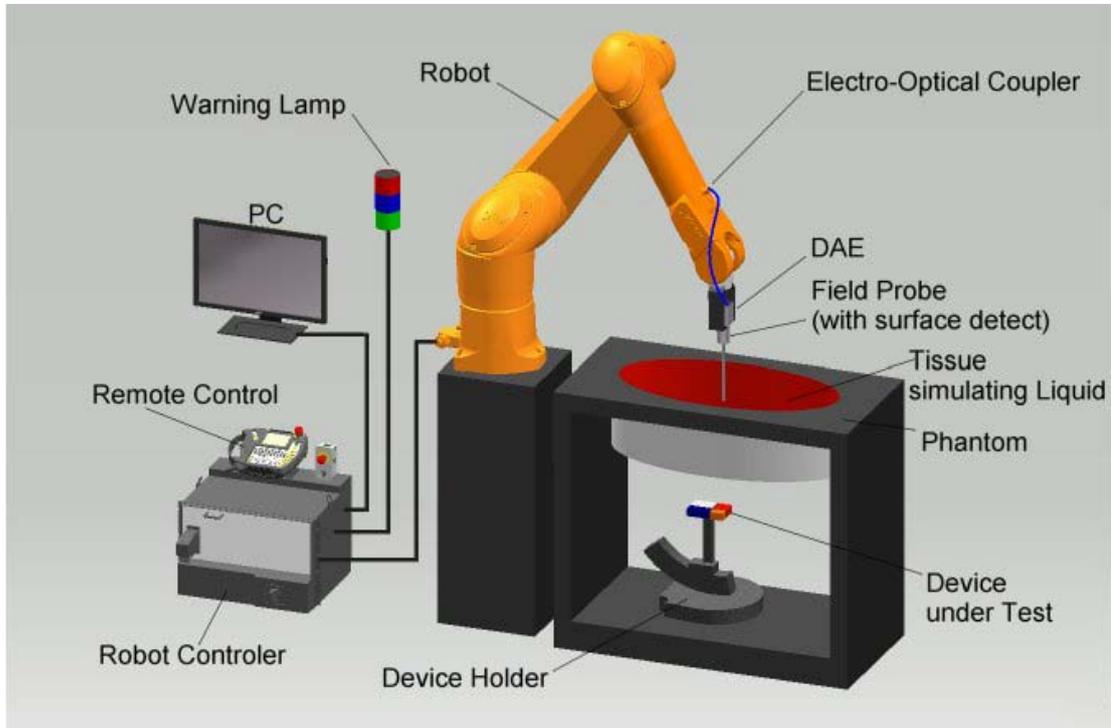

- The DASYS system for performing compliance tests consists of the following items:
- A standard high precision 6-axis robot (Stäubli RX/TX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASYS measurement server.
- The DASYS measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASYS software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The triple flat and eli phantom for the testing of handheld and body-mounted wireless devices.
- The device holder for handheld mobile phones and mounting device adaptor for laptops
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

6.1.2 Test environment

The DASY measurement system is placed in a laboratory room within an environment which avoids influence on SAR measurements by ambient electromagnetic fields and any reflection from the environment. The pictures at the beginning of the photo documentation show a complete view of the test environment. The system allows the measurement of SAR values larger than 0.005 mW/g.

6.1.3 Probe description


Isotropic E-Field Probe ET3DV6 for Dosimetric Measurements

Technical data according to manufacturer information	
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	In air from 10 MHz to 2.5 GHz In head tissue simulating liquid (HSL) at 900 (800-1000) MHz and 1.8 GHz (1700-1910 MHz) (accuracy $\pm 9.5\%$; $k=2$) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces (ET3DV6 only)
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (ET3DV6)

6.1.4 Phantom description

The used SAM Phantom meets the requirements specified in FCC KDB865664 D01 for Specific Absorption Rate (SAR) measurements.

The phantom consists of a fibreglass shell integrated in a wooden table. It allows left-hand and right-hand head as well as body-worn measurements with a maximum liquid depth of 18 cm in head position and 22 cm in planar position (body measurements). The thickness of the Phantom shell is 2 mm +/- 0.1 mm.

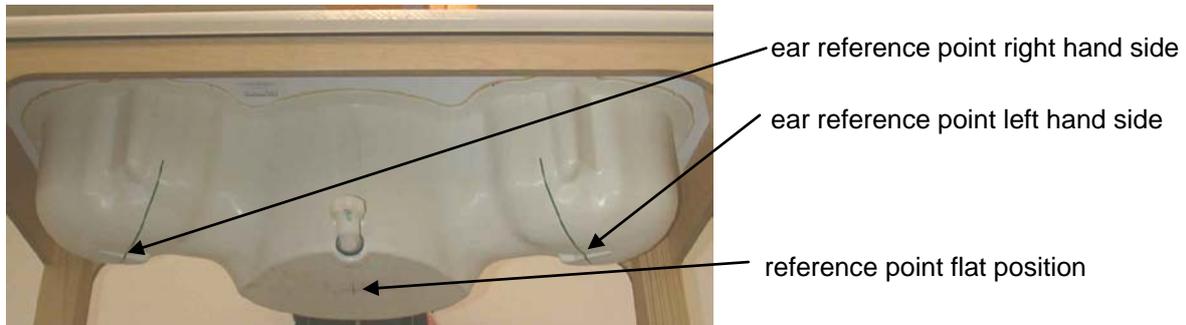

Triple Modular Phantom consists of three identical modules which can be installed and removed separately without emptying the liquid. It includes three reference points for phantom installation. Covers prevent evaporation of the liquid. Phantom material is resistant to DGBE based tissue simulating liquids.

6.1.5 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.

6.1.6 Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges ≤ 2 GHz is 15 mm in x - and y-dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

Area scan grid spacing for different frequency ranges	
Frequency range	Grid spacing
≤ 2 GHz	≤ 15 mm
2 – 4 GHz	≤ 12 mm
4 – 6 GHz	≤ 10 mm

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

Zoom scan grid spacing and volume for different frequency ranges			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
≤ 2 GHz	≤ 8 mm	≤ 5 mm	≥ 30 mm
2 – 3 GHz	≤ 5 mm	≤ 5 mm	≥ 28 mm
3 – 4 GHz	≤ 5 mm	≤ 4 mm	≥ 28 mm
4 – 5 GHz	≤ 4 mm	≤ 3 mm	≥ 25 mm
5 – 6 GHz	≤ 4 mm	≤ 2 mm	≥ 22 mm

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.

6.1.7 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

6.1.8 Data Storage and Evaluation

Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4", ".DA5x". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	D_{cpi}
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with V_i = compensated signal of channel i (i = x, y, z)
 U_i = input signal of channel i (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
 [mV/(V/m)²] for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

6.1.9 Tissue simulating liquids: dielectric properties

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests described in section 7. are marked with ☒) :

Ingredients (% of weight)	Frequency (MHz)								
	<input type="checkbox"/> 450	<input checked="" type="checkbox"/> 750	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 900	<input type="checkbox"/> 1450	<input checked="" type="checkbox"/> 1750	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450	<input checked="" type="checkbox"/> 5000
frequency band									
Tissue Type	Head	Head	Head	Head	Head	Head	Head	Head	Head
Water	38.56	41.1	41.45	40.92	52.64	52.64	54.9	62.7	64 - 78
Salt (NaCl)	3.95	1.4	1.45	1.48	0.61	0.36	0.18	0.5	2 - 3
Sugar	56.32	57.0	56.0	56.5	0.0	0.0	0.0	0.0	0.0
HEC	0.98	0.2	1.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.19	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	46.75	47.0	44.92	0.0	0.0
Emulsifiers	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9 - 15
Mineral Oil	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11 - 18

Table 3: Head tissue dielectric properties

Ingredients (% of weight)	Frequency (MHz)								
	<input type="checkbox"/> 450	<input checked="" type="checkbox"/> 750	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 900	<input type="checkbox"/> 1450	<input checked="" type="checkbox"/> 1750	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450	<input checked="" type="checkbox"/> 5000
frequency band									
Tissue Type	Body	Body	Body	Body	Body	Body	Body	Body	Body
Water	51.16	51.7	52.4	56.0	70.97	69.91	69.91	73.2	64 - 78
Salt (NaCl)	1.49	0.9	1.40	0.76	0.43	0.13	0.13	0.04	2 - 3
Sugar	46.78	47.2	45.0	41.76	0.0	0.0	0.0	0.0	0.0
HEC	0.52	0.0	1.0	1.21	0.0	0.0	0.0	0.0	0.0
Bactericide	0.05	0.1	0.1	0.27	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	0.0	0.0	28.60	29.96	29.96	26.7	0.0
Emulsifiers	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9 - 15
Mineral Oil	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11 - 18

Table 4: Body tissue dielectric properties

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

6.1.10 Tissue simulating liquids: parameters

Liquid HSL	Freq. (MHz)	Target head tissue		Measurement head tissue					Measurement date
		Permittivity	Conductivity [S/m]	Permittivity	Dev. %	Conductivity		Dev. %	
						ϵ''	[S/m]		
750	709	42.15	0.89	41.6	-1.3%	21.62	0.85	-4.2%	2013-12-18
	710	42.15	0.89	41.6	-1.3%	21.59	0.85	-4.2%	
	711	42.14	0.89	41.6	-1.3%	21.61	0.85	-4.0%	
	750	41.94	0.89	41.2	-1.8%	21.37	0.89	-0.2%	
	779	41.79	0.90	40.9	-2.1%	21.27	0.92	2.9%	
	782	41.78	0.90	40.9	-2.2%	21.26	0.92	3.2%	
	784	41.76	0.90	40.9	-2.2%	21.23	0.93	3.3%	
850/900	824	41.56	0.90	41.4	-0.4%	20.21	0.93	3.0%	2013-12-16
	825	41.55	0.90	41.4	-0.5%	20.23	0.93	3.2%	
	826	41.55	0.90	41.3	-0.5%	20.24	0.93	3.4%	
	829	41.53	0.90	41.3	-0.6%	20.25	0.93	3.8%	
	835	41.50	0.90	41.1	-0.9%	20.23	0.94	4.4%	
	836	41.49	0.90	41.1	-0.9%	20.23	0.94	4.5%	
	837	41.50	0.90	41.1	-1.0%	20.23	0.94	4.4%	
	844	41.50	0.91	41.0	-1.2%	20.18	0.95	4.1%	
	847	41.50	0.91	41.0	-1.3%	20.15	0.95	4.0%	
	849	41.50	0.92	40.9	-1.4%	20.12	0.95	3.8%	
850/900	824	41.56	0.90	41.9	0.8%	20.09	0.92	2.4%	2014-01-17
	835	41.50	0.90	41.7	0.5%	20.06	0.93	3.5%	
	837	41.50	0.90	41.7	0.5%	20.04	0.93	3.4%	
	849	41.50	0.92	41.5	0.1%	19.96	0.94	3.0%	
1750	1712	40.13	1.35	39.3	-2.0%	14.04	1.34	-1.0%	2013-12-19
	1720	40.11	1.35	39.3	-2.1%	14.06	1.35	-0.7%	
	1732	40.10	1.36	39.2	-2.2%	14.09	1.36	-0.2%	
	1745	40.08	1.37	39.2	-2.2%	14.16	1.37	0.4%	
	1750	40.07	1.37	39.2	-2.2%	14.17	1.38	0.6%	
	1752	40.07	1.37	39.2	-2.3%	14.17	1.38	0.6%	
1750	1712	40.13	1.35	40.3	0.5%	14.21	1.35	0.3%	2014-01-06
	1732	40.10	1.36	40.2	0.3%	14.20	1.37	0.5%	
	1750	40.07	1.37	40.2	0.3%	14.32	1.39	1.6%	
	1752	40.07	1.37	40.2	0.2%	14.34	1.40	1.8%	
1900	1850	40.00	1.40	40.1	0.4%	13.01	1.34	-4.4%	2013-12-17
	1852	40.00	1.40	40.1	0.4%	13.01	1.34	-4.3%	
	1860	40.00	1.40	40.1	0.2%	13.01	1.35	-3.9%	
	1880	40.00	1.40	40.1	0.1%	12.98	1.36	-3.0%	
	1900	40.00	1.40	40.0	0.0%	13.04	1.38	-1.6%	
	1908	40.00	1.40	39.9	-0.1%	13.05	1.38	-1.1%	
	1910	40.00	1.40	39.9	-0.2%	13.04	1.39	-1.0%	

Liquid HSL	Freq. (MHz)	Target head tissue		Measurement head tissue					Measurement date
		Permittivity	Conductivity [S/m]	Permittivity	Dev. %	Conductivity		Dev. %	
						ϵ''	[S/m]		
1900	1850	40.00	1.40	39.9	-0.2%	12.99	1.34	-4.5%	2014-01-17
	1880	40.00	1.40	39.9	-0.3%	13.09	1.37	-2.2%	
	1900	40.00	1.40	39.8	-0.6%	13.15	1.39	-0.7%	
	1910	40.00	1.40	39.7	-0.7%	13.18	1.40	0.0%	
2450 2600	2402	39.29	1.76	39.4	0.3%	13.18	1.76	0.2%	2013-12-21
	2412	39.27	1.77	39.4	0.3%	13.22	1.77	0.4%	
	2437	39.22	1.79	39.2	0.0%	13.32	1.81	1.0%	
	2441	39.22	1.79	39.2	0.0%	13.33	1.81	1.0%	
	2450	39.20	1.80	39.2	0.0%	13.35	1.82	1.1%	
	2462	39.18	1.81	39.2	0.1%	13.42	1.84	1.4%	
	2480	39.16	1.83	39.1	-0.1%	13.51	1.86	1.7%	
	2510	39.12	1.87	39.0	-0.3%	13.52	1.89	1.2%	
	2535	39.09	1.89	38.9	-0.6%	13.61	1.92	1.4%	
	2560	39.06	1.92	38.8	-0.6%	13.70	1.95	1.6%	
2600	39.01	1.96	38.6	-1.0%	13.83	2.00	1.8%		
5GHz	5180	36.01	4.63	36.2	0.6%	15.47	4.46	-3.8%	2013-12-20
	5200	35.99	4.66	36.3	1.0%	15.46	4.47	-3.9%	
	5300	35.87	4.76	36.1	0.6%	15.63	4.61	-3.1%	
	5500	35.64	4.96	35.8	0.4%	15.76	4.82	-2.9%	
	5580	35.55	5.04	36.0	1.1%	15.73	4.88	-3.2%	
	5800	35.30	5.27	35.4	0.2%	15.85	5.11	-3.0%	
	5825	35.27	5.30	35.4	0.5%	15.64	5.07	-4.3%	

Table 5: Parameter of the head tissue simulating liquid

Liquid MSL	Freq. (MHz)	Target body tissue		Measurement body tissue					Measurement date
		Permittivity	Conductivity [S/m]	Permittivity	Dev. %	Conductivity		Dev. %	
						ϵ''	[S/m]		
750	709	55.69	0.96	55.5	-0.3%	23.55	0.93	-3.3%	2013-12-19
	710	55.69	0.96	55.5	-0.4%	23.56	0.93	-3.1%	
	711	55.68	0.96	55.5	-0.4%	23.52	0.93	-3.1%	
	750	55.53	0.96	55.2	-0.7%	23.25	0.97	0.7%	
	779	55.42	0.97	55.0	-0.8%	22.98	1.00	3.1%	
	782	55.41	0.97	55.0	-0.8%	22.98	1.00	3.5%	
	784	55.40	0.97	54.9	-0.9%	22.97	1.00	3.7%	
850/900	824	55.24	0.97	53.6	-3.0%	20.82	0.95	-1.5%	2013-12-17
	825	55.24	0.97	53.5	-3.1%	20.82	0.96	-1.4%	
	826	55.24	0.97	53.5	-3.1%	20.81	0.96	-1.4%	
	829	55.22	0.97	53.5	-3.1%	20.82	0.96	-1.0%	
	835	55.20	0.97	53.4	-3.2%	20.80	0.97	-0.4%	
	836	55.20	0.97	53.4	-3.2%	20.81	0.97	-0.4%	
	837	55.19	0.97	53.4	-3.3%	20.77	0.97	-0.6%	
	844	55.17	0.98	53.3	-3.3%	20.77	0.98	-0.6%	
	847	55.16	0.98	53.3	-3.3%	20.78	0.98	-0.6%	
1750	1712	53.53	1.46	55.6	3.9%	15.23	1.45	-1.0%	2013-12-19
	1720	53.51	1.47	55.6	3.9%	15.23	1.46	-0.8%	
	1732	53.48	1.48	55.6	3.9%	15.26	1.47	-0.5%	
	1745	53.44	1.49	55.5	3.9%	15.32	1.49	0.1%	
	1750	53.43	1.49	55.5	3.9%	15.33	1.49	0.3%	
	1752	53.43	1.49	55.5	3.9%	15.34	1.49	0.3%	
1900	1850	53.30	1.52	53.2	-0.2%	14.25	1.47	-3.5%	2013-12-18
	1852	53.30	1.52	53.2	-0.2%	14.25	1.47	-3.5%	
	1860	53.30	1.52	53.1	-0.3%	14.27	1.48	-2.9%	
	1880	53.30	1.52	52.9	-0.7%	14.25	1.49	-2.0%	
	1900	53.30	1.52	52.9	-0.8%	14.31	1.51	-0.5%	
	1908	53.30	1.52	52.8	-0.9%	14.35	1.52	0.2%	
	1910	53.30	1.52	52.8	-0.9%	14.35	1.52	0.3%	
2450	2412	52.75	1.91	52.7	0.0%	14.77	1.98	3.6%	2013-12-28
	2437	52.72	1.94	52.6	-0.2%	14.83	2.01	3.7%	
	2450	52.70	1.95	52.6	-0.2%	14.86	2.03	3.9%	
	2462	52.68	1.97	52.6	-0.2%	14.93	2.04	3.9%	
	2510	52.62	2.04	52.4	-0.4%	15.09	2.11	3.5%	
	2535	52.59	2.07	52.3	-0.5%	15.15	2.14	3.2%	
	2560	52.56	2.11	52.3	-0.5%	15.20	2.16	2.7%	
	2600	52.51	2.16	52.1	-0.8%	15.32	2.22	2.5%	
5GHz	5180	49.04	5.28	48.4	-1.3%	17.96	5.18	-1.9%	2013-12-23
	5200	49.01	5.30	48.4	-1.2%	17.94	5.19	-2.1%	
	5300	48.88	5.42	48.2	-1.3%	18.15	5.35	-1.2%	
	5500	48.61	5.65	47.9	-1.5%	18.40	5.63	-0.3%	
	5580	48.50	5.74	48.0	-1.1%	18.43	5.72	-0.4%	
	5800	48.20	6.00	47.7	-1.1%	18.66	6.02	0.3%	
	5825	48.20	6.00	47.6	-1.3%	18.53	6.00	0.1%	

Table 6: Parameter of the body tissue simulating liquid

Note: The dielectric properties have been measured using the contact probe method at 22°C.

6.1.11 Measurement uncertainty evaluation for SAR test

Relative DASY5 Uncertainty Budget for SAR Tests								
According to IEEE 1528/2011 and IEC62209-1/2011 (0.3-3GHz range)								
Error Description	Uncertainty Value	Probability Distribution	Divisor	c_i	c_i	Standard Uncertainty		v_i^2 or v_{eff}
				(1g)	(10g)	± %, (1g)	± %, (10g)	
Measurement System								
Probe calibration	± 6.0 %	Normal	1	1	1	± 6.0 %	± 6.0 %	∞
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 9.6 %	Rectangular	√ 3	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary effects	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Modulation Response	± 2.4 %	Rectangular	√ 3	1	1	± 1.4 %	± 1.4 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞
Integration time	± 2.6 %	Rectangular	√ 3	1	1	± 1.5 %	± 1.5 %	∞
RF ambient noise	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
RF ambient reflections	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.4 %	Rectangular	√ 3	1	1	± 0.2 %	± 0.2 %	∞
Probe positioning	± 2.9 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Max. SAR evaluation	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞
Test Sample Related								
Device positioning	± 2.9 %	Normal	1	1	1	± 2.9 %	± 2.9 %	145
Device holder uncertainty	± 3.6 %	Normal	1	1	1	± 3.6 %	± 3.6 %	5
Power drift	± 5.0 %	Rectangular	√ 3	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Set-up								
Phantom uncertainty	± 6.1 %	Rectangular	√ 3	1	1	± 3.5 %	± 3.5 %	∞
SAR correction	± 1.9 %	Rectangular	√ 3	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Rectangular	√ 3	0.78	0.71	± 2.3 %	± 2.0 %	∞
Liquid permittivity (meas.)	± 5.0 %	Rectangular	√ 3	0.26	0.26	± 0.8 %	± 0.8 %	∞
Temp. Unc. - Conductivity	± 3.4 %	Rectangular	√ 3	0.78	0.71	± 1.5 %	± 1.4 %	∞
Temp. Unc. - Permittivity	± 0.4 %	Rectangular	√ 3	0.23	0.26	± 0.1 %	± 0.1 %	∞
Combined Uncertainty						± 11.3 %	± 11.3 %	330
Expanded Std. Uncertainty						± 22.7 %	± 22.5 %	

Table 7: Measurement uncertainties
 Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528/2011 and IEC 62209-1/2011 draft standards. The budget is valid for the frequency range 300MHz -3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

Relative DASY5 Uncertainty Budget for SAR Tests								
According to IEC62209-2/2010 (30 MHz - 6 GHz range)								
Error Description	Uncertainty Value	Probability Distribution	Divisor	c _i	c _i	Standard Uncertainty		v _i ² or v _{eff}
				(1g)	(10g)	± %, (1g)	± %, (10g)	
Measurement System								
Probe calibration	± 6.6 %	Normal	1	1	1	± 6.6 %	± 6.6 %	∞
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 9.6 %	Rectangular	√ 3	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary effects	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Modulation Response	± 2.4 %	Rectangular	√ 3	1	1	± 1.4 %	± 1.4 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞
Integration time	± 2.6 %	Rectangular	√ 3	1	1	± 1.5 %	± 1.5 %	∞
RF ambient noise	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
RF ambient reflections	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞
Probe positioning	± 6.7 %	Rectangular	√ 3	1	1	± 3.9 %	± 3.9 %	∞
Post-processing	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞
Test Sample Related								
Device positioning	± 2.9 %	Normal	1	1	1	± 2.9 %	± 2.9 %	145
Device holder uncertainty	± 3.6 %	Normal	1	1	1	± 3.6 %	± 3.6 %	5
Power drift	± 5.0 %	Rectangular	√ 3	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Set-up								
Phantom uncertainty	± 7.9 %	Rectangular	√ 3	1	1	± 4.6 %	± 4.6 %	∞
SAR correction	± 1.9 %	Rectangular	√ 3	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Rectangular	√ 3	0.78	0.71	± 2.3 %	± 2.0 %	∞
Liquid permittivity (meas.)	± 5.0 %	Rectangular	√ 3	0.26	0.26	± 0.8 %	± 0.8 %	∞
Temp. Unc. - Conductivity	± 3.4 %	Rectangular	√ 3	0.78	0.71	± 1.5 %	± 1.4 %	∞
Temp. Unc. - Permittivity	± 0.4 %	Rectangular	√ 3	0.23	0.26	± 0.1 %	± 0.1 %	∞
Combined Uncertainty						± 12.7 %	± 12.6 %	330
Expanded Std. Uncertainty						± 25.4 %	± 25.3 %	

Table 8: Measurement uncertainties. Worst-Case uncertainty budget for DASY5 assessed according to according to IEC 62209-2/2010 standard. The budget is valid for the frequency range 30MHz - 6 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

Relative DASY5 Uncertainty Budget for SAR Tests								
According to IEEE 1528-2003, IEC 62209-1 for the 3-6 GHz range								
Error Description	Uncertainty Value	Probability Distribution	Divisor	c _i	c _i	Standard Uncertainty		v _i ² or v _{eff}
				(1g)	(10g)	± %, (1g)	± %, (10g)	
Measurement System								
Probe calibration	± 6.6 %	Normal	1	1	1	± 6.6 %	± 6.6 %	∞
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 9.6 %	Rectangular	√ 3	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary effects	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞
Integration time	± 2.6 %	Rectangular	√ 3	1	1	± 1.5 %	± 1.5 %	∞
RF ambient noise	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
RF ambient reflections	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞
Probe positioning	± 6.7 %	Rectangular	√ 3	1	1	± 3.9 %	± 3.9 %	∞
Max. SAR evaluation	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞
Test Sample Related								
Device positioning	± 2.9 %	Normal	1	1	1	± 2.9 %	± 2.9 %	145
Device holder uncertainty	± 3.6 %	Normal	1	1	1	± 3.6 %	± 3.6 %	5
Power drift	± 5.0 %	Rectangular	√ 3	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Set-up								
Phantom uncertainty	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞
Liquid conductivity (target)	± 5.0 %	Rectangular	√ 3	0.64	0.43	± 1.8 %	± 1.2 %	∞
Liquid conductivity (meas.)	± 5.0 %	Rectangular	√ 3	0.64	0.43	± 1.8 %	± 1.2 %	∞
Liquid permittivity (target)	± 5.0 %	Rectangular	√ 3	0.6	0.49	± 1.7 %	± 1.4 %	∞
Liquid permittivity (meas.)	± 5.0 %	Rectangular	√ 3	0.6	0.49	± 1.7 %	± 1.4 %	∞
Combined Uncertainty						± 12.1 %	± 11.9 %	330
Expanded Std. Uncertainty						± 24.3 %	± 23.8 %	

Table 9: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 valid for 3G communication signals and frequency range 3 - 6 GHz. Probe calibration error reflects uncertainty of the EX3D probe. For specific tests and configurations, the uncertainty could be considerable smaller.

Relative DASY5 Uncertainty Budget for SAR Tests								
According to IEEE 1528/2011 and IEC62209-1/2011 (3-6GHz range)								
Error Description	Uncertainty Value	Probability Distribution	Divisor	c_i	c_i	Standard Uncertainty		v_i^2 or v_{eff}
				(1g)	(10g)	± %, (1g)	± %, (10g)	
Measurement System								
Probe calibration	± 6.6 %	Normal	1	1	1	± 6.6 %	± 6.6 %	∞
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 9.6 %	Rectangular	√ 3	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary effects	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Modulation Response	± 2.4 %	Rectangular	√ 3	1	1	± 1.4 %	± 1.4 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞
Integration time	± 2.6 %	Rectangular	√ 3	1	1	± 1.5 %	± 1.5 %	∞
RF ambient noise	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
RF ambient reflections	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞
Probe positioning	± 6.7 %	Rectangular	√ 3	1	1	± 3.9 %	± 3.9 %	∞
Max. SAR evaluation	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞
Test Sample Related								
Device positioning	± 2.9 %	Normal	1	1	1	± 2.9 %	± 2.9 %	145
Device holder uncertainty	± 3.6 %	Normal	1	1	1	± 3.6 %	± 3.6 %	5
Power drift	± 5.0 %	Rectangular	√ 3	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Set-up								
Phantom uncertainty	± 6.6 %	Rectangular	√ 3	1	1	± 3.8 %	± 3.8 %	∞
SAR correction	± 1.9 %	Rectangular	√ 3	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Rectangular	√ 3	0.78	0.71	± 2.3 %	± 2.0 %	∞
Liquid permittivity (meas.)	± 5.0 %	Rectangular	√ 3	0.26	0.26	± 0.8 %	± 0.8 %	∞
Temp. Unc. - Conductivity	± 3.4 %	Rectangular	√ 3	0.78	0.71	± 1.5 %	± 1.4 %	∞
Temp. Unc. - Permittivity	± 0.4 %	Rectangular	√ 3	0.23	0.26	± 0.1 %	± 0.1 %	∞
Combined Uncertainty						± 12.4 %	± 12.4 %	330
Expanded Std. Uncertainty						± 24.9 %	± 24.8 %	

Table 10: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528/2011 and IEC 62209-1/2011 draft standards. The budget is valid for the frequency range 3GHz -6GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

6.1.12 Measurement uncertainty evaluation for System Check

Uncertainty of a System Performance Check with DASY5 System for the 0.3 - 3 GHz range								
Source of uncertainty	Uncertainty Value	Probability Distribution	Divisor	c_i	c_i	Standard Uncertainty		v_i^2 or
				(1g)	(10g)	± %, (1g)	± %, (10g)	v_{eff}
Measurement System								
Probe calibration	± 6.0 %	Normal	1	1	1	± 6.0 %	± 6.0 %	∞
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 0.0 %	Rectangular	√ 3	0.7	0.7	± 0.0 %	± 0.0 %	∞
Boundary effects	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Integration time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
RF ambient conditions	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.4 %	Rectangular	√ 3	1	1	± 0.2 %	± 0.2 %	∞
Probe positioning	± 2.9 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Max. SAR evaluation	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Test Sample Related								
Dev. of experimental dipole	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Source to liquid distance	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞
Power drift	± 3.4 %	Rectangular	√ 3	1	1	± 2.0 %	± 2.0 %	∞
Phantom and Set-up								
Phantom uncertainty	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞
SAR correction	± 1.9 %	Rectangular	√ 3	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Normal	1	0.78	0.71	± 3.9 %	± 3.6 %	∞
Liquid permittivity (meas.)	± 5.0 %	Normal	1	0.26	0.26	± 1.3 %	± 1.3 %	∞
Temp. unc. - Conductivity	± 1.7 %	Rectangular	√ 3	0.78	0.71	± 0.8 %	± 0.7 %	∞
Temp. unc. - Permittivity	± 0.3 %	Rectangular	√ 3	0.23	0.26	± 0.0 %	± 0.0 %	∞
Combined Uncertainty						± 9.1 %	± 8.9 %	330
Expanded Std. Uncertainty						± 18.2 %	± 17.9 %	

Table 11: Measurement uncertainties of the System Check with DASY5 (0.3-3GHz)

Uncertainty of a System Performance Check with DASY5 System for the 3 - 6 GHz range								
Source of uncertainty	Uncertainty Value	Probability Distribution	Divisor	c_i	c_i	Standard Uncertainty		v_i^2 or v_{eff}
				(1g)	(10g)	± %, (1g)	± %, (10g)	
Measurement System								
Probe calibration	± 6.6 %	Normal	1	1	1	± 6.6 %	± 6.6 %	∞
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 0.0 %	Rectangular	√ 3	0.7	0.7	± 0.0 %	± 0.0 %	∞
Boundary effects	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Integration time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
RF ambient conditions	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞
Probe positioning	± 6.7 %	Rectangular	√ 3	1	1	± 3.9 %	± 3.9 %	∞
Max. SAR evaluation	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Test Sample Related								
Dev. of experimental dipole	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Source to liquid distance	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞
Power drift	± 3.4 %	Rectangular	√ 3	1	1	± 2.0 %	± 2.0 %	∞
Phantom and Set-up								
Phantom uncertainty	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞
SAR correction	± 1.9 %	Rectangular	√ 3	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Normal	1	0.78	0.71	± 3.9 %	± 3.6 %	∞
Liquid permittivity (meas.)	± 5.0 %	Normal	1	0.26	0.26	± 1.3 %	± 1.3 %	∞
Temp. unc. - Conductivity	± 1.7 %	Rectangular	√ 3	0.78	0.71	± 0.8 %	± 0.7 %	∞
Temp. unc. - Permittivity	± 0.3 %	Rectangular	√ 3	0.23	0.26	± 0.0 %	± 0.0 %	∞
Combined Uncertainty						± 10.1 %	± 10.0 %	330
Expanded Std. Uncertainty						± 20.2 %	± 19.9 %	

Table 12: Measurement uncertainties of the System Check with DASY5 (3-6GHz)

Note: Worst case probe calibration uncertainty has been applied for all probes used during the measurements.

6.1.13 System check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528. The following table shows system check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).


System performance check (1000 mW)								
System validation Kit	Frequency	Target SAR _{1g} /mW/g (+/- 10%)	Target SAR _{10g} /mW/g (+/- 10%)	Measured SAR _{1g} mW/g	SAR _{1g} dev. %	Measured SAR _{10g} mW/g	SAR _{10g} dev. %	Measured date
D750V3 S/N: 1041	750 MHz head	8.52	5.56	8.21	-3.6%	5.35	-3.8%	2013-12-18
D750V3 S/N: 1041	750 MHz body	8.75	5.79	9.20	5.1%	6.12	5.7%	2013-12-19
D835V2 S/N: 4d153	835 MHz head	9.58	6.21	9.54	-0.4%	6.25	0.6%	2013-12-16
D835V2 S/N: 4d153	835 MHz head	9.58	6.21	9.84	2.7%	6.51	4.8%	2013-12-17
D835V2 S/N: 4d153	835 MHz head	9.58	6.21	10.00	4.4%	6.55	5.5%	2013-12-18
D835V2 S/N: 4d153	835 MHz head	9.58	6.21	9.62	0.4%	6.31	1.6%	2014-01-17
D835V2 S/N: 4d153	835 MHz body	9.40	6.12	9.67	2.9%	6.48	5.9%	2013-12-17
D835V2 S/N: 4d153	835 MHz body	9.40	6.12	9.45	0.5%	6.31	3.1%	2013-12-18
D1750V2 S/N: 1093	1750 MHz head	36.60	19.30	36.00	-1.6%	19.00	-1.6%	2014-01-06
D1750V2 S/N: 1093	1750 MHz head	36.60	19.30	35.70	-2.5%	18.70	-3.1%	2013-12-27
D1750V2 S/N: 1093	1750 MHz body	37.90	20.30	37.70	-0.5%	20.20	-0.5%	2013-12-19
D1750V2 S/N: 1093	1750 MHz body	37.90	20.30	39.20	3.4%	21.00	3.4%	2013-12-20
D1900V2 S/N: 5d009	1900 MHz head	40.10	21.00	38.40	-4.2%	20.40	-2.9%	2013-12-17
D1900V2 S/N: 5d009	1900 MHz head	40.10	21.00	38.80	-3.2%	20.60	-1.9%	2013-12-18
D1900V2 S/N: 5d009	1900 MHz head	40.10	21.00	40.80	1.7%	21.40	1.9%	2014-01-17
D1900V2 S/N: 5d009	1900 MHz body	40.90	21.70	39.30	-3.9%	20.90	-3.7%	2013-12-18
D1900V2 S/N: 5d009	1900 MHz body	40.90	21.70	38.90	-4.9%	21.10	-2.8%	2013-12-21
D2450V2 S/N: 710	2450 MHz head	51.50	24.00	55.00	6.8%	25.40	5.8%	2013-12-21
D2450V2 S/N: 710	2450 MHz head	51.50	24.00	54.60	6.0%	25.50	6.3%	2013-12-30
D2450V2 S/N: 710	2450 MHz body	51.20	23.90	53.50	4.5%	24.70	3.3%	2013-12-28

System performance check (1000 mW)								
System validation Kit	Frequency	Target SAR _{1g} /mW/g	Target SAR _{10g} /mW/g	Measured SAR _{1g} mW/g	SAR _{1g} dev. %	Measured SAR _{10g} mW/g	SAR _{10g} dev. %	Measured date
		(+/- 10%)	(+/- 10%)					
D2600V2 S/N: 1040	2600 MHz head	58.00	26.10	57.30	-1.2%	25.50	-2.3%	2014-01-02
D2600V2 S/N: 1040	2600 MHz body	56.80	25.40	54.70	-3.7%	24.50	-3.5%	2013-12-31
D5GHzV2 S/N: 1055	5200 MHz head	80.40	23.00	75.60	-6.0%	21.24	-7.7%	2013-12-20
D5GHzV2 S/N: 1055	5500 MHz head	84.90	24.30	80.00	-5.8%	22.40	-7.8%	2013-12-20
D5GHzV2 S/N: 1055	5800 MHz head	80.10	22.70	77.20	-3.6%	21.56	-5.0%	2013-12-20
D5GHzV2 S/N: 1055	5200 MHz body	74.20	20.80	68.40	-7.8%	19.28	-7.3%	2013-12-23
D5GHzV2 S/N: 1055	5500 MHz body	77.90	21.70	79.60	2.2%	22.20	2.3%	2013-12-23
D5GHzV2 S/N: 1055	5800 MHz body	73.30	20.20	67.20	-8.3%	19.08	-5.5%	2013-12-23

Table 13: Results system check

6.1.14 System check procedure

The system check is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 1000 mW for frequencies below 2 GHz or 100 mW for frequencies above 2 GHz. To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot). System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

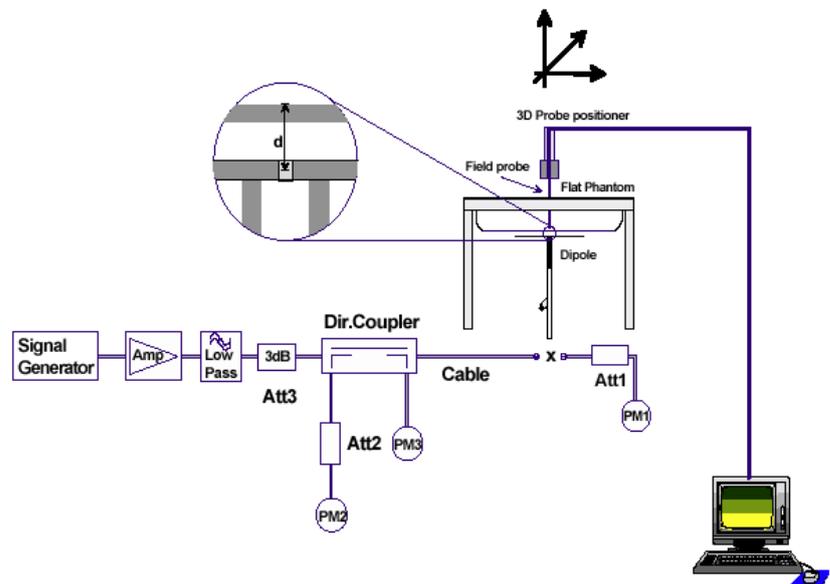

6.1.15 System validation

The system validation is performed in a similar way as a system check. It needs to be performed once a SAR measurement system has been established and allows an evaluation of the system accuracy with all components used together with the specified system. It has to be repeated at least once a year or when new system components are used (DAE, probe, phantom, dipole, liquid type).

In addition to the procedure used during system check a system validation also includes checks of probe isotropy, probe modulation factor and RF signal.

The following table lists the system validations relevant for this test report:

Probe Calibration Point f / MHz	Test System	DASY SW	Dipole Type / SN	Probe Type / SN	Calibrated signal type(s)	DAE unit Type / SN	Validation done	
							Head tissue simulant	Body tissue simulant
1750	Saarbrücken / SAR-1	V52.8.7	D1750V2 / 1093	ES3DV3 / 3320	CW	DAE3 / 413	2013-07	2013-07
2450	Saarbrücken / SAR-1	V52.8.7	D2450V2 / 710	ES3DV3 / 3320	CW	DAE3 / 413	2013-11-11	2013-11-11
750	Saarbrücken / SAR-2	V52.8.7	D750V2 / 1041	ET3DV6 / 1558	CW	DAE3 / 477	2013-10-11	2013-10-14
835	Saarbrücken / SAR-2	V52.8.7	D835V2 / 4d153	ET3DV6 / 1558	CW	DAE3 / 477	2013-10-11	2013-10-10
1900	Saarbrücken / SAR-2	V52.8.7	D1900V2 / 5d009	ET3DV6 / 1558	CW	DAE3 / 477	2013-10-15	2013-10-16
2450	Saarbrücken / SAR-2	V52.8.7	D2450V2 / 710	ET3DV6 / 1558	CW	DAE3 / 477	2013-11-13	2013-11-14
5200	Saarbrücken / SAR-2	V52.8.7	D5GHzV2 / 1055	EX3DV4 / 3944	CW	DAE3 / 477	2013-11-19	2013-11-21
5500	Saarbrücken / SAR-2	V52.8.7	D5GHzV2 / 1055	EX3DV4 / 3944	CW	DAE3 / 477	2013-11-19	2013-11-21
5800	Saarbrücken / SAR-2	V52.8.7	D5GHzV2 / 1055	EX3DV4 / 3944	CW	DAE3 / 477	2013-11-19	2013-11-21
1750	Saarbrücken / SAR-3	V52.8.7	D1750V2 / 1093	ES3DV3 / 3326	CW	DAE4 / 1387	2013-09-26	2013-10-04
1900	Saarbrücken / SAR-3	V52.8.7	D1900V2 / 5d009	ES3DV3 / 3326	CW	DAE4 / 1387	2013-09-30	2013-10-07
2450	Saarbrücken / SAR-3	V52.8.7	D2450V2 / 710	ES3DV3 / 3326	CW	DAE4 / 1387	2013-11-12	2013-11-12

7 Detailed Test Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used. The output power was measured using an integrated RF connector and attached RF cable. The conducted output power was also checked before and after each SAR measurement. The resulting power values were within a 0.2 dB tolerance of the values shown below.

Note: CMU200 measures GSM peak and average output power for active timeslots.

For SAR the time based average power is relevant. The difference in-between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1 : 8	1: 4	1 : 2.66	1 : 2
time based avg. power compared to slotted avg. power	- 9 dB	- 6 dB	- 4.25 dB	- 3 dB

The signalling modes differ as follows :

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EGPRS (EDGE)	MCS1 to MCS4	GMSK
EGPRS (EDGE)	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements GSM 850 MHz

Channel / frequency	modulation	timeslots	slotted avg. power	time based avg. Power (calculated)
128 / 824.2 MHz	GMSK	1	33.3 dBm	24.3 dBm
190 / 836.6 MHz	GMSK	1	33.2 dBm	24.2 dBm
251 / 848.8 MHz	GMSK	1	33.2 dBm	24.2 dBm
128 / 824.2 MHz	GMSK	2	31.0 dBm	25.0 dBm
190 / 836.6 MHz	GMSK	2	30.7 dBm	24.7 dBm
251 / 848.8 MHz	GMSK	2	30.7 dBm	24.7 dBm
128 / 824.2 MHz	GMSK	3	28.6 dBm	24.35 dBm
190 / 836.6 MHz	GMSK	3	28.5 dBm	24.25 dBm
251 / 848.8 MHz	GMSK	3	28.4 dBm	24.15 dBm
128 / 824.2 MHz	GMSK	4	27.5 dBm	24.5 dBm
190 / 836.6 MHz	GMSK	4	27.5 dBm	24.5 dBm
251 / 848.8 MHz	GMSK	4	27.5 dBm	24.5 dBm
128 / 824.2 MHz	8PSK	1	27.1 dBm	18.1 dBm
190 / 836.6 MHz	8PSK	1	27.0 dBm	18.0 dBm
251 / 848.8 MHz	8PSK	1	26.9 dBm	17.9 dBm
128 / 824.2 MHz	8PSK	2	25.3 dBm	19.3 dBm
190 / 836.6 MHz	8PSK	2	25.1 dBm	19.1 dBm
251 / 848.8 MHz	8PSK	2	25.0 dBm	19.0 dBm
128 / 824.2 MHz	8PSK	3	24.4 dBm	20.15 dBm
190 / 836.6 MHz	8PSK	3	24.2 dBm	19.95 dBm
251 / 848.8 MHz	8PSK	3	24.2 dBm	19.95 dBm
128 / 824.2 MHz	8PSK	4	22.3 dBm	19.3 dBm
190 / 836.6 MHz	8PSK	4	22.2 dBm	19.2 dBm
251 / 848.8 MHz	8PSK	4	22.1 dBm	19.1 dBm

Table 14: Test results conducted power measurement GSM 850 MHz

Channel / frequency	modulation	slotted avg. power	time based avg. Power (calculated)
128 / 824.2 MHz	GMSK + 1 GMSK	30.9 dBm	24.9 dBm
190 / 836.6 MHz	GMSK + 1 GMSK	30.9 dBm	24.9 dBm
251 / 848.8 MHz	GMSK + 1 GMSK	30.7 dBm	24.7 dBm
128 / 824.2 MHz	GMSK + 2 GMSK	29.0 dBm	24.8 dBm
190 / 836.6 MHz	GMSK + 2 GMSK	28.7 dBm	24.5 dBm
251 / 848.8 MHz	GMSK + 2 GMSK	28.7 dBm	24.5 dBm
128 / 824.2 MHz	GMSK + 1 8PSK	25.5 dBm	19.5 dBm
190 / 836.6 MHz	GMSK + 1 8PSK	25.6 dBm	19.6 dBm
251 / 848.8 MHz	GMSK + 1 8PSK	25.7 dBm	19.7 dBm
128 / 824.2 MHz	GMSK + 2 8PSK	25.5 dBm	21.3 dBm
190 / 836.6 MHz	GMSK + 2 8PSK	25.4 dBm	21.2 dBm
251 / 848.8 MHz	GMSK + 2 8PSK	25.4 dBm	21.2 dBm

Table 15: Test results conducted power measurement GSM DTM 850 MHz

7.1.2 Conducted power measurements GSM 1900 MHz

Channel / frequency	modulation	timeslots	slotted avg. power	time based avg. Power (calculated)
512 / 1850.2 MHz	GMSK	1	29.9 dBm	20.9 dBm
661 / 1880.0 MHz	GMSK	1	29.9 dBm	20.9 dBm
810 / 1909.8 MHz	GMSK	1	30.1 dBm	21.1 dBm
512 / 1850.2 MHz	GMSK	2	27.5 dBm	21.5 dBm
661 / 1880.0 MHz	GMSK	2	27.4 dBm	21.4 dBm
810 / 1909.8 MHz	GMSK	2	27.5 dBm	21.5 dBm
512 / 1850.2 MHz	GMSK	3	26.4 dBm	22.15 dBm
661 / 1880.0 MHz	GMSK	3	26.2 dBm	21.95 dBm
810 / 1909.8 MHz	GMSK	3	26.3 dBm	22.05 dBm
512 / 1850.2 MHz	GMSK	4	25.4 dBm	22.4 dBm
661 / 1880.0 MHz	GMSK	4	25.2 dBm	22.2 dBm
810 / 1909.8 MHz	GMSK	4	25.3 dBm	22.3 dBm
512 / 1850.2 MHz	8PSK	1	26.2 dBm	17.2 dBm
661 / 1880.0 MHz	8PSK	1	26.0 dBm	17.0 dBm
810 / 1909.8 MHz	8PSK	1	26.0 dBm	17.0 dBm
512 / 1850.2 MHz	8PSK	2	24.6 dBm	18.6 dBm
661 / 1880.0 MHz	8PSK	2	24.4 dBm	18.4 dBm
810 / 1909.8 MHz	8PSK	2	24.4 dBm	18.4 dBm
512 / 1850.2 MHz	8PSK	3	23.5 dBm	19.25 dBm
661 / 1880.0 MHz	8PSK	3	23.3 dBm	19.05 dBm
810 / 1909.8 MHz	8PSK	3	23.3 dBm	19.05 dBm
512 / 1850.2 MHz	8PSK	4	22.6 dBm	19.6 dBm
661 / 1880.0 MHz	8PSK	4	22.4 dBm	19.4 dBm
810 / 1909.8 MHz	8PSK	4	22.4 dBm	19.4 dBm

Table 16: Test results conducted power measurement GSM 1900 MHz

Channel / frequency	modulation	slotted avg. power	time based avg. Power (calculated)
512 / 1850.2 MHz	GMSK + 1 GMSK	27.6 dBm	21.6 dBm
661 / 1880.0 MHz	GMSK + 1 GMSK	27.4 dBm	21.4 dBm
810 / 1909.8 MHz	GMSK + 1 GMSK	27.4 dBm	21.4 dBm
512 / 1850.2 MHz	GMSK + 2 GMSK	26.5 dBm	22.25 dBm
661 / 1880.0 MHz	GMSK + 2 GMSK	26.3 dBm	22.05 dBm
810 / 1909.8 MHz	GMSK + 2 GMSK	26.4 dBm	22.15 dBm
512 / 1850.2 MHz	GMSK + 1 8PSK	24.8 dBm	18.8 dBm
661 / 1880.0 MHz	GMSK + 1 8PSK	24.7 dBm	18.7 dBm
810 / 1909.8 MHz	GMSK + 1 8PSK	24.8 dBm	18.8 dBm
512 / 1850.2 MHz	GMSK + 2 8PSK	24.7 dBm	20.45 dBm
661 / 1880.0 MHz	GMSK + 2 8PSK	24.6 dBm	20.35 dBm
810 / 1909.8 MHz	GMSK + 2 8PSK	24.6 dBm	20.35 dBm

Table 17: Test results conducted power measurement GSM DTM 1900 MHz

7.1.3 Justification of SAR measurements in GSM mode

SAR measurements were performed in the configuration with highest calculated time based averaged output power.

7.1.4 Conducted power measurements WCDMA FDD II (1900 MHz)

mode	Max. RMS output power 1900 MHz (FDD II) / dBm		
	9262 / 1852.4 MHz	Channel / frequency 9400 / 1880.0 MHz	9538 / 1907.6 MHz
RMC 12.2 kbit/s	24.0	23.9	23.7
RMC 64 kbit/s	24.0	23.9	23.7
RMC 144 kbit/s	24.0	23.8	23.7
RMC 384 kbit/s	24.0	23.9	23.7
AMR 4.75 kbit/s	24.0	23.8	23.7
AMR 5.15 kbit/s	24.0	23.9	23.7
AMR 5.9 kbit/s	24.0	23.8	23.7
AMR 6.7 kbit/s	24.0	23.8	23.7
AMR 7.4 kbit/s	24.0	23.8	23.8
AMR 7.95 kbit/s	24.0	23.8	23.7
AMR 10.2 kbit/s	24.0	23.8	23.7
AMR 12.2 kbit/s	23.9	23.8	23.7
HSDPA Sub test 1	23.4	23.2	23.2
HSDPA Sub test 2	22.1	21.9	22.0
HSDPA Sub test 3	21.4	21.1	21.0
HSDPA Sub test 4	21.5	21.3	21.2
DC-HSDPA Sub test 1	23.4	23.2	23.1
DC-HSDPA Sub test 2	23.3	23.1	23.1
DC-HSDPA Sub test 3	22.9	22.7	22.5
DC-HSDPA Sub test 4	22.8	22.6	22.7
HSUPA Sub test 1	23.3	23.2	23.3
HSUPA Sub test 2	21.4	21.3	21.1
HSUPA Sub test 3	22.8	22.7	22.6
HSUPA Sub test 4	21.2	21.5	21.5
HSUPA Sub test 5	23.3	23.2	23.4

Table 18: Test results conducted power measurement UMTS FDD II 1900MHz

7.1.5 Conducted power measurements WCDMA FDD IV (1700 MHz)

mode	Max. RMS output power FDD IV (1700MHz) / dBm		
	1312 / 1712.4 MHz	Channel / frequency 1412 / 1732.4 MHz	1513 / 1752.6 MHz
RMC 12.2 kbit/s	22.1	22.5	22.2
RMC 64 kbit/s	22.0	22.5	22.2
RMC 144 kbit/s	22.1	22.5	22.2
RMC 384 kbit/s	22.0	22.5	22.1
AMR 4.75 kbit/s	22.1	22.5	22.2
AMR 5.15 kbit/s	22.1	22.5	22.2
AMR 5.9 kbit/s	22.0	22.5	22.1
AMR 6.7 kbit/s	22.1	22.5	22.2
AMR 7.4 kbit/s	22.0	22.4	22.1
AMR 7.95 kbit/s	22.0	22.4	22.2
AMR 10.2 kbit/s	22.1	22.4	22.1
AMR 12.2 kbit/s	22.1	22.5	22.2
HSDPA Sub test 1	21.7	22.3	21.9
HSDPA Sub test 2	20.3	20.9	20.5
HSDPA Sub test 3	19.2	20.1	19.7
HSDPA Sub test 4	19.0	19.6	19.6
DC-HSDPA Sub test 1	21.7	22.2	21.8
DC-HSDPA Sub test 2	21.6	22.2	21.7
DC-HSDPA Sub test 3	21.3	21.8	21.3
DC-HSDPA Sub test 4	21.2	21.6	21.3
HSUPA Sub test 1	21.9	22.3	22.0
HSUPA Sub test 2	19.8	20.4	19.9
HSUPA Sub test 3	20.3	20.9	21.4
HSUPA Sub test 4	19.5	20.5	20.1
HSUPA Sub test 5	21.6	22.1	22.1

Table 19: Test results conducted power measurement UMTS FDD IV 1700MHz

7.1.6 Conducted power measurements WCDMA FDD V (850 MHz)

mode	Max. RMS output power 850 MHz (FDD V) / dBm		
	Channel / frequency		
	4132 / 826.4 MHz	4182 / 836.6 MHz	4233 / 846.6 MHz
RMC 12.2 kbit/s	24.3	24.4	24.3
RMC 64 kbit/s	24.3	24.4	24.3
RMC 144 kbit/s	24.3	24.4	24.2
RMC 384 kbit/s	24.3	24.4	24.3
AMR 4.75 kbit/s	24.3	24.3	24.2
AMR 5.15 kbit/s	24.3	24.3	24.3
AMR 5.9 kbit/s	24.3	24.3	24.3
AMR 6.7 kbit/s	24.3	24.3	24.2
AMR 7.4 kbit/s	24.3	24.4	24.2
AMR 7.95 kbit/s	24.3	24.3	24.2
AMR 10.2 kbit/s	24.3	24.4	24.2
AMR 12.2 kbit/s	24.3	24.3	24.2
HSDPA Sub test 1	23.8	23.8	23.7
HSDPA Sub test 2	22.5	22.6	22.5
HSDPA Sub test 3	21.5	21.6	21.5
HSDPA Sub test 4	21.2	21.4	21.3
DC-HSDPA Sub test 1	23.8	23.7	23.7
DC-HSDPA Sub test 2	23.7	23.6	23.6
DC-HSDPA Sub test 3	23.3	23.2	23.2
DC-HSDPA Sub test 4	23.3	23.2	23.1
HSUPA Sub test 1	23.8	23.9	23.7
HSUPA Sub test 2	21.7	21.9	21.7
HSUPA Sub test 3	22.1	22.3	22.2
HSUPA Sub test 4	21.7	21.4	21.7
HSUPA Sub test 5	23.4	23.5	23.4

Table 20: Test results conducted power measurement UMTS FDD V 850MHz

Remark: None of the HSDPA/HSUPA settings leads to conducted power values exceeding the conducted power in RMC mode by more than 0.25 dB.

Therefore no additional SAR measurements were performed in HSDPA/HSUPA mode.

7.1.7 Test-set-up information for WCDMA / HSPDA / HSUPA

a) WCDMA RMC

In RMC (reference measurement channel) mode the conducted power at 4 different bit rates was measured. They correspond with the used spreading factors as follows:

Bit rate	12.2 kbit/s	64 kbit/s	144 kbit/s	384 kbit/s
Spreading factor (SF)	64	16	8	4

In RMC mode only DPCCH and DPDCH are active. As bit rate changes do not influence the relative power of any code channel the measured RMS output power remains on the same level which is set to maximum by TPC (Transmit power control) pattern type 'All 1'.

b) HSDPA

HSDPA adds the HS-DPCCH in uplink as a control channel for high speed data transfer in downlink. In HSDPA mode 4 sub-tests are defined by 3GPP 34.121 according to the following table:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8 \iff A_{hs} = \beta_{hs}/\beta_c = 30/15 \iff \beta_{hs} = 30/15 * \beta_c$

Note 2 : CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$

Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Table 21: Sub-tests for UMTS Release 5 HSDPA

The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the above table, β_{hs} for HS-DPCCH is set automatically to the correct value when $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8$. The variation of the β_c/β_d ratio causes a power reduction at sub-tests 2 - 4.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 22: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

c) DC-HSDPA (3GPP Release 8)

Dual Cell – HSDPA has been signaled using the following settings for connection setup:

Parameter	Value
During Connection Setup	
P-CPICH_Ec/Ior	-10 dB
P-CCPCH	-12
SCH_Ec/Ior	-12
PICH_Ec/Ior	-15
HS-PDSCH	off
HS-SCCH_1	off
DPCH_Ec/Ior	-5
OCNS_Ec/Ior	-3.1

Table 23: Downlink Physical Channels according to 3GPP 34.121 Table E.5.0

The fixed reference channel has been set to H-set 12 according to 3GPP TS 34.121 Table C.8.1.12:

Parameter	Unit	Value
Nominal Average Inf. Bit Rate	kbit/s	60
Inter-TTI Distance	TTI's	1
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Process	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codecs	Codecs	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

Table 24: H-Set 12 QPSK configuration

The same Sub-test settings as for Release 5 HSDPA were used for the tests.

d) HSUPA

In HSUPA mode additional code channels (E-DPCCH, E-DPDCHn) are added for data transfer in uplink at higher bit rates.

5 sub-tests are defined by 3GPP 34.121 according to the following table :

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ec} (SF)	β_{ed} (code)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8 \iff A_{hs} = \beta_{hs}/\beta_c = 30/15 \iff \beta_{hs} = 30/15 * \beta_c$
 Note 2 : CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference
 Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$
 Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$
 Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g
 Note 6 : β_{ed} can not be set directly; it is set by Absolute Grant Value

Table 25: Subtests for UMTS Release 6 HSUPA

To achieve the settings above some additional procedures were defined by 3GPP 34.121. Those have been included in an application note for the CMU200 and were exactly followed :

- Test mode connection (BS signal tab) :
- RMC 12.2 kbit/s + HSPA 34.108 with loop mode 1
- HS-DSCH settings (BS signal tab):
- FRC with H-set 1 QPSK
- ACK-NACK repetition factor = 3
- CQI feedback cycle = 4ms
- CQI repetition factor = 2
- HSUPA-specific signalling settings (UE signal tab) :
- E-TFCI table index = 0
- E-DCH minimum set E-TFCI = 9
- Puncturing limit non-max = 0.84
- max. number of channelisation codes = 2x SF4
- Initial Serving Grant Value = Off
- HSDPA and HSUPA Gain factors (UE signal tab)

Sub-test	β_c	β_d	$\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI}$	$\Delta E-DPCCH$)*
1	10	15	8	6
2	6	15	8	8
3	15	9	8	8
4	2	15	8	5
5	14	15	8	7

)* : β_{ec} and β_{ed} ratios (relative to β_c and β_d) are set by $\Delta E-DPCCH$

- HSUPA Reference E-TFCIs (UE signal tab > HSUPA gain factors) :

Sub-test	1, 2, 4, 5				
Number of E-TFCIs	5				
Reference E-TFCI	11	67	71	75	81
Reference E-TFCI power offset	4	18	23	26	27

Sub-test	3	
Number of E-TFCIs	2	
Reference E-TFCI	11	92
Reference E-TFCI power offset	4	18

- HSUPA-specific generator parameters (BS Signal tab > HSUPA > E-AGCH > AG Pattern)

Sub-test	Absolute Grant Value (AG Index)
1	20
2	12
3	15
4	17
5	21

- Power Level settings (BS Signal tab > Node B-settings):

- Level reference : Output Channel Power (Ior)

- Output Channel Power (Ior) : -86 dBm

- Downlink Physical Channel Settings (BS signal tab)

- P-CPICH : -10 dB

- S-CPICH : Off

- P-SCH : -15 dB

- S-SCH : -15 dB

- P-CCPCH : -12 dB

- S-CCPCH : -12 dB

- PICH : -15 dB

- AICH : -12 dB

- DPDCH : -10 dB

- HS-SCCH : -8 dB

- HS-PDSCH : -3 dB

- E-AGCH : -20 dB

- E-RGCH/E-HICH - 20 dB

- E-RGCH Active : Off

The settings above were stored once for each sub-test and recalled before the measurement.

HSUPA test procedure :

To reach maximum output power in HSUPA mode the following procedures were followed:

3 different TPC patterns were defined :

Set 1 : Closed loop with target power 10 dBm

Set 2 : Single Pattern+Alternating with binary pattern '11111' for 1 dB steps 'up'

Set 3 : Single Pattern+Alternating with binary pattern '00000' for 1 dB steps 'down'

After recalling a certain HSUPA sub-test the HSUPA E-AGCH graph with E-TFCI event counter is displayed. After starting with the closed loop command the power is increased in 1 dB steps by activating pattern set 2 until the UE decreases the transmitted E-TFCI.

At this point set 3 is activated once to reduce the output power to the value at which the original E-TFCI, which is required for the sub-test, appears again.

For conducted power measurements the same steps are repeated in the power menu to read out the corresponding maximum RMS output power with the target E-TFCI.

For SAR measurements it is useful to switch to Code Domain Power vs. Time display.

Here the CMU200 shows relative power values (max. and min.) of each code channel which should roughly correspond to the numerators of the gain factors e.g. :

Sub-test	β_c	β_d	β_{hs}	β_{ec}	β_{ed}
5	15	15	30	24	134

By this way a surveillance of signalling conditions is possible to make sure that HSUPA code channels are active during the complete SAR measurement.

7.1.8 Conducted power measurements LTE FDD 2 1900 MHz

Bandwidth (MHz)	Channel / Frequency (MHz)	Resource block allocation	Average Output Power (dBm)	
			QPSK	16-QAM
1.4	18607 / 1850.7	1 RB low	23.4	22.6
		1 RB mid	23.4	22.6
		1 RB high	23.4	22.6
		50% RB low	23.4	22.4
		50% RB mid	23.4	22.3
		50% RB high	23.5	22.3
		100% RB	22.4	21.2
	18900 / 1880.0	1 RB low	23.3	22.3
		1 RB mid	23.3	22.2
		1 RB high	23.4	22.2
		50% RB low	23.2	22.3
		50% RB mid	23.3	22.5
		50% RB high	23.3	22.5
		100% RB	22.3	21.4
	19193 / 1909.3	1 RB low	23.6	22.7
		1 RB mid	23.5	22.7
		1 RB high	23.6	22.7
		50% RB low	23.6	22.5
50% RB mid		23.6	22.5	
50% RB high		23.6	22.6	
100% RB		22.6	21.6	
3	18615 / 1851.5	1 RB low	23.5	22.6
		1 RB mid	23.4	22.5
		1 RB high	23.5	22.6
		50% RB low	22.4	21.2
		50% RB mid	22.4	21.1
		50% RB high	22.4	21.2
		100% RB	22.4	21.4
	18900 / 1880.0	1 RB low	23.3	22.2
		1 RB mid	23.3	22.1
		1 RB high	23.3	22.2
		50% RB low	22.3	21.3
		50% RB mid	22.3	21.2
		50% RB high	22.3	21.3
		100% RB	22.3	21.3
	19185 / 1908.5	1 RB low	23.7	22.5
		1 RB mid	23.6	22.4
		1 RB high	23.7	22.4
		50% RB low	22.6	21.5
		50% RB mid	22.6	21.5
		50% RB high	22.6	21.5
		100% RB	22.6	21.6

5	18625 / 1852.5	1 RB low	23.5	22.4
		1 RB mid	23.5	22.4
		1 RB high	23.4	22.3
		50% RB low	22.4	21.4
		50% RB mid	22.4	21.4
		50% RB high	22.4	21.4
		100% RB	22.5	21.4
	18900 / 1880.0	1 RB low	23.3	22.5
		1 RB mid	23.2	22.5
		1 RB high	23.2	22.6
		50% RB low	22.3	21.1
		50% RB mid	22.3	21.3
		50% RB high	22.3	21.3
		100% RB	22.3	21.2
	19175 / 1907.5	1 RB low	23.3	22.1
		1 RB mid	23.6	22.3
		1 RB high	23.6	22.4
		50% RB low	22.4	21.4
50% RB mid		22.6	21.5	
50% RB high		22.6	21.5	
100% RB		22.6	21.5	
10	18650 / 1855	1 RB low	23.4	22.5
		1 RB mid	23.4	22.5
		1 RB high	23.3	22.5
		50% RB low	22.4	21.3
		50% RB mid	22.4	21.4
		50% RB high	22.3	21.3
		100% RB	22.4	21.3
	18900 / 1880	1 RB low	23.2	22.3
		1 RB mid	23.3	22.1
		1 RB high	23.3	22.1
		50% RB low	22.4	21.4
		50% RB mid	22.3	21.3
		50% RB high	22.3	21.3
		100% RB	22.2	21.2
	19150 / 1905	1 RB low	23.5	22.2
		1 RB mid	23.4	22.1
		1 RB high	23.6	22.3
		50% RB low	22.2	21.1
		50% RB mid	22.2	21.2
		50% RB high	22.4	21.4
		100% RB	22.3	21.3

15	18675 / 1857.5	1 RB low	23.5	22.6
		1 RB mid	23.3	22.5
		1 RB high	23.2	22.4
		50% RB low	22.4	21.4
		50% RB mid	22.4	21.4
		50% RB high	22.2	21.2
	100% RB	22.5	21.4	
	18900 / 1880.0	1 RB low	23.2	22.6
		1 RB mid	23.3	22.7
		1 RB high	23.3	22.7
		50% RB low	22.2	21.3
		50% RB mid	22.2	21.2
		50% RB high	22.3	21.2
	100% RB	22.3	21.3	
	19125 / 1902.5	1 RB low	23.3	22.1
		1 RB mid	23.3	21.9
		1 RB high	23.5	22.3
		50% RB low	22.3	21.3
50% RB mid		22.3	21.1	
50% RB high		22.3	21.3	
100% RB	22.3	21.3		
20	18700 / 1860	1 RB low	23.4	22.4
		1 RB mid	23.3	22.3
		1 RB high	23.2	22.3
		50% RB low	22.3	21.3
		50% RB mid	22.3	21.2
		50% RB high	22.2	21.2
	100% RB	22.3	21.2	
	18900 / 1880	1 RB low	23.1	22.4
		1 RB mid	23.1	22.5
		1 RB high	23.0	22.3
		50% RB low	22.3	21.2
		50% RB mid	22.3	21.2
		50% RB high	22.3	21.2
	100% RB	22.3	21.3	
	19100 / 1900	1 RB low	23.2	22.4
		1 RB mid	23.0	22.3
		1 RB high	23.3	22.6
		50% RB low	22.3	21.2
50% RB mid		22.4	21.2	
50% RB high		22.3	21.3	
100% RB	22.3	21.3		

Table 26: Test results conducted power measurement LTE FDD 2 1900 MHz.

7.1.9 Conducted power measurements LTE FDD 4 1700 MHz

Bandwidth (MHz)	Channel / Frequency (MHz)	Resource block allocation	Average Output Power (dBm)	Average Output Power (dBm)
			QPSK	16-QAM
1.4	19957 / 1710.7	1 RB low	22.2	21.4
		1 RB mid	22.2	21.4
		1 RB high	22.2	21.4
		50% RB low	22.3	21.2
		50% RB mid	22.2	21.2
		50% RB high	22.2	21.1
		100% RB	21.2	20.1
	20175 / 1732.5	1 RB low	22.2	21.0
		1 RB mid	22.1	21.0
		1 RB high	22.1	21.0
		50% RB low	22.2	21.3
		50% RB mid	22.0	21.3
		50% RB high	22.1	21.3
	20393 / 1754.3	1 RB low	22.3	21.4
		1 RB mid	22.2	21.3
		1 RB high	22.3	21.4
		50% RB low	22.2	21.3
		50% RB mid	22.3	21.2
50% RB high		22.3	21.3	
3.0	19965 / 1711.5	1 RB low	22.3	21.4
		1 RB mid	22.2	21.3
		1 RB high	22.3	21.4
		50% RB low	21.2	20.0
		50% RB mid	21.2	20.0
		50% RB high	21.2	20.0
		100% RB	21.2	20.3
	20175 / 1732.5	1 RB low	22.2	21.0
		1 RB mid	22.1	20.9
		1 RB high	22.1	20.9
		50% RB low	21.2	20.3
		50% RB mid	21.1	20.2
		50% RB high	21.2	20.2
	20385 / 1753.5	1 RB low	22.3	21.3
		1 RB mid	22.3	21.1
		1 RB high	22.4	21.1
		50% RB low	21.3	20.3
		50% RB mid	21.3	20.3
50% RB high		21.3	20.3	
100% RB		21.3	20.4	

5.0	19975 / 1712.5	1 RB low	22.3	21.2
		1 RB mid	22.3	21.2
		1 RB high	22.2	21.1
		50% RB low	21.2	20.3
		50% RB mid	21.2	20.3
		50% RB high	21.2	20.4
	100% RB	21.2	20.3	
	20175 / 1732.5	1 RB low	22.1	21.6
		1 RB mid	22.0	21.4
		1 RB high	22.1	21.5
		50% RB low	21.2	20.2
		50% RB mid	21.1	20.1
		50% RB high	21.1	20.2
	100% RB	21.1	20.1	
	20375 / 1752.5	1 RB low	22.3	21.0
		1 RB mid	22.2	21.1
		1 RB high	22.3	21.1
		50% RB low	21.3	20.3
50% RB mid		21.3	20.4	
50% RB high		21.3	20.4	
100% RB	21.3	20.4		
10.0	20000 / 1715.0	1 RB low	22.3	21.4
		1 RB mid	22.2	21.3
		1 RB high	22.3	21.5
		50% RB low	21.3	20.3
		50% RB mid	21.2	20.3
		50% RB high	21.3	20.3
	100% RB	21.3	20.3	
	20175 / 1732.5	1 RB low	22.2	21.0
		1 RB mid	22.1	20.9
		1 RB high	22.4	21.1
		50% RB low	21.2	20.3
		50% RB mid	21.1	20.2
		50% RB high	21.2	20.3
	100% RB	21.2	20.3	
	20350 / 1750.0	1 RB low	22.3	21.0
		1 RB mid	22.3	21.0
		1 RB high	22.4	21.0
		50% RB low	21.3	20.3
50% RB mid		21.3	20.3	
50% RB high		21.3	20.3	
100% RB	21.3	20.3		

15.0	20025 / 1717.5	1 RB low	22.3	21.4
		1 RB mid	22.3	21.5
		1 RB high	22.2	21.3
		50% RB low	21.3	20.4
		50% RB mid	21.3	20.4
		50% RB high	21.3	20.4
		100% RB	21.3	20.4
	20175 / 1732.5	1 RB low	22.2	21.5
		1 RB mid	22.1	21.5
		1 RB high	22.3	21.7
		50% RB low	21.2	20.2
		50% RB mid	21.1	20.1
		50% RB high	21.3	20.2
		100% RB	21.2	20.3
	20325 / 1747.5	1 RB low	22.3	21.1
		1 RB mid	22.2	21.1
		1 RB high	22.3	21.2
		50% RB low	21.3	20.3
		50% RB mid	21.2	20.2
		50% RB high	21.3	20.2
		100% RB	21.4	20.4
20.0	20050 / 1720.0	1 RB low	22.3	21.3
		1 RB mid	22.3	21.3
		1 RB high	22.2	21.3
		50% RB low	21.3	20.3
		50% RB mid	21.2	20.3
		50% RB high	21.2	20.3
		100% RB	21.2	20.3
	20175 / 1732.5	1 RB low	22.0	21.3
		1 RB mid	22.0	21.3
		1 RB high	22.1	21.4
		50% RB low	21.2	20.1
		50% RB mid	21.2	20.2
		50% RB high	21.2	20.2
		100% RB	21.2	20.3
	20300 / 1745.0	1 RB low	22.1	21.4
		1 RB mid	22.2	21.4
		1 RB high	22.2	21.4
		50% RB low	21.4	20.4
		50% RB mid	21.3	20.4
		50% RB high	21.3	20.3
		100% RB	21.3	20.4

Table 27: Test results conducted power measurement LTE FDD 4 1700 MHz.

7.1.10 Conducted power measurements LTE FDD 5 850 MHz

Bandwidth (MHz)	Channel / Frequency (MHz)	Resource block allocation	Average Output Power (dBm)	
			QPSK	16-QAM
1.4	20407 / 824.7	1 RB low	23.7	22.9
		1 RB mid	23.7	22.9
		1 RB high	23.6	22.8
		50% RB low	23.7	22.7
		50% RB mid	23.7	22.6
		50% RB high	23.6	22.5
		100% RB	22.7	21.5
	20525 / 836.5	1 RB low	23.8	22.6
		1 RB mid	23.7	22.6
		1 RB high	23.8	22.6
		50% RB low	23.7	22.9
		50% RB mid	23.7	22.9
		50% RB high	23.7	22.9
	20643 / 848.3	1 RB low	23.5	22.5
		1 RB mid	23.4	22.5
		1 RB high	23.5	22.6
		50% RB low	23.4	22.4
		50% RB mid	23.4	22.4
50% RB high		23.5	22.4	
3	20415 / 825.5	1 RB low	23.8	22.8
		1 RB mid	23.6	22.7
		1 RB high	23.6	22.7
		50% RB low	22.7	21.4
		50% RB mid	22.5	21.3
		50% RB high	22.5	21.3
		100% RB	22.6	21.5
	20525 / 836.5	1 RB low	23.8	22.6
		1 RB mid	23.7	22.5
		1 RB high	23.7	22.4
		50% RB low	22.7	21.7
		50% RB mid	22.8	21.7
		50% RB high	22.7	21.7
	20635 / 847.5	100% RB	22.7	21.6
		1 RB low	23.7	22.5
		1 RB mid	23.5	22.3
		1 RB high	23.6	22.3
		50% RB low	22.6	21.5
50% RB mid		22.4	21.4	
50% RB high		22.5	21.4	
100% RB	22.4	21.4		

5	20425 / 826.5	1 RB low	23.7	22.7
		1 RB mid	23.5	22.5
		1 RB high	23.6	22.6
		50% RB low	22.6	21.6
		50% RB mid	22.5	21.4
		50% RB high	22.5	21.5
	100% RB	22.6	21.5	
	20525 / 836.5	1 RB low	23.6	23.0
		1 RB mid	23.6	23.0
		1 RB high	23.7	23.0
		50% RB low	22.7	21.6
		50% RB mid	22.7	21.6
		50% RB high	22.7	21.6
	100% RB	22.6	21.6	
	20625 / 846.5	1 RB low	23.6	22.4
		1 RB mid	23.6	22.4
		1 RB high	23.5	22.3
		50% RB low	22.6	21.5
50% RB mid		22.6	21.5	
50% RB high		22.5	21.5	
100% RB	22.6	21.6		
10	20450 / 829	1 RB low	23.8	22.9
		1 RB mid	23.6	22.7
		1 RB high	23.5	22.7
		50% RB low	22.6	21.5
		50% RB mid	22.4	21.5
		50% RB high	22.6	21.5
	100% RB	22.5	21.5	
	20525 / 836.5	1 RB low	23.7	22.5
		1 RB mid	23.7	22.5
		1 RB high	23.7	22.4
		50% RB low	22.6	21.6
		50% RB mid	22.7	21.7
		50% RB high	22.7	21.7
	100% RB	22.7	21.6	
	20600 / 844	1 RB low	23.7	22.5
		1 RB mid	23.6	22.4
		1 RB high	23.6	22.2
		50% RB low	22.6	21.5
50% RB mid		22.7	21.5	
50% RB high		22.6	21.5	
100% RB	22.7	21.5		

Table 28: Test results conducted power measurement LTE FDD 5 850 MHz.

7.1.11 Conducted power measurements LTE FDD 7 2600 MHz

Bandwidth (MHz)	Channel / Frequency (MHz)	Resource block allocation	Average Output Power (dBm)	Average Output Power (dBm)
			QPSK	16-QAM
5.0	20775 / 2502.5	1 RB low	20.1	19.0
		1 RB mid	20.0	18.9
		1 RB high	20.0	18.8
		50% RB low	19.0	18.1
		50% RB mid	19.0	18.0
		50% RB high	18.9	18.0
		100% RB	19.0	18.1
	21100 / 2535	1 RB low	19.9	19.4
		1 RB mid	20.0	19.4
		1 RB high	19.9	19.4
		50% RB low	19.1	18.2
		50% RB mid	19.1	18.1
		50% RB high	19.1	18.2
		100% RB	19.1	18.1
	21425 / 2567.5	1 RB low	20.4	19.1
		1 RB mid	20.4	19.0
		1 RB high	20.3	19.0
		50% RB low	19.2	18.4
50% RB mid		19.2	18.4	
50% RB high		19.1	18.3	
100% RB		19.2	18.4	
10.0	20800 / 2505	1 RB low	20.2	19.2
		1 RB mid	20.1	19.2
		1 RB high	20.1	19.3
		50% RB low	19.0	18.1
		50% RB mid	19.0	18.2
		50% RB high	19.0	18.2
		100% RB	19.0	18.2
	21100 / 2535	1 RB low	20.0	18.9
		1 RB mid	20.0	18.9
		1 RB high	20.1	19.0
		50% RB low	19.1	18.2
		50% RB mid	19.1	18.2
		50% RB high	19.1	18.2
		100% RB	19.2	18.2
	21400 / 2565	1 RB low	20.6	19.3
		1 RB mid	20.4	19.1
		1 RB high	20.3	19.0
		50% RB low	19.3	18.5
50% RB mid		19.2	18.4	
50% RB high		19.2	18.4	
100% RB		19.2	18.4	

15.0	20825 / 2507.5	1 RB low	20.3	19.4
		1 RB mid	20.2	19.3
		1 RB high	20.5	19.6
		50% RB low	19.1	18.2
		50% RB mid	19.1	18.3
		50% RB high	19.2	18.3
		100% RB	19.1	18.2
	21100 / 2535	1 RB low	20.0	19.4
		1 RB mid	20.1	19.5
		1 RB high	20.3	19.7
		50% RB low	19.1	18.0
		50% RB mid	19.2	18.2
		50% RB high	19.3	18.3
		100% RB	19.2	18.2
	21375 / 2562.5	1 RB low	20.7	19.4
		1 RB mid	20.6	19.2
		1 RB high	20.4	19.1
		50% RB low	19.4	18.6
		50% RB mid	19.4	18.5
		50% RB high	19.4	18.4
		100% RB	19.5	18.6
20.0	20850 / 2510	1 RB low	20.1	19.1
		1 RB mid	20.1	19.0
		1 RB high	20.2	19.2
		50% RB low	18.9	18.1
		50% RB mid	19.0	18.1
		50% RB high	19.2	18.3
		100% RB	19.1	18.2
	21100 / 2535	1 RB low	19.8	19.2
		1 RB mid	19.9	19.3
		1 RB high	20.2	19.5
		50% RB low	19.0	18.1
		50% RB mid	19.1	18.1
		50% RB high	19.2	18.2
		100% RB	19.2	18.2
	21350 / 2560	1 RB low	20.6	19.7
		1 RB mid	20.4	19.6
		1 RB high	20.2	19.4
		50% RB low	19.5	18.7
		50% RB mid	19.5	18.6
		50% RB high	19.3	18.5
		100% RB	19.5	18.7

Table 29: Test results conducted power measurement LTE FDD 7 2600 MHz.

7.1.12 Conducted power measurements LTE FDD 13 700 MHz

Bandwidth (MHz)	Channel / Frequency (MHz)	Resource block allocation	Average Output Power (dBm)	
			QPSK	16-QAM
5	23205 / 779.5	1 RB low	23.8	22.9
		1 RB mid	23.7	22.7
		1 RB high	23.8	22.7
		50% RB low	22.8	21.8
		50% RB mid	22.7	21.7
		50% RB high	22.7	21.7
		100% RB	22.7	21.7
	23230 / 782	1 RB low	23.6	22.9
		1 RB mid	23.6	23.0
		1 RB high	23.7	23.0
		50% RB low	22.7	21.6
		50% RB mid	22.7	21.7
		50% RB high	22.7	21.7
	23255 / 784.5	100% RB	22.7	21.7
		1 RB low	23.7	22.4
		1 RB mid	23.7	22.5
		1 RB high	23.9	22.8
		50% RB low	22.8	21.7
50% RB mid		22.7	21.7	
50% RB high		22.7	21.7	
10	23230 / 782	100% RB	22.7	21.7
		1 RB low	23.9	22.7
		1 RB mid	23.8	22.5
		1 RB high	23.9	22.7
		50% RB low	22.7	21.7
		50% RB mid	22.7	21.6
		50% RB high	22.7	21.6
100% RB	22.7	21.6		

Table 30: Test results conducted power measurement LTE FDD 13 700 MHz.

7.1.13 Conducted power measurements LTE FDD 17 700 MHz

Bandwidth (MHz)	Channel / Frequency (MHz)	Resource block allocation	Average Output Power (dBm)	
			QPSK	16-QAM
5.0	23755 / 706.5	1 RB low	23.4	22.5
		1 RB mid	23.4	22.5
		1 RB high	23.7	22.6
		50% RB low	22.5	21.4
		50% RB mid	22.4	21.5
		50% RB high	22.5	21.4
	100% RB	22.3	21.4	
	23790 / 710.0	1 RB low	23.4	22.7
		1 RB mid	23.3	22.7
		1 RB high	23.4	22.7
		50% RB low	22.5	21.5
		50% RB mid	22.5	21.5
		50% RB high	22.4	21.4
	100% RB	22.3	21.3	
	23825 / 713.5	1 RB low	23.3	22.2
		1 RB mid	23.3	22.2
		1 RB high	23.4	22.2
		50% RB low	22.4	21.4
50% RB mid		22.4	21.4	
50% RB high		22.4	21.4	
100% RB	22.3	21.5		
10.0	23780 / 709.0	1 RB low	23.4	22.6
		1 RB mid	23.5	22.7
		1 RB high	23.4	22.6
		50% RB low	22.3	21.4
		50% RB mid	22.4	21.4
		50% RB high	22.4	21.4
	100% RB	22.4	21.3	
	23790 / 710.0	1 RB low	23.4	22.2
		1 RB mid	23.3	22.2
		1 RB high	23.4	22.1
		50% RB low	22.4	21.4
		50% RB mid	22.4	21.5
		50% RB high	22.4	21.5
	100% RB	22.4	21.4	
	23800 / 711.0	1 RB low	23.5	22.3
		1 RB mid	23.4	22.3
		1 RB high	23.4	22.2
		50% RB low	22.4	21.4
50% RB mid		22.4	21.4	
50% RB high		22.4	21.4	
100% RB	22.3	21.4		

Table 31: Test results conducted power measurement LTE FDD 17 700 MHz.

7.1.14 Justification of SAR measurements in LTE mode

According to Chapter 5 'SAR test procedures for LTE devices of FCC KDB Publication 941225 D05 the following test configurations for standalone measurements of the largest channel bandwidth (chapter 5.2) had to be taken into consideration:

5.2.1. QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and *required test channel* combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each *required test channel*. When the *reported SAR* is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and *required test channels* is not required for 1 RB allocation; otherwise, SAR is required for the remaining *required test channels* and only for the RB offset configuration with the highest output power for that channel.6 When the *reported SAR* of a *required test channel* is > 1.45 W/kg, SAR is required for all three RB offset configurations for that *required test channel*.

5.2.2. QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.

5.2.3. QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest *reported SAR* for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 ~~is~~ ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the *reported SAR* is > 1.45 W/kg, the remaining *required test channels* must also be tested.

5.2.4. Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the *reported SAR* for the QPSK configuration is > 1.45 W/kg.

Testing of other channel bandwidths was not necessary because the output power of equivalent channel configurations was less than $\frac{1}{2}$ dB larger compared to the largest channel bandwidth and reported SAR was < 1.45 W/kg.

Conducted and radiated measurements were performed with the maximum number of bundled TTIs supported by the DUT (see section 2.4 for details).

7.1.15 MPR information in LTE mode

There is a permanently applied MPR implemented by the manufacturer. MPR is enabled for this device according to 3GPP TS36.101.

Modulation	Channel bandwidth / resource block configuration						Target MPR	3 GPP MPR
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz		
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1	≤ 1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1	≤ 1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2	≤ 2

Therefore there is no power reduction at 1.4 MHz bandwidth with 50% RB allocation (3 RBs).

Additional differences in conducted power are not caused by implemented MPR but depend on measurement uncertainty and allowable tolerances per 3GPP or tune-up. A-MPR was disabled for all SAR tests.

7.2 Conducted power measurements

7.2.1 Conducted power measurements WLAN 2.4 GHz

802.11b		maximum average conducted output power [dBm]			
Band	channel	1Mbps	2Mbps	5.5Mbps	11Mbps
2450MHz	1	14.5	14.3	14.3	14.2
	6	15.9	15.6	16.0	15.6
	11	14.5	14.3	14.3	14.3

Table 32: Test results conducted power measurement 802.11b

802.11g		maximum average conducted output power [dBm]							
Band	channel	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
2450MHz	1	13.8	13.8	13.6	13.5	13.3	13.2	12.9	12.8
	6	15.2	15.5	15.1	14.9	15.0	14.8	14.3	14.1
	11	14.0	13.7	13.7	13.6	13.4	13.1	12.9	12.8

Table 33: Test results conducted power measurement 802.11g

802.11n HT-20		maximum average conducted output power [dBm]							
Band	channel	MCS-0 6.5Mbps	MCS-1 13Mbps	MCS-2 19.5Mbps	MCS-3 26Mbps	MCS-4 39Mbps	MCS-5 52Mbps	MCS-6 58.5Mbps	MCS-7 65Mbps
2450MHz	1	13.5	13.6	13.1	13.0	13.0	12.9	12.8	12.5
	6	14.9	14.7	14.8	14.5	14.4	14.2	14.0	14.0
	11	13.5	13.4	13.2	13.2	12.9	12.8	12.7	12.5

Table 34: Test results conducted power measurement 802.11n HT-20

7.2.2 Conducted power measurements WLAN 5 GHz

802.11a		maximum average conducted output power [dBm]							
Band	channel	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
5200MHz	36	15.9	15.6	15.7	15.7	15.7	15.5	15.1	14.9
	40	15.7	15.6	15.7	15.6	15.4	15.1	15.0	14.9
	44	15.8	15.7	15.6	15.4	15.5	15.0	14.9	14.9
	48	15.7	15.7	15.7	15.5	15.1	14.8	15.0	14.8
5300MHz	52	16.0	15.8	15.8	15.7	15.3	15.0	14.9	14.8
	56	15.8	15.6	15.6	15.8	15.3	15.3	15.1	15.0
	60	16.0	16.0	15.6	15.8	15.5	15.2	14.9	15.0
	64	15.9	15.9	15.9	15.8	15.4	15.2	15.2	15.1
5600MHz	100	17.4	17.3	16.8	17.0	16.7	16.4	16.3	16.2
	104	17.2	17.2	16.7	16.9	16.5	16.6	16.6	16.0
	108	17.2	17.2	17.0	17.0	16.8	16.5	16.0	16.2
	112	17.1	17.0	17.0	16.8	16.8	16.6	16.2	16.4
	116	17.4	17.3	16.9	16.8	17.1	16.4	16.2	16.2
	120	17.2	17.1	17.4	16.9	16.7	16.4	16.3	16.1
	124	17.3	16.9	16.9	16.7	16.7	16.2	16.1	16.2
	128	17.2	17.1	16.9	16.7	16.7	16.6	16.2	16.0
	132	16.9	17.0	16.9	16.7	16.4	16.4	16.2	16.0
	136	16.9	16.8	16.9	16.7	16.6	16.1	16.0	15.9
5800MHz	140	16.8	16.6	16.7	16.6	16.4	16.1	16.0	15.9
	149	13.9	13.7	13.7	13.7	13.5	13.4	13.0	13.1
	153	13.9	13.7	13.8	13.6	13.3	13.1	12.9	12.8
	157	13.9	13.9	13.8	13.7	13.5	13.3	13.3	13.0
	161	14.0	13.9	13.8	14.0	13.5	13.3	13.2	13.0
	165	14.1	14.0	14.1	14.0	13.6	13.3	13.3	13.1

Table 35: Test results conducted power measurement 802.11a

802.11n HT-20 / 802.11ac VHT-20		maximum average conducted output power [dBm]								
Band	channel	MCS-0 6.5Mbps	MCS-1 13Mbps	MCS-2 19.5Mbps	MCS-3 26Mbps	MCS-4 39Mbps	MCS-5 52Mbps	MCS-6 58.5Mbps	MCS-7 65Mbps	MCS-8 78Mbps
5200MHz	36	16.1	15.5	15.7	15.6	15.0	14.8	14.7	14.6	14.5
	40	15.8	15.7	15.6	15.3	15.1	14.9	14.9	14.8	14.7
	44	15.9	15.7	15.4	15.6	14.9	15.0	15.1	14.8	14.7
	48	15.6	15.7	15.6	15.2	15.1	14.9	14.8	14.8	14.6
5300MHz	52	15.6	15.6	15.3	15.3	15.0	14.9	14.9	14.8	14.7
	56	15.6	15.7	15.6	15.5	15.3	15.1	14.8	14.7	14.6
	60	15.6	15.8	15.6	15.5	15.2	15.0	15.1	14.8	14.7
	64	15.8	15.7	15.5	15.2	15.3	15.1	14.9	15.0	14.8
5600MHz	100	17.2	16.7	17.0	16.7	16.5	16.4	16.3	16.2	16.1
	104	17.0	16.8	17.0	16.7	16.4	16.4	16.2	16.2	16.1
	108	17.2	16.9	16.9	16.8	16.6	16.1	15.9	16.2	16.0
	112	17.0	17.1	17.0	16.7	16.5	16.4	16.4	16.1	16.0
	116	17.1	17.0	16.8	16.4	16.4	16.4	16.0	16.2	16.0
	120	17.1	16.9	16.8	16.5	16.3	16.5	16.2	16.4	16.1
	124	17.2	16.9	16.9	16.8	16.6	16.5	16.0	16.3	16.0
	128	16.9	16.7	16.6	16.5	16.5	16.1	16.0	16.2	16.0
	132	16.9	16.8	16.6	16.4	16.5	16.1	15.9	15.9	15.9
	136	16.8	16.6	16.5	16.4	16.2	16.0	16.1	15.9	15.8
5800MHz	149	13.9	13.7	13.6	13.6	13.1	13.3	13.2	13.1	13.0
	153	13.9	13.7	13.6	13.3	13.1	12.9	13.1	12.7	12.9
	157	13.8	13.9	13.4	13.4	13.2	13.1	12.9	12.9	12.9
	161	13.9	13.8	13.6	13.3	13.4	13.2	12.9	13.0	12.9
	165	13.9	13.8	13.7	13.4	13.5	13.3	12.9	13.2	13.0

Table 36: Test results conducted power measurement 802.11n HT-20 / 802.11ac VHT-20

802.11n HT-40 / 802.11ac VHT-40		maximum average conducted output power [dBm]									
Band	Ch	MCS-0 13.5Mbps	MCS-1 27Mbps	MCS-2 40.5Mbps	MCS-3 54Mbps	MCS-4 81Mbps	MCS-5 108Mbps	MCS-6 121.5Mbps	MCS-7 135Mbps	MCS-8 121.5Mbps	MCS-9 135Mbps
5200 MHz	38	12.1	11.9	11.6	11.2	11.2	11.0	10.9	10.8	10.7	10.6
	46	12.3	12.0	11.4	11.4	11.2	10.9	10.7	10.7	10.6	10.5
5300 MHz	54	12.3	11.9	11.7	11.7	11.4	11.5	10.7	10.7	10.6	10.5
	62	12.4	12.2	11.7	11.9	11.6	11.1	11.2	11.2	11.0	10.9
5600 MHz	102	15.3	15.0	14.7	14.7	14.4	14.1	14.0	13.9	13.8	13.6
	118	15.3	15.2	15.0	14.9	14.5	14.1	14.0	14.0	13.8	13.6
	134	15.3	15.0	14.7	14.5	14.0	14.0	14.0	13.8	13.7	13.4
5800 MHz	151	13.4	13.2	12.9	12.7	12.3	12.3	11.9	11.8	11.6	11.4
	159	13.4	13.0	12.9	12.6	12.4	12.4	12.1	12.0	11.8	11.7

Table 37: Test results conducted power measurement 802.11n HT-40 / 802.11ac VHT-40

802.11ac VHT-80		maximum average conducted output power [dBm]									
Band	Ch	MCS-0 29.3Mbps	MCS-1 58.5Mbps	MCS-2 87.8Mbps	MCS-3 117Mbps	MCS-4 175.5Mbps	MCS-5 234Mbps	MCS-6 263.3Mbps	MCS-7 292.5Mbps	MCS-8 351Mbps	MCS-9 390Mbps
5200 MHz	42	11.0	10.5	10.2	10.1	9.7	9.5	9.2	9.3	9.2	9.1
5300 MHz	58	10.9	10.5	10.2	10.0	9.6	9.3	9.3	9.3	9.1	9.0
5600 MHz	106	12.9	12.4	12.4	12.0	11.6	11.4	11.3	11.3	10.9	11.1
	122	13.2	12.8	12.5	12.5	11.8	11.6	11.5	11.6	11.3	11.3
5800 MHz	155	13.2	12.8	12.4	12.4	11.9	11.8	11.6	11.6	11.4	11.4

Table 38: Test results conducted power measurement 802.11ac VHT-80

7.2.3 Standalone SAR Test Exclusion

Standalone SAR test exclusion considerations for Head position					
Communication system	freq. (MHz)	P_{avg}^* (dBm)	P_{avg}^* (mW)	threshold _{1-g} comparison value	SAR test exclusion
GSM 850	835	24.4	275.4	50.3	no
GSM 1900	1900	21.5	141.3	38.9	no
UMTS FDD II	1900	24.0	251.2	69.2	no
UMTS FDD IV	1750	22.5	177.8	47.0	no
UMTS FDD V	835	24.5	281.8	51.5	no
LTE FDD 2	1880	24.0	251.2	68.9	no
LTE FDD 4	1750	23.0	199.5	52.8	no
LTE FDD 5	835	24.0	251.2	45.9	no
LTE FDD 7	2535	20.7	117.5	37.4	no
LTE FDD 13	782	24.0	251.2	44.4	no
LTE FDD 17	710	24.0	251.2	42.3	no
WLAN 2450	2450	14.9	30.9	9.7	no
WLAN 5.2 GHz	5200	16.7	46.8	21.3	no
WLAN 5.3 GHz	5300	16.7	46.8	21.5	no
WLAN 5.6 GHz	5600	17.4	55.0	26.0	no
WLAN 5.8 GHz	5800	14.4	27.5	13.3	no
Bluetooth 2450	2450	11.0	12.6	3.9	no

Table 39: Standalone SAR test exclusion considerations in **head position**

P_{avg}^* - maximum possible output power declared by manufacturer

The **1-g SAR test exclusion thresholds** for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Standalone SAR test exclusion considerations for Hot spot mode position						
Communication system	freq. (MHz)	distance (mm)	P_{avg}^* (dBm)	P_{avg}^* (mW)	threshold _{1-g} comparison value	SAR test exclusion
GSM 850	835	10	24.4	275.4	25.2	no
GSM 1900	1900	10	21.5	141.3	19.5	no
UMTS FDD II	1900	10	24.0	251.2	34.6	no
UMTS FDD IV	1750	10	22.5	177.8	23.5	no
UMTS FDD V	835	10	24.5	281.8	25.8	no
LTE FDD 2	1880	10	24.0	251.2	34.4	no
LTE FDD 4	1750	10	22.5	177.8	23.5	no
LTE FDD 5	835	10	24.0	251.2	23.0	no
LTE FDD 7	2535	10	20.7	117.5	18.7	no
LTE FDD 13	782	10	24.0	251.2	22.2	no
LTE FDD 17	710	10	24.0	251.2	21.2	no
WLAN 2450	2450	10	14.9	30.9	4.8	no
WLAN 5.2 GHz	5200	10	16.7	46.8	10.7	no
WLAN 5.3 GHz	5300	10	16.7	46.8	10.8	no
WLAN 5.6 GHz	5600	10	17.4	55.0	13.0	no
WLAN 5.8 GHz	5800	10	14.4	27.5	6.6	no
Bluetooth 2450	2450	10	11.0	12.6	2.0	yes

Table 40: Standalone SAR test exclusion considerations in **hotspot mode position**

P_{avg}^* - maximum possible output power declared by manufacturer

The **1-g SAR test exclusion thresholds** for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Standalone SAR test exclusion considerations for Body worn position						
Communication system	freq. (MHz)	distance (mm)	P _{avg} * (dBm)	P _{avg} * (mW)	threshold _{1-g} comparison value	SAR test exclusion
GSM 850	835	15	24.4	275.4	16.8	no
GSM 1900	1900	15	21.5	141.3	13.0	no
UMTS FDD II	1900	15	24.0	251.2	23.1	no
UMTS FDD IV	1750	15	22.5	177.8	15.7	no
UMTS FDD V	835	15	24.5	281.8	17.2	no
LTE FDD 2	1880	15	24.0	251.2	23.0	no
LTE FDD 4	1750	15	23.0	199.5	17.6	no
LTE FDD 5	835	15	24.0	251.2	15.3	no
LTE FDD 7	2535	15	20.7	117.5	12.5	no
LTE FDD 13	782	15	24.0	251.2	14.8	no
LTE FDD 17	710	15	24.0	251.2	14.1	no
WLAN 2450	2450	15	14.9	30.9	3.2	no
WLAN 5.2 GHz	5200	15	16.7	46.8	7.1	no
WLAN 5.3 GHz	5300	15	16.7	46.8	7.2	no
WLAN 5.6 GHz	5600	15	17.4	55.0	8.7	no
WLAN 5.8 GHz	5800	15	14.4	27.5	4.4	no
Bluetooth 2450	2450	15	11.0	12.6	1.3	yes

Table 41: Standalone SAR test exclusion considerations in **body worn position**

P_{avg}* - maximum possible output power declared by manufacturer

The **1-g SAR test exclusion thresholds** for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR, where:}$$

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Estimated stand alone SAR.					
Communication system	freq. (GHz)	distance (mm)	P _{avg} (dBm)	P _{avg} (mW)	estimated _{1-g} (W/kg)
Bluetooth 2450 hotspot	2.45	10	11	12.6	0.263
Bluetooth 2450 body worn	2.45	15	11	12.6	0.175

Table 42: Estimated stand alone SAR_{max} for **Bluetooth 2450MHz** hotspot mode and body worn

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg for test separation distances } \leq 50 \text{ mm;}$$

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

7.2.4 Hotspot mode SAR measurement positions

Hotspot mode SAR measurement positions						
mode	front	rear	left edge	right edge	top edge	bottom edge
GSM 850	yes	yes	yes	yes	no	yes
GSM 1900	yes	yes	yes	yes	no	yes
WCDMA FDD II	yes	yes	yes	yes	no	yes
WCDMA FDD IV	yes	yes	yes	yes	no	yes
WCDMA FDD V	yes	yes	yes	yes	no	yes
LTE FDD 2 1900	yes	yes	yes	yes	no	yes
LTE FDD 4 1750	yes	yes	yes	yes	no	yes
LTE FDD 5 850	yes	yes	yes	yes	no	yes
LTE FDD 7 2600	yes	yes	yes	yes	no	yes
LTE FDD 13 750	yes	yes	yes	yes	no	yes
LTE FDD 17 750	yes	yes	yes	yes	no	yes
WLAN 2450	yes	yes	yes	yes	yes	no

The edges with less than 2.5 cm distance to the TX antennas need to be tested for hotspot SAR.

Antenna dimensions and separation distances see in photo documentation

7.3 SAR test results

7.3.1 Results overview

measured / extrapolated SAR numbers - Head - GSM 850 MHz - DTM									
Ch.	Freq. (MHz)	time slots	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
				declared**	measured	Measured	Extrapolated	measured	
190	836.6	2	left cheek	31.0	30.9	0.503	0.515	0.373	22.0
190	836.6	2	left tilted 15°	31.0	30.9	0.238	0.244	0.175	22.0
128	824.2	2	right cheek	31.0	30.9	0.658	0.673	0.487	22.0
190	836.6	2	right cheek	31.0	30.9	0.668	0.684	0.487	22.0
251	848.8	2	right cheek	31.0	30.7	0.672	0.720	0.489	22.0
190	836.6	2	right tilted 15°	31.0	30.9	0.253	0.259	0.191	22.0

Table 43: Test results head SAR GSM 850MHz (see max. SAR plot in Annex B.1: GSM 850 page 123)

measured / extrapolated SAR numbers - hotspot mode - GSM 850 MHz										
Ch.	Freq. (MHz)	time slots	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
190	836.6	2	10	front	31.0	30.7	0.434	0.465	0.333	22.6
128	824.2	2	10	rear	31.0	31.0	0.496	0.496	0.383	22.6
190	836.6	2	10	rear	31.0	30.7	0.480	0.514	0.365	22.6
251	848.8	2	10	rear	31.0	30.7	0.440	0.471	0.336	22.6
190	836.6	2	10	left edge	31.0	30.7	0.075	0.080	0.053	22.6
190	836.6	2	10	right edge	31.0	30.7	0.185	0.198	0.120	22.6
190	836.6	2	10	bottom edge	31.0	30.7	0.076	0.081	0.044	22.6

Table 44: Test results hotspot mode SAR GSM 850MHz (see max. SAR plot in Annex B.1: GSM 850 page 123)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - GSM 850 MHz										
Ch.	Freq. (MHz)	time slots	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
128	824.2	2	15	front	31.0	31.0	0.431	0.431	0.329	22.6
190	836.6	2	15	front	31.0	30.7	0.384	0.411	0.289	22.6
251	848.8	2	15	front	31.0	30.7	0.372	0.399	0.280	22.6
190	836.6	2	15	rear	31.0	30.7	0.377	0.404	0.283	22.6

Table 45: Test results body worn SAR GSM 850 MHz (see max. SAR plot in Annex B.1: GSM 850 page 123)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - GSM 1900 MHz - DTM									
Ch.	Freq. (MHz)	time slots	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
				declared**	measured	measured	extrapolated	measured	
661	1880.0	3	left cheek	26.5	26.3	0.261	0.273	0.150	21.5
661	1880.0	3	left tilted 15°	26.5	26.3	0.076	0.080	0.050	21.5
512	1850.2	3	right cheek	26.5	26.5	0.285	0.285	0.153	21.5
661	1880.0	3	right cheek	26.5	26.3	0.382	0.400	0.207	21.5
810	1909.8	3	right cheek	26.5	26.4	0.530	0.542	0.291	21.5
661	1880.0	3	right tilted 15°	26.5	26.3	0.060	0.063	0.040	21.5

Table 46: Test results head SAR GSM 1900MHz (see max. SAR plot Annex B.2: GSM 1900 page 127)

measured / extrapolated SAR numbers - hotspot mode - GSM 1900 MHz											
Ch.	Freq. (MHz)	time slots	dist. (mm)	modulation	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
						declared**	measured	measured	extrapolated	measured	
512	1850.2	4	10	GMSK	front	25.5	25.4	0.422	0.432	0.277	21.7
661	1880.0	4	10	GMSK	front	25.5	25.2	0.499	0.535	0.322	21.7
810	1909.8	4	10	GMSK	front	25.5	25.3	0.559	0.585	0.359	21.7
661	1880.0	4	10	GMSK	rear	25.5	25.2	0.446	0.478	0.296	21.7
661	1880.0	4	10	GMSK	left edge	25.5	25.4	0.216	0.221	0.119	21.7
661	1880.0	4	10	GMSK	right edge	25.5	25.2	0.278	0.298	0.144	21.7
661	1880.0	4	10	GMSK	bottom edge	25.5	25.3	0.214	0.224	0.104	21.7

Table 47: Test results hotspot mode SAR GSM 1900 MHz (see max. SAR plot Annex B.2: GSM 1900 page 127)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - GSM 1900 MHz											
Ch.	Freq. (MHz)	time slots	dist. (mm)	modulation	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
						declared**	measured	measured	extrapolated	measured	
512	1850.2	4	15	GMSK	front	25.5	25.4	0.248	0.254	0.165	21.7
661	1880.0	4	15	GMSK	front	25.5	25.2	0.281	0.301	0.185	21.7
810	1909.8	4	15	GMSK	front	25.5	25.3	0.374	0.392	0.224	21.7
661	1880.0	4	15	GMSK	rear	25.5	25.2	0.258	0.276	0.170	21.7

Table 48: Test results body worn SAR GSM 1900 MHz (see max. SAR plot Annex B.2: GSM 1900 page 127)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - UMTS FDD II 1880 MHz								
Ch.	Freq. (MHz)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
			declared**	measured	measured	extrapolated	measured	
9400	1880.0	left cheek	24.0	23.9	0.305	0.312	0.188	21.9
9400	1880.0	left tilted 15°	24.0	23.9	0.088	0.090	0.057	21.9
9262	1852.4	right cheek	24.0	24.0	0.452	0.452	0.251	21.9
9400	1880.0	right cheek	24.0	23.9	0.472	0.483	0.261	21.9
9538	1907.6	right cheek	24.0	23.7	0.513	0.550	0.282	21.9
9400	1880.0	right tilted 15°	24.0	23.9	0.062	0.064	0.042	21.9

Table 49: Test results head SAR UMTS FDD II 1880 MHz (see max. SAR plot Annex B.3: UMTS FDD II page 130)

measured / extrapolated SAR numbers - hotspot mode - UMTS FDD II 1880 MHz										
Ch.	Freq. (MHz)	test condition	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
9262	1852.4	RMC	10	front	24.0	24.0	0.713	0.713	0.454	21.7
9400	1880.0	RMC	10	front	24.0	23.9	0.682	0.698	0.436	21.7
9538	1907.6	RMC	10	front	24.0	23.7	0.591	0.633	0.330	21.7
9400	1880.0	RMC	10	rear	24.0	23.9	0.624	0.639	0.409	21.7
9400	1880.0	RMC	10	left edge	24.0	23.9	0.136	0.139	0.080	21.7
9400	1880.0	RMC	10	right edge	24.0	23.9	0.379	0.388	0.195	21.7
9400	1880.0	RMC	10	bottom edge	24.0	23.9	0.256	0.262	0.125	21.7

Test results hotspot mode SAR UMTS FDD II 1880 MHz (see max. SAR plot Annex B.3: UMTS FDD II page 130)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - UMTS FDD II 1880 MHz										
Ch.	Freq. (MHz)	test condition	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
9262	1852.4	RMC	15	front	24.0	24.0	0.388	0.388	0.253	21.7
9400	1880.0	RMC	15	front	24.0	23.9	0.372	0.381	0.242	21.7
9538	1907.6	RMC	15	front	24.0	23.7	0.362	0.388	0.233	21.7
9400	1880.0	RMC	15	rear	24.0	23.9	0.348	0.356	0.228	21.7

Table 50: Test results body worn SAR UMTS FDD II 1880 MHz (see max. SAR plot Annex B.3: UMTS FDD II page 130)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - UMTS FDD IV 1700 MHz								
Ch.	Freq. (MHz)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
			declared**	measured	measured	extrapolated	measured	
1312	1712.4	left cheek	22.5	22.1	1.170	1.283	0.525	21.7
1412	1732.4	left cheek	22.5	22.5	1.120	1.120	0.507	21.7
1513	1752.6	left cheek	22.5	22.2	0.798	0.855	0.376	21.7
1412	1732.4	left tilted 15°	22.5	22.5	0.121	0.121	0.075	21.7
1412	1732.4	right cheek	22.5	22.5	0.452	0.452	0.221	21.7
1412	1732.4	right tilted 15°	22.5	22.5	0.124	0.124	0.060	21.7
1312	1712.4	left cheek	22.5	22.1	1.220	1.338	0.535	21.7

Table 51: Test results head SAR UMTS FDD IV 1700 MHz MHz (see max. SAR plot Annex B.4: UMTS FDD IV page 133)

measured / extrapolated SAR numbers - hotspot mode - UMTS FDD IV 1700 MHz										
Ch.	Freq. (MHz)	test condition	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
1412	1732.4	RMC	10	front	22.5	22.5	0.595	0.595	0.343	21.9
1312	1712.4	RMC	10	rear	22.5	22.1	0.519	0.569	0.342	21.9
1412	1732.4	RMC	10	rear	22.5	22.5	0.682	0.682	0.446	21.9
1513	1752.6	RMC	10	rear	22.5	22.2	0.564	0.604	0.370	21.9
1312	1712.4	RMC	10	left edge	22.5	22.1	0.629	0.690	0.338	21.9
1412	1732.4	RMC	10	left edge	22.5	22.5	0.744	0.744	0.394	21.9
1513	1752.6	RMC	10	left edge	22.5	22.2	0.634	0.679	0.332	21.9
1412	1732.4	RMC	10	right edge	22.5	22.5	0.174	0.174	0.088	21.9
1412	1732.4	RMC	10	bottom edge	22.5	22.5	0.330	0.330	0.162	21.9

Table 52: Test results hotspot mode SAR UMTS FDD IV 1700 MHz MHz (see max. SAR plot Annex B.4: UMTS FDD IV page 133)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - UMTS FDD IV 1700 MHz										
Ch.	Freq. (MHz)	test condition	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
1312	1712.4	RMC	15	front	22.5	22.1	0.300	0.329	0.196	21.9
1312	1712.4	RMC	15	rear	22.5	22.1	0.298	0.327	0.196	21.9
1413	1732.4	RMC	15	rear	22.5	22.5	0.364	0.364	0.239	21.9
1513	1752.6	RMC	15	rear	22.5	22.2	0.341	0.365	0.223	21.9

Table 53: Test results body worn SAR UMTS FDD IV 1700 MHz MHz (see max. SAR plot Annex B.4: UMTS FDD IV page 133)

* - repeated at the highest SAR measurement according to the FCC KDB 865664

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - UMTS FDD V 850 MHz								
Ch.	Freq. (MHz)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
			declared**	measured	measured	extrapolated	measured	
4182	836.4	left cheek	24.5	24.4	0.417	0.427	0.305	22.4
4182	836.4	left tilted 15°	24.5	24.4	0.187	0.191	0.137	22.4
4132	826.4	right cheek	24.5	24.3	0.472	0.494	0.344	22.4
4182	836.4	right cheek	24.5	24.4	0.453	0.464	0.335	22.4
4233	846.6	right cheek	24.5	24.3	0.493	0.516	0.351	22.4
4182	836.4	right tilted 15°	24.5	24.4	0.186	0.190	0.138	22.4

Table 54: Test results head SAR UMTS FDD V 850 MHz (see max. SAR plot in Annex B.5: UMTS FDD V page 137)

measured / extrapolated SAR numbers - hotspot mode - UMTS FDD V 850 MHz										
Ch.	Freq. (MHz)	test conditio	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
4182	836.4	RMC	10	front	24.5	24.4	0.321	0.328	0.244	21.6
4132	826.4	RMC	10	rear	24.5	24.3	0.346	0.362	0.270	21.6
4182	836.4	RMC	10	rear	24.5	24.4	0.346	0.354	0.267	21.6
4233	846.6	RMC	10	rear	24.5	24.3	0.330	0.346	0.253	21.6
4182	836.4	RMC	10	left edge	24.5	24.4	0.063	0.064	0.045	21.6
4182	836.4	RMC	10	right edge	24.5	24.4	0.151	0.155	0.098	21.6
4182	836.4	RMC	10	bottom edge	24.5	24.4	0.079	0.081	0.042	21.6

Table 55: Test results hotspot mode SAR UMTS FDD V 850 MHz (see max. SAR plot in Annex B.5: UMTS FDD V page 137)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - UMTS FDD V 850 MHz										
Ch.	Freq. (MHz)	test condition	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
4182	836.4	RMC	15	front	24.5	24.4	0.265	0.271	0.196	21.6
4132	826.4	RMC	15	rear	24.5	24.3	0.282	0.295	0.213	21.6
4182	836.4	RMC	15	rear	24.5	24.4	0.278	0.284	0.209	21.6
4233	846.6	RMC	15	rear	24.5	24.3	0.263	0.275	0.196	21.6

Table 56: Test results body worn SAR UMTS FDD V 850 MHz (see max. SAR plot in Annex B.5: UMTS FDD V page 137)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - LTE FDD 2 1900 MHz									
Ch.	Freq. (MHz)	RB Offset	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
				declared**	measured	measured	extrapolated	measured	
20MHz BW/1RB/QPSK									
18700	1860	low	left cheek	24.0	23.4	0.491	0.564	0.282	21.8
18900	1880	low	left cheek	24.0	23.1	0.607	0.747	0.330	21.8
19100	1900	high	left cheek	24.0	23.3	0.484	0.569	0.270	21.8
18700	1860	low	left tilted 15°	24.0	23.4	0.145	0.166	0.079	21.8
18900	1880	low	right cheek	24.0	23.1	0.321	0.395	0.157	21.8
18700	1860	low	right tilted 15°	24.0	23.4	0.227	0.261	0.118	21.8
20MHz BW/50RB/QPSK									
19100	1900	mid	left cheek	23.0	22.4	0.344	0.395	0.186	21.8
19100	1900	mid	left tilted 15°	23.0	22.4	0.082	0.094	0.041	21.8
19100	1900	mid	right cheek	23.0	22.4	0.392	0.450	0.204	21.8
19100	1900	mid	right tilted 15°	23.0	22.4	0.158	0.181	0.077	21.8

Table 57: Test results head SAR LTE FDD 2 1900 MHz (see max. SAR plot in Annex B.6: LTE FDD 2 page 140)

measured / extrapolated SAR numbers - hotspot mode - LTE FDD 2 1900 MHz										
Ch.	Freq. (MHz)	RB offset	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
20MHz BW/1RB/QPSK										
18700	1860	low	10	front	24.0	23.4	0.538	0.618	0.314	22.3
18700	1860	low	10	rear	24.0	23.4	0.715	0.821	0.401	22.3
18900	1880	low	10	rear	24.0	23.1	0.619	0.762	0.350	22.3
19100	1900	high	10	rear	24.0	23.3	0.628	0.738	0.347	22.3
18700	1860	low	10	left edge	24.0	23.4	0.214	0.246	0.127	22.3
18700	1860	low	10	right edge	24.0	23.4	0.162	0.186	0.086	22.3
18700	1860	low	10	bottom edge	24.0	23.4	0.248	0.285	0.133	22.3
20MHz BW/50RB/QPSK										
19100	1900	mid	10	front	23.0	22.4	0.432	0.496	0.245	22.3
19100	1900	mid	10	rear	23.0	22.4	0.631	0.724	0.346	22.3
19100	1900	mid	10	left edge	23.0	22.4	0.248	0.285	0.136	22.3
19100	1900	mid	10	right edge	23.0	22.4	0.225	0.258	0.115	22.3
19100	1900	mid	10	bottom edge	23.0	22.4	0.200	0.230	0.102	22.3
20MHz BW/100RB/QPSK										
18900	1880	low	10	front	23.0	22.3	0.497	0.584	0.328	22.3
18900	1880	low	10	rear	23.0	22.3	0.496	0.583	0.281	22.3
18900	1880	low	10	left edge	23.0	22.3	0.210	0.247	0.120	22.3
18900	1880	low	10	right edge	23.0	22.3	0.263	0.309	0.138	22.3
18900	1880	low	10	bottom edge	23.0	22.3	0.217	0.255	0.112	22.3

Table 58: Test results hotspot mode SAR LTE FDD 2 1900 MHz (see max. SAR plot in Annex B.6: LTE FDD 2 page 140)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - LTE FDD 2 1900 MHz											
Ch.	Freq. (MHz)	RB offset	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)	
					declared**	measured	measured	extrapolated	measured		
20MHz BW/1RB/QPSK											
18700	1860	low	15	front	24.0	23.4	0.328	0.377	0.214	22.3	
18900	1880	low	15	front	24.0	23.1	0.395	0.486	0.264	22.3	
19100	1900	high	15	front	24.0	23.3	0.390	0.458	0.259	22.3	
18700	1860	low	15	rear	24.0	23.4	0.294	0.338	0.176	22.3	
20MHz BW/50RB/QPSK											
19100	1900	mid	15	front	23.0	22.4	0.275	0.316	0.179	22.3	
19100	1900	mid	15	rear	23.0	22.4	0.262	0.301	0.156	22.3	

Table 59: Test results body worn SAR LTE FDD 2 1900 MHz (see max. SAR plot in Annex B.6: LTE FDD 2 page 140)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - LTE FDD 4 1750 MHz										
Ch.	Freq. (MHz)	RB offset	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)	
				declared**	measured	measured	extrapolated	measured		
20MHz BW/1RB/QPSK										
20050	1720.0	low	left cheek	22.5	22.3	1.040	1.089	0.494	22.3	
20175	1732.5	high	left cheek	22.5	22.1	0.802	0.879	0.385	22.3	
20300	1745.0	high	left cheek	22.5	22.2	0.650	0.696	0.320	22.3	
20050	1720.0	low	left tilted 15°	22.5	22.3	0.096	0.101	0.060	22.3	
20050	1720.0	low	right cheek	22.5	22.3	0.332	0.348	0.177	22.3	
20050	1720.0	low	right tilted 15°	22.5	22.3	0.094	0.098	0.047	22.3	
20050	1720	low	left cheek	22.5	22.3	1.040	1.089	0.489	22.3	
20MHz BW/50RB/QPSK										
20300	1745.0	low	left cheek	21.5	21.4	0.685	0.701	0.331	22.3	
20300	1745.0	low	left tilted 15°	21.5	21.4	0.089	0.091	0.053	22.3	
20300	1745.0	low	right cheek	21.5	21.4	0.248	0.254	0.124	22.3	
20300	1745.0	low	right tilted 15°	21.5	21.4	0.082	0.084	0.040	22.3	
20MHz BW/100RB/QPSK										
20050	1720.0	low	left cheek	21.5	21.2	0.876	0.939	0.408	22.3	
20175	1732.5	low	left cheek	21.5	21.2	0.834	0.894	0.390	22.3	
20300	1745.0	low	left cheek	21.5	21.3	0.743	0.778	0.356	22.3	
20300	1745.0	low	left tilted 15°	21.5	21.3	0.082	0.086	0.050	22.3	
20300	1745.0	low	right cheek	21.5	21.3	0.228	0.239	0.114	22.3	
20300	1745.0	low	right tilted 15°	21.5	21.3	0.085	0.089	0.042	22.3	

Table 60: Test results head SAR LTE FDD 4 1750 MHz (see max. SAR plot in Annex B.7: LTE FDD 4 page 143)

* - repeated at the highest SAR measurement according to the FCC KDB 865664

measured / extrapolated SAR numbers - hotspot mode - LTE FDD 4 1750 MHz										
Ch.	Freq. (MHz)	RB offset	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
20MHz BW/1RB/QPSK										
20050	1720.0	low	10	front	22.5	22.3	0.477	0.499	0.286	21.9
20175	1732.5	high	10	front	22.5	22.1	0.462	0.507	0.300	22.2
20300	1745.0	high	10	front	22.5	22.2	0.485	0.520	0.314	22.2
20050	1720.0	low	10	rear	22.5	22.3	0.457	0.479	0.304	21.9
20050	1720.0	low	10	left edge	22.5	22.3	0.617	0.646	0.328	22.2
20175	1732.5	high	10	left edge	22.5	22.1	0.539	0.591	0.284	22.2
20300	1745.0	high	10	left edge	22.5	22.2	0.452	0.484	0.239	22.2
20050	1720.0	low	10	right edge	22.5	22.3	0.078	0.082	0.041	22.2
20050	1720.0	low	10	bottom edge	22.5	22.3	0.258	0.270	0.132	22.2
20MHz BW/50RB/QPSK										
20300	1745.0	low	10	front	21.5	21.4	0.398	0.407	0.256	21.9
20300	1745.0	low	10	rear	21.5	21.4	0.412	0.422	0.273	21.9
20050	1720.0	low	10	left edge	21.5	21.3	0.488	0.511	0.259	22.2
20175	1732.5	low	10	left edge	21.5	21.2	0.479	0.513	0.252	22.2
20300	1745.0	low	10	left edge	21.5	21.4	0.435	0.445	0.228	22.2
20300	1745.0	low	10	right edge	21.5	21.4	0.106	0.108	0.053	22.2
20300	1745.0	low	10	bottom edge	21.5	21.4	0.204	0.209	0.100	22.2

Table 61: Test results hotspot mode SAR LTE FDD 4 1750 MHz (see max. SAR plot in Annex B.7: LTE FDD 4 page 143)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - LTE FDD 4 1750 MHz										
Ch.	Freq. (MHz)	RB offset	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
20MHz BW/1RB/QPSK										
20050	1720.0	low	15	front	22.5	22.3	0.257	0.269	0.167	21.9
20050	1720.0	low	15	rear	22.5	22.3	0.261	0.273	0.172	21.9
20175	1732.5	high	15	rear	22.5	22.1	0.330	0.362	0.217	22.2
20300	1745.0	high	15	rear	22.5	22.2	0.328	0.351	0.216	22.2
20MHz BW/50RB/QPSK										
20300	1745.0	low	15	front	21.5	21.4	0.229	0.234	0.150	22.2
20300	1745.0	low	15	rear	21.5	21.4	0.267	0.273	0.176	22.2

Table 62: Test results body worn SAR LTE FDD 4 1750 MHz (see max. SAR plot in Annex B.7: LTE FDD 4 page 143)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - LTE FDD 5 850 MHz									
Ch.	Freq. (MHz)	RB offset	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
				declared**	measured	measured	extrapolated	measured	
10MHz BW/1RB/QPSK									
20450	829.0	low	left cheek	24.0	23.8	0.321	0.336	0.241	22.5
20450	829.0	low	left tilted 15°	24.0	23.8	0.110	0.115	0.083	22.5
20450	829.0	low	right cheek	24.0	23.8	0.413	0.432	0.302	22.5
20525	836.5	low	right cheek	24.0	23.7	0.415	0.445	0.303	22.5
20600	844.0	low	right cheek	24.0	23.7	0.439	0.470	0.320	22.5
20450	829.0	low	right tilted 15°	24.0	23.8	0.123	0.129	0.093	22.5
10MHz BW/25RB/QPSK									
20525	836.5	high	left cheek	23.0	22.7	0.276	0.296	0.207	22.5
20525	836.5	high	left tilted 15°	23.0	22.7	0.100	0.107	0.073	22.5
20525	836.5	high	right cheek	23.0	22.7	0.305	0.327	0.170	22.5
20525	836.5	high	right tilted 15°	23.0	22.7	0.112	0.120	0.083	22.5

Table 63: Test results head SAR LTE FDD 5 850 MHz (see max. SAR plot in Annex B.8: LTE FDD 5 page 146)

measured / extrapolated SAR numbers - hotspot mode - LTE FDD 5 850 MHz										
Ch.	Freq. (MHz)	RB offset	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
10MHz BW/1RB/QPSK										
20450	829.0	low	10	front	24.0	23.8	0.248	0.260	0.195	21.6
20450	829.0	low	10	rear	24.0	23.8	0.286	0.299	0.219	21.6
20525	836.5	low	10	rear	24.0	23.7	0.308	0.330	0.236	21.6
20600	844.0	low	10	rear	24.0	23.7	0.316	0.339	0.243	21.6
20450	829.0	low	10	left edge	24.0	23.8	0.076	0.079	0.037	21.6
20450	829.0	low	10	right edge	24.0	23.8	0.087	0.091	0.041	21.6
20450	829.0	low	10	bottom edge	24.0	23.8	0.064	0.067	0.034	21.6
10MHz BW/25RB/QPSK										
20525	836.5	high	10	front	23.0	22.7	0.205	0.220	0.159	21.6
20525	836.5	high	10	rear	23.0	22.7	0.242	0.259	0.184	21.6
20525	836.5	high	10	left edge	23.0	22.7	0.085	0.091	0.043	21.6
20525	836.5	high	10	right edge	23.0	22.7	0.076	0.081	0.038	21.6
20525	836.5	high	10	bottom edge	23.0	22.7	0.054	0.057	0.282	21.6

Table 64: Test results hotspot mode SAR LTE FDD 5 850 MHz (see max. SAR plot in Annex B.8: LTE FDD 5 page 146)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - LTE FDD 5 850 MHz											
Ch.	Freq. (MHz)	RB offset	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)	
					declared**	measured	measured	extrapolated	measured		
10MHz BW/1RB/QPSK											
20450	829.0	low	15	front	24.0	23.8	0.182	0.191	0.140	21.6	
20450	829.0	low	15	rear	24.0	23.8	0.193	0.202	0.147	21.6	
20525	836.5	low	15	rear	24.0	23.7	0.219	0.235	0.166	21.6	
20600	844.0	low	15	rear	24.0	23.7	0.237	0.254	0.179	21.6	
10MHz BW/25RB/QPSK											
20525	836.5	high	15	front	23.0	22.7	0.163	0.175	0.124	21.6	
20525	836.5	high	15	rear	23.0	22.7	0.171	0.183	0.128	21.6	

Table 65: Test results body worn SAR LTE FDD 5 850 MHz (see max. SAR plot in Annex B.8: LTE FDD 5 page 146)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - LTE FDD 7 2600 MHz										
Ch.	Freq. (MHz)	RB offset	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)	
				declared**	measured	measured	extrapolated	measured		
20MHz BW/1RB/QPSK										
20850	2510	high	left cheek	20.7	20.2	0.831	0.932	0.345	22.5	
21100	2535	high	left cheek	20.7	20.2	0.832	0.934	0.342	22.5	
21350	2560	low	left cheek	20.7	20.6	0.998	1.021	0.413	22.5	
21350	2560	low	left tilted 15°	20.7	20.6	0.262	0.268	0.136	22.5	
20850	2510	high	right cheek	20.7	20.6	1.180	1.207	0.432	22.5	
21100	2535	high	right cheek	20.7	20.6	1.060	1.085	0.387	22.5	
21350	2560	low	right cheek	20.7	20.6	0.850	0.870	0.326	22.5	
21350	2560	low	right tilted 15°	20.7	20.6	0.146	0.149	0.077	22.5	
20850	2510	high	right cheek	20.7	20.6	1.240	1.269	0.446	22.5	
20MHz BW/50RB/QPSK										
20850	2510	high	left cheek	19.7	19.2	0.788	0.884	0.324	22.5	
21100	2535	high	left cheek	19.7	19.2	0.673	0.755	0.270	22.5	
21350	2560	low	left cheek	19.7	19.5	0.785	0.822	0.325	22.5	
21350	2560	low	left tilted 15°	19.7	19.5	0.205	0.215	0.106	22.5	
21350	2560	low	right cheek	19.7	19.5	0.645	0.675	0.248	22.5	
21350	2560	low	right tilted 15°	19.7	19.5	0.112	0.117	0.059	22.5	
20MHz BW/100RB/QPSK										
20850	2510	low	left cheek	19.7	19.1	0.808	0.928	0.331	22.5	
21100	2535	low	left cheek	19.7	19.2	0.631	0.708	0.254	22.5	
21350	2560	low	left cheek	19.7	19.5	0.918	0.961	0.359	22.5	
21350	2560	low	left tilted 15°	19.7	19.5	0.230	0.241	0.116	22.5	
20850	2510	low	right cheek	19.7	19.1	1.110	1.274	0.409	22.5	
21100	2535	low	right cheek	19.7	19.2	0.772	0.866	0.282	22.5	
21350	2560	low	right cheek	19.7	19.5	0.917	0.960	0.343	22.5	
21350	2560	low	right tilted 15°	19.7	19.5	0.131	0.137	0.068	22.5	

Table 66: Test results head SAR LTE FDD 7 2600 MHz (see max. SAR plot in Annex B.9: LTE FDD 7 page 149)

* - repeated at the highest SAR measurement according to the FCC KDB 865664

measured / extrapolated SAR numbers - hotspot mode - LTE FDD 7 2600 MHz										
Ch.	Freq. (MHz)	RB offset	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
20MHz BW/1RB/QPSK										
21350	2560	low	10	front	20.7	20.6	0.421	0.431	0.209	22.2
21350	2560	low	10	rear	20.7	20.6	0.493	0.504	0.247	22.2
21350	2560	low	10	left edge	20.7	20.6	0.050	0.052	0.024	22.2
20850	2510	high	10	right edge	20.7	20.2	0.677	0.760	0.304	22.2
21100	2535	high	10	right edge	20.7	20.2	0.602	0.675	0.273	22.2
21350	2560	low	10	right edge	20.7	20.6	0.668	0.684	0.308	22.2
21350	2560	low	10	bottom edge	20.7	20.6	0.135	0.138	0.050	22.2
20MHz BW/50RB/QPSK										
21350	2560	low	10	front	19.7	19.5	0.323	0.338	0.160	22.2
21350	2560	low	10	rear	19.7	19.5	0.373	0.391	0.187	22.2
21350	2560	low	10	left edge	19.7	19.5	0.041	0.043	0.019	22.2
20850	2510	high	10	right edge	19.7	19.2	0.599	0.672	0.268	22.2
21100	2535	high	10	right edge	19.7	19.2	0.424	0.476	0.191	22.2
21350	2560	low	10	right edge	19.7	19.5	0.509	0.533	0.236	22.2
21350	2560	low	10	bottom edge	19.7	19.5	0.109	0.114	0.040	22.2

Table 67: Test results hotspot mode SAR LTE FDD 7 2600 MHz (see max. SAR plot in Annex B.9: LTE FDD 7 page 149)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - LTE FDD 7 2600 MHz										
Ch.	Freq. (MHz)	RB offset	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
20MHz BW/1RB/QPSK										
21350	2560	low	15	front	20.7	20.6	0.229	0.234	0.121	22.2
20850	2510	high	15	rear	20.7	20.2	0.252	0.283	0.132	22.2
21100	2535	high	15	rear	20.7	20.2	0.248	0.278	0.131	22.2
21350	2560	low	15	rear	20.7	20.6	0.288	0.295	0.152	22.2
20MHz BW/50RB/QPSK										
21350	2560	low	15	front	19.7	19.5	0.177	0.185	0.094	22.2
21350	2560	low	15	rear	19.7	19.5	0.221	0.231	0.117	22.2

Table 68: Test results body worn SAR LTE FDD 7 2600 MHz (see max. SAR plot in Annex B.9: LTE FDD 7 page 149)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - LTE FDD 13 700 MHz									
Ch.	Freq. (MHz)	RB offset	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid
				declared**	measured	measured	extrapolated	measured	(°C)
10MHz BW/1RB/QPSK									
23230	782.0	low	left cheek	24.0	23.9	0.169	0.173	0.128	22.5
23230	782.0	low	left tilted 15°	24.0	23.9	0.100	0.102	0.074	22.5
23230	782.0	low	right cheek	24.0	23.9	0.289	0.296	0.214	22.5
23230	782.0	low	right tilted 15°	24.0	23.9	0.115	0.118	0.087	22.5
5MHz BW/1RB/QPSK									
23205	779.5	low	right cheek	24.0	23.9	0.229	0.234	0.170	22.5
23255	784.5	high	right cheek	24.0	23.9	0.234	0.239	0.174	22.5
10MHz BW/25RB/QPSK									
23230	782.0	low	left cheek	23.0	22.7	0.141	0.151	0.105	22.5
23230	782.0	low	left tilted 15°	23.0	22.7	0.083	0.089	0.061	22.5
23230	782.0	low	right cheek	23.0	22.7	0.237	0.254	0.176	22.5
23230	782.0	low	right tilted 15°	23.0	22.7	0.089	0.096	0.067	22.5

Table 69: Test results head SAR LTE FDD 13 700 MHz (see max. SAR plot in Annex B.10: LTE FDD 13 page 152)

measured / extrapolated SAR numbers - hotspot mode - LTE FDD 13 700 MHz										
Ch.	Freq. (MHz)	RB offset	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid
					declared**	measured	measured	extrapolated	measured	(°C)
10MHz BW/1RB/QPSK										
23230	782.0	low	10	front	24.0	23.9	0.292	0.299	0.235	22.6
23230	782.0	low	10	rear	24.0	23.9	0.277	0.283	0.217	22.6
23230	782.0	low	10	left edge	24.0	23.9	0.121	0.124	0.062	22.6
23230	782.0	low	10	right edge	24.0	23.9	0.117	0.120	0.081	22.6
23230	782.0	low	10	bottom edge	24.0	23.9	0.064	0.065	0.032	22.6
5MHz BW/1RB/QPSK										
23205	779.5	low	10	front	23.0	23.8	0.282	0.235	0.219	22.6
23255	784.5	high	10	front	23.0	23.9	0.291	0.237	0.227	22.6
10MHz BW/50%RB/QPSK										
23230	782.0	low	10	front	23.0	22.7	0.235	0.252	0.186	22.6
23230	782.0	low	10	rear	23.0	22.7	0.260	0.279	0.204	22.6
23230	782.0	low	10	left edge	23.0	22.7	0.059	0.063	0.041	22.6
23230	782.0	low	10	right edge	23.0	22.7	0.078	0.083	0.054	22.6
23230	782.0	low	10	bottom edge	23.0	22.7	0.056	0.060	0.028	22.6

Table 70: Test results hotspot mode SAR LTE FDD 13 700 MHz (see max. SAR plot in Annex B.10: LTE FDD 13 page 152)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - LTE FDD 13 700 MHz										
Ch.	Freq. (MHz)	RB offset	distance (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
10MHz BW/1RB/QPSK										
23230	782.0	low	15	front	24.0	23.9	0.215	0.220	0.165	22.6
23230	782.0	low	15	rear	24.0	23.9	0.202	0.207	0.158	22.6
5MHz BW/1RB/QPSK										
23205	779.5	low	15	front	23.0	23.8	0.315	0.262	0.241	22.6
23255	784.5	high	15	front	23.0	23.9	0.340	0.276	0.258	22.6
10MHz BW/50%RB/QPSK										
23230	782.0	low	15	front	23.0	22.7	0.192	0.206	0.147	22.6
23230	782.0	low	15	rear	23.0	22.7	0.193	0.207	0.149	22.6

Table 71: Test results body worn SAR LTE FDD 13 700 MHz (see max. SAR plot in Annex B.10: LTE FDD 13 page 152)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - LTE FDD 17 700 MHz										
Ch.	Freq. (MHz)	RB offset	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)	
				declared**	measured	measured	extrapolated	measured		
10MHz BW/1RB/QPSK										
23780	709	mid	left cheek	24.0	23.5	0.044	0.049	0.033	22.5	
23780	709	mid	left tilted 15°	24.0	23.5	0.012	0.013	0.009	22.5	
23780	709	mid	right cheek	24.0	23.5	0.051	0.057	0.038	22.5	
23790	710	low	right cheek	24.0	23.4	0.040	0.046	0.030	22.5	
23800	711	low	right cheek	24.0	23.5	0.041	0.046	0.031	22.5	
23780	709	mid	right tilted 15°	24.0	23.5	0.014	0.016	0.011	22.5	
10MHz BW/25RB/QPSK										
23790	710	mid	left cheek	23.0	22.4	0.035	0.040	0.022	22.3	
23790	710	mid	left tilted 15°	23.0	22.4	0.008	0.010	0.006	22.3	
23790	710	mid	right cheek	23.0	22.4	0.038	0.044	0.029	22.3	
23790	710	mid	right tilted 15°	23.0	22.4	0.010	0.011	0.007	22.3	

Table 72: Test results head SAR LTE FDD 17 700 MHz (see max. SAR plot in Annex B.11: LTE FDD 17 page 156)

measured / extrapolated SAR numbers - hotspot mode - LTE FDD 17 700 MHz										
Ch.	Freq. (MHz)	RB offset	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
10MHz BW/1RB/QPSK										
23780	709	mid	10	front	24.0	23.5	0.105	0.118	0.081	22.6
23780	709	mid	10	rear	24.0	23.5	0.110	0.123	0.086	22.6
23790	710	low	10	rear	24.0	23.4	0.104	0.119	0.080	22.6
23800	711	low	10	rear	24.0	23.5	0.112	0.126	0.087	22.6
23780	709	mid	10	left edge	24.0	23.5	0.065	0.072	0.033	22.6
23780	709	mid	10	right edge	24.0	23.5	0.033	0.036	0.023	22.6
23780	709	mid	10	bottom edge	24.0	23.5	0.030	0.033	0.015	22.6
10MHz BW/25RB/QPSK										
23790	710	mid	10	front	23.0	22.4	0.090	0.103	0.070	22.6
23780	709	mid	10	rear	23.0	22.4	0.094	0.108	0.073	22.6
23790	710	mid	10	rear	23.0	22.4	0.091	0.105	0.071	22.6
23800	711	mid	10	rear	23.0	22.4	0.095	0.109	0.074	22.6
23790	710	mid	10	left edge	23.0	22.4	0.054	0.061	0.028	22.6
23790	710	mid	10	right edge	23.0	22.4	0.030	0.034	0.021	22.6
23790	710	mid	10	bottom edge	23.0	22.4	0.022	0.025	0.011	22.6

Table 73: Test results hotspot mode SAR LTE FDD 17 700 MHz (see max. SAR plot in Annex B.11: LTE FDD 17 page 156)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - LTE FDD 17 700 MHz										
Ch.	Freq. (MHz)	RB offset	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
10MHz BW/1RB/QPSK										
23780	709	mid	15	front	24.0	23.5	0.070	0.078	0.056	22.6
23790	710	low	15	front	24.0	23.4	0.062	0.071	0.049	22.6
23800	711	low	15	front	24.0	23.5	0.066	0.075	0.053	22.6
23780	709	mid	15	rear	24.0	23.5	0.063	0.070	0.050	22.6
10MHz BW/25RB/QPSK										
23790	710	mid	15	front	23.0	22.4	0.059	0.067	0.047	22.6
23790	710	mid	15	rear	23.0	22.4	0.050	0.058	0.040	22.6

Table 74: Test results body worn SAR LTE FDD 17 700 MHz (see max. SAR plot in Annex B.11: LTE FDD 17 page 156)

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - WLAN 2450 MHz								
Ch.	Freq. (MHz)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
			declared**	measured	measured	extrapolated	measured	
1	2412	left cheek	14.9	14.5	0.217	0.238	0.097	20.9
6	2437	left cheek	16.4	15.9	0.286	0.321	0.130	20.9
11	2462	left cheek	14.9	14.5	0.255	0.280	0.111	20.9
6	2437	left tilted 15°	16.4	15.9	0.159	0.178	0.070	20.9
6	2437	right cheek	16.4	15.9	0.181	0.203	0.091	20.9
6	2437	right tilted 15°	16.4	15.9	0.085	0.095	0.045	20.9

Table 75: Test results head SAR WLAN 2450 MHz (see max. SAR plot in Annex B.12: WLAN 2450GHz page 160)

measured / extrapolated SAR numbers - hotspot mode - WLAN 2450 MHz										
Ch.	Freq. (MHz)	Test condition	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
6	2437	1Mbit/s	10	front	16.4	15.9	0.058	0.065	0.029	21.9
1	2412	1Mbit/s	10	rear	14.9	14.5	0.146	0.160	0.070	21.9
6	2437	1Mbit/s	10	rear	16.4	15.9	0.195	0.219	0.094	21.9
11	2462	1Mbit/s	10	rear	14.9	14.5	0.058	0.064	0.028	21.9
6	2437	1Mbit/s	10	left edge	16.4	15.9	0.009	0.011	0.005	21.9
6	2437	1Mbit/s	10	right edge	16.4	15.9	0.061	0.069	0.031	21.9
6	2437	1Mbit/s	10	top	16.4	15.9	0.020	0.022	0.011	21.9

Table 76: Test results hotspot mode SAR WLAN 2450 MHz (see max. SAR plot in Annex B.12: WLAN 2450GHz page 160)

Bottom side edge positions for hotspot mode are not required since the distance from the WLAN antenna to the edge is greater than 2.5cm.

measured / extrapolated SAR numbers - Body worn - WLAN 2450 MHz										
Ch.	Freq. (MHz)	Test condition	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
6	2437	1Mbit/s	15	front	16.4	15.9	0.030	0.033	0.016	21.9
1	2412	1Mbit/s	15	rear	14.9	14.5	0.054	0.059	0.030	21.9
6	2437	1Mbit/s	15	rear	16.4	15.9	0.074	0.083	0.039	21.9
11	2462	1Mbit/s	15	rear	14.9	14.5	0.151	0.166	0.072	21.9

Table 77: Test results body worn SAR WLAN 2450 MHz (see max. SAR plot in Annex B.12: WLAN 2450GHz page 160)

* - repeated at the highest SAR measurement according to the FCC KDB 865664

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - WLAN 5 GHz								
Ch.	Freq. (MHz)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
			declared**	measured	measured	extrapolated	measured	
36	5180	left cheek	16.7	15.9	0.089	0.106	0.031	22.3
60	5300	left cheek	16.7	16.0	0.076	0.089	0.025	22.3
116	5580	left cheek	17.4	17.4	0.131	0.131	0.050	22.3
165	5825	left cheek	14.4	14.1	0.484	0.519	0.151	22.3
36	5180	left tilted 15°	16.7	15.9	0.028	0.034	0.008	22.3
60	5300	left tilted 15°	16.7	16.0	0.025	0.029	0.007	22.3
116	5580	left tilted 15°	17.4	17.4	0.040	0.040	0.009	22.3
165	5825	left tilted 15°	14.4	14.1	0.062	0.066	0.017	22.3
36	5180	right cheek	16.7	15.9	0.071	0.086	0.019	22.3
60	5300	right cheek	16.7	16.0	0.083	0.098	0.022	22.3
116	5580	right cheek	17.4	17.4	0.141	0.141	0.040	22.3
165	5825	right cheek	14.4	14.1	0.102	0.109	0.029	22.3
36	5180	right tilted 15°	16.7	15.9	0.034	0.041	0.010	22.3
60	5300	right tilted 15°	16.7	16.0	0.026	0.031	0.009	22.3
116	5580	right tilted 15°	17.4	17.4	0.019	0.019	0.004	22.3
165	5825	right tilted 15°	14.4	14.1	0.034	0.036	0.009	22.3

Table 78: Test results head SAR WLAN 5 GHz (see max. SAR plot in Annex B.13: WLAN 5GHz page 163)

measured / extrapolated SAR numbers - Body worn - WLAN 5 GHz										
Ch.	Freq. (MHz)	Test condition	dist. (mm)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid (°C)
					declared**	measured	measured	extrapolated	measured	
36	5180	6Mbit/s	15	front	16.7	15.9	0.023	0.027	0.008	22.0
60	5300	6Mbit/s	15	front	16.7	16.0	0.028	0.033	0.011	22.0
116	5580	6Mbit/s	15	front	17.4	17.4	0.005	0.005	0.001	22.0
165	5825	6Mbit/s	15	front	14.4	14.1	0.017	0.018	0.005	22.0
36	5180	6Mbit/s	15	rear	16.7	15.9	0.398	0.479	0.136	22.0
60	5300	6Mbit/s	15	rear	16.7	16.0	0.578	0.679	0.198	22.0
116	5580	6Mbit/s	15	rear	17.4	17.4	0.445	0.445	0.149	22.0
165	5825	6Mbit/s	15	rear	14.4	14.1	0.277	0.297	0.093	22.0

Table 79: Test results body worn SAR WLAN 5 GHz (see max. SAR plot in Annex B.13: WLAN 5GHz page 163)

* - repeated at the highest SAR measurement according to the FCC KDB 865664

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - Bluetooth 2450 MHz								
Ch.	Freq. (MHz)	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)	liquid
			declared**	measured	measured	extrapolated	measured	(°C)
0	2402	left cheek	10.30	5.73	0.014	0.041	0.006	22.5
39	2441	left cheek	10.30	8.47	0.026	0.039	0.012	22.5
78	2480	left cheek	10.30	6.89	0.016	0.035	0.007	22.5
39	2441	left tilted 15°	10.30	8.47	0.020	0.030	0.009	22.5
39	2441	right cheek	10.30	8.47	0.023	0.036	0.010	22.5
39	2441	right tilted 15°	10.30	8.47	0.009	0.014	0.005	22.5

Table 80: Test results head SAR Bluetooth 2.4 GHz (see max. SAR plot in Annex B.14: Bluetooth 2.4GHz page 165)

Estimated stand alone SAR.					
Communication system	freq. (GHz)	distance (mm)	P _{avg} (dBm)	P _{avg} (mW)	estimated _{1-g} (W/kg)
Bluetooth 2450 hotspot	2.45	10	10.5	11.2	0.234
Bluetooth 2450 body worn	2.45	15	10.5	11.2	0.156

Table 81: Estimated stand alone SAR_{max} for **Bluetooth 2450MHz** hotspot mode and body worn

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$
W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

7.3.2 General description of test procedures

- The DUT is tested using CMU 200 and CMW 500 communications testers as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.
- Test positions as described in the tables above are in accordance with the specified test standard.
- Tests in body position were performed in that configuration, which generates the highest time based averaged output power (see conducted power results).
- Tests in head position with GSM were performed in voice mode with 1 timeslot unless GPRS/EGPRS/DTM function allows parallel voice and data traffic on 2 or more timeslots (see section 2.4 for details).
- UMTS was tested in RMC mode with 12.2 kbit/s and TPC bits set to 'all 1'.
- WLAN was tested in 802.11a/b mode with 1 MBit/s and 6 MBit/s. According to KDB 248227 the SAR testing for 802.11g/n is not required since the maximum power of 802.11g/n is less ¼ dB higher than maximum power of 802.11a/b.
- For 802.11ac slide 78 of 79 in the October 2012 TCB workshop slides and slide 44 of 49 in the April 2013 TCB workshop slides were referred to (RF exposure slides for both)
- Required WLAN test channels were selected according to KDB 248227
- For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15 mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.
- According to FCC KDB pub 941225 D06 this device has been tested with 10 mm distance to the phantom for operation in WLAN hot spot mode.
- Per FCC KDB pub 941225 D06 the edges with antennas within 2.5 cm are required to be evaluated for SAR to cover WLAN hot spot function.
- According to IEEE 1528 the SAR test shall be performed at middle channel. Testing of top and bottom channel is optional.
- According to KDB 447498 D01 testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- IEEE 1528-2003 require the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- **10-g extremity SAR** is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg.

7.3.3 Multiple Transmitter Information

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05.

reported SAR WWAN and WLAN 2.4GHz , Σ SAR evaluation, SPLSR_i						
Frequency band	Position	SAR _{max} /W/kg		Σ SAR <1.6W/kg	distance R _i , mm	ratio ≤ 0.040
		WWAN	WLAN			
GSM 850	left cheek	0.515	0.321	0.836		
	left tilted 15°	0.244	0.178	0.422		
	right cheek	0.720	0.203	0.923		
	right tilted 15°	0.259	0.095	0.354		
	front 10mm	0.465	0.065	0.530		
	rear 10mm	0.514	0.219	0.733		
	front 15mm	0.431	0.033	0.464		
	rear 15mm	0.404	0.166	0.570		
GSM 1900	left cheek	0.273	0.321	0.594		
	left tilted 15°	0.080	0.178	0.258		
	right cheek	0.542	0.203	0.745		
	right tilted 15°	0.063	0.095	0.158		
	front 10mm	0.585	0.065	0.650		
	rear 10mm	0.478	0.219	0.697		
	front 15mm	0.392	0.033	0.425		
	rear 15mm	0.276	0.166	0.442		
UMTS FDD II	left cheek	0.312	0.321	0.633		
	left tilted 15°	0.090	0.178	0.268		
	right cheek	0.550	0.203	0.753		
	right tilted 15°	0.064	0.095	0.159		
	front 10mm	0.713	0.065	0.778		
	rear 10mm	0.639	0.219	0.858		
	front 15mm	0.388	0.033	0.421		
	rear 15mm	0.356	0.166	0.522		
UMTS FDD IV	left cheek	1.338	0.321	1.659	78.0	0.027
	left tilted 15°	0.121	0.178	0.299		
	right cheek	0.452	0.203	0.655		
	right tilted 15°	0.124	0.095	0.219		
	front 10mm	0.595	0.065	0.660		
	rear 10mm	0.682	0.219	0.901		
	left edge 10mm	0.744	0.011	0.755		
	front 15mm	0.329	0.033	0.362		
	rear 15mm	0.365	0.166	0.531		
WCDMA FDD V	left cheek	0.427	0.321	0.748		
	left tilted 15°	0.191	0.178	0.369		
	right cheek	0.516	0.203	0.719		
	right tilted 15°	0.190	0.095	0.285		
	front 10mm	0.328	0.065	0.393		
	rear 10mm	0.362	0.219	0.581		
	front 15mm	0.271	0.033	0.304		
	rear 15mm	0.295	0.166	0.461		
LTE FDD 2	left cheek	0.747	0.321	1.068		
	left tilted 15°	0.166	0.178	0.344		
	right cheek	0.450	0.203	0.653		
	right tilted 15°	0.261	0.095	0.356		
	front 10mm	0.618	0.065	0.683		
	rear 10mm	0.821	0.219	1.040		
	front 15mm	0.486	0.033	0.519		
	rear 15mm	0.338	0.166	0.504		

Table 82: SAR_{max} WWAN and WLAN 2.4GHz, Σ SAR evaluation, SPLSR_i

reported SAR WWAN and WLAN 2.4GHz , Σ SAR evaluation, SPLSR_i						
Frequency band	Position	SAR _{max} /W/kg		Σ SAR <1.6W/kg	distance R _i , mm	ratio ≤ 0.040
		WWAN	WLAN			
LTE FDD 4	left cheek	1.089	0.321	1.410		
	left tilted 15°	0.060	0.178	0.238		
	right cheek	0.177	0.203	0.380		
	right tilted 15°	0.047	0.095	0.142		
	front 10mm	0.520	0.065	0.585		
	rear 10mm	0.479	0.219	0.698		
	left edge 10mm	0.646	0.011	0.657		
	front 15mm	0.269	0.033	0.302		
	rear 15mm	0.362	0.166	0.528		
LTE FDD 5	left cheek	0.336	0.321	0.657		
	left tilted 15°	0.115	0.178	0.293		
	right cheek	0.470	0.203	0.673		
	right tilted 15°	0.129	0.095	0.224		
	front 10mm	0.260	0.065	0.325		
	rear 10mm	0.339	0.219	0.558		
	front 15mm	0.191	0.033	0.224		
	rear 15mm	0.254	0.166	0.420		
LTE FDD 7	left cheek	1.021	0.321	1.342		
	left tilted 15°	0.268	0.178	0.446		
	right cheek	1.269	0.203	1.472		
	right tilted 15°	0.149	0.095	0.244		
	front 10mm	0.431	0.065	0.496		
	rear 10mm	0.504	0.219	0.723		
	front 15mm	0.234	0.033	0.267		
	rear 15mm	0.295	0.166	0.461		
LTE FDD 13	left cheek	0.173	0.321	0.494		
	left tilted 15°	0.102	0.178	0.280		
	right cheek	0.296	0.203	0.499		
	right tilted 15°	0.118	0.095	0.213		
	front 10mm	0.299	0.065	0.364		
	rear 10mm	0.283	0.219	0.502		
	front 15mm	0.276	0.033	0.309		
	rear 15mm	0.207	0.166	0.373		
LTE FDD 17	left cheek	0.049	0.321	0.370		
	left tilted 15°	0.013	0.178	0.191		
	right cheek	0.057	0.203	0.260		
	right tilted 15°	0.016	0.095	0.111		
	front 10mm	0.118	0.065	0.183		
	rear 10mm	0.126	0.219	0.345		
	front 15mm	0.078	0.033	0.111		
	rear 15mm	0.070	0.166	0.236		

Table 83: SAR_{max} **WWAN** and **WLAN 2.4GHz**, Σ SAR evaluation, **SPLSR_i**

reported SAR WWAN and WLAN 5GHz , Σ SAR evaluation, SPLSR_i						
Frequency band	Position	SAR _{max} /W/kg		Σ SAR	distance	ratio
		WWAN	WLAN	<1.6W/kg	R _i , mm	≤ 0.040
GSM 850	left cheek	0.515	0.519	1.034		
	left tilted 15°	0.244	0.066	0.310		
	right cheek	0.720	0.141	0.861		
	right tilted 15°	0.259	0.041	0.300		
	front 15mm	0.431	0.033	0.464		
	rear 15mm	0.404	0.679	1.083		
GSM 1900	left cheek	0.273	0.519	0.792		
	left tilted 15°	0.080	0.066	0.146		
	right cheek	0.542	0.141	0.683		
	right tilted 15°	0.063	0.041	0.104		
	front 15mm	0.392	0.033	0.425		
	rear 15mm	0.276	0.679	0.955		
UMTS FDD II	left cheek	0.312	0.519	0.831		
	left tilted 15°	0.090	0.066	0.156		
	right cheek	0.550	0.141	0.691		
	right tilted 15°	0.064	0.041	0.105		
	front 15mm	0.388	0.033	0.421		
	rear 15mm	0.356	0.679	1.035		
UMTS FDD IV	left cheek	1.338	0.519	1.857	84.7	0.030
	left tilted 15°	0.121	0.066	0.187		
	right cheek	0.452	0.141	0.593		
	right tilted 15°	0.124	0.041	0.165		
	front 15mm	0.329	0.033	0.362		
	rear 15mm	0.365	0.679	1.044		
WCDMA FDD V	left cheek	0.427	0.519	0.946		
	left tilted 15°	0.191	0.066	0.257		
	right cheek	0.516	0.141	0.657		
	right tilted 15°	0.190	0.041	0.231		
	front 15mm	0.271	0.033	0.304		
	rear 15mm	0.295	0.679	0.974		
LTE FDD 2	left cheek	0.747	0.519	1.266		
	left tilted 15°	0.166	0.066	0.232		
	right cheek	0.450	0.141	0.591		
	right tilted 15°	0.261	0.041	0.302		
	front 15mm	0.486	0.033	0.519		
	rear 15mm	0.338	0.679	1.017		
LTE FDD 4	left cheek	1.089	0.519	1.608	86.7	0.024
	left tilted 15°	0.060	0.066	0.126		
	right cheek	0.177	0.141	0.318		
	right tilted 15°	0.047	0.041	0.088		
	front 15mm	0.269	0.033	0.302		
	rear 15mm	0.362	0.679	1.041		
LTE FDD 5	left cheek	0.336	0.519	0.855		
	left tilted 15°	0.115	0.066	0.181		
	right cheek	0.470	0.141	0.611		
	right tilted 15°	0.129	0.041	0.170		
	front 15mm	0.191	0.033	0.224		
	rear 15mm	0.254	0.679	0.933		
LTE FDD 7	left cheek	1.021	0.519	1.540		
	left tilted 15°	0.268	0.066	0.334		
	right cheek	1.269	0.141	1.410		
	right tilted 15°	0.149	0.041	0.190		
	front 15mm	0.234	0.033	0.267		
	rear 15mm	0.295	0.679	0.974		

Table 84: SAR_{max} **WWAN** and **WLAN 5GHz**, Σ SAR evaluation, **SPLSR_i**

reported SAR WWAN and WLAN 5GHz , Σ SAR evaluation, SPLSR_i						
Frequency band	Position	SARmax /W/kg		Σ SAR	distance	ratio
		WWAN	WLAN	<1.6W/kg	R _i , mm	≤ 0.040
LTE FDD 13	left cheek	0.173	0.519	0.692		
	left tilted 15°	0.102	0.066	0.168		
	right cheek	0.296	0.141	0.437		
	right tilted 15°	0.118	0.041	0.159		
	front 15mm	0.276	0.033	0.309		
	rear 15mm	0.207	0.679	0.886		
LTE FDD 17	left cheek	0.049	0.519	0.568		
	left tilted 15°	0.013	0.066	0.079		
	right cheek	0.057	0.141	0.198		
	right tilted 15°	0.016	0.041	0.057		
	front 15mm	0.078	0.033	0.111		
	rear 15mm	0.070	0.679	0.749		

Table 85: SAR_{max} WWAN and **WLAN 5GHz**, Σ SAR evaluation, **SPLSR_i**,

reported SAR WWAN and BT 2.4GHz , Σ SAR evaluation, SPLSR_i						
Frequency band	Position	SAR _{max} /W/kg		Σ SAR	distance	ratio
		WWAN	BT	<1.6W/kg	R _i , mm	≤ 0.040
GSM 850	left cheek	0.515	0.039	0.554		
	left tilted 15°	0.244	0.030	0.274		
	right cheek	0.720	0.036	0.756		
	right tilted 15°	0.259	0.014	0.273		
	front 10mm	0.465	0.234	0.699		
	rear 10mm	0.514	0.234	0.748		
	front 15mm	0.431	0.156	0.587		
	rear 15mm	0.404	0.156	0.560		
GSM 1900	left cheek	0.273	0.039	0.312		
	left tilted 15°	0.080	0.030	0.110		
	right cheek	0.542	0.036	0.578		
	right tilted 15°	0.063	0.014	0.077		
	front 10mm	0.585	0.234	0.819		
	rear 10mm	0.478	0.234	0.712		
	front 15mm	0.392	0.156	0.548		
	rear 15mm	0.276	0.156	0.432		
UMTS FDD II	left cheek	0.312	0.039	0.351		
	left tilted 15°	0.090	0.030	0.120		
	right cheek	0.550	0.036	0.586		
	right tilted 15°	0.064	0.014	0.078		
	front 10mm	0.713	0.234	0.947		
	rear 10mm	0.639	0.234	0.873		
	front 15mm	0.388	0.156	0.544		
	rear 15mm	0.356	0.156	0.512		
UMTS FDD IV	left cheek	1.338	0.039	1.377		
	left tilted 15°	0.121	0.030	0.151		
	right cheek	0.452	0.036	0.488		
	right tilted 15°	0.124	0.014	0.138		
	front 10mm	0.595	0.234	0.829		
	rear 10mm	0.682	0.234	0.916		
	left edge 10mm	0.744	0.234	0.978		
	front 15mm	0.329	0.156	0.485		
WCDMA FDD V	left cheek	0.427	0.039	0.466		
	left tilted 15°	0.191	0.030	0.221		
	right cheek	0.516	0.036	0.552		
	right tilted 15°	0.190	0.014	0.204		
	front 10mm	0.328	0.234	0.562		
	rear 10mm	0.362	0.234	0.596		
	front 15mm	0.271	0.156	0.427		
	rear 15mm	0.295	0.156	0.451		

Table 86: SAR_{max} WWAN and **Bluetooth 2.4GHz**, Σ SAR evaluation, **SPLSR_i**,

reported SAR WWAN and Bluetooth 2.4GHz, ΣSAR evaluation, SPLSRi						
Frequency band	Position	SAR _{max} /W/kg		ΣSAR <1.6W/kg	distance Ri, mm	ratio ≤ 0.040
		WWAN	BT			
LTE FDD 4	left cheek	1.089	0.039	1.128		
	left tilted 15°	0.060	0.030	0.090		
	right cheek	0.177	0.036	0.213		
	right tilted 15°	0.047	0.014	0.061		
	front 10mm	0.520	0.234	0.754		
	rear 10mm	0.479	0.234	0.713		
	left edge 10mm	0.646	0.234	0.880		
	front 15mm	0.269	0.156	0.425		
rear 15mm	0.362	0.156	0.518			
LTE FDD 5	left cheek	0.336	0.039	0.375		
	left tilted 15°	0.115	0.030	0.145		
	right cheek	0.470	0.036	0.506		
	right tilted 15°	0.129	0.014	0.143		
	front 10mm	0.260	0.234	0.494		
	rear 10mm	0.339	0.234	0.573		
	front 15mm	0.191	0.156	0.347		
	rear 15mm	0.254	0.156	0.410		
LTE FDD 7	left cheek	1.021	0.039	1.060		
	left tilted 15°	0.268	0.030	0.298		
	right cheek	1.269	0.036	1.305		
	right tilted 15°	0.149	0.014	0.163		
	front 10mm	0.431	0.234	0.665		
	rear 10mm	0.504	0.234	0.738		
	front 15mm	0.234	0.156	0.390		
	rear 15mm	0.295	0.156	0.451		
LTE FDD 13	left cheek	0.173	0.039	0.212		
	left tilted 15°	0.102	0.030	0.132		
	right cheek	0.296	0.036	0.332		
	right tilted 15°	0.118	0.014	0.132		
	front 10mm	0.299	0.234	0.533		
	rear 10mm	0.283	0.234	0.517		
	front 15mm	0.276	0.156	0.432		
	rear 15mm	0.207	0.156	0.363		
LTE FDD 17	left cheek	0.049	0.039	0.088		
	left tilted 15°	0.013	0.030	0.043		
	right cheek	0.057	0.036	0.093		
	right tilted 15°	0.016	0.014	0.030		
	front 10mm	0.118	0.234	0.352		
	rear 10mm	0.126	0.234	0.360		
	front 15mm	0.078	0.156	0.234		
	rear 15mm	0.070	0.156	0.226		

Table 87: SAR_{max} WWAN and Bluetooth 2.4GHz, ΣSAR evaluation, SPLSR_i

reported SAR WWAN , BT and WLAN 5GHz , Σ SAR evaluation, SPLSRi							
Frequency band	Position	SAR _{max} /W/kg			Σ SAR	distance	ratio
		WWAN	WLAN	BT	<1.6W/kg	Ri, mm	≤ 0.040
GSM 850	left cheek	0.515	0.519	0.039	1.073		
	left tilted 15°	0.244	0.066	0.030	0.340		
	right cheek	0.720	0.141	0.036	0.897		
	right tilted 15°	0.259	0.041	0.014	0.314		
	front 15mm	0.431	0.033	0.156	0.620		
	rear 15mm	0.404	0.679	0.156	1.239		
GSM 1900	left cheek	0.273	0.519	0.039	0.831		
	left tilted 15°	0.080	0.066	0.030	0.176		
	right cheek	0.542	0.141	0.036	0.719		
	right tilted 15°	0.063	0.041	0.014	0.118		
	front 15mm	0.392	0.033	0.156	0.581		
	rear 15mm	0.276	0.679	0.156	1.111		
UMTS FDD II	left cheek	0.312	0.519	0.039	0.870		
	left tilted 15°	0.090	0.066	0.030	0.186		
	right cheek	0.550	0.141	0.036	0.727		
	right tilted 15°	0.064	0.041	0.014	0.119		
	front 15mm	0.388	0.033	0.156	0.577		
	rear 15mm	0.356	0.679	0.156	1.191		
UMTS FDD IV	left cheek	1.338	0.519	0.039	1.896	84.7	0.031
	left tilted 15°	0.121	0.066	0.030	0.217		
	right cheek	0.452	0.141	0.036	0.629		
	right tilted 15°	0.124	0.041	0.014	0.179		
	front 15mm	0.329	0.033	0.156	0.518		
	rear 15mm	0.365	0.679	0.156	1.200		
WCDMA FDD V	left cheek	0.427	0.519	0.039	0.985		
	left tilted 15°	0.191	0.066	0.030	0.287		
	right cheek	0.516	0.141	0.036	0.693		
	right tilted 15°	0.190	0.041	0.014	0.245		
	front 15mm	0.271	0.033	0.156	0.460		
	rear 15mm	0.295	0.679	0.156	1.130		
LTE FDD 2	left cheek	0.747	0.519	0.039	1.305		
	left tilted 15°	0.166	0.066	0.030	0.262		
	right cheek	0.450	0.141	0.036	0.627		
	right tilted 15°	0.261	0.041	0.014	0.316		
	front 15mm	0.486	0.033	0.156	0.675		
	rear 15mm	0.338	0.679	0.156	1.173		
LTE FDD 4	left cheek	1.089	0.519	0.039	1.647	86.7	0.024
	left tilted 15°	0.060	0.066	0.030	0.156		
	right cheek	0.177	0.141	0.036	0.354		
	right tilted 15°	0.047	0.041	0.014	0.102		
	front 15mm	0.269	0.033	0.156	0.458		
	rear 15mm	0.362	0.679	0.156	1.197		

Table 88: SAR_{max} **WWAN**, **WLAN 5GHz** and **Bluetooth 2.4GHz**, Σ SAR evaluation, **SPLSRi**,

reported SAR WWAN , BT and WLAN 5GHz , Σ SAR evaluation, SPLSRi							
Frequency band	Position	SAR _{max} /W/kg			Σ SAR	distance	ratio
		WWAN	WLAN	BT	<1.6W/kg	Ri, mm	≤ 0.040
LTE FDD 5	left cheek	0.336	0.519	0.039	0.894		
	left tilted 15°	0.115	0.066	0.030	0.211		
	right cheek	0.470	0.141	0.036	0.647		
	right tilted 15°	0.129	0.041	0.014	0.184		
	front 15mm	0.191	0.033	0.156	0.380		
	rear 15mm	0.254	0.679	0.156	1.089		
LTE FDD 7	left cheek	1.021	0.519	0.039	1.579		
	left tilted 15°	0.268	0.066	0.030	0.364		
	right cheek	1.269	0.141	0.036	1.446		
	right tilted 15°	0.149	0.041	0.014	0.204		
	front 15mm	0.234	0.033	0.156	0.423		
	rear 15mm	0.295	0.679	0.156	1.130		
LTE FDD 13	left cheek	0.173	0.519	0.039	0.731		
	left tilted 15°	0.102	0.066	0.030	0.198		
	right cheek	0.296	0.141	0.036	0.473		
	right tilted 15°	0.118	0.041	0.014	0.173		
	front 15mm	0.276	0.033	0.156	0.465		
	rear 15mm	0.207	0.679	0.156	1.042		
LTE FDD 17	left cheek	0.049	0.519	0.039	0.607		
	left tilted 15°	0.013	0.066	0.030	0.109		
	right cheek	0.057	0.141	0.036	0.234		
	right tilted 15°	0.016	0.041	0.014	0.071		
	front 15mm	0.078	0.033	0.156	0.267		
	rear 15mm	0.070	0.679	0.156	0.905		

Table 89: SAR_{max} **WWAN**, **WLAN 5GHz** and **Bluetooth 2.4GHz**, Σ SAR evaluation, **SPLSRi**

Conclusion:


Σ SAR > 1.6 W/kg, but SAR-to-(peak-locations spacing) ratio (SPLSR_i) is less than **0.04** therefore simultaneous transmissions SAR measurement with the enlarged zoom scan measurement and volume scan post-processing procedures is **not** required.

Evaluation by calculated volumetric SAR data see in Annex B.15: Volumetric SAR page 166

7.3.4 SAR peak location separation

UMTS FDD IV + WLAN2450 left cheek

Find distance of maxima	
<input type="checkbox"/> Maxima and position w.r.t. Grid Reference Point associated 1g averages	
<input type="checkbox"/> Zoom Scan (D:\SAR-3\Projekte2013\1-6965-4-24\1750\IEEE1528-UMTS FDD IV head.da53:0\Touch Position - Mid)	
Max. 1 at (3.65, -6.86, -0.00) cm	1.31 W/kg
<input type="checkbox"/> Zoom Scan (R:\Projekte2013\1-6965-4-24\2450\IEEE1528_EN62209-WLAN2450 head.da53:0\Touch Position - Middle)	
Max. 2 at (4.77, 0.85, -0.27) cm	0.29 W/kg
<input type="checkbox"/> Distances and Separation Ratios	
Max. 1 - Max. 2	Distance [cm]: 7.80 / Separation ratio [W/kg/cm]: 0.21

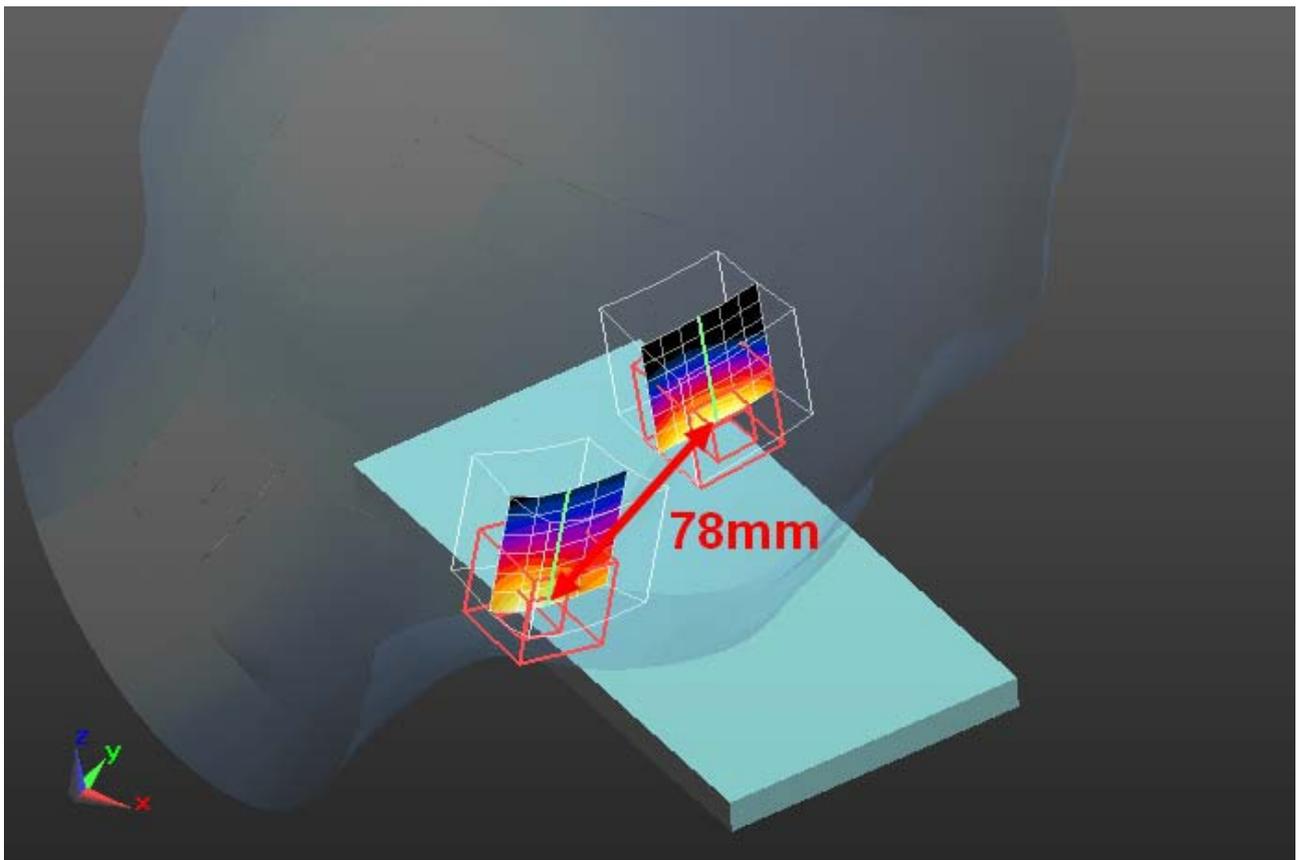


UMTS FDD IV + WLAN5GHz rear hotspot mode 10mm

Find distance of maxima

Maxima and position w.r.t. Grid Reference Point associated 1g averages	
<input type="checkbox"/> Zoom Scan (D:\SAR-3\Projekte2013\1-6965-4-24\1750\IEEE1528-UMTS FDD IV head.da53:0/Touch Position - Mid)	
Max. 1 at (3.65, -6.86, -0.00) cm	1.31 W/kg
<input type="checkbox"/> Zoom Scan (R:\Projekte2013\1-6965-4-24\5GHz\IEEE1528_EN62209-WLAN5GHz head.da53:0/Touch Position - Ch165)	
Max. 2 at (2.99, 1.58, -0.19) cm	0.48 W/kg
<input type="checkbox"/> Distances and Separation Ratios	
Max. 1 - Max. 2	Distance [cm]: 8.47 / Separation ratio [W/kg/cm]: 0.21

Done

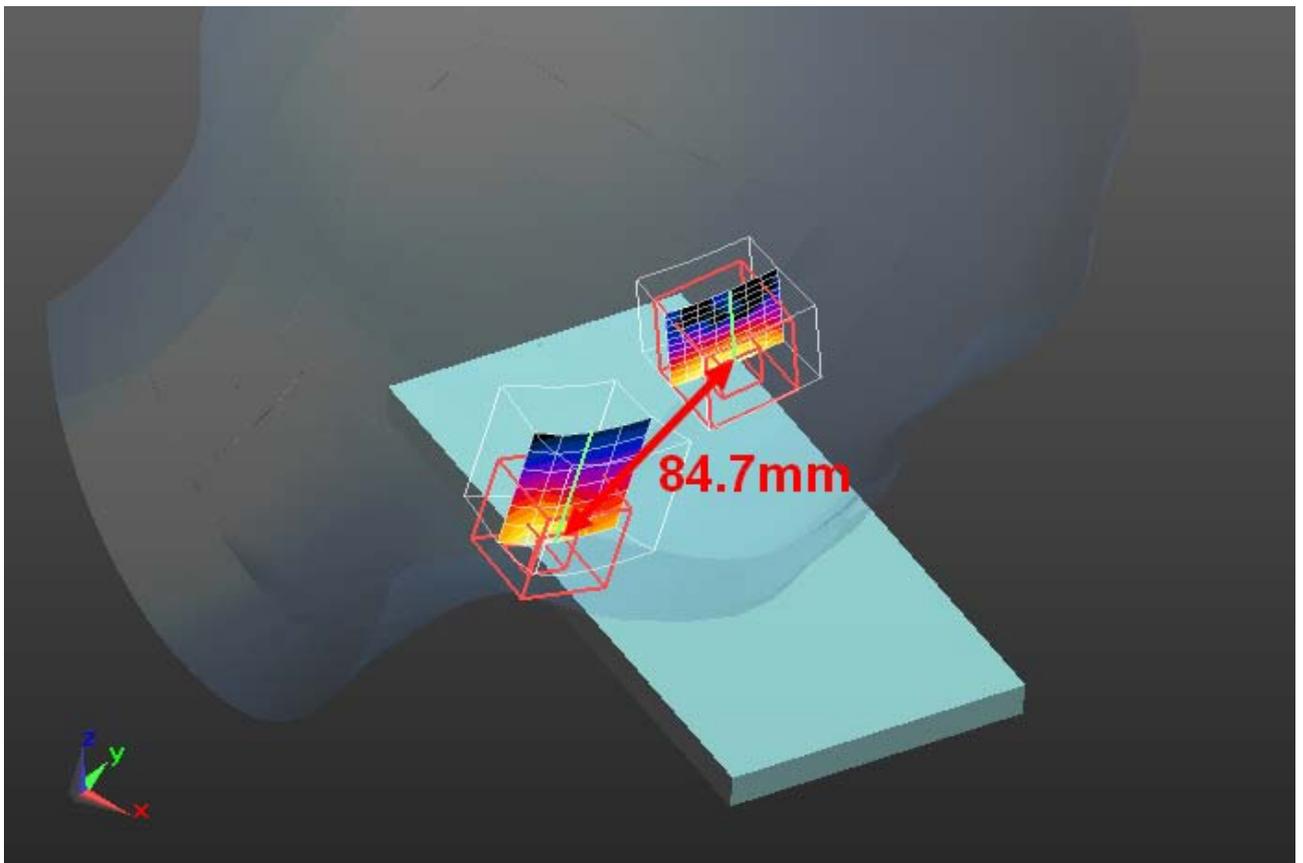


UMTS FDD II + WLAN2450 left cheek

Find distance of maxima

Maxima and position w.r.t. Grid Reference Point		associated 1g averages
Zoom Scan (D:\SAR-3\Projekte2013\1-6965-4-24\1750\IEEE1528-LTE FDD 4 head.da53:0/Touch Position - Hi 99RB offset 2)		
Max. 1 at (3.58, -7.07, 0.00) cm		1.37 W/kg
Zoom Scan (R:\Projekte2013\1-6965-4-24\5GHz\IEEE1528_EN62209-WLAN5GHz head.da53:0/Touch Position - Ch165)		
Max. 2 at (2.99, 1.58, -0.19) cm		0.48 W/kg
Distances and Separation Ratios		
Max. 1 - Max. 2		Distance [cm]: 8.67 / Separation ratio [W/kg/cm]: 0.21

Done

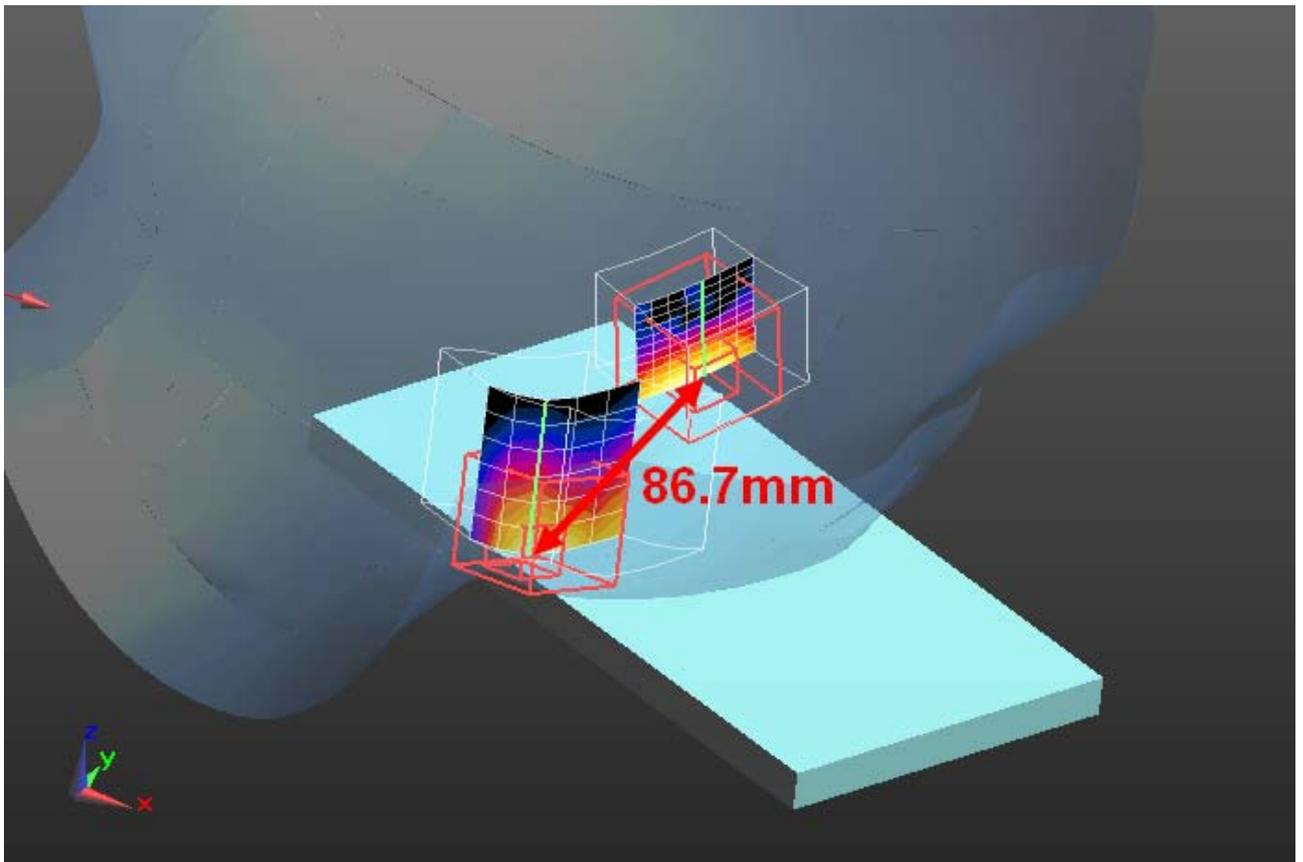

8 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

Equipment	Type	Manufacturer	Serial No.	Last Calibration	Frequency (months)
Dosimetric E-Field Probe	ET3DV6	Schmid & Partner Engineering AG	1558	August 22, 2013	12
Dosimetric E-Field Probe	ES3DV3	Schmid & Partner Engineering AG	3320	June 04, 2013	12
Dosimetric E-Field Probe	ES3DV3	Schmid & Partner Engineering AG	3326	September 02, 2013	12
Dosimetric E-Field Probe	EX3DV4	Schmid & Partner Engineering AG	3944	August 02, 2013	12
750 MHz System Validation Dipole	D750V3	Schmid & Partner Engineering AG	1041	August 15, 2013	24
835 MHz System Validation Dipole	D835V2	Schmid & Partner Engineering AG	4d153	June 06, 2013	24
1750 MHz System Validation Dipole	D1750V2	Schmid & Partner Engineering AG	1093	June 06, 2013	24
1900 MHz System Validation Dipole	D1900V2	Schmid & Partner Engineering AG	5d009	May 15, 2013	24
2450 MHz System Validation Dipole	D2450V2	Schmid & Partner Engineering AG	710	August 13, 2012	24
2600 MHz System Validation Dipole	D2600V2	Schmid & Partner Engineering AG	1040	August 15, 2013	24
5 GHz System Validation Dipole	D5GHV2	Schmid & Partner Engineering AG	1055	August 19, 2013	24
Data acquisition electronics	DAE3V1	Schmid & Partner Engineering AG	413	January 11, 2013	12
Data acquisition electronics	DAE3V1	Schmid & Partner Engineering AG	477	May 13, 2013	12
Data acquisition electronics	DAE4	Schmid & Partner Engineering AG	1387	August 28, 2013	12
Software	DASY52 52.8.7	Schmid & Partner Engineering AG	---	N/A	--
Phantom	SAM	Schmid & Partner Engineering AG	---	N/A	--
Triple Flat Phantom 5.1C	QD 000 P51 CA	Schmid & Partner Engineering AG	---	N/A	--
Universal Radio Communication Tester	CMU 200	Rohde & Schwarz	106826	January 16, 2013	24
Universal Radio Communication Tester	CMW500	Rohde & Schwarz	102375	January 16, 2013	24
Network Analyser 300 kHz to 6 GHz	8753ES	Hewlett Packard)*	US39174436	February 24, 2012	24
Dielectric Probe Kit	85070C	Hewlett Packard	US99360146	N/A	12
Signal Generator	8671B	Hewlett Packard	2823A00656	January 15, 2013	24
Amplifier	25S1G4 (25 Watt)	Amplifier Research	20452	N/A	--
Power Meter	NRP	Rohde & Schwarz	101367	January 15, 2013	24
Power Meter Sensor	NRP Z22	Rohde & Schwarz	100227	January 14, 2013	12
Power Meter Sensor	NRP Z22	Rohde & Schwarz	100234	January 14, 2013	12
Directional Coupler	778D	Hewlett Packard	19171	January 14, 2013	12

)* : Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

9 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A: System performance check

Date/Time: 18.12.2013 16:27:19

SystemPerformanceCheck-D750 head 2013-12-18

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1041

Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.188$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.15, 6.15, 6.15); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL750/d=15mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1): Interpolated

grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 8.85 W/kg

HSL750/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 104.0 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 8.21 W/kg; SAR(10 g) = 5.35 W/kg

Maximum value of SAR (measured) = 8.90 W/kg

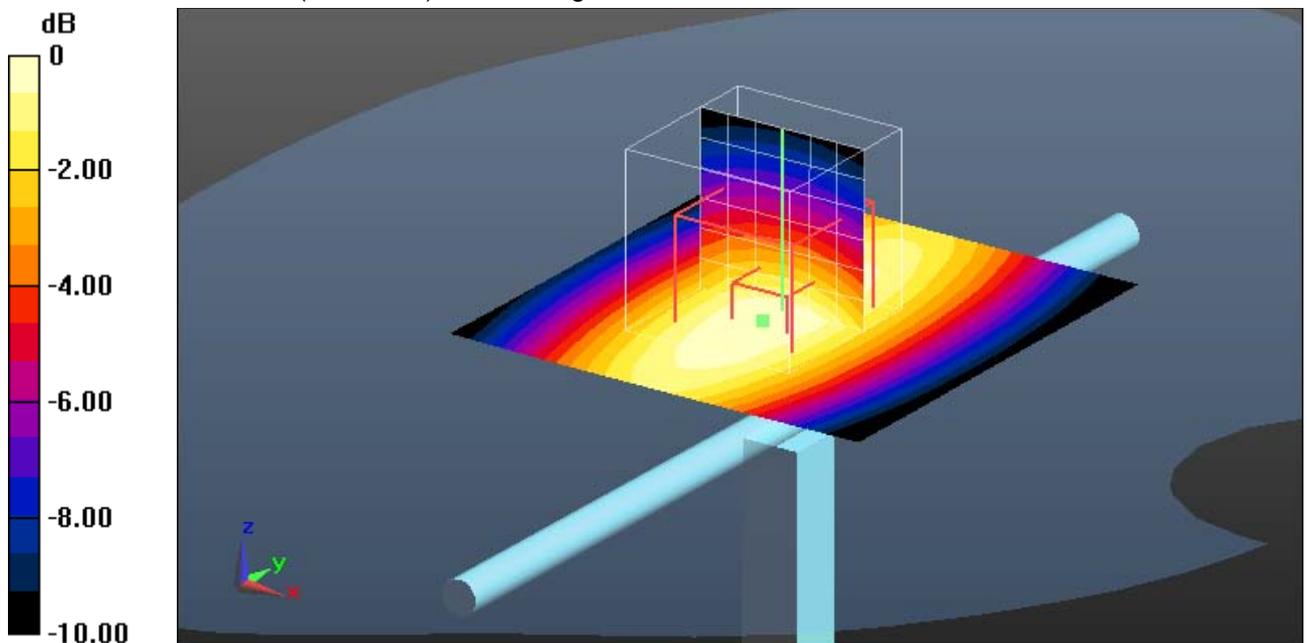

0 dB = 8.90 W/kg = 9.49 dBW/kg

Additional information:

ambient temperature: 22.5°C; liquid temperature: 22.5°C

Date/Time: 19.12.2013 22:27:58

SystemPerformanceCheck-D750 body 2013-12-19

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1041

Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 55.157$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.73, 5.73, 5.73); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL750/d=15mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 9.75 W/kg

MSL750/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 105.3 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 13.2 W/kg

SAR(1 g) = 9.2 W/kg; SAR(10 g) = 6.12 W/kg

Maximum value of SAR (measured) = 9.94 W/kg

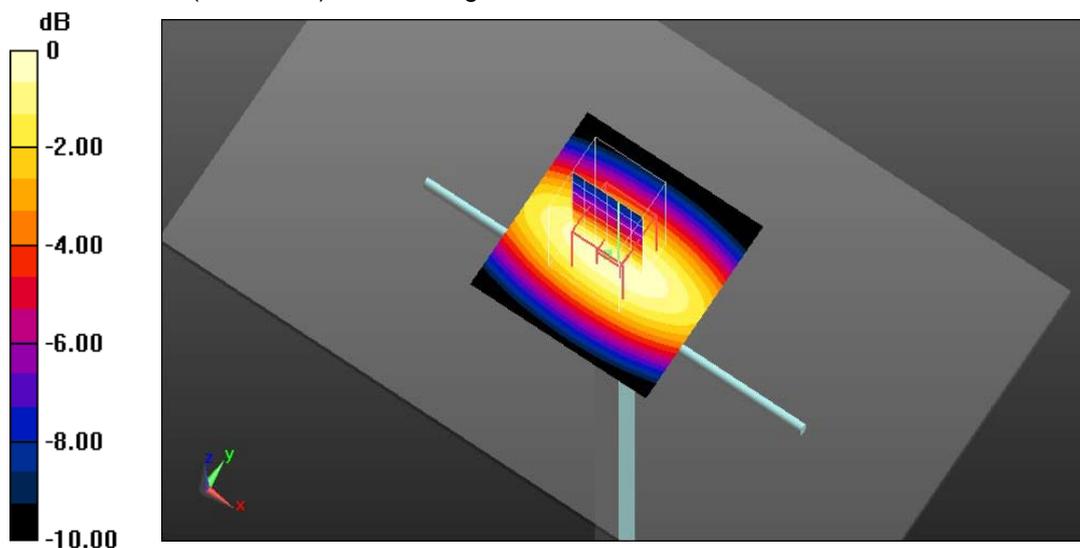

0 dB = 9.94 W/kg = 9.97 dBW/kg

Additional information:

ambient temperature: 23.1°C; liquid temperature: 22.6°C

Date/Time: 16.12.2013 22:21:27

SystemPerformanceCheck-D835 head 2013-12-16

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d153

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 41.112$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.89, 5.89, 5.89); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL835/d=15mm, Pin=100 mW, dist=4.0mm/Area Scan (51x51x1): Interpolated

grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.03 W/kg

HSL835/d=15mm, Pin=100 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 34.281 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.954 W/kg; SAR(10 g) = 0.625 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

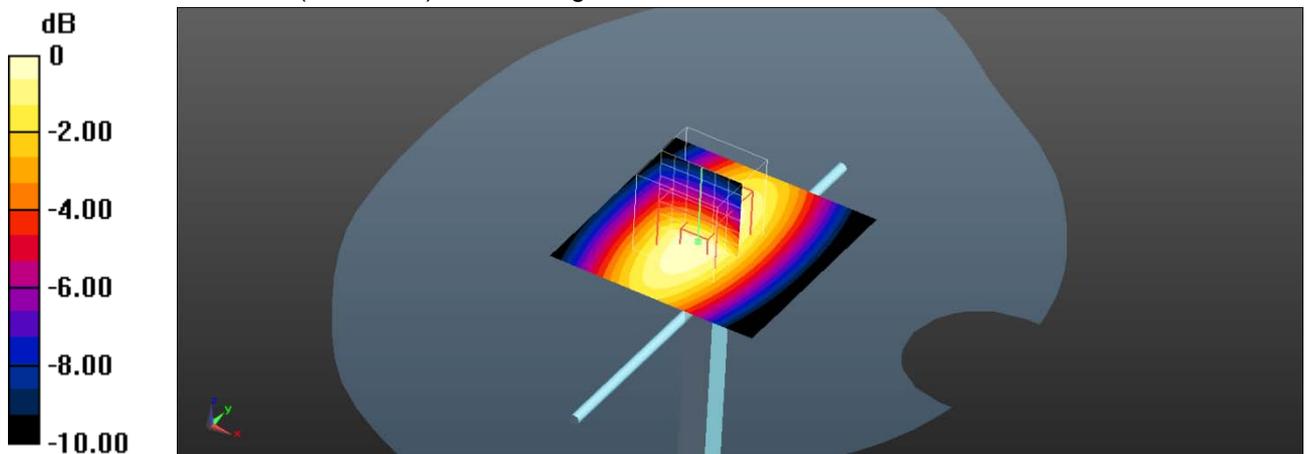

0 dB = 1.03 W/kg = 0.13 dBW/kg

Additional information:

ambient temperature: 22.4°C; liquid temperature: 22.4°C

Date/Time: 18.12.2013 11:46:28

SystemPerformanceCheck-D835 head 2013-12-18

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d153

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ S/m}$; $\epsilon_r = 41.112$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.89, 5.89, 5.89); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 10.6 W/kg

HSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 110.7 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 6.55 W/kg

Maximum value of SAR (measured) = 10.8 W/kg

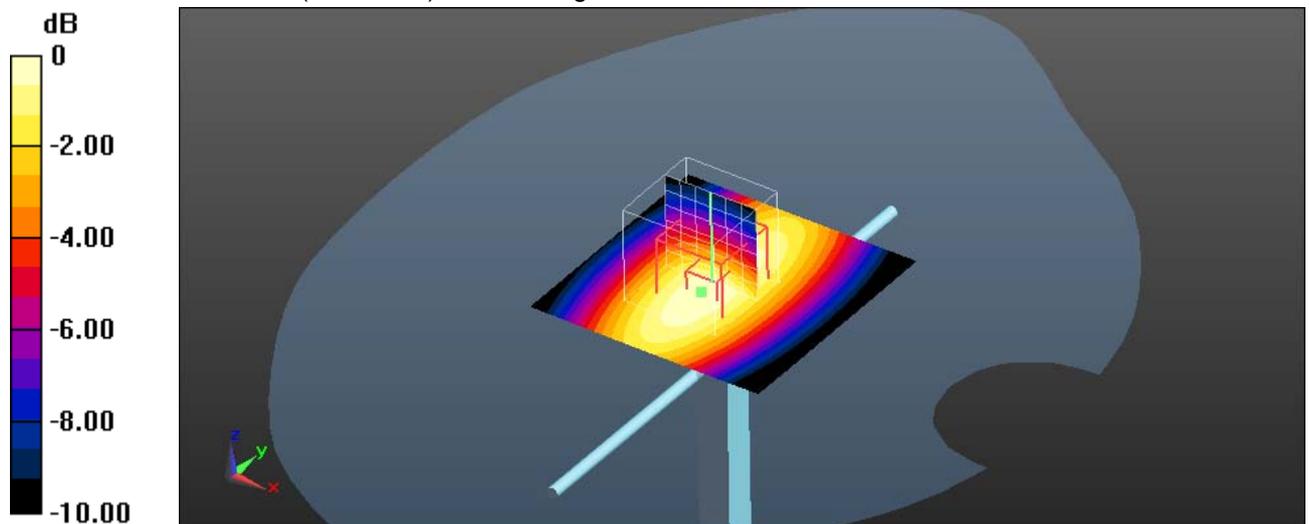

0 dB = 10.8 W/kg = 10.33 dBW/kg

Additional information:

ambient temperature: 22.7°C; liquid temperature: 22.5°C

Date/Time: 17.01.2014 14:47:00

SystemPerformanceCheck-D835 head 2014-01-17

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d153

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.932 \text{ S/m}$; $\epsilon_r = 41.715$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.32, 6.32, 6.32); Calibrated: 04.06.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 10.2 W/kg

HSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 107.4 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 14.3 W/kg

SAR(1 g) = 9.62 W/kg; SAR(10 g) = 6.31 W/kg

Maximum value of SAR (measured) = 10.4 W/kg

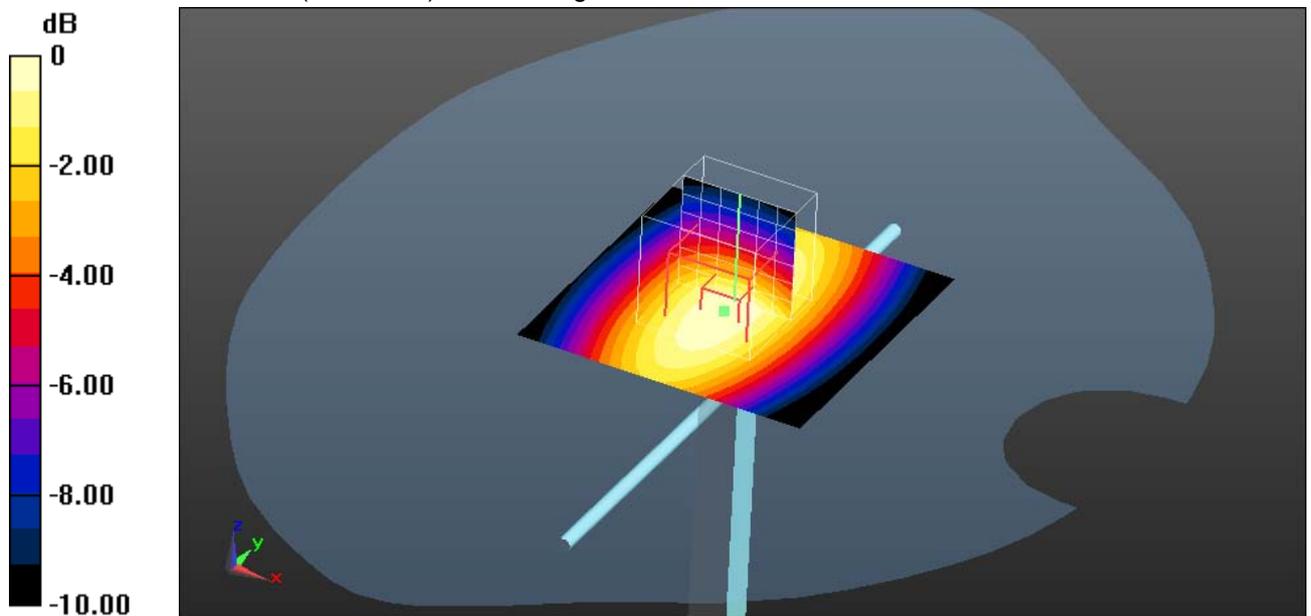

0 dB = 10.4 W/kg = 10.17 dBW/kg

Additional information:

ambient temperature: 23.4°C; liquid temperature: 22.3°C

Date/Time: 17.12.2013 11:15:46

SystemPerformanceCheck-D835 body 2013-12-17

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d153

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.966 \text{ S/m}$; $\epsilon_r = 53.422$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.64, 5.64, 5.64); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASYS52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 10.3 W/kg

MSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 109.2 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 13.3 W/kg

SAR(1 g) = 9.67 W/kg; SAR(10 g) = 6.48 W/kg

Maximum value of SAR (measured) = 10.5 W/kg

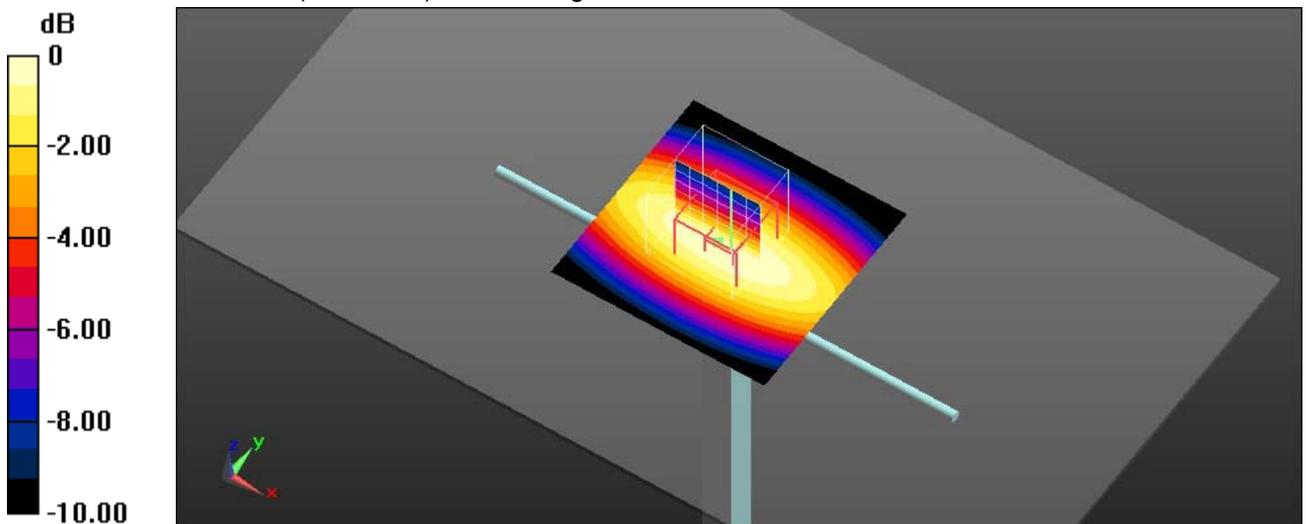

0 dB = 10.5 W/kg = 10.21 dBW/kg

Additional information:

ambient temperature: 22.1°C; liquid temperature: 21.6°C

Date/Time: 18.12.2013 12:06:22

SystemPerformanceCheck-D835 body 2013-12-18

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d153

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 53.422$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.64, 5.64, 5.64); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASYS52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 10.0 W/kg

MSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 108.1 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 13.1 W/kg

SAR(1 g) = 9.45 W/kg; SAR(10 g) = 6.31 W/kg

Maximum value of SAR (measured) = 10.2 W/kg

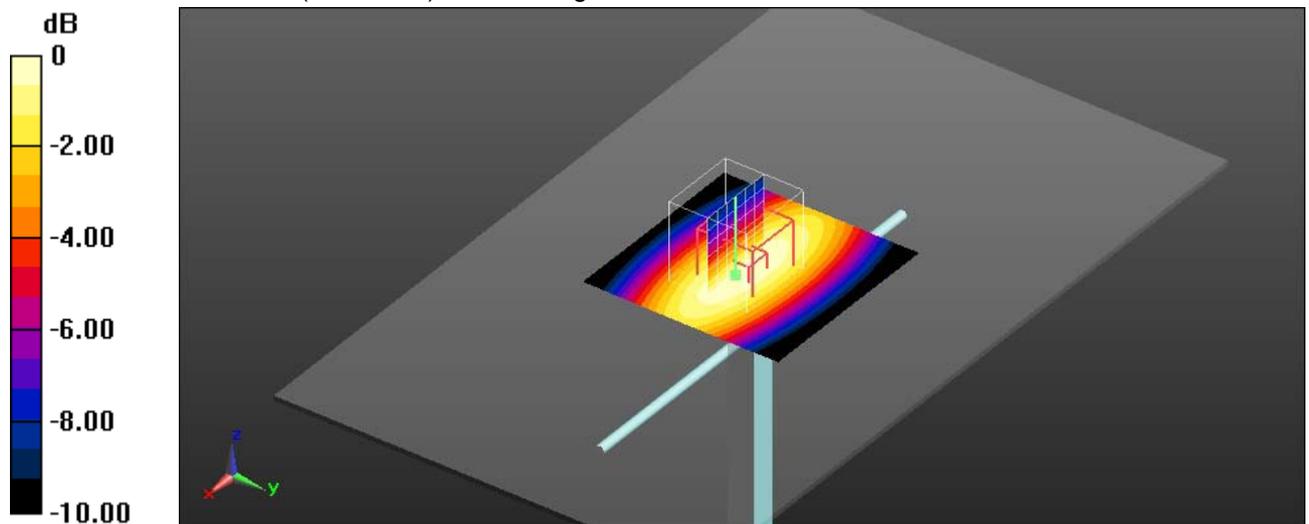

0 dB = 10.2 W/kg = 10.09 dBW/kg

Additional information:

ambient temperature: 22.8°C; liquid temperature: 22.6°C

Date/Time: 27.12.2013 16:46:31

SystemPerformanceCheck-D1750 head 2013-12-27

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1093

Communication System: UID 0, CW (0); Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.171$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(5.23, 5.23, 5.23); Calibrated: 04.06.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.0, 32.0
- Electronics: DAE3 Sn413; Calibrated: 11.01.2013
- Phantom: SAM; Type: SAM; Serial: 1043
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL1750/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 47.5 W/kg

HSL1750/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 174.4 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 66.4 W/kg

SAR(1 g) = 35.7 W/kg; SAR(10 g) = 18.7 W/kg

Maximum value of SAR (measured) = 40.3 W/kg

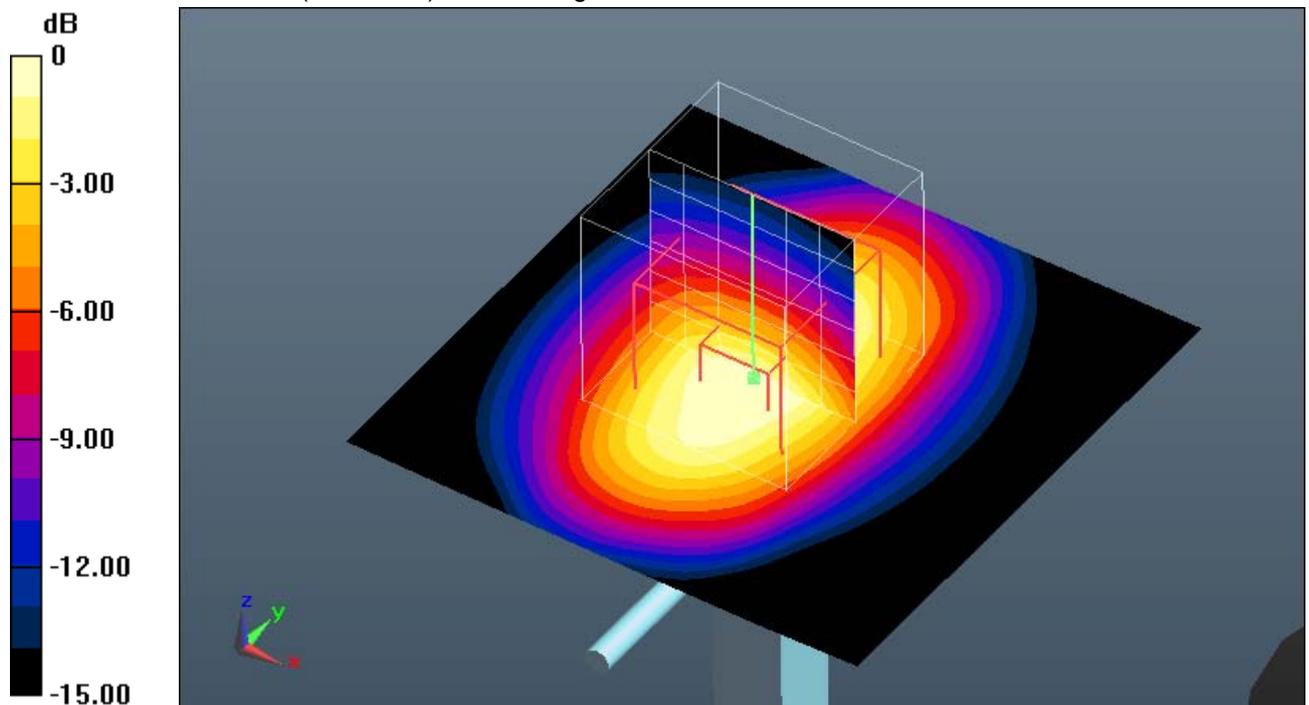

0 dB = 40.3 W/kg = 16.05 dBW/kg

Additional information:

ambient temperature: 22.2°C; liquid temperature: 21.0°C

Date/Time: 1/6/2014 1:56:00 PM

SystemPerformanceCheck-D1750 head 2014-01-06

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1093

Communication System: UID 0, CW (0); Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3326; ConvF(5.4, 5.4, 5.4); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- DASYS52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL1750/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 43.9 W/kg

HSL1750/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 171.5 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 65.7 W/kg

SAR(1 g) = 36 W/kg; SAR(10 g) = 19 W/kg

Maximum value of SAR (measured) = 40.3 W/kg

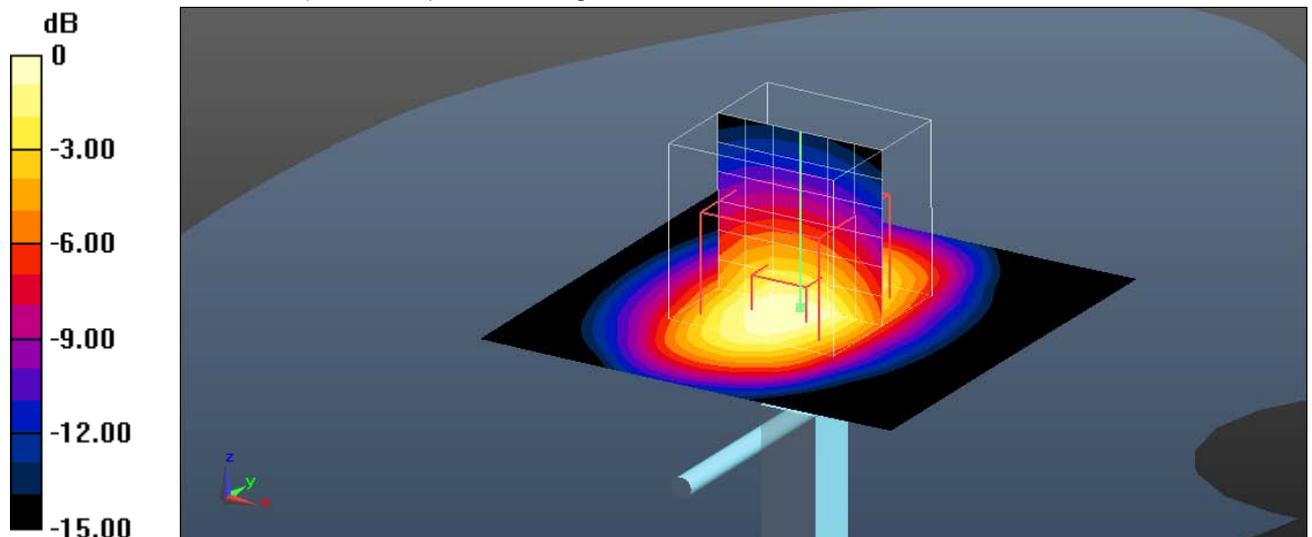

0 dB = 40.3 W/kg = 16.05 dBW/kg

Additional information:

ambient temperature: 22.3°C; liquid temperature: 22.0°C

Date/Time: 12/19/2013 3:16:03 PM

SystemPerformanceCheck-D1750 body 2013-12-19

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1093

Communication System: UID 0, CW (0); Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 55.535$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.85, 4.85, 4.85); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.0, 32.0
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 45.0 W/kg

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 166.6 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 66.7 W/kg

SAR(1 g) = 37.7 W/kg; SAR(10 g) = 20.2 W/kg

Maximum value of SAR (measured) = 42.1 W/kg

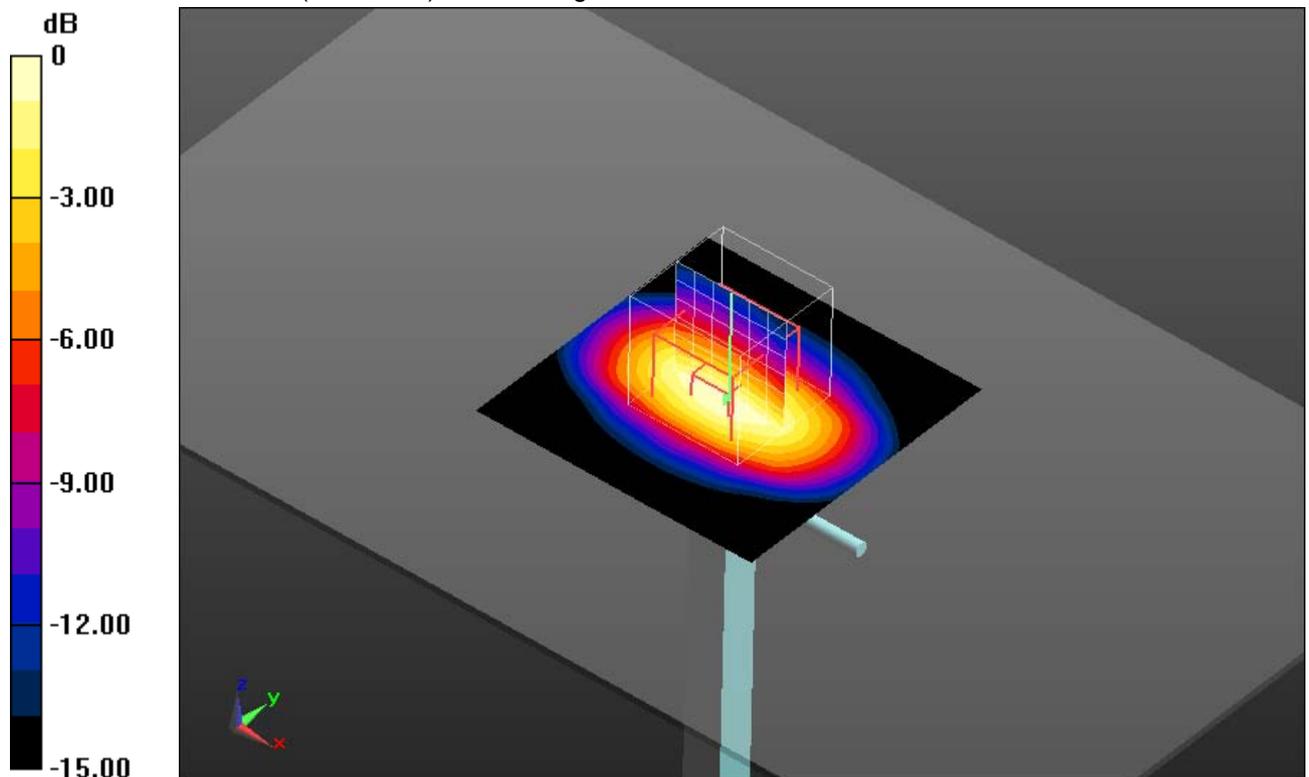

0 dB = 42.1 W/kg = 16.24 dBW/kg

Additional information:

ambient temperature: 22.2°C; liquid temperature: 21.9°C

Date/Time: 12/20/2013 1:12:21 PM

SystemPerformanceCheck-D1750 body 2013-12-20

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1093

Communication System: UID 0, CW (0); Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 55.535$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.85, 4.85, 4.85); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.0, 32.0
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 49.6 W/kg

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 174.1 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 69.5 W/kg

SAR(1 g) = 39.2 W/kg; SAR(10 g) = 21 W/kg

Maximum value of SAR (measured) = 44.2 W/kg

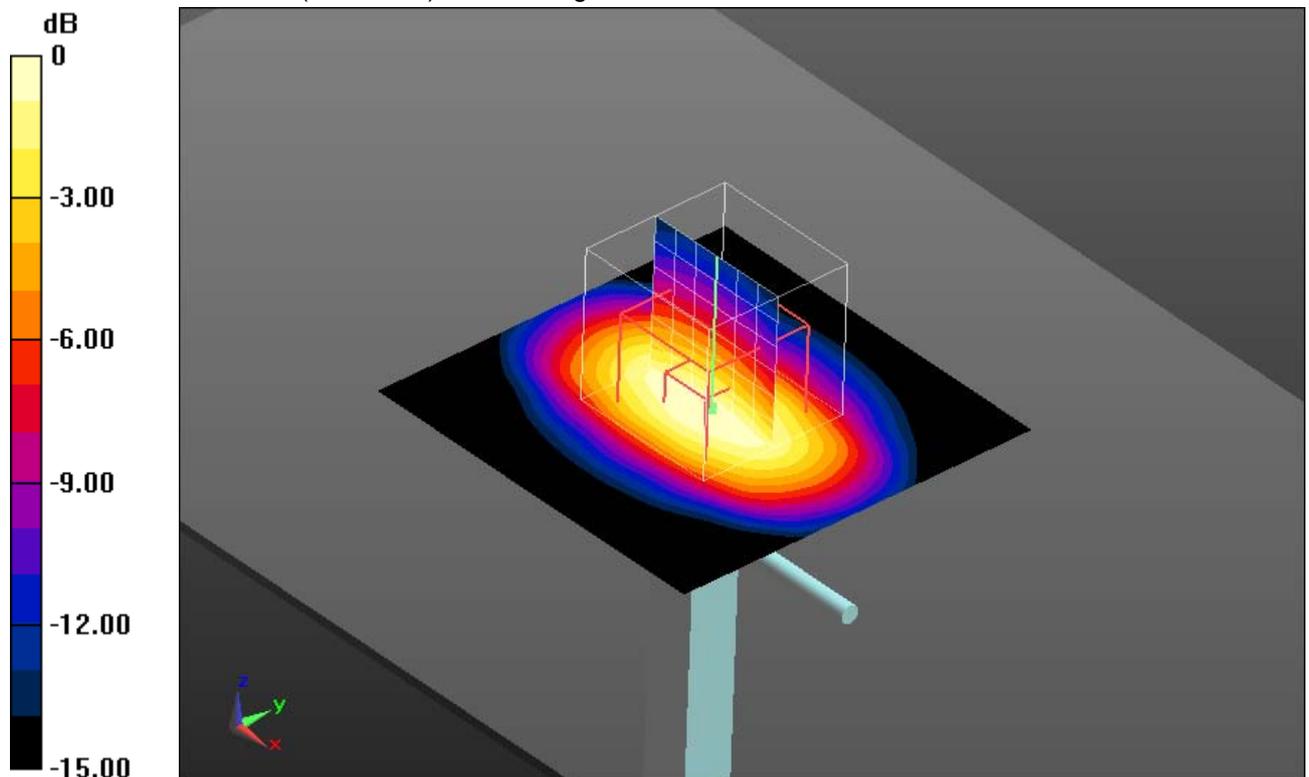

0 dB = 44.2 W/kg = 16.45 dBW/kg

Additional information:

ambient temperature: 22.5°C; liquid temperature: 22.2°C

Date/Time: 12/17/2013 3:16:22 PM

SystemPerformanceCheck-D1900 head 2013-12-17

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d009

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(5.05, 5.05, 5.05); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 48.5 W/kg

HSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 179.8 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 68.7 W/kg

SAR(1 g) = 38.4 W/kg; SAR(10 g) = 20.4 W/kg

Maximum value of SAR (measured) = 43.2 W/kg

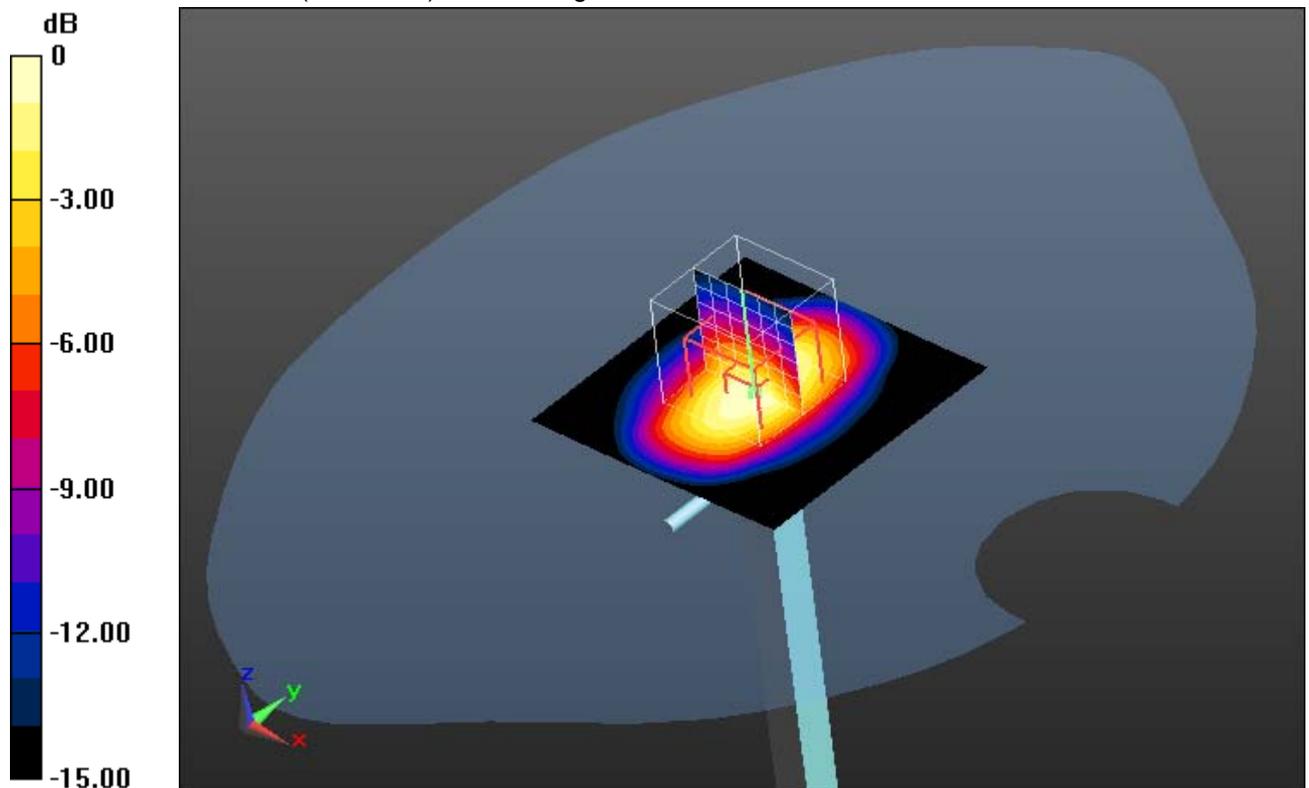

0 dB = 43.2 W/kg = 16.35 dBW/kg

Additional information:

ambient temperature: 22.2°C; liquid temperature: 21.9°C

Date/Time: 12/18/2013 7:02:08 AM

SystemPerformanceCheck-D1900 head 2013-12-18

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d009

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(5.05, 5.05, 5.05); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.0, 32.0
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 49.3 W/kg

HSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 180.9 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 69.9 W/kg

SAR(1 g) = 38.8 W/kg; SAR(10 g) = 20.6 W/kg

Maximum value of SAR (measured) = 43.8 W/kg

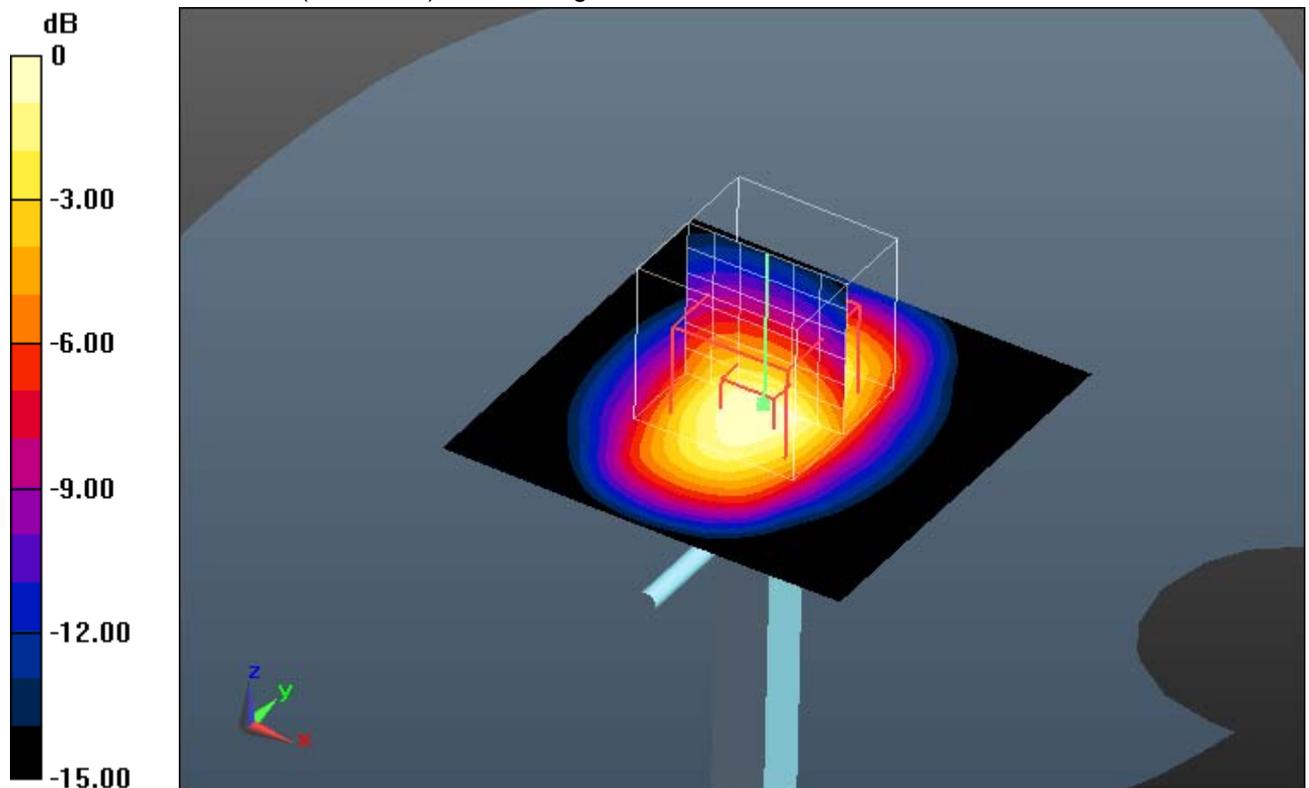

0 dB = 43.8 W/kg = 16.41 dBW/kg

Additional information:

ambient temperature: 22.4°C; liquid temperature: 21.8°C

Date/Time: 1/17/2014 1:29:32 PM

SystemPerformanceCheck-D1900 head 2014-01-17

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d009

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.767$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(5.05, 5.05, 5.05); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.0, 32.0
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- DASYS52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 51.5 W/kg

HSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 183.2 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 74.1 W/kg

SAR(1 g) = 40.8 W/kg; SAR(10 g) = 21.4 W/kg

Maximum value of SAR (measured) = 46.0 W/kg

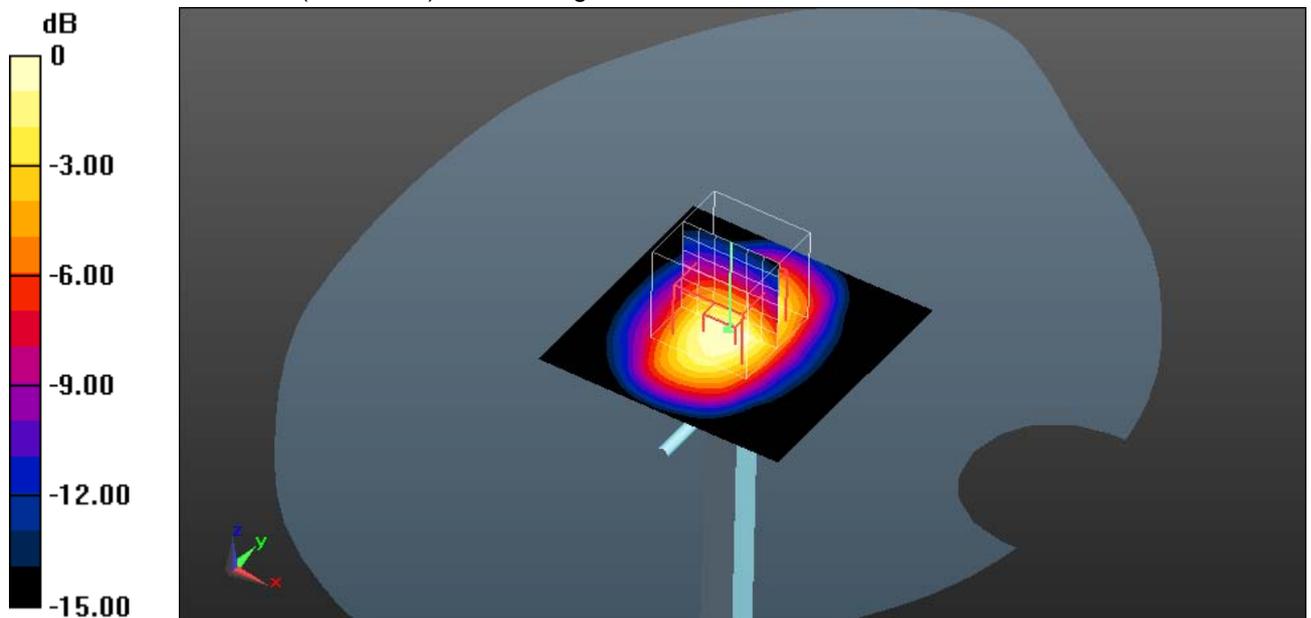

0 dB = 46.0 W/kg = 16.63 dBW/kg

Additional information:

ambient temperature: 21.8°C; liquid temperature: 21.5°C

Date/Time: 12/18/2013 9:45:41 PM

SystemPerformanceCheck-D1900 body 2013-12-18

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d009

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.65, 4.65, 4.65); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 51.3 W/kg

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 175.1 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 69.0 W/kg

SAR(1 g) = 39.3 W/kg; SAR(10 g) = 20.9 W/kg

Maximum value of SAR (measured) = 44.6 W/kg

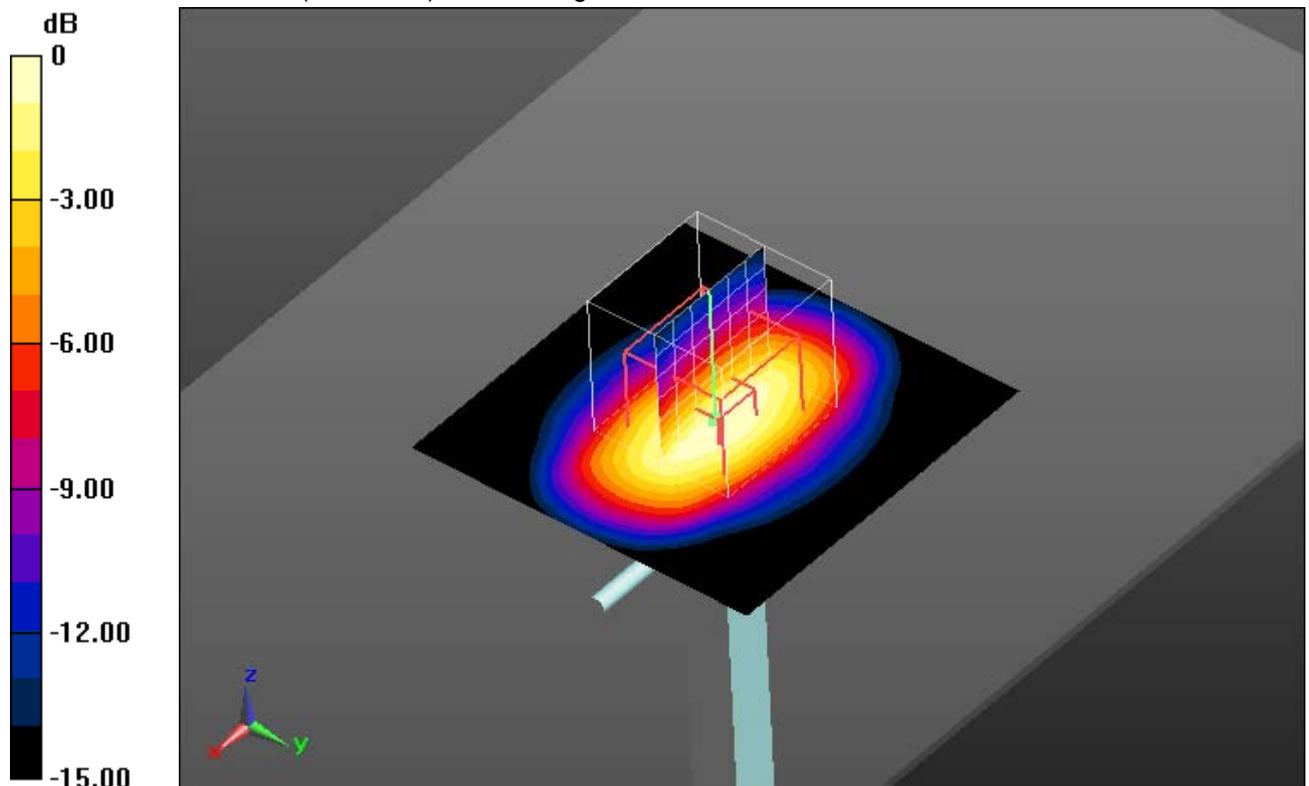

0 dB = 44.6 W/kg = 16.49 dBW/kg

Additional information:

ambient temperature: 22.0°C; liquid temperature: 21.7°C

Date/Time: 21.12.2013 19:21:17

SystemPerformanceCheck-D1900 body 2013-12-21

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d009

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.21, 4.21, 4.21); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASYS52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 54.6 W/kg

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 182.4 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 63.9 W/kg

SAR(1 g) = 38.9 W/kg; SAR(10 g) = 21.1 W/kg

Maximum value of SAR (measured) = 43.9 W/kg

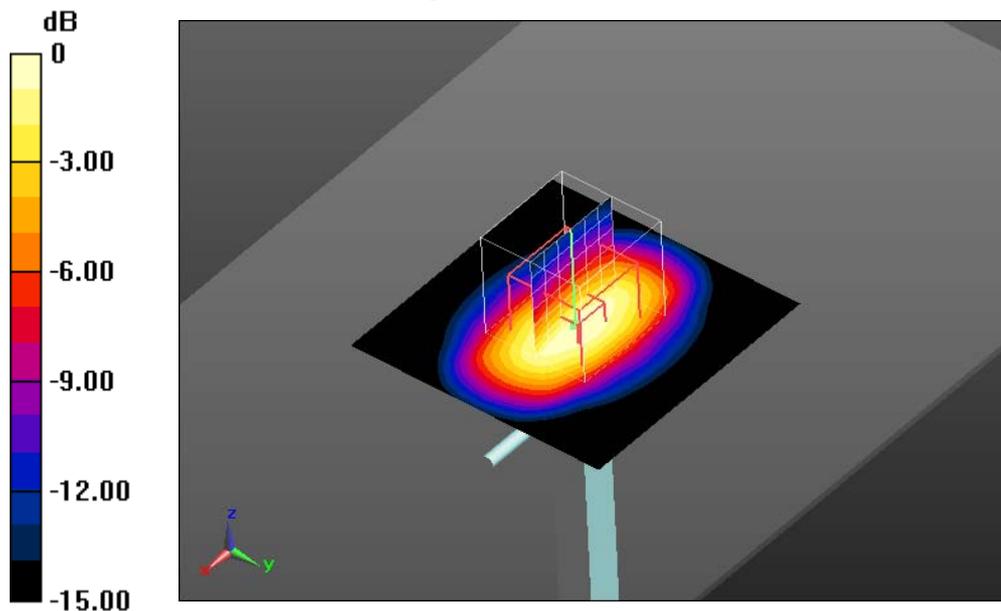

0 dB = 43.9 W/kg = 16.42 dBW/kg

Additional information:

ambient temperature: 22.3°C; liquid temperature: 22.3°C

Date/Time: 21.12.2013 07:12:49

SystemPerformanceCheck-D2450 head 2013-12-21

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 710

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.819$ S/m; $\epsilon_r = 39.213$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.49, 4.49, 4.49); Calibrated: 04.06.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.0, 32.0
- Electronics: DAE3 Sn413; Calibrated: 11.01.2013
- Phantom: SAM; Type: SAM; Serial: 1043
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (81x81x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 63.4 W/kg

HSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 186.6 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 114 W/kg

SAR(1 g) = 55 W/kg; SAR(10 g) = 25.4 W/kg

Maximum value of SAR (measured) = 63.2 W/kg

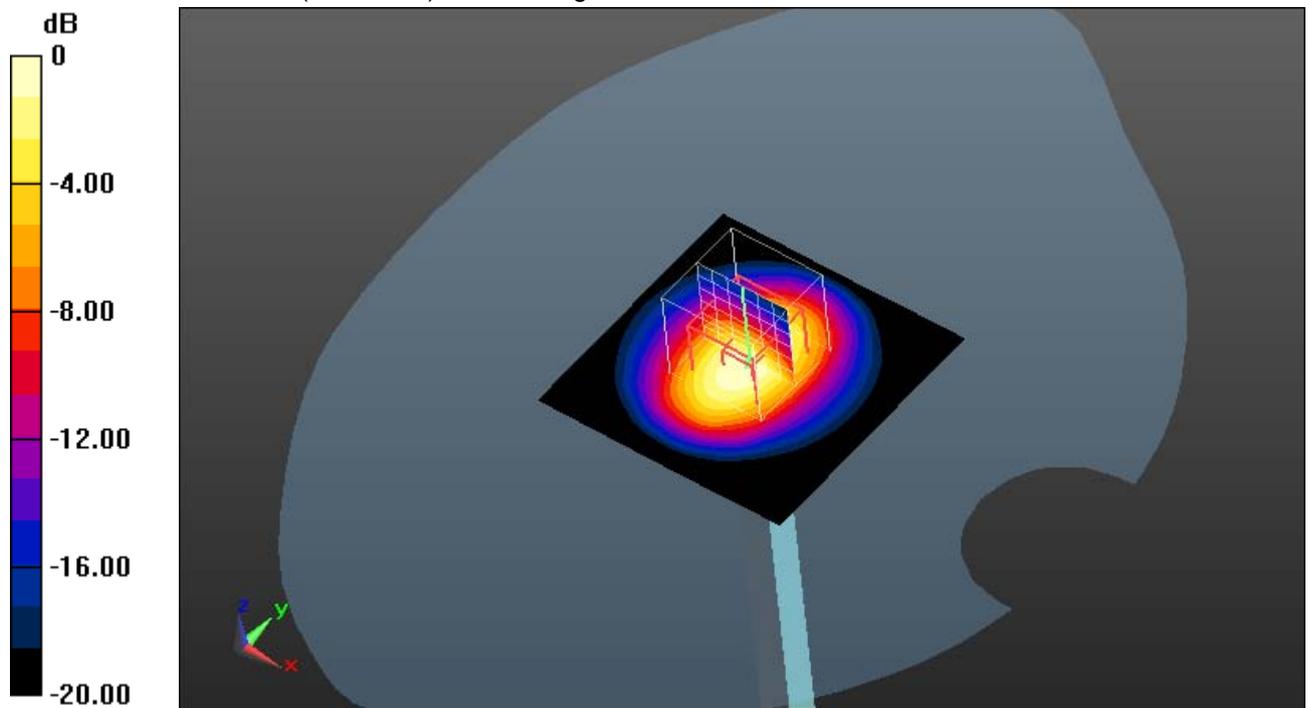

0 dB = 63.2 W/kg = 18.01 dBW/kg

Additional information:

ambient temperature: 21.5°C; liquid temperature: 20.8°C

Date/Time: 30.12.2013 14:10:13

SystemPerformanceCheck-D2450 head 2013-12-30

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 710

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.819$ S/m; $\epsilon_r = 39.213$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.18, 4.18, 4.18); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (81x81x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 63.0 W/kg

HSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 187.9 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 119 W/kg

SAR(1 g) = 54.6 W/kg; SAR(10 g) = 25.5 W/kg

Maximum value of SAR (measured) = 61.8 W/kg

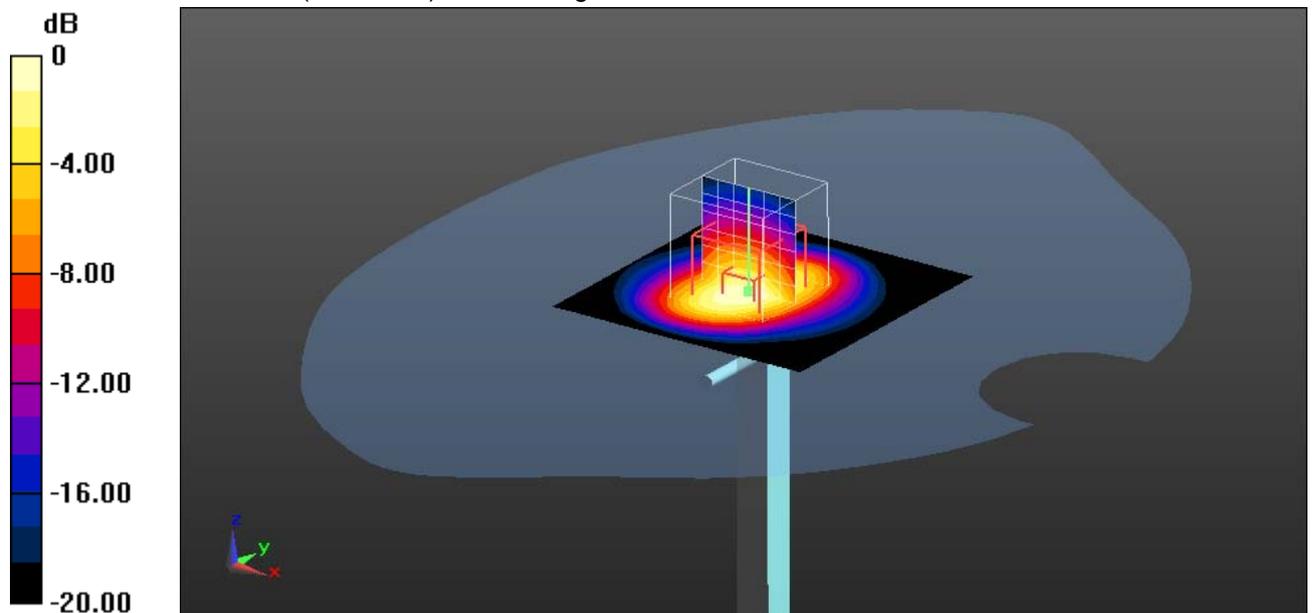

0 dB = 61.8 W/kg = 17.91 dBW/kg

Additional information:

ambient temperature: 23.7°C; liquid temperature: 22.5°C

Date/Time: 12/28/2013 2:44:16 PM

SystemPerformanceCheck-D2450 body 2013-12-28

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 710

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.026$ S/m; $\epsilon_r = 52.609$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.18, 4.18, 4.18); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.0, 32.0
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (81x81x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 61.7 W/kg

MSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 175.1 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 112 W/kg

SAR(1 g) = 53.5 W/kg; SAR(10 g) = 24.7 W/kg

Maximum value of SAR (measured) = 61.3 W/kg

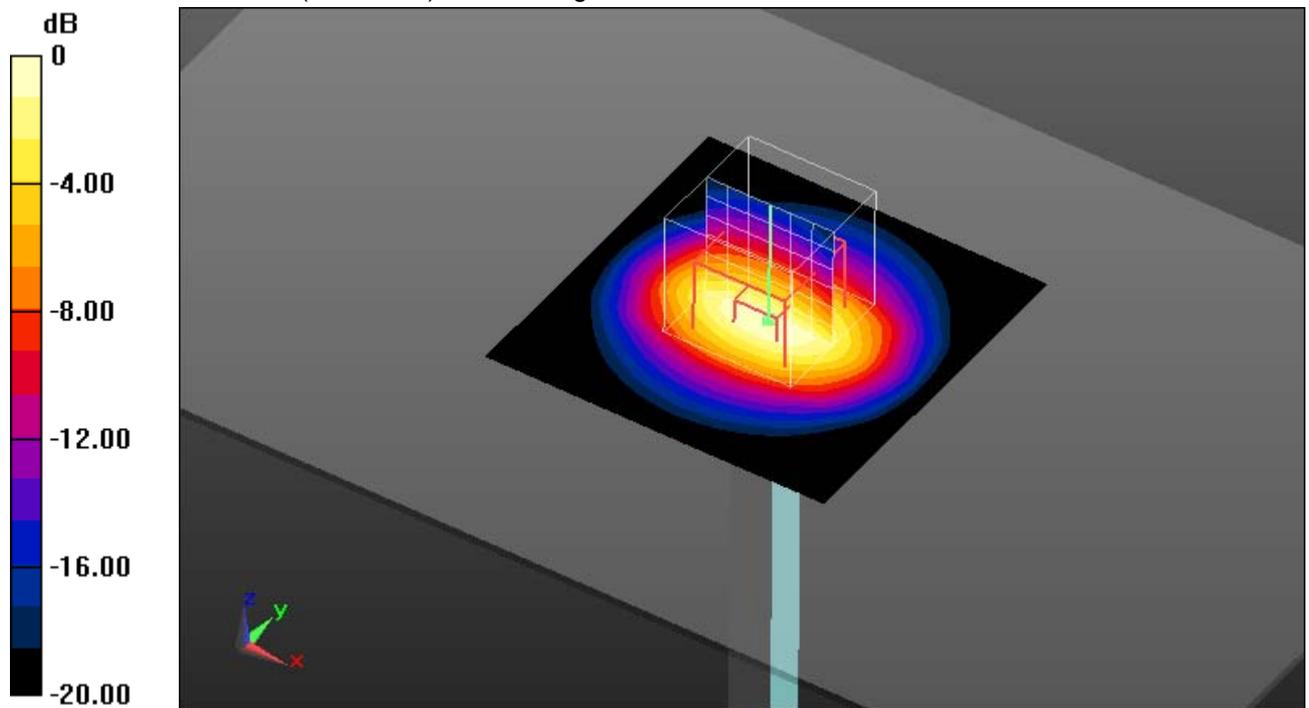

0 dB = 61.3 W/kg = 17.87 dBW/kg

Additional information:

ambient temperature: 22.2°C; liquid temperature: 21.9°C

Date/Time: 02.01.2014 11:29:56

SystemPerformanceCheck-D2600 head 2014-01-02

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1040

Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2$ S/m; $\epsilon_r = 38.631$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL2450_2600/d=10mm, Pin=1000 mW, dist=2.0mm/Area Scan (81x81x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 89.2 W/kg

HSL2450_2600/d=10mm, Pin=1000 mW, dist=2.0mm/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 209.4 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 122 W/kg

SAR(1 g) = 57.3 W/kg; SAR(10 g) = 25.5 W/kg

Maximum value of SAR (measured) = 89.3 W/kg

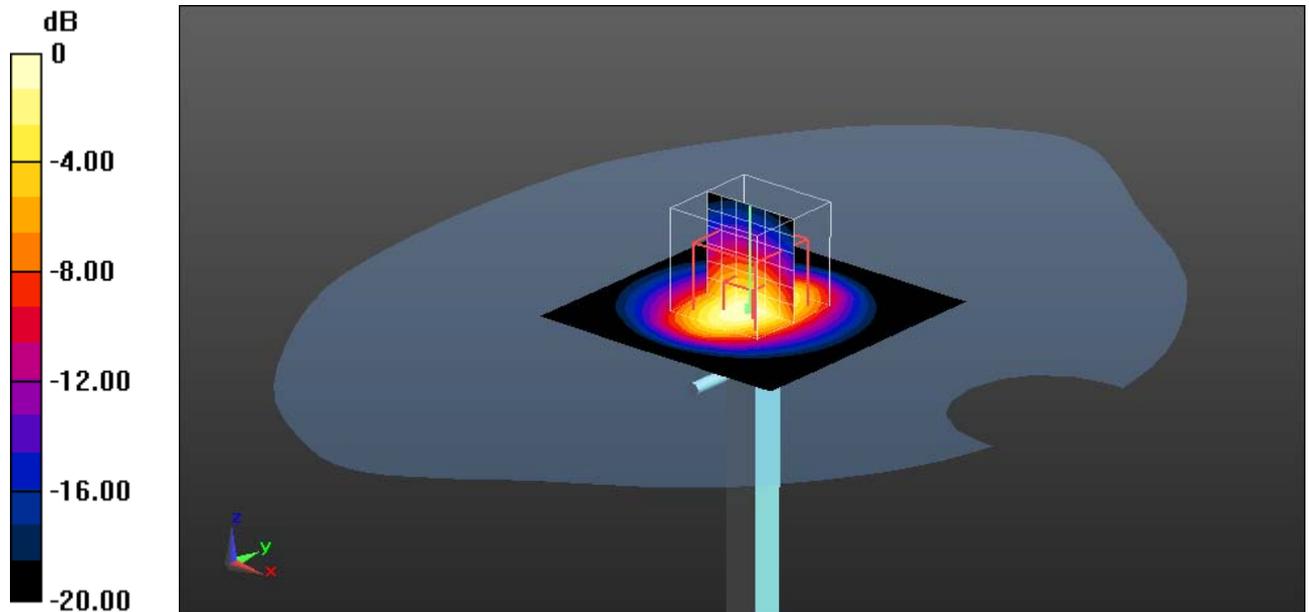

0 dB = 89.3 W/kg = 19.51 dBW/kg

Additional information:

ambient temperature: 23.3°C; liquid temperature: 22.5°C

Date/Time: 31.12.2013 14:48:11

SystemPerformanceCheck-D2600 body 2013-12-31

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1040

Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.217$ S/m; $\epsilon_r = 52.104$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.27, 7.27, 7.27); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL2450_2600/d=10mm, Pin=1000 mW, dist=2.0mm/Area Scan (81x81x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 85.5 W/kg

HSL2450_2600/d=10mm, Pin=1000 mW, dist=2.0mm/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 195.0 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 117 W/kg

SAR(1 g) = 54.7 W/kg; SAR(10 g) = 24.5 W/kg

Maximum value of SAR (measured) = 85.3 W/kg

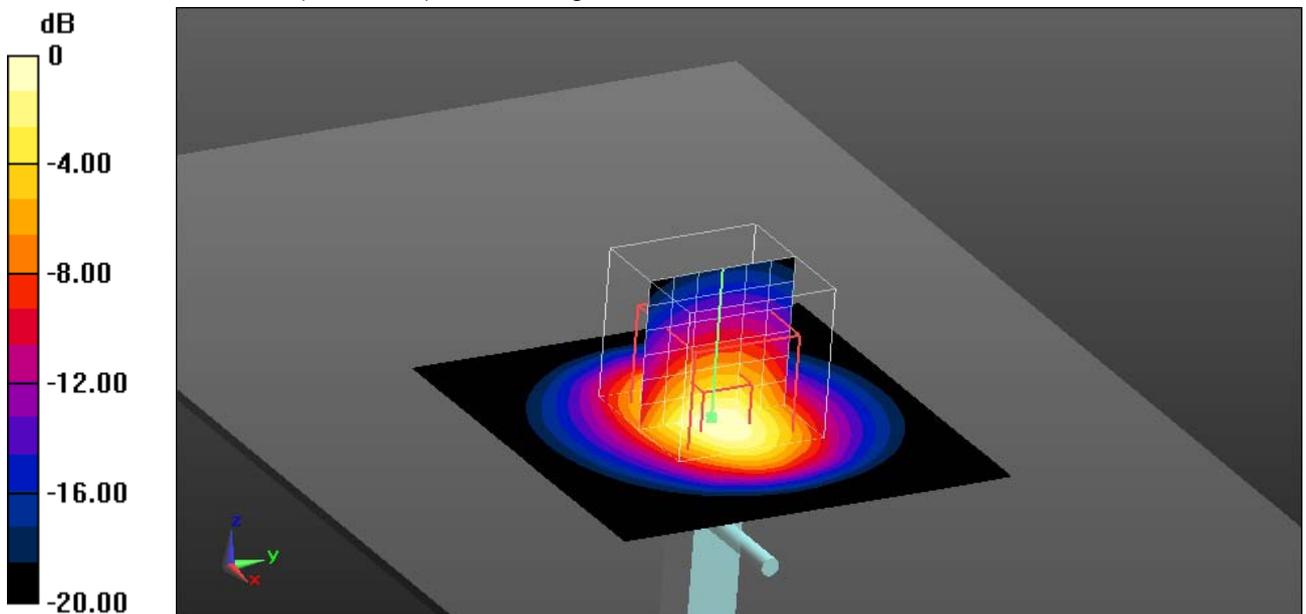

0 dB = 85.3 W/kg = 19.31 dBW/kg

Additional information:

ambient temperature: 23.3 °C; liquid temperature: 22.2 °C

Date/Time: 20.12.2013 15:44:45

SystemPerformanceCheck-D5GHz head 2013-12-20

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.473$ S/m; $\epsilon_r = 36.336$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(5.37, 5.37, 5.37); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL 5GHz/d=10mm, Pin=250mW 5.2GHz/Area Scan (61x61x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 39.5 W/kg

HSL 5GHz/d=10mm, Pin=250mW 5.2GHz/Zoom Scan (7x7x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 98.221 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 79.5 W/kg

SAR(1 g) = 18.9 W/kg; SAR(10 g) = 5.31 W/kg

Maximum value of SAR (measured) = 38.8 W/kg

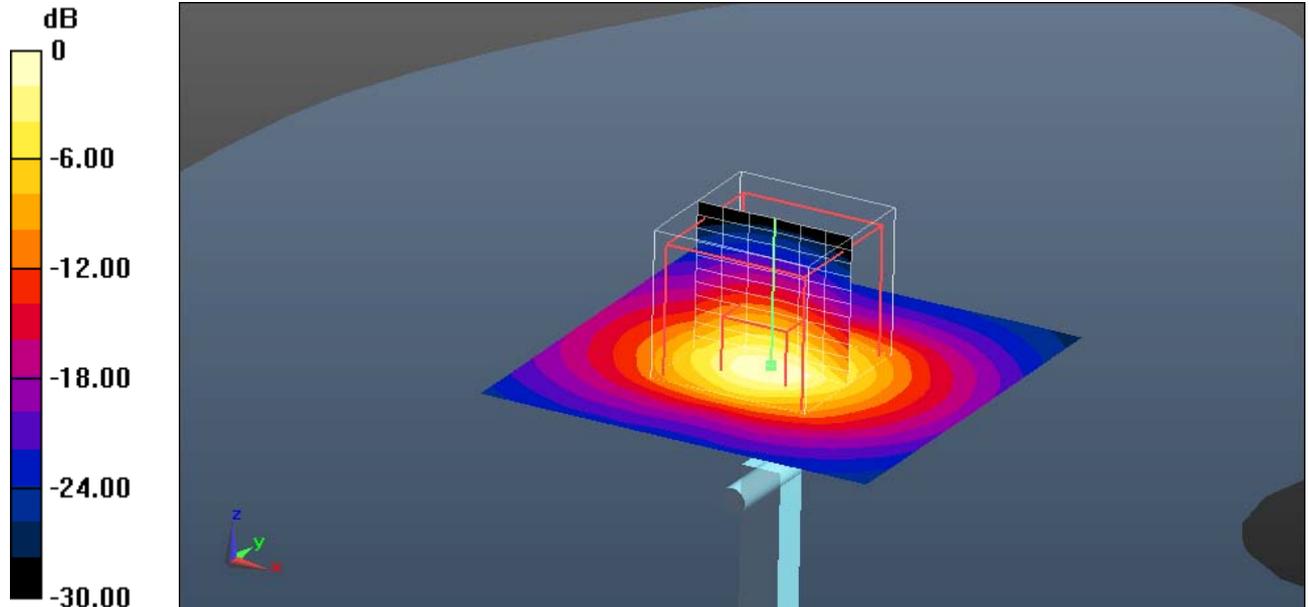

0 dB = 38.8 W/kg = 15.89 dBW/kg

Additional information:

ambient temperature: 22.3°C; liquid temperature: 22.5°C

Date/Time: 20.12.2013 16:07:52

SystemPerformanceCheck-D5GHz head 2013-12-20

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5500 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.822$ S/m; $\epsilon_r = 35.774$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(5, 5, 5); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL 5GHz/d=10mm, Pin=250mW 5.5GHz/Area Scan (61x61x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 42.2 W/kg

HSL 5GHz/d=10mm, Pin=250mW 5.5GHz/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 96.869 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 91.6 W/kg

SAR(1 g) = 20 W/kg; SAR(10 g) = 5.6 W/kg

Maximum value of SAR (measured) = 41.5 W/kg

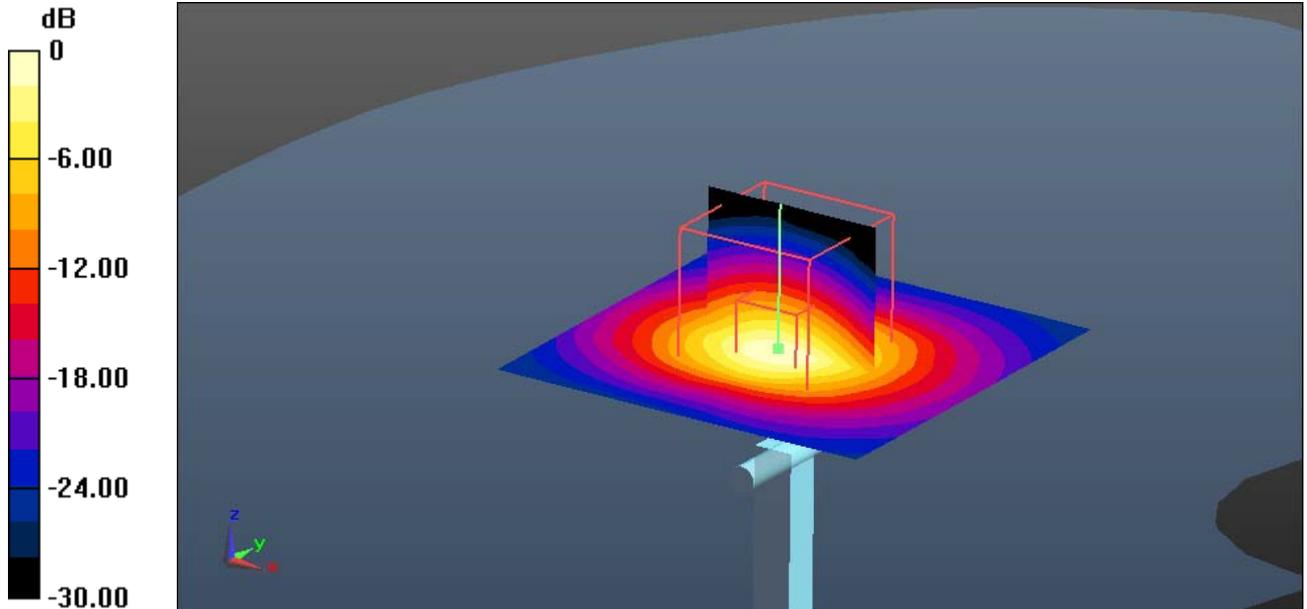

0 dB = 41.5 W/kg = 16.18 dBW/kg

Additional information:

ambient temperature: 22.3°C; liquid temperature: 22.5°C

Date/Time: 20.12.2013 16:35:38

SystemPerformanceCheck-D5GHz head 2013-12-20

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.114$ S/m; $\epsilon_r = 35.361$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.75, 4.75, 4.75); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL 5GHz/d=10mm, Pin=250mW 5.8GHz/Area Scan (61x61x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 40.9 W/kg

HSL 5GHz/d=10mm, Pin=250mW 5.8GHz/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 93.430 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 91.4 W/kg

SAR(1 g) = 19.3 W/kg; SAR(10 g) = 5.39 W/kg

Maximum value of SAR (measured) = 40.0 W/kg

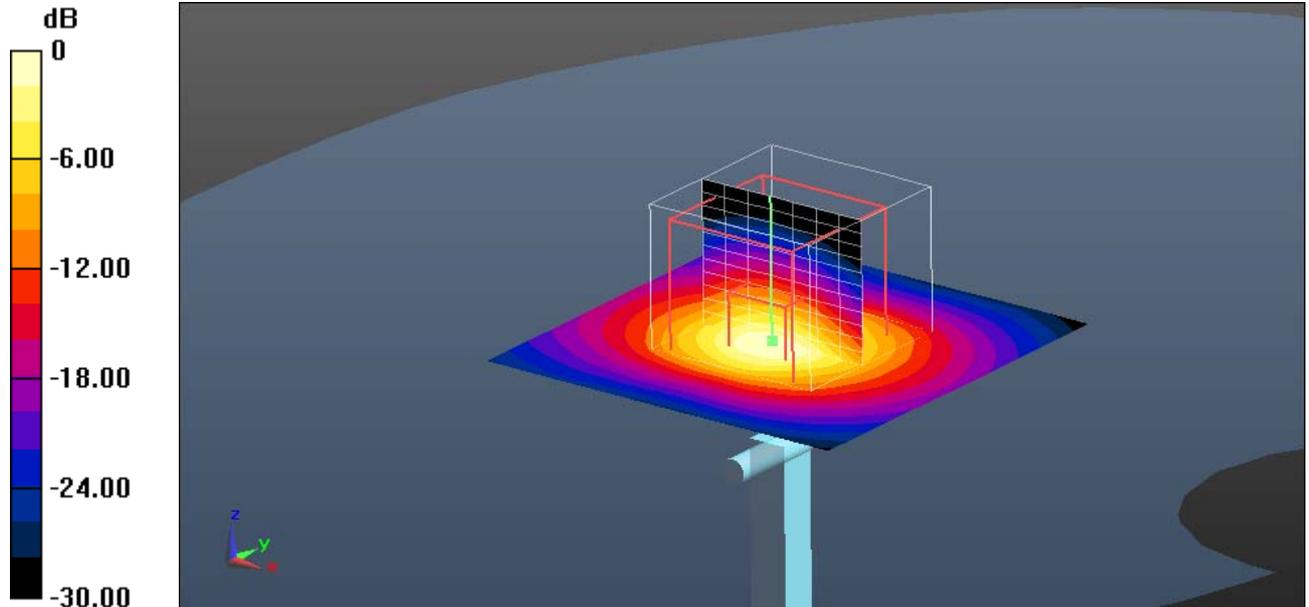

0 dB = 40.0 W/kg = 16.02 dBW/kg

Additional information:

ambient temperature: 22.3°C; liquid temperature: 22.5°C

Date/Time: 23.12.2013 11:21:56

SystemPerformanceCheck-D5GHz body 2013-12-23

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.188$ S/m; $\epsilon_r = 48.439$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.47, 4.47, 4.47); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASYS2 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL 5GHz/d=10mm, Pin=250mW 5.2GHz/Area Scan (61x61x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 37.8 W/kg

MSL 5GHz/d=10mm, Pin=250mW 5.2GHz/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 89.927 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 70.0 W/kg

SAR(1 g) = 17.1 W/kg; SAR(10 g) = 4.82 W/kg

Maximum value of SAR (measured) = 35.8 W/kg

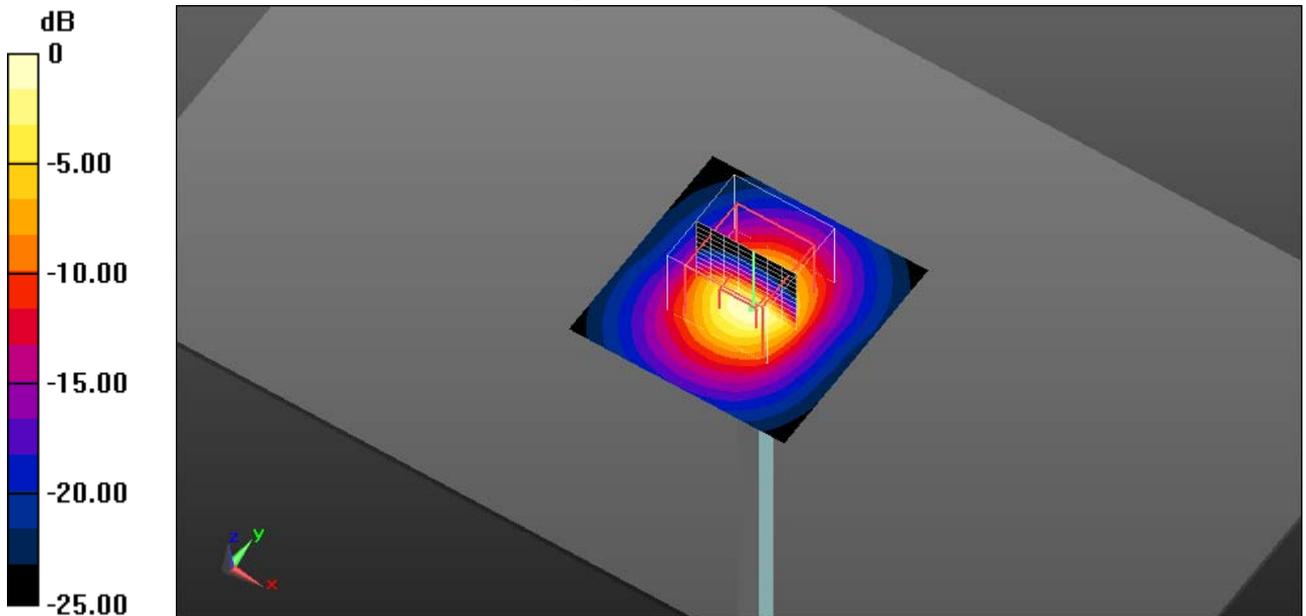

0 dB = 35.8 W/kg = 15.54 dBW/kg

Additional information:

ambient temperature: 22.8°C; liquid temperature: 22.0°C

Date/Time: 23.12.2013 12:12:41

SystemPerformanceCheck-D5GHz body 2013-12-23

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5500 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.631$ S/m; $\epsilon_r = 47.888$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.09, 4.09, 4.09); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), z = 1.0, 23.0
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL 5GHz/d=10mm, Pin=250mW 5.5GHz/Area Scan (61x61x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 43.2 W/kg

MSL 5GHz/d=10mm, Pin=250mW 5.5GHz/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 93.863 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 83.2 W/kg

SAR(1 g) = 19.9 W/kg; SAR(10 g) = 5.55 W/kg

Maximum value of SAR (measured) = 42.1 W/kg

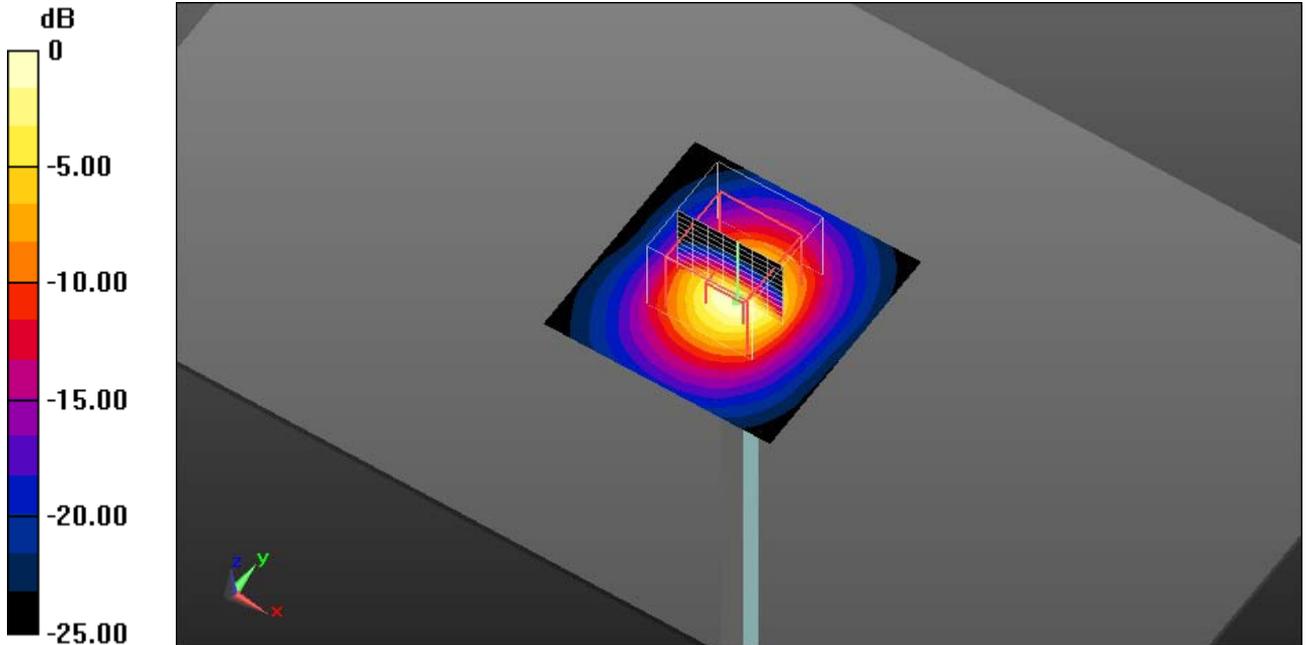

0 dB = 42.1 W/kg = 16.24 dBW/kg

Additional information:

ambient temperature: 22.8°C; liquid temperature: 22.0°C

Date/Time: 23.12.2013 12:42:38

SystemPerformanceCheck-D5GHz body 2013-12-23

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.022$ S/m; $\epsilon_r = 47.673$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.2, 4.2, 4.2); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL 5GHz/d=10mm, Pin=250mW 5.8GHz/Area Scan (61x61x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 37.1 W/kg

MSL 5GHz/d=10mm, Pin=250mW 5.8GHz/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 83.290 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 71.2 W/kg

SAR(1 g) = 16.8 W/kg; SAR(10 g) = 4.77 W/kg

Maximum value of SAR (measured) = 35.0 W/kg

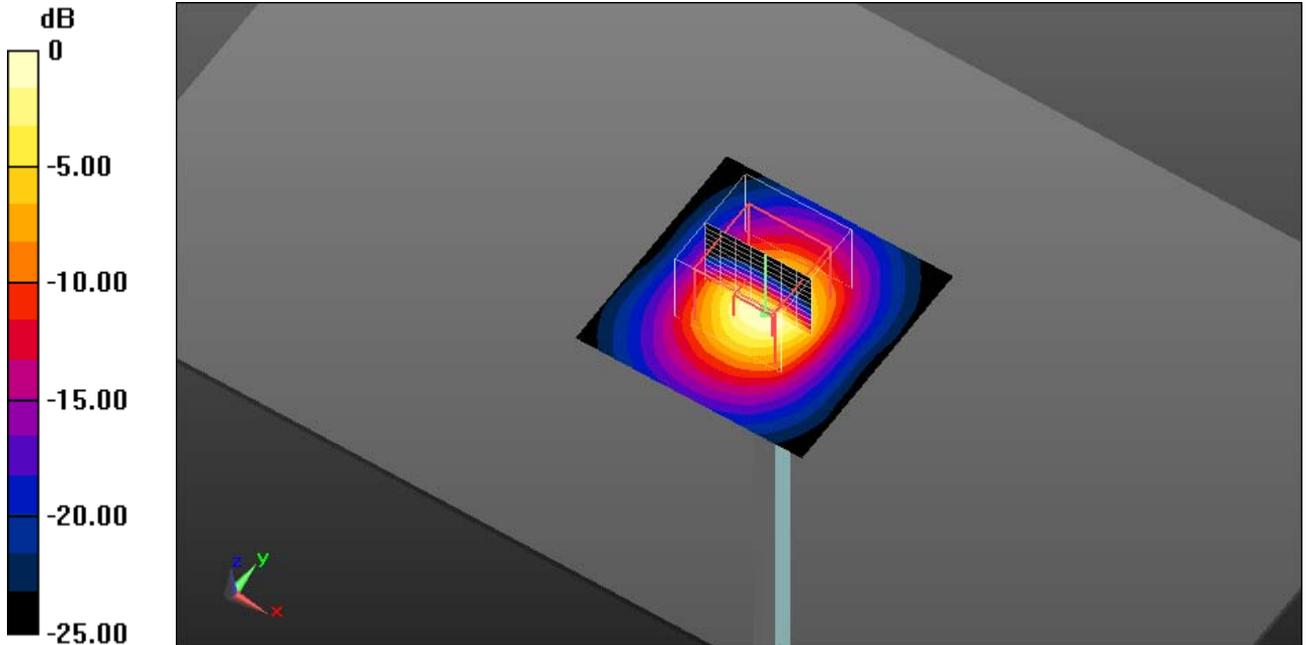

0 dB = 35.0 W/kg = 15.44 dBW/kg

Additional information:

ambient temperature: 22.8°C; liquid temperature: 22.0°C

Annex B: DASY5 measurement results

SAR plots for **the highest measured SAR** in each exposure configuration, wireless mode and frequency band combination according to FCC KDB 865664 D02

Annex B.1: GSM 850

Date/Time: 17.01.2014 10:33:53

IEEE1528-GSM850 head - DTM

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 850; Frequency: 848.8 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used: $f = 849$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.539$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.32, 6.32, 6.32); Calibrated: 04.06.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right-Hand-Side HSL/Touch Position - Hi/Area Scan (71x121x1): Interpolated

grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.710 W/kg

Right-Hand-Side HSL/Touch Position - Hi/Zoom Scan (6x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 27.021 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.489 W/kg

Maximum value of SAR (measured) = 0.707 W/kg

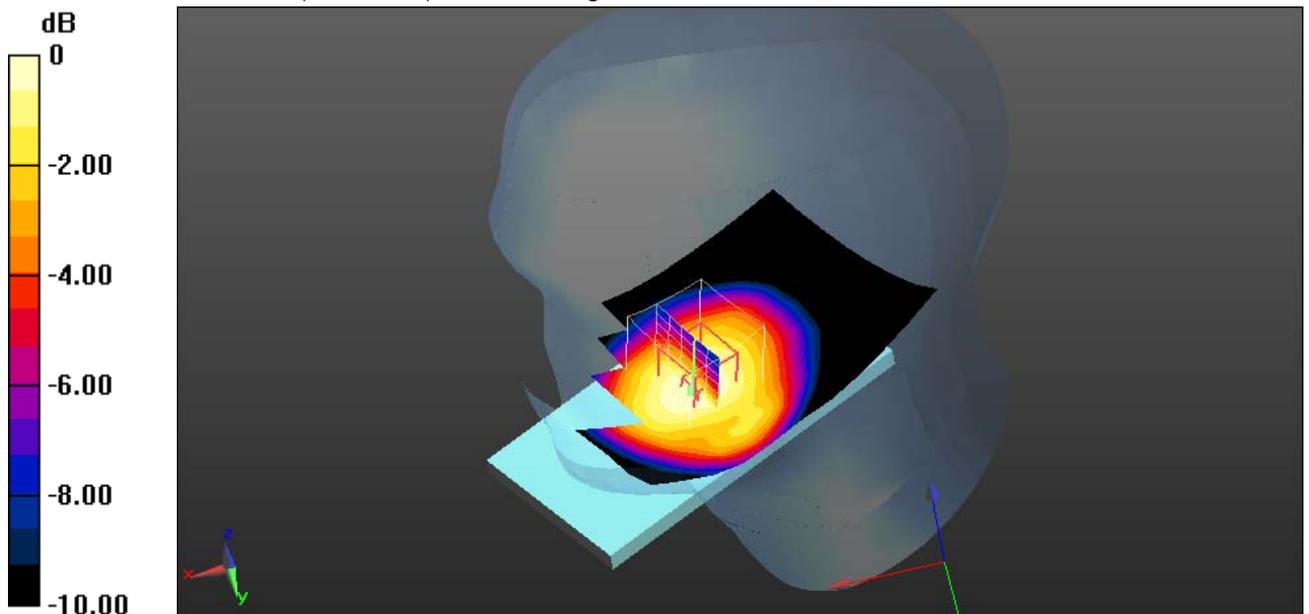

0 dB = 0.707 W/kg = -1.51 dBW/kg

Additional information:

ambient temperature: 23.4°C; liquid temperature: 22.3°C

Date/Time: 18.12.2013 09:44:07

FCC_EN62209-2 GSM835 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 850; Frequency: 824.2 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 53.551$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.64, 5.64, 5.64); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-10mm/Rear Low/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.543 W/kg


MSL850-10mm/Rear Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 23.943 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 0.522 W/kg

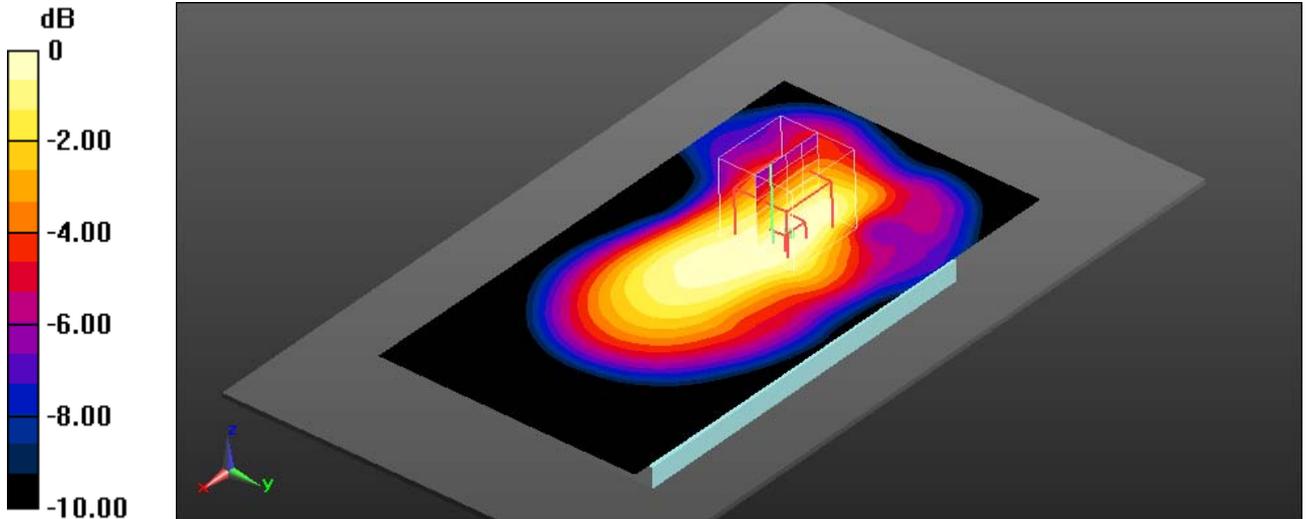

0 dB = 0.522 W/kg = -2.82 dBW/kg

Additional information:

position or distance of DUT to SAM: 10mm

ambient temperature: 22.8°C; liquid temperature: 22.6°C

Date/Time: 18.12.2013 07:56:46

FCC_EN62209-2 GSM835 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 850; Frequency: 836.6 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 53.401$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.64, 5.64, 5.64); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-10mm/Rear Middle/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.525 W/kg

MSL850-10mm/Rear Middle/Zoom Scan (6x6x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 23.752 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 0.504 W/kg

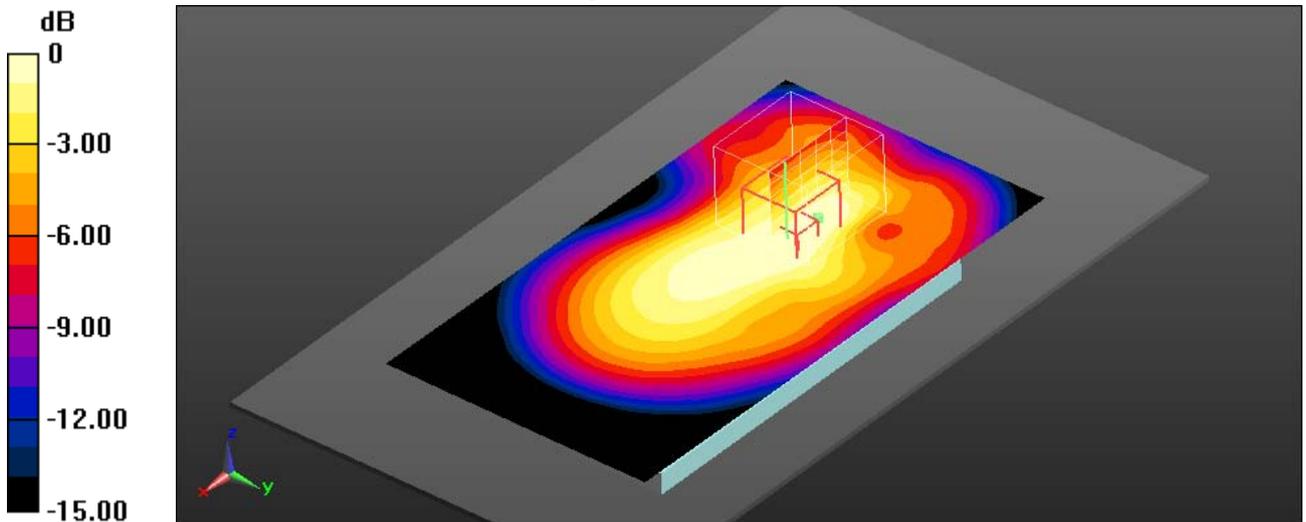

0 dB = 0.504 W/kg = -2.98 dBW/kg

Additional information:

position or distance of DUT to SAM: 10mm

ambient temperature: 22.8°C; liquid temperature: 22.6°C

Date/Time: 18.12.2013 10:26:03

FCC_EN62209-2 GSM835 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 850; Frequency: 824.2 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 53.551$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.64, 5.64, 5.64); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-15mm/Front Low/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.456 W/kg

MSL850-15mm/Front Low/Zoom Scan (6x6x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 22.693 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.329 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

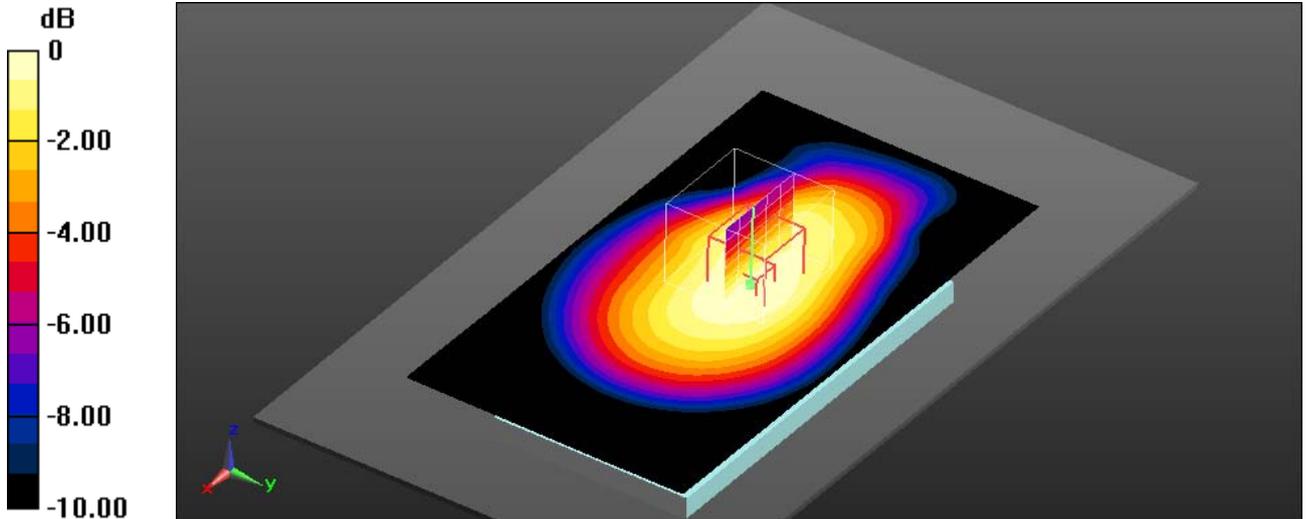

0 dB = 0.454 W/kg = -3.43 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 22.8°C; liquid temperature: 22.6°C

Annex B.2: GSM 1900

Date/Time: 1/17/2014 1:05:01 PM

IEEE1528-GSM1900 head DTM

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, GSM/GPRS 3TS (0); Communication System Band: GSM 1900; Frequency: 1909.8 MHz; Communication System PAR: 4.314 dB; PMF: 1.64324

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 39.707$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(5.05, 5.05, 5.05); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right-Hand-Side HSL/Touch Position - Hi/Area Scan (81x121x1): Interpolated
 grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 0.607 W/kg

Right-Hand-Side HSL/Touch Position - Hi/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.439 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.600 W/kg

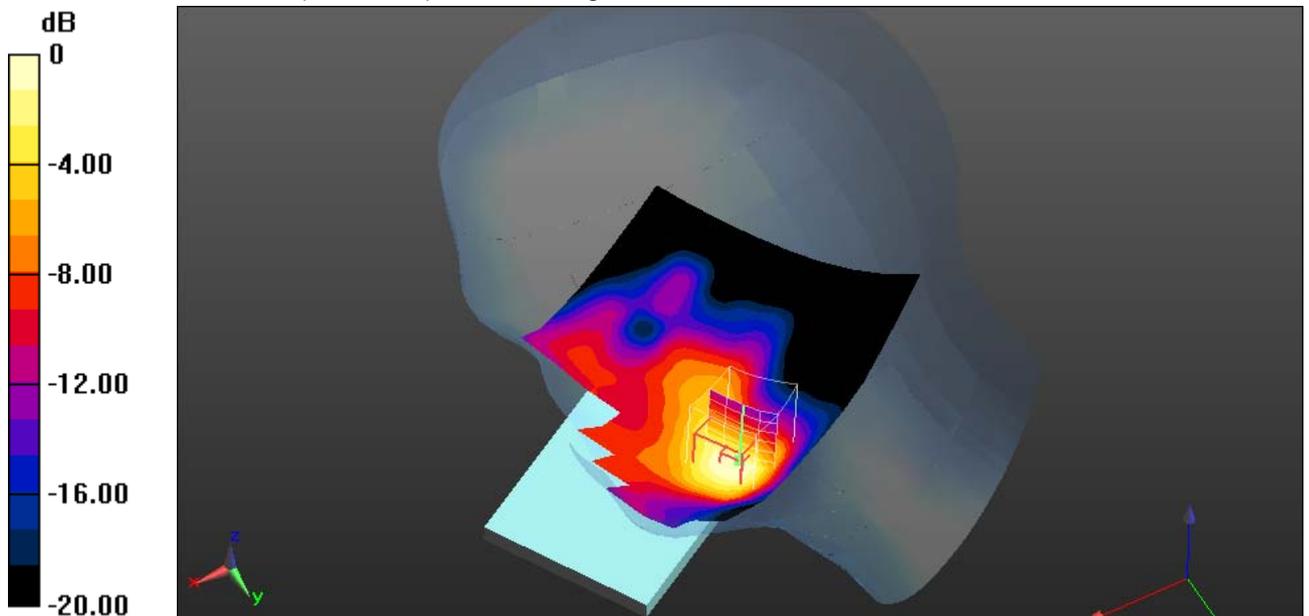

0 dB = 0.600 W/kg = -2.22 dBW/kg

Additional information:

ambient temperature: 21.8°C; liquid temperature: 21.5°C

Date/Time: 12/18/2013 4:01:52 PM

FCC_EN62209-2 GSM1900 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, GSM/GPRS 4TS (0); Communication System Band: GSM 1900; Frequency: 1909.8 MHz; Communication System PAR: 3.01 dB; PMF: 1.41416

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.525$ S/m; $\epsilon_r = 52.839$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.65, 4.65, 4.65); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASYS52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-10mm/Front High/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.555 W/kg

MSL1900-10mm/Front High/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.612 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.359 W/kg

Maximum value of SAR (measured) = 0.588 W/kg

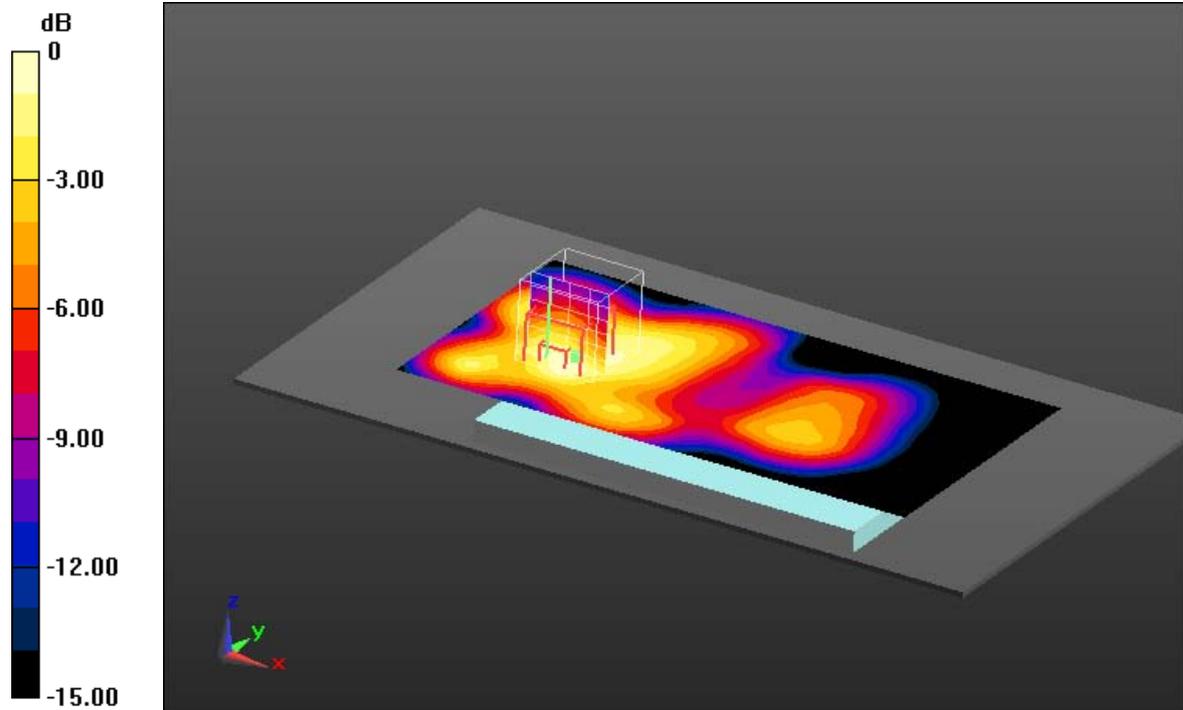

0 dB = 0.588 W/kg = -2.31 dBW/kg

Additional information:

position or distance of DUT to Phantom: 10mm

ambient temperature: 22.0°C; liquid temperature: 21.7°C

Date/Time: 12/18/2013 3:19:58 PM

FCC_EN62209-2 GSM1900 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, GSM/GPRS 4TS (0); Communication System Band: GSM 1900; Frequency: 1909.8 MHz; Communication System PAR: 3.01 dB; PMF: 1.41416

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.525$ S/m; $\epsilon_r = 52.839$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.65, 4.65, 4.65); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-15mm/Front High/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.357 W/kg

MSL1900-15mm/Front High/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.668 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.354 W/kg

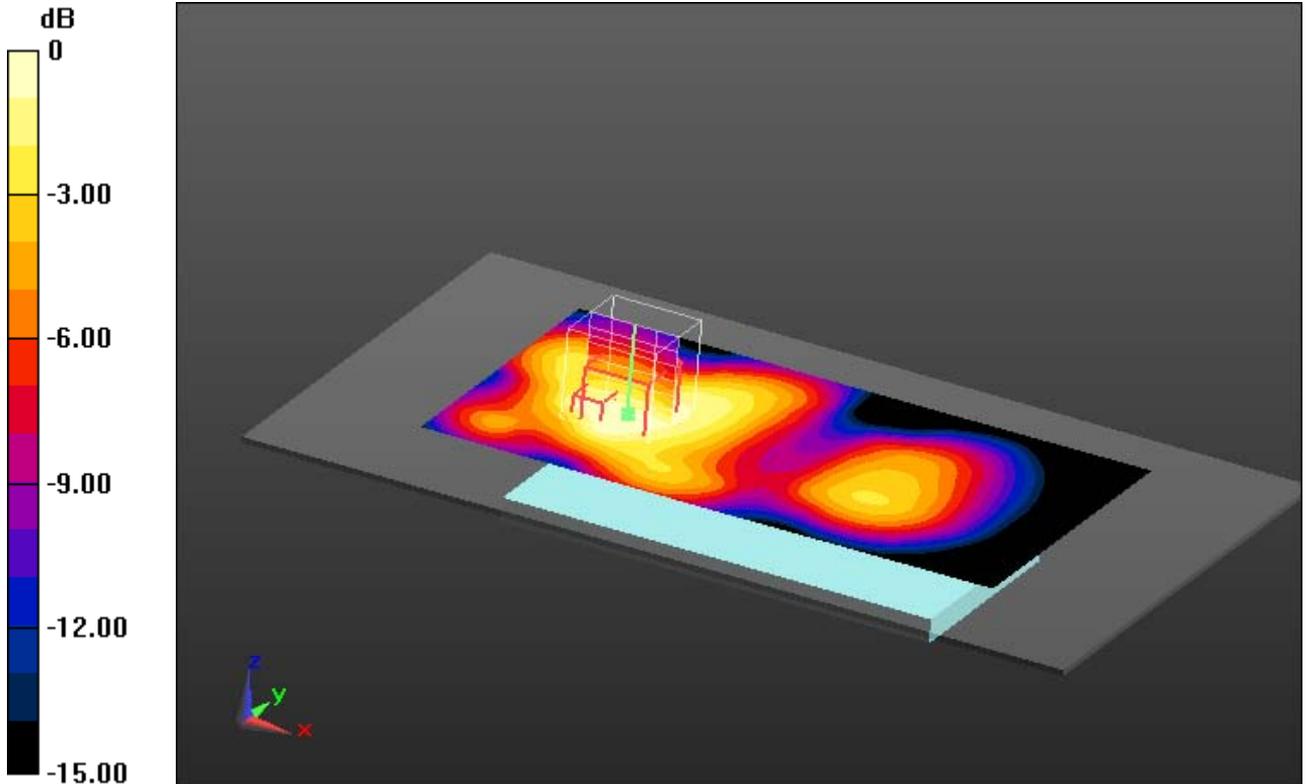

0 dB = 0.354 W/kg = -4.51 dBW/kg

Additional information:

position or distance of DUT to Phantom: 15mm

ambient temperature: 22.0°C; liquid temperature: 21.7°C

Annex B.3: UMTS FDD II

Date/Time: 12/17/2013 6:06:04 PM

IEEE1528-UMTS FDD II head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.385 \text{ S/m}$; $\epsilon_r = 39.95$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(5.05, 5.05, 5.05); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right-Hand-Side HSL/Touch Position - Hi/Area Scan (71x121x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.685 W/kg

Right-Hand-Side HSL/Touch Position - Hi/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.655 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

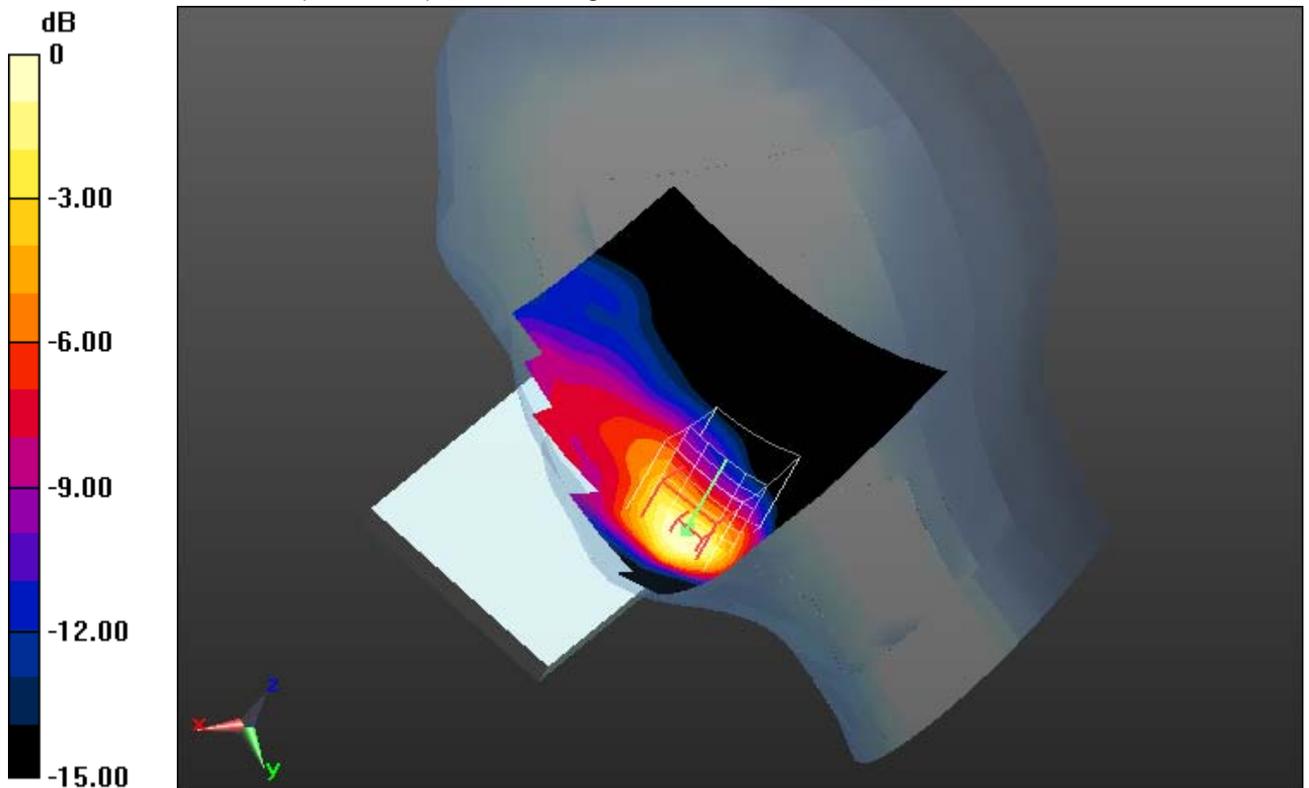

0 dB = 0.554 W/kg = -2.56 dBW/kg

Additional information:

ambient temperature: 22.2°C; liquid temperature: 21.9°C

Date/Time: 12/18/2013 8:00:54 PM

FCC_EN62209-2 UMTS FDD II hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD II; Frequency: 1852.4 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.468$ S/m; $\epsilon_r = 53.177$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.65, 4.65, 4.65); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-10mm/Front Low/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.733 W/kg

MSL1900-10mm/Front Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 22.788 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.454 W/kg

Maximum value of SAR (measured) = 0.751 W/kg

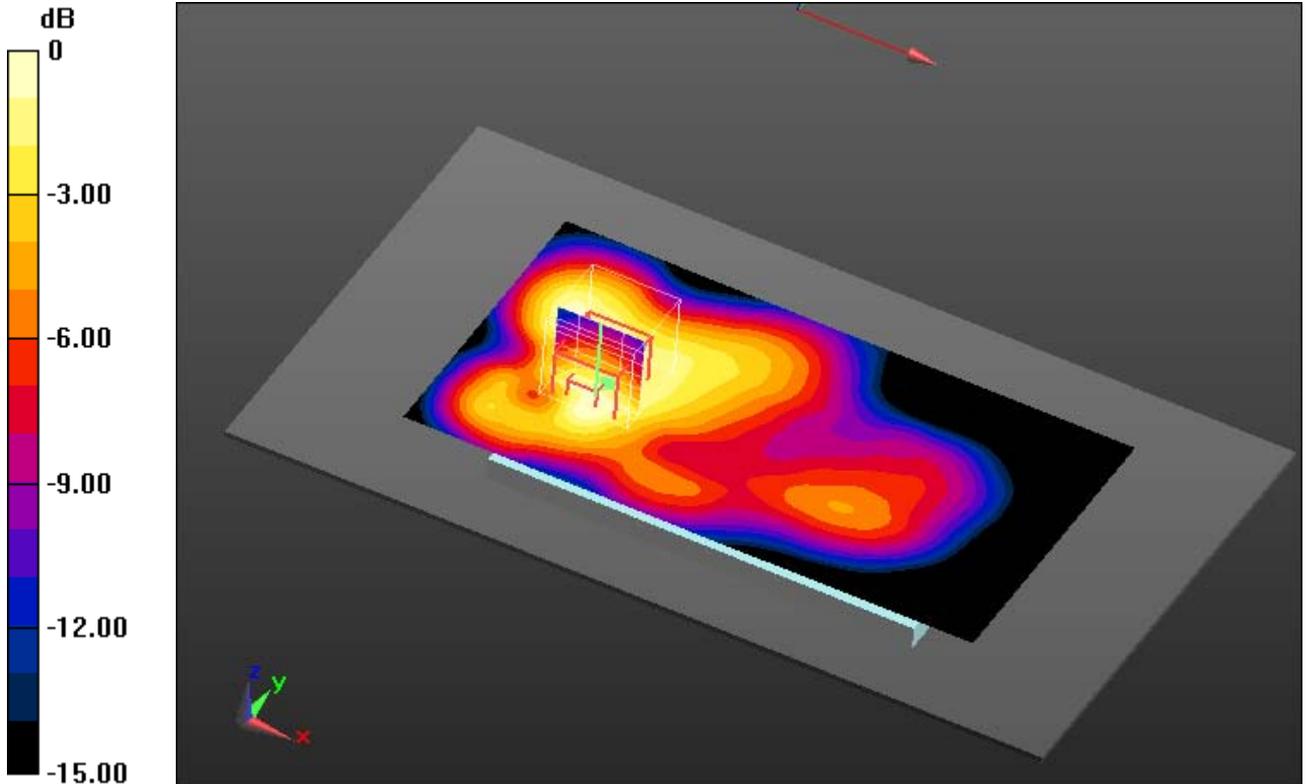

0 dB = 0.751 W/kg = -1.24 dBW/kg

Additional information:

position or distance of DUT to Phantom: 10mm

ambient temperature: 22.0°C; liquid temperature: 21.7°C

Date/Time: 12/18/2013 7:21:42 PM

IEEE1528-UMTS FDD II body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD II; Frequency: 1852.4 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.468$ S/m; $\epsilon_r = 53.177$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.65, 4.65, 4.65); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-15mm/Front Low/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.424 W/kg

MSL1900-15mm/Front Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 17.232 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.408 W/kg

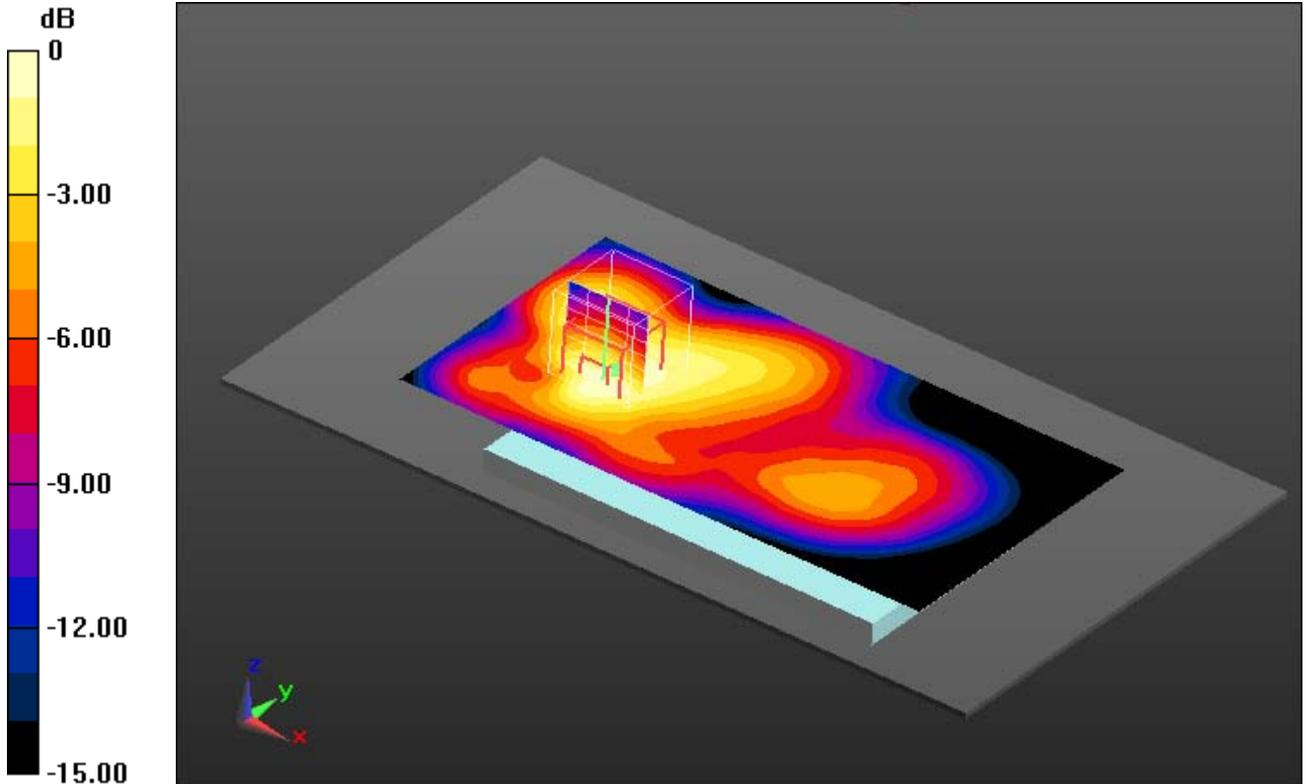

0 dB = 0.408 W/kg = -3.89 dBW/kg

Additional information:

position or distance of DUT to Phantom: 15mm

ambient temperature: 22.0°C; liquid temperature: 21.7°C

Annex B.4: UMTS FDD IV

Date/Time: 1/6/2014 2:23:22 PM

IEEE1528-UMTS FDD IV head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD IV; Frequency: 1712.4 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.323$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3326; ConvF(5.4, 5.4, 5.4); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- DASYS 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL/Touch Position - Low WC/Area Scan (81x121x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.48 W/kg

Left-Hand-Side HSL/Touch Position - Low WC/Zoom Scan (6x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 30.711 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.535 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

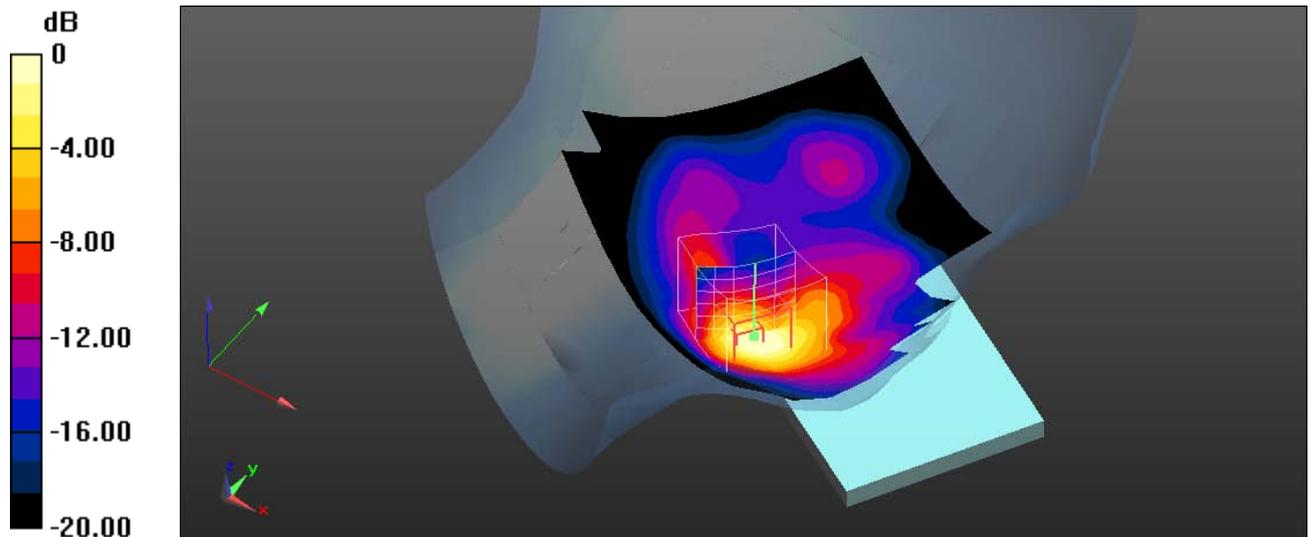

0 dB = 1.27 W/kg = 1.04 dBW/kg

Additional information:

ambient temperature: 22.3°C; liquid temperature: 22.0°C

Date/Time: 12/19/2013 5:56:51 PM

FCC_EN62209-2 UMTS FDD IV hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD IV; Frequency: 1732.4 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.471$ S/m; $\epsilon_r = 55.55$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.85, 4.85, 4.85); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-10mm/Left Side Middle/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.860 W/kg

MSL1900-10mm/Left Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 20.660 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.744 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 0.844 W/kg

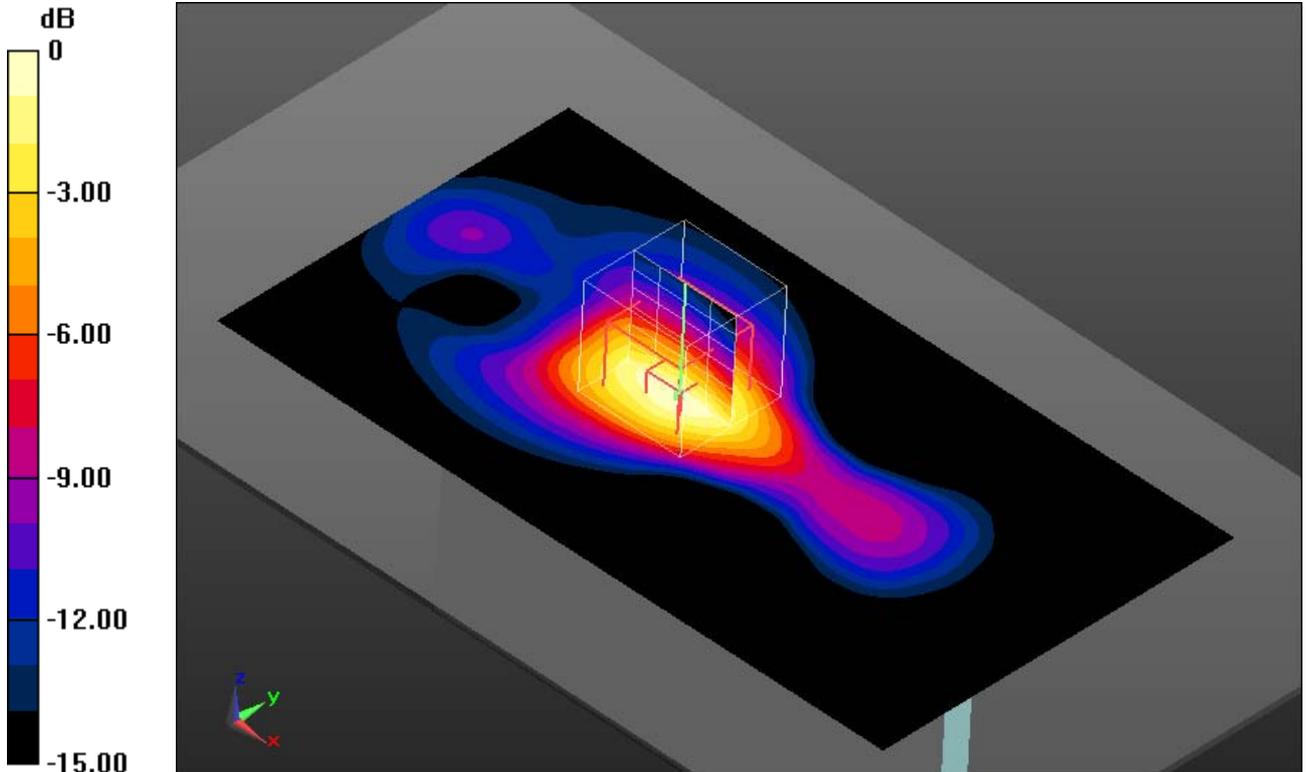

0 dB = 0.844 W/kg = -0.74 dBW/kg

Additional information:

position or distance of DUT to SAM: 10mm

ambient temperature: 22.2°C; liquid temperature: 21.9°C

Date/Time: 12/19/2013 1:03:46 PM

IEEE1528-UMTS FDD IV body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD IV; Frequency: 1732.4 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.471$ S/m; $\epsilon_r = 55.55$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.85, 4.85, 4.85); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-15mm/Rear Middle/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.423 W/kg

MSL1900-15mm/Rear Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.201 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.388 W/kg

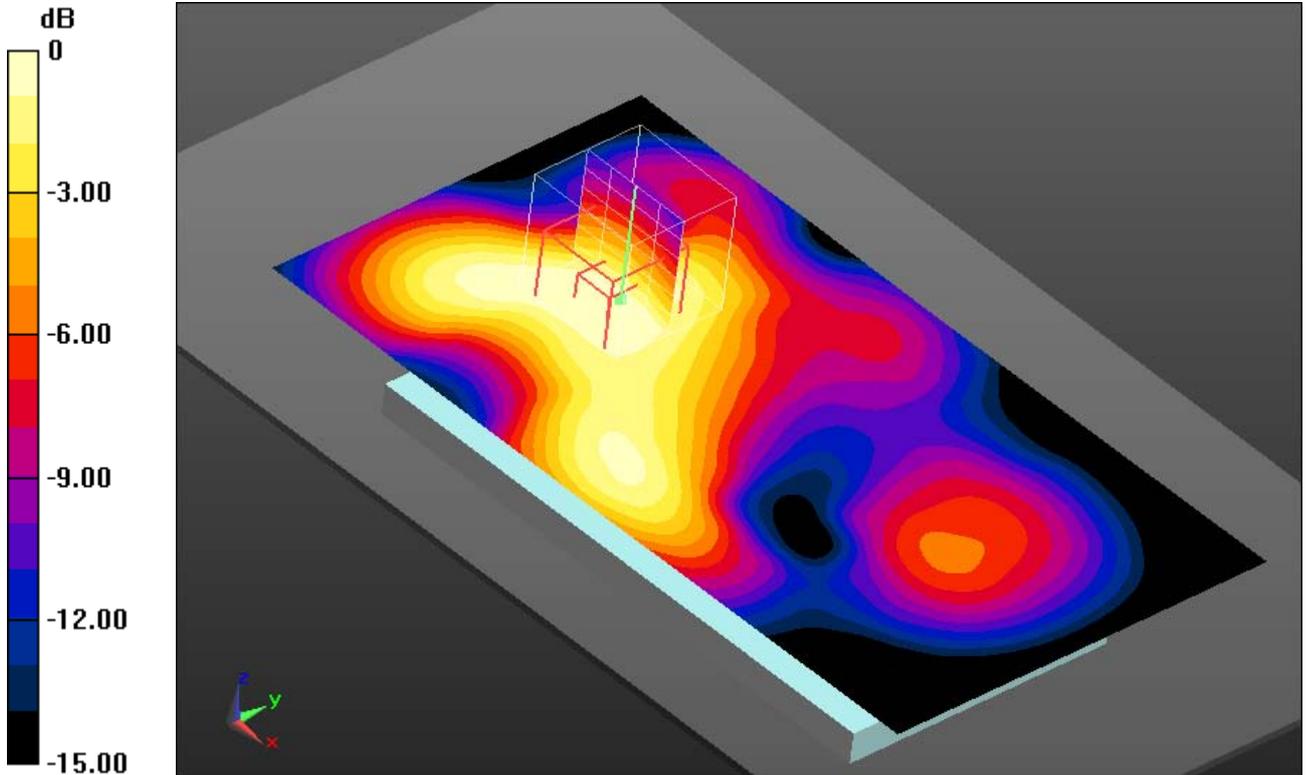

0 dB = 0.388 W/kg = -4.11 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 22.2°C; liquid temperature: 21.9°C

Date/Time: 12/19/2013 1:41:25 PM

IEEE1528-UMTS FDD IV body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD IV; Frequency: 1752.6 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.497$ S/m; $\epsilon_r = 55.525$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.85, 4.85, 4.85); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-15mm/Rear High/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.395 W/kg

MSL1900-15mm/Rear High/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.184 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.367 W/kg

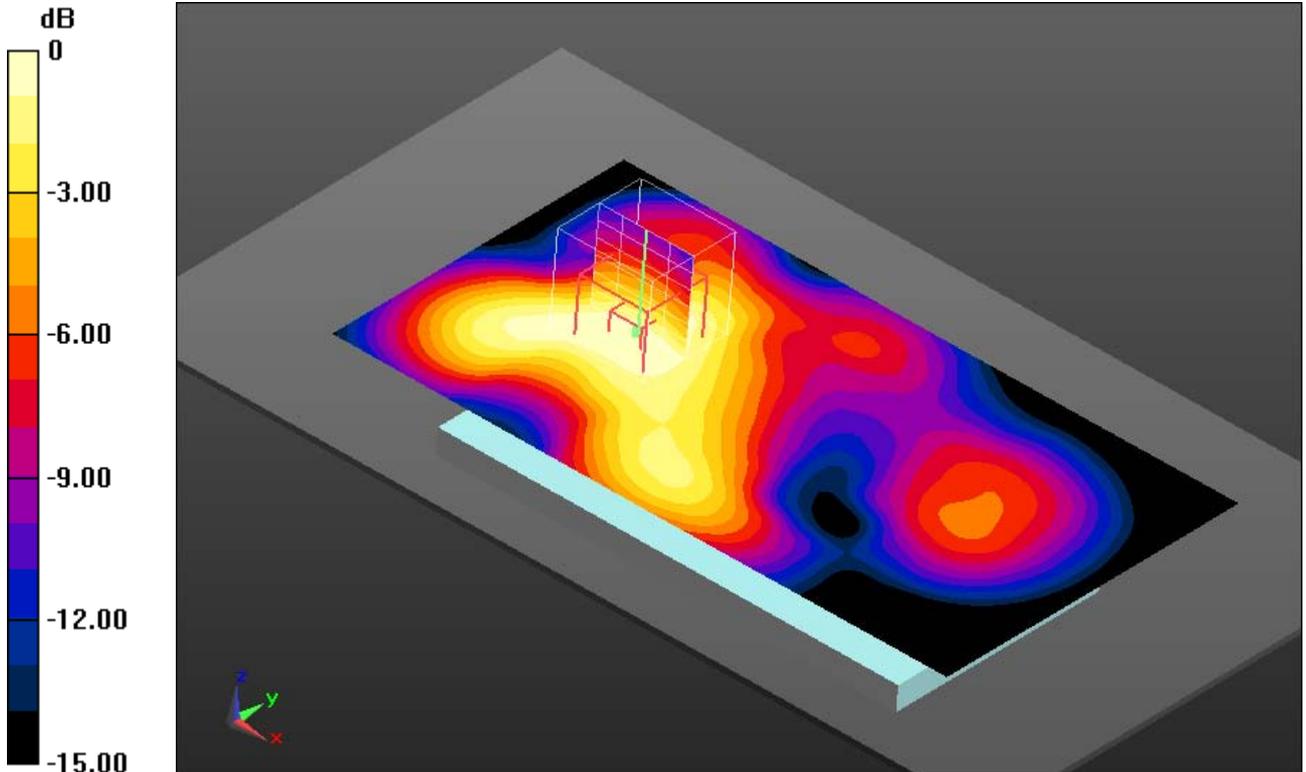

0 dB = 0.367 W/kg = -4.35 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 22.2°C; liquid temperature: 21.9°C

Annex B.5: UMTS FDD V

Date/Time: 16.12.2013 20:38:41

IEEE1528-UMTS FDDV head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD V; Frequency: 846.6 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.89, 5.89, 5.89); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASYS2 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right-Hand-Side HSL/Touch Position - Hi/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.530 W/kg

Right-Hand-Side HSL/Touch Position - Hi/Zoom Scan (6x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 24.124 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 0.529 W/kg

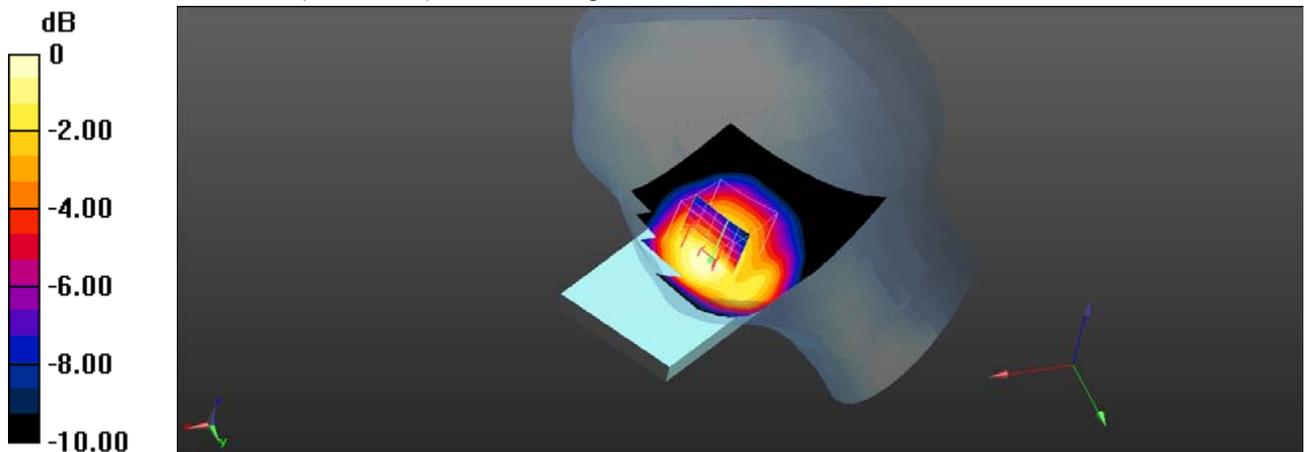

0 dB = 0.529 W/kg = -2.77 dBW/kg

Additional information:

ambient temperature: 22.4°C; liquid temperature: 22.4°C

Date/Time: 12/17/2013 9:45:22 PM

FCC_EN62209-2 UMTS FDD V hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD V; Frequency: 826.4 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 53.519$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.64, 5.64, 5.64); Calibrated: 8/22/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 5/13/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-10mm/Rear Low/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.365 W/kg


MSL850-10mm/Rear Low/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 20.273 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.359 W/kg

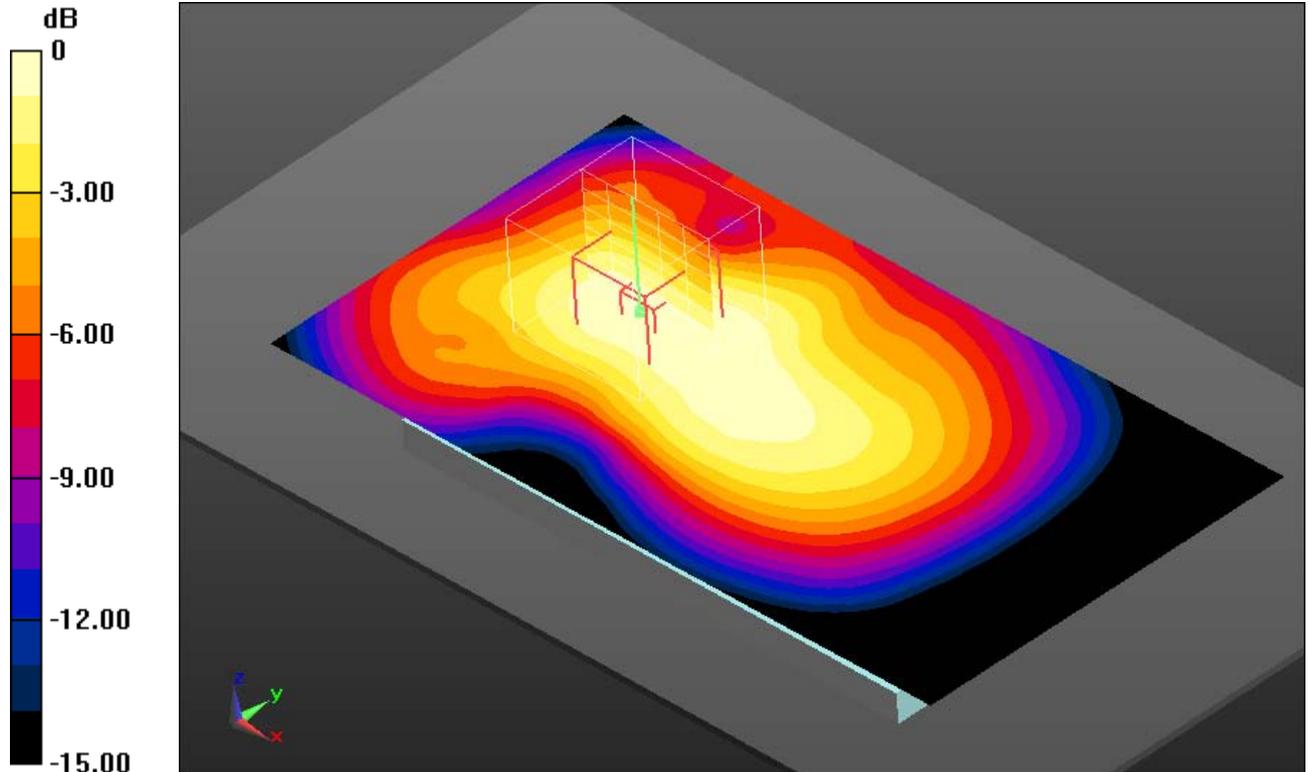

0 dB = 0.359 W/kg = -4.45 dBW/kg

Additional information:

position or distance of DUT to SAM: 10mm

ambient temperature: 22.1°C; liquid temperature: 21.6°C

Date/Time: 12/17/2013 9:19:26 PM

FCC_EN62209-2 UMTS FDD V body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD V; Frequency: 826.4 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 53.519$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.64, 5.64, 5.64); Calibrated: 8/22/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 5/13/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-15mm/Rear Low/Area Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.299 W/kg


MSL850-15mm/Rear Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.210 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

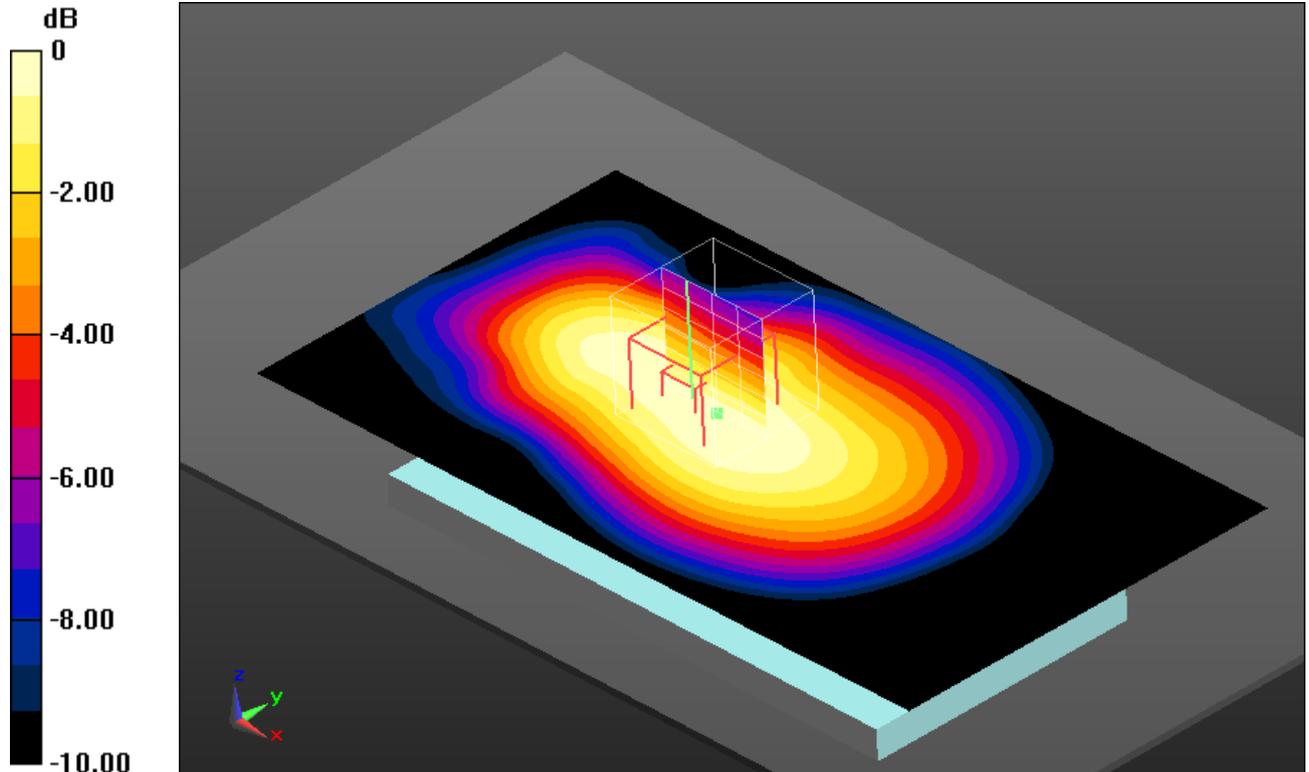

0 dB = 0.298 W/kg = -5.26 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 22.1°C; liquid temperature: 21.6°C

Annex B.6: LTE FDD 2

Date/Time: 12/18/2013 10:17:38 AM

IEEE1528-LTE FDD2 head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 2 (1900MHz); Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 40.059$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(5.05, 5.05, 5.05); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL - QPSK - 20MHz BW - 1RB/Touch Position - Mid 0RB offset/Area Scan (71x121x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.811 W/kg

Left-Hand-Side HSL - QPSK - 20MHz BW - 1RB/Touch Position - Mid 0RB offset/Zoom Scan (7x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 22.152 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.671 W/kg

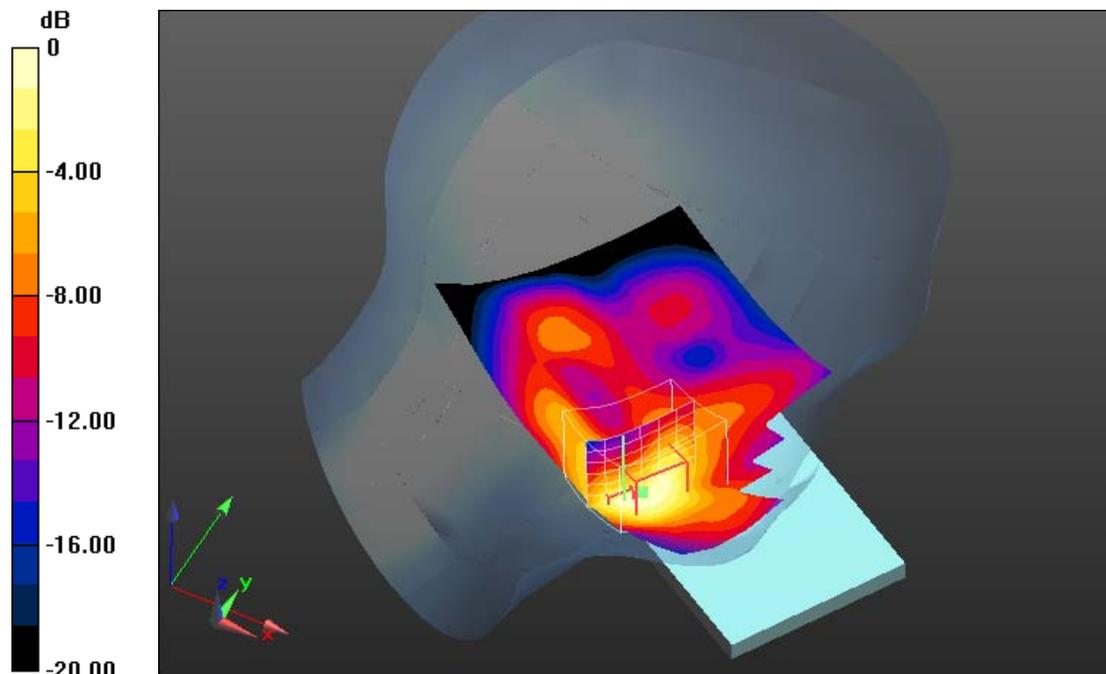

0 dB = 0.671 W/kg = -1.73 dBW/kg

Additional information:

ambient temperature: 22.4°C; liquid temperature: 21.8°C

Date/Time: 21.12.2013 13:23:35

FCC_EN62209-2 LTE FDD 2 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 2 (1900MHz); Frequency: 1860 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.476$ S/m; $\epsilon_r = 53.12$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.21, 4.21, 4.21); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-10mm - QPSK - 20MHz BW - 1RB/Rear Low 0RB offset/Area Scan

(131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.874 W/kg

MSL1900-10mm - QPSK - 20MHz BW - 1RB/Rear Low 0RB offset/Zoom


Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 24.689 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.715 W/kg; SAR(10 g) = 0.401 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

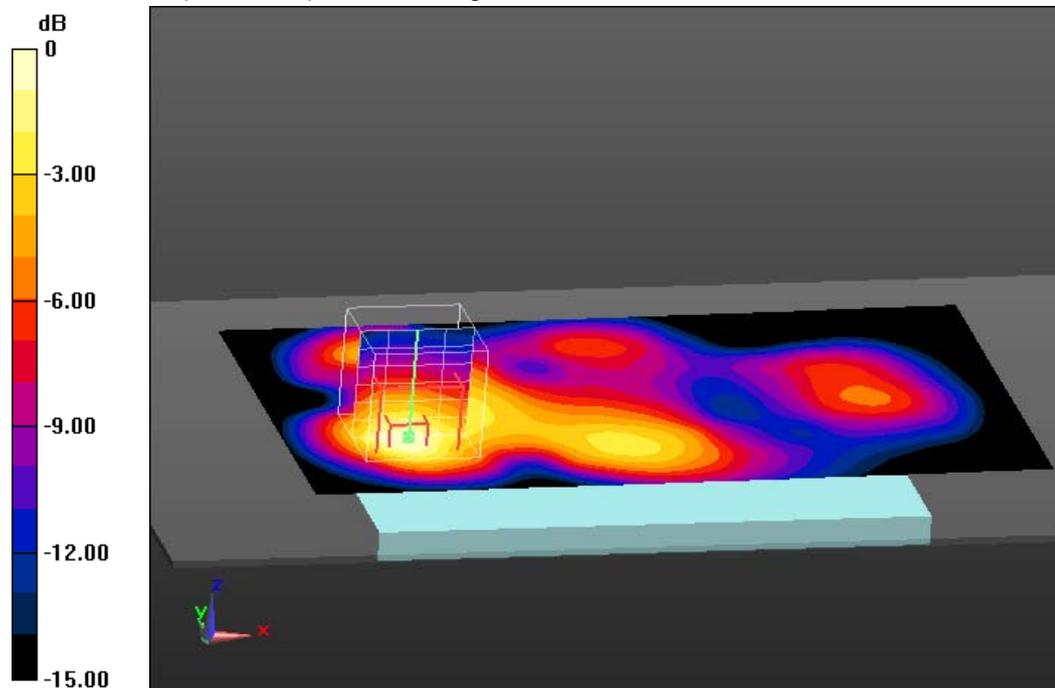

0 dB = 0.792 W/kg = -1.01 dBW/kg

Additional information:

position or distance of DUT to SAM : 10 mm

ambient temperature: 22.3°C; liquid temperature: 22.3°C

Date/Time: 21.12.2013 16:25:46

FCC_EN62209-2 LTE FDD 2 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 2 (1900MHz); Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 52.927$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.21, 4.21, 4.21); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-15mm - QPSK - 20MHz BW - 1RB/Front Middle 0RB offset/Area

Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.422 W/kg

MSL1900-15mm - QPSK - 20MHz BW - 1RB/Front Middle 0RB offset/Zoom


Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.029 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

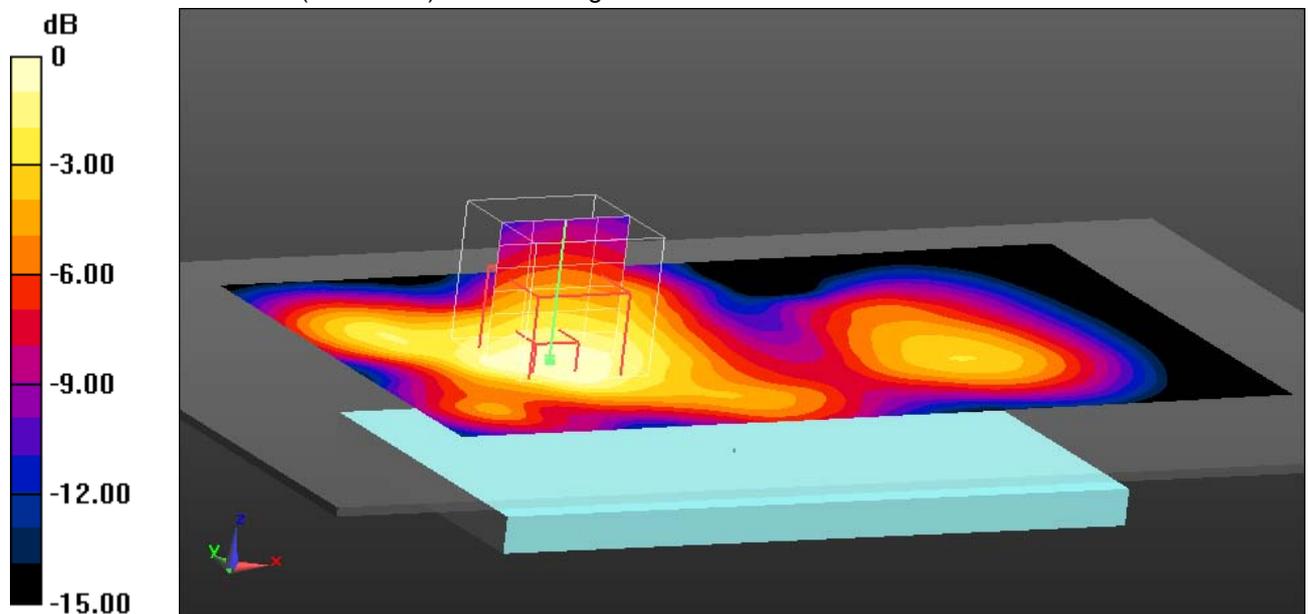

0 dB = 0.415 W/kg = -3.82 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 22.3°C; liquid temperature: 22.3°C

Annex B.7: LTE FDD 4

Date/Time: 27.12.2013 18:57:56

IEEE1528-LTE FDD 4 head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 4 (1700MHz); Frequency: 1720 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 39.282$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(5.23, 5.23, 5.23); Calibrated: 04.06.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn413; Calibrated: 11.01.2013
- Phantom: SAM; Type: SAM; Serial: 1043
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left -Hand-Side HSL - QPSK - 20MHz BW - 1RB/Touch Position - Low 0RB offset/Area Scan (91x121x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Left -Hand-Side HSL - QPSK - 20MHz BW - 1RB/Touch Position - Low 0RB offset/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 24.904 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.494 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

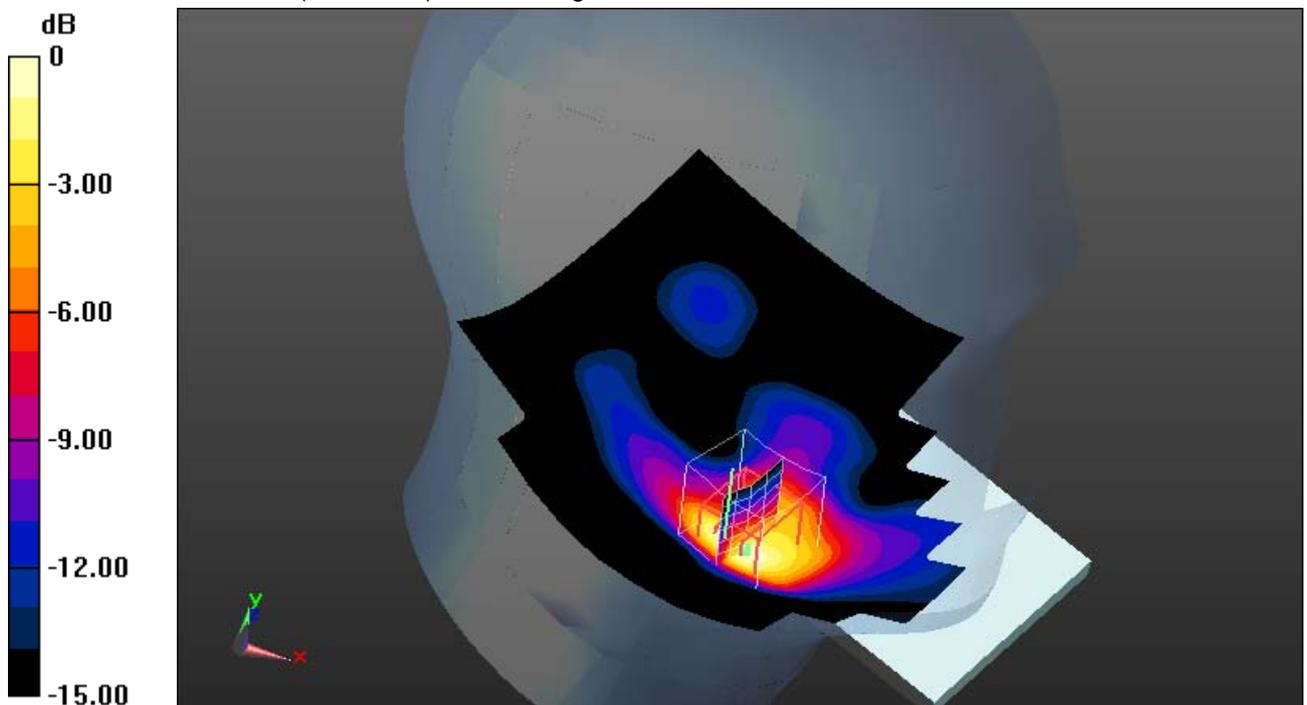

0 dB = 1.10 W/kg = 0.41 dBW/kg

Additional information:

ambient temperature: 22.6°C; liquid temperature: 22.3°C

Date/Time: 12/20/2013 9:22:12 AM

FCC_EN62209-2 LTE FDD 4 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 4 (1700MHz); Frequency: 1720 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 55.58$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.85, 4.85, 4.85); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1750-10mm -QPSK - 20MHz BW - 1RB/Left Side Low ORB offset/Area

Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.681 W/kg

MSL1750-10mm -QPSK - 20MHz BW - 1RB/Left Side Low ORB offset/Zoom


Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.593 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.617 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 0.689 W/kg

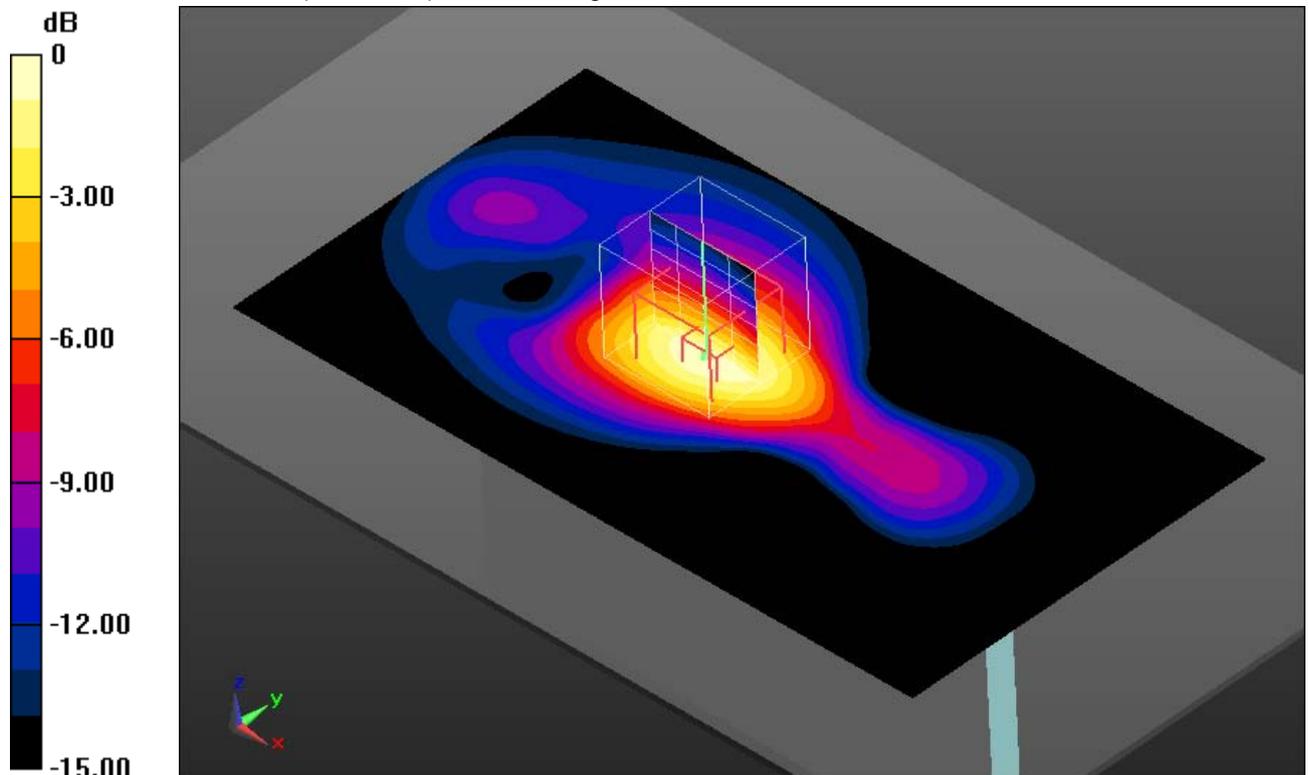

0 dB = 0.689 W/kg = -1.62 dBW/kg

Additional information:

position or distance of DUT to SAM: 10mm

ambient temperature: 22.5°C; liquid temperature: 22.2°C

Date/Time: 12/20/2013 8:18:50 AM

FCC_EN62209-2 LTE FDD 4 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 4 (1700MHz); Frequency: 1732.5 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.472$ S/m; $\epsilon_r = 55.548$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.85, 4.85, 4.85); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1750-15mm -QPSK - 20MHz BW - 1RB/Rear Middle 99RB offset/Area

Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.372 W/kg

MSL1750-15mm -QPSK - 20MHz BW - 1RB/Rear Middle 99RB offset/Zoom


Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.664 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.351 W/kg

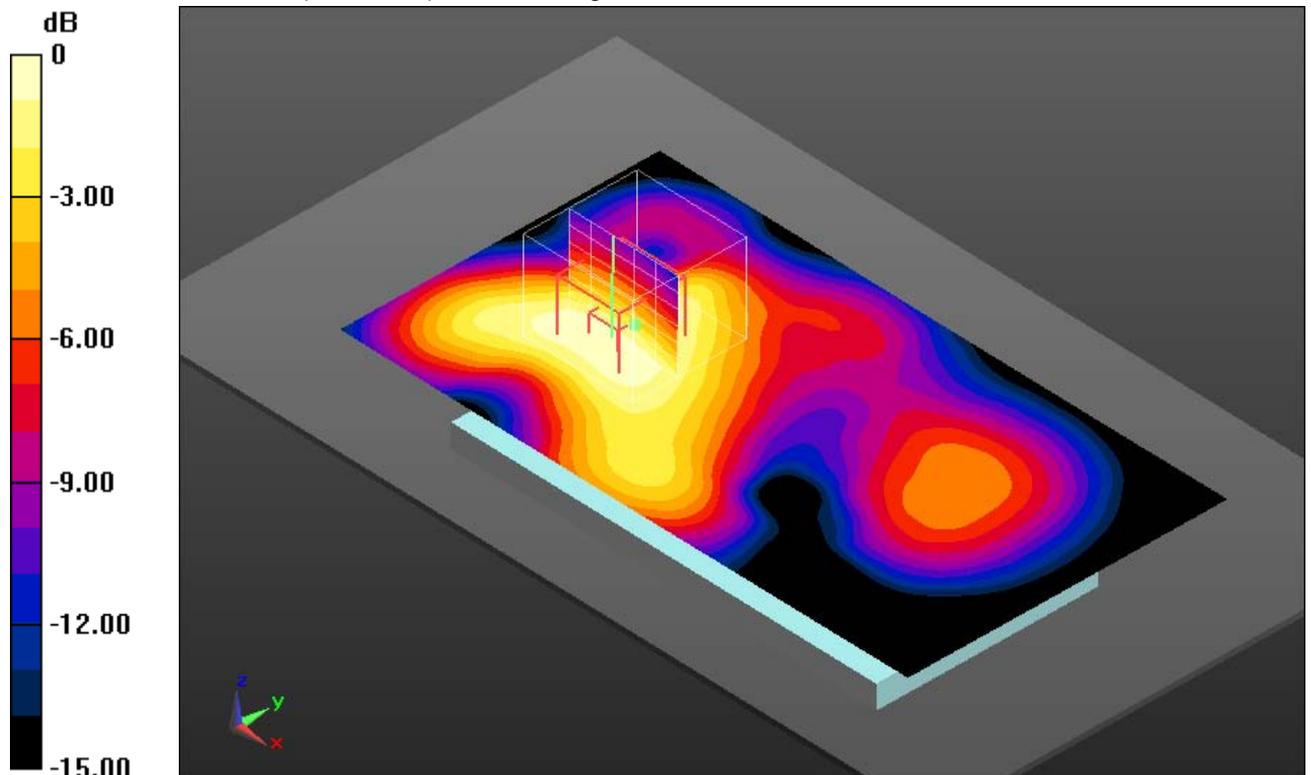

0 dB = 0.351 W/kg = -4.55 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 22.5°C; liquid temperature: 22.2°C

Annex B.8: LTE FDD 5

Date/Time: 12/18/2013 2:53:50 PM

IEEE1528-LTE FDD5 head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 5 (850MHz); Frequency: 844 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.947 \text{ S/m}$; $\epsilon_r = 40.996$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.89, 5.89, 5.89); Calibrated: 8/22/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 5/13/2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right-Hand-Side HSL - QPSK - 10MHz BW - 1RB/Touch Position - Hi 0RB offset/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.459 W/kg


Right-Hand-Side HSL - QPSK - 10MHz BW - 1RB/Touch Position - Hi 0RB offset/Zoom Scan (9x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.756 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.459 W/kg

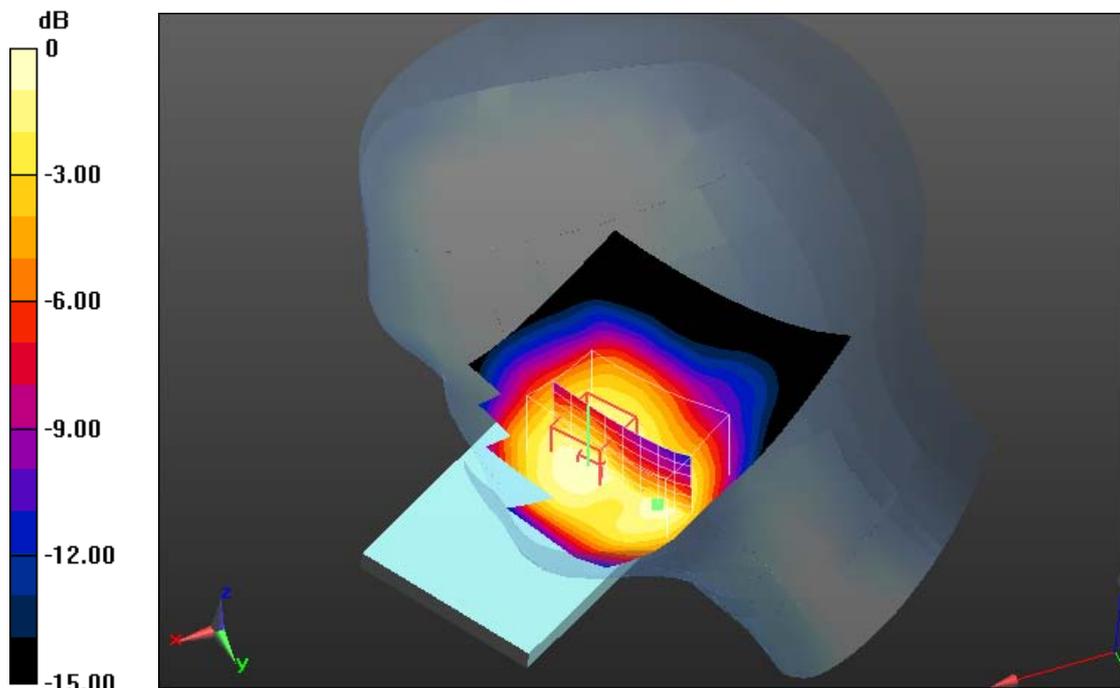

0 dB = 0.459 W/kg = -3.38 dBW/kg

Additional information:

ambient temperature: 22.7°C; liquid temperature: 22.5°C

Date/Time: 17.12.2013 17:32:42

FCC_EN62209-2 LTE FDD 5 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 5 (850MHz); Frequency: 844 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 53.337$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.64, 5.64, 5.64); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-10mm - QPSK - 10MHz BW - 1RB/Rear High 0RB offset/Area Scan

(131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.335 W/kg

MSL850-10mm - QPSK - 10MHz BW - 1RB/Rear High 0RB offset/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.361 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

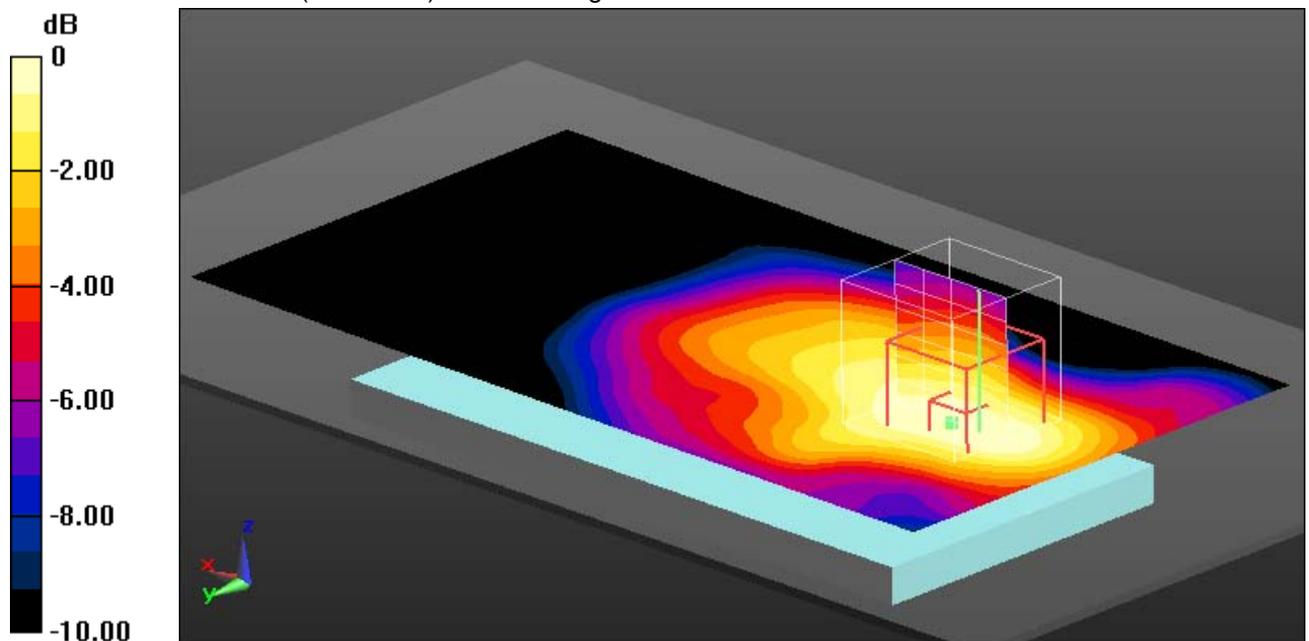

0 dB = 0.330 W/kg = -4.81 dBW/kg

Additional information:

position or distance of DUT to SAM: 10 mm

ambient temperature: 22.2°C; liquid temperature: 21.6°C

Date/Time: 17.12.2013 15:29:10

FCC-LTE FDD 5 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 5 (850MHz); Frequency: 844 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.975 \text{ S/m}$; $\epsilon_r = 53.337$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.64, 5.64, 5.64); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-15mm - QPSK - 10MHz BW - 1RB/Rear High 0RB offset/Area Scan

(131x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.253 W/kg

MSL850-15mm - QPSK - 10MHz BW - 1RB/Rear High 0RB offset/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.563 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

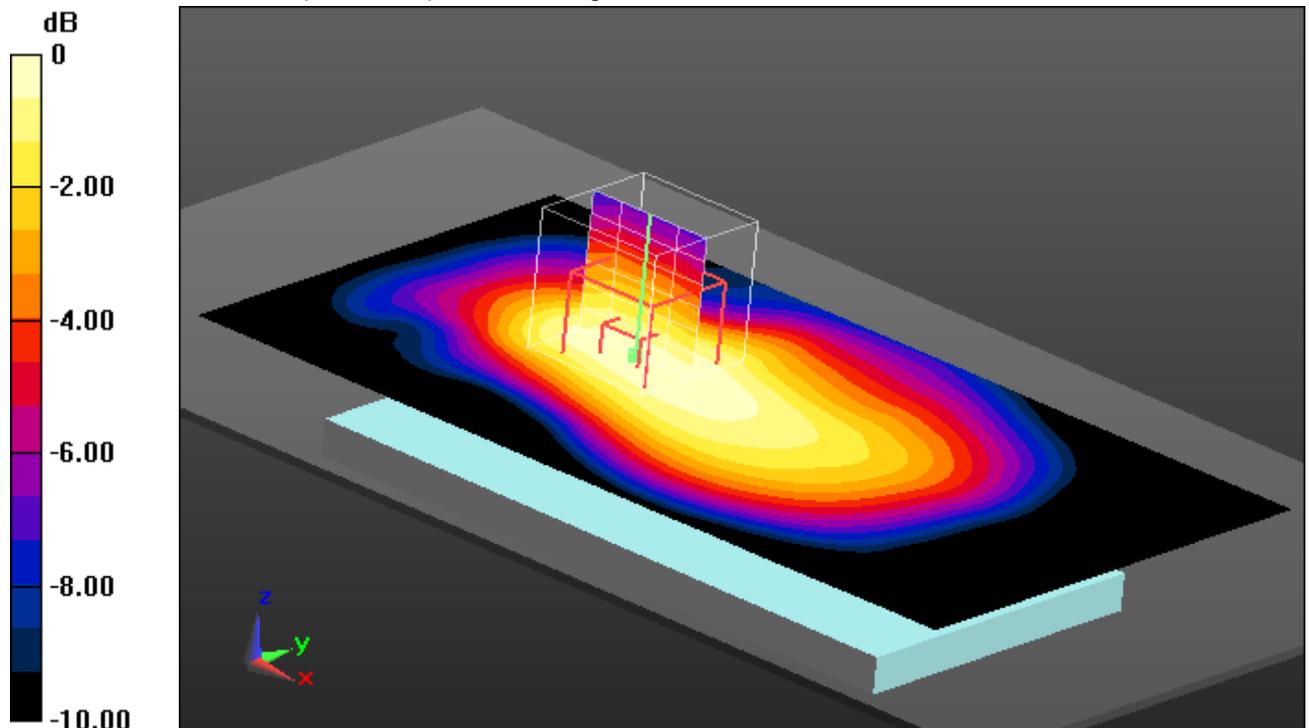

0 dB = 0.250 W/kg = -6.02 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 22.2°C; liquid temperature: 21.6°C

Annex B.9: LTE FDD 7

Date/Time: 02.01.2014 10:43:36

IEEE1528_EN62209-LTE FDD 7 head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 7 (2600MHz); Frequency: 2510 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.989$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right-Hand-Side HSL QPSK - 20MHz BW/Touch Position - Low - 1RB - 99RB offset WC/Area Scan (111x171x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.85 W/kg

Right-Hand-Side HSL QPSK - 20MHz BW/Touch Position - Low - 1RB - 99RB offset WC/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.546 V/m; Power Drift = -0.35 dB

Peak SAR (extrapolated) = 3.30 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.446 W/kg

Maximum value of SAR (measured) = 2.03 W/kg

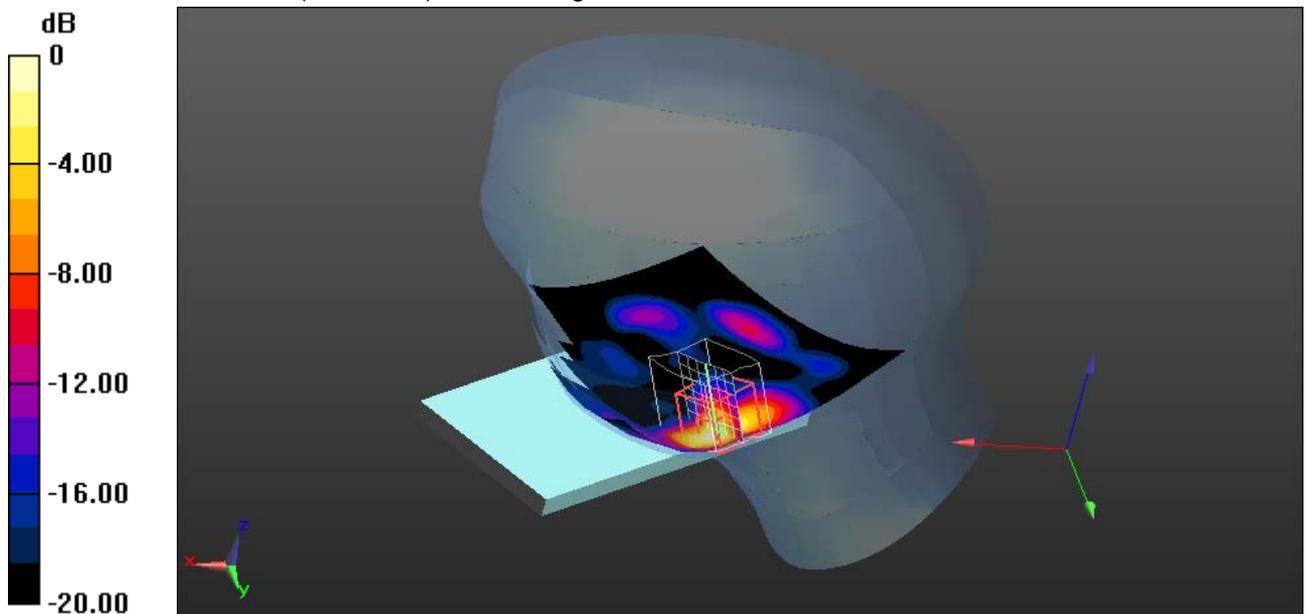

0 dB = 2.03 W/kg = 3.07 dBW/kg

Additional information:

ambient temperature: 23.3°C; liquid temperature: 22.5°C

Date/Time: 31.12.2013 16:49:43

FCC_EN62209-2 LTE FDD 7 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 7 (2600MHz); Frequency: 2510 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.106$ S/m; $\epsilon_r = 52.407$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.27, 7.27, 7.27); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL- QPSK - 1 RB - 20MHz BW - 10mm/Right side Low 0RB offset/Area

Scan (191x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.08 W/kg

MSL- QPSK - 1 RB - 20MHz BW - 10mm/Right side Low 0RB offset/Zoom


Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 20.130 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

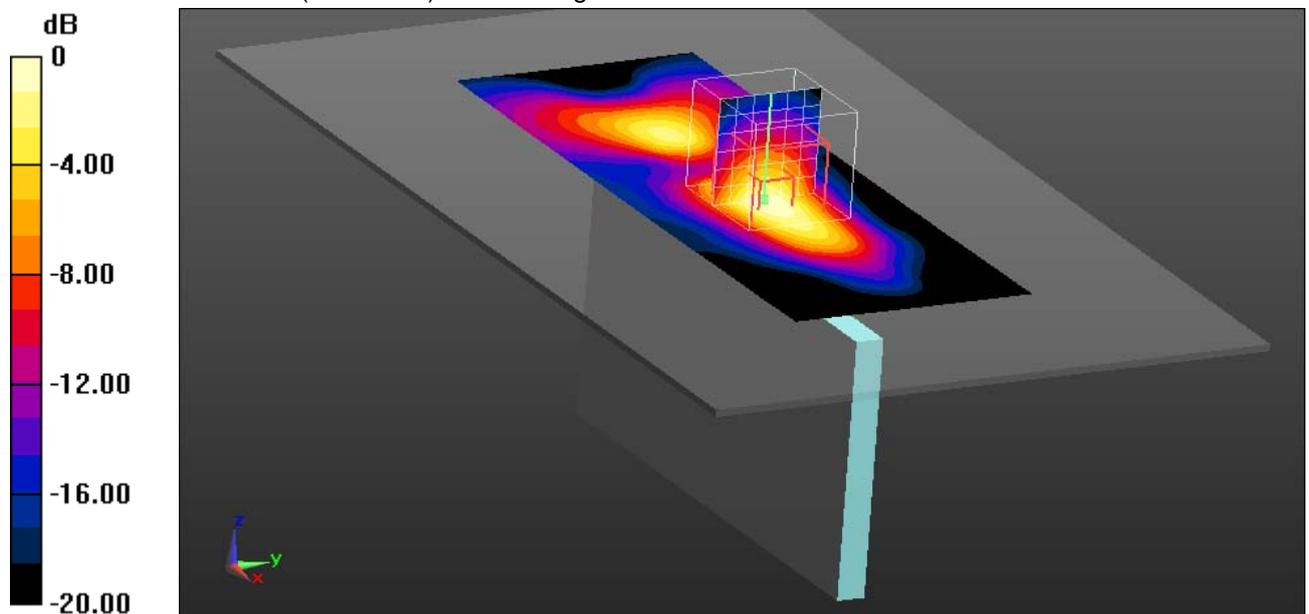

0 dB = 1.04 W/kg = 0.17 dBW/kg

Additional information:

ambient temperature: 23.3 °C; liquid temperature: 22.2 °C

Date/Time: 31.12.2013 10:42:40

FCC_EN62209-2 LTE FDD 7 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 7 (2600MHz); Frequency: 2560 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.164$ S/m; $\epsilon_r = 52.277$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.27, 7.27, 7.27); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL- QPSK - 1 RB - 20MHz BW - 15mm/Rear High 0RB offset/Area Scan

(191x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.410 W/kg

MSL- QPSK - 1 RB - 20MHz BW - 15mm/Rear High 0RB offset/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.301 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.409 W/kg

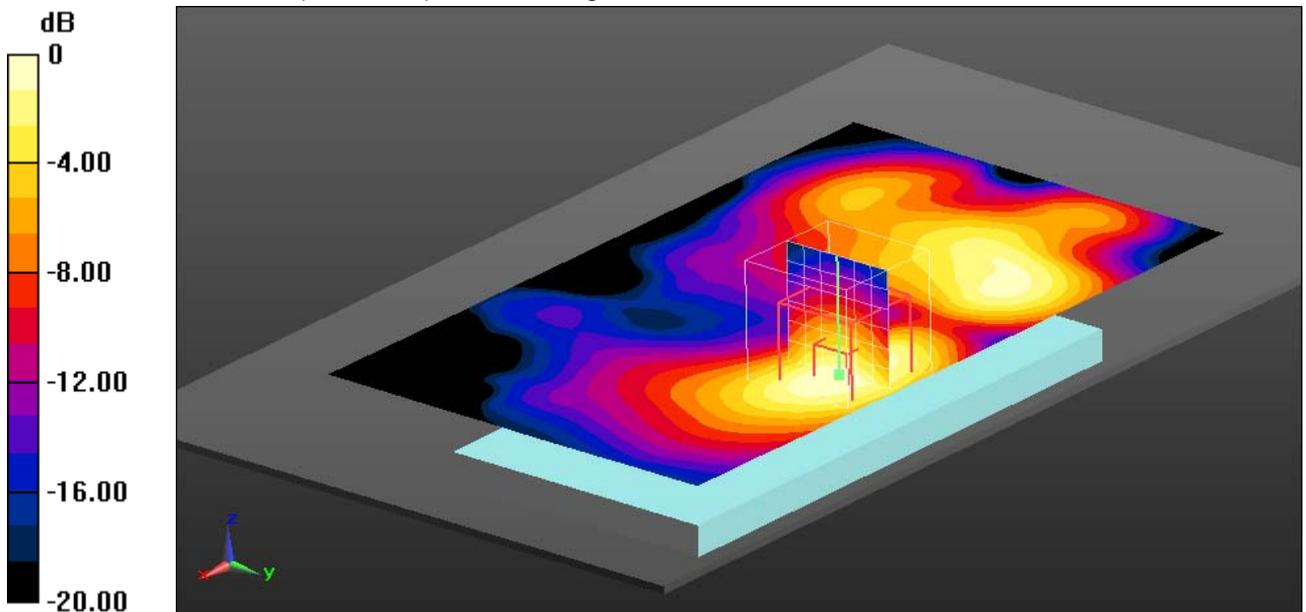

0 dB = 0.409 W/kg = -3.88 dBW/kg

Additional information:

ambient temperature: 23.3 °C; liquid temperature: 22.2 °C

Annex B.10: LTE FDD 13

Date/Time: 18.12.2013 17:49:11

IEEE1528-LTE FDD13 head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 13 (700MHz); Frequency: 782 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 40.875$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.15, 6.15, 6.15); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right-Hand-Side HSL - QPSK - 10MHz BW - 1RB/Touch Position - Mid 0RB offset/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.301 W/kg


Right-Hand-Side HSL - QPSK - 10MHz BW - 1RB/Touch Position - Mid 0RB offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.495 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

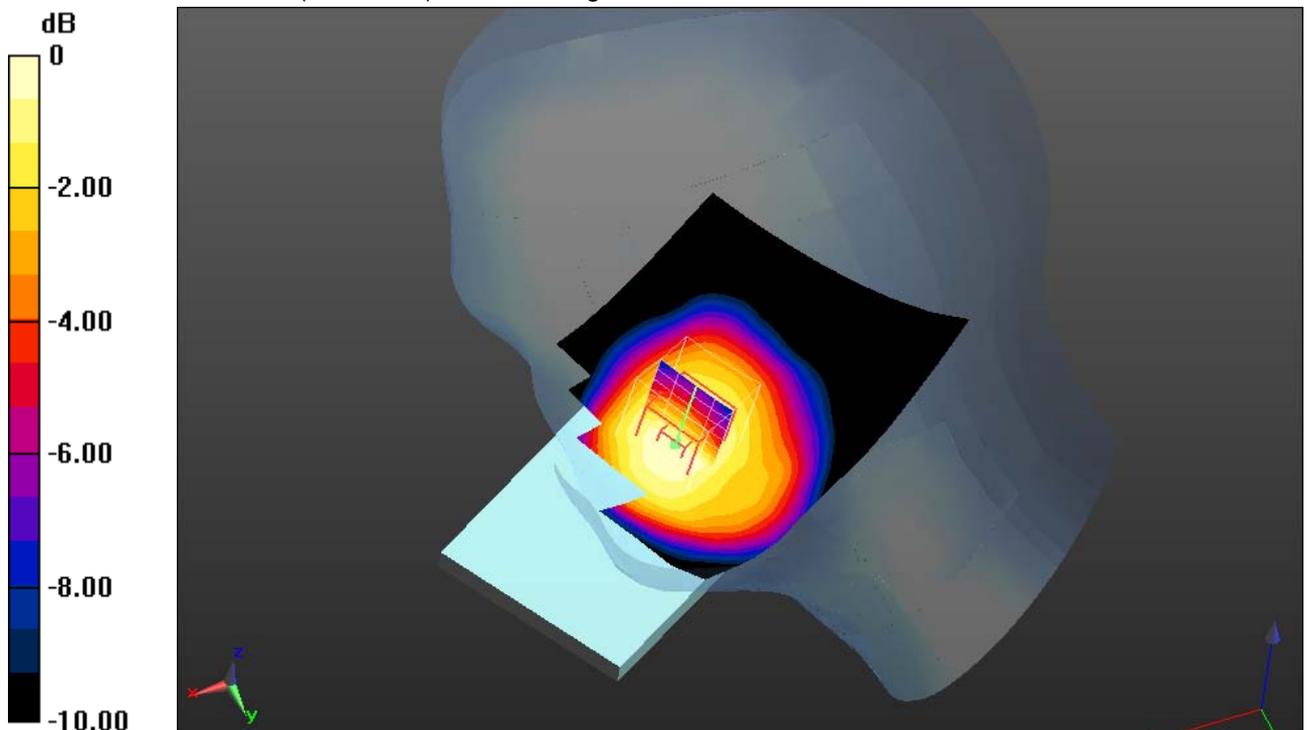

0 dB = 0.307 W/kg = -5.13 dBW/kg

Additional information:

ambient temperature: 23.1°C; liquid temperature: 22.5°C

Date/Time: 19.12.2013 09:25:47

FCC_EN62209-2 LTE FDD 13 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 13 (700MHz); Frequency: 782 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 782$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 54.95$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.73, 5.73, 5.73); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-10mm - QPSK - 10MHz BW - 1RB/Front Middle 0RB offset/Area

Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.300 W/kg

MSL850-10mm - QPSK - 10MHz BW - 1RB/Front Middle 0RB offset/Zoom


Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 17.720 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.360 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

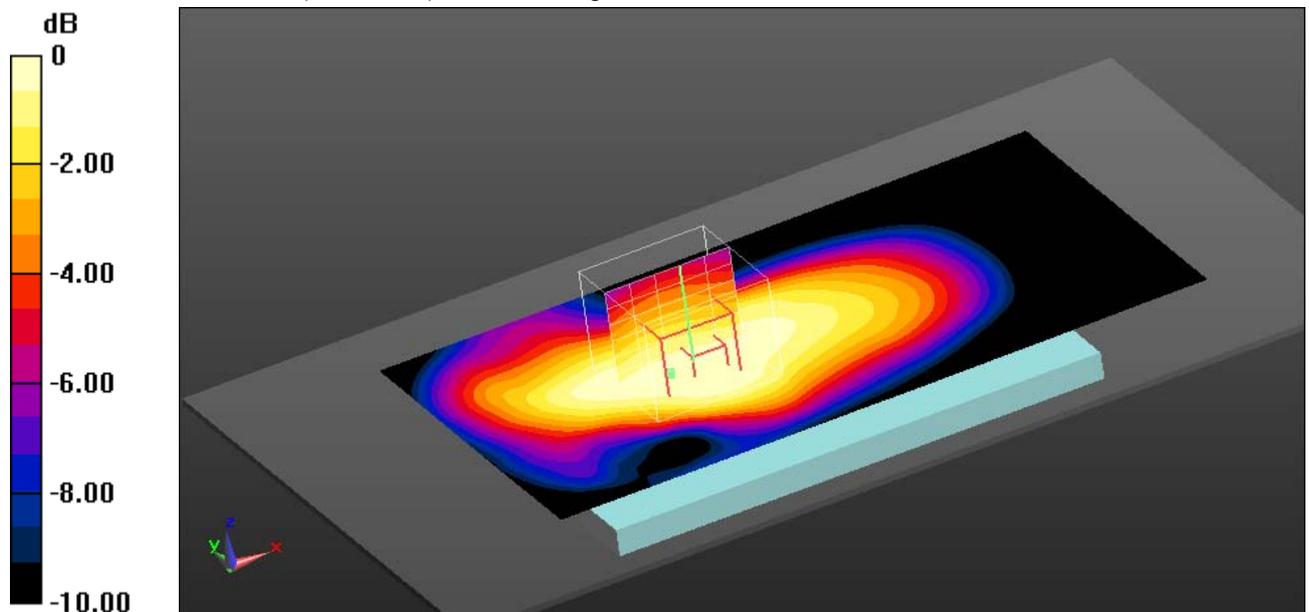

0 dB = 0.303 W/kg = -5.19 dBW/kg

Additional information:

position or distance of DUT to SAM: 10 mm

ambient temperature: 23.1°C; liquid temperature: 22.6°C

Date/Time: 19.12.2013 09:48:27

FCC_EN62209-2 LTE FDD 13 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 13 (700MHz); Frequency: 782 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 54.95$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.73, 5.73, 5.73); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-15mm - QPSK - 10MHz BW - 1RB/Front Middle 0RB offset/Area

Scan (131x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.249 W/kg

MSL850-15mm - QPSK - 10MHz BW - 1RB/Front Middle 0RB offset/Zoom


Scan (7x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.810 V/m; Power Drift = -0.44 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.226 W/kg

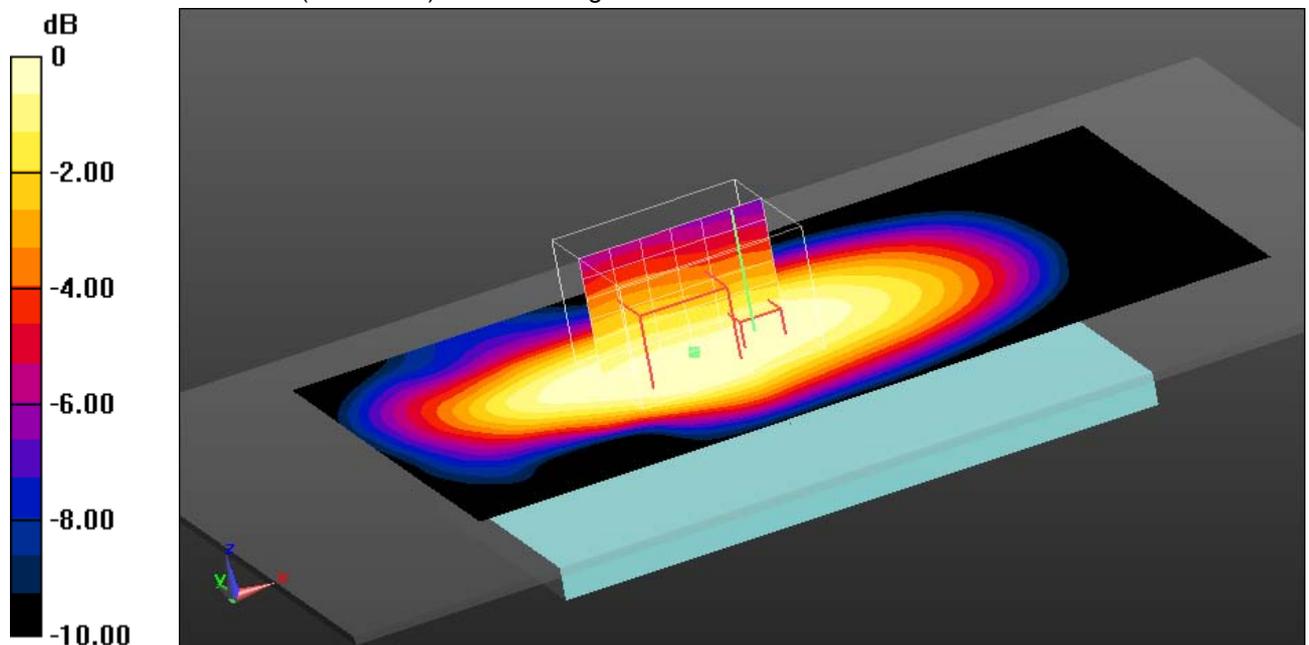

0 dB = 0.226 W/kg = -6.46 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 23.1°C; liquid temperature: 22.6°C

Date/Time: 19.12.2013 15:37:56

FCC_EN62209-2 LTE FDD 13 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 13 (700MHz); Frequency: 784.5 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 784.5$ MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.906$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.73, 5.73, 5.73); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-15mm - QPSK - 5MHz BW - 1RB/Rear High 25RB offset/Area Scan

(131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.359 W/kg

MSL850-15mm - QPSK - 5MHz BW - 1RB/Rear High 25RB offset/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.451 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

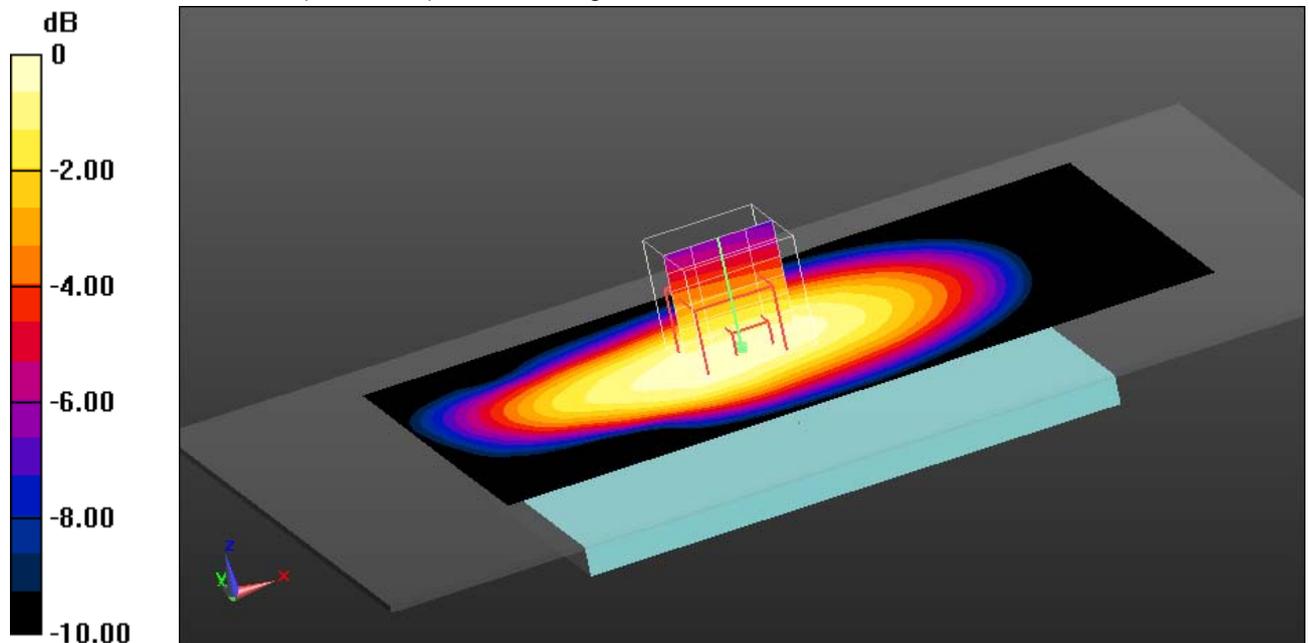

0 dB = 0.357 W/kg = -4.47 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 23.1°C; liquid temperature: 22.6°C

Annex B.11: LTE FDD 17

Date/Time: 18.12.2013 22:07:41

IEEE1528-LTE FDD17 head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HSZ

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 17 (700MHz); Frequency: 709 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.853 \text{ S/m}$; $\epsilon_r = 41.611$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.15, 6.15, 6.15); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right-Hand-Side HSL - QPSK - 10MHz BW - 1RB/Touch Position - Low 12RB offset/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0542 W/kg


Right-Hand-Side HSL - QPSK - 10MHz BW - 1RB/Touch Position - Low 12RB offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.901 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0525 W/kg

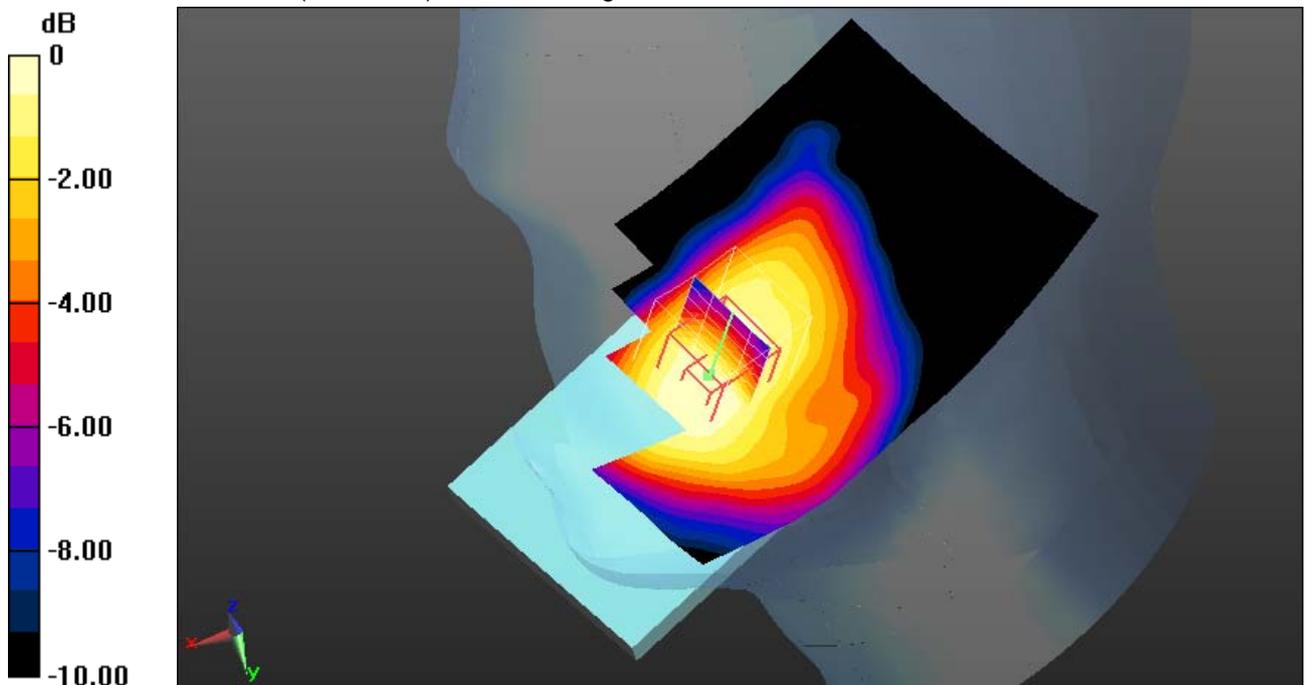

0 dB = 0.0525 W/kg = -12.80 dBW/kg

Additional information:

ambient temperature: 23.1°C; liquid temperature: 22.5°C

Date/Time: 19.12.2013 17:26:50

FCC_EN62209-2 LTE FDD 17 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 17 (700MHz); Frequency: 709 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 55.512$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.73, 5.73, 5.73); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-10mm - QPSK - 10MHz BW - 1RB/Rear Low 25RB offset/Area Scan (131x71x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.115 W/kg

MSL850-10mm - QPSK - 10MHz BW - 1RB/Rear Low 25RB offset/Zoom Scan (7x6x7)/Cube 0:


Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.513 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

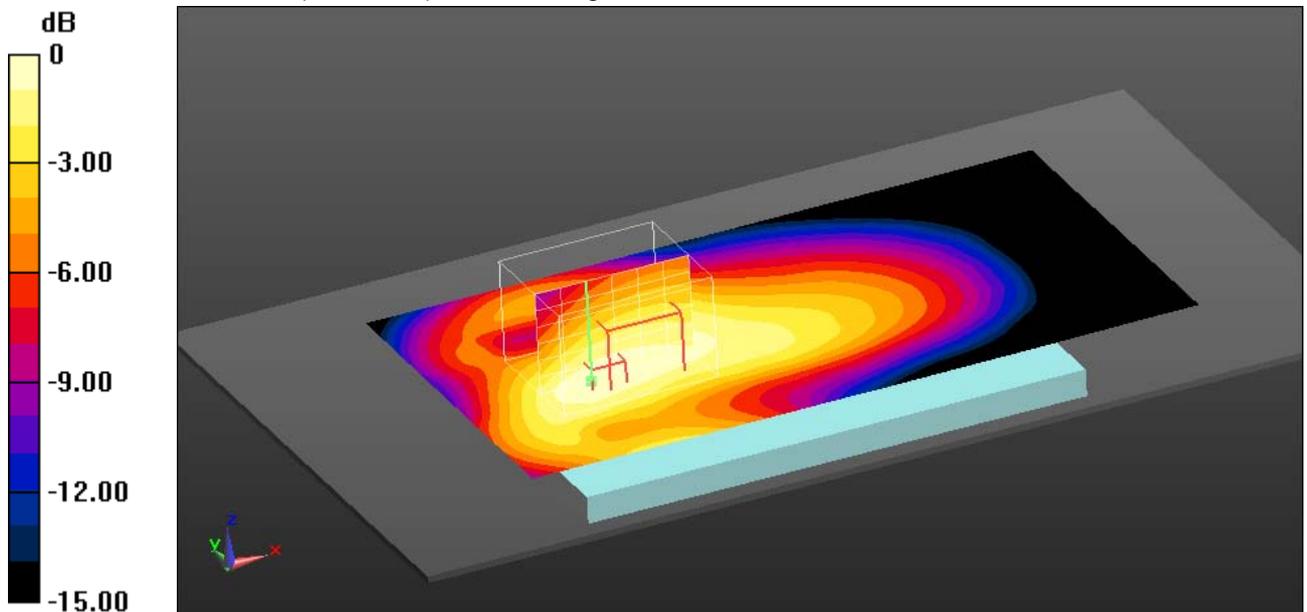

0 dB = 0.116 W/kg = -9.36 dBW/kg

Additional information:

position or distance of DUT to SAM: 10 mm

ambient temperature: 23.1°C; liquid temperature: 22.6°C

Date/Time: 19.12.2013 20:37:03

FCC_EN62209-2 LTE FDD 17 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 17 (700MHz); Frequency: 711 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 55.463$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.73, 5.73, 5.73); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-10mm - QPSK - 10MHz BW - 1RB/Rear High 0RB offset/Area Scan

(131x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.120 W/kg

MSL850-10mm - QPSK - 10MHz BW - 1RB/Rear High 0RB offset/Zoom Scan


(7x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.644 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

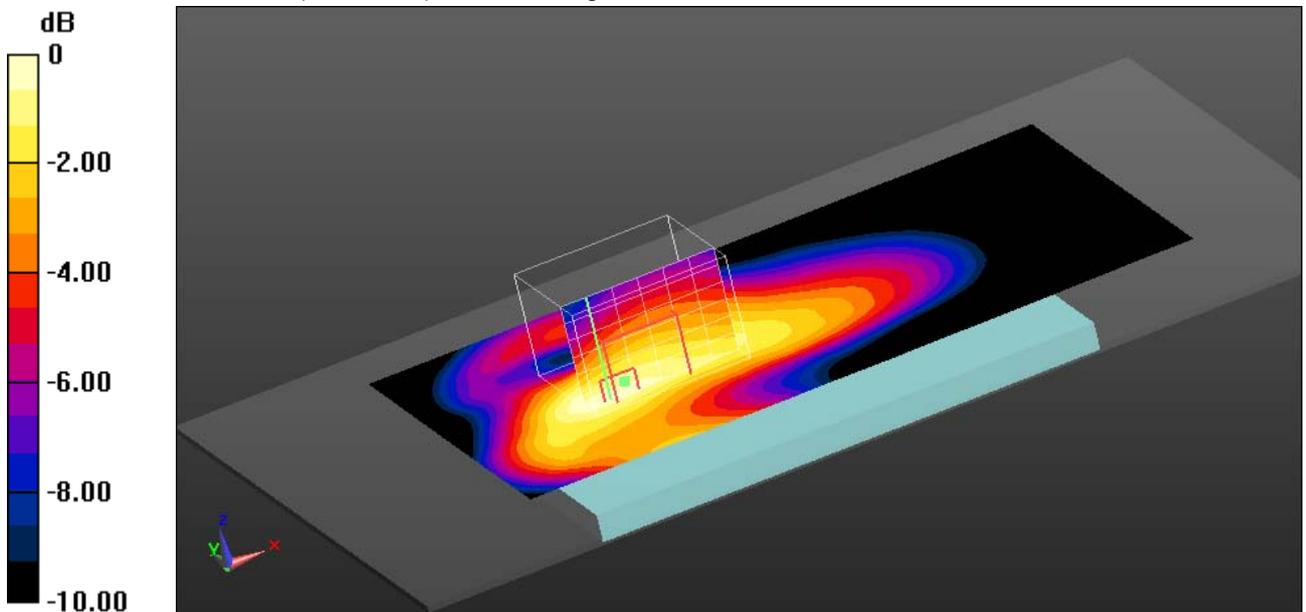

0 dB = 0.117 W/kg = -9.32 dBW/kg

Additional information:

position or distance of DUT to SAM: 10 mm

ambient temperature: 23.1°C; liquid temperature: 22.6°C

Date/Time: 19.12.2013 16:58:40

FCC_EN62209-2 LTE FDD 17 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRG

Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 17 (700MHz); Frequency: 709 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 55.512$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.73, 5.73, 5.73); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL850-15mm - QPSK - 10MHz BW - 1RB/Front Low 25RB offset/Area

Scan (131x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0761 W/kg

MSL850-15mm - QPSK - 10MHz BW - 1RB/Front Low 25RB offset/Zoom


Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 9.134 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.0723 W/kg

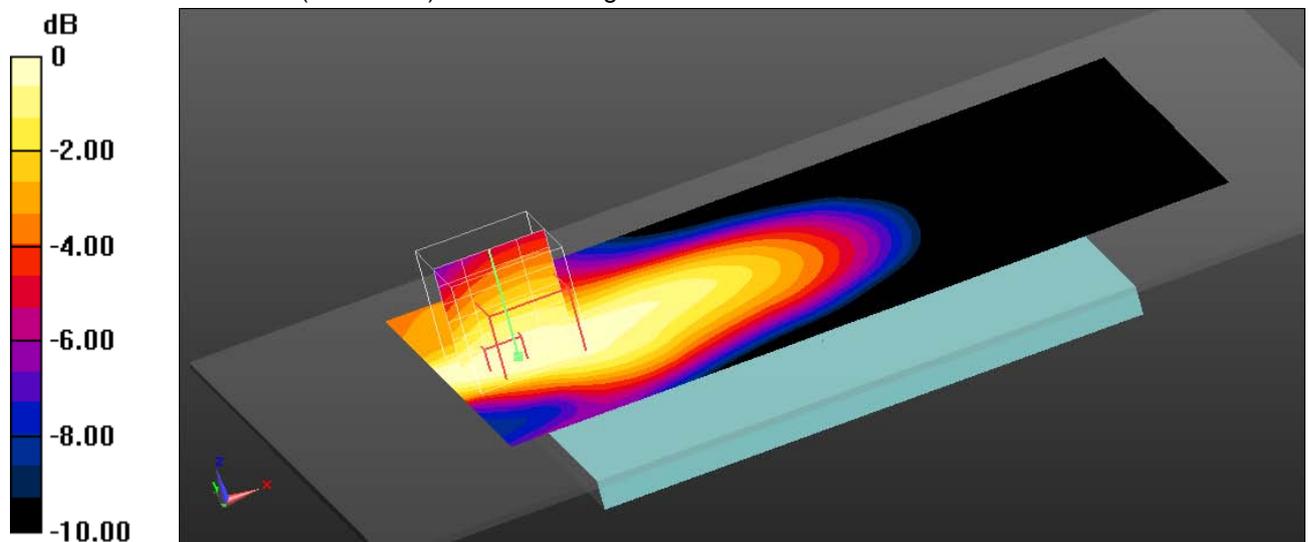

0 dB = 0.0723 W/kg = -11.41 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 23.1°C; liquid temperature: 22.6°C

Annex B.12: WLAN 2450GHz

Date/Time: 21.12.2013 11:20:25

IEEE1528_EN62209-WLAN2450 head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRP

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 39.233$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.49, 4.49, 4.49); Calibrated: 04.06.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn413; Calibrated: 11.01.2013
- Phantom: SAM; Type: SAM; Serial: 1043
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL/Touch Position - Middle/Area Scan (111x171x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.371 W/kg

Left-Hand-Side HSL/Touch Position - Middle/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.307 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

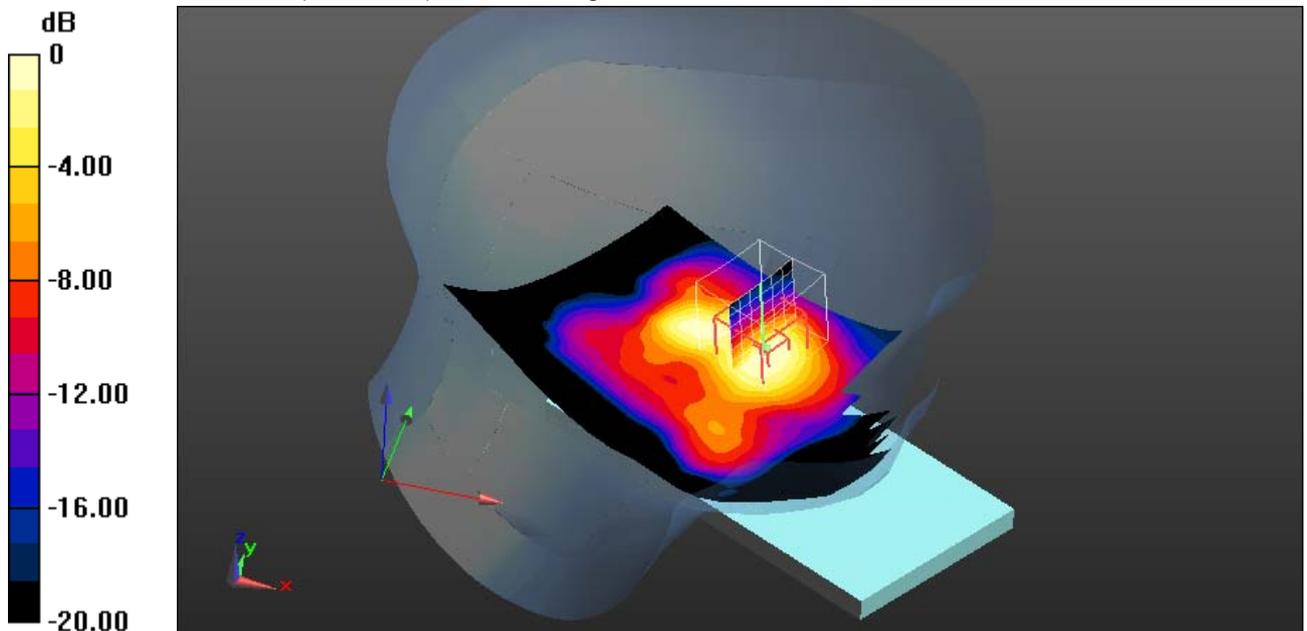

0 dB = 0.316 W/kg = -5.00 dBW/kg

Additional information:

ambient temperature: 21.4°C; liquid temperature: 20.9°C

Date/Time: 12/28/2013 9:42:20 AM

FCC_EN62209-2 WLAN2450 hotspot

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRP

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 52.637$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.18, 4.18, 4.18); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450-10mm/Rear Middle/Area Scan (191x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.222 W/kg

MSL2450-10mm/Rear Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.275 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.222 W/kg

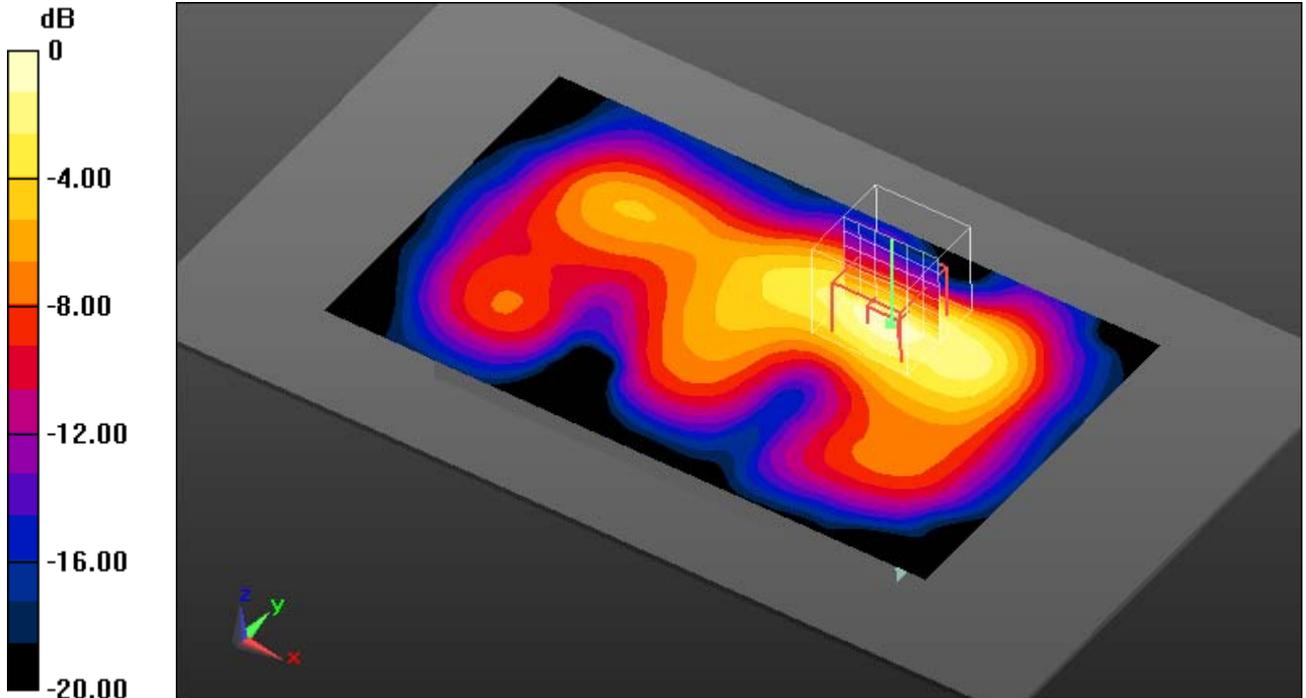

0 dB = 0.222 W/kg = -6.54 dBW/kg

Additional information:

position or distance of DUT to SAM: 10 mm

ambient temperature: 22.2°C; liquid temperature: 21.9°C

Date/Time: 12/28/2013 1:30:30 PM

FCC_EN62209-2 WLAN2450 body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRP

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2462$ MHz; $\sigma = 2.045$ S/m; $\epsilon_r = 52.573$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: ES3DV3 - SN3326; ConvF(4.18, 4.18, 4.18); Calibrated: 9/2/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1387; Calibrated: 8/28/2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450-15mm/Rear High/Area Scan (191x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.174 W/kg


MSL2450-15mm/Rear High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.111 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

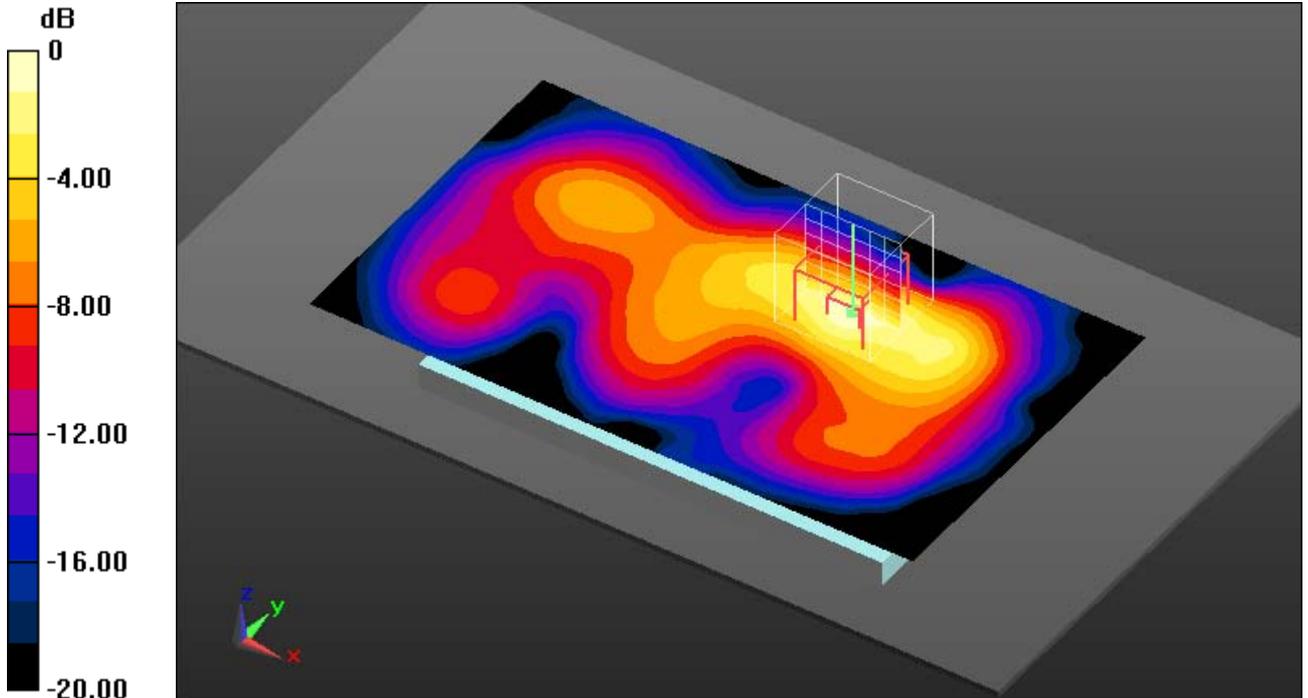

0 dB = 0.172 W/kg = -7.64 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 22.2°C; liquid temperature: 21.9°C

Annex B.13: WLAN 5GHz

Date/Time: 20.12.2013 23:49:35

IEEE1528_EN62209-WLAN5GHz head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRP

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5825 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.068$ S/m; $\epsilon_r = 35.444$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.75, 4.75, 4.75); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL/Touch Position - Ch165/Area Scan (111x171x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Left-Hand-Side HSL/Touch Position - Ch165/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 12.362 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

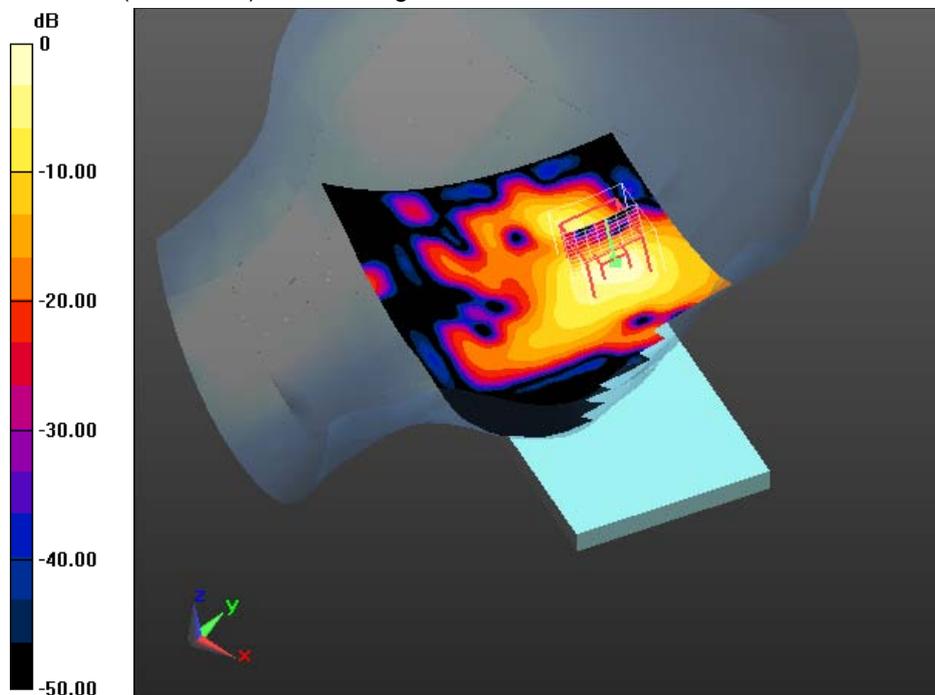

0 dB = 1.04 W/kg = 0.17 dBW/kg

Additional information:

ambient temperature: 22.3°C; liquid temperature: 22.3°C

Date/Time: 23.12.2013 15:31:38

FCC_EN62209-2 WLAN5GHz body worn

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRP

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 5.353 \text{ S/m}$; $\epsilon_r = 48.221$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

Measurement Standard: DASYS5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.3, 4.3, 4.3); Calibrated: 02.08.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL - 15mm/RearCh60/Area Scan (191x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.09 W/kg


MSL - 15mm/RearCh60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 15.154 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

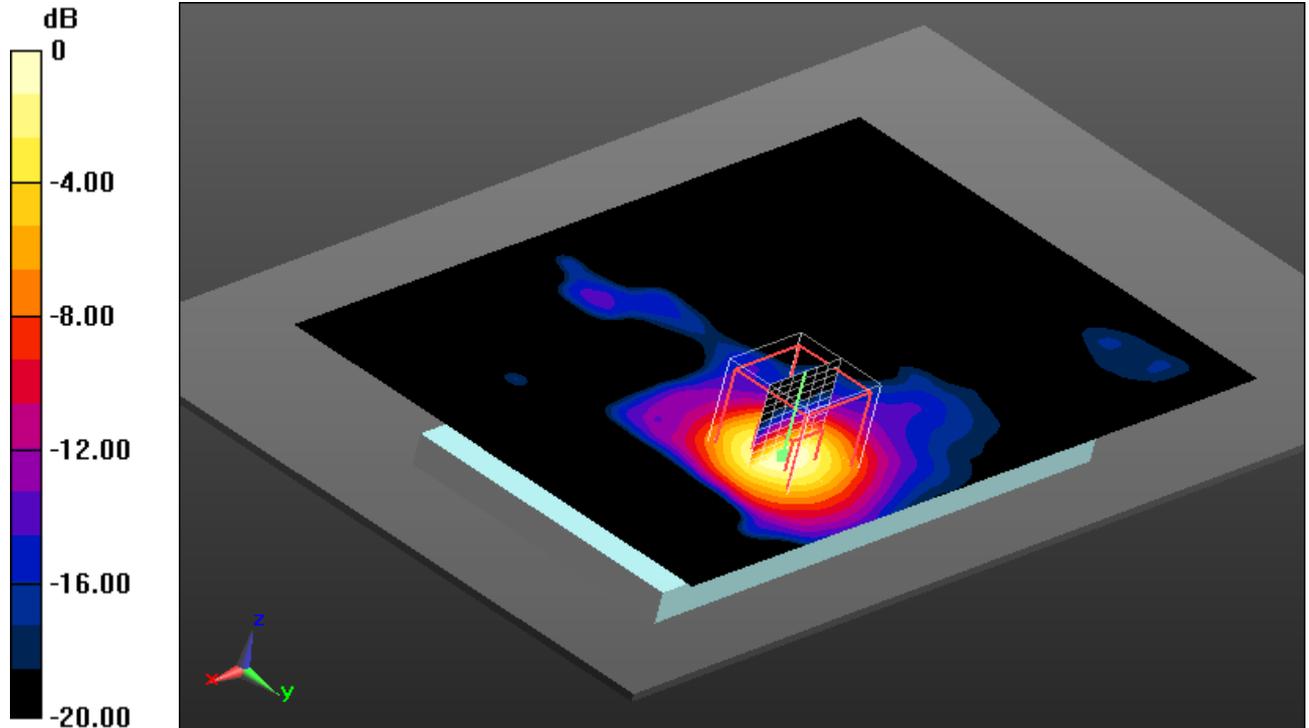

0 dB = 1.06 W/kg = 0.25 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 22.0 °C; liquid temperature: 22.0 °C

Annex B.14: Bluetooth 2.4GHz

Date/Time: 30.12.2013 09:47:35

IEEE1528_EN62209-Bluetooth 2450 head

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQC

Communication System: UID 0, Bluetooth (0); Communication System Band: BT; Frequency: 2441 MHz;

Communication System PAR: 1.16 dB; PMF: 1.14288

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.226$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.18, 4.18, 4.18); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL/Touch Position - Mid/Area Scan (111x171x1): Interpolated

grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0381 W/kg

Left-Hand-Side HSL/Touch Position - Mid/Zoom Scan (8x10x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.913 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0311 W/kg

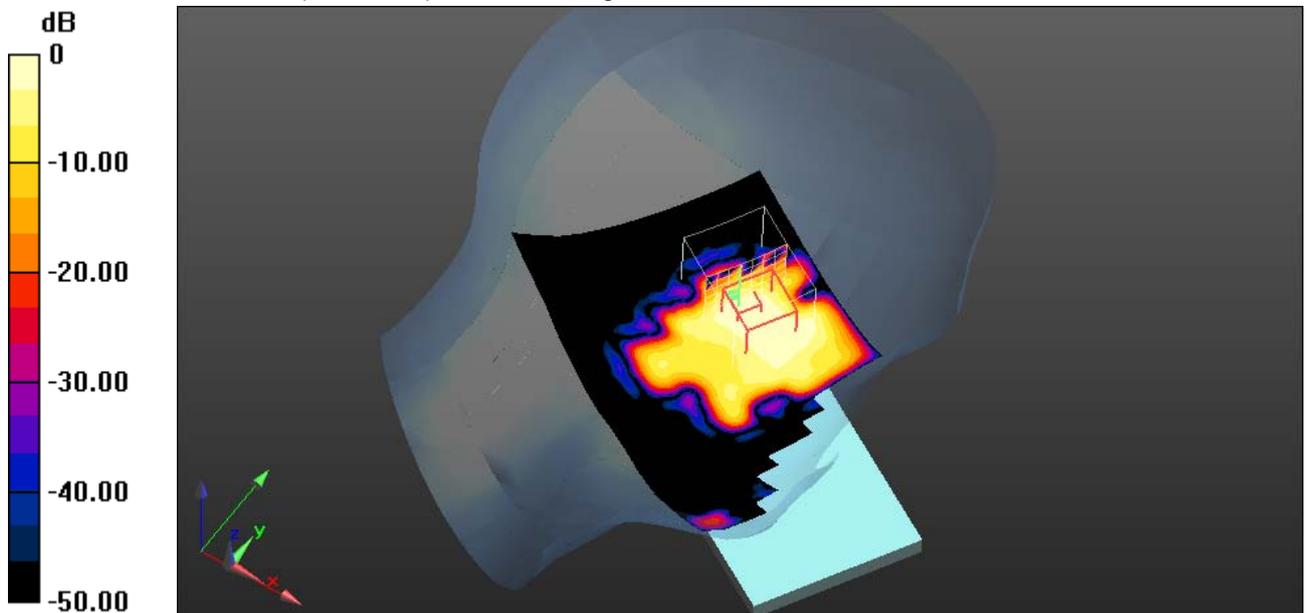

0 dB = 0.0311 W/kg = -15.07 dBW/kg

Additional information:

ambient temperature: 23.7°C; liquid temperature: 22.5°C

Annex B.15: Volumetric SAR

Multi-Band Average SAR UMTS FDD IV + WLAN 2.4GHz

Multi-Band Configurations:

DASY Configuration for Left-Hand-Side HSL 2014-01-06/Touch Position - Low/Volume Scan:

Date/Time: 06.01.2014 15:38:10

Test Laboratory: CETECOM ICT Services GmbH

File Name: [IEEE1528-UMTS FDD IV head volume scan.da53:0](#)

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL1750 Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.323$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ES3DV3 - SN3326; ConvF(5.4, 5.4, 5.4); Calibrated: 02.09.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1387; Calibrated: 28.08.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- Measurement SW: DASY52, Version 52.8 (7)

DASY Configuration for Left-Hand-Side/Touch Position - Mid/Volume Scan:

Date/Time: 07.01.2014 11:14:41

Test Laboratory: Cetecom ICT Services GmbH

File Name: [IEEE1528-WLAN2450 head volume scan.da53:0](#)

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRP

Communication System: UID 0, WLAN 2450 (0); Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 38.929$; $\rho = 1000$ kg/m³

Phantom section: Left Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ET3DV6 - SN1558; ConvF(4.18, 4.18, 4.18); Calibrated: 22.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- Measurement SW: DASY52, Version 52.8 (7)

Multi Band Result:

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (interpolated) = 2.15 W/kg

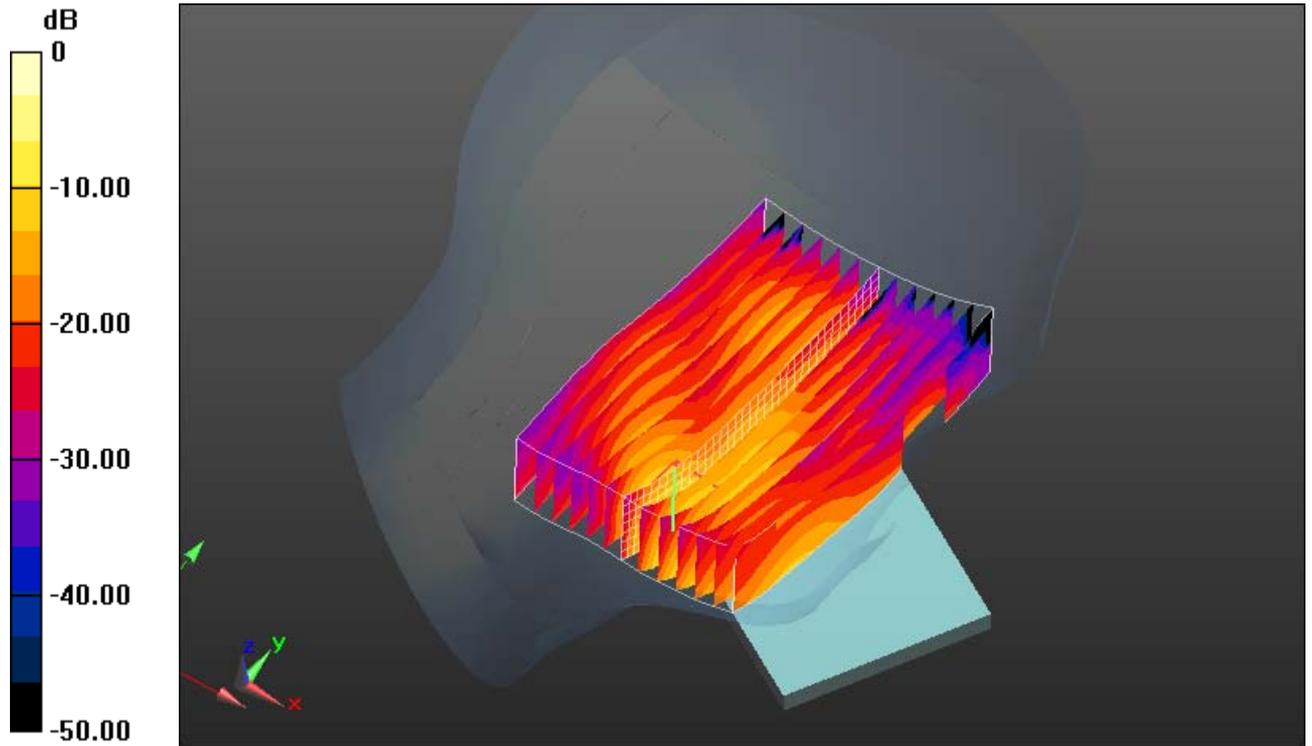

0 dB = 2.15 W/kg = 3.32 dBW/kg

Multi-Band Average SAR UMTS FDD IV + WLAN 5GHz

Multi-Band Configurations:

DASY Configuration for Left-Hand-Side/Touch Position - Ch165/Volume Scan:

Date/Time: 07.01.2014 13:05:21

Test Laboratory: Cetecom ICT Services GmbH

File Name: [IEEE1528-WLAN5GHz head volume scan.da53:0](#)

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRP

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL5GHz Medium parameters used: $f = 5825$ MHz; $\sigma = 5.068$ S/m; $\epsilon_r = 35.444$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3944; ConvF(4.75, 4.75, 4.75); Calibrated: 02.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- Measurement SW: DASY52, Version 52.8 (7)

DASY Configuration for Left-Hand-Side HSL 2014-01-06/Touch Position - Low/Volume Scan:

Date/Time: 06.01.2014 15:38:10

Test Laboratory: CETECOM ICT Services GmbH

File Name: [IEEE1528-UMTS FDD IV head volume scan.da53:0](#)

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, UMTS FDD (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL1750 Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.323$; $\rho = 1000$ kg/m³

Phantom section: Left Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ES3DV3 - SN3326; ConvF(5.4, 5.4, 5.4); Calibrated: 02.09.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1387; Calibrated: 28.08.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- Measurement SW: DASY52, Version 52.8 (7)

Multi Band Result:

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.500 W/kg

Maximum value of SAR (interpolated) = 2.14 W/kg

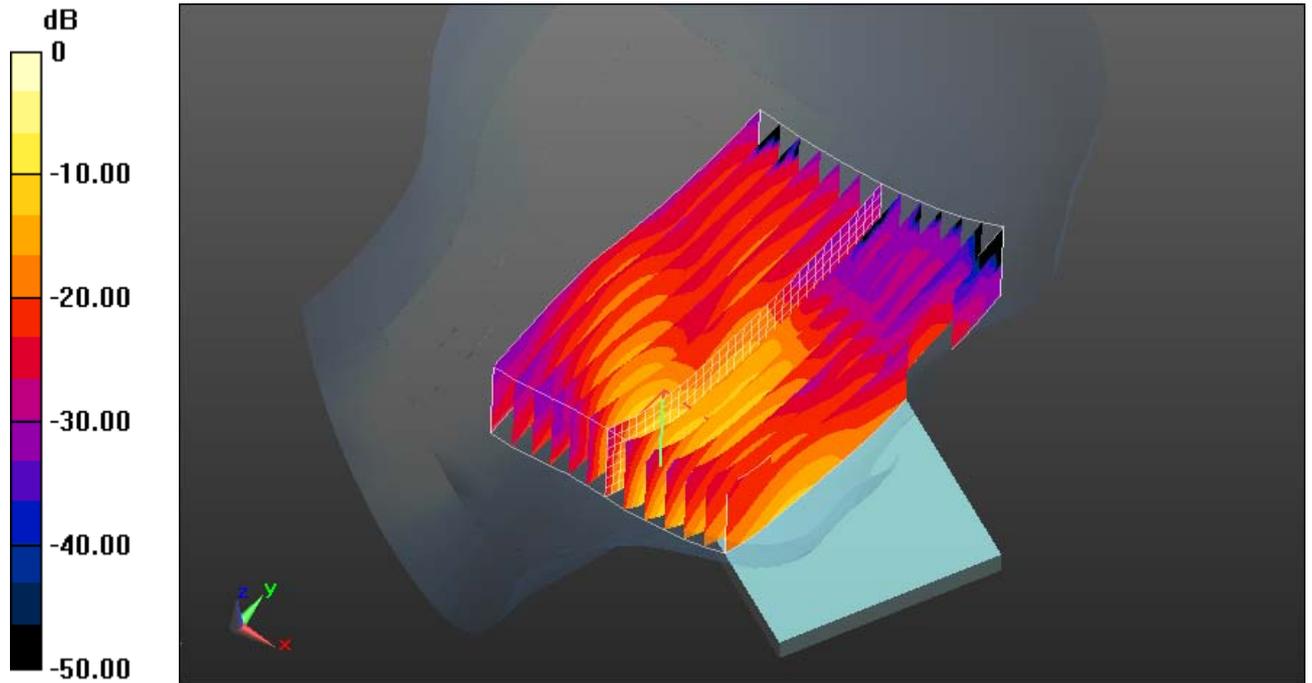

0 dB = 2.14 W/kg = 3.30 dBW/kg

Multi-Band Average SAR LTE FDD 4 + WLAN 5GHz

Multi-Band Configurations:

DASY Configuration for Left-Hand-Side/Touch Position - Ch165/Volume Scan:

Date/Time: 07.01.2014 13:05:21

Test Laboratory: Cetecom ICT Services GmbH

File Name: [IEEE1528-WLAN5GHz head volume scan.da53:0](#)

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HRP

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL5GHz Medium parameters used: $f = 5825$ MHz; $\sigma = 5.068$ S/m; $\epsilon_r = 35.444$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3944; ConvF(4.75, 4.75, 4.75); Calibrated: 02.08.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 13.05.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- Measurement SW: DASY52, Version 52.8 (7)

DASY Configuration for Left-Hand-Side - QPSK - 20MHz BW - 1RB - 0RB offset/Touch Position - Low/Volume Scan:

Date/Time: 07.01.2014 09:36:37

Test Laboratory: CETECOM ICT Services GmbH

File Name: [IEEE1528-LTE FDD 4 head volume scan.da53:0](#)

DUT: Sony; Type: PM-0740-BV; Serial: CB5A1W1HQD

Communication System: UID 0, LTE FDD (0); Frequency: 1720 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL1750 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 40.27$; $\rho = 1000$ kg/m³

Phantom section: Left Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ES3DV3 - SN3326; ConvF(5.4, 5.4, 5.4); Calibrated: 02.09.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1387; Calibrated: 28.08.2013
- Phantom: SAM front; Type: QD000P40CC; Serial: TP:1041
- Measurement SW: DASY52, Version 52.8 (7)

Multi Band Result:

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.475 W/kg

Maximum value of SAR (interpolated) = 2.08 W/kg

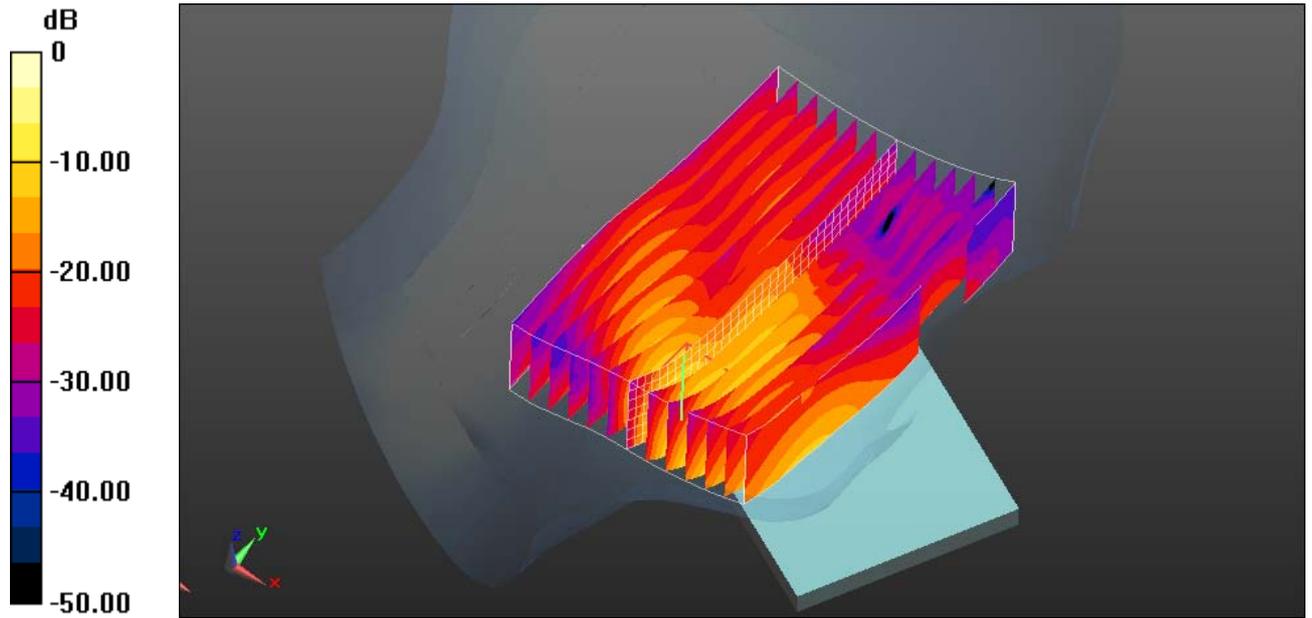

0 dB = 2.08 W/kg = 3.18 dBW/kg

Annex B.16: Liquid depth

Photo 1: Liquid depth 750 MHz head simulating liquid

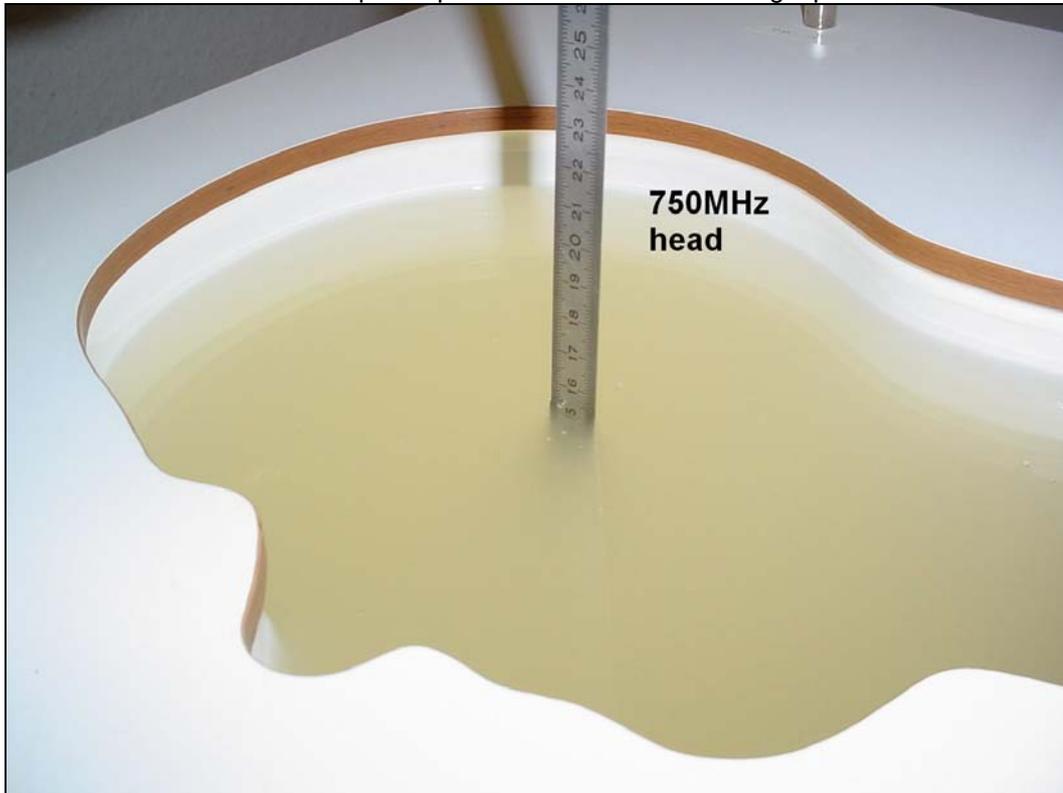


Photo 2: Liquid depth 750 MHz body simulating liquid



Photo 3: Liquid depth 850 MHz head simulating liquid

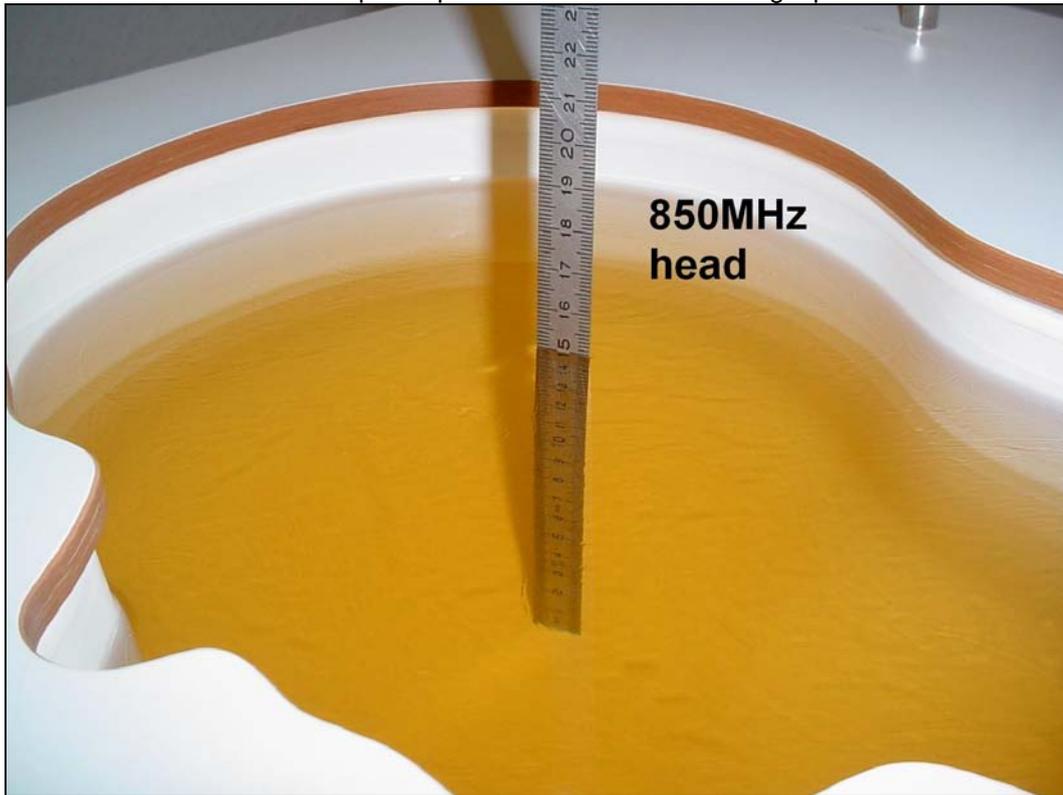


Photo 4: Liquid depth 850 MHz body simulating liquid

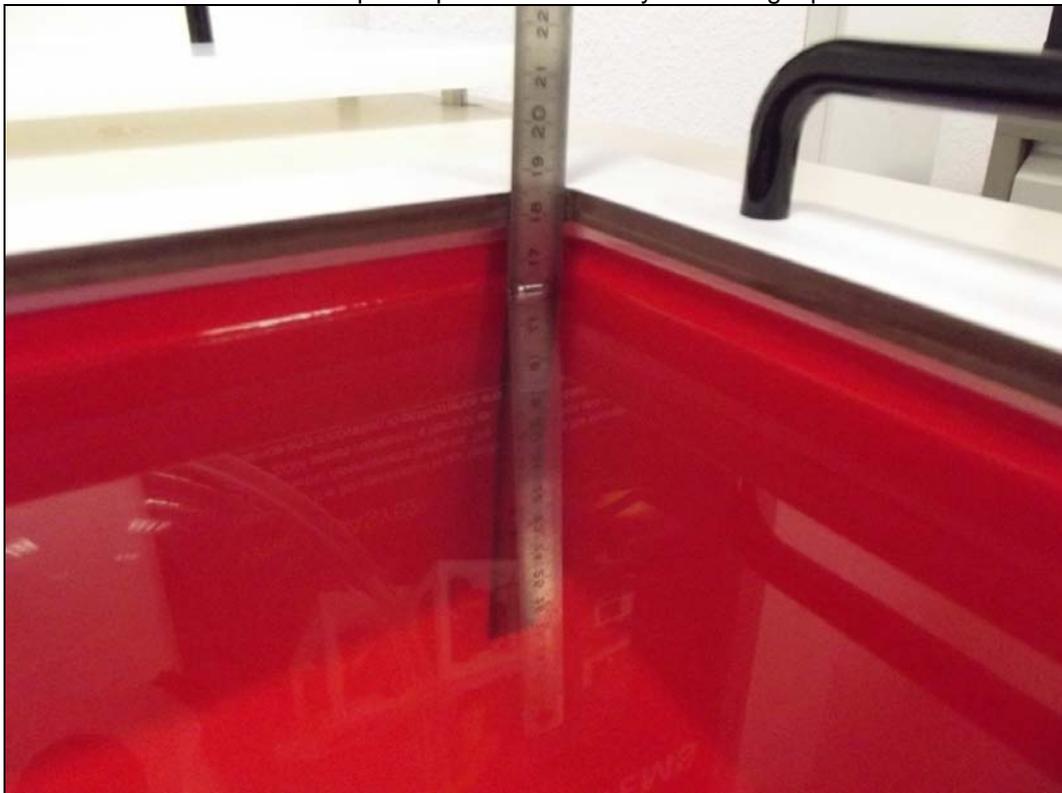


Photo 5: Liquid depth 1750MHz head simulating liquid

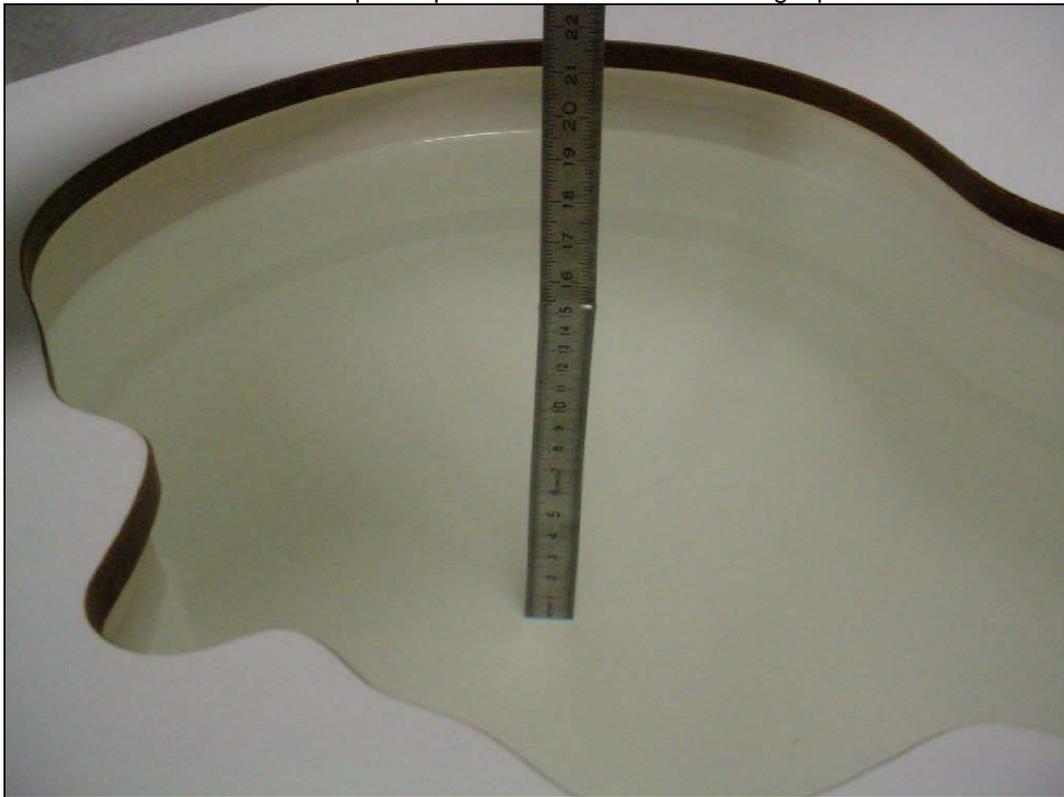


Photo 6: Liquid depth 1750 MHz body simulating liquid

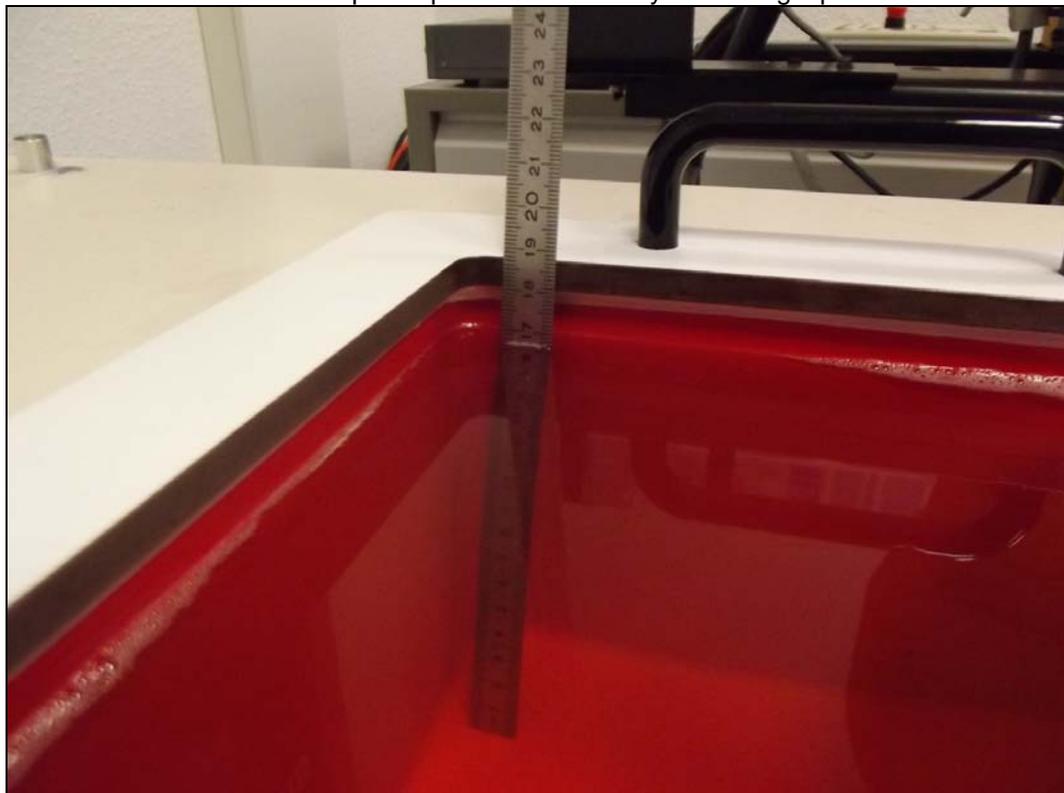


Photo 7: Liquid depth 1900MHz head simulating liquid

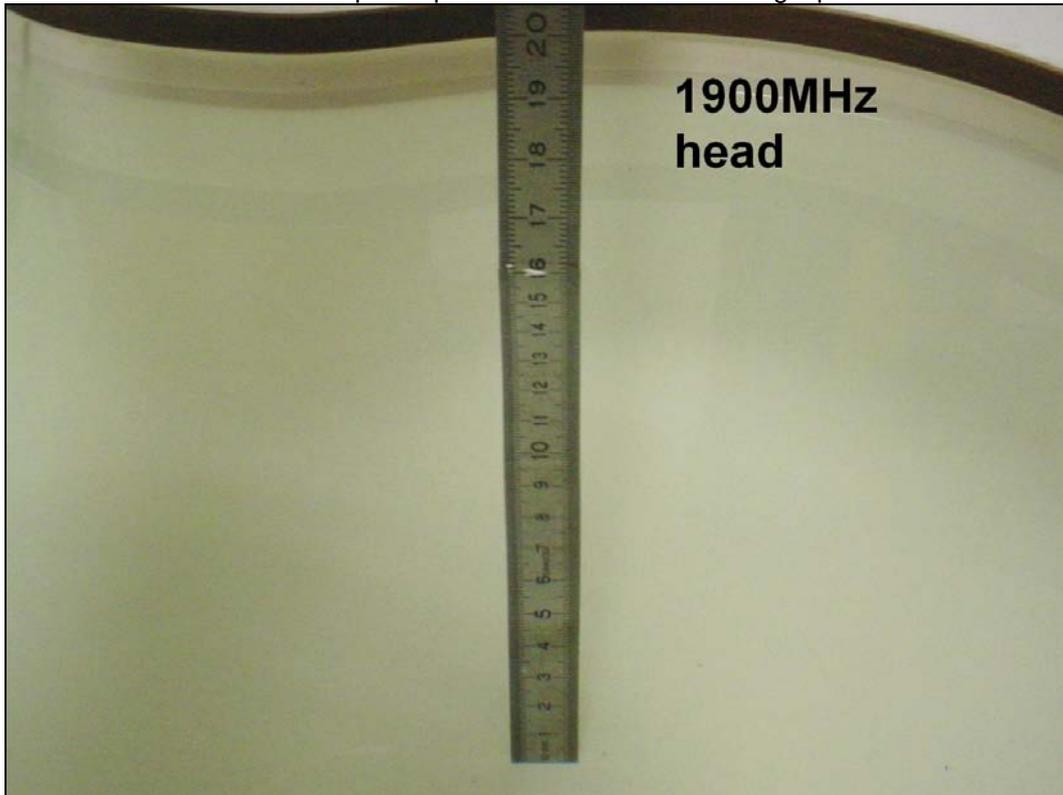


Photo 8: Liquid depth 1900 MHz body simulating liquid



Photo 9: Liquid depth 2450MHz head simulating liquid



Photo 10: Liquid depth 2450 MHz body simulating liquid


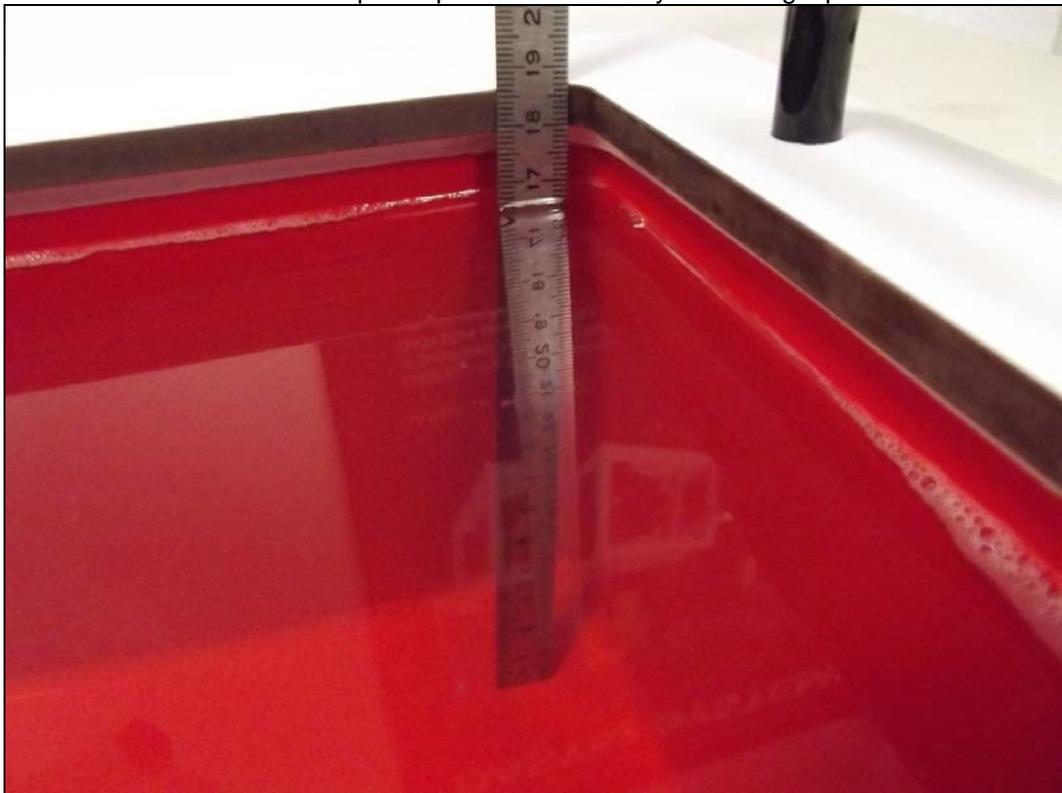


Photo 11: Liquid depth 5 GHz head simulating liquid



Photo 12: Liquid depth 5 GHz body simulating liquid

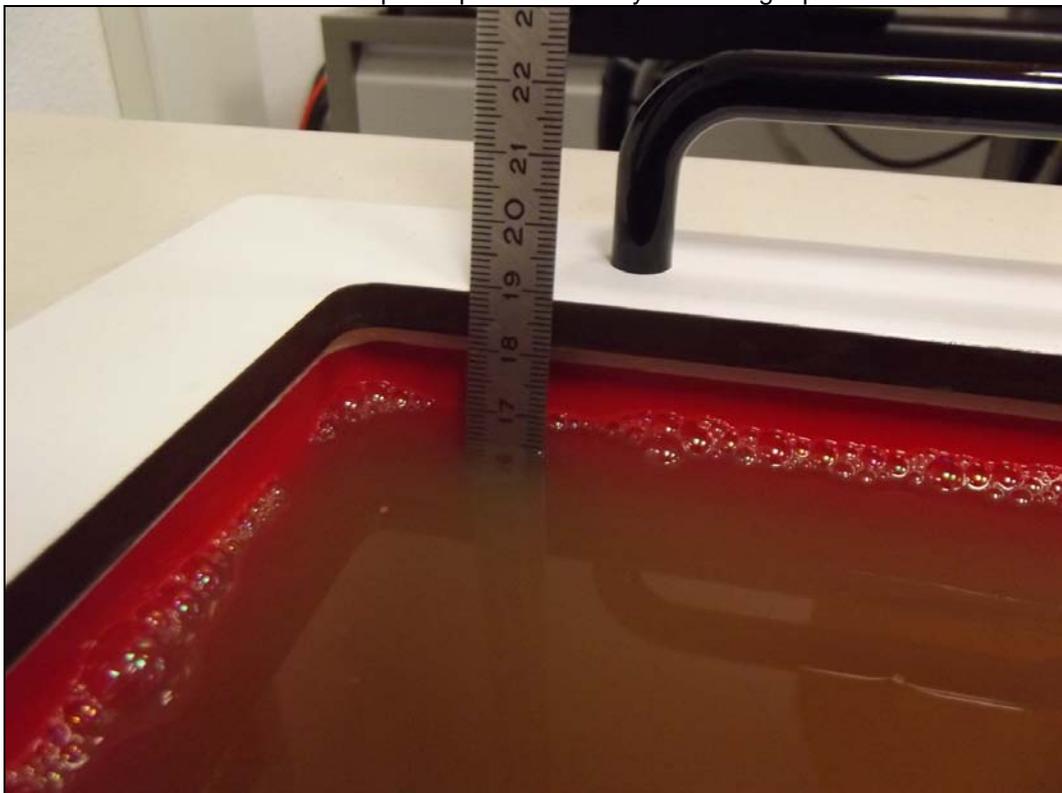

Annex C: Photo documentation

Photo documentation is described in the additional document:

Appendix to test report no. 1-6965/13-04-24 Photo documentation

Annex D: Calibration parameters

Calibration parameters are described in the additional document:

Appendix to test report no. 1-6965/13-04-24 Calibration data, Phantom certificate and detail information of the DASY5 System

Annex E: Document History

Version	Applied Changes	Date of Release
	Initial Release	2014-01-21

Annex F: Further Information

Glossary

BW	-	Bandwidth
DTS	-	Distributed Transmission System
DUT	-	Device under Test
EUT	-	Equipment under Test
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
LTE	-	Long Term Evolution
N/A	-	not applicable
PCE	-	Personal Consumption Expenditure
OET	-	Office of Engineering and Technology
RB	-	resource block(s)
SAR	-	Specific Absorption Rate
S/N	-	Serial Number
SPLSR _i	-	SAR-to-(peak-locations spacing) ratio
SW	-	Software
UNII	-	Unlicensed National Information Infrastructure