

TEST REPORT

Test report no.: 1-6965/13-19-10



Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing:
Radio Communications & EMC (RCE)

Applicant

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: -/
Contact: Mikael Nilsson
e-mail: Micke.nilsson@sonymobile.com
Phone: +46 7 03 22 75 03

Manufacturer

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN

Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Smart Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDD/III/V/VIII; LTE FDD/1/2/3/5/7/8/28; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS
FCC ID: PY7PM-0751
IC: -/
Frequency: DTS band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2403 MHz, highest channel 78 – 2480 MHz)
Technology tested: ANT+
Antenna: Integrated antenna
Power supply: 4.2 V DC by Li - polymer battery
Temperature range: -30°C to +60°C


This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:



Stefan Bös
Senior Testing Manager

Test performed:



Marco Bertolino
Testing Manager

1 Table of contents

1 Table of contents2

2 General information3

 2.1 Notes and disclaimer3

 2.2 Application details.....3

3 Test standard/s3

 3.1 Measurement guidance.....3

4 Test environment.....4

5 Test item4

 5.1 Additional information4

6 Test laboratories sub-contracted4

7 Description of the test setup5

 7.1 Radiated measurements chamber F.....5

 7.2 Radiated measurements chamber C6

 7.3 Radiated measurements 12.75 GHz to 25 GHz7

 7.4 AC conducted8

 7.5 Conducted measurements9

8 Summary of measurement results10

 8.1 Additional comments11

9 Measurement results.....12

 9.1 Timing of the transmitter12

 9.2 Occupied bandwidth – 99% bandwidth.....14

 9.3 Maximum field strength17

 9.4 Band edge compliance radiated18

 9.5 TX spurious emissions radiated20

 9.6 RX spurious emissions radiated.....31

 9.7 Spurious emissions radiated < 30 MHz.....35

 9.8 Spurious emissions conducted < 30 MHz.....37

10 Test equipment and ancillaries used for tests40

11 Observations41

Annex A Document history42

Annex B Further information.....42

Annex C Accreditation Certificate43

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2014-04-14
Date of receipt of test item:	2014-05-05
Start of test:	2014-05-05
End of test:	2014-05-15
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	-/-	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

3.1 Measurement guidance

DTS : KDB 558074	2013-04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
------------------	---------	---

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+60 °C during high temperature tests
	T_{min}	-30 °C during low temperature tests
Relative humidity content:		41 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	4.2 V DC by Li - polymer battery
	V_{max}	4.2 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	Smart Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/II/V/VIII; LTE FDD1/2/3/5/7/8/28; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS
Type identification	:	PY7PM-0751
S/N serial number	:	Conducted units: CB5126Z74E; CB5126Z756 Radiated units: CB5126Z4RH; CB5126Z4R1
HW hardware status	:	No information available!
SW software status	:	RF test software
Frequency band [MHz]	:	DTS band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2403 MHz; highest channel 78 – 2480 MHz)
Type of radio transmission	:	FHSS
Use of frequency spectrum	:	
Type of modulation	:	GFSK
Number of channels	:	78
Antenna	:	Integrated antenna
Power supply	:	4.2 V DC by Li - polymer battery
Temperature range	:	-30°C to +60 °C

5.1 Additional information

Test setup- and EUT-photos are included in test report: 1-6965/13-19-01_AnnexA
1-6965/13-19-01_AnnexB
1-6965/13-19-01_AnnexD


6 Test laboratories sub-contracted

None

7 Description of the test setup

7.1 Radiated measurements chamber F


The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

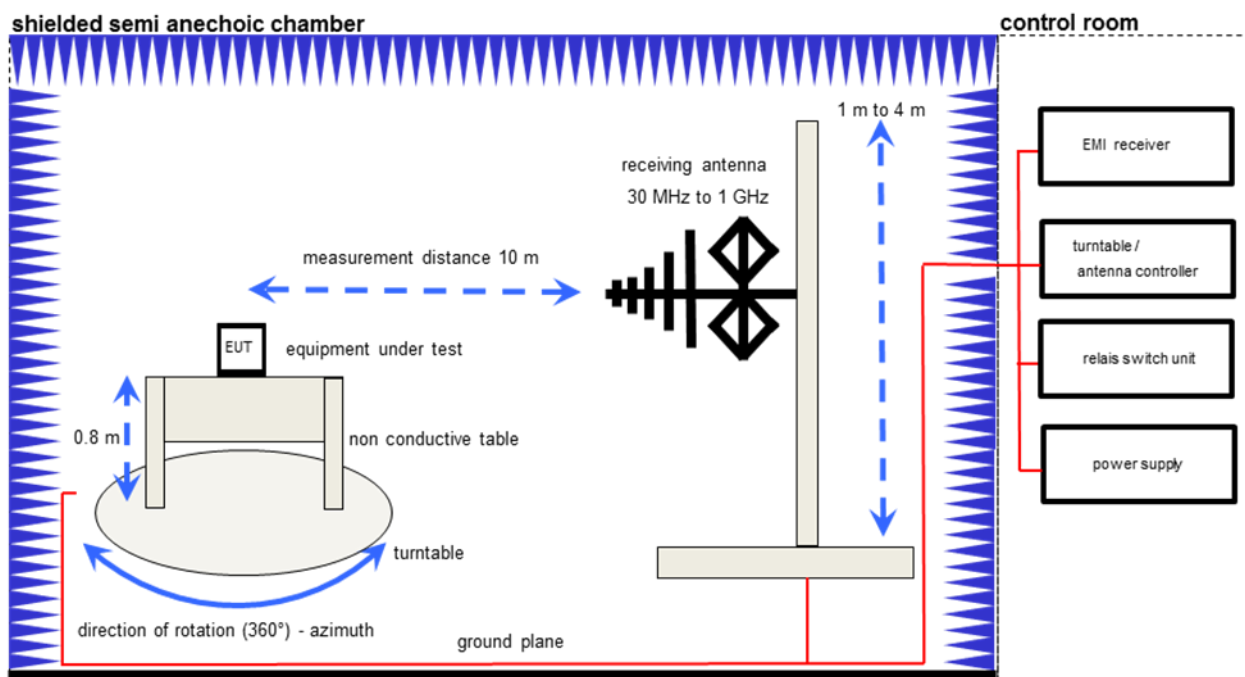

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368
DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580
EMI Test Receiver	ESCI 3	R&S	100083	300003312
Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379
Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745
Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746
Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787

7.2 Radiated measurements chamber C

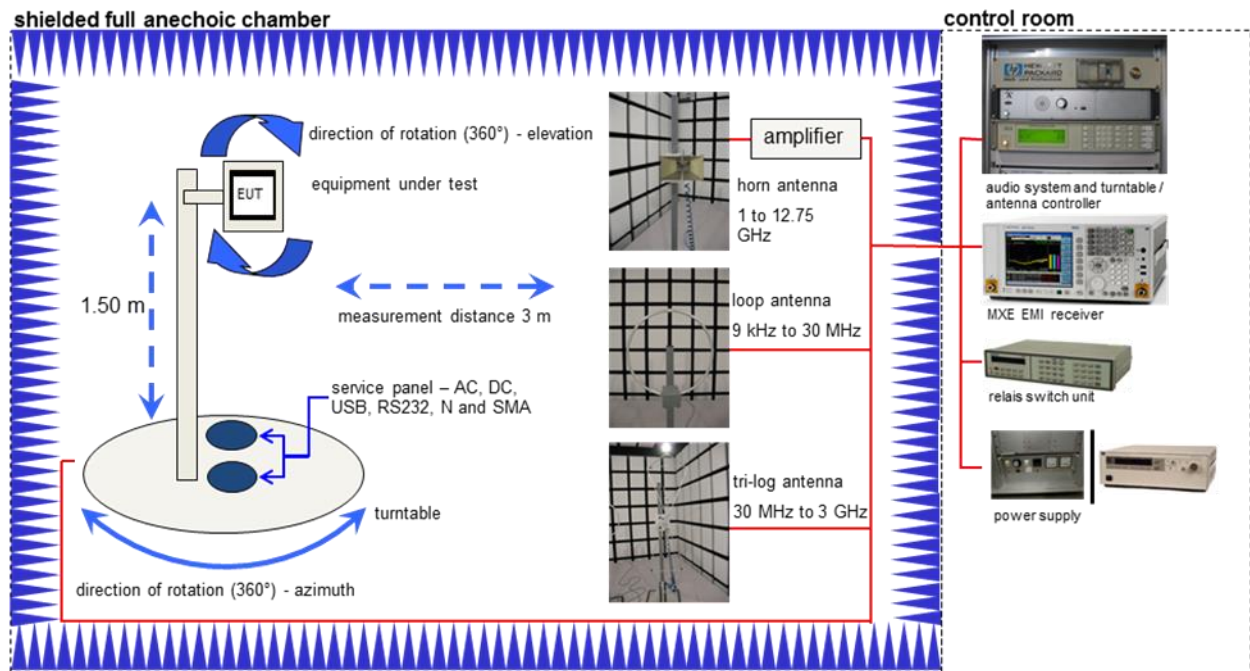

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854
Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789
Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032
Active Loop Antenna	6502	EMCO	8905-2342	300000256
Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156
Isolating Transformer	MPL IEC625 Bus Regeltrentravo	Erfi	91350	300001155
Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997
Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143


7.3 Radiated measurements 12.75 GHz to 25 GHz



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787
Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442
Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268
Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517


7.4 AC conducted

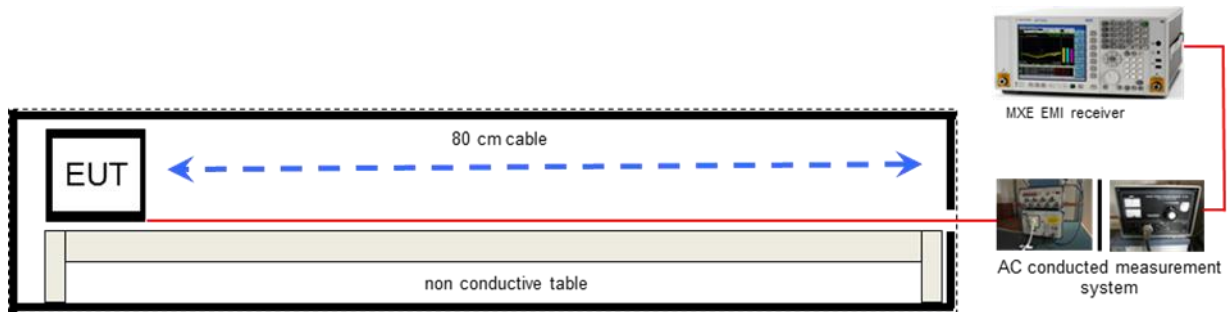

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001168
Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210

7.5 Conducted measurements

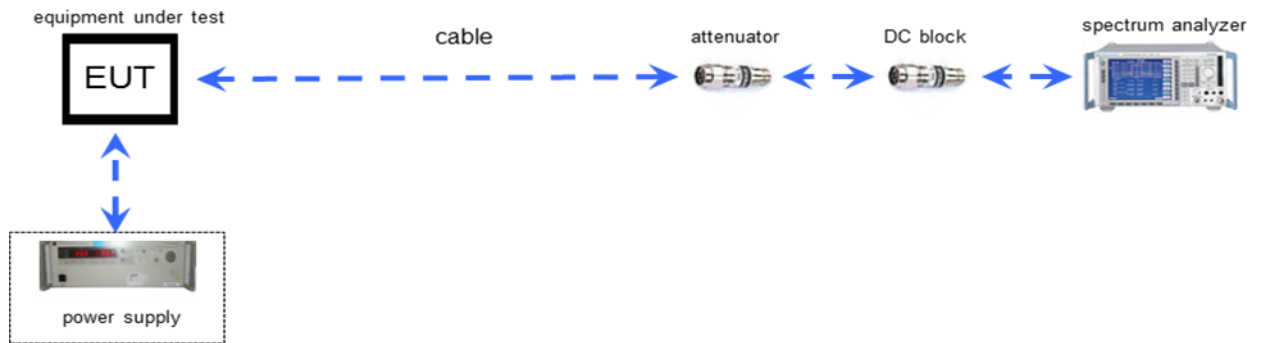

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517

8 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15	Passed	2014-05-15	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
CFR 15.35	Timing of the transmitter	Nominal	Nominal	TX	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Not limited!
-/-	99% - Occupied Bandwidth	Nominal	Nominal	TX	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Not limited!
§15.249	Maximum field strength	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.249	Band edge compliance radiated	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.249	TX spurious emissions radiated	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109	RX spurious emissions radiated	Nominal	Nominal	Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209	Spurious emissions radiated < 30 MHz	Nominal	Nominal	TX/Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107 §15.207	Spurious emissions conducted < 30 MHz	Nominal	Nominal	TX/Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8.1 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:

- No test mode available.
Iperf was used to ping another device with the largest support packet size
- Special software is used.
EUT is transmitting pseudo random data by itself

9 Measurement results

9.1 Timing of the transmitter

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	See plot
Resolution bandwidth:	See plot
Video bandwidth:	See plot
Span:	Zero
Trace-Mode:	Single

Limits:

FCC	-/-
Timing of the transmitter	
<p>(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.</p>	

Result: see customer information

Plot 1:

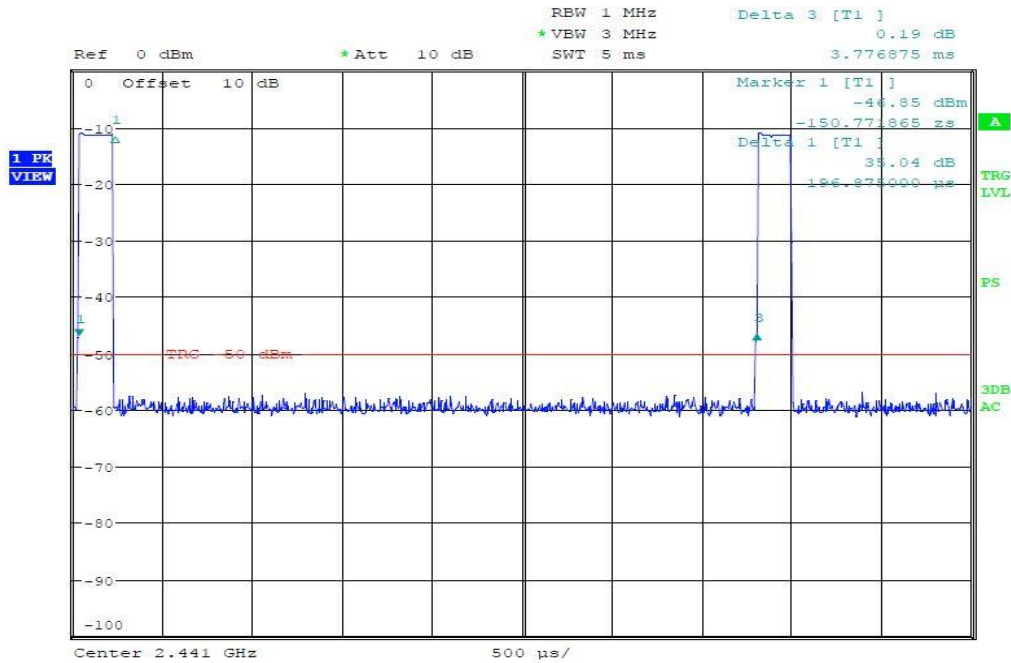

Plot 2:



Burst time: 196.875 μs
 On time: 27 times X 196.875 μs over 100 ms
 DC correction: 20 log (27 * 0.196875 ms / 100 ms) = 25.48 dB

9.2 Occupied bandwidth – 99% bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	30 kHz
Video bandwidth:	100 kHz
Span:	3 MHz
Trace-Mode:	Max Hold

Limits:

FCC	-/-
Spectrum Bandwidth – 99% Bandwidth	
Required for emission designator	

Results:

Modulation Frequency	99% BANDWIDTH [kHz]		
	Lowest channel	Middle channel	Highest channel
	881	877	881
Measurement uncertainty	± 30 kHz		

Plots:

Plot 1: lowest channel



Date: 12.MAY.2014 16:47:45

Plot 2: middle channel



Date: 12.MAY.2014 16:51:02

Plot 3: highest channel



Date: 12.MAY.2014 16:51:45

9.3 Maximum field strength

Description:

Measurement of the maximum field strength radiated.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Span:	5 MHz
Trace-Mode:	Max Hold
Measurement distance:	3 m

Limits:

FCC	-/-
Maximum field strength	
The field strength of emissions of intentional radiators shall comply with the following: Field strength of fundamental: 50 mV/m / (94 dBµV/m) @ 3 m (AVG) 500 mV/m / (114 dBµV/m) @ 3 m (Peak)	

Result:

Modulation Frequency	Maximum field strength [dBµV/m]		
	Lowest channel	Middle channel	Highest channel
Peak	99.6	102.4	100.9
AVG*)	74.1	76.9	75.4
Measurement uncertainty	± 3 dB		

*) Average value calculated with duty cycle correction factor. (see chapter 9.1)

Result: Passed

9.4 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to lowest channel for the lower restricted band and to highest channel for the upper restricted band. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz / 1 MHz
Video bandwidth:	1 MHz / 10 Hz
Span:	Lower Band: 2370 – 2400 MHz Upper Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

Limits:


FCC	-/-
Band Edge Compliance Radiated	
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 / RSS GEN, whichever is the lesser attenuation.	
54 dB μ V/m (AVG) / 74 dB μ V/m (Peak)	

Result:


Modulation	Band Edge Compliance Radiated [dB μ V/m]
	GFSK
Lower Band Edge – Lowest Channel	< 54 dB μ V/m (AVG) < 74 dB μ V/m (Peak)
Upper Band Edge – Highest Channel	< 54 dB μ V/m (AVG) < 74 dB μ V/m (Peak)
Measurement uncertainty	\pm 3 dB

Plots:

Plot 1: lower band edge, vertical & horizontal polarization, peak & AVG

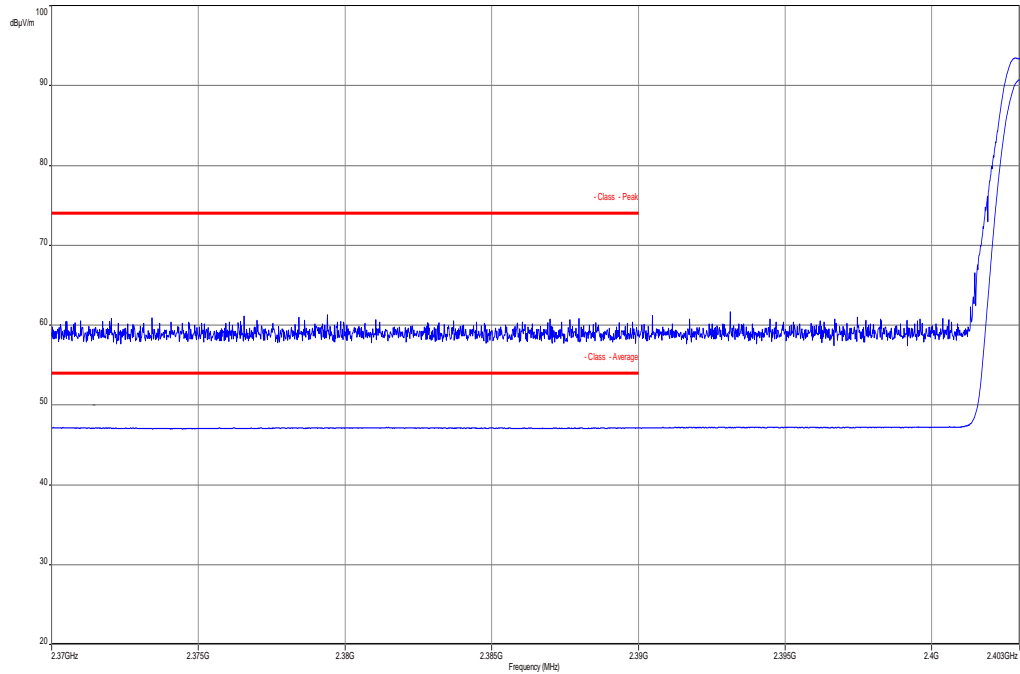

Plot 2: upper band edge, vertical & horizontal polarization, peak & AVG

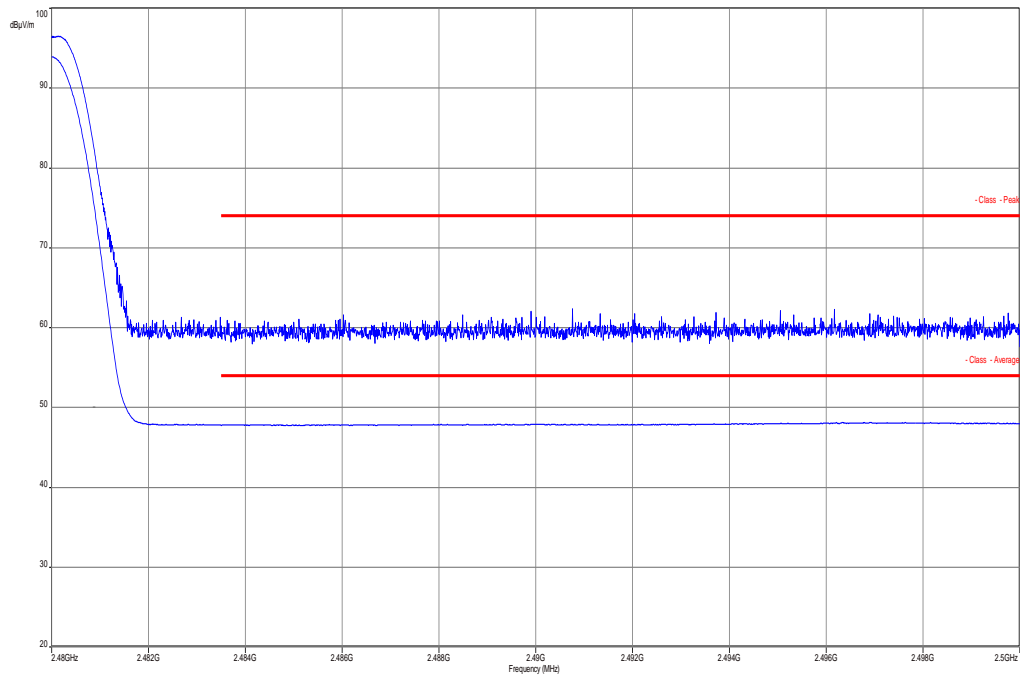

Result: Passed

9.5 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz or Duty cycle correction
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold

Limits:

FCC	-/-	
TX spurious emissions radiated		
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 / RSS GEN, whichever is the lesser attenuation.		
§15.209		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:


TX Spurious Emissions Radiated [dB μ V/m]								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.		
Measurement uncertainty			± 3 dB					

Result: **Passed**

Note: The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

Plots:


Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

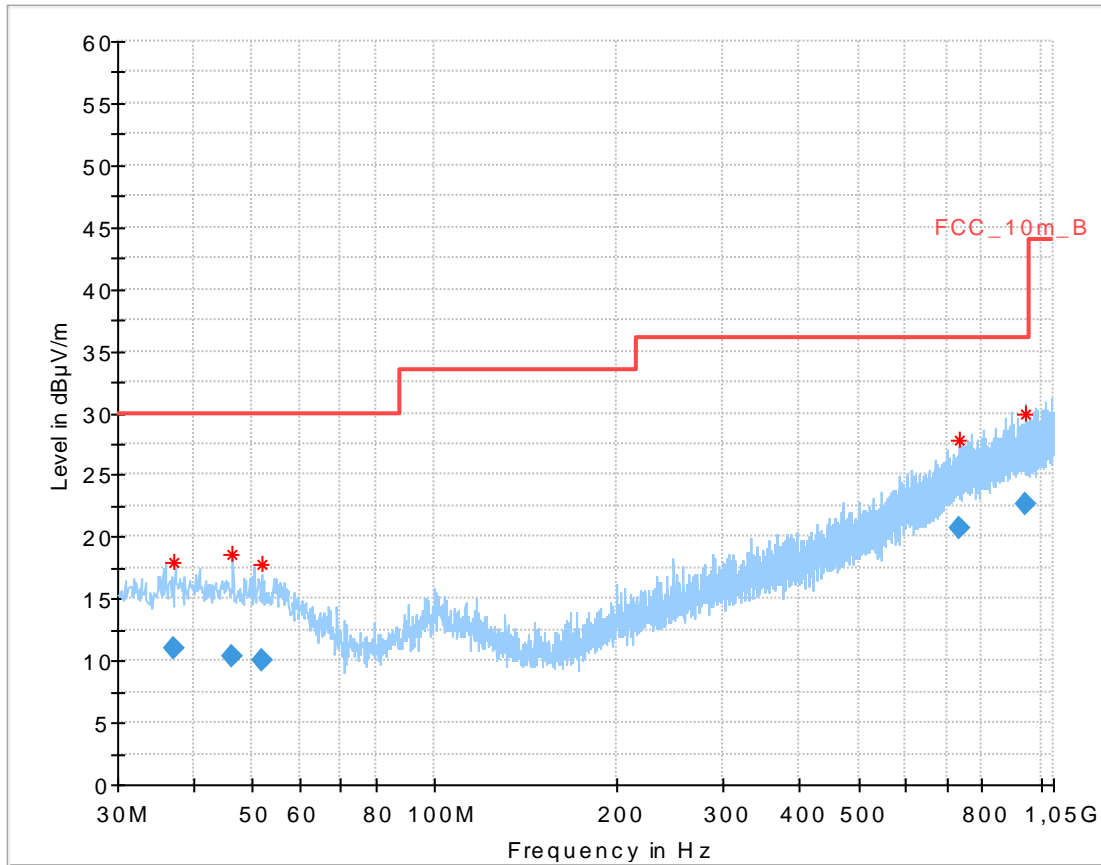

Final result:


Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
37.015650	11.01	30.00	18.99	1000.0	120.000	170.0	V	88.0	13.2
46.222950	10.41	30.00	19.59	1000.0	120.000	101.0	H	179.0	13.3
51.746400	10.07	30.00	19.93	1000.0	120.000	164.0	H	280.0	13.2
732.347700	20.62	36.00	15.38	1000.0	120.000	122.0	H	171.0	23.3
942.846450	22.64	36.00	13.36	1000.0	120.000	170.0	V	83.0	25.3

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

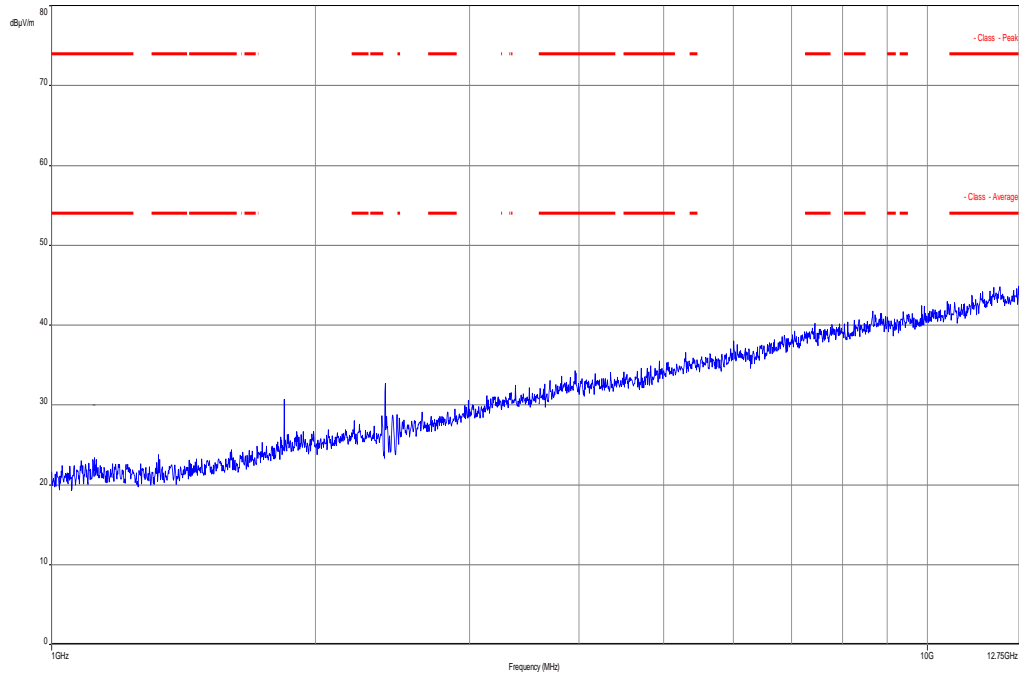


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

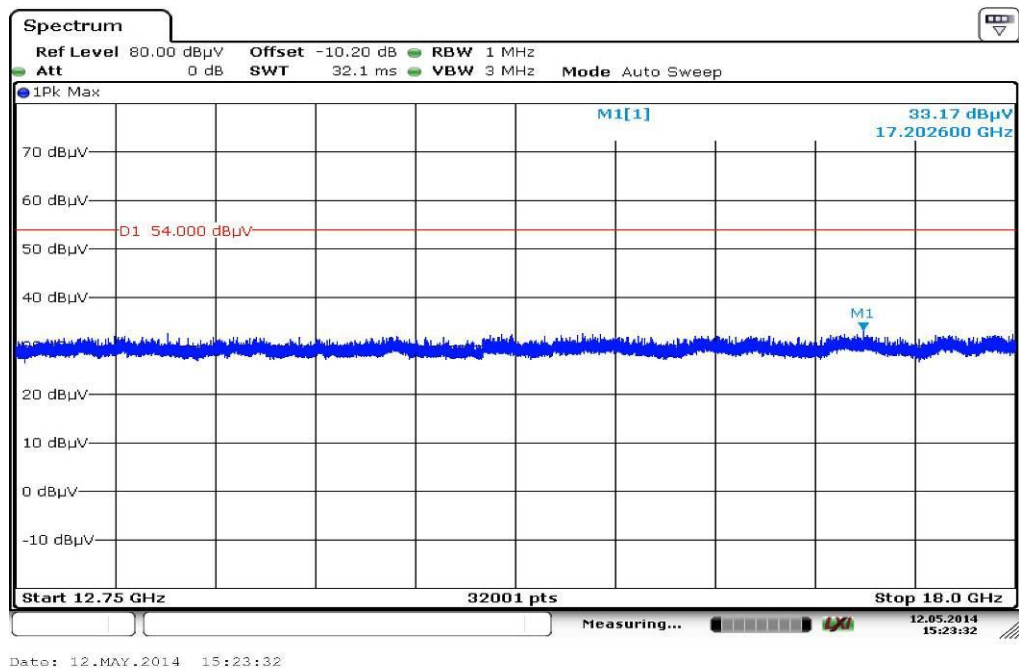


Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

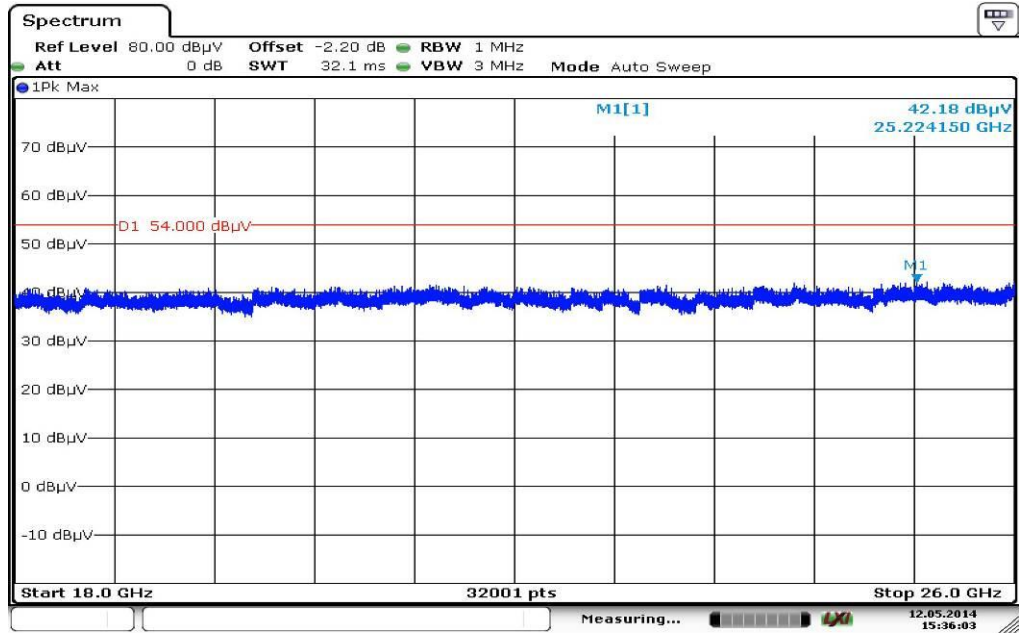

Date: 12.MAY.2014 15:36:03


Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

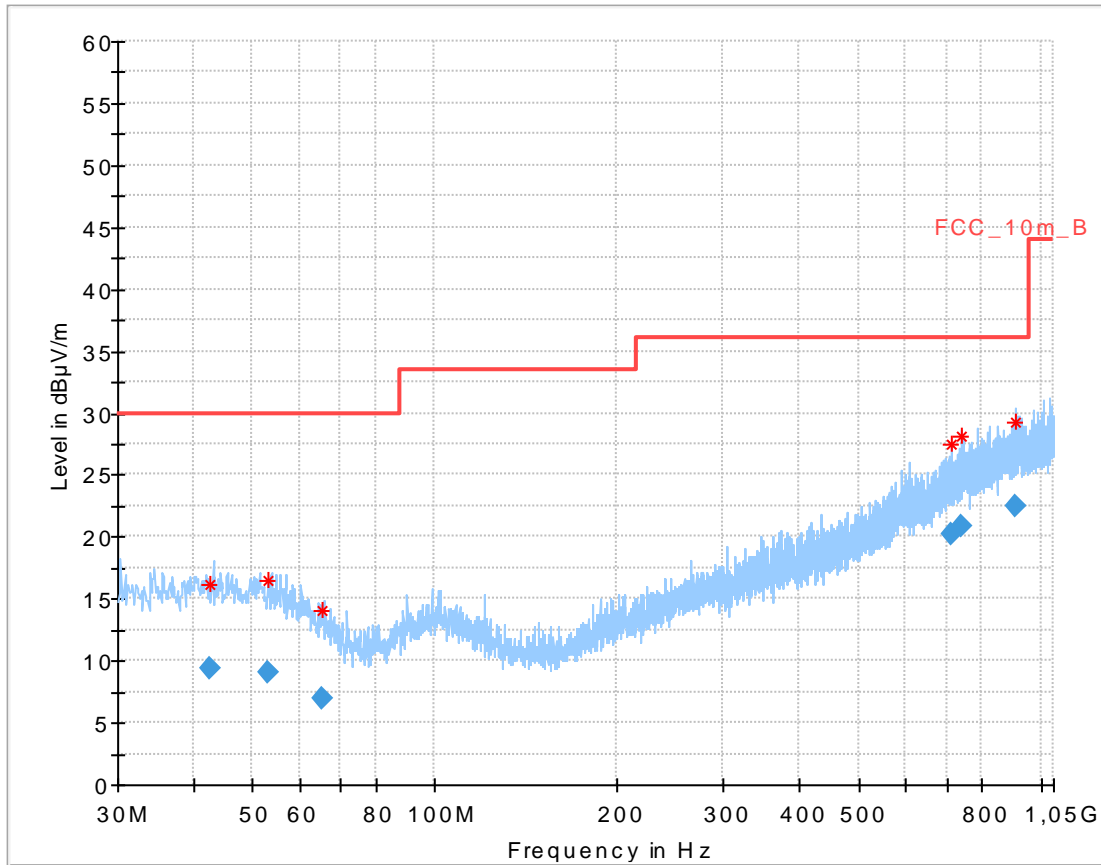

Final result:


Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.709200	9.46	30.00	20.54	1000.0	120.000	107.0	V	10.0	13.3
53.246700	9.08	30.00	20.92	1000.0	120.000	135.0	H	86.0	13.1
65.270700	6.94	30.00	23.06	1000.0	120.000	170.0	V	176.0	10.3
713.011050	20.17	36.00	15.83	1000.0	120.000	101.0	V	280.0	22.8
742.075650	20.83	36.00	15.17	1000.0	120.000	170.0	H	280.0	23.5
906.890850	22.47	36.00	13.53	1000.0	120.000	170.0	H	86.0	25.2

Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

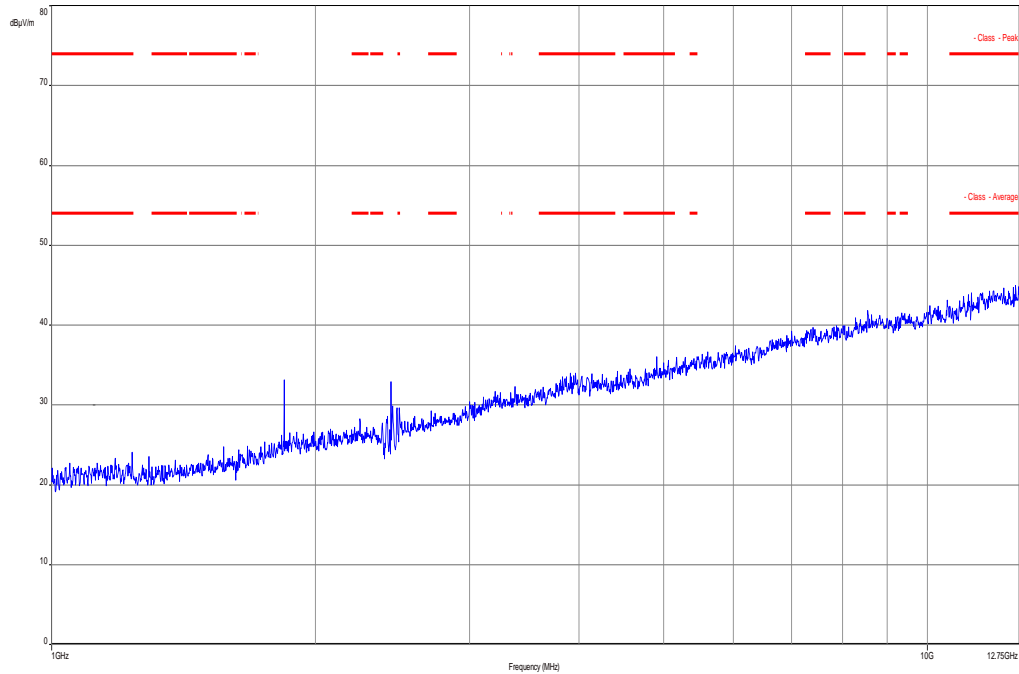


The carrier signal is notched with a 2.4 GHz band rejection filter.


Plot 7: Middle channel, 12 GHz to 18 GHz, vertical & horizontal polarization

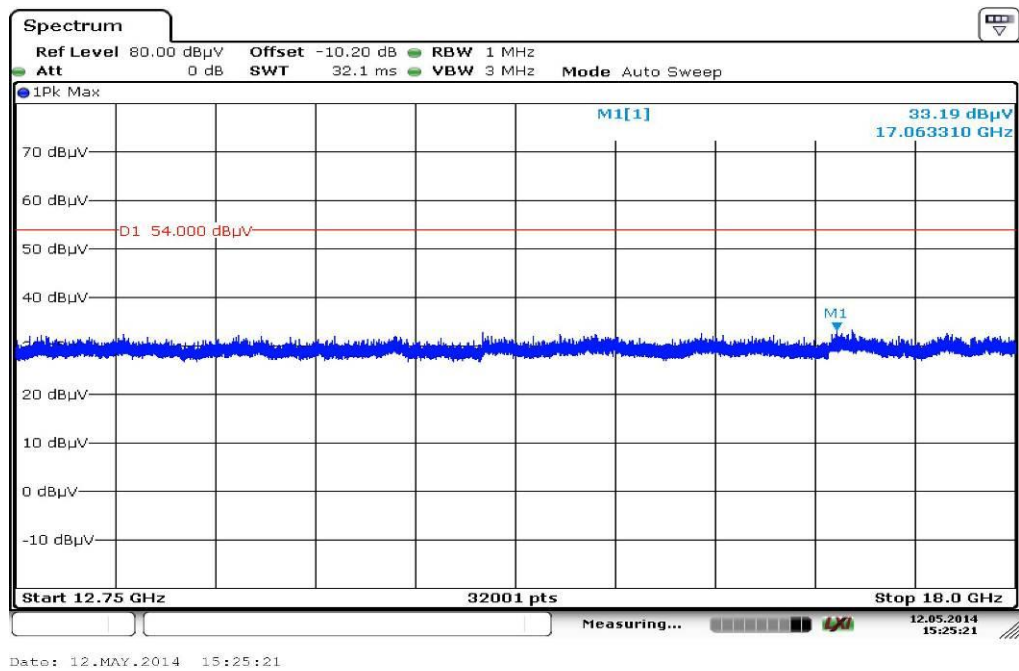

Plot 8: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

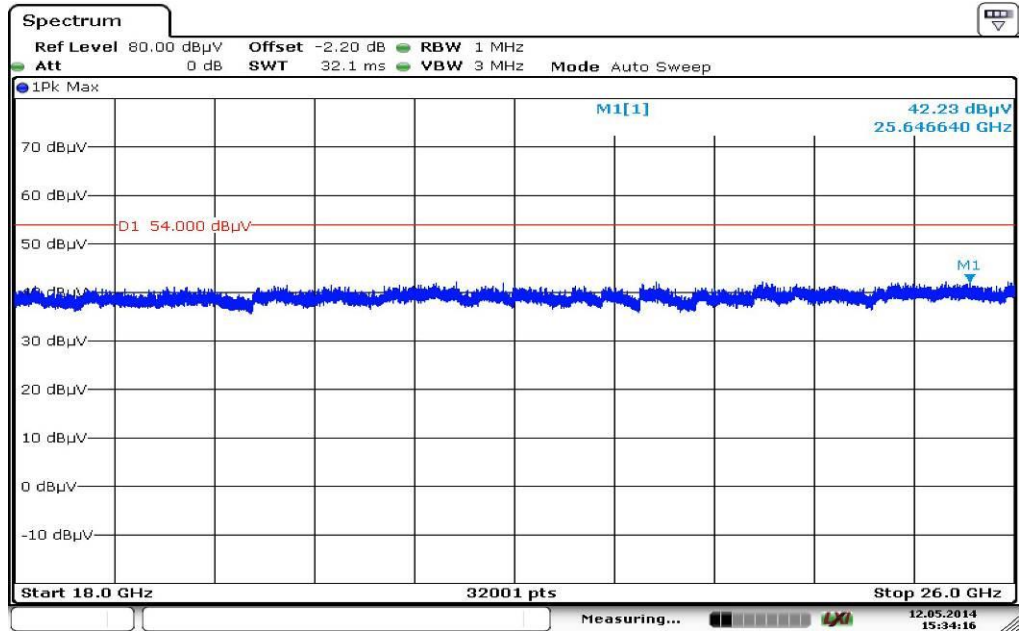


Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

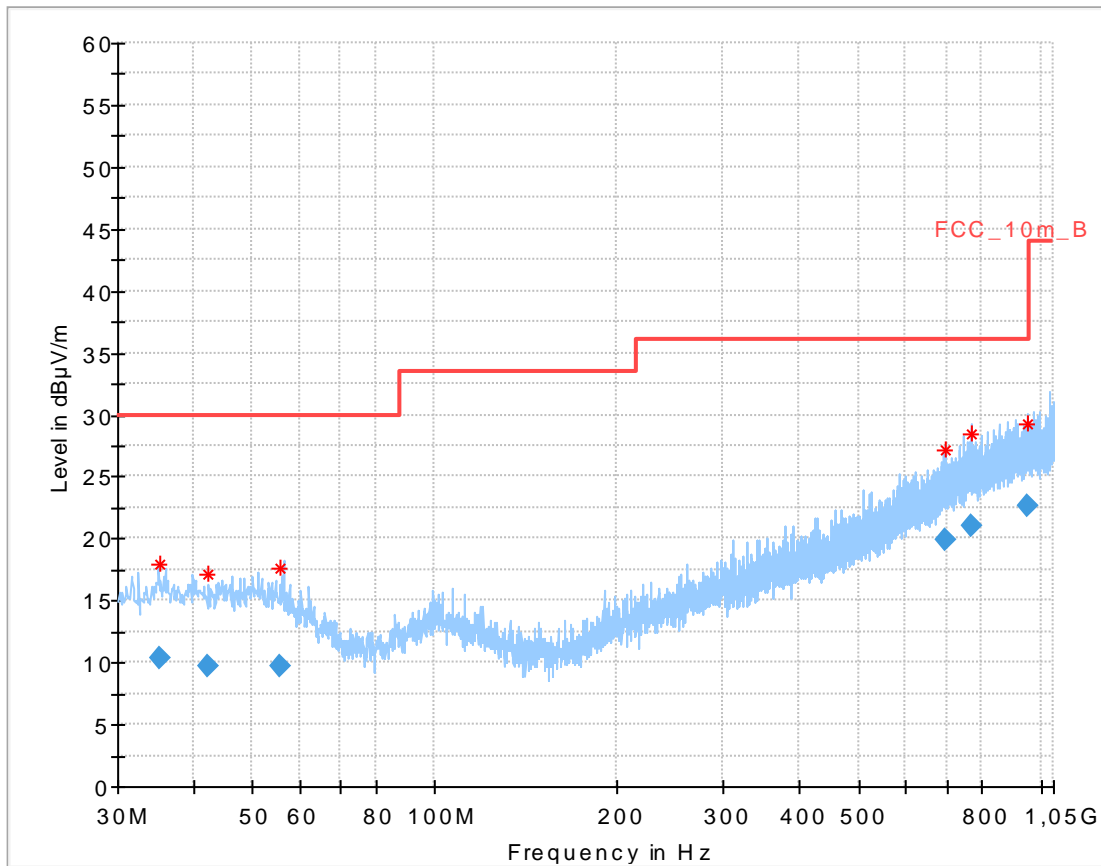

Final result:


Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
35.113500	10.40	30.00	19.60	1000.0	120.000	170.0	V	10.0	13.0
42.277650	9.69	30.00	20.31	1000.0	120.000	170.0	V	181.0	13.4
55.470300	9.66	30.00	20.34	1000.0	120.000	170.0	H	1.0	12.8
697.421100	19.85	36.00	16.15	1000.0	120.000	156.0	H	190.0	22.4
767.625000	20.96	36.00	15.04	1000.0	120.000	135.0	H	260.0	23.7
954.013350	22.69	36.00	13.31	1000.0	120.000	170.0	H	100.0	25.4

Plot 10: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

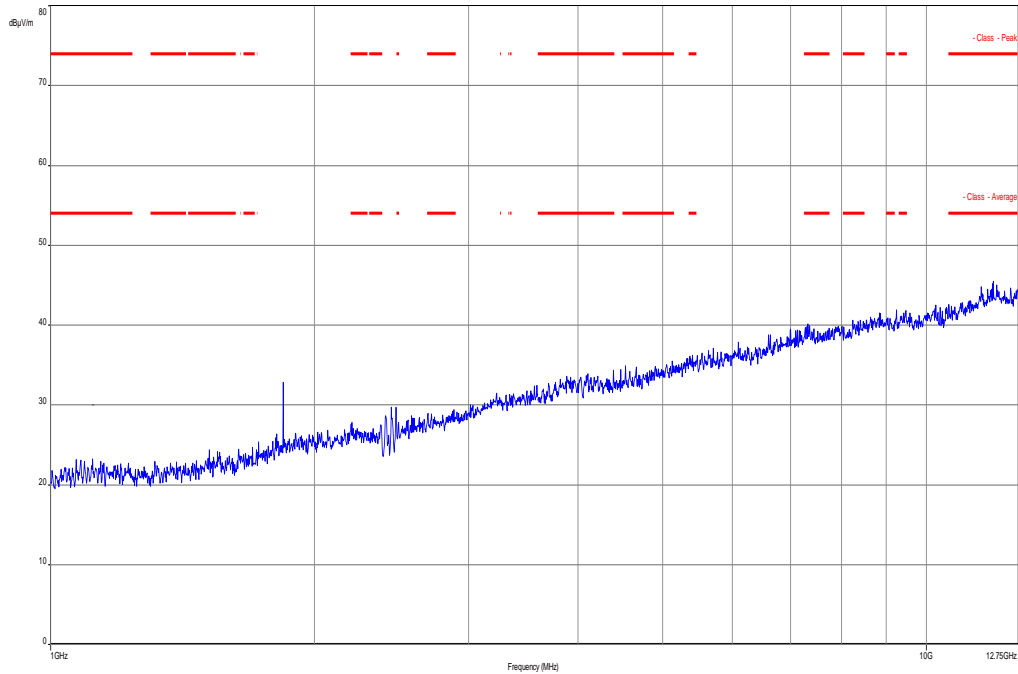


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: Highest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

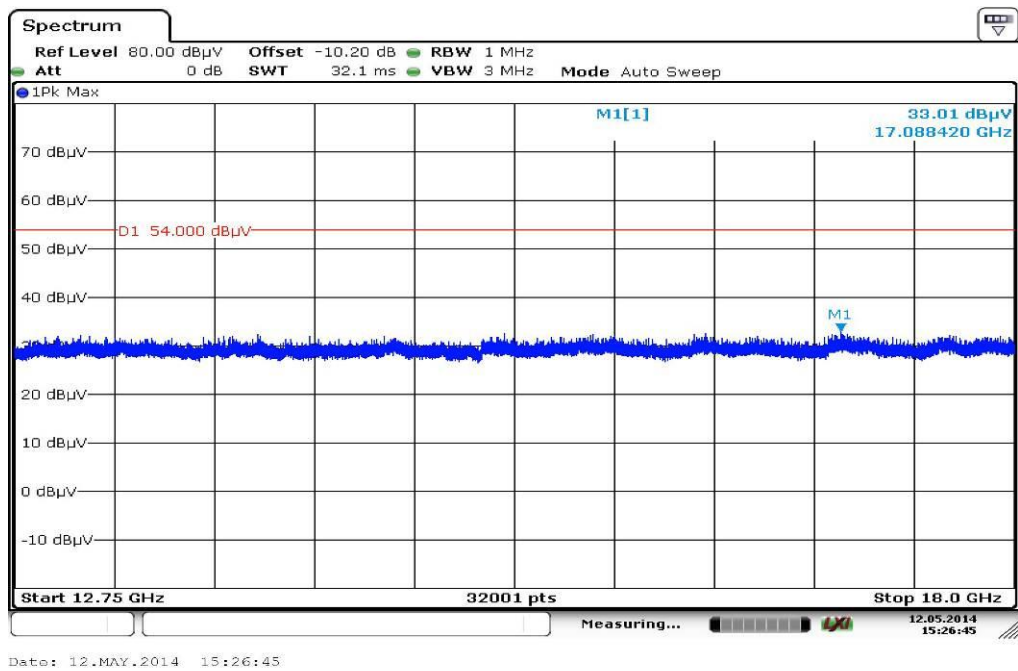

Plot 12: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

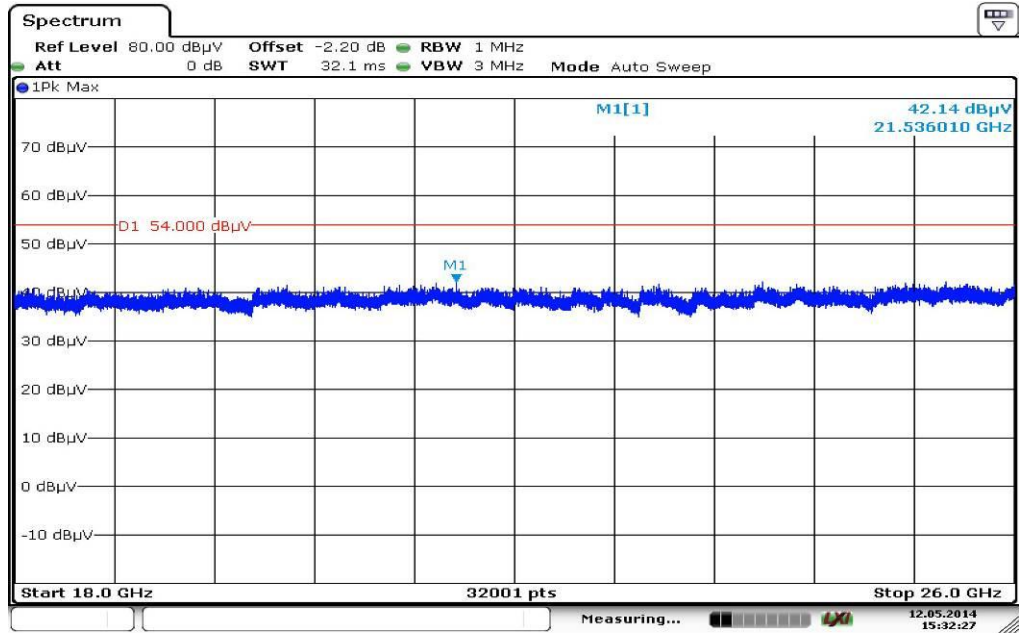

9.6 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold

Limits:

FCC	-/-	
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:


RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
All detected peak emissions are below the average limit.		
Measurement uncertainty	± 3 dB	

Result: **Passed**

Note: The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

Plots:


Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization

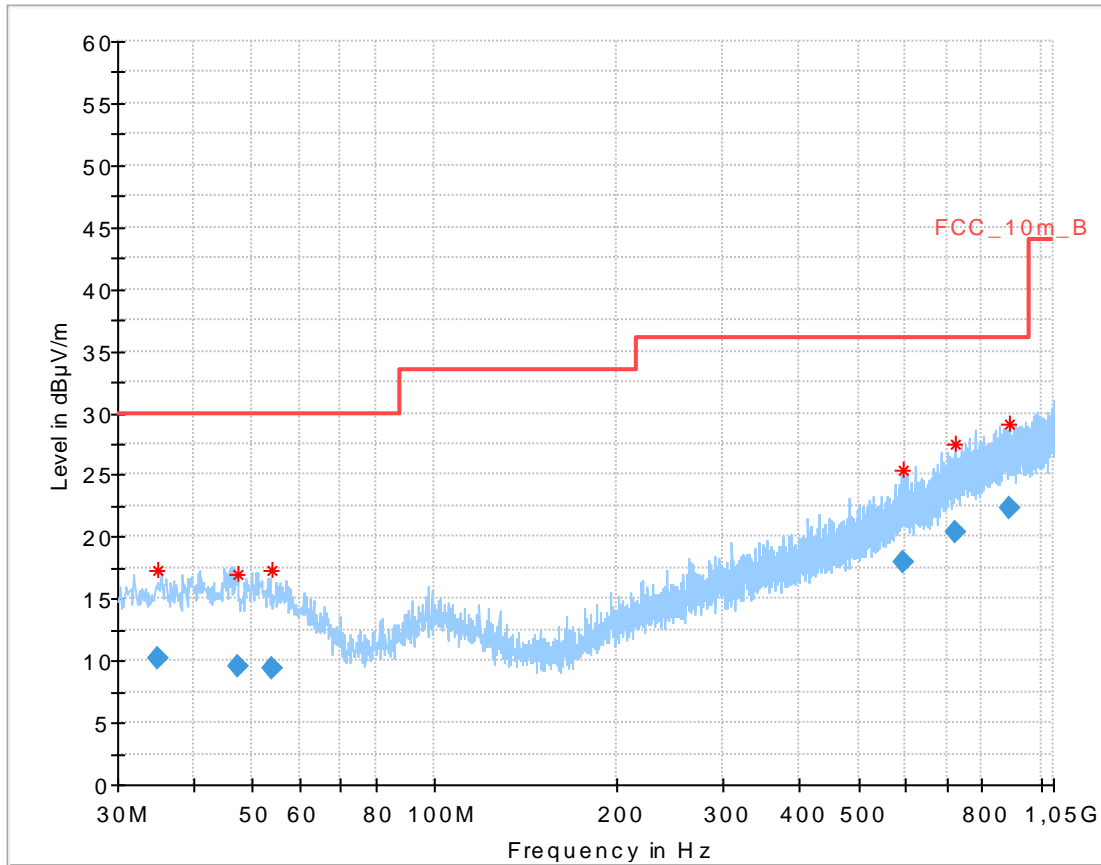


Final result:

Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
34.940550	10.17	30.00	19.83	1000.0	120.000	143.0	V	100.0	13.0
47.458800	9.59	30.00	20.41	1000.0	120.000	130.0	V	190.0	13.3
53.957550	9.32	30.00	20.68	1000.0	120.000	130.0	V	190.0	13.0
592.537050	17.94	36.00	18.06	1000.0	120.000	112.0	V	-2.0	20.6
724.230600	20.36	36.00	15.64	1000.0	120.000	106.0	H	93.0	23.1
888.229050	22.36	36.00	13.64	1000.0	120.000	170.0	V	100.0	25.1


Plot 2: 1 GHz to 12.75 GHz, vertical & horizontal polarization

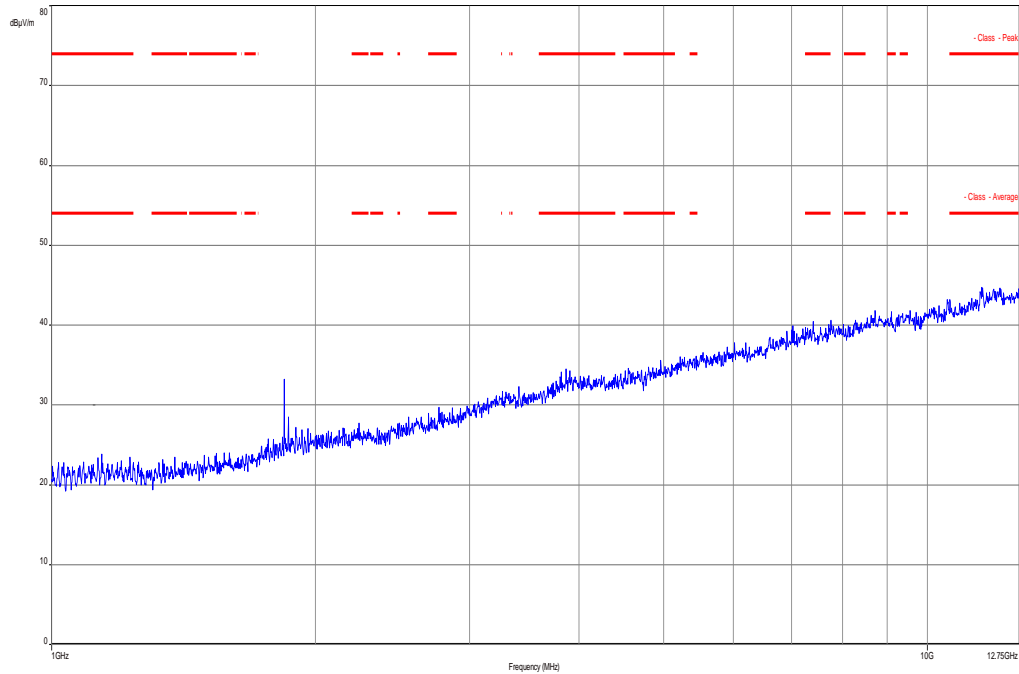

Plot 3: 12 GHz to 18 GHz, vertical & horizontal polarization

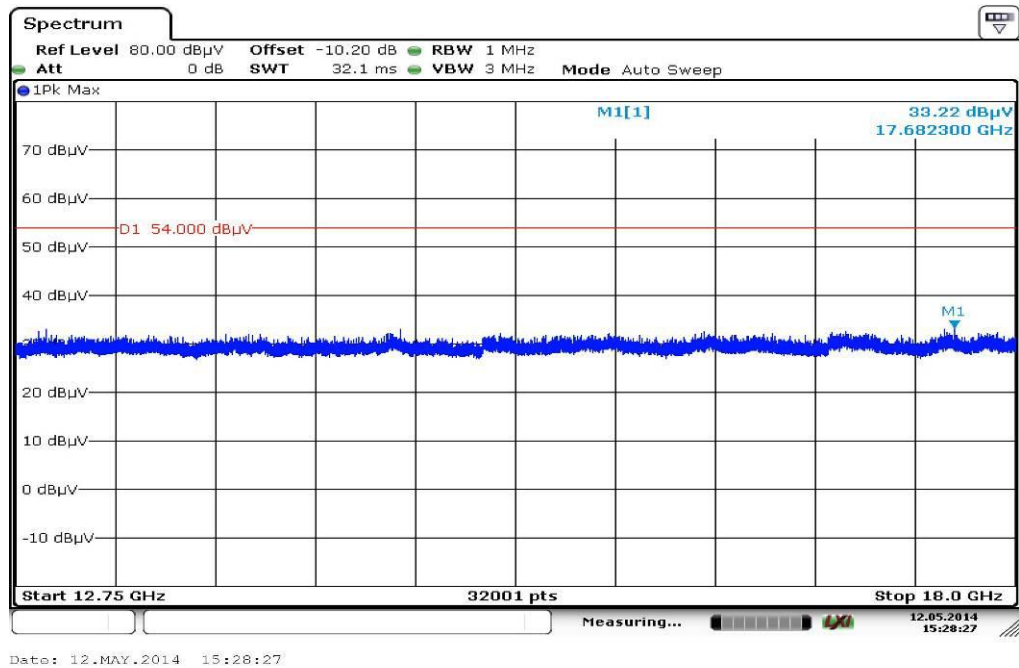

Plot 4: 18 GHz to 26 GHz, vertical & horizontal polarization

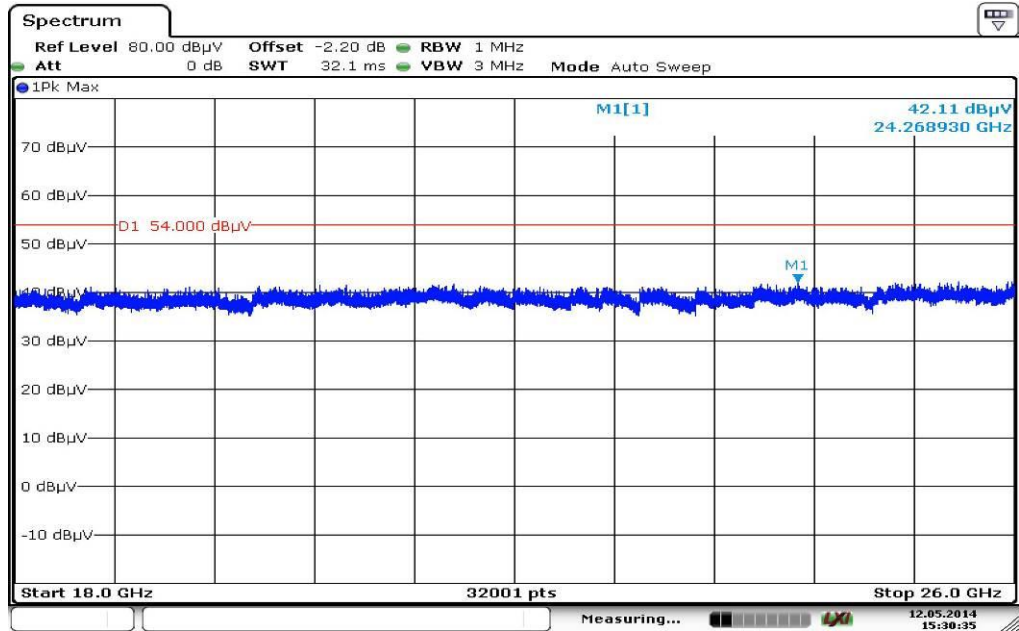

Date: 12.MAY.2014 15:30:35

9.7 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to lowest, middle and highest channel. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC	-/-	
Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


Results:

TX Spurious Emissions Radiated < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No emissions detected.		
Measurement uncertainty	± 3 dB	

Result: Passed


Plots: TX mode

Plot 1: 9 kHz to 30 MHz

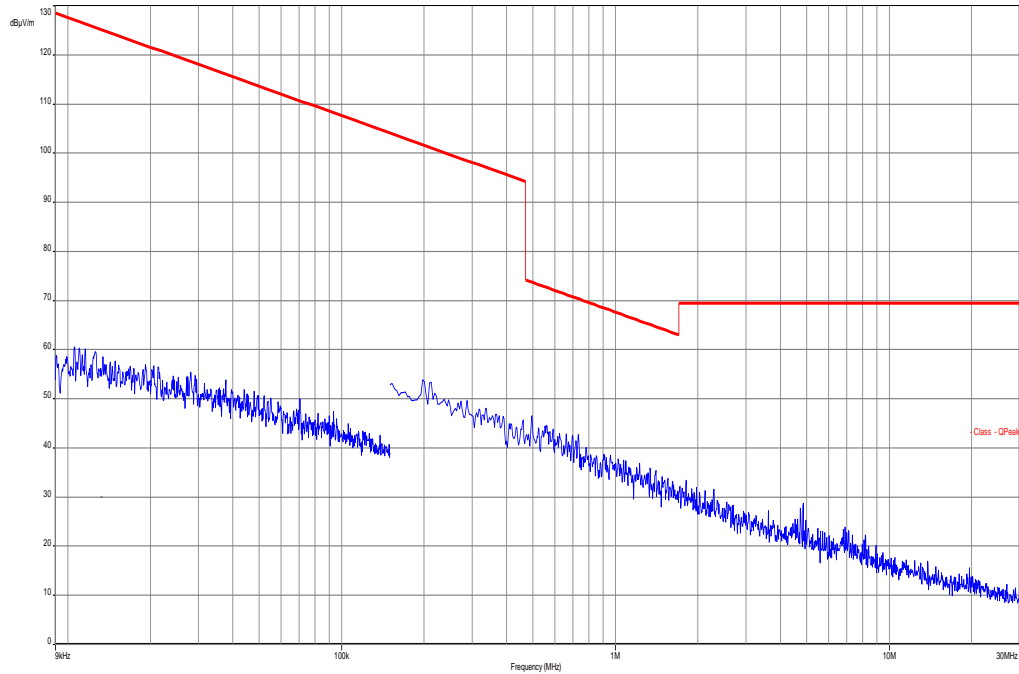

Plots: RX / Idle – mode

Plot 1: 9 kHz to 30 MHz

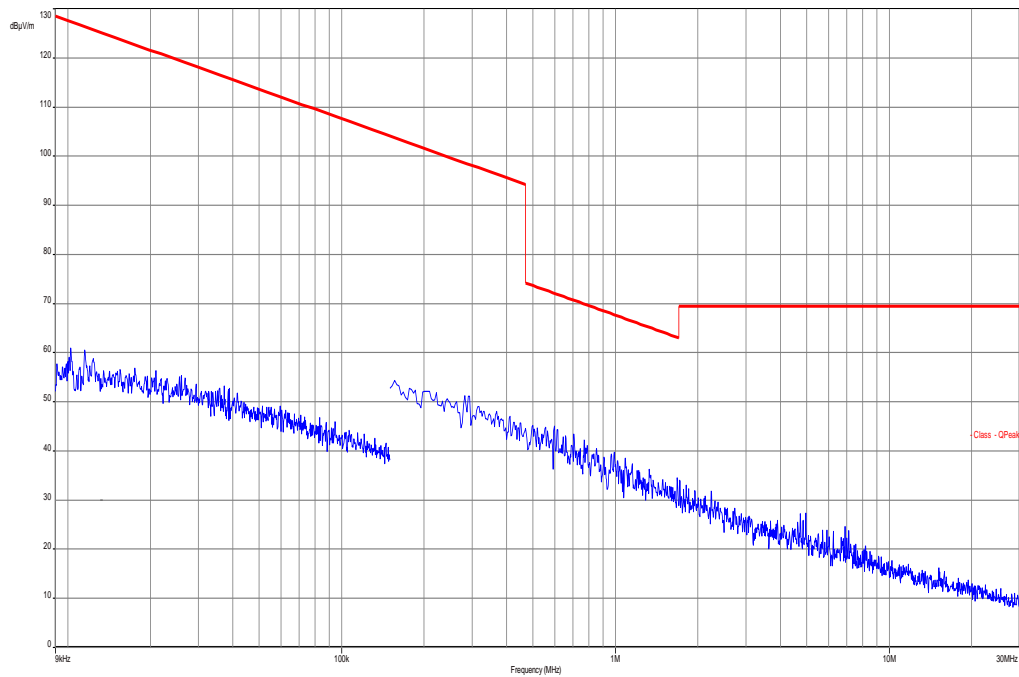

9.8 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel and Idle mode. If peaks are found the lowest and highest channel will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		-/-
TX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dB μ V/m)	Average (dB μ V/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency


Results:

TX Spurious Emissions Conducted < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No emissions detected.		
Measurement uncertainty	± 3 dB	


Result: Passed

Plots:


Plot 1: TX mode, 150 kHz to 30 MHz, phase line

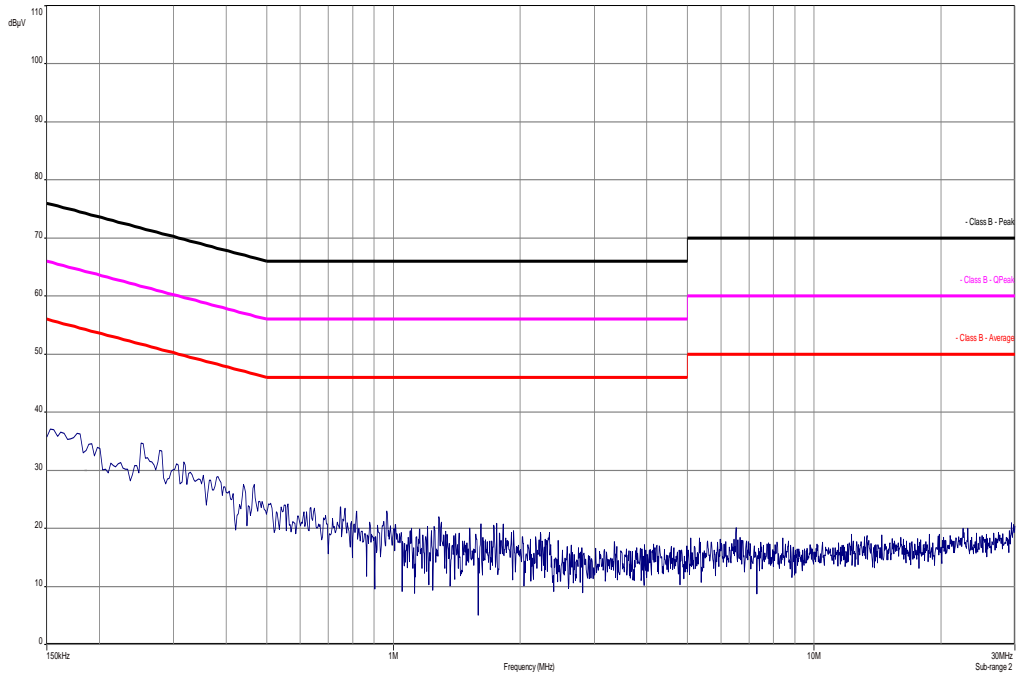


Plot 2: TX mode, 150 kHz to 30 MHz, neutral line

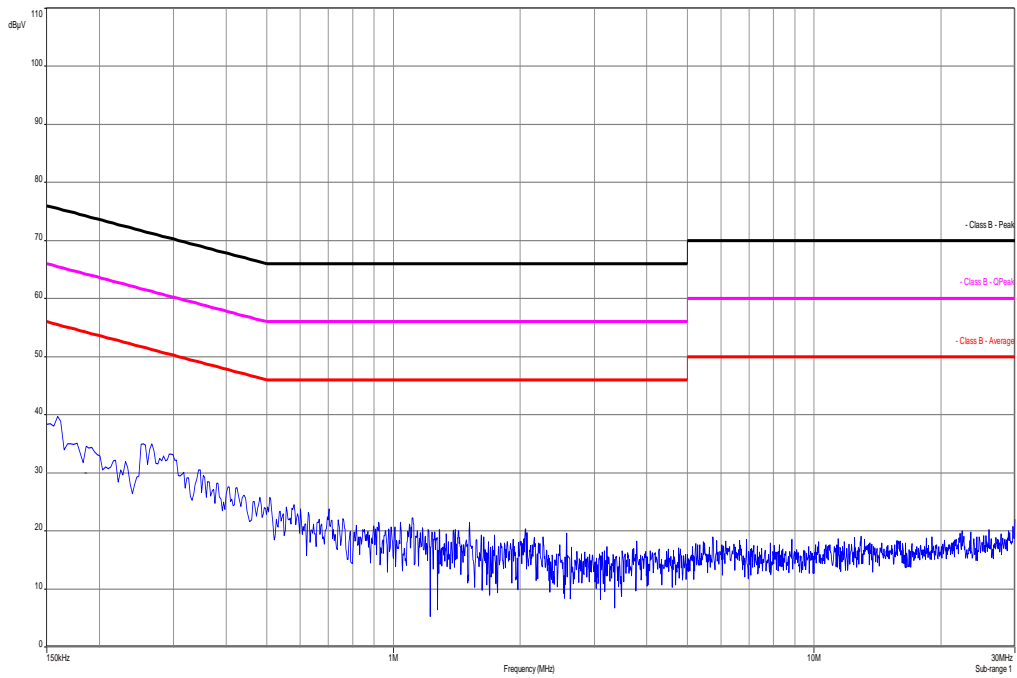

Plot 3: RX / Idle – mode, 150 kHz to 30 MHz, phase line

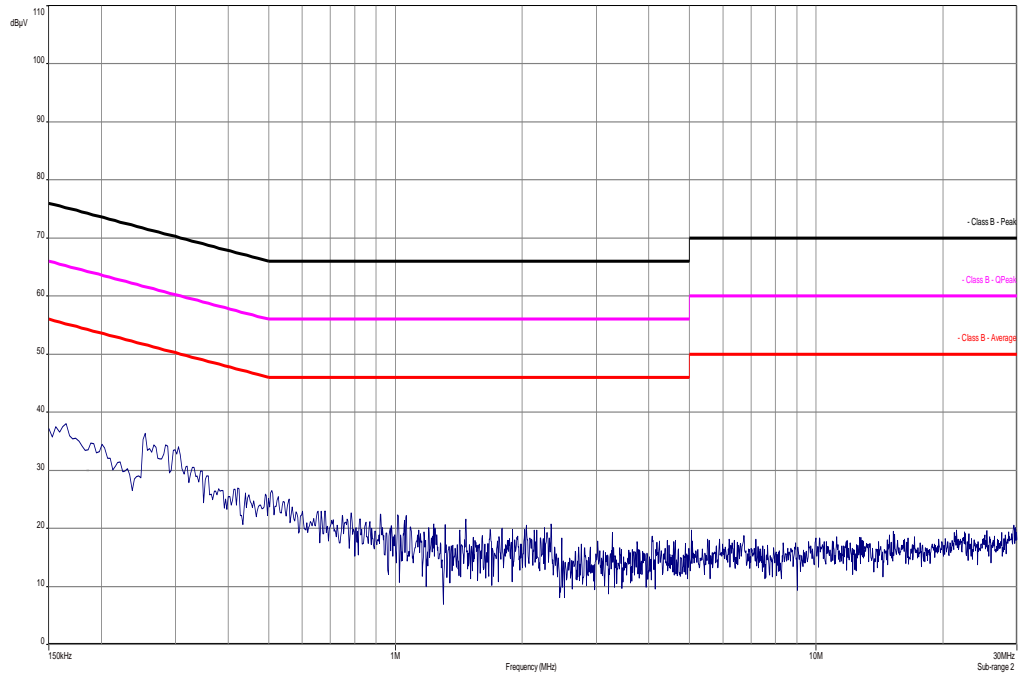

Plot 4: RX / Idle – mode, 150 kHz to 30 MHz, neutral line

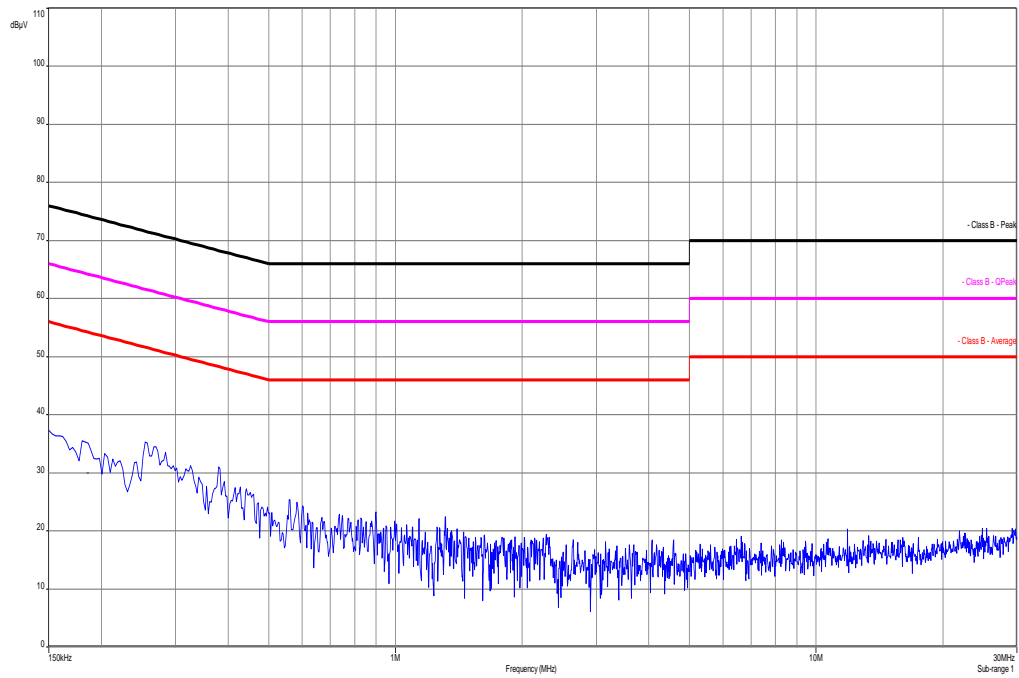

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	27.01.2014	27.01.2015
4	n. a.	Funkstörmesse mpfänger 20Hz-26,5GHz	ESU26	R&S	100037	300003555	k	28.02.2014	28.02.2015
5	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
6	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
7	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
8	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	22.04.2014	22.04.2016
9	n. a.	Double-Ridged Waveguide Horn Antenna 1-18,0GHz	3115	EMCO	8812-3088	300001032	vKI!	08.05.2013	08.05.2015
10	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
11	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
12	9	Isolating Transformer	MPL IEC625 Bus Regeltrennravo	Erfi	91350	300001155	ne		
13	90	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	13.06.2013	13.06.2015
14	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
15	n. a.	Band Reject filter	WRCG240/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
16	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vKI!	14.10.2011	14.10.2014
17	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	13.03.2014	13.03.2015
18	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
19	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787	k	22.07.2013	22.07.2015
20	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442	k	19.07.2013	19.07.2015
21	n. a.	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	21.01.2014	21.01.2015

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

11 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
	Initial release	2014-05-15

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate

Front side of certificate

Back side of certificate



Deutsche Akkreditierungsstelle GmbH

Bellehene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
 Unterzeichnerin der Multilateralen Abkommen
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestatigt hiermit, dass das Pruflaboratorium

CETECOM ICT Services GmbH
 Unterturkheimer Strae 6-10, 66117 Saarbrucken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prufungen in folgenden Bereichen durchzufuhren:

- Drahtgebundene Kommunikation einschlielich xDSL
- VoIP und DECT
- Akustik
- Funk einschlielich WLAN
- Short Range Devices (SRD)
- RFID
- WiFiMax und Richtfunk
- Mobilfunk (GSM / GPRS / UTRAN / DCS, Over the Air (OTA) Performance)
- Elektromagnetische Vertraglichkeit (EMV) einschlielich Automotive
- Produktsicherheit
- SAR und Hearing Aid Compatibility (HAC)
- Umweltsimulation
- Smart Card Terminals
- Bluetooth
- Wi-Fi Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 07.03.2014 mit der Akkreditierungsnummer D-PL-12076-01 und ist gultig 17.01.2018. Sie besteht aus diesem Deckblatt, der Ruckseite des Deckblatts und der folgenden Anlage mit insgesamt 77 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-00

Frankfurt am Main, 07.03.2014

Im Auftrag D-PL-12076-01/01/01/01/01
 Akkreditierungsstellenleiter

Deutsche Akkreditierungsstelle GmbH

Standort Berlin
 Spittelmarkt 10
 10117 Berlin

Standort Frankfurt am Main
 Gartenstrae 6
 60504 Frankfurt am Main

Standort Braunschweig
 Bundesallee 100
 38116 Braunschweig

Die auszugsweise Veroffentlichung des Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die unseitig genannte Konformitatsbewertungsstelle in unverandelter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die uber den durch die DAkkS bestatigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gema des Gesetzes uber die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2675) sowie der Verordnung (EG) Nr. 765/2008 des Europaischen Parlaments und des Rates vom 9. Juli 2008 uber die Vorschriften fur die Akkreditierung und Marktuberwachung im Zusammenhang mit der Vermarktung von Produkten (Abt. L 228 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der Europaischen Organisation fur Akkreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
 EA: www.european-accreditation.org
 IAF: www.iaf.or.jp
 ILAC: www.ilac.org

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>