

## TEST REPORT

Test report no.: 1-6965/13-16-14-A



Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing laboratory

**CETECOM ICT Services GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>

e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Area of Testing:

Radio Communications & EMC (RCE)

### Applicant

**Sony Mobile Communications AB**

Nya Vattentorget

22188 Lund / SWEDEN

Phone: +46 46 19 30 00

Fax: -/-

Contact: Mikael Nilsson

e-mail: [Micke.nilsson@sonymobile.com](mailto:Micke.nilsson@sonymobile.com)

Phone: +46 7 03 22 75 03

### Manufacturer

**Sony Mobile Communications AB**

Nya Vattentorget

22188 Lund / SWEDEN

### Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:**

**Smart Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDD/II/V; LTE FDD1/3/17/18; LTE TDD41; CDMA 2K BC0/BC6; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS**

**FCC ID:**

**PY7PM-0750**

**Frequency:**

DTS band 2400 MHz to 2483.5 MHz  
(lowest channel 01 – 2412 MHz; highest channel 11 – 2462 MHz)

**Technology tested:**

WLAN (DSSS/b – mode; OFDM/g - & n HT20 – mode)

**Antenna:**

Integrated antenna

**Power supply:**

3.7 V DC by Li - polymer battery

**Temperature range:**

-30°C to +60°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorised:

Christoph Schneider  
Expert

### Test performed:

Andreas Luckenbill  
Expert

|                            |  |
|----------------------------|--|
| <b>1 Table of contents</b> |  |
| 1                          | Table of contents .....2                                 |
| 2                          | General information .....3                               |
| 2.1                        | Notes and disclaimer .....3                              |
| 2.2                        | Application details.....3                                |
| 3                          | Test standard/s .....3                                   |
| 3.1                        | Measurement guidance.....3                               |
| 4                          | Test environment.....4                                   |
| 5                          | Test item .....4   |
| 5.1                        | Additional information .....4                            |
| 6                          | Test laboratories sub-contracted .....4                  |
| 7                          | Description of the test setup.....5                      |
| 7.1                        | Radiated measurements in a semi-anechoic chamber .....5  |
| 7.2                        | Radiated measurements in a fully anechoic chamber .....6 |
| 7.3                        | Radiated measurements 12.75 GHz to 25 GHz .....7         |
| 7.4                        | AC conducted .....8                                      |
| 7.5                        | Conducted measurements .....9                            |
| 8                          | Summary of measurement results .....10                   |
| 9                          | Additional comments .....11                              |
| 10                         | Measurement results .....12                              |
| 10.1                       | Antenna gain .....12                                     |
| 10.2                       | Identify worst case data rate .....13                    |
| 10.3                       | Maximum output power.....14                              |
| 10.4                       | Power spectral density.....15                            |
| 10.5                       | Spectrum bandwidth – 6 dB.....22                         |
| 10.6                       | Occupied bandwidth – 99% emission bandwidth.....23       |
| 10.7                       | Band edge compliance conducted .....30                   |
| 10.8                       | Band edge compliance radiated.....34                     |
| 10.9                       | TX spurious emissions conducted .....48                  |
| 10.10                      | TX spurious emissions radiated .....57                   |
| 10.11                      | RX spurious emissions radiated .....68                   |
| 10.12                      | Spurious emissions radiated < 30 MHz .....71             |
| 10.13                      | Spurious emissions conducted < 30 MHz.....73             |
| 11                         | Test equipment and ancillaries used for tests.....76     |
| 12                         | Observations .....79                                     |
| Annex A                    | Document history .....80                                 |
| Annex B                    | Further information.....80                               |
| Annex C                    | Accreditation Certificate .....81                        |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 2014-02-19 |
| Date of receipt of test item:      | 2014-03-14 |
| Start of test:                     | 2014-03-15 |
| End of test:                       | 2014-03-26 |
| Person(s) present during the test: | -/-        |

## 3 Test standard/s

| Test standard  | Date | Test standard description   |
|----------------|------|---|
| 47 CFR Part 15 |      | Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices |

### 3.1 Measurement guidance

|                  |         |   |
|------------------|---------|---|
| DTS : KDB 558074 | 2013-04 | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 |
|------------------|---------|---|

#### 4 Test environment

|                            |           |                                       |
|----------------------------|-----------|---------------------------------------|
| Temperature:               | $T_{nom}$ | +22 °C during room temperature tests  |
|                            | $T_{max}$ | +60 °C during high temperature tests  |
|                            | $T_{min}$ | -30 °C during low temperature tests   |
| Relative humidity content: |           | 42 %                                  |
| Barometric pressure:       |           | not relevant for this kind of testing |
| Power supply:              | $V_{nom}$ | 3.7 V DC by Li - polymer battery      |
|                            | $V_{max}$ | 4.4 V                                 |
|                            | $V_{min}$ | 3.3 V                                 |

#### 5 Test item

|                            |   |   |
|----------------------------|---|---|
| Kind of test item          | : | Smart Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDD/III/V; LTE FDD1/3/17/18; LTE TDD41; CDMA 2K BC0/BC6; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS |
| Type identification        | : | PY7PM-0750  |
| S/N serial number          | : | Rad. CB5126D6YF<br>Cond. CB5126DB1G   |
| HW hardware status         | : | AP1.0   |
| SW software status         | : | RF test software  |
| Frequency band [MHz]       | : | DTS band 2400 MHz to 2483.5 MHz<br>(lowest channel 01 – 2412 MHz; highest channel 11 – 2462 MHz)  |
| Type of radio transmission | : | DSSS, OFDM  |
| Use of frequency spectrum  | : |   |
| Type of modulation         | : | BPSK, QPSK, 16 - QAM and 64 - QAM   |
| Number of channels         | : | 11  |
| Antenna                    | : | Integrated antenna  |
| Power supply               | : | 3.7 V DC by Li - polymer battery  |
| Temperature range          | : | -30°C to +60 °C   |

#### 5.1 Additional information

Test setup- and EUT-photos are included in test report: 1-6965/13-16-01\_AnnexA  
1-6965/13-16-01\_AnnexB  
1-6965/13-16-01\_AnnexD

All conducted measurements performed by CETECOM ICT Services GmbH, Saarbrücken.  
All radiated measurements performed by CETECOM GmbH, Essen.


#### 6 Test laboratories sub-contracted

None


## 7 Description of the test setup

### 7.1 Radiated measurements in a semi-anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

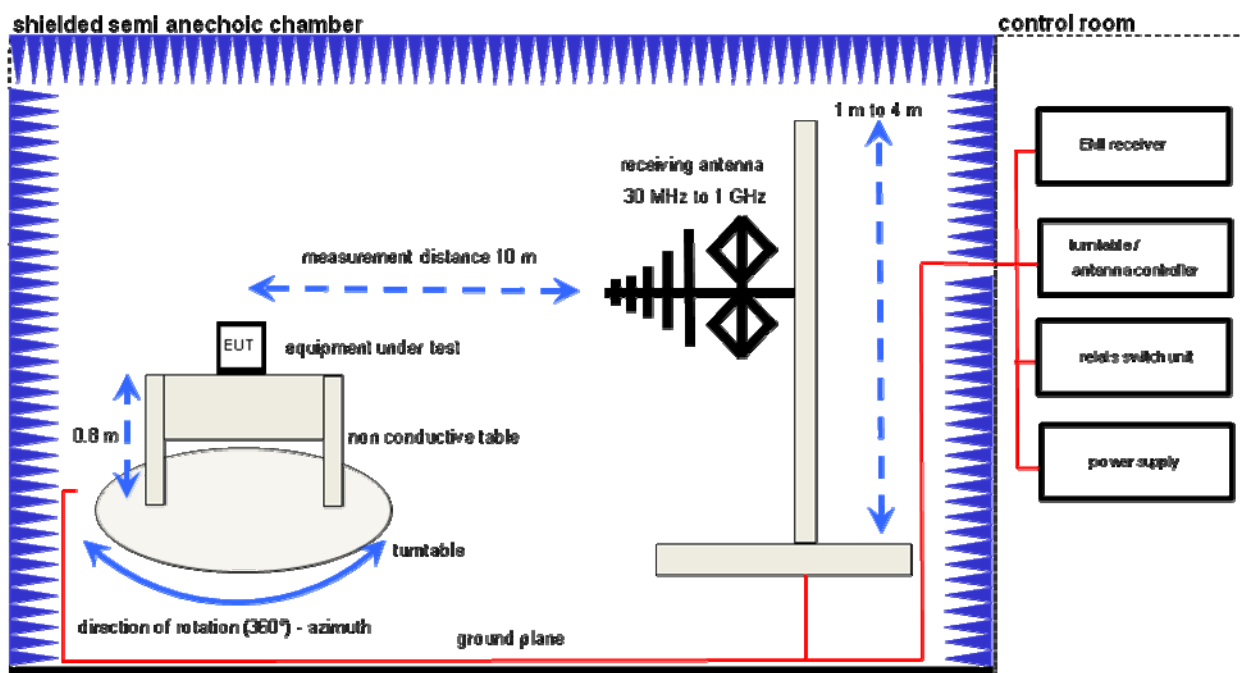

## 7.2 Radiated measurements in a fully anechoic chamber

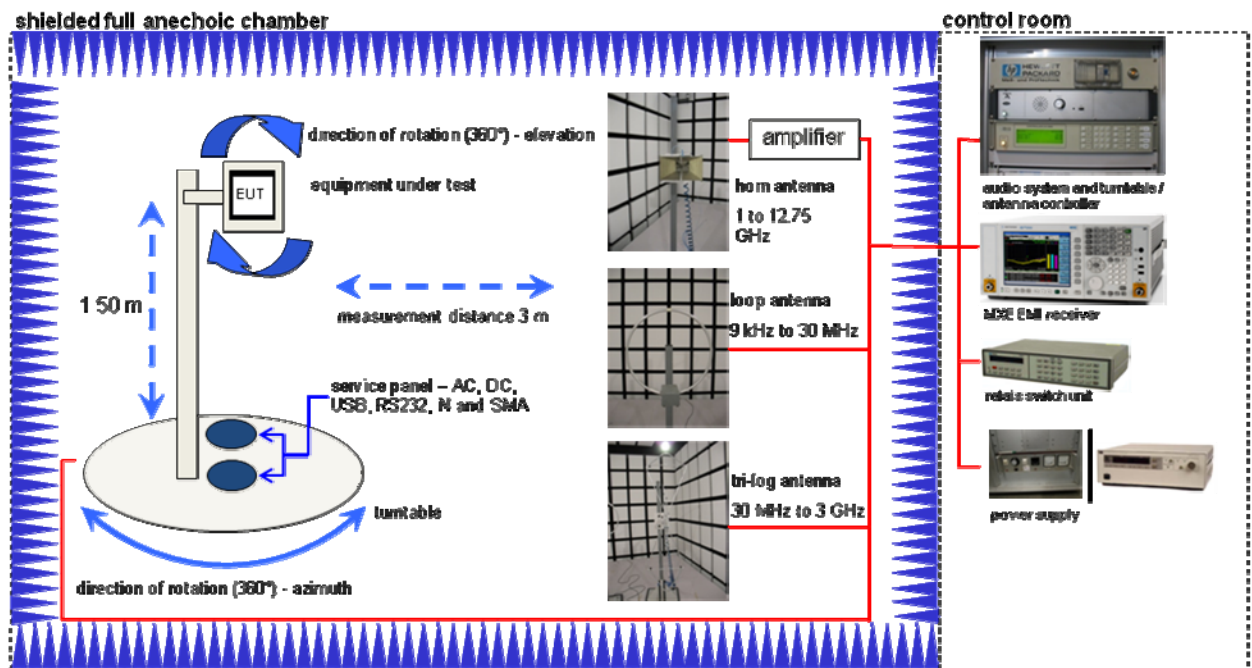


### 7.3 Radiated measurements 12.75 GHz to 25 GHz



**Equipment table:**

| Equipment                                   | Type   | Manufacturer  | Serial No. | INV. No Cetecom |
|---|--------|---------------|------------|-----------------|
| Std. Gain Horn Antenna<br>12.4 to 18.0 GHz  | 639    | Narda         | 8402       | 300000787       |
| Std. Gain Horn Antenna<br>18.0 to 26.5 GHz  | 638    | Narda         | 8205       | 300002442       |
| Microwave System<br>Amplifier, 0.5-26.5 GHz | 83017A | HP Meßtechnik | 00419      | 300002268       |
| Spectrum Analyzer 20 Hz -<br>50 GHz         | FSU50  | R&S           | 200012     | 300003443       |
| Signal Analyzer 40 GHz                      | FSV40  | R&S           | 101042     | 300004517       |

## 7.4 AC conducted

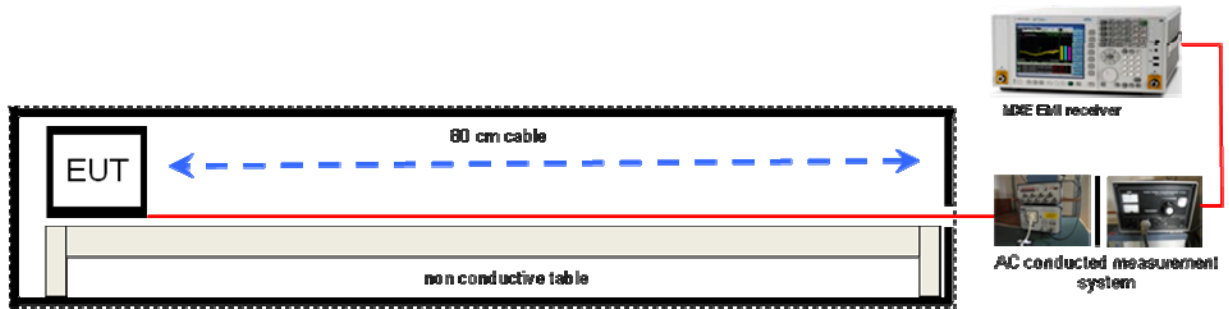


### Equipment table:

| Equipment                           | Type                           | Manufacturer         | Serial No. | INV. No Cetecom |
|-------------------------------------|--------------------------------|----------------------|------------|-----------------|
| MXE EMI Receiver 20 Hz bis 26,5 GHz | N9038A                         | Agilent Technologies | MY51210197 | 300004405       |
| Isolating Transformer               | MPL IEC625 Bus Regeltrenntravo | Erfi                 | 91350      | 300001155       |
| Switch / Control Unit               | 3488A                          | HP Meßtechnik        | *          | 300000199       |
| Switch / Control Unit               | 3488A                          | HP Meßtechnik        | 2719A15013 | 300001168       |
| Artificial Mains 9 kHz to 30 MHz    | ESH3-Z5                        | R&S                  | 828576/020 | 300001210       |



## 7.5 Conducted measurements

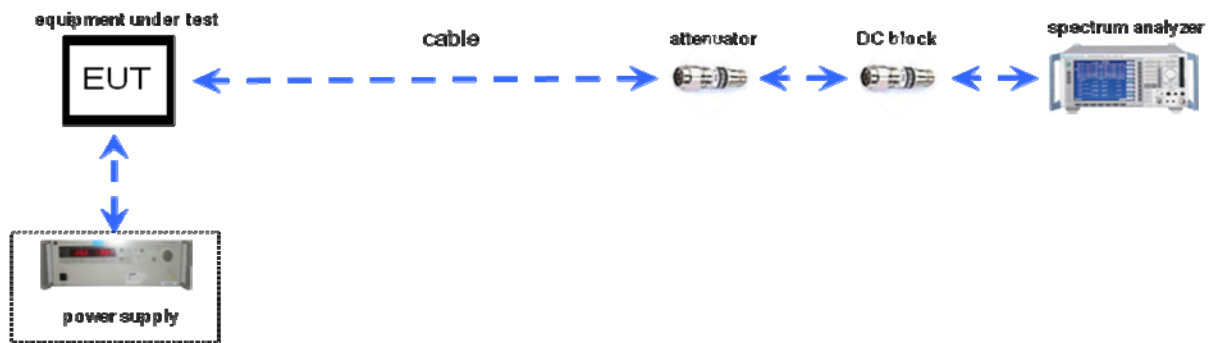

### Equipment table:

| Equipment              | Type  | Manufacturer | Serial No. | INV. No Cetecom |
|------------------------|-------|--------------|------------|-----------------|
| Signal Analyzer 40 GHz | FSV40 | R&S          | 101042     | 300004517       |

## 8 Summary of measurement results

No deviations from the technical specifications were ascertained  
 There were deviations from the technical specifications ascertained

| TC Identifier | Description | Verdict | Date       | Remark |
|---------------|-------------|---------|------------|--------|
| RF-Testing    | CFR Part 15 | Passed  | 2014-03-28 | -/-    |

| Test specification clause | Test case                               | Guideline                                | Temperature conditions | Power source voltages | Mode               | Pass   | Fail   | NA   | NP   | Remark   |
|---------------------------|---|--|------------------------|-----------------------|--------------------|--|--|--|--|----------|
| §15.247(b)(4)             | Antenna gain                            | -/-                                      | Nominal                | Nominal               | DSSS               | <input checked="" type="checkbox"/>  | <input type="checkbox"/>                             | <input type="checkbox"/>                             | <input type="checkbox"/>                             | complies |
| §15.247(e)                | Power spectral density                  | KDB 558074<br>DTS clause:<br>10.2        | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |
| §15.247(a)(2)             | Spectrum bandwidth – 6 dB bandwidth     | KDB 558074<br>DTS clause:<br>8.2         | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |
|                           | Occupied bandwidth                      | -/-                                      | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |
| §15.247(b)(3)             | Maximum output power                    | KDB 558074<br>DTS clause:<br>9.1.2       | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |
| §15.247(d)                | Band edge compliance conducted          | KDB 558074<br>DTS clause:<br>13.2.1      | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |
| §15.205                   | Band edge compliance radiated           | -/-                                      | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |
| §15.247(d)                | TX spurious emissions conducted         | KDB 558074<br>DTS clause:<br>11.1 & 11.2 | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |
| §15.247(d)                | TX spurious emissions radiated          | -/-                                      | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |
| §15.109                   | RX spurious emissions radiated          | -/-                                      | Nominal                | Nominal               | -/-                | <input checked="" type="checkbox"/>  | <input type="checkbox"/>                             | <input type="checkbox"/>                             | <input type="checkbox"/>                             | complies |
| §15.209(a)                | TX spurious emissions radiated < 30 MHz | -/-                                      | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |
| §15.107(a)<br>§15.207     | Conducted emissions < 30 MHz            | -/-                                      | Nominal                | Nominal               | DSSS<br>OFDM g & n | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | <input type="checkbox"/><br><input type="checkbox"/> | complies |

**Note:** NA = Not Applicable; NP = Not Performed

## 9 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:

- No test mode available.  
Iperf was used to ping another device with the largest support packet size
- Special software is used.  
EUT is transmitting pseudo random data by itself

## 10 Measurement results

### 10.1 Antenna gain

**Limits:**

| FCC          |
|--------------|
| Antenna Gain |
| 6 dBi        |

**Results:**

| $T_{nom}$                                  | $V_{nom}$ | lowest channel<br>2402 MHz | middle channel<br>2441 MHz | highest channel<br>2480 MHz |
|--|-----------|----------------------------|----------------------------|-----------------------------|
| Gain [dBi]<br>Declared by the manufacturer |           | -0.4                       | -3.1                       | -4.4                        |

**Result:** Passed

## 10.2 Identify worst case data rate

### Measurement:

All modes of the EUT will be measured with an average power meter to identify the maximum transmission power on low, mid and high channel. In the case that only one or two channels are available, only these will be measured.

In further tests only the identified worst case modulation scheme or bandwidth will be measured. Additional the band edge compliance test will be performed in the lowest and highest modulation scheme.

### Measurement parameters:

Average Power Meter

### Results:

| Modulation<br>Frequency | Modulation scheme / bandwidth |          |           |
|-------------------------|-------------------------------|----------|-----------|
|                         | 2412 MHz                      | 2437 MHz | 2462 MHz  |
| DSSS / b – mode         | 2 Mbit/s                      | 2 Mbit/s | 11 Mbit/s |
| OFDM / g – mode         | 6 Mbit/s                      | 6 Mbit/s | 6 Mbit/s  |
| OFDM / n HT20 – mode    | MCS0                          | MCS1     | MCS0      |

### 10.3 Maximum output power

**Description:**

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power.

**Measurement:**

| Measurement parameter          |  |
|--------------------------------|--|
| According to DTS clause: 9.1.2 |  |
| Detector:                      | Peak   |
| Sweep time:                    | Auto   |
| Resolution bandwidth:          | 1 MHz  |
| Video bandwidth:               | 3 MHz  |
| Span:                          | 40 MHz                                       |
| Integration bandwidth:         | 75 % power - bandwidth (DTS BW)              |
| Trace-Mode:                    | Max hold<br>(allow trace to fully stabilize) |
| Measurement function:          | Channel power with DTS BW                    |

**Limits:**

| FCC  |
|--|
| Maximum Output Power                       |
| Conducted: 1.0 W – Antenna Gain max. 6 dBi |

**Results:**

| DSSS / b – mode<br>Frequency                        | Maximum Output Power [dBm] |          |          |
|---|----------------------------|----------|----------|
|   | 2412 MHz                   | 2437 MHz | 2462 MHz |
| Peak output power conducted<br>Worst case data rate | 16.0                       | 19.3     | 19.4     |
| OFDM / g – mode<br>Frequency                        | Maximum Output Power [dBm] |          |          |
|   | 2412 MHz                   | 2437 MHz | 2462 MHz |
| Peak output power conducted<br>Worst case data rate | 18.2                       | 22.1     | 18.8     |
| OFDM / n HT20 – mode<br>Frequency                   | Maximum Output Power [dBm] |          |          |
|   | 2412 MHz                   | 2437 MHz | 2462 MHz |
| Peak output power conducted<br>Worst case data rate | 18.1                       | 22.2     | 18.8     |
| Measurement uncertainty                             | ± 1.5 dB (cond.)           |          |          |

**Result: Passed**

## 10.4 Power spectral density

### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

### Measurement:

| Measurement parameter         |   |
|-------------------------------|---|
| According to DTS clause: 10.2 |   |
| Detector:                     | Peak                                      |
| Sweep time:                   | Auto                                      |
| Resolution bandwidth:         | 3 kHz                                     |
| Video bandwidth:              | 10 kHz                                    |
| Span:                         | 40 MHz                                    |
| Trace-Mode:                   | Max hold (allow trace to fully stabilize) |

### Limits:

| FCC                    |
|------------------------|
| Power Spectral Density |
| 8 dBm (conducted)      |

### Results:

| Modulation<br>Frequency | Power Spectral density [dBm] |          |          |
|-------------------------|------------------------------|----------|----------|
|                         | 2412 MHz                     | 2437 MHz | 2462 MHz |
| DSSS / b – mode         | -7.1                         | -3.7     | -7.6     |
| OFDM / g – mode         | -13.4                        | -10.3    | -13.1    |
| OFDM / n HT20 – mode    | -11.9                        | -9.9     | -12.0    |
| Measurement uncertainty | ± 1.5 dB (cond.)             |          |          |

Result: **Passed**

**Plots: DSSS / b – mode**

**Plot 1: TX mode, lowest channel**




**Plot 2: TX mode, middle channel**






Plot 3: TX mode, highest channel

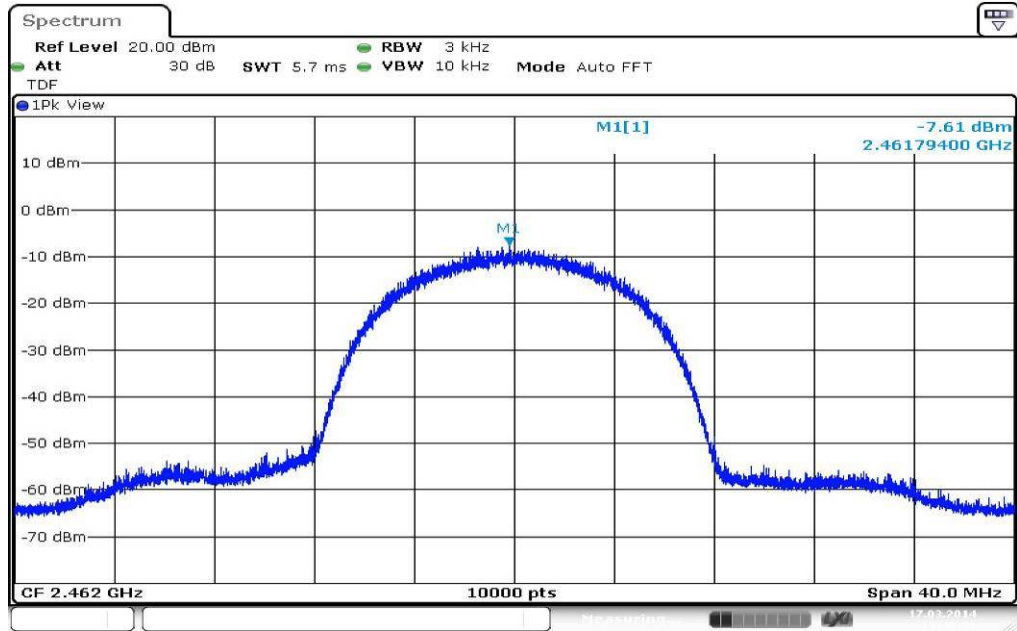


Date: 17.MAR.2014 15:40:29

**Plots: OFDM / g – mode**


**Plot 1: TX mode, lowest channel**

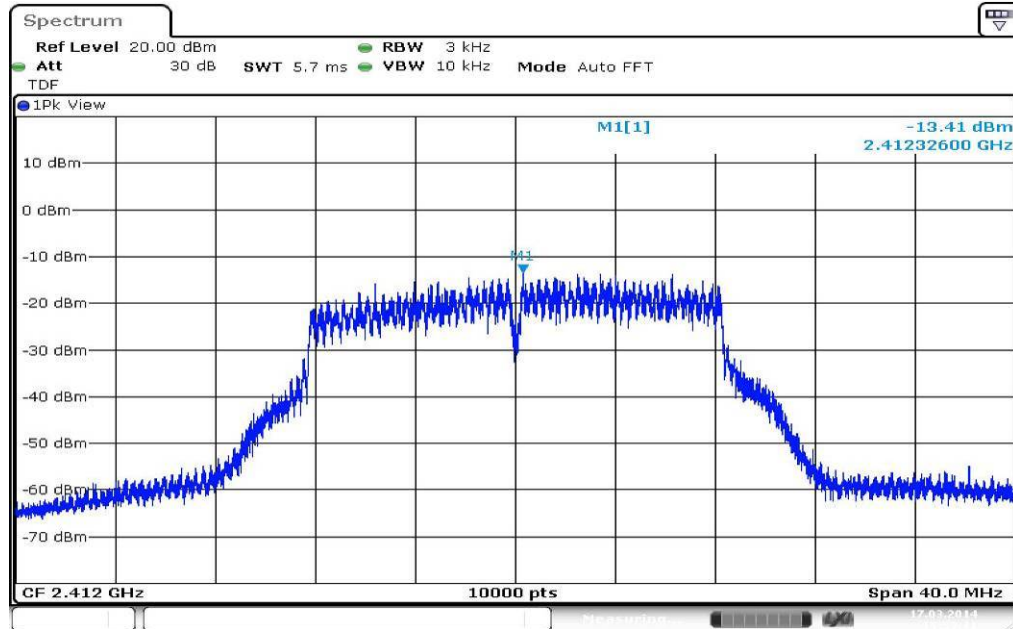

**Plot 2: TX mode, middle channel**

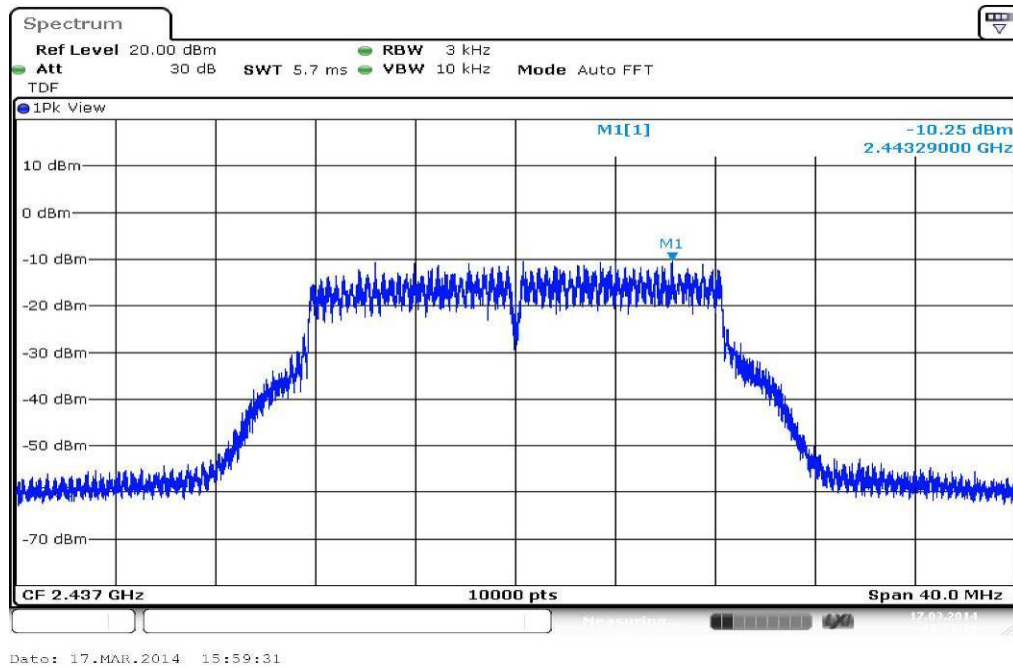


Plot 3: TX mode, highest channel

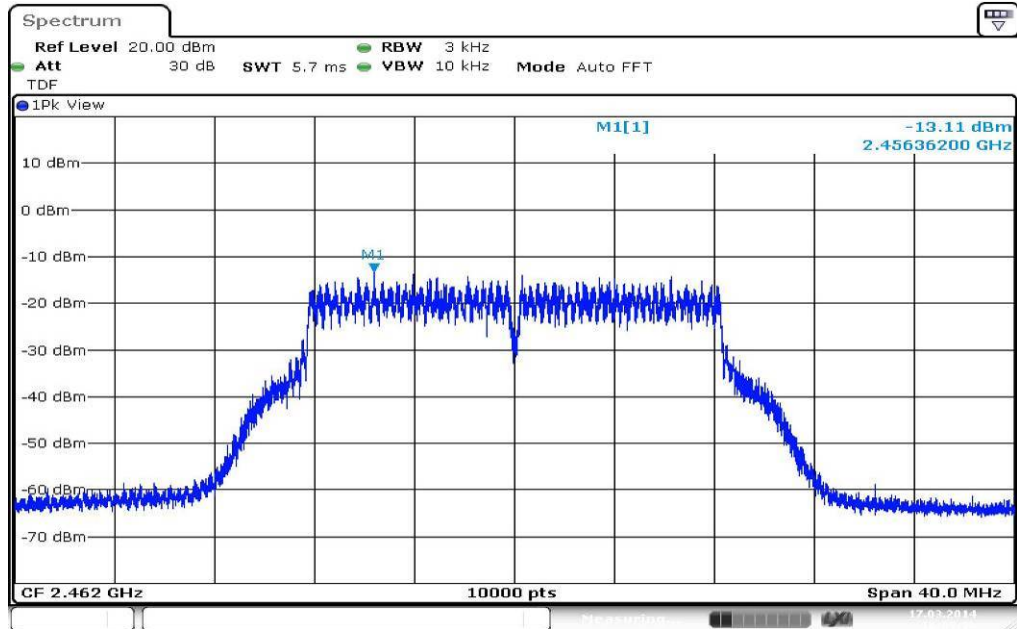

Date: 17.MAR.2014 16:05:36


**Plots: OFDM / n HT20 – mode**

**Plot 1: TX mode, lowest channel**

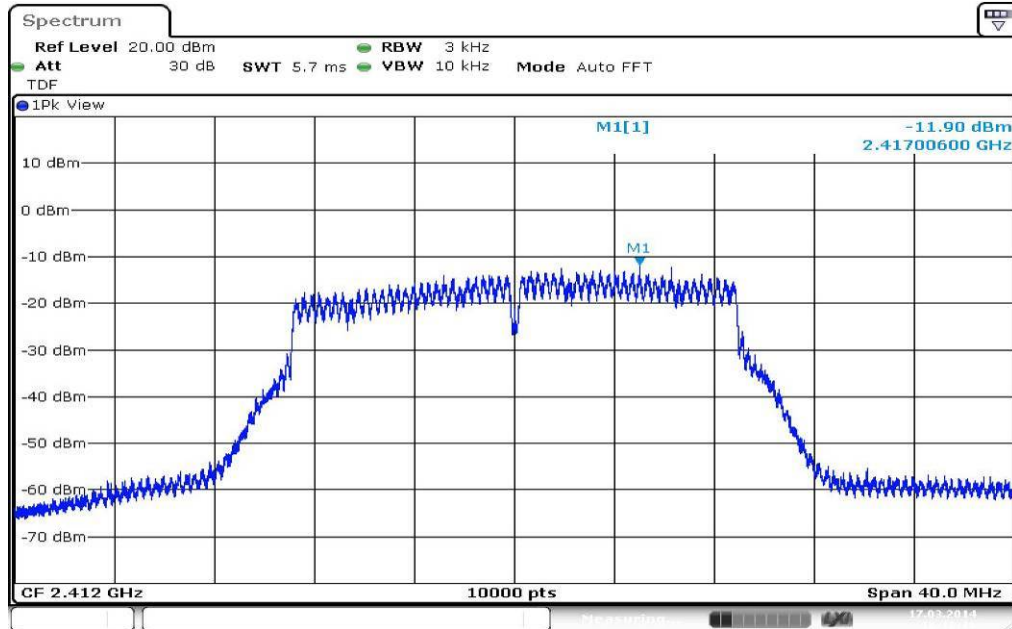


Date: 17.MAR.2014 16:18:18

**Plot 2: TX mode, middle channel**

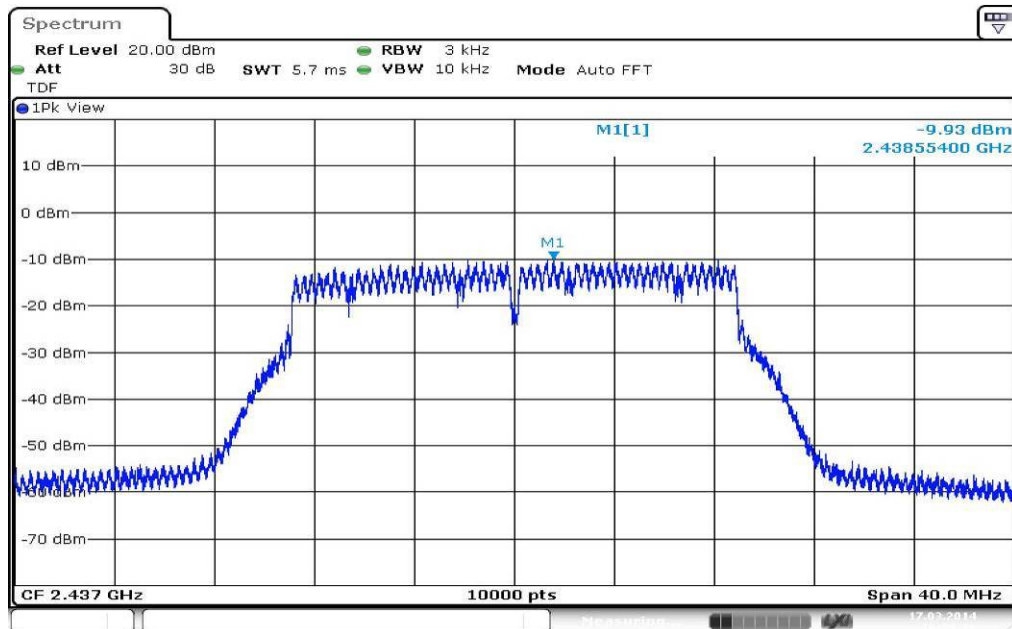

Date: 17.MAR.2014 16:24:39

Plot 3: TX mode, highest channel

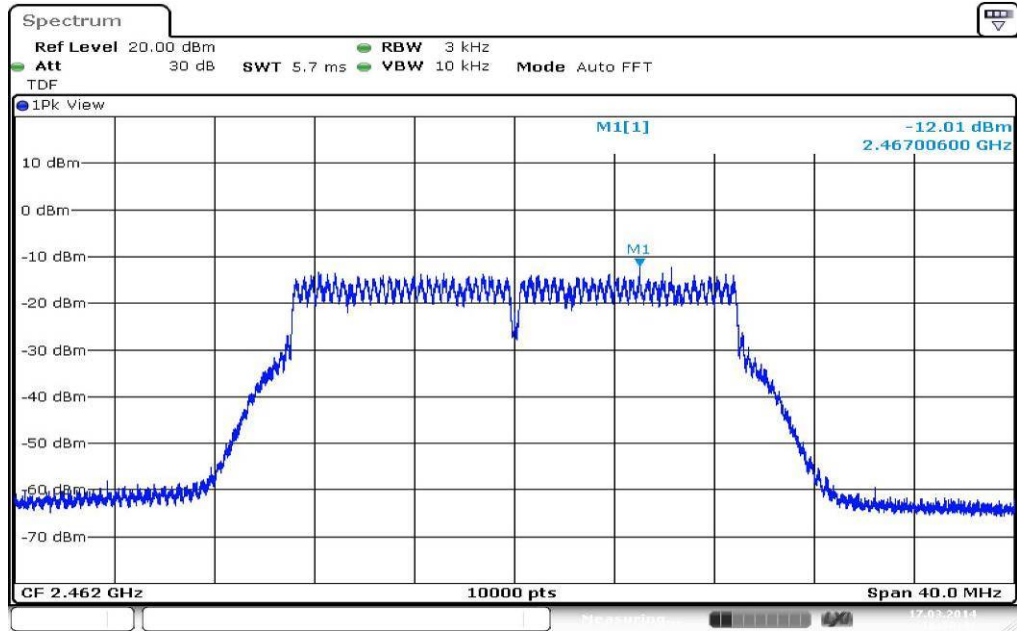

Date: 17.MAR.2014 16:30:43

## 10.5 Spectrum bandwidth – 6 dB

### Description:

Measurement of the 6 dB bandwidth of the modulated signal.

### Measurement:

| Measurement parameter        |   |
|------------------------------|---|
| According to DTS clause: 8.2 |   |
| Detector:                    | Peak  |
| Sweep time:                  | Auto  |
| Resolution bandwidth:        | 100 kHz   |
| Video bandwidth:             | 300 kHz   |
| Span:                        | 40 MHz  |
| Measurement procedure:       | Measurement of the 75% bandwidth using the integration function of the analyzer |
| Trace-Mode:                  | Max hold (allow trace to stabilize)   |

### Limits:

| FCC   |
|---|
| Spectrum Bandwidth – 6 dB   |
| Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band.<br>The minimum 6 dB bandwidth shall be at least 500 kHz. |

### Results:

| Frequency               | 6 dB bandwidth [MHz] |          |          |
|-------------------------|----------------------|----------|----------|
|                         | 2412 MHz             | 2437 MHz | 2462 MHz |
| DSSS / b – mode         | 5.31                 | 5.69     | 5.66     |
| OFDM / g – mode         | 10.75                | 11.81    | 12.39    |
| OFDM / n HT20 – mode    | 11.36                | 12.63    | 13.05    |
| Measurement uncertainty | ± RBW                |          |          |

**Result: Passed**

### 10.6 Occupied bandwidth – 99% emission bandwidth

**Description:**

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

**Measurement:**

| Measurement parameter  |   |
|------------------------|---|
| Detector:              | Peak  |
| Sweep time:            | Auto  |
| Resolution bandwidth:  | 500 kHz   |
| Video bandwidth:       | 3 MHz   |
| Span:                  | 40 MHz  |
| Measurement procedure: | Measurement of the 99% bandwidth using the integration function of the analyzer |
| Trace-Mode:            | Max hold (allow trace to stabilize)   |

**Usage:**

| -/-   | IC |
|---|----|
| Occupied Bandwidth – 99% emission bandwidth |    |
| OBW is necessary for Emission Designator    |    |


**Results:**

| Modulation<br>Frequency | 20 dB bandwidth [MHz] |          |          |
|-------------------------|-----------------------|----------|----------|
|                         | 2412 MHz              | 2437 MHz | 2462 MHz |
| DSSS / b – mode         | 10.59                 | 10.96    | 11.23    |
| OFDM / g – mode         | 17.30                 | 17.67    | 17.66    |
| OFDM / n HT20 – mode    | 18.31                 | 18.29    | 18.72    |
| Measurement uncertainty | ± RBW                 |          |          |

**Result: Passed**

**Plots: DSSS / b – mode**

**Plot 1: TX mode, lowest channel**

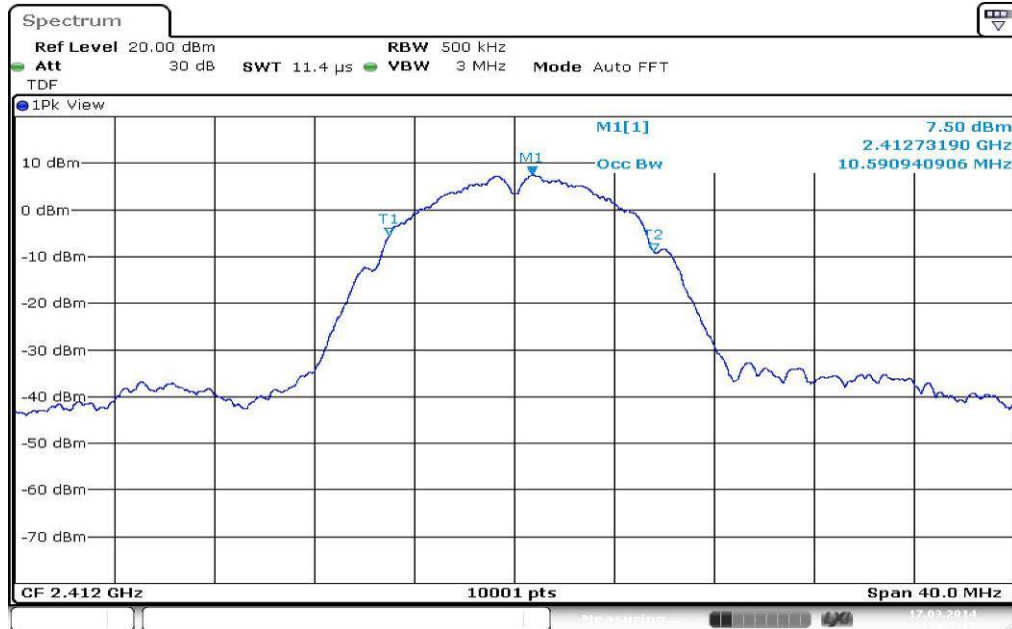

**Plot 2: TX mode, middle channel**





Plot 3: TX mode, highest channel



**Plots: OFDM / g – mode**


**Plot 1: TX mode, lowest channel**



**Plot 2: TX mode, middle channel**



Plot 3: TX mode, highest channel

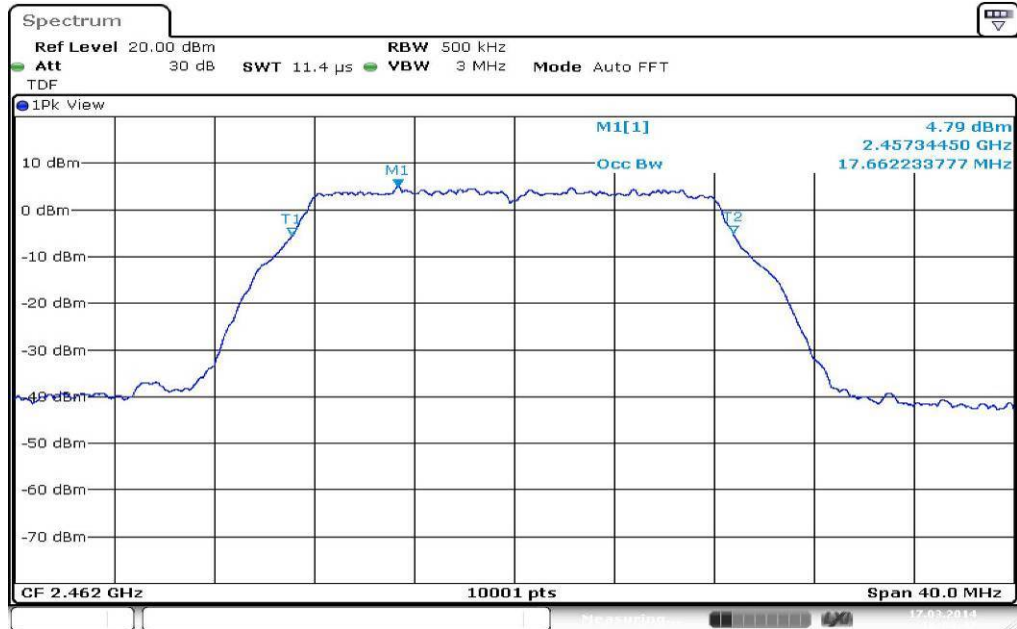

Date: 17.MAR.2014 16:04:47

**Plots: OFDM / n HT20 – mode**


**Plot 1: TX mode, lowest channel**



**Plot 2: TX mode, middle channel**



Plot 3: TX mode, highest channel

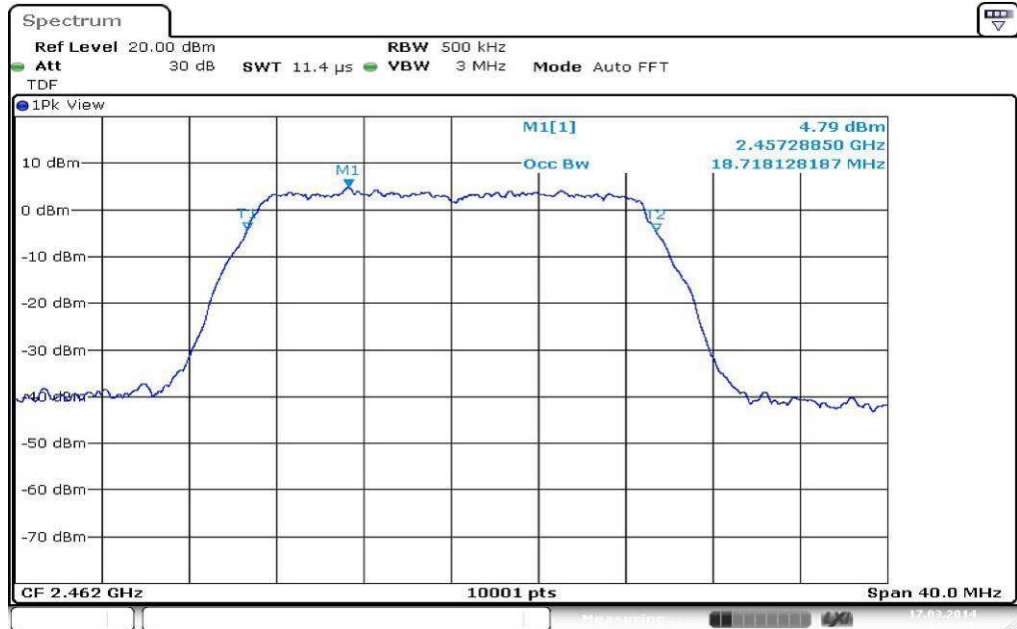

Date: 17.MAR.2014 16:29:54

## 10.7 Band edge compliance conducted

### Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in both modes.

### Measurement:

| Measurement parameter           |  |
|---------------------------------|--|
| According to DTS clause: 13.2.1 |  |
| Detector:                       | Peak   |
| Sweep time:                     | Auto   |
| Resolution bandwidth:           | 100 kHz  |
| Video bandwidth:                | 500 kHz  |
| Span:                           | Lower Band Edge: 2300 – 2425 MHz<br>Upper Band Edge: 2450 – 2550 MHz |
| Trace-Mode:                     | Max hold   |

### Limits:

| FCC   |
|---|
| Band Edge Compliance Conducted  |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. |


### Results:

| Scenario<br>Modulation       | Band Edge Compliance Conducted [dB] |                    |                         |
|------------------------------|-------------------------------------|--------------------|-------------------------|
|                              | DSSS /<br>b – mode                  | OFDM /<br>g – mode | OFDM /<br>n HT20 – mode |
| Lower Band Edge – Channel 1  | > 20 dB                             | > 20 dB            | > 20 dB                 |
| Upper Band Edge – Channel 11 | > 20 dB                             | > 20 dB            | > 20 dB                 |
| Measurement uncertainty      | ± 1.5 dB                            |                    |                         |


**Result:** **Passed**

**Plots: DSSS / b – mode**

**Plot 1: TX mode, lower band edge**

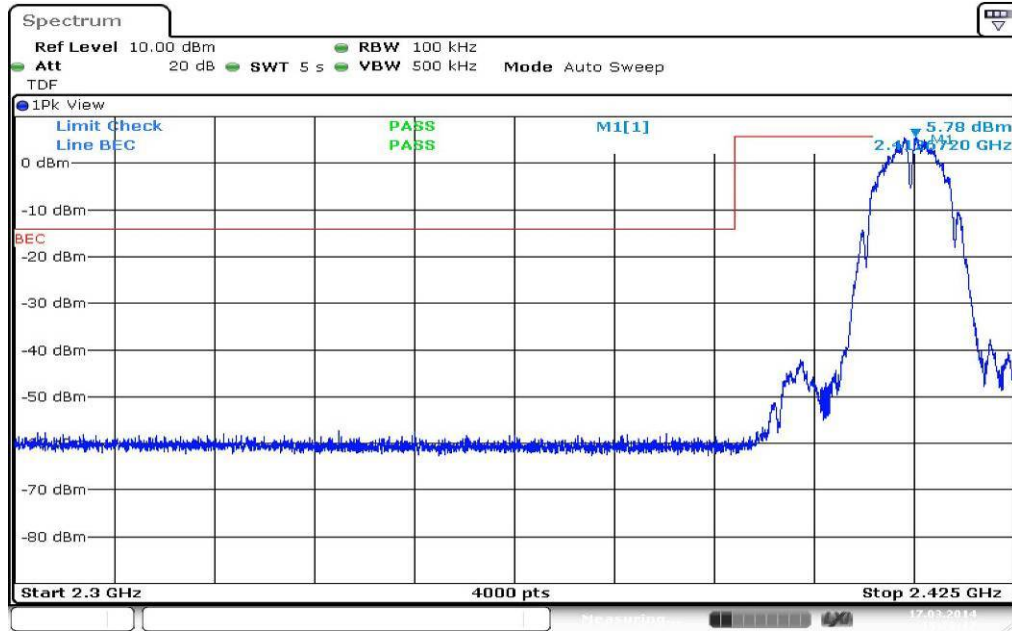


**Plot 2: TX mode, upper band edge**

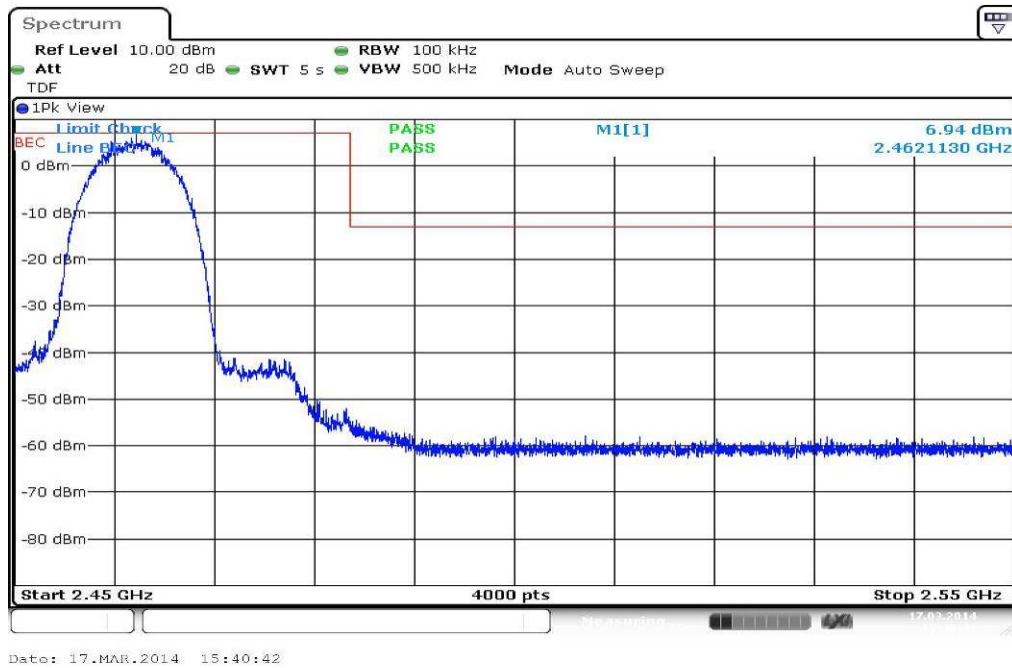


**Plots: OFDM / g – mode**

**Plot 1: TX mode, lower band edge**

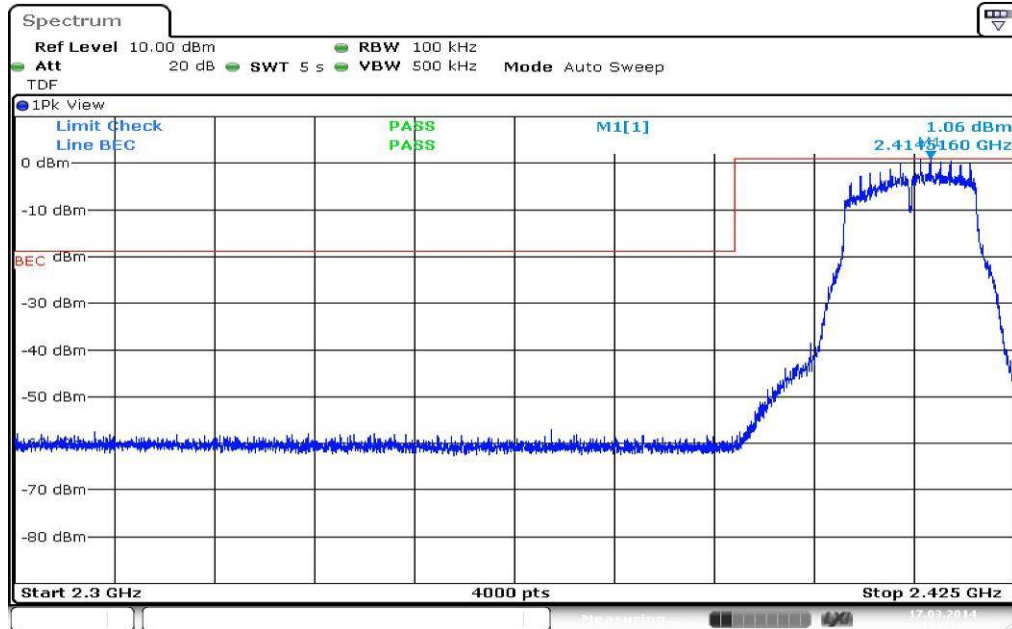


**Plot 2: TX mode, upper band edge**

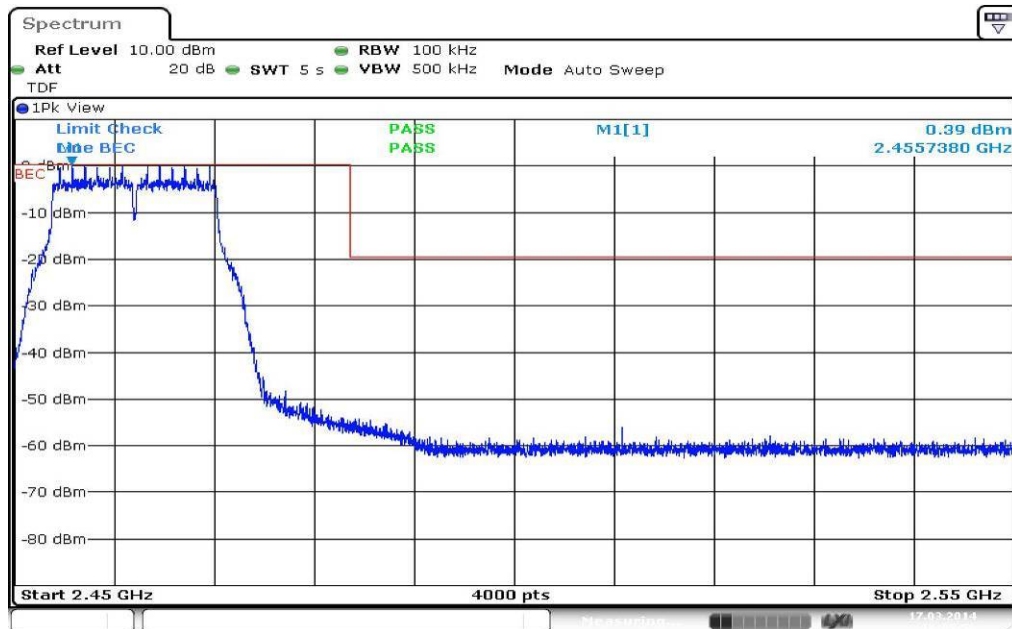




**Plots: OFDM / n HT20 – mode**

**Plot 1: TX mode, lower band edge**

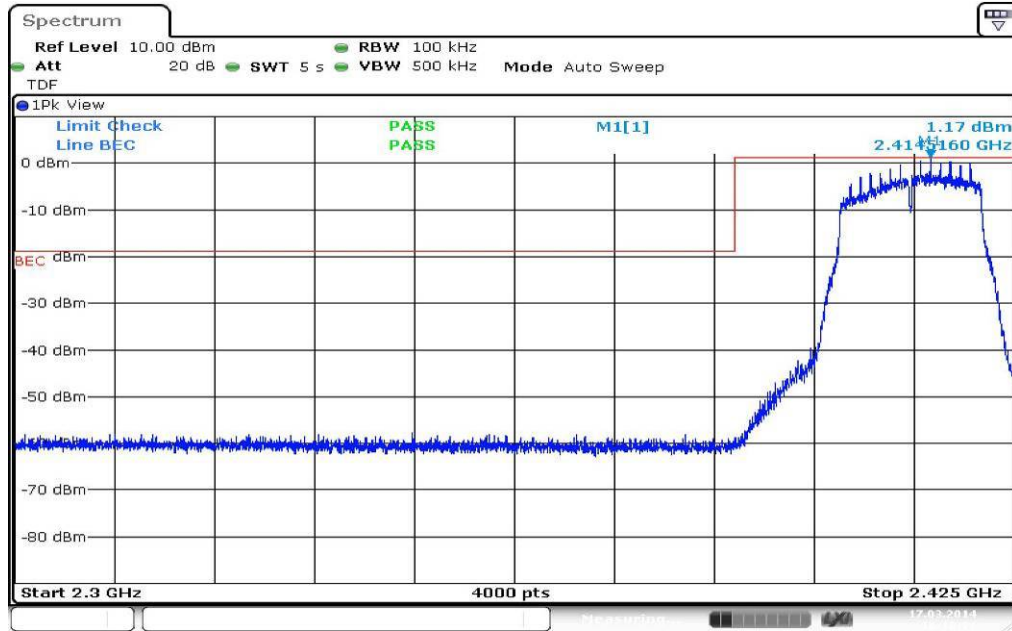

**Plot 2: TX mode, upper band edge**

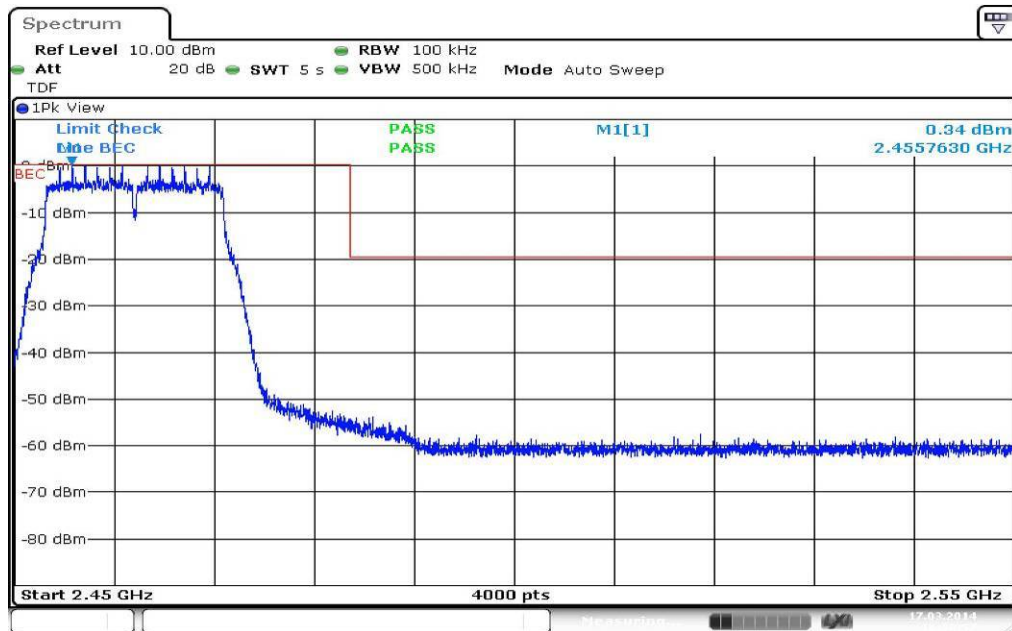

## 10.8 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

### Measurement:

| Measurement parameter |               |
|-----------------------|---------------|
| Detector:             | Peak          |
| Sweep time:           | Auto          |
| Resolution bandwidth: | 1 MHz / 1 MHz |
| Video bandwidth:      | 1 MHz / 10 Hz |
| Span:                 | See plot!     |
| Trace-Mode:           | Max Hold      |

### Limits:

| FCC  |
|--|
| Band Edge Compliance Radiated  |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)). |
| 74 dB $\mu$ V/m Peak<br>54 dB $\mu$ V/m AVG  |

### Results:


| Scenario                     | Band Edge Compliance Conducted [dB] |                                 |                                 |
|------------------------------|-------------------------------------|---------------------------------|---------------------------------|
|                              | DSSS /<br>b – mode                  | OFDM /<br>g – mode              | OFDM /<br>n HT20 – mode         |
| Lower Band Edge – Channel 1  | > 20 dB (Peak)<br>> 20 dB (AVG)     | > 10 dB (Peak)<br>> 20 dB (AVG) | > 10 dB (Peak)<br>> 20 dB (AVG) |
| Upper Band Edge – Channel 11 | > 20 dB (Peak)<br>> 20 dB (AVG)     | > 10 dB (Peak)<br>> 20 dB (AVG) | > 10 dB (Peak)<br>> 20 dB (AVG) |
| Measurement uncertainty      | ± 3 dB                              |                                 |                                 |

Result: **Passed**

**Plots: DSSS/ b – mode peak / average**


**Plot 1: TX mode, lower band edge, 1MB, vertical & horizontal polarization**

00431\_BE\_Low\_SM1\_KP1\_WLAN\_1ms

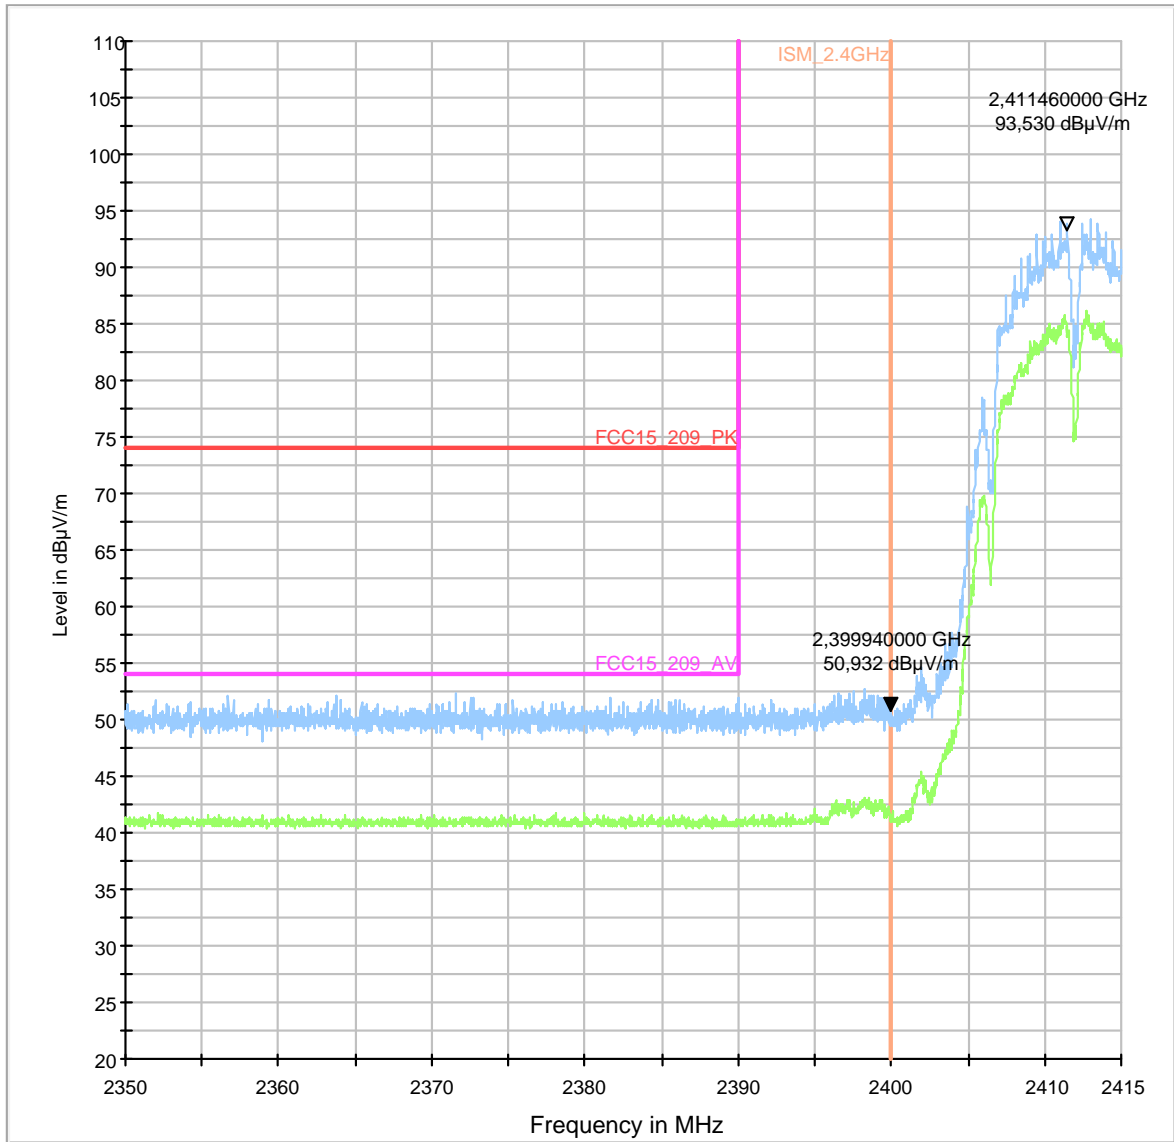


Plot 2: TX mode, lower band edge, 11MB, vertical & horizontal polarization


00431\_BE\_Low\_SM1\_KP1\_WLAN\_1ms

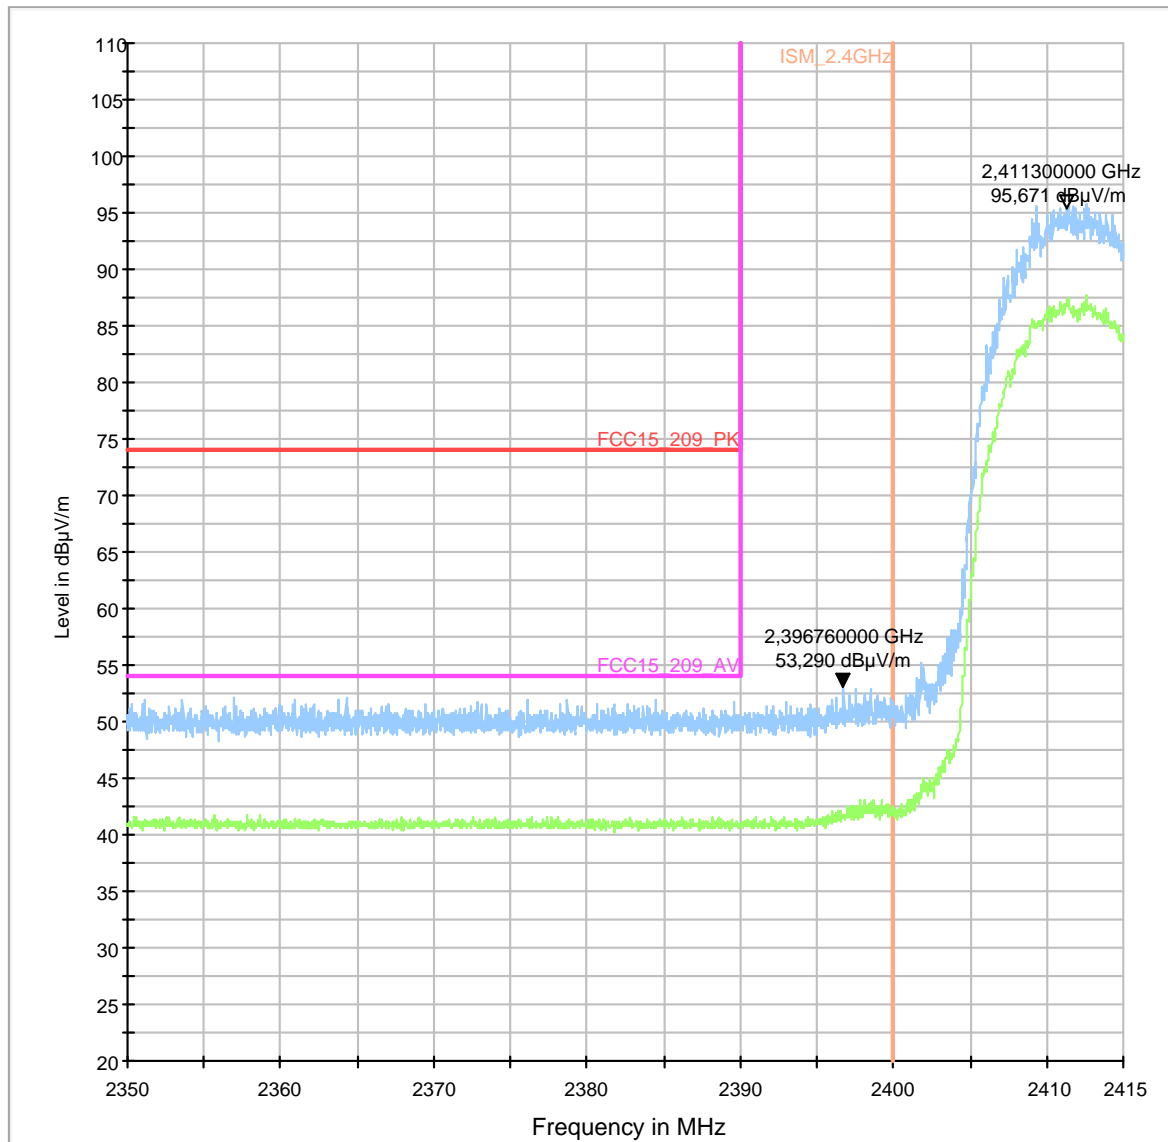

Plot 3: TX mode, upper band edge, 1MB, vertical & horizontal polarization

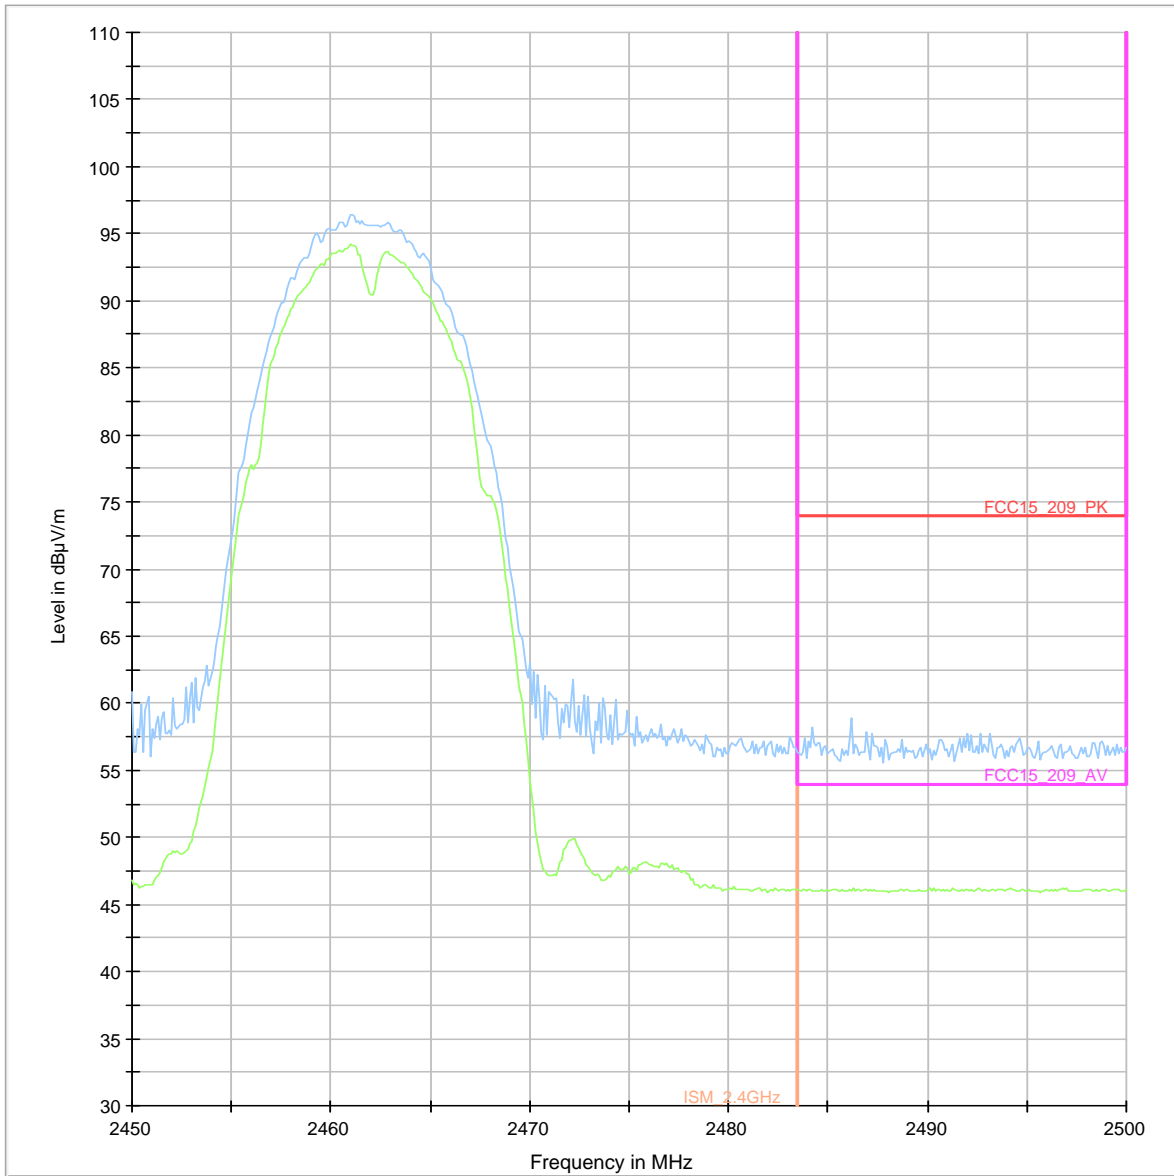


Plot 4: TX mode, upper band edge, 11MB, vertical & horizontal polarization

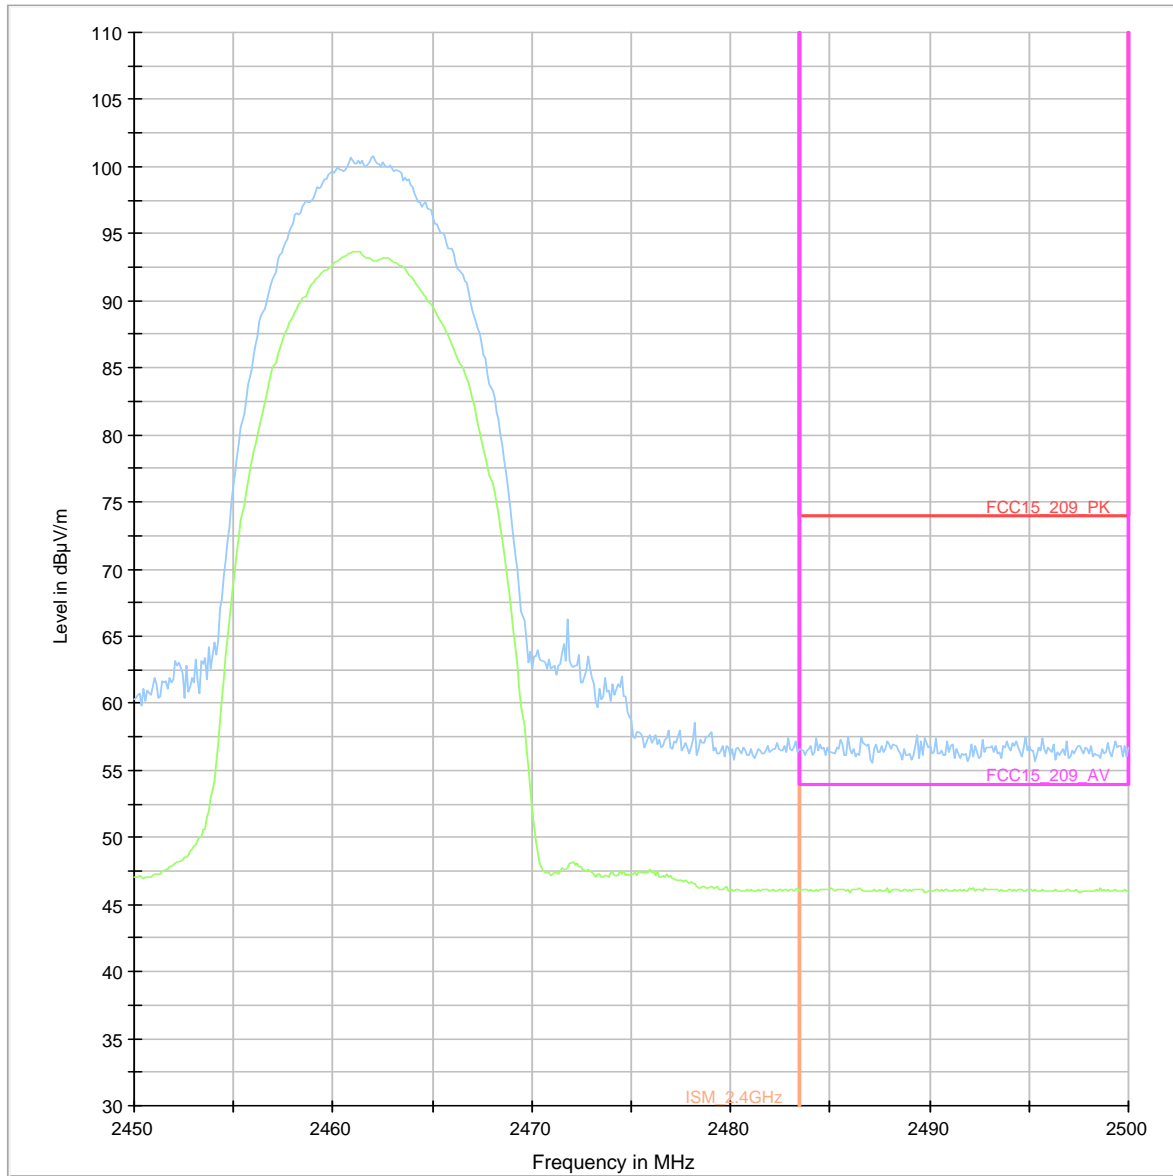


**Plots: OFDM / g – mode peak / average**

**Plot 1: TX mode, lower band edge, 6MB, vertical & horizontal polarization**

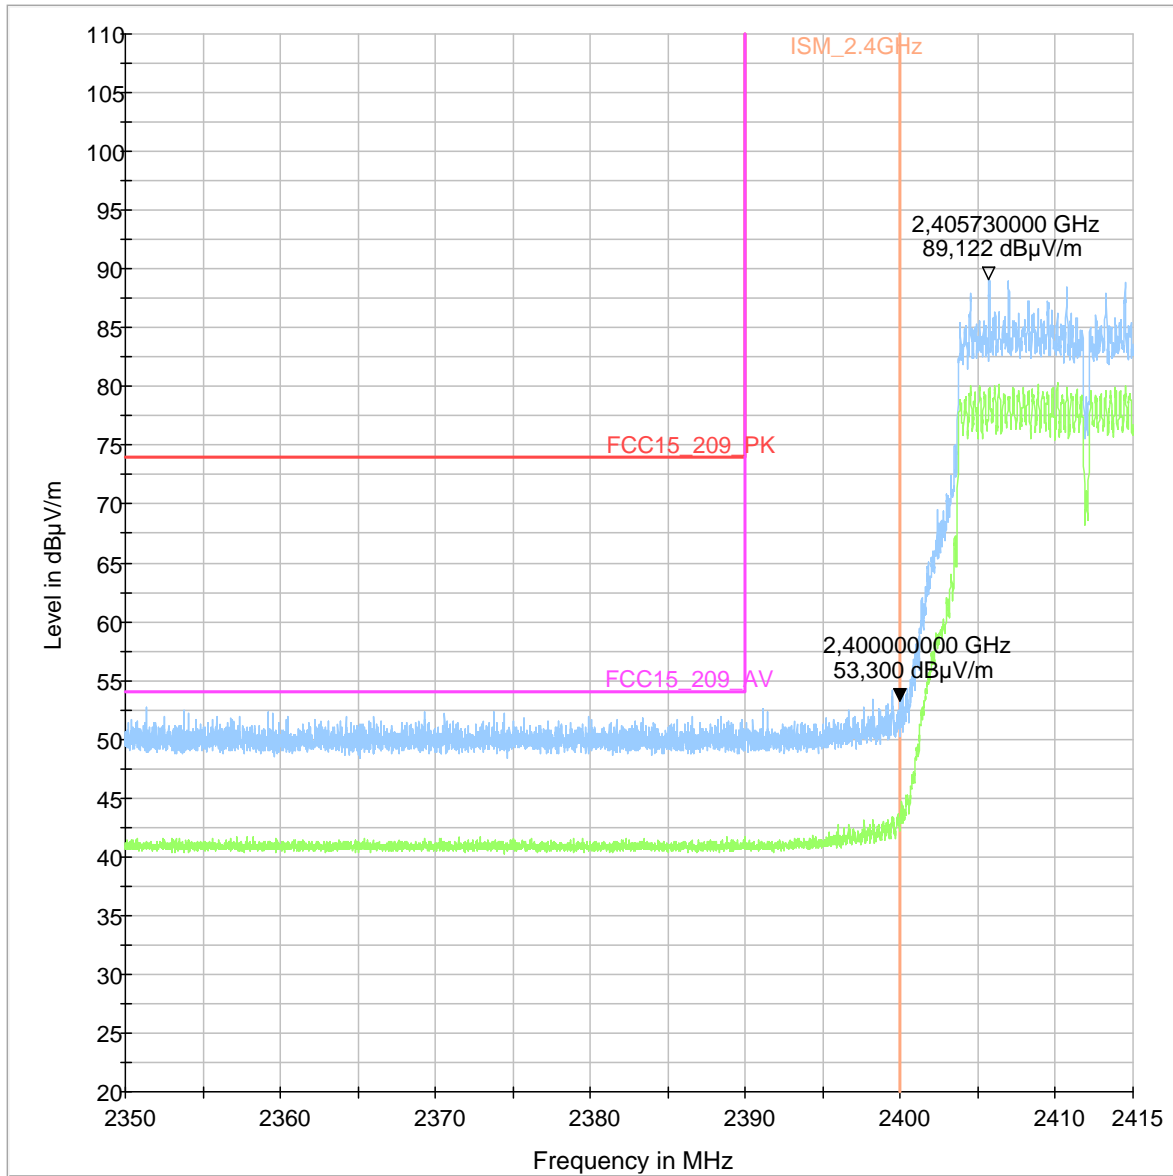


Plot 2: TX mode, lower band edge, 54MB, vertical & horizontal polarization

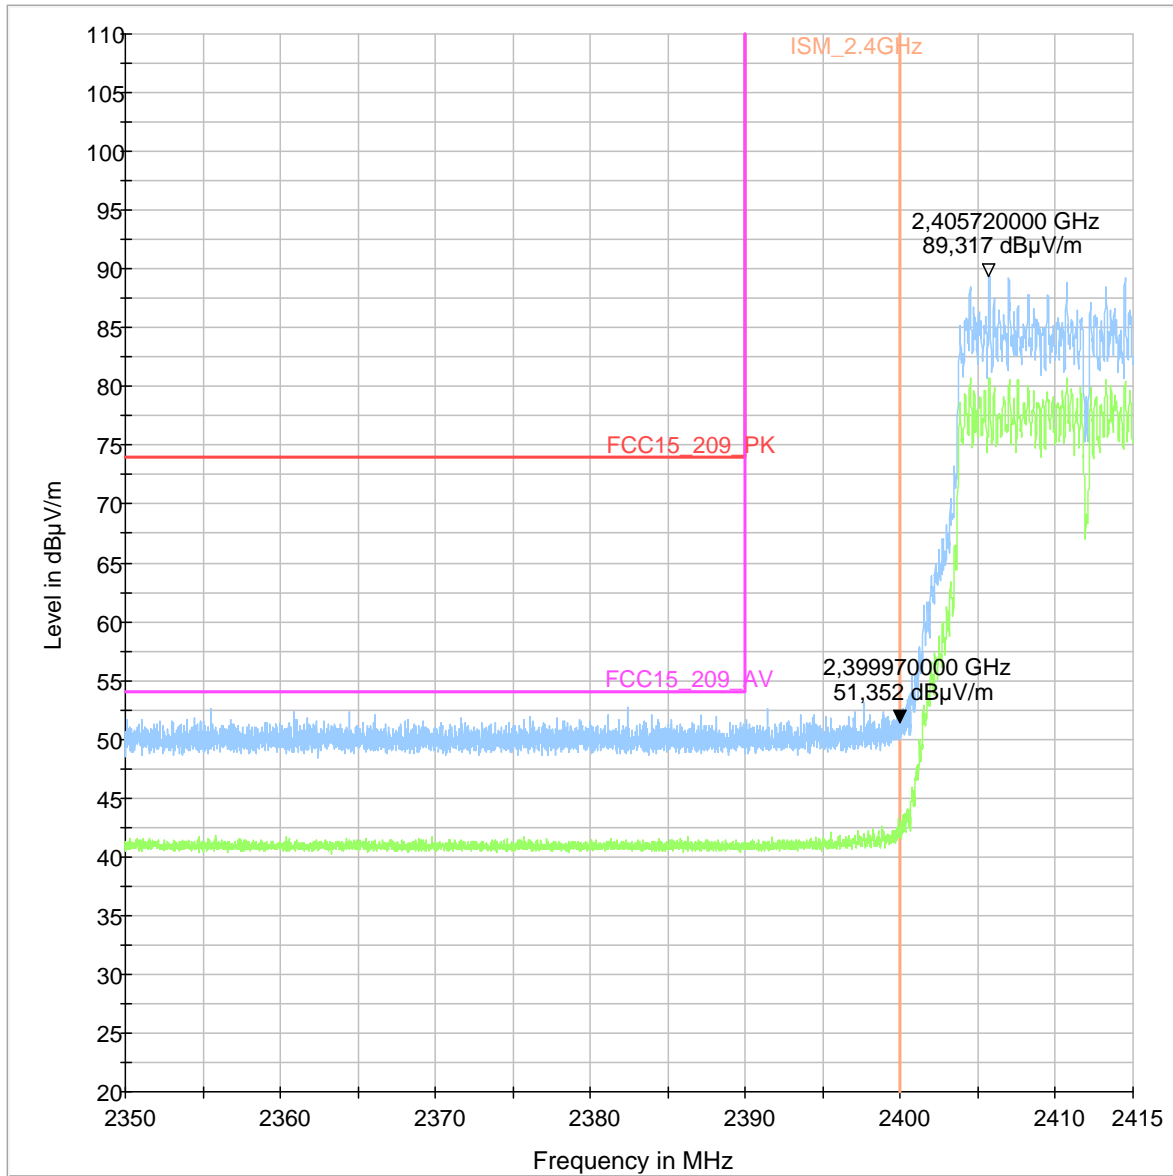




Plot 3: TX mode, upper band edge, 6MB, vertical & horizontal polarization

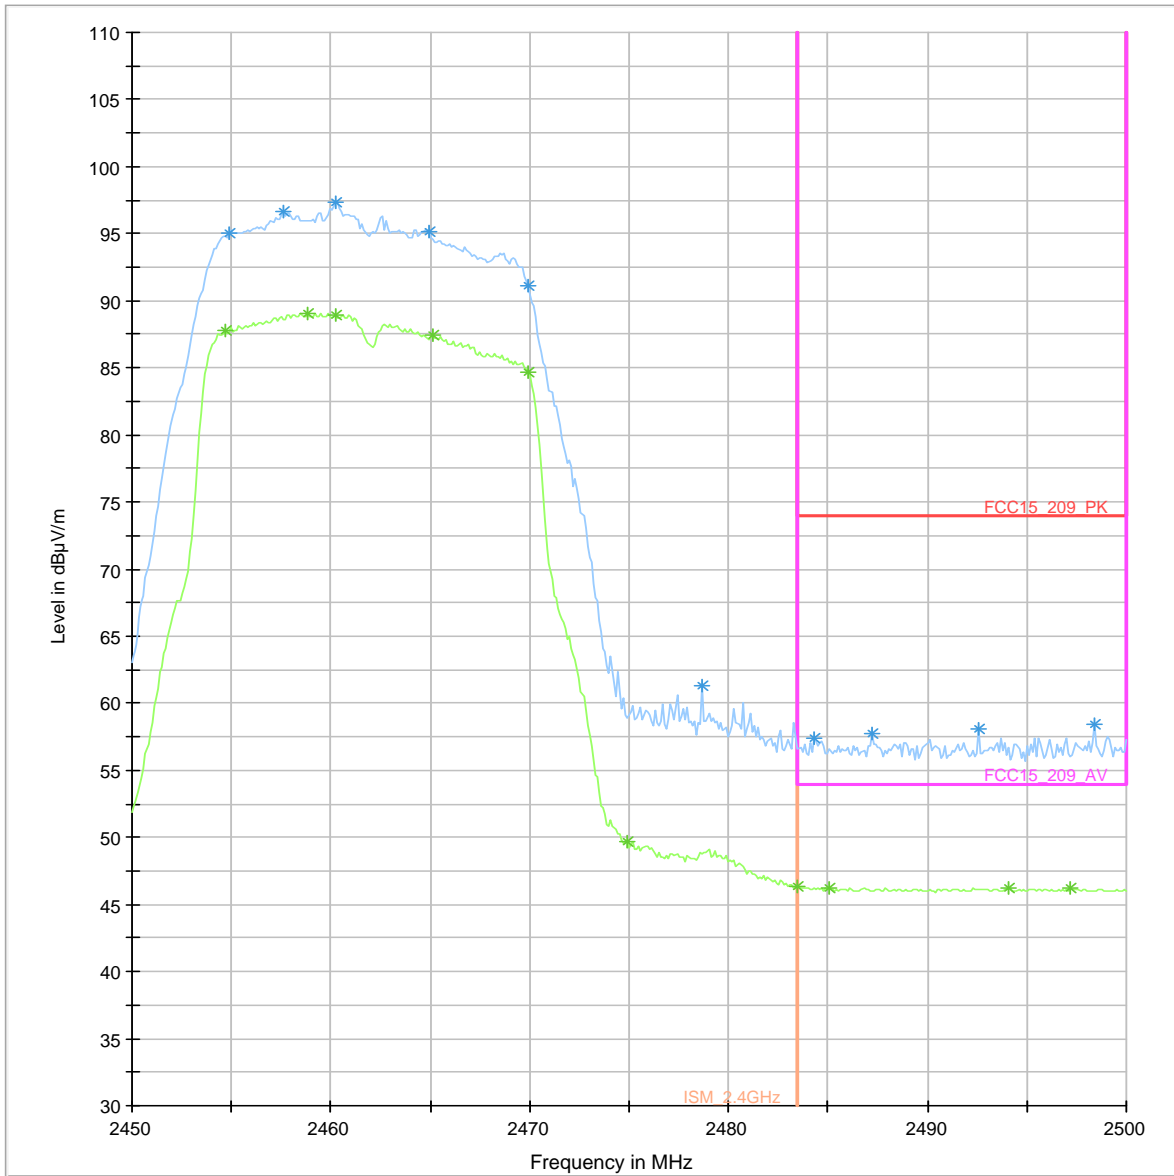


Plot 4: TX mode, upper band edge, 54MB, vertical & horizontal polarization

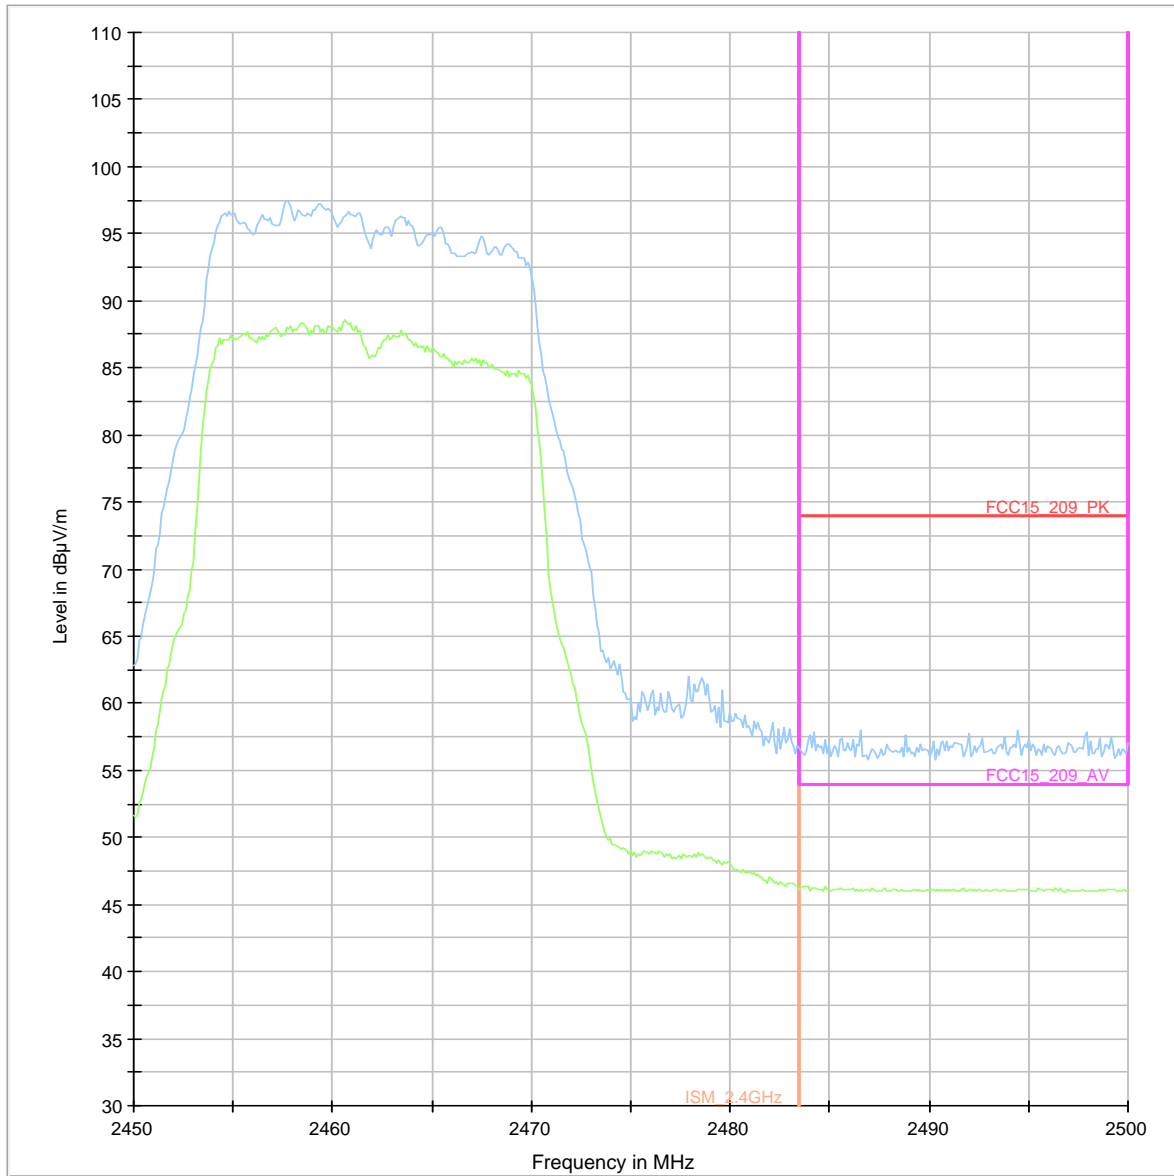


**Plots: OFDM / n HT20 – mode peak / average**


**Plot 1: TX mode, n-mode, MCS0, lower band edge, vertical & horizontal polarization**

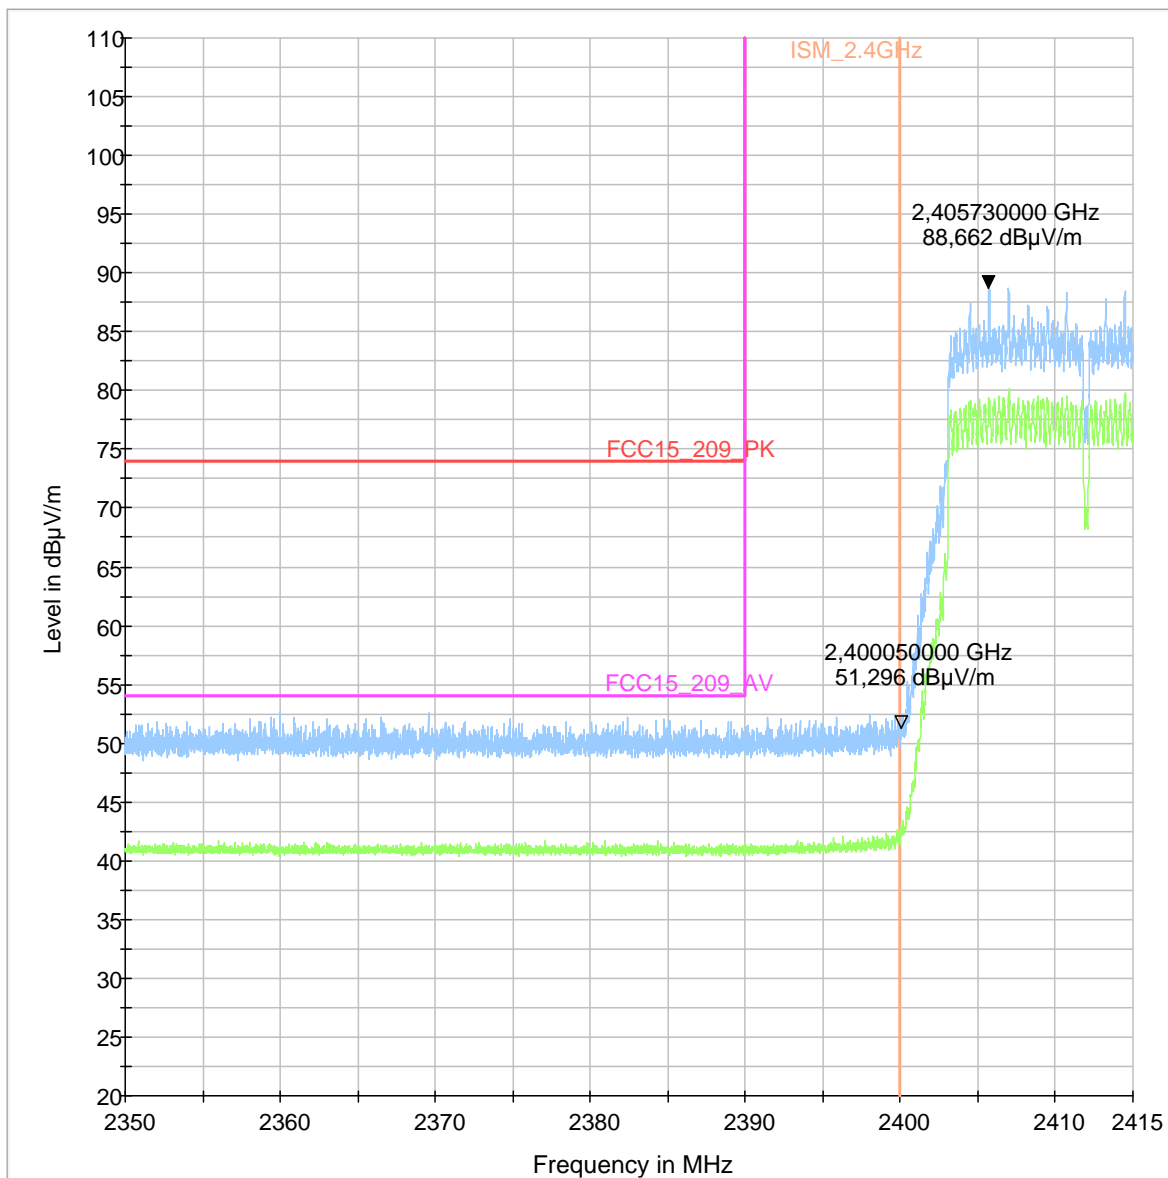


Plot 2: TX mode, n-mode, MCS3, lower band edge, vertical & horizontal polarization

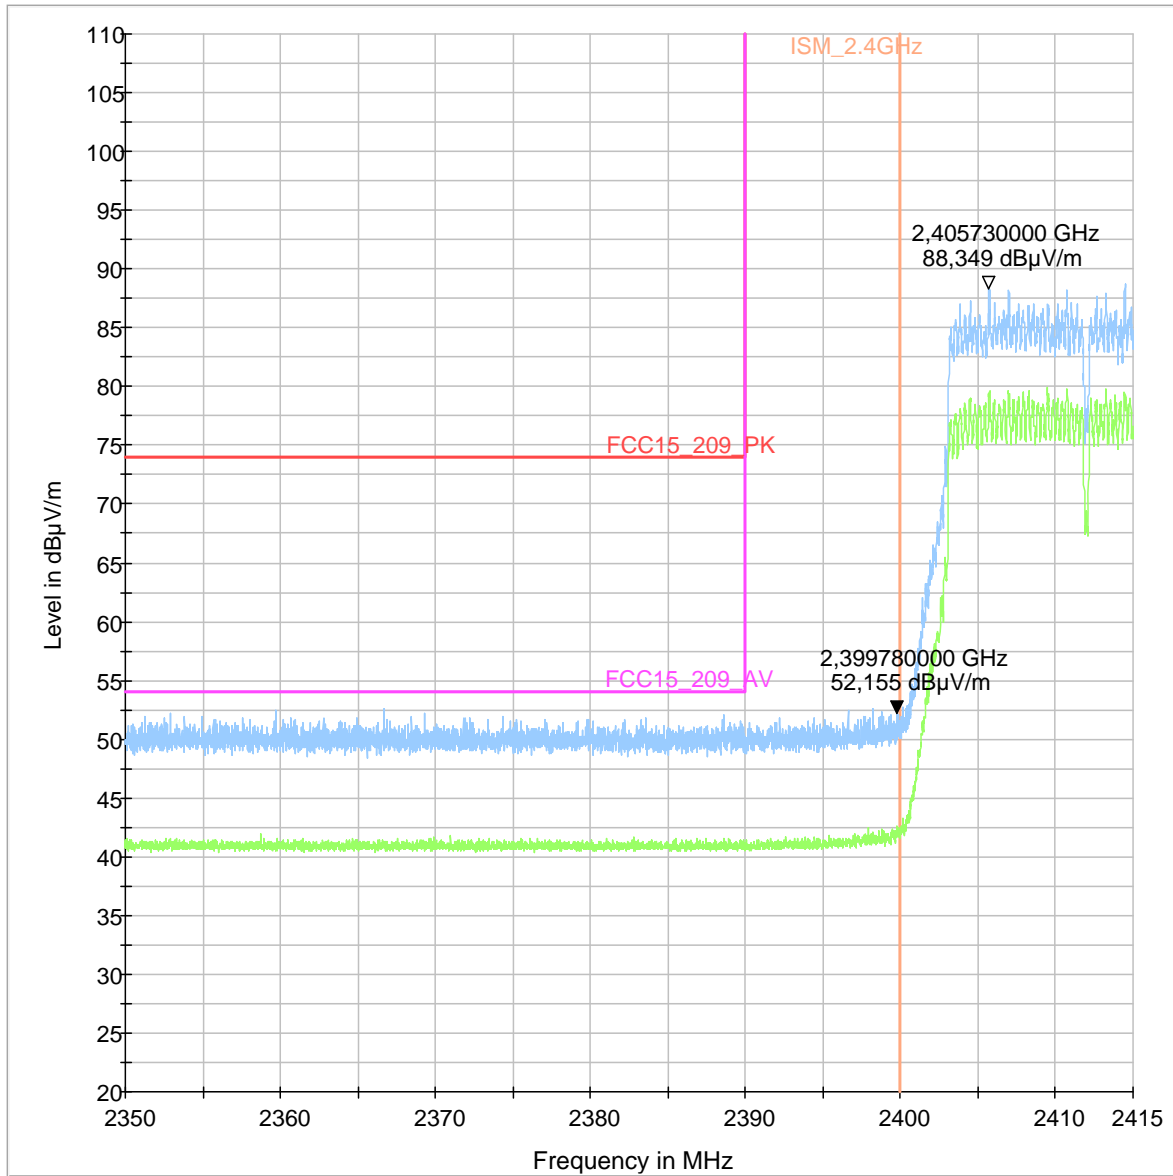

Plot 3: TX mode, n-mode, MCS7, lower band edge, vertical & horizontal polarization

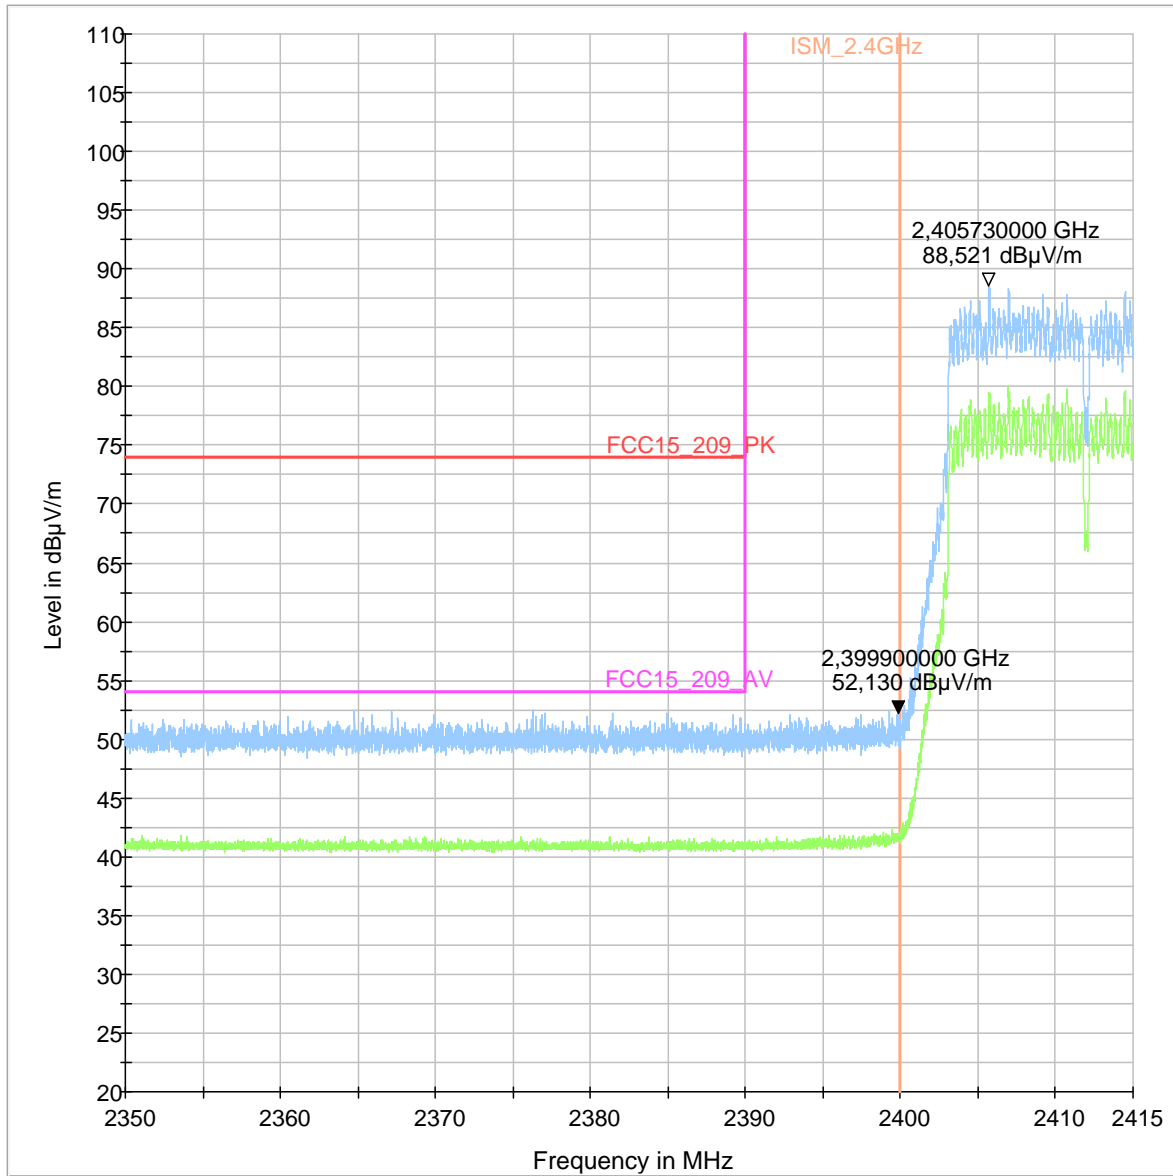


Plot 4: TX mode, n-mode, MCS0, upper band edge, vertical & horizontal polarization

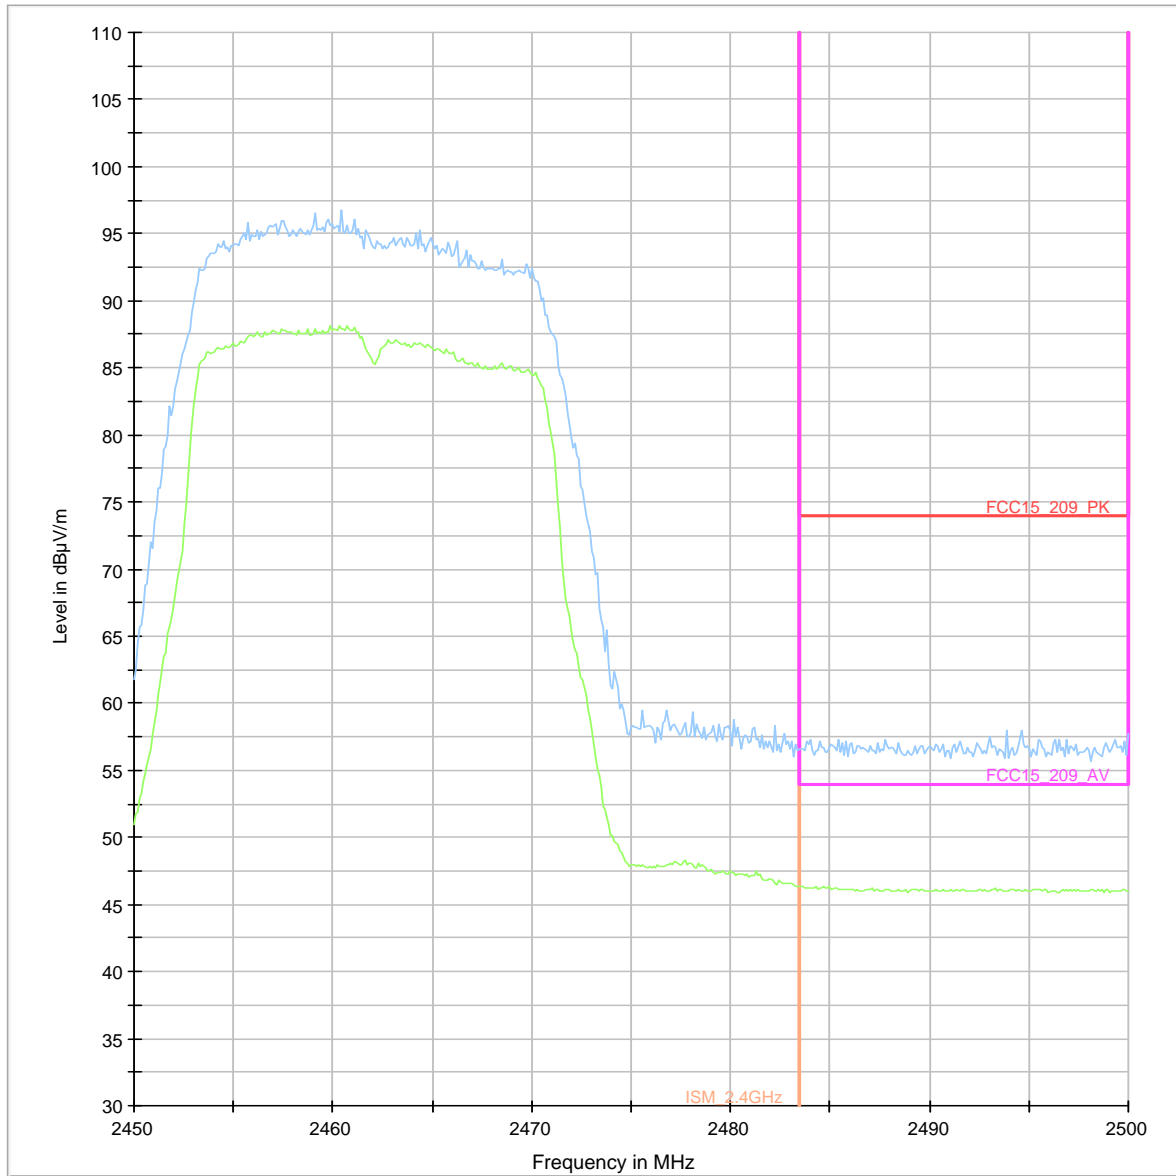

**Plot 5:** TX mode, n-mode, MCS3, upper band edge, vertical & horizontal polarization

Carrier\_measurement\_SM1\_PA0\_KP1\_WLAN

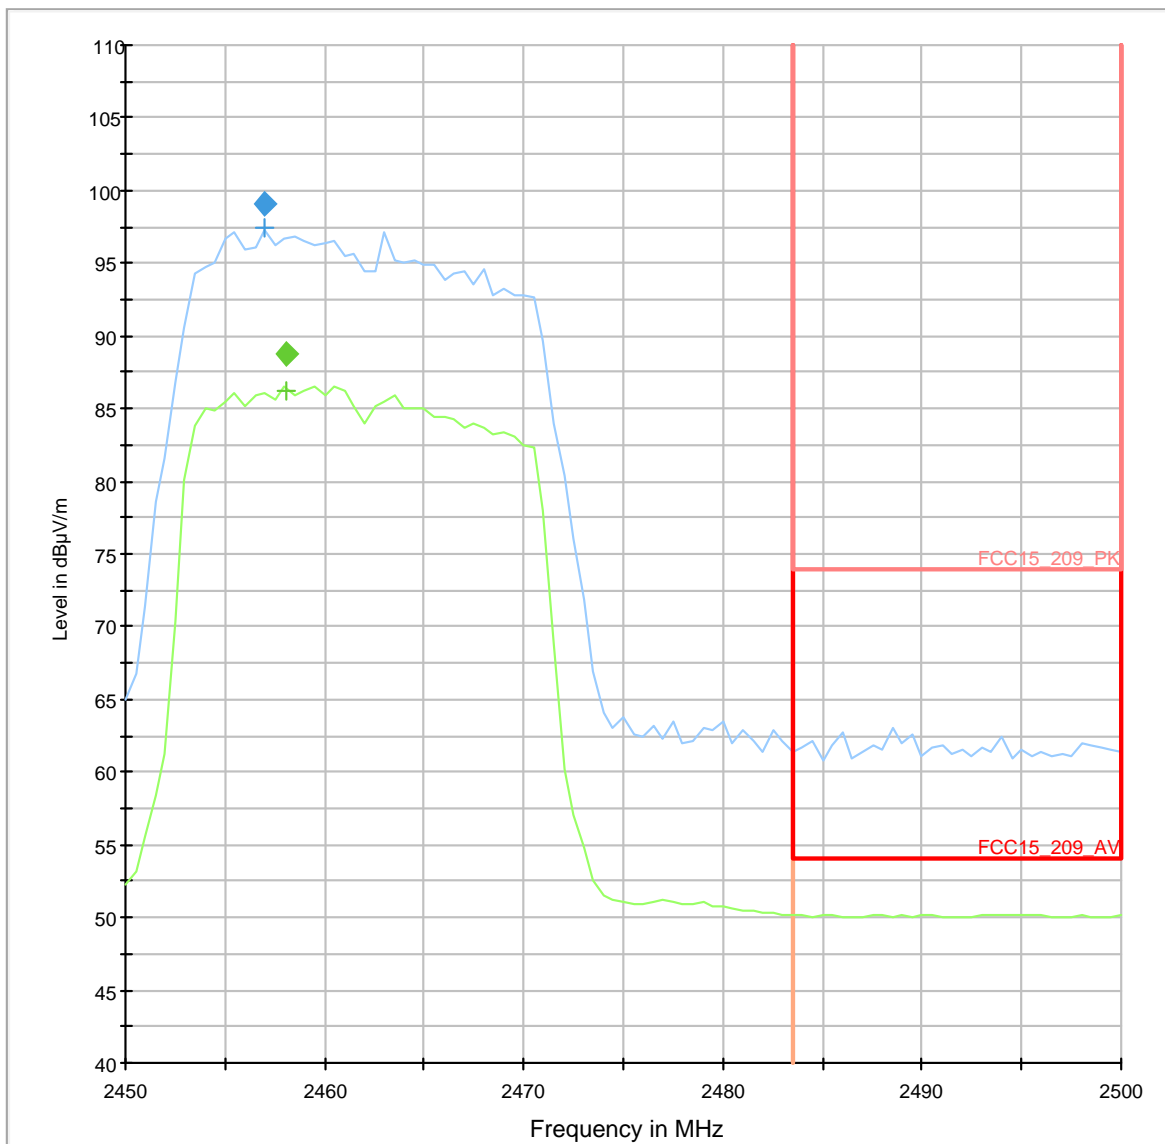

**Final Result 1**

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Elevation (deg) | Corr. (dB) | Comment |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|-----------------|------------|---------|
| 2457.00000      | 99.1             | 100.0           | 1000.000        | 155.        | H            | 36.0          | 0.0             | 35.6       |         |

**Final Result 2**

| Frequency (MHz) | Average (dBµV/m) | Meas. Time | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Elevation (deg) | Corr. (dB) | Comment |
|-----------------|------------------|------------|-----------------|-------------|--------------|---------------|-----------------|------------|---------|
| 2458.10000      | 88.8             | 100.0      | 1000.000        | 155.        | V            | 141.0         | 90.0            | 35.6       |         |

## 10.9 TX spurious emissions conducted

### Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

### Measurement:

| Measurement parameter |                 |
|-----------------------|-----------------|
| Detector:             | Peak            |
| Sweep time:           | Auto            |
| Resolution bandwidth: | 100 kHz         |
| Video bandwidth:      | 500 kHz         |
| Span:                 | 9 kHz to 25 GHz |
| Trace-Mode:           | Max Hold        |

### Limits:

| FCC   | IC |
|---|----|
| TX Spurious Emissions Conducted   |    |
| <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required</p> |    |



**Results: DSSS / b – mode**

| TX Spurious Emissions Conducted   |  |                             |                                     |  |                     |
|---|--|-----------------------------|-------------------------------------|--|---------------------|
| DSSS / b – mode   |  |                             |                                     |  |                     |
| f [MHz]   |  | amplitude of emission [dBm] | limit max. allowed emission power   | actual attenuation below frequency of operation [dB] | results             |
| 2412  |  | 6.3                         | 30 dBm                              |  | Operating frequency |
| No peaks detected. All detected emissions are below the -20 dBc criteria. |  |                             | -20 dBc (peak)<br>-30 dBc (average) |  | complies            |
|   |  |                             |                                     |  |                     |
| 2437  |  | 9.2                         | 30 dBm                              |  | Operating frequency |
| No peaks detected. All detected emissions are below the -20 dBc criteria. |  |                             | -20 dBc (peak)<br>-30 dBc (average) |  | complies            |
|   |  |                             |                                     |  |                     |
| 2462  |  | 5.7                         | 30 dBm                              |  | Operating frequency |
| No peaks detected. All detected emissions are below the -20 dBc criteria. |  |                             | -20 dBc (peak)<br>-30 dBc (average) |  | complies            |
|   |  |                             |                                     |  |                     |
| Measurement uncertainty   |  | ± 3 dB                      |                                     |  |                     |

**Result: Passed**

**Results: OFDM / g – mode**

| TX Spurious Emissions Conducted   |  |                             |                                     |  |                     |
|---|--|-----------------------------|-------------------------------------|--|---------------------|
| OFDM / g – mode   |  |                             |                                     |  |                     |
| f [MHz]   |  | amplitude of emission [dBm] | limit max. allowed emission power   | actual attenuation below frequency of operation [dB] | results             |
| 2412  |  | 1.0                         | 30 dBm                              |  | Operating frequency |
| No peaks detected. All detected emissions are below the -20 dBc criteria. |  |                             | -20 dBc (peak)<br>-30 dBc (average) |  | complies            |
|   |  |                             |                                     |  |                     |
| 2437  |  | 4.1                         | 30 dBm                              |  | Operating frequency |
| No peaks detected. All detected emissions are below the -20 dBc criteria. |  |                             | -20 dBc (peak)<br>-30 dBc (average) |  | complies            |
|   |  |                             |                                     |  |                     |
| 2462  |  | 0.2                         | 30 dBm                              |  | Operating frequency |
| No peaks detected. All detected emissions are below the -20 dBc criteria. |  |                             | -20 dBc (peak)<br>-30 dBc (average) |  | complies            |
|   |  |                             |                                     |  |                     |
| Measurement uncertainty   |  | ± 3 dB                      |                                     |  |                     |

**Result: Passed**


**Results: OFDM / n HT20 – mode**

| TX Spurious Emissions Conducted   |  |                             |                                     |  |                     |
|---|--|-----------------------------|-------------------------------------|--|---------------------|
| OFDM / n HT20 – mode  |  |                             |                                     |  |                     |
| f [MHz]   |  | amplitude of emission [dBm] | limit max. allowed emission power   | actual attenuation below frequency of operation [dB] | results             |
| 2412  |  | 0.4                         | 30 dBm                              |  | Operating frequency |
| No peaks detected. All detected emissions are below the -20 dBc criteria. |  |                             | -20 dBc (peak)<br>-30 dBc (average) |  | complies            |
|   |  |                             |                                     |  |                     |
| 2437  |  | 4.1                         | 30 dBm                              |  | Operating frequency |
| No peaks detected. All detected emissions are below the -20 dBc criteria. |  |                             | -20 dBc (peak)<br>-30 dBc (average) |  | complies            |
|   |  |                             |                                     |  |                     |
| 2462  |  | 0.0                         | 30 dBm                              |  | Operating frequency |
| No peaks detected. All detected emissions are below the -20 dBc criteria. |  |                             | -20 dBc (peak)<br>-30 dBc (average) |  | complies            |
|   |  |                             |                                     |  |                     |
| Measurement uncertainty   |  | ± 3 dB                      |                                     |  |                     |

**Result: Passed**


**Plots: DSSS / b – mode**

**Plot 1: TX mode, lowest channel, up to 25 GHz**

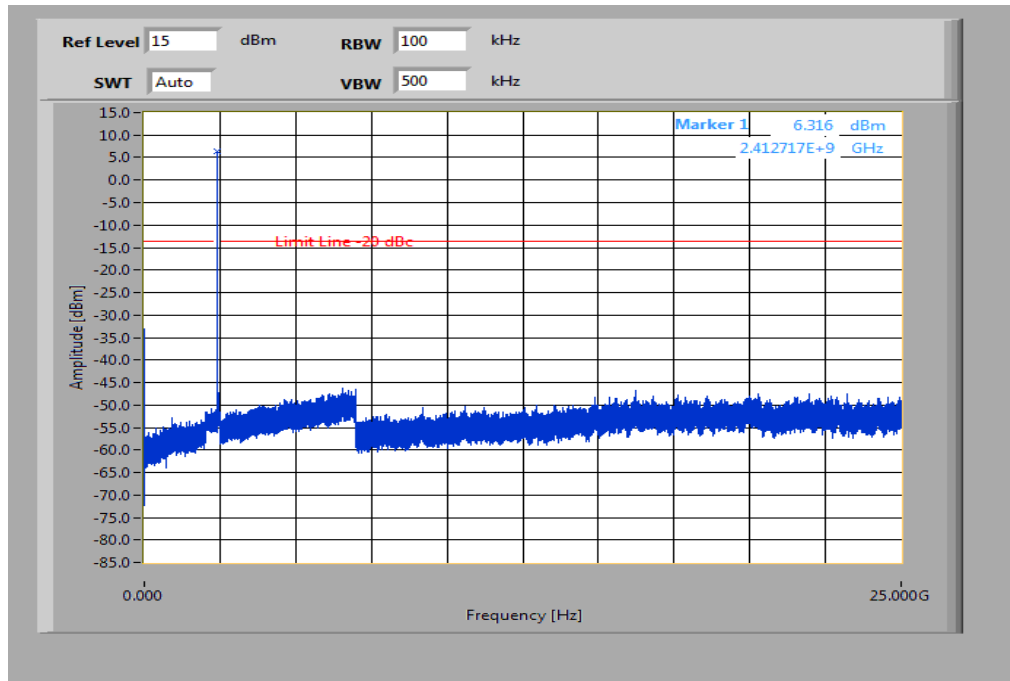


The peak at the beginning of the plot is the LO from the SA.

**Plot 2: TX mode, middle channel, up to 25 GHz**

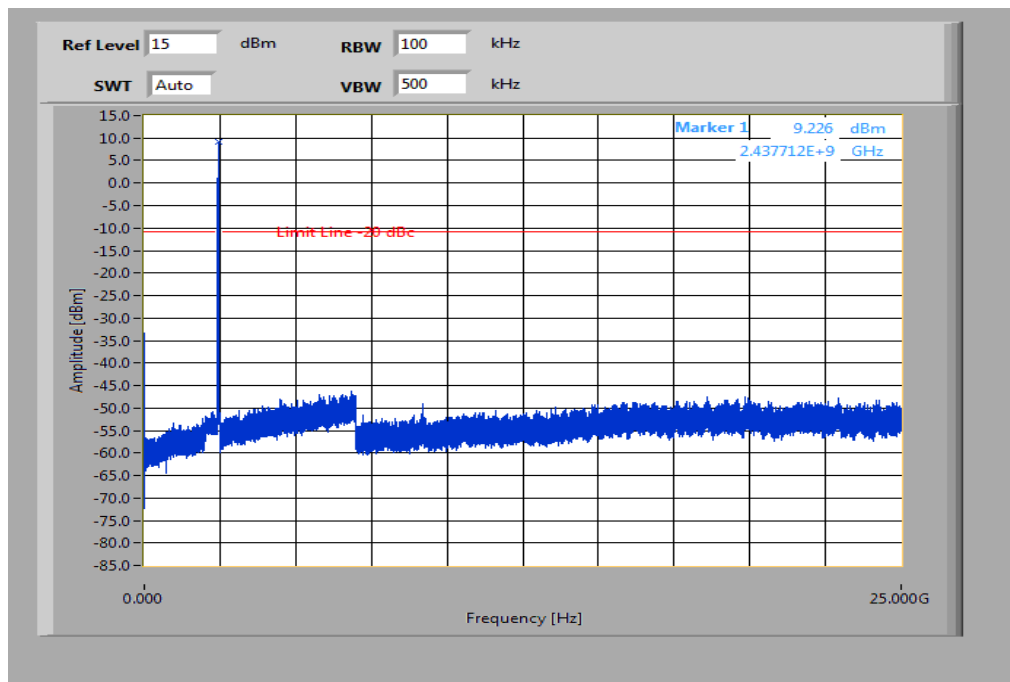

The peak at the beginning of the plot is the LO from the SA.


**Plot 3:** TX mode, highest channel, up to 25 GHz

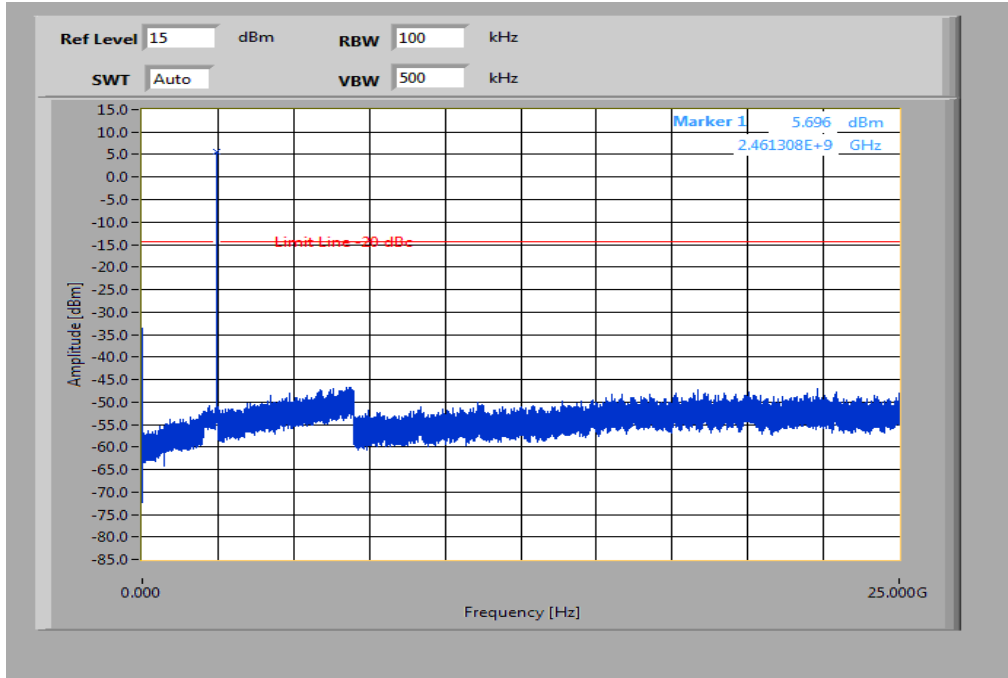

The peak at the beginning of the plot is the LO from the SA.


**Plots: OFDM / g – mode**

**Plot 1: TX mode, lowest channel, up to 25 GHz**

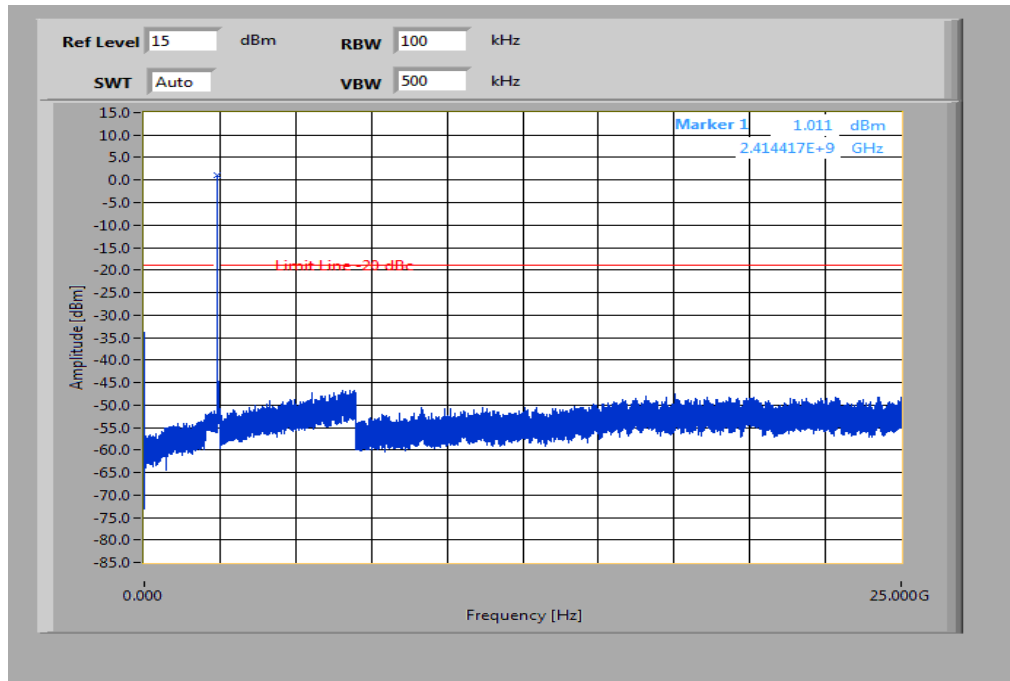


The peak at the beginning of the plot is the LO from the SA.

**Plot 2: TX mode, middle channel, up to 25 GHz**

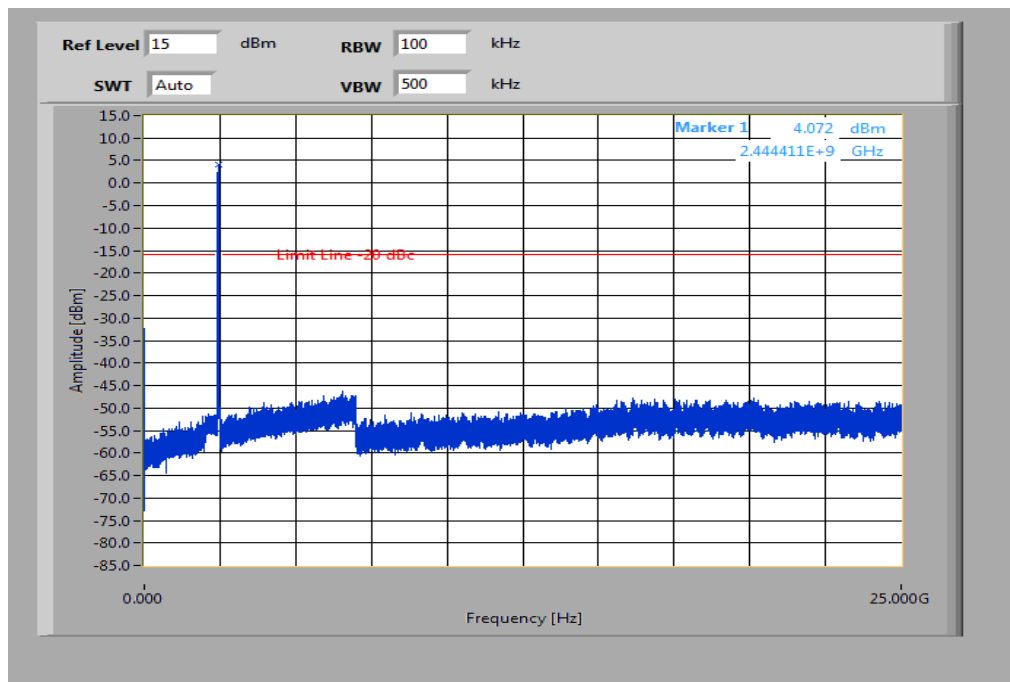

The peak at the beginning of the plot is the LO from the SA.


Plot 3: TX mode, highest channel, up to 25 GHz

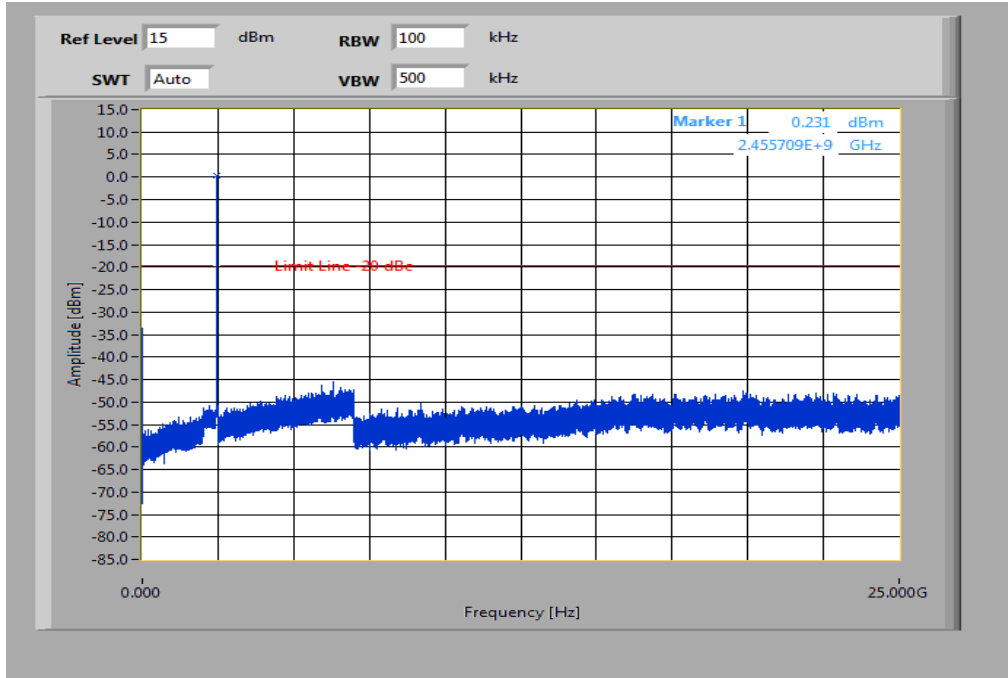

The peak at the beginning of the plot is the LO from the SA.


**Plots: OFDM / n – mode**

**Plot 1: TX mode, lowest channel, up to 25 GHz**

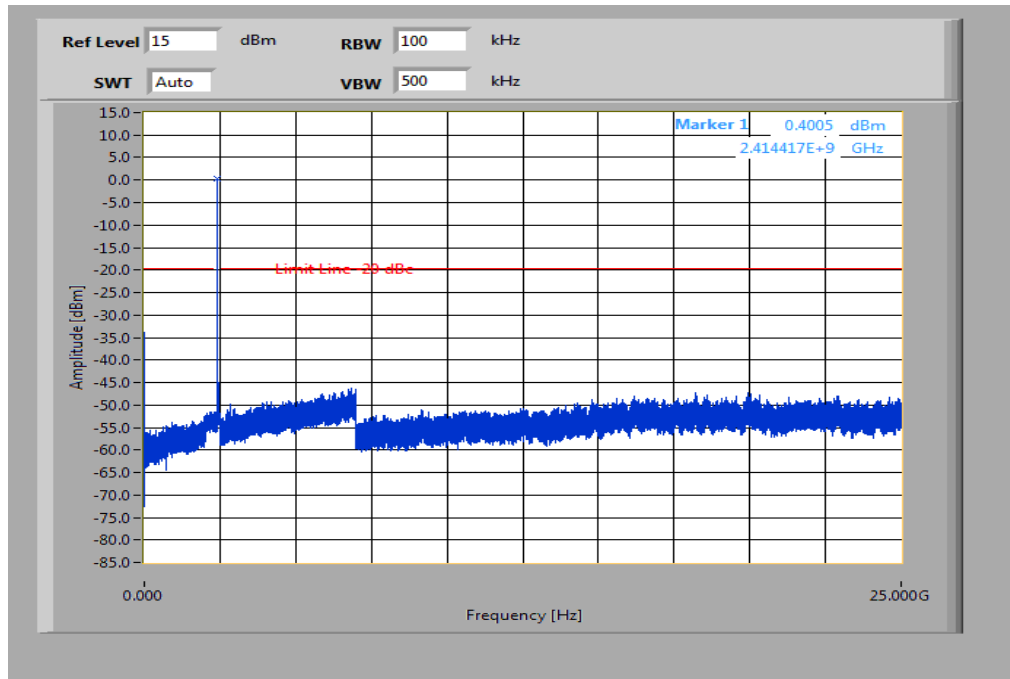


The peak at the beginning of the plot is the LO from the SA.

**Plot 2: TX mode, middle channel, up to 25 GHz**

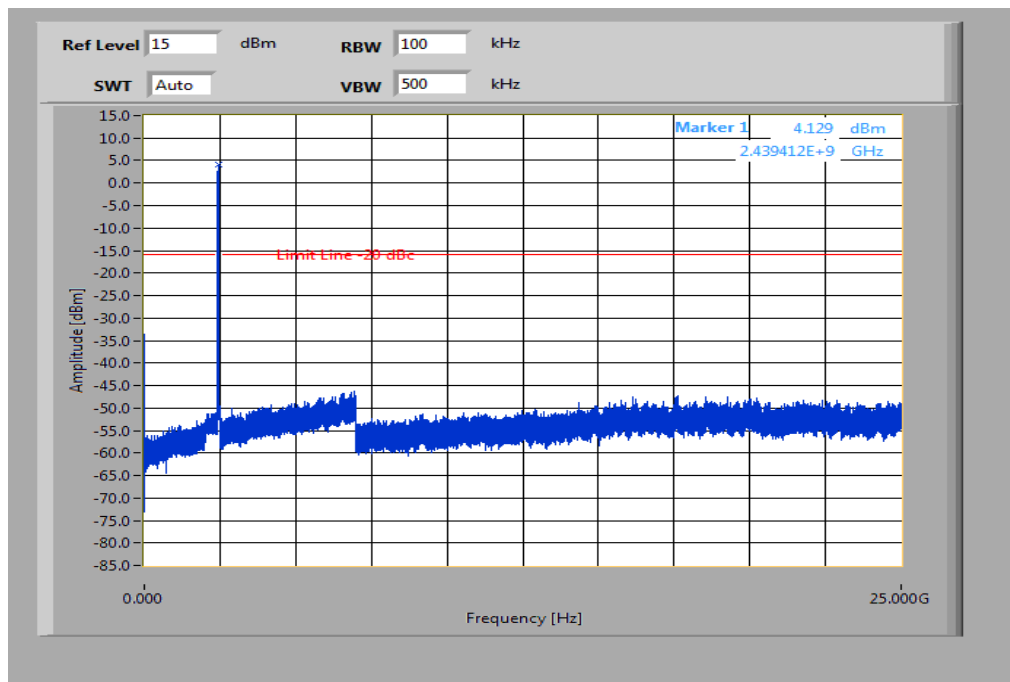

The peak at the beginning of the plot is the LO from the SA.

Plot 3: TX mode, highest channel, up to 25 GHz

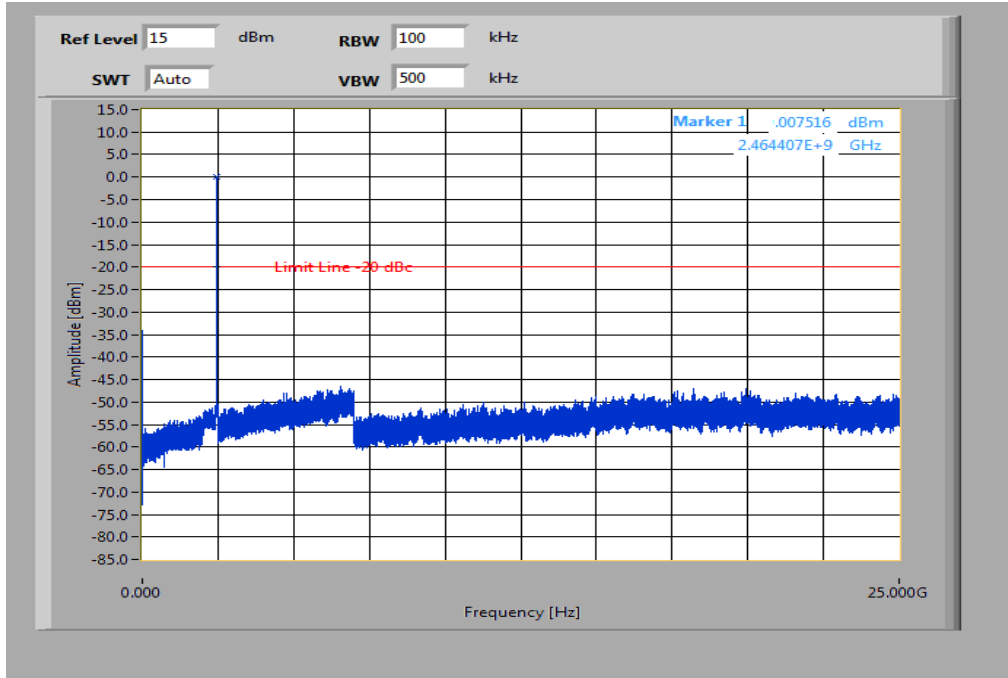

The peak at the beginning of the plot is the LO from the SA.



## 10.10 TX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

### Measurement:

| Measurement parameter            |   |   |
|----------------------------------|---|---|
| EMI-Receiver (Analyzer) Settings | Scan frequency range:<br>Scan-Mode<br>Detector<br>RBW/VBW<br>Mode:<br>Scan step<br>Sweep-Time | <input checked="" type="checkbox"/> 30 – 1000 MHz <input type="checkbox"/> other:<br><input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB spectrum analyser mode<br>Peak / Quasi-peak<br>100 kHz/300 kHz<br>Repetitive-Scan, max-hold<br>80 kHz<br>Coupled – calibrated display if continuous tx-signal otherwise adapted to EUT's individual duty-cycle  |
| Spectrum-Analyzer settings       | Scan frequency range:<br>Scan-Mode<br>Detector<br>RBW/VBW<br>Mode:<br>Scan step<br>Sweep-Time | <input checked="" type="checkbox"/> 1 – 18 GHz <input checked="" type="checkbox"/> 18 – 25 GHz <input type="checkbox"/> 18 – 40 GHz <input type="checkbox"/> other:<br><input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB Spectrum analyser Mode<br>Peak and Average<br>1 MHz / 3 MHz<br>Repetitive-Scan, max-hold<br>400 kHz<br>Coupled – calibrated display if CW signal otherwise adapted to EUT's individual duty-cycle |

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

### Limits:

| FCC  |                         |                      |
|--|-------------------------|----------------------|
| TX Spurious Emissions Radiated   |                         |                      |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |                         |                      |
| Frequency (MHz)  | Field Strength (dBµV/m) | Measurement distance |
| 30 - 88  | 30.0                    | 10                   |
| 88 – 216   | 33.5                    | 10                   |
| 216 – 960  | 36.0                    | 10                   |
| Above 960  | 54.0                    | 3                    |

**Results: DSSS / b – mode**

| TX Spurious Emissions Radiated [dBµV/m]  |          |                |  |          |                |  |          |                |
|--|----------|----------------|--|----------|----------------|--|----------|----------------|
| DSSS / b – mode  |          |                |  |          |                |  |          |                |
| 2412 MHz   |          |                | 2437 MHz   |          |                | 2462 MHz   |          |                |
| F [MHz]  | Detector | Level [dBµV/m] | F [MHz]  | Detector | Level [dBµV/m] | F [MHz]  | Detector | Level [dBµV/m] |
| For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                |
| No spurious emissions above 1 GHz detected.                                      |          |                | No spurious emissions above 1 GHz detected.                                      |          |                | No spurious emissions above 1 GHz detected.                                      |          |                |
|  |          |                |  |          |                |  |          |                |
| Measurement uncertainty  |          |                | ± 3 dB   |          |                |  |          |                |

**Results: OFDM / g – mode**

| TX Spurious Emissions Radiated [dBµV/m]  |          |                |  |          |                |  |          |                |
|--|----------|----------------|--|----------|----------------|--|----------|----------------|
| OFDM / g – mode  |          |                |  |          |                |  |          |                |
| 2412 MHz   |          |                | 2437 MHz   |          |                | 2462 MHz   |          |                |
| F [MHz]  | Detector | Level [dBµV/m] | F [MHz]  | Detector | Level [dBµV/m] | F [MHz]  | Detector | Level [dBµV/m] |
| For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                |
| No spurious emissions above 1 GHz detected.                                      |          |                | No spurious emissions above 1 GHz detected.                                      |          |                | No spurious emissions above 1 GHz detected.                                      |          |                |
|  |          |                |  |          |                |  |          |                |
| Measurement uncertainty  |          |                | ± 3 dB   |          |                |  |          |                |

**Results: OFDM / n HT20 – mode**

| TX Spurious Emissions Radiated [dBµV/m]  |          |                |  |          |                |  |          |                |
|--|----------|----------------|--|----------|----------------|--|----------|----------------|
| OFDM / n – mode  |          |                |  |          |                |  |          |                |
| 2412 MHz   |          |                | 2437 MHz   |          |                | 2462 MHz   |          |                |
| F [MHz]  | Detector | Level [dBµV/m] | F [MHz]  | Detector | Level [dBµV/m] | F [MHz]  | Detector | Level [dBµV/m] |
| For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                | For emissions below 1 GHz, please take a look at the table below the 1 GHz plot. |          |                |
| No spurious emissions above 1 GHz detected.                                      |          |                | No spurious emissions above 1 GHz detected.                                      |          |                | No spurious emissions above 1 GHz detected.                                      |          |                |
|  |          |                |  |          |                |  |          |                |
| Measurement uncertainty  |          |                | ± 3 dB   |          |                |  |          |                |


**Result: Passed**

**Note:** The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

**Plots: DSSS / b – mode**

**Plot 1:** Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

01\_FCC15.209\_hor+vert\_kipp

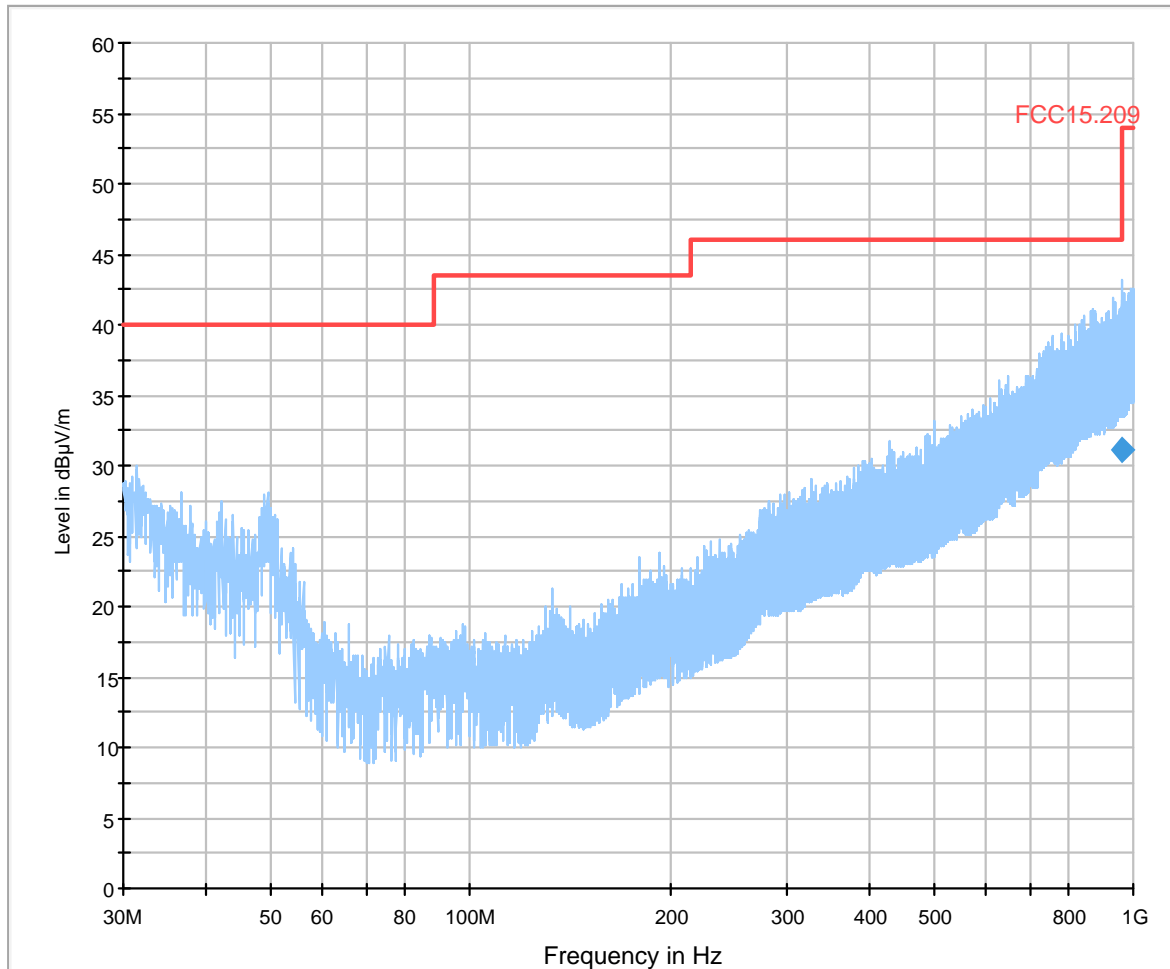

**Final Result 1**


| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Elevation (deg) | Corr. (dB) | Margin (dB) |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|-----------------|------------|-------------|
| 963.810000      | 31.1               | 1000.0          | 120.000         | 215.0       | H            | 102.0         | 0.0             | 27.6       | 22.90       |

(continuation of the "Final Result 1" table from column 10 ...)

| Frequency (MHz) | Limit (dBµV/m) |
|-----------------|----------------|
| 963.810000      | 54.00          |

**Plot 2:** Lowest channel, b-mode, 1MB, 1 GHz to 18 GHz, vertical & horizontal polarization


00431\_SM1\_KP1\_WLAN\_500us

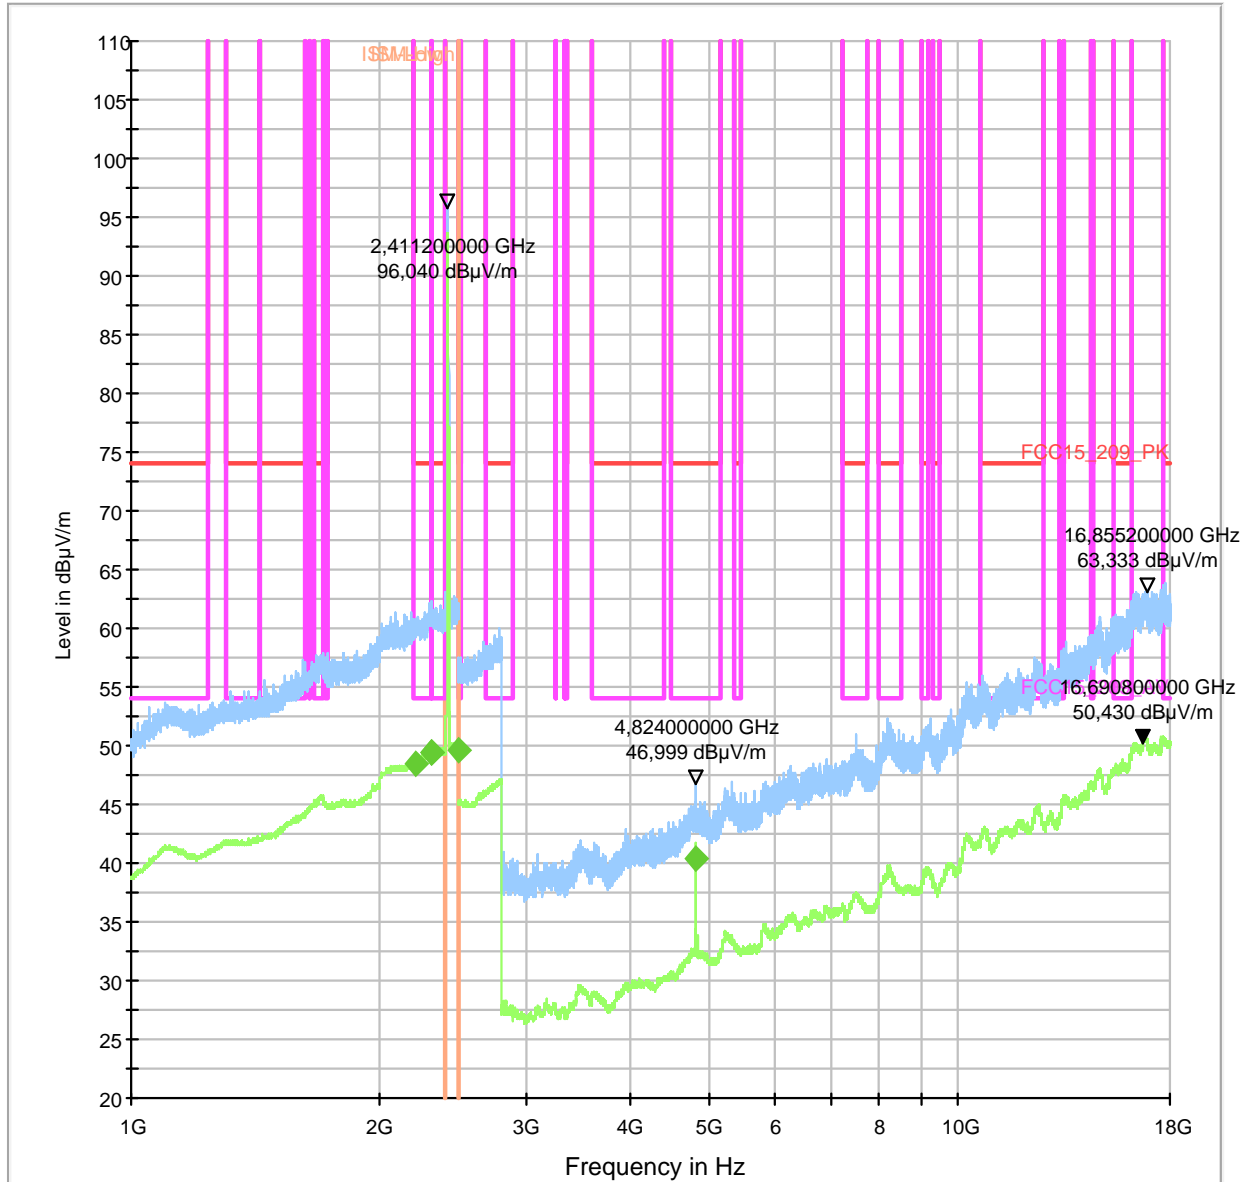

The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 3:** Lowest channel, b-mode, 1MB, 18 GHz to 25 GHz, vertical & horizontal polarization


EMI Sweep\_18\_25GHz\_Preamp\_On\_Ref338\_AntRef302\_1m\_dBuV

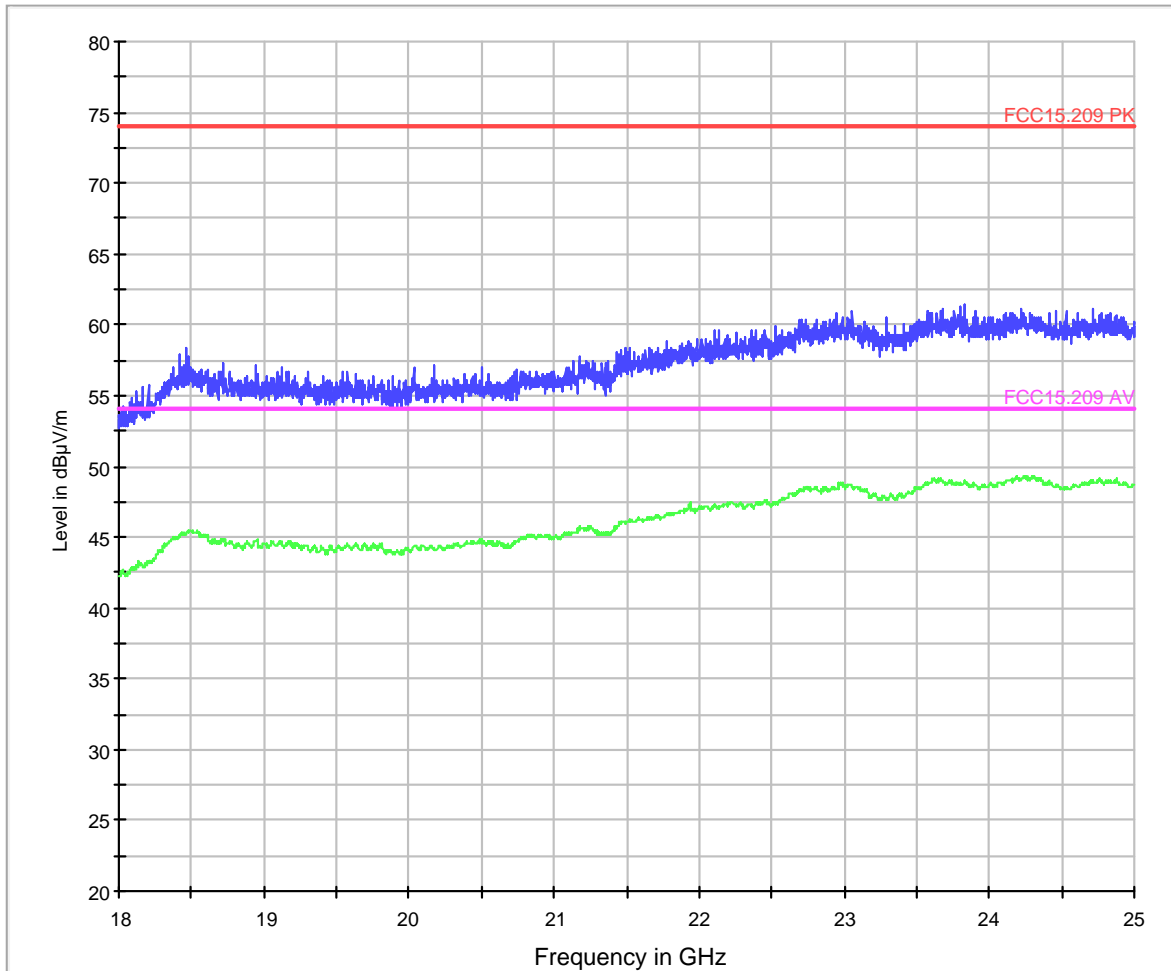

**Plots: OFDM / g – mode**


**Plot 1:** Middle channel, g-mode, 6MB, 30 MHz to 1 GHz, vertical & horizontal polarization

01\_FCC15.209\_hor+vert\_kipp

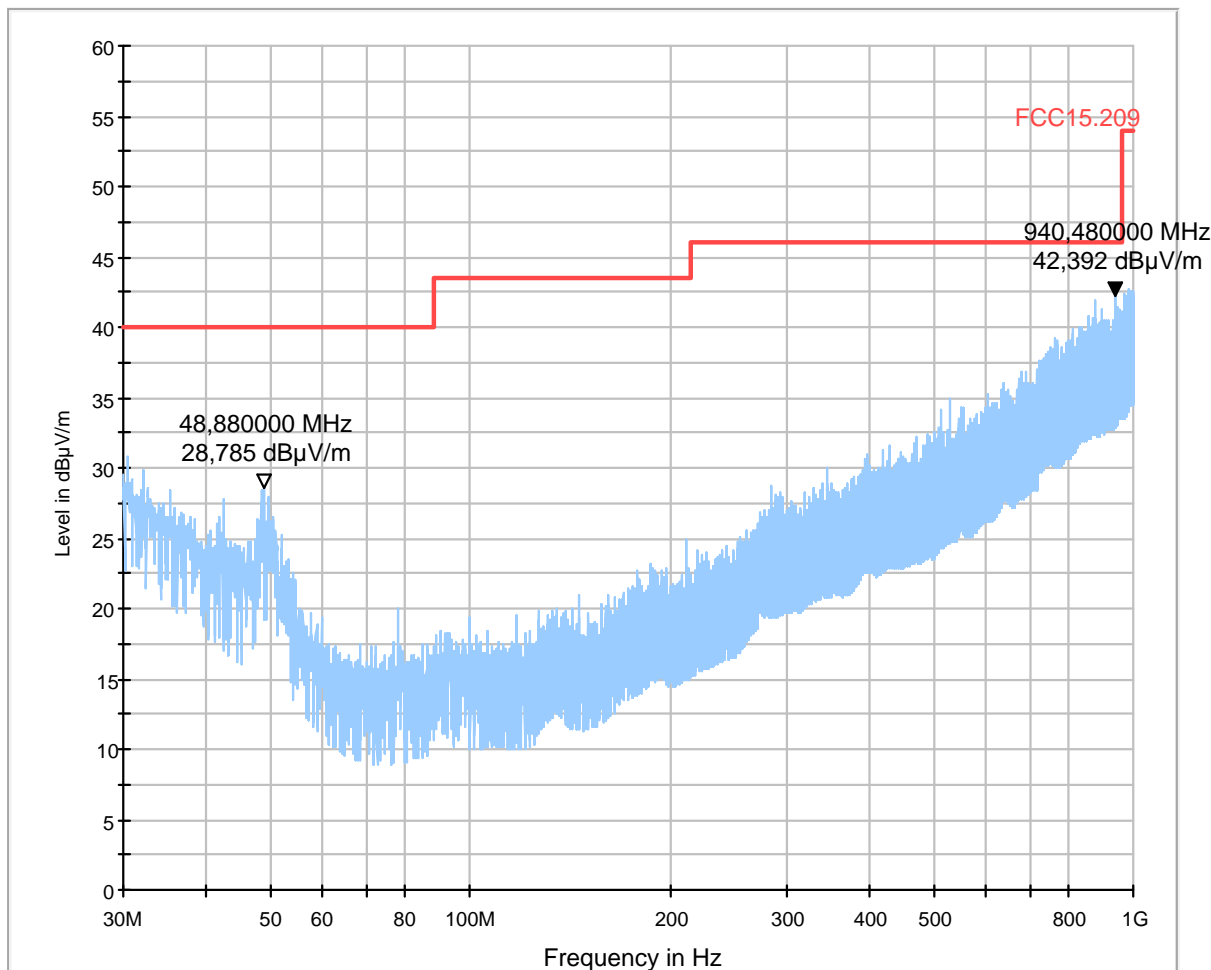

Plot 2: Middle channel, g-mode, 6MB, 1 GHz to 18 GHz, vertical & horizontal polarization


00431\_SM1\_KP1\_WLAN\_500us

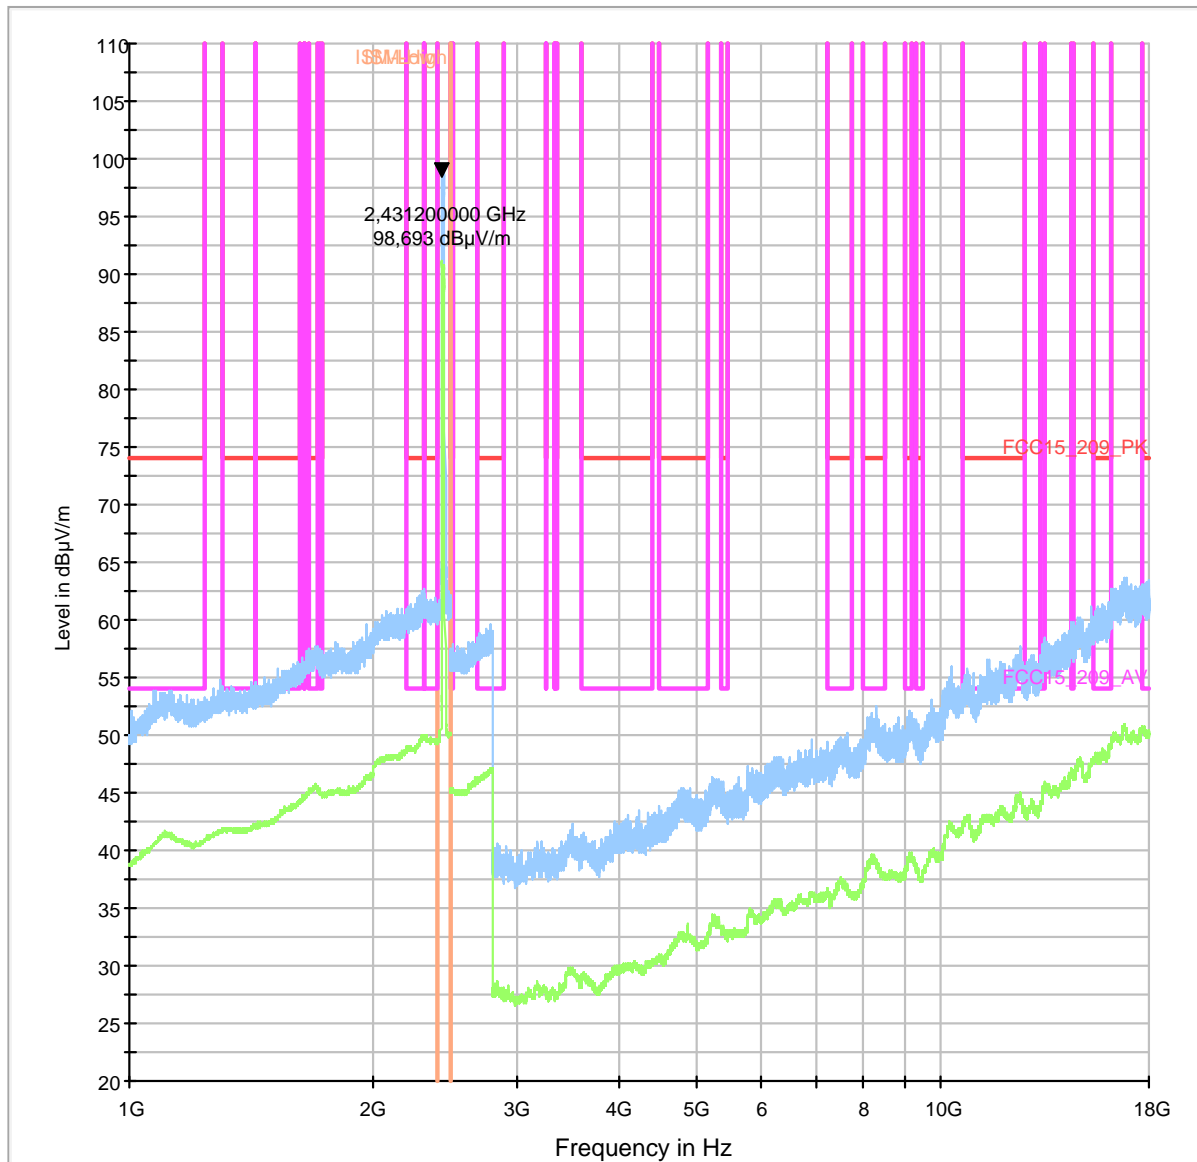

The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 3:** Middle channel, g-mode, 6MB, 18 GHz to 25 GHz, vertical & horizontal polarization

EMI Sweep\_18\_25GHz\_Preamplifier\_On\_Ref338\_AntRef302\_1m\_dBuV

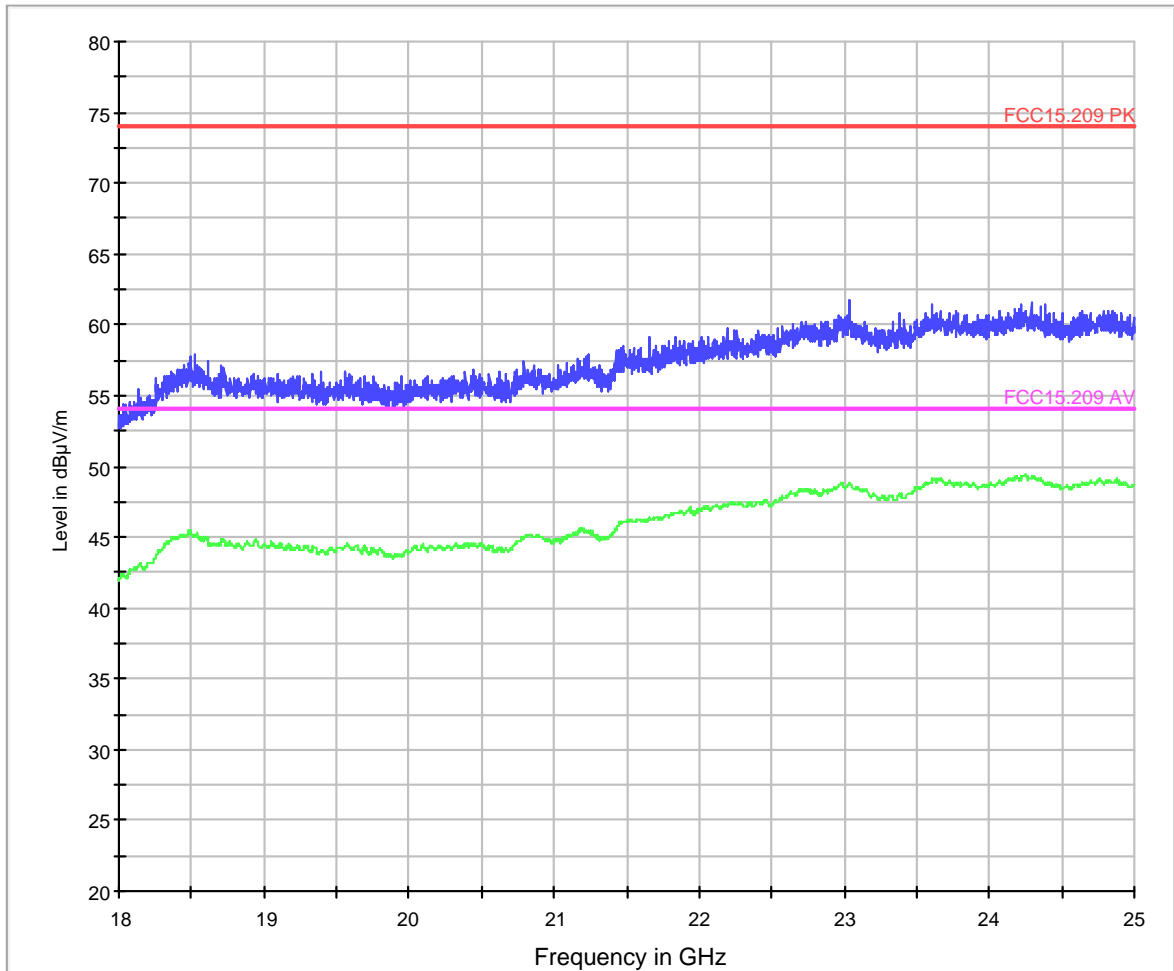




**Plots: OFDM / n – mode**


**Plot 1:** Highest channel, n-mode, MCS3, 30 MHz to 1 GHz, vertical & horizontal polarization

01\_FCC15.209\_hor+vert\_kipp

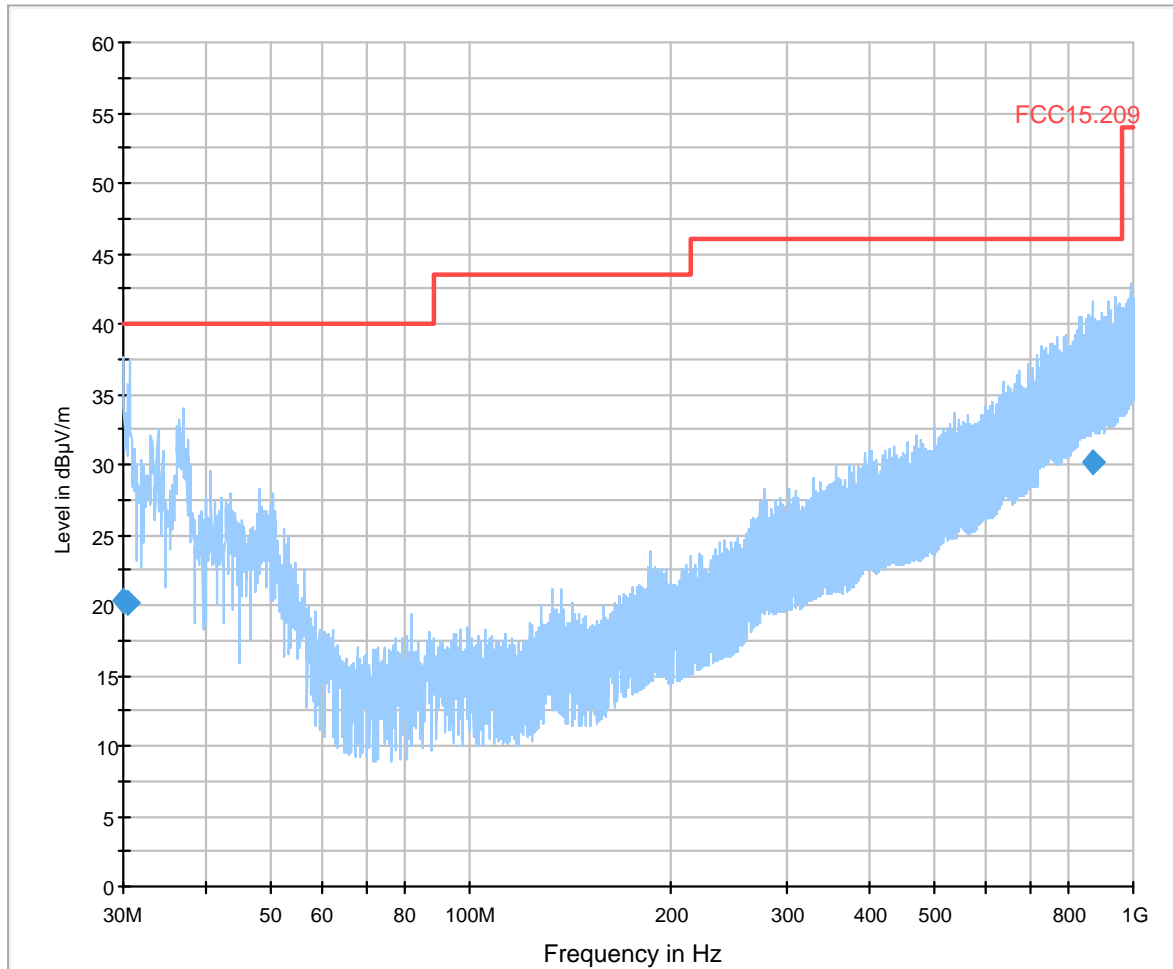

Plot 2: Highest channel, n-mode, MCS3, 1 GHz to 18 GHz, vertical & horizontal polarization


00431\_SM1\_KP1\_WLAN\_500us

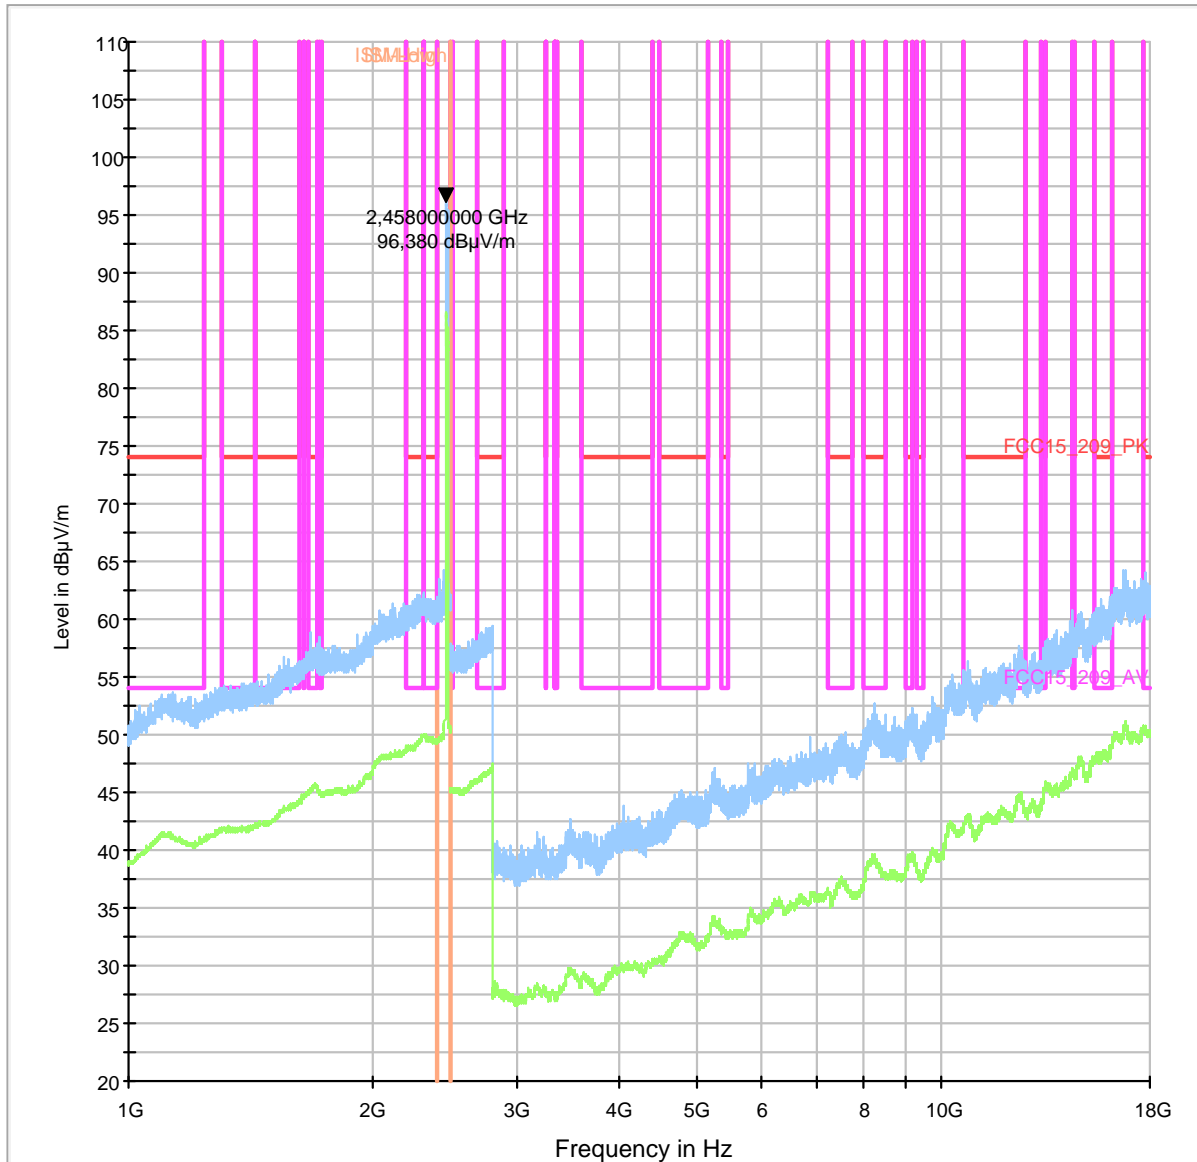

The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 3:** Highest channel, n-mode, MCS3, 18 GHz to 25 GHz, vertical & horizontal polarization

EMI Sweep\_18\_25GHz\_Preamp\_On\_Ref338\_AntRef302\_1m\_dBuV

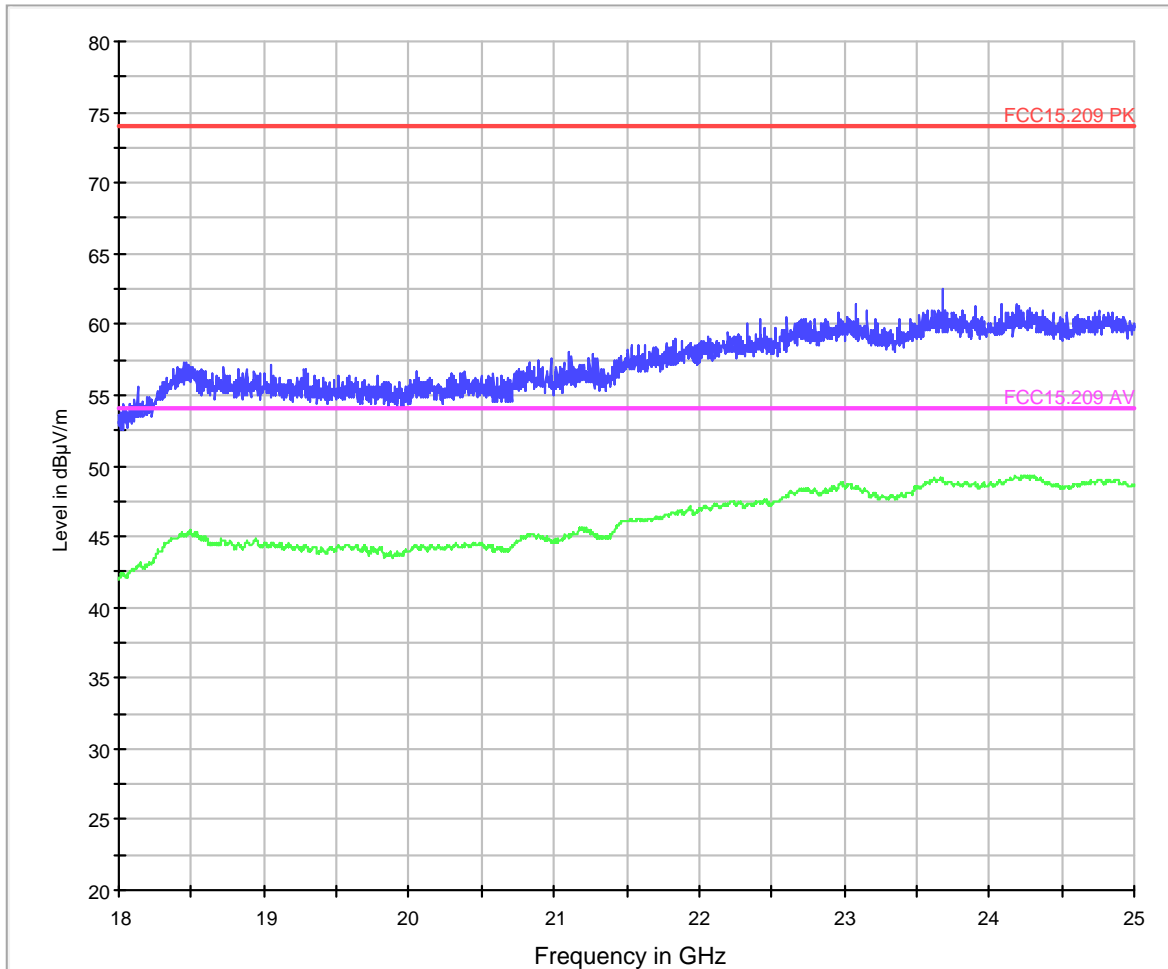

### 10.11 RX spurious emissions radiated

**Description:**

Measurement of the radiated spurious emissions in idle/receive mode. The results are valid for both modes.

**Measurement:**

| Measurement parameter            |   |  |
|----------------------------------|---|--|
| EMI-Receiver (Analyzer) Settings | Scan frequency range:<br>Scan-Mode<br>Detector<br>RBW/VBW<br>Mode:<br>Scan step<br>Sweep-Time | <input checked="" type="checkbox"/> 30 – 1000 MHz <input type="checkbox"/> other:<br><input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB spectrum analyser mode<br>Peak / Quasi-peak<br>100 kHz/300 kHz<br>Repetitive-Scan, max-hold<br>80 kHz<br>Coupled – calibrated display if continuous tx-signal otherwise adapted to EUT's individual duty-cycle   |
| Spectrum-Analyzer settings       | Scan frequency range:<br>Scan-Mode<br>Detector<br>RBW/VBW<br>Mode:<br>Scan step<br>Sweep-Time | <input checked="" type="checkbox"/> 1 – 16 GHz <input type="checkbox"/> 18 – 25 GHz <input type="checkbox"/> 18 – 40 GHz <input type="checkbox"/> other:<br><input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB Spectrum analyser Mode<br>Peak and Average<br>1 MHz / 3 MHz<br>Repetitive-Scan, max-hold<br>400 kHz<br>Coupled – calibrated display if CW signal otherwise adapted to EUT's individual duty-cycle |

**Limits:**

| FCC                            |                         |                      |
|--------------------------------|-------------------------|----------------------|
| RX Spurious Emissions Radiated |                         |                      |
| Frequency (MHz)                | Field strength (dBµV/m) | Measurement distance |
| 30 - 88                        | 30.0                    | 10                   |
| 88 – 216                       | 33.5                    | 10                   |
| 216 – 960                      | 36.0                    | 10                   |
| Above 960                      | 54.0                    | 3                    |

**Results:**


| RX spurious emissions radiated [dBµV/m] |          |                |
|---|----------|----------------|
| F [MHz]                                 | Detector | Level [dBµV/m] |
| No peaks found                          |          |                |
| Measurement uncertainty                 |          | ±3 dB          |

**Result: Passed**

**Plots: RX / Idle – mode**


**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization

FCC15.109\_hor+vert

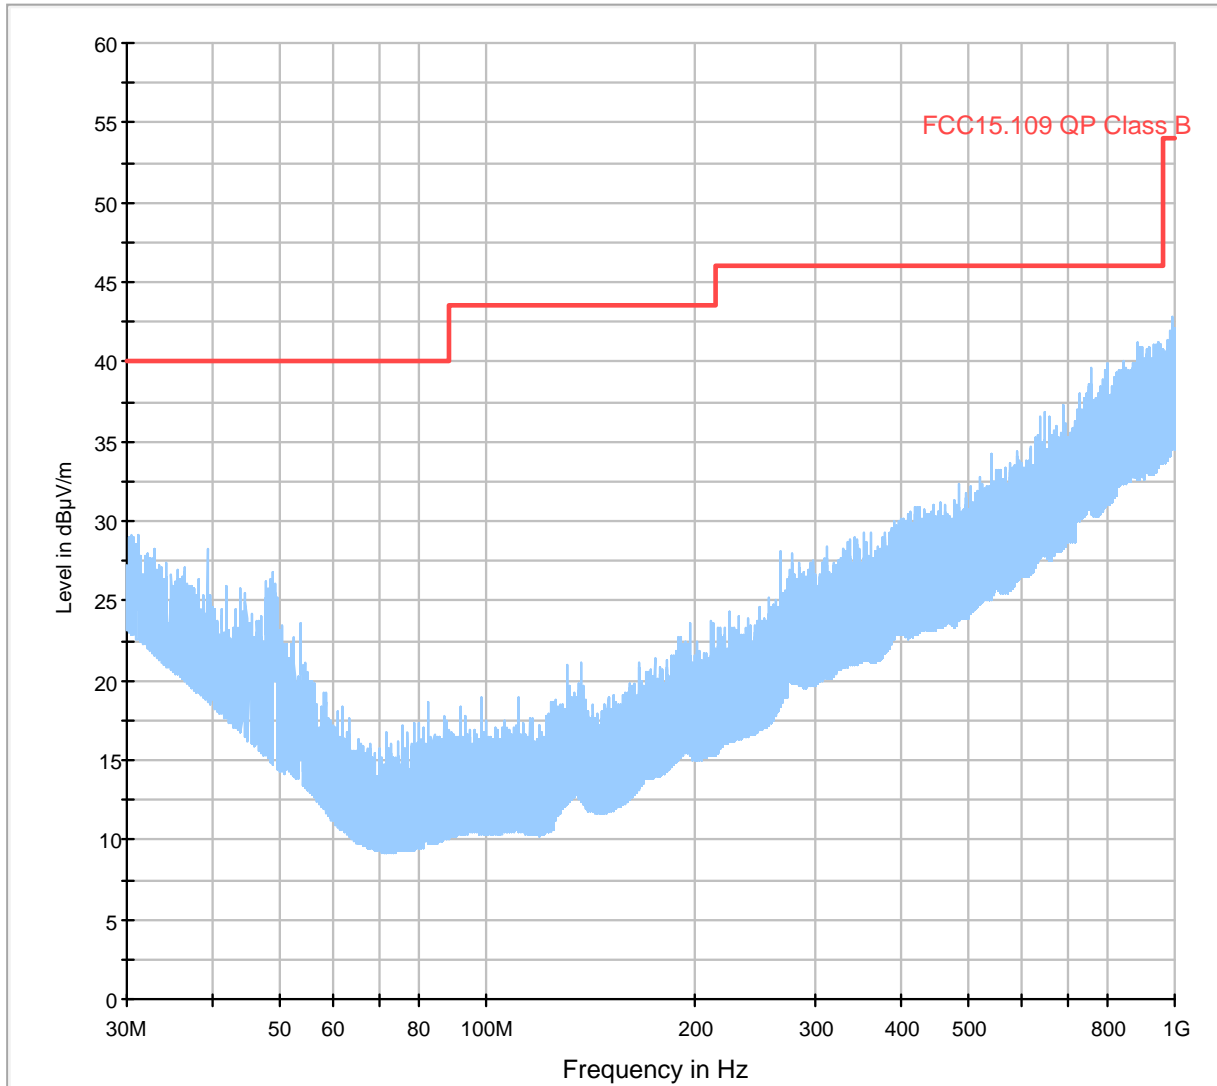

Plot 2: 1 GHz to 16 GHz, vertical & horizontal polarization

030442\_FCC\_Part15.109\_Unint\_Rad\_Class\_B\_1G-20G\_ESU40

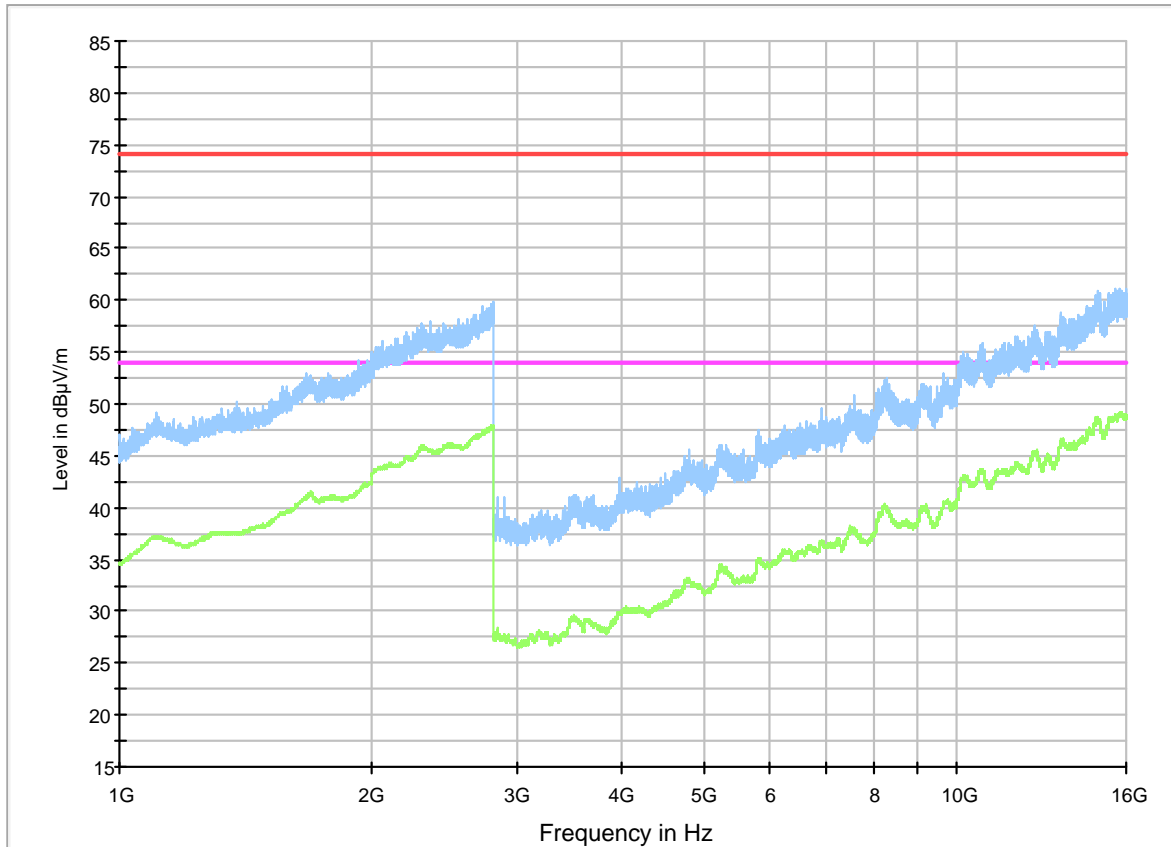

**10.12 Spurious emissions radiated < 30 MHz**

**Description:**

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is representative for all channels and modes. If peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

**Measurement:**

| Measurement parameter |  |
|-----------------------|--|
| Detector:             | Peak / Quasi Peak                          |
| Sweep time:           | Auto                                       |
| Video bandwidth:      | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Resolution bandwidth: | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span:                 | 9 kHz to 30 MHz                            |
| Trace-Mode:           | Max Hold                                   |

**Limits:**

| FCC                                     |                         |                      |
|---|-------------------------|----------------------|
| TX Spurious Emissions Radiated < 30 MHz |                         |                      |
| Frequency (MHz)                         | Field Strength (dBµV/m) | Measurement distance |
| 0.009 – 0.490                           | 2400/F(kHz)             | 300                  |
| 0.490 – 1.705                           | 24000/F(kHz)            | 30                   |
| 1.705 – 30.0                            | 30                      | 30                   |

**Results:**


| TX Spurious Emissions Radiated < 30 MHz [dBµV/m] |          |                |
|--|----------|----------------|
| F [MHz]  | Detector | Level [dBµV/m] |
| No peaks detected.                               |          |                |
| Measurement uncertainty                          | ± 3 dB   |                |

**Result: Passed**

**Plots: TX mode**

**Plot 1: 9 kHz to 30 MHz**

FCC15.209\_magn hor+vert

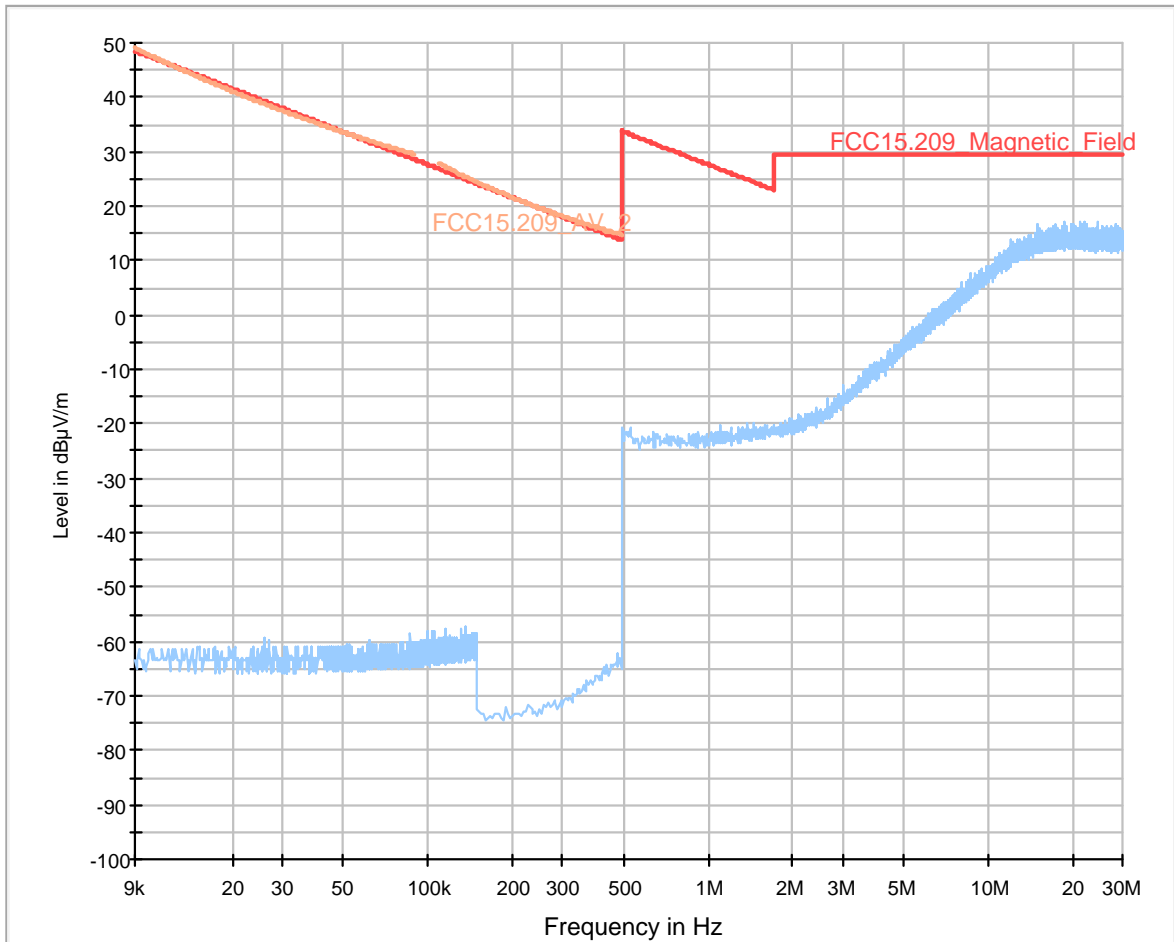



### 10.13 Spurious emissions conducted < 30 MHz

**Description:**

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

**Measurement:**

| Measurement parameter |  |
|-----------------------|--|
| Detector:             | Peak - Quasi Peak / Average                |
| Sweep time:           | Auto                                       |
| Video bandwidth:      | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Resolution bandwidth: | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span:                 | 9 kHz to 30 MHz                            |
| Trace-Mode:           | Max Hold                                   |

**Limits:**

| FCC                                      |                     |                  |
|--|---------------------|------------------|
| TX Spurious Emissions Conducted < 30 MHz |                     |                  |
| Frequency (MHz)                          | Quasi-Peak (dBµV/m) | Average (dBµV/m) |
| 0.15 – 0.5                               | 66 to 56*           | 56 to 46*        |
| 0.5 – 5                                  | 56                  | 46               |
| 5 – 30.0                                 | 60                  | 50               |

\*Decreases with the logarithm of the frequency


**Results:**

| TX Spurious Emissions Conducted < 30 MHz [dBµV/m] |          |                |
|---|----------|----------------|
| F [MHz]   | Detector | Level [dBµV/m] |
| No peaks detected.                                |          |                |
| Measurement uncertainty                           | ± 3 dB   |                |


**Result: Passed**

**Plots:**


**Plot 1:** TX mode, 150 kHz to 30 MHz, phase line

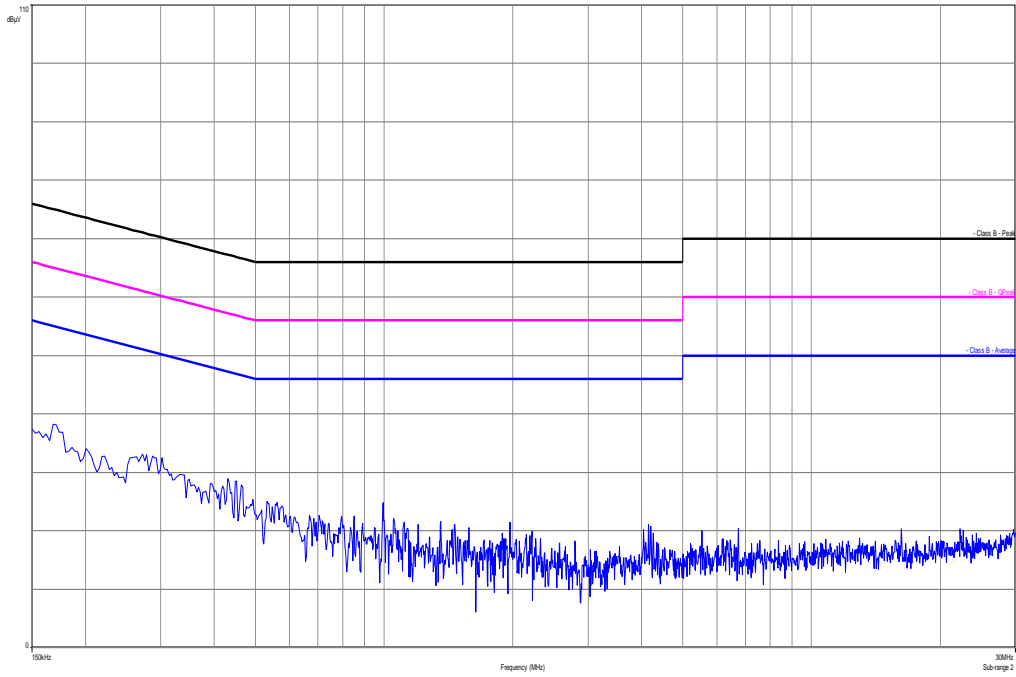


**Plot 2:** TX mode, 150 kHz to 30 MHz, neutral line

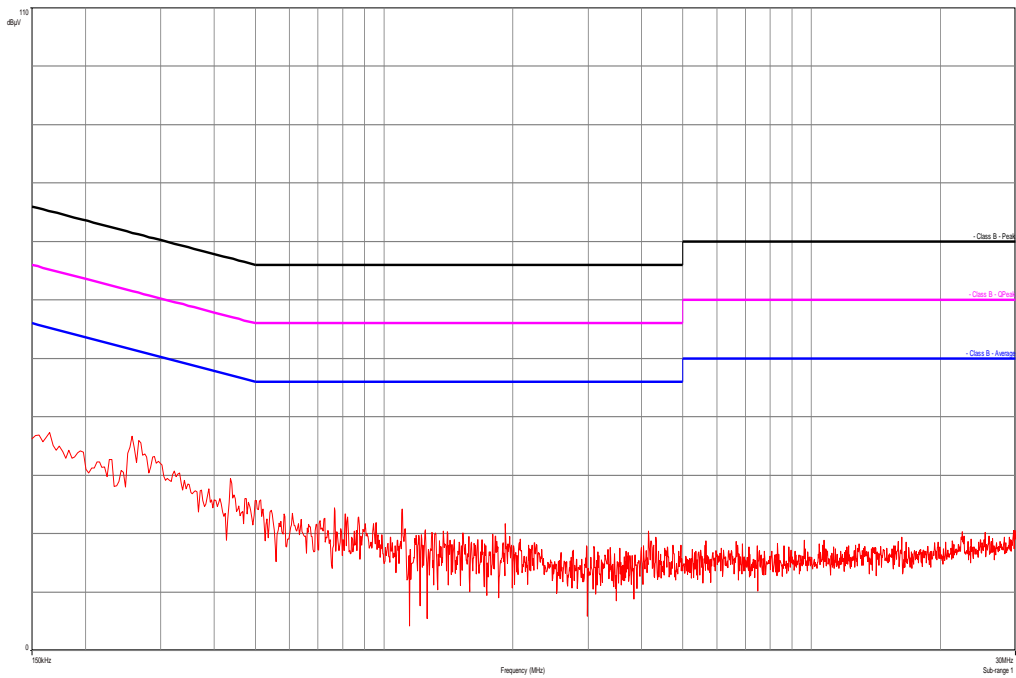

Plot 3: RX / Idle – mode, 150 kHz to 30 MHz, phase line

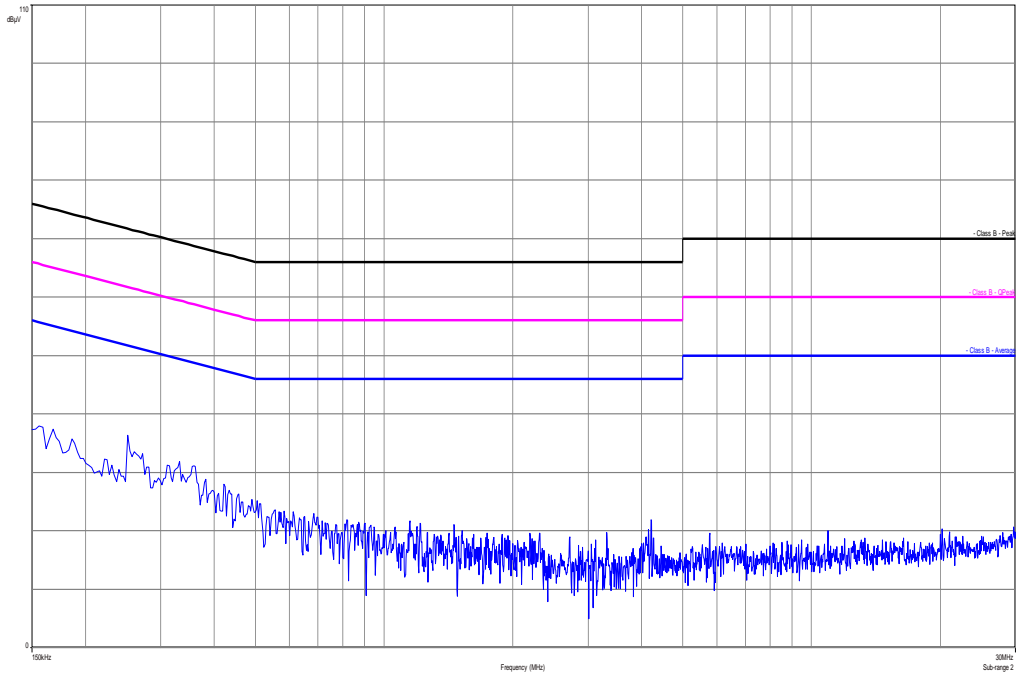

Plot 4: RX / Idle – mode, 150 kHz to 30 MHz, neutral line

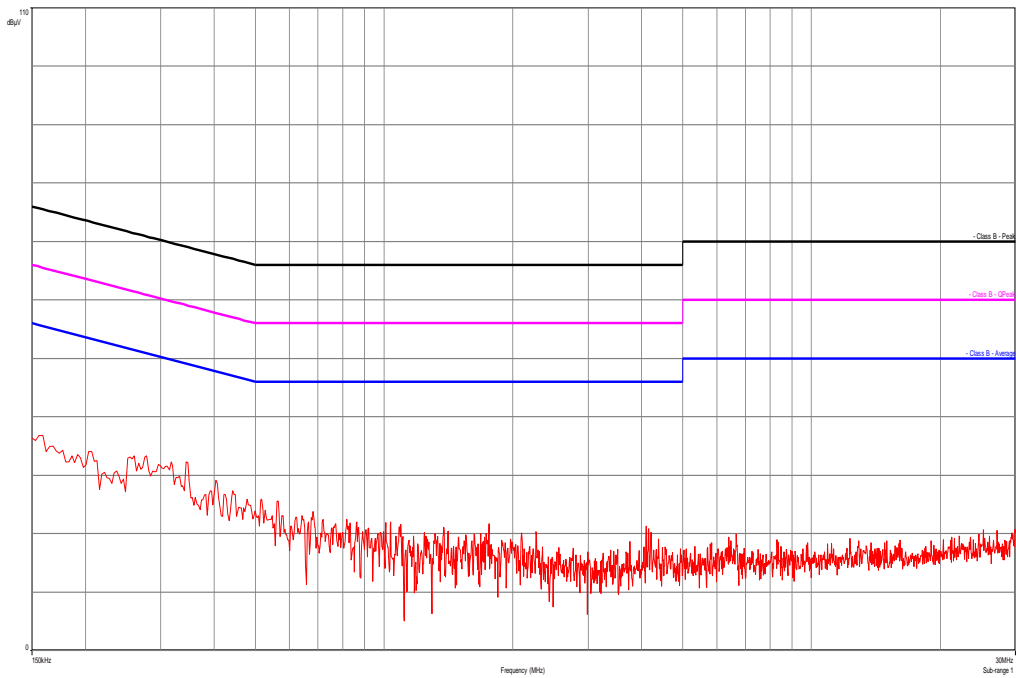

## 11 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

### Used equipment of Cetecom ICT Services GmbH

| No. | Lab / Item | Equipment                                    | Type              | Manufact.       | Serial No.      | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|--|-------------------|-----------------|-----------------|-----------------|---------------------|------------------|------------------|
| 1   | n. a.      | Switch / Control Unit                        | 3488A             | HP Meßtechnik   |                 | 300001691       | ne                  |                  |                  |
| 2   | n. a.      | Power Supply DC                              | NGPE 40/40        | R&S             | 388             | 400000078       | vKI!                | 21.08.2012       | 21.08.2014       |
| 3   | n. a.      | Signal Analyzer 20Hz-26,5GHz-150 to + 30 DBM | FSIQ26            | R&S             | 835540/018      | 300002681-0005  | k                   | 30.01.2014       | 30.01.2016       |
| 4   | n. a.      | Directional Coupler                          | 101020010         | Krytar          | 70215           | 300002840       | ev                  |                  |                  |
| 5   | n. a.      | Powersplitter                                | 6005-3            | Inmet Corp.     |                 | 300002841       | ev                  |                  |                  |
| 6   | n. a.      | Temperature Test Chamber                     | VT 4002           | Heraeus Voetsch | 58566046820 010 | 300003019       | Ve                  | 26.09.2013       | 26.09.2015       |
| 7   | n. a.      | CBT (Bluetooth Tester + EDR Signalling)      | CBT 1153.9000 K35 | R&S             | 100185          | 300003416       | vKI!                | 21.08.2012       | 21.08.2014       |

### Agenda: Kind of Calibration

|      |  |     |  |
|------|--|-----|--|
| k    | calibration / calibrated                   | EK  | limited calibration                                  |
| ne   | not required (k, ev, izw, zw not required) | zw  | cyclical maintenance (external cyclical maintenance) |
| ev   | periodic self verification                 | izw | internal cyclical maintenance                        |
| Ve   | long-term stability recognized             | g   | blocked for accredited testing                       |
| vKI! | Attention: extended calibration interval   | *)  | next calibration ordered / currently in progress     |
| NK!  | Attention: not calibrated                  |     |  |

### Equipment and Software of Cetecom GmbH

#### Used equipment "CTC"

The "Ref.-No" in the left column of the following tables allows the clear identification of the laboratory equipment.

#### Test software and firmware of equipment

| Ref.-No. | Equipment                               | Type     | Serial-No.  | Version of Firmware or Software during the test   |
|----------|---|----------|-------------|---|
| 001      | EMI Test Receiver                       | ESS      | 825132/017  | Firm.= 1.21 , OTP=2.0, GRA=2.0  |
| 012      | Signal Generator (EMS-cond.)            | SMY 01   | 839069/027  | Firm.= V 2.02   |
| 013      | Power Meter (EMS cond.)                 | NRVD     | 839111/003  | Firm.= V 1.51   |
| 017      | Digital Radiocommunication Tester       | CMD 60 M | 844365/014  | Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99  |
| 053      | Audio Analyzer                          | UPA3     | 860612/022  | Firm. V 4.3   |
| 119      | RT Harmonics Analyzer dig. Flickermeter | B10      | G60547      | Firm.= V 3.1DHG   |
| 140      | Signal Generator                        | SMHU     | 831314/006  | Firm.= 3.21   |
| 261      | Thermal Power Sensor                    | NRV-Z55  | 825083/0008 | EPROM-Datum 02.12.04, SE EE 1 B   |
| 262      | Power Meter                             | NRV-S    | 825770/0010 | Firm.= 2.6  |
| 263      | Signal Generator                        | SMP 04   | 826190/0007 | Firm.=3.21  |
| 264      | Spectrum Analyzer                       | FSEK 30  | 826939/005  | Bios=2.1, Analyzer= 3.20  |
| 295      | Racal Digital Radio Test Set            | 6103     | 1572        | UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02 |
| 298      | Univ. Radio Communication Tester        | CMU 200  | 832221/091  | R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used                        |
| 323      | Digital Radiocommunication Tester       | CMD 55   | 825878/0034 | Firm.= 3.52 .22.01.99   |

| Ref.-No. | Equipment                           | Type                   | Serial-No.     | Version of Firmware or Software during the test   |
|----------|-------------------------------------|------------------------|----------------|---|
| 331      | Climatic Test Chamber -40/+80 Grad  | HC 4055                | 43146          | TSI 1.53  |
| 335      | CTC-EMS-Conducted                   | System EMS Conducted   | -              | EMC 32 V 8.52   |
| 340      | Digital Radiocommunication Tester   | CMD 55                 | 849709/037     | Firm.= 3.52 .22.01.99   |
| 355      | Power Meter                         | URV 5                  | 891310/027     | Firm.= 1.31   |
| 365      | 10V Insertion Unit 50 Ohm           | URV5-Z2                | 100880         | Eprom Data = 31.03.08   |
| 366      | Ultra Compact Simulator             | UCS 500 M4             | V0531100594    | Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10  |
| 371      | Bluetooth Tester                    | CBT32                  | 100153         | CBT V5.30+ SW-Option K55, K57   |
| 377      | EMI Test Receiver                   | ESCS 30                | 100160         | Firm.= 2.30, OTP= 02.01, GRA= 02.36   |
| 378      | Broadband RF Field Monitor          | RadiSense III          | 03D00013SNO-08 | Firm.= V.03D13  |
| 383      | Signal Generator                    | SME 03                 | 842 828 /034   | Firm.= 4.61   |
| 389      | Digital Multimeter                  | Keithley 2000          | 0583926        | Firm. = A13 (Mainboard) A02 (Display)   |
| 392      | Radio Communication Tester          | MT8820A                | 6K00000788     | Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002  |
| 436      | Univ. Radio Communication Tester    | CMU 200                | 103083         | R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band |
| 441      | CTC-SAR-EMI Cable Loss              | System EMI field (SAR) | -              | EMC 32 Version 8.52   |
| 442      | CTC-SAR-EMS                         | System EMS field (SAR) | -              | EMC 32 Version 8.40   |
| 443      | CTC-FAR-EMI-RSE                     | System CTC-FAR-EMI-RSE | -              | Spuri 7.2.5 or EMC 32 Ver. 8.53   |
| 444      | CTC-FAR-EMS field                   | System-EMS-Field (FAR) | -              | EMC 32 Version 8.40   |
| 460      | Univ. Radio Communication Tester    | CMU 200                | 108901         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,    |
| 489      | EMI Test Receiver                   | ESU40                  | 1000-30        | Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00   |
| 491      | ESD Simulator dito                  | ESD dito               | dito307022     | V 2.30  |
| 524      | Voltage Drop Simulator              | VDS 200                | 0196-16        | Software Nr: 000037 Version V4.20a01  |
| 526      | Burst Generator                     | EFT 200 A              | 0496-06        | Software Nr. 000034 Version V2.32   |
| 527      | Micro Pulse Generator               | MPG 200 B              | 0496-05        | Software-Nr. 000030 Version V2.43   |
| 528      | Load Dump Simulator                 | LD 200B                | 0496-06        | Software-Nr. 000031 Version V2.35a01  |
| 546      | Univ. Radio Communication Tester    | CMU 200                | 106436         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used     |
| 547      | Univ. Radio Communication Tester    | CMU 200                | 835390/014     | R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14  |
| 584      | Spectrum Analyzer                   | FSU 8                  | 100248         | 2.82_SP3  |
| 597      | Univ. Radio Communication Tester    | CMU 200                | 100347         | R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= $\mu$ P1=V.850           |
| 598      | Spectrum Analyzer                   | FSEM 30 (Reserve)      | 831259/013     | Firmware Bios 3.40 , Analyzer 3.40 Sp 2   |
| 620      | EMI Test Receiver                   | ESU 26                 | 100362         | 4.43_SP3  |
| 642      | Wideband Radio Communication Tester | CMW 500                | 126089         | Setup V03.26, Test programm component V03.02.20   |

Single instruments and test systems

| Ref.-No. | Equipment                                  | Type                      | Serial-No.  | Manufacturer          | Interval of calibration | Remark | Cal due    |
|----------|--|---------------------------|-------------|-----------------------|-------------------------|--------|------------|
| 001      | EMI Test Receiver                          | ESS                       | 825132/017  | Rohde & Schwarz       | 12 M                    | -      | 31.03.2014 |
| 005      | AC - LISN (50 Ohm/50 $\mu$ H, test site 1) | ESH2-Z5                   | 861741/005  | Rohde & Schwarz       | 24/12 M                 | -      | 31.03.2014 |
| 007      | Single-Line V-Network (50 Ohm/5 $\mu$ H)   | ESH3-Z6                   | 892563/002  | Rohde & Schwarz       | 24/12 M                 | -      | 31.03.2014 |
| 009      | Power Meter (EMS-radiated)                 | NRV                       | 863056/017  | Rohde & Schwarz       | 24 M                    | -      | 31.03.2015 |
| 016      | Line Impedance Simulating Network          | Op. 24-D                  | B6366       | Spitzenberger+Spies   | 36 M                    | -      | 31.03.2016 |
| 020      | Horn Antenna 18 GHz (Subst 1)              | 3115                      | 9107-3699   | EMCO                  | 36/12 M                 | -      | 31.03.2014 |
| 021      | Loop Antenna (H-Field)                     | 6502                      | 9206-2770   | EMCO                  | 36 M                    | -      | 31.03.2015 |
| 030      | Loop Antenna (H-field)                     | HFH-Z2                    | 879604/026  | Rohde & Schwarz       | 36 M                    | -      | 31.03.2015 |
| 033      | RF-current probe (100kHz-30MHz)            | ESH2-Z1                   | 879581/18   | Rohde & Schwarz       | 24 M                    | -      | 31.03.2015 |
| 057      | relay-switch-unit (EMS system)             | RSU                       | 494440/002  | Rohde & Schwarz       | pre-m                   | 1a     |            |
| 060      | power amplifier (DC-2kHz)                  | PAS 5000                  | B6363       | Spitzenberger+Spies   | -                       | 3      |            |
| 066      | notch filter (WCDMA; FDD1)                 | WRCT 1900/2200-5/40-10EEK | 5           | Wainwright GmbH       | 12 M                    | 1g     | 30.06.2014 |
| 086      | DC - power supply, 0 -10 A                 | LNG 50-10                 | -           | Heinzinger Electronic | pre-m                   | 2      |            |
| 087      | DC - power supply, 0 -5 A                  | EA-3013 S                 | -           | Elektro Automatik     | pre-m                   | 2      |            |
| 090      | Helmholtz coil: 2x10 coils in series       | -                         | -           | RWTÜV                 | -                       | 4      |            |
| 091      | USB-LWL-Converter                          | OLS-1                     | 007/2006    | Ing. Büro Scheiba     | -                       | 4      |            |
| 099      | passive voltage probe                      | ESH2-Z3                   | 299.7810.52 | Rohde & Schwarz       | 36 M                    | -      | 31.03.2015 |
| 100      | passive voltage probe                      | Probe TK 9416             | without     | Schwarzbeck           | 36 M                    | -      | 31.03.2015 |
| 110      | USB-LWL-Converter                          | OLS-1                     | -           | Ing. Büro Scheiba     | -                       | 4      |            |
| 119      | RT Harmonics Analyzer dig. Flickermeter    | B10                       | G60547      | BOCONSULT             | 36 M                    | -      | 31.03.2016 |
| 134      | horn antenna 18 GHz (Subst 2)              | 3115                      | 9005-3414   | EMCO                  | pre-m                   | -      | 31.03.2014 |
| 136      | adjustable dipole antenna (Dipole 1)       | 3121C-DB4                 | 9105-0697   | EMCO                  | 36 M                    | -      | 31.03.2015 |
| 140      | Signal Generator                           | SMHU                      | 831314/006  | Rohde & Schwarz       | 24 M                    | -      | 31.03.2014 |
| 248      | attenuator                                 | SMA 6dB 2W                | -           | Radiall               | pre-m                   | 2      |            |
| 249      | attenuator                                 | SMA 10dB 10W              | -           | Radiall               | pre-m                   | 2      |            |
| 252      | attenuator                                 | N 6dB 12W                 | -           | Radiall               | pre-m                   | 2      |            |

| Ref.-No. | Equipment                              | Type                         | Serial-No.      | Manufacturer                | Interval of calibration | Remark | Cal due    |
|----------|--|------------------------------|-----------------|-----------------------------|-------------------------|--------|------------|
| 256      | attenuator                             | SMA 3dB 2W                   | -               | Radiall                     | pre-m                   | 2      |            |
| 257      | hybrid                                 | 4031C                        | 04491           | Narda                       | pre-m                   | 2      |            |
| 260      | hybrid coupler                         | 4032C                        | 11342           | Narda                       | pre-m                   | 2      |            |
| 261      | Thermal Power Sensor                   | NRV-Z55                      | 825083/0008     | Rohde & Schwarz             | 24 M                    | -      | 31.03.2014 |
| 262      | Power Meter                            | NRV-S                        | 825770/0010     | Rohde & Schwarz             | 24 M                    | -      | 31.03.2014 |
| 263      | Signal Generator                       | SMP 04                       | 826190/0007     | Rohde & Schwarz             | 36 M                    | -      | 31.03.2016 |
| 264      | Spectrum Analyzer                      | FSEK 30                      | 826939/005      | Rohde & Schwarz             | 12 M                    | -      | 31.03.2014 |
| 265      | peak power sensor                      | NRV-Z33, Model 04            | 840414/009      | Rohde & Schwarz             | 24 M                    | -      | 31.03.2014 |
| 266      | peak power sensor                      | NRV-Z31, Model 04            | 843383/016      | Rohde & Schwarz             | 24 M                    | -      | 31.03.2014 |
| 267      | notch filter GSM 850                   | WRCA 800/960-6EEK            | 9               | Wainwright GmbH             | pre-m                   | 2      |            |
| 270      | termination                            | 1418 N                       | BB6935          | Weinschel                   | pre-m                   | 2      |            |
| 271      | termination                            | 1418 N                       | BE6384          | Weinschel                   | pre-m                   | 2      |            |
| 272      | attenuator (20 dB) 50 W                | Model 47                     | BF6239          | Weinschel                   | pre-m                   | 2      |            |
| 273      | attenuator (10 dB) 100 W               | Model 48                     | BF9229          | Weinschel                   | pre-m                   | 2      |            |
| 274      | attenuator (10 dB) 50 W                | Model 47 (10 dB) 50 W        | BG0321          | Weinschel                   | pre-m                   | 2      |            |
| 275      | DC-Block                               | Model 7003 (N)               | C5129           | Weinschel                   | pre-m                   | 2      |            |
| 276      | DC-Block                               | Model 7006 (SMA)             | C7061           | Weinschel                   | pre-m                   | 2      |            |
| 279      | power divider                          | 1515 (SMA)                   | LH855           | Weinschel                   | pre-m                   | 2      |            |
| 287      | pre-amplifier 25MHz - 4GHz             | AMF-2D-100M4G-35-10P         | 379418          | Miteq                       | 12 M                    | 1c     | 30.06.2014 |
| 291      | high pass filter GSM 850/900           | WHJ 2200-4EE                 | 14              | Wainwright GmbH             | 12 M                    | 1c     | 30.06.2014 |
| 298      | Univ. Radio Communication Tester       | CMU 200                      | 832221/091      | Rohde & Schwarz             | pre-m                   | 3      |            |
| 300      | AC LISN (50 Ohm/50µH, 1-phase)         | ESH3-Z5                      | 892 239/020     | Rohde & Schwarz             | 24/12 M                 | -      | 31.03.2014 |
| 301      | attenuator (20 dB) 50W, 18GHz          | 47-20-33                     | AW0272          | Lucas Weinschel             | pre-m                   | 2      |            |
| 302      | horn antenna 40 GHz (Meas 1)           | BBHA9170                     | 155             | Schwarzbeck                 | 36 M                    | -      | 31.03.2014 |
| 303      | horn antenna 40 GHz (Subst 1)          | BBHA9170                     | 156             | Schwarzbeck                 | 36 M                    | -      | 31.03.2014 |
| 331      | Climatic Test Chamber -40/+80 Grad     | HC 4055                      | 43146           | Heraeus Vötsch              | 24 M                    | -      | 30.11.2014 |
| 341      | Digital Multimeter                     | Fluke 112                    | 81650455        | Fluke                       | 24 M                    | -      | 31.03.2014 |
| 342      | Digital Multimeter                     | Voltcraft M-4660A            | IB 255466       | Voltcraft                   | 24 M                    | -      | 31.03.2015 |
| 347      | laboratory site                        | radio lab.                   | -               | -                           | -                       | 5      |            |
| 348      | laboratory site                        | EMI conducted                | -               | -                           | -                       | 5      |            |
| 354      | DC - Power Supply 40A                  | NGPE 40/40                   | 448             | Rohde & Schwarz             | pre-m                   | 2      |            |
| 355      | Power Meter                            | URV 5                        | 891310/027      | Rohde & Schwarz             | 24 M                    | -      | 31.03.2014 |
| 356      | power sensor                           | NRV-Z1                       | 882322/014      | Rohde & Schwarz             | 24 M                    | -      | 31.03.2015 |
| 357      | power sensor                           | NRV-Z1                       | 861761/002      | Rohde & Schwarz             | 24 M                    | -      | 31.03.2015 |
| 371      | Bluetooth Tester                       | CBT32                        | 100153          | R&S                         | 24 M                    | -      | 31.03.2014 |
| 373      | Single-Line V-Network (50 Ohm/5µH)     | ESH3-Z6                      | 100535          | Rohde & Schwarz             | 24/12 M                 | -      | 31.03.2014 |
| 376      | Horn Antenna 6 GHz                     | BBHA9120 E                   | BBHA 9120 E 179 | Schwarzbeck                 | 12 M                    | -      | 31.03.2014 |
| 377      | EMI Test Receiver                      | ESCS 30                      | 100160          | Rohde & Schwarz             | 12 M                    | -      | 31.03.2014 |
| 389      | Digital Multimeter                     | Keithley 2000                | 0583926         | Keithley                    | 24 M                    | -      | 31.03.2015 |
| 392      | Radio Communication Tester             | MT8820A                      | 6K00000788      | Anritsu                     | 12 M                    | -      | 31.03.2014 |
| 431      | Model 7405                             | Near-Field Probe Set         | 9305-2457       | EMCO                        | -                       | 4      |            |
| 436      | Univ. Radio Communication Tester       | CMU 200                      | 103083          | Rohde & Schwarz             | 12 M                    | -      | 31.03.2014 |
| 441      | CTC-SAR-EMI Cable Loss                 | System EMI field (SAR) Cable | -               | CETECOM                     | 12 M                    | 5      | 31.10.2014 |
| 443      | CTC-FAR-EMI-RSE                        | System CTC-FAR-EMI-RSE       | -               | ETS-Lindgren / CETECOM      | 12 M                    | 5      | 15.07.2014 |
| 448      | notch filter WCDMA_FDD II              | WRCT 1850.0/2170.0-5/40-     | 5               | Wainwright Instruments GmbH | 12 M                    | 1c     | 30.06.2014 |
| 449      | notch filter WCDMA FDD V               | WRCT 824.0/894.0-5/40-8SSK   | 1               | Wainwright                  | 12 M                    | 1c     | 30.06.2014 |
| 454      | Oscilloscope                           | HM 205-3                     | 9210 P 29661    | Hameg                       | -                       | 4      |            |
| 456      | DC-Power supply 0-5 A                  | EA 3013 S                    | 207810          | Elektro Automatik           | pre-m                   | 2      |            |
| 459      | DC -Power supply 0-5 A , 0-32 V        | EA-PS 2032-50                | 910722          | Elektro Automatik           | pre-m                   | 2      |            |
| 460      | Univ. Radio Communication Tester       | CMU 200                      | 108901          | Rohde & Schwarz             | 12 M                    | -      | 31.03.2014 |
| 463      | Universal source                       | HP3245A                      | 2831A03472      | Agilent                     | -                       | 4      |            |
| 466      | Digital Multimeter                     | Fluke 112                    | 89210157        | Fluke USA                   | 24 M                    | -      | 31.03.2014 |
| 467      | Digital Multimeter                     | Fluke 112                    | 89680306        | Fluke USA                   | 24 M                    | -      | 31.03.2014 |
| 468      | Digital Multimeter                     | Fluke 112                    | 90090455        | Fluke USA                   | 24 M                    | -      | 31.03.2014 |
| 477      | ReRadiating GPS-System                 | AS-47                        | -               | Automotive Cons. Fink       | -                       | 3      |            |
| 480      | power meter (Fula)                     | NRVS                         | 838392/031      | Rohde & Schwarz             | 24 M                    | -      | 31.03.2015 |
| 482      | filter matrix                          | Filter matrix SAR 1          | -               | CETECOM (Brl)               | -                       | 1d     |            |
| 484      | pre-amplifier 2,5 - 18 GHz             | AMF-5D-02501800-25-10P       | 1244554         | Miteq                       | 12 M                    | -      | 30.06.2014 |
| 487      | System CTC NSA-Verification SAR-EMI    | System EMI field (SAR) NSA   | -               | ETS Lindgren / CETECOM      | 24 M                    | -      | 30.06.2015 |
| 489      | EMI Test Receiver                      | ESU40                        | 1000-30         | Rohde & Schwarz             | 12 M                    | -      | 31.03.2014 |
| 502      | band reject filter                     | WRCG 1709/1786-1699/1796-    | SN 9            | Wainwright                  | pre-m                   | 2      |            |
| 503      | band reject filter                     | WRCG 824/849-814/859-        | SN 5            | Wainwright                  | pre-m                   | 2      |            |
| 512      | notch filter GSM 850                   | WRCA 800/960-02/40-6EEK      | SN 24           | Wainwright                  | 12 M                    | 1c     | 30.06.2014 |
| 517      | relais switch matrix                   | HF Relais Box Keithley       | SE 04           | Keithley                    | pre-m                   | 2      |            |
| 523      | Digital Multimeter                     | L4411A                       | MY46000154      | Agilent                     | 24 M                    | -      | 31.03.2015 |
| 529      | 6 dB Broadband resistive power divider | Model 1515                   | LH 855          | Weinschel                   | pre-m                   | 2      |            |

| Ref.-No. | Equipment                               | Type                        | Serial-No.             | Manufacturer                | Interval of calibration | Remark | Cal due    |
|----------|---|-----------------------------|------------------------|-----------------------------|-------------------------|--------|------------|
| 530      | 10 dB Broadband resistive power divider | R 416110000                 | LOT 9828               | -                           | pre-m                   | 2      |            |
| 546      | Univ. Radio Communication Tester        | CMU 200                     | 106436                 | R&S                         | 12 M                    | -      | 31.03.2014 |
| 547      | Univ. Radio Communication Tester        | CMU 200                     | 835390/014             | Rohde & Schwarz             | 12 M                    | -      | 31.03.2014 |
| 548      | Digital-Barometer                       | GBP 2300                    | without                | Greisinger GmbH             | 36 M                    | -      | 30.06.2015 |
| 549      | Log.Per-Antenna                         | HL025                       | 1000060                | Rohde & Schwarz             | 36/12 M                 | -      | 31.03.2015 |
| 552      | high pass filter 2.8-18GHz              | WHKX 2.8/18G-10SS           | 4                      | Wainwright                  | 12 M                    | 1c     | 30.06.2014 |
| 558      | System CTC FAR S-VSWR                   | System CTC FAR S-VSWR       | -                      | CTC                         | 24 M                    | -      | 31.07.2015 |
| 574      | Biconilog Hybrid Antenna                | BTA-L                       | 980026L                | Frankonia                   | 36/12 M                 | -      | 31.03.2016 |
| 584      | Spectrum Analyzer                       | FSU 8                       | 100248                 | Rohde & Schwarz             | 24 M                    | -      | 31.03.2014 |
| 597      | Univ. Radio Communication Tester        | CMU 200                     | 100347                 | Rohde & Schwarz             | 12 M                    | -      | 31.03.2014 |
| 598      | Spectrum Analyzer                       | FSEM 30 (Reserve)           | 831259/013             | Rohde & Schwarz             | 24 M                    | -      | 13.01.2015 |
| 600      | power meter                             | NRVD (Reserve)              | 834501/018             | Rohde & Schwarz             | 24 M                    | -      | 31.03.2015 |
| 601      | medium-sensitivity diode sensor         | NRV-Z5 (Reserve)            | 8435323/003            | Rohde & Schwarz             | 24 M                    | -      | 31.03.2015 |
| 602      | peak power sensor                       | NRV-Z32 (Reserve)           | 835080                 | Rohde & Schwarz             | 24 M                    | -      | 31.03.2015 |
| 608      | UltraLog-Antenna                        | HL 562                      | 830547/009             | Rohde & Schwarz             | 36/12 M                 | -      | 31.03.2014 |
| 611      | DC power supply                         | E3632A                      | KR 75305854            | Agilent                     | pre-m                   | 2      |            |
| 612      | DC power supply                         | E3632A                      | MY 40001321            | Agilent                     | pre-m                   | 2      |            |
| 613      | Attenuator                              | R416120000 20dB 10W         | Lot. 9828              | Radiall                     | pre-m                   | 2      |            |
| 616      | Digitalmultimeter                       | Fluke 177                   | 88900339               | Fluke                       | 24 M                    | -      | 31.03.2014 |
| 617      | Power Splitter/Combiner                 | ZFSC-2-2-S+                 | S F987001108           | Mini Circuits               | -                       | 2      |            |
| 618      | Power Splitter/Combiner                 | 50PD-634                    | 600994                 | JFW Industries USA          | -                       | 2      |            |
| 619      | Power Splitter/Combiner                 | 50PD-634                    | 600995                 | JFW Industries, USA         | -                       | 3      |            |
| 620      | EMI Test Receiver                       | ESU 26                      | 100362                 | Rohde-Schwarz               | 12 M                    | -      | 01.03.2014 |
| 621      | Step Attenuator 0-139 dB                | RSP                         | 100017                 | Rohde & Schwarz             | pre-m                   | 2      |            |
| 625      | Generic Test Load USB                   | Generic Test Load USB       | -                      | CETECOM                     | -                       | 2      |            |
| 627      | data logger                             | OPUS 1                      | 201.0999.9302.6.4.1.43 | G. Lufft GmbH               | 24 M                    | -      | 30.05.2014 |
| 634      | Spectrum Analyzer                       | FSM (HF-Unit)               | 826188/010             | Rohde & Schwarz             | pre-m                   | 2      |            |
| 636      | Thermal Imaging camera                  | Ti32                        | Ti32-12060213          | Fluke Corporation           | 24 M                    | -      | 31.07.2014 |
| 637      | High Speed HDMI with Ethernet 1m        | HDMI cable with Ethernet 1m | -                      | KogiLink                    | -                       | 2      |            |
| 638      | HDMI Kabel with Ethernet 1,5 m flach    | HDMI cable with Ethernet    | -                      | Reichelt                    | -                       | 2      |            |
| 640      | HDMI cable 2m rund                      | HDMI cable 2m rund          | -                      | Reichelt                    | -                       | 2      |            |
| 641      | HDMI cable with Ethernet                | Certified HDMI cable with   | -                      | PureLink                    | -                       | 2      |            |
| 642      | Wideband Radio Communication Tester     | CMW 500                     | 126089                 | Rohde&Schwarz               | 24 M                    | -      | 31.03.2014 |
| 644      | Amplifier                               | ZX60-2534M+                 | SN865701299            | Mini-Circuits               | -                       | -      |            |
| 670      | Univ. Radio Communication Tester        | CMU 200                     | 106833                 | Rohde & Schwarz             | 12 M                    | -      | 31.03.2014 |
| 671      | DC-power supply 0-5 A                   | EA-3013S                    | -                      | Elektro Automatik           | pre-m                   | 2      |            |
| 678      | Power Meter                             | NRP                         | 101638                 | Rohde&Schwarz               | pre-m                   | -      |            |
| 683      | Spectrum Analyzer                       | FSU 26                      | 200571                 | Rohde & Schwarz             | 12 M                    | -      | 26.11.2014 |
| 686      | Field Analyzer                          | EHP-200A                    | 160WX30702             | Narda Safety Test Solutions | 24 M                    | -      | 18.07.2015 |
| 687      | Signal Generator                        | SMF 100A                    | 102073                 | Rohde&Schwarz               | 12 M                    | -      | 27.11.2014 |
| 688      | Pre Amp                                 | JS-18004000-40-8P           | 1750117                | Miteq                       | pre-m                   | -      |            |

## 12 Observations

No observations exceeding those reported with the single test cases have been made.

**Annex A Document history**

| Version | Applied changes   | Date of release |
|---------|-------------------|-----------------|
|         | Initial release   | 2014-03-27      |
| -A      | Editorial changes | 2014-03-28      |

**Annex B Further information****Glossary**

|          |   |  |
|----------|---|--|
| AVG      | - | Average  |
| DUT      | - | Device under test                              |
| EMC      | - | Electromagnetic Compatibility                  |
| EN       | - | European Standard                              |
| EUT      | - | Equipment under test                           |
| ETSI     | - | European Telecommunications Standard Institute |
| FCC      | - | Federal Communication Commission               |
| FCC ID   | - | Company Identifier at FCC                      |
| HW       | - | Hardware                                       |
| IC       | - | Industry Canada                                |
| Inv. No. | - | Inventory number                               |
| N/A      | - | Not applicable                                 |
| PP       | - | Positive peak                                  |
| QP       | - | Quasi peak                                     |
| S/N      | - | Serial number                                  |
| SW       | - | Software                                       |



## Annex C Accreditation Certificate

Front side of certificate



Deutsche Akkreditierungsstelle GmbH

Befehle gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV  
 Unterzeichnerin der Multilateralen Abkommen  
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

**Akkreditierung**



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

**CETECOM ICT Services GmbH**  
 Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

**Drahtgebundene Kommunikation einschließlich xDSL**  
 VoIP und DECT  
 Akustik  
 Funk einschließlich WLAN  
 Short Range Devices (SRD)  
 RFID  
 WiMax und Richtfunk  
 Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)  
 Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive  
 Produktsicherheit  
 SAR und Hearing Aid Compatibility (HAC)  
 Umweltsimulation  
 Smart Card Terminals  
 Bluetooth  
 Wi-Fi- Services

Die Akkreditierungskunde gilt nur in Verbindung mit dem Bescheid vom 18.01.2013 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 80 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt am Main, 18.01.2013  
Siehe Hinweis auf der Rückseite

Im Auftrag  
 Dr. Ingrid Pflüger  
 Abteilungsleiter

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
 Spittelmarkt 10  
 10117 Berlin

Standort Frankfurt am Main  
 Gartenstraße 6  
 60594 Frankfurt am Main

Standort Braunschweig  
 Bundesallee 100  
 38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungskunde bedarf der vorherigen schriftlichen Zustimmung der Deutschen Akkreditierungsstelle GmbH (DAKKS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAKKS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30). Die DAKKS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:  
 EA: [www.european-accreditation.org](http://www.european-accreditation.org)  
 ILAC: [www.ilac.org](http://www.ilac.org)  
 IAF: [www.iaf.nu](http://www.iaf.nu)

**Note:**

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>