



# FCC/IC RF Test Report

**APPLICANT** : Sony Mobile Communications AB  
**EQUIPMENT** : Smart phone  
**BRAND NAME** : SONY  
**TYPE NAME** : PM-0771-BV  
**FCC ID** : PY7PM-0771  
**IC** : 4170B-PM0771  
**STANDARD** : FCC Part 15 Subpart C §15.247  
IC RSS-210 issue 8  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Apr. 02, 2014 and testing was completed on May 08, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7PM-0771

IC : 4170B-PM0771

Page Number : 1 of 67

Report Issued Date : Jun. 09, 2014

Report Version : Rev. 01



## TABLE OF CONTENTS

REVISION HISTORY ..... 3

SUMMARY OF TEST RESULT ..... 4

1 GENERAL DESCRIPTION ..... 5

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Site ..... 7

    1.7 Applied Standards ..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9

    2.1 Descriptions of Test Mode ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 11

    2.4 Support Unit used in test configuration and system ..... 12

    2.5 EUT Operation Test Setup ..... 12

    2.6 Measurement Results Explanation Example ..... 13

3 TEST RESULT ..... 14

    3.1 6dB and 99% Bandwidth Measurement ..... 14

    3.2 Peak Output Power Measurement ..... 20

    3.3 Power Spectral Density Measurement ..... 22

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 30

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 39

    3.6 AC Conducted Emission Measurement ..... 60

    3.7 Antenna Requirements ..... 64

4 LIST OF MEASURING EQUIPMENT ..... 65

5 UNCERTAINTY OF EVALUATION ..... 65



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR440284B	Rev. 01	Initial issue of report	Jun. 09, 2014

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.87 dB at 30.000 MHz
3.6	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 6.80 dB at 0.158 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Sony Mobile Communications AB**  
Nya Vattentorget, 22188 Lund, Sweden

## 1.2 Manufacturer

**Compal Communications, INC.**  
No. 385, Yangguang Street, Neihu, Taipei 11491, Taiwan

## 1.3 Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is smart phone supporting, GSM / WCDMA / LTE, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, Bluetooth with FM Receiver, ANT+, GPS, and NFC features, and below is details of information.

General Information of Equipment Under Test	
Equipment	Smart phone
Brand Name	SONY
Type Name	PM-0771-BV
FCC ID	PY7PM-0771
IC	4170B-PM0771
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS / EGPRS Multi Slot Class	GPRS Class 33, EGPRS Class 33
WCDMA Operating Band(s)	FDD Band I / II / IV / V
WCDMA Rel. Version	Rel. 8
LTE Operating Band(s)	FDD Band II / IV / VII / XVII
LTE Rel. Version	Rel. 10
GPRS / EGPRS Multi Slot Class	GPRS Class 33 , EGPRS Class 33
Wi-Fi Specification	802.11b/g/n (HT40) 802.11a/n (HT20/HT40)
Bluetooth Version	v3.0+EDR / v4.0-LE
NFC Specification	ISO14443A / ISO14443B / Felica
ANT+	ANT+
Power Supply	Battery / AC Adapter / Car Charger
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	1.83 dBm (0.0015 W)
99% Occupied Bandwidth	1.06MHz
Antenna Type	PIFA Antenna type with gain 1.40 dBi
H/W	A
S/W	18.3.C.0.8
Type of Modulation	Bluetooth LE : GFSK

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI : 004402452474269	A	18.3.C.0.8	ZH8002JUPJ	RF conducted measurement
IMEI : 004402452477643			ZH80038NS9	Radiated Spurious Emission
IMEI : 004402452477734			ZH8002JVQW	Conducted Emission

Accessory List	
<b>AC Adapter</b>	Model No. : EP800
	Type No. : CAA-0002016-US B
	SN : 1112W28321732 (for Radiated Spurious Emission) 3113W23610674 (for AC power line Conducted Emission)
<b>Battery</b>	Model No. : LIS1551ERPC
	Type No. : F-4993-128-0
<b>Earphone</b>	Model No. : MH410c
	Type No. : AG-1100
	SN : 12522047001ADD8 (for Radiated Spurious Emission) 12481A10036502 (for AC power line Conducted Emission)
<b>USB Cable</b>	Model No. : AHAB EC450
	Type No. : AI-0700
	SN : 132512DA0631054 (for Radiated Spurious Emission) 132212DF3297482 (for AC power line Conducted Emission)



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Test Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.			
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>IC Registration No.</b>
	TH02-HY	CO05-HY	03CH06-HY	4086B-1



## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	0.90 dBm	
Ch19	2440MHz	1.83 dBm	
Ch39	2480MHz	1.13 dBm	

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.
  
- b. AC power line Conducted Emission was tested under maximum output power.




## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Earphone + Battery + USB Cable (Data Link with Notebook) + GPS Rx

## 2.3 Connection Diagram of Test System

### <Bluetooth 4.0 – LE Tx Mode>

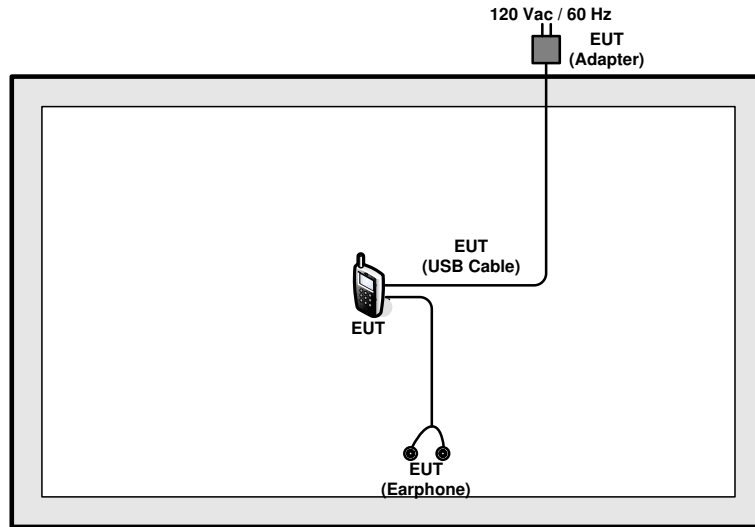

### <AC Conducted Emission Mode>

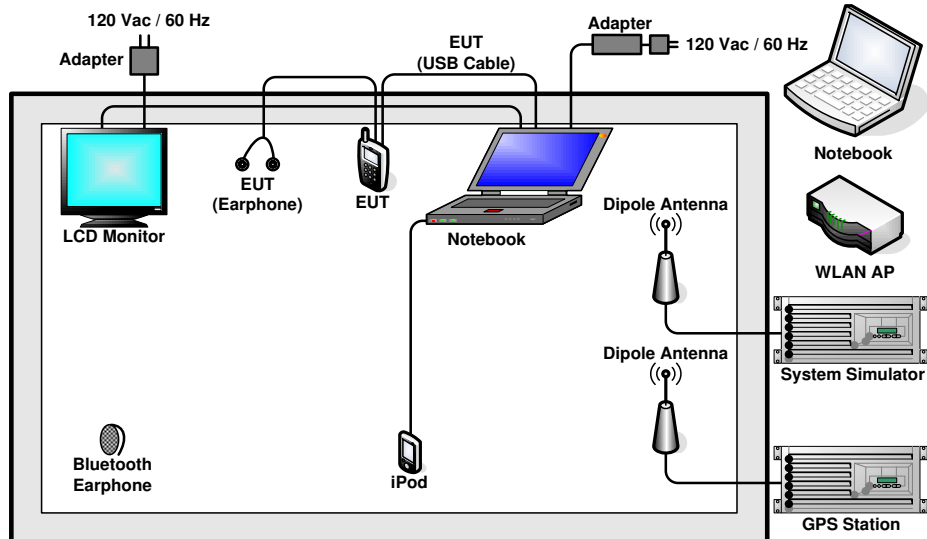

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	Unshielded, 0.75m	N/A
6.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
7.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
8.	SD Card	SanDisk	MicroSD HC	FCC DoC	Shielded, 1.0 m	N/A

## 2.5 EUT Operation Test Setup

For Bluetooth function, programmed RF utility, “Android Debug Bridge” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.



## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

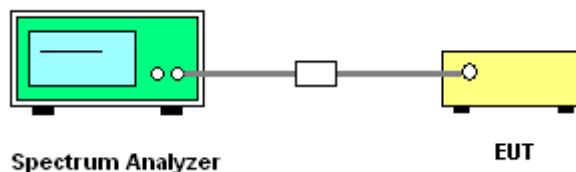




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Osolemio Chang and Bill Kuo	Relative Humidity :	51~55%

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
00	2402	0.66	0.5	Pass
19	2440	0.66	0.5	Pass
39	2480	0.66	0.5	Pass


6 dB Bandwidth Plot on Channel 00

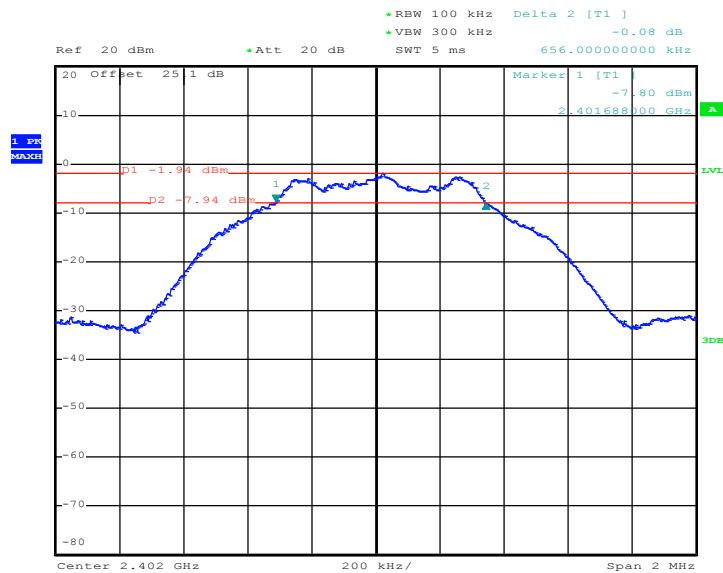

Date: 16.APR.2014 00:25:48




6 dB Bandwidth Plot on Channel 19

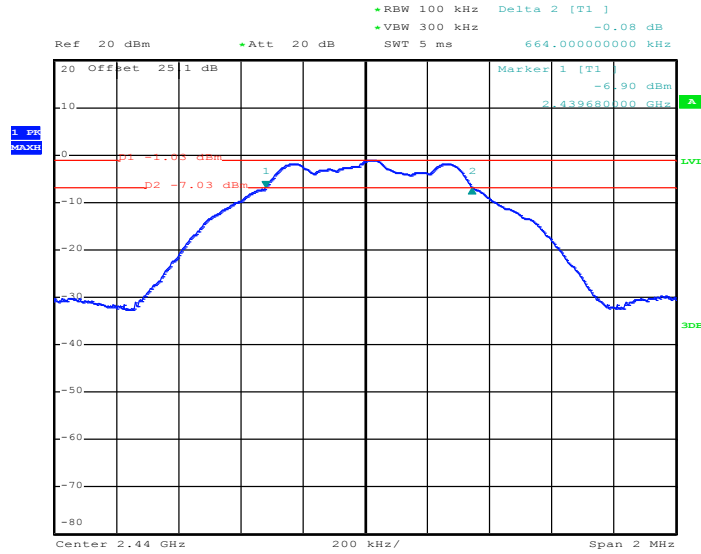

Date: 16.APR.2014 00:31:39

6 dB Bandwidth Plot on Channel 39

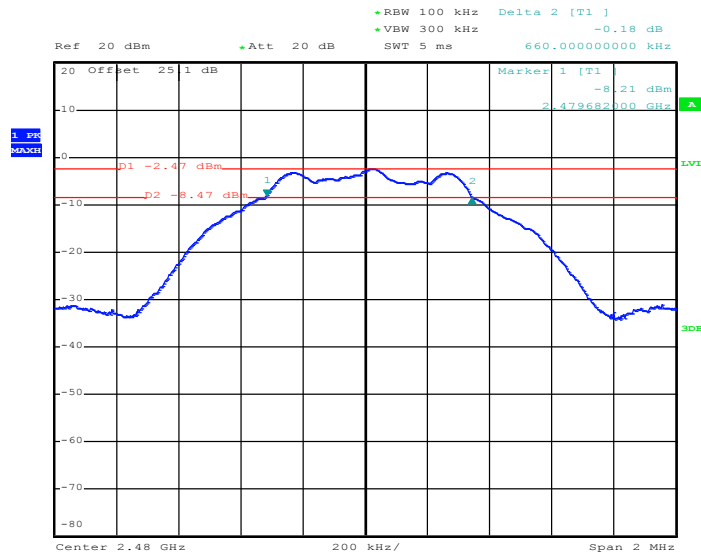

Date: 16.APR.2014 00:35:22





---

**SPORTON INTERNATIONAL INC.**

TEL : 886-3-327-3456  
FAX : 886-3-328-4978  
FCC ID : PY7PM-0771  
IC : 4170B-PM0771

Page Number : 17 of 67  
Report Issued Date : Jun. 09, 2014  
Report Version : Rev. 01

Report Template No.: BU5-FR15CBT4.0 Version 1.0  
Report Template No.: BU5-CR210BT4.0 Version 1.0




3.1.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Osolemio Chang and Bill Kuo	Relative Humidity :	51~55%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.06
19	2440	1.06
39	2480	1.06


99% Bandwidth Plot on Channel 00

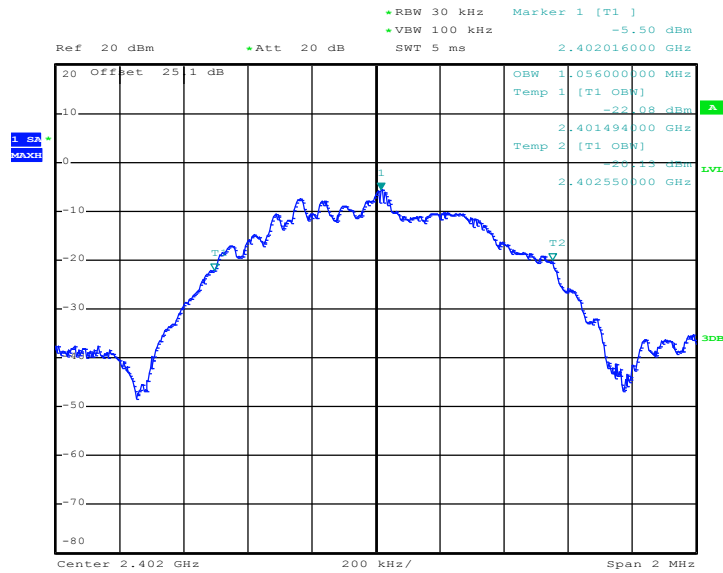

Date: 16.APR.2014 00:27:18




99% Occupied Bandwidth Plot on Channel 19

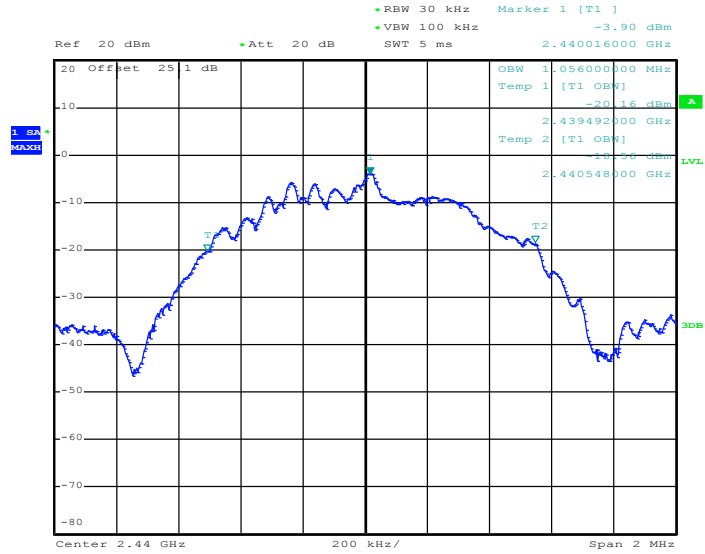

Date: 16.APR.2014 00:33:39

99% Occupied Bandwidth Plot on Channel 39

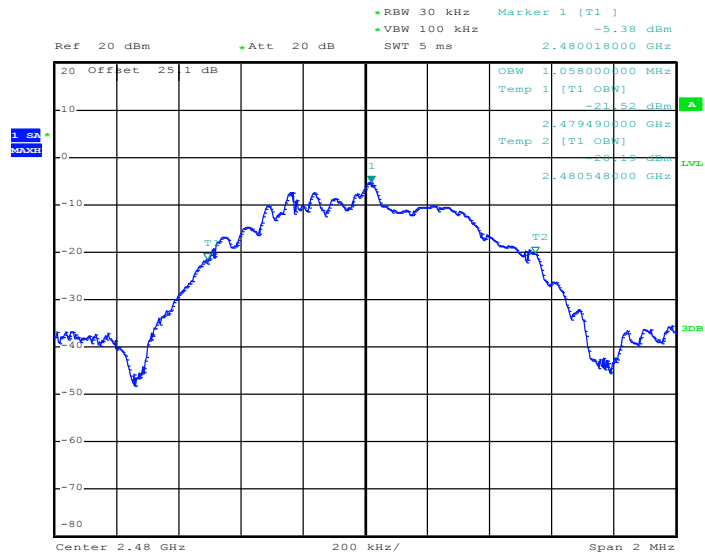

Date: 16.APR.2014 00:37:26

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

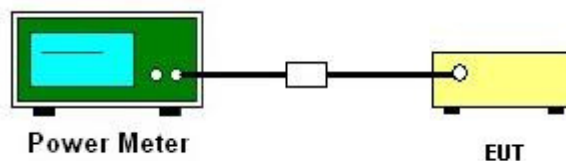



3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Osolemio Chang and Bill Kuo	Relative Humidity :	51~55%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	0.90	30.00	Pass
19	2440	1.83	30.00	Pass
39	2480	1.13	30.00	Pass

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

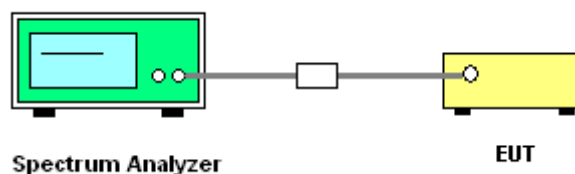



3.3.5 Test Result of Power Spectral Density

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Osolemio Chang and Bill Kuo	Relative Humidity :	51~55%

Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3kHz)	Pass/Fail
		PSD/100kHz (dBm)	PSD/3kHz (dBm)		
00	2402	-2.57	-17.89	8	Pass
19	2440	-1.04	-16.26	8	Pass
39	2480	-2.47	-17.76	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100kHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

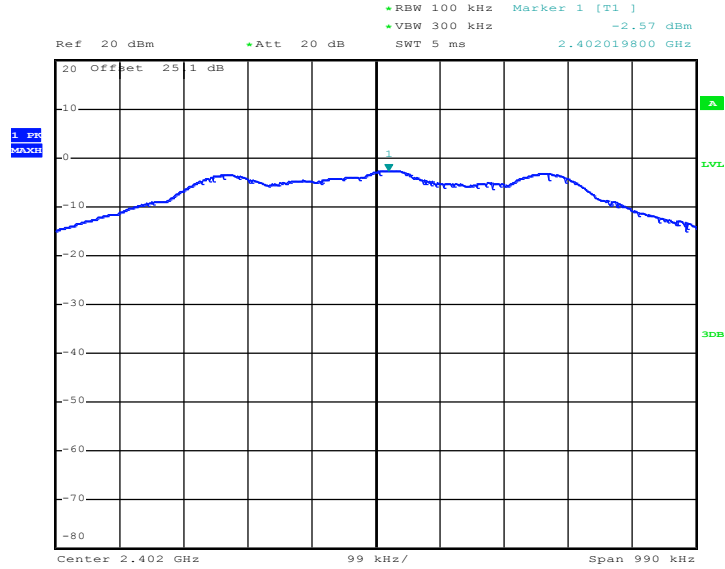


Date: 16.APR.2014 00:26:16






PSD 100kHz Plot on Channel 19

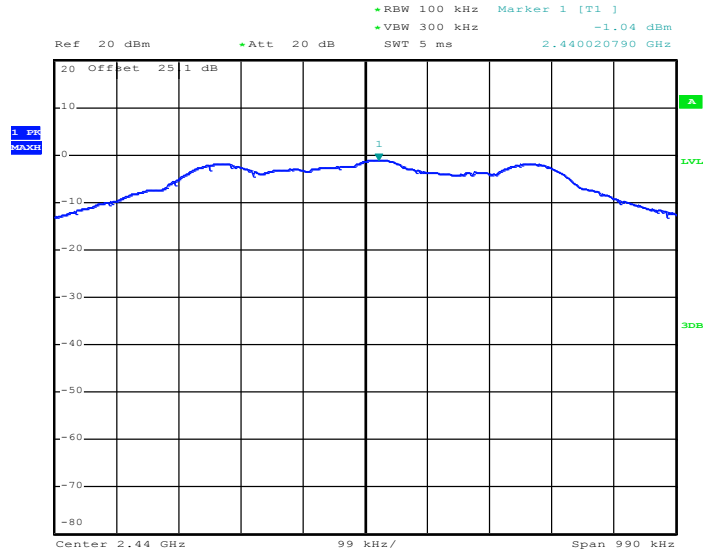

Date: 16.APR.2014 00:32:37

PSD 100kHz Plot on Channel 39

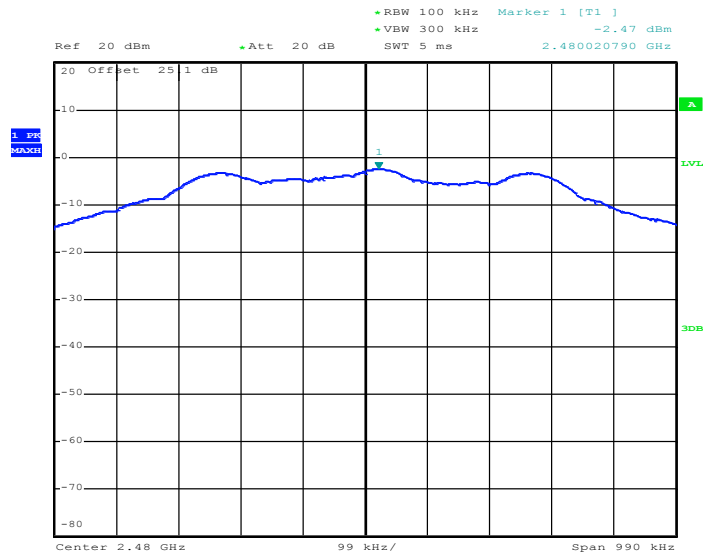

Date: 16.APR.2014 00:35:55



---

**SPORTON INTERNATIONAL INC.**

TEL : 886-3-327-3456  
FAX : 886-3-328-4978  
FCC ID : PY7PM-0771  
IC : 4170B-PM0771


Page Number : 26 of 67  
Report Issued Date : Jun. 09, 2014  
Report Version : Rev. 01

Report Template No.: BU5-FR15CBT4.0 Version 1.0  
Report Template No.: BU5-CR210BT4.0 Version 1.0



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

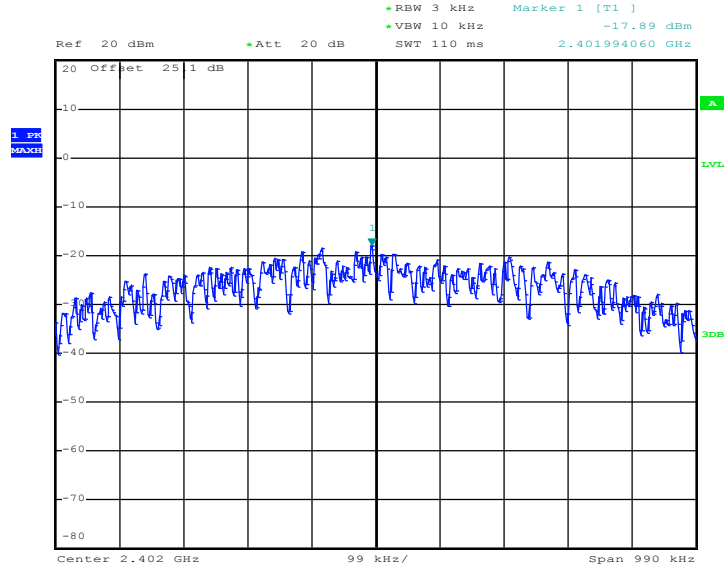

Date: 16.APR.2014 00:26:08




PSD 3kHz Plot on Channel 19

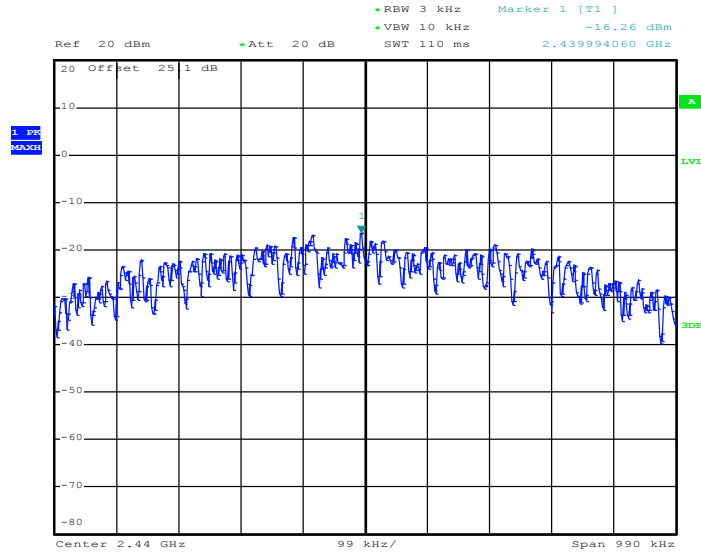

Date: 16.APR.2014 00:32:27

PSD 3kHz Plot on Channel 39

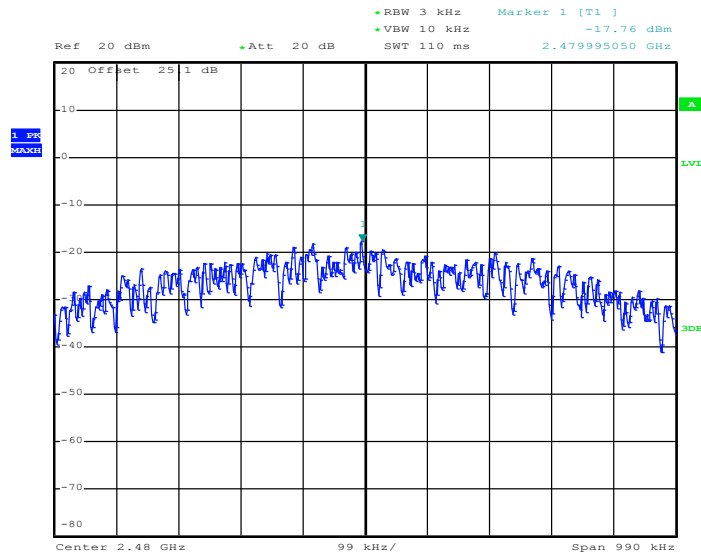

Date: 16.APR.2014 00:35:46



---

**SPORTON INTERNATIONAL INC.**

TEL : 886-3-327-3456  
FAX : 886-3-328-4978  
FCC ID : PY7PM-0771  
IC : 4170B-PM0771

Page Number : 29 of 67  
Report Issued Date : Jun. 09, 2014  
Report Version : Rev. 01

Report Template No.: BU5-FR15CBT4.0 Version 1.0  
Report Template No.: BU5-CR210BT4.0 Version 1.0

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.4.4 Test Setup

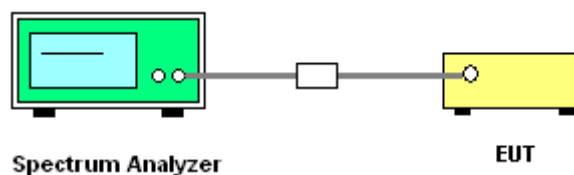




3.4.5 Test Result of Conducted Band Edges

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	00 and 39	Relative Humidity :	51~55%
		Test Engineer :	Osolemio Chang and Bill Kuo


Low Band Edge Plot on Channel 00

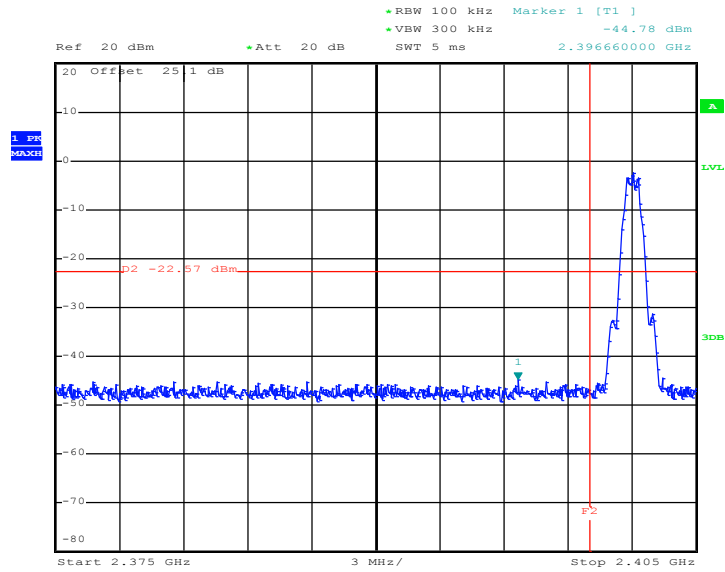

Date: 16.APR.2014 00:26:30



High Band Edge Plot on Channel 39

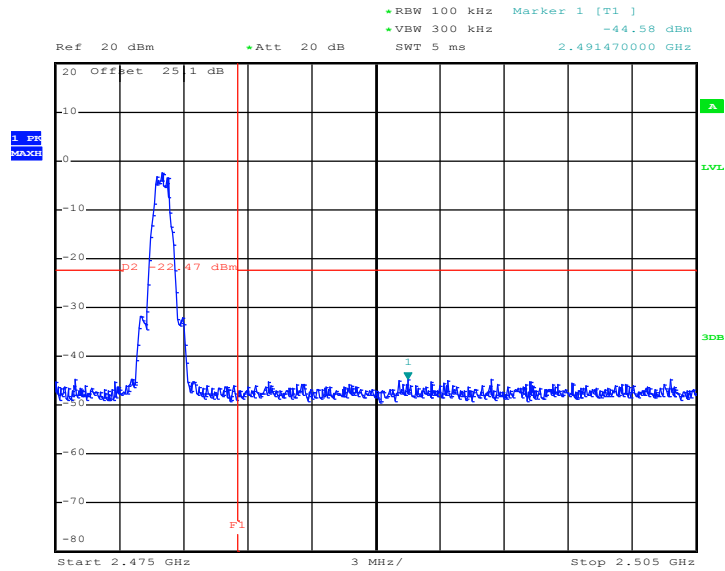

Date: 16.APR.2014 00:36:13






3.4.6 Test Result of Conducted Spurious Emission

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	51~55%
		Test Engineer :	Osolemio Chang and Bill Kuo


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

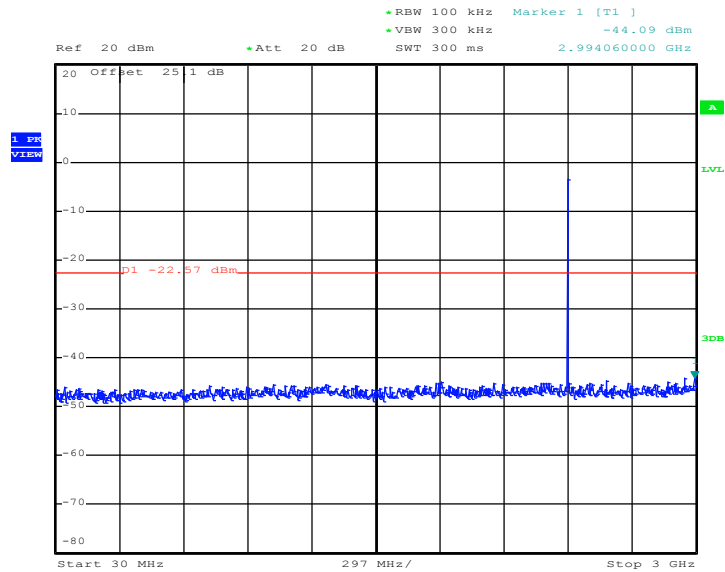

Date: 16.APR.2014 00:26:49



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

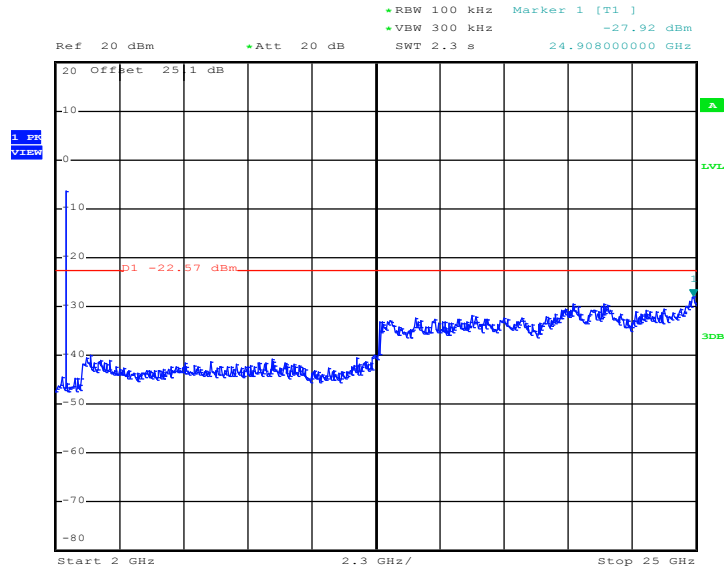


Date: 16.APR.2014 00:27:07



Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	19	Relative Humidity :	51~55%
		Test Engineer :	Osolemio Chang and Bill Kuo


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

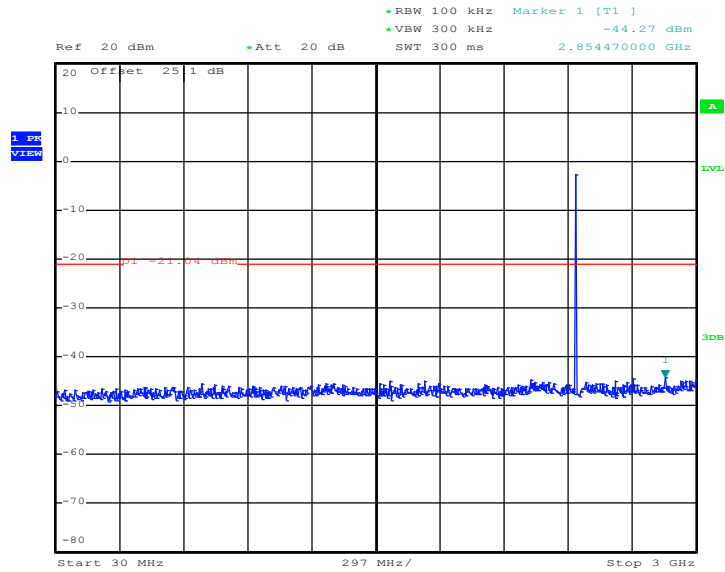

Date: 16.APR.2014 00:33:08



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

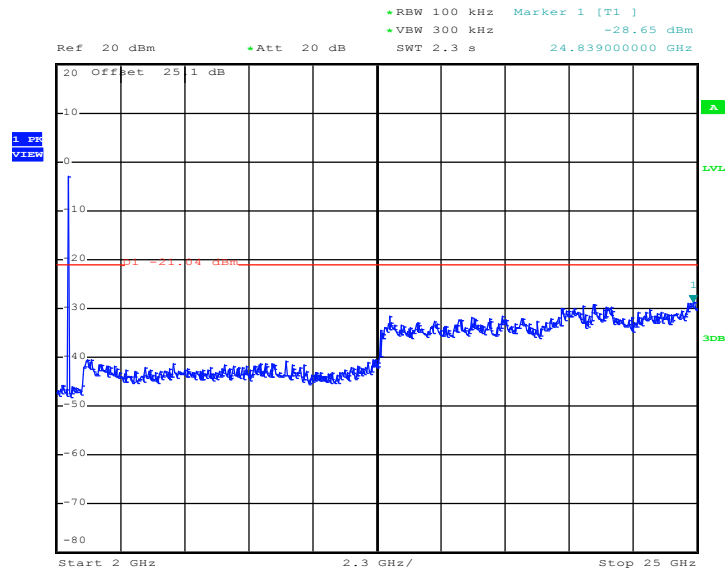


Date: 16.APR.2014 00:33:26



Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	39	Relative Humidity :	51~55%
		Test Engineer :	Osolemio Chang and Bill Kuo


**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39**

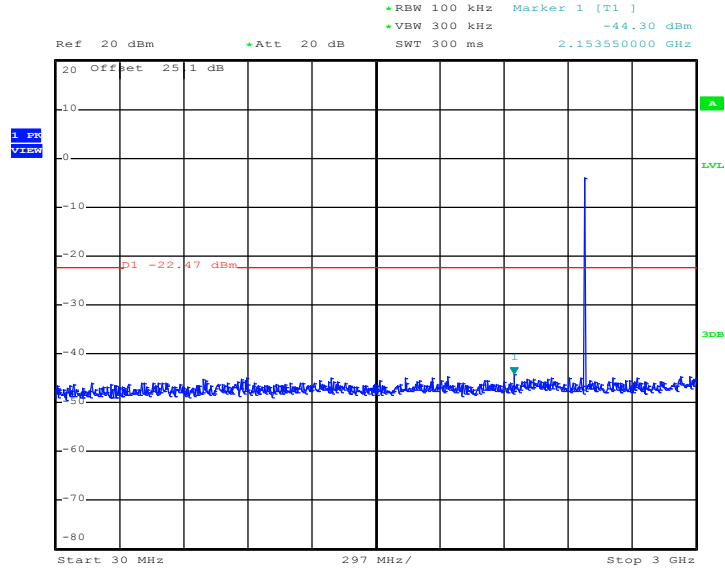

Date: 16.APR.2014 00:36:40



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39

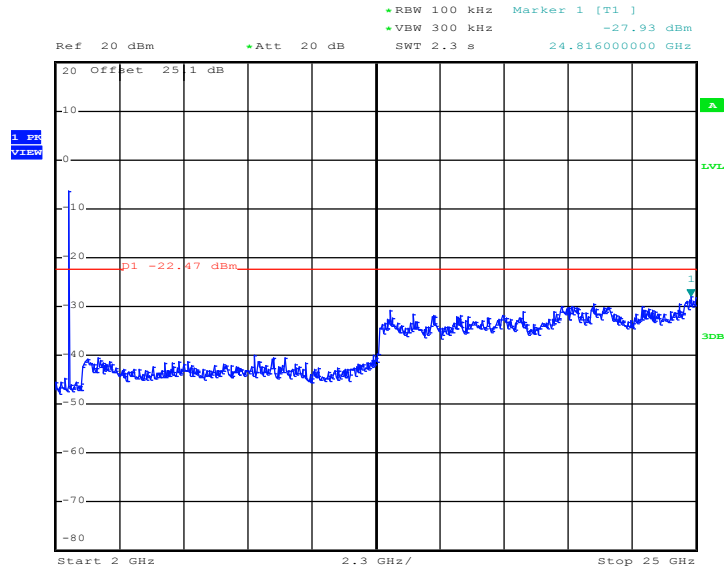

Date: 16.APR.2014 00:36:59



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.
 

For average measurement:


    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
Bluetooth 4.0 - LE	62.66	396.000	2.53	3kHz




### 3.5.4 Test Setup


For radiated emissions below 30MHz

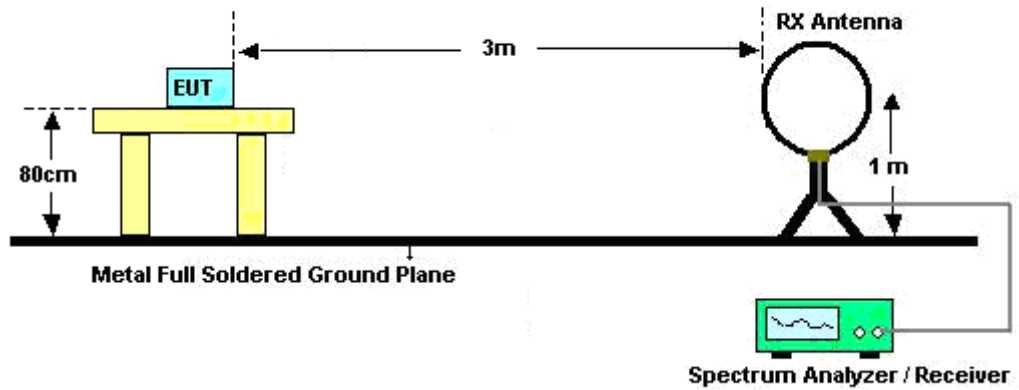

For radiated emissions from 30MHz to 1GHz

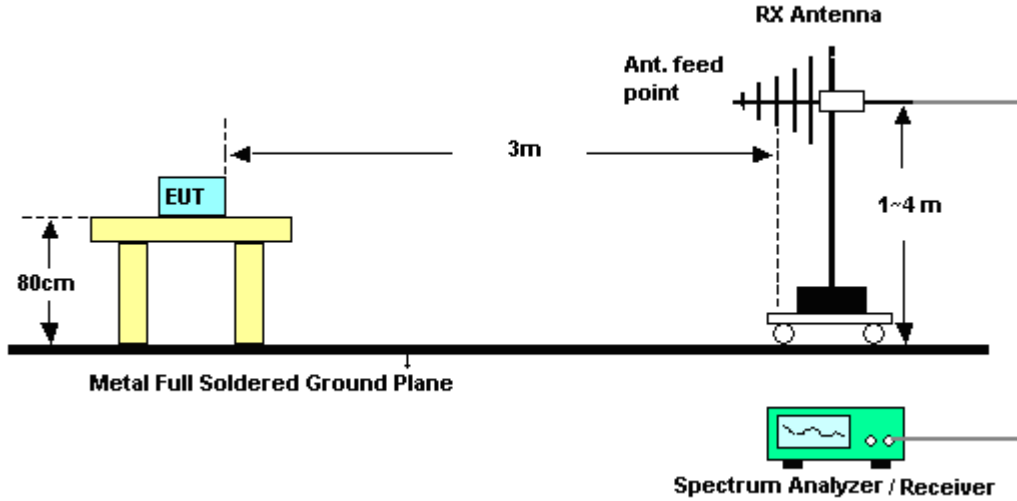

For radiated emissions above 1GHz

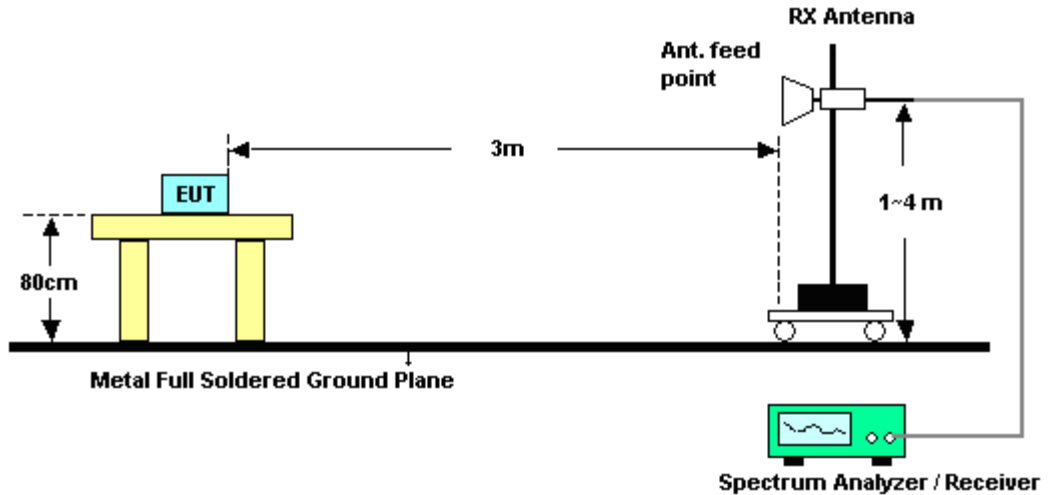


### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	45~46%
		Test Engineer :	Gavin Wu

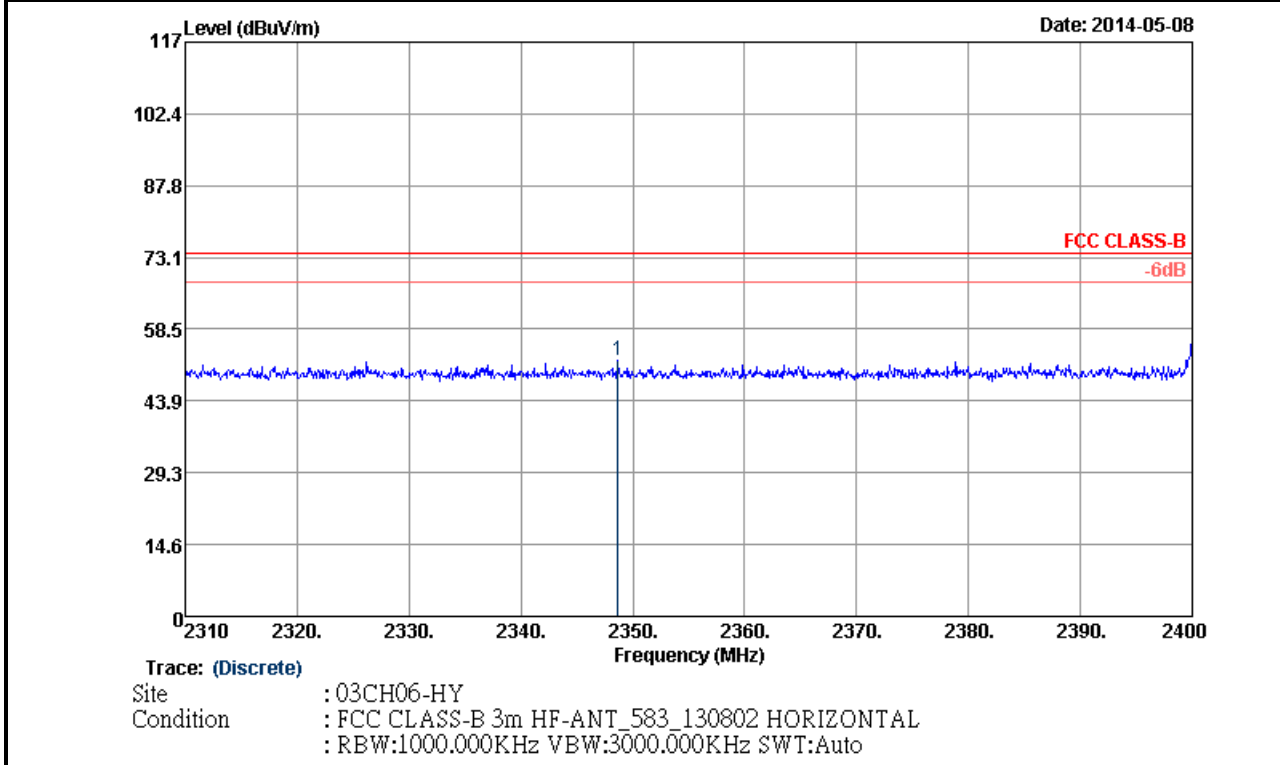


ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level (dBμV/m)	Over Limit ( dB )	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2348.70	52.13	-21.87	74	48.52	31.88	6.38	34.65	122	332	Peak

**Note:** Worst case measurement on 2348.7MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	45~46%
		Test Engineer :	Gavin Wu

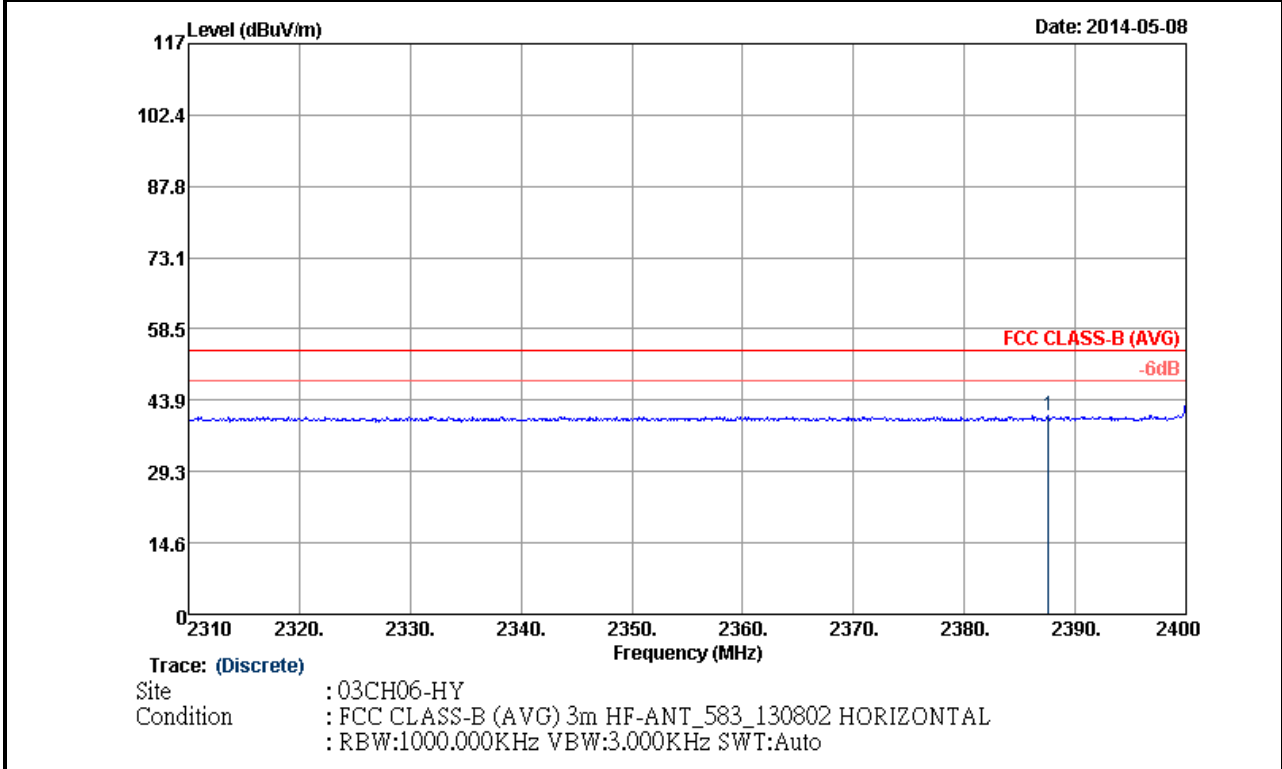


ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level (dBμV/m)	Over Limit ( dB )	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.58	40.62	-13.38	54	36.9	31.92	6.45	34.65	122	332	Average

**Note:** Worst case measurement on 2387.58 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	45~46%
		Test Engineer :	Gavin Wu

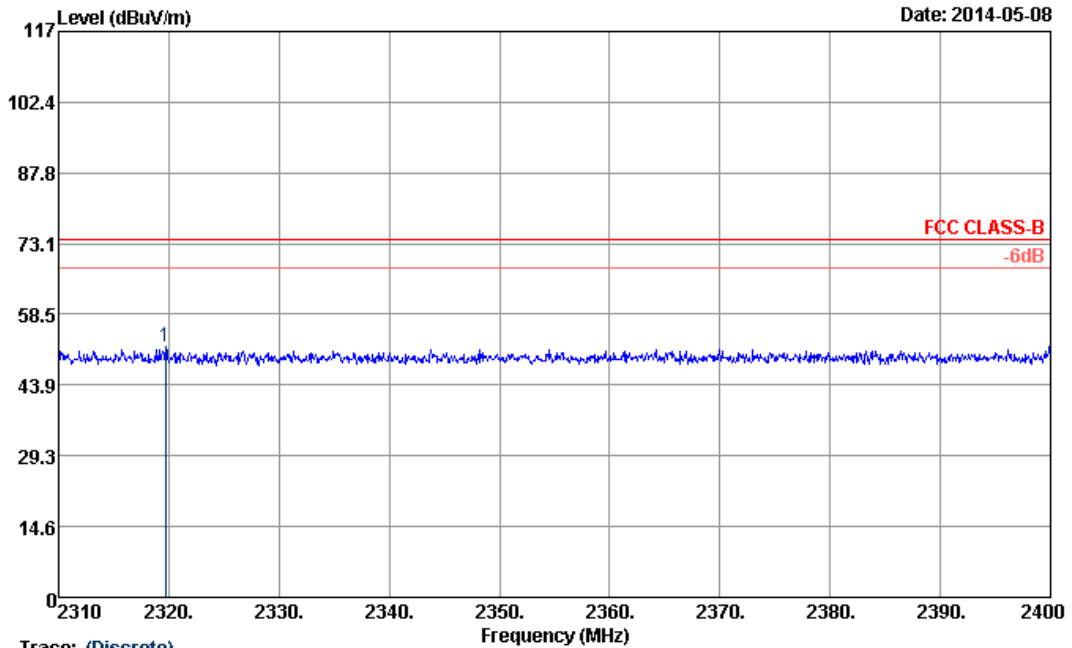

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level (dBμV/m)	Over Limit ( dB )	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2319.72	51.67	-22.33	74	48.11	31.86	6.35	34.65	100	91	Peak

**Note:** Worst case measurement on 2319.72 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	45~46%
		Test Engineer :	Gavin Wu

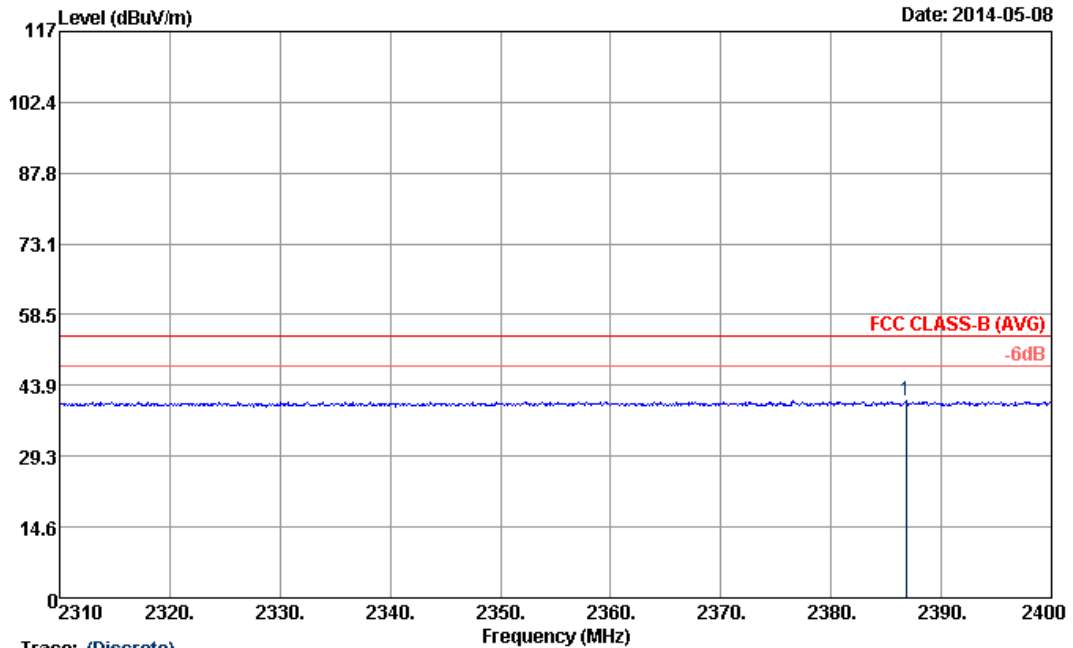

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B (AVG) 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:3.000KHz SWT:Auto


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level (dBμV/m)	Over Limit ( dB )	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386.77	40.66	-13.34	54	36.94	31.92	6.45	34.65	100	91	Average

**Note:** Worst case measurement on 2386.77 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2310-2390MHz. And, 2390-2400 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	45~46%
		Test Engineer :	Gavin Wu

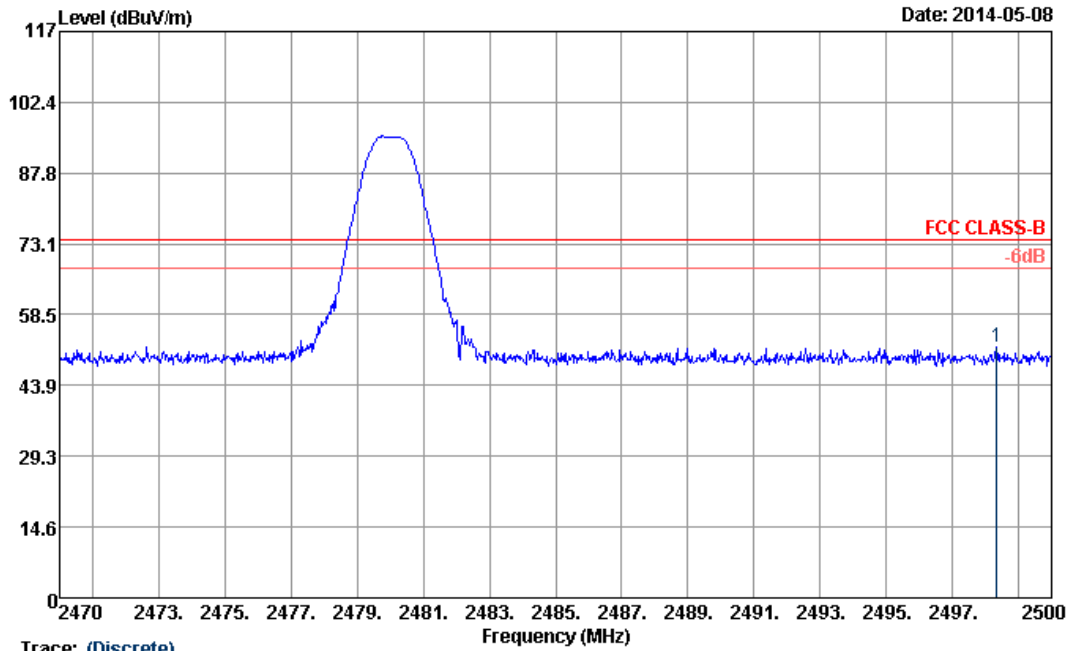

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 HORIZONTAL  
 : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto


ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level (dBμV/m)	Over Limit ( dB )	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2498.35	51.7	-22.3	74	47.74	32	6.59	34.63	117	333	Peak

**Note:** Worst case measurement on 2498.35 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500 MHz. And, 2470-2483.5 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	45~46%
		Test Engineer :	Gavin Wu

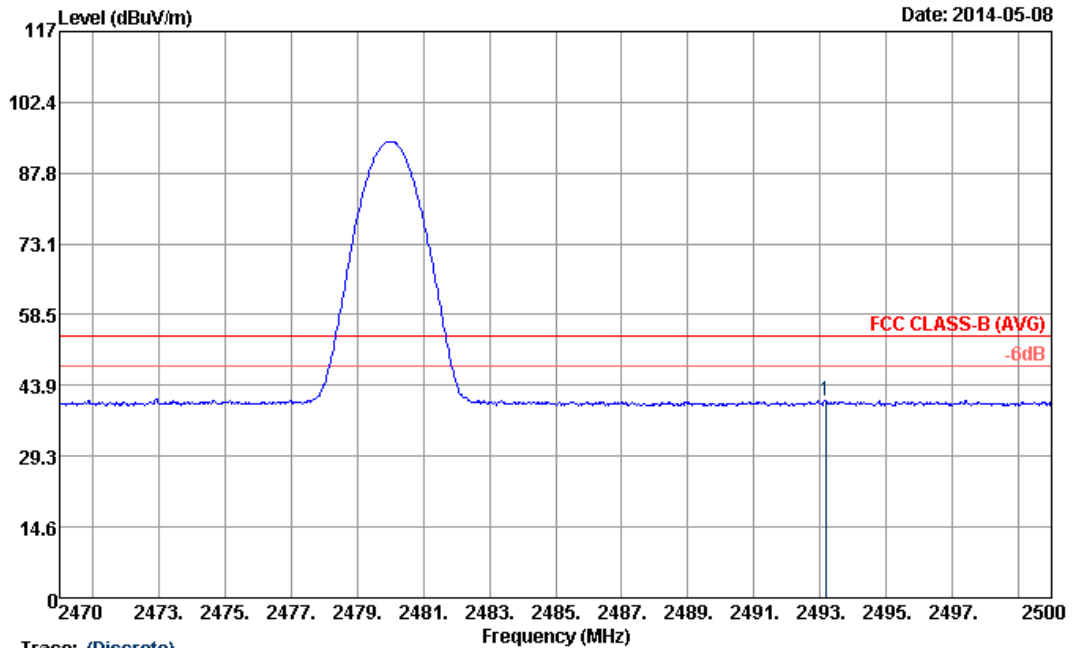

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B (AVG) 3m HF-ANT\_583\_130802 HORIZONTAL  
 : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

ANTENNA POLARITY : HORIZONTAL


Frequency ( MHz )	Level (dBμV/m)	Over Limit ( dB )	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2493.16	40.76	-13.24	54	36.8	32	6.59	34.63	117	333	Average

**Note:** Worst case measurement on 2493.16 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500 MHz. And, 2470-2483.5 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.





Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	45~46%
		Test Engineer :	Gavin Wu

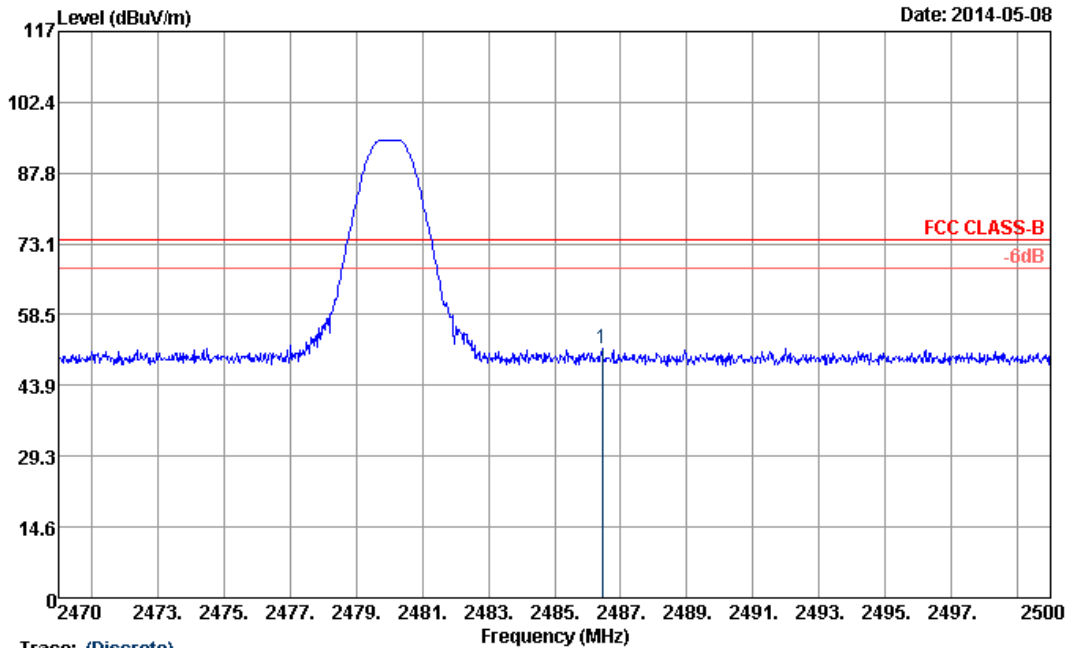

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto


ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level (dBμV/m)	Over Limit ( dB )	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2486.44	51.53	-22.47	74	47.58	31.99	6.59	34.63	100	90	Peak

**Note:** Worst case measurement on 2486.44 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500 MHz. And, 2470-2483.5 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	45~46%
		Test Engineer :	Gavin Wu

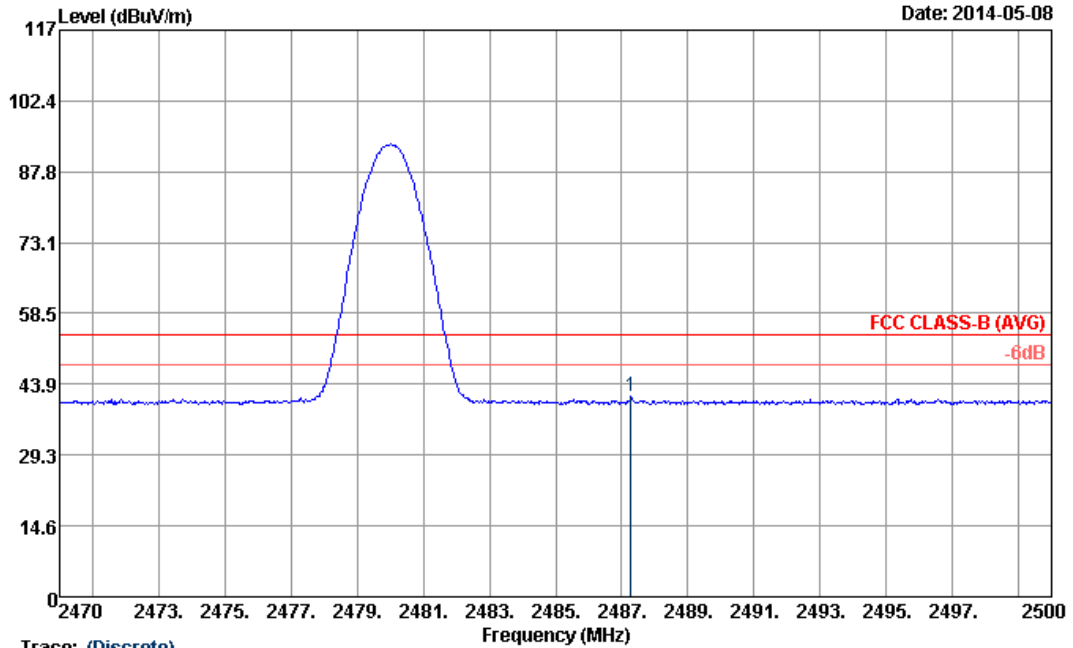

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B (AVG) 3m HF-ANT\_583\_130802 VERTICAL  
 : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level (dBμV/m)	Over Limit ( dB )	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2487.28	41.23	-12.77	54	37.28	31.99	6.59	34.63	100	90	Average

**Note:** Worst case measurement on 2487.28 MHz is compliance with 74/54 dBuV/m (peak/average) limit and Edge Measurement in the restricted band 2483.5-2500 MHz. And, 2470-2483.5 MHz is non-restricted band which limit line is 20dB below the fundamental frequency emission level which is tested by conducted spurious emission. Both the test results are compliance with the FCC limit line.



### 3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.


<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	24~25°C							
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	45~46%							
<b>Test Engineer :</b>	Gavin Wu									
<b>Remark :</b>	<ol style="list-style-type: none"> <li>2403 MHz is fundamental signal which can be ignored.</li> <li>7206 and 9609 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 94.24 dBμV/m - 20dB = 74.24 dBμV/m.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>									
<p style="text-align: right;">Date: 2014-05-08</p> <p>Trace: (Discrete)          Site : 03CH06-HY          Condition : FCC CLASS-B 3m SHF-EHF HORIZONTAL</p>										
ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2403	93.23	-	-	89.49	31.93	6.45	34.64	122	332	Average
2403	94.24	-	-	90.5	31.93	6.45	34.64	122	332	Peak
4803	40.07	-33.93	74	56.36	34.41	10.16	60.86	100	0	Peak
7206	41.02	-33.22	74.24	54.85	35.68	10.97	60.48	100	0	Peak
9609	42.89	-31.35	74.24	57.13	36.32	10.56	61.12	100	0	Peak



**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Gavin Wu		
<b>Remark :</b>	1. 2403 MHz is fundamental signal which can be ignored. 2. 7206 and 9609 MHz are not within a restricted band. 3. Average measurement was not performed if peak level went lower than the average limit.		

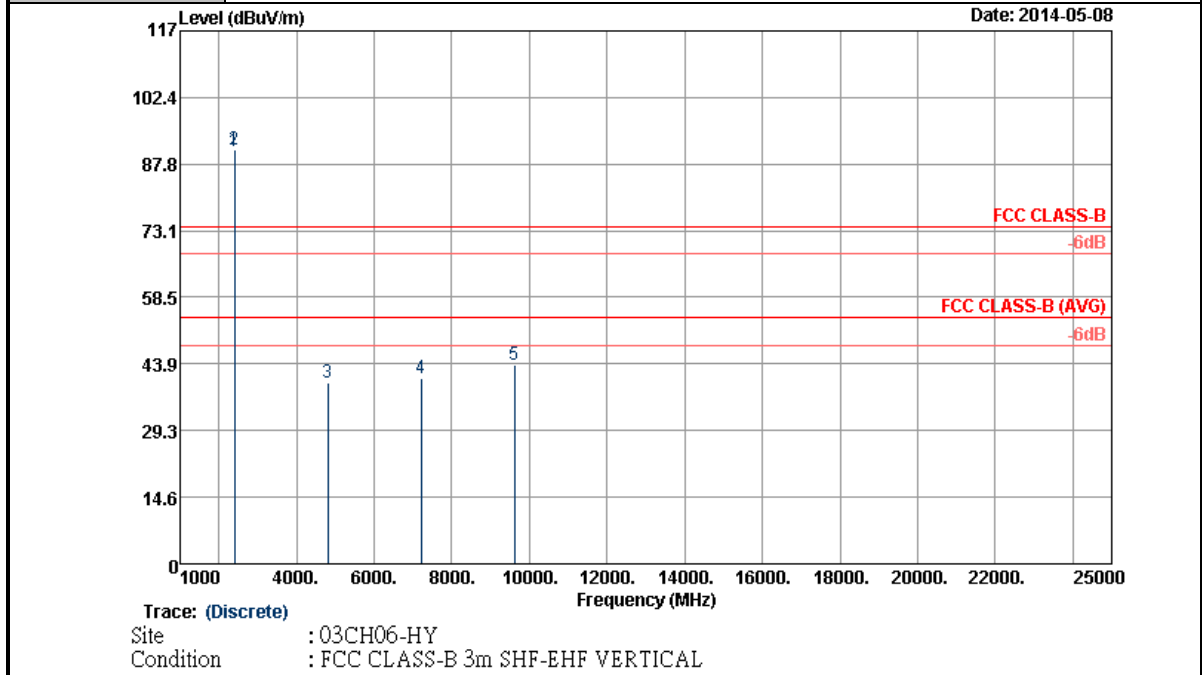


ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	90.63	-	-	86.9	31.92	6.45	34.64	100	91	Average
2402	91.08	-	-	87.35	31.92	6.45	34.64	100	91	Peak
4803	39.68	-34.32	74	55.97	34.41	10.16	60.86	100	0	Peak
7206	40.61	-33.39	74	54.44	35.68	10.97	60.48	100	0	Peak
9609	43.57	-30.43	74	57.81	36.32	10.56	61.12	100	0	Peak

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Gavin Wu		
<b>Remark :</b>	1. 2440 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 97.3 dBμV/m - 20dB = 77.3 dBμV/m. 3. Average measurement was not performed if peak level went lower than the average limit.		

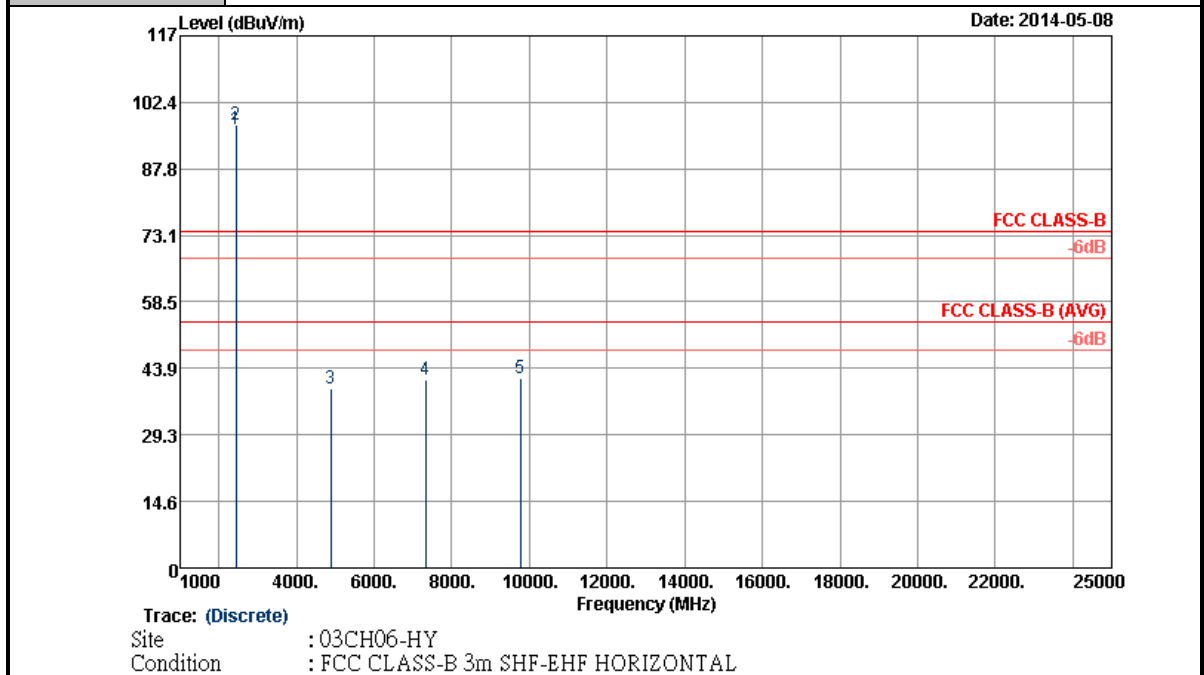

Trace: (Discrete)  
 Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m SHF-EHF HORIZONTAL


**ANTENNA POLARITY : HORIZONTAL**

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2440	96.52	-	-	92.68	31.96	6.52	34.64	117	333	Average
2440	97.3	-	-	93.46	31.96	6.52	34.64	117	333	Peak
4881	39.59	-34.41	74	55.72	34.37	10.19	60.69	100	0	Peak
7323	41.32	-32.68	74	55.31	35.6	10.94	60.53	100	0	Peak
9765	41.75	-35.55	77.3	55.81	36.53	10.57	61.16	100	0	Peak

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Gavin Wu		
<b>Remark :</b>	1. 2440 MHz is fundamental signal which can be ignored. 2. 9765 MHz is not within a restricted band. 3. Average measurement was not performed if peak level went lower than the average limit.		

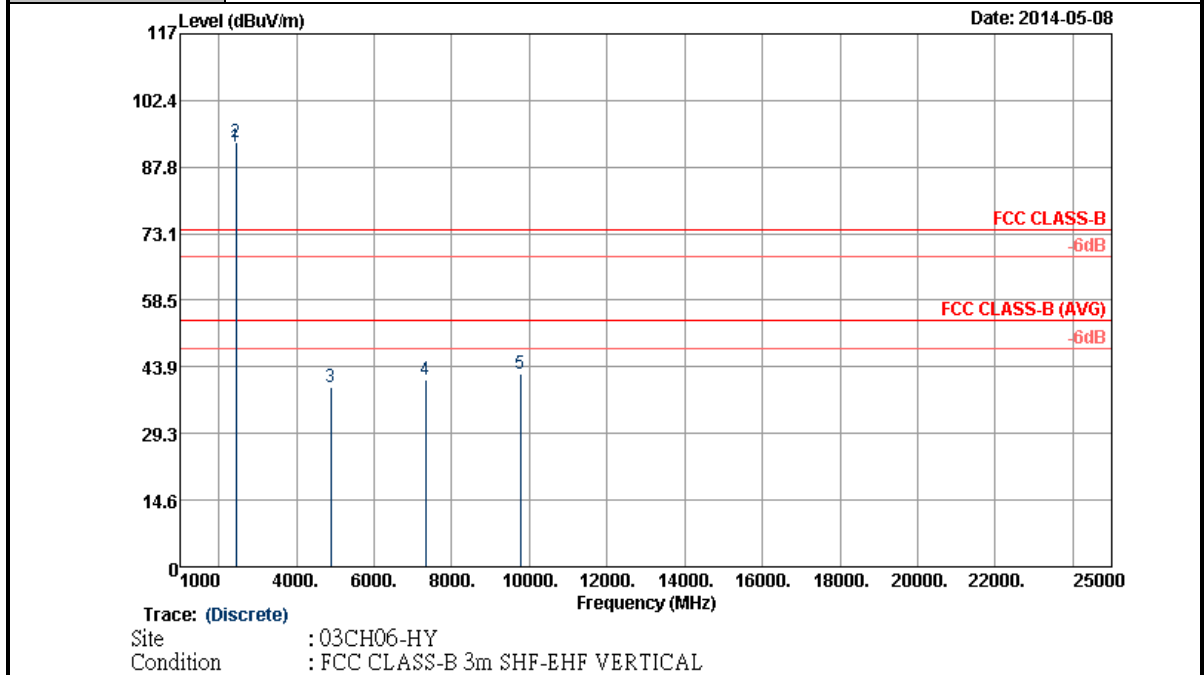


ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2440	92.31	-	-	88.47	31.96	6.52	34.64	100	89	Average
2440	93.25	-	-	89.41	31.96	6.52	34.64	100	89	Peak
4881	39.58	-34.42	74	55.71	34.37	10.19	60.69	100	0	Peak
7323	41.12	-32.88	74	55.11	35.6	10.94	60.53	100	0	Peak
9765	42.32	-31.68	74	56.38	36.53	10.57	61.16	100	0	Peak

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Gavin Wu		
<b>Remark :</b>	1. 2481 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 95.29 dBμV/m - 20dB = 75.29 dBμV/m. 3. Average measurement was not performed if peak level went lower than the average limit.		

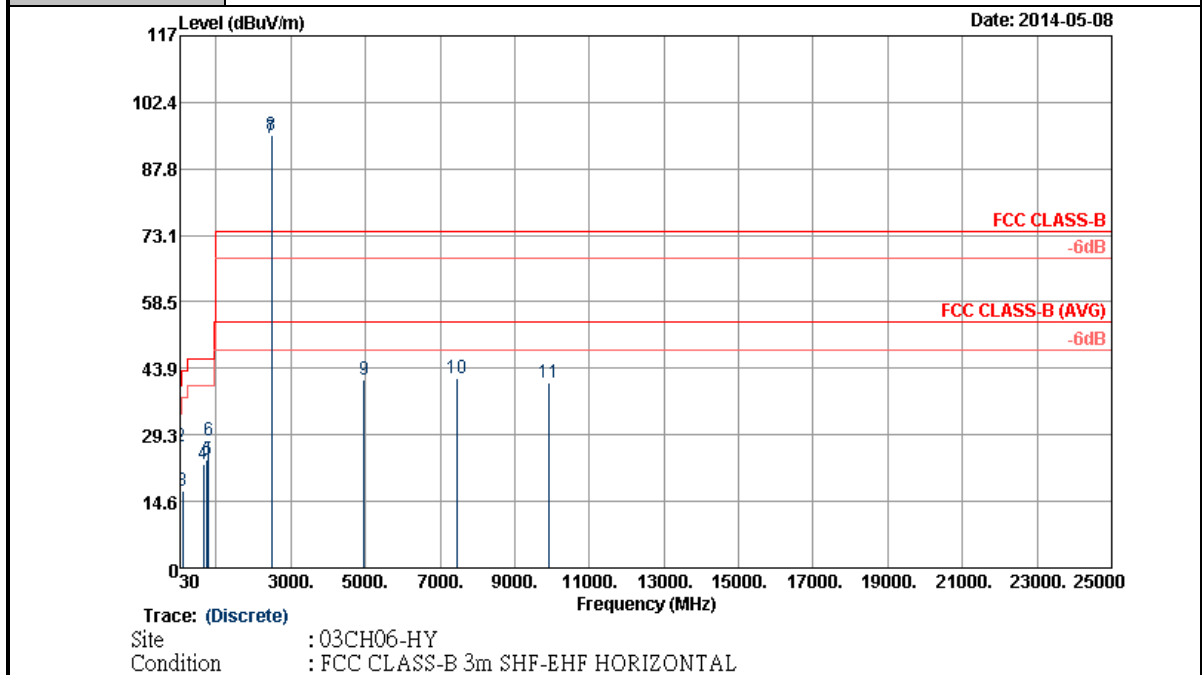

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
36.75	28.75	-11.25	40	45.37	14.46	0.71	31.79	100	147	Peak
39.99	26.73	-13.27	40	44.88	12.9	0.74	31.79	-	-	Peak
106.14	16.8	-26.7	43.5	35.7	11.72	1.13	31.75	-	-	Peak
650	22.71	-23.29	46	32.45	19.5	2.8	32.04	-	-	Peak
760.6	23.64	-22.36	46	32.37	20.2	3.05	31.98	-	-	Peak
784.4	28.11	-17.89	46	36.86	20.15	3.06	31.96	-	-	Peak






ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2481	94.39	-	-	90.44	31.99	6.59	34.63	117	333	Average
2481	95.29	-	-	91.34	31.99	6.59	34.63	117	333	Peak
4959	41.24	-32.76	74	57.19	34.32	10.21	60.48	100	0	Peak
7440	41.84	-32.16	74	55.99	35.53	10.9	60.58	100	0	Peak
9921	40.85	-34.44	75.29	54.75	36.72	10.57	61.19	100	0	Peak

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Gavin Wu		
<b>Remark :</b>	1. 2481 MHz is fundamental signal which can be ignored. 2. 9921 MHz is not within a restricted band. 3. Average measurement was not performed if peak level went lower than the average limit.		

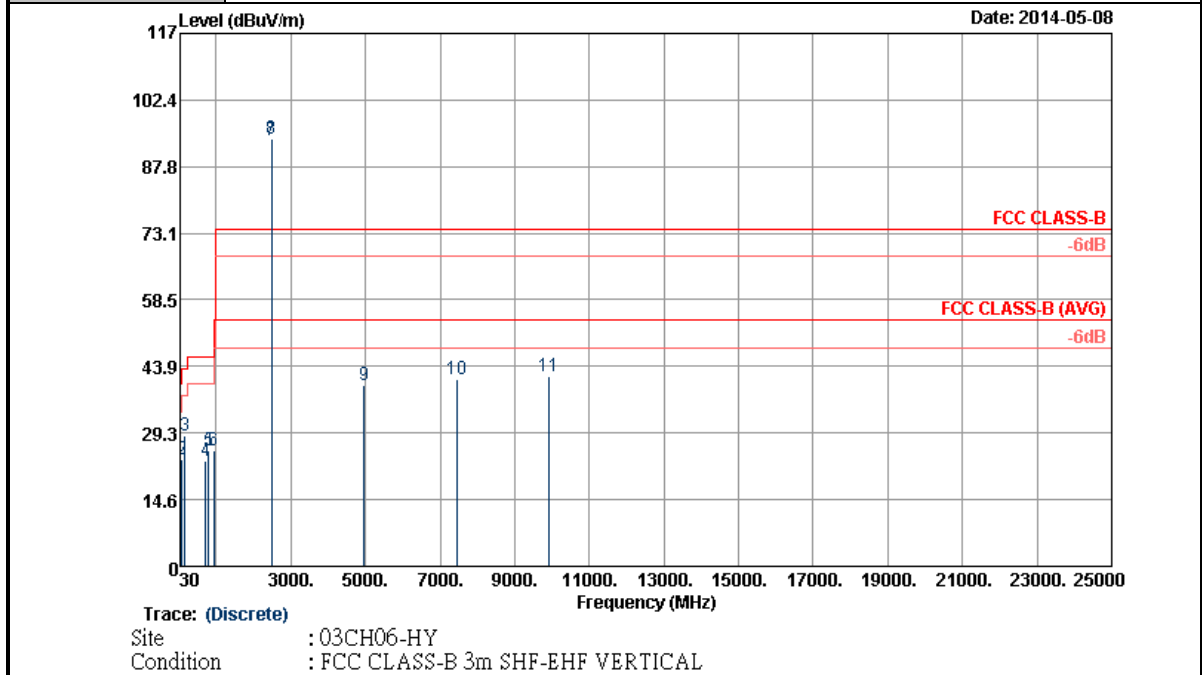

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	32.13	-7.87	40	44.79	18.5	0.64	31.8	100	105	Peak
71.85	23.35	-16.65	40	47.67	6.5	0.95	31.77	-	-	Peak
168.24	28.6	-14.9	43.5	48.92	9.82	1.61	31.75	-	-	Peak
720	23.03	-22.97	46	32.29	19.8	2.95	32.01	-	-	Peak
784.4	25.52	-20.48	46	34.27	20.15	3.06	31.96	-	-	Peak
926.5	25.37	-20.63	46	32.14	21.16	3.36	31.29	-	-	Peak



ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2481	93.57	-	-	89.62	31.99	6.59	34.63	100	90	Average
2481	93.93	-	-	89.98	31.99	6.59	34.63	100	90	Peak
4959	39.64	-34.36	74	55.59	34.32	10.21	60.48	100	0	Peak
7440	41.22	-32.78	74	55.37	35.53	10.9	60.58	100	0	Peak
9921	41.68	-32.32	74	55.58	36.72	10.57	61.19	100	0	Peak

**Note:** Other harmonics are lower than background noise.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

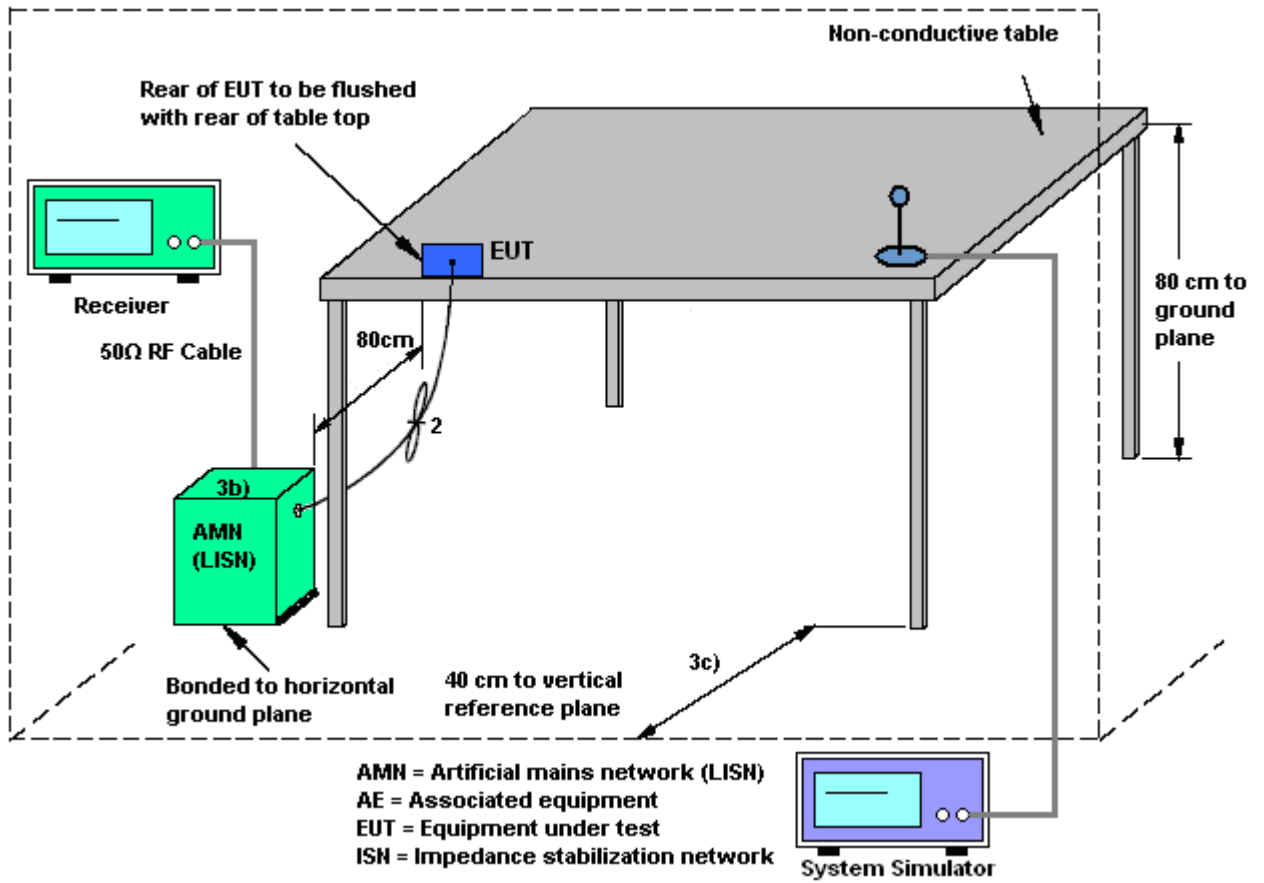

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Earphone + Battery + USB Cable (Data Link with Notebook) + GPS Rx		

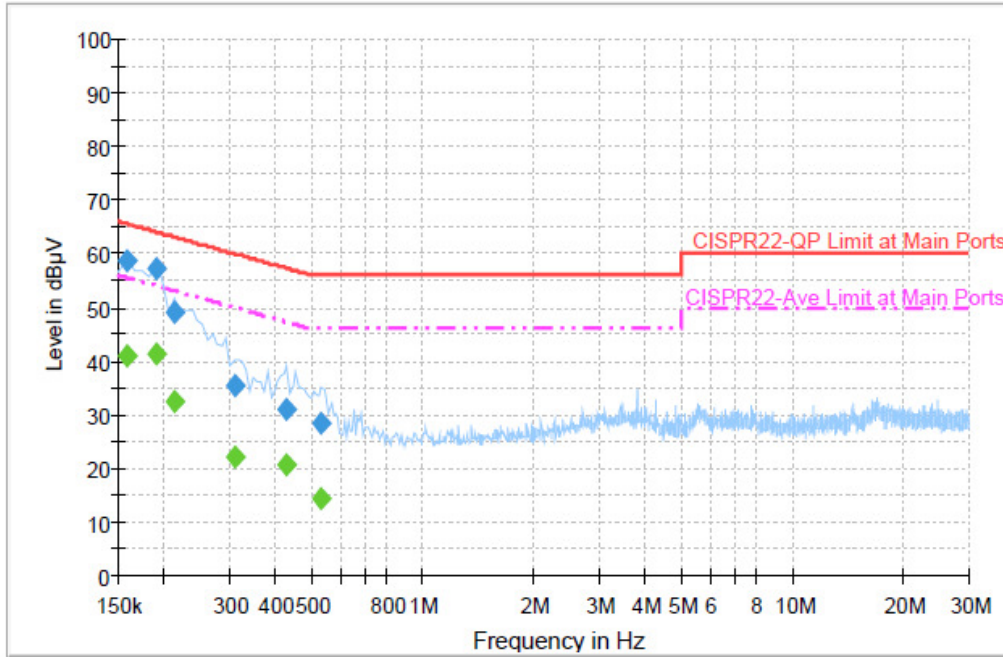

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	58.8	Off	L1	19.3	6.8	65.6
0.190000	57.1	Off	L1	19.4	6.9	64.0
0.214000	49.0	Off	L1	19.4	14.0	63.0
0.312000	35.4	Off	L1	19.4	25.0	60.4
0.430000	31.1	Off	L1	19.4	26.2	57.3
0.534000	28.6	Off	L1	19.4	27.4	56.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	41.0	Off	L1	19.3	14.6	55.6
0.190000	41.4	Off	L1	19.4	12.6	54.0
0.214000	32.3	Off	L1	19.4	20.7	53.0
0.312000	22.0	Off	L1	19.4	28.4	50.4
0.430000	20.5	Off	L1	19.4	26.8	47.3
0.534000	14.2	Off	L1	19.4	31.8	46.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Mode 1:		

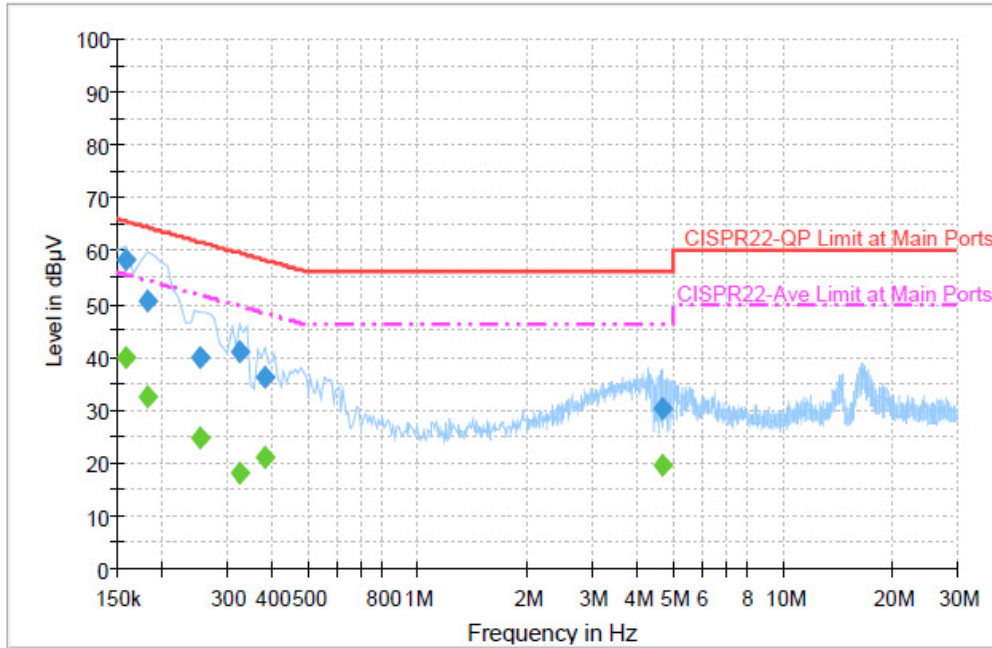

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	58.2	Off	N	19.3	7.4	65.6
0.182000	50.6	Off	N	19.3	13.8	64.4
0.254000	39.7	Off	N	19.4	21.9	61.6
0.326000	40.9	Off	N	19.4	18.7	59.6
0.382000	36.3	Off	N	19.3	21.9	58.2
4.670000	30.4	Off	N	19.6	25.6	56.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	40.0	Off	N	19.3	15.6	55.6
0.182000	32.5	Off	N	19.3	21.9	54.4
0.254000	24.8	Off	N	19.4	26.8	51.6
0.326000	18.2	Off	N	19.4	31.4	49.6
0.382000	21.2	Off	N	19.3	27.0	48.2
4.670000	19.7	Off	N	19.6	26.3	46.0



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Apr. 12, 2014 ~ Apr. 15, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Jan. 28, 2014	Apr. 12, 2014 ~ Apr. 15, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Jan. 28, 2014	Apr. 12, 2014 ~ Apr. 15, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Hygrometer	Testo	608-H1	34897199	N/A	May 07, 2013	Apr. 12, 2014 ~ Apr. 15, 2014	May 06, 2014	Conducted (TH02-HY)
RF cable	HONOVA	MF86	N/A	N/A	Nov. 25, 2013	Apr. 12, 2014 ~ Apr. 15, 2014	Nov. 24, 2014	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP30	101067	9kHz ~ 30GHz	Nov. 20, 2013	May 08, 2014	Nov. 19, 2014	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9kHz ~ 26.5GHz	Dec. 02, 2013	May 08, 2014	Dec. 01, 2014	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/0003	20MHz ~ 1000MHz	May 06, 2014	May 08, 2014	May 05, 2015	Radiation (03CH06-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/0001	9kHz ~ 30Mz	Jul. 03, 2012	May 08, 2014	Jul. 02, 2014	Radiation (03CH06-HY)
Bilog Antenna	Schaffner	CBL6112B	2885	30MHz ~ 2GHz	Oct. 10, 2013	May 08, 2014	Oct. 09, 2014	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 02, 2013	May 08, 2014	Aug. 01, 2014	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9kHz ~ 1GHz	Apr. 16, 2014	May 08, 2014	Apr. 15, 2015	Radiation (03CH06-HY)
Pre Amplifier	EMCI	EMC051845	SN980048	1GHz ~ 18GHz	Jul. 18, 2013	May 08, 2014	Jul. 17, 2014	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Oct. 03, 2013	May 08, 2014	Oct. 02, 2014	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A01917	1GHz ~ 26.5GHz	Apr. 10, 2014	May 08, 2014	Apr. 09, 2015	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0 ~ 360 degree	N/A	May 08, 2014	N/A	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208212	1 m ~ 4 m	N/A	May 08, 2014	N/A	Radiation (03CH06-HY)
LF RF Cable	warison	WCBA-WC04NM.NM2	N/A	30MHz~1GHz	Nov. 28, 2013	May 08, 2014	Nov. 27, 2014	Radiation (03CH06-HY)
HF RF Cable	Huber + Suhner	sucoflex 104	286027/4	1GHz~26.5GHz	Nov. 28, 2013	May 08, 2014	Nov. 27, 2014	Radiation (03CH06-HY)
High Pass Filter	Microwave Circuits	H3G018G1	SN477219	3G HPF	Nov. 28, 2013	May 08, 2014	Nov. 27, 2014	Radiation (03CH06-HY)
High Pass Filter	Microwave Circuits	H07G18G3	282388	7G HPF	Nov. 28, 2013	May 08, 2014	Nov. 27, 2014	Radiation (03CH06-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Low Pass Filter	Wainwright	WLKS1500-8SS	SN51	1.5G LPF	Nov. 28, 2013	May 08, 2014	Nov. 27, 2014	Radiation (03CH06-HY)
Hygrometer	WISEWIND	410	BU5004	N/A	May 06, 2014	May 08, 2014	May 05, 2015	Radiation (03CH06-HY)
Test Software	Audix	E3 V6.0	N/A	N/A	N/A	May 08, 2014	N/A	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 15, 2013	Apr. 11, 2014	Nov. 14, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	Apr. 11, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 04, 2013	Apr. 11, 2014	Dec. 03, 2014	Conduction (CO05-HY)
AC Power Source	APC	APC-1000 W	N/A	N/A	N/A	Apr. 11, 2014	N/A	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	Apr. 11, 2014	N/A	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 25, 2013,	Apr. 11, 2014	Apr. 24, 2014	Conduction (CO05-HY)
LF Cable	Shuner	RG-402	N/A	N/A	Oct. 17, 2013	Apr. 11, 2014	Oct. 16, 2014	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50
---	------