


281: Touch Right WLAN 802.11ac 80MHz CH155

Date: 4/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

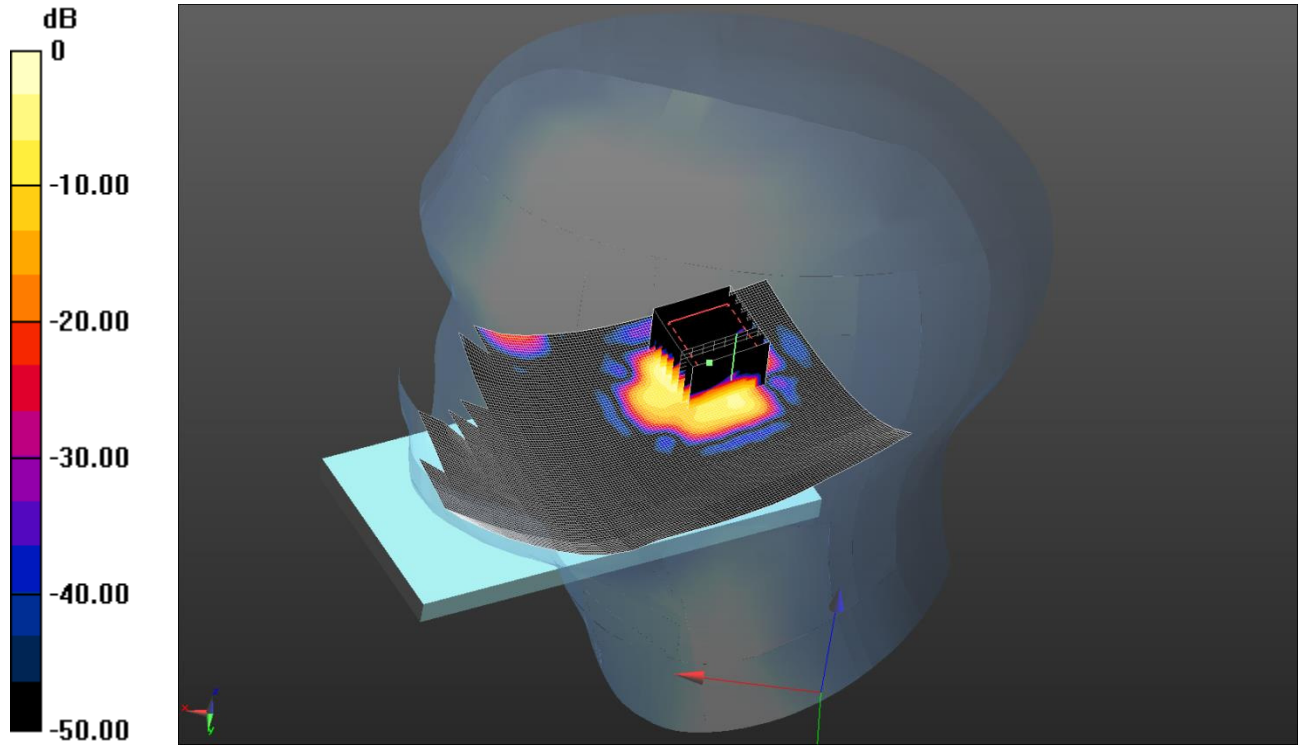

0 dB = 0.541 W/kg = -2.67 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: 5800 MHz HSL Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.097$ S/m; $\epsilon_r = 34.663$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.59, 4.59, 4.59); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right - High/Area Scan 2 2 (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.472 W/kg

Configuration/Touch Right - High/Zoom Scan (7x7x12) 2 (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.667 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.986 W/kg


SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.541 W/kg

282: Front Of EUT Facing Phantom WiFi 802.11a 6Mbps CH48

Date: 5/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

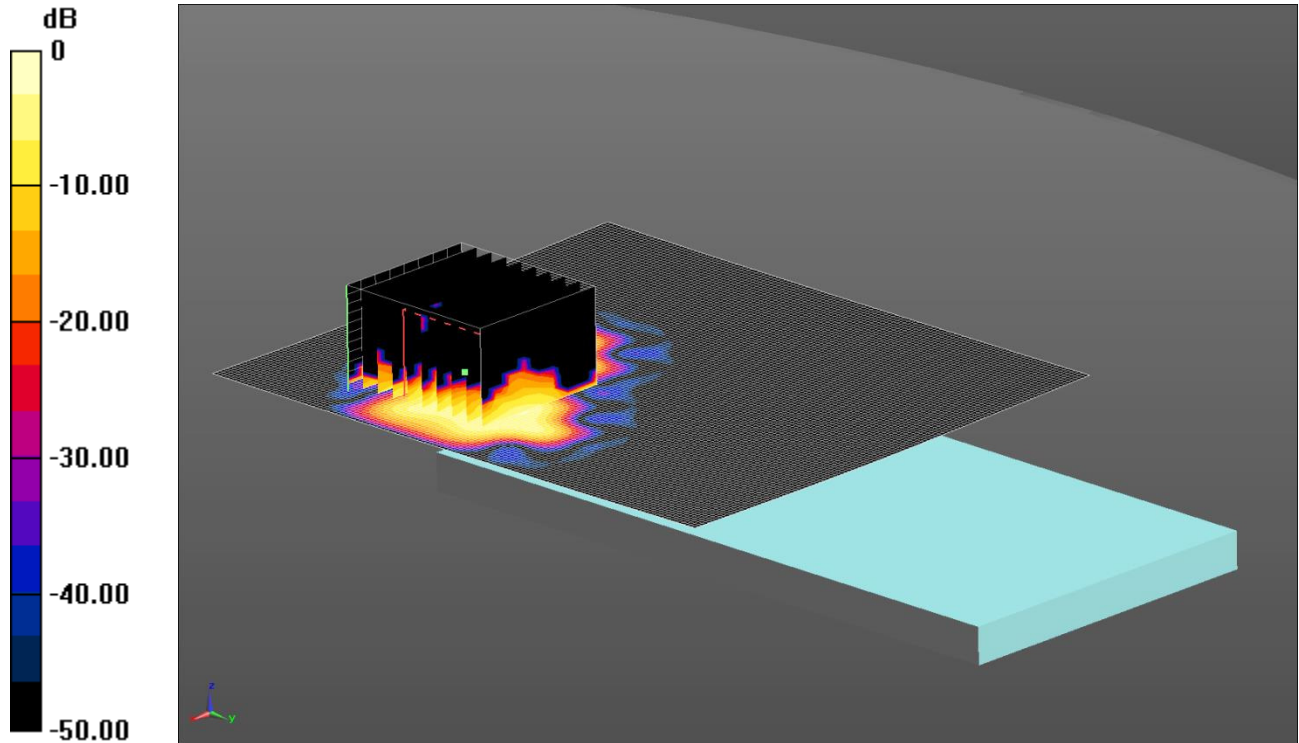

0 dB = 0.151 W/kg = -8.21 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 5.394$ S/m; $\epsilon_r = 49.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.44, 4.44, 4.44); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Front of EUT Facing Phantom HotSpot- Middle/Area Scan (111x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.145 W/kg

Configuration/Front of EUT Facing Phantom HotSpot- Middle/Zoom Scan (5-6 GHz) (7x7x12) 2 (9x10x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.919 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.283 W/kg


SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.151 W/kg

283: Back Of EUT Facing Phantom WiFi 802.11a 6Mbps CH48

Date: 5/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

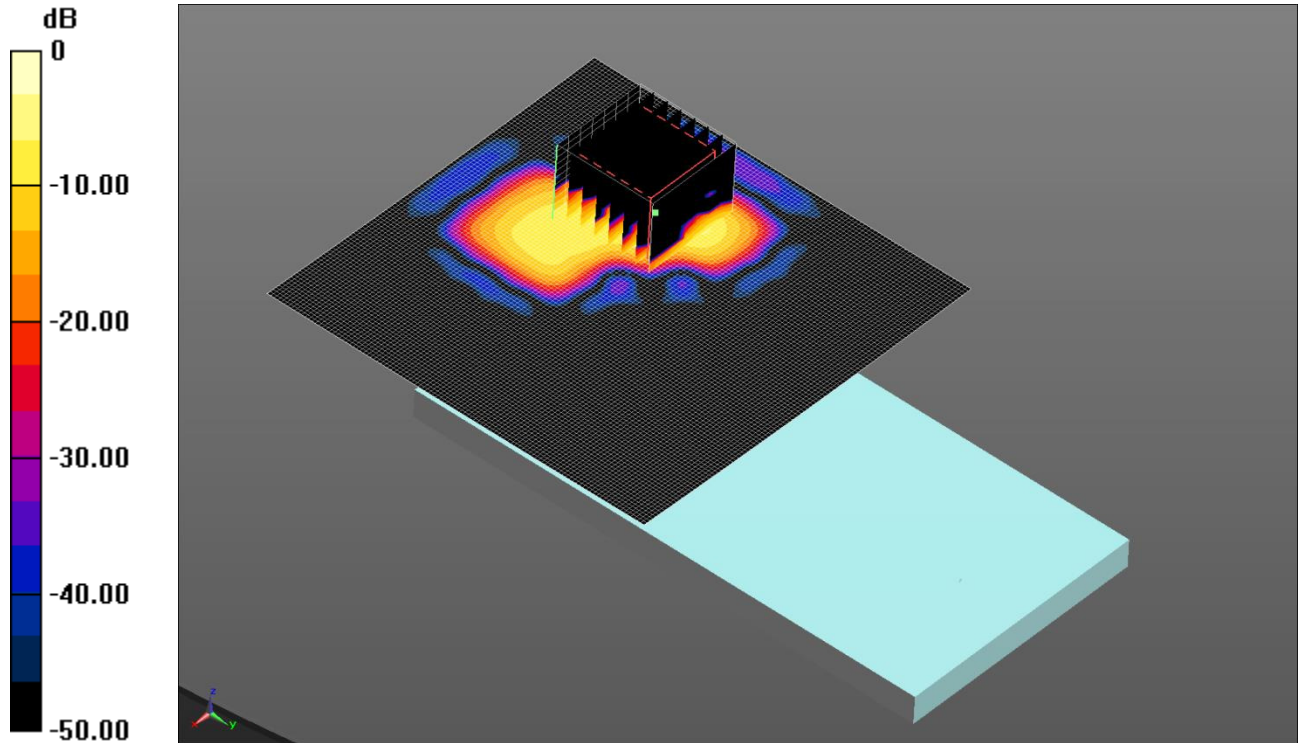

0 dB = 0.415 W/kg = -3.82 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 5.394$ S/m; $\epsilon_r = 49.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.44, 4.44, 4.44); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Middle/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.239 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Middle/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.414 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.737 W/kg


SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

284: Left Hand Side Of EUT Facing Phantom WiFi 802.11a 6Mbps CH48

Date: 5/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

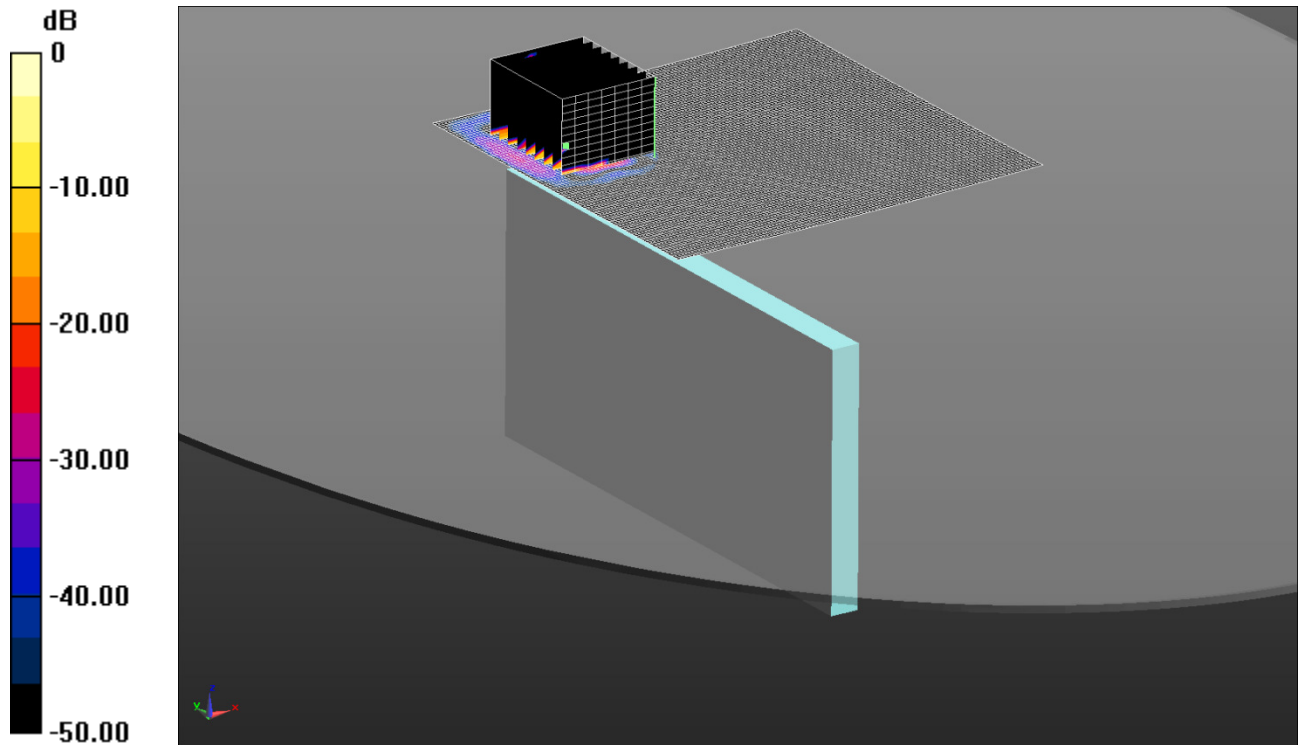

0 dB = 0.0721 W/kg = -11.42 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 5.394$ S/m; $\epsilon_r = 49.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.44, 4.44, 4.44); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Left Hand Side of EUT Facing Phantom - Middle/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0274 W/kg

Configuration/Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5-6 GHz) (7x7x12) (8x9x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.247 W/kg


SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00946 W/kg

Maximum value of SAR (measured) = 0.0721 W/kg

285: Back Of EUT Facing Phantom WiFi 802.11a 6Mbps CH64

Date: 6/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

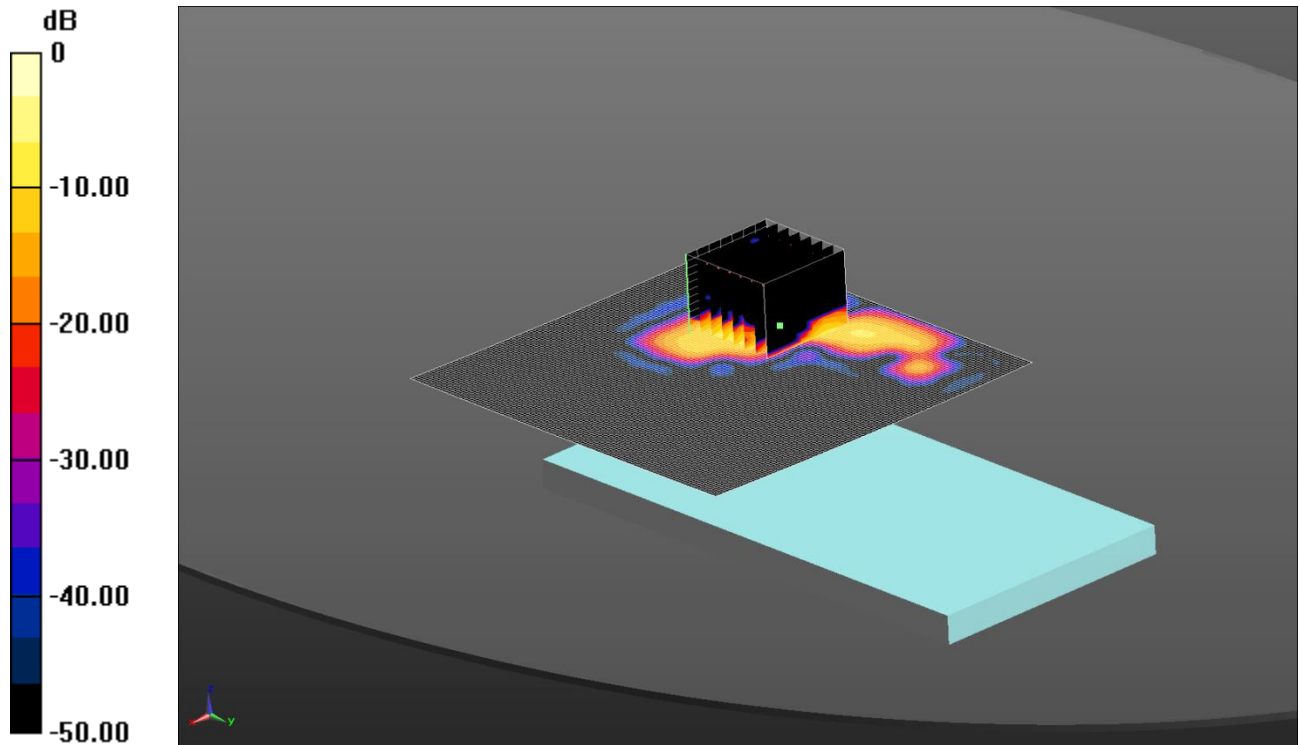

0 dB = 0.581 W/kg = -2.36 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5320$ MHz; $\sigma = 5.511$ S/m; $\epsilon_r = 48.853$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.09, 4.09, 4.09); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Middle 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.443 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Middle 2/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.960 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.44 W/kg


SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.581 W/kg

286: Back Of EUT Facing Phantom WiFi 802.11a 6Mbps CH100

Date: 6/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

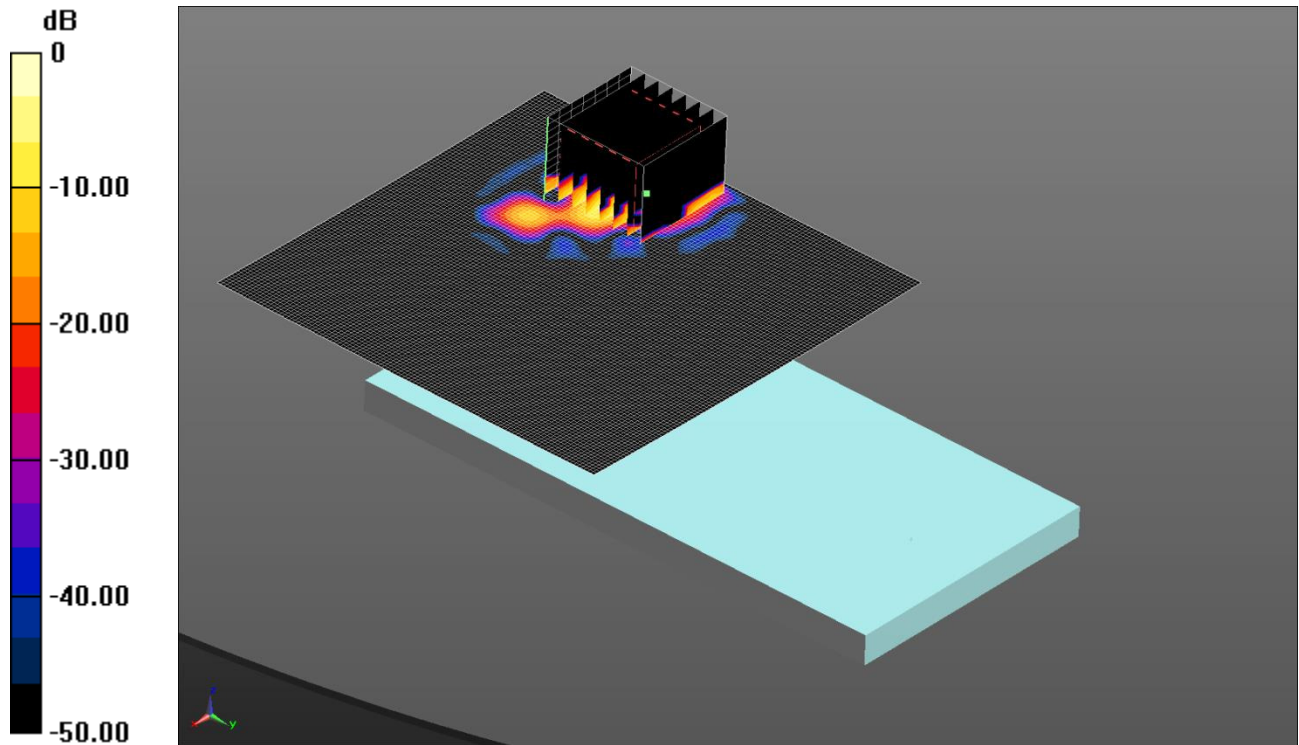

0 dB = 0.313 W/kg = -5.04 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used: $f = 5500$ MHz; $\sigma = 5.749$ S/m; $\epsilon_r = 48.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.89, 3.89, 3.89); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Middle 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.270 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Middle 2/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.454 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.575 W/kg


SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

287: Back Of EUT Facing Phantom WiFi 802.11a 6Mbps CH165

Date: 6/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

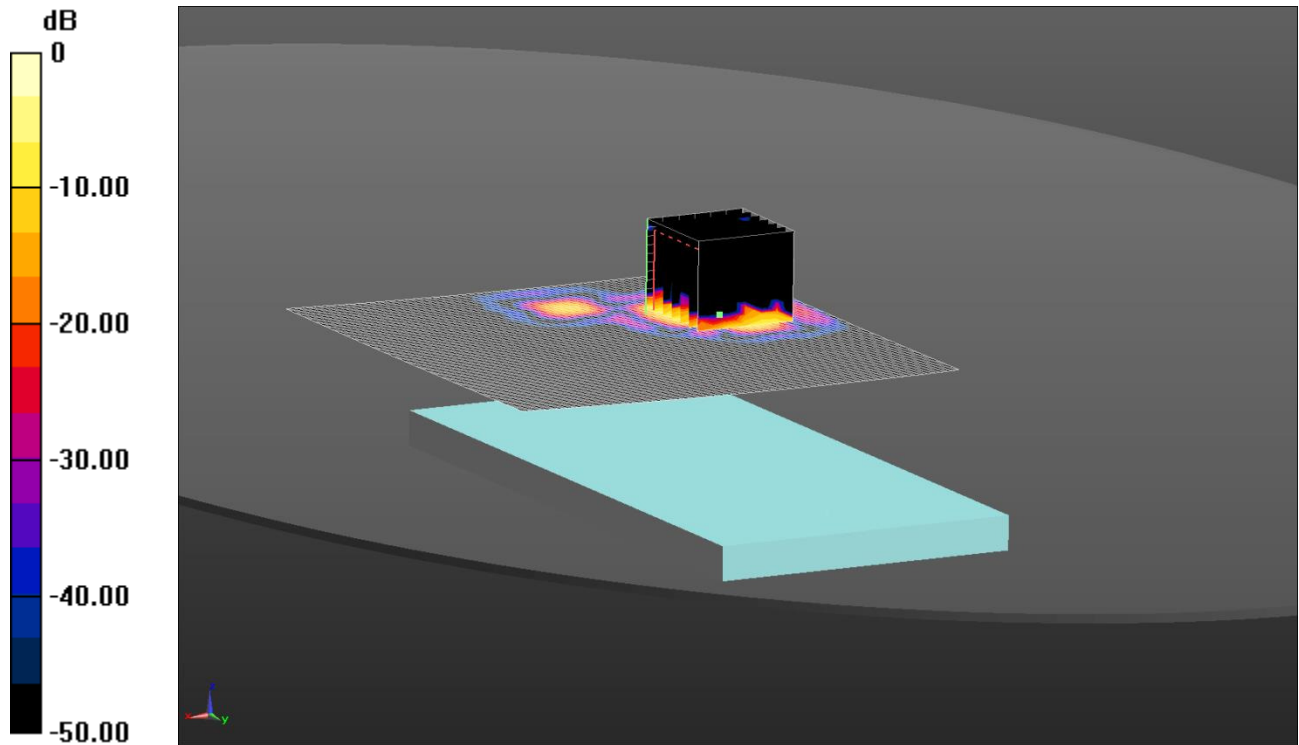

0 dB = 0.266 W/kg = -5.75 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.237$ S/m; $\epsilon_r = 47.615$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.96, 3.96, 3.96); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Middle 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.123 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Middle 2/Zoom Scan (5-6 GHz) (7x7x12) (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.278 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.443 W/kg


SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.266 W/kg

288: Back Of EUT Facing Phantom WiFi 802.11ac 40MHz 13.5Mbps CH38

Date: 6/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

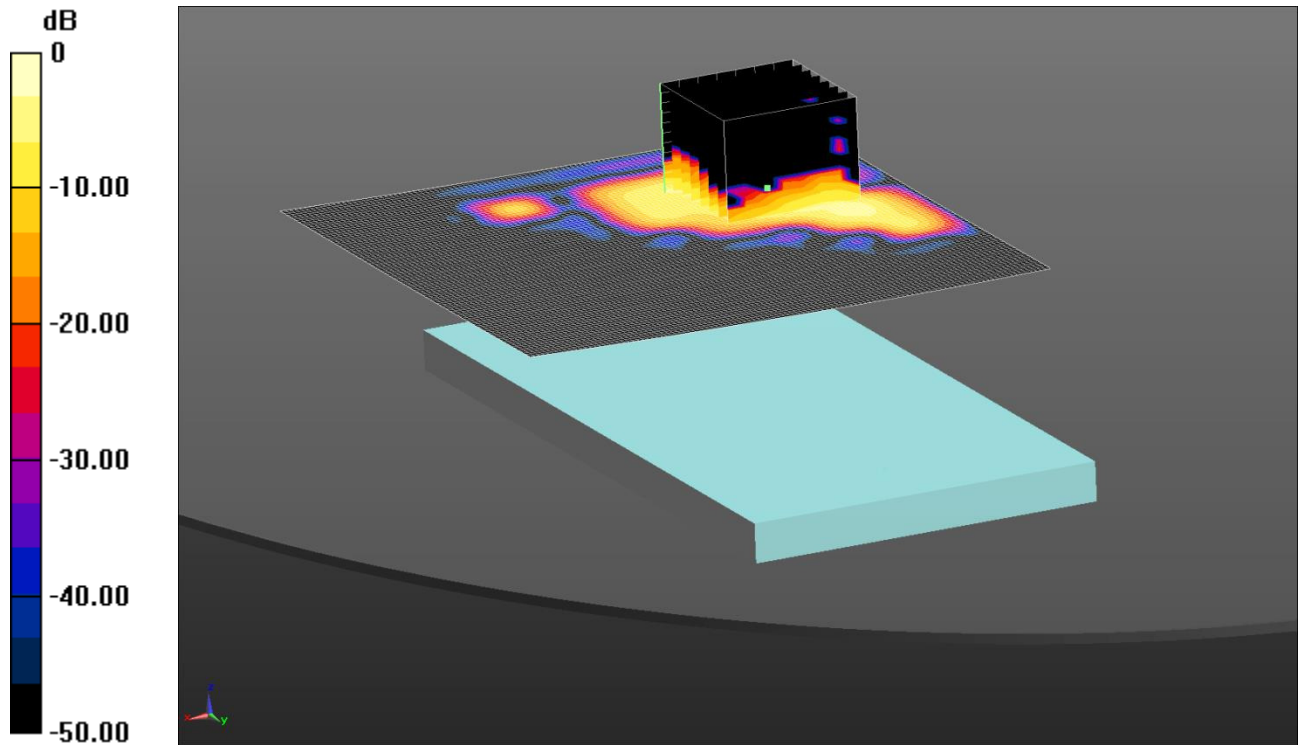

0 dB = 0.283 W/kg = -5.48 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5190$ MHz; $\sigma = 5.319$ S/m; $\epsilon_r = 49.291$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.44, 4.44, 4.44); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.229 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.745 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.515 W/kg


SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.283 W/kg

289: Back Of EUT Facing Phantom WiFi 802.11ac 40MHz 13.5Mbps CH54

Date: 6/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

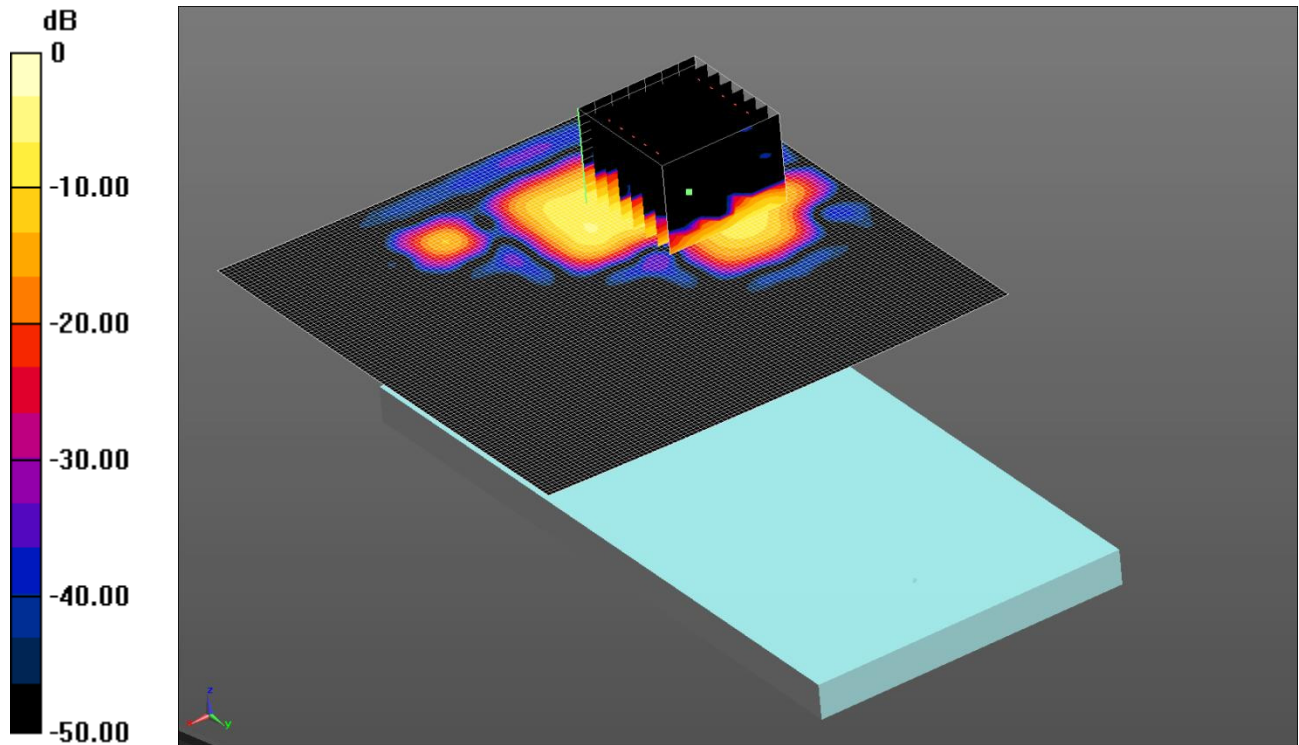

0 dB = 0.428 W/kg = -3.69 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5270 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.434$ S/m; $\epsilon_r = 49.023$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.09, 4.09, 4.09); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.404 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.554 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.742 W/kg


SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.428 W/kg

290: Back Of EUT Facing Phantom WiFi 802.11ac 40MHz 13.5Mbps CH102

Date: 6/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

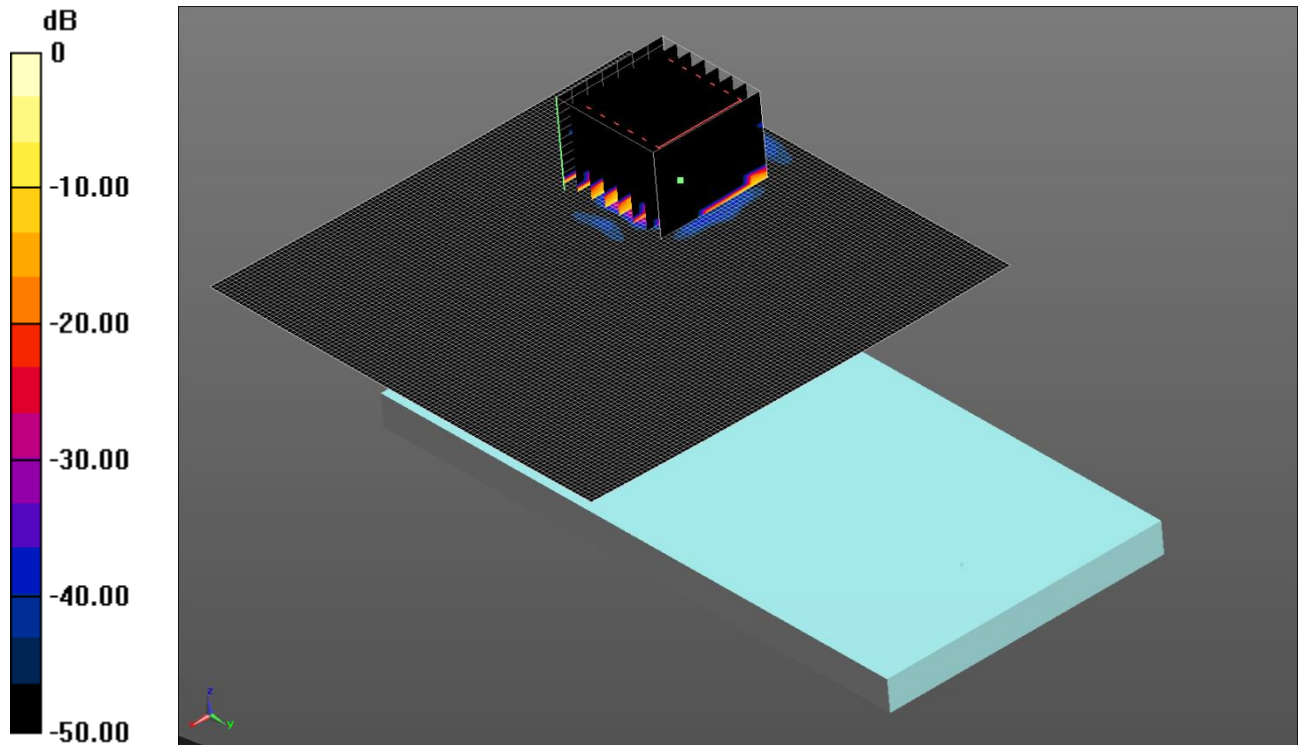

0 dB = 0.168 W/kg = -7.75 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5510 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5510$ MHz; $\sigma = 5.762$ S/m; $\epsilon_r = 48.37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.89, 3.89, 3.89); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0734 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.963 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.582 W/kg


SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.168 W/kg

291: Back Of EUT Facing Phantom WiFi 802.11ac 40MHz 13.5Mbps CH151

Date: 6/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

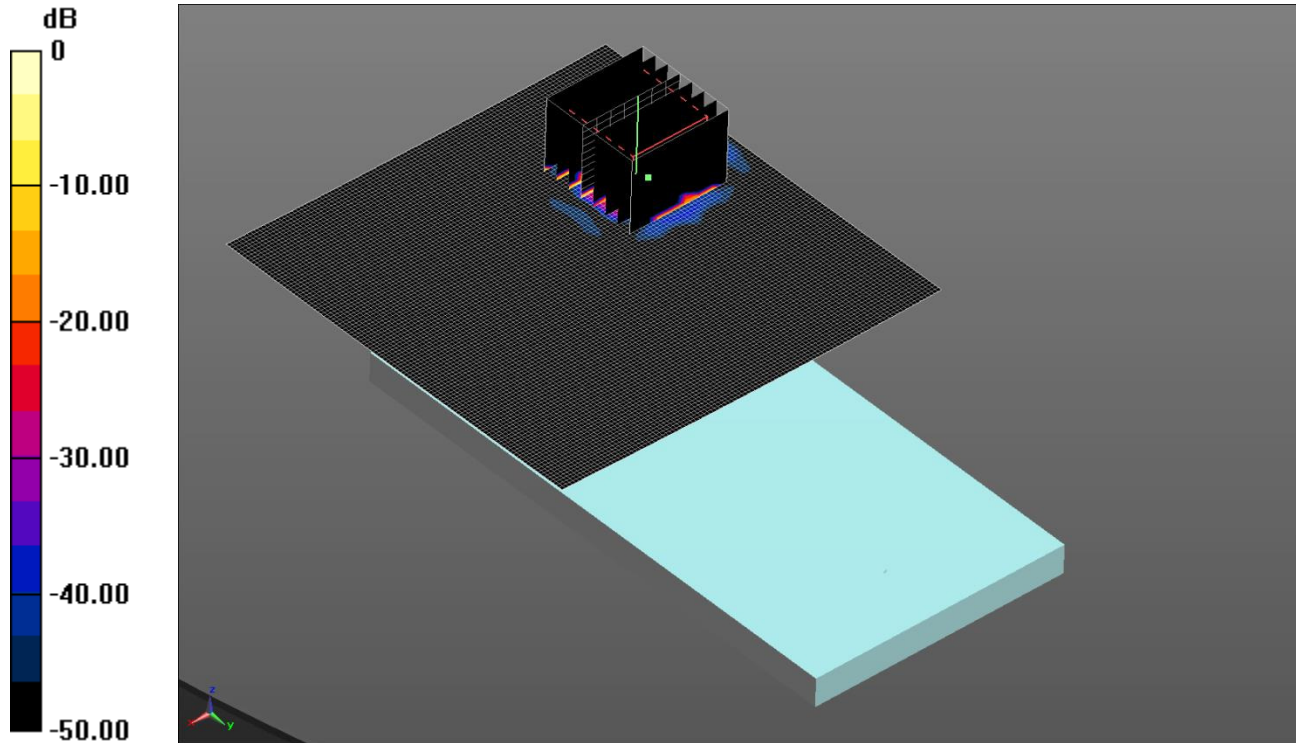

0 dB = 0.107 W/kg = -9.71 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5755 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.132$ S/m; $\epsilon_r = 47.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.96, 3.96, 3.96); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0375 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.543 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.621 W/kg


SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

292: Back Of EUT Facing Phantom WiFi 802.11ac 80MHz 29.3Mbps CH42

Date: 6/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

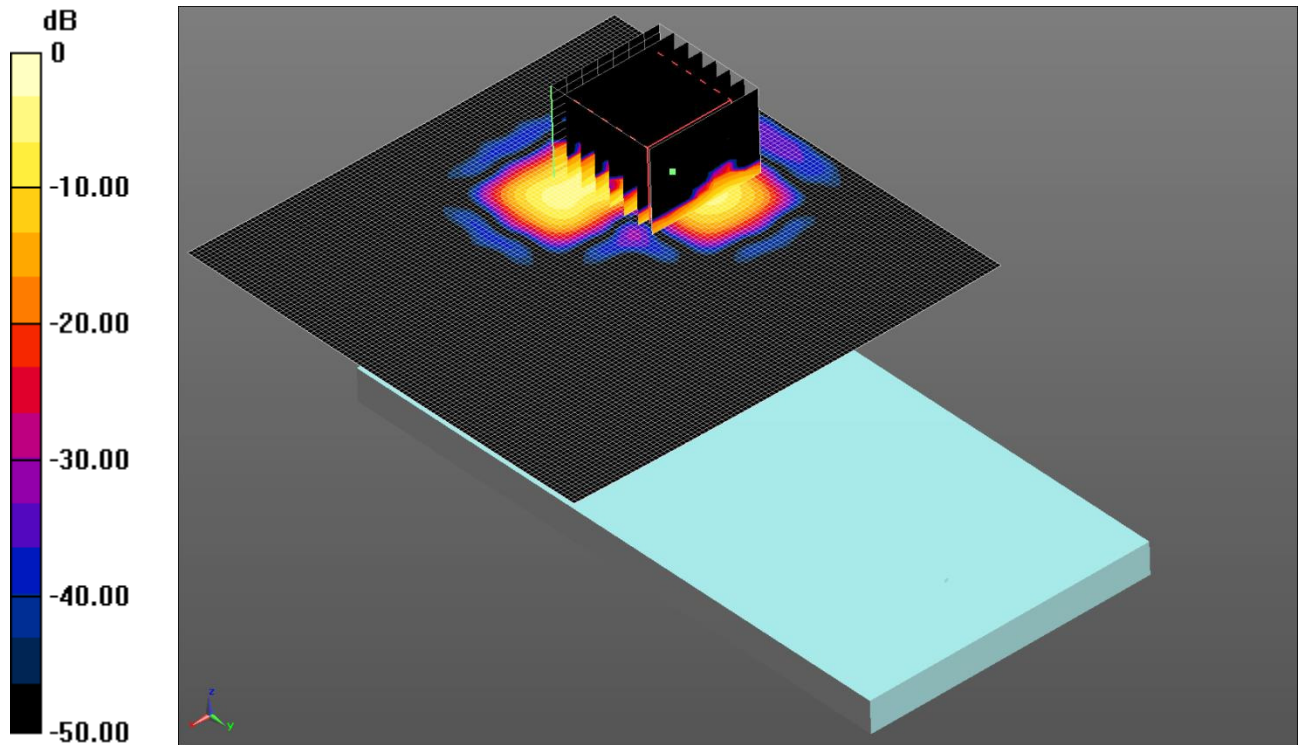

0 dB = 0.269 W/kg = -5.70 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5210 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.351$ S/m; $\epsilon_r = 49.224$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.44, 4.44, 4.44); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.304 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Low 2/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.321 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.461 W/kg


SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

293: Back Of EUT Facing Phantom WiFi 802.11ac 80MHz 29.3Mbps CH58

Date: 9/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

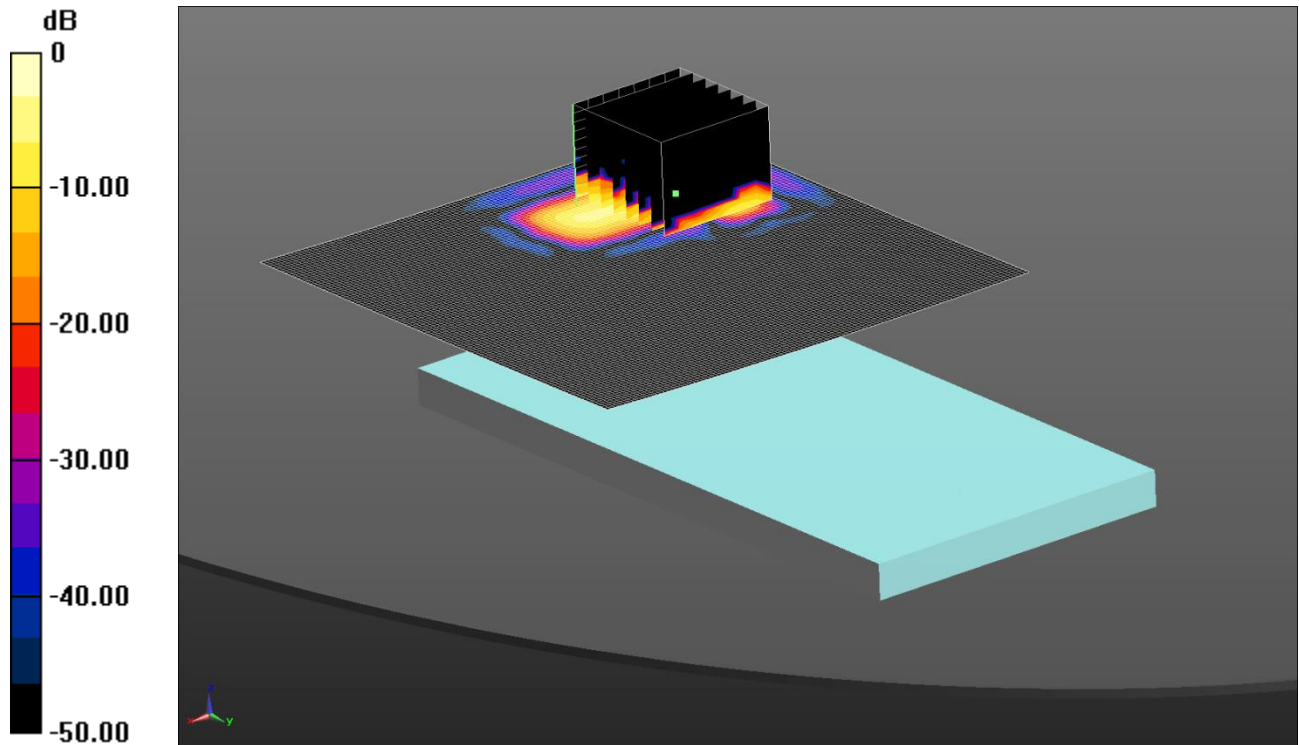

0 dB = 0.290 W/kg = -5.38 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 5.293$ S/m; $\epsilon_r = 47.716$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.09, 4.09, 4.09); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Low 2 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.395 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Low 2 2/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.822 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.500 W/kg


SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

294: Back Of EUT Facing Phantom WiFi 802.11ac 80MHz 29.3Mbps CH106

Date: 9/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

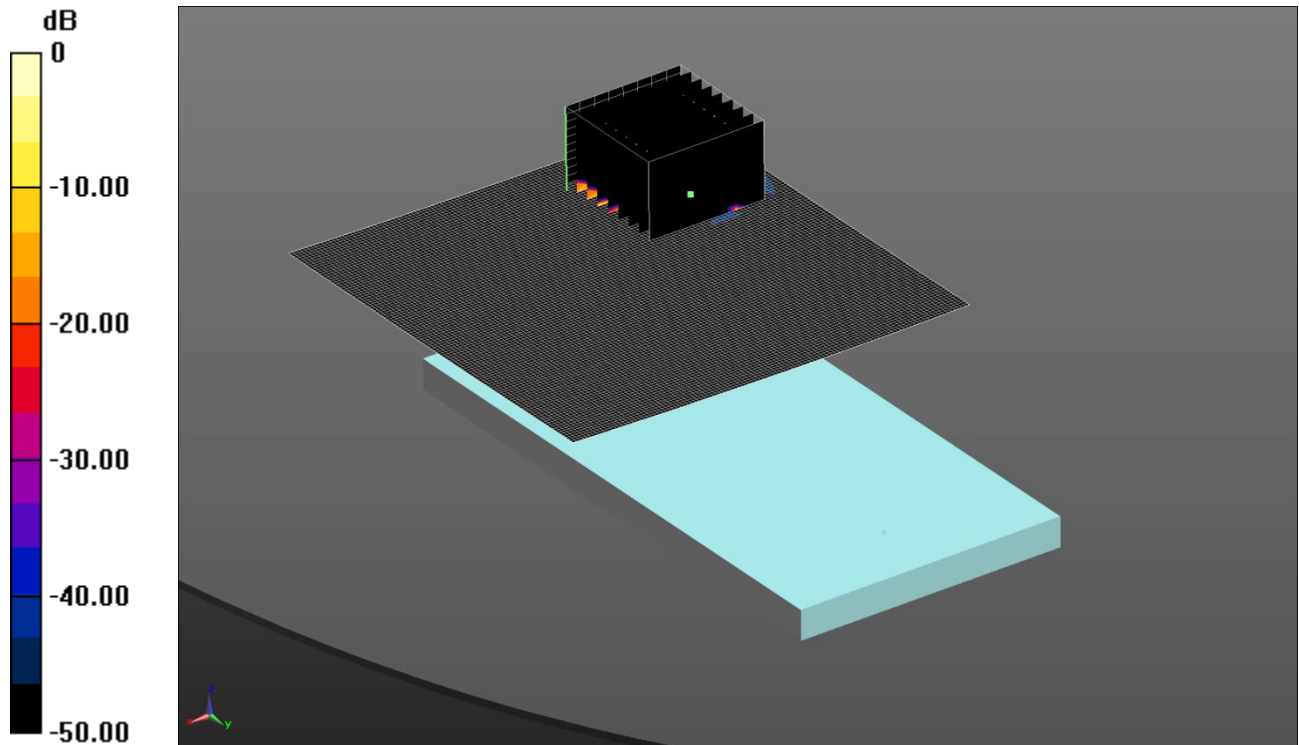

0 dB = 0.115 W/kg = -9.39 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 5.623$ S/m; $\epsilon_r = 47.092$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.89, 3.89, 3.89); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Mid 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0314 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Mid 2/Zoom Scan (5-6 GHz) (7x7x12) (9x9x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.863 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.689 W/kg


SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.115 W/kg

295: Back Of EUT Facing Phantom WiFi 802.11ac 80MHz 29.3Mbps CH155

Date: 9/6/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

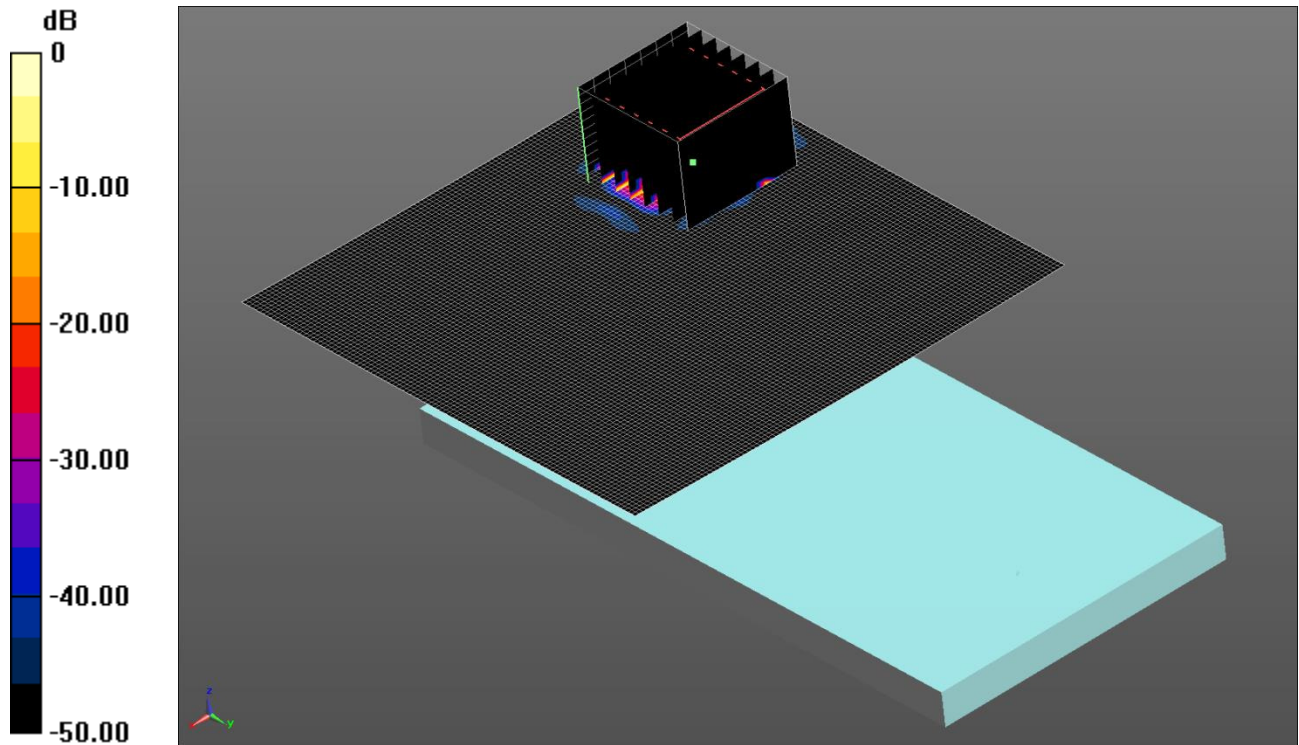

0 dB = 0.103 W/kg = -9.87 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.007$ S/m; $\epsilon_r = 46.461$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.96, 3.96, 3.96); Calibrated: 24/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom HotSpot- Mid 2 2/Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0385 W/kg

Configuration/Back of EUT Facing Phantom HotSpot- Mid 2 2/Zoom Scan (5-6 GHz) (7x7x12) (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.957 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.631 W/kg


SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

296: Front Of EUT Facing Phantom Bluetooth 1Mbps CH39

Date: 17/06/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

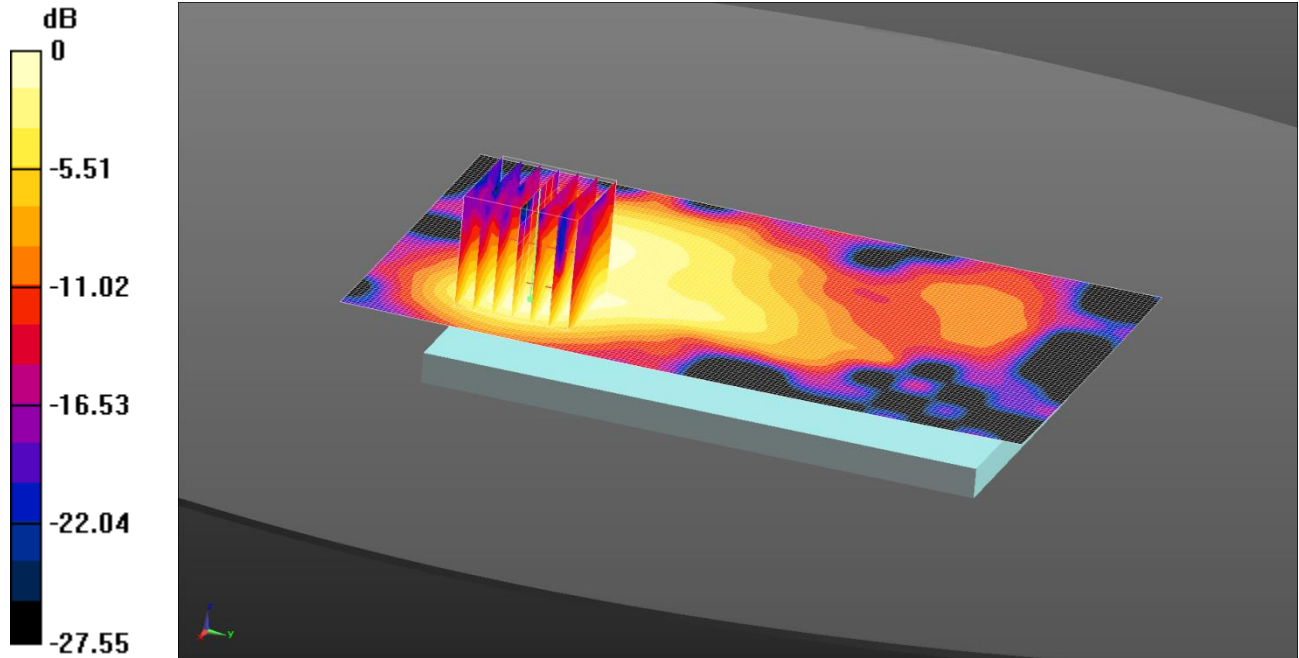

0 dB = 0.0342 W/kg = -14.66 dBW/kg

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450MHz MSL Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 52.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(3.95, 3.95, 3.95); Calibrated: 22/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT Facing Phantom Hotspot - Middle 2/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0359 W/kg

Configuration/Front of EUT Facing Phantom Hotspot - Middle 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.234 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0730 W/kg


SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0342 W/kg

297: Back Of EUT Facing Phantom Bluetooth 1Mbps CH39

Date: 17/06/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

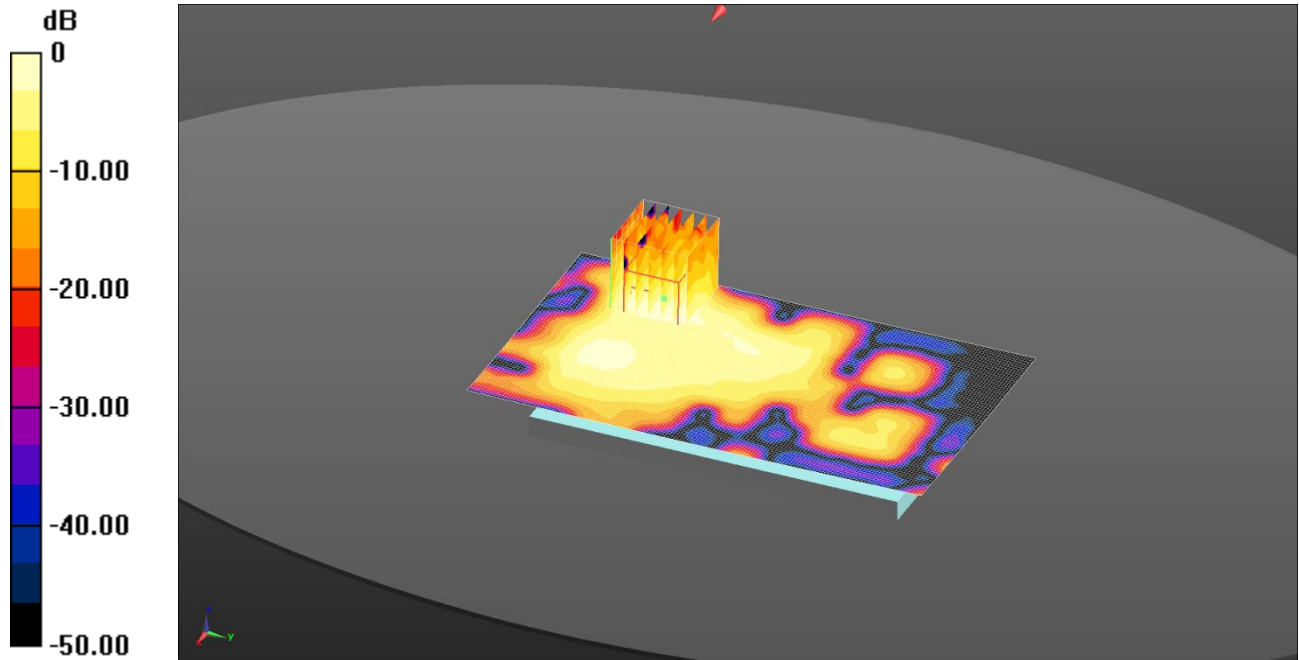

0 dB = 0.0328 W/kg = -14.84 dBW/kg

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450MHz MSL Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 52.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(3.95, 3.95, 3.95); Calibrated: 22/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Back of EUT Facing Phantom Hotspot - Middle 2/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0328 W/kg

Configuration/Back of EUT Facing Phantom Hotspot - Middle 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.031 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0770 W/kg


SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0290 W/kg

298: Left Hand Side Of EUT Facing Phantom Bluetooth 1Mbps CH39

Date: 17/06/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

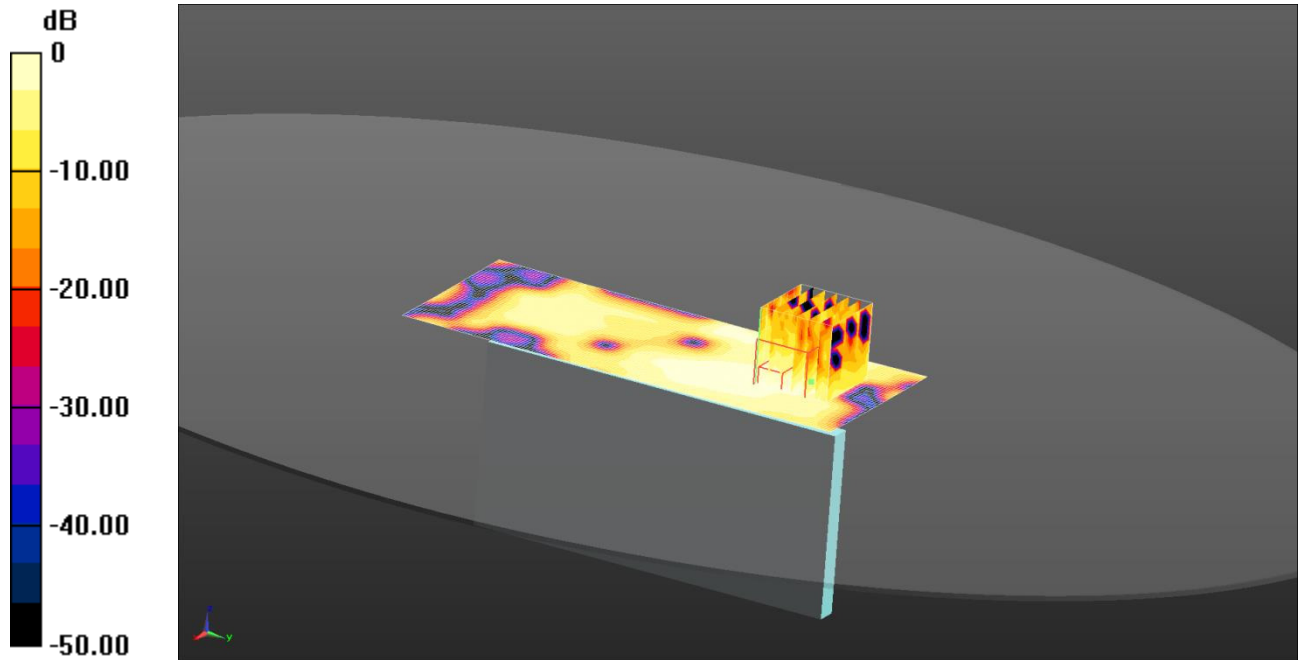

0 dB = 0.00750 W/kg = -21.25 dBW/kg

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450MHz MSL Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 52.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(3.95, 3.95, 3.95); Calibrated: 22/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Left Hand Side of EUT Facing Phantom Hotspot - Middle 2/Area Scan (61x151x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.00750 W/kg

Configuration/Left Hand Side of EUT Facing Phantom Hotspot - Middle 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.713 V/m; Power Drift = -0.39 dB

Peak SAR (extrapolated) = 0.0120 W/kg


SAR(1 g) = 0.00627 W/kg; SAR(10 g) = 0.00267 W/kg

Maximum value of SAR (measured) = 0.00705 W/kg

299: Top Of EUT Facing Phantom Bluetooth 1Mbps CH39

Date: 18/06/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

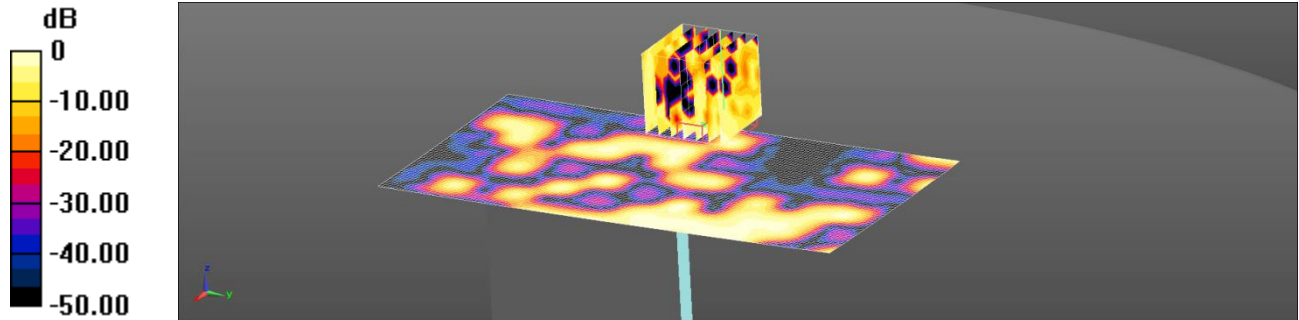

0 dB = 0.00213 W/kg = -26.72 dBW/kg

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450MHz MSL Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 52.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(3.95, 3.95, 3.95); Calibrated: 22/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Top of EUT Facing Phantom Hotspot - Middle 2 2/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00176 W/kg

Configuration/Top of EUT Facing Phantom Hotspot - Middle 2 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.527 V/m; Power Drift = -4.43 dB

Peak SAR (extrapolated) = 0.00277 W/kg


SAR(1 g) = 0.000383 W/kg; SAR(10 g) = 8.37e-005 W/kg

Maximum value of SAR (measured) = 0.00213 W/kg

300: Front Of EUT Facing Phantom Bluetooth 1Mbps CH0

Date: 18/06/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

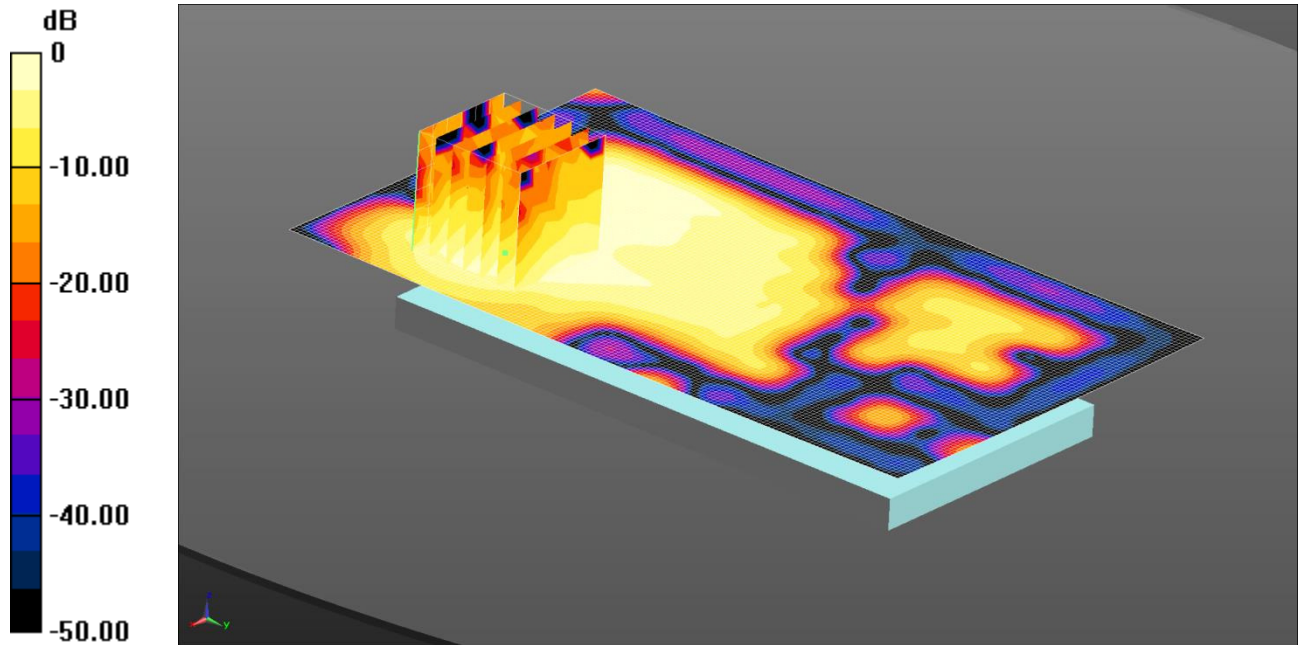

0 dB = 0.0157 W/kg = -18.04 dBW/kg

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: 2450MHz MSL Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 52.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(3.95, 3.95, 3.95); Calibrated: 22/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT Facing Phantom Hotspot - Low/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0157 W/kg

Configuration/Front of EUT Facing Phantom Hotspot - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.589 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0590 W/kg


SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.0069 W/kg

Maximum value of SAR (measured) = 0.0149 W/kg

301: Front Of EUT Facing Phantom Bluetooth 1Mbps CH78

Date: 18/06/2014

DUT: Sony; Type: FCC ID: PY7PM-0800;

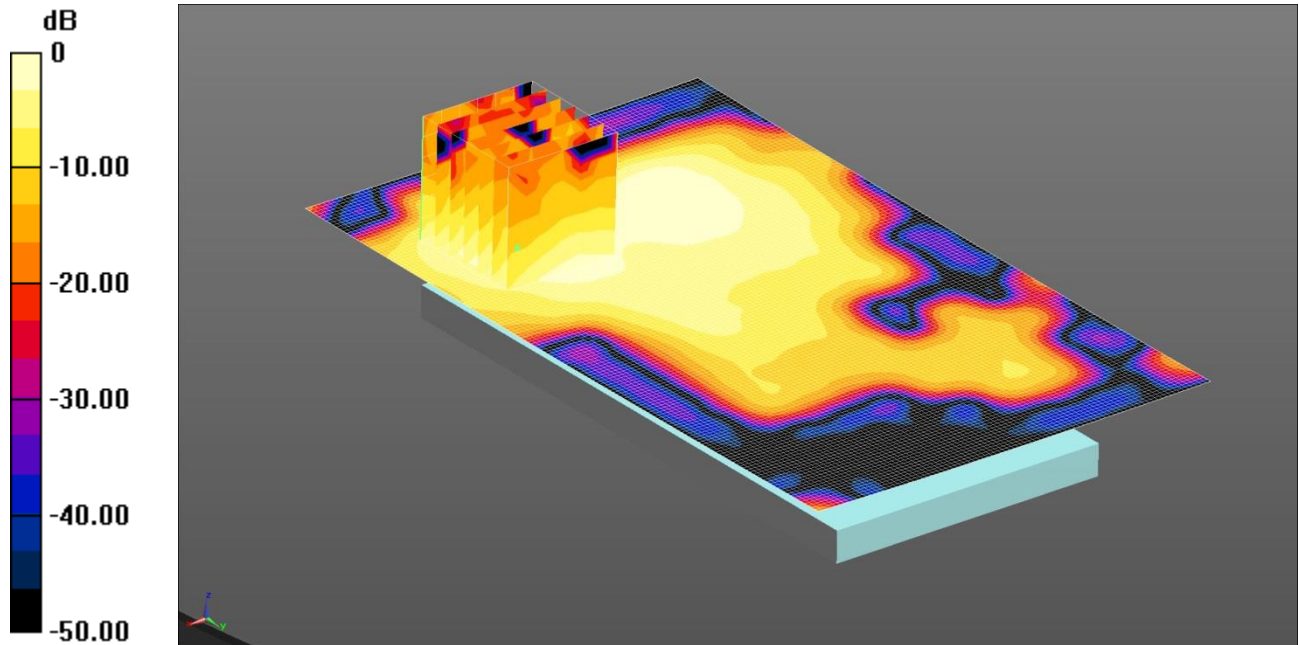

0 dB = 0.0259 W/kg = -15.86 dBW/kg

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: 2450MHz MSL Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 2.071$ S/m; $\epsilon_r = 51.882$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(3.95, 3.95, 3.95); Calibrated: 22/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT Facing Phantom Hotspot - High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0259 W/kg

Configuration/Front of EUT Facing Phantom Hotspot - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.198 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0540 W/kg


SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0239 W/kg

302: System Performance Check 750MHz Head 05 06 14

Date: 05/06/2014

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1011

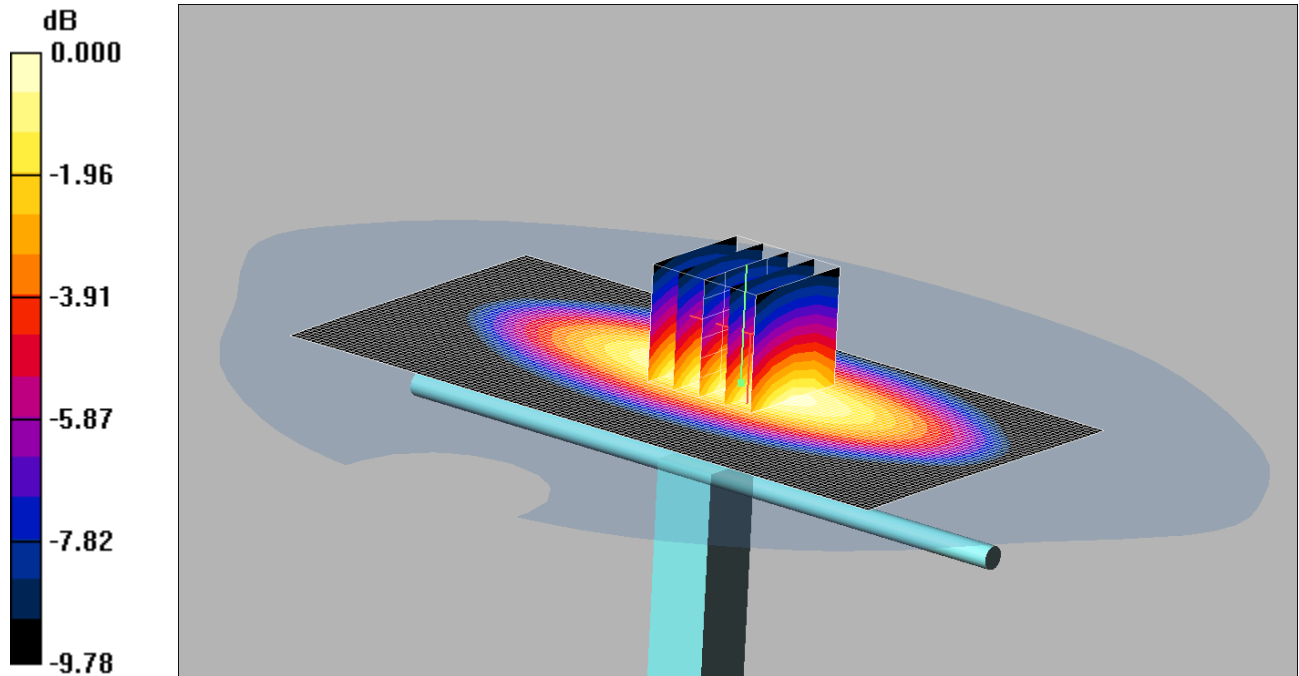

0 dB = 2.28mW/g

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 MHz HSL Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.867 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.46, 10.46, 10.46);

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 31/10/2013

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW 2 2/Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.27 mW/g

d=15mm, Pin=250mW 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.7 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 3.11 W/kg


SAR(1 g) = 2.12 mW/g; SAR(10 g) = 1.41 mW/g

Maximum value of SAR (measured) = 2.28 mW/g

303: System Performance Check 750MHz Head 09 06 14

Date: 09/06/2014

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1011

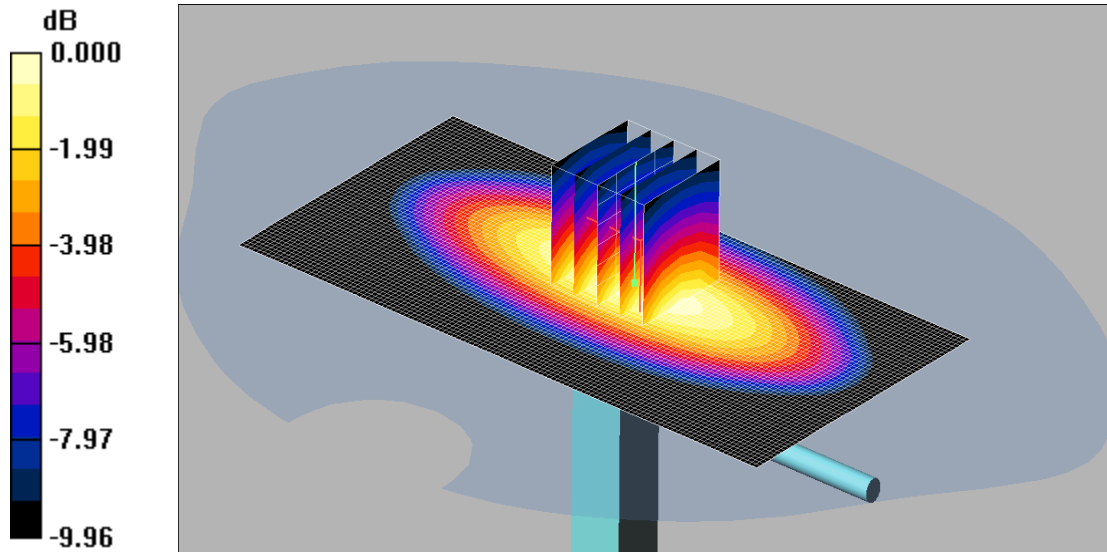

0 dB = 2.25mW/g

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 MHz HSL Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.862 \text{ mho/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.46, 10.46, 10.46);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW 2 2/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.22 mW/g

d=15mm, Pin=250mW 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.4 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 3.09 W/kg


SAR(1 g) = 2.1 mW/g; SAR(10 g) = 1.39 mW/g

Maximum value of SAR (measured) = 2.25 mW/g

304: System Performance Check 750MHz Body 06 06 14

Date/Time: 06/06/2014

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1011

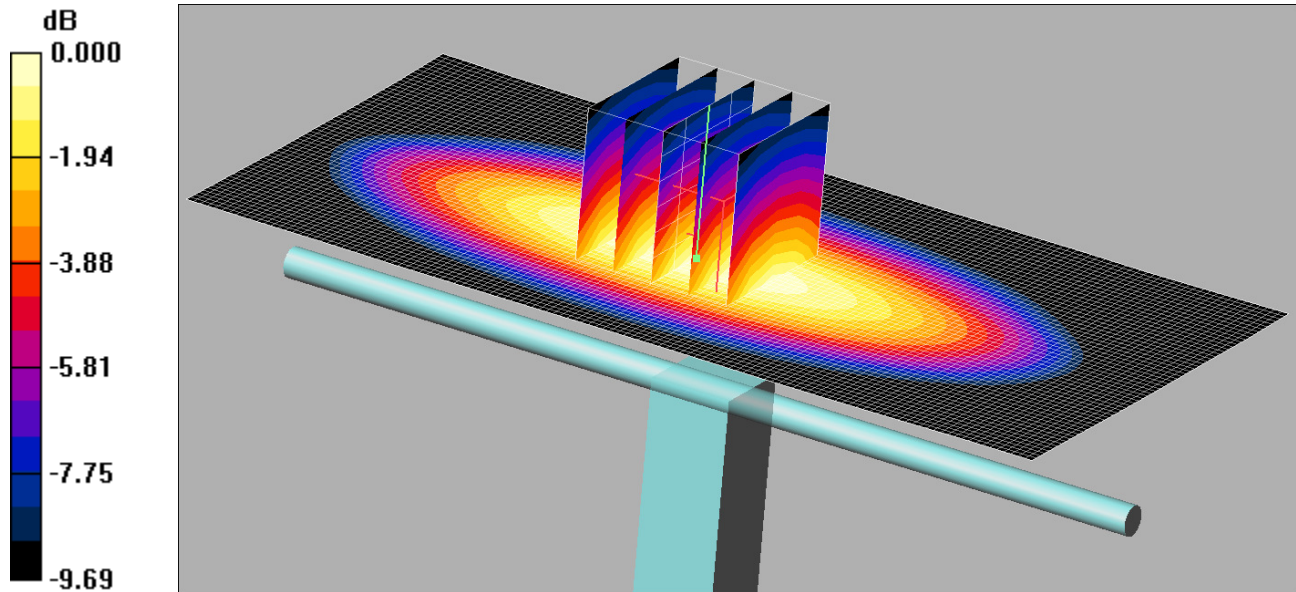

0 dB = 2.38mW/g

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 MHz MSL Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.926 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.23, 10.23, 10.23);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW 2/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.39 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.5 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 3.23 W/kg


SAR(1 g) = 2.21 mW/g; SAR(10 g) = 1.48 mW/g

Maximum value of SAR (measured) = 2.38 mW/g

305: System Performance Check 750MHz Body 09 06 14

Date: 09/06/2014

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1011

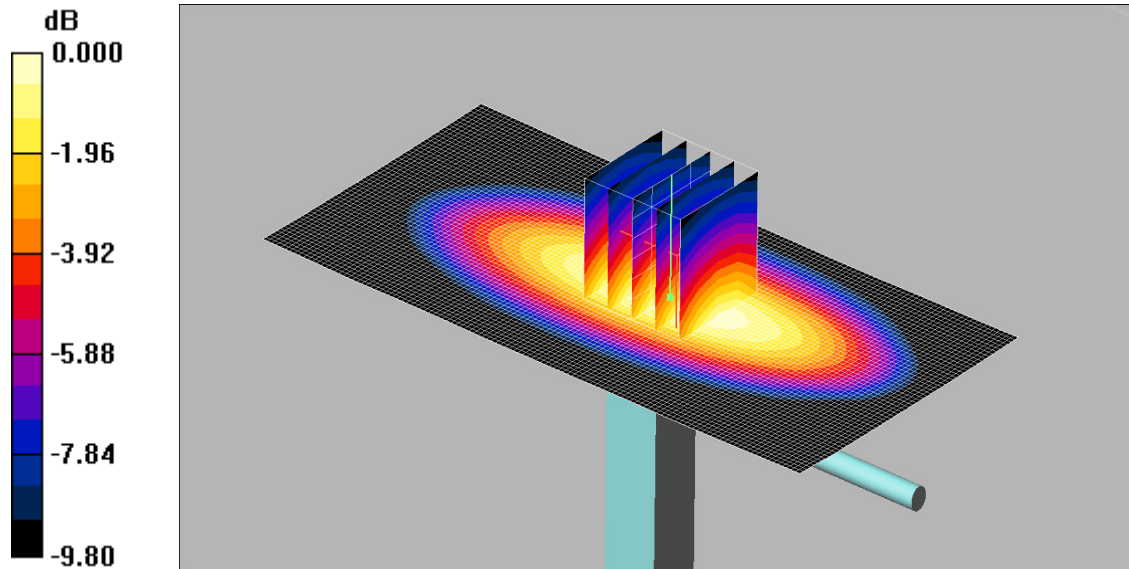

0 dB = 2.29mW/g

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 MHz MSL Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.955 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.23, 10.23, 10.23);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW 2/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 2.31 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.4 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 3.14 W/kg


SAR(1 g) = 2.12 mW/g; SAR(10 g) = 1.42 mW/g

Maximum value of SAR (measured) = 2.29 mW/g

306: System Performance Check 900MHz Head 02 06 14

Date: 2/6/14

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

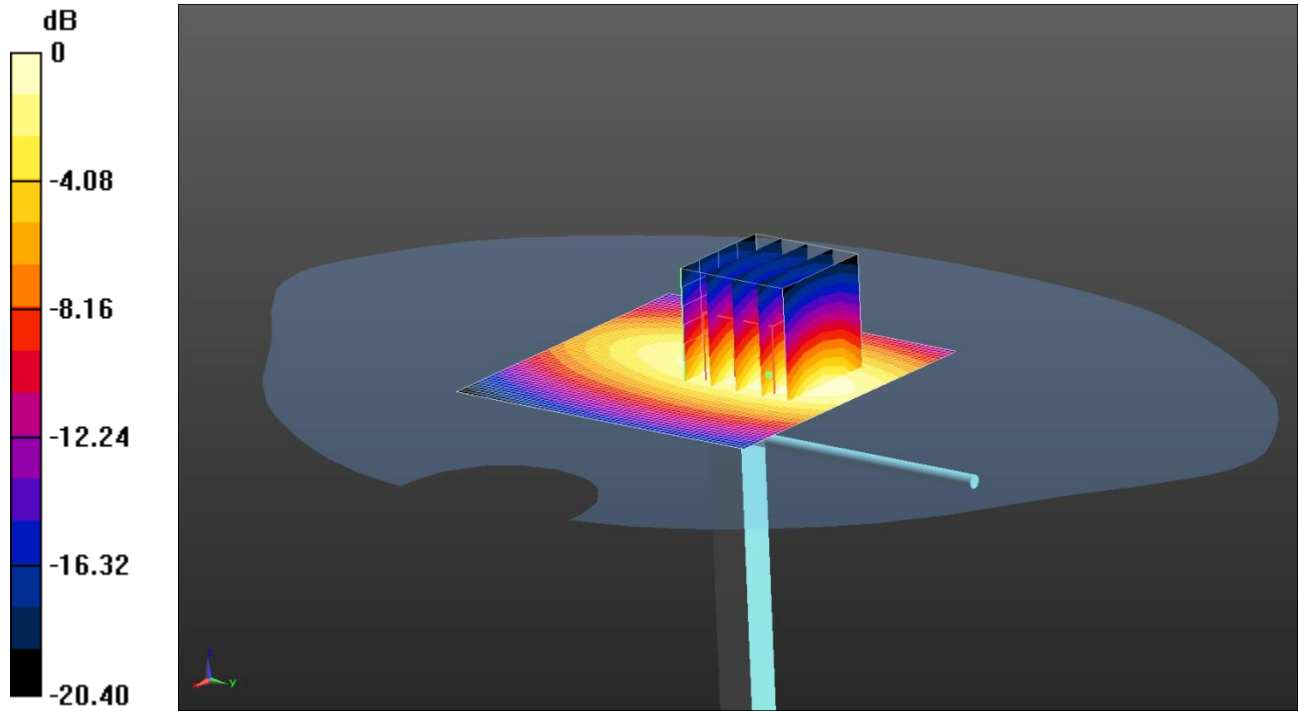

0 dB = 2.92 W/kg = 4.65 dBW/kg

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.981 \text{ S/m}$; $\epsilon_r = 41.624$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(9.65, 9.65, 9.65); Calibrated: 7/5/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/13
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=15mm, Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.92 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.27 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.05 W/kg


SAR(1 g) = 2.67 W/kg; SAR(10 g) = 1.73 W/kg

Maximum value of SAR (measured) = 2.87 W/kg

307: System Performance Check 900MHz Head 05 06 14

Date: 05/06/2014

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

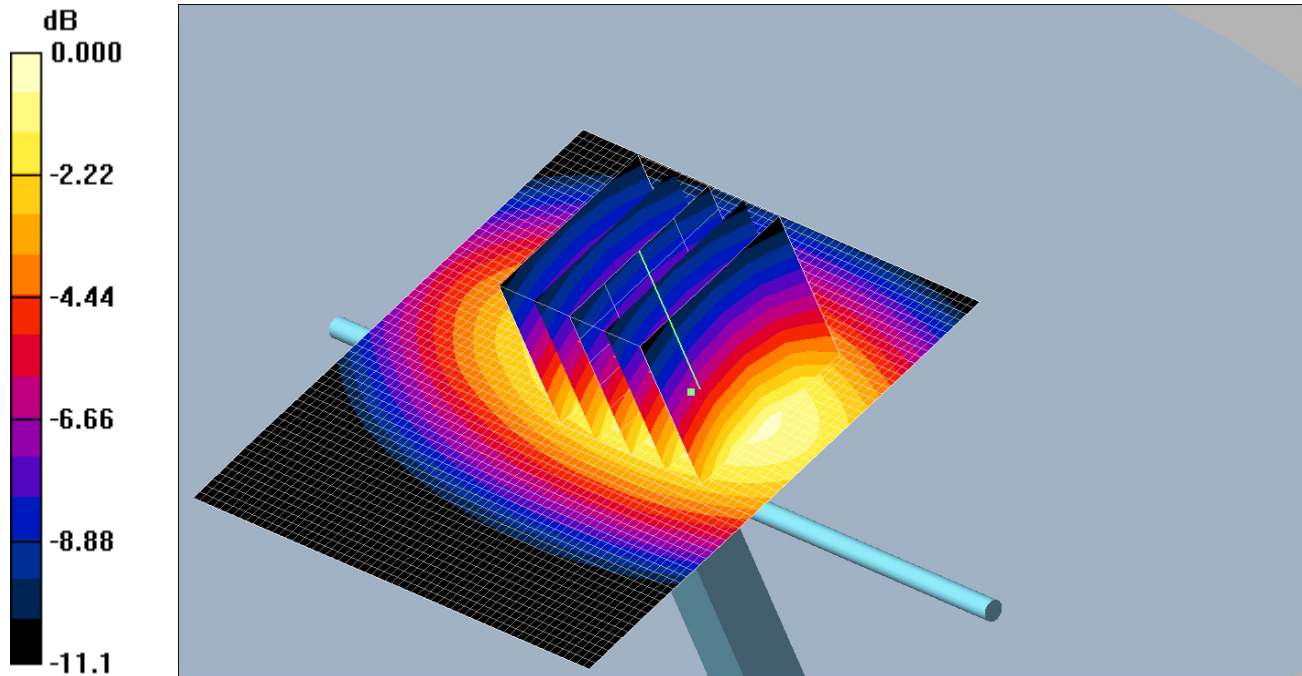

0 dB = 2.75mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.984 \text{ mho/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(9.65, 9.65, 9.65);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=15mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 2.74 mW/g

d=15mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 50.5 V/m; Power Drift = 0.007 dB
 Peak SAR (extrapolated) = 3.88 W/kg
SAR(1 g) = 2.54 mW/g; SAR(10 g) = 1.64 mW/g
 Maximum value of SAR (measured) = 2.75 mW/g

308: System Performance Check 900MHz Head 05 06 14 (2)

Date: 05/06/2014

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

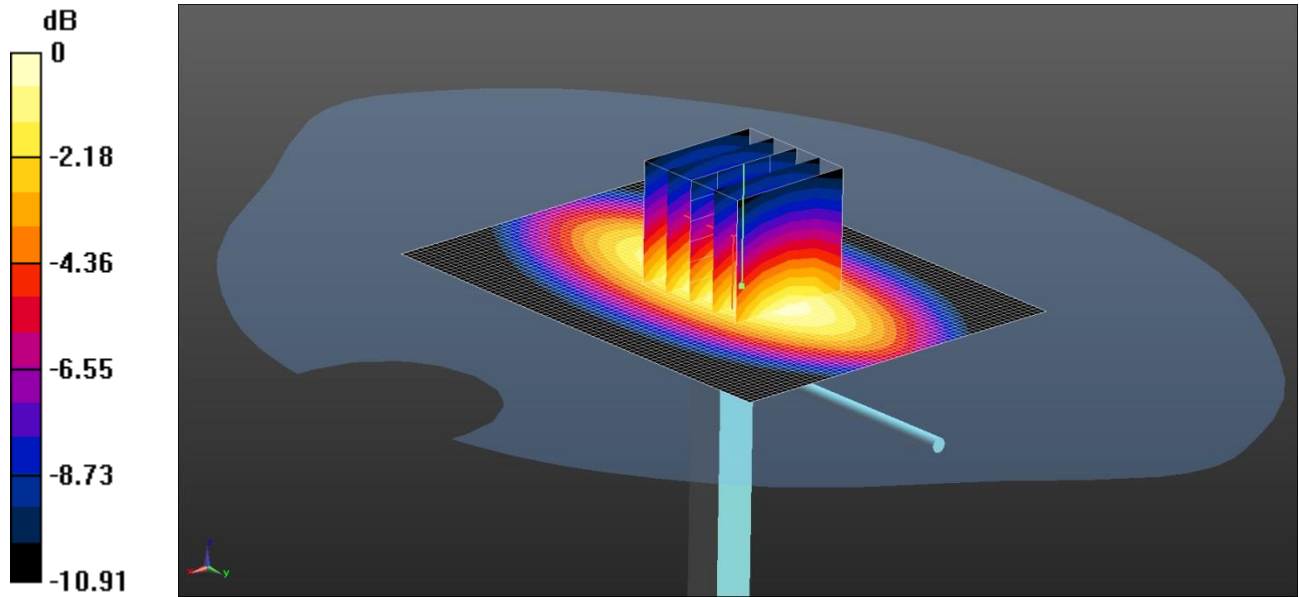

0 dB = 2.87 W/kg = 4.58 dBW/kg

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1
 Medium: 900 MHz HSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 40.606$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.06, 6.06, 6.06); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 17/04/2013
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

SAR/d=15mm, Pin=250 mW (ET-Probe)/Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.92 W/kg

SAR/d=15mm, Pin=250 mW (ET-Probe)/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.626 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 3.82 W/kg


SAR(1 g) = 2.64 W/kg; SAR(10 g) = 1.72 W/kg

Maximum value of SAR (measured) = 2.87 W/kg

309: System Performance Check 900MHz Head 16 06 14

Date: 16/06/2014

DUT: Dipole 900 MHz; Type: D900V2; Serial: SN035

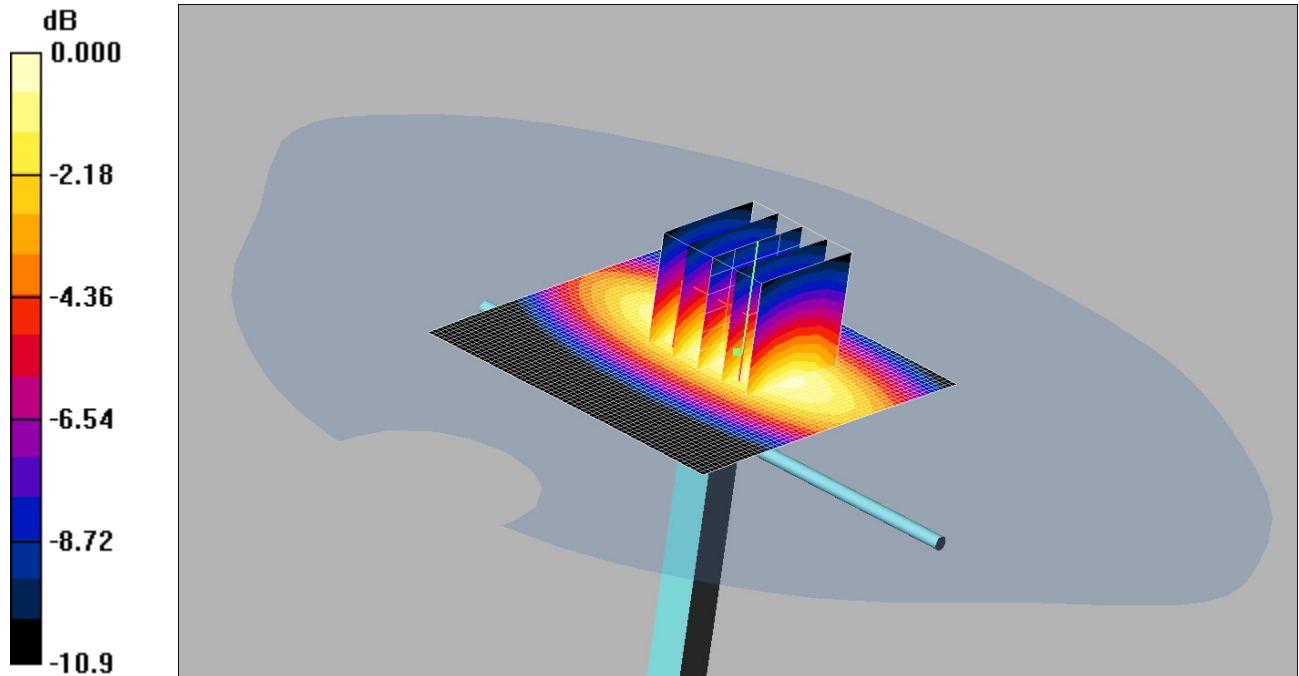

0 dB = 2.86mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.996 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW 2/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.84 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.6 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 3.91 W/kg


SAR(1 g) = 2.65 mW/g; SAR(10 g) = 1.72 mW/g

Maximum value of SAR (measured) = 2.86 mW/g

310: System Performance Check 900MHz Head 16 06 14

Date: 16/6/14

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

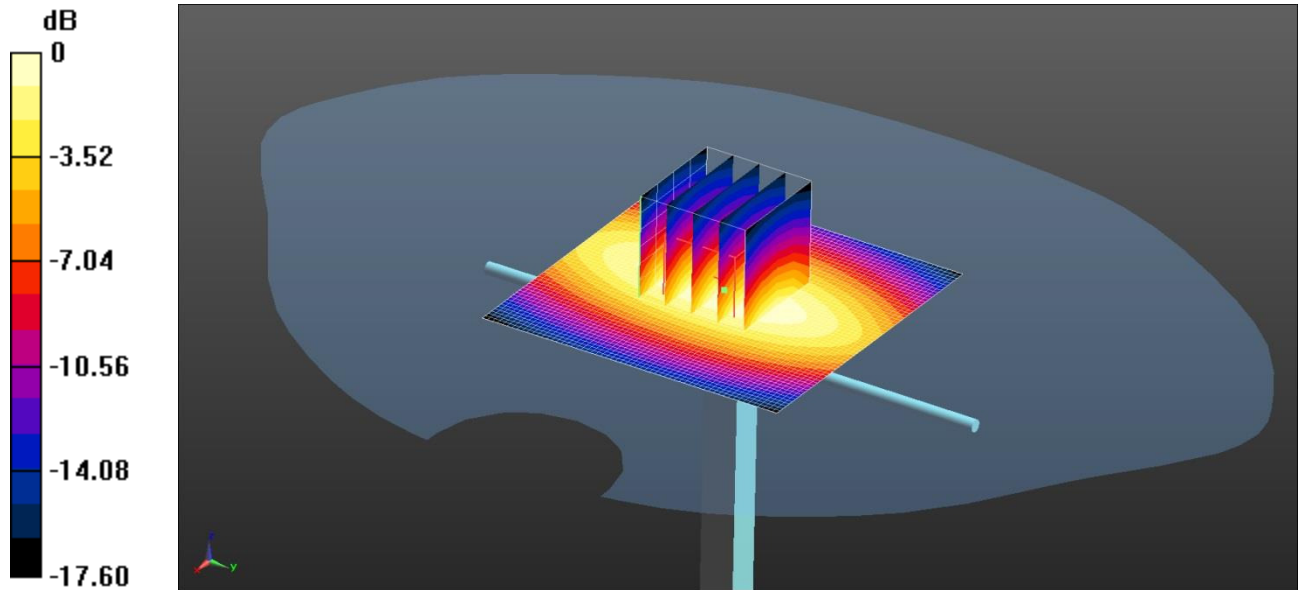

0 dB = 2.78 W/kg = 4.45 dBW/kg

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.972 \text{ S/m}$; $\epsilon_r = 39.839$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(9.79, 9.79, 9.79); Calibrated: 9/5/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/4/14
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

SAR/d=15mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.78 W/kg

SAR/d=15mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.38 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.85 W/kg


SAR(1 g) = 2.56 W/kg; SAR(10 g) = 1.65 W/kg

Maximum value of SAR (measured) = 2.77 W/kg

311: System Performance Check 900MHz Head 19 06 14

Date: 19/06/2014

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

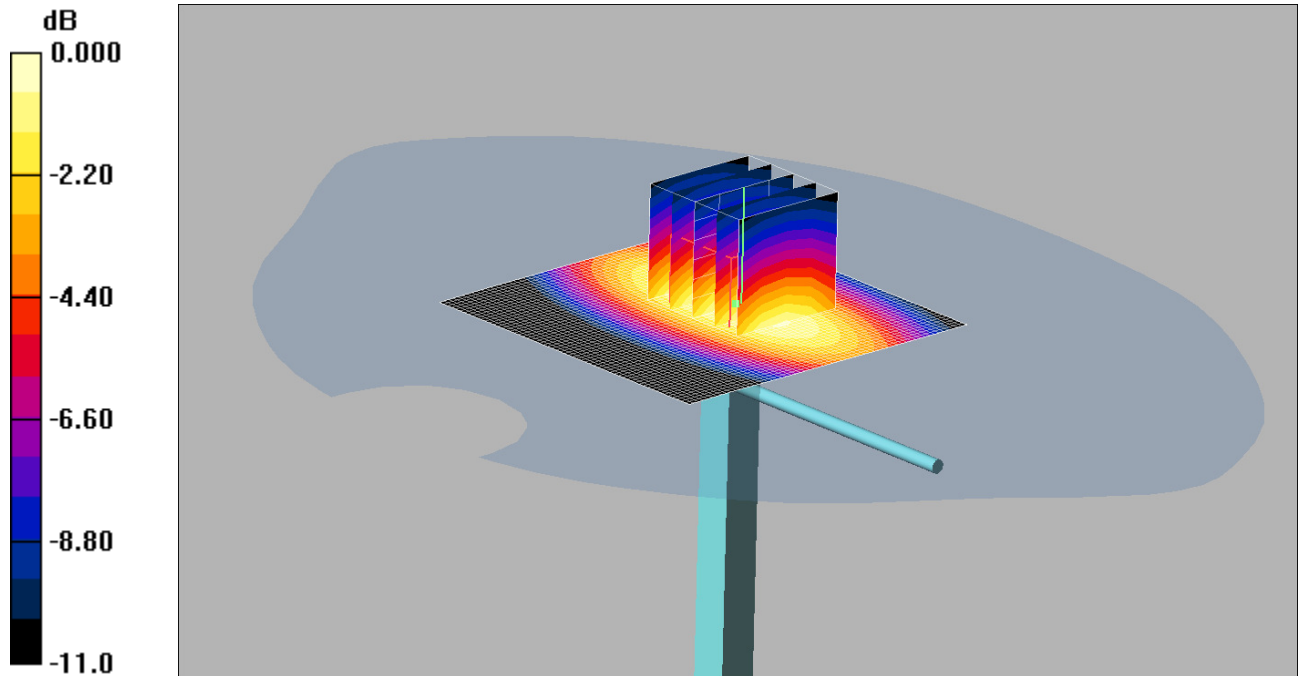

0 dB = 2.77mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW 2/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.71 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.2 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 3.81 W/kg


SAR(1 g) = 2.57 mW/g; SAR(10 g) = 1.67 mW/g

Maximum value of SAR (measured) = 2.77 mW/g

312: System Performance Check 900MHz Body 02 06 14

Date: 2/6/14

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

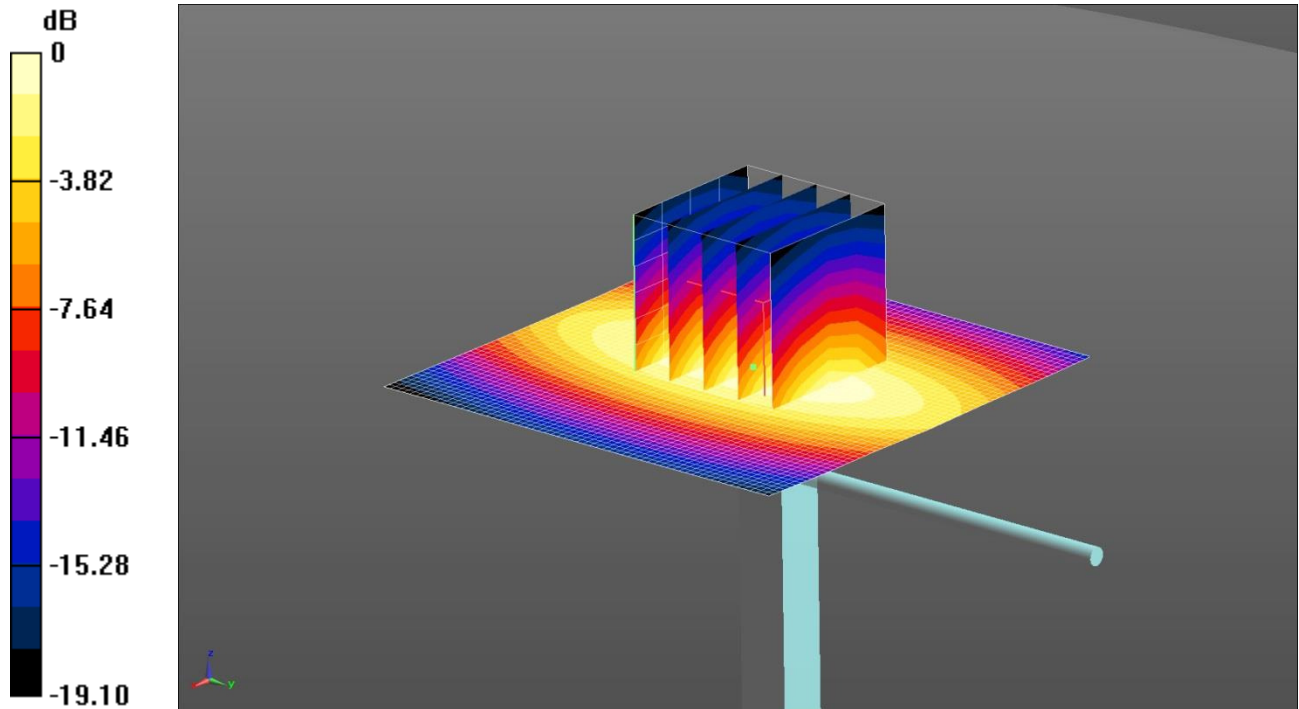

0 dB = 2.74 W/kg = 4.38 dBW/kg

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.03 \text{ S/m}$; $\epsilon_r = 54.015$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(9.85, 9.85, 9.85); Calibrated: 7/5/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=15mm, Pin=250mW 2/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.74 W/kg

Configuration/d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.11 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.90 W/kg


SAR(1 g) = 2.6 W/kg; SAR(10 g) = 1.69 W/kg

Maximum value of SAR (measured) = 2.82 W/kg

313: System Performance Check 900MHz Body 05 06 14

Date: 05/06/2014

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

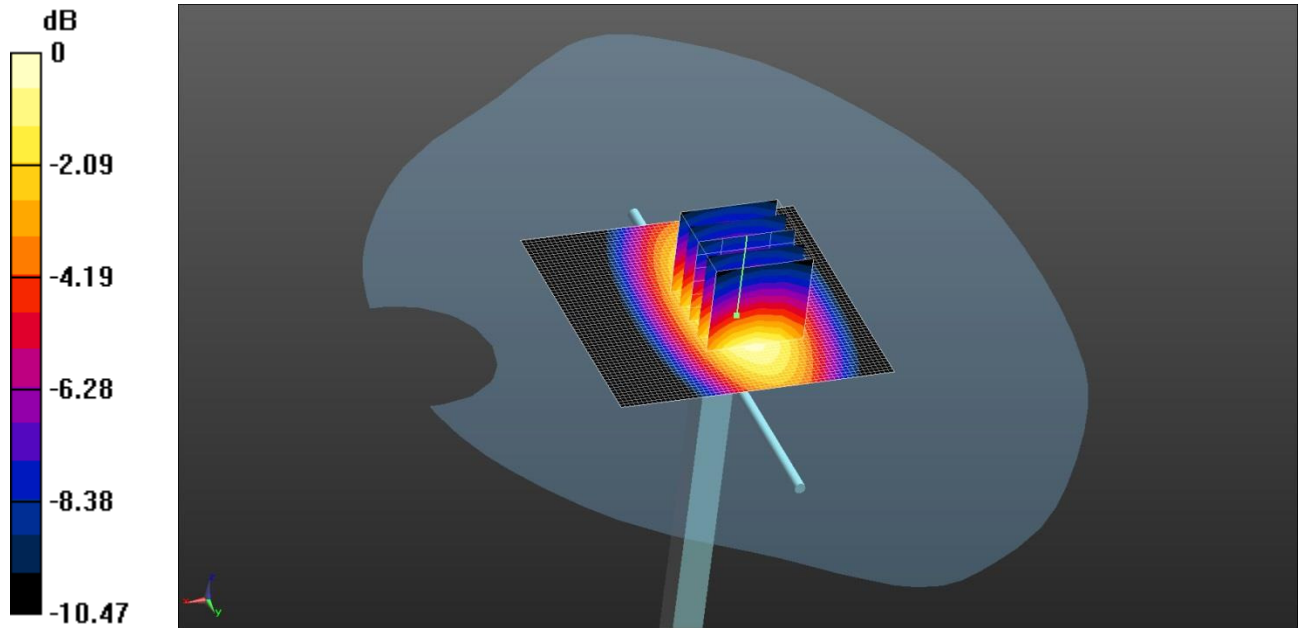

0 dB = 2.78 W/kg = 4.44 dBW/kg

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.021 \text{ S/m}$; $\epsilon_r = 52.914$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.92, 5.92, 5.92); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

SAR/d=15mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2 2/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.79 W/kg

SAR/d=15mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.224 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.60 W/kg


SAR(1 g) = 2.56 W/kg; SAR(10 g) = 1.69 W/kg

Maximum value of SAR (measured) = 2.78 W/kg

314: System Performance Check 900MHz Body 05 06 14

Date: 05/06/2014

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

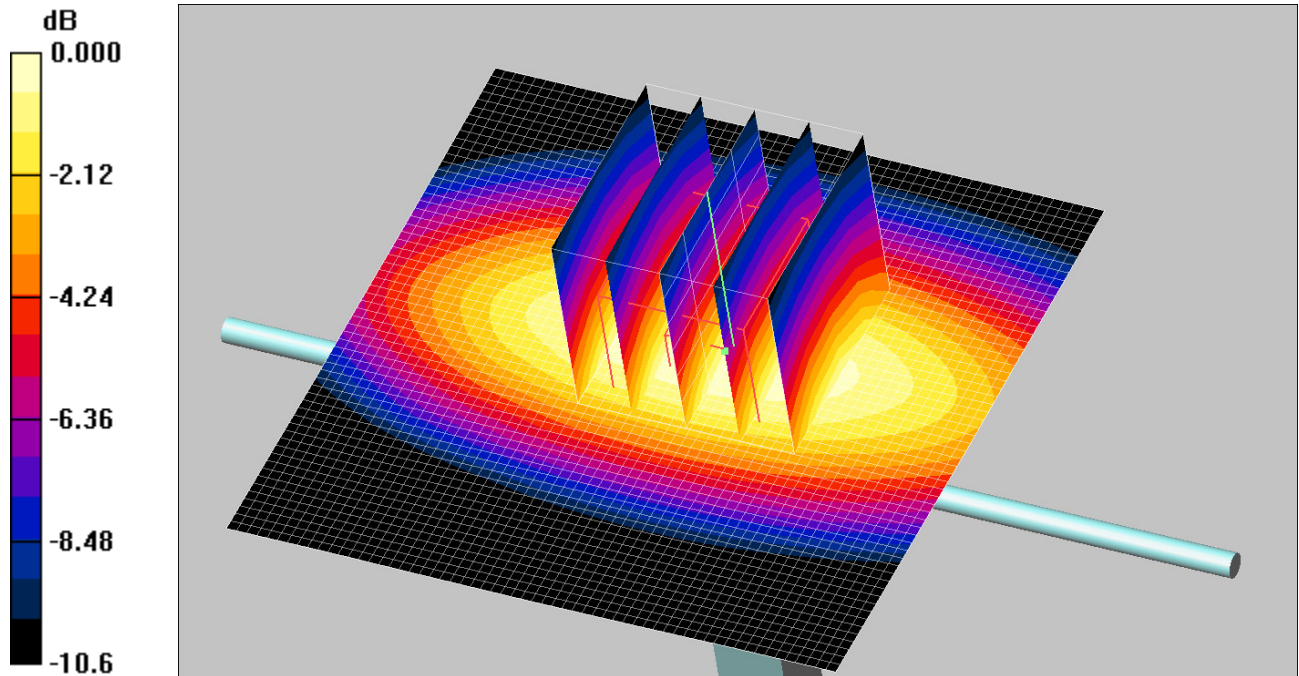

0 dB = 2.68mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(9.85, 9.85, 9.85);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=15mm, Pin=250mW 2/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 2.72 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 51.1 V/m; Power Drift = 0.003 dB
 Peak SAR (extrapolated) = 3.72 W/kg
SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.62 mW/g
 Maximum value of SAR (measured) = 2.68 mW/g

315: System Performance Check 900MHz Body 16 06 14

Date: 16/6/14

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

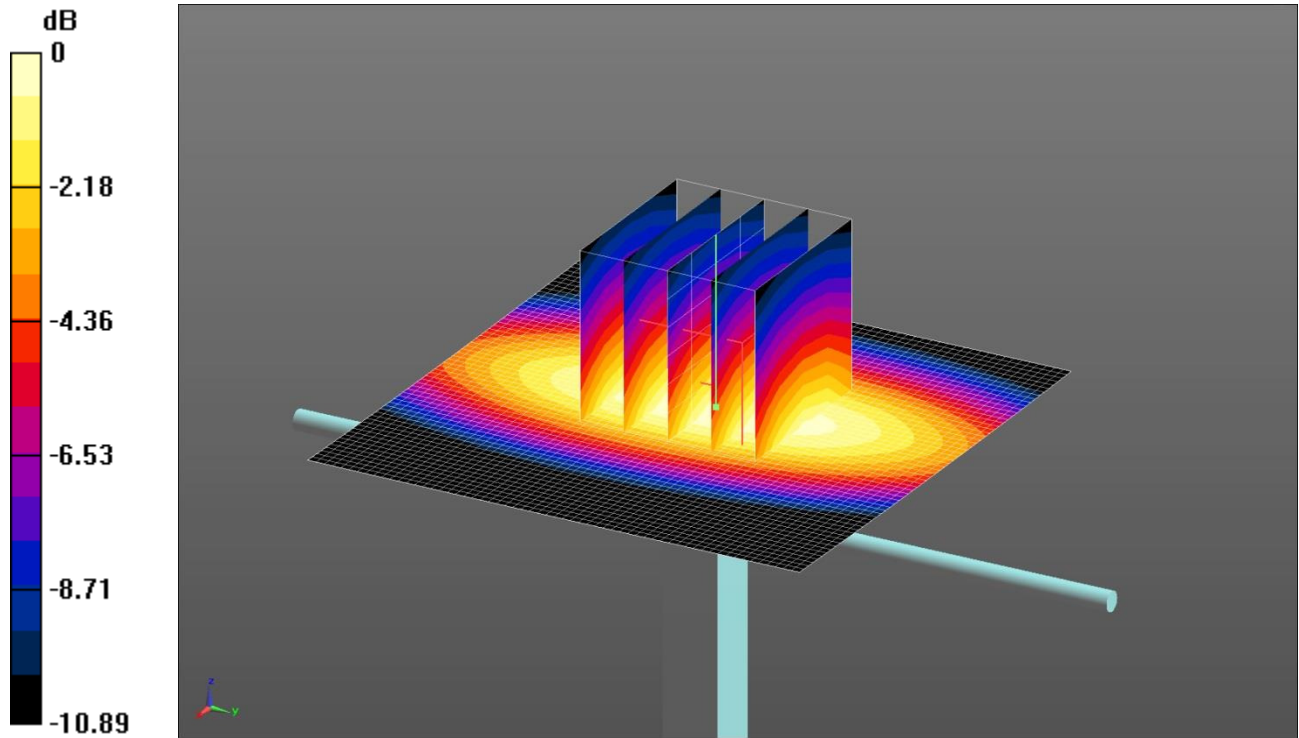

0 dB = 2.75 W/kg = 4.39 dBW/kg

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.088 \text{ S/m}$; $\epsilon_r = 54.128$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(9.72, 9.72, 9.72); Calibrated: 9/5/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/4/14
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

SAR/d=15mm, Pin=250 mW, dist=10.0mm (ET-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.77 W/kg

SAR/d=15mm, Pin=250 mW, dist=10.0mm (ET-Probe)/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.50 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.84 W/kg


SAR(1 g) = 2.54 W/kg; SAR(10 g) = 1.64 W/kg

Maximum value of SAR (measured) = 2.75 W/kg

316: System Performance Check 900MHz Body 16 06 14

Date: 16/06/2014

DUT: Dipole 900 MHz; Type: D900V2; Serial: SN035

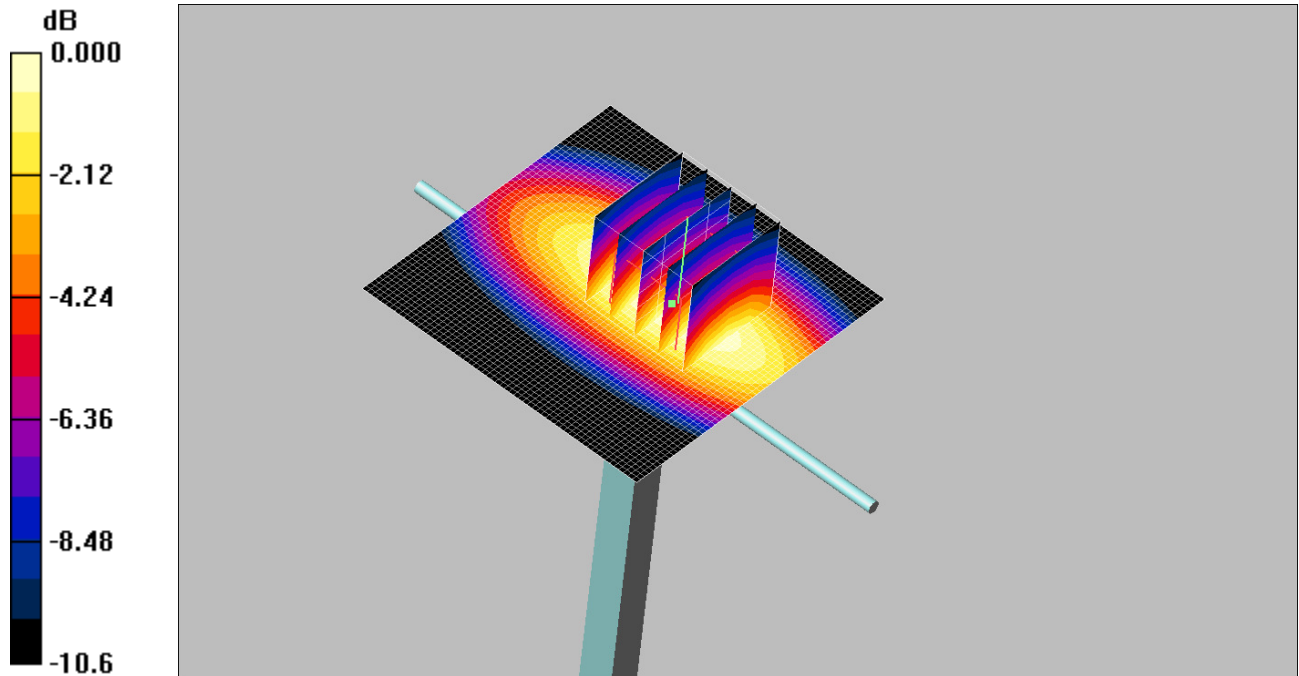

0 dB = 2.77mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: f = 900 MHz; $\sigma = 1.06 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(6.04, 6.04, 6.04);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW 2/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 2.79 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.8 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 3.80 W/kg


SAR(1 g) = 2.58 mW/g; SAR(10 g) = 1.69 mW/g

Maximum value of SAR (measured) = 2.77 mW/g

317: System Performance Check 900MHz Body 19 06 14

Date: 19/06/2014

DUT: Dipole 900 MHz; SN: 035; Type: D900V2; Serial: SN035

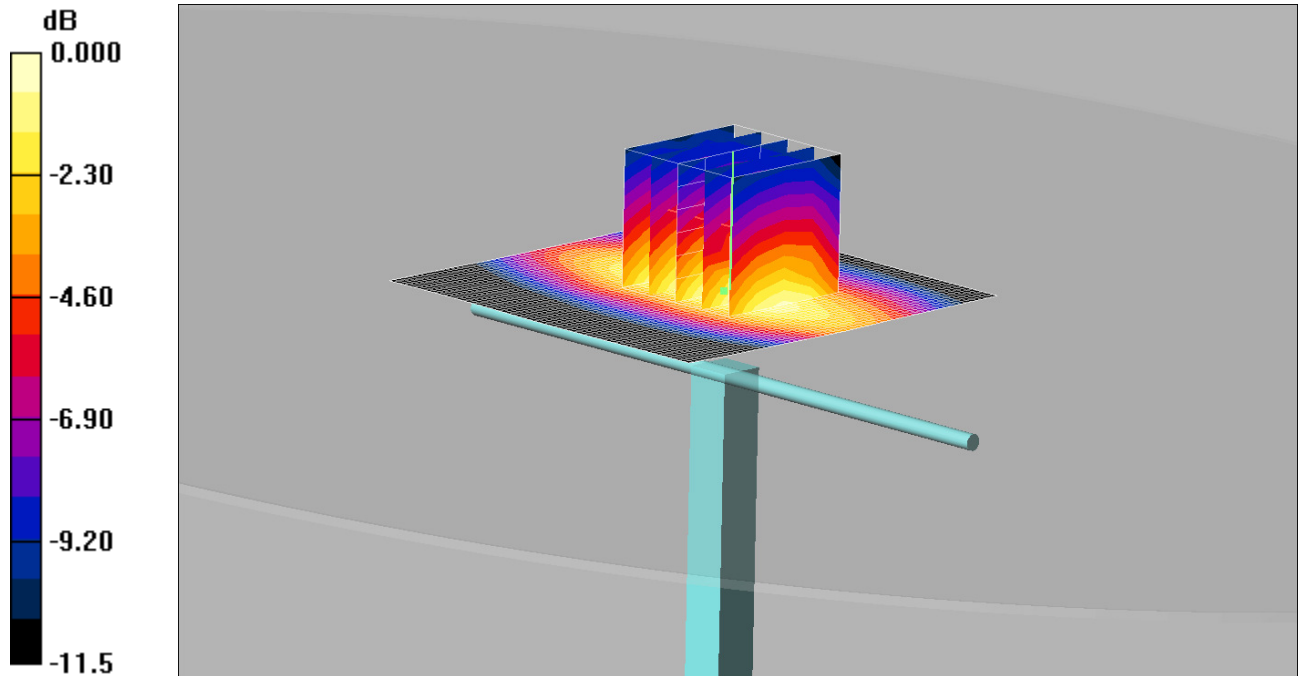

0 dB = 2.86mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.09 \text{ mho/m}$; $\epsilon_r = 53.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(6.04, 6.04, 6.04);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW 2/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.52 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.0 V/m; Power Drift = -0.243 dB

Peak SAR (extrapolated) = 3.98 W/kg


SAR(1 g) = 2.65 mW/g; SAR(10 g) = 1.72 mW/g

Maximum value of SAR (measured) = 2.86 mW/g

318: System Performance Check 1800MHz Head 02 06 14

Date: 02/06/2014

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d009

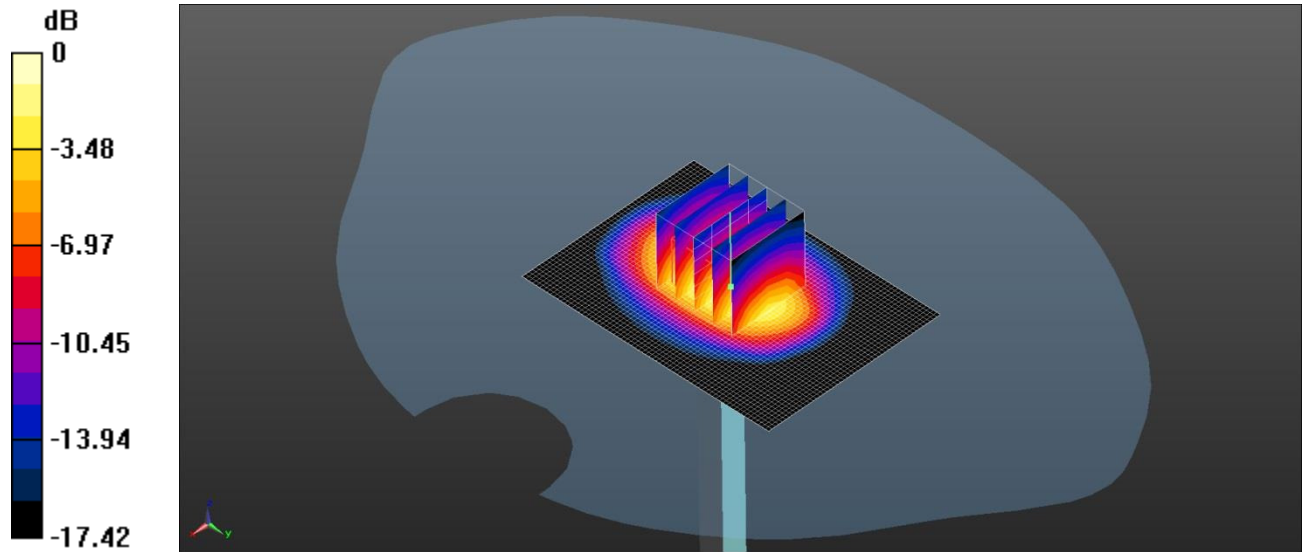

0 dB = 10.2 W/kg = 10.09 dBW/kg

Communication System: UID 0 - n/a, CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.43 \text{ S/m}$; $\epsilon_r = 39.676$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

SAR/d=10mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Area Scan (51x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 10.8 W/kg

SAR/d=10mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.634 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 15.2 W/kg


SAR(1 g) = 9.2 W/kg; SAR(10 g) = 4.97 W/kg

Maximum value of SAR (measured) = 10.2 W/kg

319: System Performance Check 1800MHz Head 05 06 14

Date: 05/06/2014

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d009

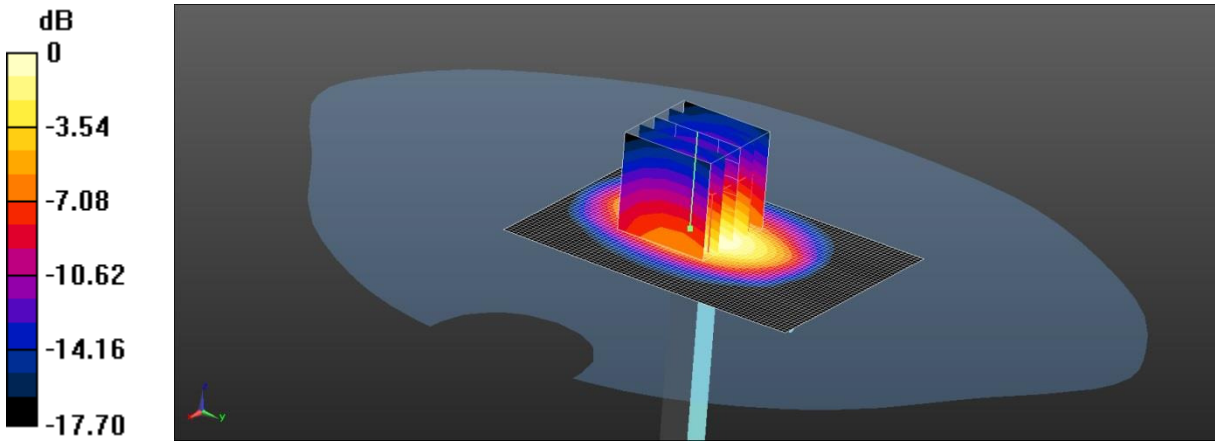

0 dB = 10.5 W/kg = 10.21 dBW/kg

Communication System: UID 0 - n/a, CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used: $f = 1800$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 39.604$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

SAR/d=10mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Area Scan (51x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 11.0 W/kg

SAR/d=10mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.421 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 15.6 W/kg


SAR(1 g) = 9.46 W/kg; SAR(10 g) = 5.08 W/kg

Maximum value of SAR (measured) = 10.5 W/kg

320: System Performance Check 1800MHz Body 02 06 14

Date: 02/06/2014

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d009

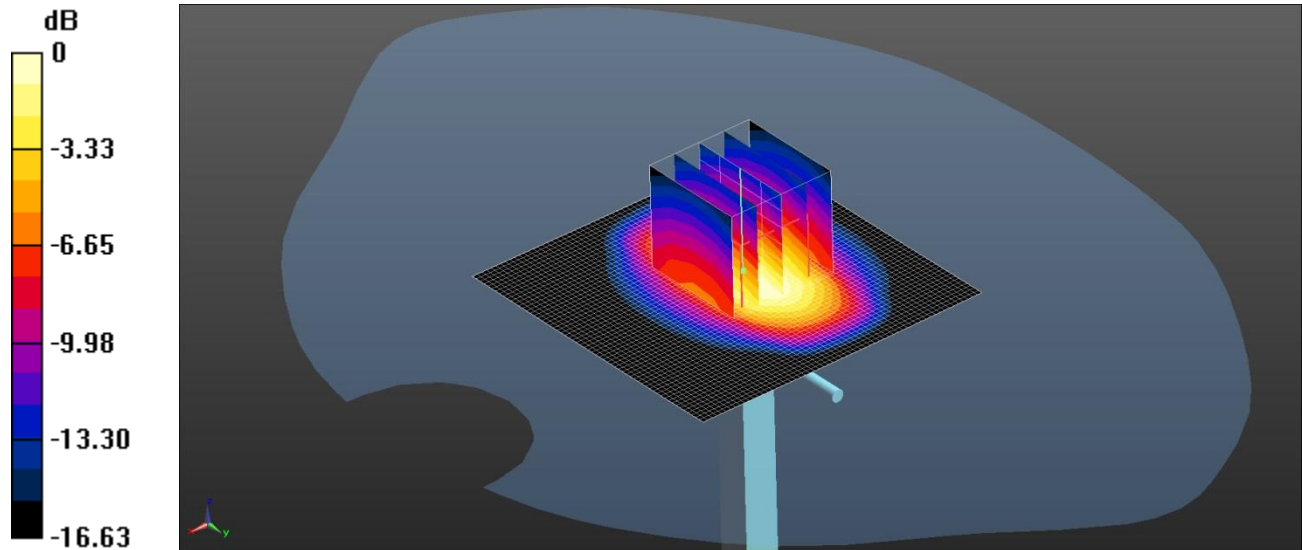

0 dB = 10.0 W/kg = 10.00 dBW/kg

Communication System: UID 0 - n/a, CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.561 \text{ S/m}$; $\epsilon_r = 51.061$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 02/05/2012
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

SAR/d=10mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 86.106 V/m; Power Drift = 0.06 dB

Fast SAR: SAR(1 g) = 9.21 W/kg; SAR(10 g) = 4.93 W/kg

Maximum value of SAR (interpolated) = 10.6 W/kg

SAR/d=10mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 86.106 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 14.0 W/kg


SAR(1 g) = 8.9 W/kg; SAR(10 g) = 4.88 W/kg

Maximum value of SAR (measured) = 10.0 W/kg

321: System Performance Check 1800MHz Body 05 06 14

Date: 05/06/2014

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d009

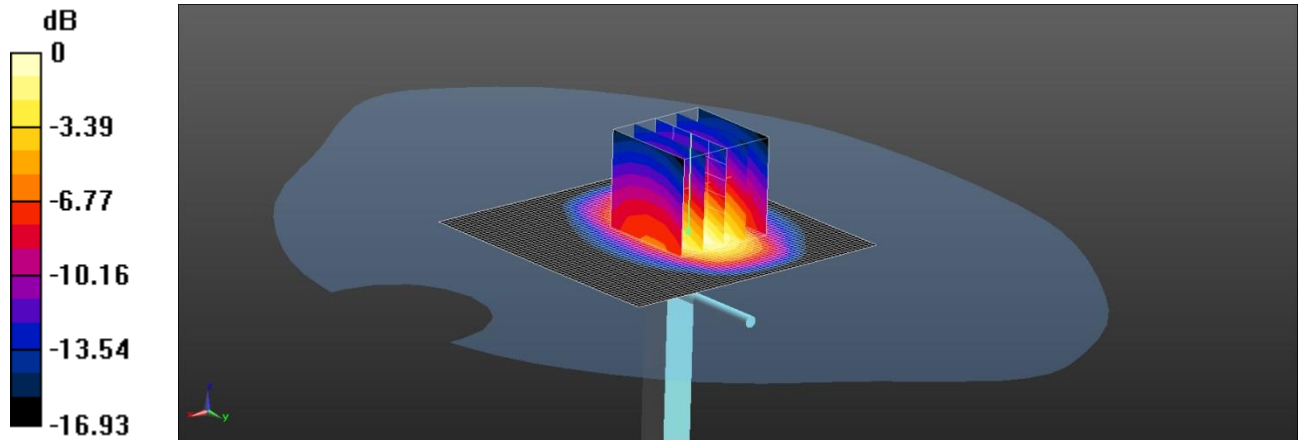

0 dB = 10.2 W/kg = 10.09 dBW/kg

Communication System: UID 0 - n/a, CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used: $f = 1800$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.64, 4.64, 4.64); Calibrated: 26/07/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

SAR/d=10mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 10.6 W/kg

SAR/d=10mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.829 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 14.4 W/kg


SAR(1 g) = 9.07 W/kg; SAR(10 g) = 4.94 W/kg

Maximum value of SAR (measured) = 10.2 W/kg

322: System Performance Check 1900MHz Head 02 06 14

Date: 02/06/2014

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN537

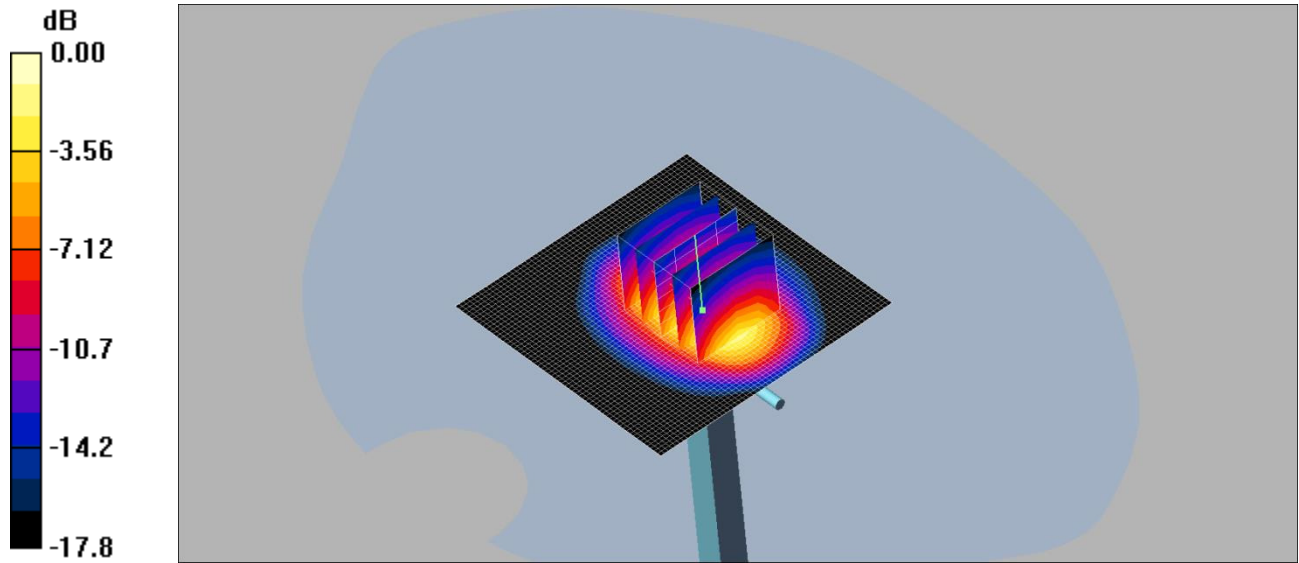

0 dB = 11.3mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.5 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.1 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 18.6 W/kg


SAR(1 g) = 10 mW/g; SAR(10 g) = 5.19 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

323: System Performance Check 1900MHz Head 05 06 14

Date: 05/06/2014

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN537

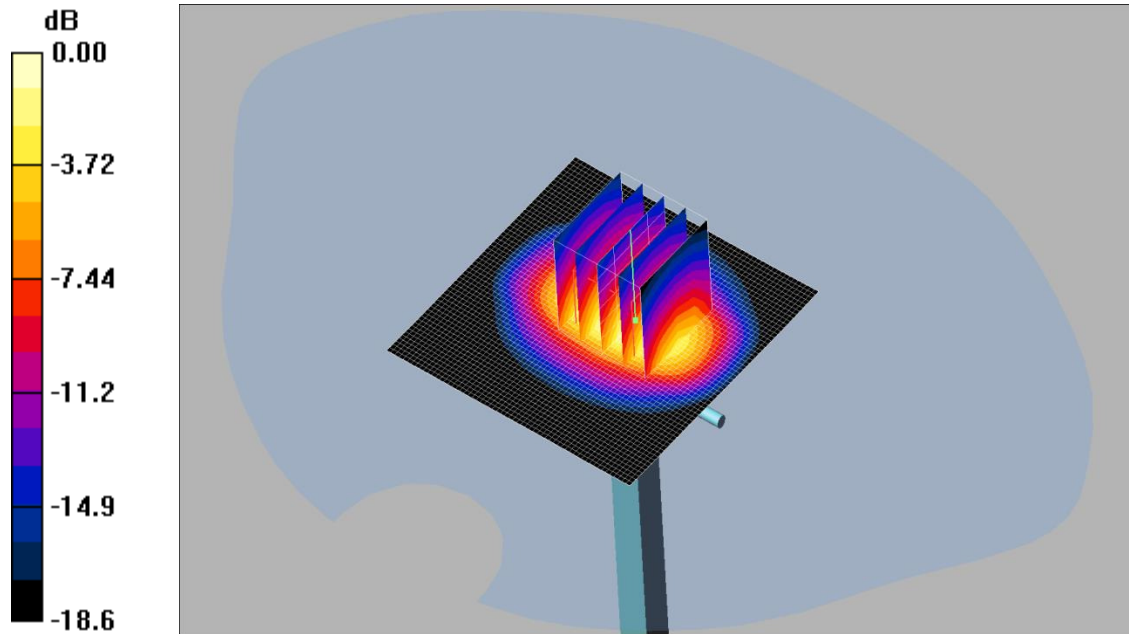

0 dB = 10.9mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.2 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.5 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 18.4 W/kg


SAR(1 g) = 9.78 mW/g; SAR(10 g) = 5.02 mW/g

Maximum value of SAR (measured) = 10.9 mW/g

324: System Performance Check 1900MHz Head 09 06 14

Date: 09/06/2014

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN537

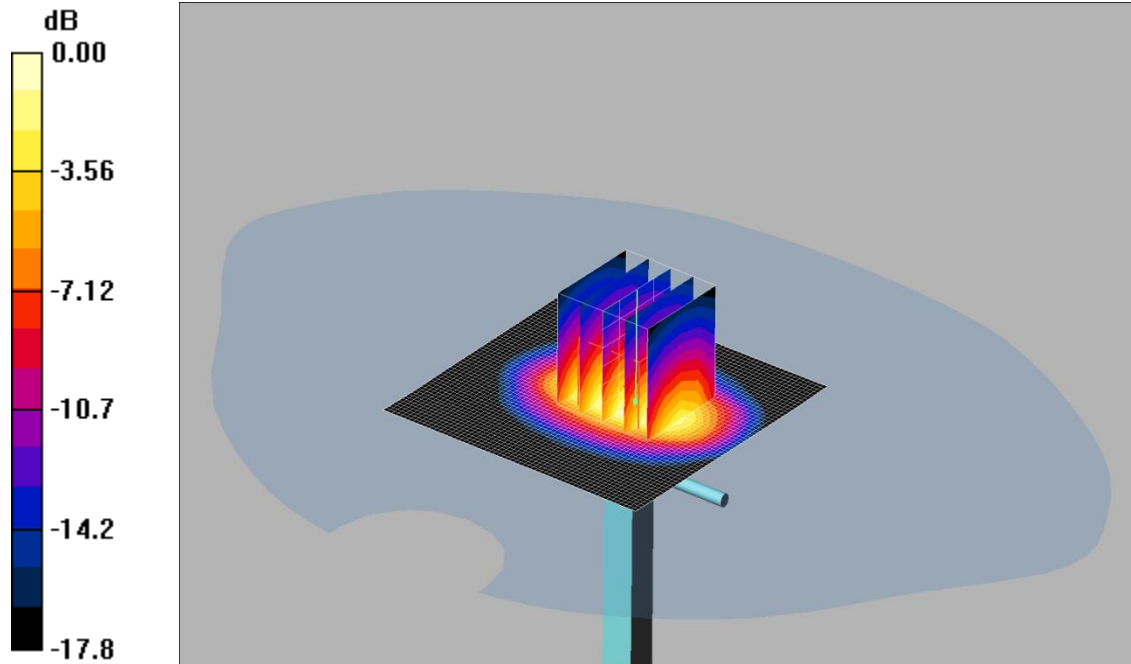

0 dB = 11.0mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 12.4 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 90.1 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 18.2 W/kg


SAR(1 g) = 9.79 mW/g; SAR(10 g) = 5.03 mW/g

Maximum value of SAR (measured) = 11.0 mW/g

325: System Performance Check 1900MHz Head 30 06 14

Date: 30/6/14

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN537

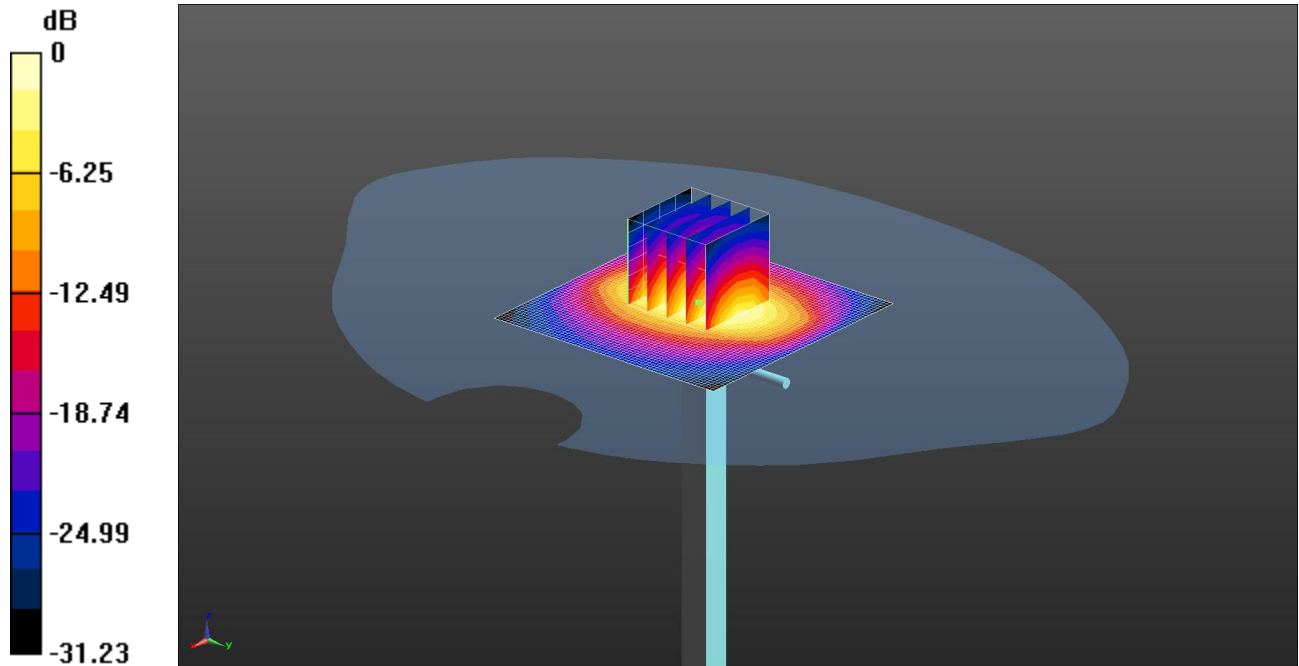

0 dB = 11.4 W/kg = 10.58 dBW/kg

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 39.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(7.96, 7.96, 7.96); Calibrated: 9/5/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/4/14
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1832
- ; SEMCAD X Version 14.6.10 (7331)

SAR/d=15mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2 2/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 11.4 W/kg

SAR/d=15mm, Pin=250 mW, dist=10.0mm (ET-Probe) 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.10 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 18.1 W/kg


SAR(1 g) = 9.84 W/kg; SAR(10 g) = 5.11 W/kg

Maximum value of SAR (measured) = 11.0 W/kg

326: System Performance Check 1900MHz Body 02 06 14

Date: 02/06/2014

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN537

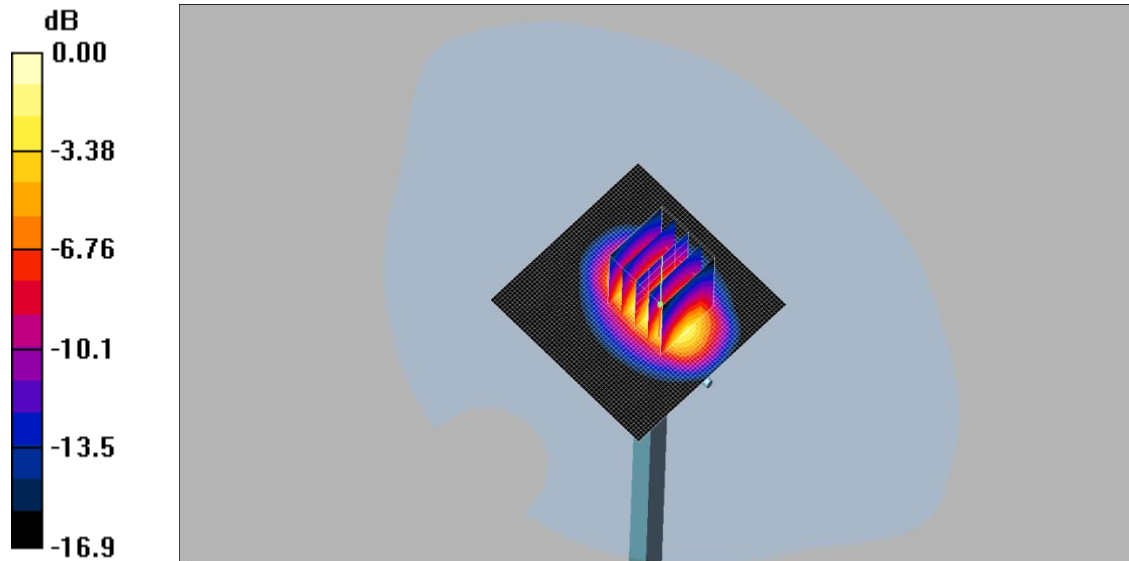

0 dB = 11.6mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.6 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.8 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 17.9 W/kg


SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.45 mW/g

Maximum value of SAR (measured) = 11.6 mW/g

327: System Performance Check 1900MHz Body 05 06 14

Date: 05/06/2014

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN537

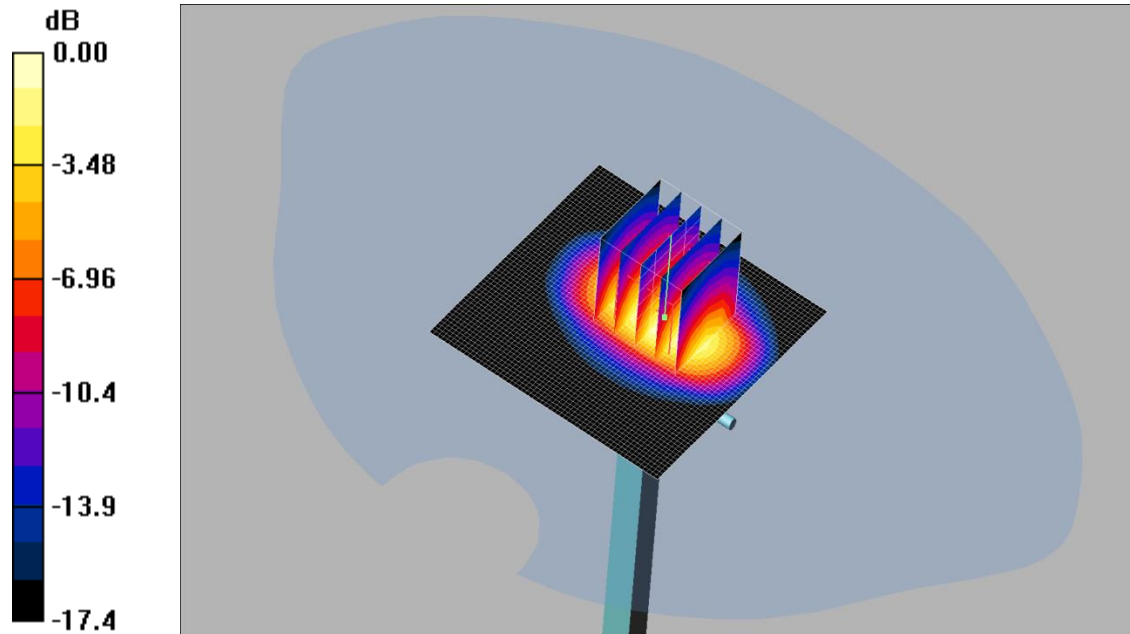

0 dB = 11.4mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 51.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145


d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 13.3 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 83.7 V/m; Power Drift = -0.078 dB
 Peak SAR (extrapolated) = 18.2 W/kg
SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.3 mW/g
 Maximum value of SAR (measured) = 11.4 mW/g

328: System Performance Check 1900MHz Body 09 06 14

Date: 09/06/2014

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN537

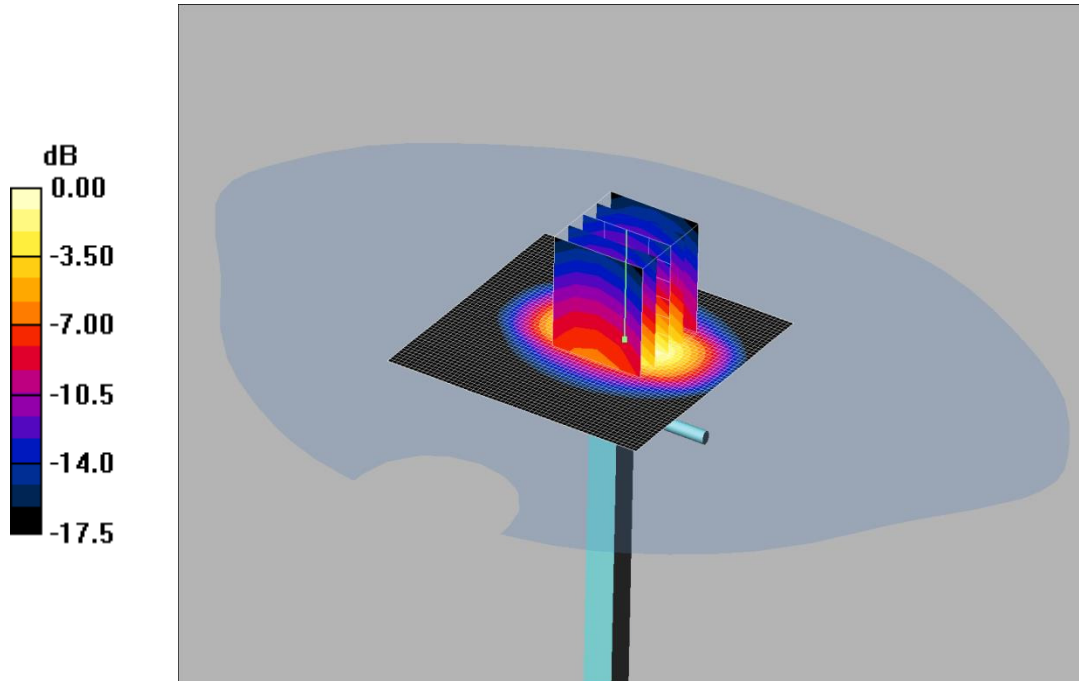

0 dB = 11.3mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.4 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.3 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 17.9 W/kg


SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.26 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

329: System Performance Check 1900MHz Body 19 06 14

Date: 19/06/2014

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN537

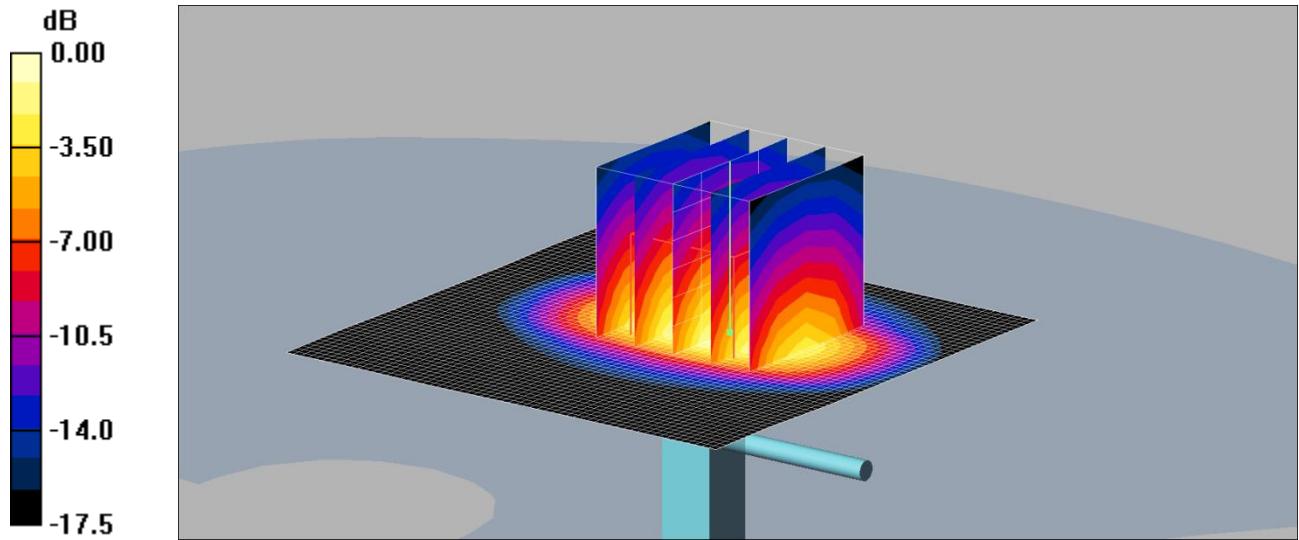

0 dB = 11.0mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.4 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.1 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 17.3 W/kg


SAR(1 g) = 9.79 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 11.0 mW/g

330: System Performance Check 2450MHz Head 04 06 14

Date: 04/06/2014

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2440V2 - SN:701

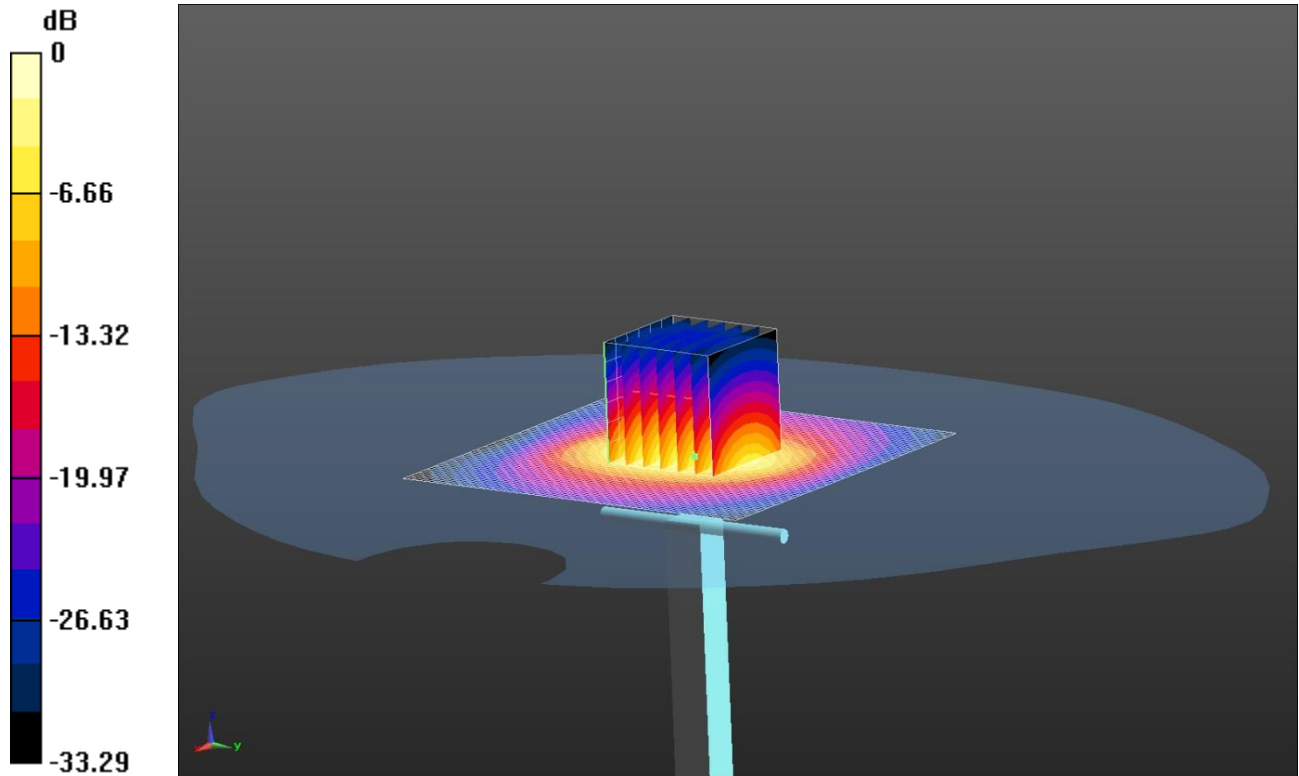

0 dB = 15.5 W/kg = 11.90 dBW/kg

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450MHz HSL Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.924$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.55, 4.55, 4.55); Calibrated: 08/01/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/d=10mm, Pin=250mW 4 3/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 15.5 W/kg

Configuration/d=10mm, Pin=250mW 4 3/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.809 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 28.4 W/kg


SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.24 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

331: System Performance Check 2450MHz Head 17 06 14

Date: 17/06/2014

DUT: Dipole 2440 MHz; Type: D2440V2; Serial: D2440V2 - SN:701

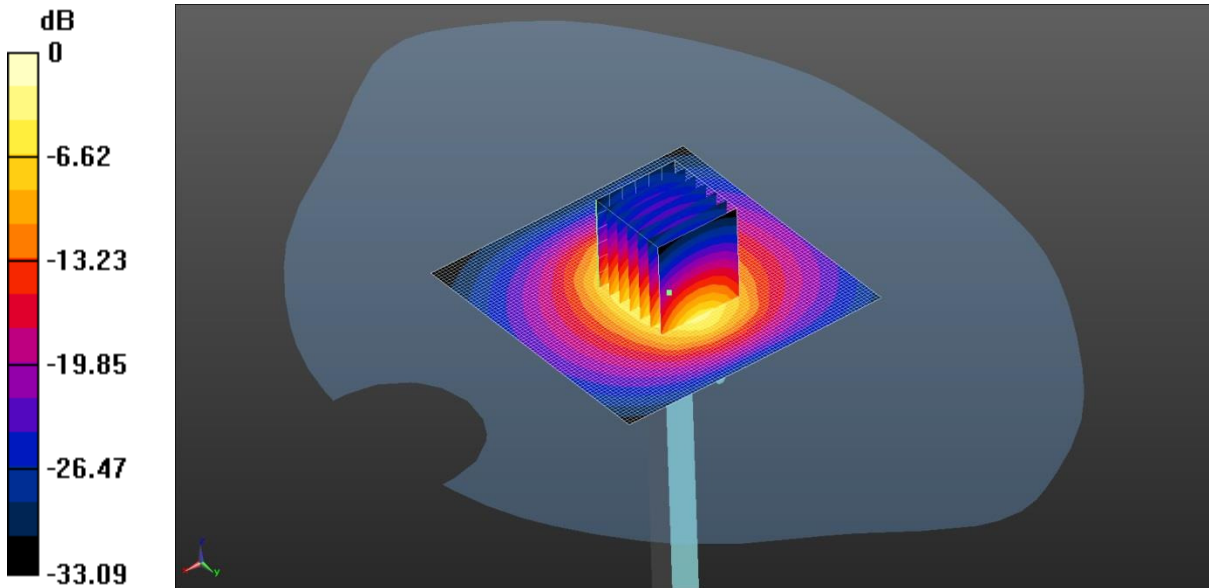

0 dB = 15.4 W/kg = 11.88 dBW/kg

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used: $f = 2450$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 37.773$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(4.08, 4.08, 4.08); Calibrated: 22/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/d=10mm, Pin=250mW 2 2/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 15.4 W/kg

Configuration/d=10mm, Pin=250mW 2 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.086 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 27.2 W/kg


SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.18 W/kg

Maximum value of SAR (measured) = 14.9 W/kg

332: System Performance Check 2450MHz Body 02 06 14

Date: 02/06/2014

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2440V2 - SN:701

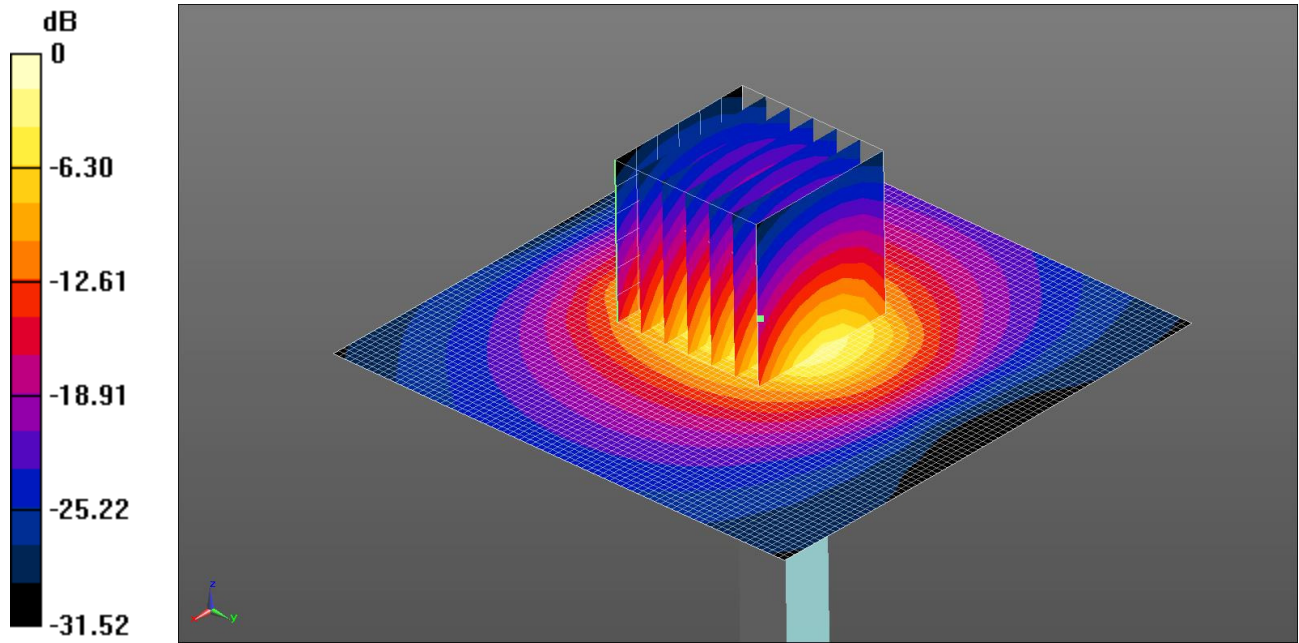

0 dB = 19.2 W/kg = 12.83 dBW/kg

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450MHz MSL Medium parameters used: $f = 2450$ MHz; $\sigma = 1.994$ S/m; $\epsilon_r = 52.785$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.42, 4.42, 4.42); Calibrated: 08/01/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/d=10mm, Pin=250mW 4 2/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 14.9 W/kg

Configuration/d=10mm, Pin=250mW 4 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 84.196 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 27.1 W/kg


SAR(1 g) = 13 W/kg; SAR(10 g) = 6.02 W/kg

Maximum value of SAR (measured) = 14.9 W/kg

333: System Performance Check 2450MHz Body 17 06 14

Date: 17/06/2014

DUT: Dipole 2440 MHz; Type: D2440V2; Serial: D2440V2 - SN:701

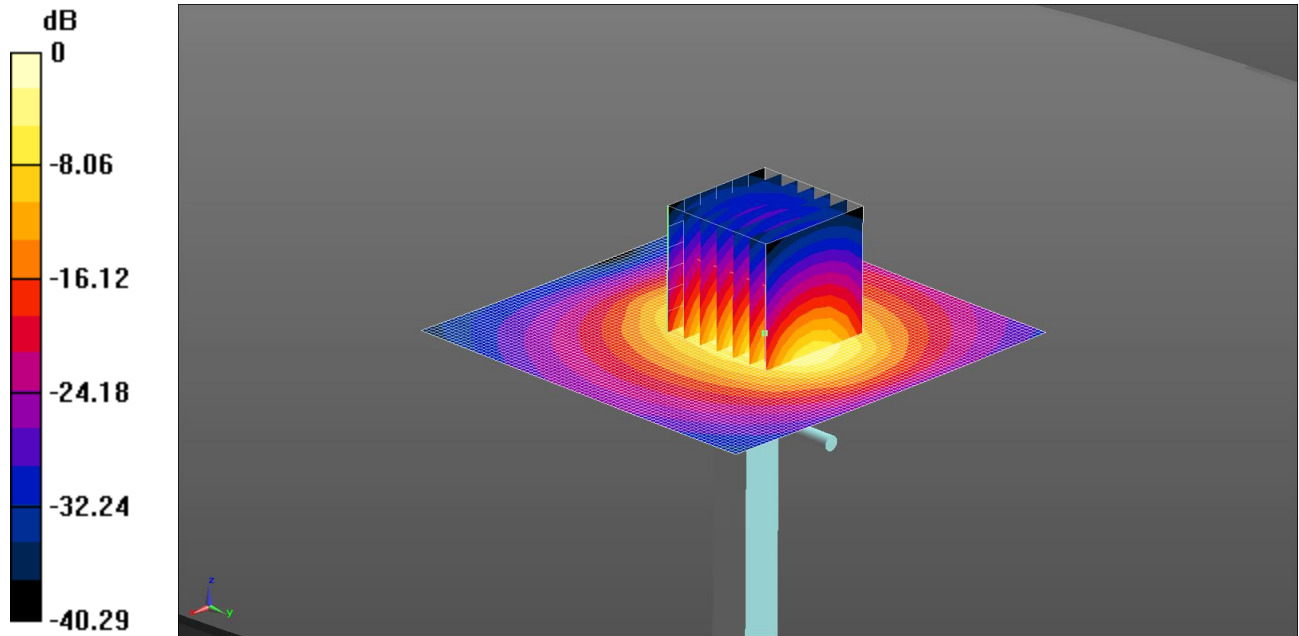

0 dB = 15.4 W/kg = 11.88 dBW/kg

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450MHz MSL Medium parameters used: $f = 2450$ MHz; $\sigma = 2.037$ S/m; $\epsilon_r = 52.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(3.95, 3.95, 3.95); Calibrated: 22/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/d=10mm, Pin=250mW 4 2 2/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.794 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 32.7 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 5.97 W/kg

Maximum value of SAR (measured) = 14.8 W/kg


Configuration/d=10mm, Pin=250mW 4 2 2/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 14.8 W/kg

334: System Performance Check 2600MHz head 05 06 14

Date: 05/06/2014

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1046

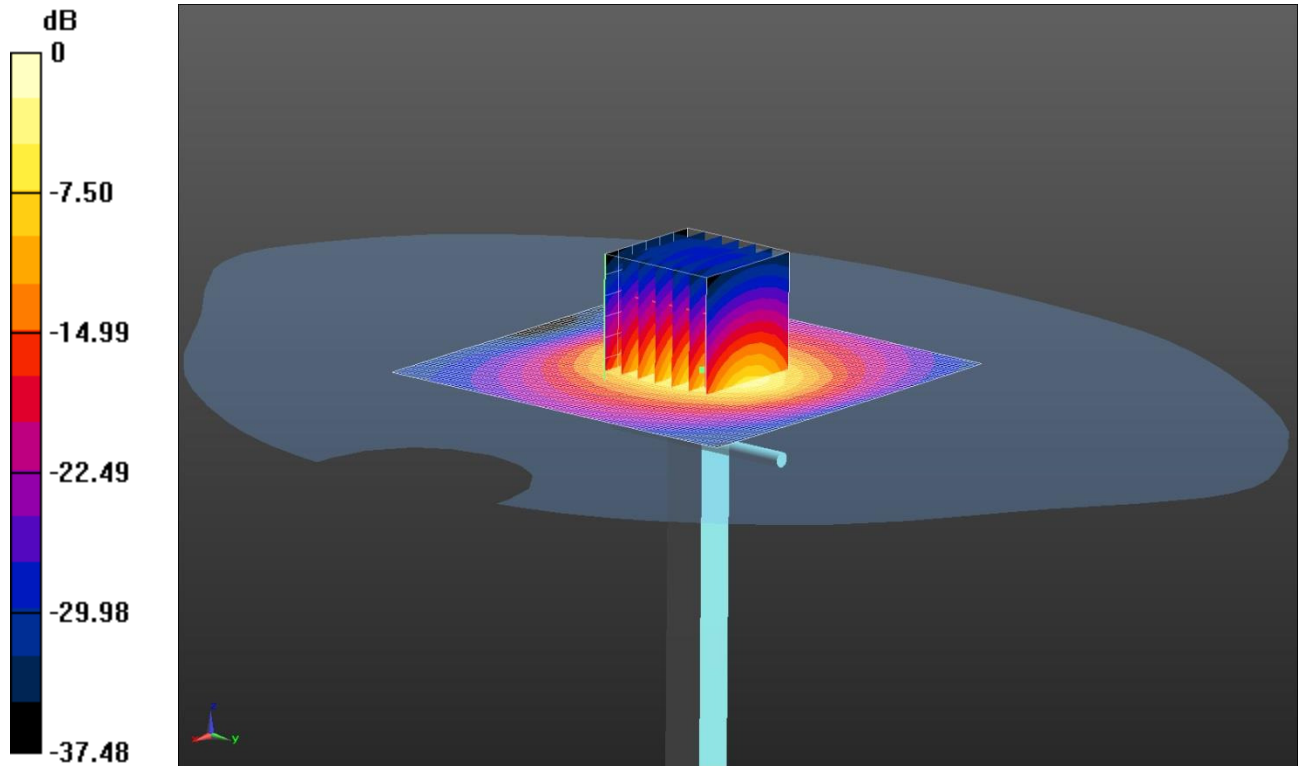

0 dB = 17.1 W/kg = 12.33 dBW/kg

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600MHz HSL Medium parameters used: $f = 2600$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 39.327$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.36, 4.36, 4.36); Calibrated: 08/01/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/d=10mm, Pin=250mW 4 2 2/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 17.1 W/kg

Configuration/d=10mm, Pin=250mW 4 2 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.157 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 32.2 W/kg


SAR(1 g) = 14.7 W/kg; SAR(10 g) = 6.44 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

335: System Performance Check 2600MHz Body 05 06 14

Date: 06/06/2014

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1046

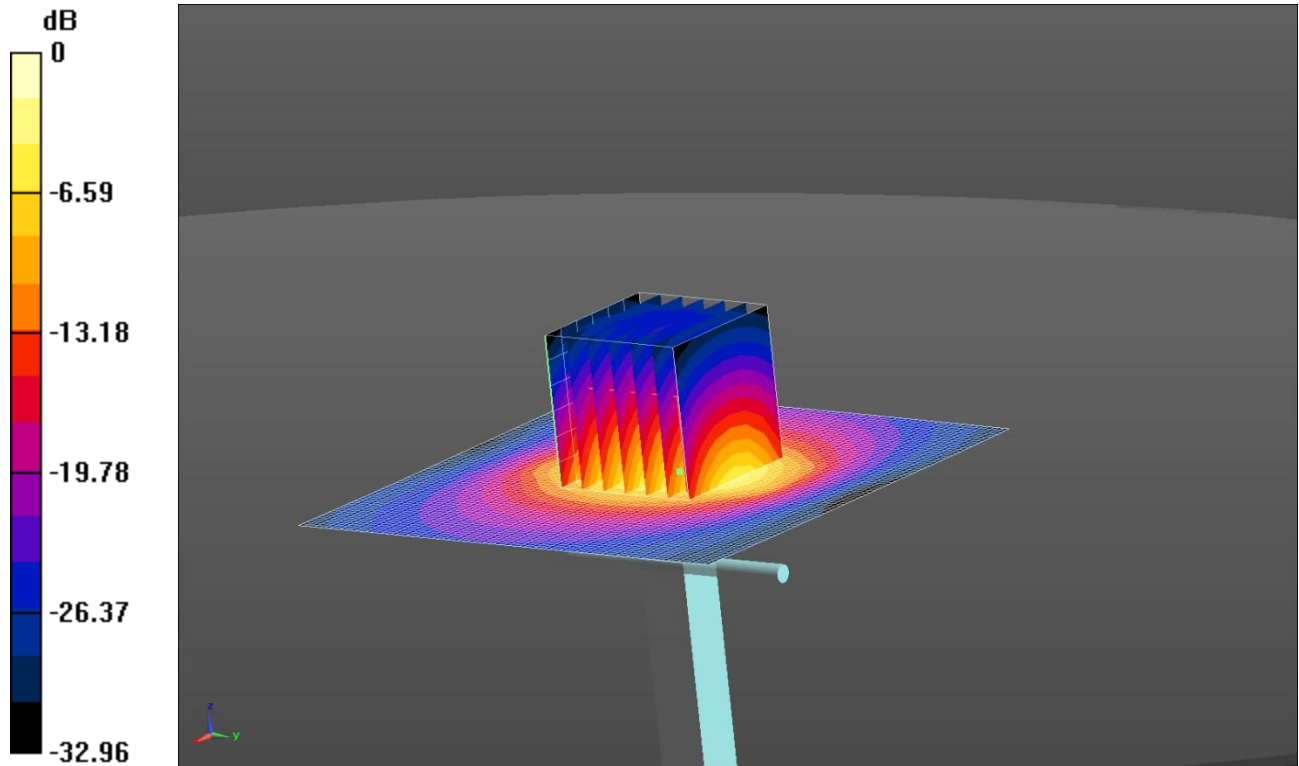

0 dB = 19.4 W/kg = 12.88 dBW/kg

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600MHz MSL Medium parameters used: $f = 2600$ MHz; $\sigma = 2.205$ S/m; $\epsilon_r = 53.029$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.14, 4.14, 4.14); Calibrated: 08/01/2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/d=10mm, Pin=250mW 4 2 2/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.4 W/kg

Configuration/d=10mm, Pin=250mW 4 2 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.420 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 33.3 W/kg


SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.26 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

336: System Performance Check 2600MHz Body 09 06 14

Date: 09/06/2014

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1046

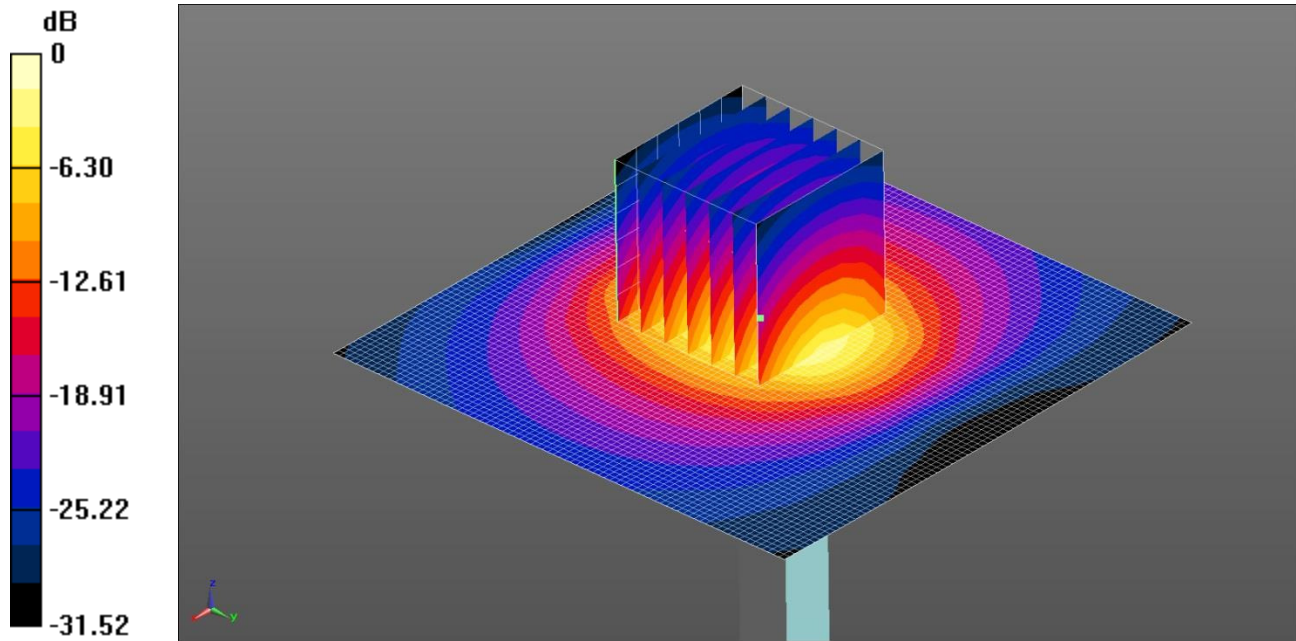

0 dB = 19.2 W/kg = 12.83 dBW/kg

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600MHz MSL Medium parameters used: $f = 2600$ MHz; $\sigma = 2.206$ S/m; $\epsilon_r = 53.674$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.14, 4.14, 4.14); Calibrated: 08/01/2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/d=10mm, Pin=250mW 4 2 2/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.2 W/kg

Configuration/d=10mm, Pin=250mW 4 2 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.894 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 31.8 W/kg


SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.03 W/kg

Maximum value of SAR (measured) = 18.4 W/kg

337: System Performance Check 5200 MHz Head 02 06 14

Date: 2/6/2014

DUT: 5GHz Dipole; Type: D5GHzV2; Serial: SN 1016

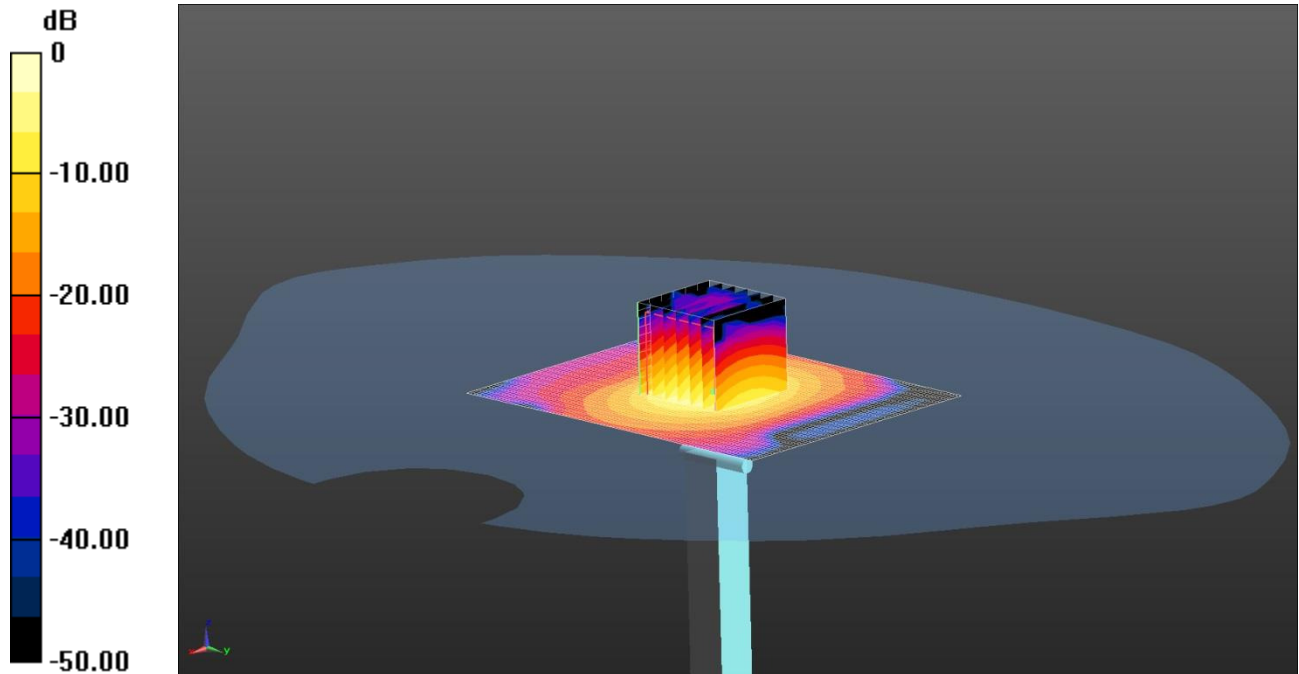

0 dB = 15.8 W/kg = 11.99 dBW/kg

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used: $f = 5200$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 35.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(5.07, 5.07, 5.07); Calibrated: 24/9/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=10mm, Pin=100mW 2 2/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.4 W/kg

Configuration/d=10mm, Pin=100mW 2 2/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 44.25 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 30.4 W/kg


SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 15.8 W/kg

338: System Performance Check 5500 MHz Head 02 06 14

Date: 2/6/2014

DUT: 5GHz Dipole; Type: D5GHzV2; Serial: SN 1016

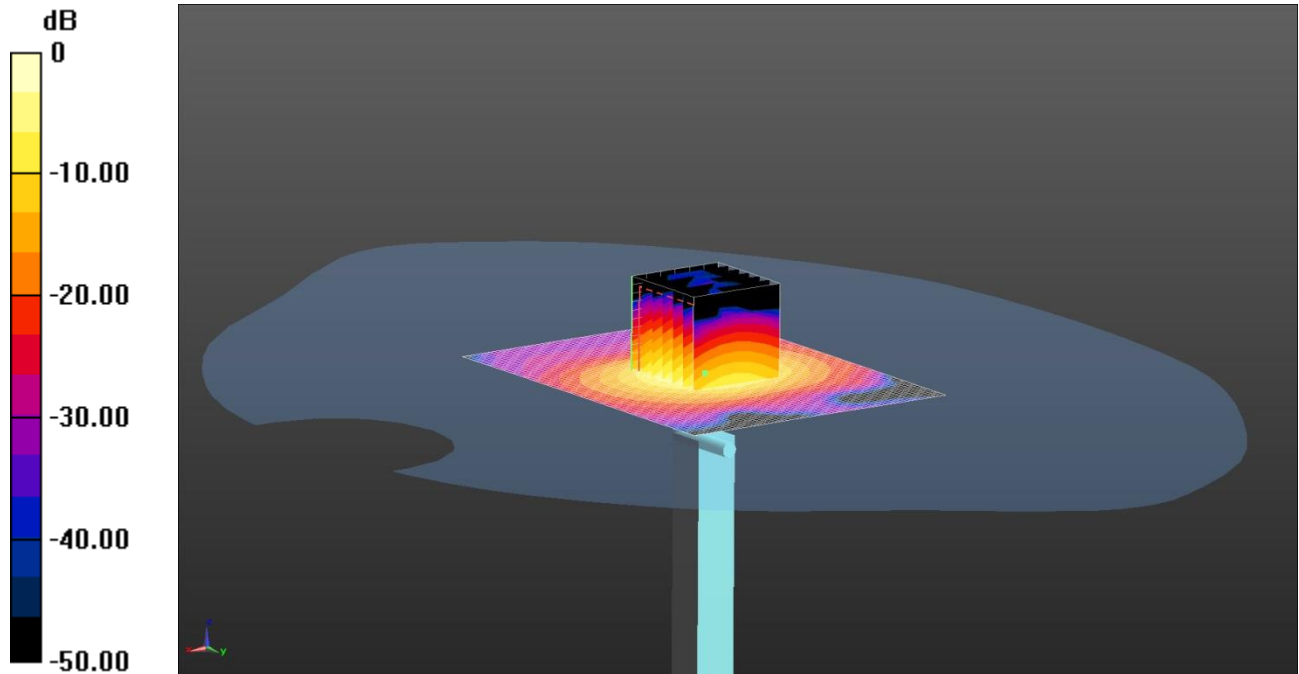

0 dB = 17.7 W/kg = 12.48 dBW/kg

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used: $f = 5500$ MHz; $\sigma = 4.834$ S/m; $\epsilon_r = 35.012$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.76, 4.76, 4.76); Calibrated: 24/9/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=10mm, Pin=100mW 2 2 2/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.4 W/kg

Configuration/d=10mm, Pin=100mW 2 2 2/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 44.09 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 35.5 W/kg


SAR(1 g) = 8.42 W/kg; SAR(10 g) = 2.39 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

339: System Performance Check 5800 MHz Head 02 06 14

Date: 2/6/2014

DUT: 5GHz Dipole; Type: D5GHzV2; Serial: SN 1016

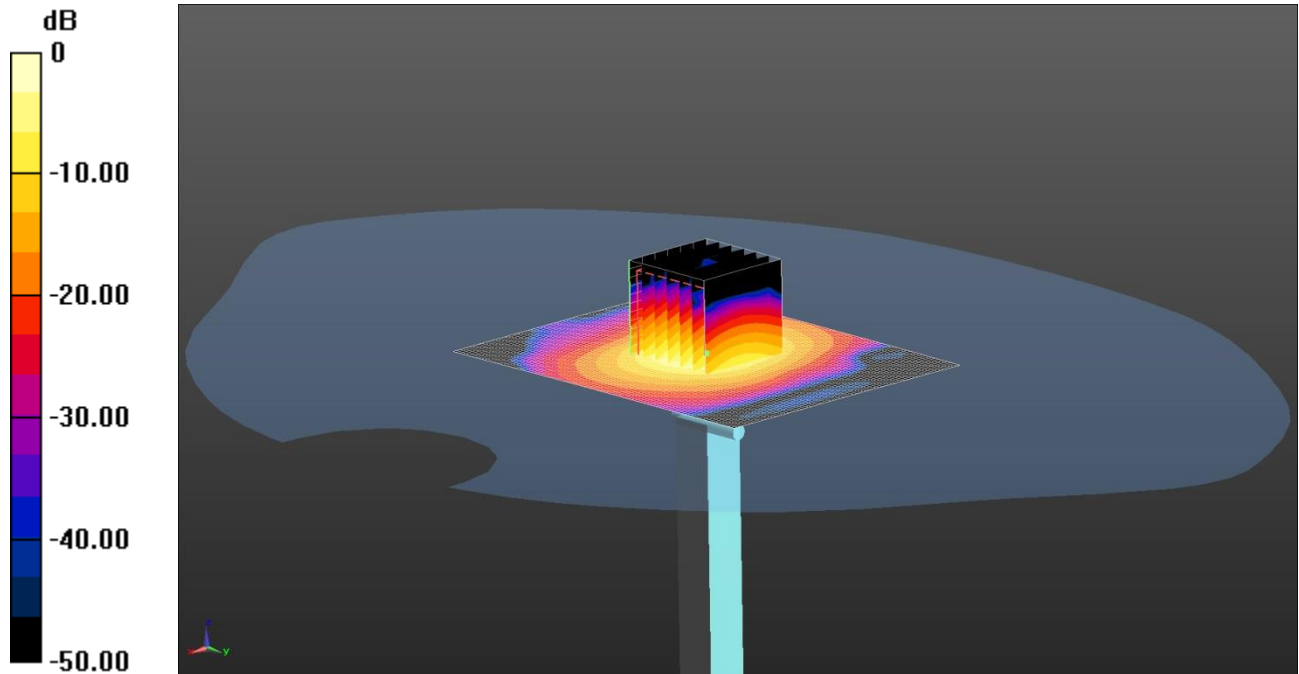

0 dB = 16.4 W/kg = 12.15 dBW/kg

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used: $f = 5800$ MHz; $\sigma = 5.123$ S/m; $\epsilon_r = 34.64$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.59, 4.59, 4.59); Calibrated: 24/9/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=10mm, Pin=100mW 2 2 2 2/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 16.6 W/kg

Configuration/d=10mm, Pin=100mW 2 2 2 2/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 39.42 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 34.4 W/kg


SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.2 W/kg

Maximum value of SAR (measured) = 16.4 W/kg

340: System Performance Check 5200 MHz Body 05 06 14

Date: 5/6/2014

DUT: 5GHz Dipole; Type: D5GHzV2; Serial: SN 1016

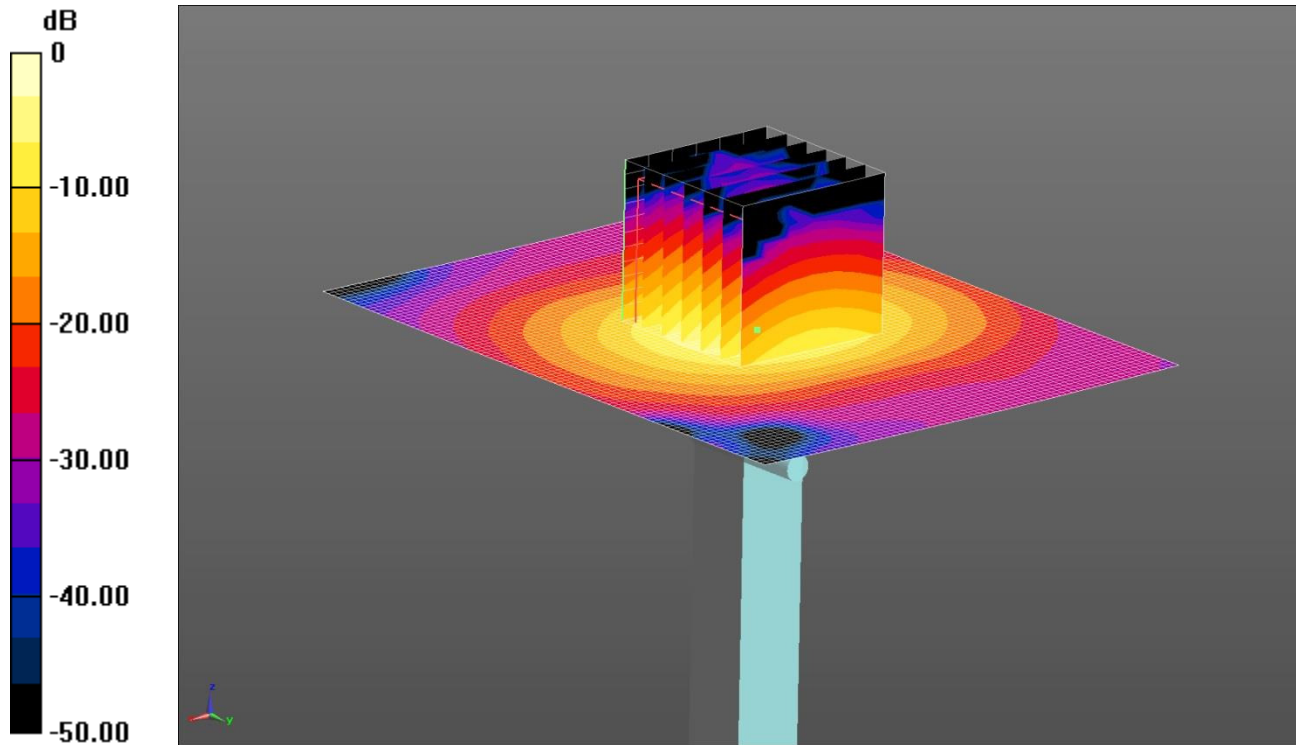

0 dB = 14.7 W/kg = 11.67 dBW/kg

Communication System: UID 0, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used: $f = 5200$ MHz; $\sigma = 5.336$ S/m; $\epsilon_r = 49.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.44, 4.44, 4.44); Calibrated: 24/9/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=10mm, Pin=100mW/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.8 W/kg

Configuration/d=10mm, Pin=100mW/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 39.19 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 28.9 W/kg


SAR(1 g) = 7.03 W/kg; SAR(10 g) = 1.99 W/kg

Maximum value of SAR (measured) = 14.7 W/kg

341: System Performance Check 5200 MHz Body 09 06 14

Date: 9/6/2014

DUT: 5GHz Dipole; Type: D5GHzV2; Serial: SN 1016

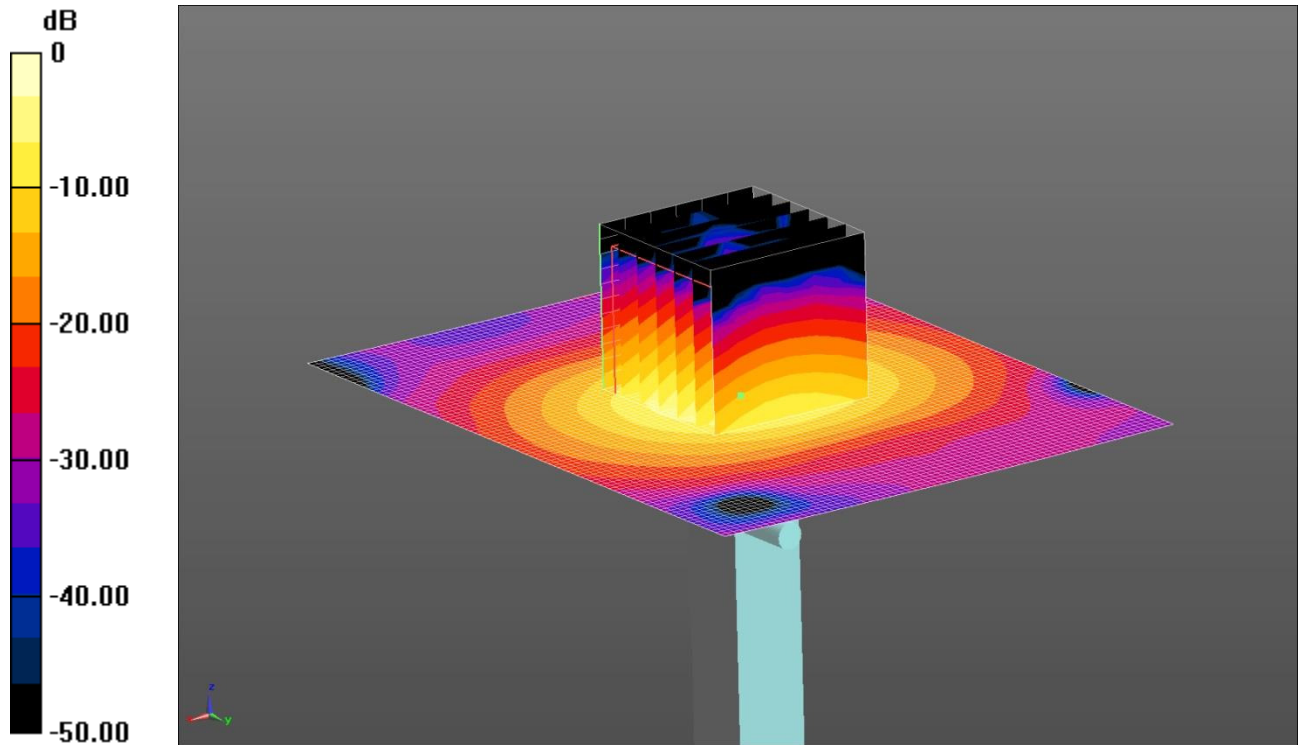

0 dB = 15.0 W/kg = 11.76 dBW/kg

Communication System: UID 0, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used: $f = 5200$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 48.113$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.44, 4.44, 4.44); Calibrated: 24/9/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=10mm, Pin=100mW/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.0 W/kg

Configuration/d=10mm, Pin=100mW/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 40.34 V/m; Power Drift = 0.29 dB

Peak SAR (extrapolated) = 29.0 W/kg


SAR(1 g) = 7.22 W/kg; SAR(10 g) = 2.03 W/kg

Maximum value of SAR (measured) = 15.0 W/kg

342: System Performance Check 5500 MHz Body 05 06 14

Date: 5/6/2014

DUT: 5GHz Dipole; Type: D5GHzV2; Serial: SN 1016

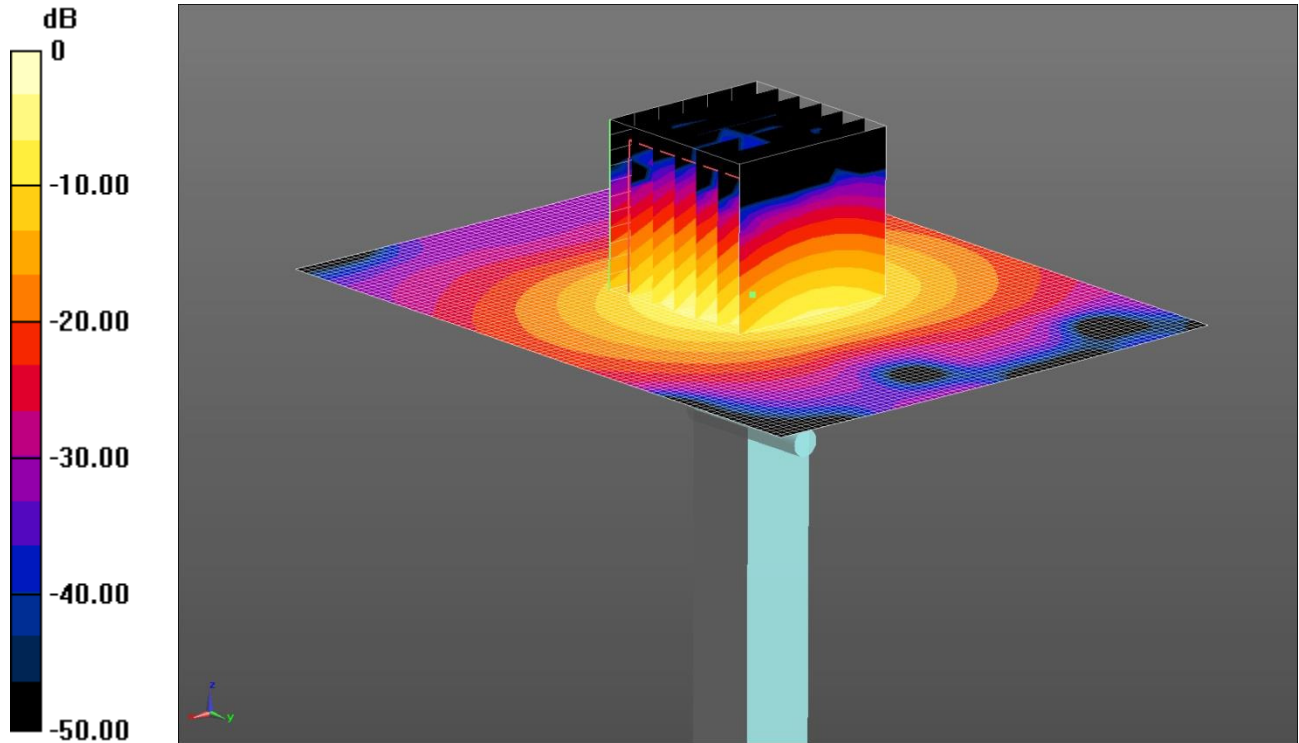

0 dB = 15.9 W/kg = 12.01 dBW/kg

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used: $f = 5500$ MHz; $\sigma = 5.749$ S/m; $\epsilon_r = 48.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.89, 3.89, 3.89); Calibrated: 24/9/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=10mm, Pin=100mW 2/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.7 W/kg

Configuration/d=10mm, Pin=100mW 2/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 38.76 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 31.1 W/kg


SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.11 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

343: System Performance Check 5500 MHz Body 09 06 14

Date: 9/6/2014

DUT: 5GHz Dipole; Type: D5GHzV2; Serial: SN 1016

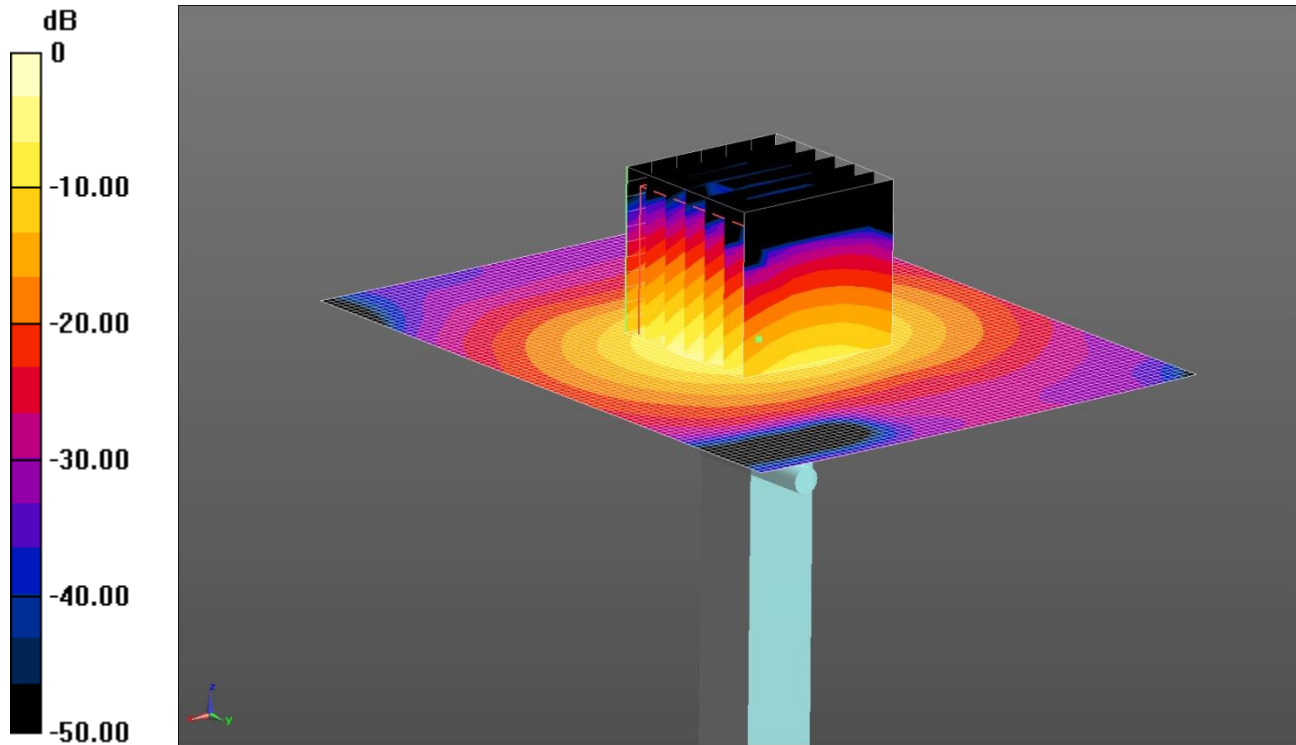

0 dB = 17.0 W/kg = 12.30 dBW/kg

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used: $f = 5500$ MHz; $\sigma = 5.592$ S/m; $\epsilon_r = 47.09$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.89, 3.89, 3.89); Calibrated: 24/9/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=10mm, Pin=100mW 2/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.8 W/kg

Configuration/d=10mm, Pin=100mW 2/Zoom Scan (7x7x12) 2 2 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 42.41 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 30.4 W/kg


SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 17.0 W/kg

344: System Performance Check 5800 MHz Body 05 06 14

Date: 5/6/2014

DUT: 5GHz Dipole; Type: D5GHzV2; Serial: SN 1016

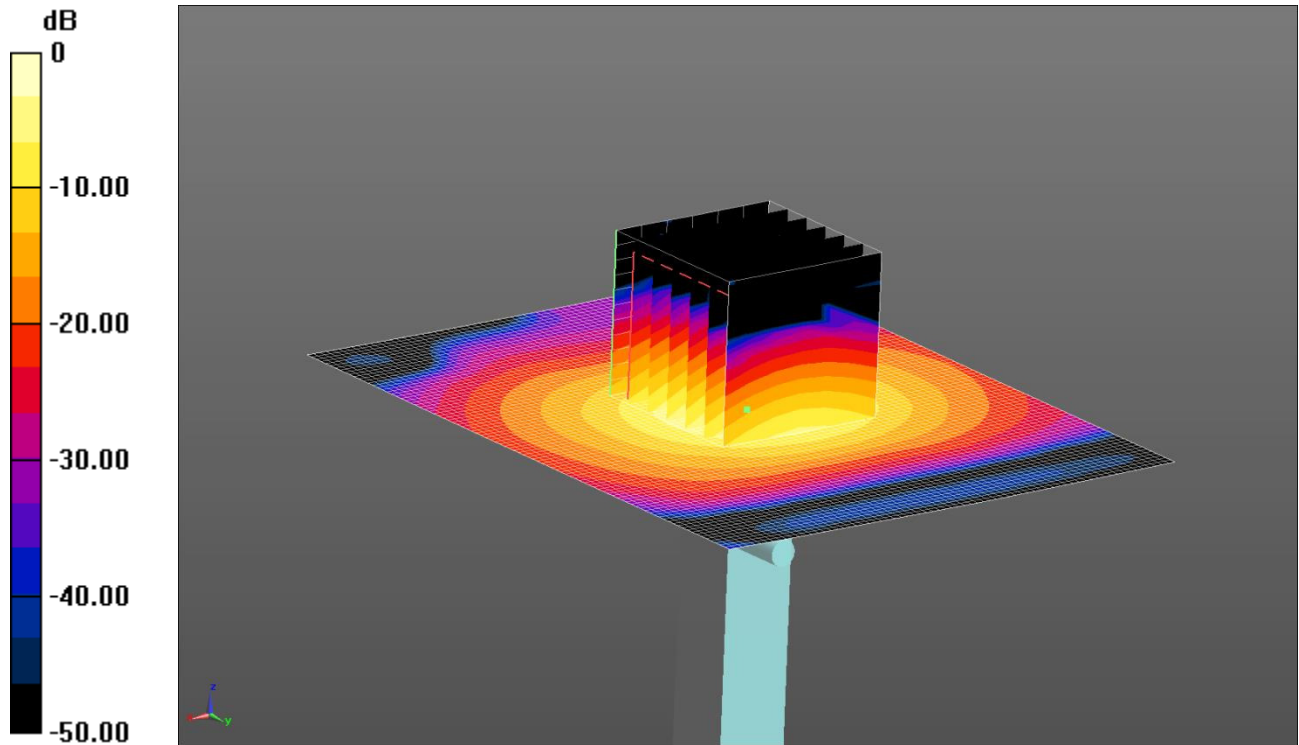

0 dB = 15.2 W/kg = 11.82 dBW/kg

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used: $f = 5800$ MHz; $\sigma = 6.212$ S/m; $\epsilon_r = 47.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.96, 3.96, 3.96); Calibrated: 24/9/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=10mm, Pin=100mW 2 2 2/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.5 W/kg

Configuration/d=10mm, Pin=100mW 2 2 2/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 36.73 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 31.2 W/kg


SAR(1 g) = 7.12 W/kg; SAR(10 g) = 1.98 W/kg

Maximum value of SAR (measured) = 15.2 W/kg

345: System Performance Check 5800 MHz Body 09 06 14

Date: 9/6/2014

DUT: 5GHz Dipole; Type: D5GHzV2; Serial: SN 1016

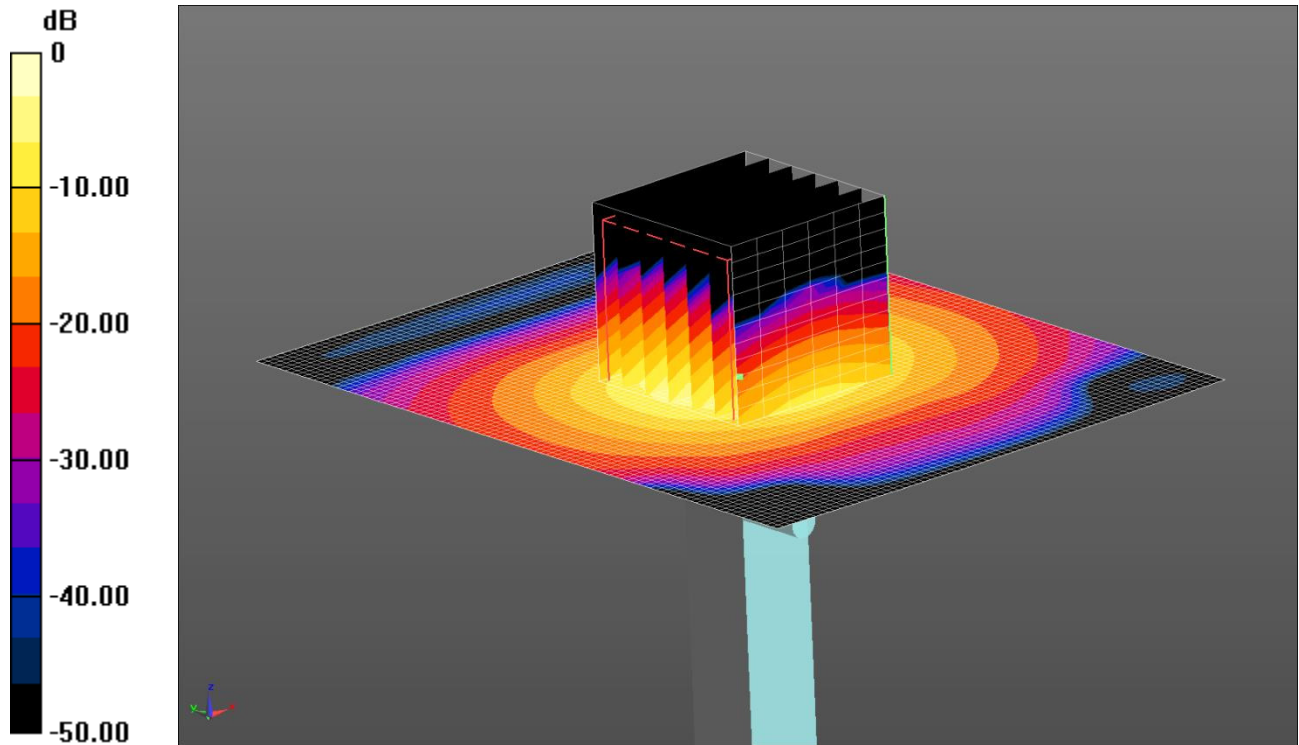

0 dB = 15.5 W/kg = 11.90 dBW/kg

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz MSL Medium parameters used: $f = 5800$ MHz; $\sigma = 6.023$ S/m; $\epsilon_r = 46.361$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.96, 3.96, 3.96); Calibrated: 24/9/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/d=10mm, Pin=100mW 2 2 2 2/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.2 W/kg

Configuration/d=10mm, Pin=100mW 2 2 2 2/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 37.35 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 7.16 W/kg; SAR(10 g) = 1.97 W/kg

Maximum value of SAR (measured) = 15.5 W/kg