


058: Touch Right UMTS FDD 4 CH1312

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

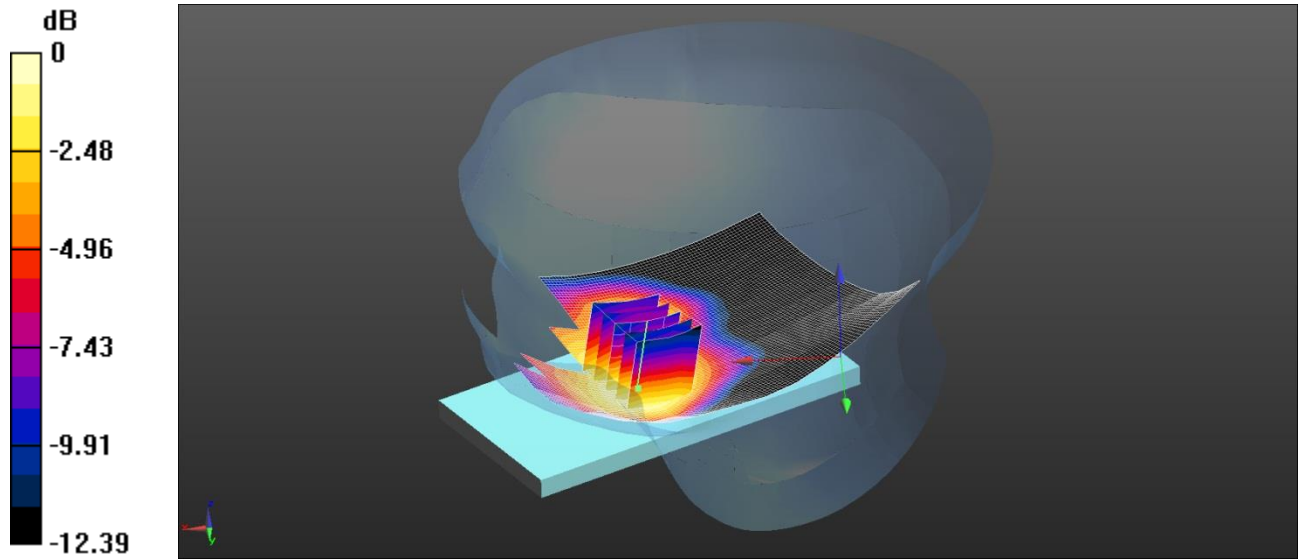

0 dB = 0.511 W/kg = -2.92 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.302$ S/m; $\epsilon_r = 40.475$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right - Low/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.511 W/kg

Configuration/Touch Right - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.709 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.610 W/kg


SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.511 W/kg

059: Touch Right UMTS FDD 4 CH1513

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

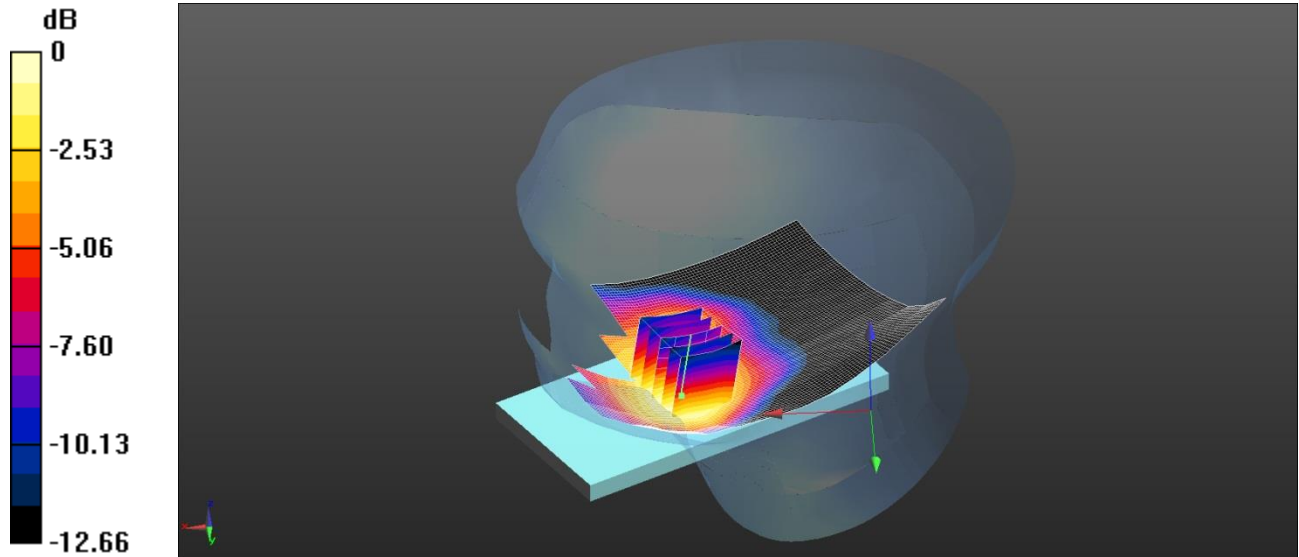

0 dB = 0.530 W/kg = -2.76 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 40.272$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 10/04/2014

- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right - High/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.540 W/kg

Configuration/Touch Right - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.476 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.648 W/kg


SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.329 W/kg

Maximum value of SAR (measured) = 0.530 W/kg

060: Front EUT Facing Phantom UMTS FDD 4 CH1412

Date: 29/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

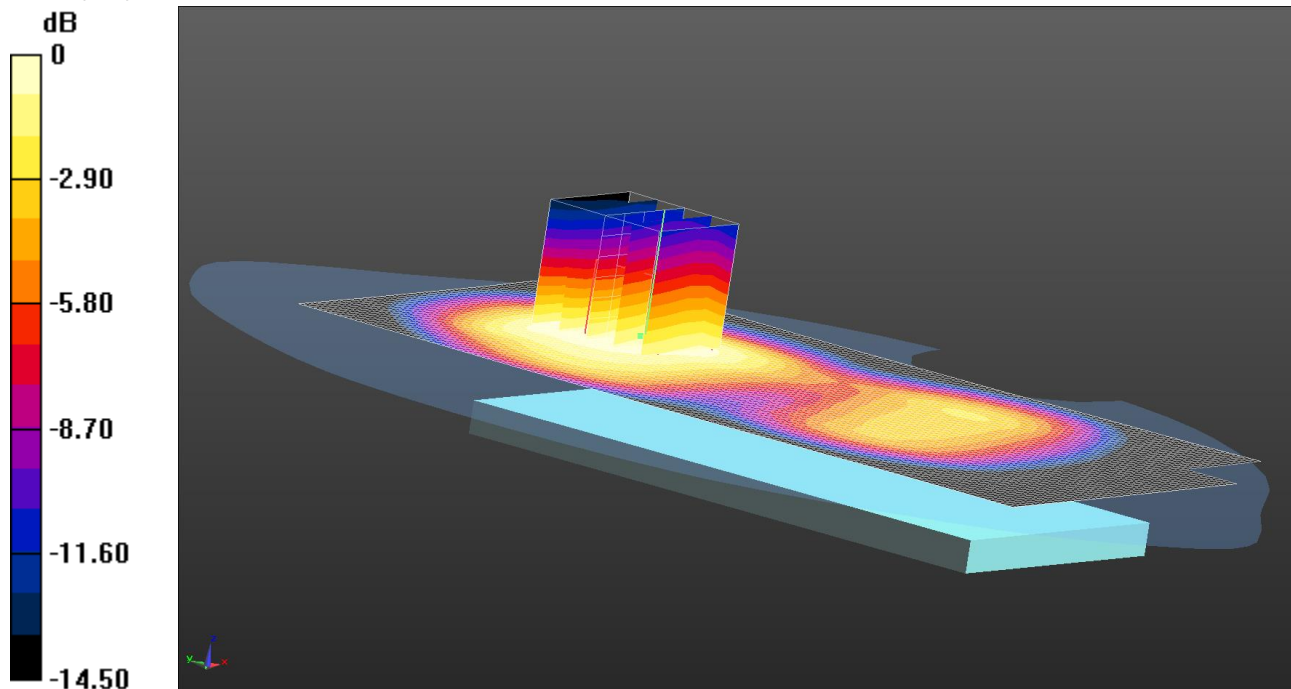

0 dB = 0.926 W/kg = -0.33 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): f = 1732.4 MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.68, 4.68, 4.68); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom - Middle 2/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.975 W/kg

Configuration/Front of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.760 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.24 W/kg


SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.567 W/kg

Maximum value of SAR (measured) = 0.926 W/kg

061: Front EUT Facing Phantom UMTS FDD 4 CH1312

Date: 29/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

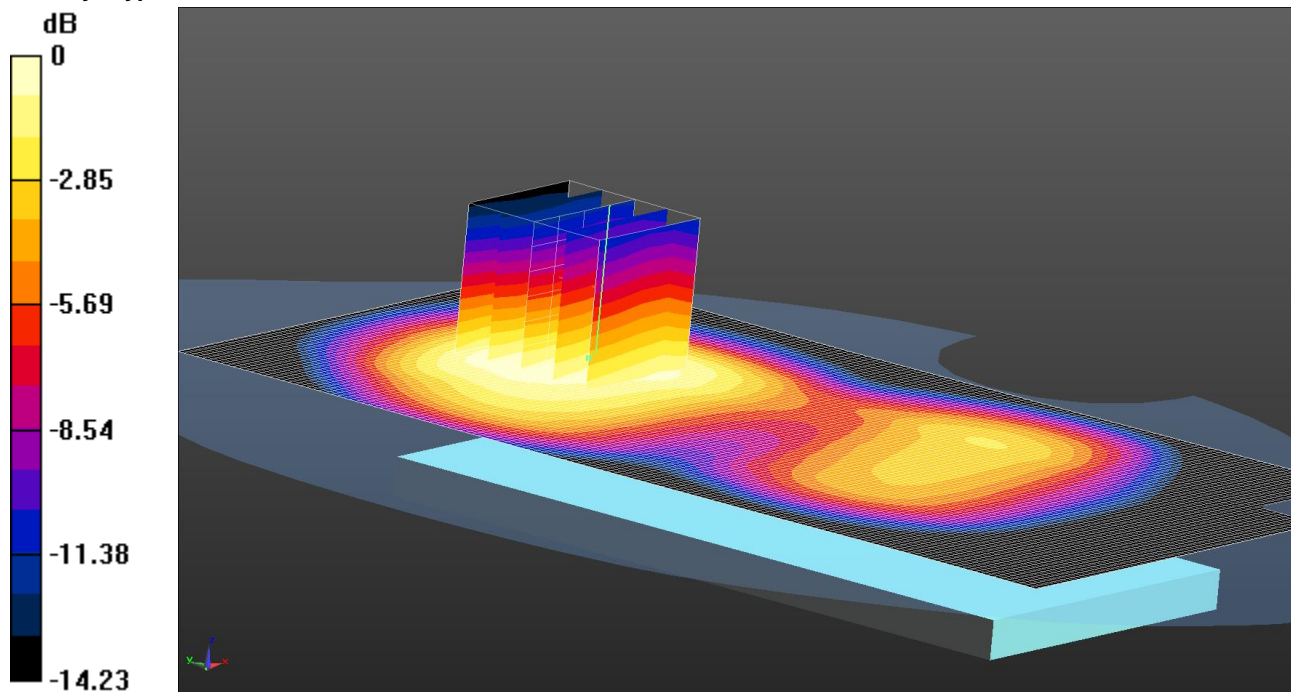

0 dB = 0.941 W/kg = -0.26 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.68, 4.68, 4.68); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom - Low/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.993 W/kg

Configuration/Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.518 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.24 W/kg


SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.569 W/kg

Maximum value of SAR (measured) = 0.941 W/kg

062: Front EUT Facing Phantom UMTS FDD 4 CH1513

Date: 29/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

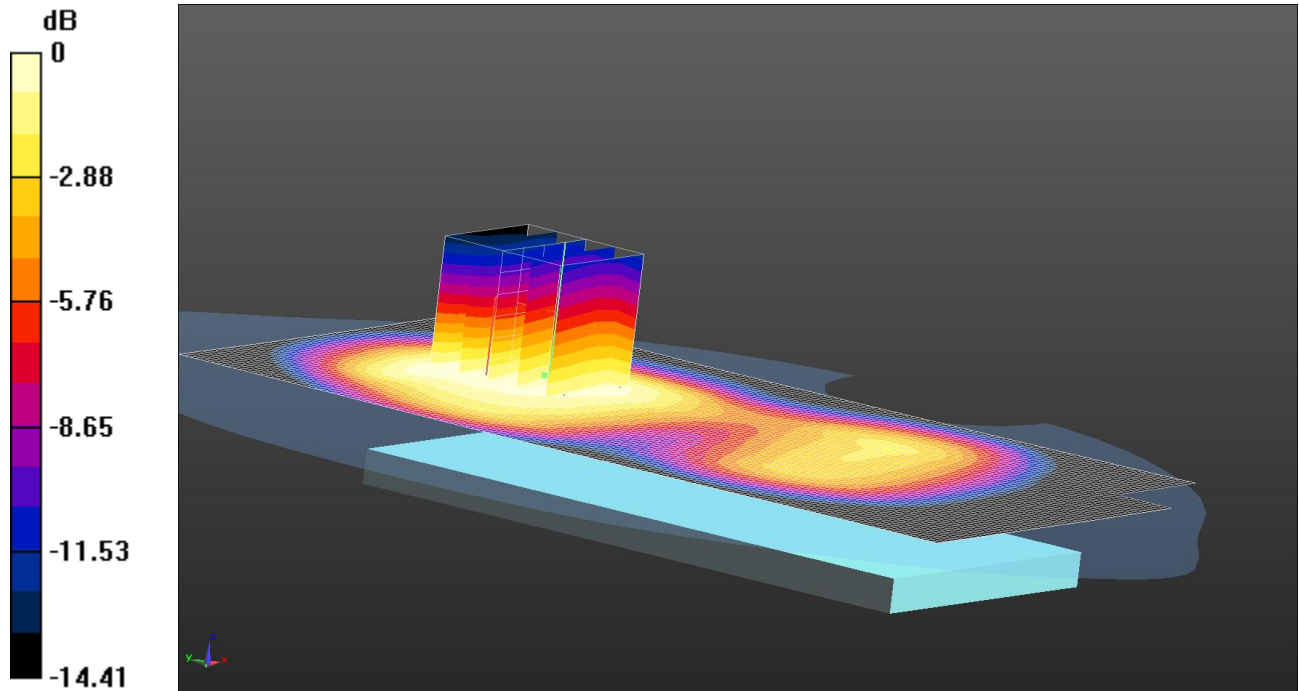

0 dB = 0.923 W/kg = -0.35 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): f = 1752.6 MHz; $\sigma = 1.549$ S/m; $\epsilon_r = 51.836$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.68, 4.68, 4.68); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom - High/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.970 W/kg

Configuration/Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.196 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.24 W/kg


SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.567 W/kg

Maximum value of SAR (measured) = 0.923 W/kg

063: Back EUT Facing Phantom UMTS FDD 4 CH1412

Date: 29/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

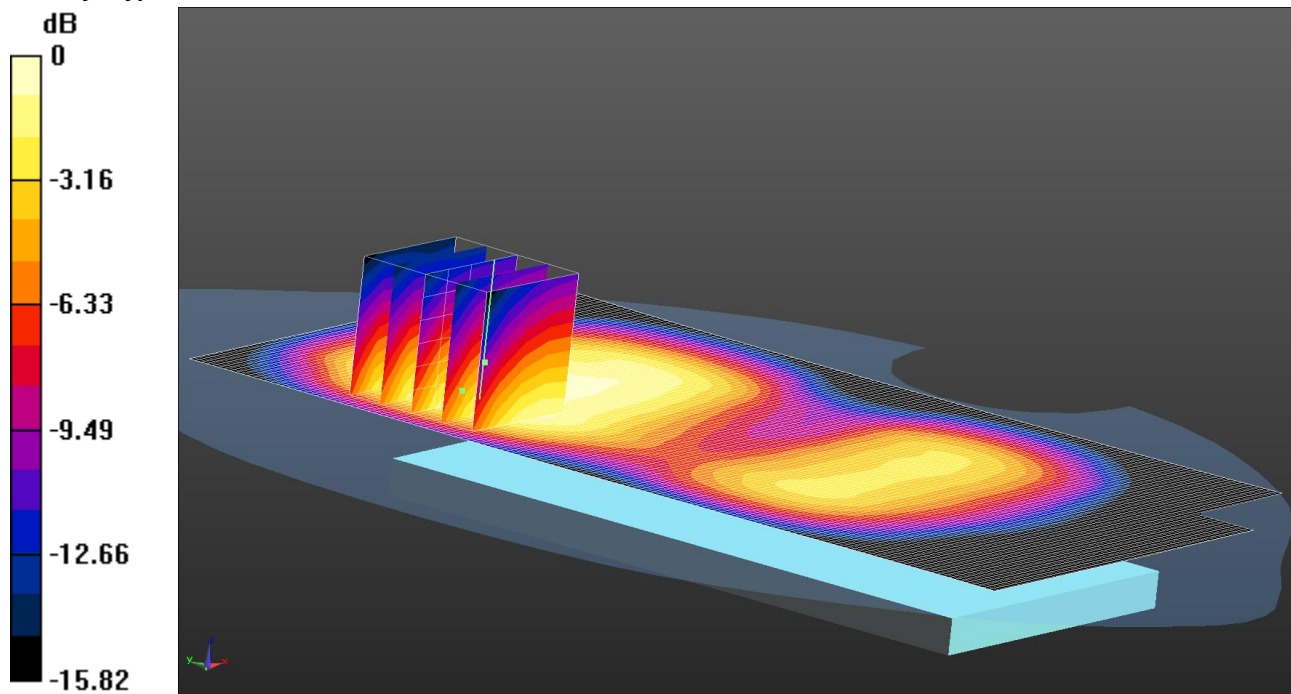

0 dB = 0.840 W/kg = -0.76 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1732.4 MHz;Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): f = 1732.4 MHz; $\sigma = 1.53 \text{ S/m}$; $\epsilon_r = 51.911$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.68, 4.68, 4.68); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom - Middle 2/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.934 W/kg

Configuration/Front of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.269 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.525 W/kg

Maximum value of SAR (measured) = 0.893 W/kg

Configuration/Front of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.269 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.22 W/kg


SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.457 W/kg

Maximum value of SAR (measured) = 0.840 W/kg

064: Back EUT Facing Phantom UMTS FDD 4 CH1312

Date: 29/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

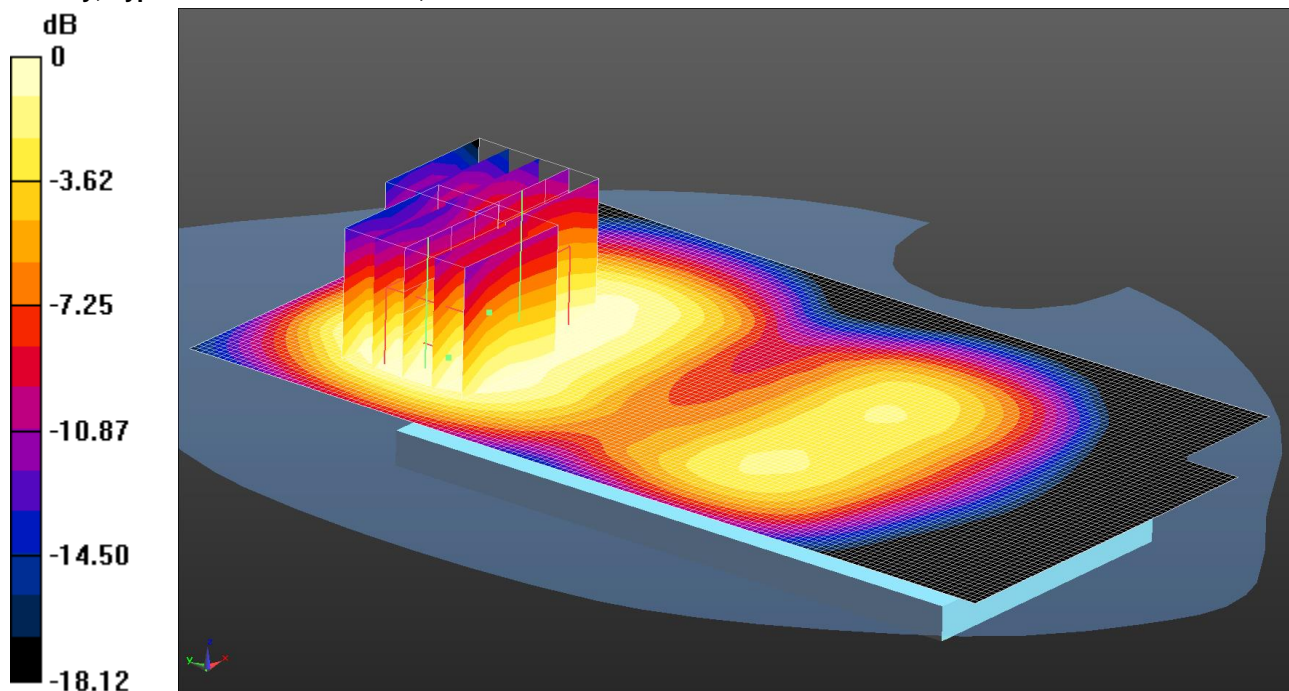

0 dB = 0.779 W/kg = -1.08 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.68, 4.68, 4.68); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom - Low/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.942 W/kg

Configuration/Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.332 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.845 W/kg; SAR(10 g) = 0.532 W/kg

Maximum value of SAR (measured) = 0.894 W/kg

Configuration/Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.332 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.498 W/kg


Maximum value of SAR (measured) = 0.779 W/kg

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

065: Back EUT Facing Phantom UMTS FDD 4 CH1513

Date: 29/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

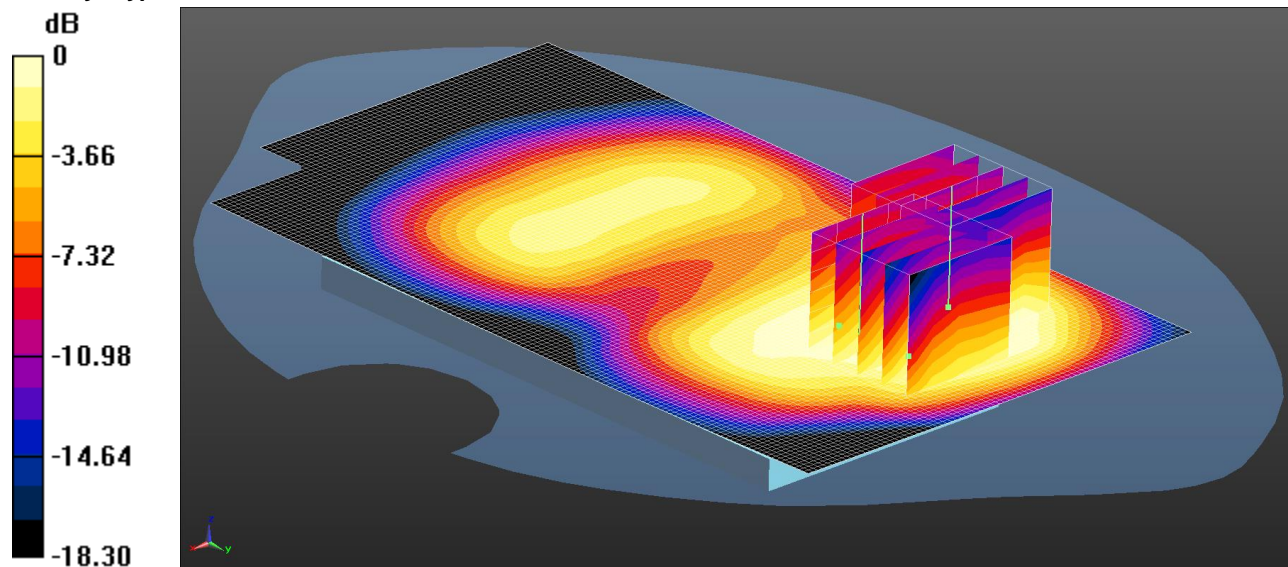

0 dB = 0.760 W/kg = -1.19 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.549$ S/m; $\epsilon_r = 51.836$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.68, 4.68, 4.68); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Front of EUT Facing Phantom - Low/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.916 W/kg

Configuration/Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.203 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.840 W/kg; SAR(10 g) = 0.533 W/kg

Maximum value of SAR (measured) = 0.885 W/kg

Configuration/Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.203 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.466 W/kg


Maximum value of SAR (measured) = 0.760 W/kg

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

066: Left Hand Side EUT Facing Phantom UMTS FDD 4 CH1412

Date: 29/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

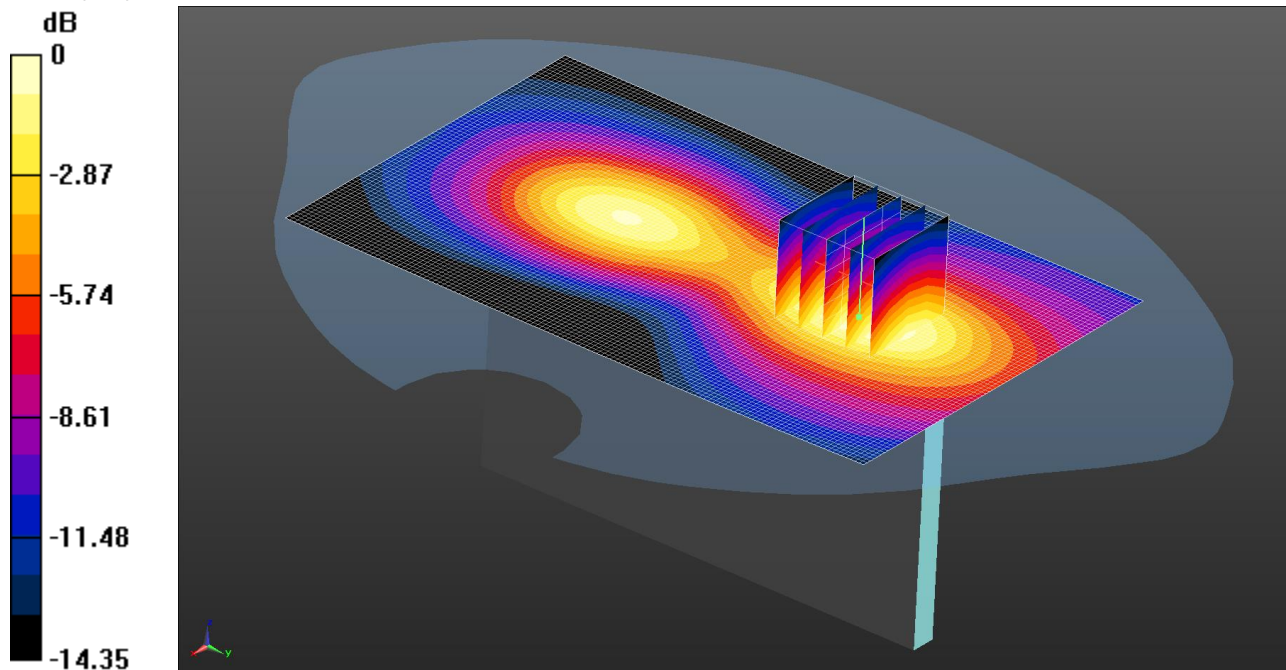

0 dB = 0.354 W/kg = -4.51 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.68, 4.68, 4.68); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Left Hand Side of EUT Facing Phantom - Middle/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.355 W/kg

Configuration/Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.067 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.471 W/kg


SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.354 W/kg

067: Right Hand Side EUT Facing Phantom UMTS FDD 4 CH1412

Date: 29/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

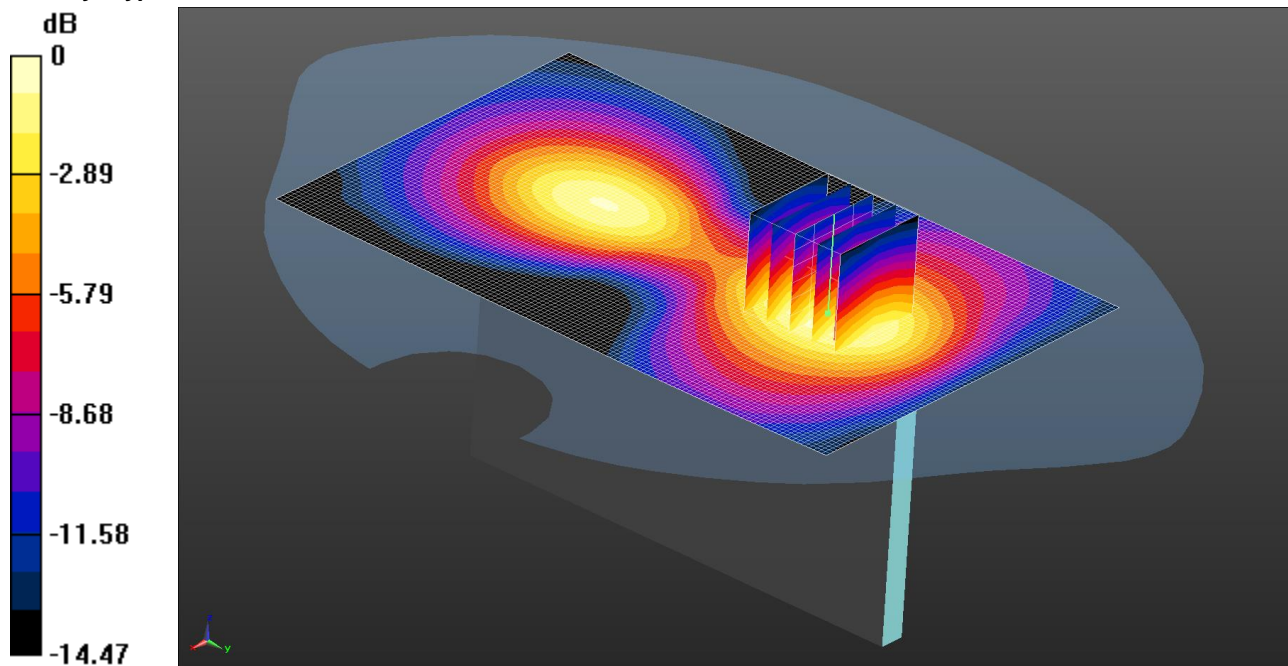

0 dB = 0.218 W/kg = -6.62 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.68, 4.68, 4.68); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Right Hand Side of EUT Facing Phantom - Middle/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.221 W/kg

Configuration/Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.666 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.289 W/kg


SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

068: Bottom EUT Facing Phantom UMTS FDD 4 CH1412

Date: 29/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

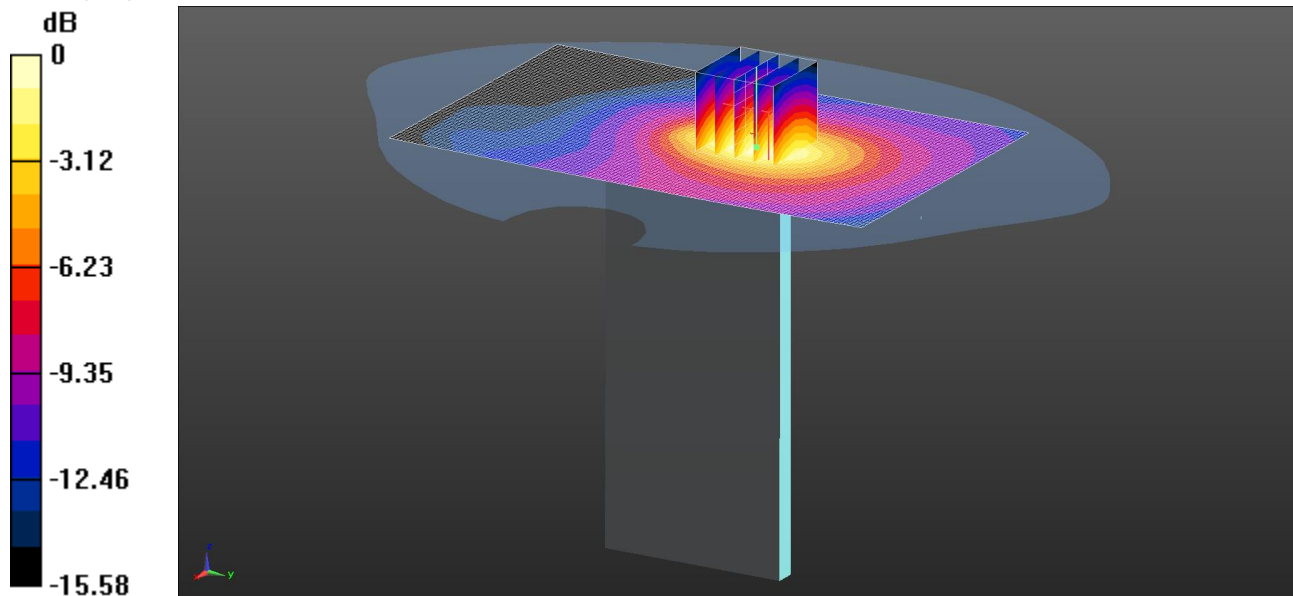

0 dB = 0.383 W/kg = -4.17 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.68, 4.68, 4.68); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Bottom of EUT Facing Phantom - Middle/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.395 W/kg

Configuration/Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.326 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.520 W/kg



SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.383 W/kg

069: Touch Left UMTS FDD 5 CH4183

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

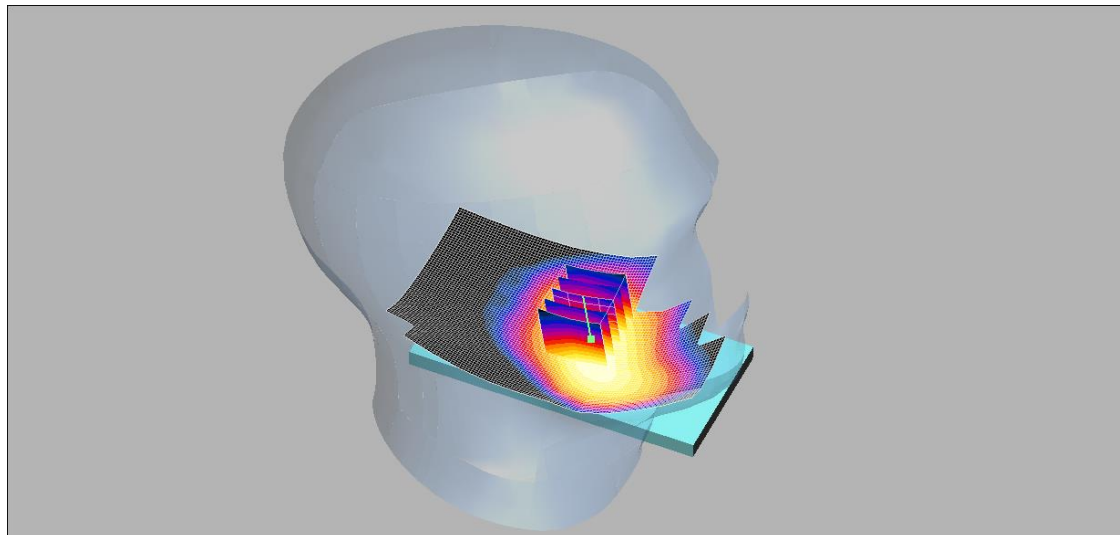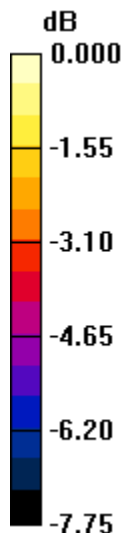

0 dB = 0.171mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.19, 10.19, 10.19);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.171 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.72 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.200 W/kg


SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.128 mW/g.

Maximum value of SAR (measured) = 0.171 mW/g

070: Tilt Left UMTS FDD 5 CH4183

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

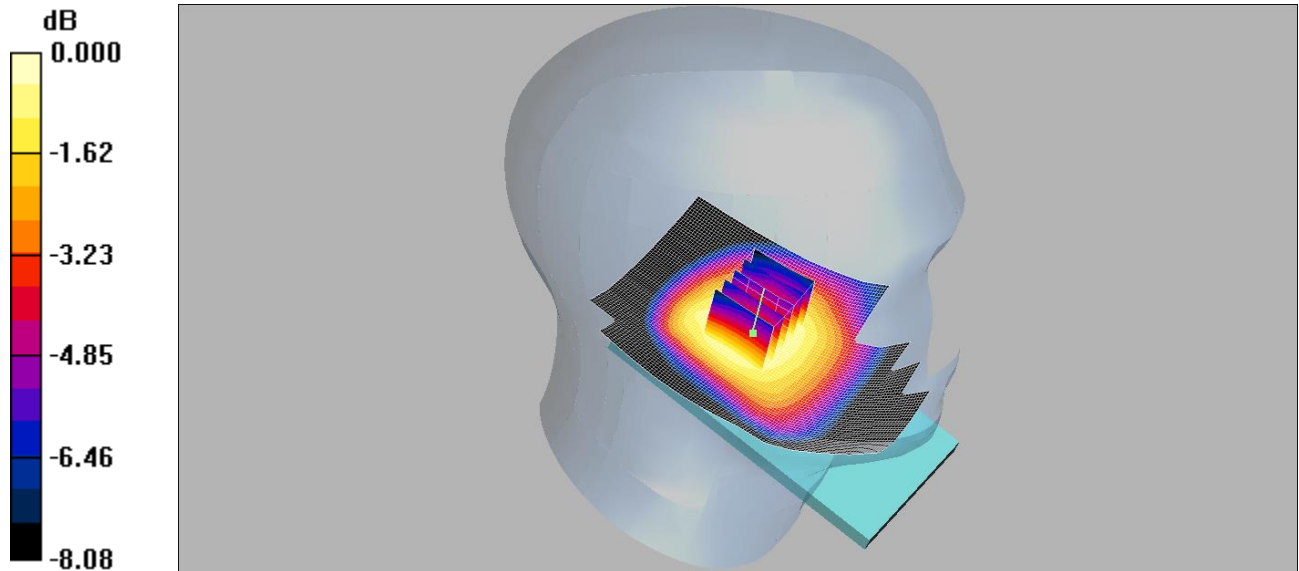

0 dB = 0.115mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.19, 10.19, 10.19);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.115 mW/g

Tilt Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.04 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.134 W/kg


SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.115 mW/g

071: Touch Right UMTS FDD 5 CH4183

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

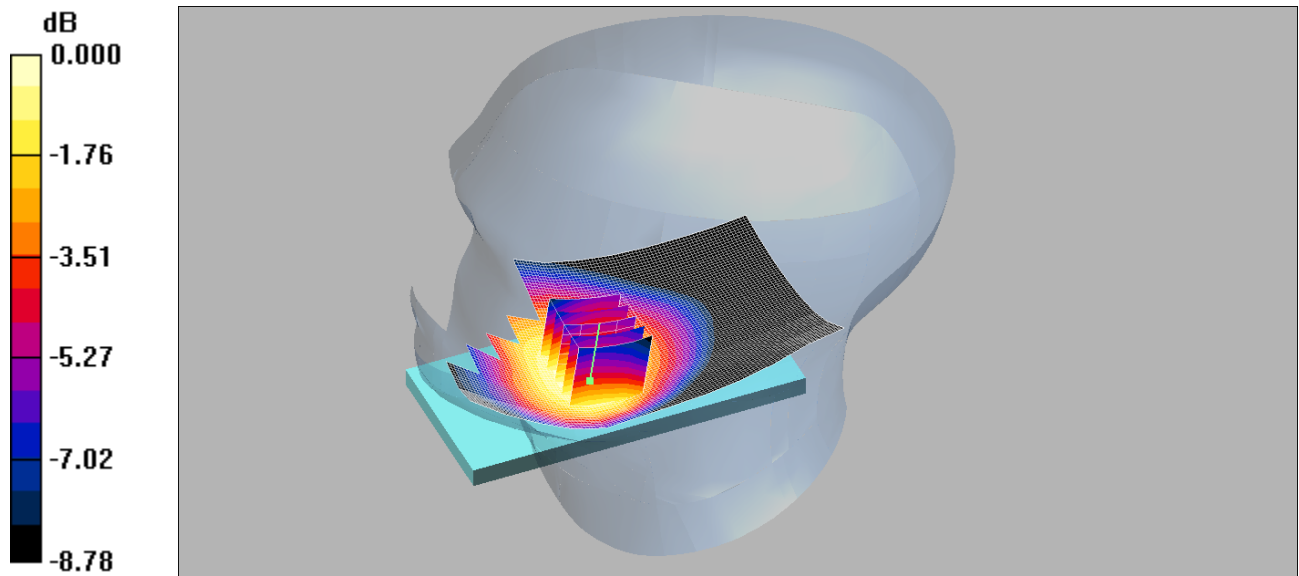

0 dB = 0.221mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.19, 10.19, 10.19);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.221 mW/g

Touch Right- Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.92 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.255 W/kg


SAR(1 g) = 0.211 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.221 mW/g

072: Tilt Right UMTS FDD 5 CH4183

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

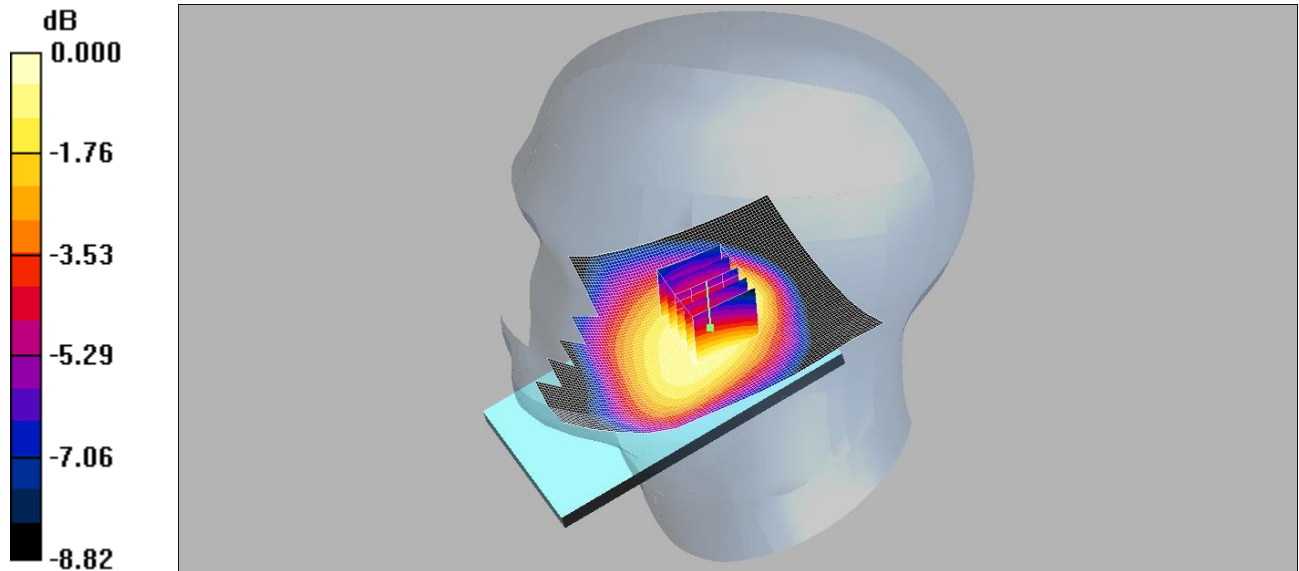

0 dB = 0.117mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.19, 10.19, 10.19);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.117 mW/g

Touch Right- Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.92 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.138 W/kg


SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.117 mW/g

073: Touch Right UMTS FDD 5 CH4132

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

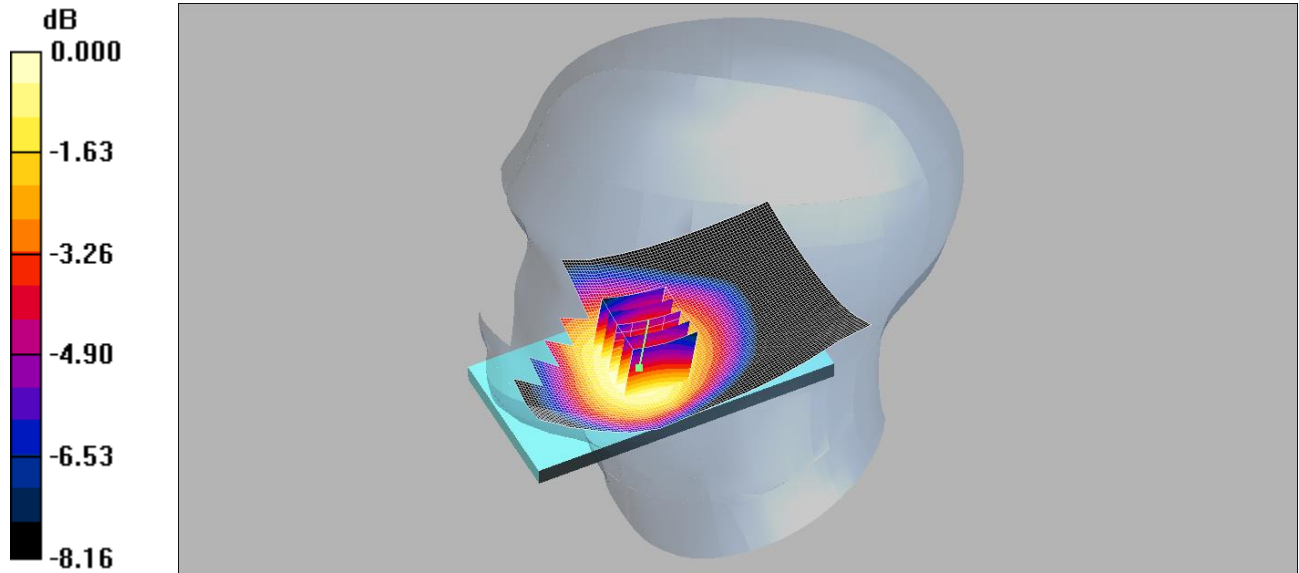

0 dB = 0.218mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.19, 10.19, 10.19);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.219 mW/g

Touch Right- Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.92 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.252 W/kg


SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.218 mW/g

074: Touch Right UMTS FDD 5 CH4233

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

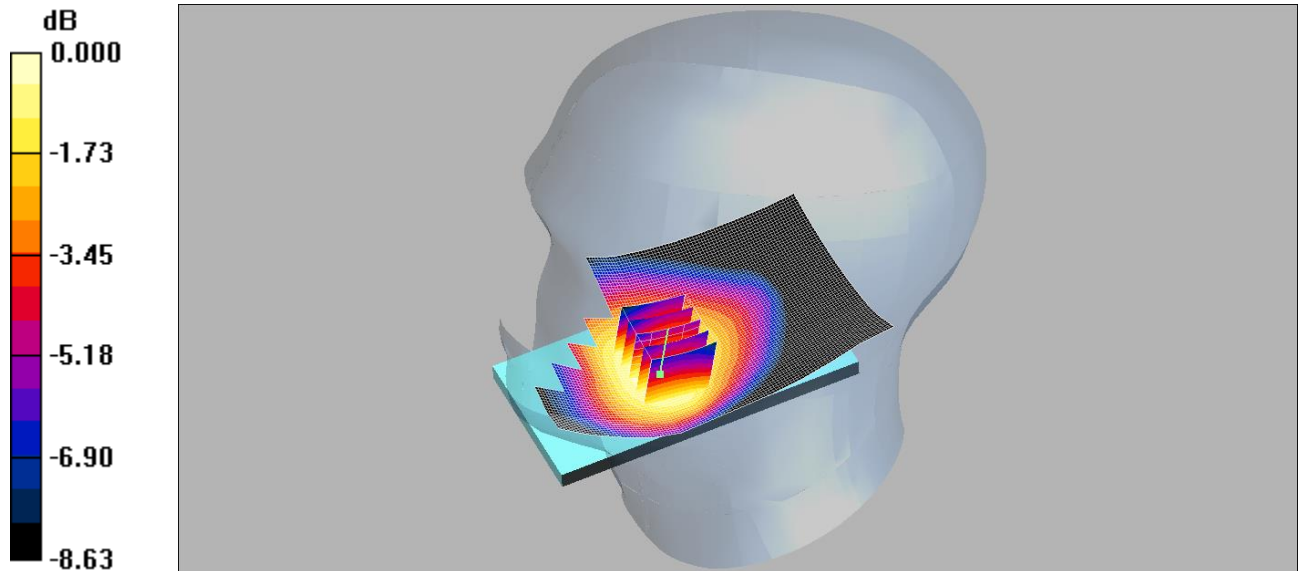

0 dB = 0.188mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.19, 10.19, 10.19);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right- High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.186 mW/g

Touch Right- High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.84 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 0.216 W/kg


SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.188 mW/g

075: Front of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

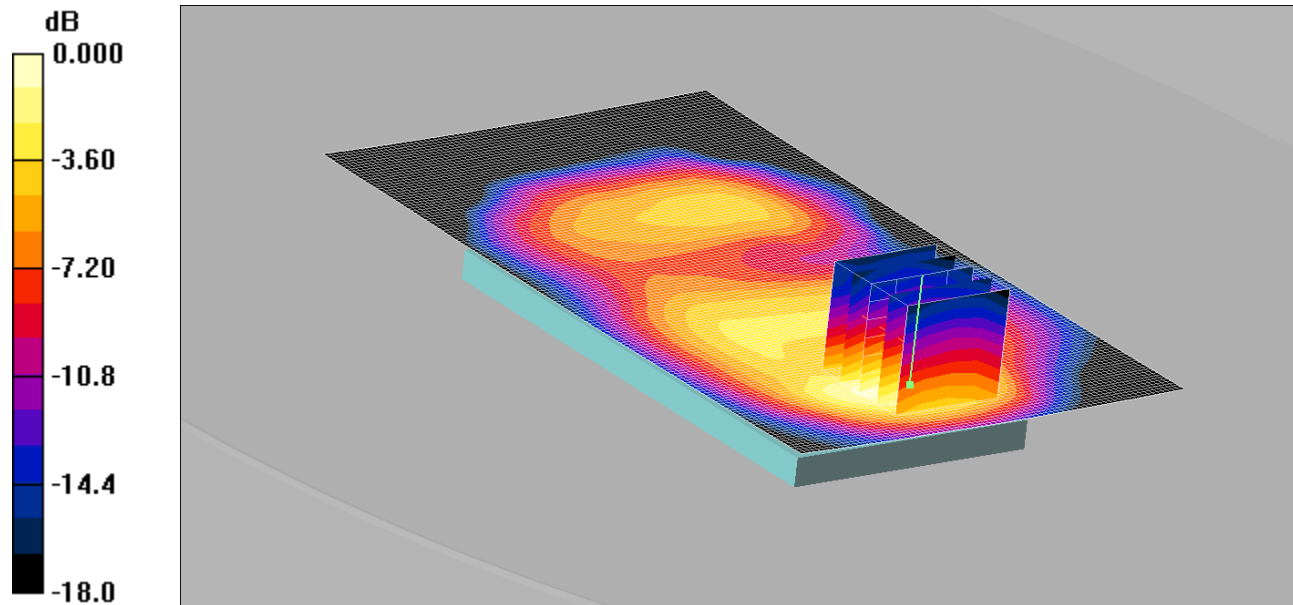

0 dB = 0.414mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): f = 836.6 MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.14, 10.14, 10.14);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan 2 (81x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.421 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.87 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.683 W/kg


SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.414 mW/g

076: Back of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

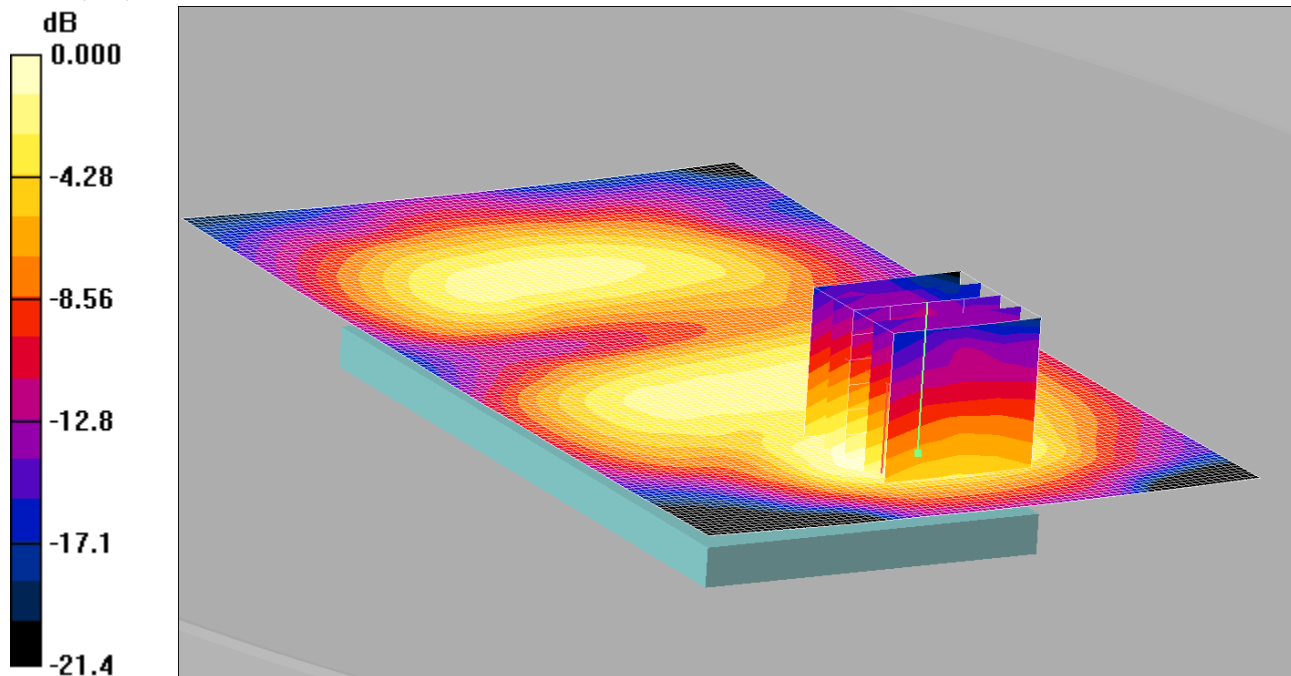

0 dB = 0.188mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz ;Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.985 mho/m; ϵ_r = 55.3; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.14, 10.14, 10.14);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT Facing Phantom - Middle/Area Scan (81x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.193 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.73 V/m; Power Drift = 0.174 dB

Peak SAR (extrapolated) = 0.311 W/kg


SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.099 mW/g

Maximum value of SAR (measured) = 0.188 mW/g

077: Left Hand Side of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

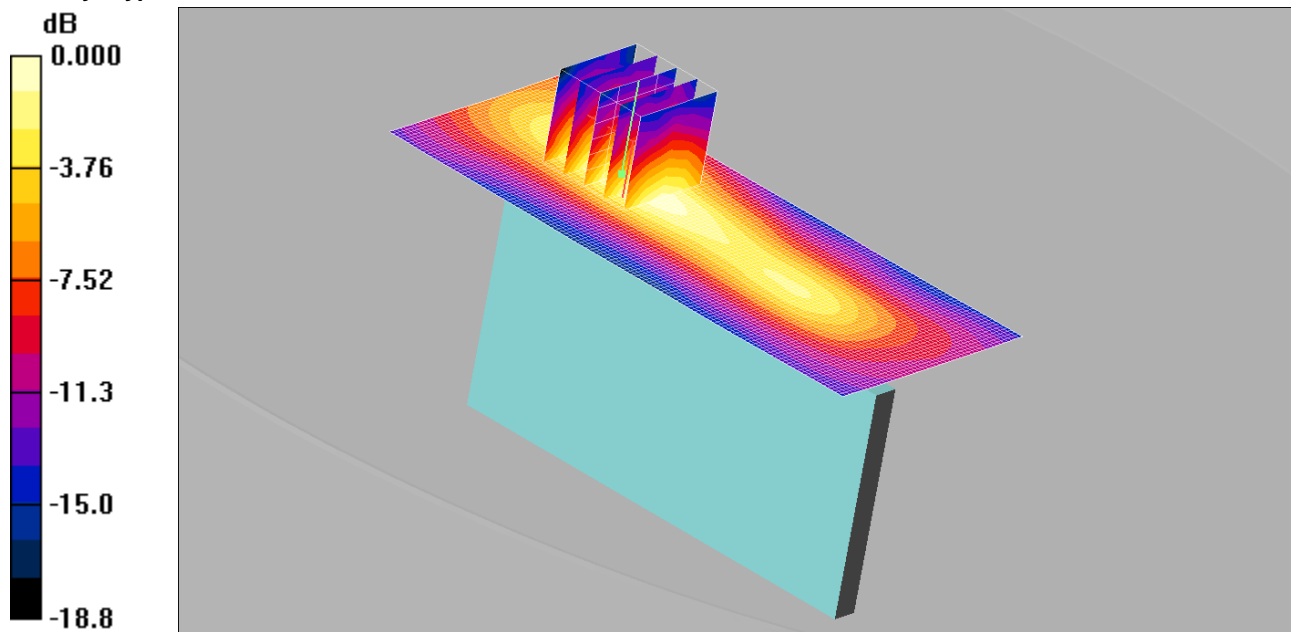

0 dB = 0.152mW/g

- Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1
- Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.985 \text{ mho/m}$; $\epsilon_r = 55.3$; $\rho = 1000 \text{ kg/m}^3$
- Phantom section: Flat Section
- DASY4 Configuration:
 - Probe: EX3DV4 - SN3994; ConvF(10.14, 10.14, 10.14);
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn450; Calibrated: 31/10/2013
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Hand Side of EUT Facing Phantom - Middle/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.152 mW/g

Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.51 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.240 W/kg


SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.152 mW/g

078: Right Hand Side of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

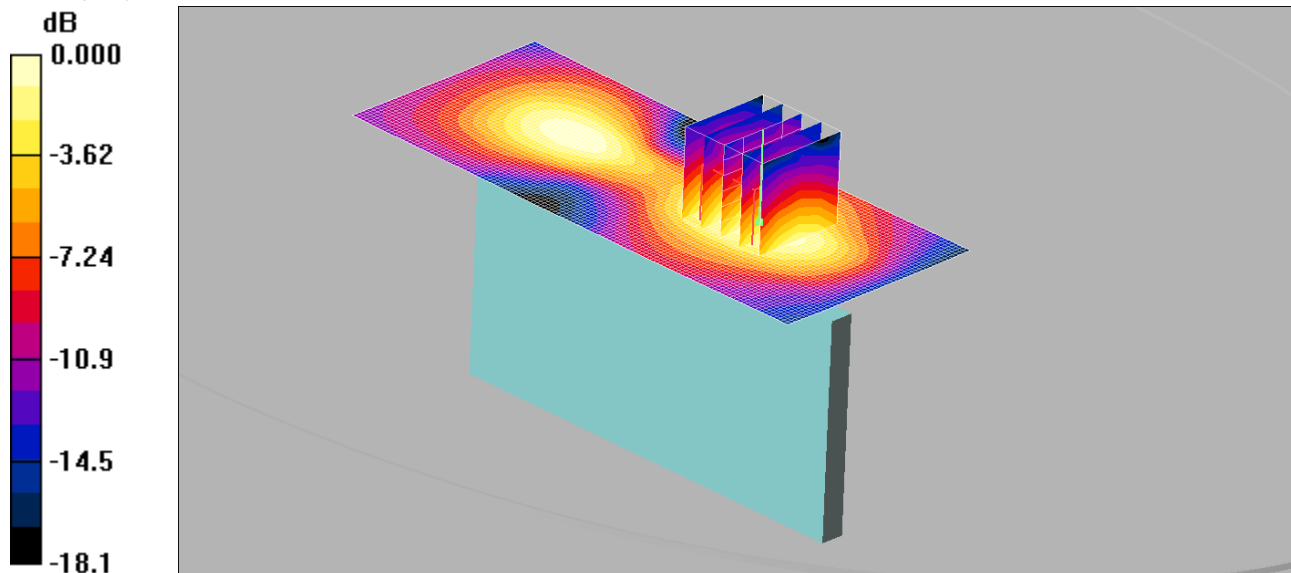

0 dB = 0.146mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.985 mho/m; ϵ_r = 55.3; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.14, 10.14, 10.14);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side of EUT Facing Phantom - Middle/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.155 mW/g

Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.08 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.223 W/kg


SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.146 mW/g

079: Bottom of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

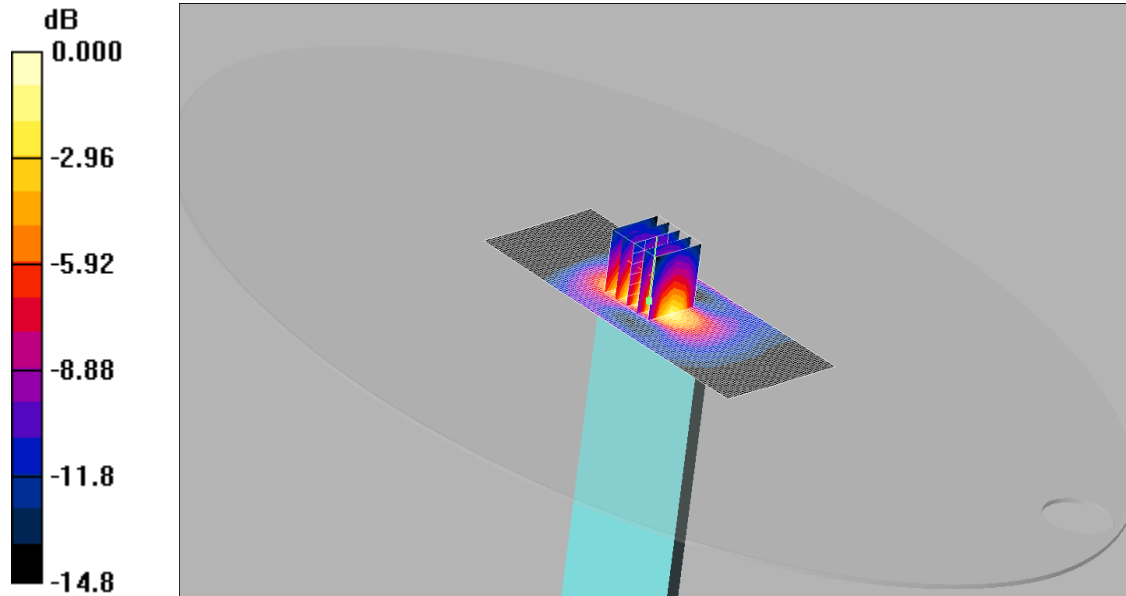

0 dB = 0.241mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.14, 10.14, 10.14);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom of EUT Facing Phantom - Middle/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.239 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.3 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.407 W/kg


SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.241 mW/g

080: Front of EUT Facing Phantom UMTS FDD 5 CH4132

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

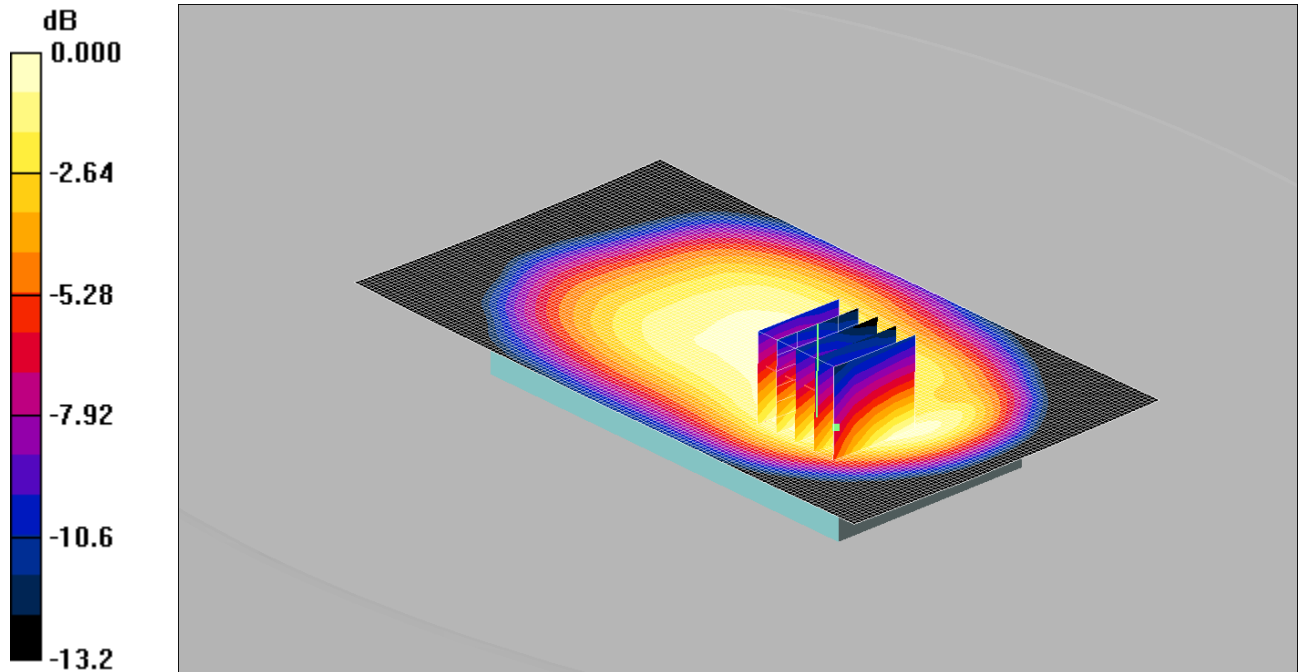

0 dB = 0.365mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.979$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.14, 10.14, 10.14);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 31/10/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - Middle/Area Scan 2 (81x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.370 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.9 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.568 W/kg


SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.215 mW/g

Maximum value of SAR (measured) = 0.365 mW/g

081: Front of EUT Facing Phantom UMTS FDD 5 CH4233

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYM

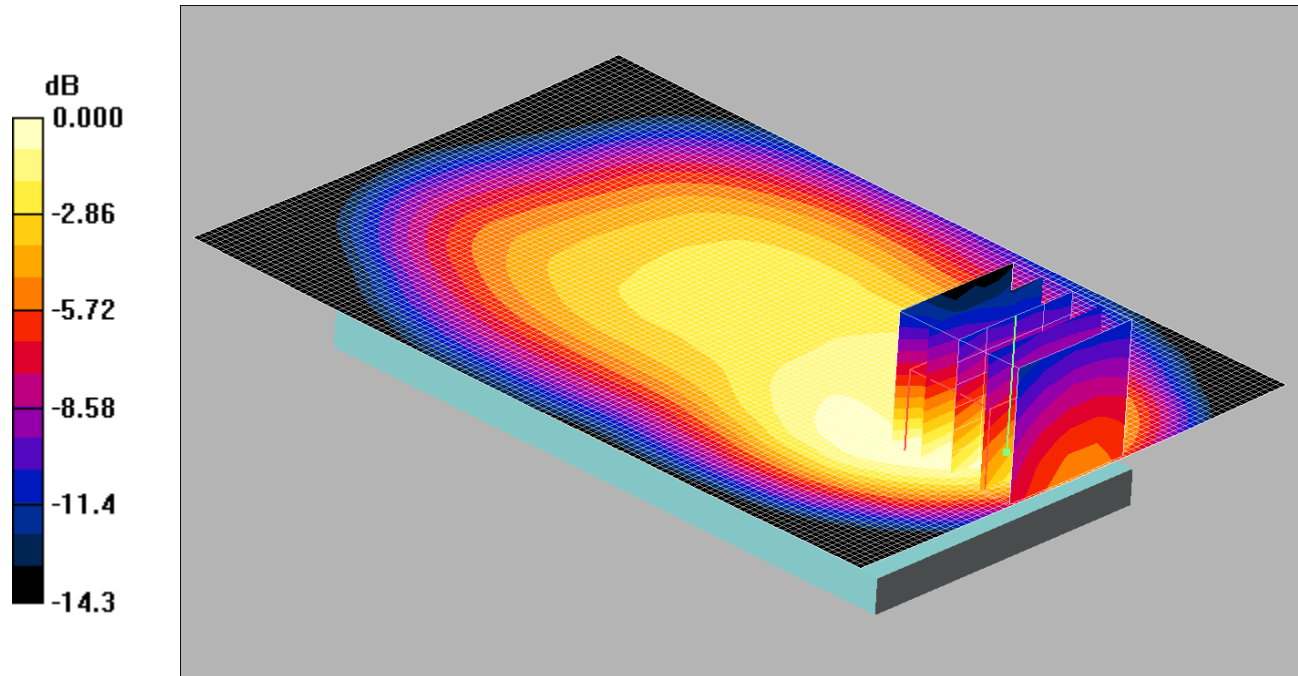

0 dB = 0.386mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated); $f = 846.6$ MHz; $\sigma = 0.991$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(10.14, 10.14, 10.14);

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn450; Calibrated: 31/10/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front of EUT Facing Phantom - High/Area Scan 2 (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.379 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.624 W/kg


SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

082: Touch Left LTE Band 2 20MHz 1RB-Middle CH18700

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

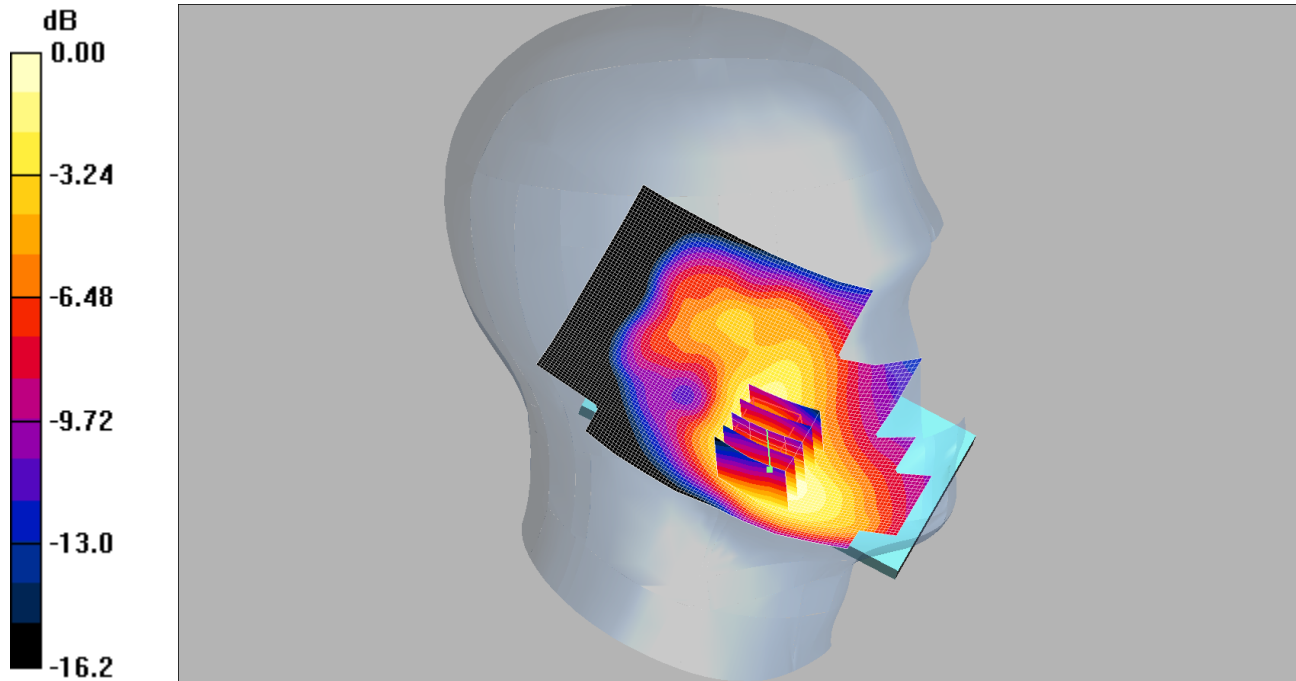

0 dB = 0.518mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left - Low 2/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.549 mW/g

Touch Left - Low 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.07 V/m; Power Drift = 0.088 dB

Peak SAR (extrapolated) = 0.699 W/kg


SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.518 mW/g

083: Touch Left LTE Band 2 20MHz 50%RB-Middle CH18700

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

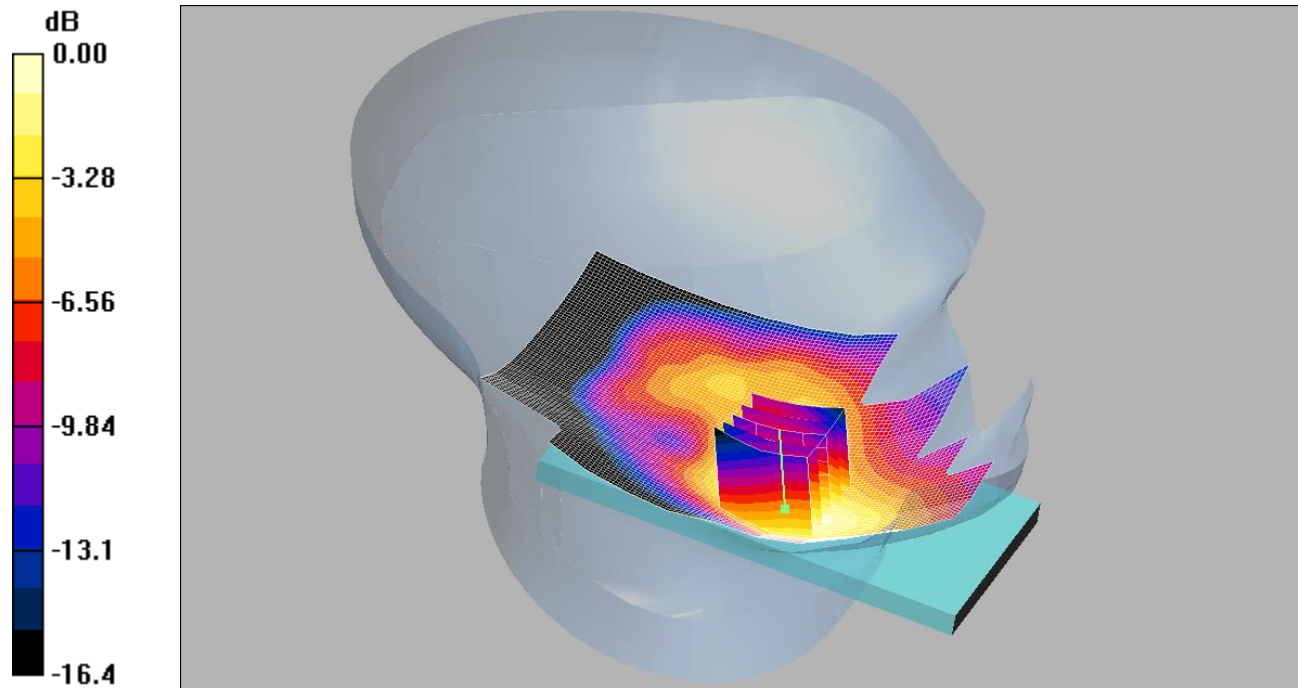

0 dB = 0.409mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left - Low 2/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.431 mW/g

Touch Left - Low 2/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.545 W/kg


SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.409 mW/g

084: Tilt Left LTE Band 2 20MHz 1RB-Middle CH18700

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

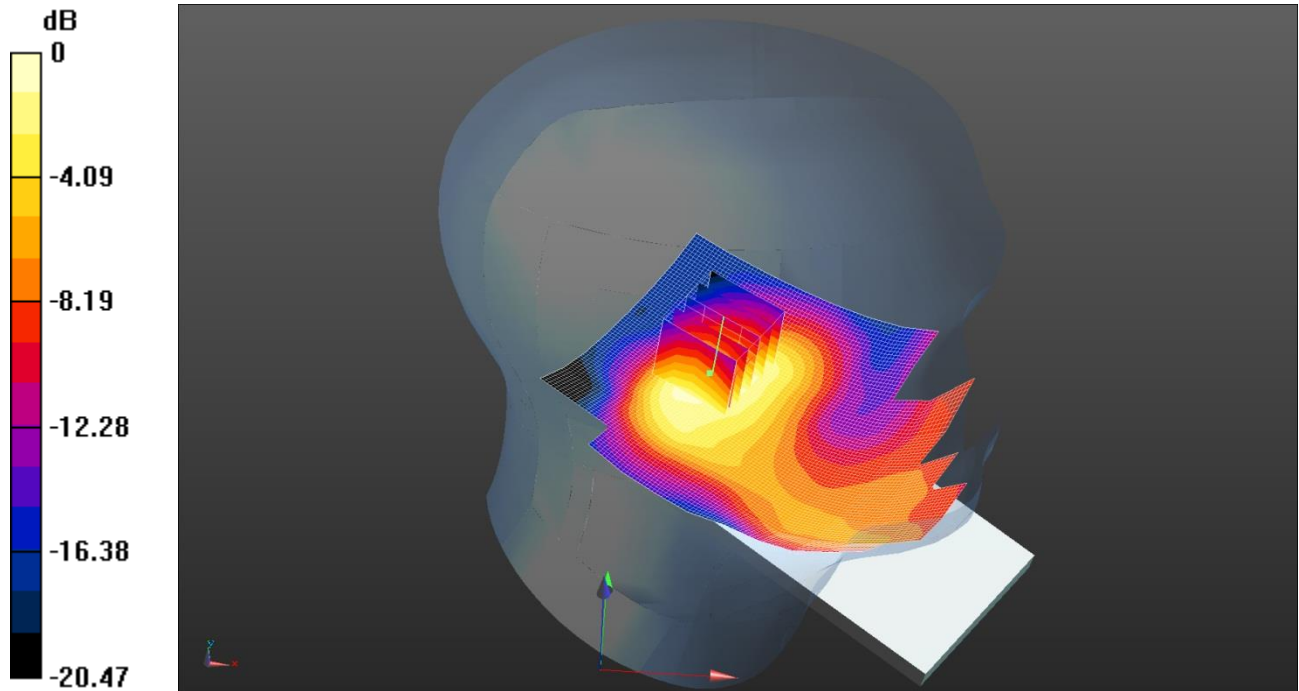

0 dB = 0.270mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt Left - Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.308 mW/g

Tilt Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.58 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 0.388 W/kg


SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.270 mW/g

085: Tilt Left LTE Band 2 20MHz 50%RB-Middle CH18700

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

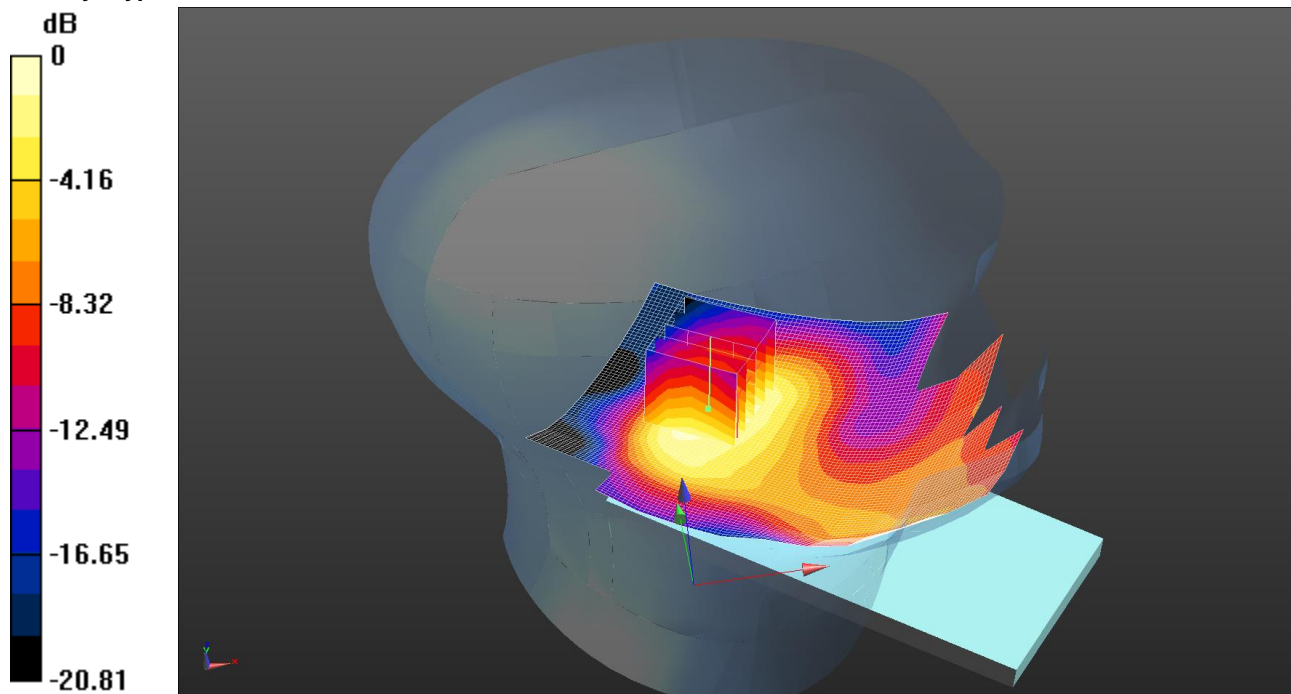

0 dB = 0.214mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1
 Medium: 1900 MHz Head Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt Left - Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.243 mW/g

Tilt Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.68 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 0.314 W/kg


SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.214 mW/g

086: Touch Right LTE Band 2 20MHz 1RB-Middle CH18700

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

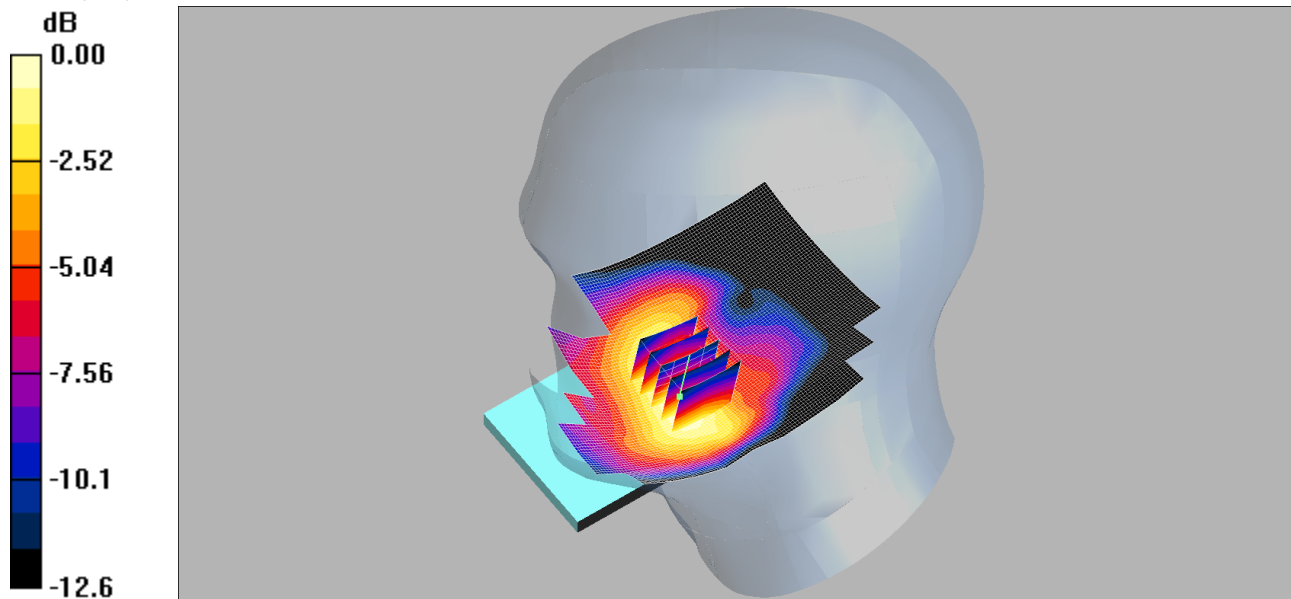

0 dB = 0.457mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated): f = 1860 MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Right - Low 2/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.456 mW/g

Touch Right - Low 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.41 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 0.596 W/kg


SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.457 mW/g

087: Touch Right LTE Band 2 20MHz 50%RB-Low CH18700

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

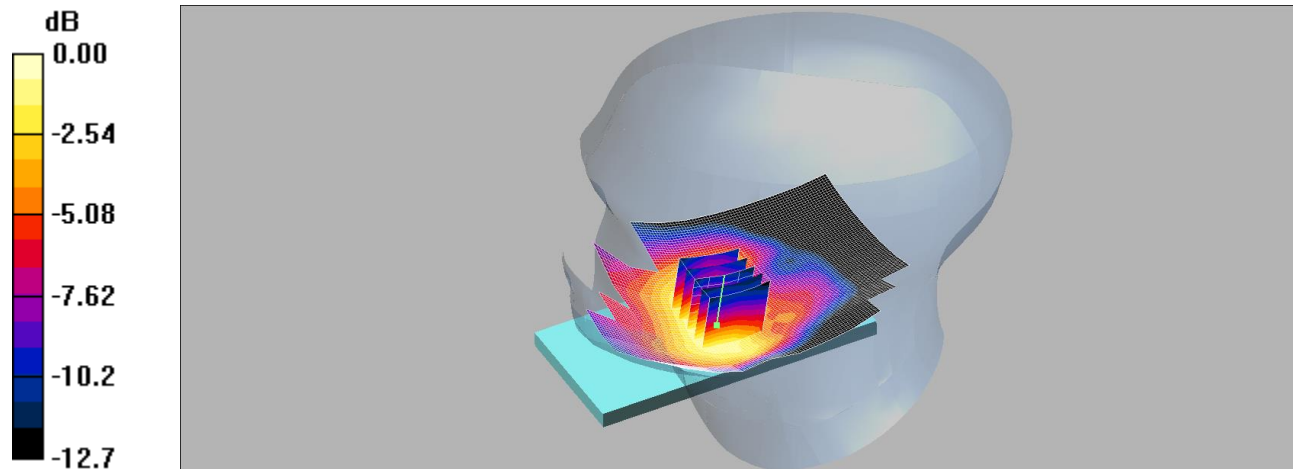

0 dB = 0.322mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated): $f = 1860 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Right - Low 2/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.325 mW/g

Touch Right - Low 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.06 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.409 W/kg


SAR(1 g) = 0.280 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

088: Tilt Right LTE Band 2 20MHz 1RB-Middle CH18700

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

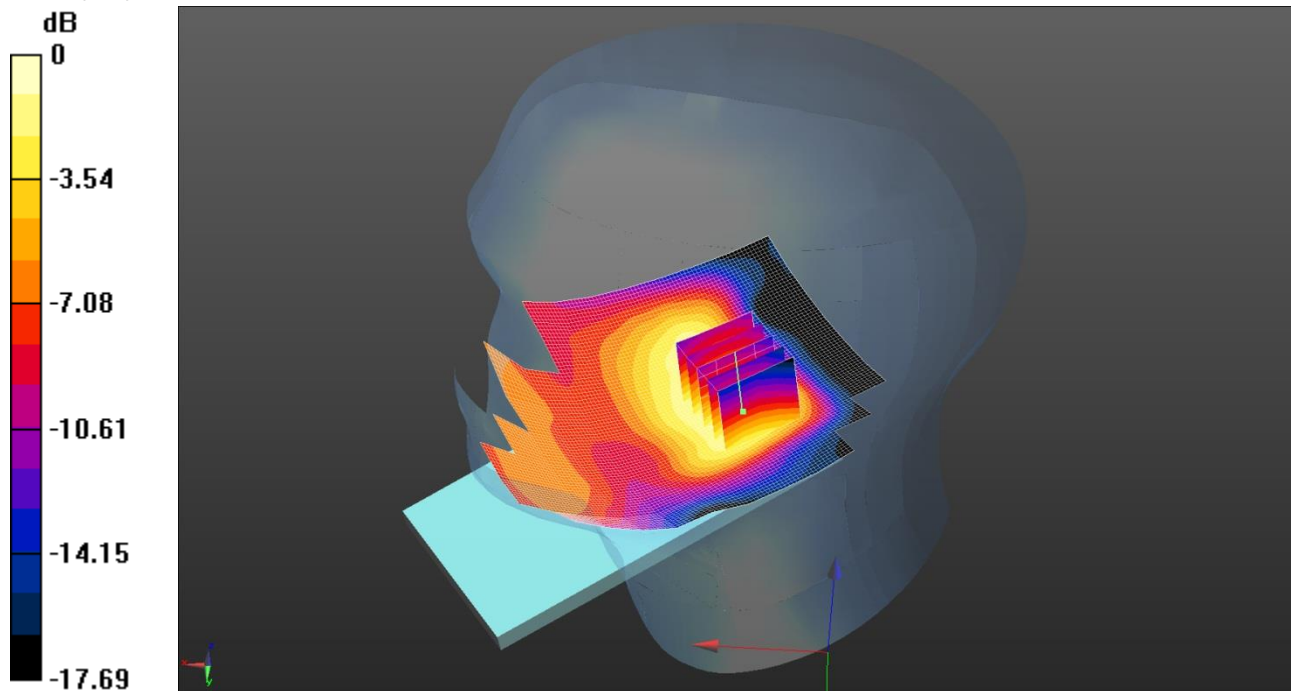

0 dB = 0.206mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated): $f = 1860 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt Right - Low/Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.232 mW/g

Tilt Right - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.01 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.275 W/kg


SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.206 mW/g

089: Tilt Right LTE Band 2 20MHz 50%RB-Middle CH18700

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

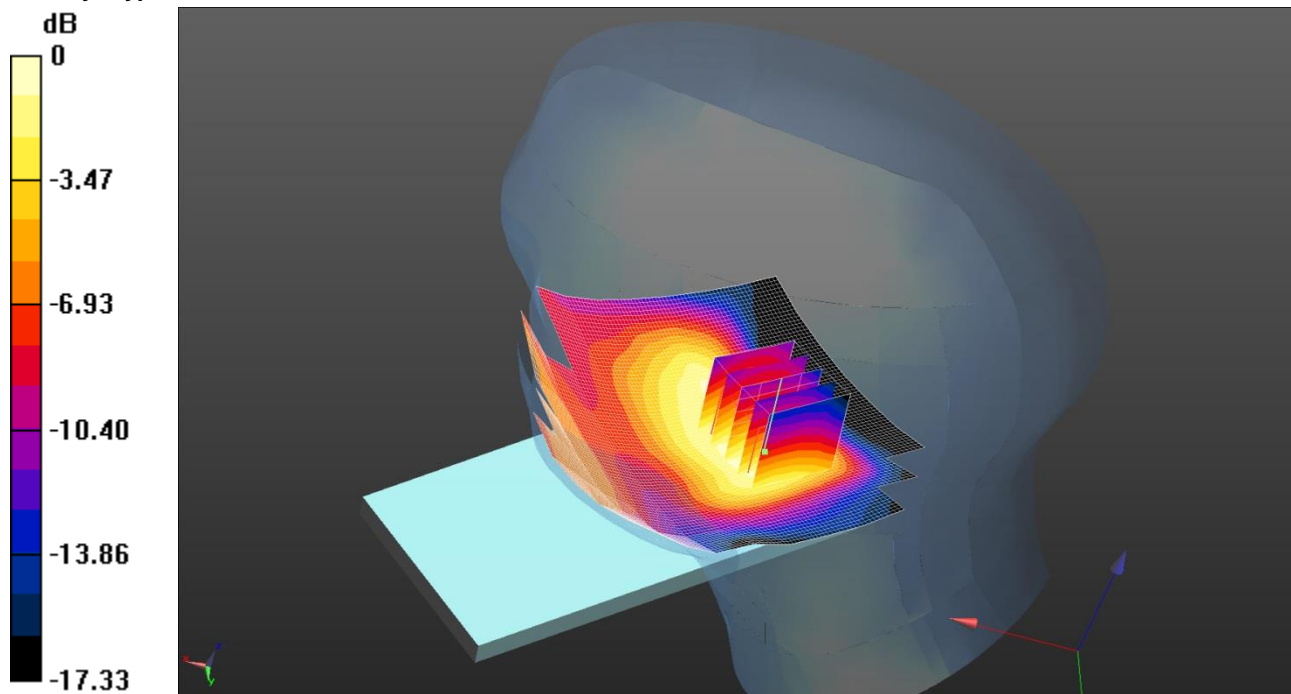

0 dB = 0.162mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1
 Medium: 1900 MHz Head Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt Right - Low 2/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.186 mW/g

Tilt Right - Low 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.54 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 0.221 W/kg


SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.087 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

090: Touch Left LTE Band 2 20MHz 1RB-Middle CH18900

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

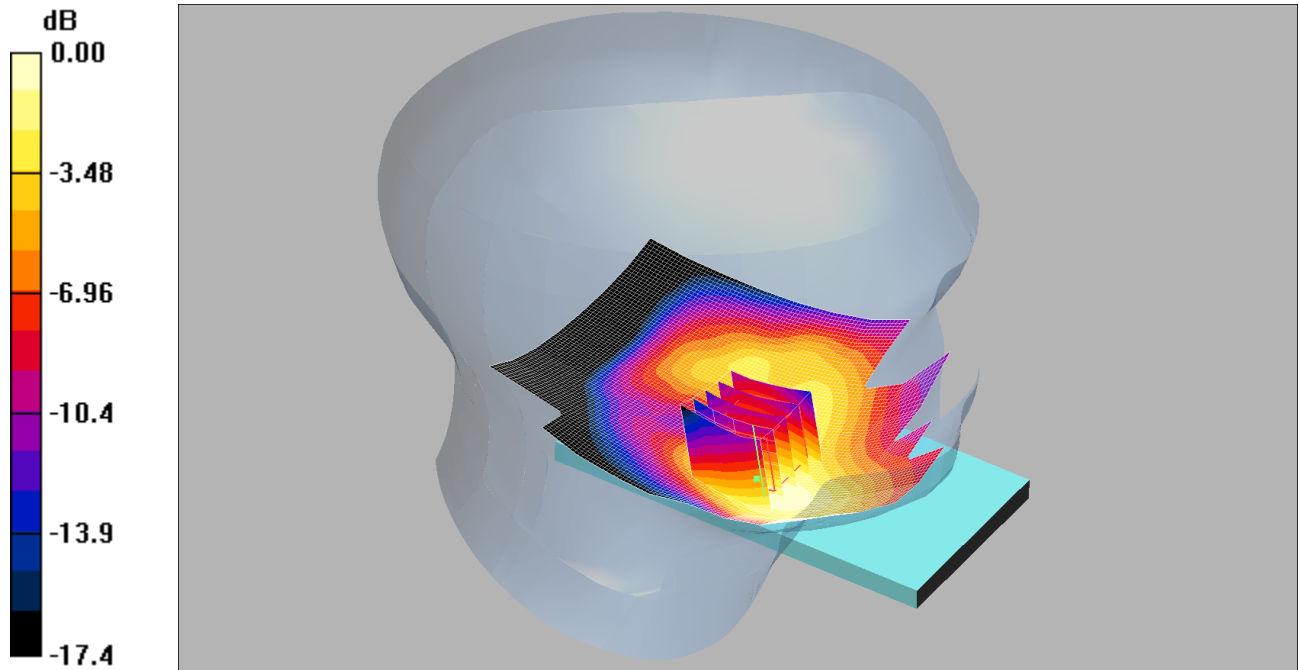

0 dB = 0.452mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated): f = 1880 MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left - Middle/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.475 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.30 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.621 W/kg


SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.264 mW/g

Maximum value of SAR (measured) = 0.452 mW/g

091: Touch Left LTE Band 2 20MHz 1RB-Middle CH19100

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1RYK

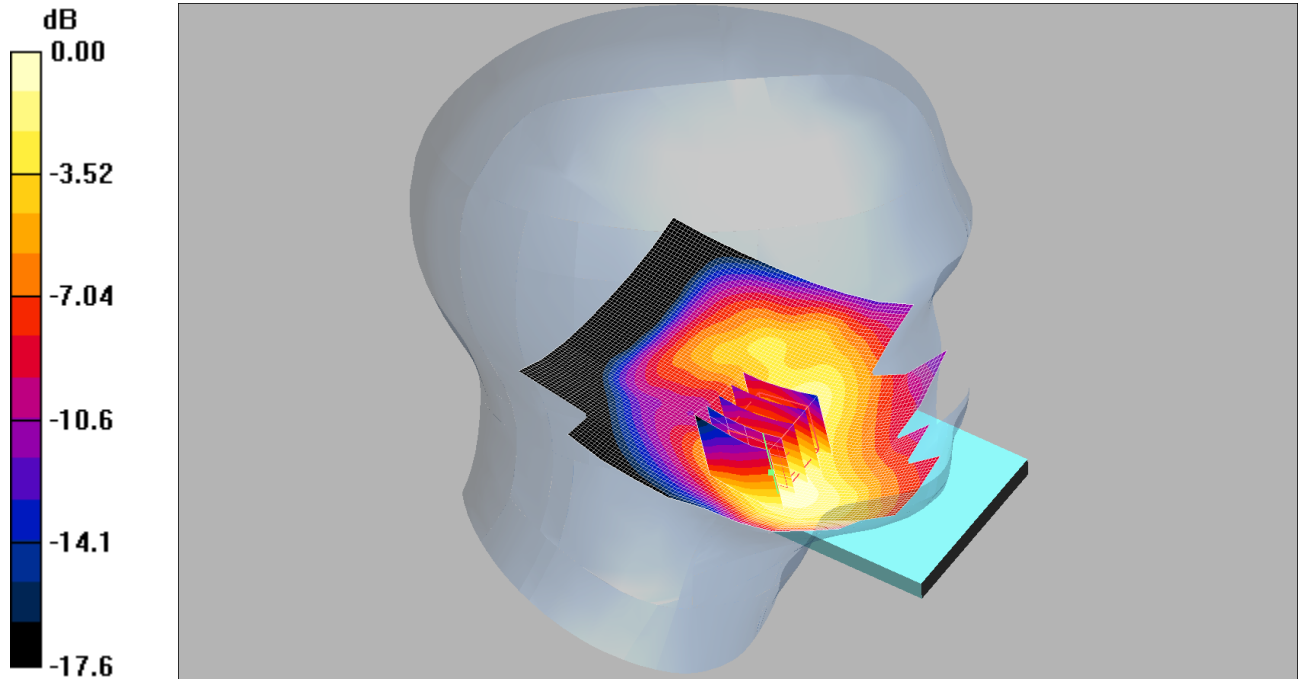

0 dB = 0.406mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(5.12, 5.12, 5.12);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left High/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.428 mW/g

Touch Left High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.07 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 0.556 W/kg


SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.406 mW/g

092: Front of EUT Facing Phantom LTE Band 2 20MHz 1RB Middle CH18700

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

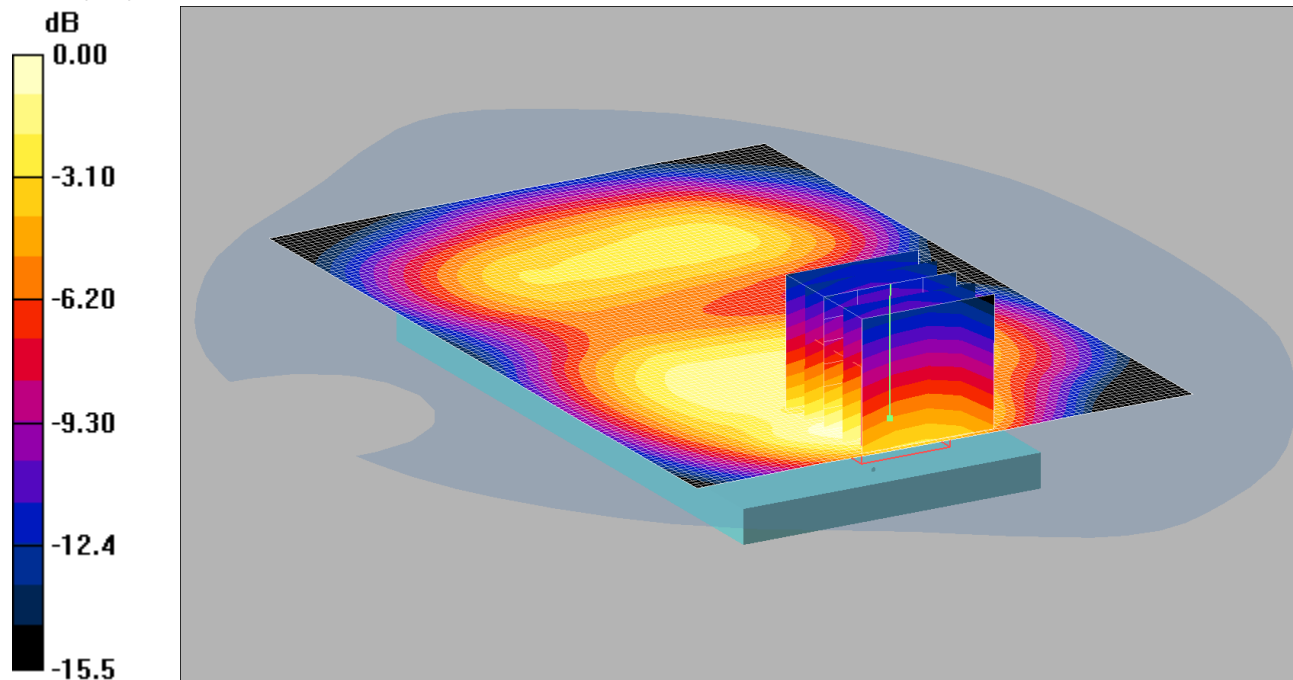

0 dB = 0.371mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MSL Medium parameters used (interpolated): f = 1860 MHz; σ = 1.52 mho/m; ϵ_r = 51.8; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Front of EUT Facing Phantom - low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.387 mW/g

Front of EUT Facing Phantom – Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.95 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.547 W/kg


SAR(1 g) = 0.344 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.371 mW/g

093: Front of EUT Facing Phantom LTE Band 2 20MHz 50%RB Middle CH18700

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

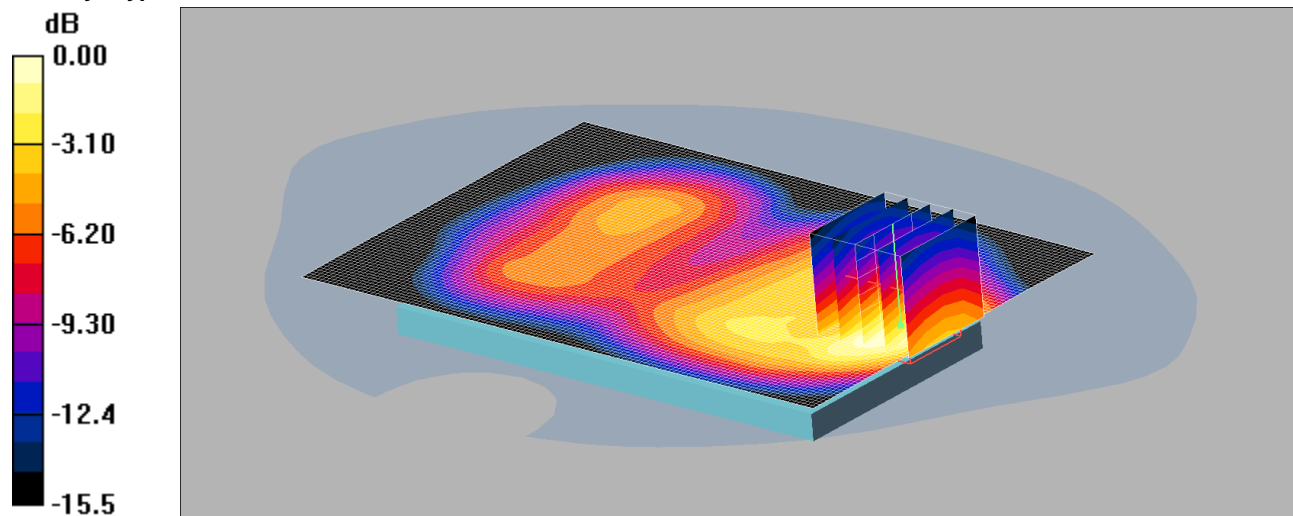

0 dB = 0.602mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1
 Medium: 1900 MSL Medium parameters used (interpolated): $f = 1860 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 DASY4 Configuration:
 - Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn432; Calibrated: 28/08/2013
 - Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
 - Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145


Front of EUT Facing Phantom - Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.614 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 8.03 V/m; Power Drift = -0.100 dB
 Peak SAR (extrapolated) = 0.939 W/kg
SAR(1 g) = 0.563 mW/g; SAR(10 g) = 0.320 mW/g
 Maximum value of SAR (measured) = 0.602 mW/g

094: Back of EUT Facing Phantom LTE Band 2 20MHz 1RB Middle CH18700

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

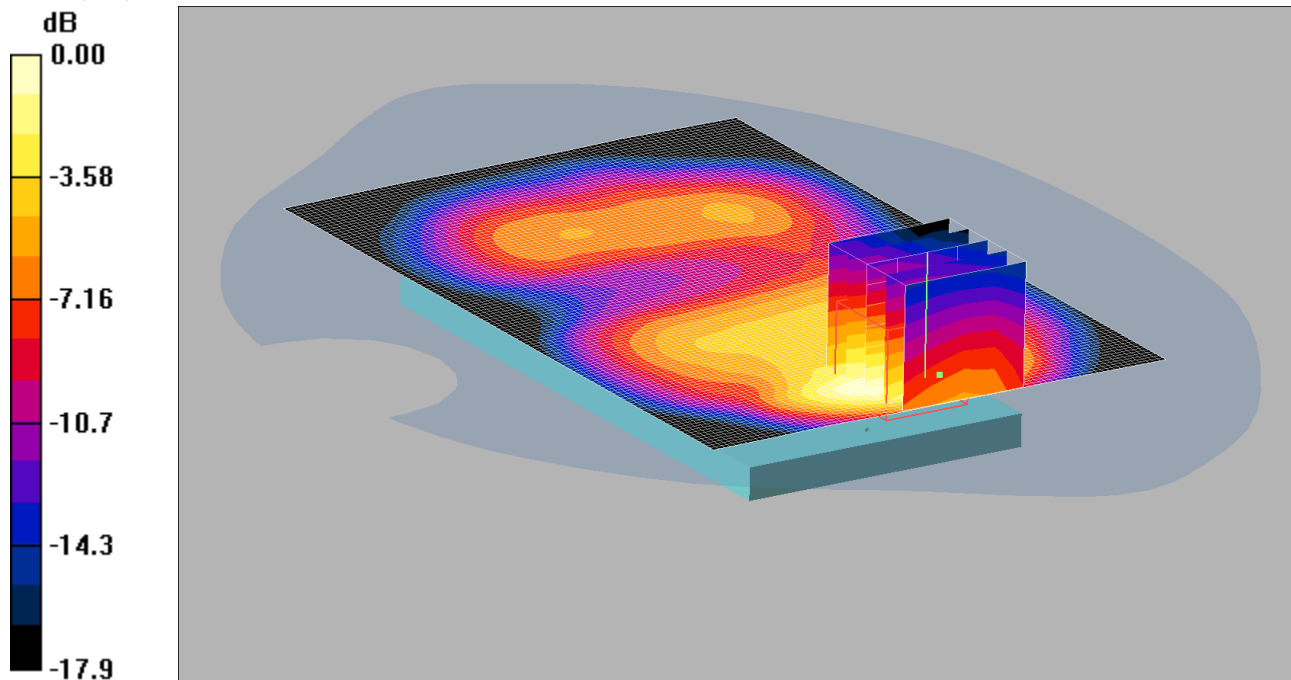

0 dB = 0.871mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.928 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.12 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.45 W/kg


SAR(1 g) = 0.780 mW/g; SAR(10 g) = 0.434 mW/g

Maximum value of SAR (measured) = 0.871 mW/g

095: Back of EUT Facing Phantom LTE Band 2 20MHz 1RB Middle CH18900

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

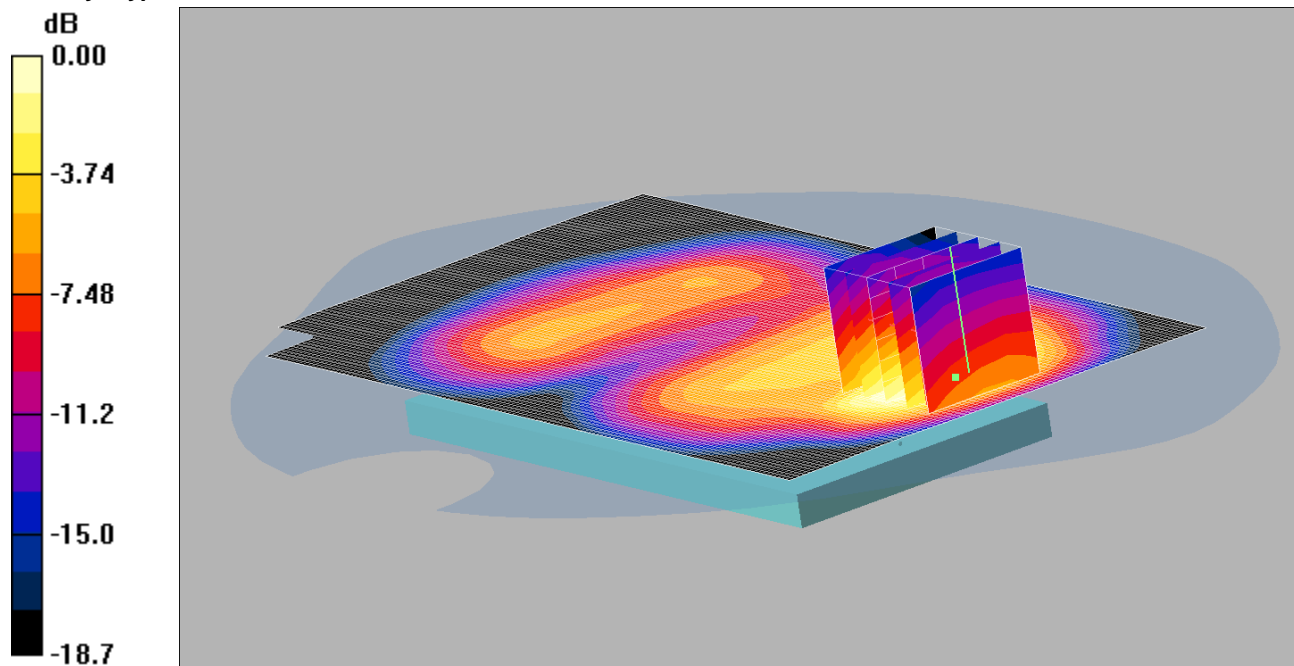

0 dB = 0.859mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - Middle/Area Scan (81x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.858 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.85 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.36 W/kg


SAR(1 g) = 0.762 mW/g; SAR(10 g) = 0.434 mW/g

Maximum value of SAR (measured) = 0.859 mW/g

096: Back of EUT Facing Phantom LTE Band 2 20MHz 1RB Middle CH19100

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

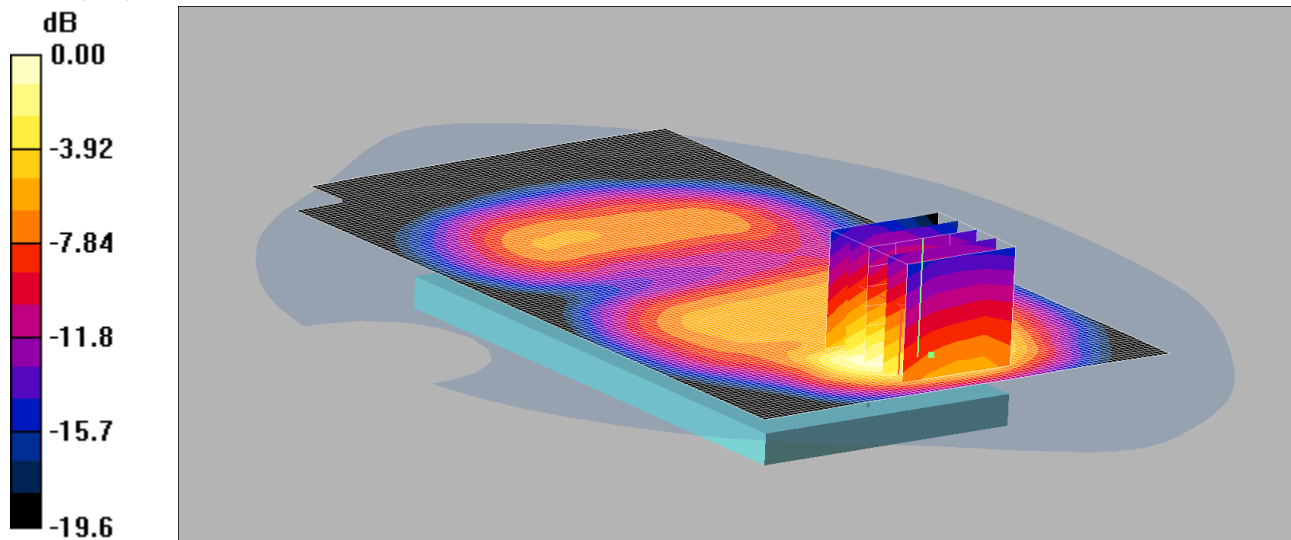

0 dB = 1.00mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 MSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - HIGH/Area Scan (81x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g

Back of EUT Facing Phantom - HIGH/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.83 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 1.59 W/kg


SAR(1 g) = 0.898 mW/g; SAR(10 g) = 0.508 mW/g

Maximum value of SAR (measured) = 1.00 mW/g

097: Back of EUT Facing Phantom LTE Band 2 20MHz 50%RB Middle CH18700

Date: 27/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

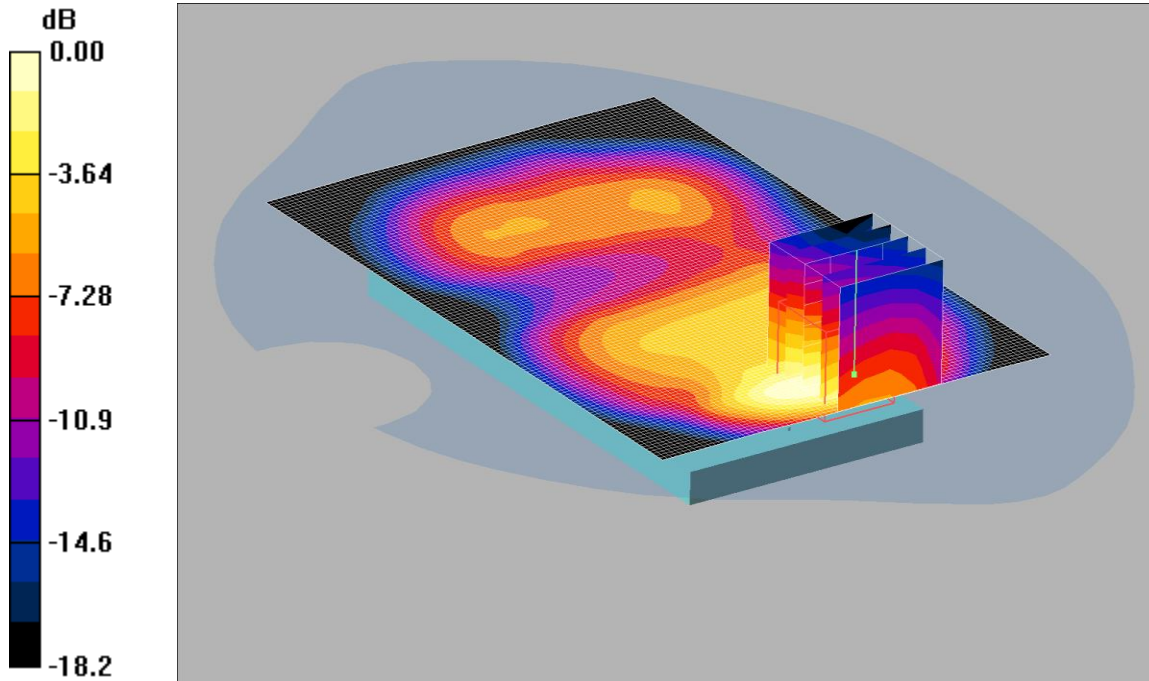

0 dB = 0.694mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom -Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.730 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.25 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.14 W/kg


SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.335 mW/g

Maximum value of SAR (measured) = 0.694 mW/g

098: Back of EUT Facing Phantom LTE Band 2 20MHz 100%RB CH19100

Date 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

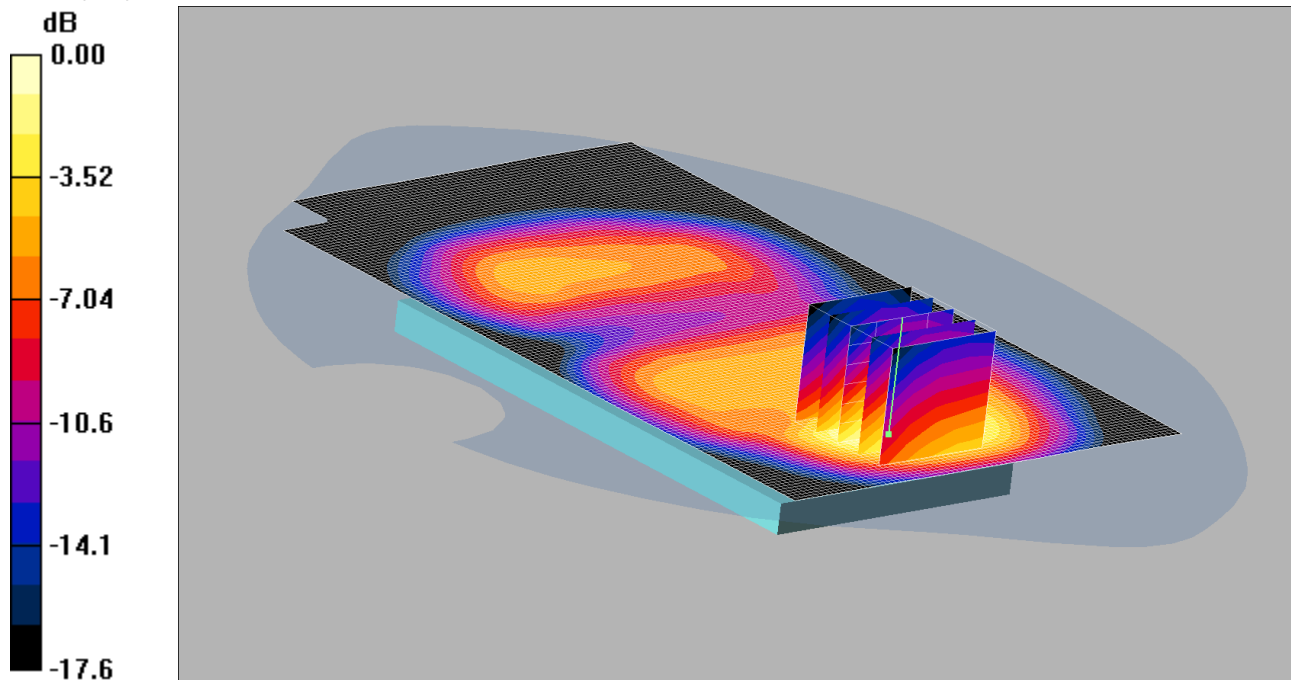

0 dB = 0.502mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 MSL Medium parameters used: f = 1900 MHz; σ = 1.56 mho/m; ϵ_r = 51.7; ρ = 1000 kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - High/Area Scan (81x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.512 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.39 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.768 W/kg


SAR(1 g) = 0.454 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

099: Left of EUT Facing Phantom LTE Band 2 20MHz 1RB Middle CH18700

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

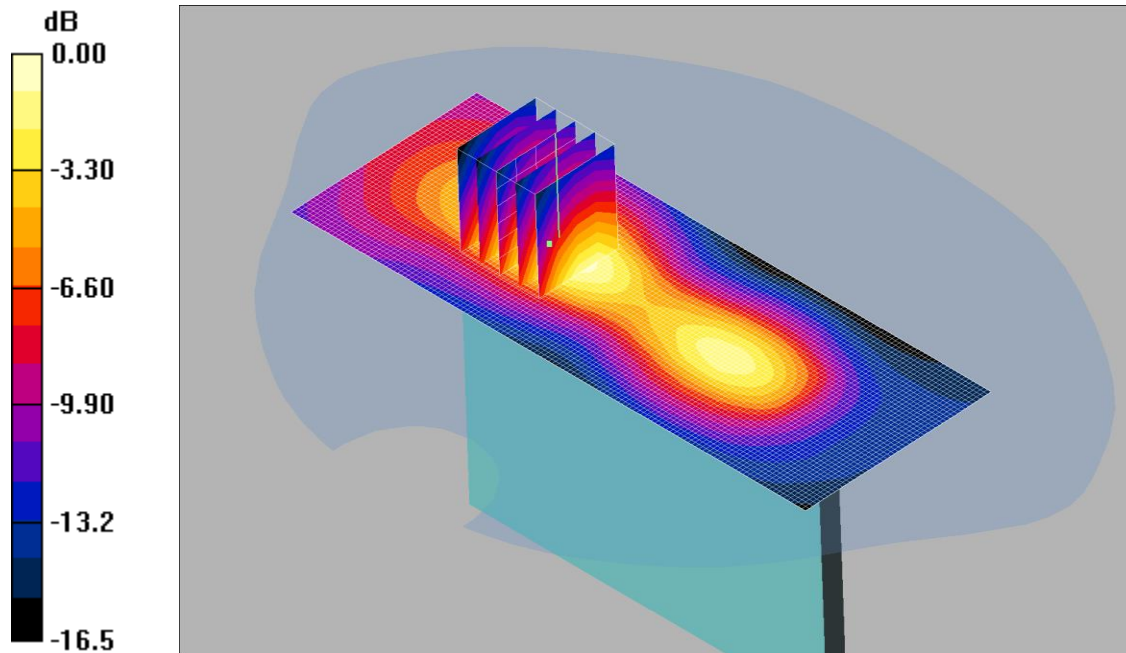

0 dB = 0.309mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: 1900 MSL Medium parameters used (interpolated): f = 1860 MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Left of EUT Facing Phantom - Middle/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.339 mW/g

Left of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.63 V/m; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 0.478 W/kg


SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.309 mW/g

100: Left of EUT Facing Phantom LTE Band 2 20MHz 50%RB Middle CH18700

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

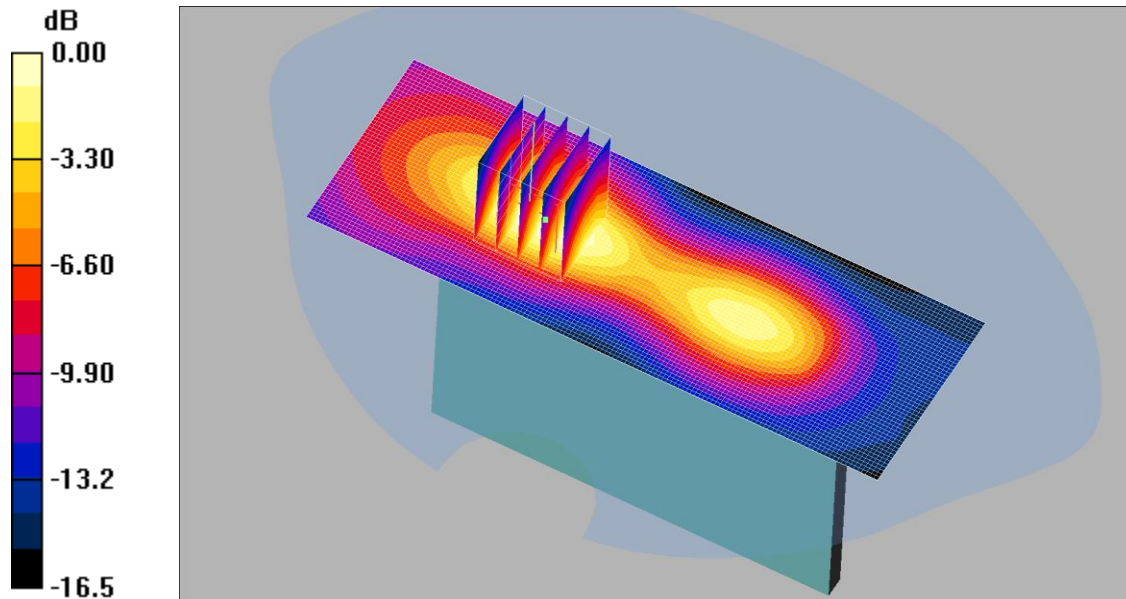

0 dB = 0.244mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1
 Medium: 1900 MSL Medium parameters used (interpolated): $f = 1860 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 DASY4 Configuration:
 - Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn432; Calibrated: 28/08/2013
 - Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
 - Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Left of EUT Facing Phantom - Middle/Area Scan (51x141x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.277 mW/g


Left of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.74 V/m; Power Drift = -0.049 dB
 Peak SAR (extrapolated) = 0.376 W/kg
SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.135 mW/g
 Maximum value of SAR (measured) = 0.244 mW/g

101: Right of EUT Facing Phantom LTE Band 2 20MHz 1RB Middle CH18700

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

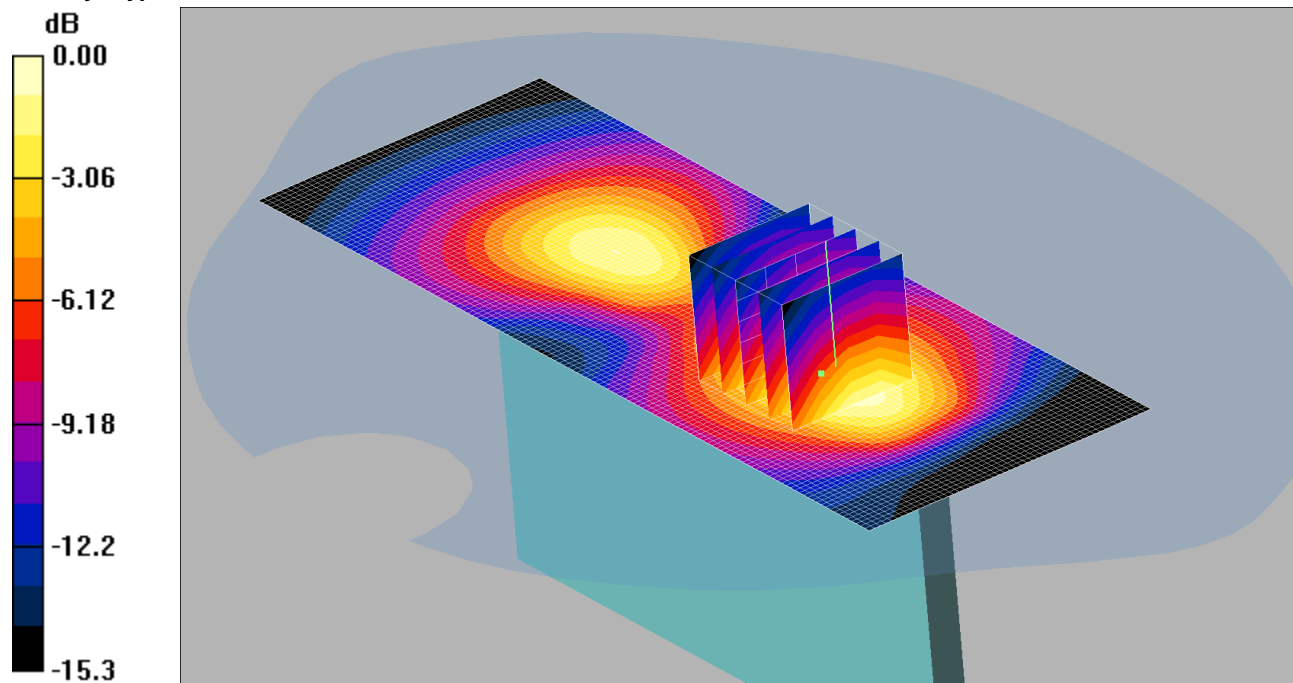

0 dB = 0.285mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MSL Medium parameters used (interpolated): f = 1860 MHz; σ = 1.52 mho/m; ϵ_r = 51.8; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Right of EUT Facing Phantom - Middle/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.298 mW/g

Right of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.91 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.438 W/kg


SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.285 mW/g

102: Right of EUT Facing Phantom LTE Band 2 20MHz 50%RB Middle CH18700

Date 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

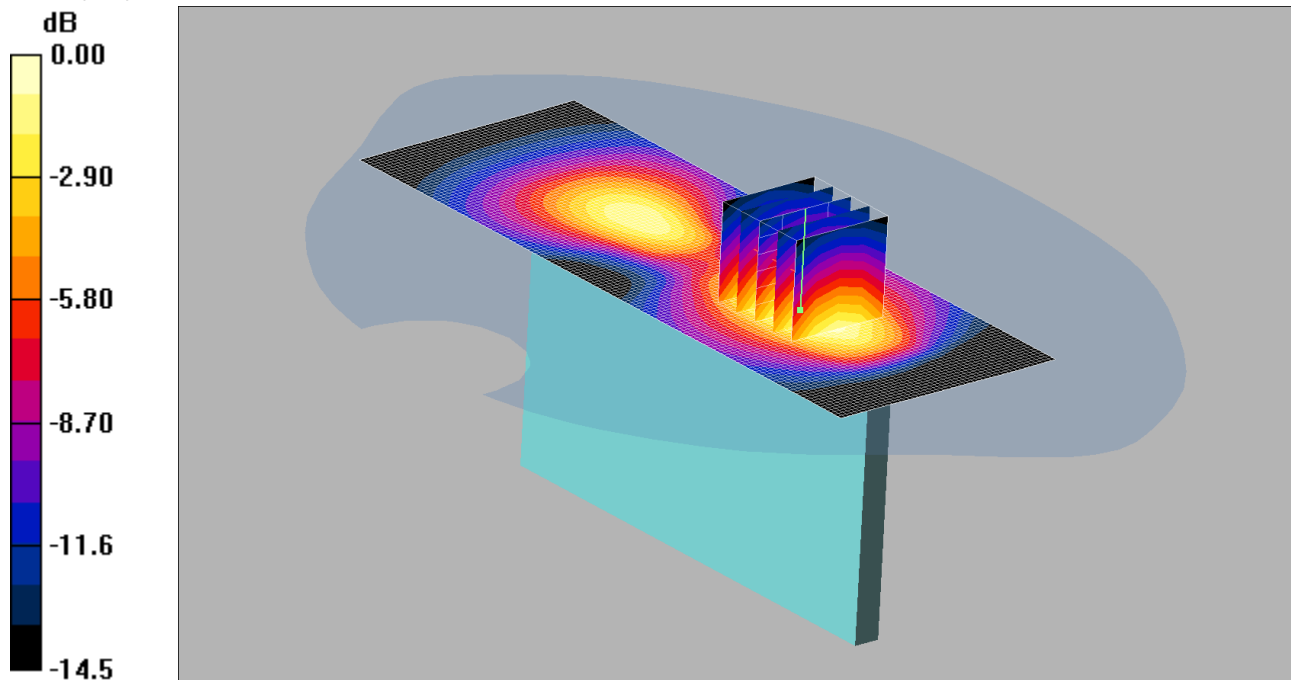

0 dB = 0.183mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MSL Medium parameters used (interpolated): f = 1860 MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Right of EUT Facing Phantom - Middle 2 2/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.183 mW/g

Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.29 V/m; Power Drift = 0.167 dB

Peak SAR (extrapolated) = 0.260 W/kg


SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.183 mW/g

103: Bottom of EUT Facing Phantom LTE Band 2 20MHz 1RB Middle CH18700

Date 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

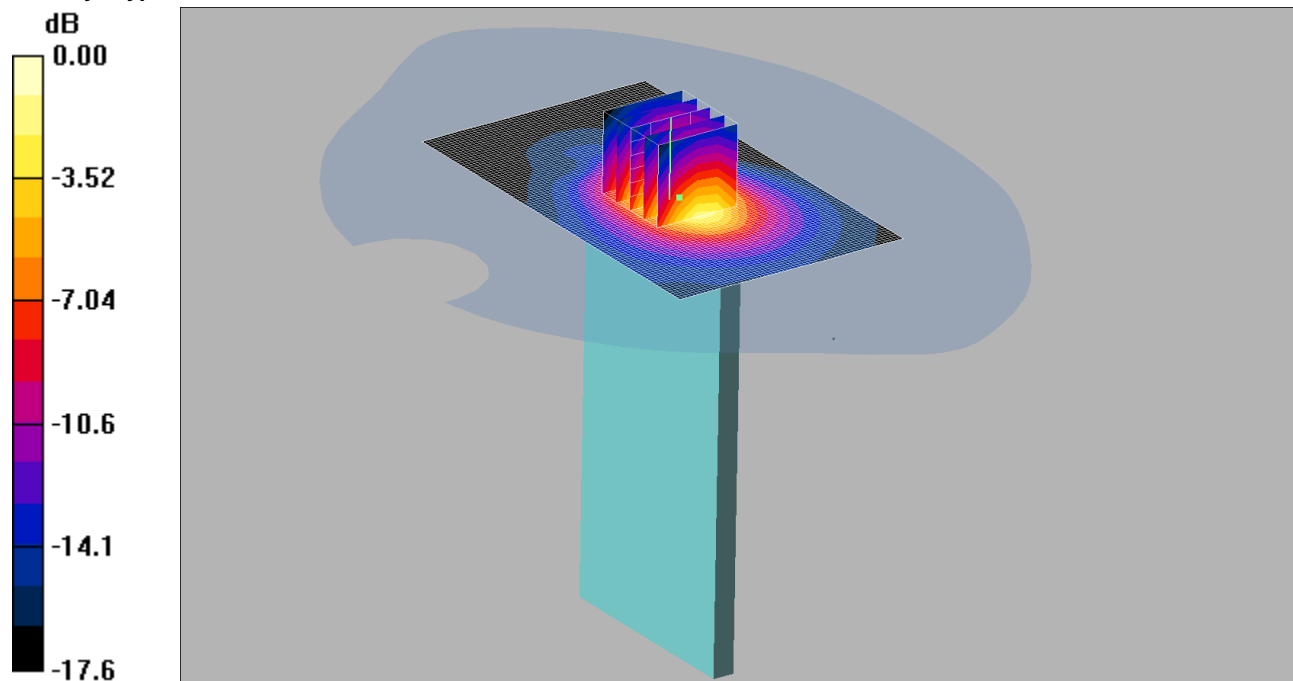

0 dB = 0.714mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz;Duty Cycle: 1:1

Medium: 1900 MSL Medium parameters used (interpolated): f = 1860 MHz; σ = 1.52 mho/m; ϵ_r = 51.8; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 28/08/2013
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Bottom of EUT Facing Phantom - Middle/Area Scan 2 (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.798 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 1.18 W/kg


SAR(1 g) = 0.683 mW/g; SAR(10 g) = 0.370 mW/g

Maximum value of SAR (measured) = 0.714 mW/g

104: Bottom of EUT Facing Phantom LTE Band 2 20MHz 50%RB Middle CH18700

Date 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S18

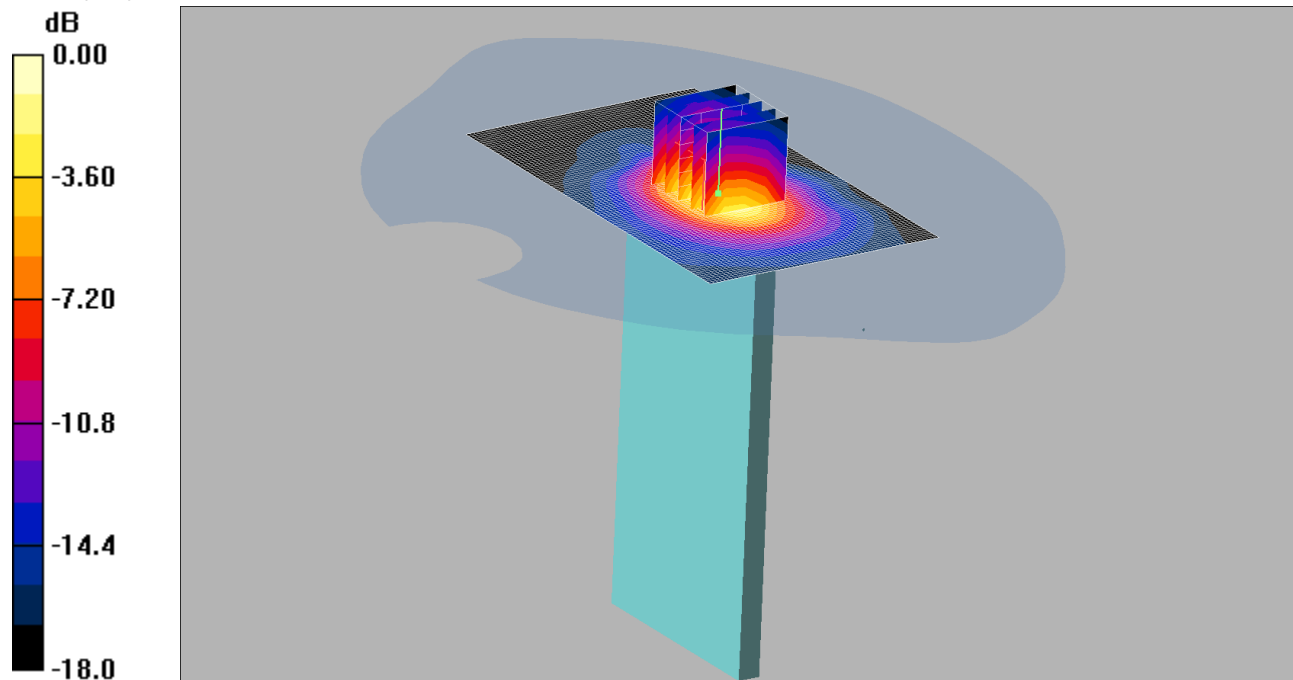

0 dB = 0.348mW/g

Communication System: LTE - Band 2 / 20MHz Channel; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 MSL Medium parameters used (interpolated): f = 1860 MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.67, 4.67, 4.67);

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 28/08/2013

- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1805

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Bottom of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.382 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.531 W/kg


SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.348 mW/g

105: Touch Left LTE Band 4 20MHz 1RB Middle CH20300

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

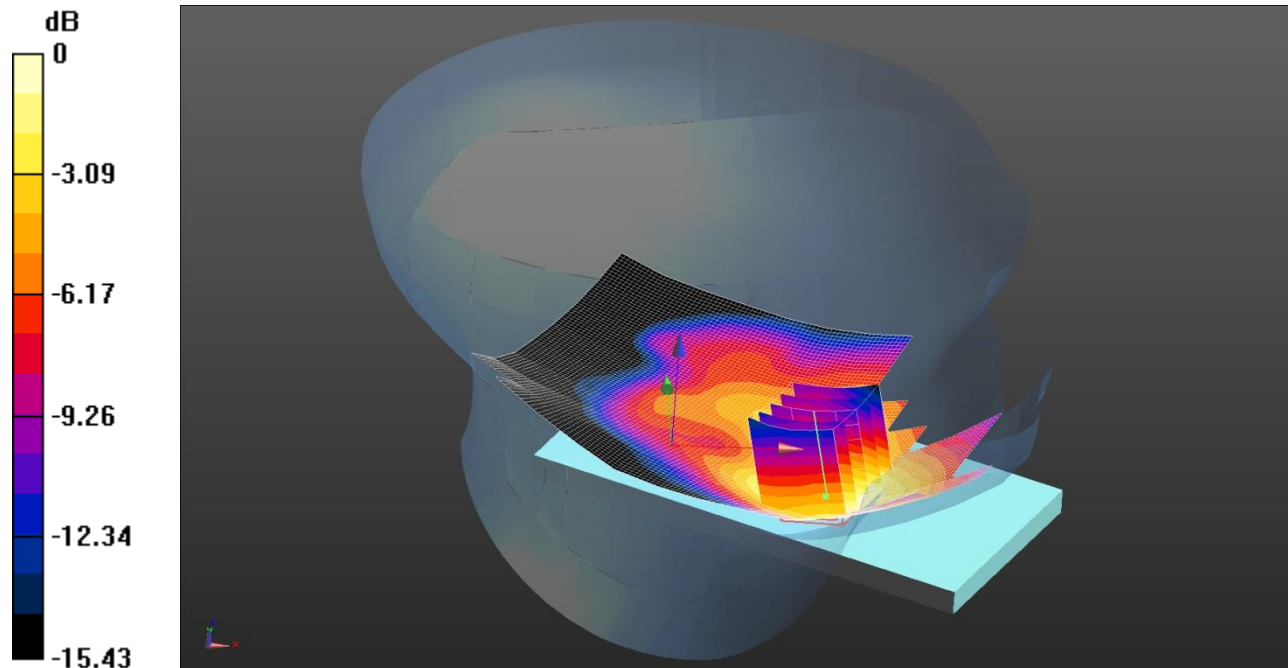

0 dB = 0.442 W/kg = -3.55 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium: 1800 MHz HSL Medium parameters used (interpolated): f = 1745 MHz; $\sigma = 1.332 \text{ S/m}$; $\epsilon_r = 40.309$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left - High/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.454 W/kg

Configuration/Touch Left - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.723 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.585 W/kg


SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

106: Touch Left LTE Band 4 20MHz 50%RB Middle CH20175

Date/: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

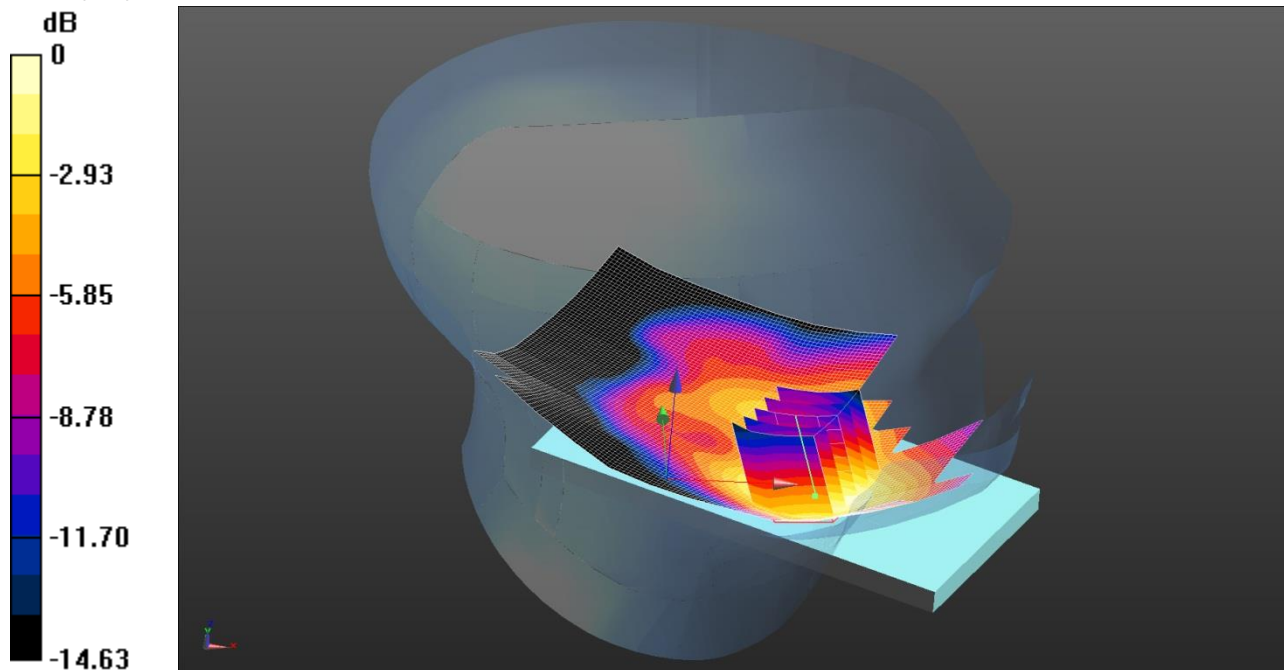

0 dB = 0.334 W/kg = -4.76 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): f = 1732.5 MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.373$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn417; Calibrated: 10/04/2014

- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193

- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left - Middle/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.366 W/kg

Configuration/Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.499 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.439 W/kg


SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

107: Tilt Left LTE Band 4 20MHz 1RB Middle CH20300

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

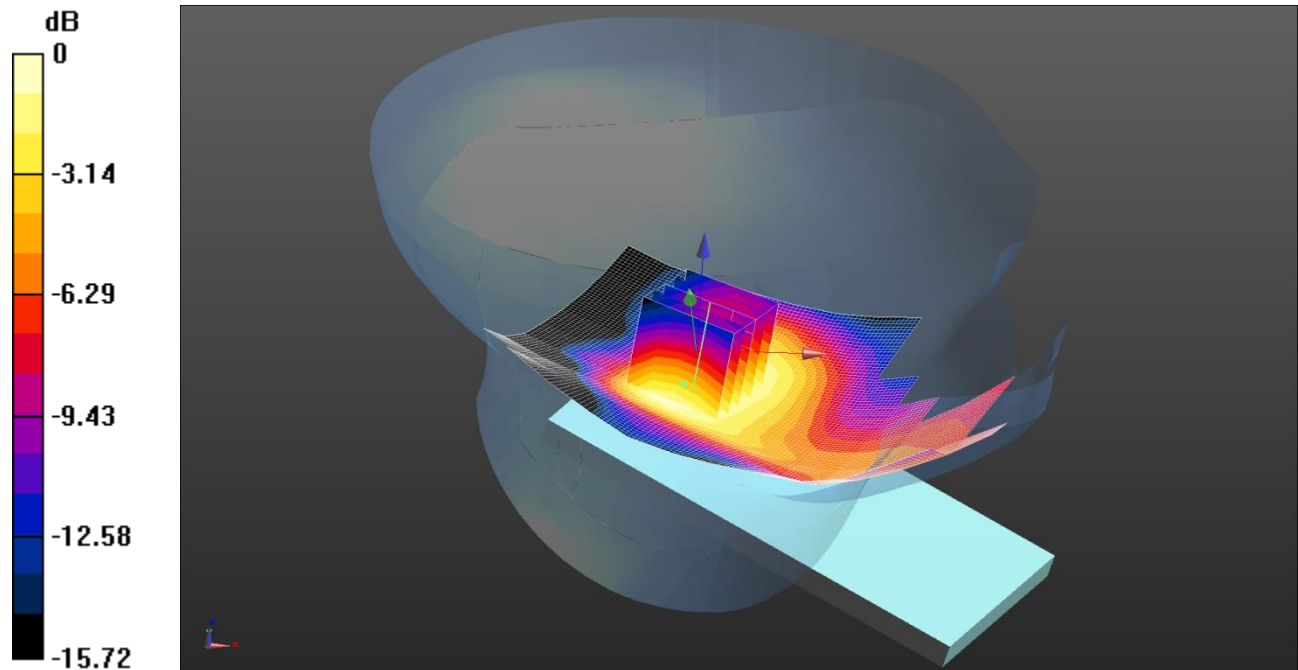

0 dB = 0.218 W/kg = -6.62 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.332$ S/m; $\epsilon_r = 40.309$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Left - High/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.235 W/kg

Configuration/Tilt Left - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.695 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.293 W/kg


SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

108: Tilt Left LTE Band 4 20MHz 50%RB Middle CH20175

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

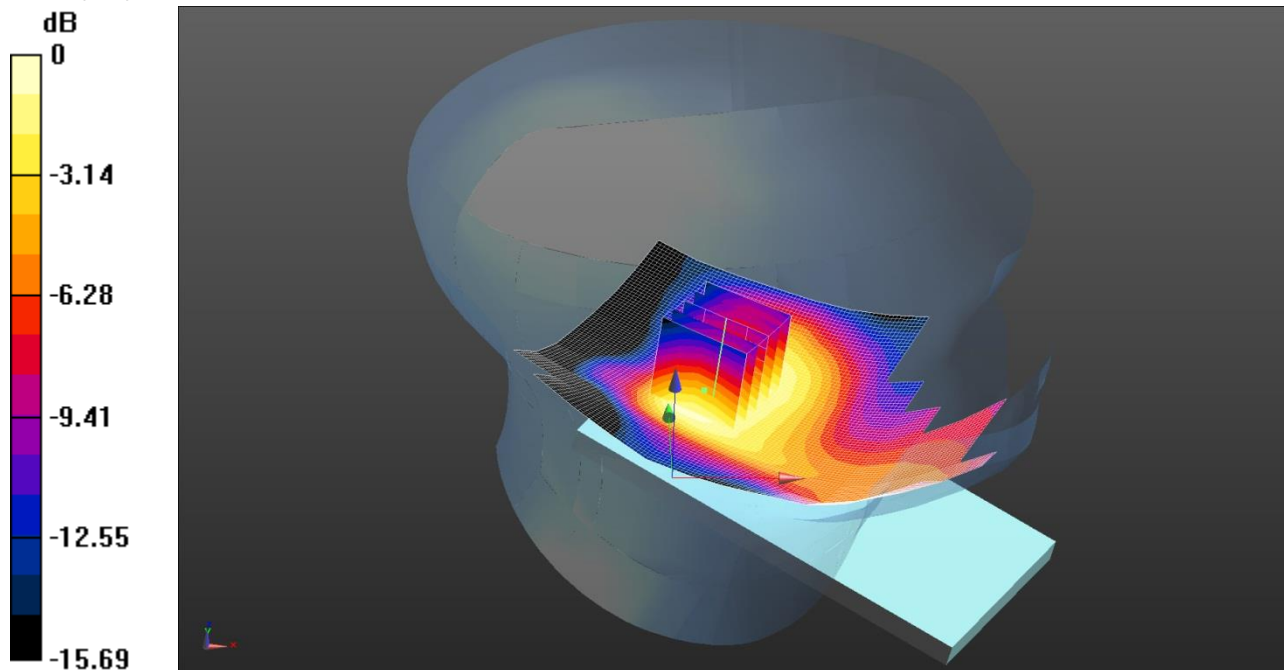

0 dB = 0.175 W/kg = -7.57 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1800 MHz HSL Medium parameters used (interpolated): f = 1732.5 MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.373$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Left - Middle/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.187 W/kg

Configuration/Tilt Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.280 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.233 W/kg


SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

109: Touch Right LTE Band 4 20MHz 1RB Middle CH20300

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

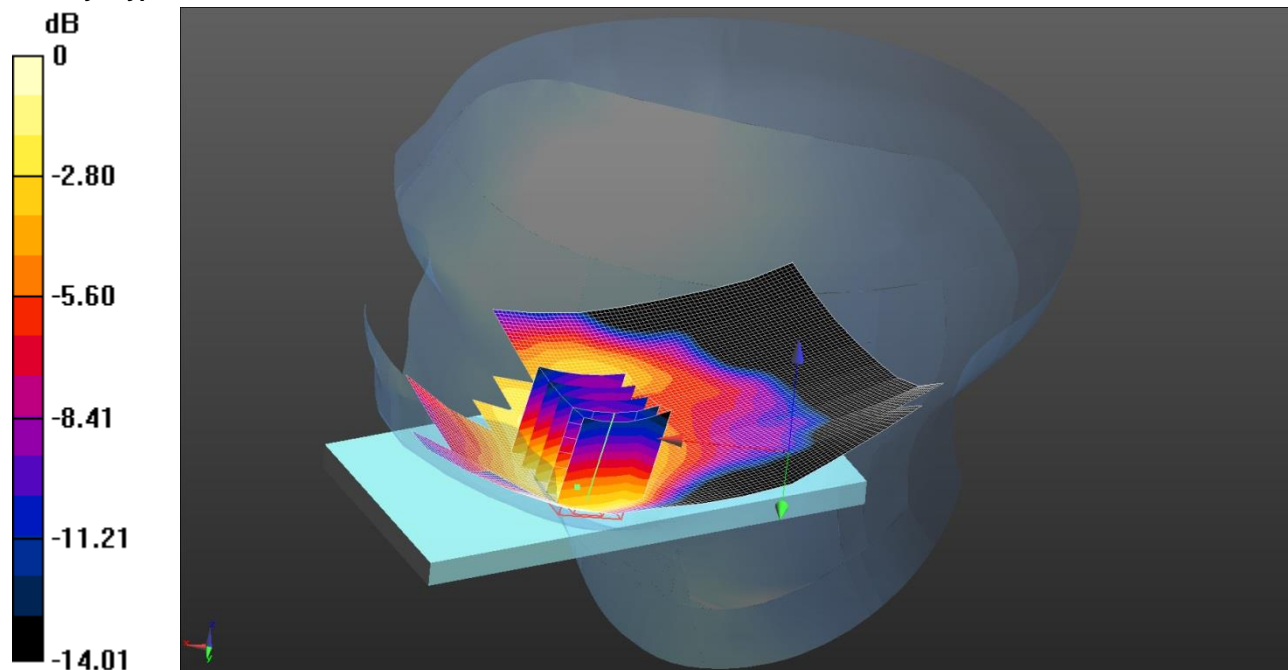

0 dB = 0.353 W/kg = -4.52 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium: 1800 MHz HSL Medium parameters used (interpolated): f = 1745 MHz; $\sigma = 1.332$ S/m; $\epsilon_r = 40.309$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right - High/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.368 W/kg

Configuration/Touch Right - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.717 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.479 W/kg


SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.353 W/kg

110: Touch Right LTE Band 4 20MHz 50%RB Middle CH20175

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

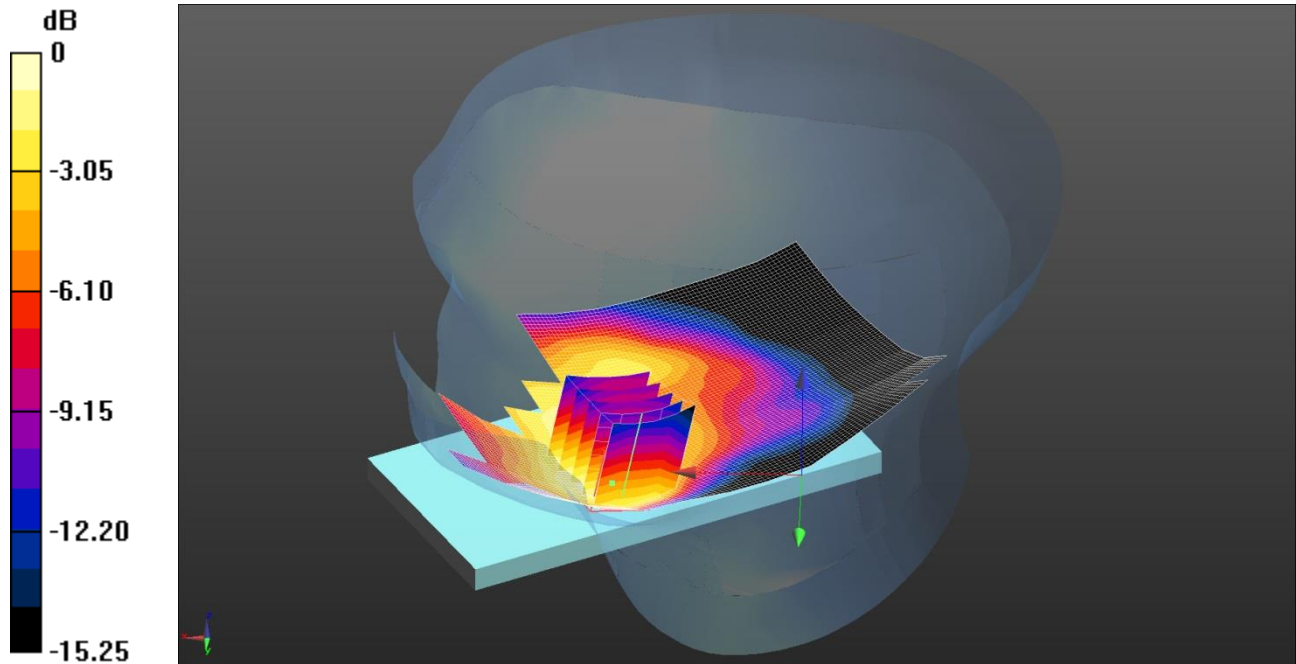

0 dB = 0.348 W/kg = -4.58 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.373$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.371 W/kg

Configuration/Touch Right - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.144 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.477 W/kg


SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.348 W/kg

111: Tilt Right LTE Band 4 20MHz 1RB Middle CH20300

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

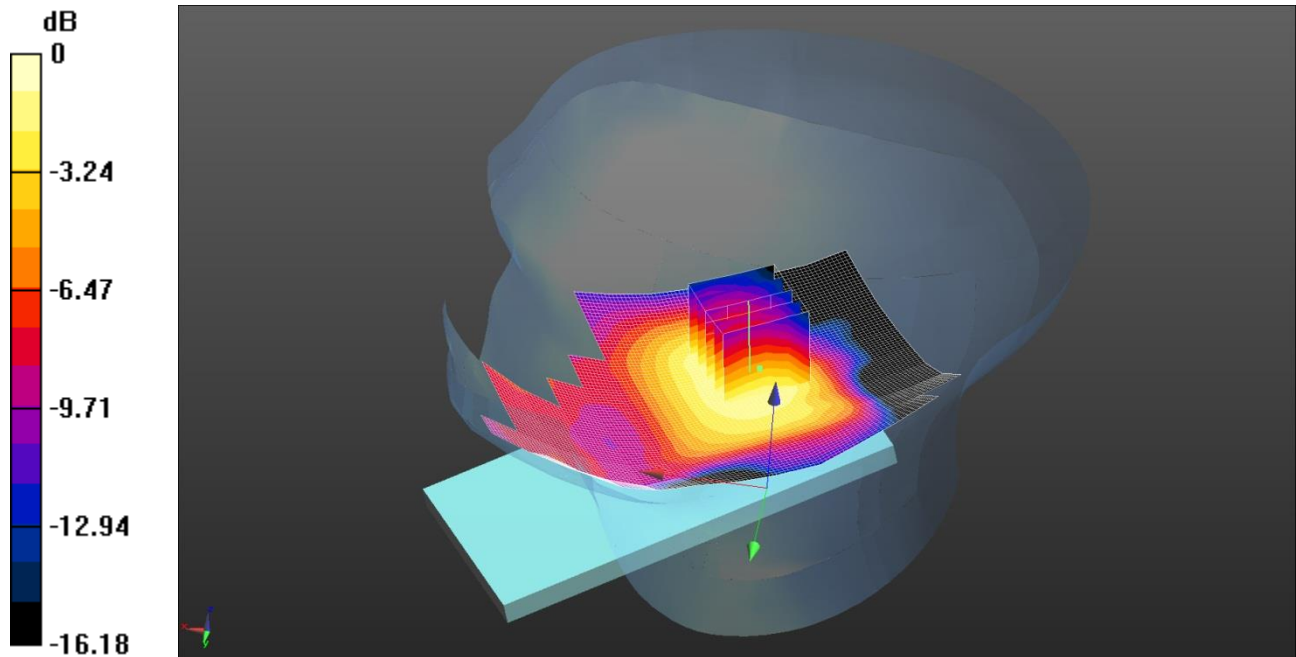

0 dB = 0.222 W/kg = -6.54 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.332$ S/m; $\epsilon_r = 40.309$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Right - High/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.224 W/kg

Configuration/Tilt Right - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.065 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.280 W/kg


SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.222 W/kg

112: Tilt Right LTE Band 4 20MHz 50%RB Middle CH20175

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

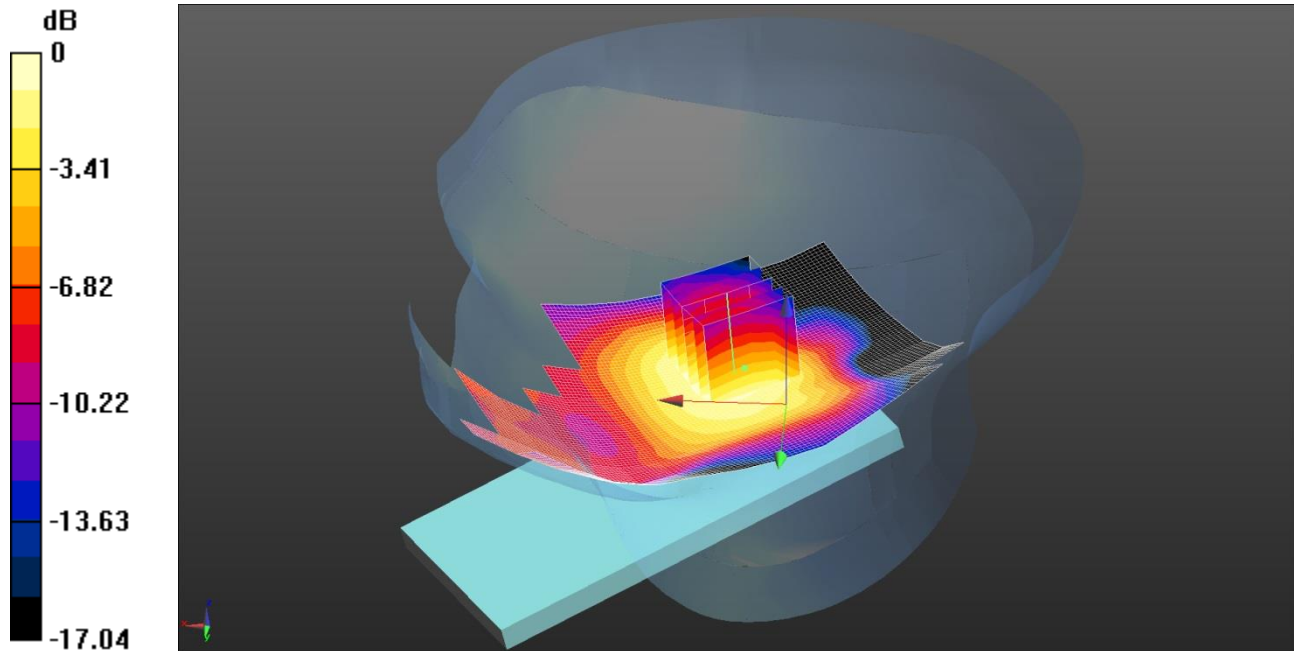

0 dB = 0.217 W/kg = -6.64 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.373$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Tilt Right - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.223 W/kg

Configuration/Tilt Right - Mid/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.040 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.279 W/kg


SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

113: Touch Left LTE Band 4 20MHz 1RB Middle CH20050

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

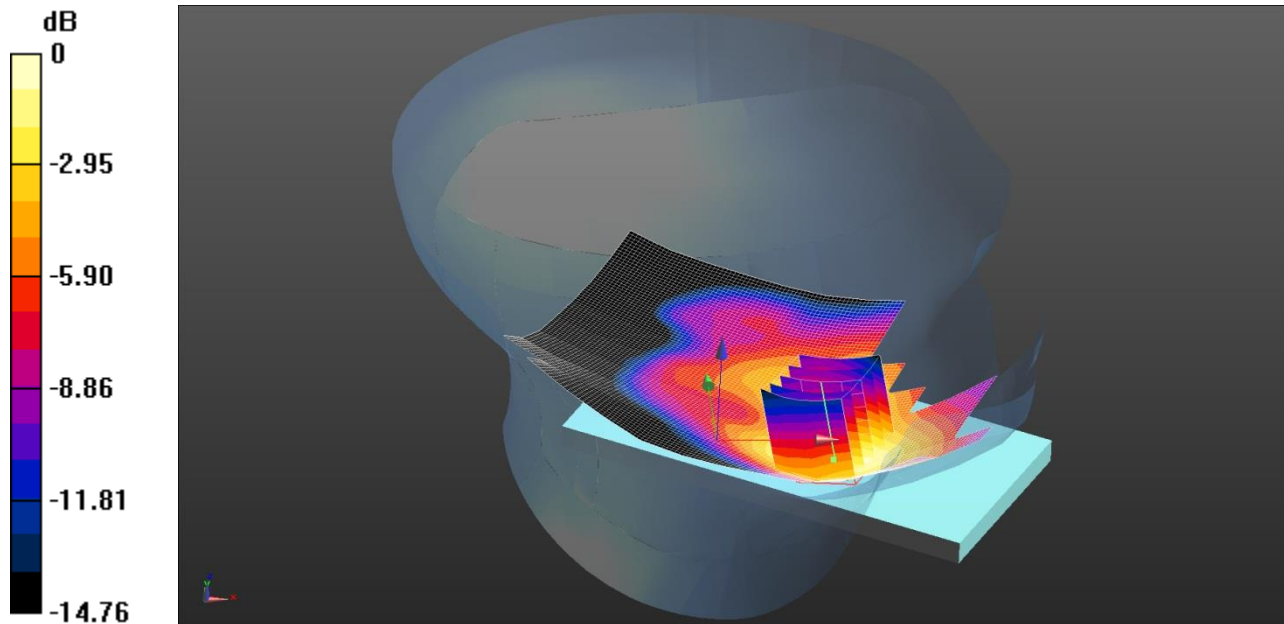

0 dB = 0.439 W/kg = -3.58 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1720 MHz; Duty Cycle: 1:1
 Medium: 1800 MHz HSL Medium parameters used (interpolated): f = 1720 MHz; $\sigma = 1.309$ S/m; $\epsilon_r = 40.436$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left - Low/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.454 W/kg

Configuration/Touch Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.534 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.570 W/kg


SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

114: Touch Left LTE Band 4 20MHz 1RB Middle CH20175

Date: 28/05/2014

DUT: Sony; Type: FCC ID: PY7PM-0801; Serial: CB5A1Z1S1S

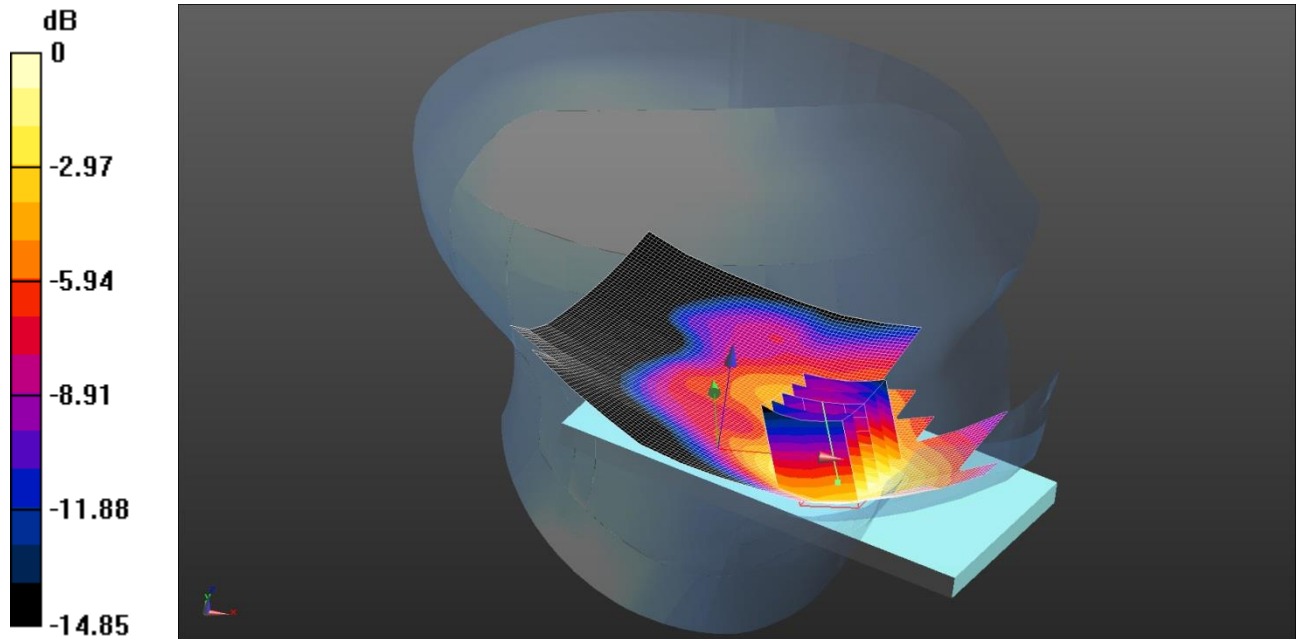

0 dB = 0.465 W/kg = -3.33 dBW/kg

Communication System: UID 0 - n/a, LTE Bands - 20MHz Channel BW; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.373$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(5.25, 5.25, 5.25); Calibrated: 16/04/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn417; Calibrated: 10/04/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Left - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.493 W/kg

Configuration/Touch Left - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.512 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 0.465 W/kg