


113: Touch Left LTE Band 5 10MHz 1RB Low CH20525

Date: 3/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

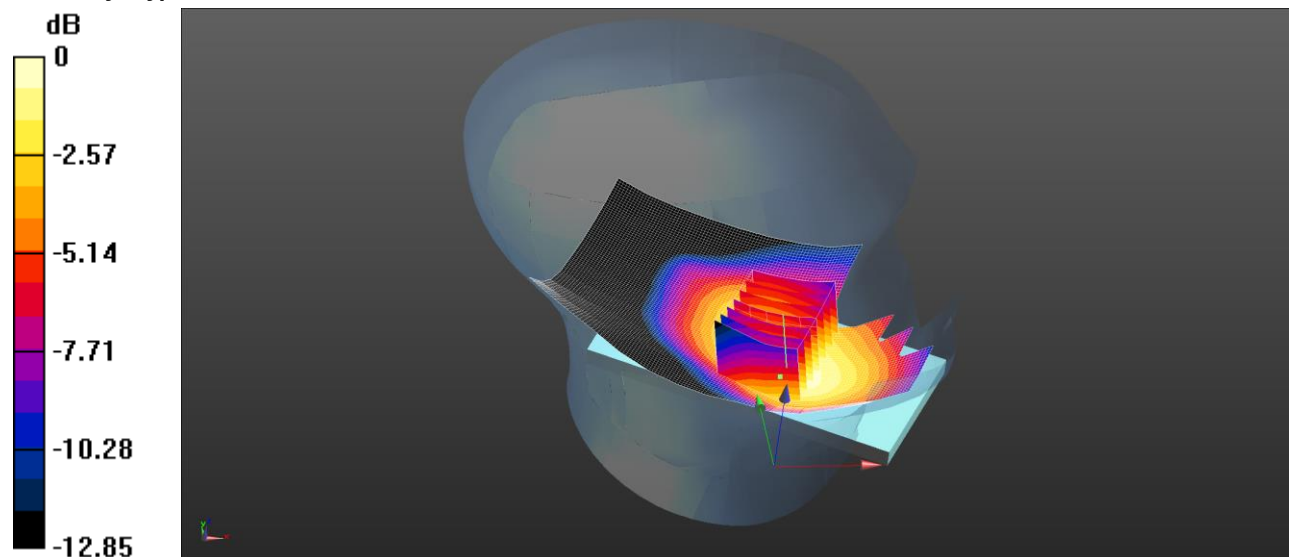

0 dB = 0.290 W/kg = -5.38 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.196$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.21, 6.21, 6.21); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Left - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.295 W/kg

Configuration/Touch Left - Mid/Zoom Scan (5x5x7) (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.465 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.339 W/kg


SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

114: Touch Left LTE Band 5 10MHz 50%RB Low CH20525

Date: 3/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

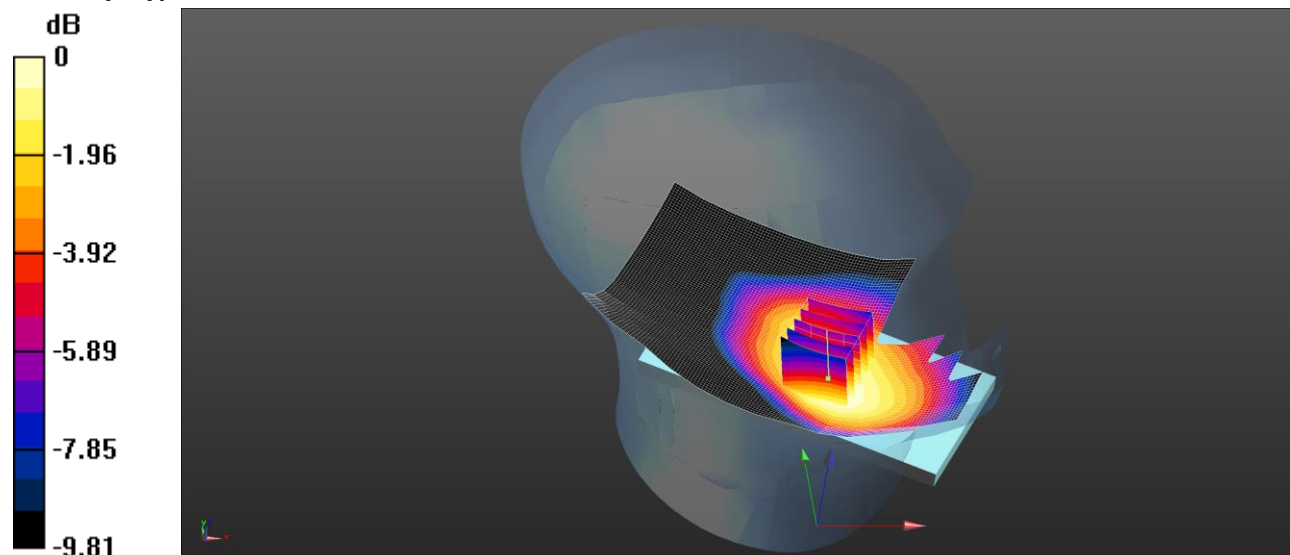

0 dB = 0.233 W/kg = -6.33 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.196$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.21, 6.21, 6.21); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Left - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.238 W/kg

Configuration/Touch Left - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.49 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.276 W/kg


SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

115: Tilt Left LTE Band 5 10MHz 1RB Low CH20525

Date: 3/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

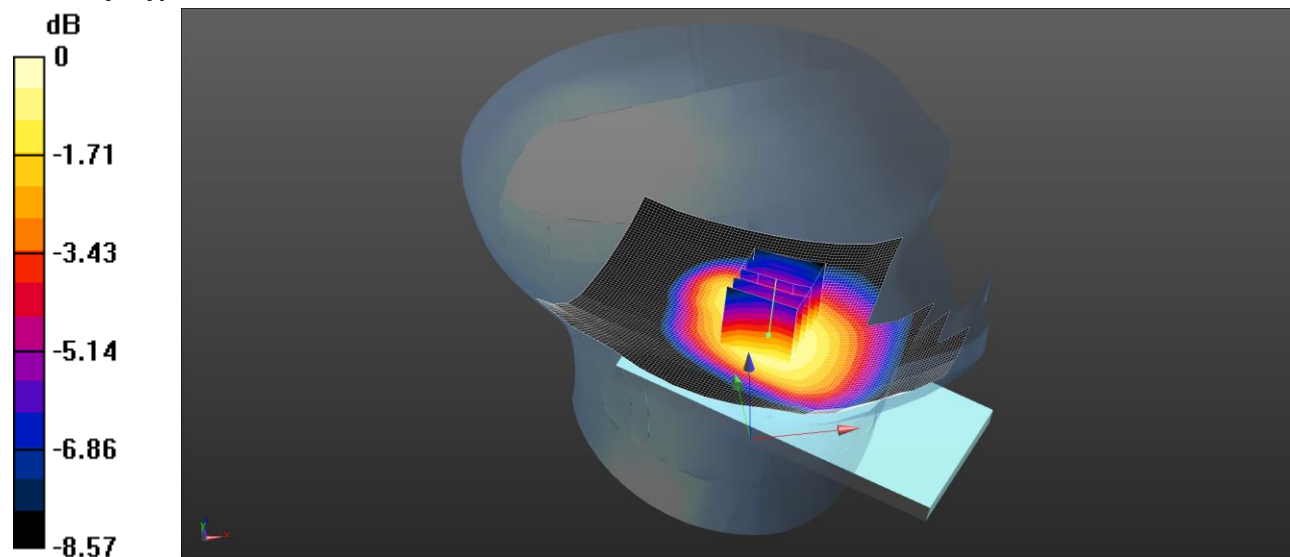

0 dB = 0.209 W/kg = -6.80 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.196$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.21, 6.21, 6.21); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Tilt Left - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.204 W/kg

Configuration/Tilt Left - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.89 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.239 W/kg


SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.209 W/kg

116: Tilt Left LTE Band 5 10MHz 50%RB Low CH20525

Date: 3/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

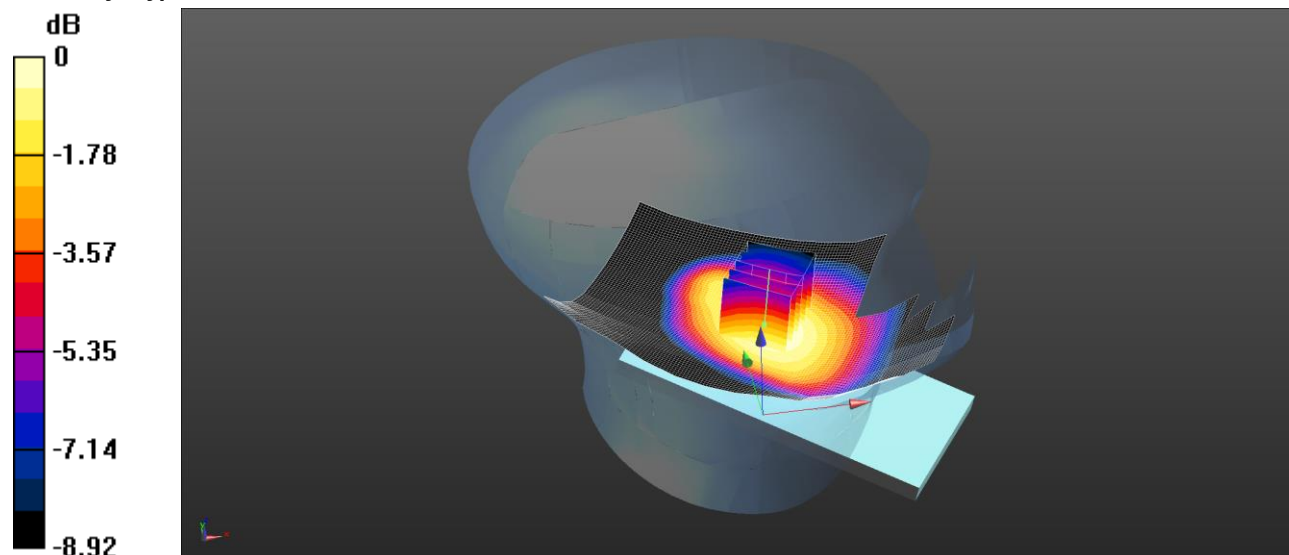

0 dB = 0.171 W/kg = -7.67 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.196$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.21, 6.21, 6.21); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Tilt Left - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.178 W/kg

Configuration/Tilt Left - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.87 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.195 W/kg


SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

117: Touch Right LTE Band 5 10MHz 1RB Low CH20525

Date: 3/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

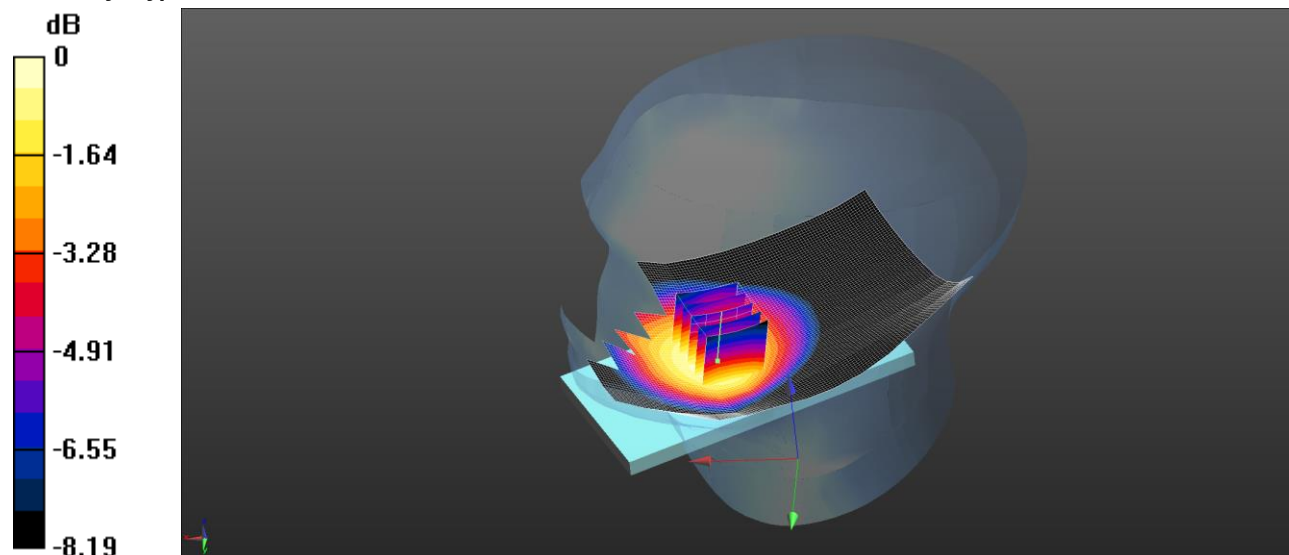

0 dB = 0.342 W/kg = -4.66 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.196$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.21, 6.21, 6.21); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.347 W/kg

Configuration/Touch Right - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.72 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.407 W/kg


SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 0.342 W/kg

118: Touch Right LTE Band 5 10MHz 50%RB Low CH20525

Date: 3/7/2014 AM

DUT: Sony, Type: FCC ID: PY7PM-0804

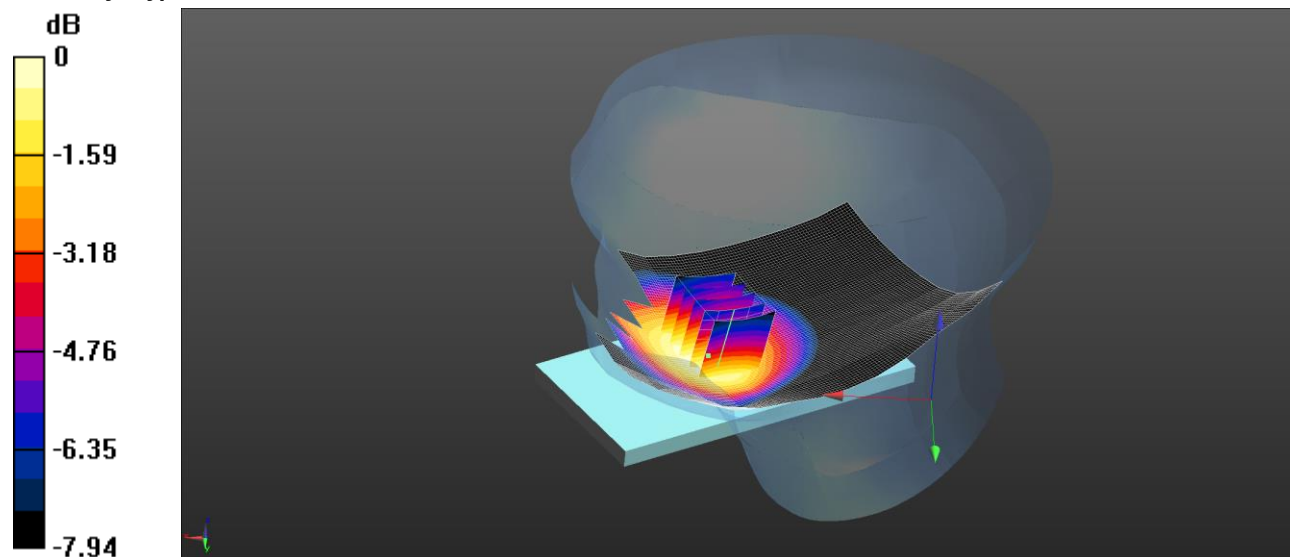

0 dB = 0.257 W/kg = -5.90 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.196$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.21, 6.21, 6.21); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.265 W/kg

Configuration/Touch Right - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.05 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.303 W/kg


SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.257 W/kg

119: Tilt Right LTE Band 5 10MHz 1RB Low CH20525

Date: 3/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

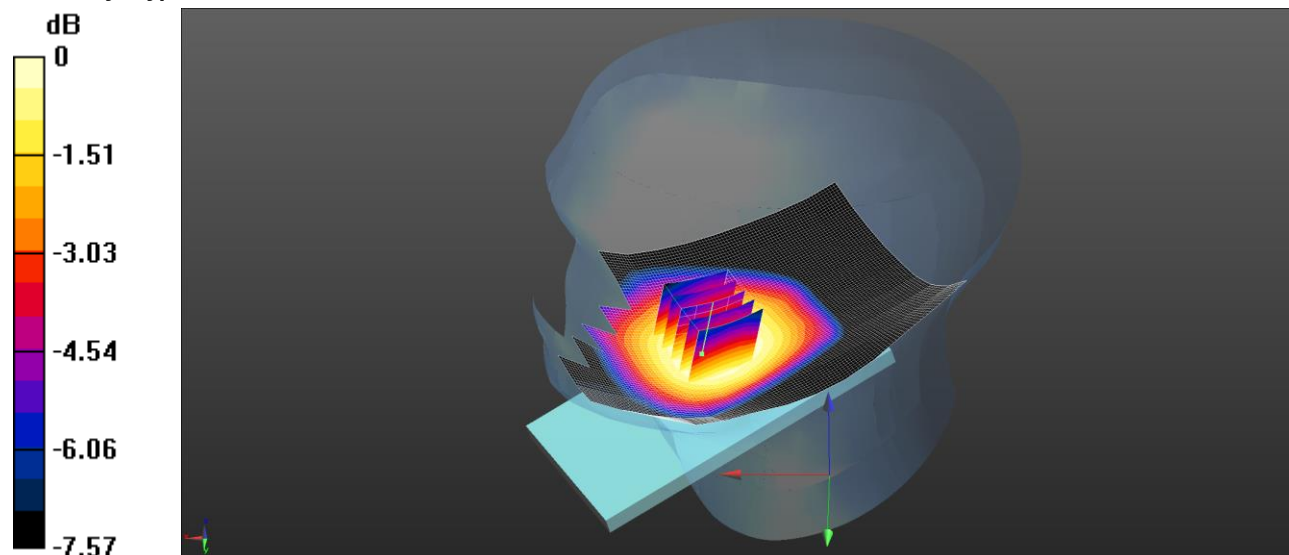

0 dB = 0.248 W/kg = -6.06 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.196$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.21, 6.21, 6.21); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Tilt Right - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.263 W/kg

Configuration/Tilt Right - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.75 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.276 W/kg


SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

120: Tilt Right LTE Band 5 10MHz 50%RB Low CH20525

Date: 3/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

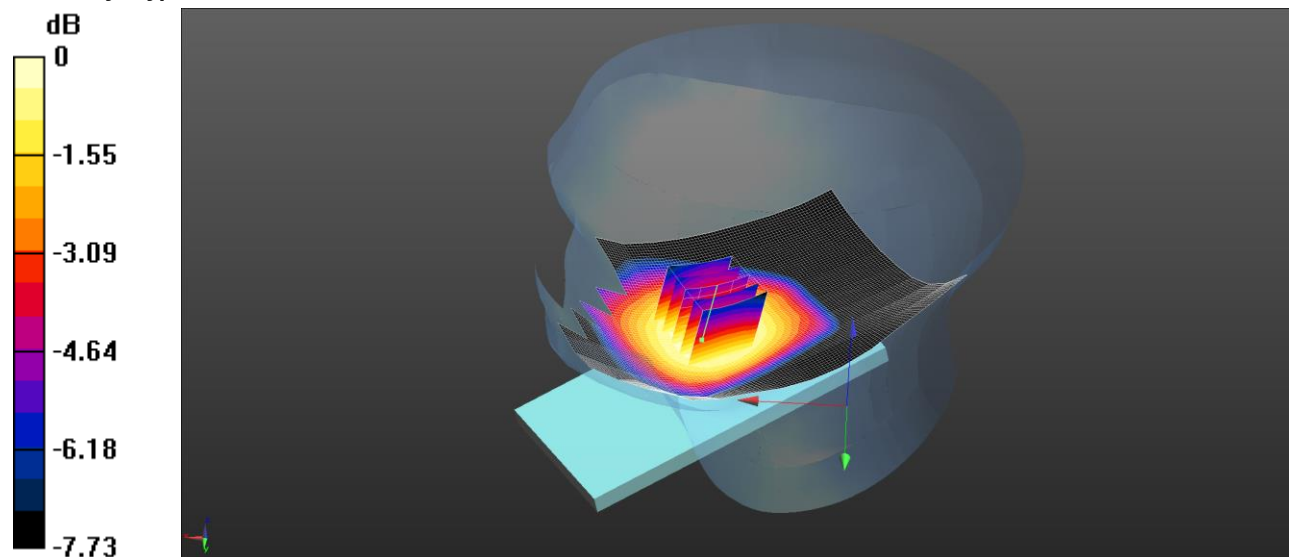

0 dB = 0.192 W/kg = -7.17 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.196$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.21, 6.21, 6.21); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Tilt Right - Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.192 W/kg

Configuration/Tilt Right - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.13 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.213 W/kg


SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

121: Front of EUT Facing Phantom LTE Band 5 1 RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

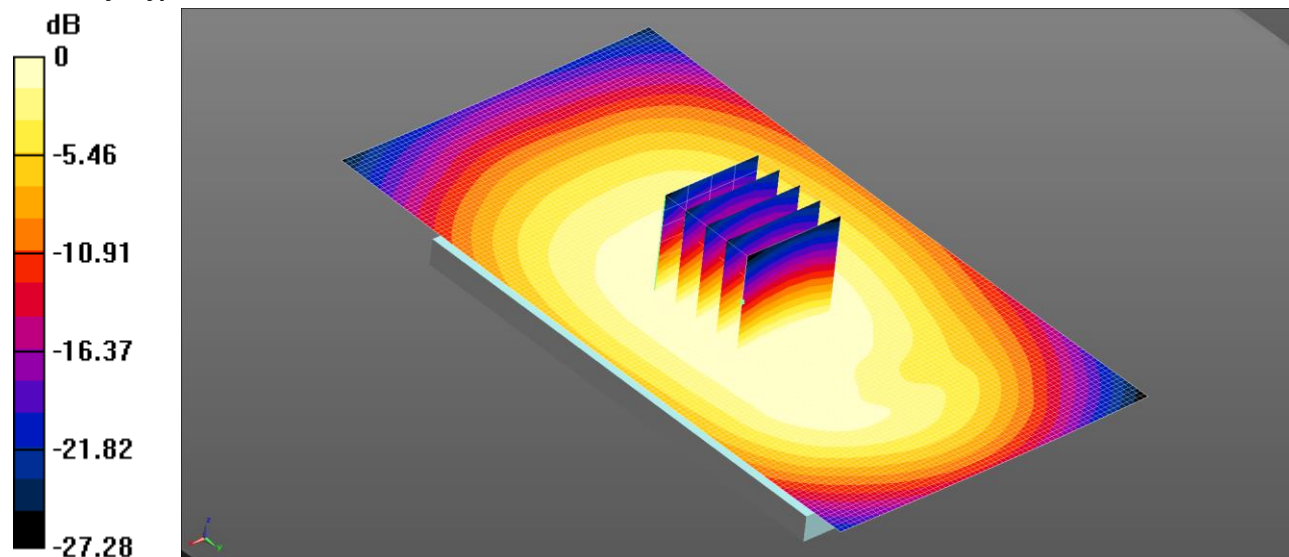

0 dB = 0.411 W/kg = -3.86 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Front of EUT Facing Phantom - Middle/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.411 W/kg

Configuration/Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.88 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.481 W/kg


SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 0.410 W/kg

122: Front of EUT Facing Phantom LTE Band 5 50% RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

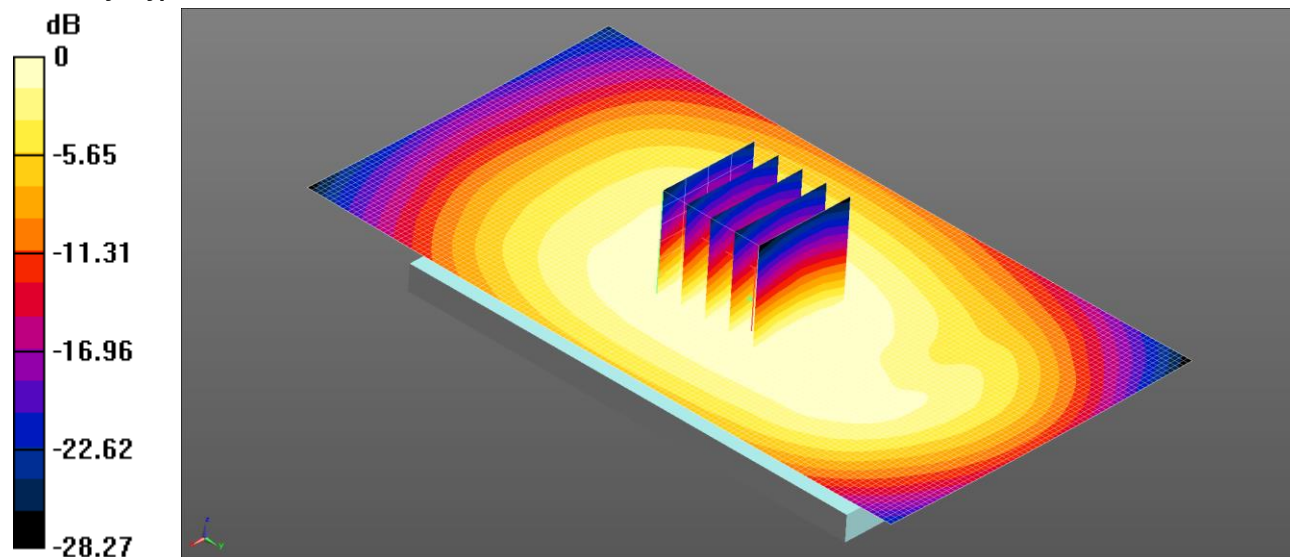

0 dB = 0.253 W/kg = -5.97 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Front of EUT Facing Phantom - Middle/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.253 W/kg

Configuration/Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.46 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.303 W/kg


SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

123: Back of EUT Facing Phantom LTE Band 5 1 RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

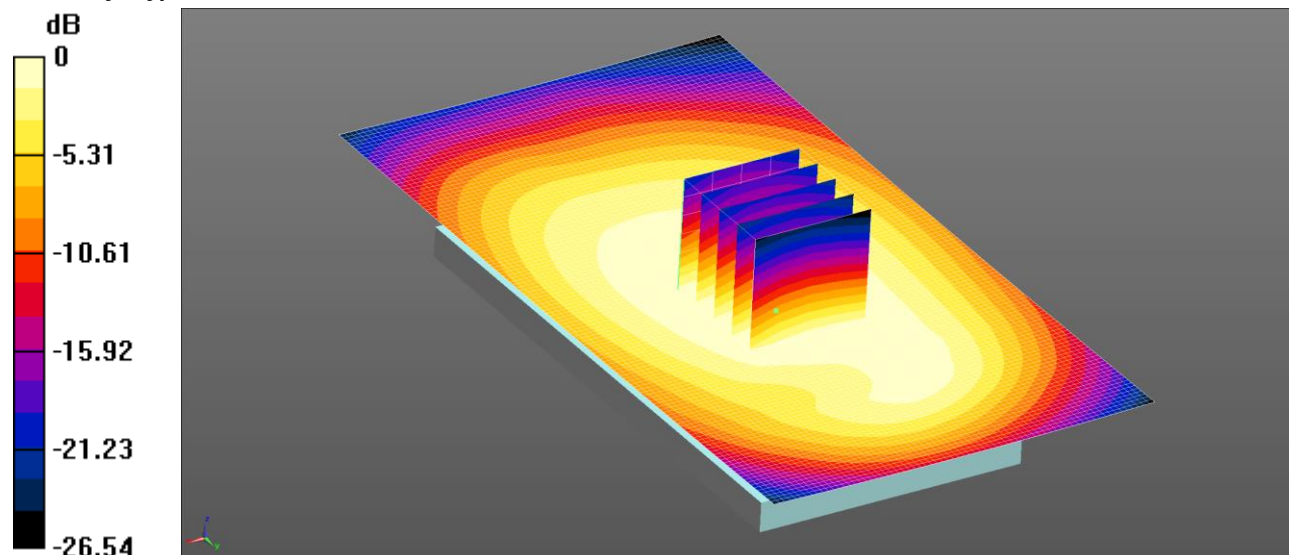

0 dB = 0.430 W/kg = -3.67 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom - Middle/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.430 W/kg

Configuration/Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.08 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.501 W/kg


SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 0.422 W/kg

124: Back of EUT Facing Phantom LTE Band 5 50% RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

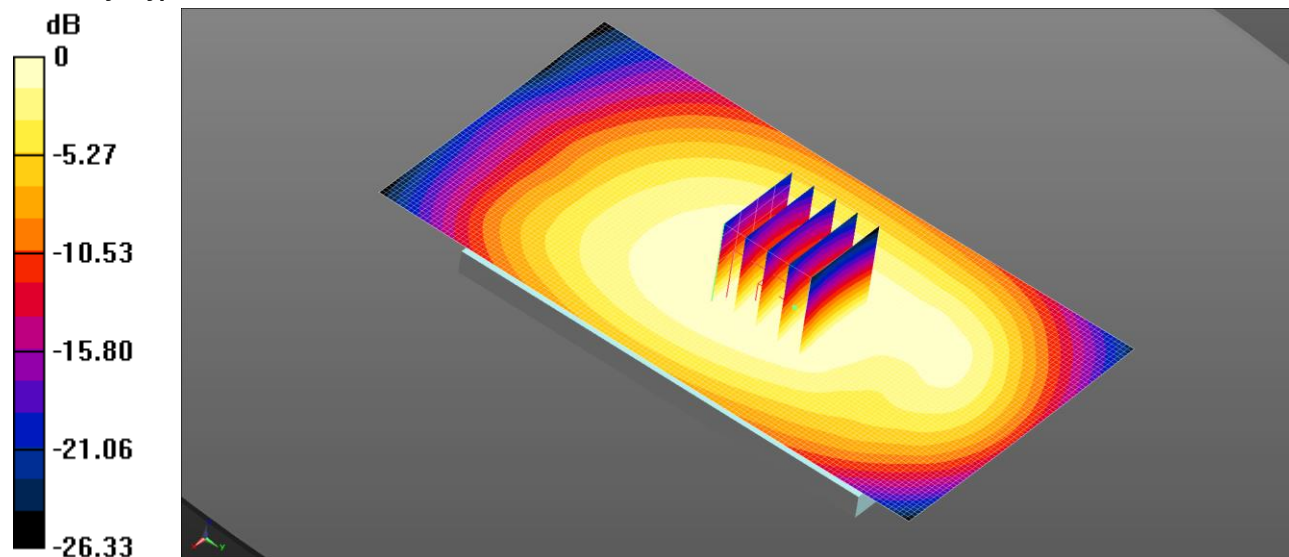

0 dB = 0.351 W/kg = -4.55 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom - Middle/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.351 W/kg

Configuration/Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.09 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.410 W/kg


SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.348 W/kg

125: Left Hand Side of EUT Facing Phantom LTE Band 5 1 RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

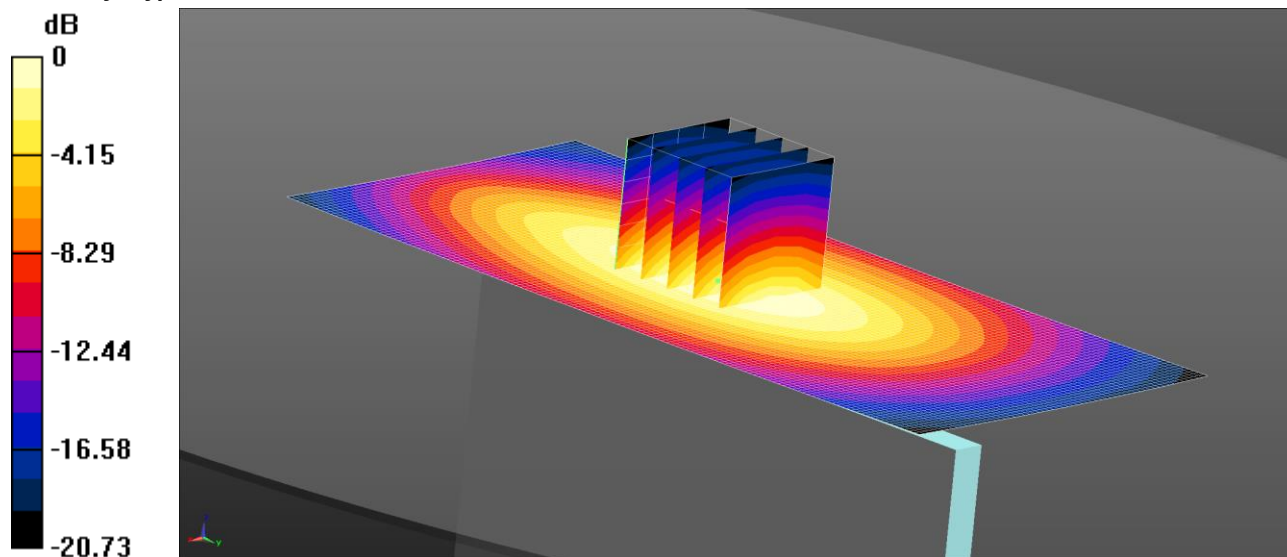

0 dB = 0.319 W/kg = -4.96 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Left Hand Side of EUT Facing Phantom - Middle/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.319 W/kg

Configuration/Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.84 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.420 W/kg


SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.317 W/kg

126: Left Hand Side of EUT Facing Phantom LTE Band 5 50% RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

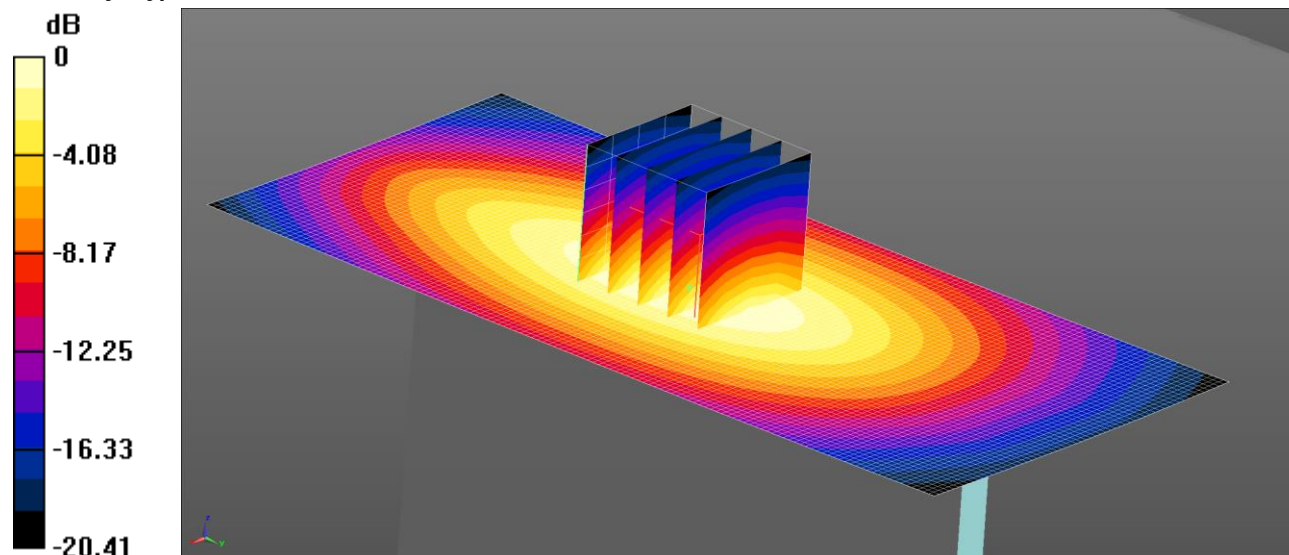

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Left Hand Side of EUT Facing Phantom - Middle/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.257 W/kg

Configuration/Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.10 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.338 W/kg


SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

127: Right Hand Side of EUT Facing Phantom LTE Band 5 1 RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

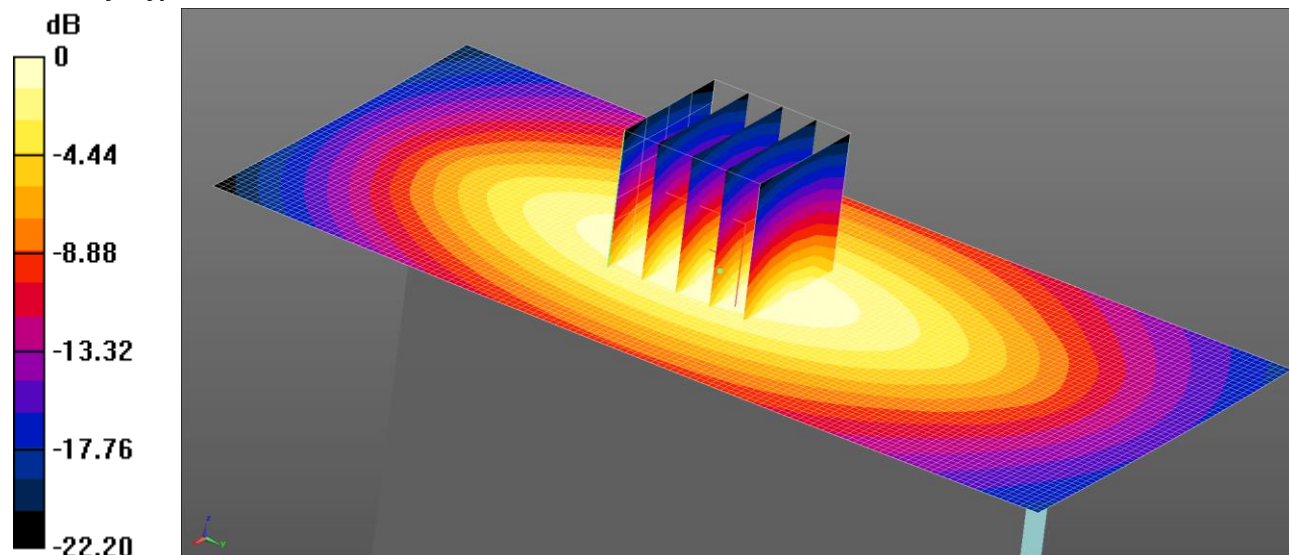

0 dB = 0.366 W/kg = -4.37 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right Hand Side of EUT Facing Phantom - Middle/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.366 W/kg

Configuration/Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.04 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.479 W/kg


SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.367 W/kg

128: Right Hand Side of EUT Facing Phantom LTE Band 5 50% RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

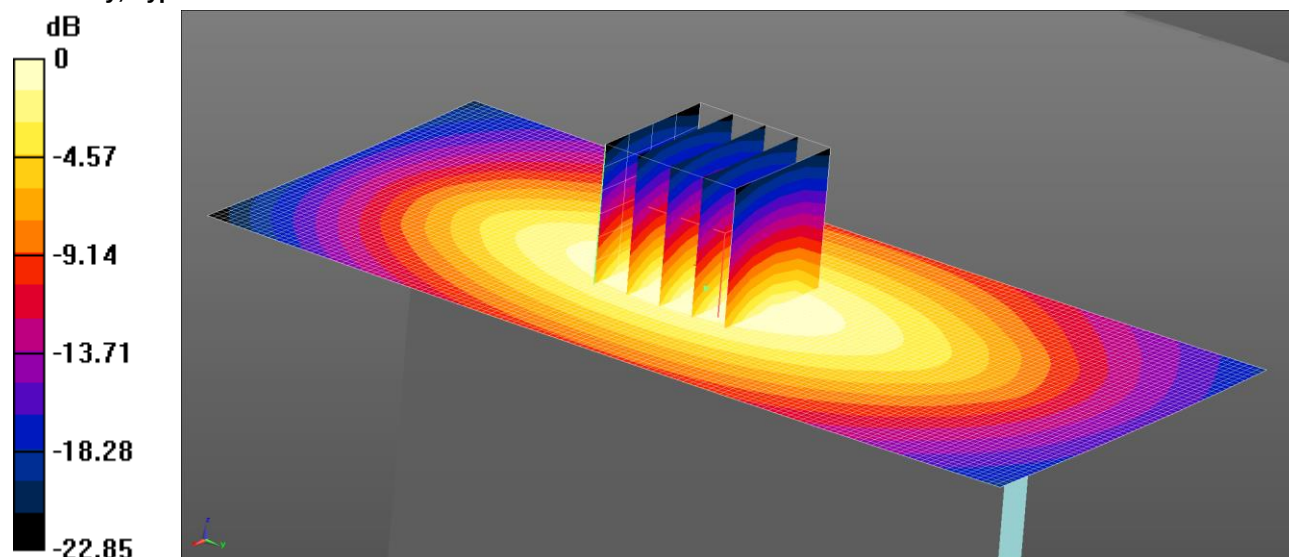

0 dB = 0.292 W/kg = -5.35 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right Hand Side of EUT Facing Phantom - Middle/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.292 W/kg

Configuration/Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.00 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.389 W/kg


SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

129: Bottom of EUT Facing Phantom LTE Band 5 1 RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

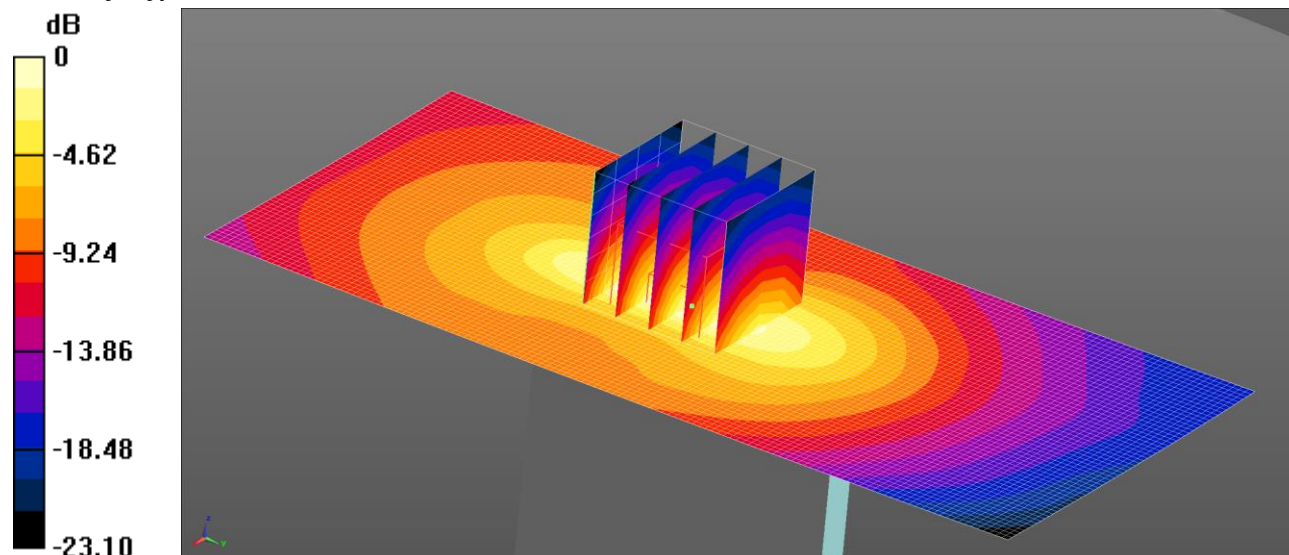

0 dB = 0.116 W/kg = -9.34 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Bottom of EUT Facing Phantom - Middle/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.116 W/kg

Configuration/Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.63 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.178 W/kg


SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

130: Bottom of EUT Facing Phantom LTE Band 5 50% RB Low CH20525

Date: 4/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

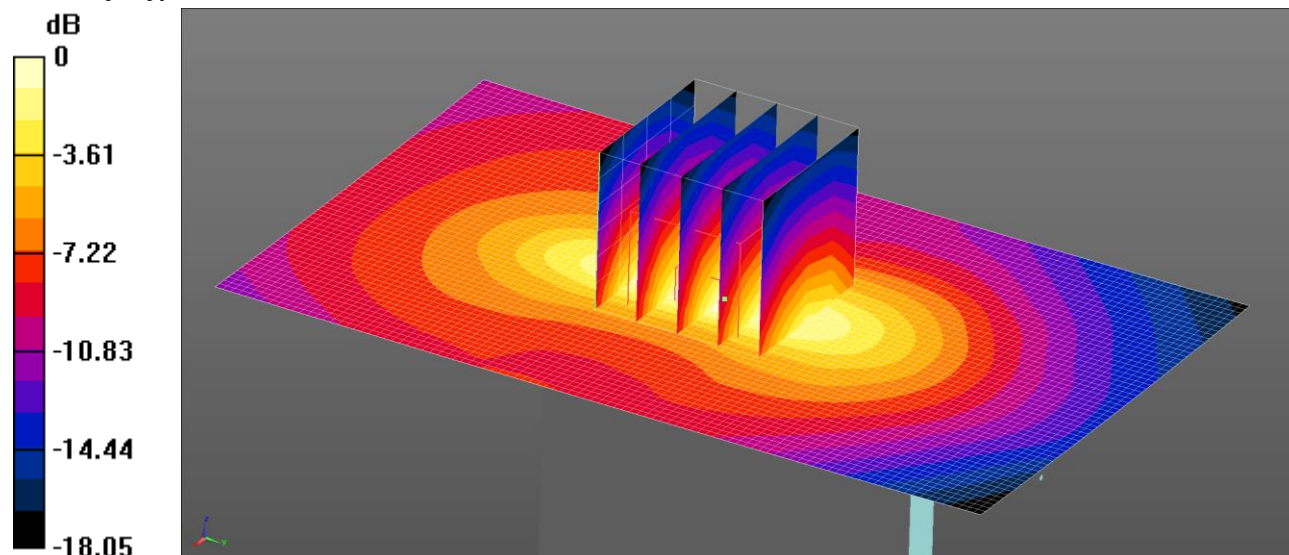

0 dB = 0.0964 W/kg = -10.16 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.033$ S/m; $\epsilon_r = 53.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.07, 6.07, 6.07); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Bottom of EUT Facing Phantom - Middle/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0964 W/kg

Configuration/Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.703 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.144 W/kg


SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0949 W/kg

131: Touch Left LTE Band 7 1RB Mid 20MHz CH21100

Date: 02/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

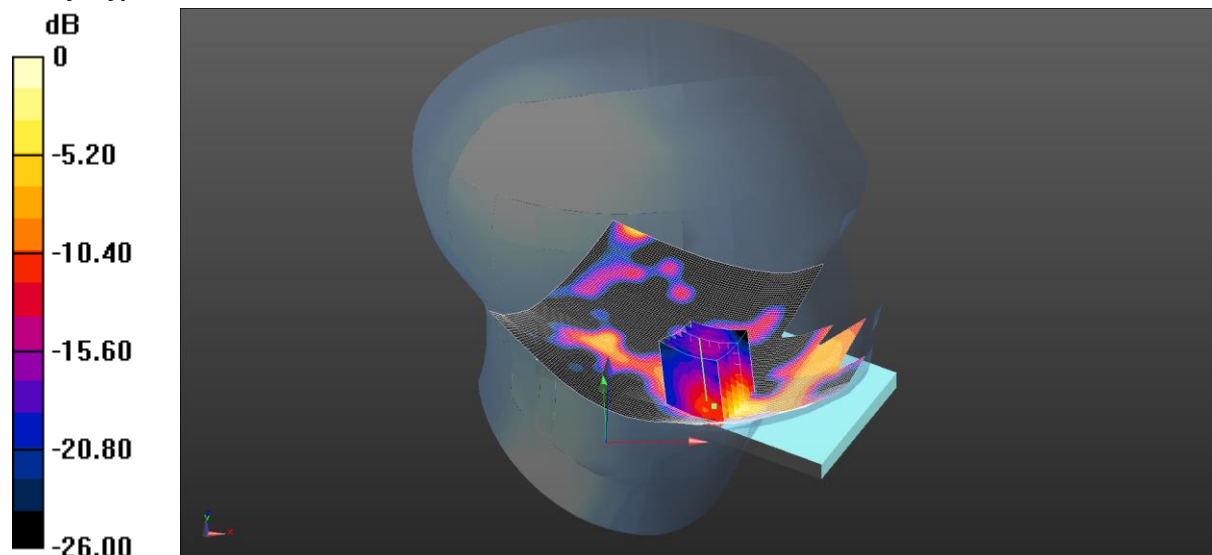

0 dB = 0.501 W/kg = -3.00 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.14, 7.14, 7.14); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Left - Middle 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.592 W/kg

Configuration/Touch Left - Middle 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.802 V/m; Power Drift = 1.15 dB

Peak SAR (extrapolated) = 1.01 W/kg


SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.501 W/kg

132: Touch Left LTE Band 7 50%RB Mid 20MHz CH21100

Date: 02/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

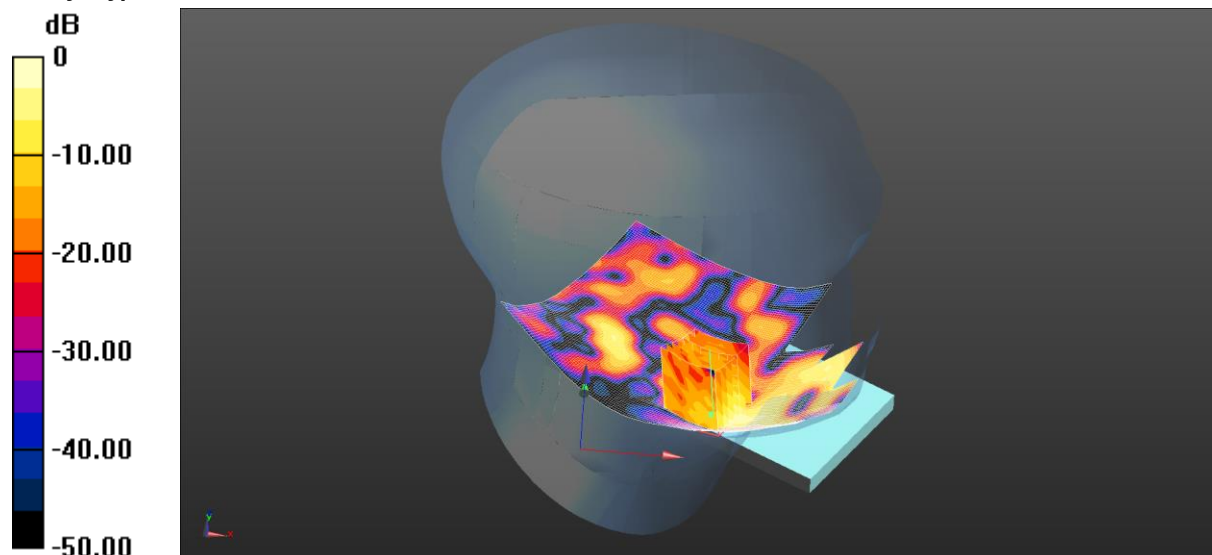

0 dB = 0.400 W/kg = -3.98 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.14, 7.14, 7.14); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Left - Middle/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.533 W/kg

Configuration/Touch Left - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.967 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.747 W/kg


SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.400 W/kg

133: Tilt Left LTE Band 7 1RB Mid 20MHz CH21100

Date: 02/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

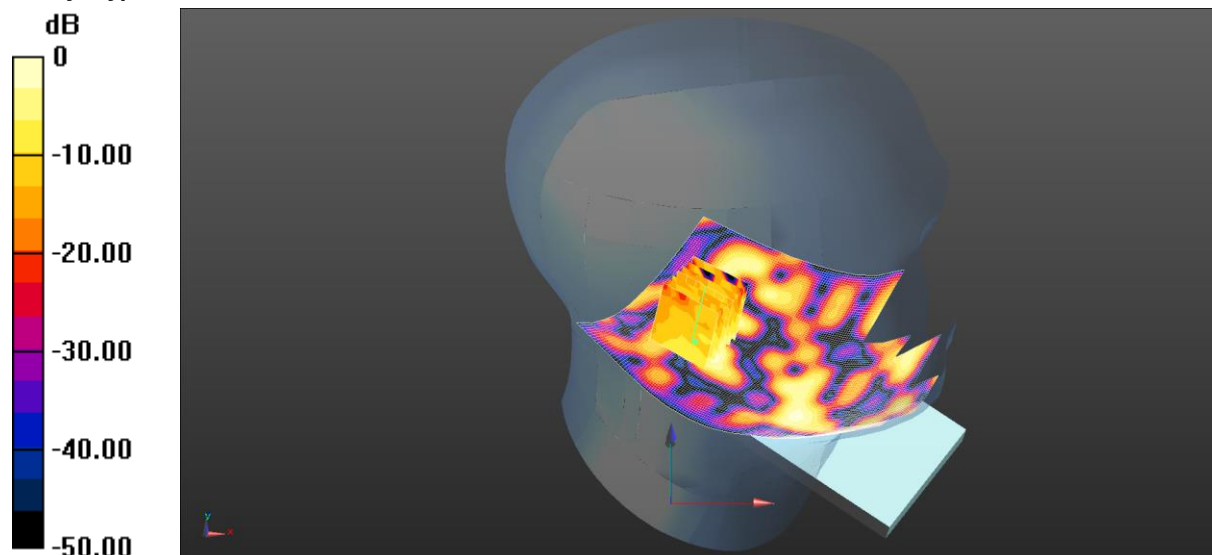

0 dB = 0.0925 W/kg = -10.34 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.14, 7.14, 7.14); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Tilt Left - Middle/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0972 W/kg

Configuration/Tilt Left - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.447 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.031 W/kg


Maximum value of SAR (measured) = 0.0925 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

134: Tilt Left LTE Band 7 50%RB Mid 20MHz CH21100

Date: 02/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

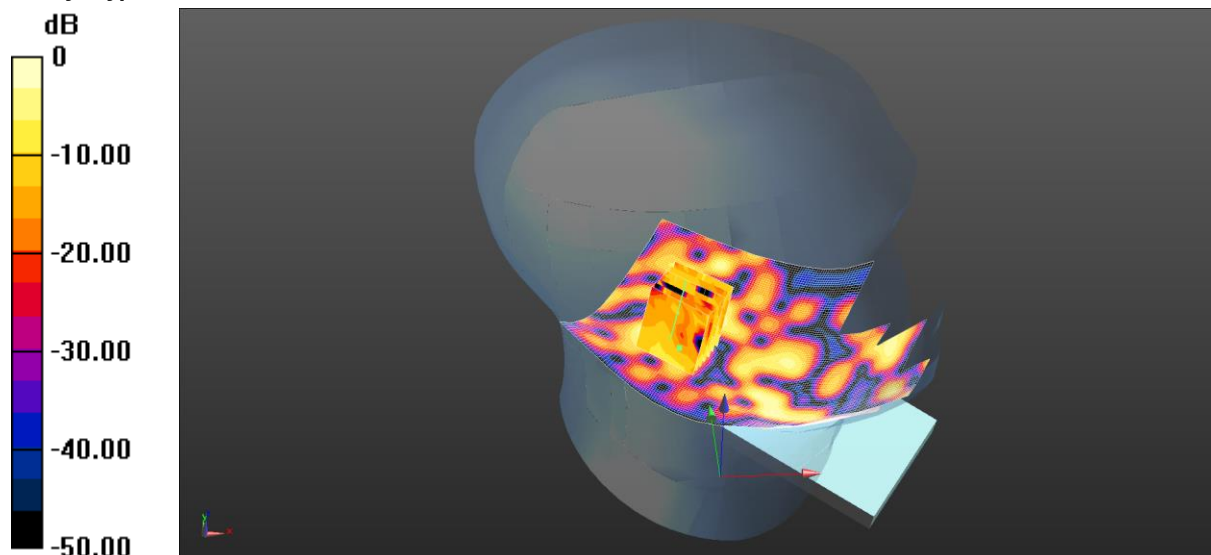

0 dB = 0.0702 W/kg = -11.54 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.14, 7.14, 7.14); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Tilt Left - Middle/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.176 W/kg

Configuration/Tilt Left - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.344 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.020 W/kg


Maximum value of SAR (measured) = 0.0702 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

135: Touch Right LTE Band 7 1RB Mid 20MHz CH21100

Date: 02/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

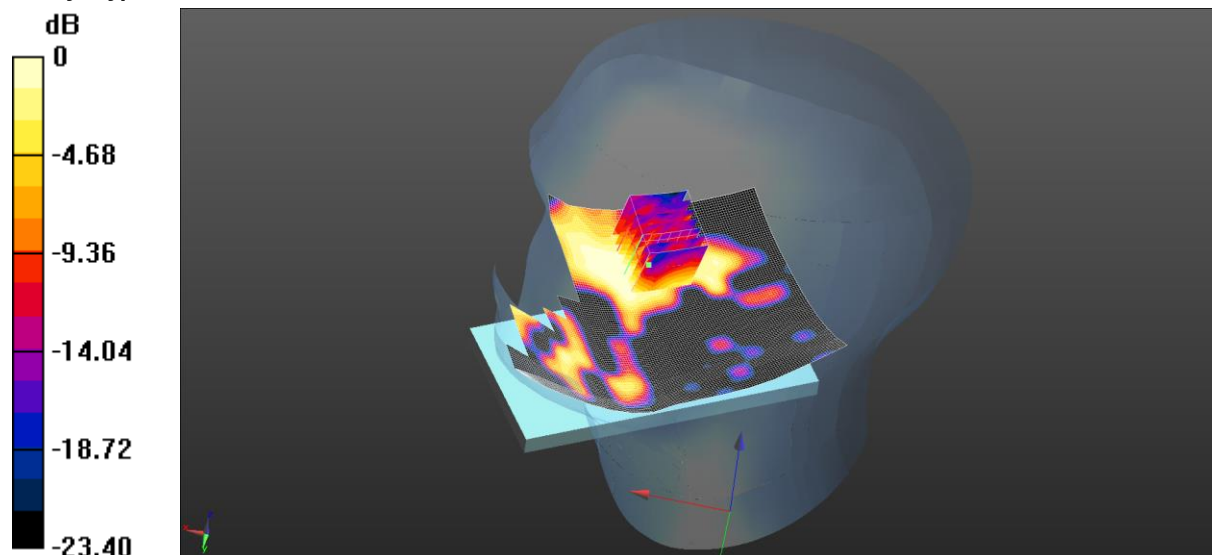

0 dB = 0.151 W/kg = -8.21 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.14, 7.14, 7.14); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Right - Middle/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.184 W/kg

Configuration/Touch Right - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.848 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.208 W/kg


SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.151 W/kg

136: Touch Right LTE Band 7 50%RB Mid 20MHz CH21100

Date: 02/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

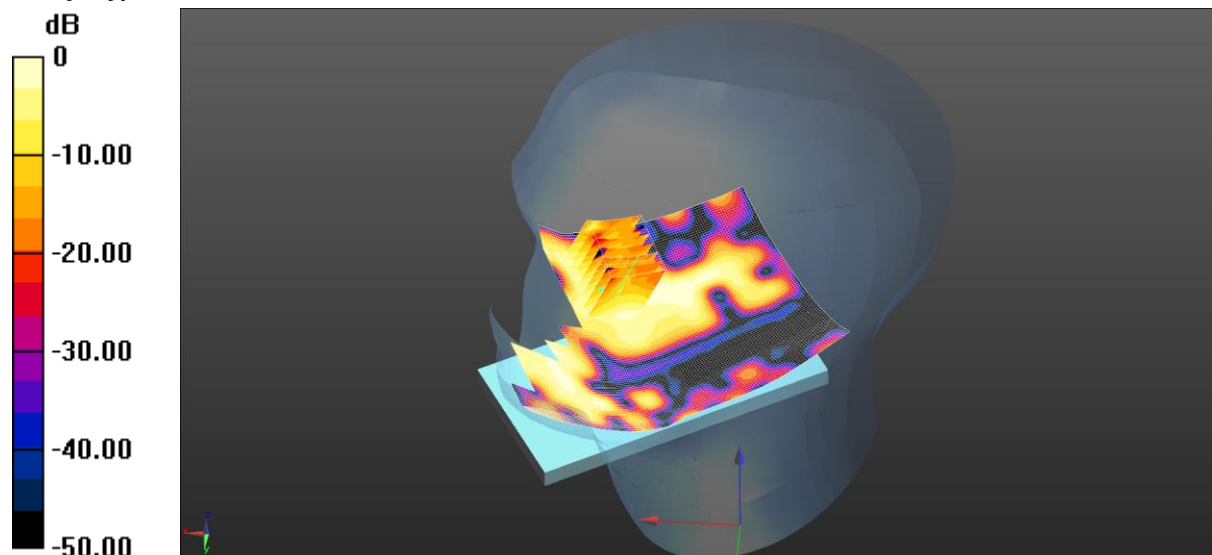

0 dB = 0.130 W/kg = -8.86 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.14, 7.14, 7.14); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Right - Middle 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.148 W/kg

Configuration/Touch Right - Middle 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.217 V/m; Power Drift = 1.26 dB

Peak SAR (extrapolated) = 0.242 W/kg


SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

137: Tilt Right LTE Band 7 1RB Mid 20MHz CH21100

Date: 02/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

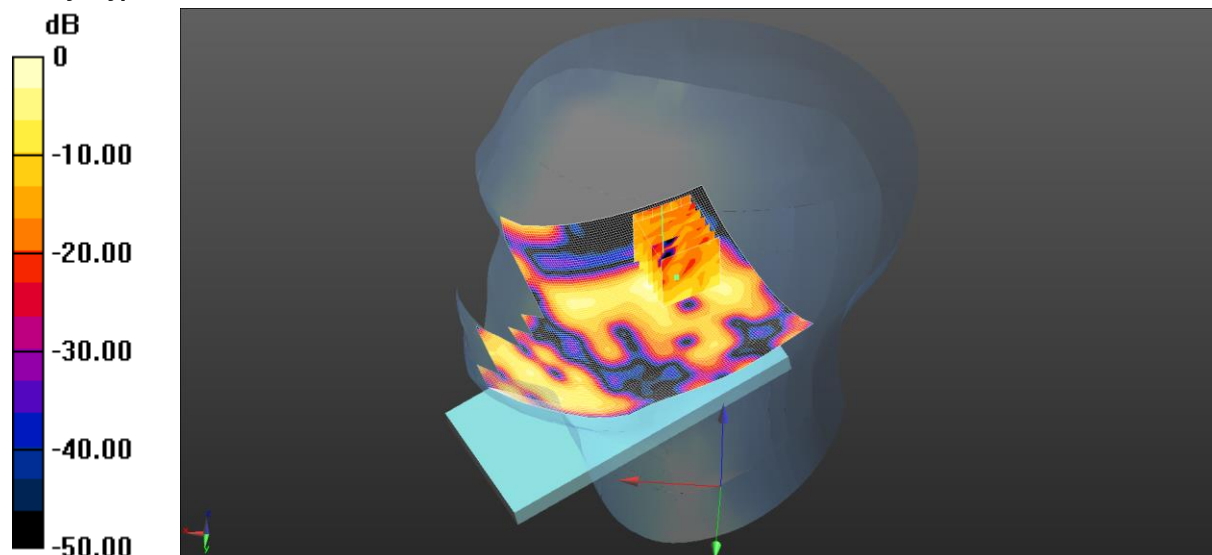

0 dB = 0.142 W/kg = -8.48 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.14, 7.14, 7.14); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Tilt Right - Middle/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.160 W/kg

Configuration/Tilt Right - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.830 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.022 W/kg


Maximum value of SAR (measured) = 0.142 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

138: Tilt Right LTE Band 7 50%RB Mid 20MHz CH21100

Date: 02/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

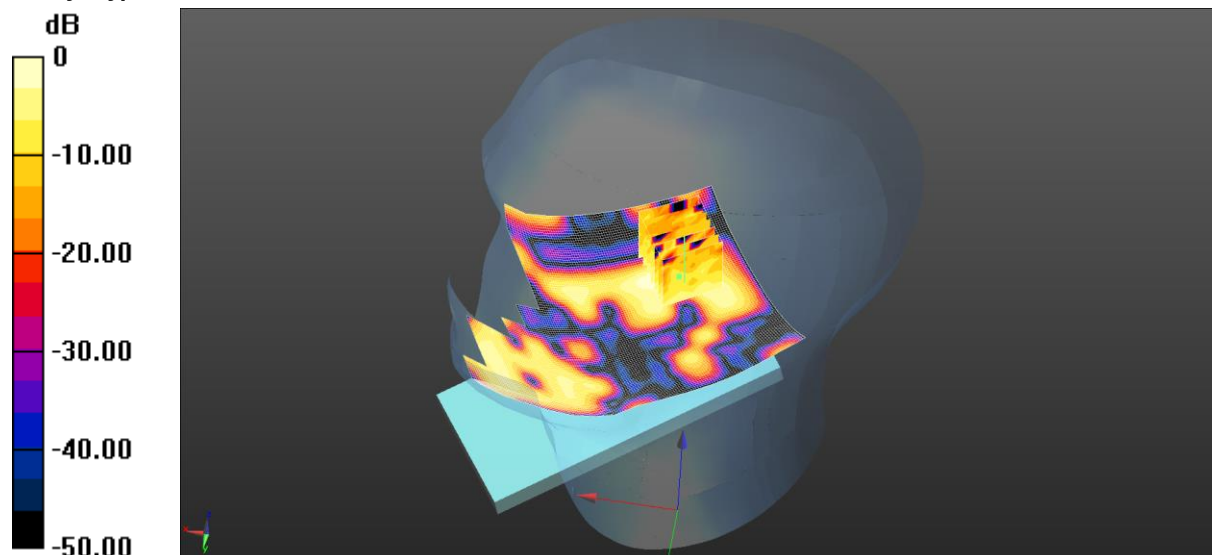

0 dB = 0.0719 W/kg = -11.43 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.14, 7.14, 7.14); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Tilt Right - Middle/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.145 W/kg

Configuration/Tilt Right - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.299 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.021 W/kg


Maximum value of SAR (measured) = 0.0719 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

139: Front of EUT Facing Phantom LTE Band 7 1RB Mid CH21100

Date: 04/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

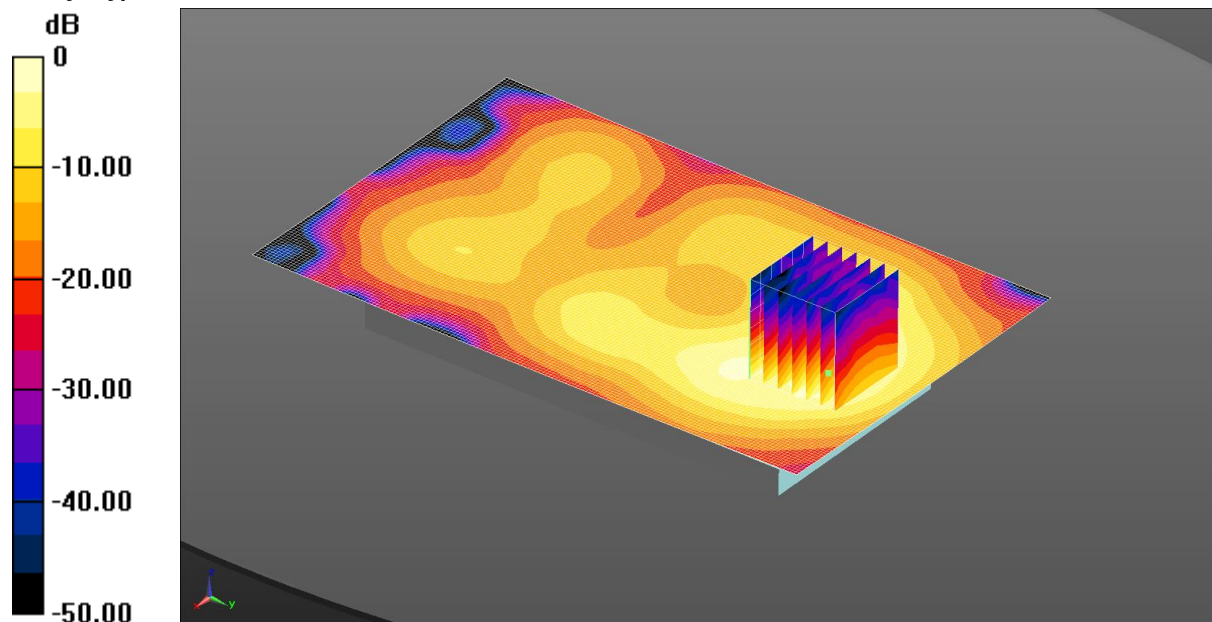

0 dB = 1.21 W/kg = 0.83 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.137$ S/m; $\epsilon_r = 51.238$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT - Middle 2/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Configuration/Front of EUT - Middle 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.951 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.12 W/kg


SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.513 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

140: Front of EUT Facing Phantom LTE Band 7 1RB Mid CH20850

Date: 04/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

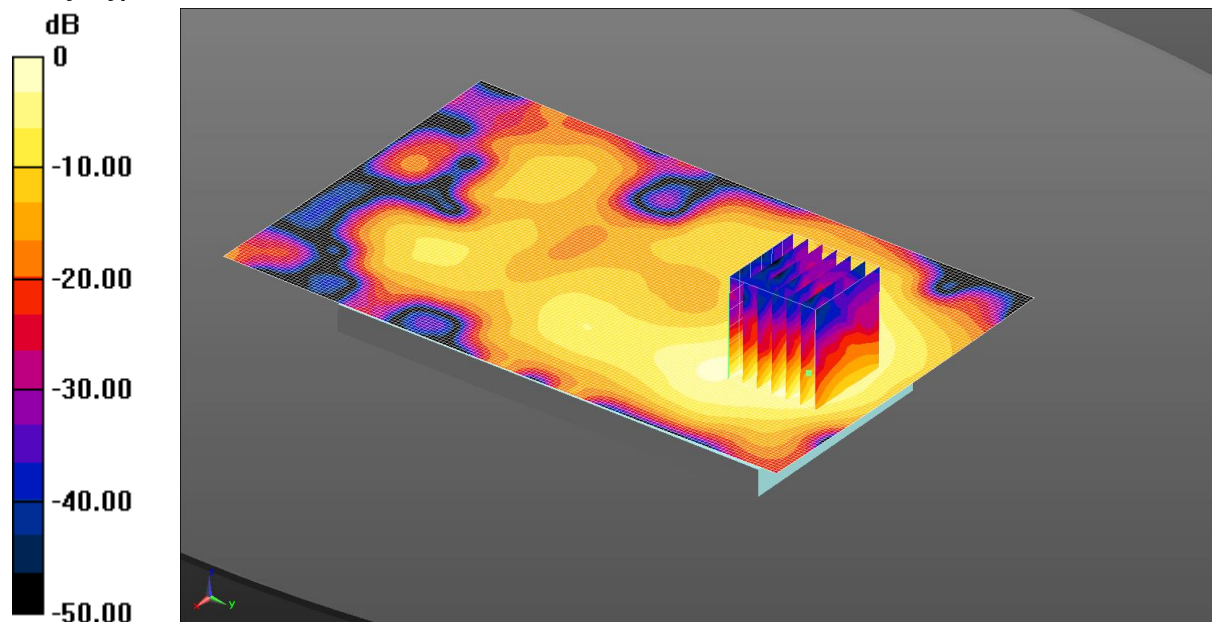

0 dB = 1.18 W/kg = 0.72 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2510 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 2.102$ S/m; $\epsilon_r = 51.326$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT - Low/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Configuration/Front of EUT - Low/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.069 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.14 W/kg


SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.509 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

141: Front of EUT Facing Phantom LTE Band 7 1RB Mid CH21350

Date: 04/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

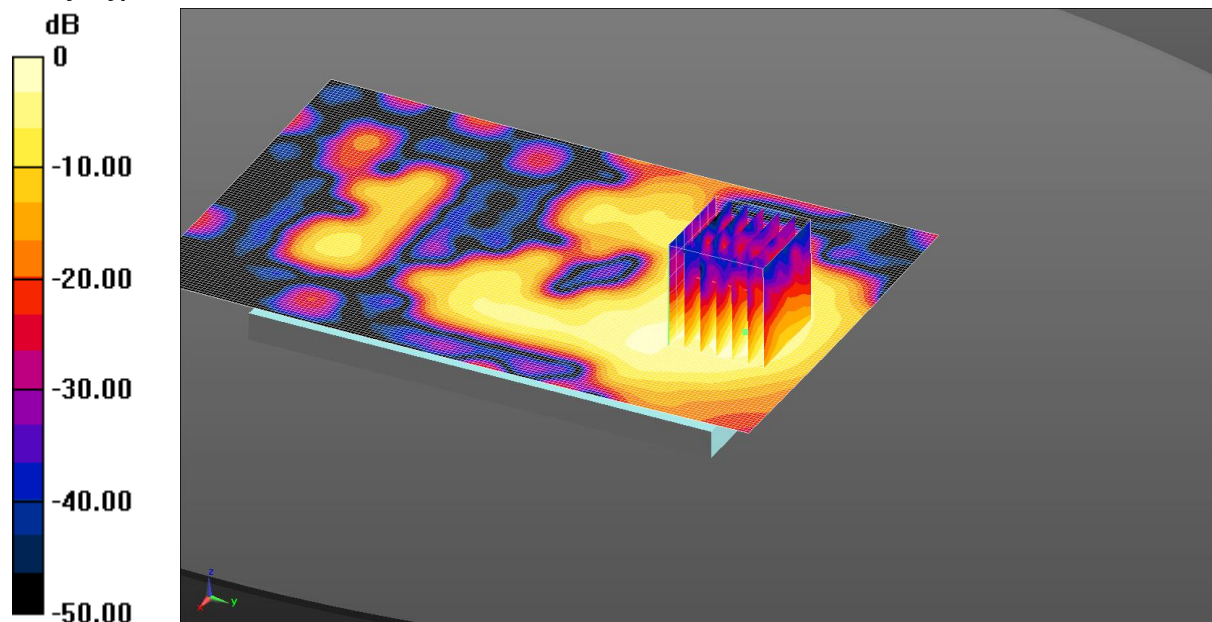

0 dB = 1.14 W/kg = 0.57 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2560 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 2.169$ S/m; $\epsilon_r = 51.171$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT - Low/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

Configuration/Front of EUT - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.841 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.12 W/kg


SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.493 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

142: Front of EUT Facing Phantom LTE Band 7 50%RB Mid CH21100

Date: 04/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

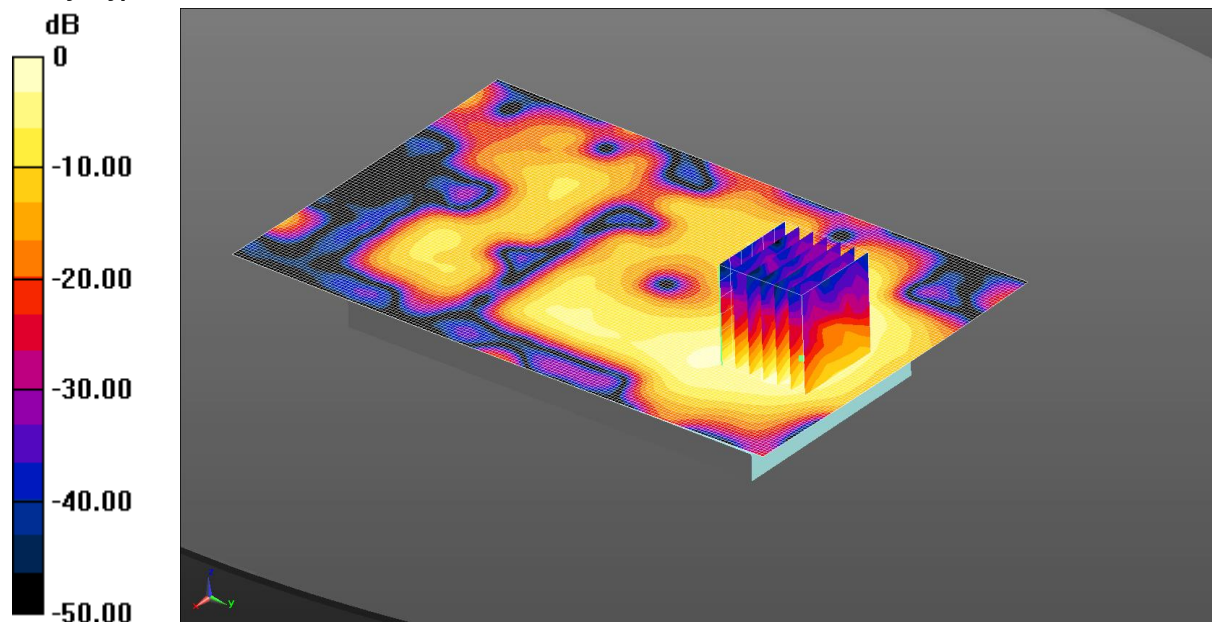

0 dB = 0.939 W/kg = -0.28 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.137$ S/m; $\epsilon_r = 51.238$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT - Middle/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.939 W/kg

Configuration/Front of EUT - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.033 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.89 W/kg


SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.404 W/kg

Maximum value of SAR (measured) = 0.888 W/kg

143: Front of EUT Facing Phantom LTE Band 7 50%RB Mid CH20850

Date: 04/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

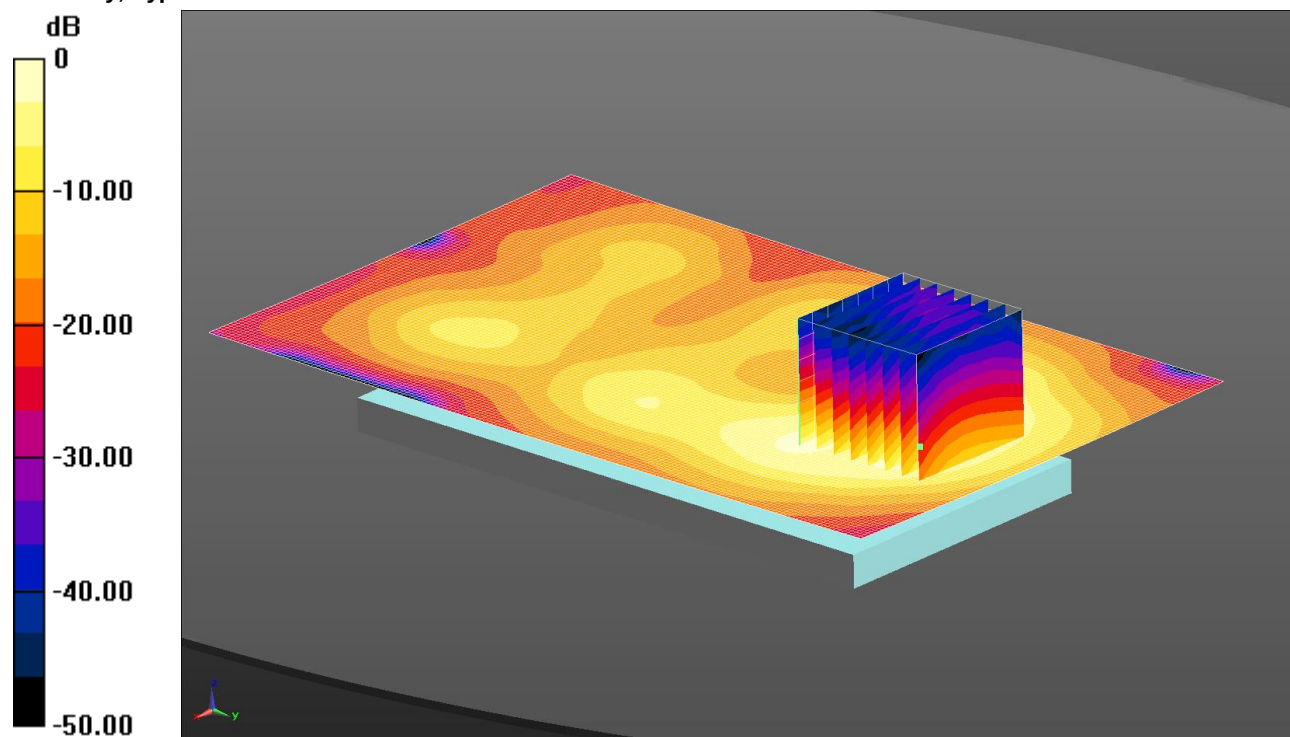

0 dB = 0.874 W/kg = -0.59 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2510 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 2.102$ S/m; $\epsilon_r = 51.326$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT - Low/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.874 W/kg

Configuration/Front of EUT - Low/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.833 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.54 W/kg


SAR(1 g) = 0.770 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 0.854 W/kg

144: Front of EUT Facing Phantom LTE Band 7 50%RB Mid CH21350

Date: 04/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

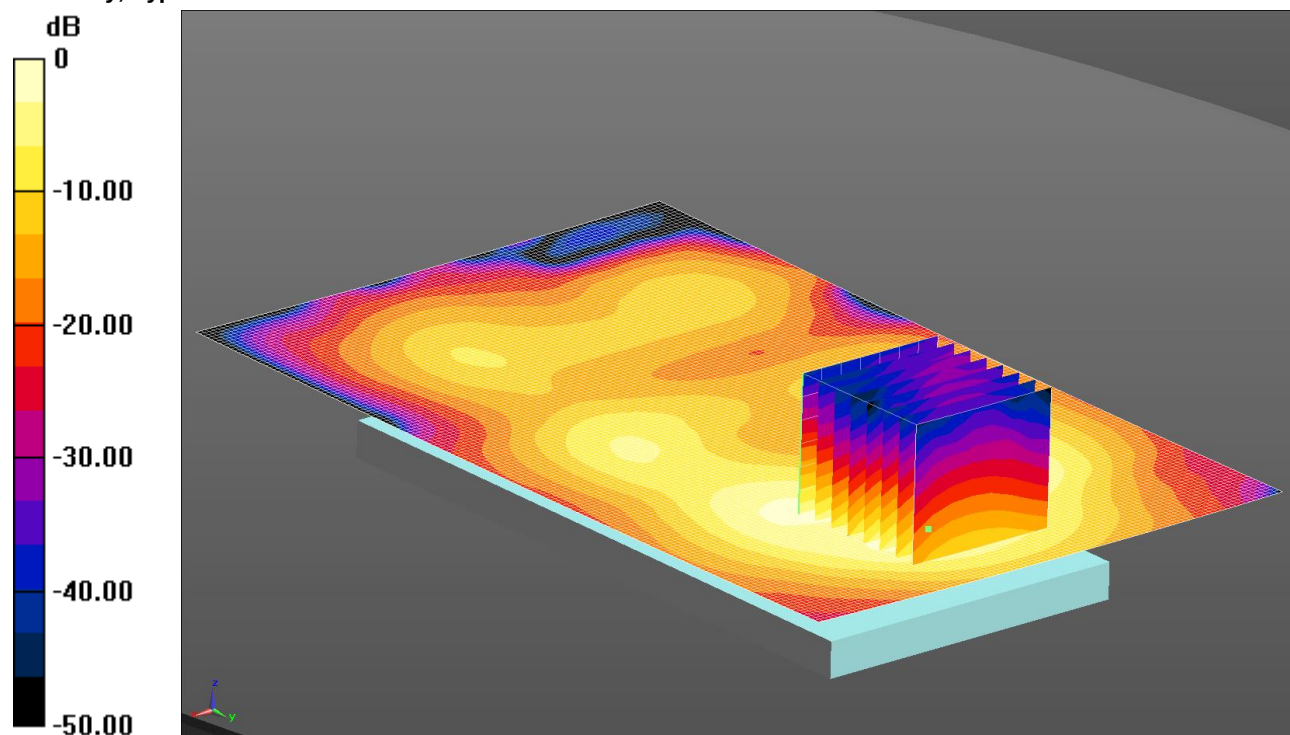

0 dB = 0.813 W/kg = -0.90 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2560 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 2.169$ S/m; $\epsilon_r = 51.171$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT - High/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.813 W/kg

Configuration/Front of EUT - High/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.937 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.46 W/kg


SAR(1 g) = 0.718 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.807 W/kg

145: Front of EUT Facing Phantom LTE Band 7 100%RB Mid CH21100

Date: 07/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

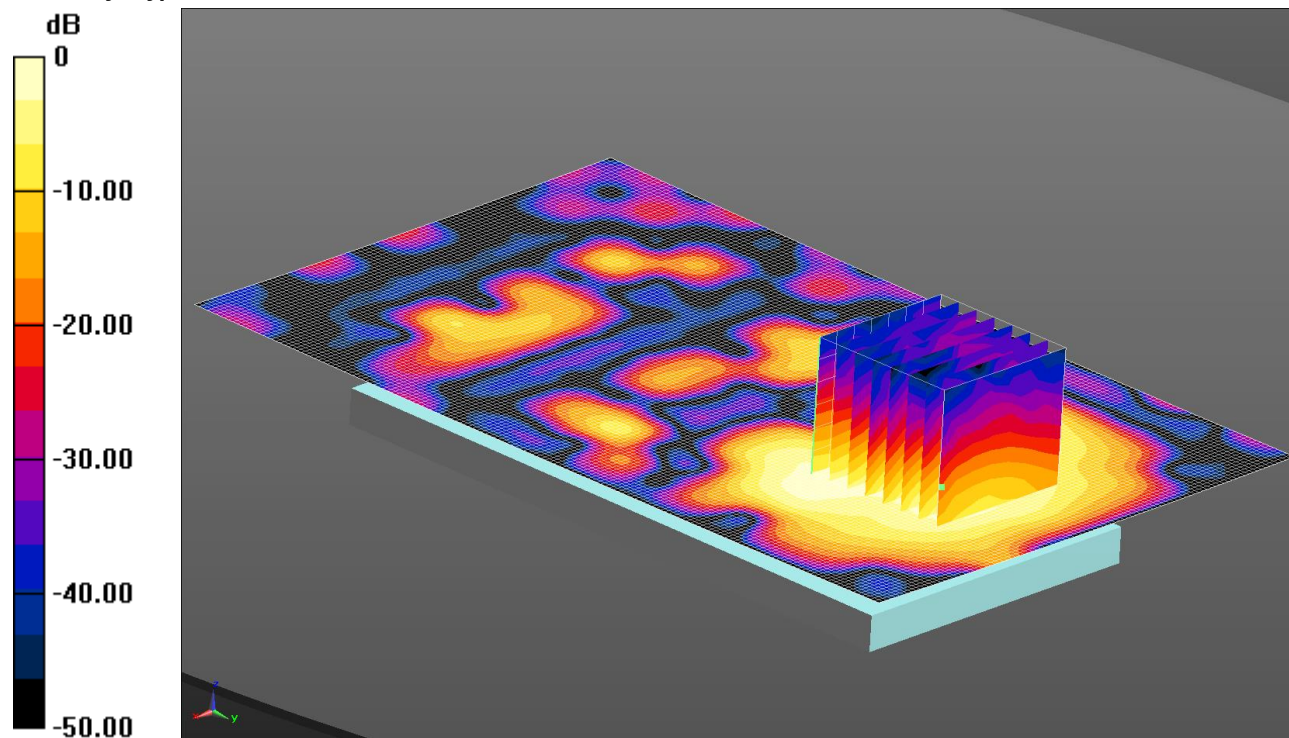

0 dB = 0.713 W/kg = -1.47 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.13$ S/m; $\epsilon_r = 52.261$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Front of EUT - Mid/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.713 W/kg

Configuration/Front of EUT - Mid/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.541 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.24 W/kg


SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.339 W/kg

Maximum value of SAR (measured) = 0.770 W/kg

146: Back of EUT Facing Phantom LTE Band 7 1RB Mid CH21100

Date: 08/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

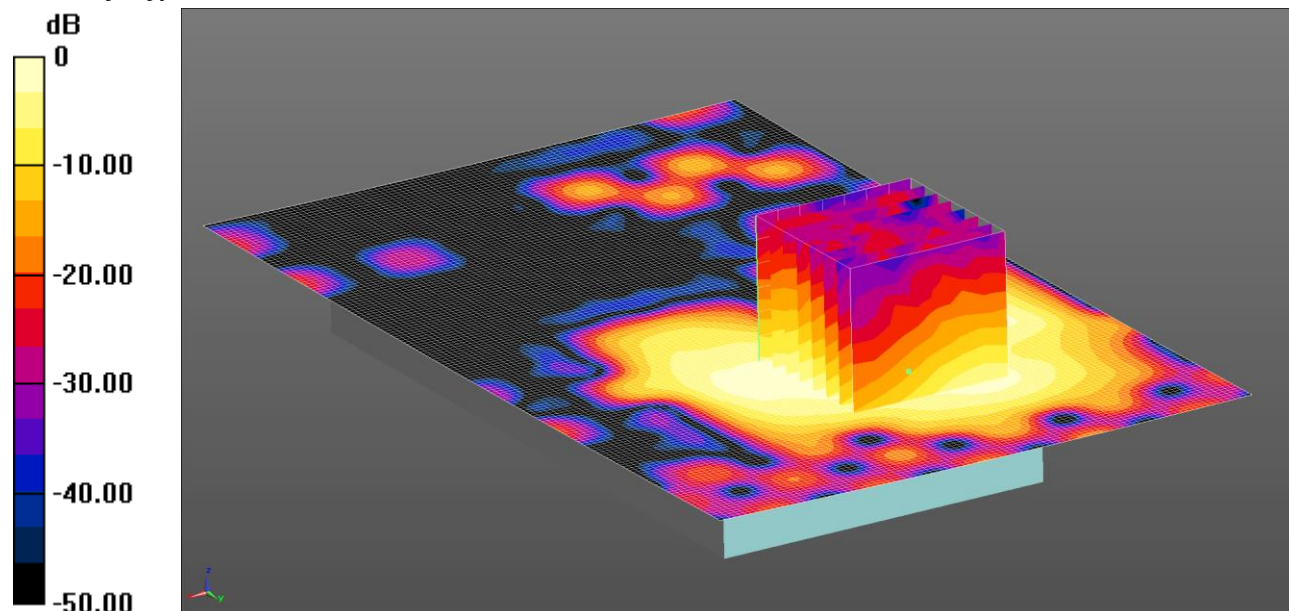

0 dB = 0.650 W/kg = -1.87 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.13$ S/m; $\epsilon_r = 52.261$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 18/11/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Back of EUT - Middle 2 2/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.650 W/kg

Configuration/Back of EUT - Middle 2 2/Zoom Scan (7x7x7) 2 (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.113 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.921 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

147: Back of EUT Facing Phantom LTE Band 7 50%RB Mid CH21100
Date: 07/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

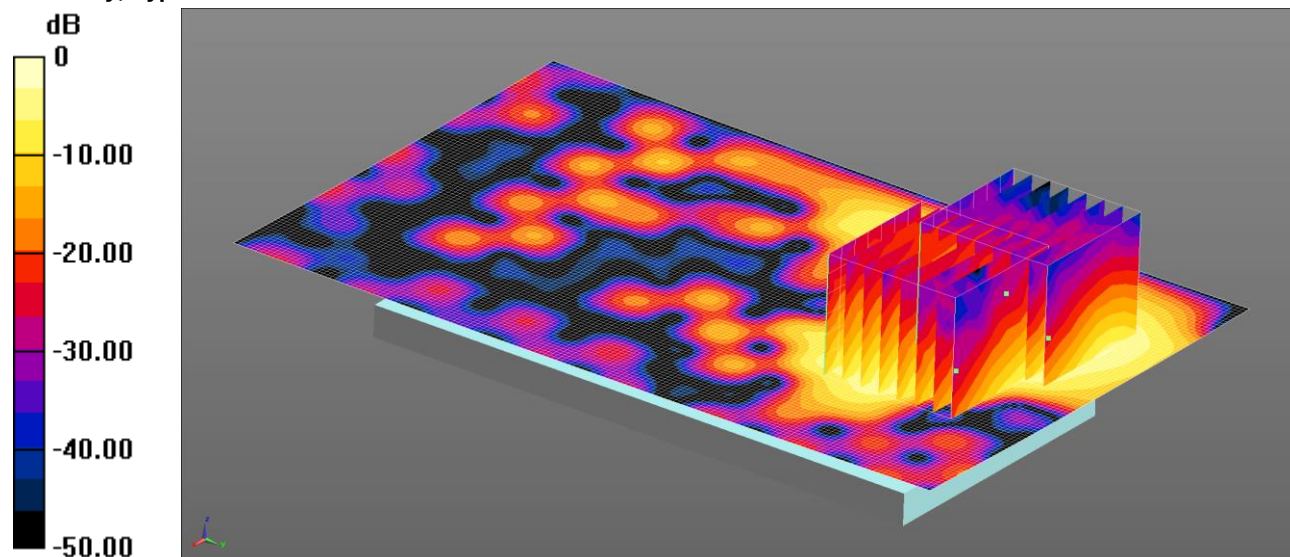

0 dB = 0.750 W/kg = -1.25 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.13$ S/m; $\epsilon_r = 52.261$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Back of EUT - Middle/Area Scan (101x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.750 W/kg

Configuration/Back of EUT - Middle/Zoom Scan (7x7x7) 2 (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.547 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.322 W/kg

Maximum value of SAR (measured) = 0.717 W/kg

Configuration/Back of EUT - Middle/Zoom Scan (7x7x7) 2 (8x8x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.547 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.803 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.260 W/kg


Maximum value of SAR (measured) = 0.562 W/kg

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

148: Left of EUT Facing Phantom LTE Band 7 1RB Mid CH21100

Date: 08/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

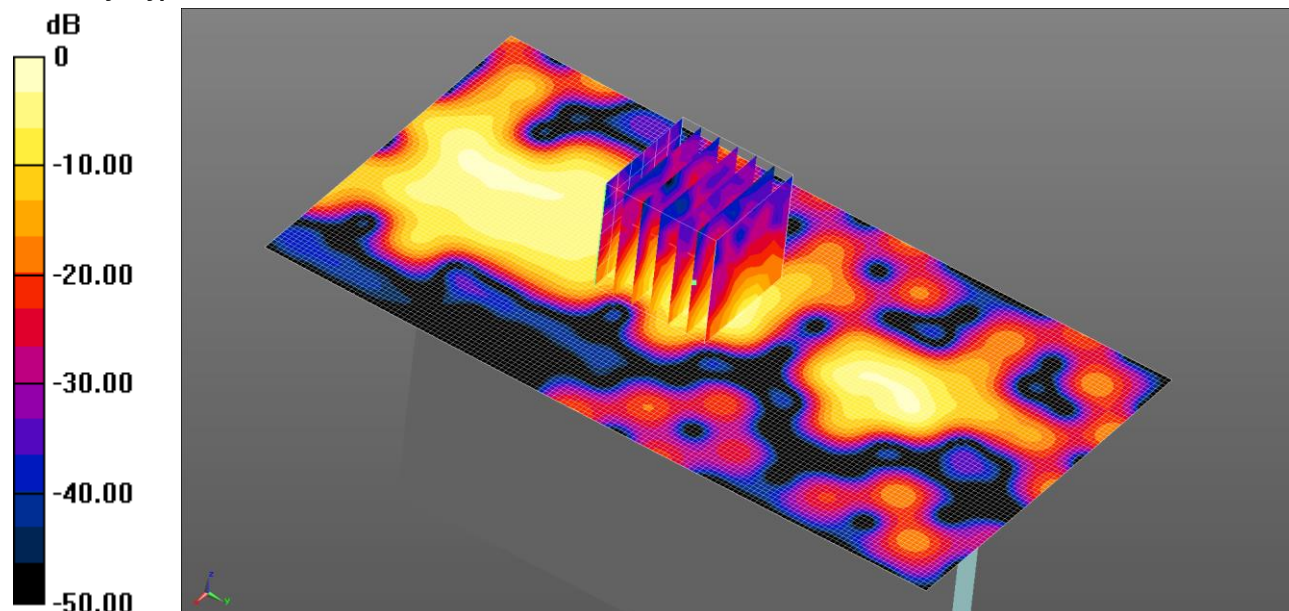

0 dB = 0.446 W/kg = -3.50 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.13$ S/m; $\epsilon_r = 52.261$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 18/11/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Left of EUT - Middle 2/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.446 W/kg

Configuration/Left of EUT - Middle 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.192 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.370 W/kg


SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

149: Left of EUT Facing Phantom LTE Band 7 50%RB Mid CH21100

Date: 08/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

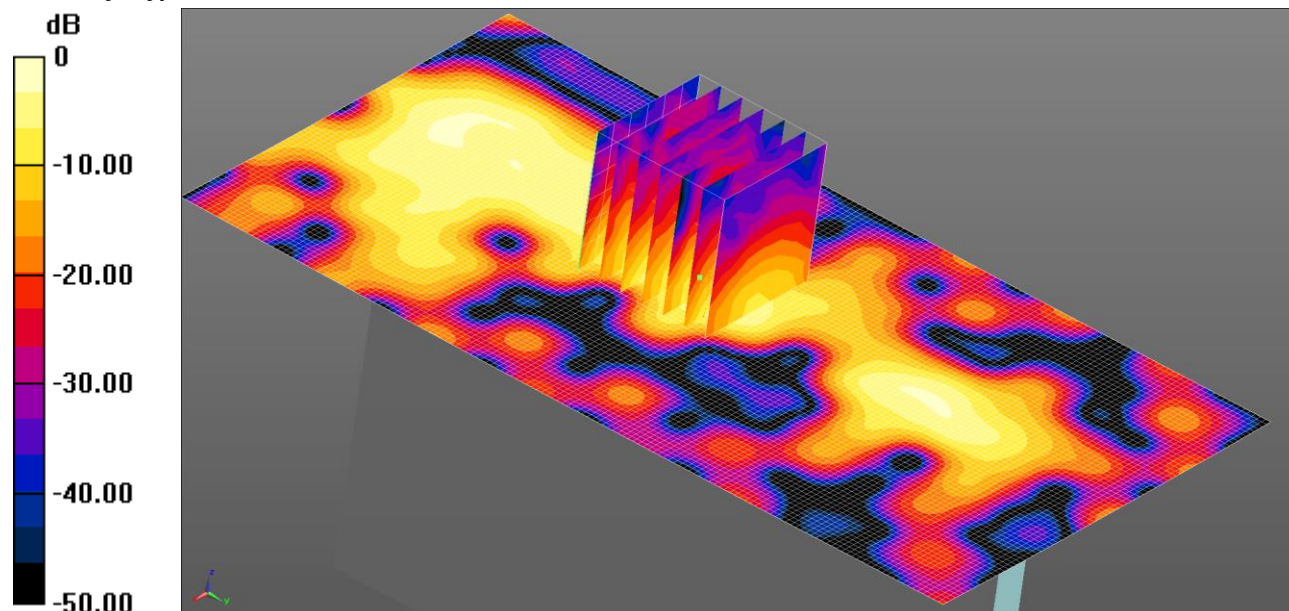

0 dB = 0.480 W/kg = -3.18 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.13$ S/m; $\epsilon_r = 52.261$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn431; Calibrated: 18/11/2013

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Left of EUT - Middle 2/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.480 W/kg

Configuration/Left of EUT - Middle 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.632 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

150: Right of EUT Facing Phantom LTE Band 7 1RB Mid CH21100
Date: 08/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

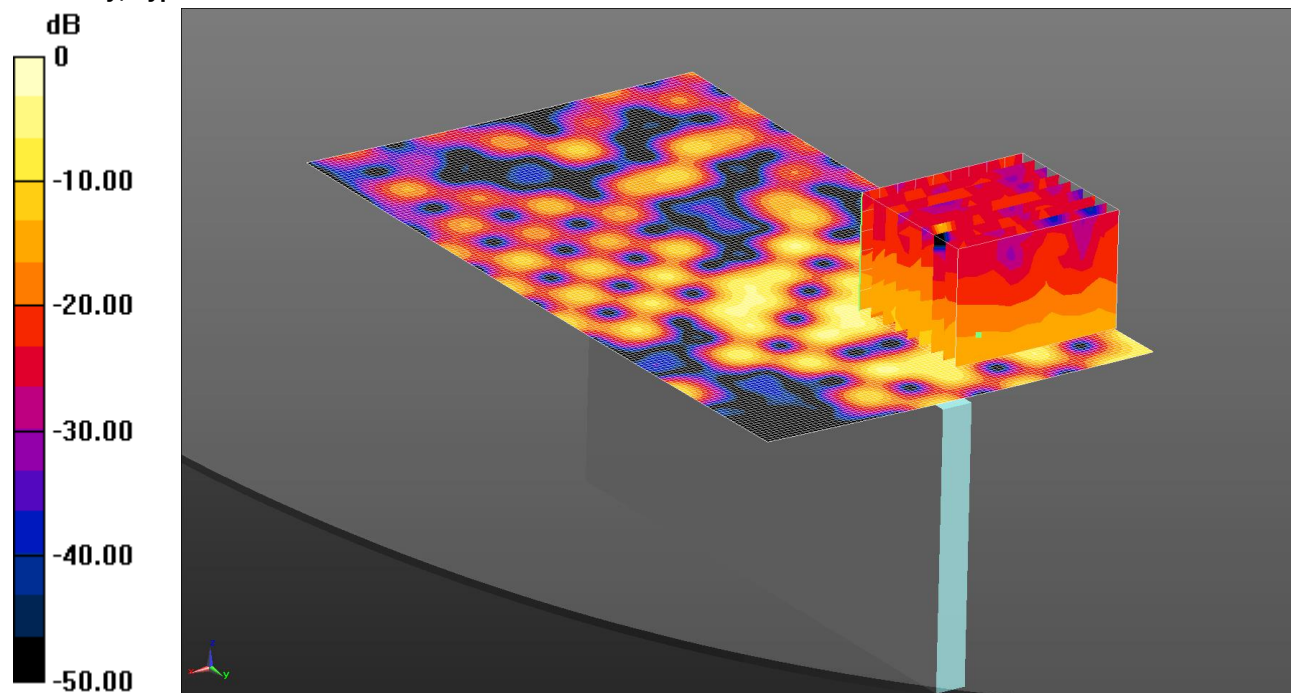

0 dB = 0.150 W/kg = -8.24 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036
Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 51.221$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Right of EUT-Middle 2/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.150 W/kg

Configuration/Right of EUT-Middle 2/Zoom Scan (7x7x7) (10x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.261 V/m; Power Drift = 1.94 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.029 W/kg


Maximum value of SAR (measured) = 1.15 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

151: Right of EUT Facing Phantom LTE Band 7 50%RB Mid CH21100

Date: 08/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

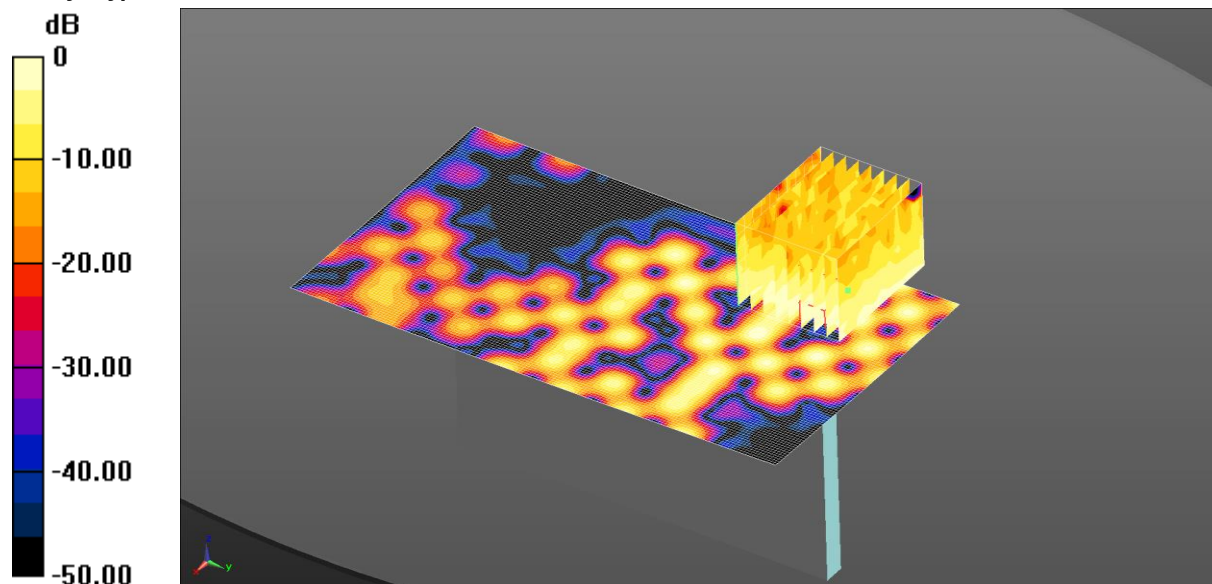

0 dB = 0.0425 W/kg = -13.72 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 51.221$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Right of EUT-Middle 2/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0425 W/kg

Configuration/Right of EUT-Middle 2/Zoom Scan (7x7x7) (11x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.290 V/m; Power Drift = 2.60 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.017 W/kg


Maximum value of SAR (measured) = 0.0529 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

152: Bottom of EUT Facing Phantom LTE Band 7 1RB Mid CH21100

Date: 09/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

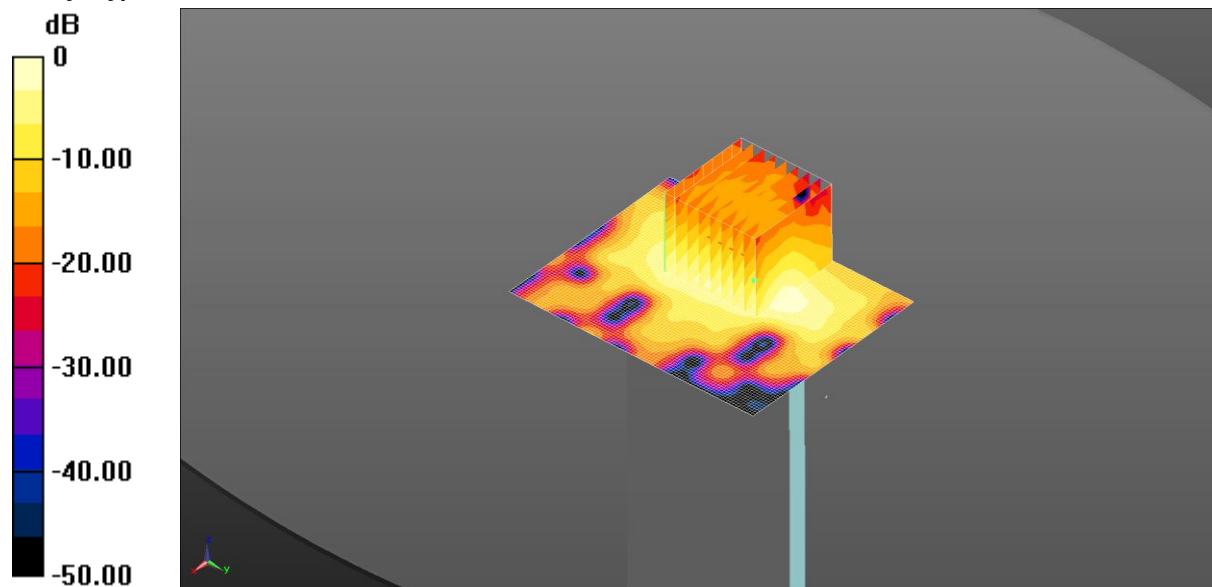

0 dB = 0.808 W/kg = -0.93 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 51.221$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Bottom of EUT-Middle/Area Scan (71x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.808 W/kg

Configuration/Bottom of EUT-Middle/Zoom Scan (7x7x7) (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.781 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.52 W/kg


SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.346 W/kg

Maximum value of SAR (measured) = 0.794 W/kg

153: Bottom of EUT Facing Phantom LTE Band 7 50%RB Mid CH21100

Date: 09/07/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

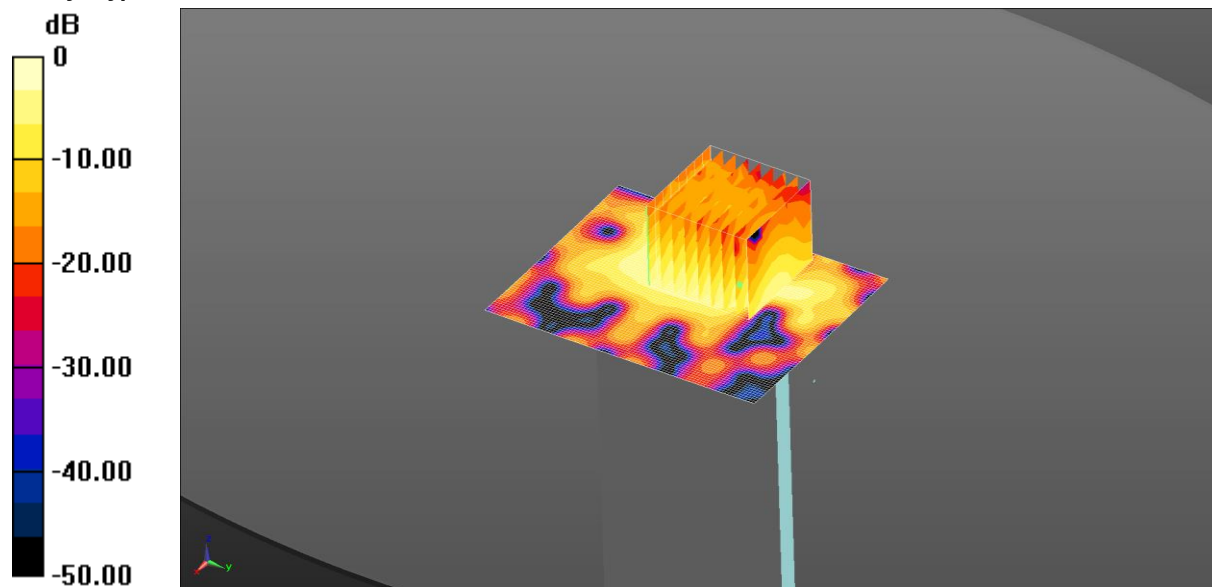

0 dB = 0.752 W/kg = -1.24 dBW/kg

Communication System: UID 0, LTE Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1.57036

Medium: 2600MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 51.221$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(7.16, 7.16, 7.16); Calibrated: 07/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 18/11/2013
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Bottom of EUT-Middle/Area Scan (71x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.752 W/kg

Configuration/Bottom of EUT-Middle/Zoom Scan (7x7x7) (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.744 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.902 W/kg


SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.591 W/kg

154: Touch Left LTE Band 17 1RB-High CH23790

Date: 2/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

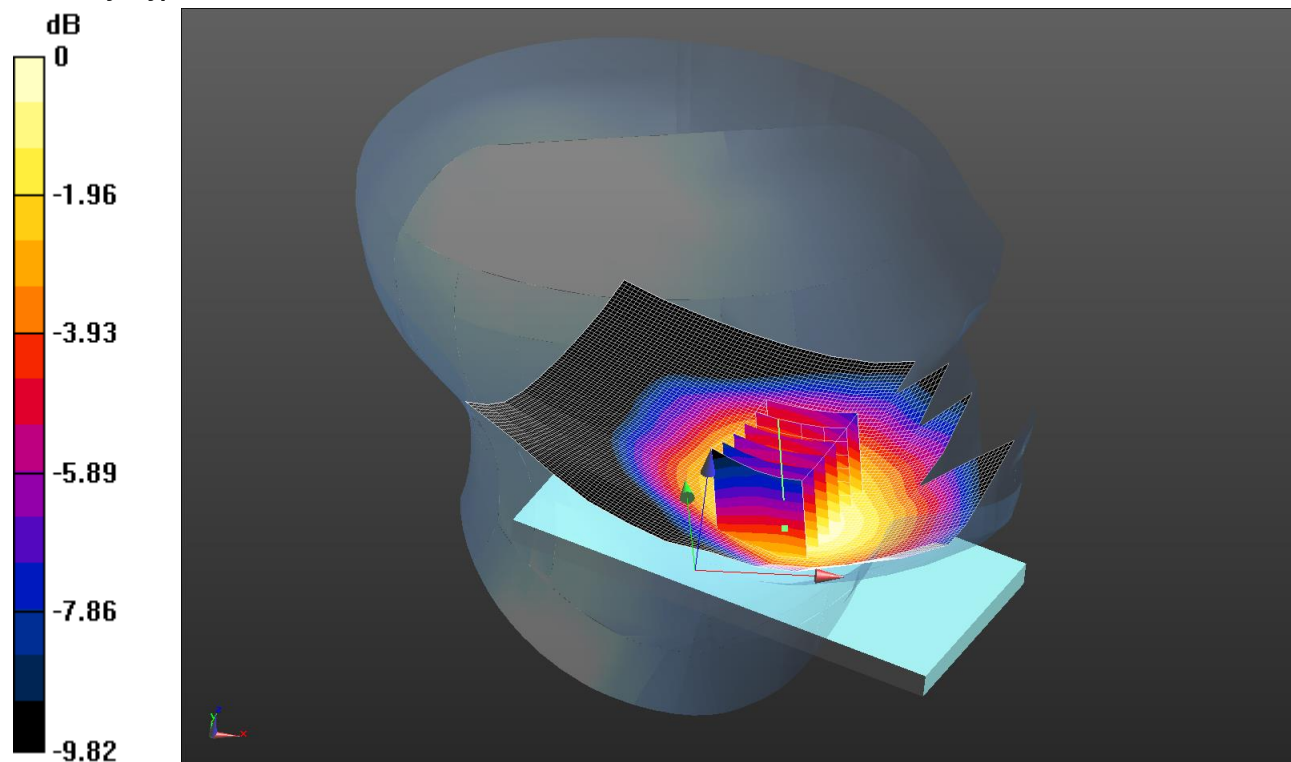

0 dB = 0.215 W/kg = -6.68 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 710$ MHz; $\sigma = 0.831$ S/m; $\epsilon_r = 42.033$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.4, 6.4, 6.4); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Left Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.227 W/kg

Configuration/Touch Left Mid/Zoom Scan (5x5x7) 2 (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.66 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.252 W/kg


SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

155: Touch Left LTE Band 17 50%RB-High CH23790

Date: 2/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

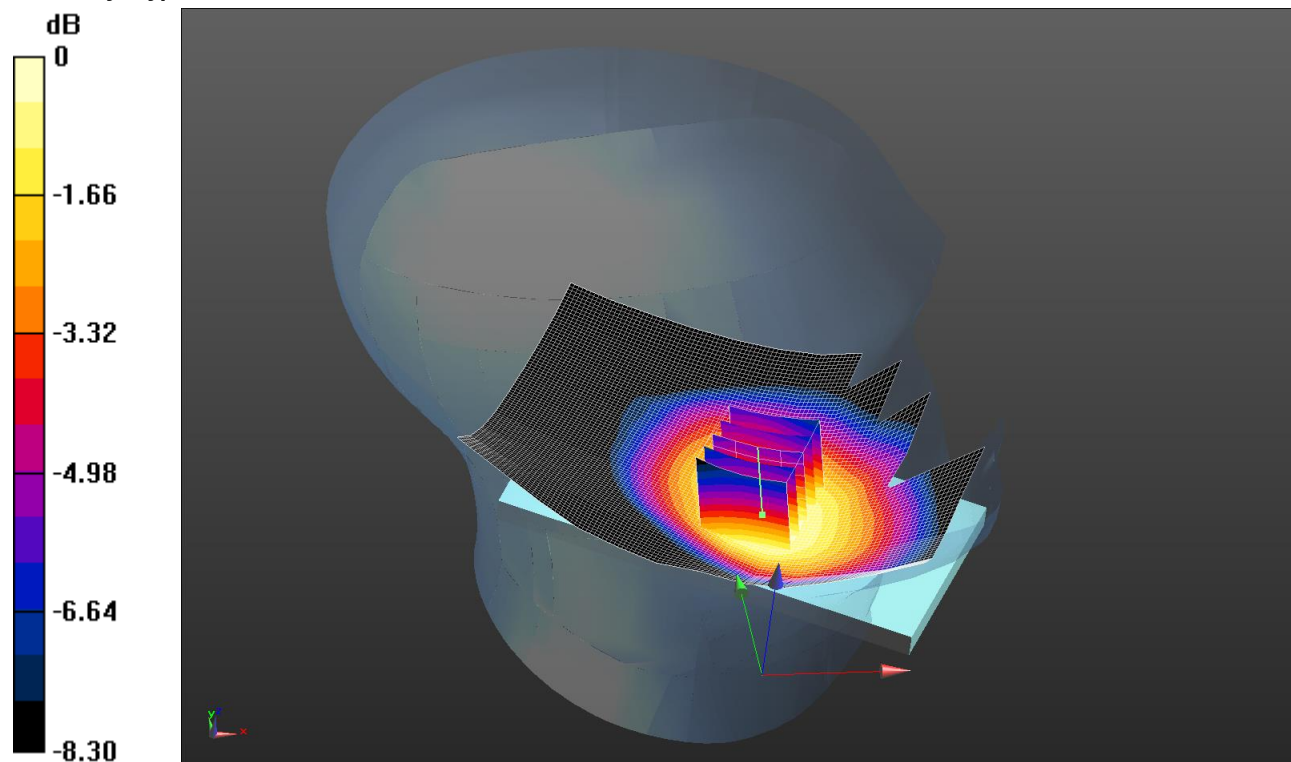

0 dB = 0.177 W/kg = -7.52 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 710 MHz; Duty Cycle: 1:1
 Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 710$ MHz; $\sigma = 0.831$ S/m; $\epsilon_r = 42.033$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.4, 6.4, 6.4); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Left Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.173 W/kg

Configuration/Touch Left Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.051 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.203 W/kg


SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

156: Tilt Left LTE Band 17 1RB-High CH23790

Date: 2/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

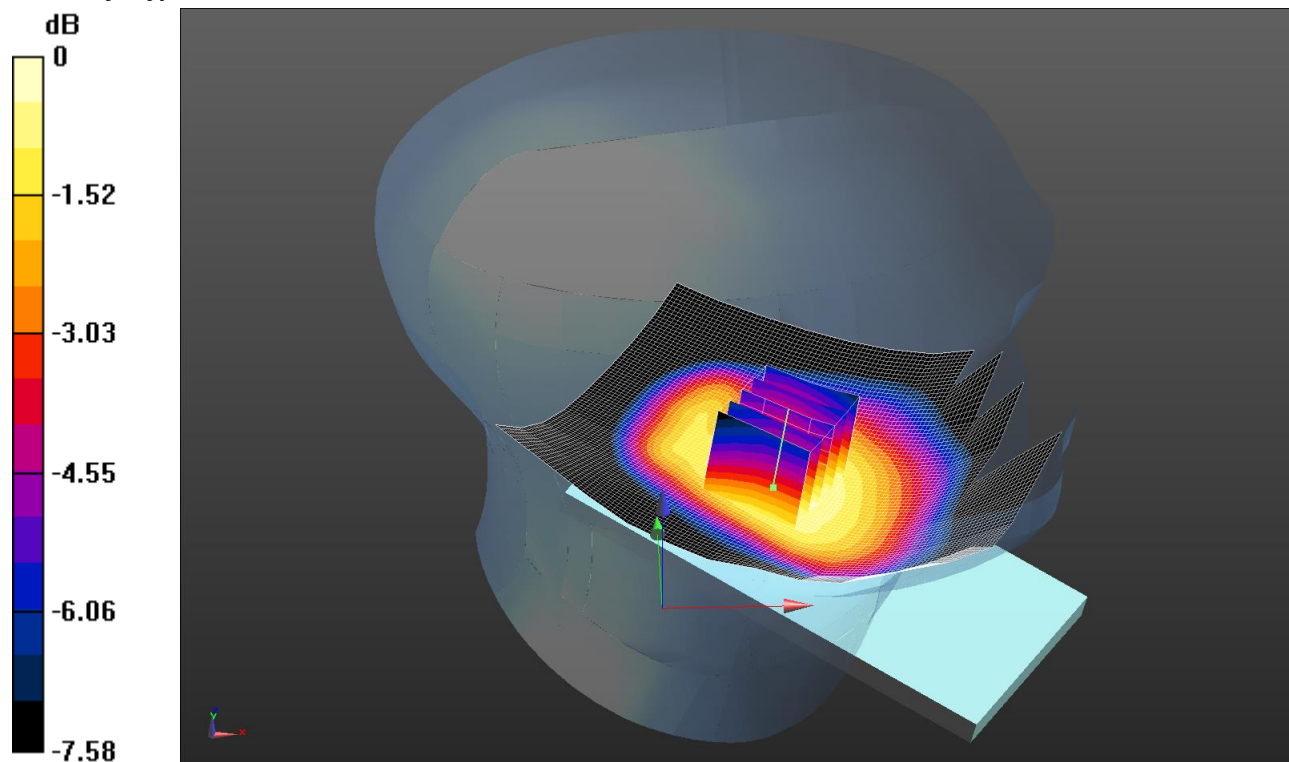

0 dB = 0.131 W/kg = -8.83 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 710 MHz; Duty Cycle: 1:1
 Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 710$ MHz; $\sigma = 0.831$ S/m; $\epsilon_r = 42.033$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.4, 6.4, 6.4); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Tilt Left Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.132 W/kg

Configuration/Tilt Left Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.47 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.148 W/kg


SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

157: Tilt Left LTE Band 17 50%RB-High CH23790

Date: 2/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

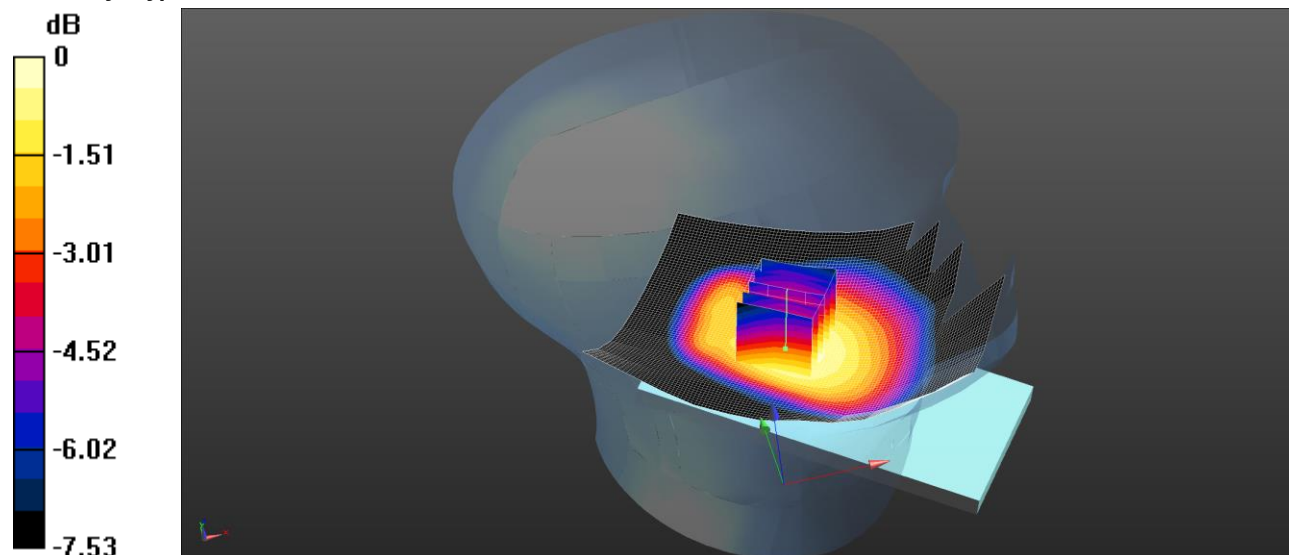

0 dB = 0.103 W/kg = -9.87 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 710$ MHz; $\sigma = 0.831$ S/m; $\epsilon_r = 42.033$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.4, 6.4, 6.4); Calibrated: 2/9/2013;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014

- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836

- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Tilt Left Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.100 W/kg

Configuration/Tilt Left Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.95 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.078 W/kg.


Maximum value of SAR (measured) = 0.103 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

158: Touch Right LTE Band 17 1RB-High CH23790

Date: 2/7/2014

DUT: Sony, Type: FCC ID: PY7PM-0804

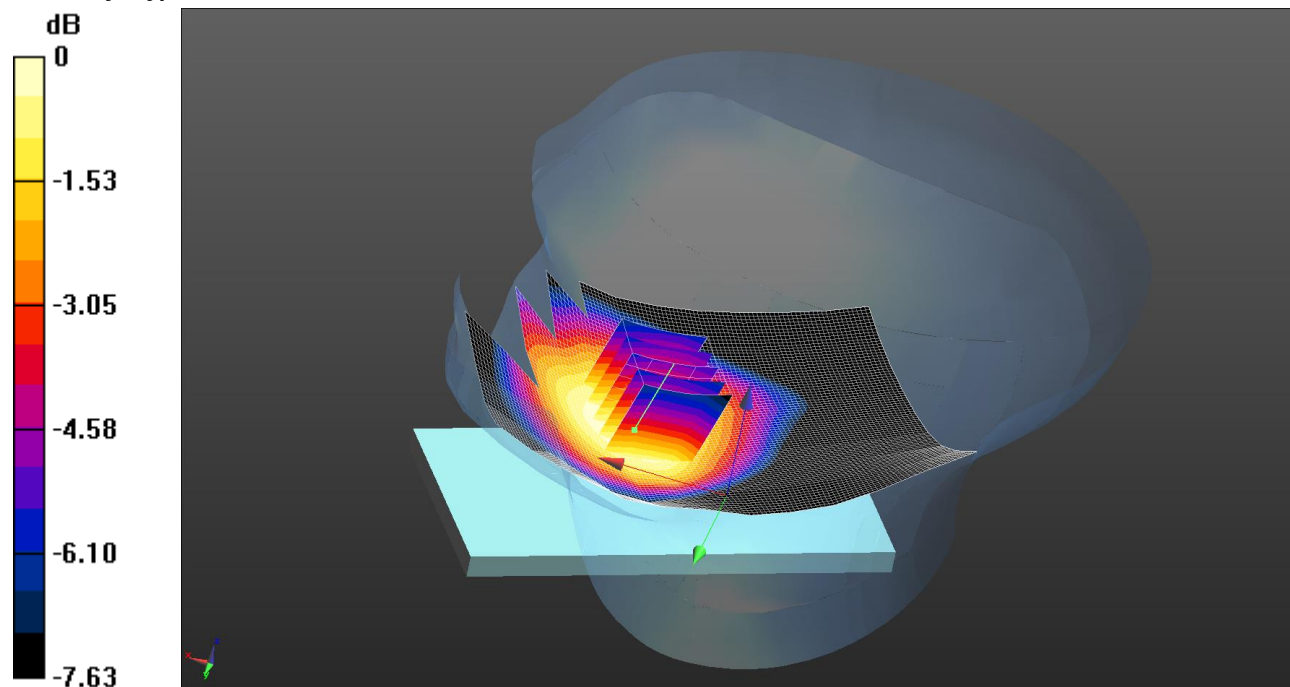

0 dB = 0.206 W/kg = -6.86 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 710$ MHz; $\sigma = 0.831$ S/m; $\epsilon_r = 42.033$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(6.4, 6.4, 6.4); Calibrated: 2/9/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1438; Calibrated: 12/5/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right Mid/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.217 W/kg

Configuration/Touch Right Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.85 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.206 W/kg