

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/25/2014 3:07:11 PM

Test Laboratory: GTA-Beijing

**5GHZ\_Head Validation\_20140725**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1061**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 5.486 \text{ S/m}$ ;  $\epsilon_r = 34.697$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.41, 4.41, 4.41); Calibrated: 12/20/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1326; Calibrated: 2/14/2014
- Phantom: SAM with CRP v5.0#1696; Type: QD000P40CD; Serial: TP:1696
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)\_5.8G/Area Scan**

**(51x61x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 39.6 W/kg

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)\_5.8G/Zoom Scan**


**(7x7x7) (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 97.88 V/m; Power Drift = 0.28 dB

Peak SAR (extrapolated) = 86.6 W/kg

**SAR(1 g) = 18.8 W/kg; SAR(10 g) = 5.33 W/kg**

Maximum value of SAR (measured) = 48.6 W/kg

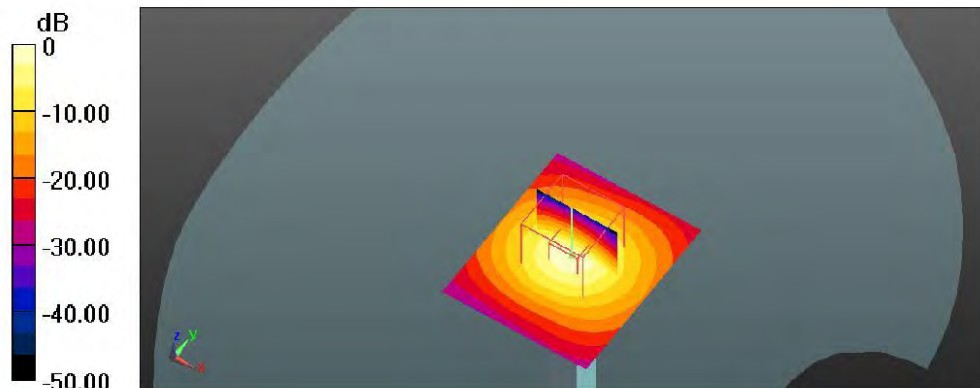

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 8/19/2014 1:10:32 PM

Test Laboratory: GTA Beijing

**5GHZ\_Head Validation\_20140819**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1061**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1  
 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.833$  S/m;  $\epsilon_r = 35.761$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: EX3DV4 - SN3642; ConvF(4.97, 4.97, 4.97); Calibrated: 12/20/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1326; Calibrated: 2/14/2014
- Phantom: SAM; Type: QD000P40CD; Serial: TP:xxxx
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)\_5.2G/Area Scan**

**(51x61x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm  
 Maximum value of SAR (interpolated) = 49.2 W/kg

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)\_5.2G/Zoom Scan**

**(7x7x7) (8x8x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm  
 Reference Value = 89.01 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 80.3 W/kg  
**SAR(1 g) = 18.9 W/kg; SAR(10 g) = 5.4 W/kg**  
 Maximum value of SAR (measured) = 47.1 W/kg

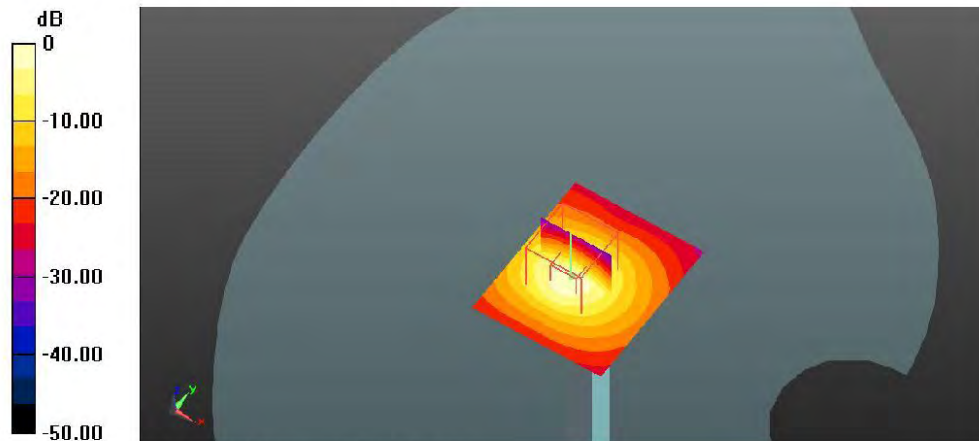

0 dB = 47.1 W/kg = 16.73 dBW/kg

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 8/19/2014 1:47:52 PM

Test Laboratory: GTA Beijing

**5GHZ\_Head Validation\_20140819**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1061**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 5.486 \text{ S/m}$ ;  $\epsilon_r = 34.697$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.41, 4.41, 4.41); Calibrated: 12/20/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1326; Calibrated: 2/14/2014
- Phantom: SAM; Type: QD000P40CD; Serial: TP:xxxx
- DASYS2 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)\_5.8G/Area Scan**

**(51x61x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 52.1 W/kg

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)\_5.8G/Zoom Scan**


**(7x7x7) (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 84.51 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 91.3 W/kg

**SAR(1 g) = 19.3 W/kg; SAR(10 g) = 5.44 W/kg**

Maximum value of SAR (measured) = 50.6 W/kg

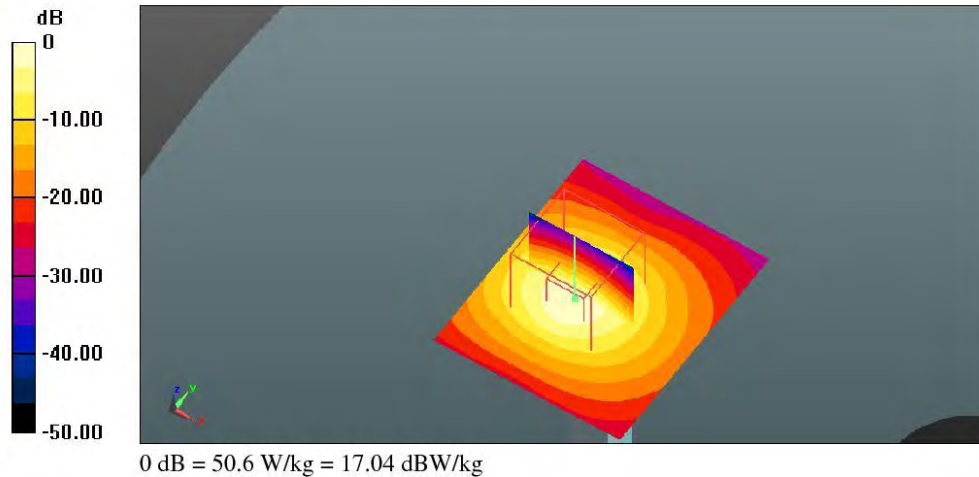

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/25/2014 11:44:28 AM

Test Laboratory: GTA-Beijing

**750M Body\_System Validation\_20140725**

**DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1055**

Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz);

Frequency: 750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.954$  S/m;  $\epsilon_r = 56.564$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.07, 6.07, 6.07); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = -8.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0\_1489; Type: QD000P40CC; Serial: TP:1489
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Validation/Area Scan (61x201x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 2.55 W/kg


**Configuration/Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 53.09 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.22 W/kg

**SAR(1 g) = 2.19 W/kg; SAR(10 g) = 1.45 W/kg**

Maximum value of SAR (measured) = 2.55 W/kg

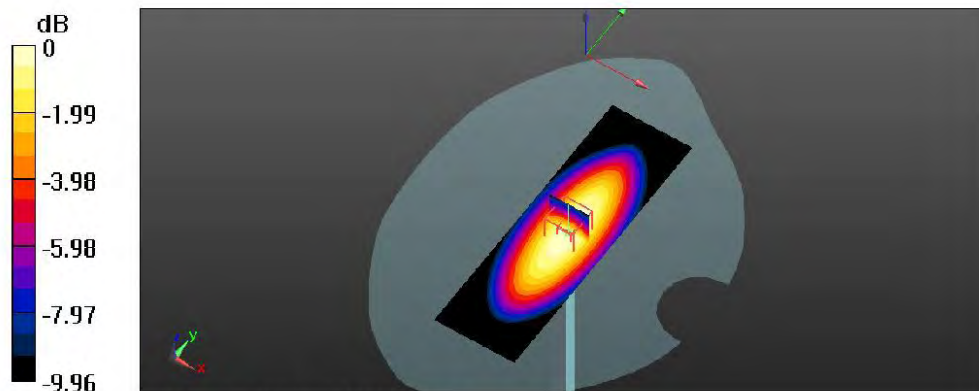

0 dB = 2.55 W/kg = 4.07 dBW/kg

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/20/2014 2:42:26 PM

Test Laboratory: GTA-Beijing

**GSM835 Body Validation\_20140720**

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d061**

Communication System: UID 0, CW; Frequency: 835 MHz; Communication System PAR: 0 dB;  
PMF: 1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.984 \text{ S/m}$ ;  $\epsilon_r = 53.545$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.08, 6.08, 6.08); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: ELI v4.0\_1041; Type: QDOVA001BB; Serial: TP:1041
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/835MHz Body\_Validation/Area Scan (61x181x1):** Interpolated grid:

$dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.90 W/kg

**Configuration/835MHz Body\_Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 55.84 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.66 W/kg

**SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.63 W/kg**

Maximum value of SAR (measured) = 2.90 W/kg

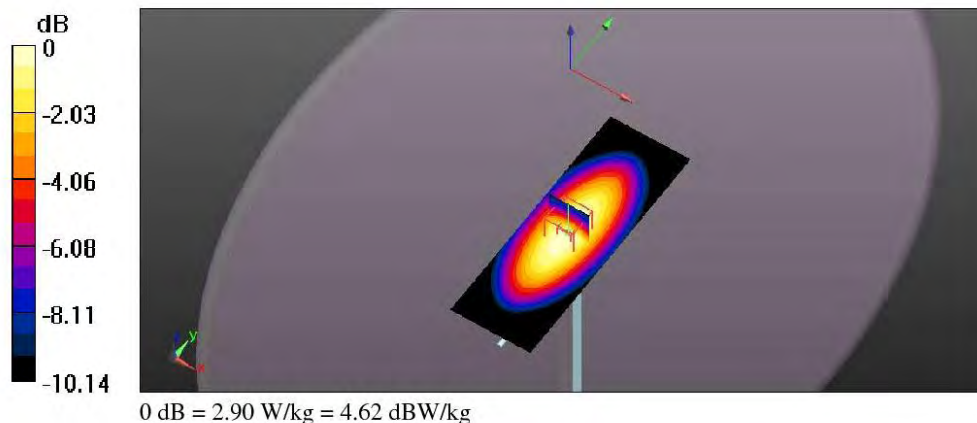

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/23/2014 11:38:18 AM

Test Laboratory: GTA-Beijing

**GSM835 Body Validation\_20140723**

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d061**

Communication System: UID 0, CW; Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.995 \text{ S/m}$ ;  $\epsilon_r = 53.85$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.08, 6.08, 6.08); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: ELI v4.0\_1041; Type: QDOVA001BB; Serial: TP:1041
- DASYS2 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/835MHz Head\_Validation/Area Scan (61x181x1):** Interpolated grid:

$dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.88 W/kg

**Configuration/835MHz Head\_Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 55.38 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.65 W/kg

**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg**

Maximum value of SAR (measured) = 2.88 W/kg

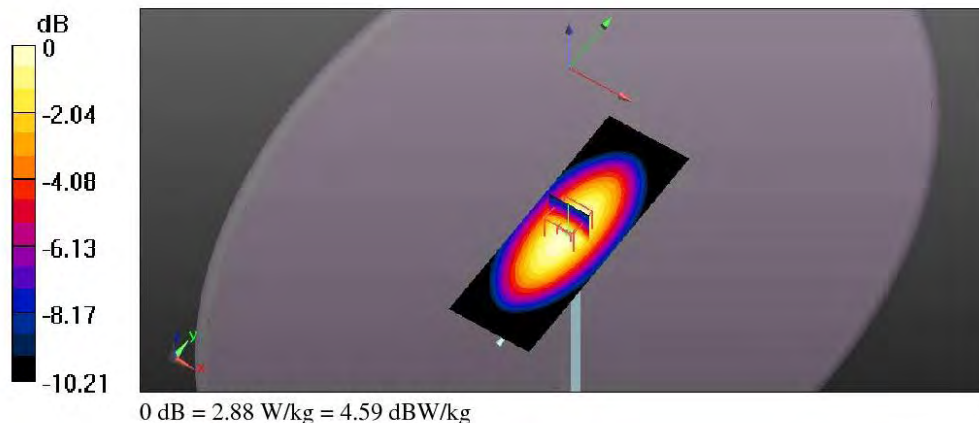

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/21/2014 1:46:22 PM

Test Laboratory: GTA-Beijing

**GSM1800 Body\_Validation\_20140721**

**DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: SN:2d158**

Communication System: UID 10000, CW; Communication System Band: D1800 (1800.0 MHz);  
Frequency: 1800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.497$  S/m;  $\epsilon_r = 54.578$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(4.91, 4.91, 4.91); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0\_1489; Type: QD000P40CC; Serial: TP:1489
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Validation/Area Scan (61x101x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 11.6 W/kg


**Configuration/Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 89.84 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 15.6 W/kg

**SAR(1 g) = 9.14 W/kg; SAR(10 g) = 4.94 W/kg**

Maximum value of SAR (measured) = 11.5 W/kg

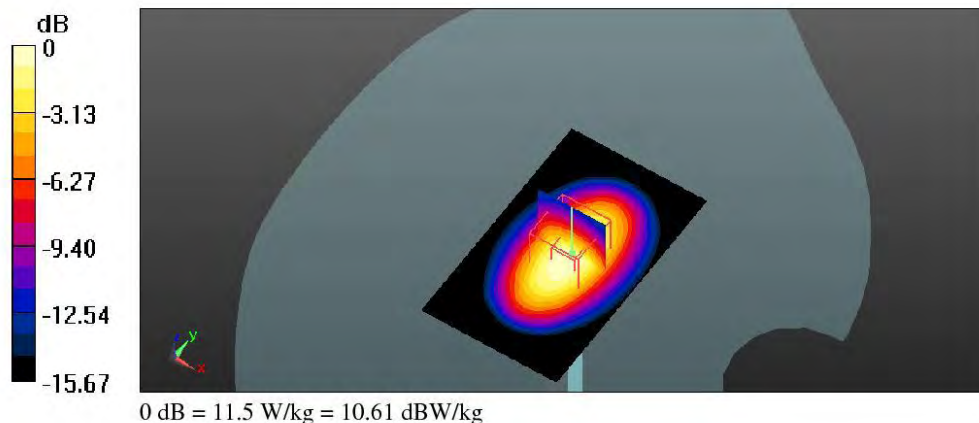

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/24/2014 10:50:25 AM

Test Laboratory: GTA-Beijing

**GSM1800 Body\_Validation\_20140724**

**DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: SN:2d158**

Communication System: UID 10000, CW; Communication System Band: D1800 (1800.0 MHz);  
Frequency: 1800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 1800 \text{ MHz}$ ;  $\sigma = 1.494 \text{ S/m}$ ;  $\epsilon_r = 54.513$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3170; ConvF(4.91, 4.91, 4.91); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE4 Sn853; Calibrated: 12/16/2013
- Phantom: SAM with CRP v4.0\_1489; Type: QD000P40CC; Serial: TP:1489
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Validation/Area Scan (61x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 11.8 W/kg


**Configuration/Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 89.86 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 15.8 W/kg

**SAR(1 g) = 9.21 W/kg; SAR(10 g) = 4.96 W/kg**

Maximum value of SAR (measured) = 11.6 W/kg

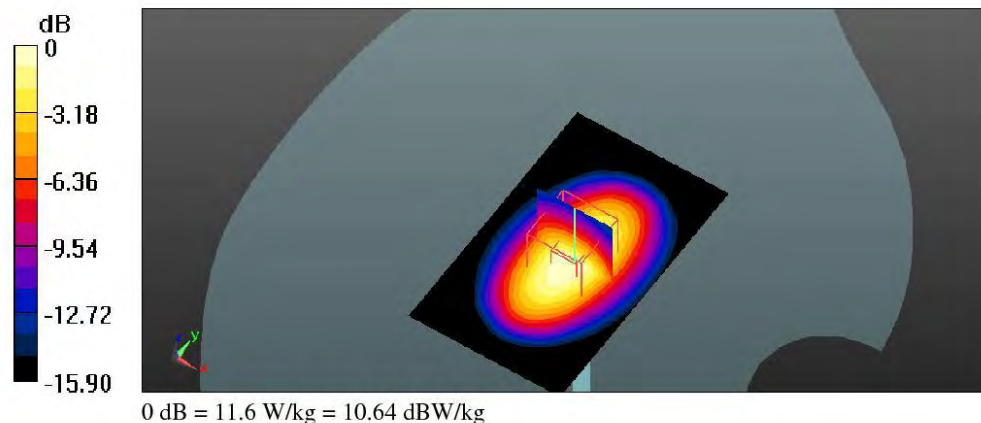



<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/11/2014 1:19:32 PM

Test Laboratory: GTA-Beijing

**MSL1900\_System check\_20140711**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093**

Communication System: UID 0, CW; Communication System Band: D1900 (1900.0 MHz);

Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 51.078$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.31, 7.31, 7.31); Calibrated: 2/21/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn854; Calibrated: 12/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS2 52.8.8(1222); SEMCAD X 14.6.10(7331)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (61x101x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 13.4 W/kg


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 89.48 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.7 W/kg

**SAR(1 g) = 9.32 W/kg; SAR(10 g) = 4.87 W/kg**

Maximum value of SAR (measured) = 13.2 W/kg

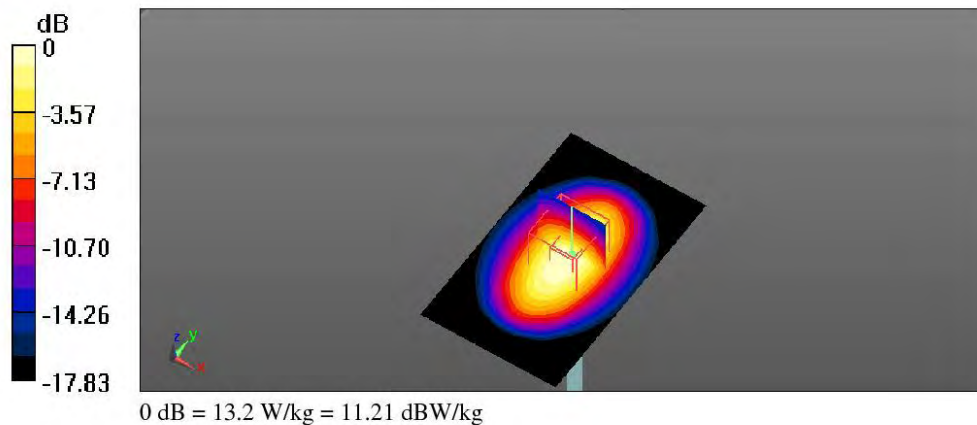

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/18/2014 2:55:54 PM

Test Laboratory: GTA-Beijing

**MSL1900\_System check\_20140718**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093**

Communication System: UID 0, CW; Communication System Band: D1900 (1900.0 MHz);  
Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.525$  S/m;  $\epsilon_r = 50.933$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.31, 7.31, 7.31); Calibrated: 2/21/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn854; Calibrated: 12/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (61x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 13.6 W/kg


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.83 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 16.9 W/kg

**SAR(1 g) = 9.46 W/kg; SAR(10 g) = 4.93 W/kg**

Maximum value of SAR (measured) = 13.5 W/kg

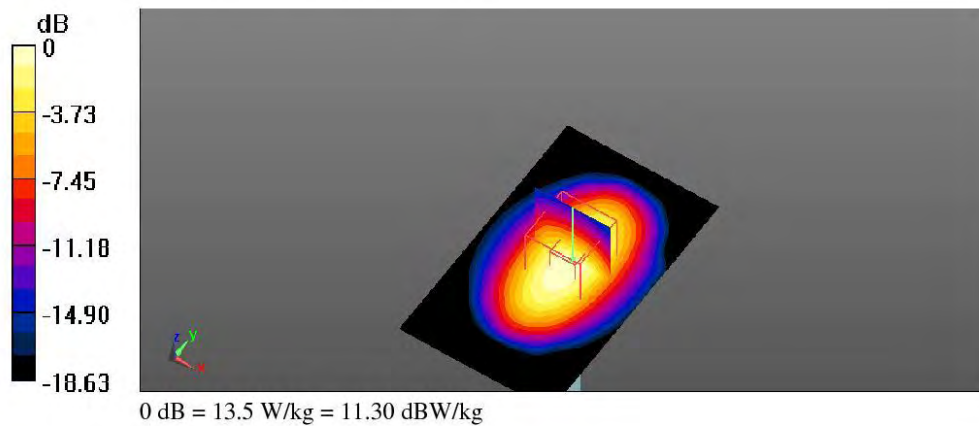

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/21/2014 9:50:35 AM

Test Laboratory: GTA-Beijing

**MSL1900\_System check\_20140721**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093**

Communication System: UID 0, CW; Communication System Band: D1900 (1900.0 MHz);  
 Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 51.249$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.77, 4.77, 4.77); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE4 Sn854; Calibrated: 12/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS2 52.8.8(1222); SEMCAD X 14.6.10(7331)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (61x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 12.3 W/kg


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 91.80 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 9.72 W/kg; SAR(10 g) = 5.05 W/kg**

Maximum value of SAR (measured) = 13.9 W/kg

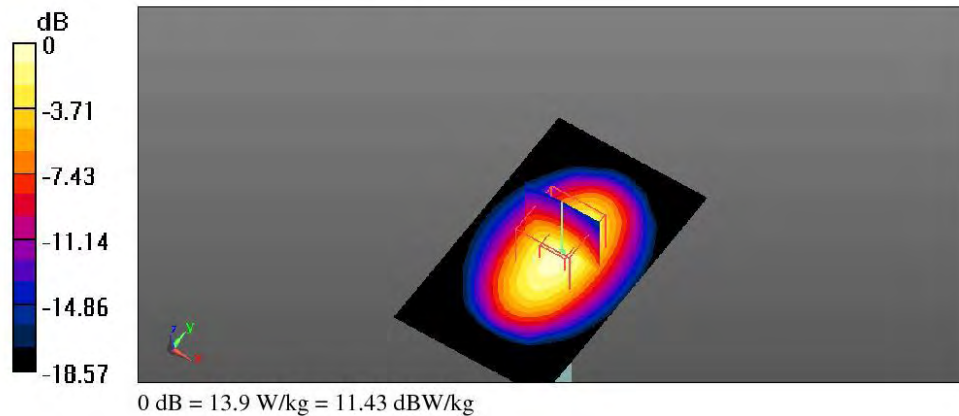

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/23/2014 10:36:03 AM

Test Laboratory: GTA-Beijing

**MSL1900\_System check\_20140723**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093**

Communication System: UID 0, CW; Communication System Band: D1900 (1900.0 MHz);  
Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.549 \text{ S/m}$ ;  $\epsilon_r = 51.51$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.77, 4.77, 4.77); Calibrated: 12/19/2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE4 Sn854; Calibrated: 12/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS2 52.8.8(1222); SEMCAD X 14.6.10(7331)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (61x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 13.0 W/kg


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 91.51 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 18.9 W/kg

**SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.44 W/kg**

Maximum value of SAR (measured) = 14.8 W/kg

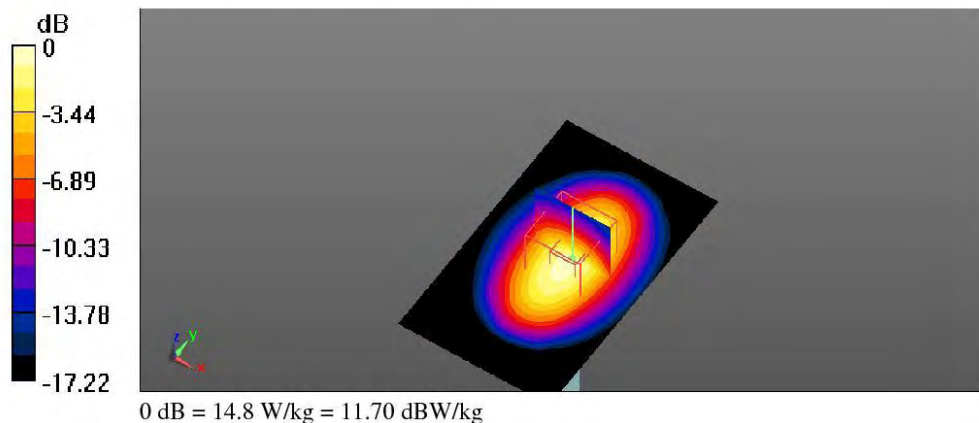

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/14/2014 10:29:11 AM

Test Laboratory: GTA-Beijing

**MSL2450\_System check\_20140714**

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:806**

Communication System: UID 0, CW; Communication System Band: D2450 (2450.0 MHz);

Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.045$  S/m;  $\epsilon_r = 50.076$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.6, 6.6, 6.6); Calibrated: 2/21/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn854; Calibrated: 12/16/2013
- Phantom: SAM with CRP v5.0#1696; Type: QD000P40CD; Serial: TP:1696
- DASYS2 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (81x71x1):**

Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 19.9 W/kg

**Configuration/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)**


**(7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 89.91 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 26.6 W/kg

**SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.66 W/kg**

Maximum value of SAR (measured) = 19.2 W/kg

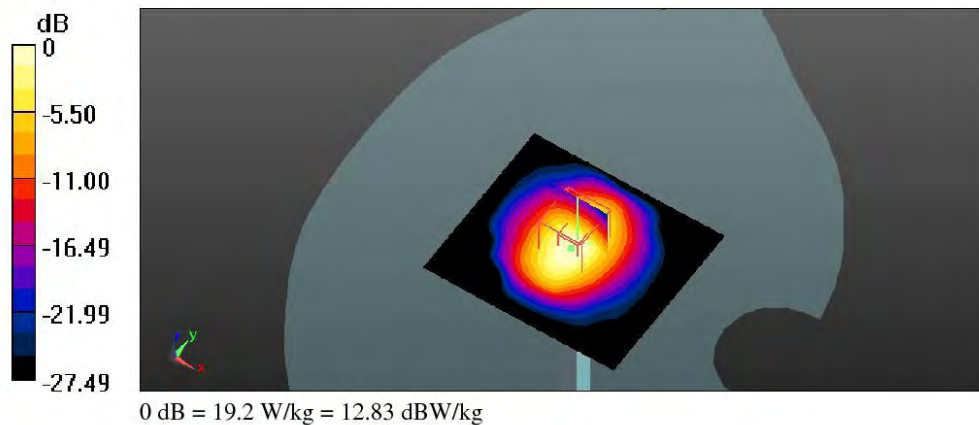

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/29/2014 3:41:26 PM

Test Laboratory: GTA-Beijing

**MSL2600\_System check\_20140729**

**DUT: Dipole D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1012**

Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz);  
Frequency: 2600 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.177$  S/m;  $\epsilon_r = 50.376$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.27, 6.27, 6.27); Calibrated: 2/21/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1326; Calibrated: 2/14/2014
- Phantom: SAM with CRP v5.0#1696; Type: QD000P40CD; Serial: TP:1696
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan**

**(81x71x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 21.4 W/kg

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7)**


**(7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 89.95 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 29.0 W/kg

**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6 W/kg**

Maximum value of SAR (measured) = 20.9 W/kg

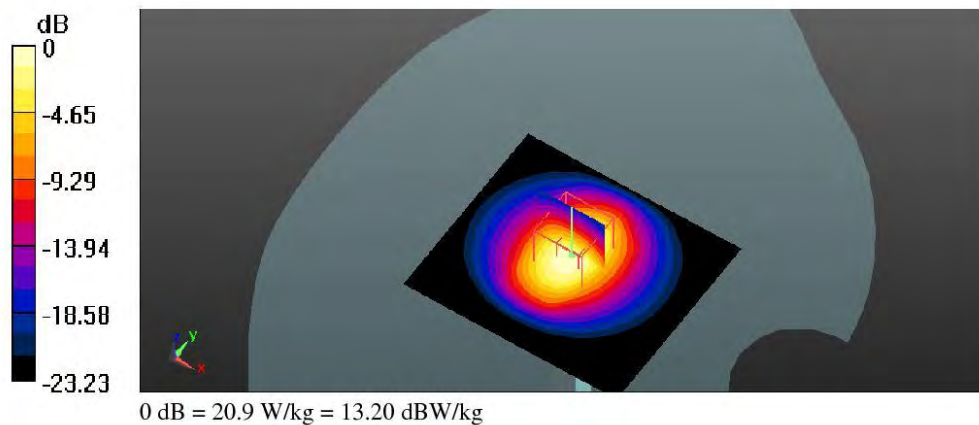

<b>SONY</b>	Sony Mobile Communications (China) Co., Ltd. Test Laboratory	Report No.: TARC-PY7PM-0808- SAR-FCC-01	
	PY7PM-0808 SAR FCC Test Report	Edition 2	Revision 0

Date/Time: 7/28/2014 10:16:43 AM

Test Laboratory: GTA-Beijing

**5GHZ\_Body Validation\_20140728\_1**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1061**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.369$  S/m;  $\epsilon_r = 50.106$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.1, 4.1, 4.1); Calibrated: 12/20/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1326; Calibrated: 2/14/2014
- Phantom: SAM with CRP v5.0#1696; Type: QD000P40CD; Serial: TP:1696
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)\_5.2G/Area Scan**

**(51x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 42.9 W/kg

**Configuration/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)\_5.2G/Zoom Scan**

**(7x7x7) (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 96.97 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 68.1 W/kg

**SAR(1 g) = 16.7 W/kg; SAR(10 g) = 4.7 W/kg**

Maximum value of SAR (measured) = 41.0 W/kg

