



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/CDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ & NFC

FCC ID: PY7-PM0841

REPORT NUMBER: 15U20107-E5, Revision A
ISSUE DATE: MAY 11, 2015

Prepared for
SONY MOBILE COMMUNICATIONS, INC.
1-8-15 KONAN, MINATO-KU
TOKYO, 108-0075 JAPAN

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	04/22/15	Initial Issue	CHOON OOI
A	05/11/15	Revised Section 5.3	CHOON OOI

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.4. WORST-CASE CONFIGURATION AND MODE	14
5.5. DESCRIPTION OF TEST SETUP.....	15
6. TEST AND MEASUREMENT EQUIPMENT	17
7. SUMMARY TABLE	18
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	19
8.1. ON TIME AND DUTY CYCLE RESULTS.....	19
8.2. DUTY CYCLE PLOTS	19
9. MEASUREMENT METHOD.....	22
10. ANTENNA PORT TEST RESULTS	23
10.1. 6 dB BANDWIDTH	23
10.1.1. 802.11a MODE IN THE 5.8 GHz BAND	23
10.1.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND	23
10.1.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND	24
10.1.4. 802.11ac HT80 MODE IN THE 5.8 GHz BAND	24
10.1.5. 802.11a MODE THE CHANNEL 144	24
10.1.6. 802.11n HT20 MODE THE CHANNEL 144.....	24
10.1.7. 802.11n HT40 MODE THE CHANNEL 142.....	25
10.1.8. 802.11ac HT80 MODE THE CHANNEL 138.....	25
10.1.9. 6 dB BANDWIDTH MID CH PLOTS.....	26
10.2. 26 dB BANDWIDTH	30
10.2.1. 802.11a MODE IN THE 5.2 GHz BAND	30
10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	30
10.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	30
10.2.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND	30
10.2.5. 802.11a MODE IN THE 5.3 GHz BAND.....	31
10.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND	31

10.2.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	31
10.2.8.	802.11ac HT80 MODE IN THE 5.3 GHz BAND	31
10.2.9.	802.11a MODE IN THE 5.5 GHz BAND	32
10.2.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	32
10.2.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	32
10.2.12.	802.11ac HT80 MODE IN THE 5.5 GHz BAND	32
10.2.13.	802.11a MODE IN THE 5.8 GHz BAND	33
10.2.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	33
10.2.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	33
10.2.16.	802.11ac HT80 MODE IN THE 5.8 GHz BAND	33
10.2.17.	26 dB BANDWIDTH PLOTS	34
10.3.	99% BANDWIDTH	41
10.3.1.	802.11a MODE IN THE 5.2 GHz BAND	41
10.3.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	41
10.3.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	41
10.3.4.	802.11ac HT80 MODE IN THE 5.2 GHz BAND	41
10.3.5.	802.11a MODE IN THE 5.3 GHz BAND	42
10.3.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	42
10.3.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	42
10.3.8.	802.11ac HT80 MODE IN THE 5.3 GHz BAND	42
10.3.9.	802.11a MODE IN THE 5.5 GHz BAND	43
10.3.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	43
10.3.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	43
10.3.12.	802.11ac HT80 MODE IN THE 5.5 GHz BAND	43
10.3.13.	802.11a MODE IN THE 5.8 GHz BAND	44
10.3.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	44
10.3.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	44
10.3.16.	802.11ac HT80 MODE IN THE 5.8 GHz BAND	44
10.3.17.	99% BANDWIDTH PLOTS	45
10.4.	OUTPUT POWER AND PPSD	52
10.4.1.	802.11a MODE IN THE 5.2 GHz BAND	55
10.4.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	56
10.4.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	57
10.4.4.	802.11ac HT80 MODE IN THE 5.2 GHz BAND	58
10.4.5.	802.11a MODE IN THE 5.3 GHz BAND	59
10.4.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	60
10.4.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	61
10.4.8.	802.11ac HT80 MODE IN THE 5.3 GHz BAND	62
10.4.9.	802.11a MODE IN THE 5.5 GHz BAND	63
10.4.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	64
10.4.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	65
10.4.12.	802.11ac HT80 MODE IN THE 5.5 GHz BAND	66
10.4.13.	802.11a MODE STRADDLE CHANNEL 144	67
10.4.14.	802.11n HT20 MODE STRADDLE CHANNEL 144	70
10.4.15.	802.11n HT40 MODE STRADDLE CHANNEL 142	73
10.4.16.	802.11ac80 MODE STRADDLE CHANNEL 138	76
10.4.17.	802.11a MODE IN THE 5.8 GHz BAND	79
10.4.18.	802.11n HT20 MODE IN THE 5.8 GHz BAND	80
10.4.19.	802.11n HT40 MODE IN THE 5.8 GHz BAND	81
10.4.20.	802.11ac HT80 MODE IN THE 5.8 GHz BAND	82
10.4.21.	OUTPUT POWER AND PPSD PLOTS	83

11. TRANSMITTER ABOVE 1 GHz.....	96
11.1. 5.2 GHz.....	97
11.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND	97
11.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	108
11.1.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	119
11.1.4. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.2 GHz BAND.....	127
11.1. 5.3 GHz.....	132
11.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND	132
11.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	143
11.1.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	154
11.1.4. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.3 GHz BAND.....	162
11.2. 5.5-5.6 GHz.....	167
11.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND	167
11.2.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.5 GHz BAND.....	180
11.2.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.5 GHz BAND.....	193
11.2.4. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.5 GHz BAND.....	206
11.3. 5.8 GHz.....	213
11.3.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND	213
11.3.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND.....	226
11.3.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND.....	239
11.3.4. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.8 GHz BAND.....	249
12. WORST-CASE BELOW 1 GHz (in the 5.3 GHz Band).....	256
13. AC POWER LINE CONDUCTED EMISSIONS	259
14. DYNAMIC FREQUENCY SELECTION.....	263
14.1. OVERVIEW.....	263
14.1.1. LIMITS.....	263
14.1.2. TEST AND MEASUREMENT SYSTEM	267
14.1.3. SETUP OF EUT.....	270
14.1.4. DESCRIPTION OF EUT	271
14.2. RESULTS FOR 20 MHz BANDWIDTH.....	273
14.2.1. TEST CHANNEL	273
14.2.2. RADAR WAVEFORM AND TRAFFIC.....	273
14.2.3. OVERLAPPING CHANNEL TESTS.....	276
14.2.4. MOVE AND CLOSING TIME	276
14.3. RESULTS FOR 40 MHz BANDWIDTH.....	280
14.3.1. TEST CHANNEL	280
14.3.2. RADAR WAVEFORM AND TRAFFIC.....	280
14.3.3. OVERLAPPING CHANNEL TESTS.....	283
14.3.4. MOVE AND CLOSING TIME	283
14.3.5. 10-MINUTE BEACON MONITORING PERIOD	287
15. SETUP PHOTOS.....	288

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.

EUT DESCRIPTION: GSM/WCDMA/CDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ & NFC

SERIAL NUMBER: CB5A24PBQC (Conducted), CB5A24QH1H (Radiated)

DATE TESTED: APRIL 1 - 6, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



CHOON OOI
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.4-2009. 789033 D02 General UNII Test Procedures New Rules v01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber F
☐ Chamber B	☒ Chamber G
☒ Chamber C	☐ Chamber H

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 40000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/CDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac & NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

Frequency Range (MHz)	Mode	Total Output Power (dBm)	Total Output Power (mW)
5180-5240	802.11a	18.69	73.96
5180-5240	802.11n HT20	18.76	75.16
5190-5230	802.11n HT40	16.99	50.00
5210	802.11ac HT80	13.63	23.07
5260-5320	802.11a	18.7	74.13
5260-5320	802.11n HT20	18.98	79.07
5270-5310	802.11n HT40	16.47	44.36
5290	802.11ac HT80	13.38	21.78
5500-5720	802.11a	19.04	80.17
5500-5720	802.11n HT20	19.1	81.28
5510-5710	802.11n HT40	17.27	53.33
5530-5690	802.11ac HT80	13.935	24.75
5745-5825	802.11a	19.53	89.74
5745-5825	802.11n HT20	19.49	88.92
5755-5795	802.11n HT40	17.57	57.15
5775	802.11ac HT80	14.03	25.29

The transmitter has average conducted output power (measured by power meter) as follows:

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Avg Pwr (dBm)
UNII-1	802.11a	6 Mbps	36	5180	14.8	15.6
			40	5200	15.1	15.8
			44	5220	15.0	15.7
			48	5240	14.9	15.8
	802.11n (HT20)	6.5 Mbps	36	5180	14.7	15.6
			40	5200	14.9	15.7
			44	5220	15.0	15.5
			48	5240	14.9	15.7
	802.11n (HT40)	13.5 Mbps	38	5190	12.7	13.6
			46	5230	12.7	13.6
	802.11ac (VHT20)	6.5 Mbps	36	5180	14.6	15.9
			40	5200	14.9	15.8
			44	5220	14.9	15.6
			48	5240	14.9	15.8
	802.11ac (VHT40)	13.5 Mbps	38	5190	13.0	13.6
			46	5230	12.7	13.8
	802.11ac (VHT80)	29.3 Mbps	42	5210	9.7	10.7
UNII-2A	802.11a	6 Mbps	52	5260	15.2	16.1
			56	5280	15.0	15.6
			60	5300	14.9	15.7
			64	5320	14.8	15.9
	802.11n (HT20)	6.5 Mbps	52	5260	15.1	15.9
			56	5280	14.9	15.9
			60	5300	15.0	15.7
			64	5320	14.8	15.7
	802.11n (HT40)	13.5 Mbps	54	5270	12.8	14.0
			62	5310	12.9	13.7
	802.11ac (VHT20)	6.5 Mbps	52	5260	15.0	15.9
			56	5280	14.9	15.9
			60	5300	15.0	15.6
			64	5320	14.9	15.6
	802.11ac (VHT40)	13.5 Mbps	54	5270	12.8	14.0
			62	5310	12.8	13.7
	802.11ac (VHT80)	29.3 Mbps	58	5290	9.6	10.6
UNII-2C	802.11a	6 Mbps	100	5500	15.4	16.5
			104	5520	15.3	16.6
			108	5540	15.0	16.7
			112	5560	15.2	16.4
			116	5580	15.4	16.4

			120	5600	15.1	16.4
			124	5620	15.3	16.2
			128	5640	15.2	16.2
			132	5660	14.8	16.2
			136	5680	15.2	16.3
			140	5700	15.2	16.2
			144	5720	15.1	16.1
	802.11n (HT20)	6.5 Mbps	100	5500	15.0	16.5
			104	5520	15.2	16.6
			108	5540	15.2	16.6
			112	5560	15.3	16.6
			116	5580	15.5	16.3
			120	5600	15.4	16.2
			124	5620	15.2	16.3
			128	5640	14.9	16.2
			132	5660	15.0	16.2
			136	5680	15.0	16.3
			140	5700	15.0	16.1
			144	5720	14.8	16.1
	802.11n (HT40)	13.5 Mbps	102	5510	13.2	14.7
			110	5550	13.5	14.3
			118	5590	13.3	14.4
			126	5630	13.4	14.4
			134	5670	13.2	14.1
			142	5710	13.0	14.2
	802.11ac (VHT20)	6.5 Mbps	100	5500	15.1	16.6
			104	5520	15.1	16.6
			108	5540	15.3	16.5
			112	5560	15.3	16.8
			116	5580	15.3	16.4
			120	5600	14.9	16.3
			124	5620	15.4	16.2
			128	5640	15.0	16.4
			132	5660	15.0	16.3
			136	5680	15.0	16.2
			140	5700	15.0	16.2
			144	5720	14.8	16.2
	802.11ac (VHT40)	13.5 Mbps	102	5510	13.4	14.7
			110	5550	13.4	14.5
			118	5590	13.3	14.3
			126	5630	13.3	14.3
			134	5670	13.2	14.1
			142	5710	13.0	14.1
	802.11ac	29.3 Mbps	106	5530	10.0	11.6

	(VHT80)		122	5610	10.2	11.4
			138	5690	10.1	11.2
UNII-3 or §15.247	802.11a	6 Mbps	149	5745	15.5	16.0
			153	5765	15.1	16.0
			157	5785	15.0	16.1
			161	5805	14.8	15.6
			165	5825	15.0	16.2
	802.11n (HT20)	6.5 Mbps	149	5745	15.2	16.0
			153	5765	14.9	15.9
			157	5785	15.2	15.9
			161	5805	14.7	16.0
			165	5825	15.1	15.9
	802.11n (HT40)	13.5 Mbps	151	5755	12.9	13.7
			159	5795	12.9	14.0
	802.11ac (VHT20)	6.5 Mbps	149	5745	15.4	16.2
			153	5765	15.1	15.9
			157	5785	15.1	16.1
			161	5805	14.8	16.0
			165	5825	15.0	16.3
	802.11ac (VHT40)	13.5 Mbps	151	5755	13.0	14.0
			159	5795	13.1	14.0
	802.11ac (VHT80)	29.3 Mbps	155	5775	10.0	10.6

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, please refer to section 10.4 for antenna gain information.

List of test reduction and modes covering other modes:

Authorized Frequency Band (Antenna port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
5180 - 5240	802.11a legacy 1TX/STBC 2TX	802.11a 2TX CDD
5180 - 5240	802.11HT20 1TX	802.11n HT20 2TX CDD
5180 - 5240	802.11HT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5180 - 5240	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5180 - 5240	802.11ac VHT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5180 - 5240	802.11ac VHT20 2TX CDD/Tx BF	802.11n HT20 2TX CDD
5190 - 5230	802.11n HT40 1TX	802.11n HT40 2TX CDD
5190 - 5230	802.11n HT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5190 - 5230	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5190 - 5230	802.11ac VHT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5190 - 5230	802.11ac VHT40 2TX CDD/Tx BF	802.11n HT40 2TX CDD
5210	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5210	802.11ac VHT80 2TX STBC/SDM/Tx BF	802.11ac VHT80 2TX CDD

Authorized Frequency Band (Antenna port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
5260 - 5320	802.11a legacy 1TX/STBC 2TX	802.11a 2TX CDD
5260 - 5320	802.11HT20 1TX	802.11n HT20 2TX CDD
5260 - 5320	802.11HT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5260 - 5320	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5260 - 5320	802.11ac VHT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5260 - 5320	802.11ac VHT20 2TX CDD/Tx BF	802.11n HT20 2TX CDD
5270 - 5310	802.11n HT40 1TX	802.11n HT40 2TX CDD
5270 - 5310	802.11n HT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5270 - 5310	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5270 - 5310	802.11ac VHT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5270 - 5310	802.11ac VHT40 2TX CDD/Tx BF	802.11n HT40 2TX CDD
5290	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5290	802.11ac VHT80 2TX STBC/SDM/Tx BF	802.11ac VHT80 2TX CDD

Authorized Frequency Band (Antenna port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
5500 - 5720	802.11a legacy 1TX/STBC 2TX	802.11a 2TX CDD
5500 - 5720	802.11HT20 1TX	802.11n HT20 2TX CDD
5500 - 5720	802.11HT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5500 - 5720	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5500 - 5720	802.11ac VHT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5500 - 5720	802.11ac VHT20 2TX CDD/Tx BF	802.11n HT20 2TX CDD
5510 - 5710	802.11n HT40 1TX	802.11n HT40 2TX CDD
5510 - 5710	802.11n HT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5510 - 5710	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5510 - 5710	802.11ac VHT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5510 - 5710	802.11ac VHT40 2TX CDD/Tx BF	802.11n HT40 2TX CDD
5530 - 5690	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5530 - 5690	802.11ac VHT80 2TX STBC/SDM/Tx BF	802.11ac VHT80 2TX CDD

Authorized Frequency Band (Antenna port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
5745 - 5825	802.11a legacy 1TX/STBC 2TX	802.11a 2TX CDD
5745 - 5825	802.11HT20 1TX	802.11n HT20 2TX CDD
5745 - 5825	802.11HT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5745 - 5825	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5745 - 5825	802.11ac VHT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5745 - 5825	802.11ac VHT20 2TX CDD/Tx BF	802.11n HT20 2TX CDD
5755 - 5795	802.11n HT40 1TX	802.11n HT40 2TX CDD
5755 - 5795	802.11n HT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5755 - 5795	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5755 - 5795	802.11ac VHT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5755 - 5795	802.11ac VHT40 2TX CDD/Tx BF	802.11n HT40 2TX CDD
5775	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5775	802.11ac VHT80 2TX STBC/SDM/Tx BF	802.11ac VHT80 2TX CDD

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in the X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0
802.11ac VHT80mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT


Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	EP880	3514W 01 S08328	N/A
Earphone	Sony	N/A	N/A	N/A
USB cable	Sony	N/A	N/A	N/A

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is setup as a stand-alone device.

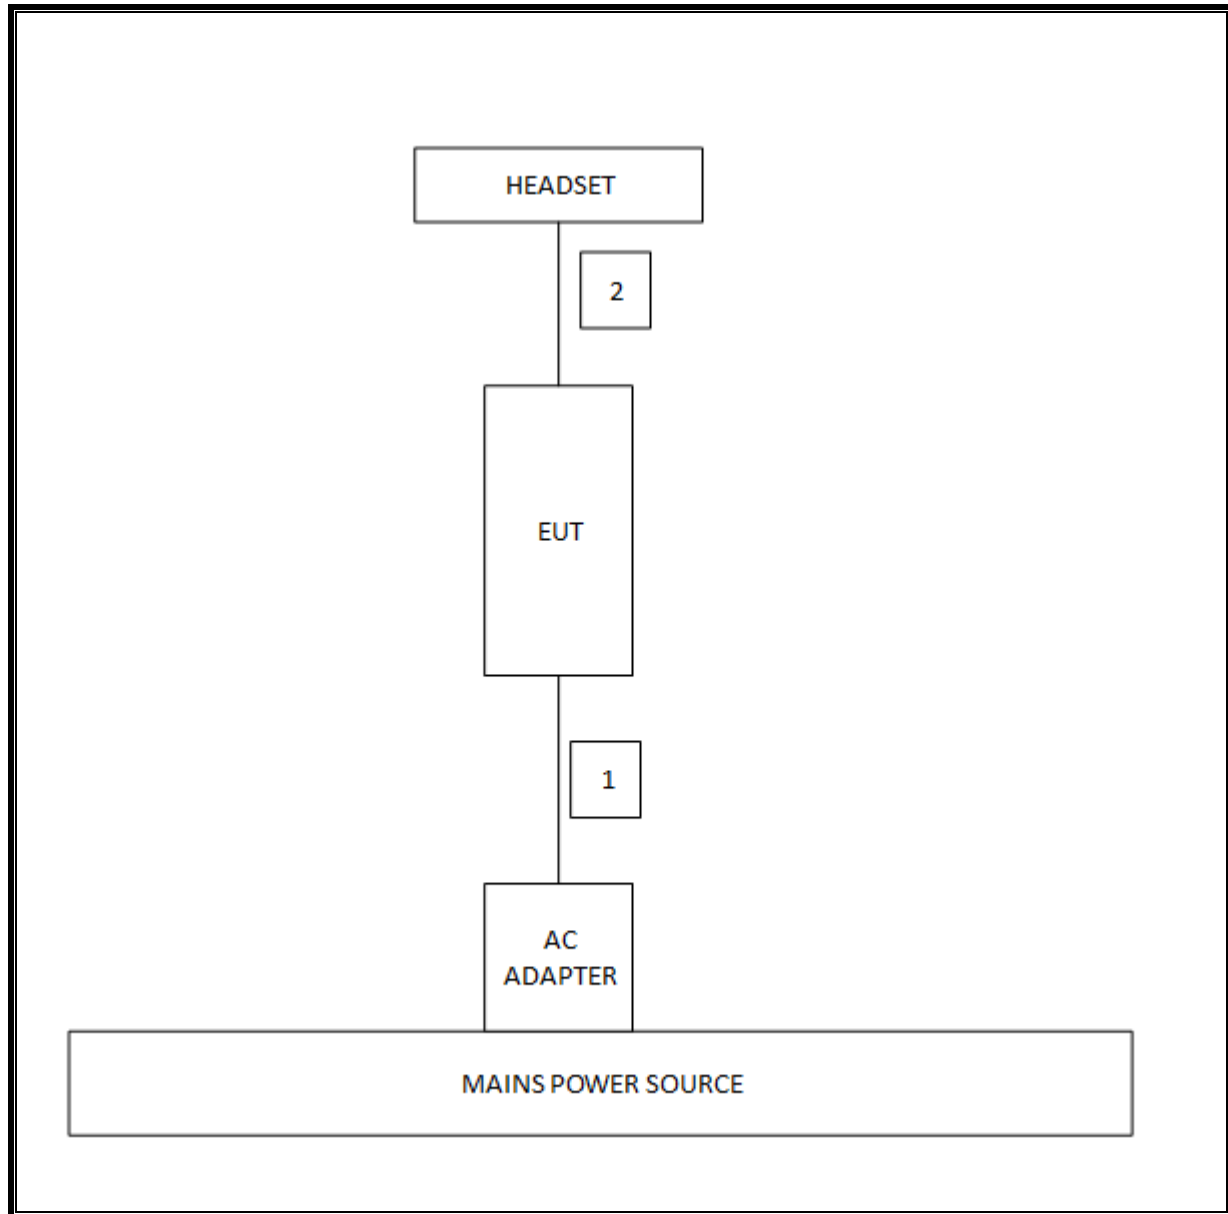SETUP DIAGRAM FOR TESTS

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
Spectrum Analyzer, 9KHz-40GHz	HP	8564E	106	08/06/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	100773	08/15/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/15
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB 1	T243	12/08/15
RF Preamplifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preamplifier, 26GHz - 40GHz	Miteq	NSP4000-SP2	86	04/07/16
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 18GHz	Miteq	AFS42-00101800-25-S-42	1818466	05/09/15
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.407 (a)	Occupied Band width (26dB)	N/A	Conducted	Pass	82.0MHz
14.407	6dB Band width	>500KHz		Pass	16.41MHz
15.407 (a)(2)	TX Cond. Power 5.15-5.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		Pass	19.1dBm
15.407 (a)(3)	TX Cond. Power 5.725-5.850	< 30dBm or 17+10Log(OBW)		Pass	19.49dBm
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		Pass	7.97dBm
15.407 (a)(5)	PSD	30dBm per 500kHz		Pass	5.66dBm
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	Pass	32.15dBuV(AV)
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		Pass	52.6dBuV/m
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Radiated / Conducted	Pass	N/A

8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.


PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.


8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
802.11a	3.12	3.15	0.992	99.2%	0.00	0.010
802.11n HT20	1.47	1.494	0.986	98.6%	0.00	0.010
802.11n HT40	0.73	0.746	0.973	97.3%	0.12	1.377
802.11ac HT80	0.36	0.382	0.948	94.8%	0.23	2.759

8.2. DUTY CYCLE PLOTS

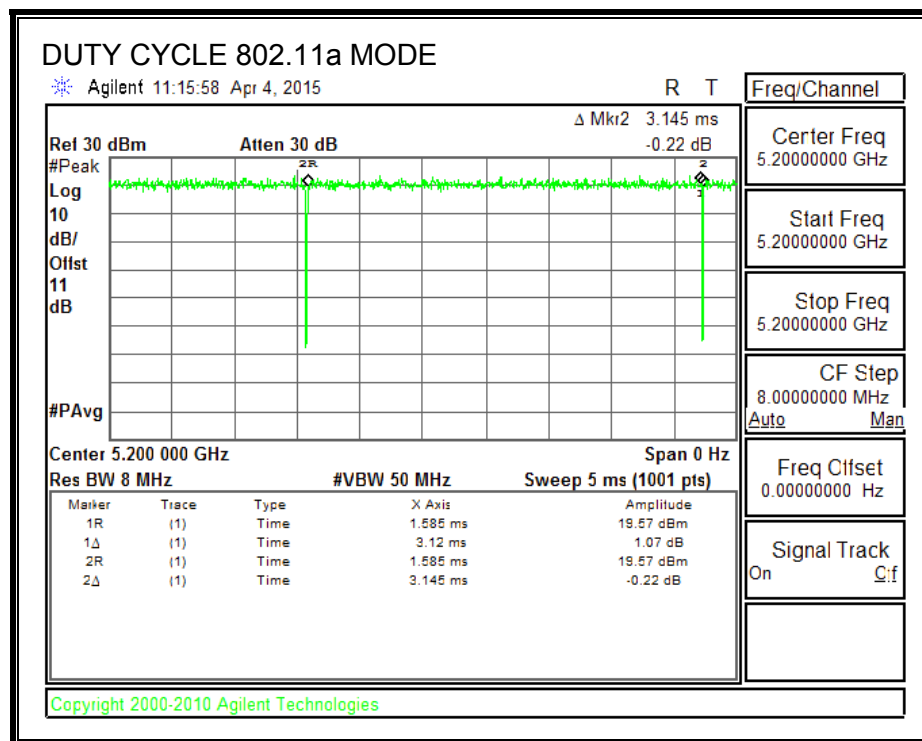

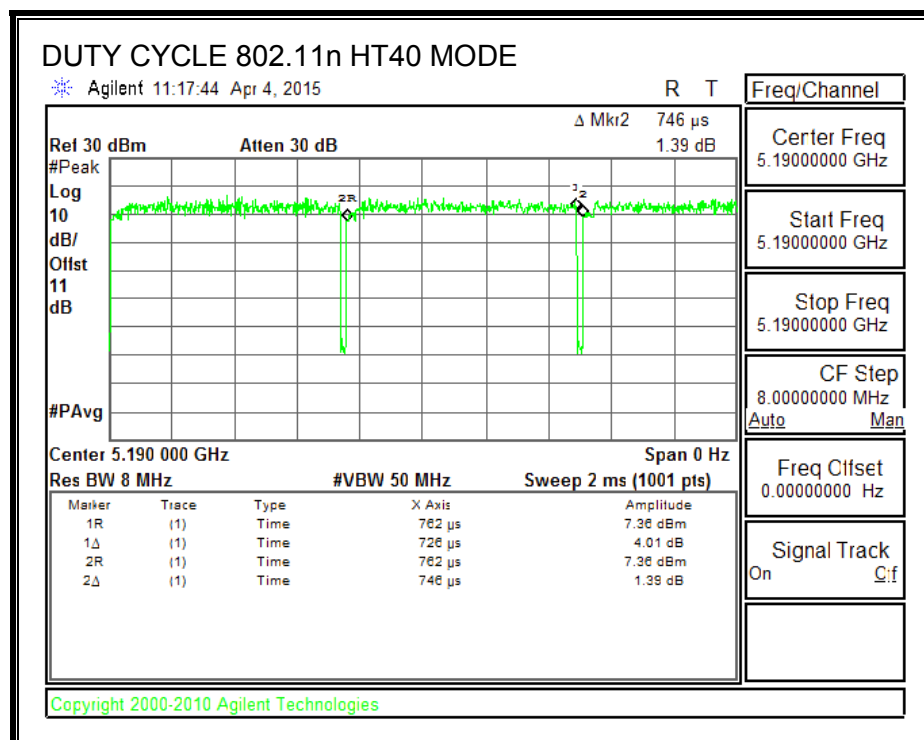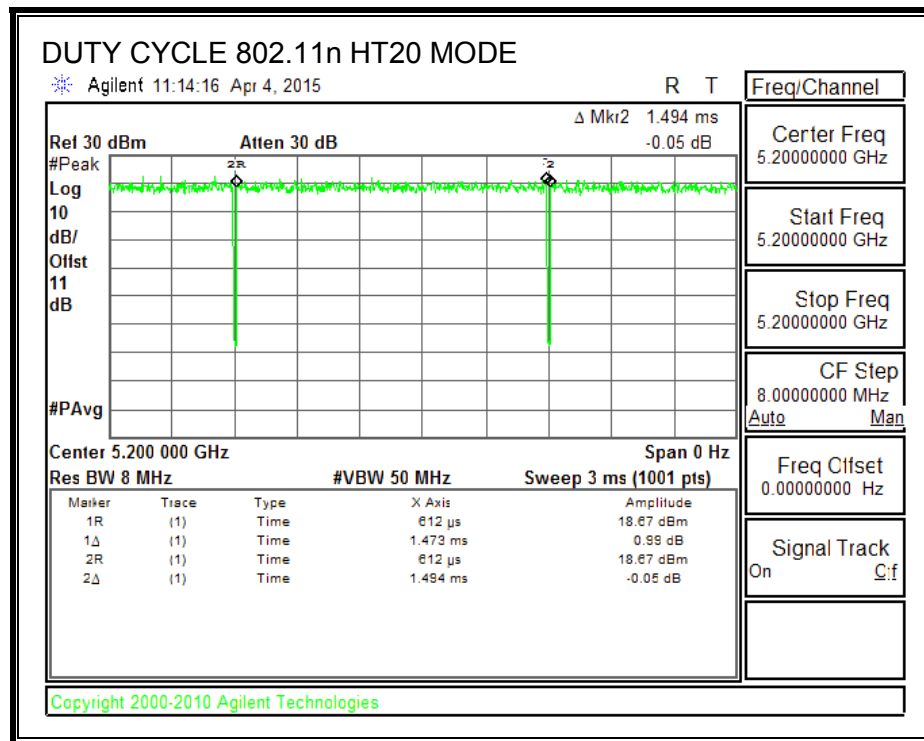

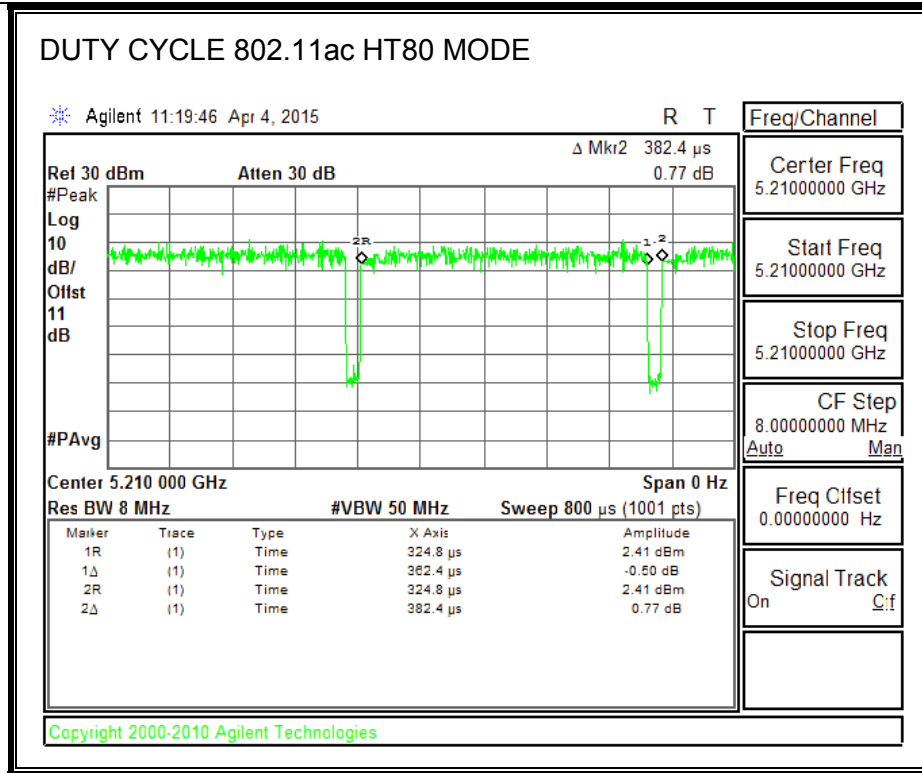

9. MEASUREMENT METHOD

789033 D02 General UNII Test Procedures New Rules v01

The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used for power and PPSD

The Duty Cycle is less than 98% and consistent, KDB 789033 Method AD with Power RMS Averaging and duty cycle correction is used.

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

10.1.1. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
Low	5745	16.41	16.44	0.5
Mid	5785	16.41	16.44	0.5
High	5825	16.41	16.41	0.5
Worst		16.41	16.41	

10.1.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
Low	5745	17.64	17.67	0.5
Mid	5785	17.64	17.67	0.5
High	5825	17.64	17.64	0.5
Worst		17.64	17.64	

10.1.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
Low	5755	36.36	36.42	0.5
High	5795	36.36	36.36	0.5
Worst		36.36	36.36	0.5

10.1.4. 802.11ac HT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
Low	5775	75.60	76.32	0.5
Worst		75.60	76.36	0.5

10.1.5. 802.11a MODE THE CHANNEL 144

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
144	5720	3.25	3.27	0.5

Note: the 6dB minimum bandwidth for the portion falling in the UNII-3 band.

10.1.6. 802.11n HT20 MODE THE CHANNEL 144

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
144	5720	3.84	3.88	0.5

Note: the 6dB minimum bandwidth for the portion falling in the UNII-3 band.

10.1.7. 802.11n HT40 MODE THE CHANNEL 142

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
142	5710	3.24	3.24	0.5

Note: the 6dB minimum bandwidth for the portion falling in the UNII-3 band.


10.1.8. 802.11ac HT80 MODE THE CHANNEL 138

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
138	5690	3.16	3.16	0.5

Note: the 6dB minimum bandwidth for the portion falling in the UNII-3 band.

10.1.9. 6 dB BANDWIDTH MID CH PLOTS

6 dB BANDWIDTH Chain 0

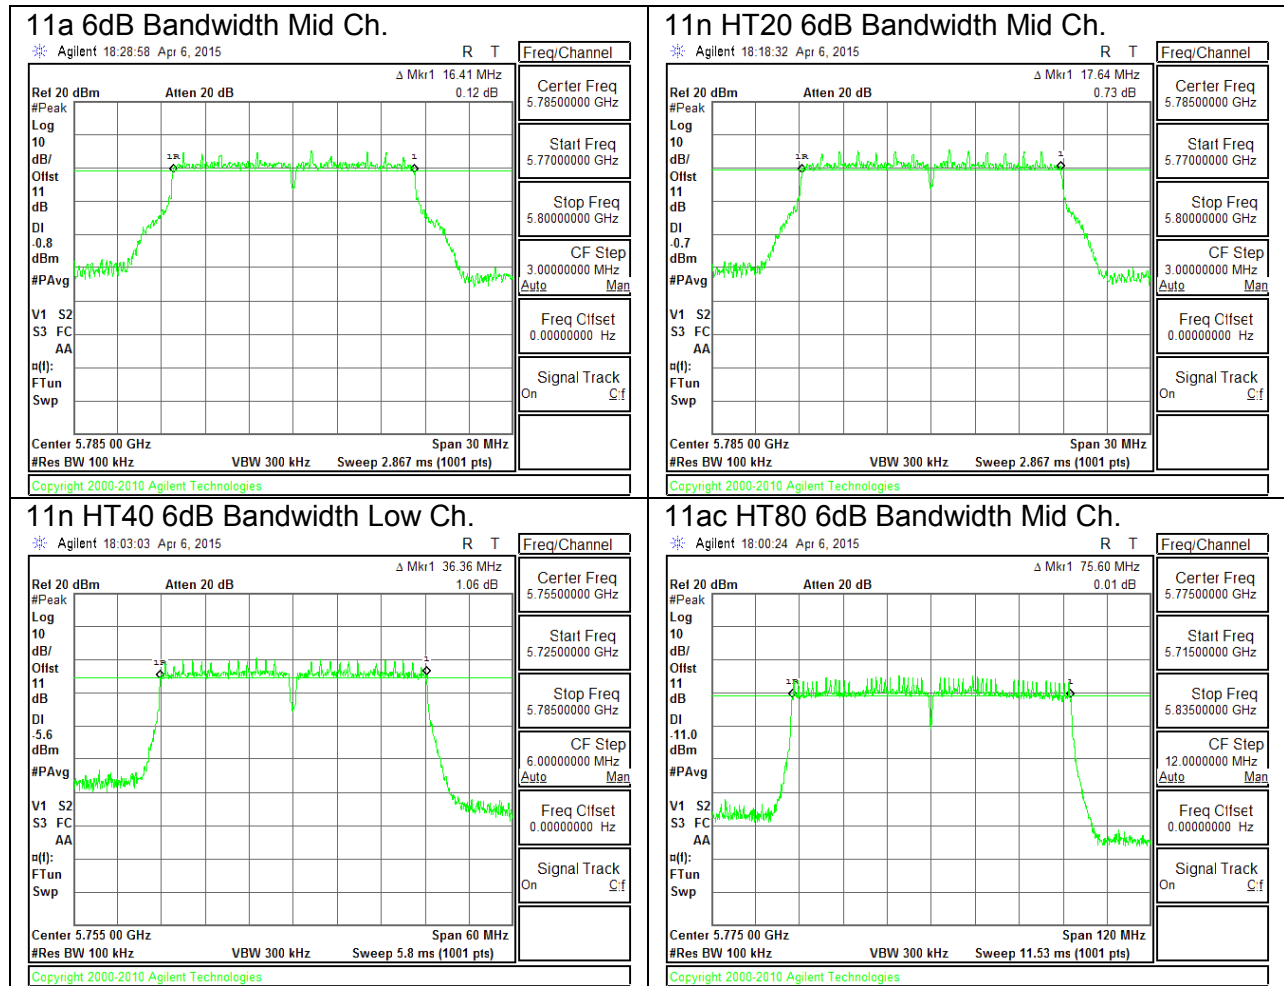


11a 6dB Bandwidth Channel 144




11n HT20 6dB Bandwidth Channel 144




11n HT40 6dB Bandwidth Channel 142

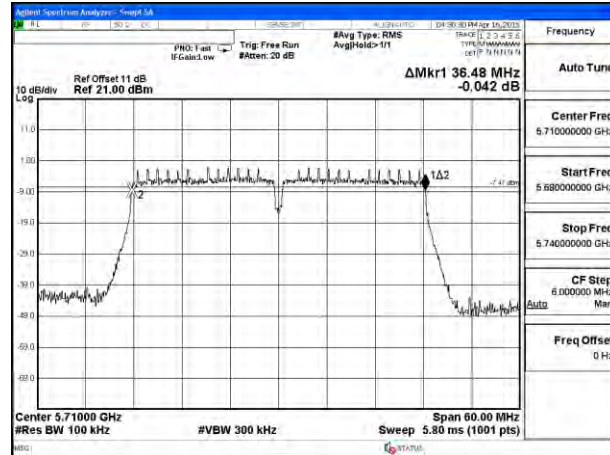


11ac HT80 6dB Bandwidth Channel 138

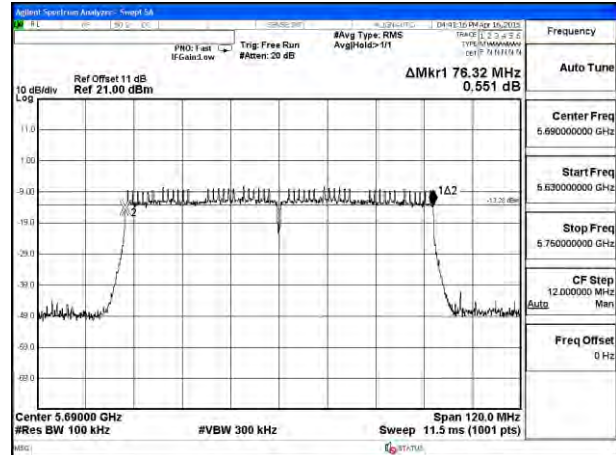


6 dB BANDWIDTH Chain 1

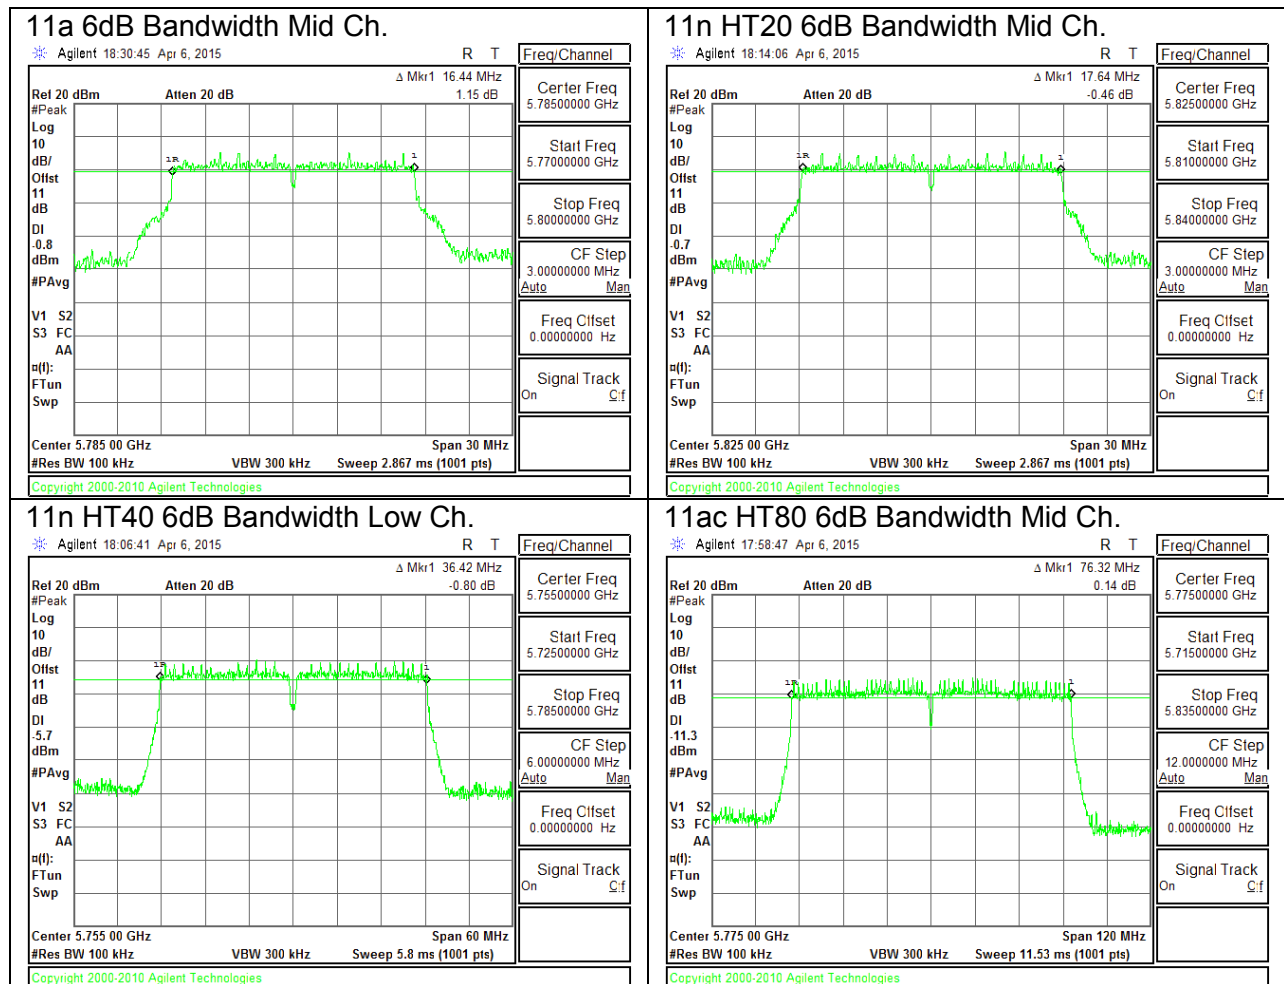


11a 6dB Bandwidth Channel 144

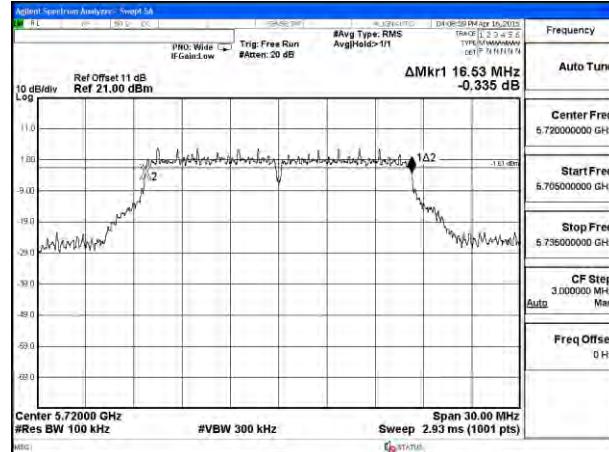


11n HT20 6dB Bandwidth Channel 144

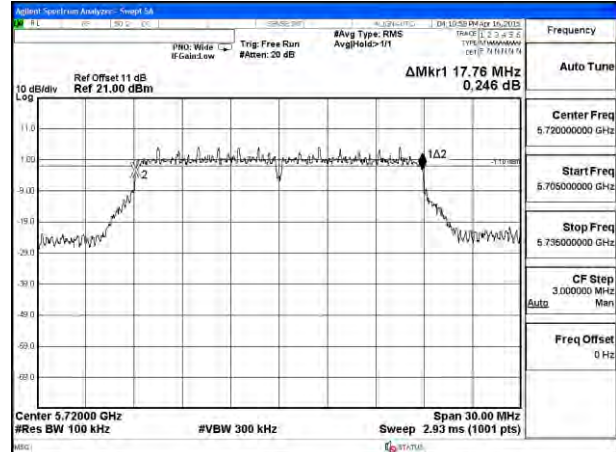

11n HT40 6dB Bandwidth Channel 142

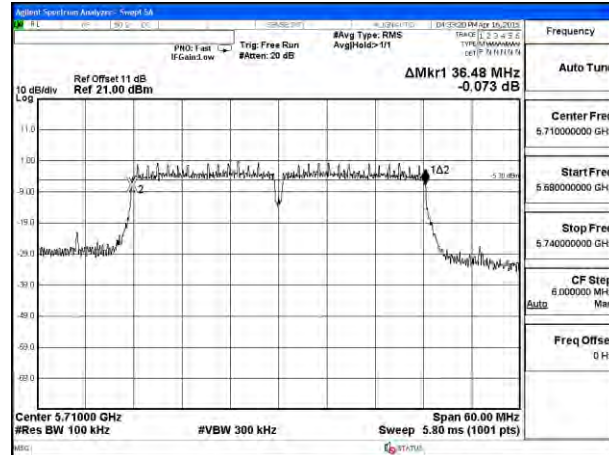

11ac HT80 6dB Bandwidth Channel 138

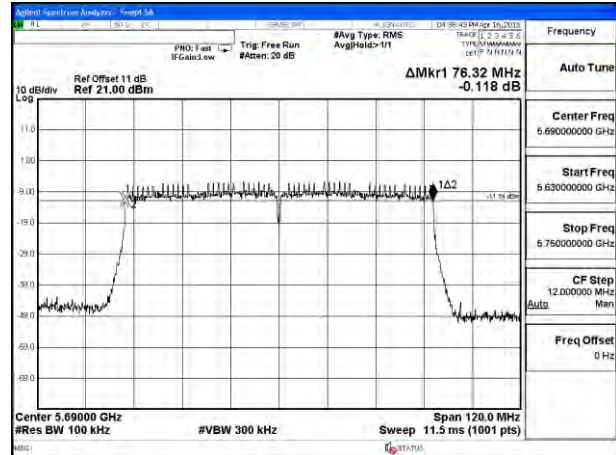

10.2. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

10.2.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	21.5	21.6
Mid	5200	21.5	21.5
High	5240	18.7	18.6

10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	21.8	21.6
Mid	5200	21.6	21.9
High	5240	18.8	19.0

10.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.1	39.4
High	5230	40.1	39.4

10.2.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5210	82.0	81.8

10.2.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5260	18.6	18.5
Mid	5300	21.6	21.7
High	5320	21.5	21.4

10.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5260	18.9	18.8
Mid	5300	21.8	22.0
High	5320	21.8	21.8

10.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5270	40.3	39.8
High	5310	40.1	40.1

10.2.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5290	82.0	81.5

10.2.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5500	21.7	21.5
Mid	5580	18.5	18.4
High	5700	21.6	21.4
144	5720	21.14	21.5

10.2.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5500	21.8	21.7
Mid	5580	18.8	19.0
High	5700	21.7	21.7
144	5720	21.68	21.47

10.2.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5510	40.1	39.7
Mid	5550	40.0	39.6
High	5670	40.3	39.5
142	5710	39.88	39.35

10.2.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5530	81.8	81.2
138	5690	81.33	80.94

10.2.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5745	21.5	21.5
Mid	5785	21.5	21.4
High	5825	21.7	21.5

10.2.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5745	21.7	21.6
Mid	5785	21.8	21.6
High	5825	21.9	21.9

10.2.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5755	40.2	39.7
High	5795	39.9	39.4


10.2.16. 802.11ac HT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5775	81.8	81.2


10.2.17. 26 dB BANDWIDTH PLOTS


UNII 5.2 GHz

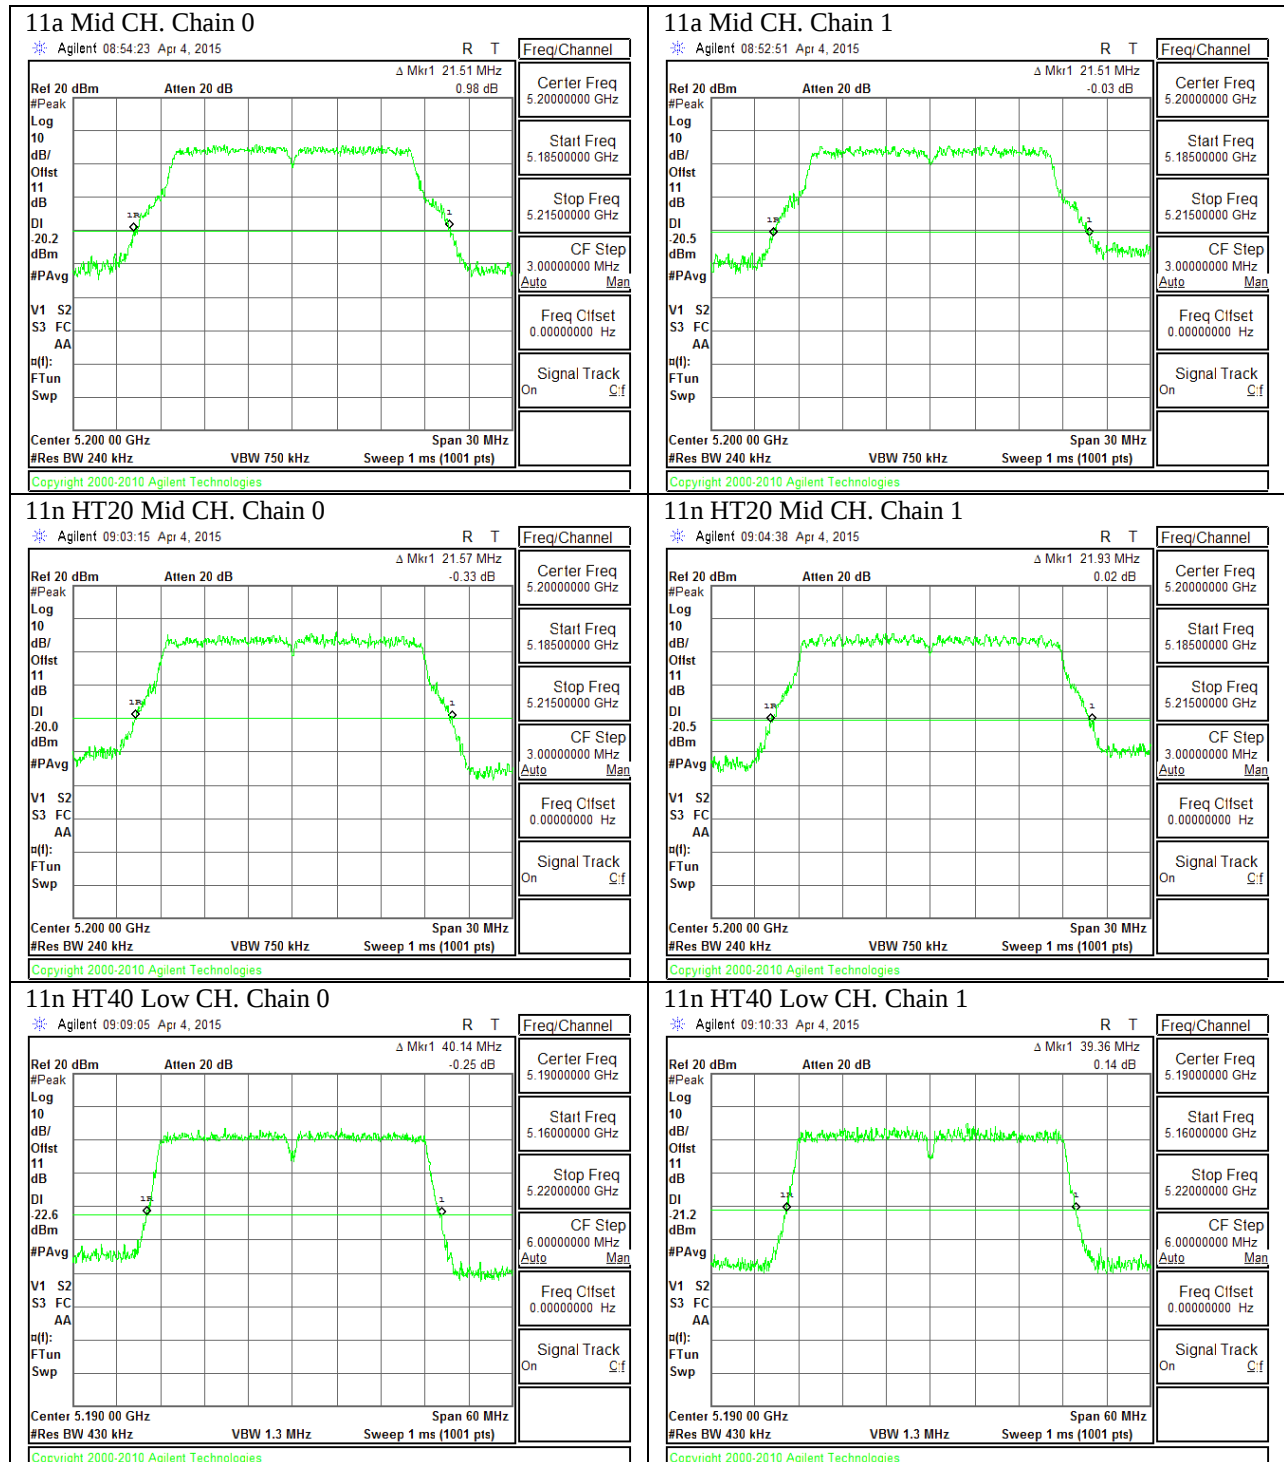

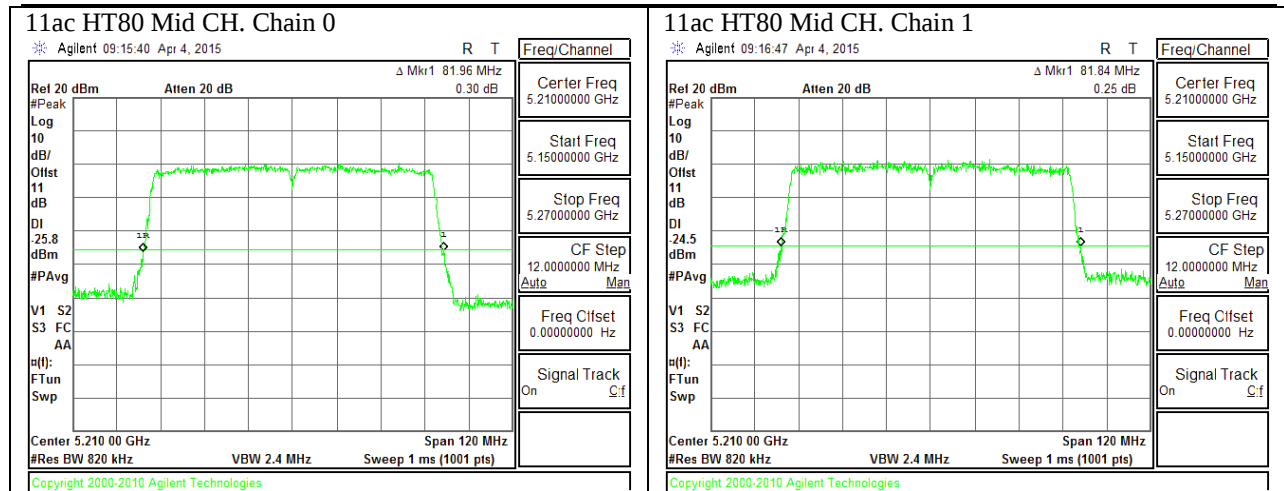



UNII 5.3GHz

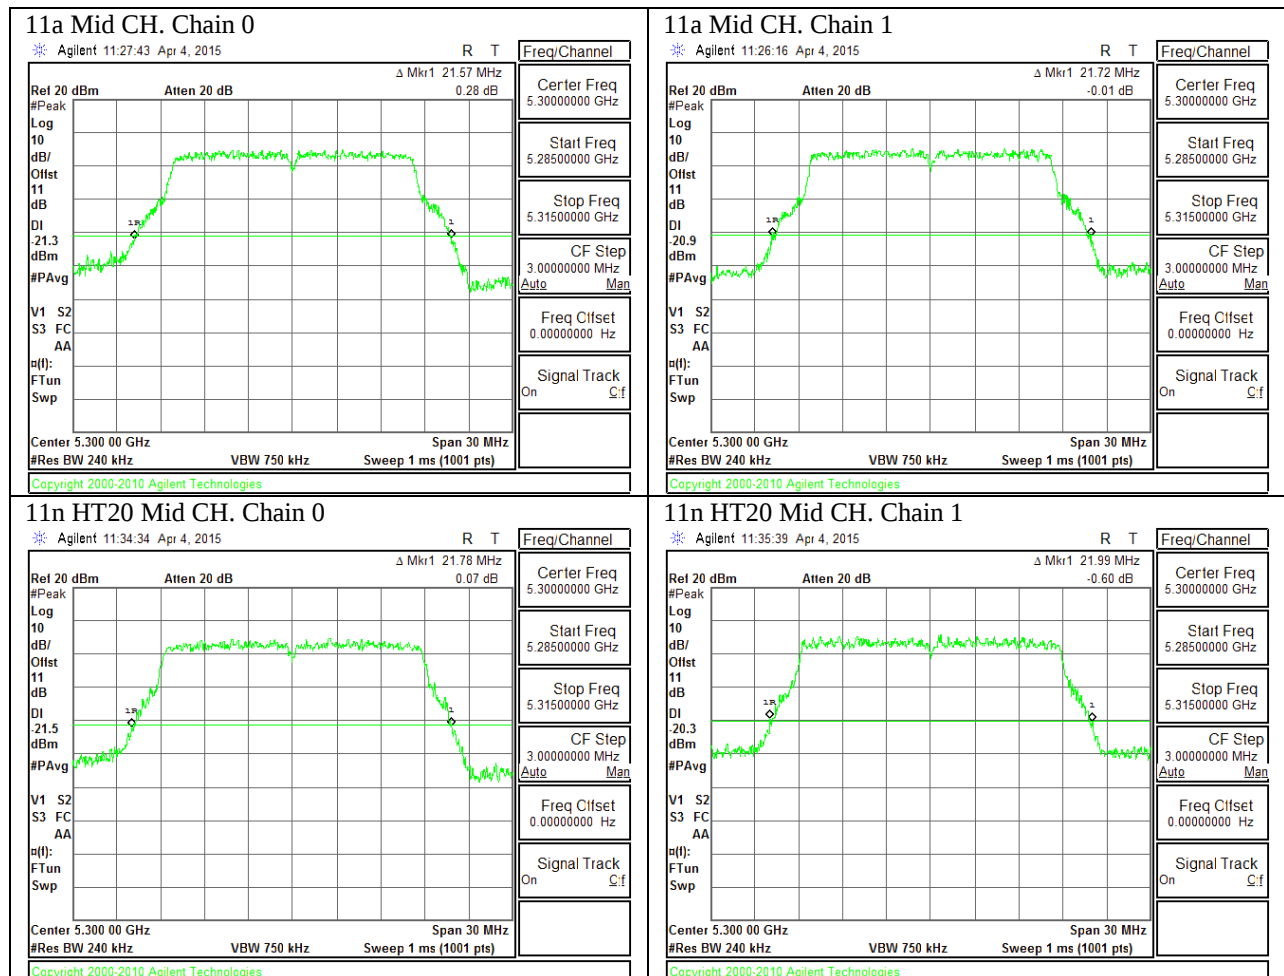

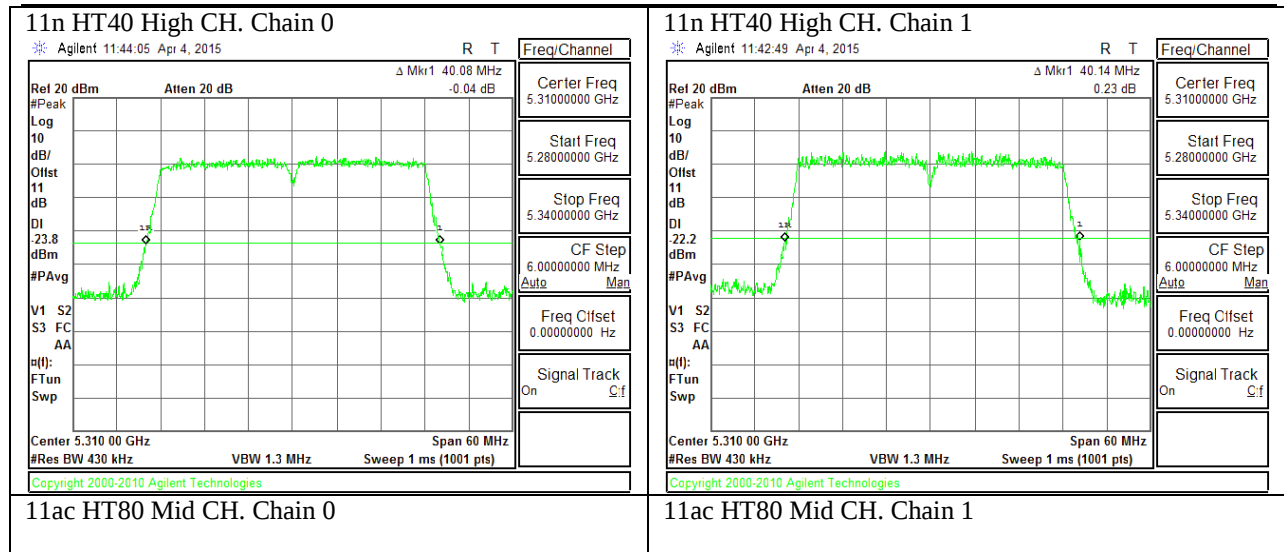



UNII 5.5GHz

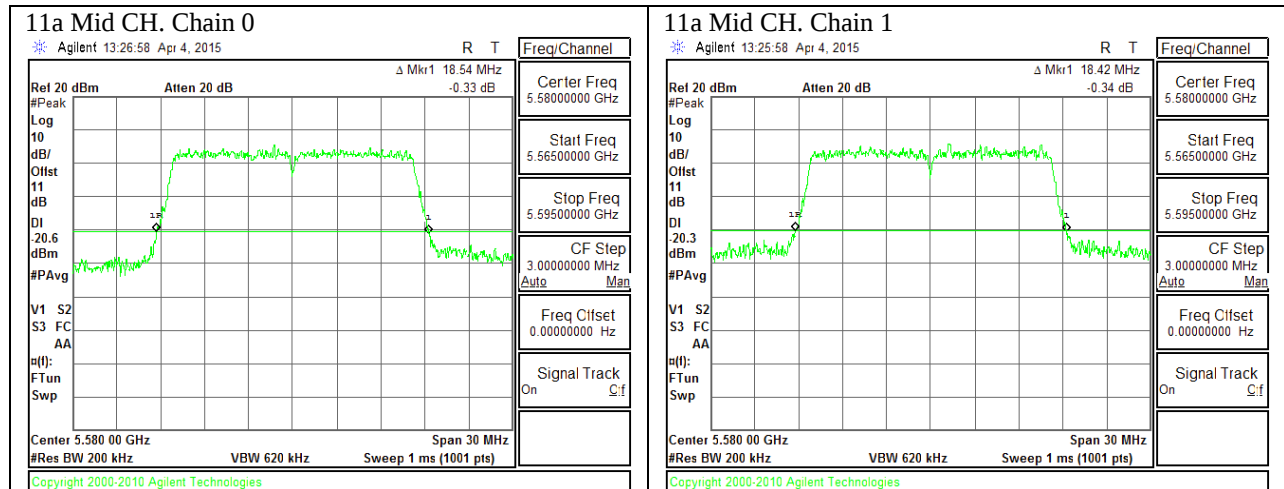

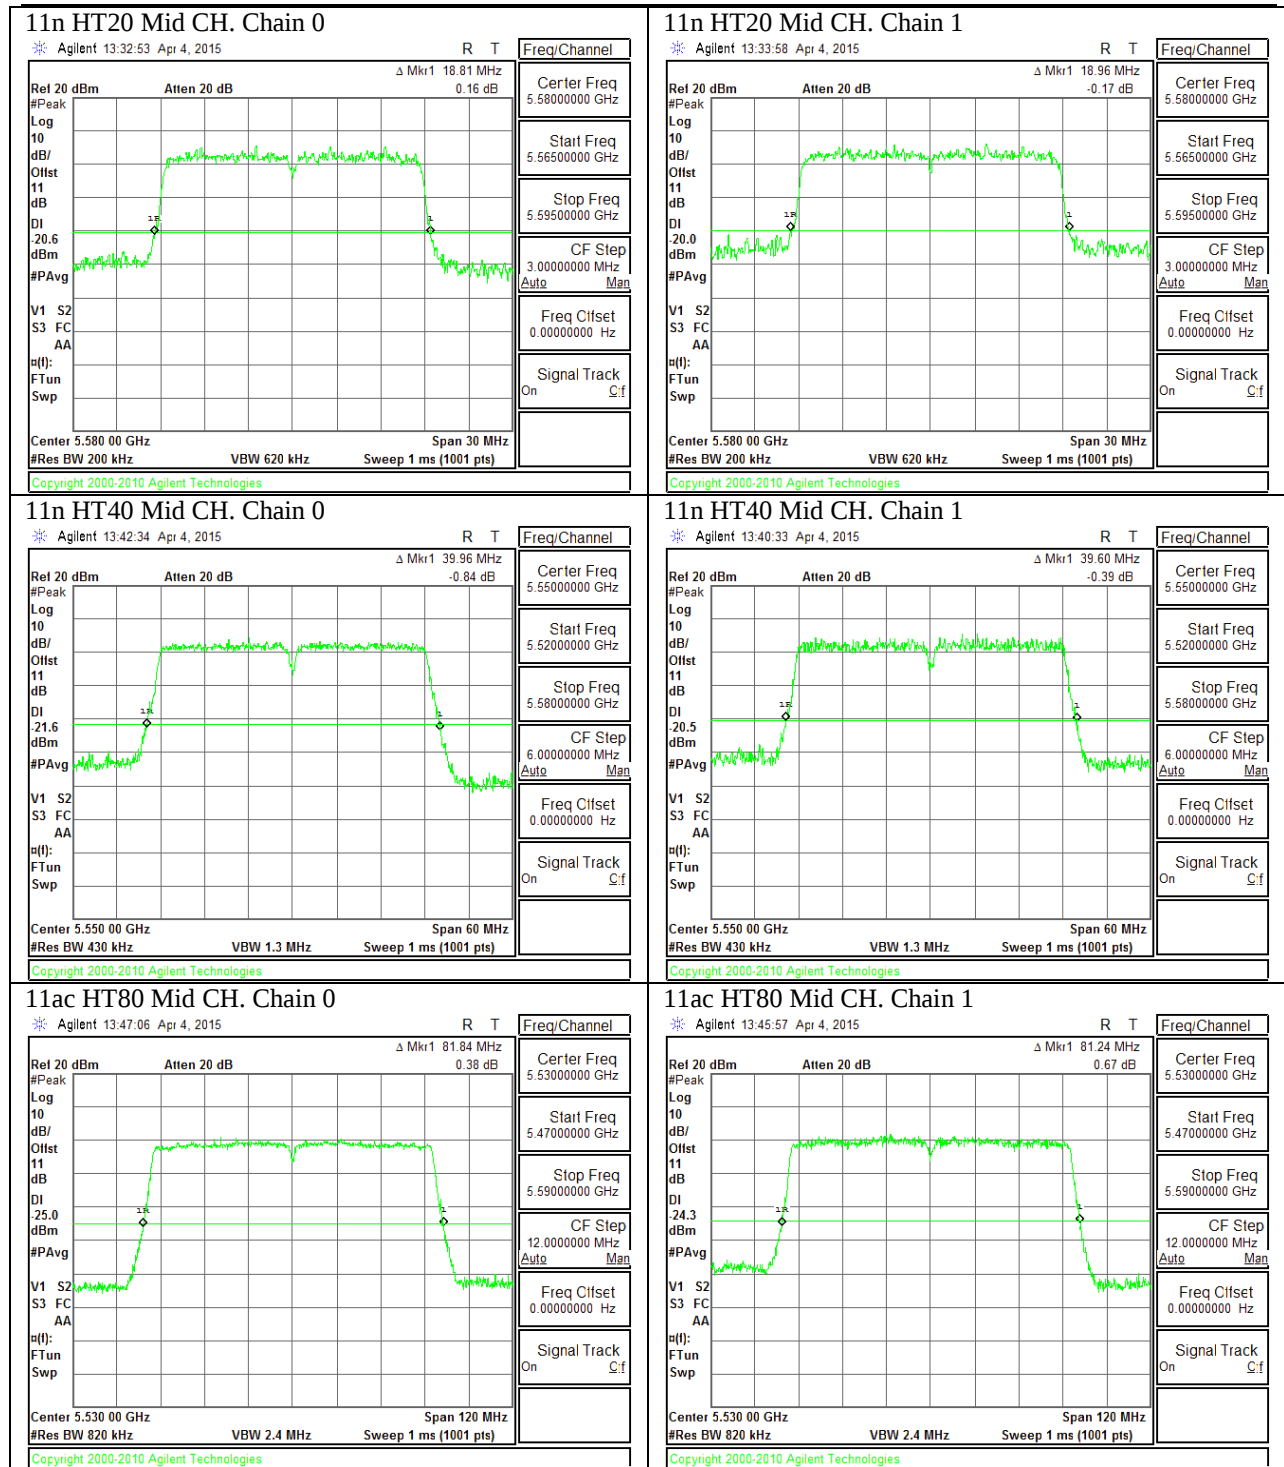



UNII Straddling Channels

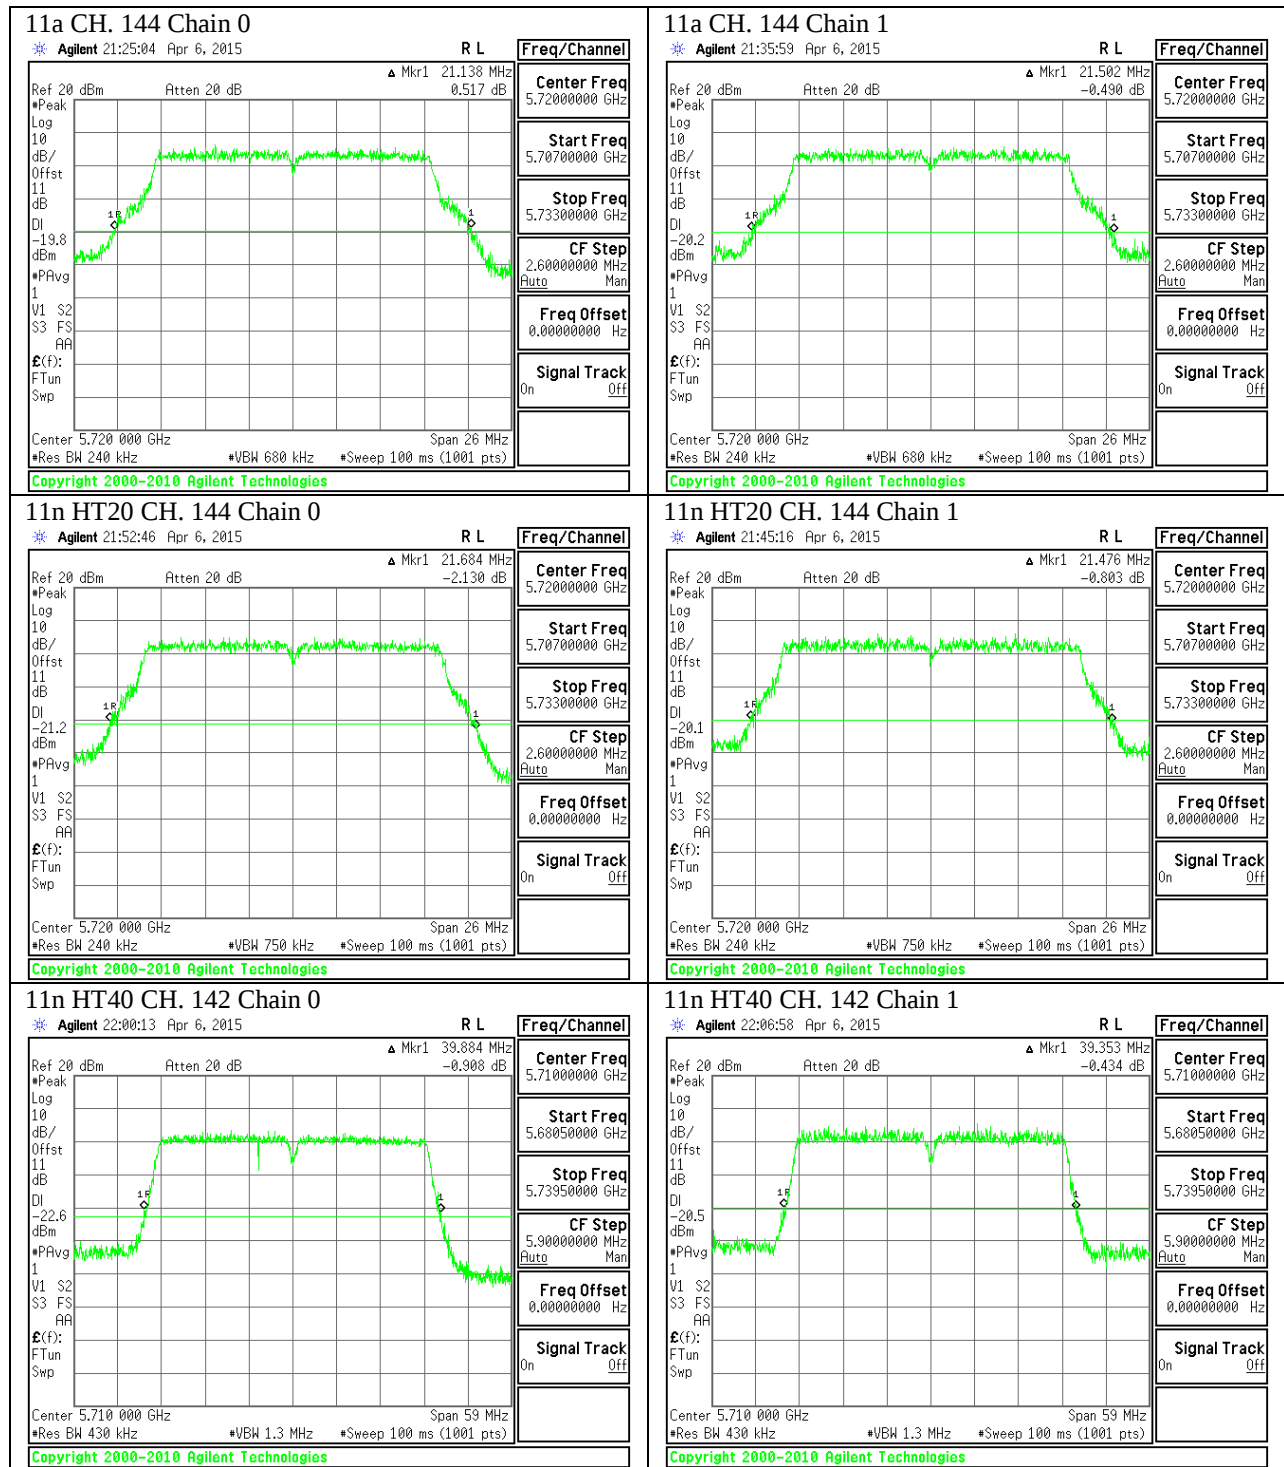

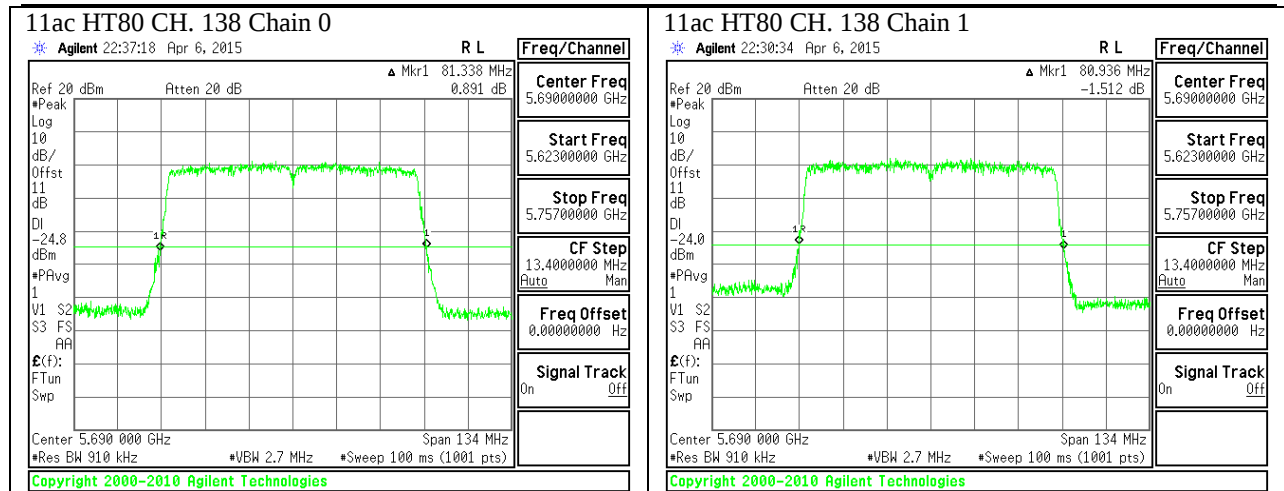

UNII 5.8GHz

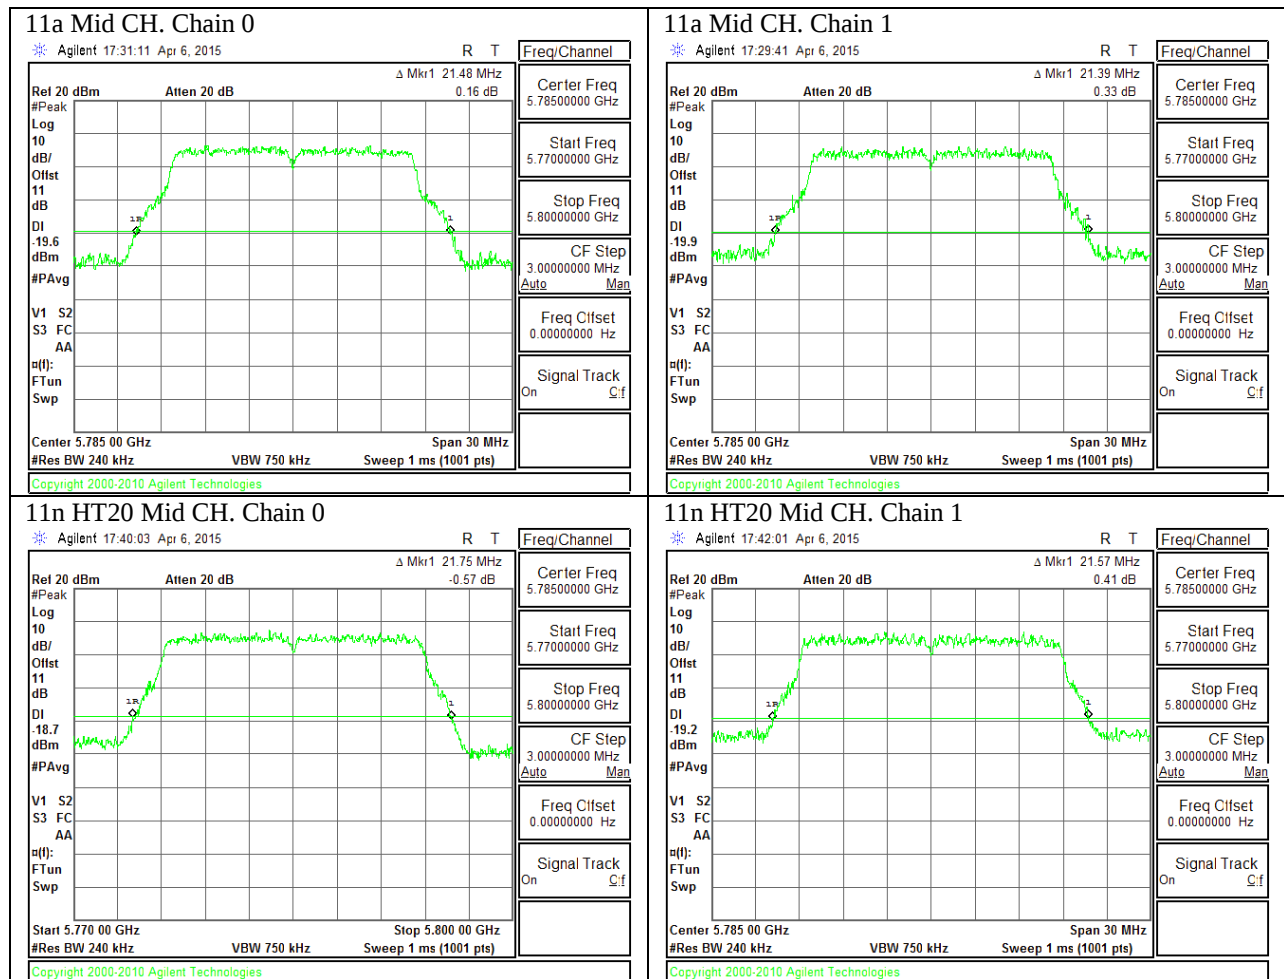

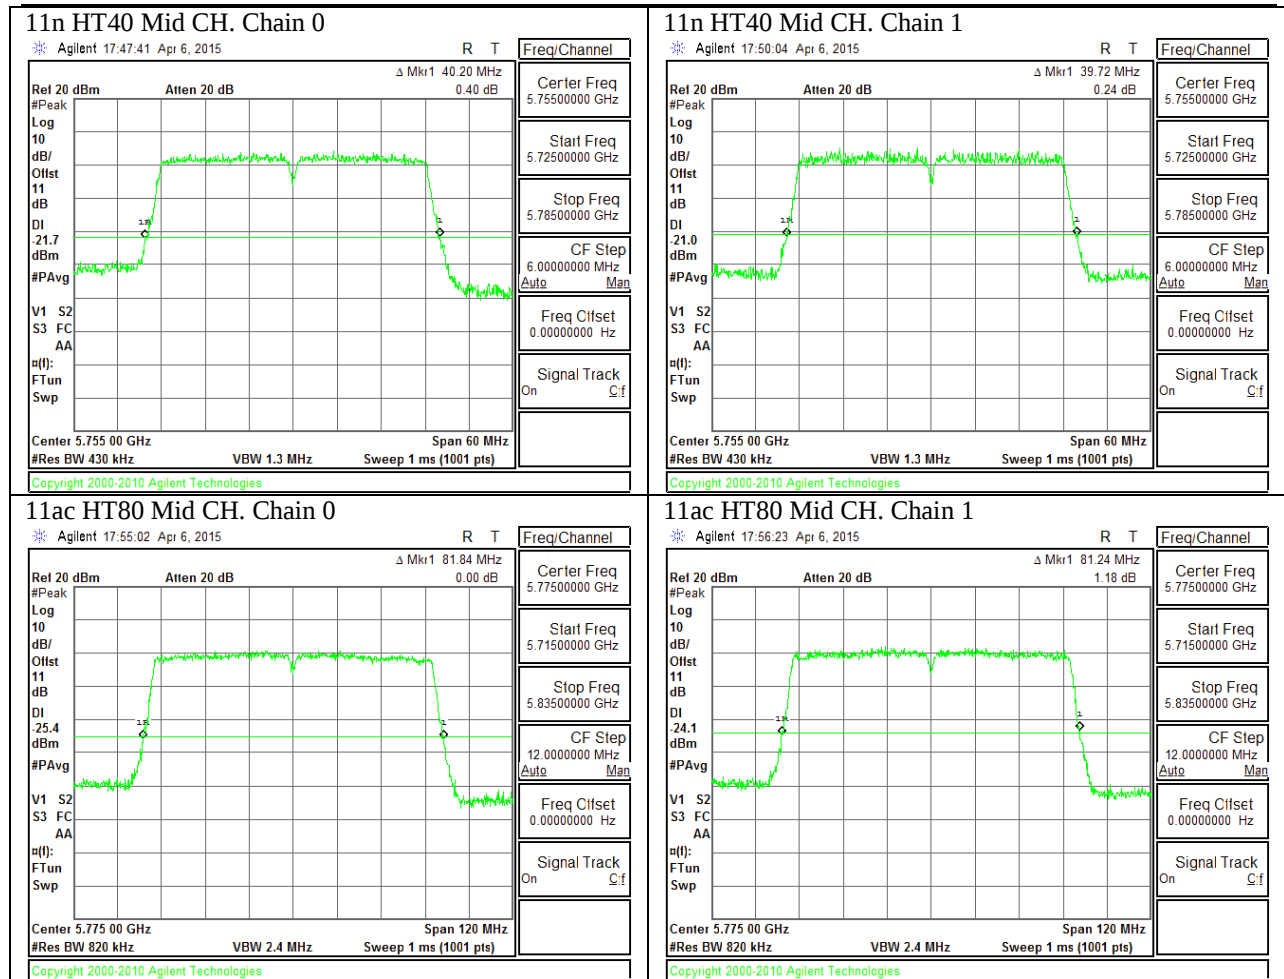

10.3. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

10.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	16.6	17.9
Mid	5200	16.6	16.6
High	5240	16.5	16.5

10.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	17.8	17.8
Mid	5200	17.8	17.8
High	5240	17.5	17.5

10.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.3	36.3
High	5230	36.3	36.3

10.3.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5210	75.7	75.7

10.3.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5260	16.5	16.5
Mid	5300	16.6	16.6
High	5320	17.7	16.6

10.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5260	17.5	17.5
Mid	5300	17.8	17.8
High	5320	17.8	17.8

10.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5270	36.2	36.3
High	5310	36.3	36.2

10.3.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5290	75.7	75.7

10.3.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5500	16.6	16.6
Mid	5580	16.5	16.5
High	5700	16.6	16.6
144	5720	16.6	16.6

10.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5500	17.8	17.8
Mid	5580	17.5	17.5
High	5700	17.8	17.8
144	5720	17.8	17.8

10.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5510	36.3	36.3
Mid	5550	36.3	36.3
High	5670	36.3	36.3
142	5710	34.3	36.3

10.3.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5530	75.7	75.7
138	5690	75.8	75.8

10.3.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5745	16.6	16.6
Mid	5785	16.6	16.6
High	5825	16.6	16.6

10.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5745	17.8	17.8
Mid	5785	17.8	17.8
High	5825	17.8	17.8

10.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5755	36.3	36.3
High	5795	36.3	36.3


10.3.16. 802.11ac HT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5775	75.7	75.7


10.3.17. 99% BANDWIDTH PLOTS

UNII 5.2GHz

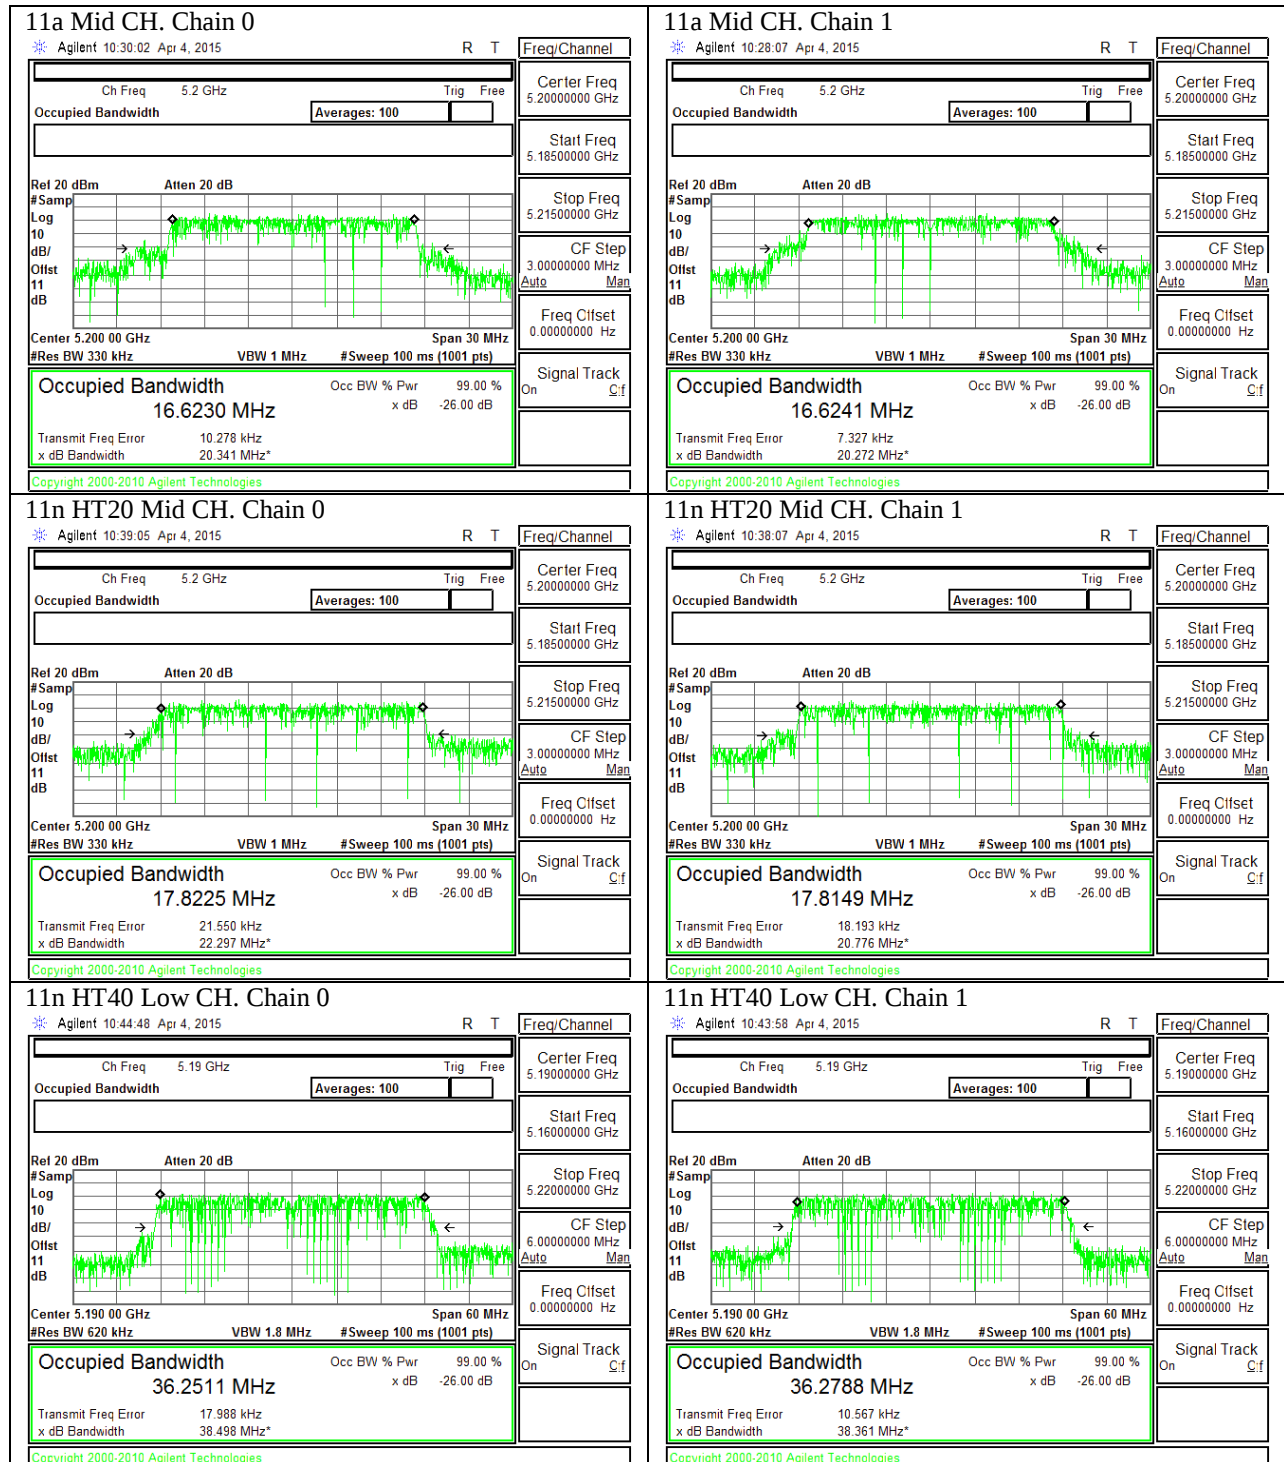

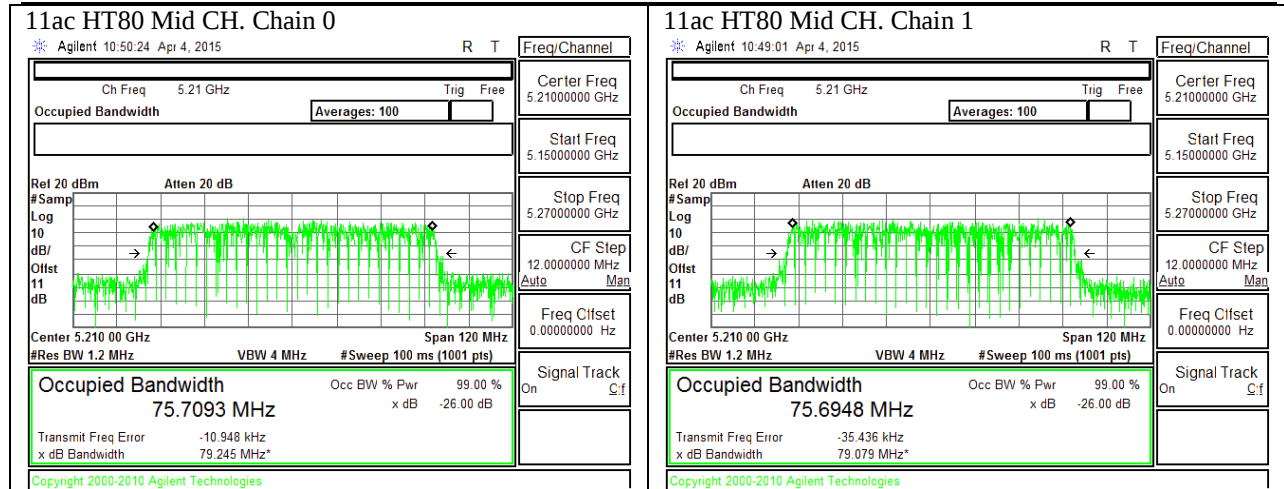



UNII 5.3GHz

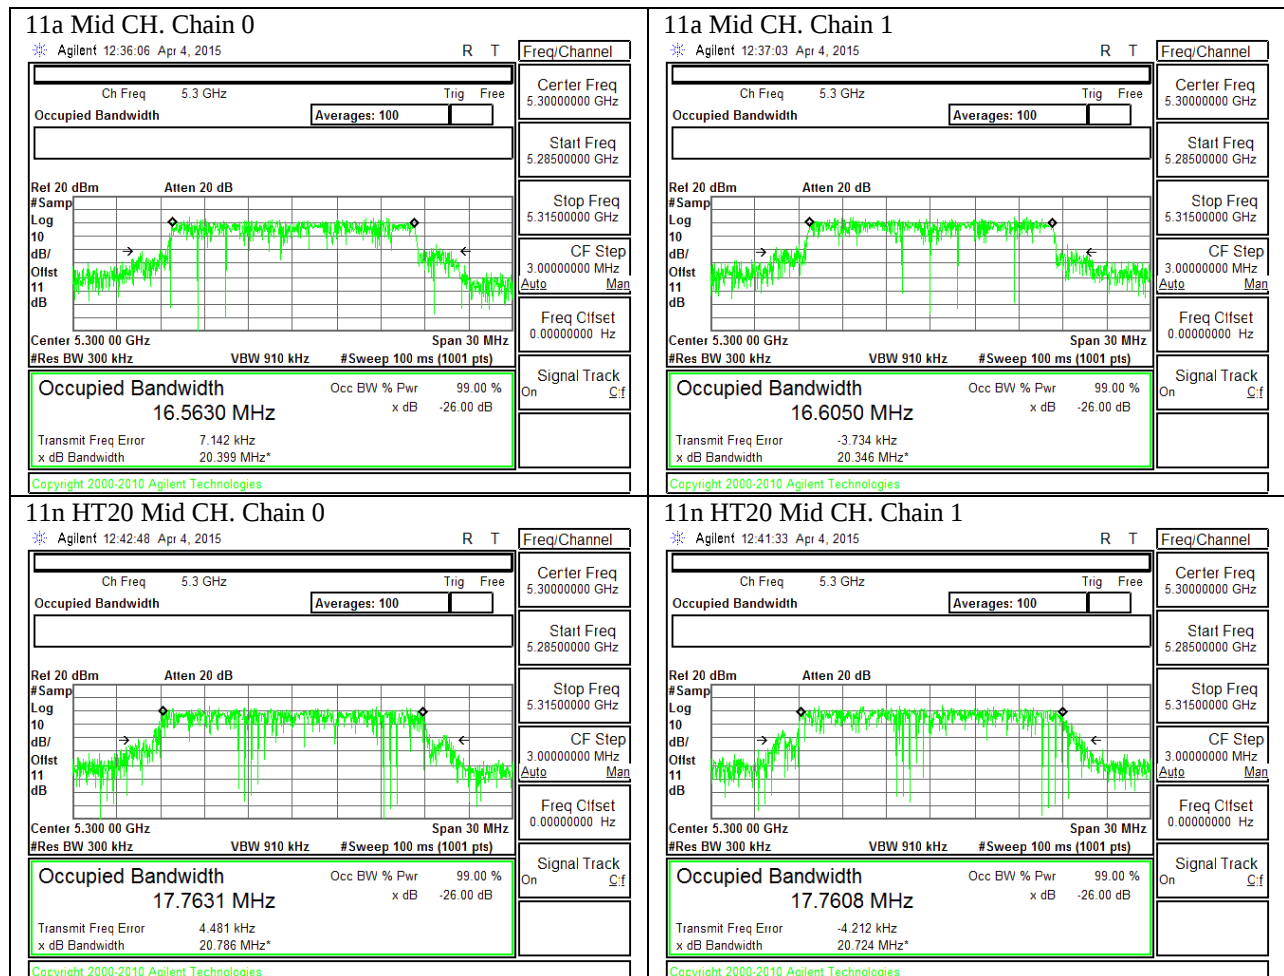





UNII 5.5GHz

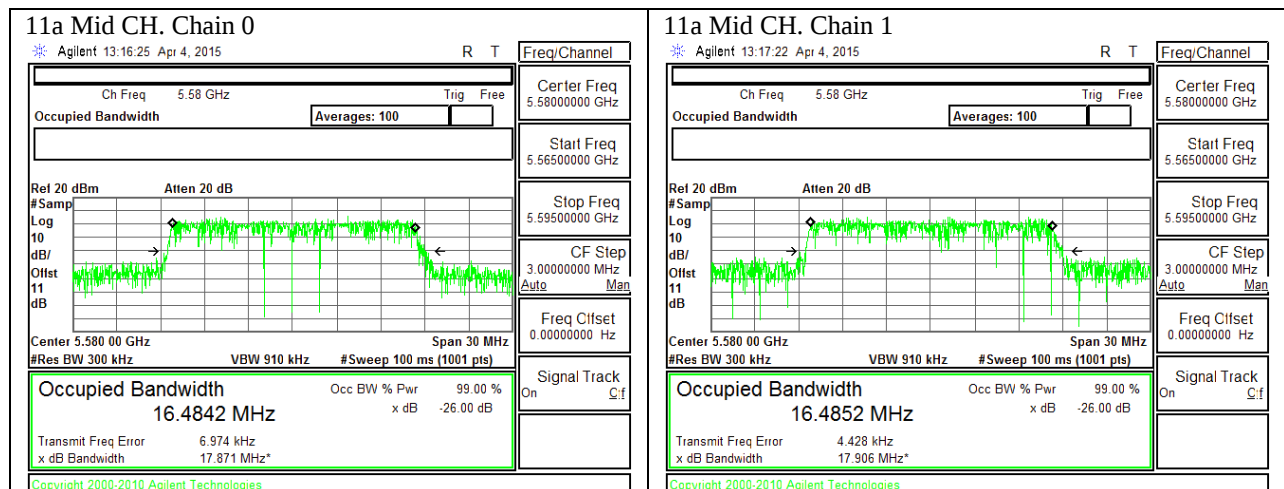

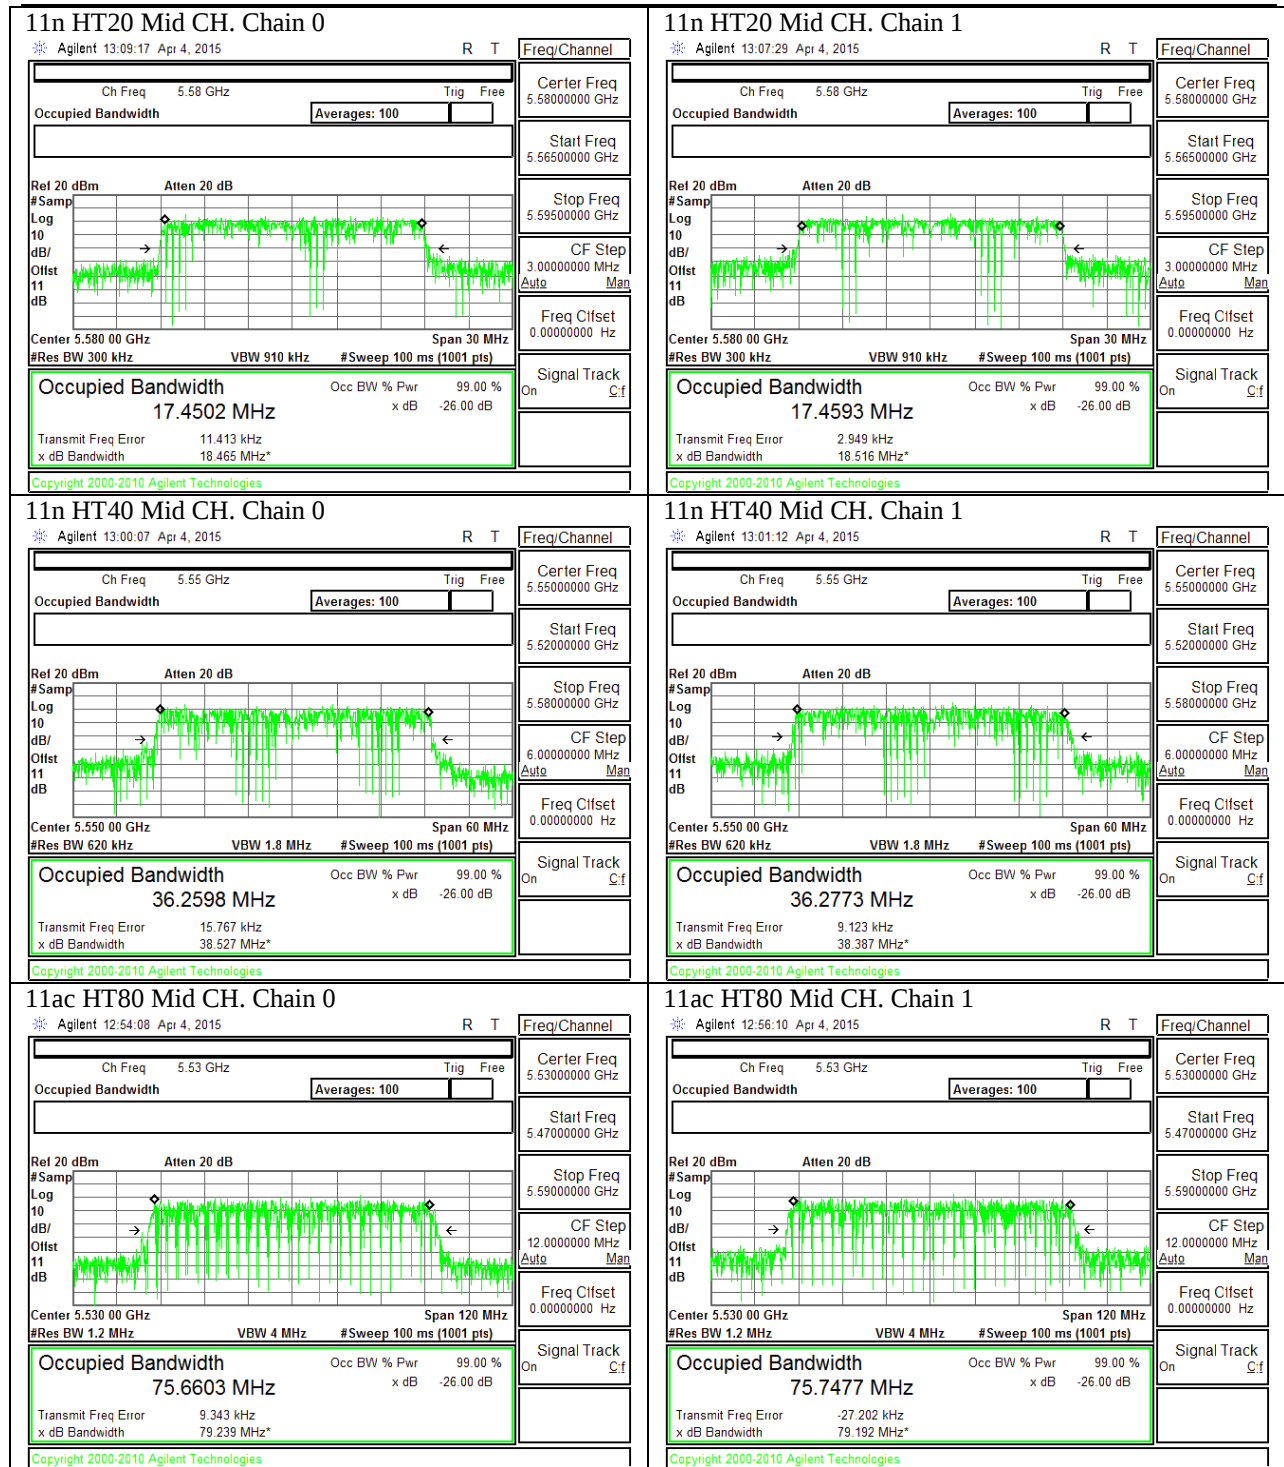



UNII Straddling Channels

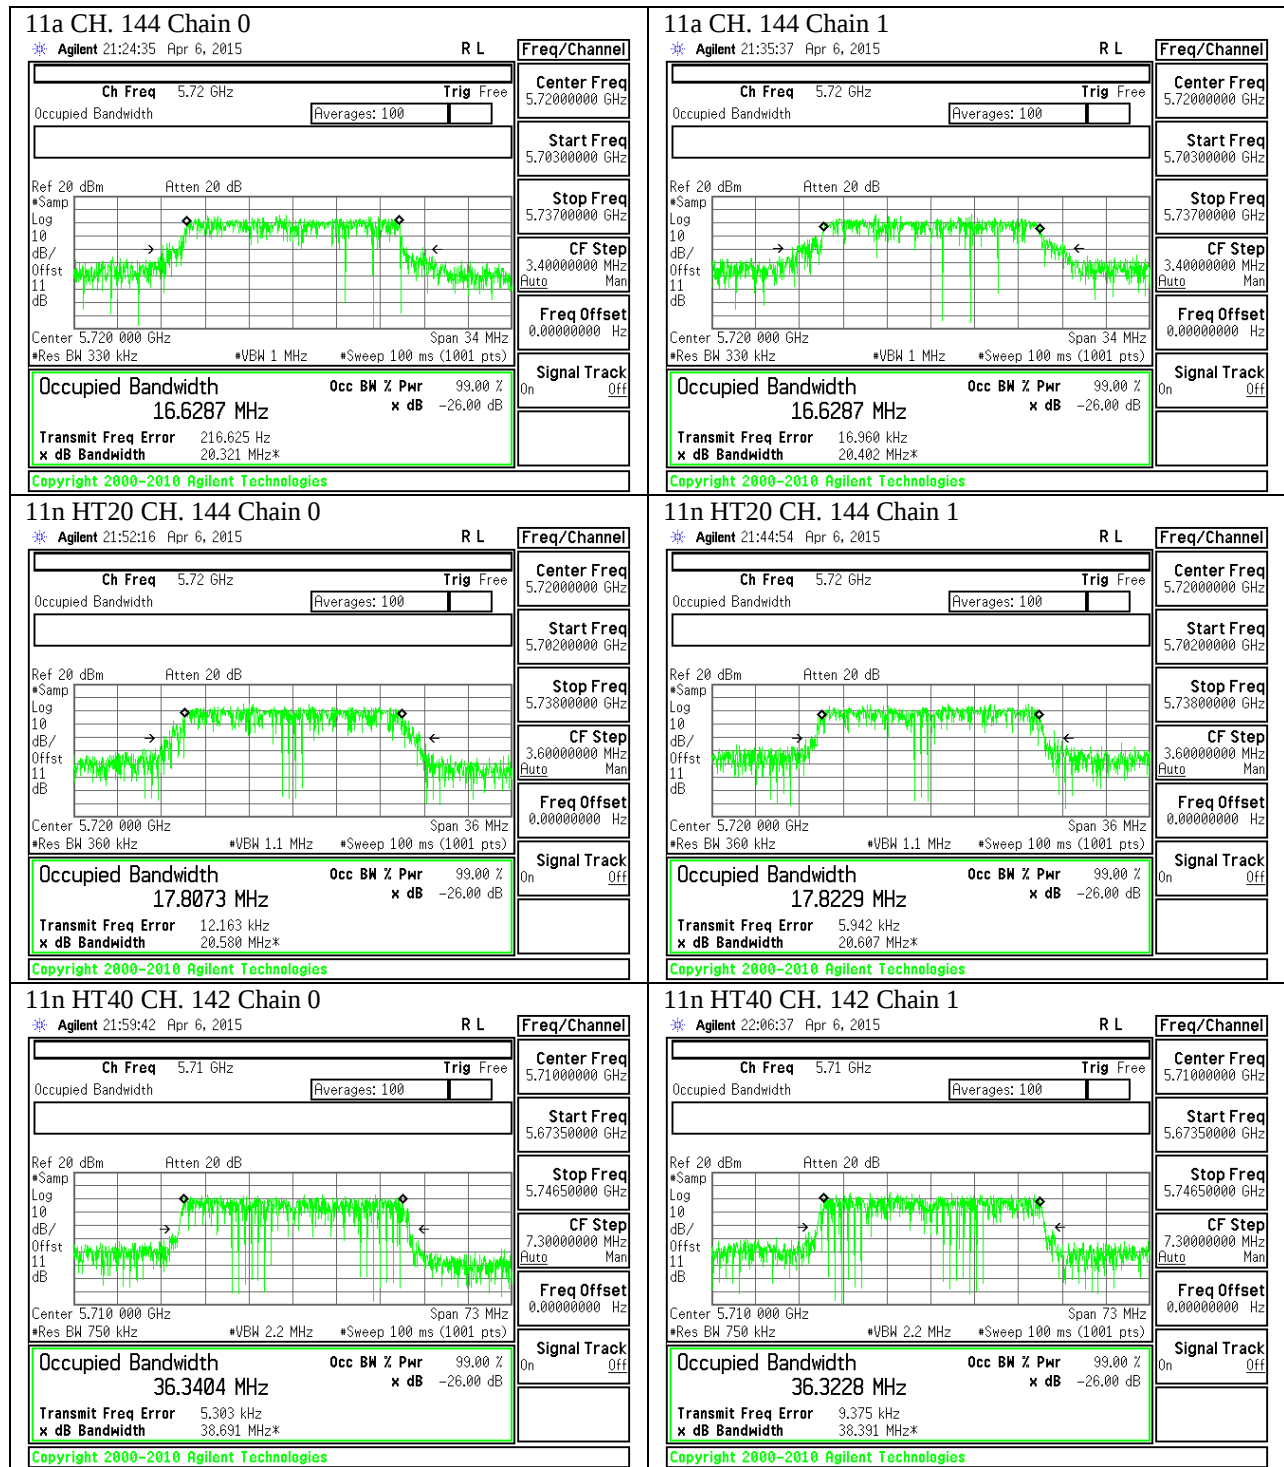

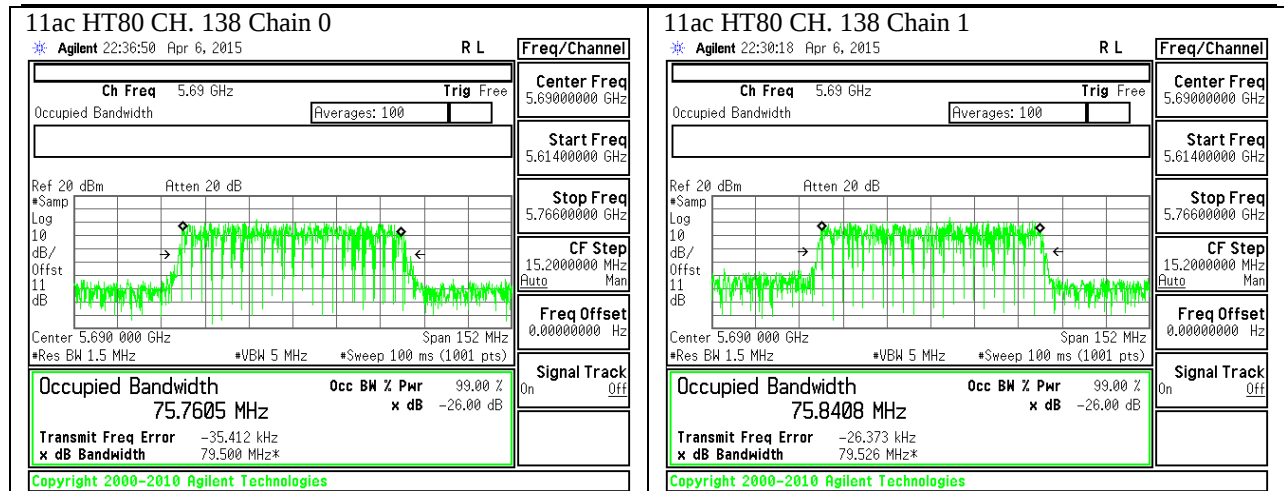

UNII 5.8GHz

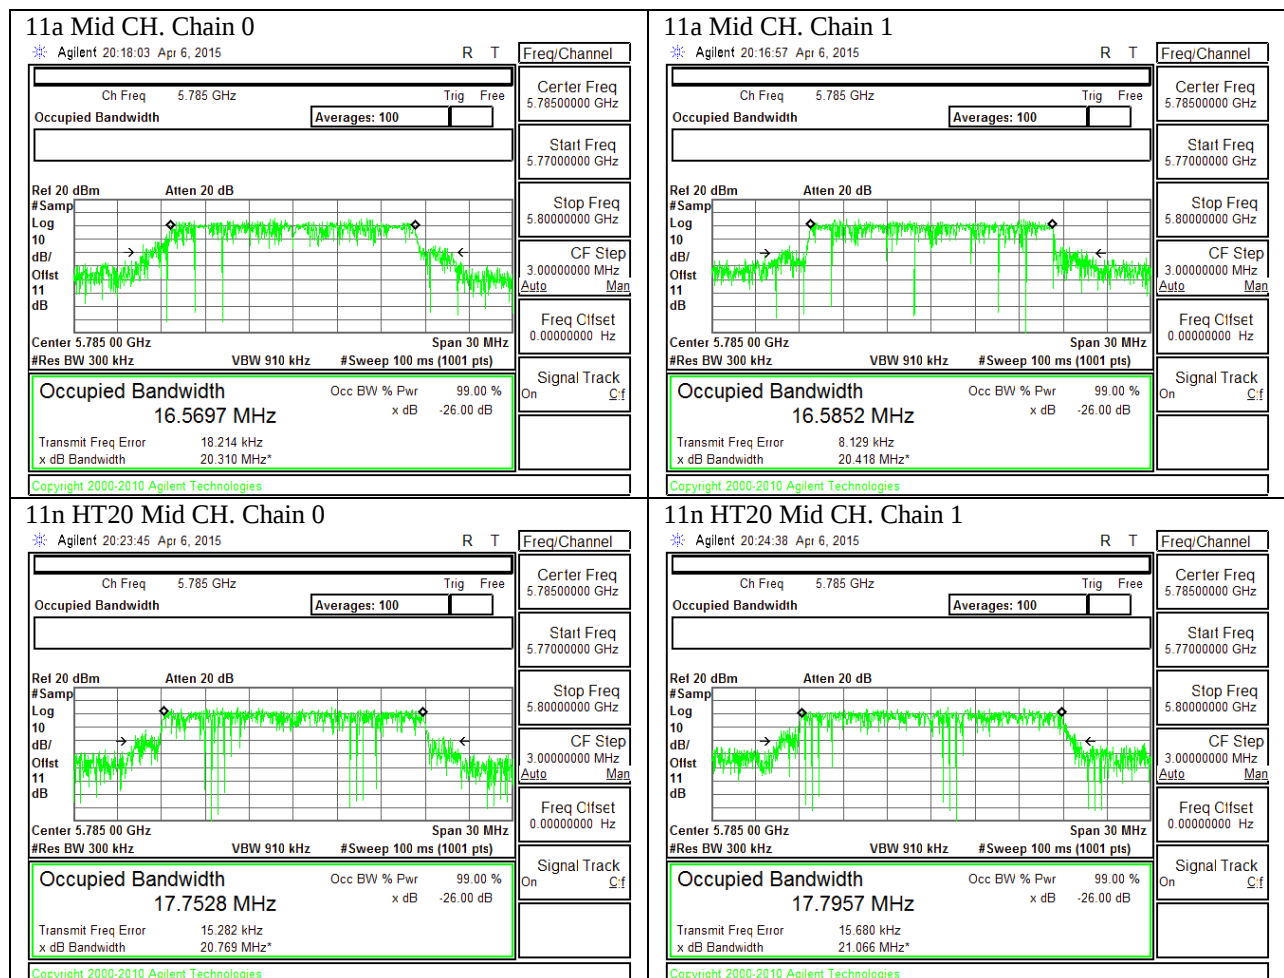

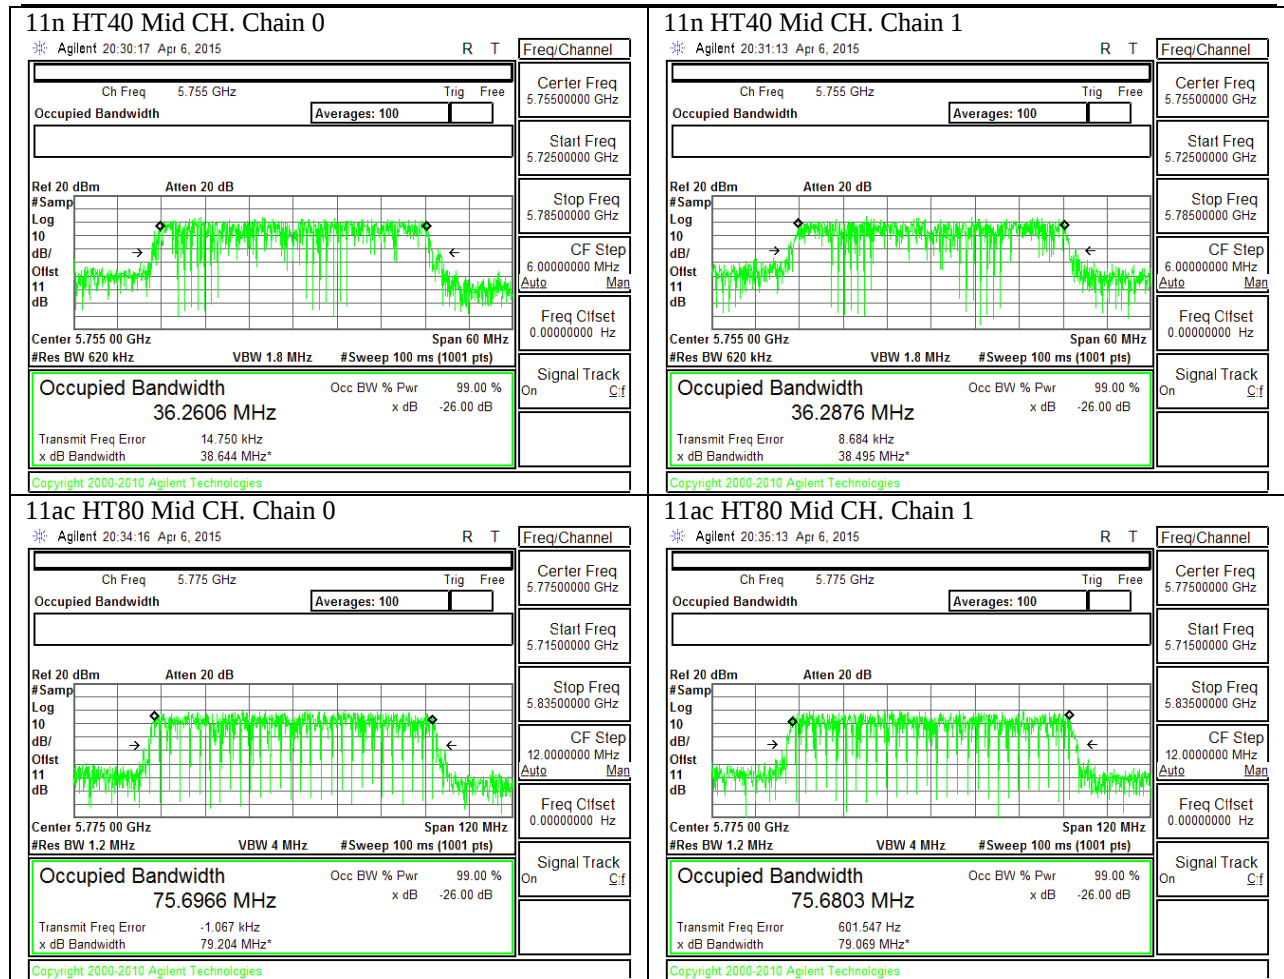

10.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1) (2) (3)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

5180-5320MHz

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
1.10	-1.30	0.06

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

5180-5320MHz

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
1.10	-1.30	2.99

5500-5700MHz

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
0.40	-2.20	-0.71

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

5500-5700MHz

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
0.40	-2.20	2.21

5725-5850MHz

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-0.80	-3.10	-1.80

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

5725-5850MHz

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-0.80	-3.10	1.14

RESULTS

10.4.1. 802.11a MODE IN THE 5.2 GHZ BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5180	21.60	17.9100	0.06	2.99
Mid	5200	21.51	16.6200	0.06	2.99
High	5240	18.66	16.5200	0.06	2.99

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5180	24.00	22.53	23.94	24.00	11.00	10.00	8.01
Mid	5200	24.00	22.21	23.94	24.00	11.00	10.00	8.01
High	5240	24.00	22.18	23.94	24.00	11.00	10.00	8.01

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSP
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.65	15.72	18.69	24.00	-5.31
Mid	5200	15.68	15.67	18.68	24.00	-5.32
High	5240	15.60	15.24	18.44	24.00	-5.56

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	4.29	4.44	7.38	11.00	-3.62
Mid	5200	4.30	4.35	7.34	11.00	-3.66
High	5240	4.32	3.86	7.11	11.00	-3.89

10.4.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSP (dBi)
Low	5180	21.81	17.8100	0.06	2.99
Mid	5200	21.93	17.8200	0.06	2.99
High	5240	18.96	17.5000	0.06	2.99

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSP Limit (dBm)	IC eirp PSD Limit (dBm)	PPSP Limit (dBm)
Low	5180	24.00	22.51	22.45	24.00	11.00	10.00	8.01
Mid	5200	24.00	22.51	22.45	24.00	11.00	10.00	8.01
High	5240	23.78	22.43	22.37	24.00	11.00	10.00	8.01

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.57	15.60	18.60	24.00	-5.40
Mid	5200	15.69	15.54	18.62	24.00	-5.38
High	5240	15.85	15.66	18.76	24.00	-5.24

PPSP Results

Channel	Frequency (MHz)	Chain 0 Meas PPSP (dBm)	Chain 1 Meas PPSP (dBm)	Total Corr'd PPSP (dBm)	PPSP Limit (dBm)	PPSP Margin (dB)
Low	5180	4.01	3.94	6.99	11.00	-4.01
Mid	5200	4.04	3.97	7.02	11.00	-3.98
High	5240	4.30	4.10	7.21	11.00	-3.79

10.4.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5190	40.14	36.2700	0.06	2.99
High	5230	40.08	36.2800	0.06	2.99

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5190	24.00	23.00	22.94	23.94	11.00	10.00	8.01
High	5230	24.00	23.00	22.94	23.94	11.00	10.00	8.01

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.42	13.54	16.61	24.00	-7.39
High	5230	13.97	13.75	16.99	24.00	-7.01

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-1.18	-1.06	2.01	11.00	-8.99
High	5230	-0.57	-0.92	2.39	11.00	-8.61

10.4.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5210	81.96	75.7000	-0.14	2.86

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5210	24.00	23.00	23.14	24.14	11.00	10.00	8.14

Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5210	10.37	10.42	13.63	24.00	-10.37

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5210	-7.22	-7.07	-3.90	11.00	-14.90

10.4.5. 802.11a MODE IN THE 5.3 GHZ BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5260	18.60	16.4900	0.06	2.99
Mid	5300	21.72	16.6000	0.06	2.99
High	5320	21.51	17.7300	0.06	2.99

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5260	24.00	23.17	29.17	23.94	11.00	11.00	8.01
Mid	5300	24.00	23.20	29.20	23.94	11.00	11.00	8.01
High	5320	24.00	23.49	29.49	23.94	11.00	11.00	8.01

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.78	15.60	18.70	24.00	-5.30
Mid	5300	15.97	15.11	18.57	24.00	-5.43
High	5320	15.81	15.28	18.56	24.00	-5.44

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	4.41	4.42	7.43	11.00	-3.57
Mid	5300	4.54	3.83	7.21	11.00	-3.79
High	5320	4.54	3.97	7.27	11.00	-3.73

10.4.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSP (dBi)
Low	5260	18.90	17.4500	0.06	2.99
Mid	5300	21.99	17.7600	0.06	2.99
High	5320	21.84	17.7700	0.06	2.99

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSP Limit (dBm)	IC PPSP Limit (dBm)	PPSP Limit (dBm)
Low	5260	24.00	23.42	29.42	23.94	11.00	11.00	8.01
Mid	5300	24.00	23.49	29.49	23.94	11.00	11.00	8.01
High	5320	24.00	23.50	29.50	23.94	11.00	11.00	8.01

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.16	16.66	18.98	24.00	-5.02
Mid	5300	15.03	15.47	18.27	24.00	-5.73
High	5320	15.98	15.81	18.91	24.00	-5.09

PPSP Results

Channel	Frequency (MHz)	Chain 0 Meas PPSP (dBm)	Chain 1 Meas PPSP (dBm)	Total Corr'd PPSP (dBm)	PPSP Limit (dBm)	PPSP Margin (dB)
Low	5260	3.68	4.20	6.96	11.00	-4.04
Mid	5300	3.50	3.87	6.70	11.00	-4.30
High	5320	4.41	4.14	7.29	11.00	-3.71

10.4.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5270	40.32	36.2500	0.06	2.99
High	5310	40.14	36.2500	0.06	2.99

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5270	24.00	24.00	30.00	23.94	11.00	11.00	8.01
High	5310	24.00	24.00	30.00	23.94	11.00	11.00	8.01

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	12.88	13.75	16.47	24.00	-7.53
High	5310	12.96	13.45	16.34	24.00	-7.66

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5270	-1.51	-0.88	1.95	11.00	-9.05
High	5310	-1.63	-1.03	1.81	11.00	-9.19

10.4.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW	Min 99% BW	Directional Gain for Power	Directional Gain for PPSD
Low	5290	81.96	75.7000	0.06	2.99

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5290	24.00	24.00	30.00	23.94	11.00	11.00	8.01

Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5290	9.61	10.61	13.38	24.00	-10.62

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5290	-7.91	-6.91	-4.14	11.00	-15.14

10.4.9. 802.11a MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5500	21.72	17.7800	-0.71	2.21
Mid	5580	18.54	17.4600	-0.71	2.21
High	5700	21.63	17.7700	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5500	24.00	23.50	29.50	24.71	11.00	11.00	8.79
Mid	5580	24.00	23.42	29.42	24.71	11.00	11.00	8.79
High	5700	24.00	23.50	29.50	24.71	11.00	11.00	8.79

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	15.36	15.63	18.51	24.00	-5.49
Mid	5580	15.90	16.17	19.04	24.00	-4.96
High	5700	16.10	15.51	18.82	24.00	-5.18

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	3.98	4.41	7.21	11.00	-3.79
Mid	5580	4.54	4.02	7.30	11.00	-3.70
High	5700	4.77	5.15	7.97	11.00	-3.03

10.4.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5500	21.81	17.7800	-0.71	2.21
Mid	5580	18.96	17.4600	-0.71	2.21
High	5700	21.72	17.7700	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5500	24.00	23.50	29.50	24.71	11.00	11.00	8.79
Mid	5580	24.00	23.42	29.42	24.71	11.00	11.00	8.79
High	5700	24.00	23.50	29.50	24.71	11.00	11.00	8.79

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	15.48	15.61	18.56	24.00	-5.44
Mid	5580	15.97	16.18	19.09	24.00	-4.91
High	5700	15.86	16.31	19.10	24.00	-4.90

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	3.89	4.06	6.99	11.00	-4.01
Mid	5580	4.43	4.65	7.55	11.00	-3.45
High	5700	4.18	4.70	7.46	11.00	-3.54

10.4.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5510	40.14	36.2700	-0.71	2.21
Mid	5550	36.96	36.2700	-0.71	2.21
High	5670	40.32	36.2800	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5510	24.00	24.00	30.00	24.00	11.00	11.00	11.00
Mid	5550	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5670	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.77	13.81	16.45	24.00	-7.55
Mid	5550	13.95	14.31	17.27	24.00	-6.73
High	5670	13.31	14.55	17.10	24.00	-6.90

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5510	-1.89	-0.71	1.87	11.00	-9.13
Mid	5550	-0.60	-0.38	2.64	11.00	-8.36
High	5670	-1.29	-0.10	2.48	11.00	-8.52

10.4.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5530	81.84	75.7400	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5530	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	10.30	11.02	13.91	24.00	-10.09

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5530	-7.20	-6.58	-3.64	11.00	-14.64

10.4.13. 802.11a MODE STRADDLE CHANNEL 144

UNII-2C BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSP (dBi)
144	5720	15.5700	13.3000	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSP Limit (dBm)	IC PSD Limit (dBm)	PPSP Limit (dBm)
144	5720	22.92	22.24	28.24	22.24	11.00	11.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	14.90	14.93	17.93	22.24	-4.31

PPSP Results

Channel	Frequency (MHz)	Chain 0 Meas PPSP (dBm)	Chain 1 Meas PPSP (dBm)	Total Corr'd PPSP (dBm)	PPSP Limit (dBm)	PPSP Margin (dB)
144	5720	4.13	4.14	7.15	11.00	-3.85

UNII-3 BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
144	5720	5.5700	3.3000	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
144	5720	18.46	16.19	22.19	16.19	11.00	11.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSP
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	8.68	8.76	11.73	16.19	-4.46

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
144	5720	1.09	1.23	4.17	11.00	-6.83

AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL

Results

Frequency	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Output Power (dBm)	Output Power (mW)
5.6 GHz band, 2TX (Channels overlapping UNII-2 and UNII-3 bands)				
5720 (UNII-2 portion)	14.90	14.93	17.925	62.02
5720 (UNII-3 portion)	8.87	8.76	11.825	15.22
5720 (Whole signal)	15.10	16.10	18.639	73.10

10.4.14. 802.11n HT20 MODE STRADDLE CHANNEL 144

UNII-2C BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSP (dBi)
144	5720	15.7350	13.9000	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSP Limit (dBm)	IC PPSP Limit (dBm)	PPSP Limit (dBm)
144	5720	22.97	22.43	28.43	22.43	11.00	11.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSP
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	14.21	14.67	17.46	22.43	-4.97

PPSP Results

Channel	Frequency (MHz)	Chain 0 Meas PPSP (dBm)	Chain 1 Meas PPSP (dBm)	Total Corr'd PPSP (dBm)	PPSP Limit (dBm)	PPSP Margin (dB)
144	5720	3.28	3.77	6.54	11.00	-4.46

UNII-3 BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSP (dBi)
144	5720	5.7350	3.9000	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSP Limit (dBm)	IC PSD Limit (dBm)	PPSP Limit (dBm)
144	5720	18.59	16.91	22.91	16.91	11.00	11.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	8.51	9.00	11.77	16.91	-5.14

PPSP Results

Channel	Frequency (MHz)	Chain 0 Meas PPSP (dBm)	Chain 1 Meas PPSP (dBm)	Total Corr'd PPSP (dBm)	PPSP Limit (dBm)	PPSP Margin (dB)
144	5720	0.73	0.25	3.51	11.00	-7.49

AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL

Results

Frequency	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Output Power (dBm)	Output Power (mW)
5.6 GHz band, 2TX (Channels overlapping UNII-2 and UNII-3 bands)				
5720 (UNII-2 portion)	14.21	14.67	17.456	55.67
5720 (UNII-3 portion)	8.51	9.00	11.772	15.04
5720 (Whole signal)	14.80	16.10	18.509	70.94

10.4.15. 802.11n HT40 MODE STRADDLE CHANNEL 142

UNII-2C BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
142	5710	34.6750	32.1500	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
142	5710	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PPSSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	13.67	13.17	16.56	24.00	-7.44

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
142	5710	-0.81	-1.32	2.07	11.00	-8.93

UNII-3 BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSP (dBi)
142	5710	4.6750	2.1500	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSP Limit (dBm)	IC PPSP Limit (dBm)	PPSP Limit (dBm)
142	5710	17.70	14.32	20.32	14.32	11.00	11.00	11.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PPSP
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	2.67	3.27	6.11	14.32	-8.21

PPSP Results

Channel	Frequency (MHz)	Chain 0 Meas PPSP (dBm)	Chain 1 Meas PPSP (dBm)	Total Corr'd PPSP (dBm)	PPSP Limit (dBm)	PPSP Margin (dB)
142	5710	-4.82	-4.10	-1.31	11.00	-12.31

AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL

Results

Frequency	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Output Power (dBm)	Output Power (mW)
5.6 GHz band, 2TX (Channels overlapping UNII-2 and UNII-3 bands)				
5710 (UNII-2 portion)	13.67	13.17	16.557	45.26
5710 (UNII-3 portion)	2.67	3.27	6.107	4.08
5710 (Whole signal)	13.00	14.20	16.772	47.55

10.4.16. 802.11ac80 MODE STRADDLE CHANNEL 138

UNII-2C BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
138	5690	75.47	72.9000	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
138	5690	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	10.35	10.83	13.84	24.00	-10.16

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
138	5690	-7.25	-6.76	-3.76	11.00	-14.76

UNII-3 BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
138	5690	5.47	2.9000	-0.71	2.21

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
138	5690	18.38	15.62	21.62	15.62	11.00	11.00	11.00

Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PPSP
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	-3.99	-3.56	-0.53	15.62	-16.15

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
138	5690	-11.17	-10.53	-7.60	11.00	-18.60

AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL

Results

Frequency	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Output Power (dBm)	Output Power (mW)
5.6 GHz band, 2TX (Channels overlapping UNII-2 and UNII-3 bands)				
5690 (UNII-2 portion)	10.35	10.83	13.727	23.59
5690 (UNII-3 portion)	-3.99	-3.56	-0.517	0.89
5690 (Whole signal)	10.10	11.20	13.935	24.75

10.4.17. 802.11a MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5745	21.54	16.6000	-1.80	1.14
Mid	5785	21.48	16.5800	-1.80	1.14
High	5825	21.72	16.5800	-1.80	1.14

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5745	30.00	29.20	35.20	29.20	30.00	17.00	17.00
Mid	5785	30.00	29.20	35.20	29.20	30.00	17.00	17.00
High	5825	30.00	29.20	35.20	29.20	30.00	17.00	17.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.01	16.03	19.03	30.00	-10.97
Mid	5785	16.57	16.46	19.53	30.00	-10.47
High	5825	16.16	16.12	19.15	30.00	-10.85

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5745	1.97	2.01	5.00	17.00	-12.00
Mid	5785	2.65	2.28	5.48	17.00	-11.52
High	5825	2.65	2.64	5.66	17.00	-11.34

10.4.18. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5745	21.72	17.7600	-1.80	1.14
Mid	5785	21.75	17.7900	-1.80	1.14
High	5825	21.90	17.7700	-1.80	1.14

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5745	30.00	29.49	35.49	29.49	30.00	17.00	17.00
Mid	5785	30.00	29.50	35.50	29.50	30.00	17.00	17.00
High	5825	30.00	29.50	35.50	29.50	30.00	17.00	17.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.08	16.13	19.12	29.49	-10.38
Mid	5785	16.39	16.57	19.49	29.50	-10.01
High	5825	16.12	16.09	19.11	29.50	-10.38

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5745	1.92	2.01	4.98	17.00	-12.02
Mid	5785	2.65	2.28	5.48	17.00	-11.52
High	5825	2.65	2.64	5.66	17.00	-11.34

10.4.19. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5755	36.4	36.2800	-1.80	1.14
High	5795	36.4	36.2700	-1.80	1.14

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5755	30.00	30.00	36.00	30.00	30.00	17.00	17.00
High	5795	30.00	30.00	36.00	30.00	30.00	17.00	17.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	13.99	13.98	17.11	30.00	-12.89
High	5795	14.34	14.54	17.57	30.00	-12.43

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5755	-3.29	-2.97	0.01	17.00	-16.99
High	5795	-2.45	-2.02	0.91	17.00	-16.09

10.4.20. 802.11ac HT80 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5775	81.84	75.6900	-1.80	1.14

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5775	30.00	30.00	36.00	30.00	30.00	17.00	17.00

Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	---

Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5775	10.75	10.84	14.03	30.00	-15.97


PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5775	-9.24	-9.36	-6.06	17.00	-23.06


10.4.21. OUTPUT POWER AND PPSD PLOTS


UNII 5.2GHz

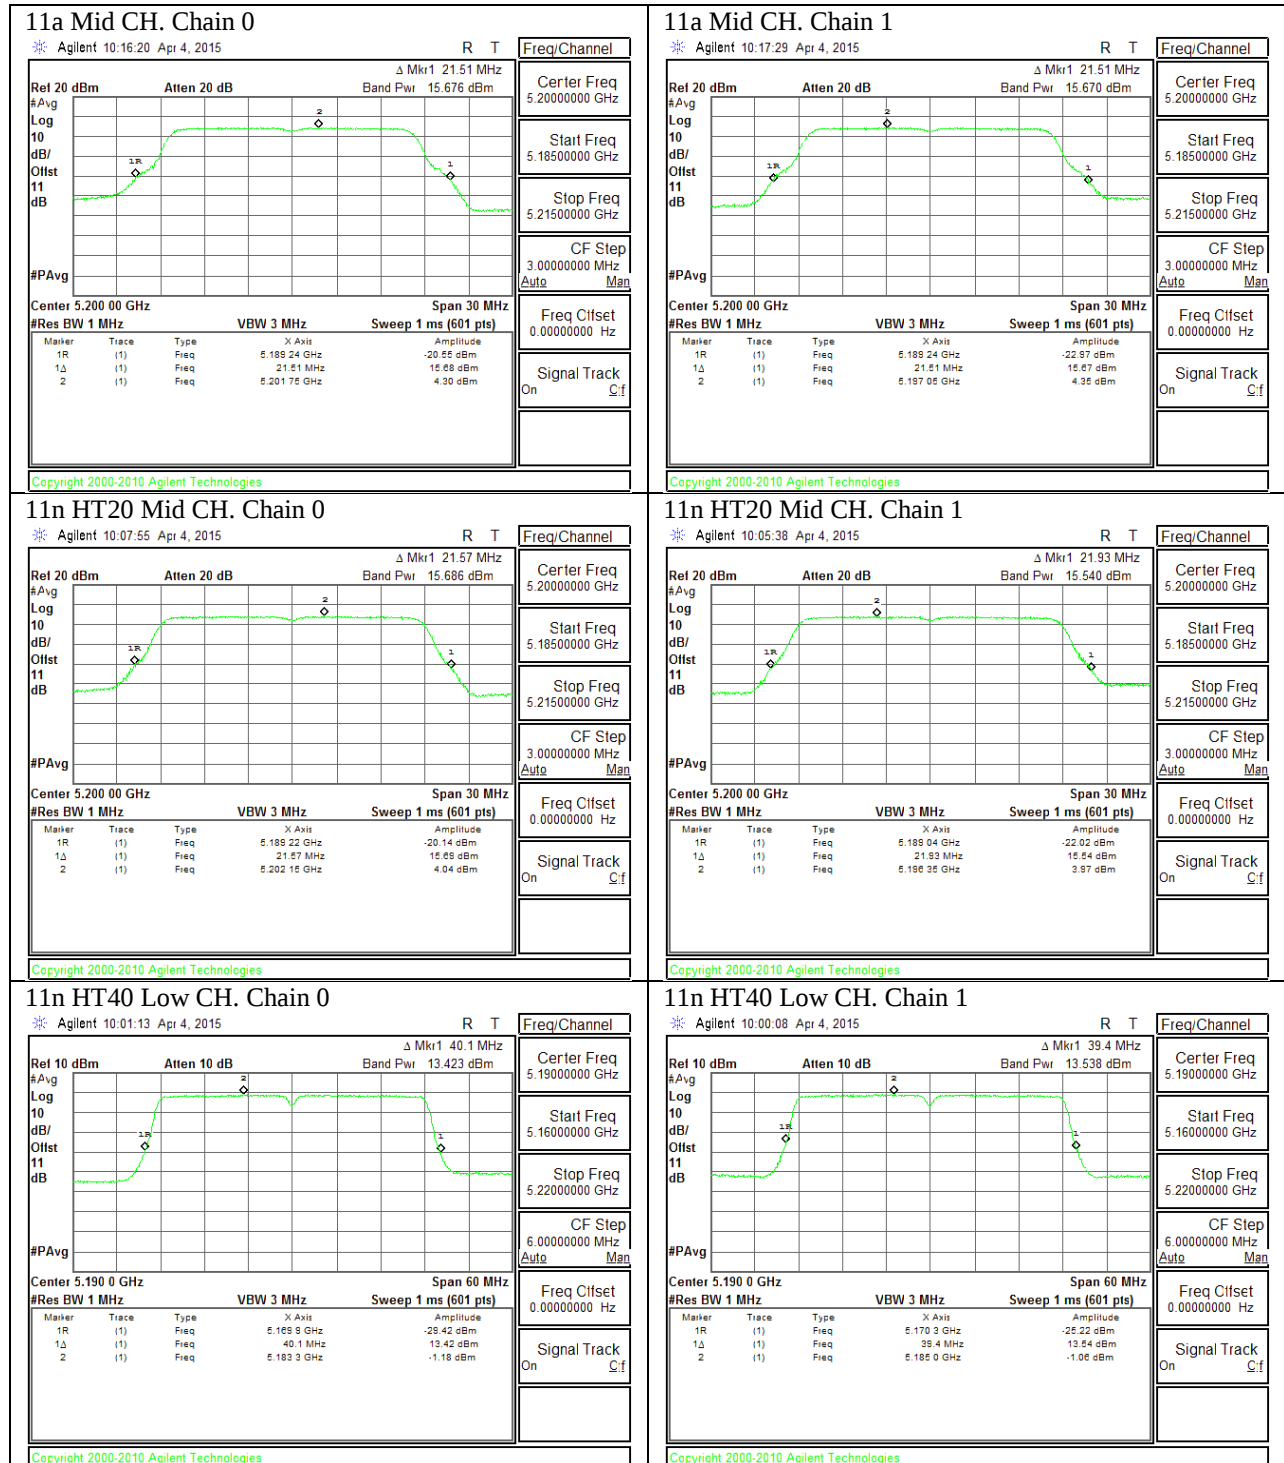

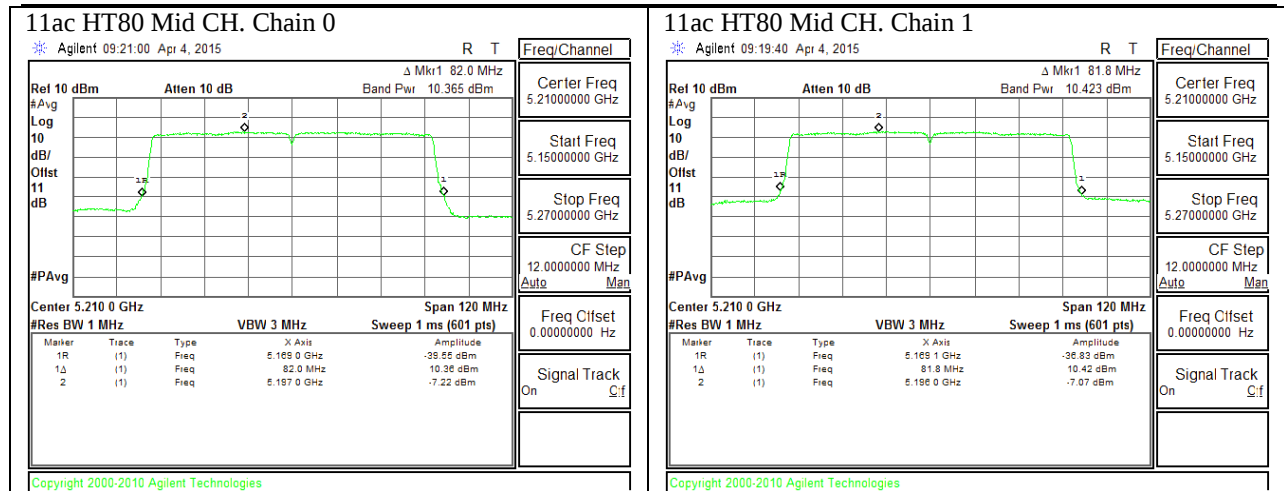


UNII 5.3GHz

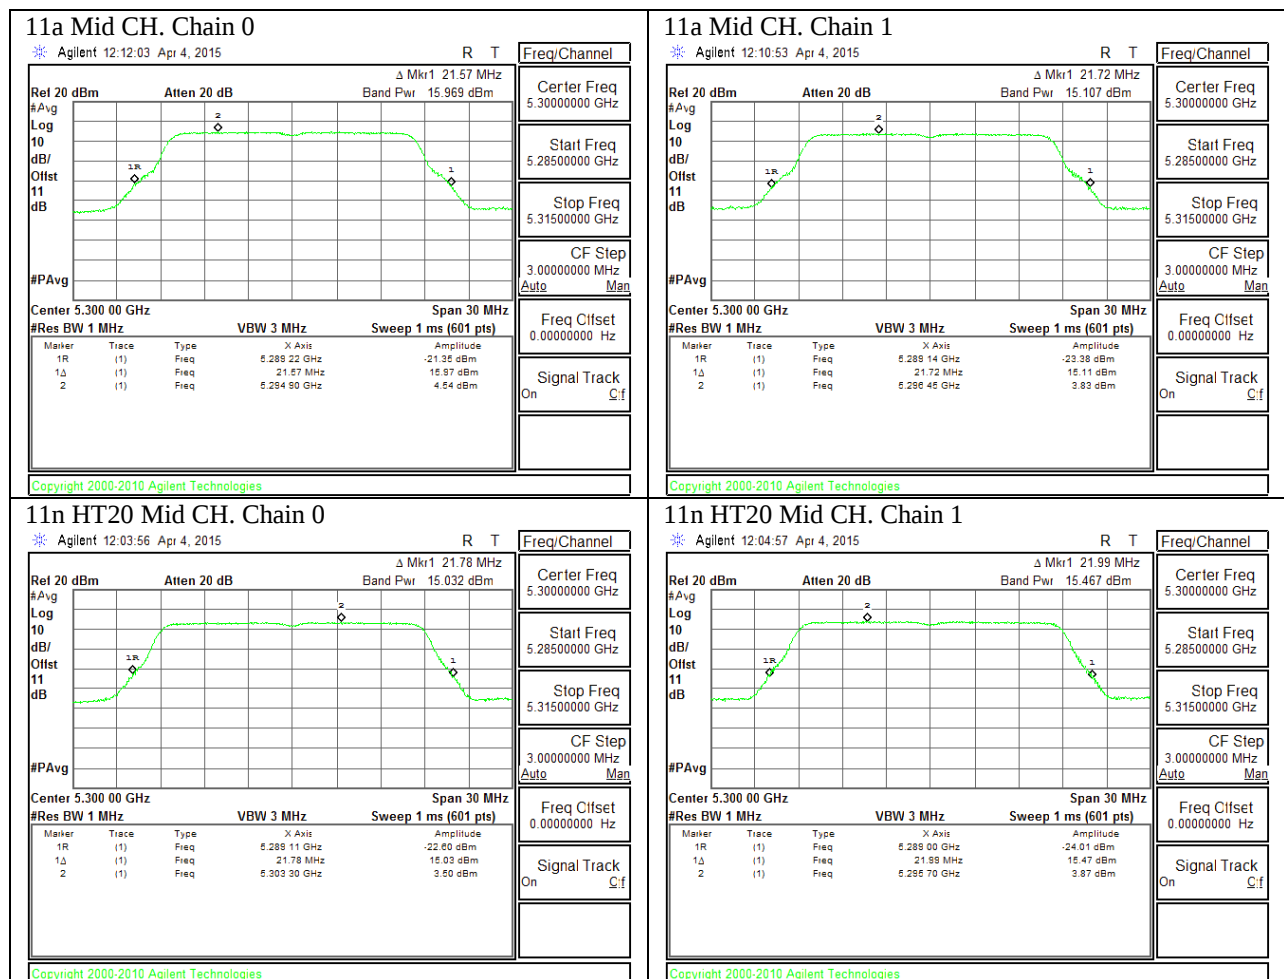


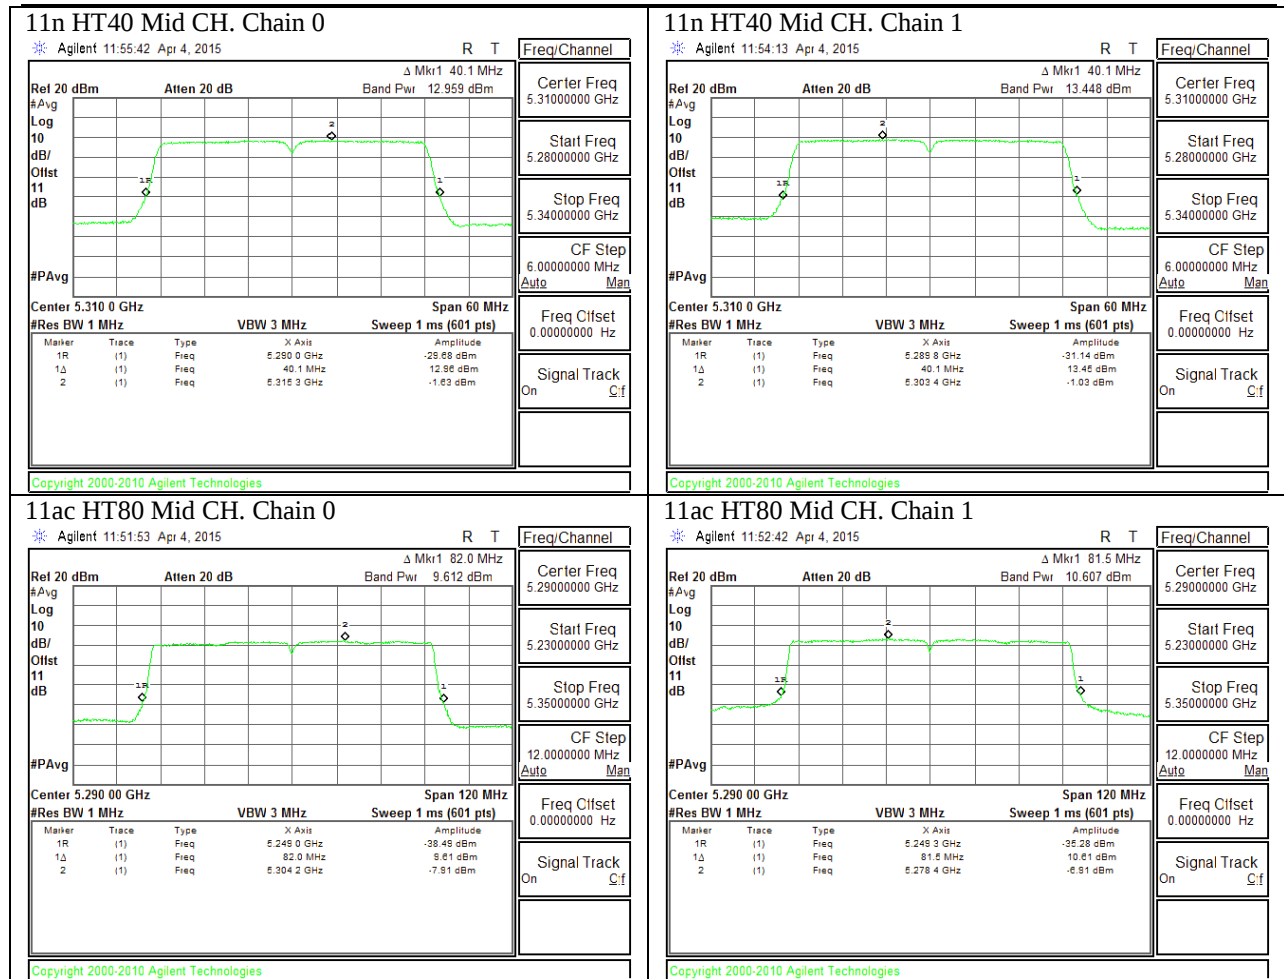


UNII 5.5GHz

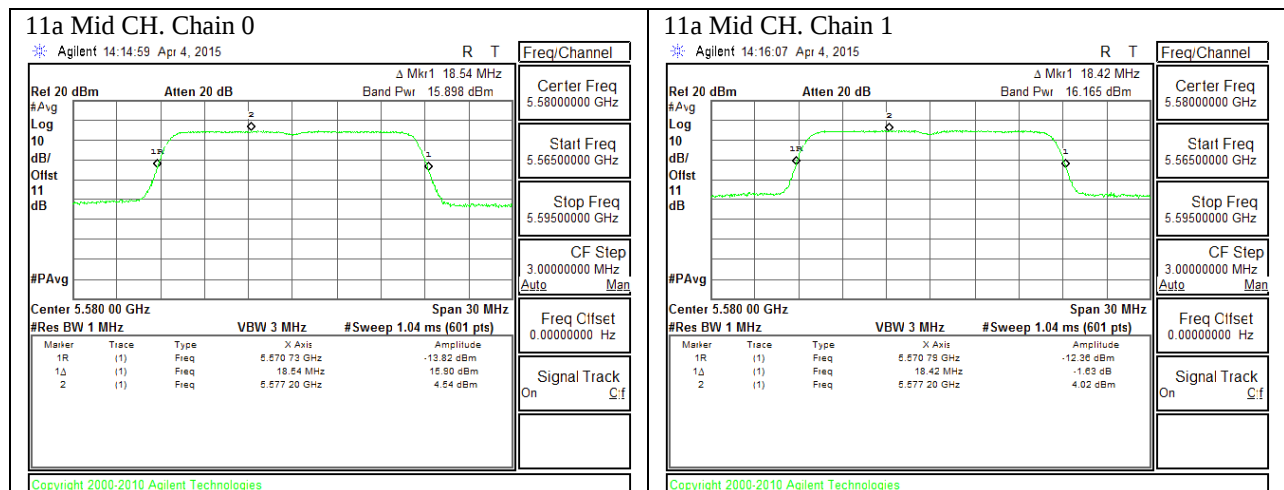


11n HT20 Mid CH. Chain 0

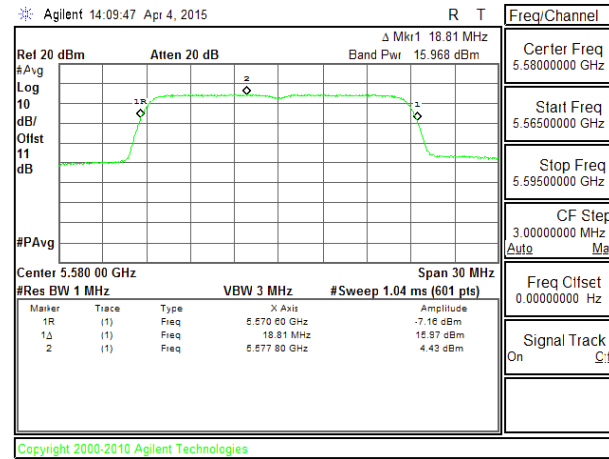


11n HT20 Mid CH. Chain 1

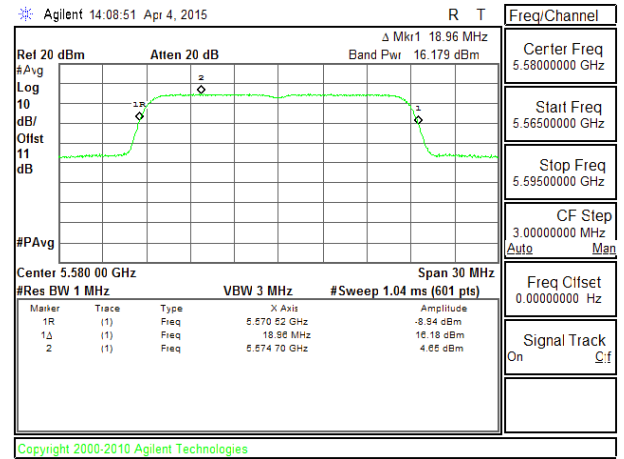


11n HT40 Mid CH. Chain 0

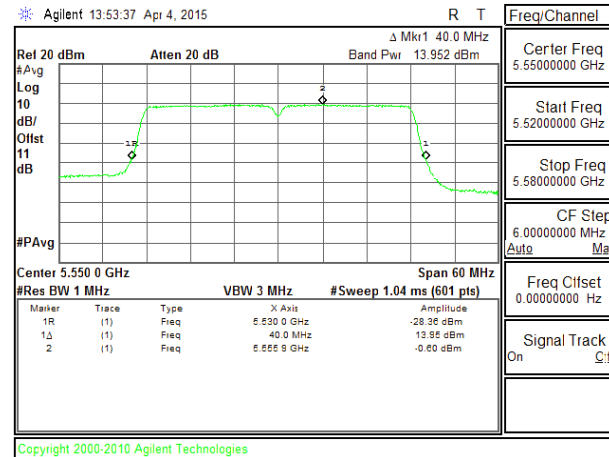


11n HT40 Mid CH. Chain 1

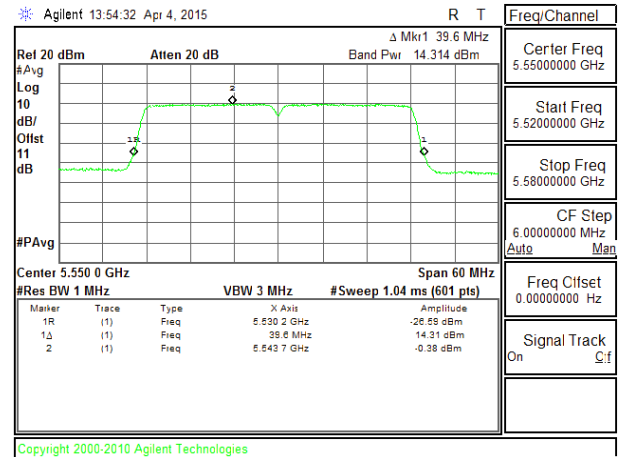

11ac HT80 Mid CH. Chain 0

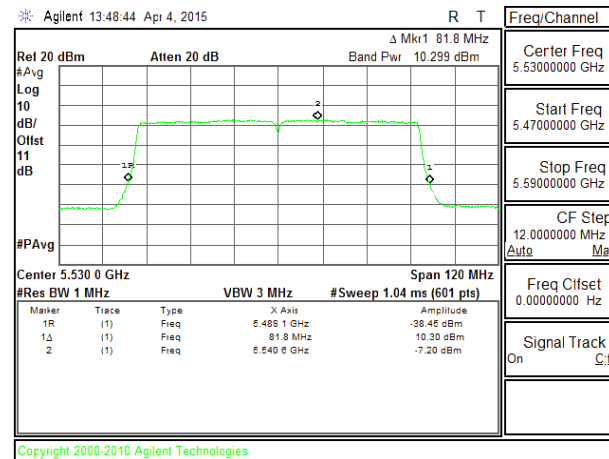


11ac HT80 Mid CH. Chain 1

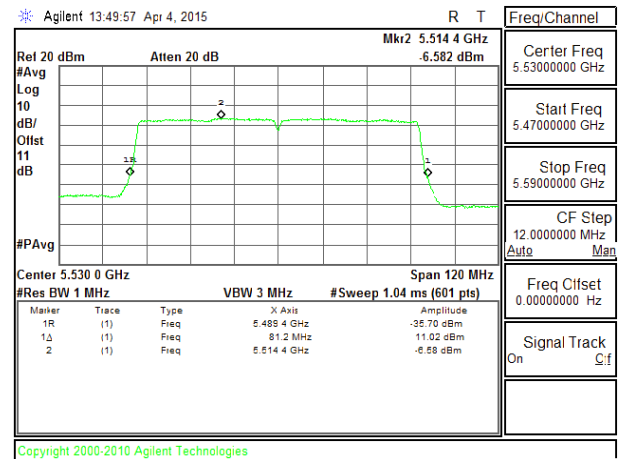


UNII STRADDLE CHANNEL

UNII-2C BAND


11a CH. 144 Chain 0

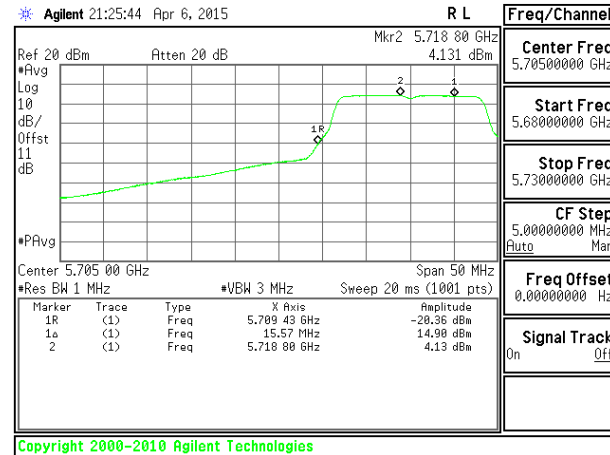


11a CH. 144 Chain 1

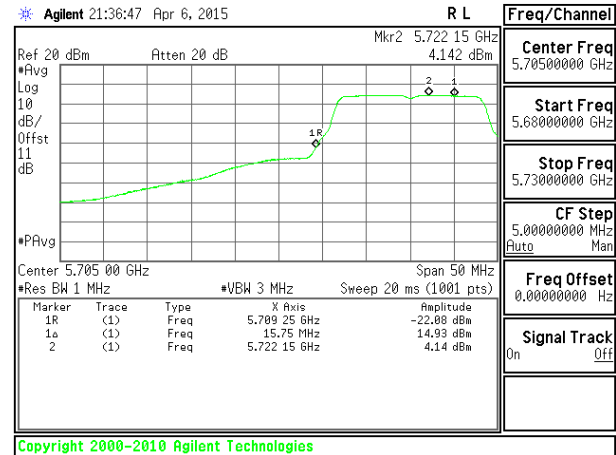


11n HT20 CH. 144 Chain 0

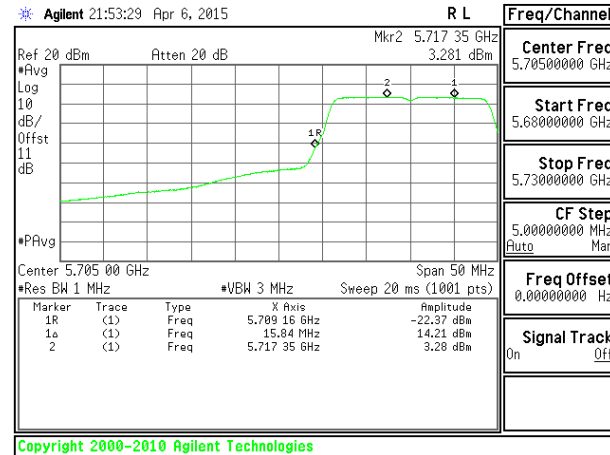


11n HT20 CH. 144 Chain 1

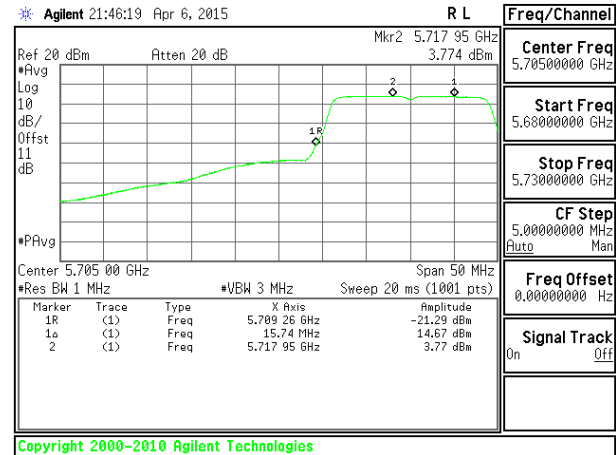


11n HT40 CH. 142 Chain 0

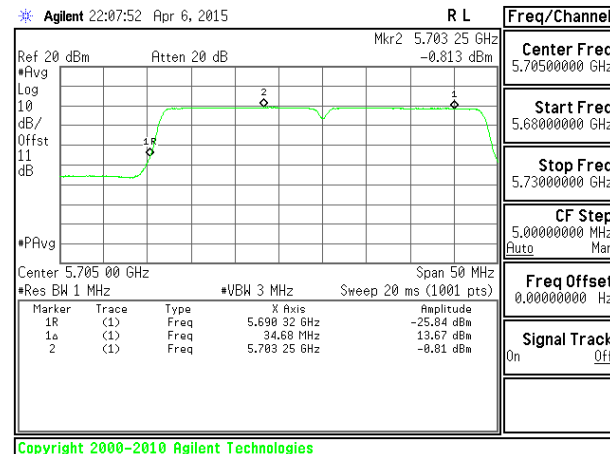



11n HT40 CH. 142 Chain 1

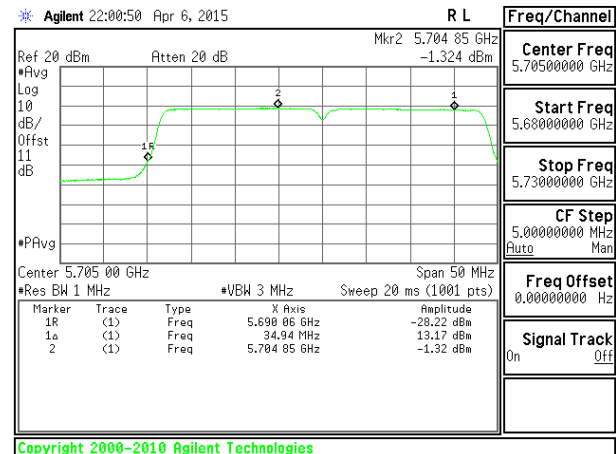

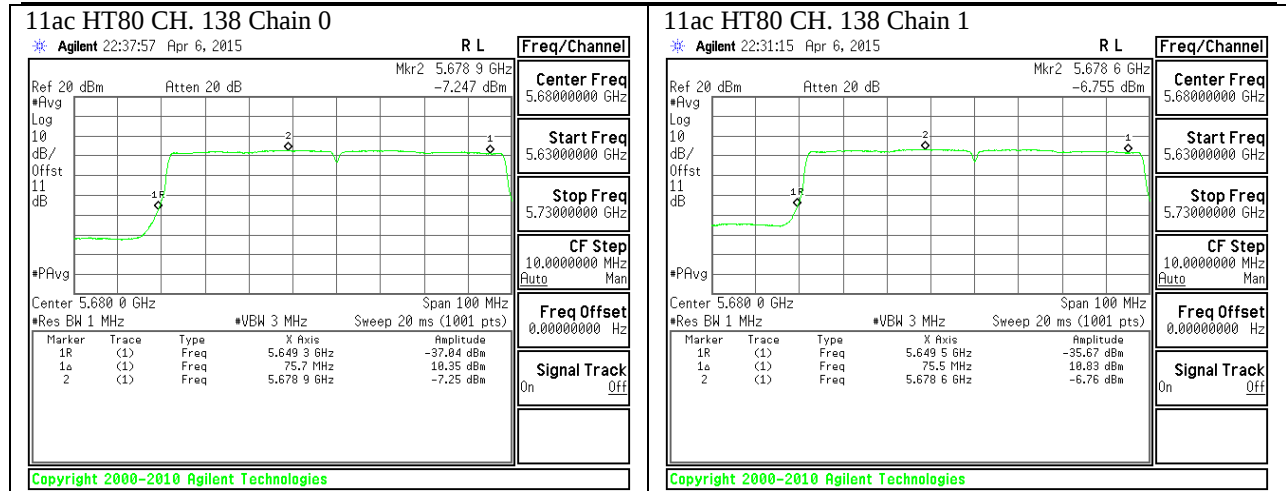



UNII-3 BAND

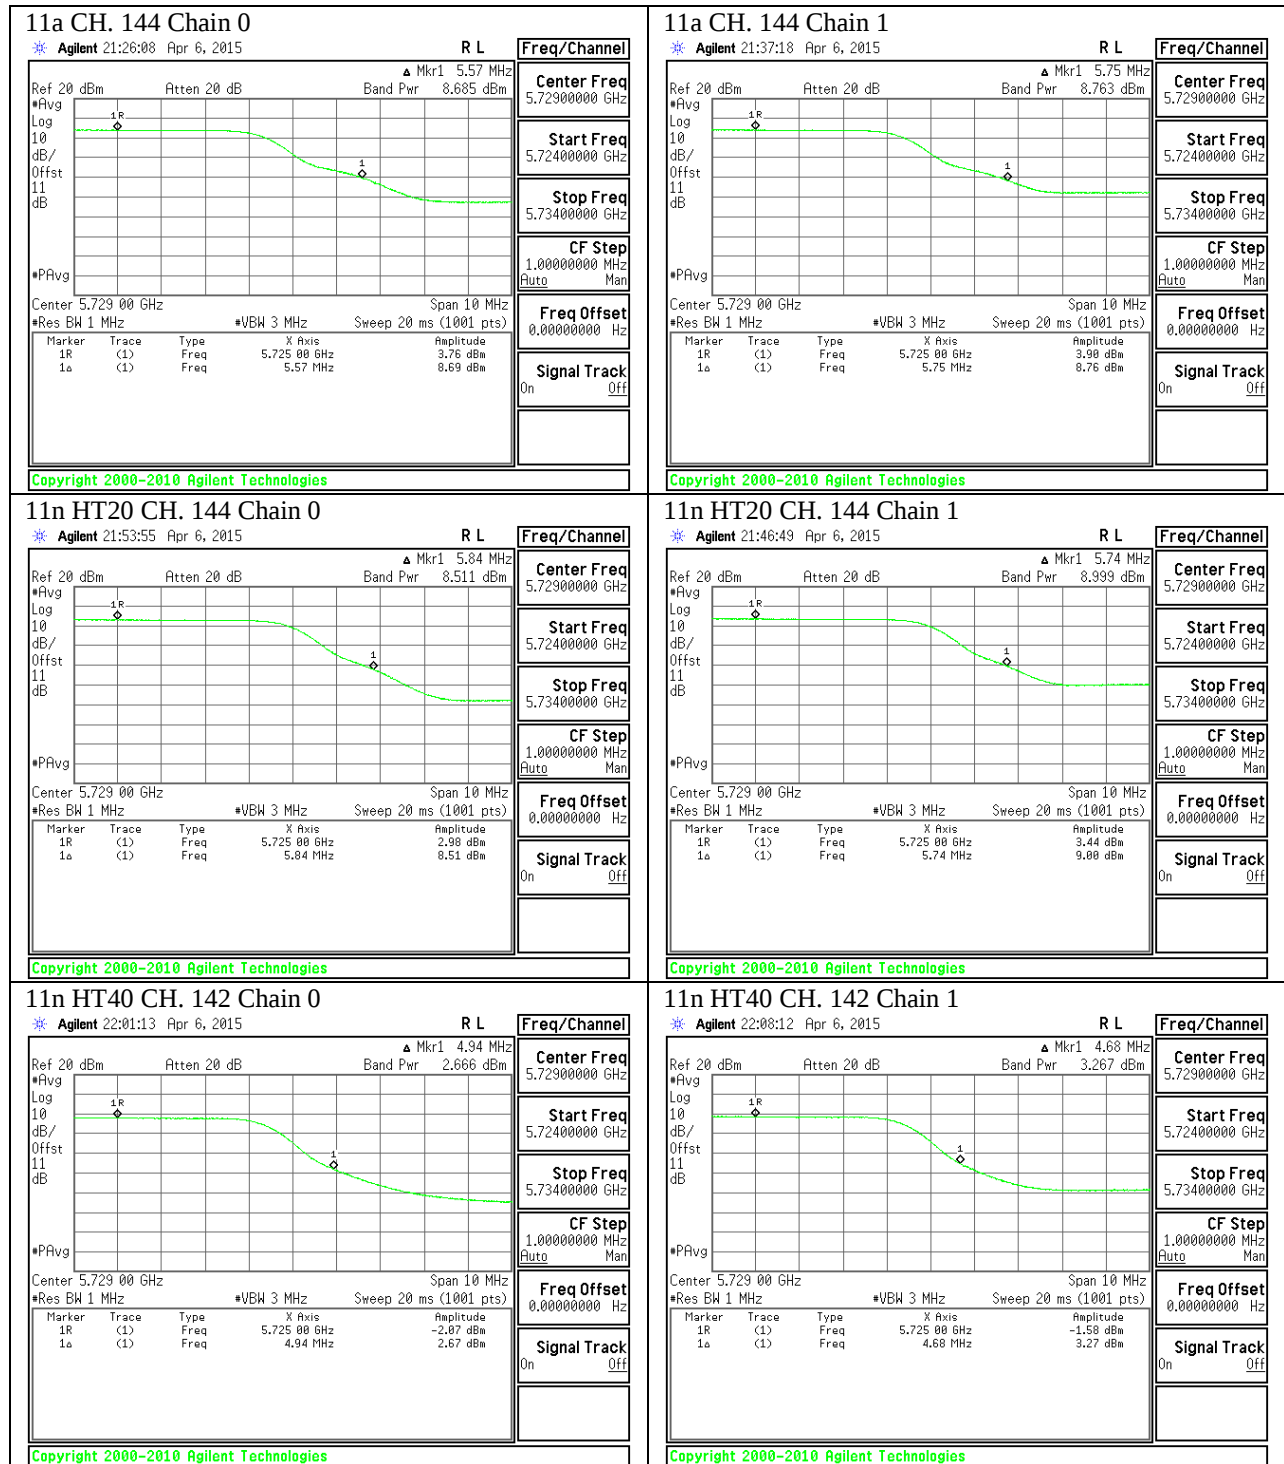

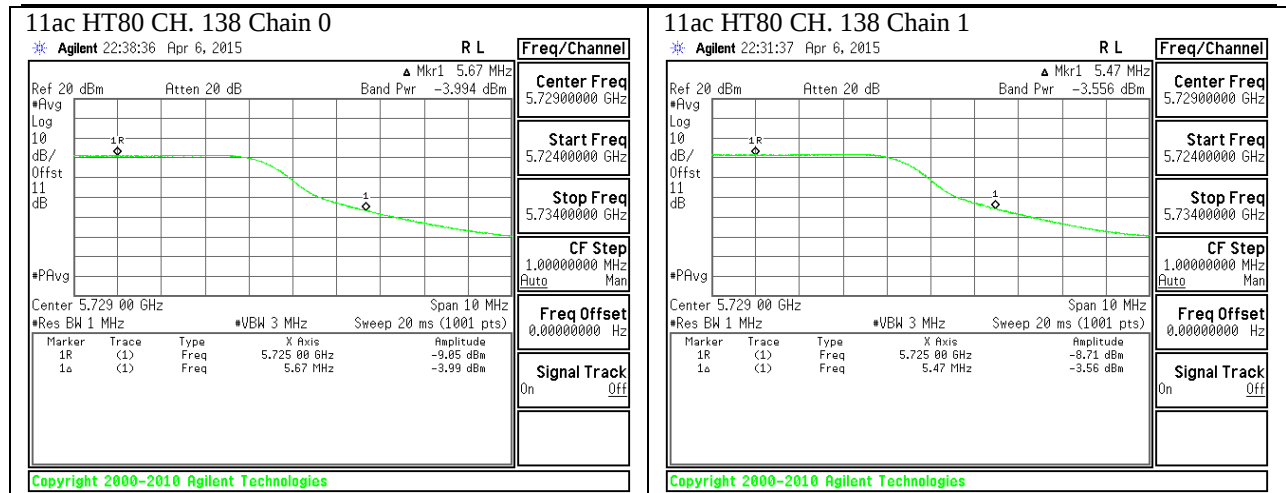





UNII-3 BAND PSD

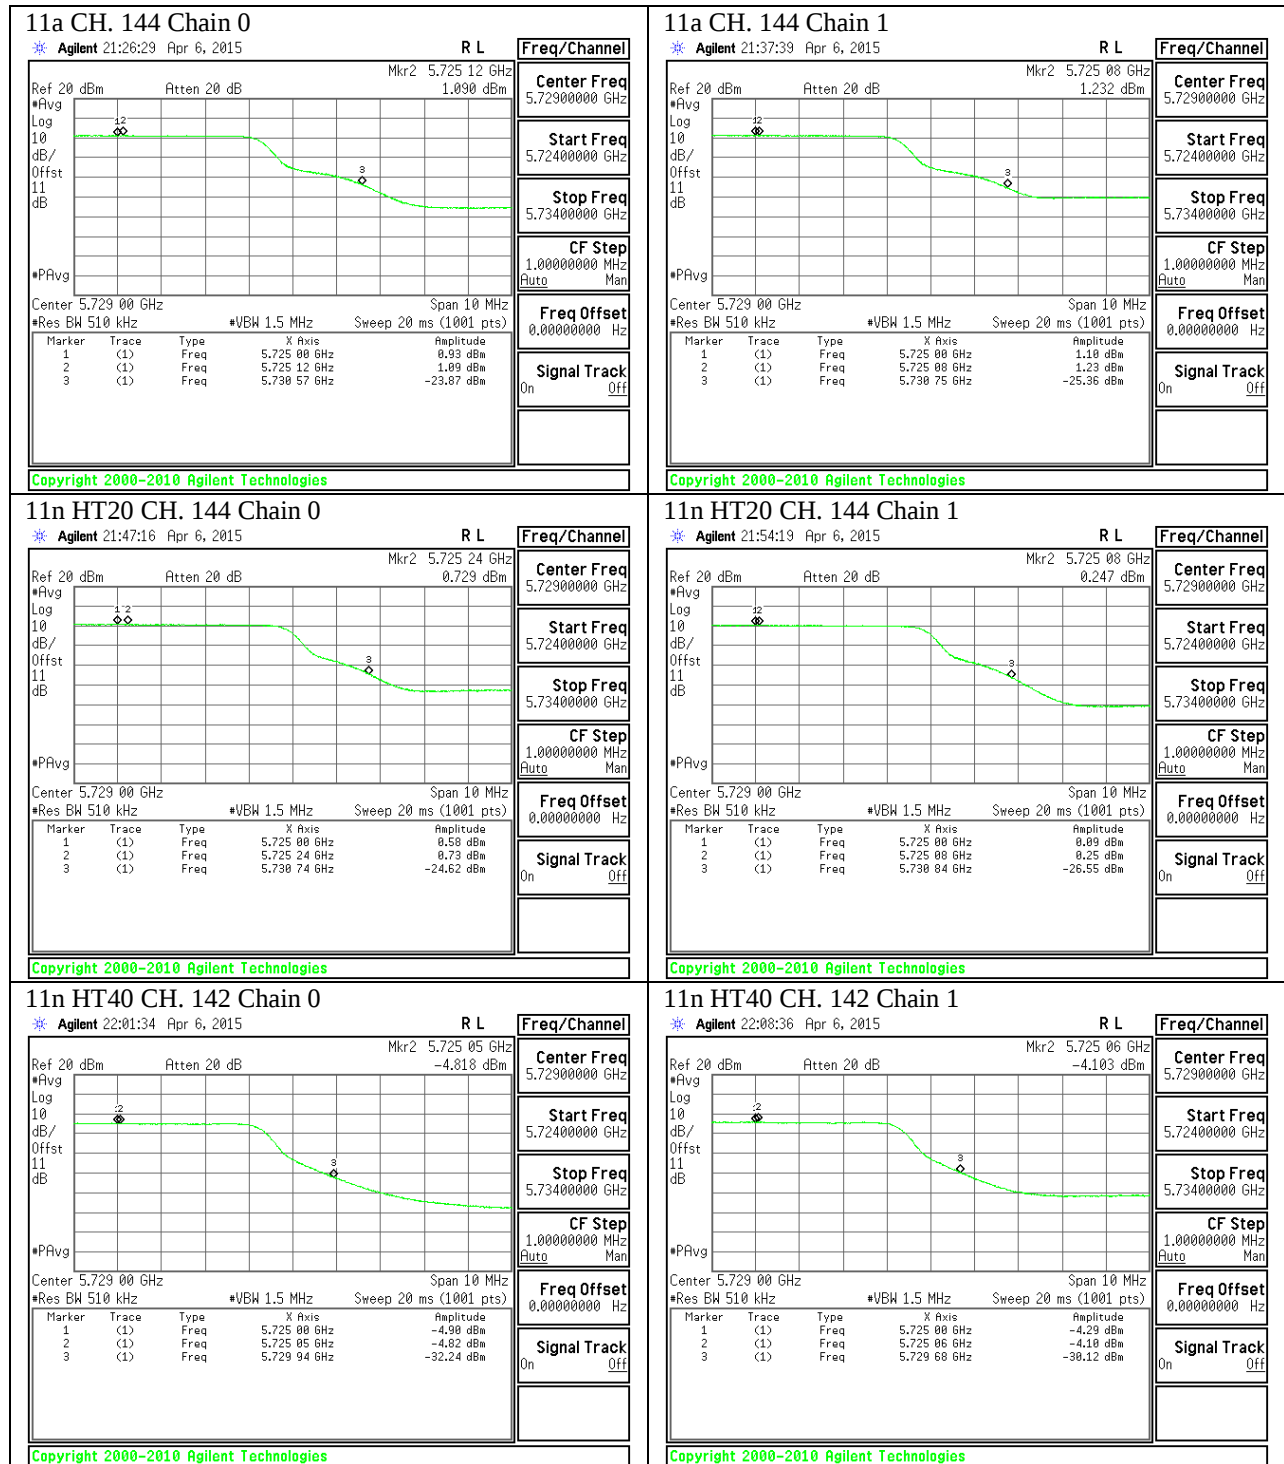


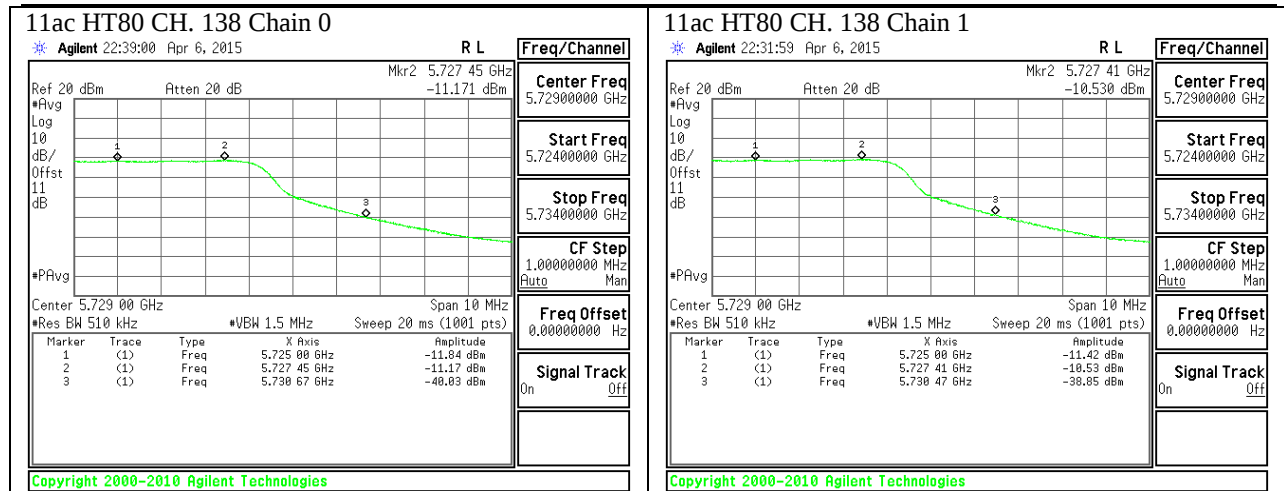

UNII 5.8GHz

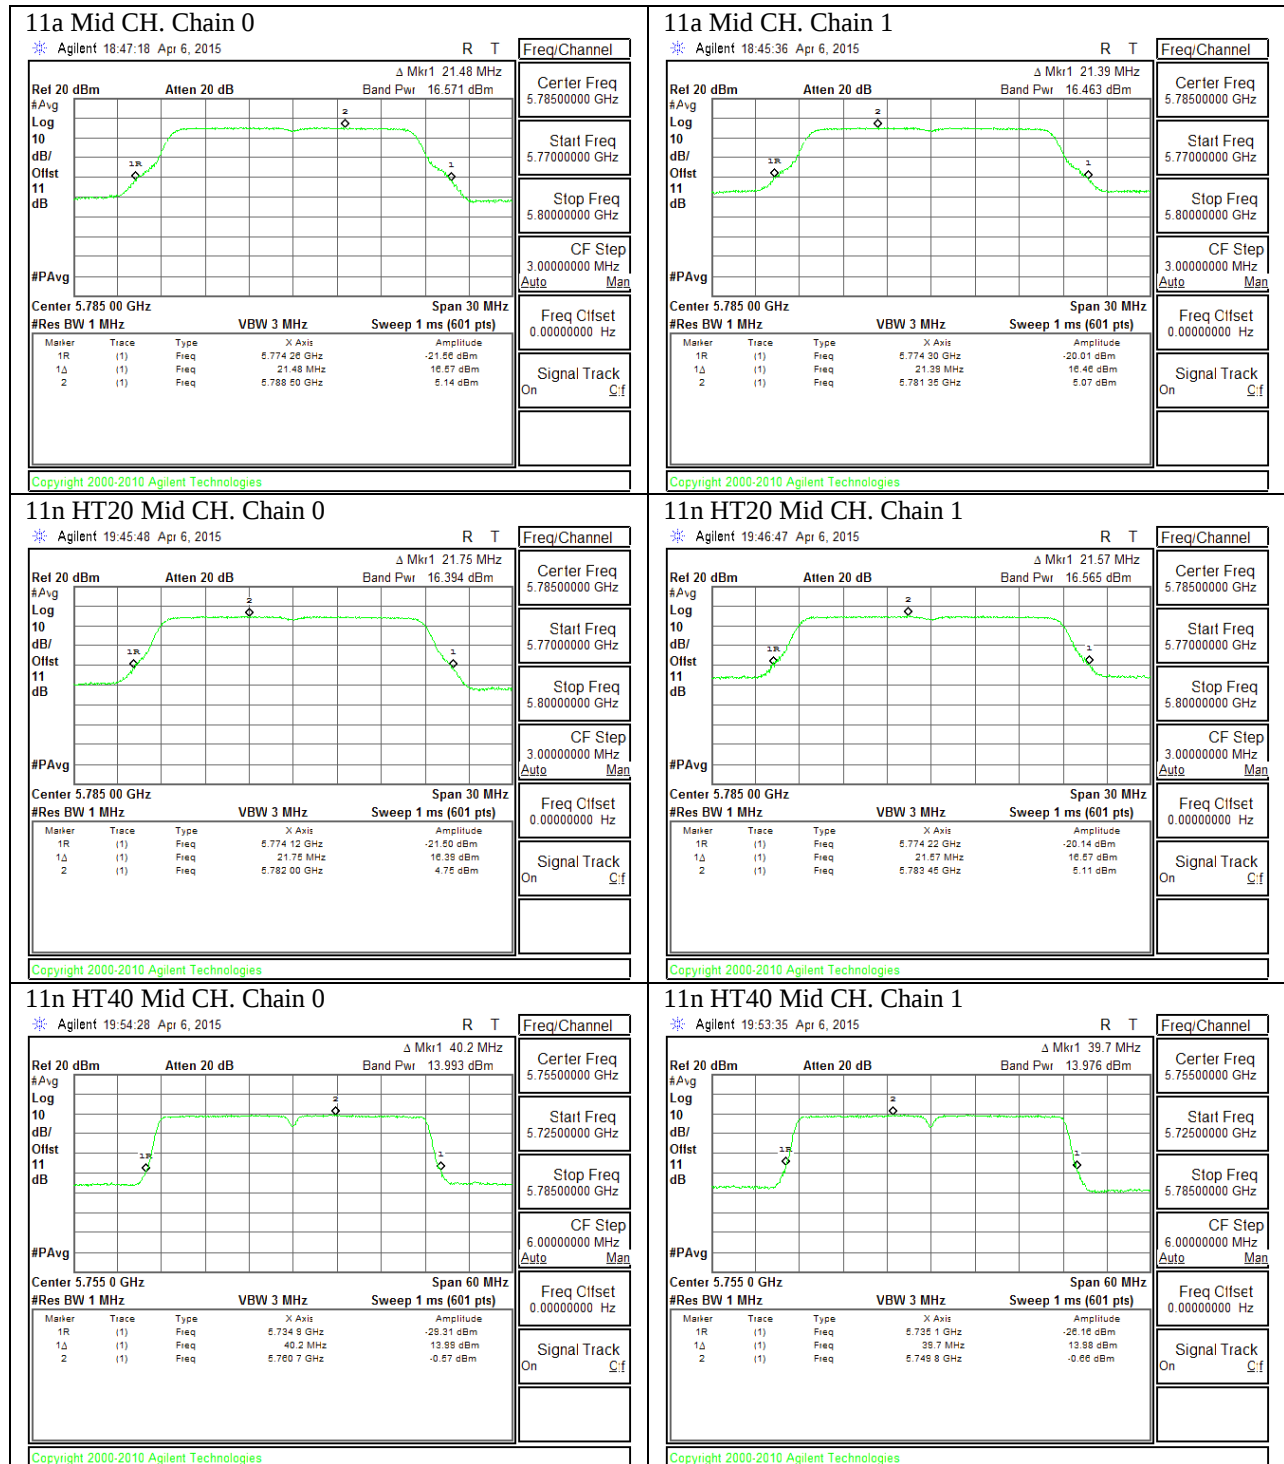

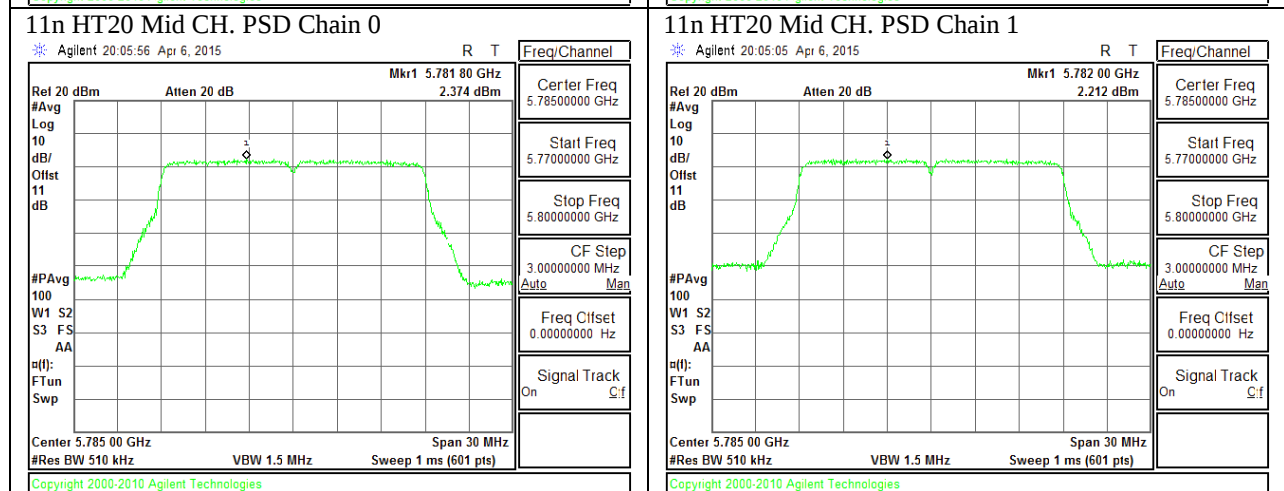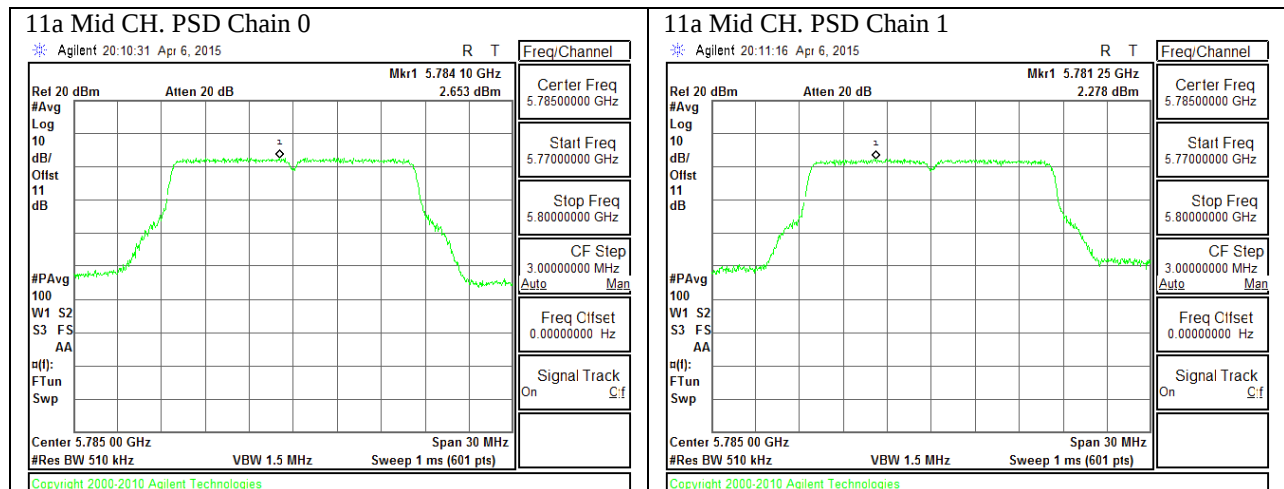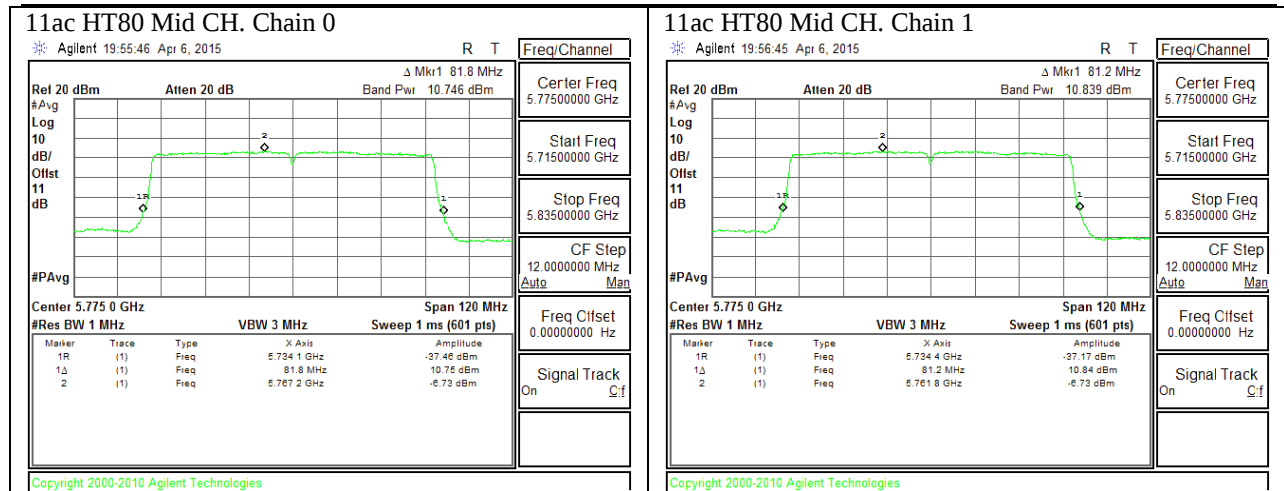

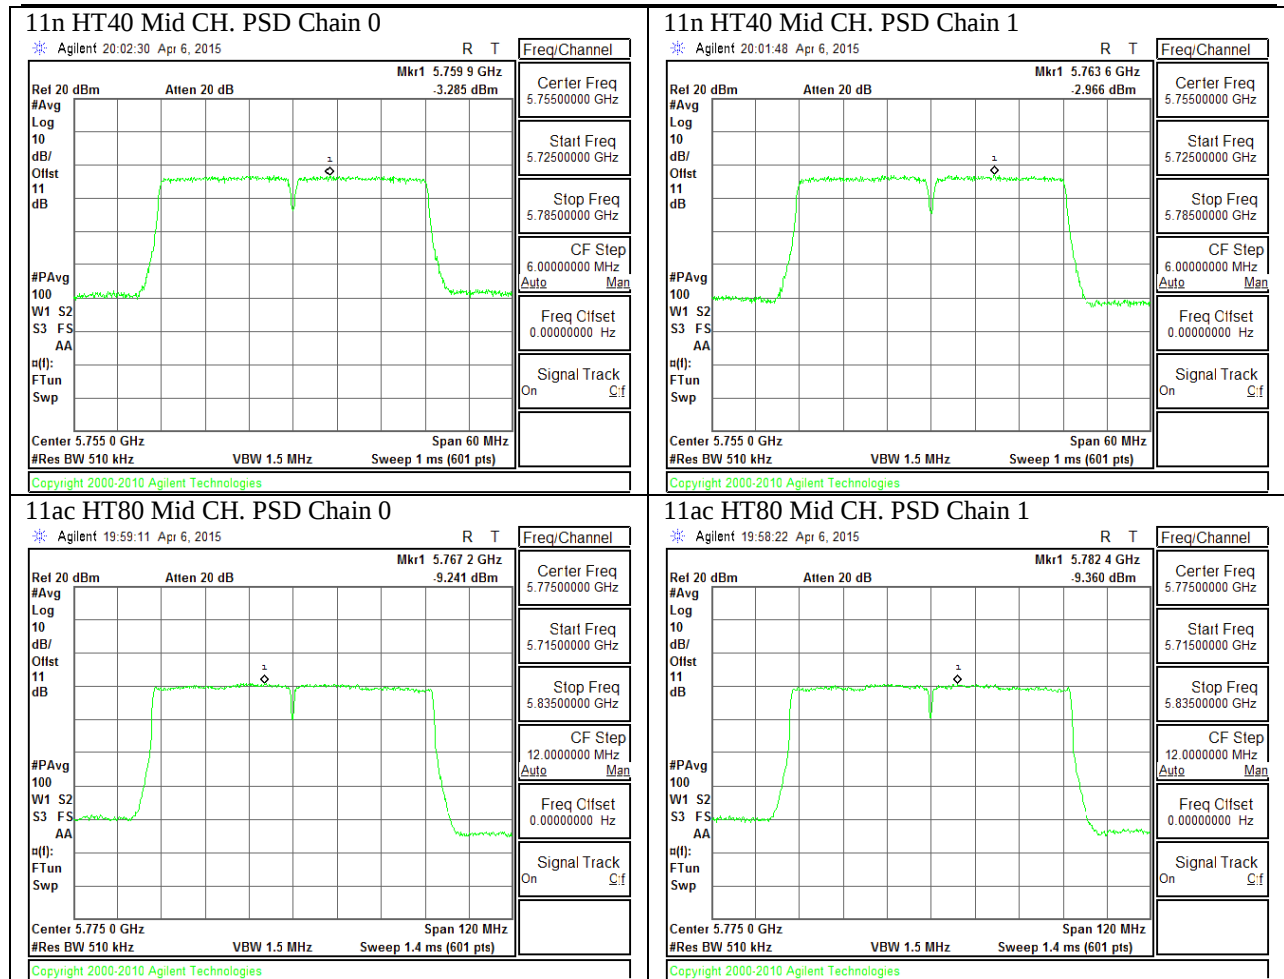

11. TRANSMITTER ABOVE 1 GHz

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Reference to KDB 789033 UNII part H) 6) d) Method AD:

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor to the reading offset for average measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

11.1. 5.2 GHz

11.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

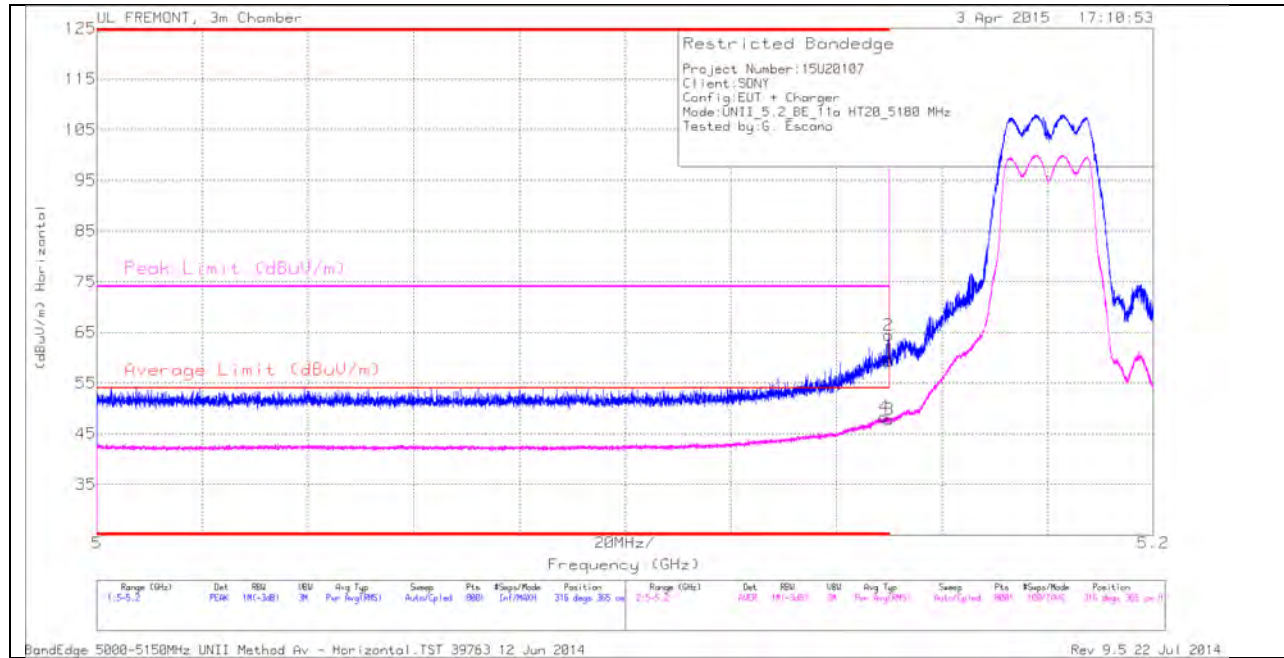

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	46.82	PK	34.2	-21.6	0	59.42	-	-	74	-14.58	316	365	H
2	* 5.15	51.83	PK	34.2	-21.6	0	64.43	-	-	74	-9.57	316	365	H
3	* 5.15	35.26	RMS	34.2	-21.6	0	47.86	54	-6.14	-	-	316	365	H
4	* 5.149	35.67	RMS	34.2	-21.6	0	48.27	54	-5.73	-	-	316	365	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

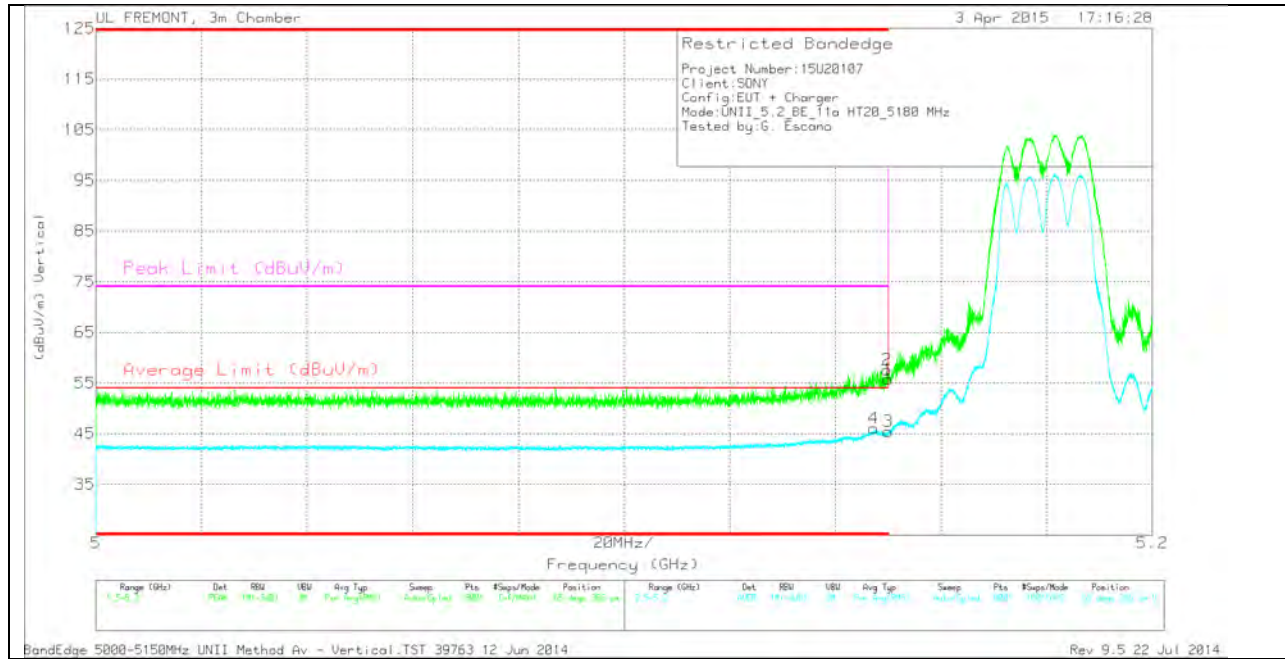

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	43.2	PK	34.2	-21.6	0	55.8	-	-	74	-18.2	65	366	V
2	* 5.15	45.07	PK	34.2	-21.6	0	57.67	-	-	74	-16.33	65	366	V
3	* 5.15	32.8	RMS	34.2	-21.6	0	45.4	54	-8.6	-	-	65	366	V
4	* 5.147	33.49	RMS	34.2	-21.6	0	46.09	54	-7.91	-	-	65	366	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

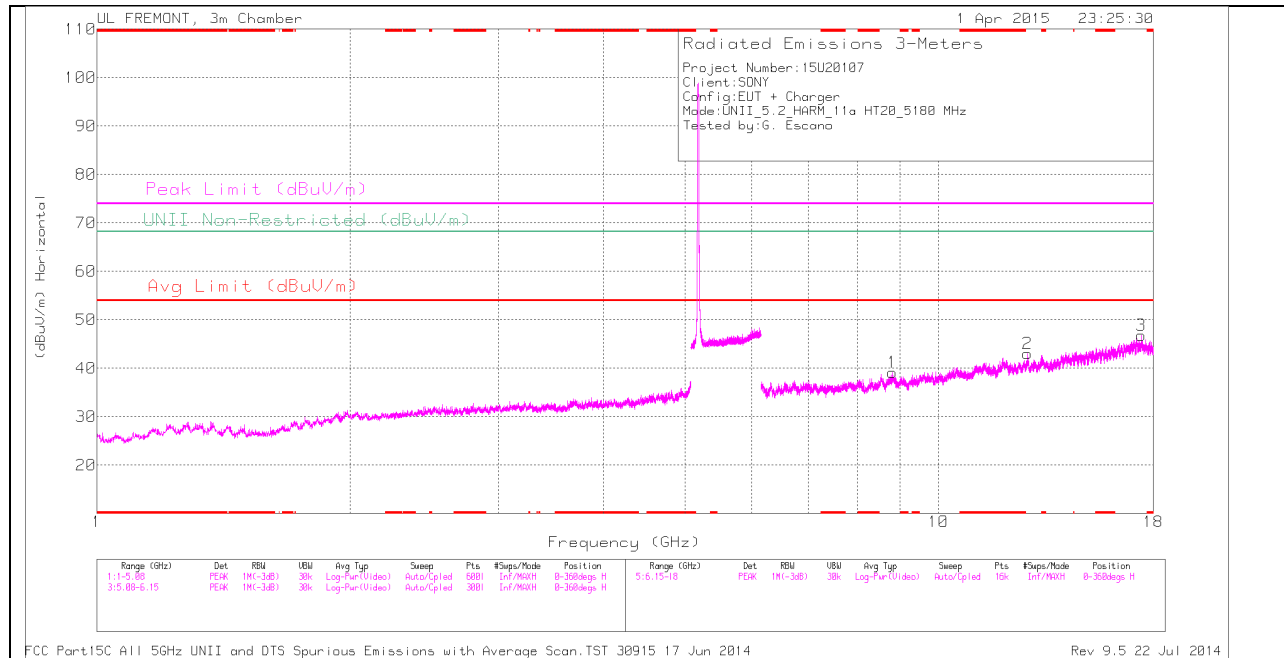

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

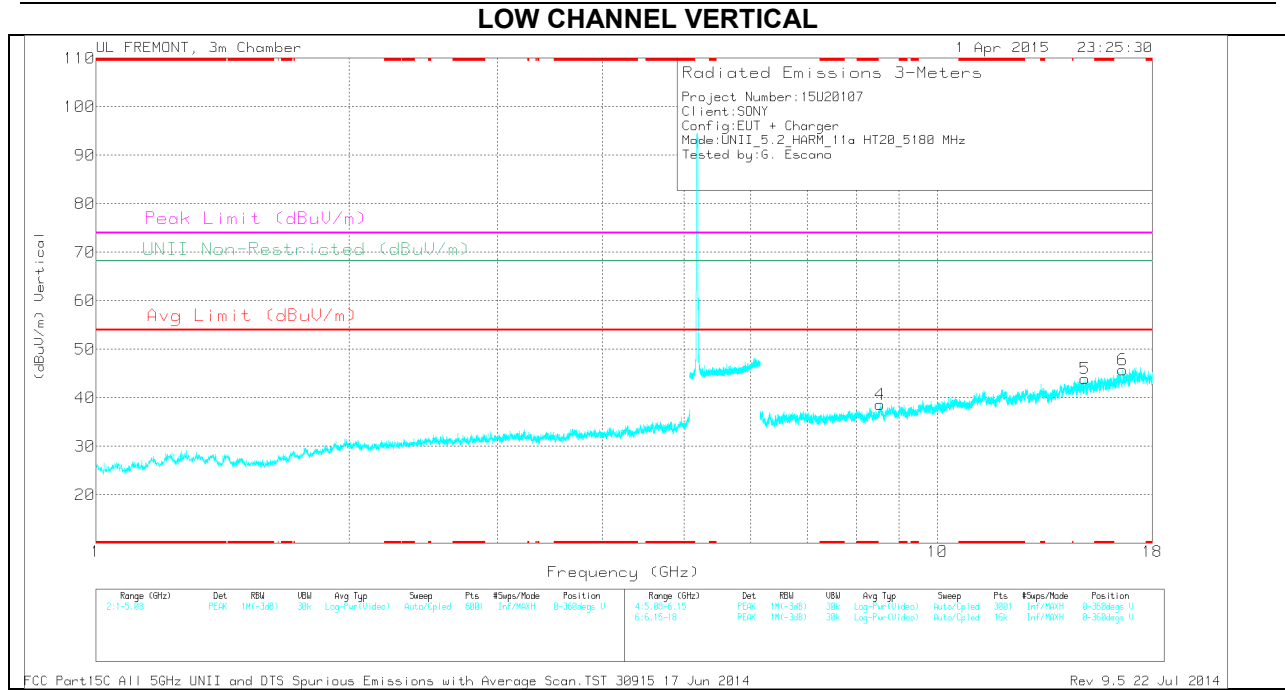

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	8.551	28.78	PK	35.8	-26	0	38.58	-	-	-	-	68.2	-29.62	0-360	200	V
1	8.819	28.96	PK	35.9	-25.7	0	39.16	-	-	-	-	68.2	-29.04	0-360	100	H
2	12.769	29.92	PK	39.1	-26	0	43.02	-	-	-	-	68.2	-25.18	0-360	100	H
5	14.968	31.43	PK	39.8	-27.3	0	43.93	-	-	-	-	68.2	-24.27	0-360	200	V
6	16.6	29	PK	41	-24.2	0	45.8	-	-	-	-	68.2	-22.4	0-360	100	V
3	17.418	27.67	PK	41.4	-22.3	0	46.77	-	-	-	-	68.2	-21.43	0-360	200	H


PK - Peak detector

MID CHANNEL HORIZONTAL

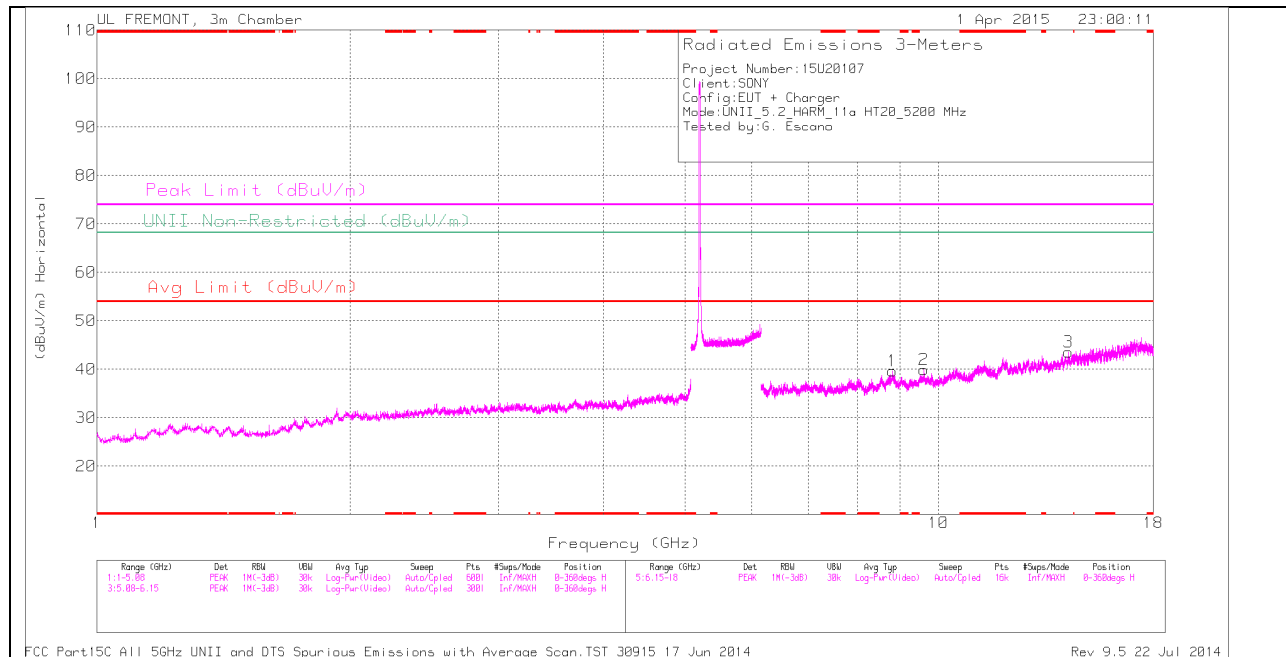

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

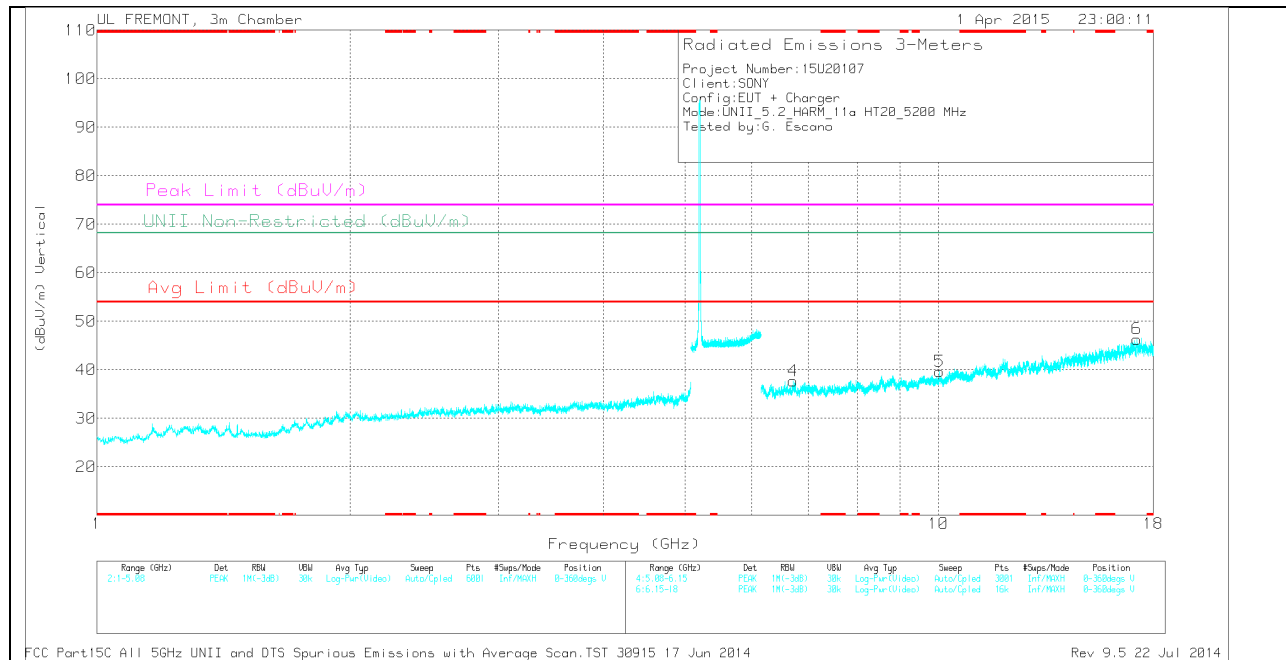

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


MID CHANNEL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	6.718	31.33	PK	35.6	-29.2	0	37.73	-	-	-	-	68.2	-30.47	0-360	200	V
1	8.819	29.42	PK	35.9	-25.7	0	39.62	-	-	-	-	68.2	-28.58	0-360	100	H
2	9.614	28.42	PK	36.7	-25.2	0	39.92	-	-	-	-	68.2	-28.28	0-360	200	H
5	10.025	27.82	PK	36.9	-25	0	39.72	-	-	-	-	68.2	-28.48	0-360	100	V
3	14.258	31.09	PK	39.3	-26.8	0	43.59	-	-	-	-	68.2	-24.61	0-360	200	H
6	17.202	27.95	PK	41.3	-22.9	0	46.35	-	-	-	-	68.2	-21.85	0-360	200	V

PK - Peak detector

HIGH CHANNEL HORIZONTAL

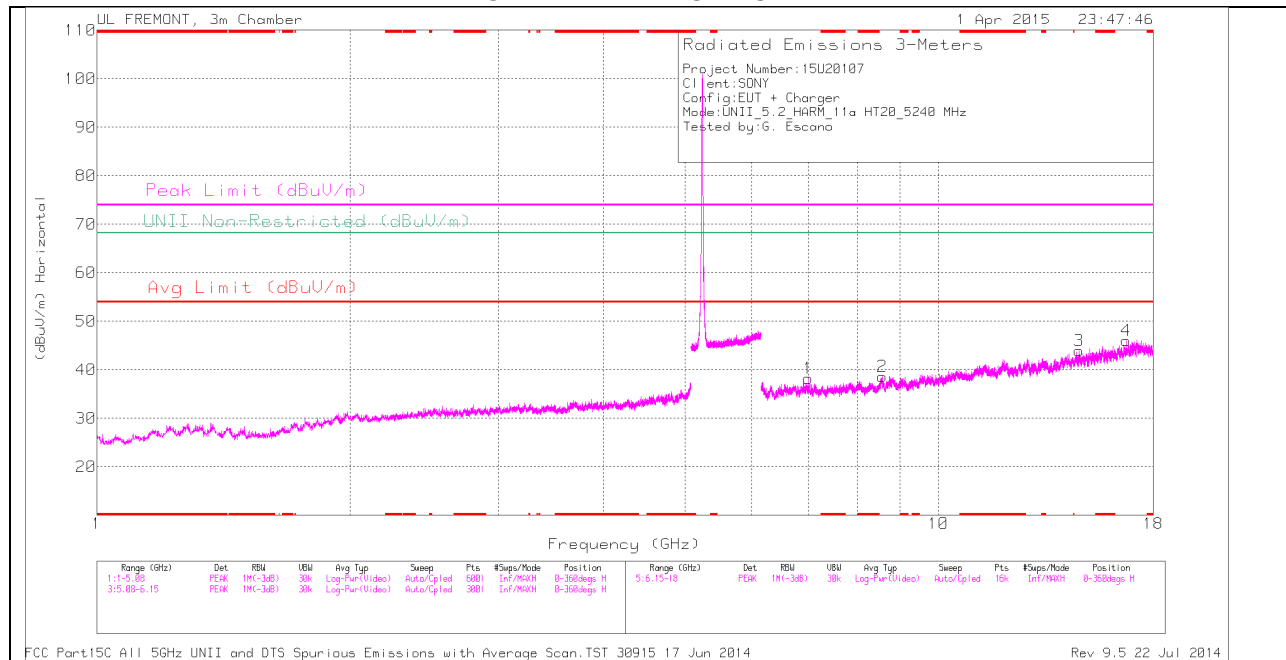

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

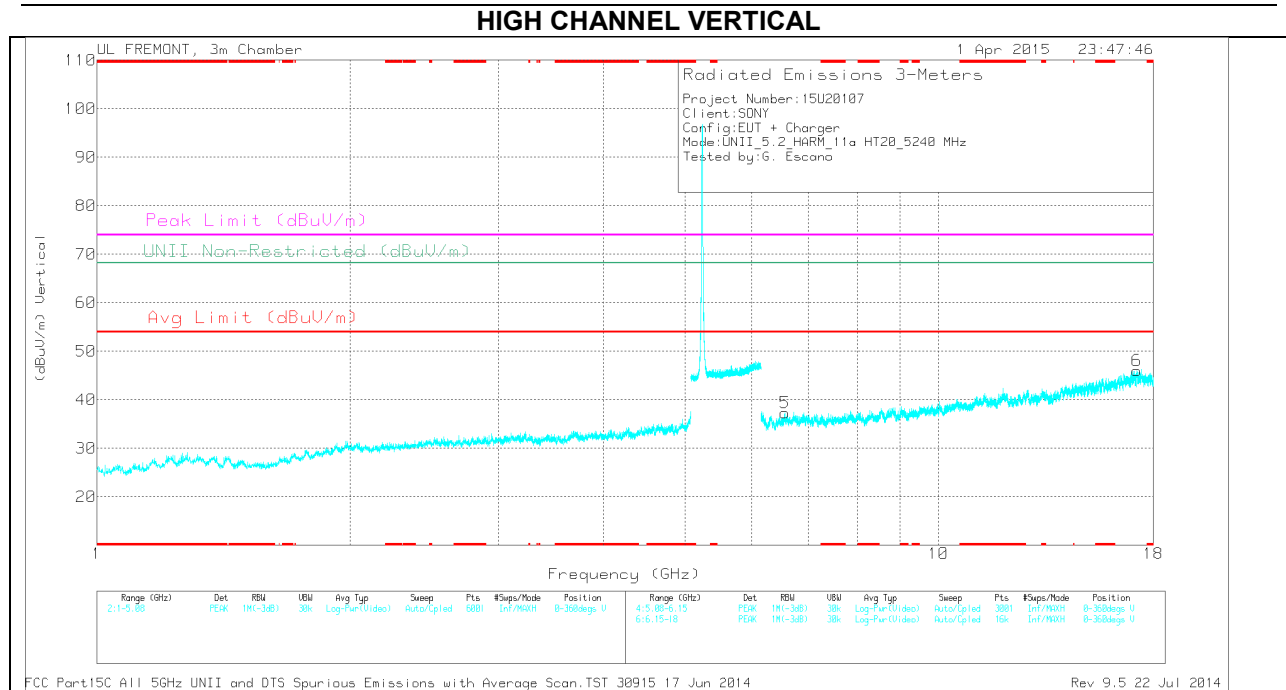

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA


TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	6.571	31.12	PK	35.6	-29.4	0	37.32	-	-	-	-	68.2	-30.88	0-360	100	V
1	7.005	31.38	PK	35.6	-28.8	0	38.18	-	-	-	-	68.2	-30.02	0-360	200	H
2	8.57	28.98	PK	35.8	-26.1	0	38.68	-	-	-	-	68.2	-29.52	0-360	100	H
3	14.681	31.25	PK	39.8	-27.1	0	43.95	-	-	-	-	68.2	-24.25	0-360	100	H
4	16.721	29.48	PK	41.2	-24.7	0	45.98	-	-	-	-	68.2	-22.22	0-360	200	H
6	17.205	27.61	PK	41.3	-22.9	0	46.01	-	-	-	-	68.2	-22.19	0-360	100	V

PK - Peak detector

11.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

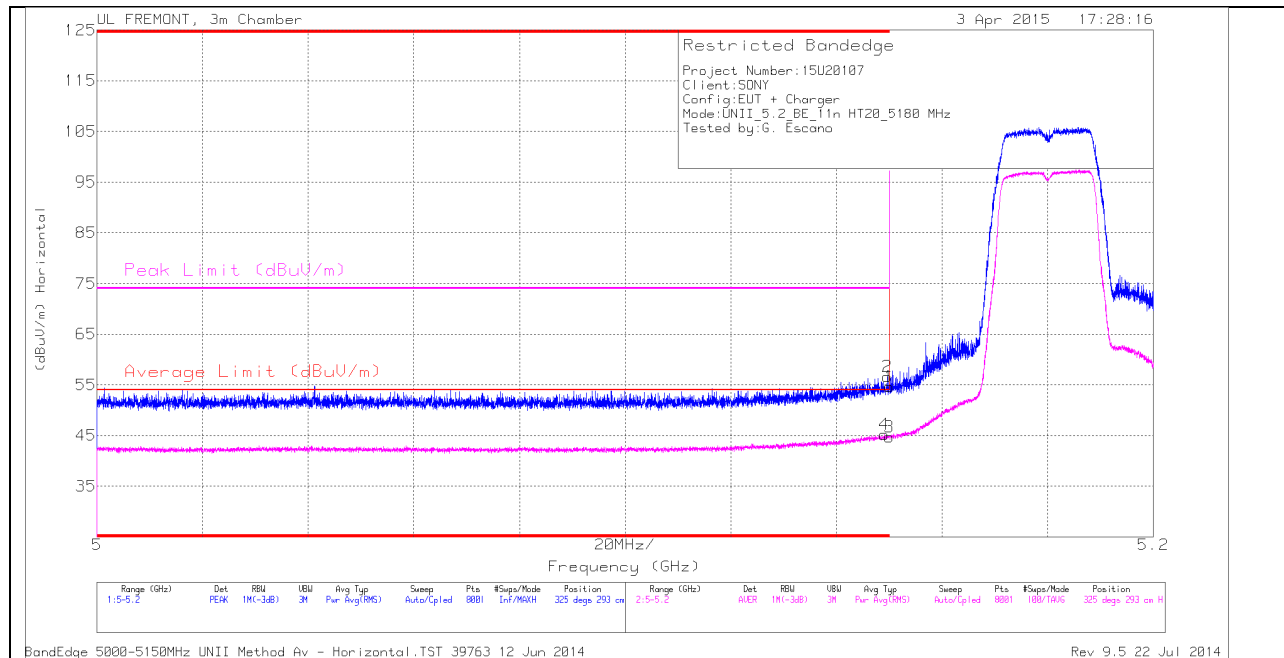

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 5.149	32.55	RMS	34.2	-21.6	0	45.15	54	-8.85	-	-	325	293	H
1	* 5.15	42.03	PK	34.2	-21.6	0	54.63	-	-	74	-19.37	325	293	H
2	* 5.15	44.05	PK	34.2	-21.6	0	56.65	-	-	74	-17.35	325	293	H
3	* 5.15	32.07	RMS	34.2	-21.6	0	44.67	54	-9.33	-	-	325	293	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

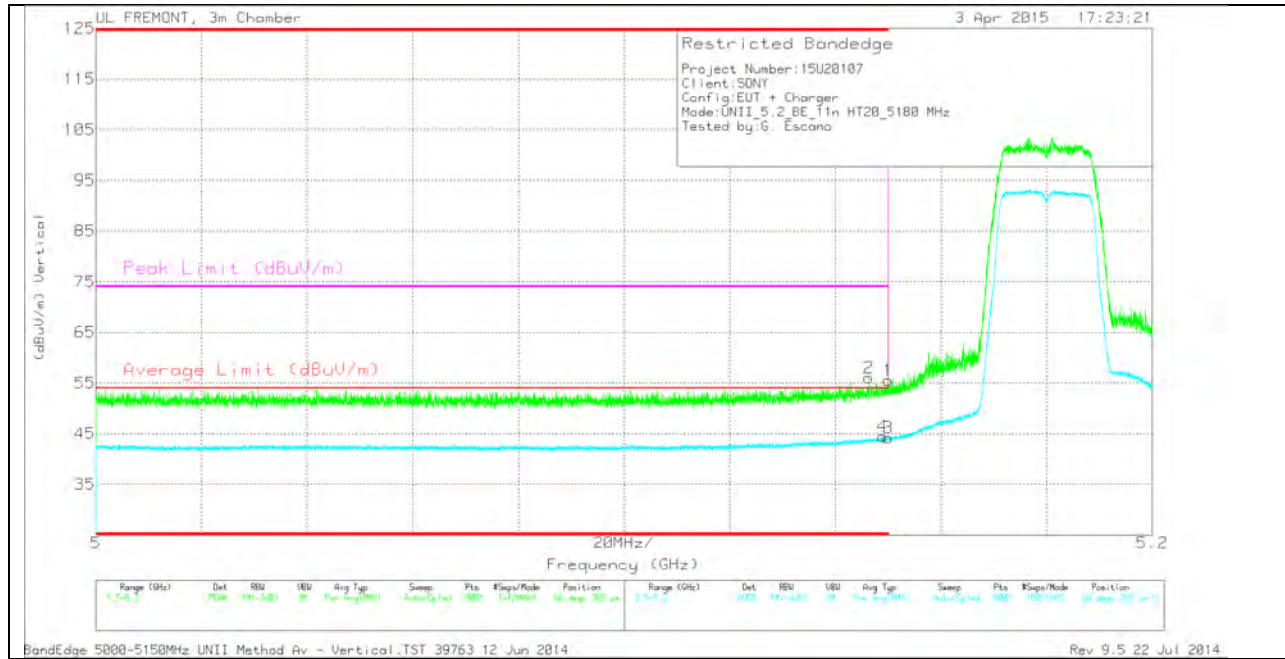

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.146	43.44	PK	34.2	-21.6	0	56.04	-	-	74	-17.96	66	365	V
4	* 5.149	31.84	RMS	34.2	-21.6	0	44.44	54	-9.56	-	-	66	365	V
1	* 5.15	42.9	PK	34.2	-21.6	0	55.5	-	-	74	-18.5	66	365	V
3	* 5.15	31.57	RMS	34.2	-21.6	0	44.17	54	-9.83	-	-	66	365	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

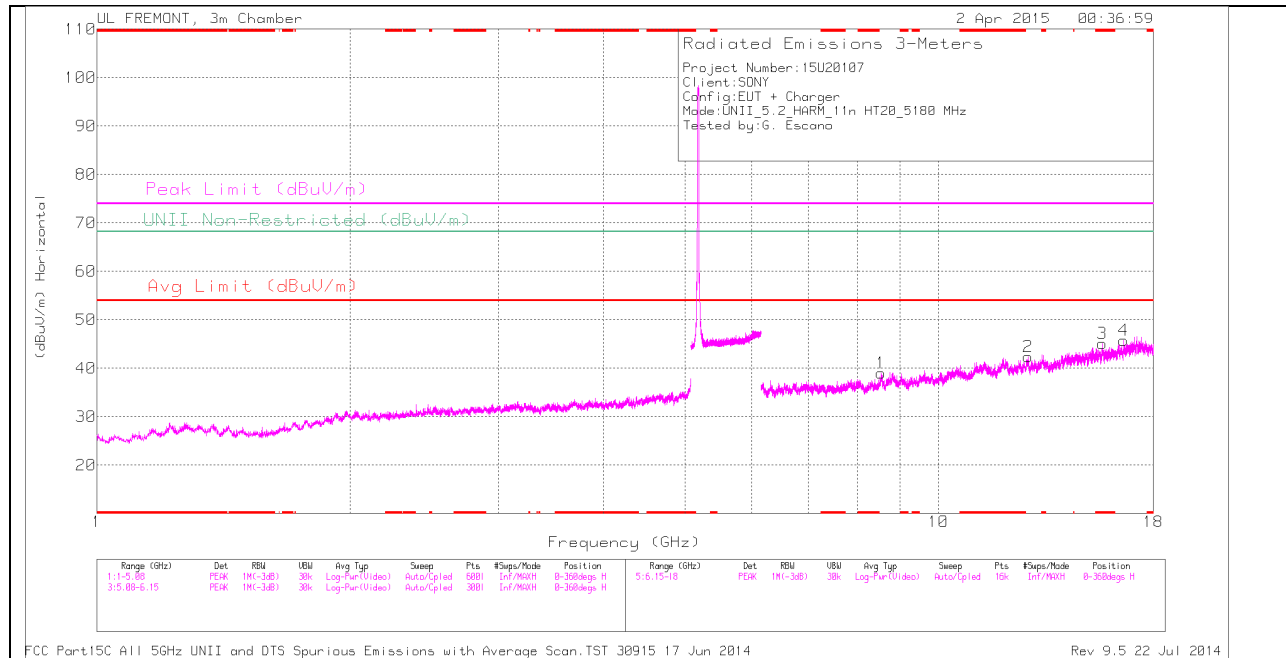

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

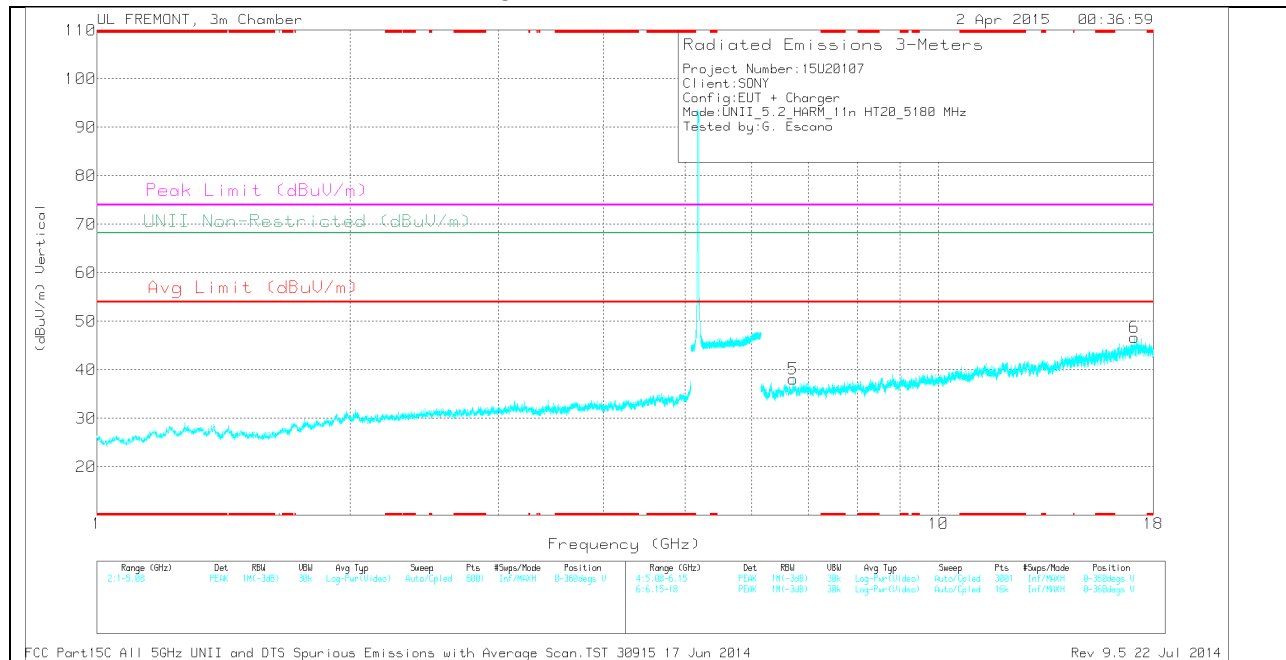

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 15.656	31.55	PK	40.3	-26.7	0	45.15	-	-	74	-28.85	-	-	0-360	100	H
5	6.722	31.69	PK	35.6	-29.2	0	38.09	-	-	-	-	68.2	-30.11	0-360	100	V
1	8.544	29.37	PK	35.8	-26.1	0	39.07	-	-	-	-	68.2	-29.13	0-360	100	H
2	12.777	29.17	PK	39.1	-25.9	0	42.37	-	-	-	-	68.2	-25.83	0-360	100	H
4	16.605	29.11	PK	41	-24.3	0	45.81	-	-	-	-	68.2	-22.39	0-360	200	H
6	17.087	28.67	PK	41.5	-23.5	0	46.67	-	-	-	-	68.2	-21.53	0-360	100	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 15.656	39.71	PK1	40.3	-26.7	0	53.31	-	-	74	-20.69	-	-	52	378	H
* 15.658	27.69	AD1	40.3	-26.7	0	41.29	54	-12.71	-	-	-	-	52	378	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak


AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HORIZONTAL

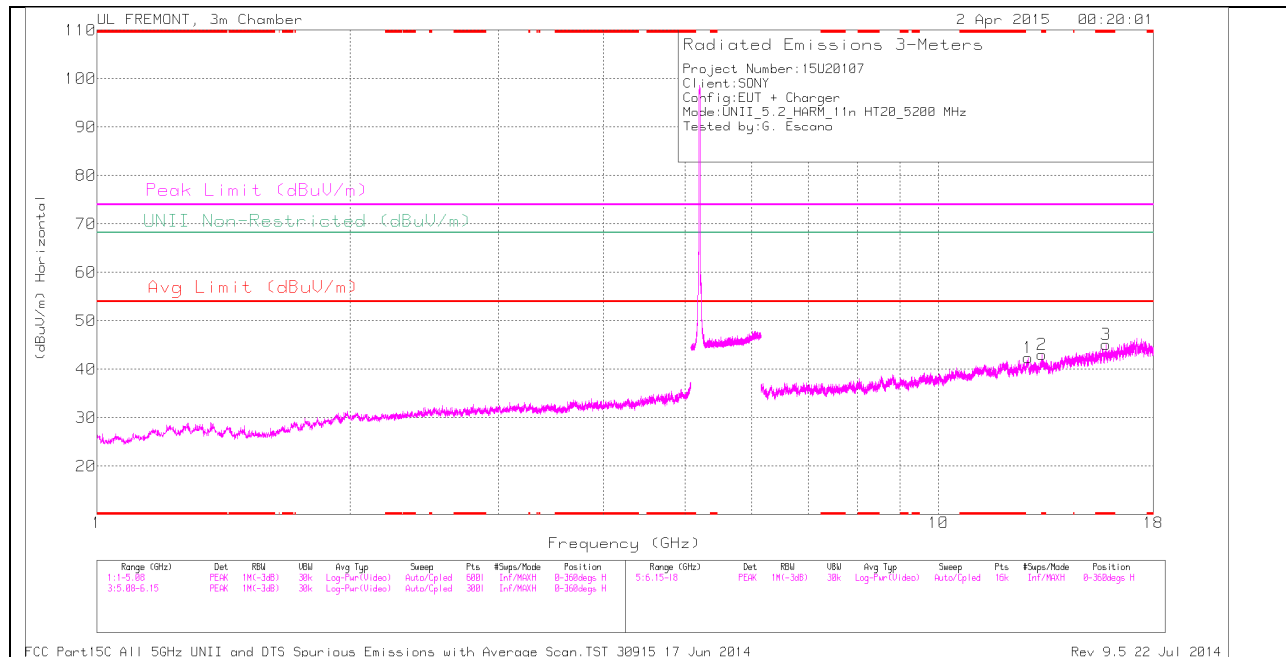

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

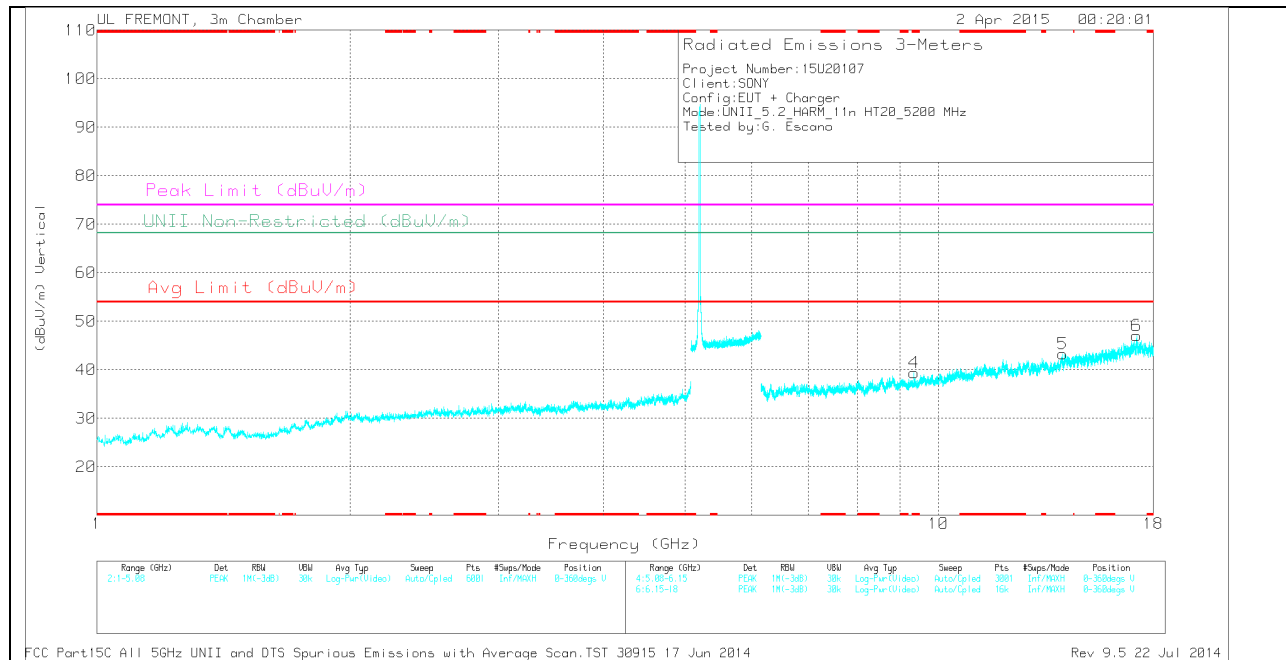

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fil tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 13.277	30.17	PK	39	-26.1	0	43.07	-	-	74	-30.93	-	-	0-360	200	H
3	* 15.815	31.17	PK	40.3	-26.4	0	45.07	-	-	74	-28.93	-	-	0-360	100	H
4	* 9.354	28.76	PK	36.4	-25.7	0	39.46	-	-	74	-34.54	-	-	0-360	200	V
1	12.78	29.18	PK	39.1	-25.9	0	42.38	-	-	-	-	68.2	-25.82	0-360	100	H
5	14.043	31.75	PK	38.9	-27.4	0	43.25	-	-	-	-	68.2	-24.95	0-360	100	V
6	17.194	29.02	PK	41.3	-23.2	0	47.12	-	-	-	-	68.2	-21.08	0-360	200	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fil tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 13.278	38.75	PK1	39	-26.1	0	51.65	-	-	74	-22.35	-	-	260	294	H
* 13.278	26.93	AD1	39	-26.1	0	39.83	54	-14.17	-	-	-	-	260	294	H
* 15.814	39.88	PK1	40.3	-26.4	0	53.78	-	-	74	-20.22	-	-	23	221	H
* 15.814	27.72	AD1	40.3	-26.4	0	41.62	54	-12.38	-	-	-	-	23	221	H
* 9.353	36.69	PK1	36.4	-25.6	0	47.49	-	-	74	-26.51	-	-	36	296	V
* 9.356	24.9	AD1	36.4	-25.7	0	35.6	54	-18.4	-	-	-	-	36	296	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL

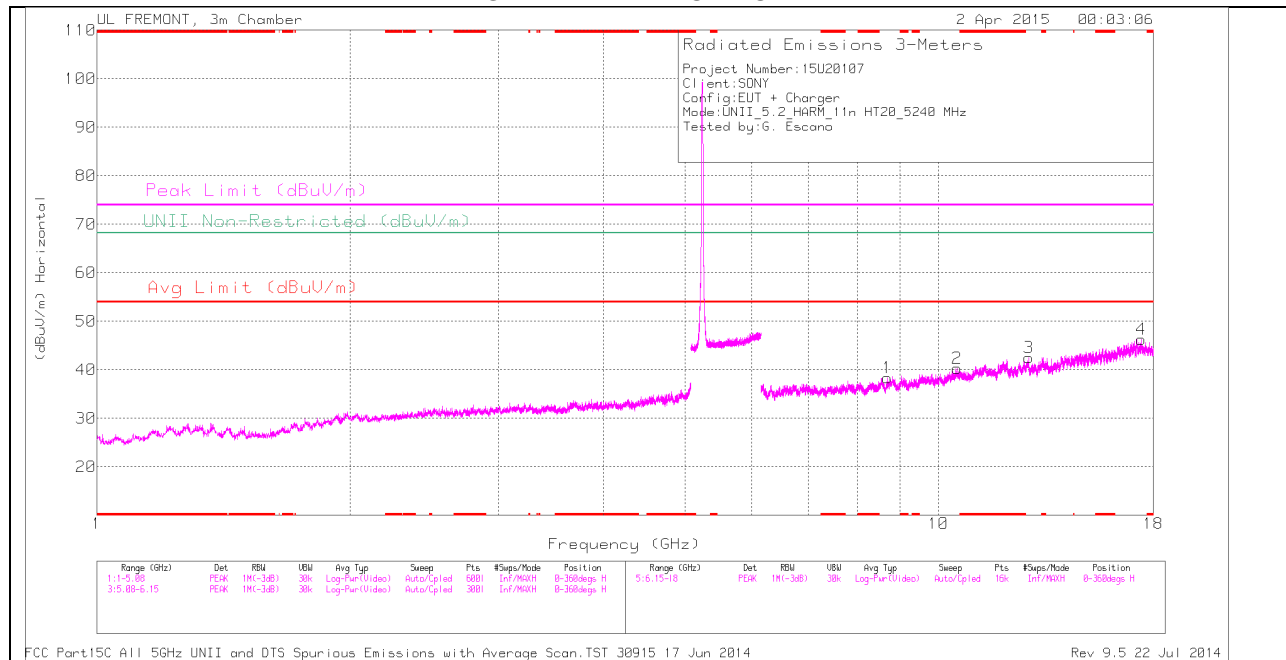

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

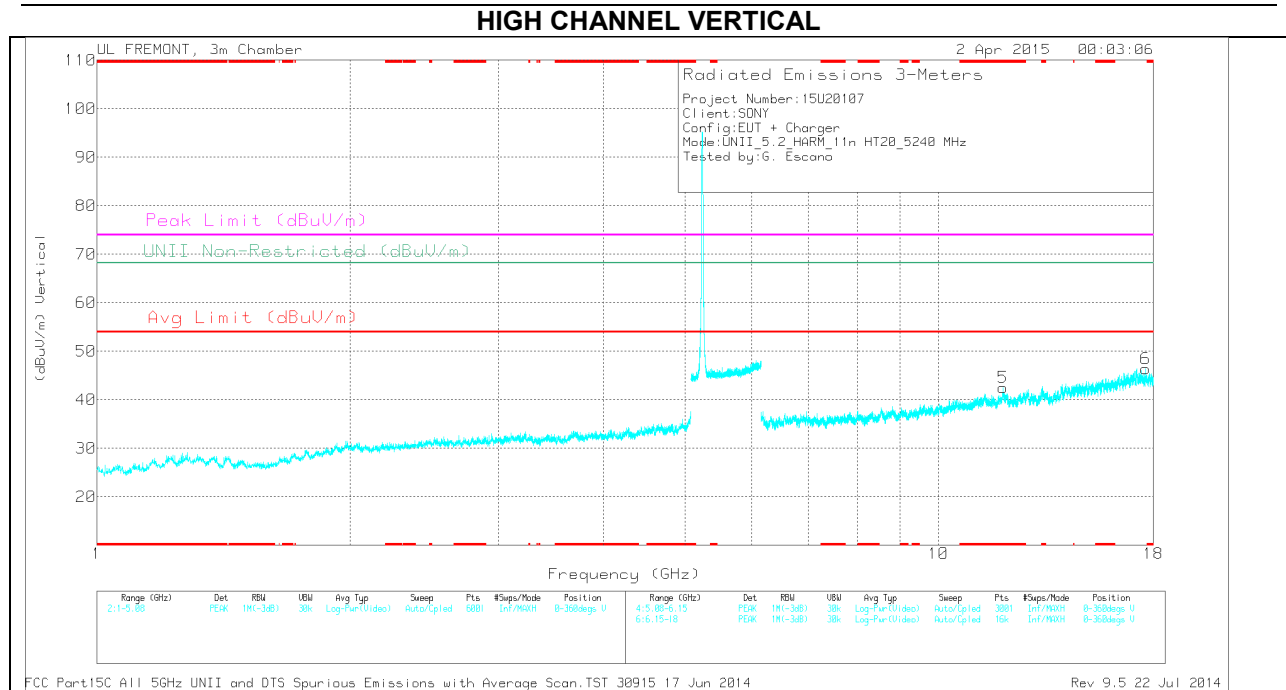

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 11.93	29.65	PK	39.1	-26.2	0	42.55	-	-	74	-31.45	-	-	0-360	200	V
1	8.698	30.41	PK	35.9	-27.9	0	38.41	-	-	-	-	68.2	-29.79	0-360	100	H
2	10.523	27.87	PK	37.5	-25	0	40.37	-	-	-	-	68.2	-27.83	0-360	100	H
3	12.793	29.36	PK	39.1	-26	0	42.46	-	-	-	-	68.2	-25.74	0-360	200	H
4	17.428	27.66	PK	41.4	-22.8	0	46.26	-	-	-	-	68.2	-21.94	0-360	200	H
6	17.618	28.5	PK	41.4	-23.5	0	46.4	-	-	-	-	68.2	-21.8	0-360	200	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.928	38.18	PK1	39.1	-26.2	0	51.08	-	-	74	-22.92	-	-	278	229	V
* 11.929	26.14	AD1	39.1	-26.2	0	39.04	54	-14.96	-	-	-	-	278	229	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

11.1.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

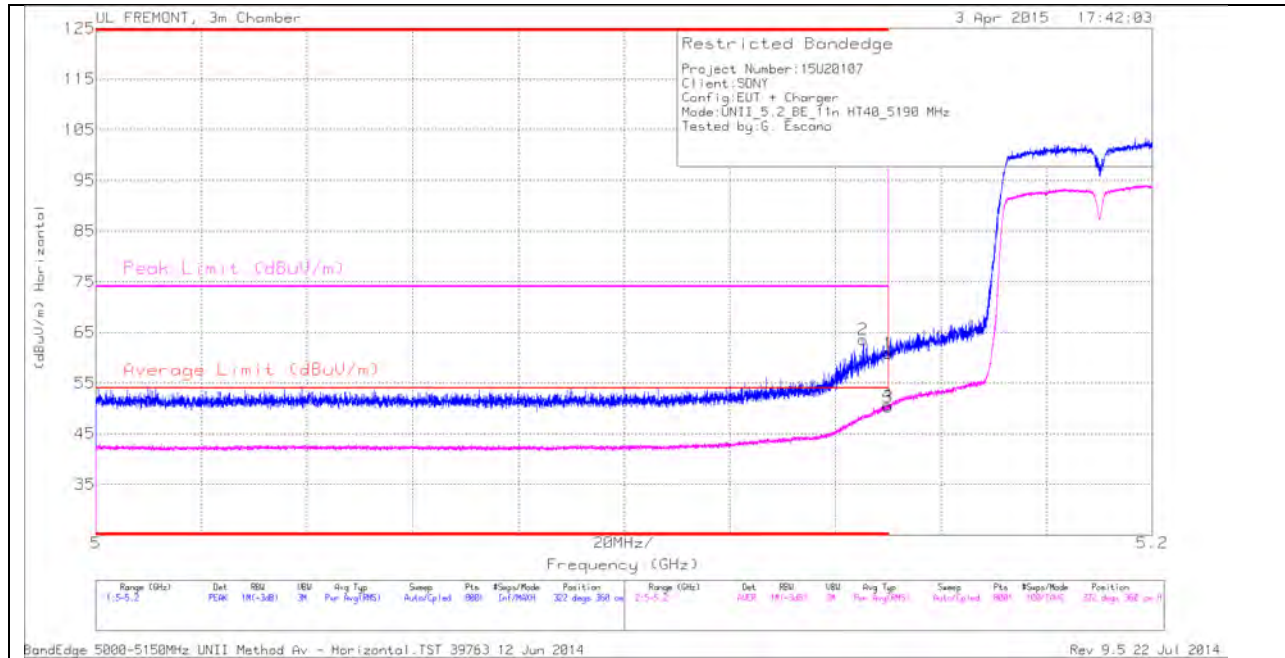

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.145	50.99	PK	34.2	-21.6	0	63.59	-	-	74	-10.41	322	360	H
1	* 5.15	48.26	PK	34.2	-21.6	0	60.86	-	-	74	-13.14	322	360	H
3	* 5.15	37.74	RMS	34.2	-21.6	.12	50.46	54	-3.54	-	-	322	360	H
4	* 5.15	38.05	RMS	34.2	-21.6	.12	50.77	54	-3.23	-	-	322	360	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

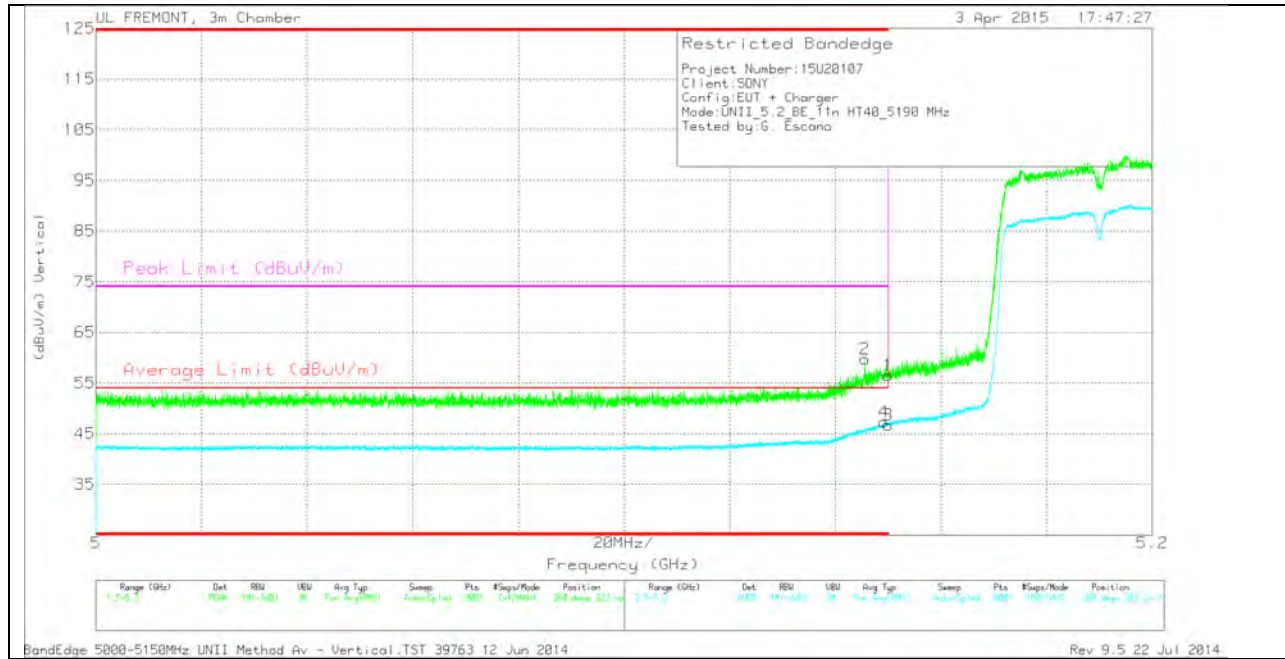

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.146	47.12	PK	34.2	-21.6	0	59.72	-	-	74	-14.28	260	323	V
4	* 5.149	34.69	RMS	34.2	-21.6	.12	47.41	54	-6.59	-	-	260	323	V
1	* 5.15	43.86	PK	34.2	-21.6	0	56.46	-	-	74	-17.54	260	323	V
3	* 5.15	34.04	RMS	34.2	-21.6	.12	46.76	54	-7.24	-	-	260	323	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

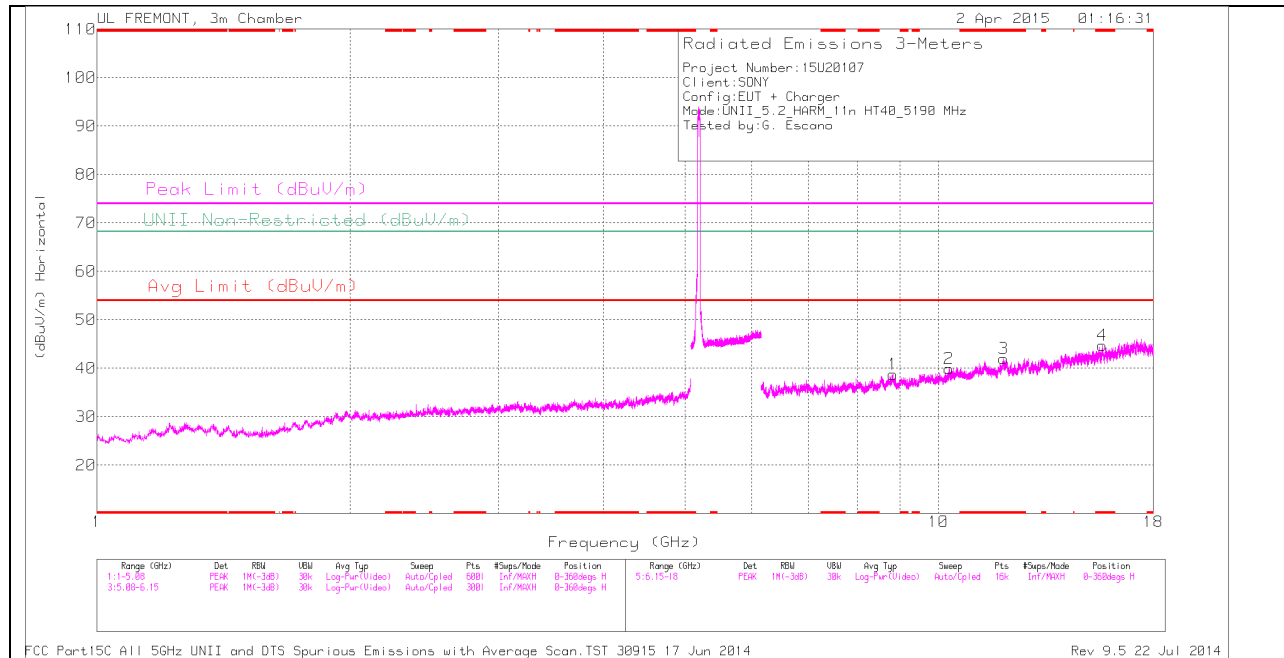

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

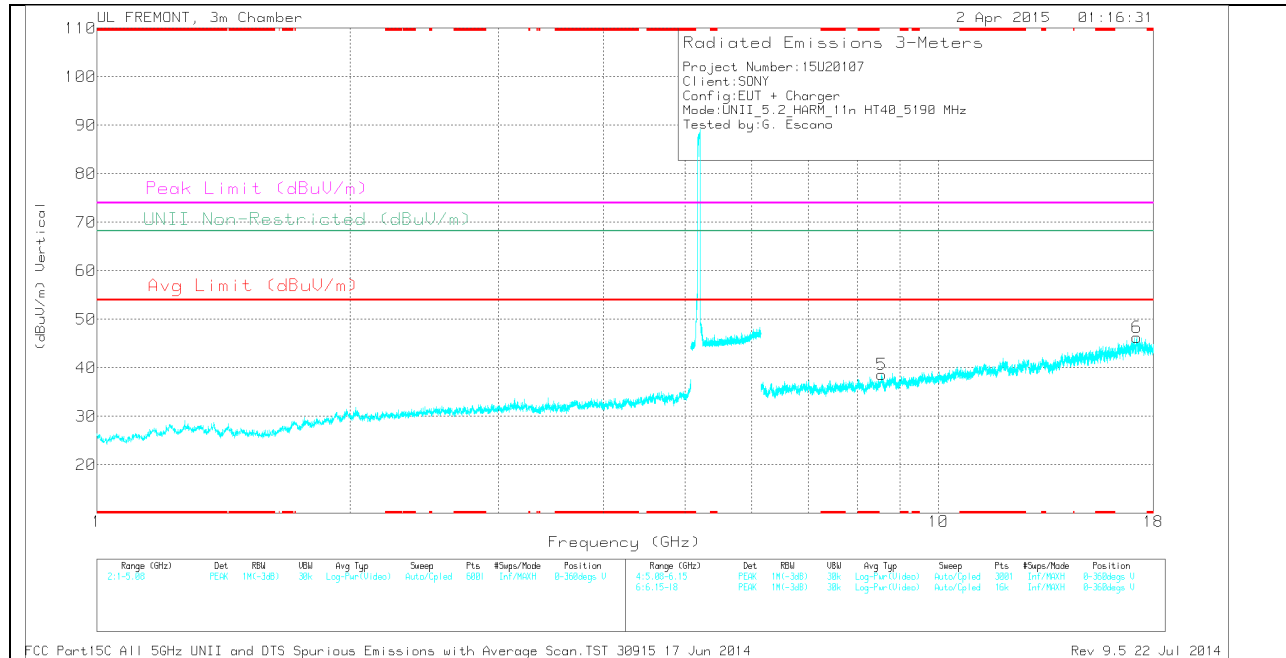

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 11.946	29.34	PK	39.1	-26.4	0	42.04	-	-	74	-31.96	-	-	0-360	100	H
4	* 15.658	31.08	PK	40.3	-26.7	0	44.68	-	-	74	-29.32	-	-	0-360	200	H
5	8.559	28.9	PK	35.8	-26.1	0	38.6	-	-	-	-	68.2	-29.6	0-360	200	V
1	8.829	28.72	PK	35.9	-25.9	0	38.72	-	-	-	-	68.2	-29.48	0-360	100	H
2	10.299	27.8	PK	37.1	-25	0	39.9	-	-	-	-	68.2	-28.3	0-360	100	H
6	17.212	28.11	PK	41.3	-23.1	0	46.31	-	-	-	-	68.2	-21.89	0-360	100	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.947	37.85	PK1	39.1	-26.4	0	50.55	-	-	74	-23.45	-	-	205	190	H
* 11.944	26	AD1	39.1	-26.3	.12	38.92	54	-15.08	-	-	-	-	205	190	H
* 15.658	41.05	PK1	40.3	-26.7	0	54.65	-	-	74	-19.35	-	-	113	395	H
* 15.659	27.86	AD1	40.3	-26.7	.12	41.58	54	-12.42	-	-	-	-	113	395	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL

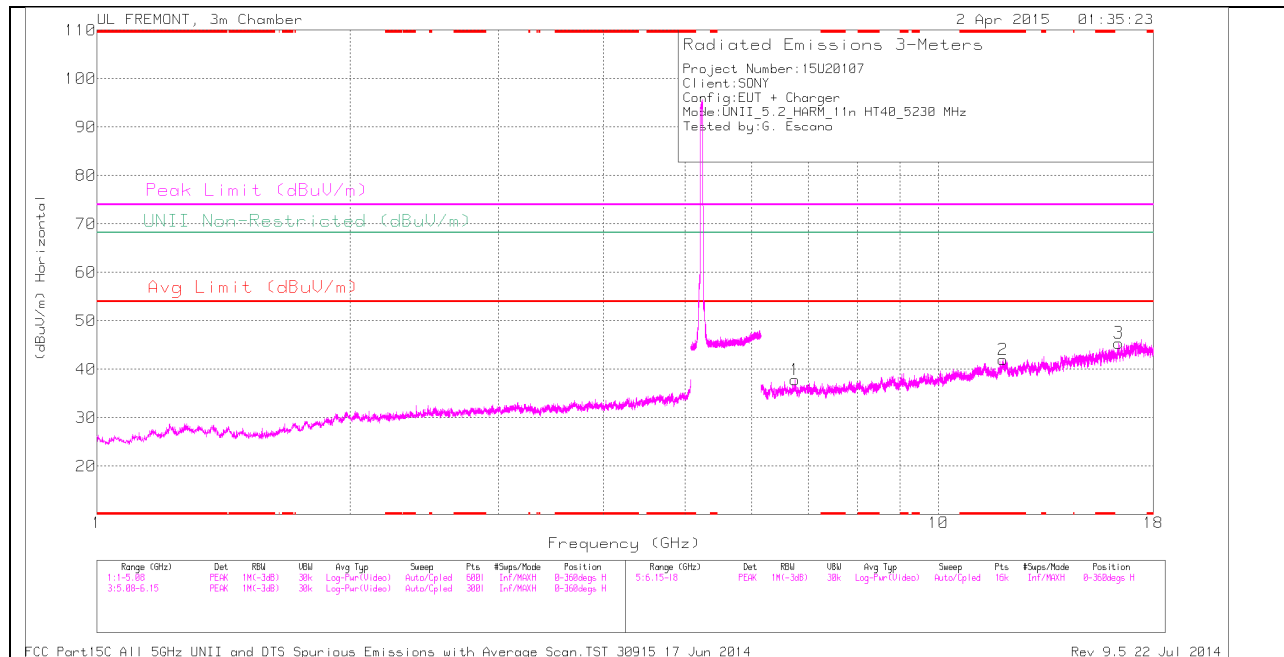

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

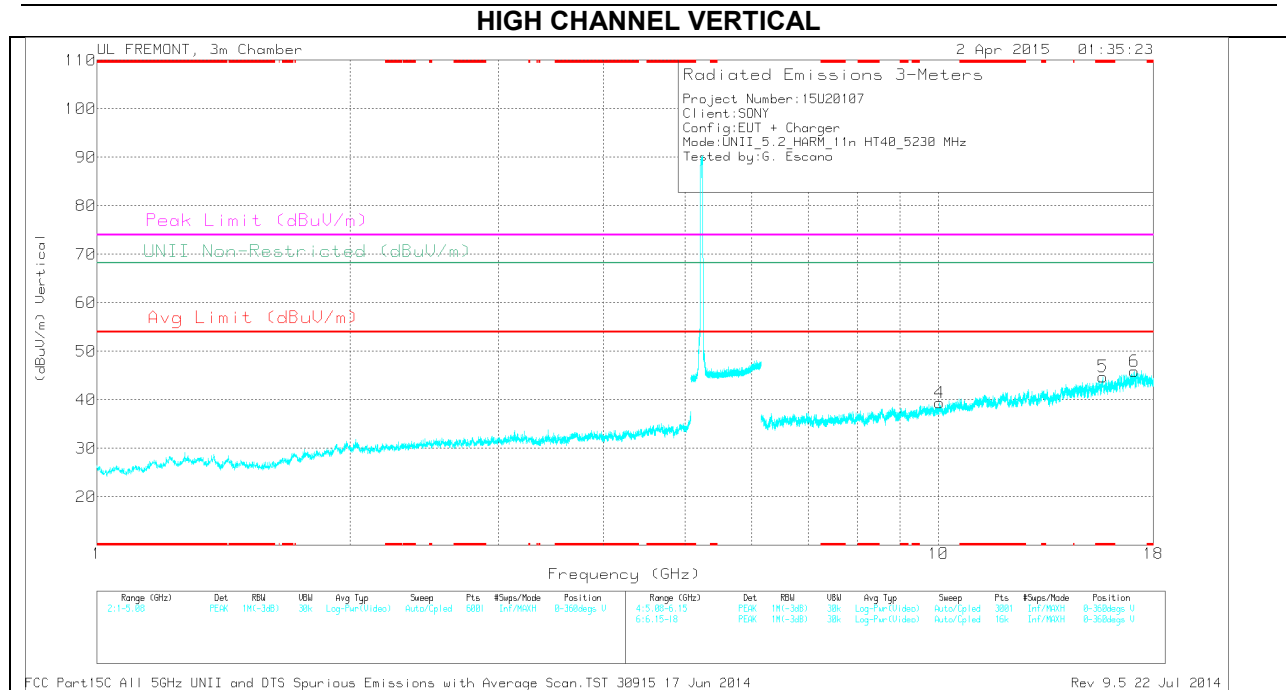

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 11.935	29.25	PK	39.1	-26.3	0	42.05	-	-	74	-31.95	-	-	0-360	100	H
5	* 15.672	31.39	PK	40.4	-27	0	44.79	-	-	74	-29.21	-	-	0-360	100	V
1	6.751	31.88	PK	35.6	-29.6	0	37.88	-	-	-	-	68.2	-30.32	0-360	100	H
4	10.031	27.33	PK	36.9	-24.8	0	39.43	-	-	-	-	68.2	-28.77	0-360	100	V
3	16.359	30.14	PK	40.7	-25.4	0	45.44	-	-	-	-	68.2	-22.76	0-360	100	H
6	17.085	27.98	PK	41.5	-23.6	0	45.88	-	-	-	-	68.2	-22.32	0-360	100	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.937	38.14	PK1	39.1	-26.3	0	50.94	-	-	74	-23.06	-	-	31	400	H
* 11.933	26.21	AD1	39.1	-26.3	.12	39.13	54	-14.87	-	-	-	-	31	400	H
* 15.672	39.73	PK1	40.4	-27	0	53.13	-	-	74	-20.87	-	-	1	250	V
* 15.674	27.68	AD1	40.4	-26.9	.12	41.30	54	-12.70	-	-	-	-	1	250	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

11.1.4. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.2 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

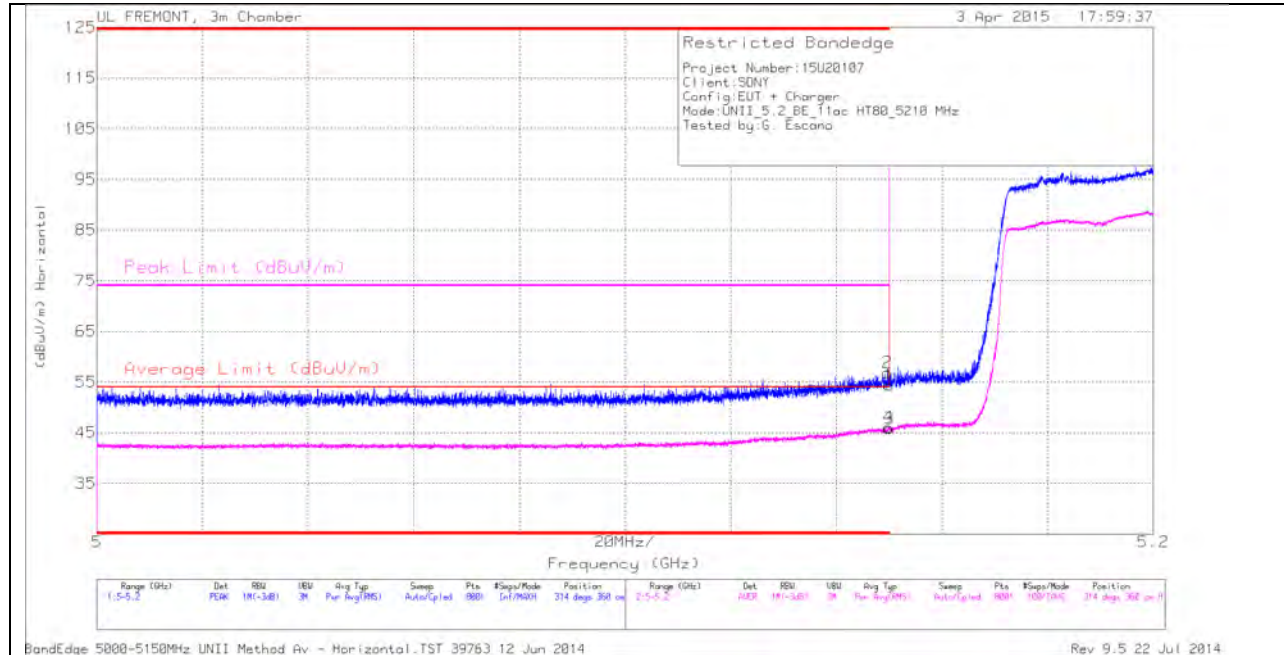

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	41.78	PK	34.2	-21.6	0	54.38	-	-	74	-19.62	314	360	H
2	* 5.15	44.26	PK	34.2	-21.6	0	56.86	-	-	74	-17.14	314	360	H
3	* 5.15	33.09	RMS	34.2	-21.6	.23	45.92	54	-8.08	-	-	314	360	H
4	* 5.15	33.29	RMS	34.2	-21.6	.23	46.12	54	-7.88	-	-	314	360	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

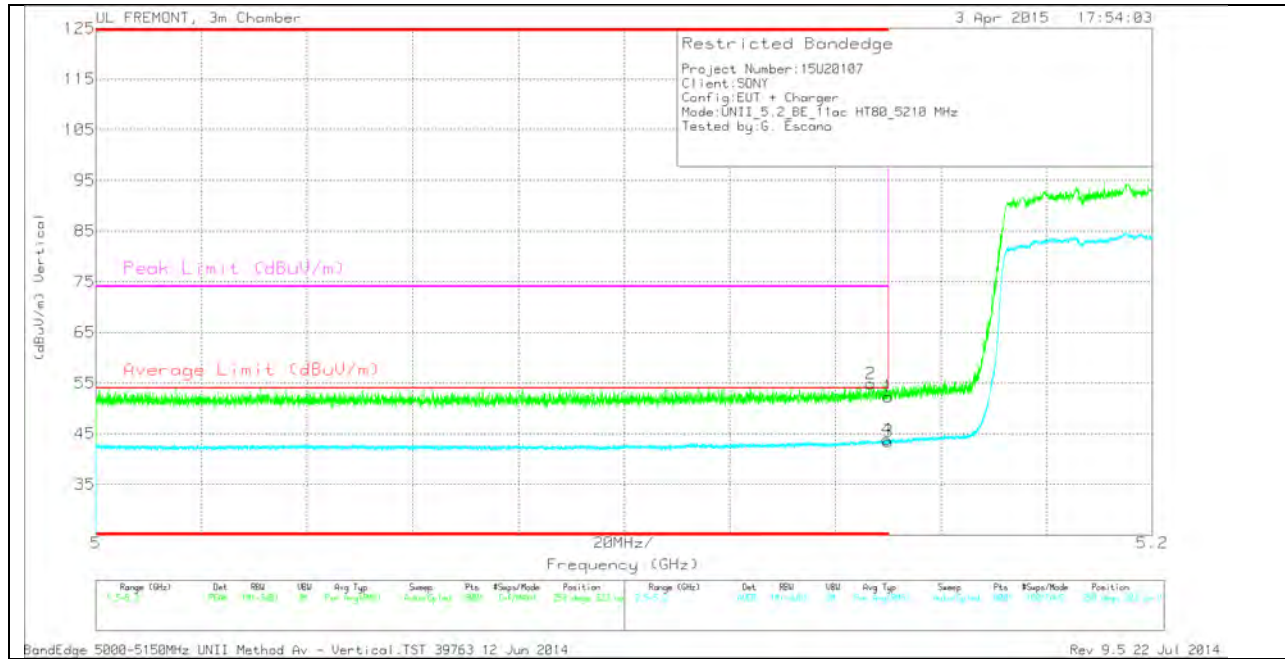

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.147	42.3	PK	34.2	-21.6	0	54.9	-	-	74	-19.1	258	323	V
1	* 5.15	39.74	PK	34.2	-21.6	0	52.34	-	-	74	-21.66	258	323	V
3	* 5.15	30.79	RMS	34.2	-21.6	.23	43.62	54	-10.38	-	-	258	323	V
4	* 5.15	31.08	RMS	34.2	-21.6	.23	43.91	54	-10.09	-	-	258	323	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

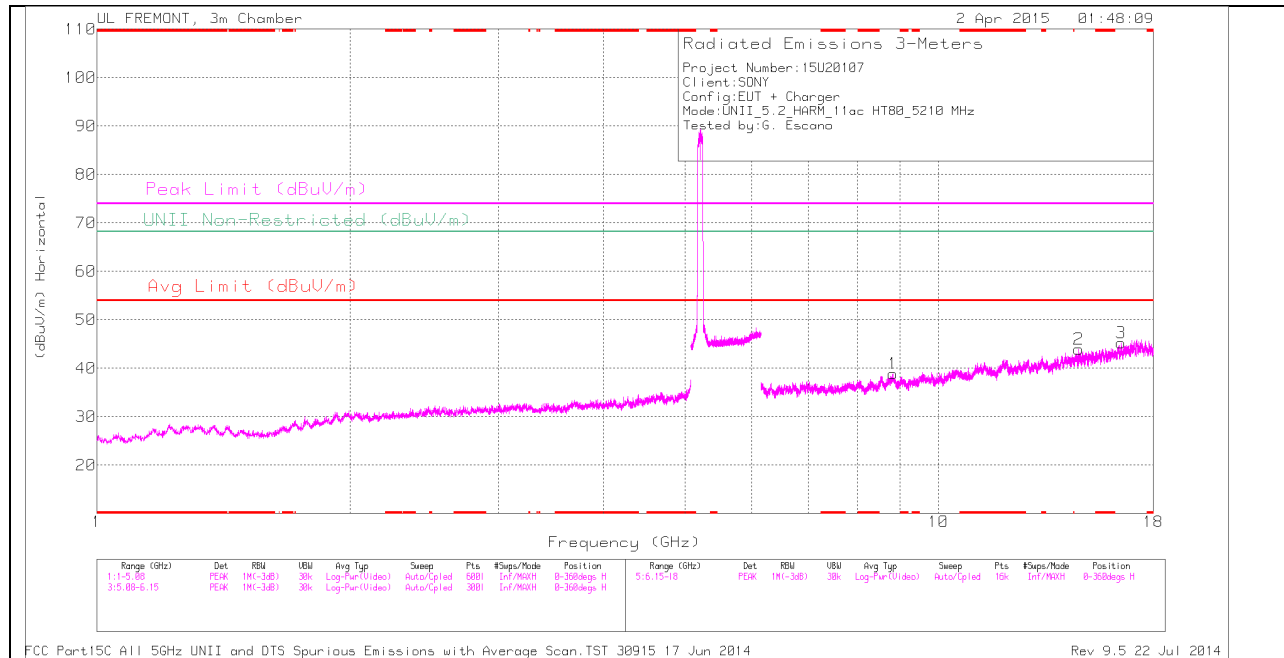

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

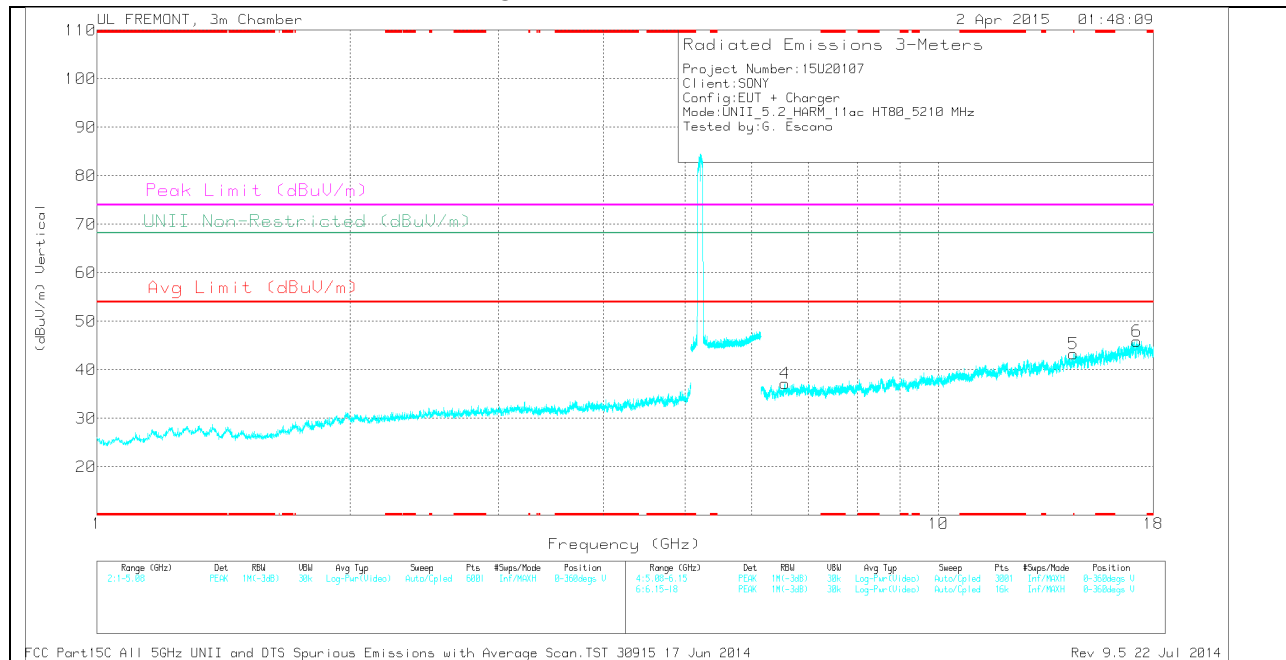

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	6.568	31.15	PK	35.6	-29.5	0	37.25	-	-	-	-	68.2	-30.95	0-360	200	V
1	8.826	28.84	PK	35.9	-25.9	0	38.84	-	-	-	-	68.2	-29.36	0-360	100	H
5	14.454	30.97	PK	39.6	-27.3	0	43.27	-	-	-	-	68.2	-24.93	0-360	100	V
2	14.678	31.1	PK	39.8	-27	0	43.9	-	-	-	-	68.2	-24.3	0-360	200	H
3	16.488	29.32	PK	40.9	-25	0	45.22	-	-	-	-	68.2	-22.98	0-360	100	H
6	17.196	27.7	PK	41.3	-23.1	0	45.9	-	-	-	-	68.2	-22.3	0-360	100	V

PK - Peak detector

11.1. 5.3 GHz

11.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

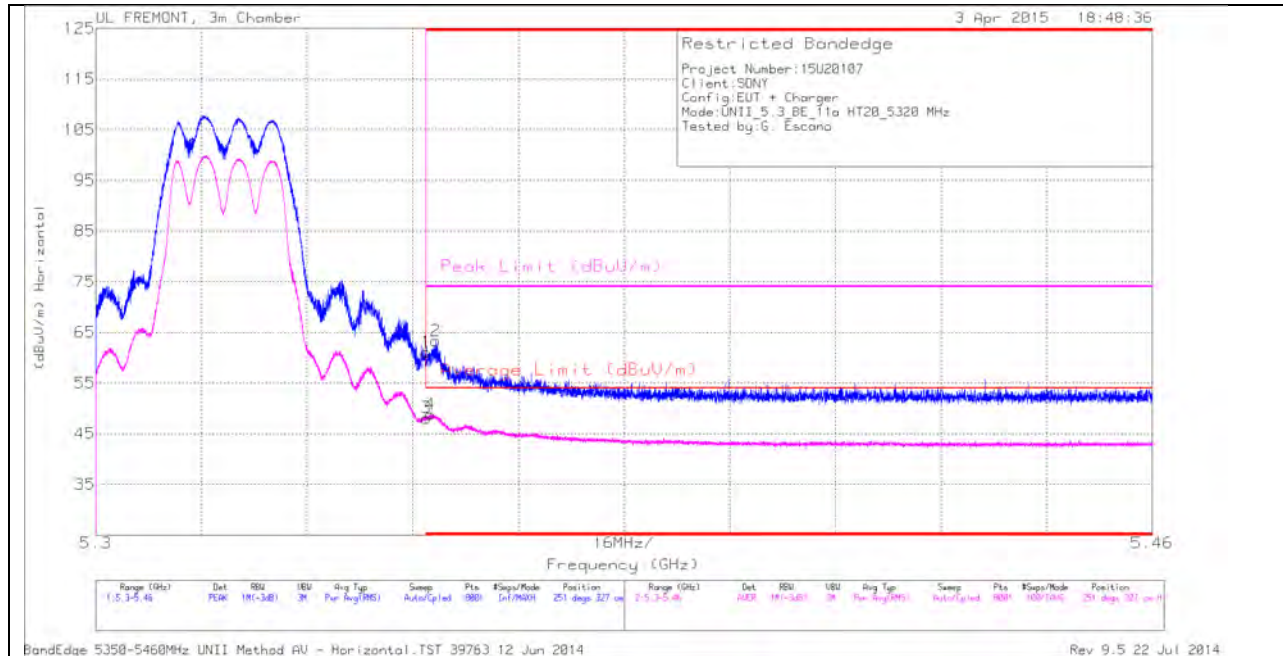

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	47.95	PK	34.5	-21.4	0	61.05	-	-	74	-12.95	251	327	H
3	* 5.35	35.02	RMS	34.5	-21.4	0	48.12	54	-5.88	-	-	251	327	H
4	* 5.351	35.75	RMS	34.5	-21.4	0	48.85	54	-5.15	-	-	251	327	H
2	* 5.352	50.28	PK	34.5	-21.4	0	63.38	-	-	74	-10.62	251	327	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

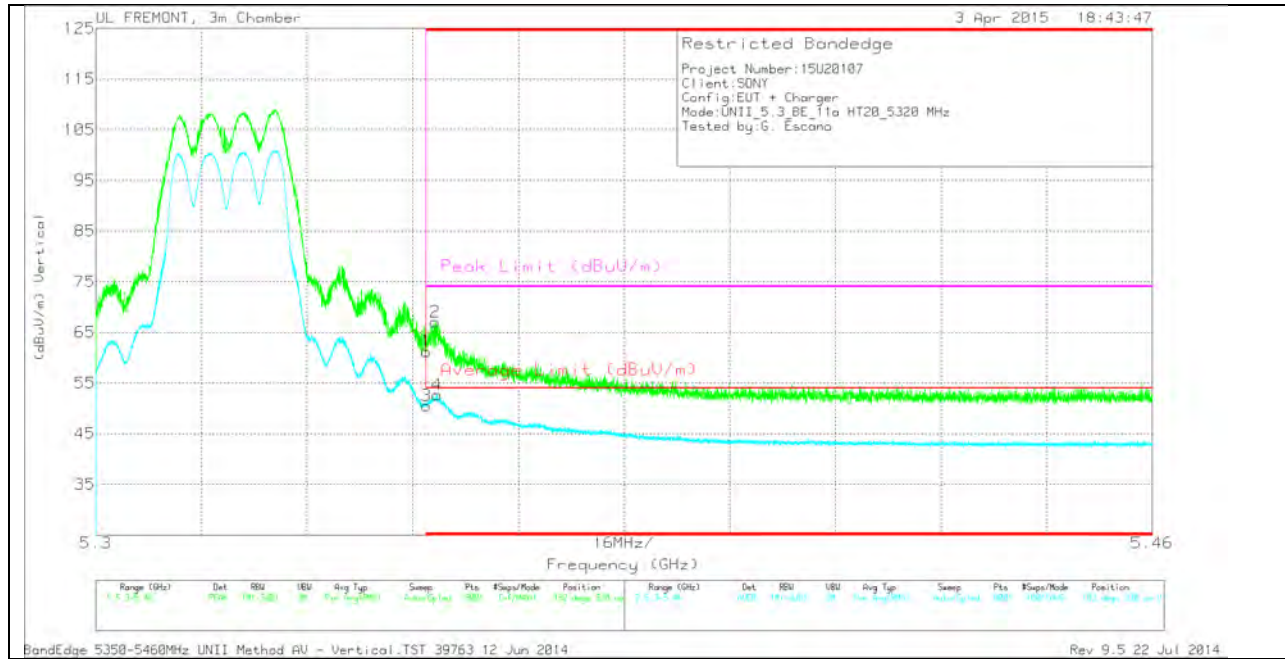

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.18	PK	34.5	-21.4	0	61.28	-	-	74	-12.72	182	330	V
3	* 5.35	37.49	RMS	34.5	-21.4	0	50.59	54	-3.41	-	-	182	330	V
2	* 5.351	53.96	PK	34.5	-21.4	0	67.06	-	-	74	-6.94	182	330	V
4	* 5.352	39.5	RMS	34.5	-21.4	0	52.6	54	-1.4	-	-	182	330	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

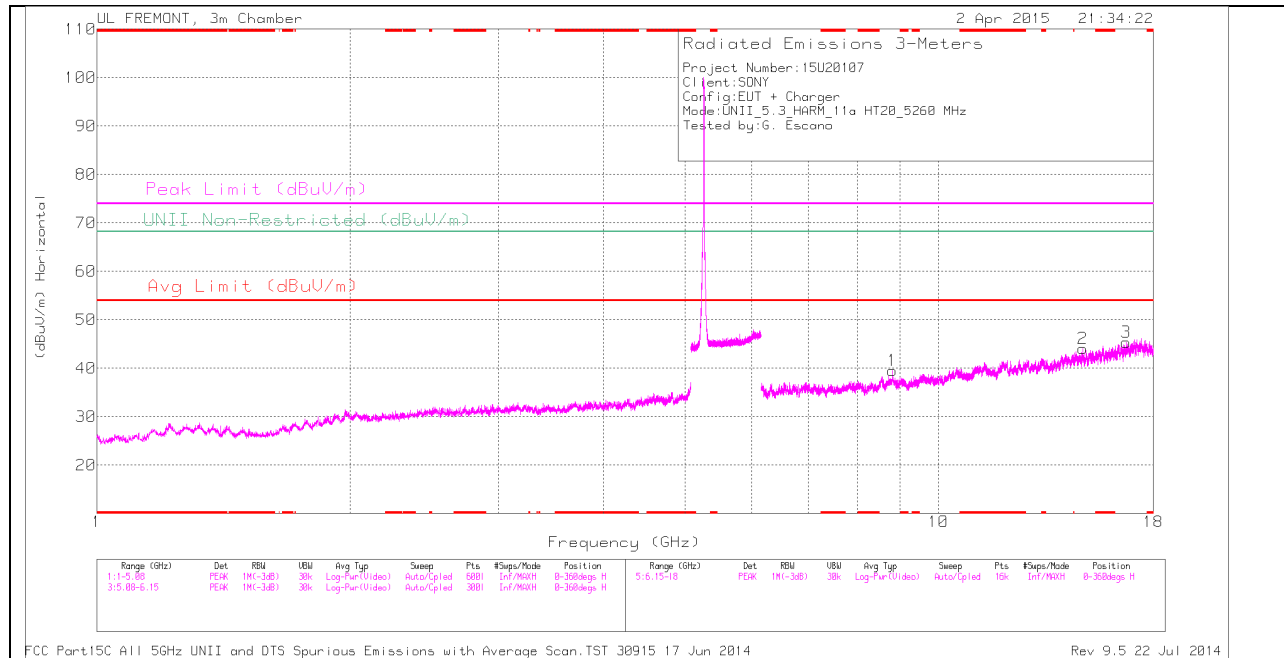

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

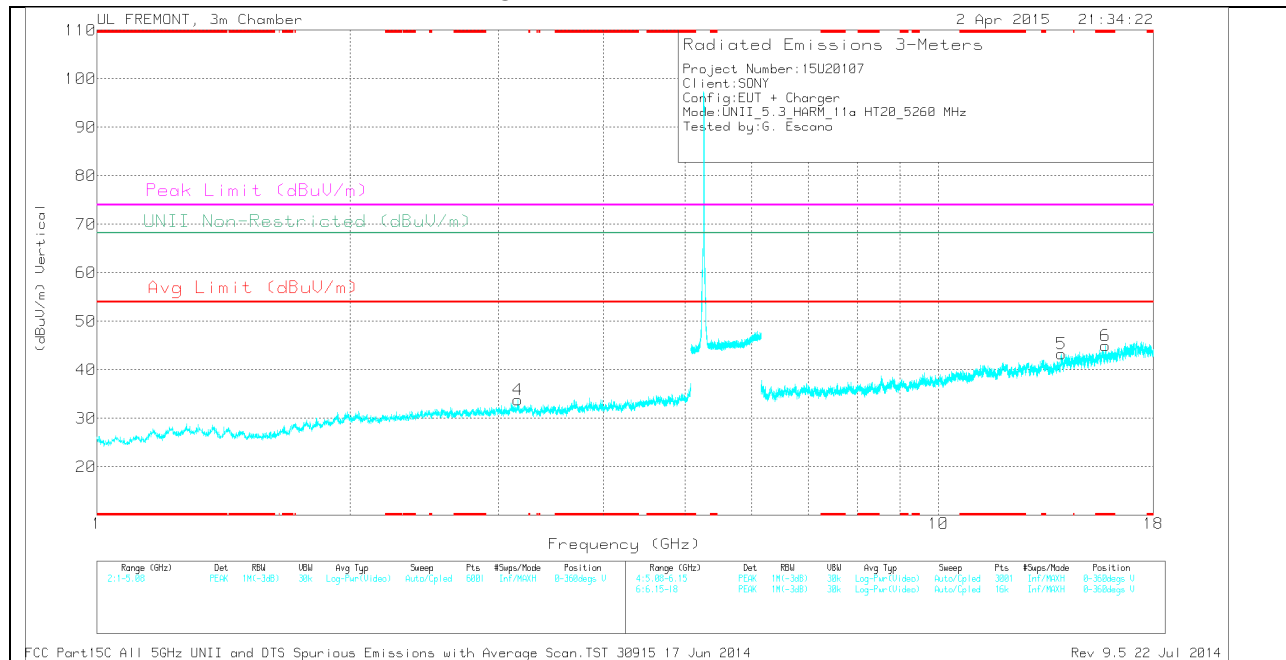

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 15.803	31.24	PK	40.3	-26.6	0	44.94	-	-	74	-29.06	-	-	0-360	200	V
4	3.164	32.59	PK	32.7	-31.5	0	33.79	-	-	-	-	68.2	-34.41	0-360	100	V
1	8.815	29.14	PK	35.9	-25.5	0	39.54	-	-	-	-	68.2	-28.66	0-360	100	H
5	14.002	32.35	PK	38.8	-27.8	0	43.35	-	-	-	-	68.2	-24.85	0-360	100	V
2	14.838	31.44	PK	39.8	-27.2	0	44.04	-	-	-	-	68.2	-24.16	0-360	100	H
3	16.72	28.91	PK	41.2	-24.7	0	45.41	-	-	-	-	68.2	-22.79	0-360	100	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 15.805	40.02	PK1	40.3	-26.5	0	53.82	-	-	74	-20.18	-	-	342	170	V
* 15.803	27.91	AD1	40.3	-26.6	0	41.61	54	-12.39	-	-	-	-	342	170	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average