



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

**ANT+
CERTIFICATION TEST REPORT
FOR**

GSM/WCDMA/CDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ & NFC

FCC ID: PY7-PM0841

REPORT NUMBER: 15U20107-E7

ISSUE DATE: APRIL 26, 2015

Prepared for
**SONY MOBILE COMMUNICATIONS, INC.
1-8-15 KONAN, MINATO-KU
TOKYO, 108-0075 JAPAN**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
-	04/26/15	Initial Issue	CHOON OOI

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT FUNDAMENTAL FIELD STRENGTH	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE	7
5.5. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. 99% BANDWIDTH	11
7.2. TRANSMITTER RADIATED EMISSIONS	14
7.2.1. DUTY CYCLE	16
7.2.2. FUNDAMENTAL FREQUENCY RADIATED EMISSION	17
7.2.3. TRANSMITTER RESTRICTED BAND EDGES	18
7.2.4. SPURIOUS BELOW 1 GHz	23
8. AC POWER LINE CONDUCTED EMISSIONS	25
9. SETUP PHOTOS	29
END OF REPORT	31

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
EUT DESCRIPTION: GSM/WCDMA/CDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ & NFC
Serial Number: CB5A24QGLY (Conducted), CB5A24QGLV (Radiated)
DATE TESTED: APRIL 1 – 7, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



CHOON OOI
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
WiSE LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☐ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☒ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☒ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac and ANT+ and NFC.

5.2. MAXIMUM OUTPUT FUNDAMENTAL FIELD STRENGTH

The ANT+ mode has maximum output fundamental field strength as follows:

Frequency Range (MHz)	Mode	Peak E-field Strength (dBuV/m)	Avg E-field Strength (dBuV/m)	Distance (m)
2402 - 2480	ANT +	94.12	93.80	3.00

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.4dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	EP880	3514W 01 S08328	N/A
Earphone	Sony	N/A	N/A	N/A
USB cable	Sony	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is set to continuously transmit in ANT + test mode

SETUP DIAGRAM FOR TESTS

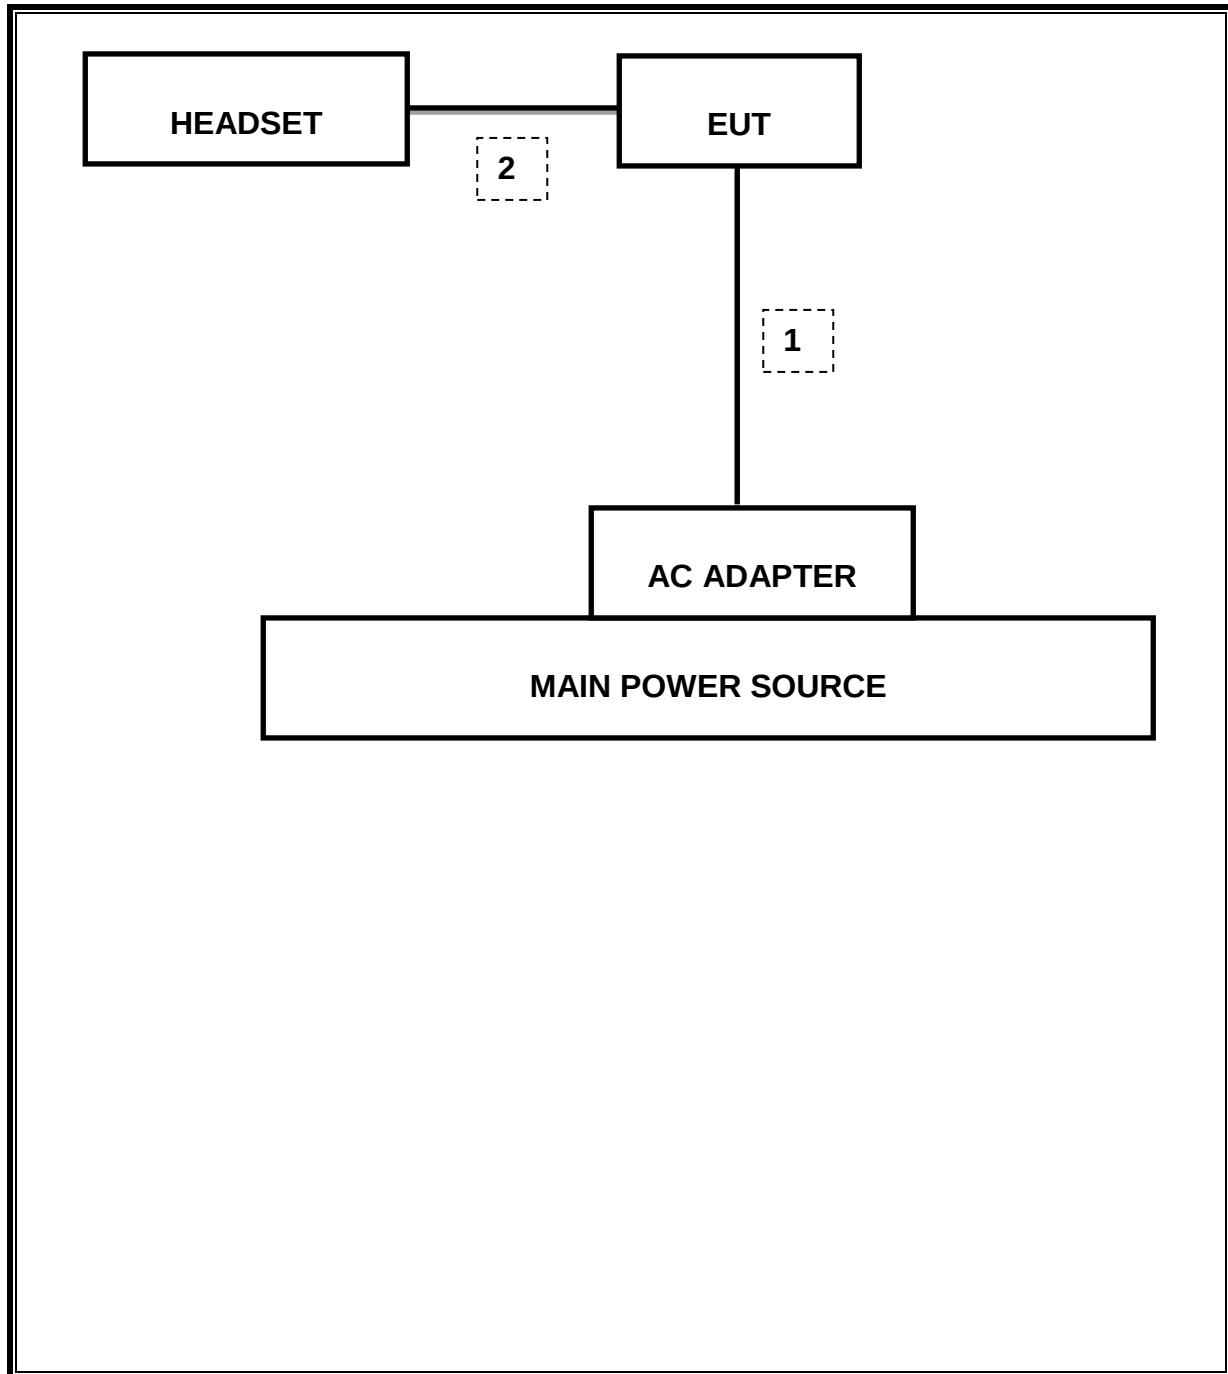

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
Spectrum Analyzer, 9KHz-40GHz	HP	8564E	106	08/06/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	100773	08/15/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/15
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	12/08/15
RF Preamplifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preamplifier, 26GHz - 40GHz	Miteq	NSP4000-SP2	86	04/07/16
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 18GHz	Miteq	AFS42-00101800-25-S-42	1818466	05/09/15
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

7. LIMITS AND RESULTS

7.1. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0183
Middle	2442	1.0719
High	2480	1.0191

99% BANDWIDTH

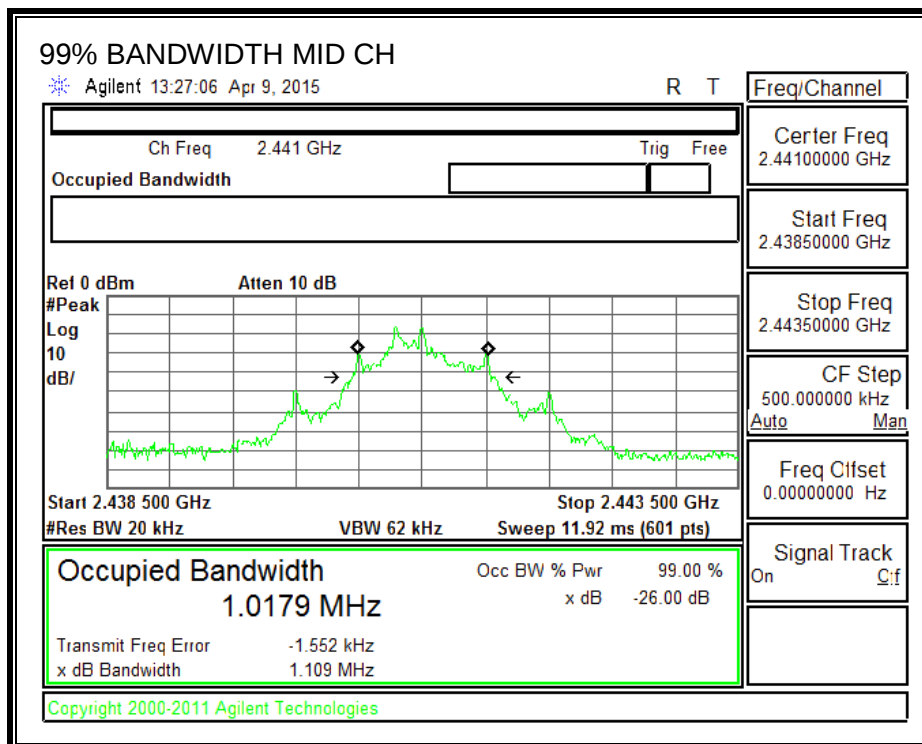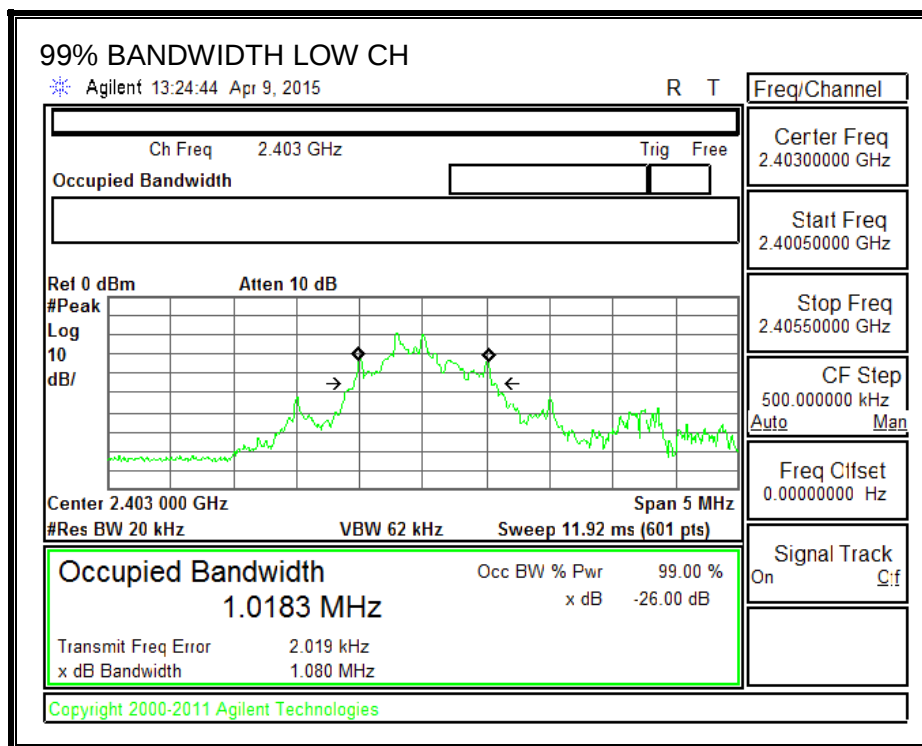

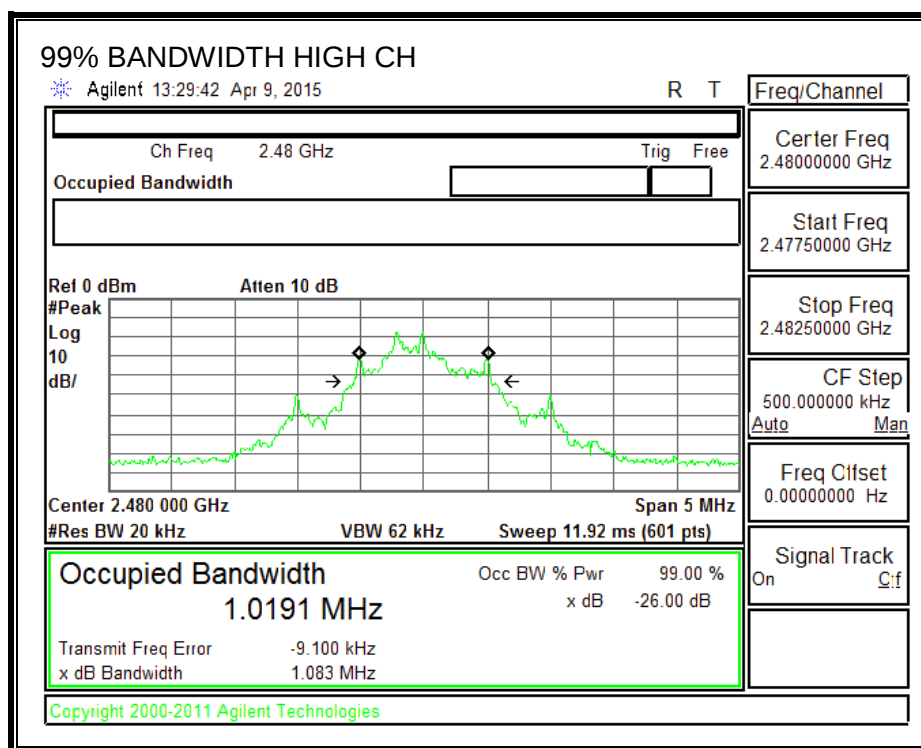

7.2. TRANSMITTER RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.4

LIMIT

IC RSS-210, A2.9
FCC 15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/ meter)	Field strength of harmonics (microvolts/ meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.


(e) As shown in Sec. 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Frequency (MHz)	Field strength (microvolts/meter)	Measure- ment dis- tance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100 **	3
88–216	150 **	3
216–960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

RESULTS

7.2.1. DUTY CYCLE

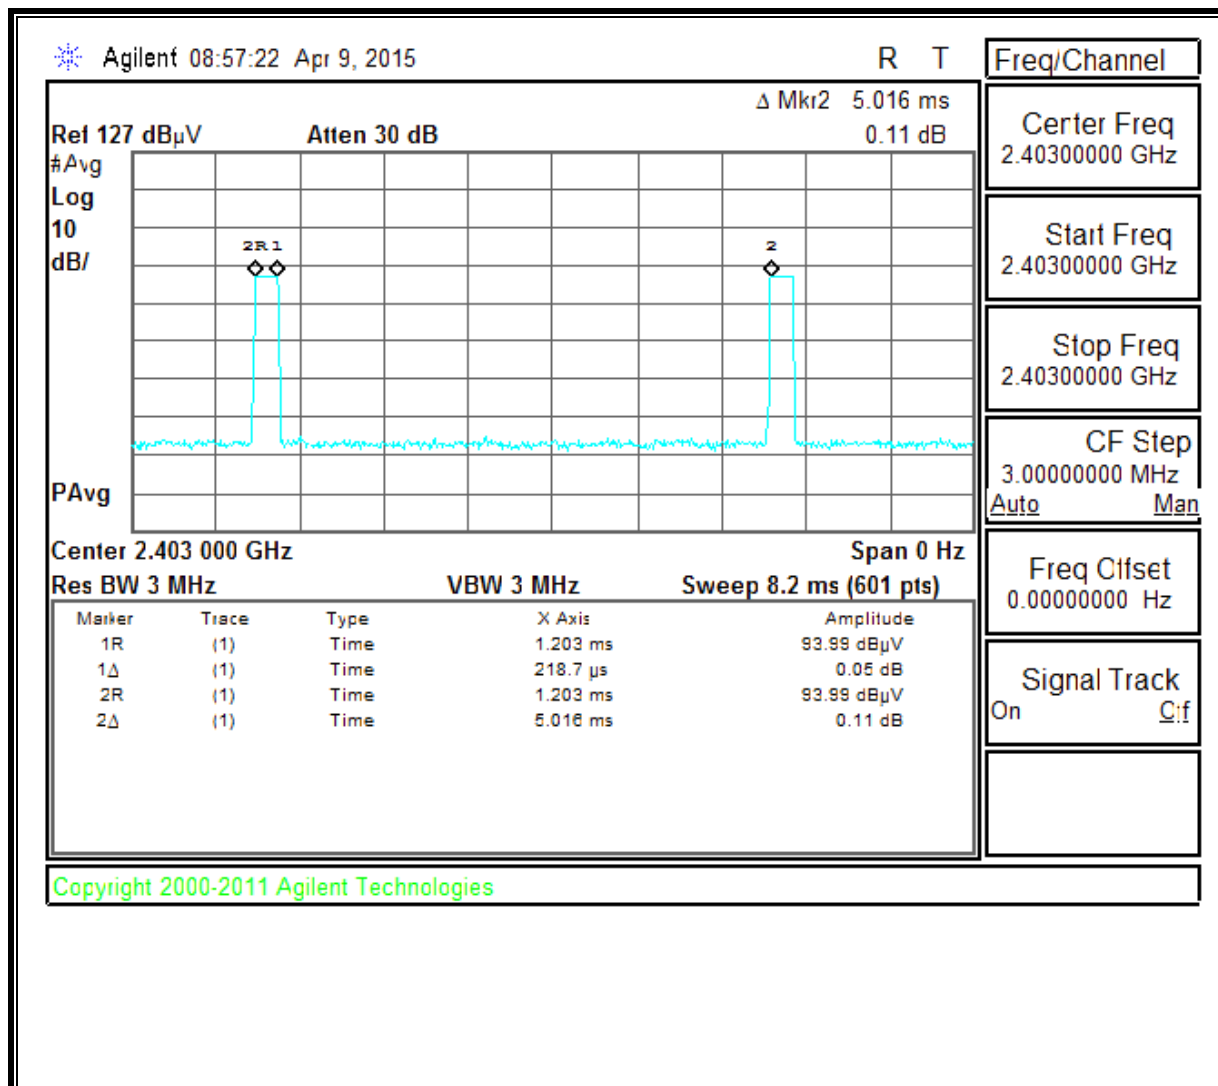


7.2.2. FUNDAMENTAL FREQUENCY RADIATED EMISSION

	FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 47173 BENICIA STREET, FREMONT, CA 94538, USA	<i>Project #:</i> 15U20107 <i>Report #:</i> 15U20107 <i>Date & Time:</i> 04/09/15 <i>Test Engr:</i> K. Kedida																																																																																																																																																																		
<i>Company:</i> Sony <i>EUT Description:</i> GSM/WCDMA/LTE PHONE + BLUETOOTH + DTS/UNII a/b/g/n/ac + ANT+ & NFC <i>Test Configuration :</i> X POSITION <i>Type of Test:</i> FCC <i>Mode of Operation:</i> Transmitting : ANT+ mode																																																																																																																																																																				
M% = ((t1+t2+t3+...)/T) * 66.83% = 4.60% Av Reading = Pk Reading + 20*log(M%) 20 * log (M%) = -26.74																																																																																																																																																																				
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr style="background-color: #e0f7fa;"> <th>Freq. (MHz)</th> <th>Pk Rdg (dBuV)</th> <th>Av Rdg (dBuV)</th> <th>AF (dB)</th> <th>Closs (dB)</th> <th>Pre-amp (dB)</th> <th>Pk Level (dBuV/m)</th> <th>Av Level (dBuV/m)</th> <th>Pk Limit FCC_B</th> <th>Av Limit FCC_B</th> <th>Pk Margin (dB)</th> <th>Avg Margin (dB)</th> <th>Pol (H/V)</th> <th>Az (Deg)</th> <th>Height (Meter)</th> </tr> </thead> <tbody> <tr> <td colspan="15">Low channel</td> </tr> <tr style="background-color: #e8f5e9;"> <td>2403.00</td> <td>90.41</td> <td>89.35</td> <td>32.10</td> <td>-33.00</td> <td>0.00</td> <td>89.51</td> <td>88.45</td> <td>114.00</td> <td>94.00</td> <td>-24.49</td> <td>-5.55</td> <td>3mV</td> <td>0.00</td> <td>1.00</td> </tr> <tr> <td>2403.00</td> <td>94.24</td> <td>93.85</td> <td>32.10</td> <td>-33.00</td> <td>0.00</td> <td>93.34</td> <td>92.95</td> <td>114.00</td> <td>94.00</td> <td>-20.66</td> <td>-1.05</td> <td>3mH</td> <td>0.00</td> <td>2.00</td> </tr> <tr> <td colspan="15">Mid channel</td> </tr> <tr style="background-color: #e8f5e9;"> <td>2441.00</td> <td>92.06</td> <td>91.76</td> <td>32.10</td> <td>-33.00</td> <td>0.00</td> <td>91.16</td> <td>90.86</td> <td>114.00</td> <td>94.00</td> <td>-22.84</td> <td>-3.14</td> <td>3mV</td> <td>0.00</td> <td>1.00</td> </tr> <tr> <td>2441.00</td> <td>95.02</td> <td>94.70</td> <td>32.10</td> <td>-33.00</td> <td>0.00</td> <td>94.12</td> <td>93.80</td> <td>114.00</td> <td>94.00</td> <td>-19.88</td> <td>-0.20</td> <td>3mH</td> <td>0.00</td> <td>2.00</td> </tr> <tr> <td colspan="15">High channel</td> </tr> <tr style="background-color: #e8f5e9;"> <td>2480.00</td> <td>91.56</td> <td>91.46</td> <td>32.10</td> <td>-33.00</td> <td>0.00</td> <td>90.66</td> <td>90.56</td> <td>114.00</td> <td>94.00</td> <td>-23.34</td> <td>-3.44</td> <td>3mV</td> <td>0.00</td> <td>1.00</td> </tr> <tr> <td>2480.00</td> <td>94.95</td> <td>94.65</td> <td>32.10</td> <td>-33.00</td> <td>0.00</td> <td>94.05</td> <td>93.75</td> <td>114.00</td> <td>94.00</td> <td>-19.95</td> <td>-0.25</td> <td>3mH</td> <td>0.00</td> <td>2.00</td> </tr> </tbody> </table>															Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC_B	Av Limit FCC_B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Low channel															2403.00	90.41	89.35	32.10	-33.00	0.00	89.51	88.45	114.00	94.00	-24.49	-5.55	3mV	0.00	1.00	2403.00	94.24	93.85	32.10	-33.00	0.00	93.34	92.95	114.00	94.00	-20.66	-1.05	3mH	0.00	2.00	Mid channel															2441.00	92.06	91.76	32.10	-33.00	0.00	91.16	90.86	114.00	94.00	-22.84	-3.14	3mV	0.00	1.00	2441.00	95.02	94.70	32.10	-33.00	0.00	94.12	93.80	114.00	94.00	-19.88	-0.20	3mH	0.00	2.00	High channel															2480.00	91.56	91.46	32.10	-33.00	0.00	90.66	90.56	114.00	94.00	-23.34	-3.44	3mV	0.00	1.00	2480.00	94.95	94.65	32.10	-33.00	0.00	94.05	93.75	114.00	94.00	-19.95	-0.25	3mH	0.00	2.00
Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC_B	Av Limit FCC_B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)																																																																																																																																																						
Low channel																																																																																																																																																																				
2403.00	90.41	89.35	32.10	-33.00	0.00	89.51	88.45	114.00	94.00	-24.49	-5.55	3mV	0.00	1.00																																																																																																																																																						
2403.00	94.24	93.85	32.10	-33.00	0.00	93.34	92.95	114.00	94.00	-20.66	-1.05	3mH	0.00	2.00																																																																																																																																																						
Mid channel																																																																																																																																																																				
2441.00	92.06	91.76	32.10	-33.00	0.00	91.16	90.86	114.00	94.00	-22.84	-3.14	3mV	0.00	1.00																																																																																																																																																						
2441.00	95.02	94.70	32.10	-33.00	0.00	94.12	93.80	114.00	94.00	-19.88	-0.20	3mH	0.00	2.00																																																																																																																																																						
High channel																																																																																																																																																																				
2480.00	91.56	91.46	32.10	-33.00	0.00	90.66	90.56	114.00	94.00	-23.34	-3.44	3mV	0.00	1.00																																																																																																																																																						
2480.00	94.95	94.65	32.10	-33.00	0.00	94.05	93.75	114.00	94.00	-19.95	-0.25	3mH	0.00	2.00																																																																																																																																																						

7.2.3. TRANSMITTER RESTRICTED BAND EDGES

RESTRICTED BANDEGE (LOW CHANNEL, HORIZONTAL)

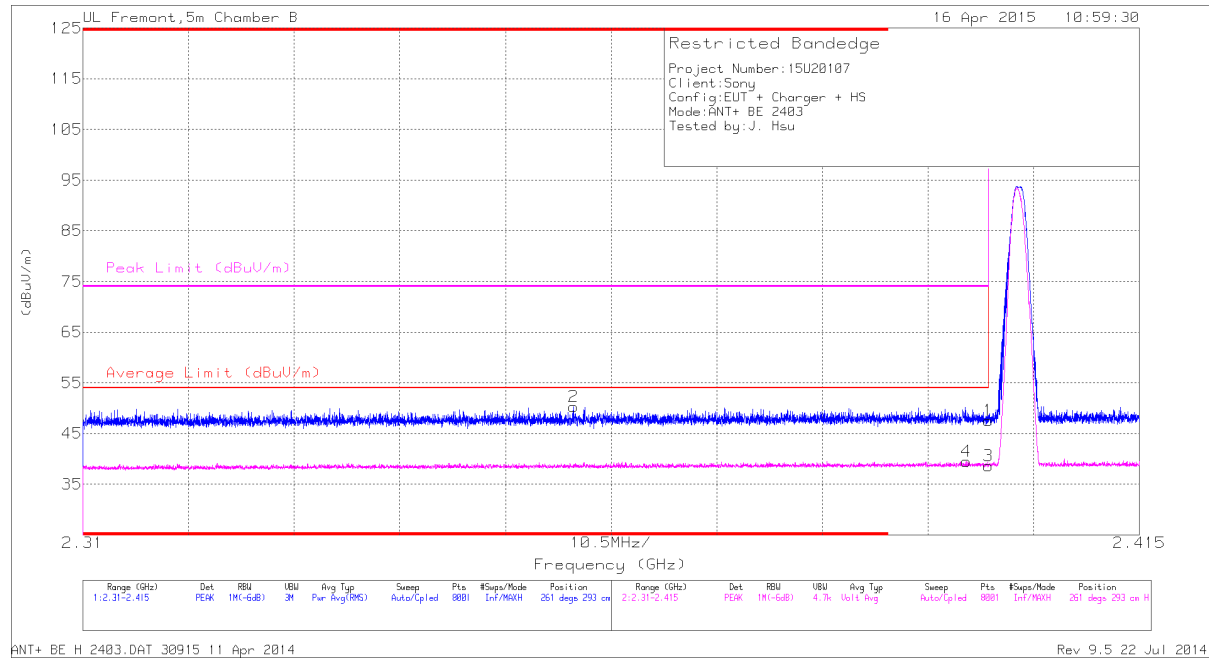


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.359	41.08	PK	31.8	-22.6	50.28	-	-	74	-23.72	261	293	H
4	2.398	30.07	VB1T	32	-22.6	39.47	54	-14.53	-	-	261	293	H
1	2.4	38.01	PK	32.1	-22.6	47.51	-	-	74	-26.49	261	293	H
3	2.4	29.07	VB1T	32.1	-22.6	38.57	54	-15.43	-	-	261	293	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

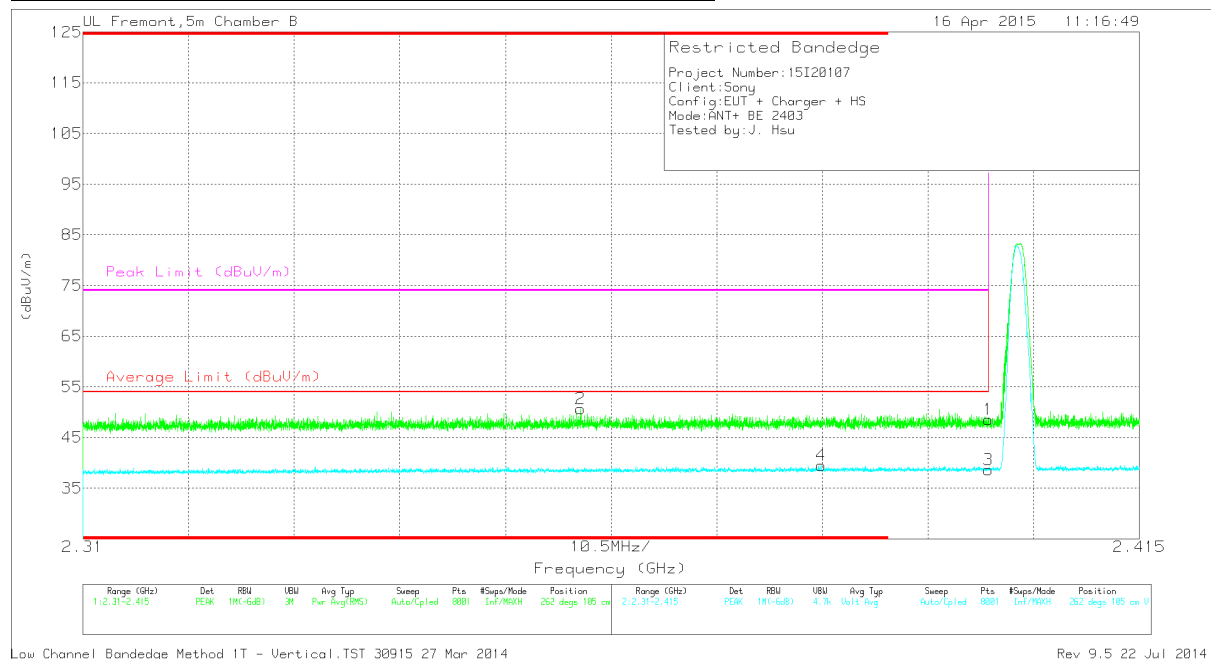


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.359	41.49	PK	31.8	-22.6	50.69	-	-	74	-23.31	262	105	V
4	* 2.383	30.11	VB1T	32	-22.6	39.51	54	-14.49	-	-	262	105	V
1	2.4	39.03	PK	32.1	-22.6	48.53	-	-	74	-25.47	262	105	V
3	2.4	29.14	VB1T	32.1	-22.6	38.64	54	-15.36	-	-	262	105	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

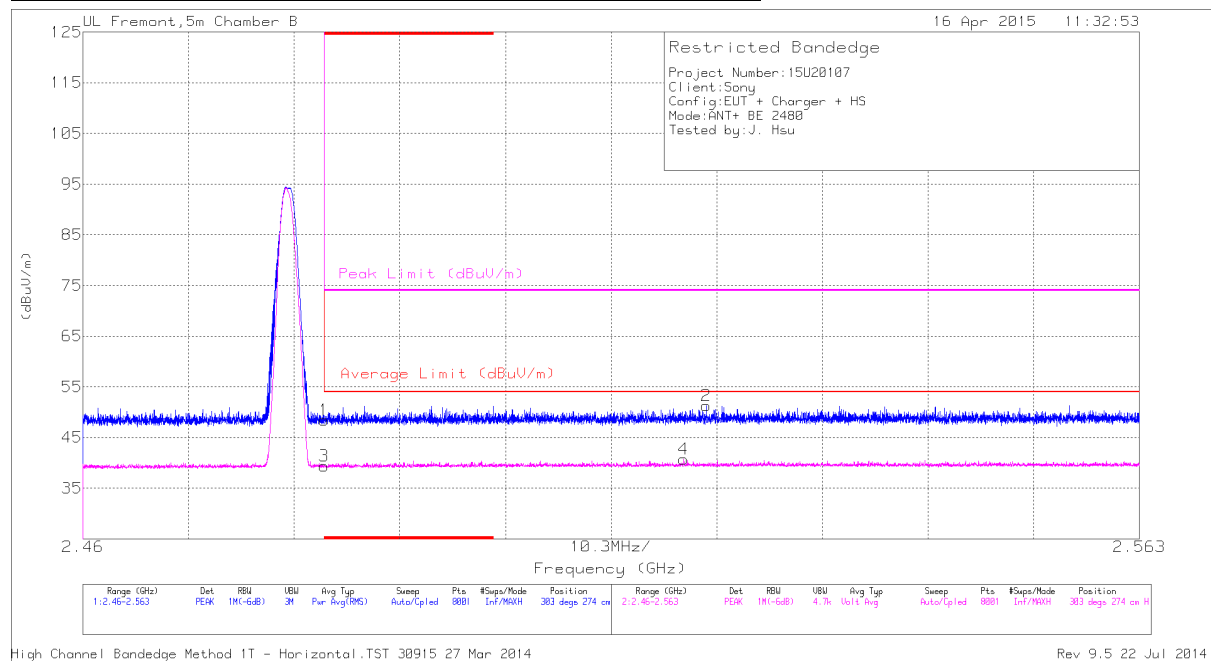


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.3	PK	32.5	-22.4	48.4	-	-	74	-25.6	303	274	H
3	* 2.484	29.22	VB1T	32.5	-22.4	39.32	54	-14.68	-	-	303	274	H
4	2.519	30.4	VB1T	32.6	-22.3	40.7	54	-13.3	-	-	303	274	H
2	2.521	40.96	PK	32.6	-22.3	51.26	-	-	74	-22.74	303	274	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, VERTICAL)

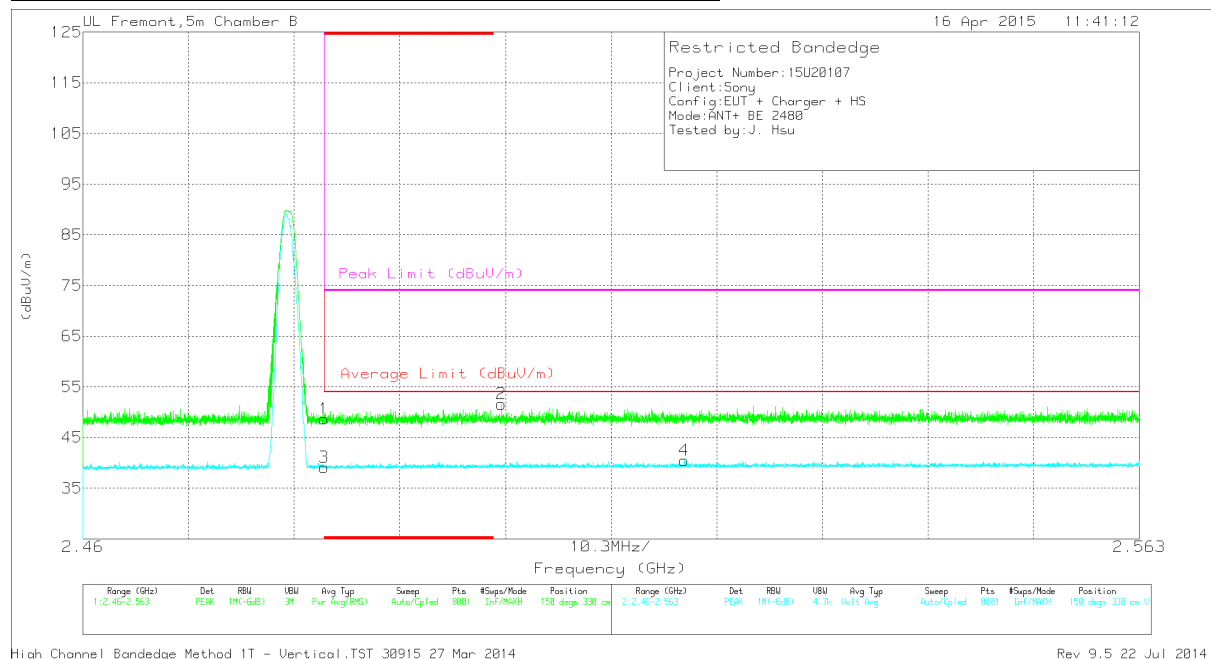

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.63	PK	32.5	-22.4	48.73	-	-	74	-25.27	150	330	V
3	* 2.484	29.02	VB1T	32.5	-22.4	39.12	54	-14.88	-	-	150	330	V
2	2.501	41.5	PK	32.5	-22.4	51.6	-	-	74	-22.4	150	330	V
4	2.519	30.21	VB1T	32.6	-22.3	40.51	54	-13.49	-	-	150	330	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHz

HARMONICS



FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

47173 BENICIA STREET, FREMONT, CA 94538, USA

Project #: 15U20107
Report #: 15U20107
Date & Time: 04/09/15
Test Engr: K.Kedida

Company: Sony
EUT Description: GSM/WCDMA/LTE PHONE + BLUETOOTH + DTS/UNII a/b/g/n/ac + ANT+ & NFC
Test Configuration : X POSITION
Type of Test: FCC
Mode of Operation: Transmitting : ANT+ mode


M% = ((t1+t2+t3+...)/T) * 66.83% = 4.60%

Av Reading = Pk Reading + 20*log(M%)
20 * log (M%) = -26.74


Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC B	Av Limit FCC B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)
Low channel														
4806.00	35.38	26.14	34.00	-31.00	0.00	38.38	29.14	74.00	54.00	-35.62	-24.86	3mV	0.00	1.00
4806.00	36.17	26.57	34.00	-31.00	0.00	39.17	29.57	74.00	54.00	-34.83	-24.43	3mH	0.00	2.00
Mid channel														
4882.00	38.65	27.23	34.00	-31.00	0.00	41.65	30.23	74.00	54.00	-32.35	-23.77	3mV	0.00	1.00
4882.00	38.69	27.33	34.00	-31.00	0.00	41.69	30.33	74.00	54.00	-32.31	-23.67	3mH	0.00	2.00
High channel														
4960.00	39.30	28.09	34.00	-31.00	0.00	42.30	31.09	74.00	54.00	-31.70	-22.91	3mV	0.00	1.00
4960.00	39.44	28.02	34.00	-31.00	0.00	42.44	31.02	74.00	54.00	-31.56	-22.98	3mH	0.00	2.00

7.2.4. SPURIOUS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL)

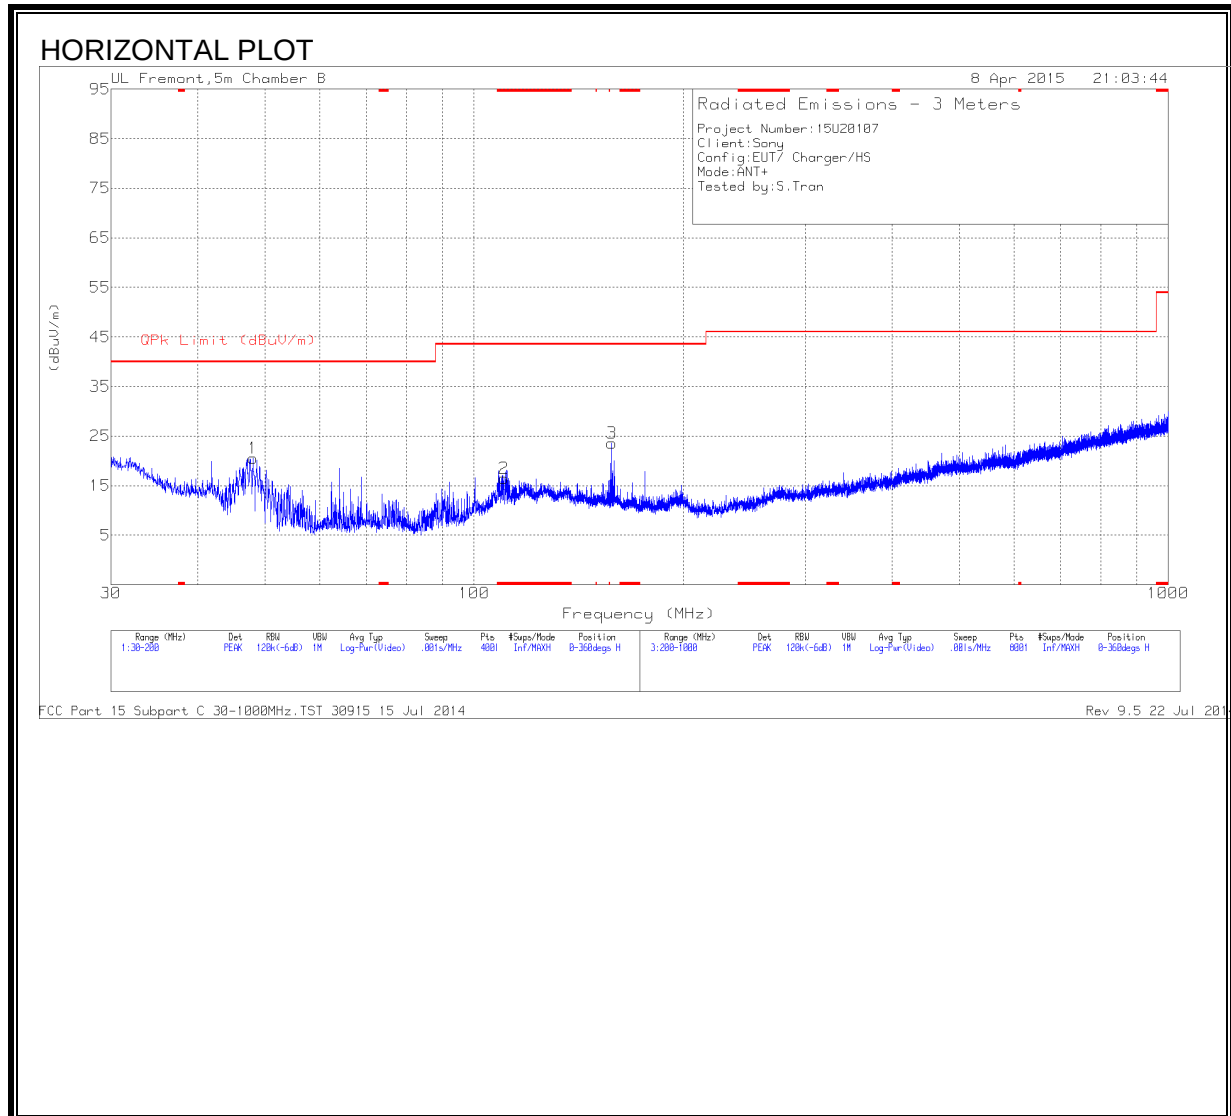

SPURIOUS EMISSIONS 30 TO 1000 MHz (VERTICAL)

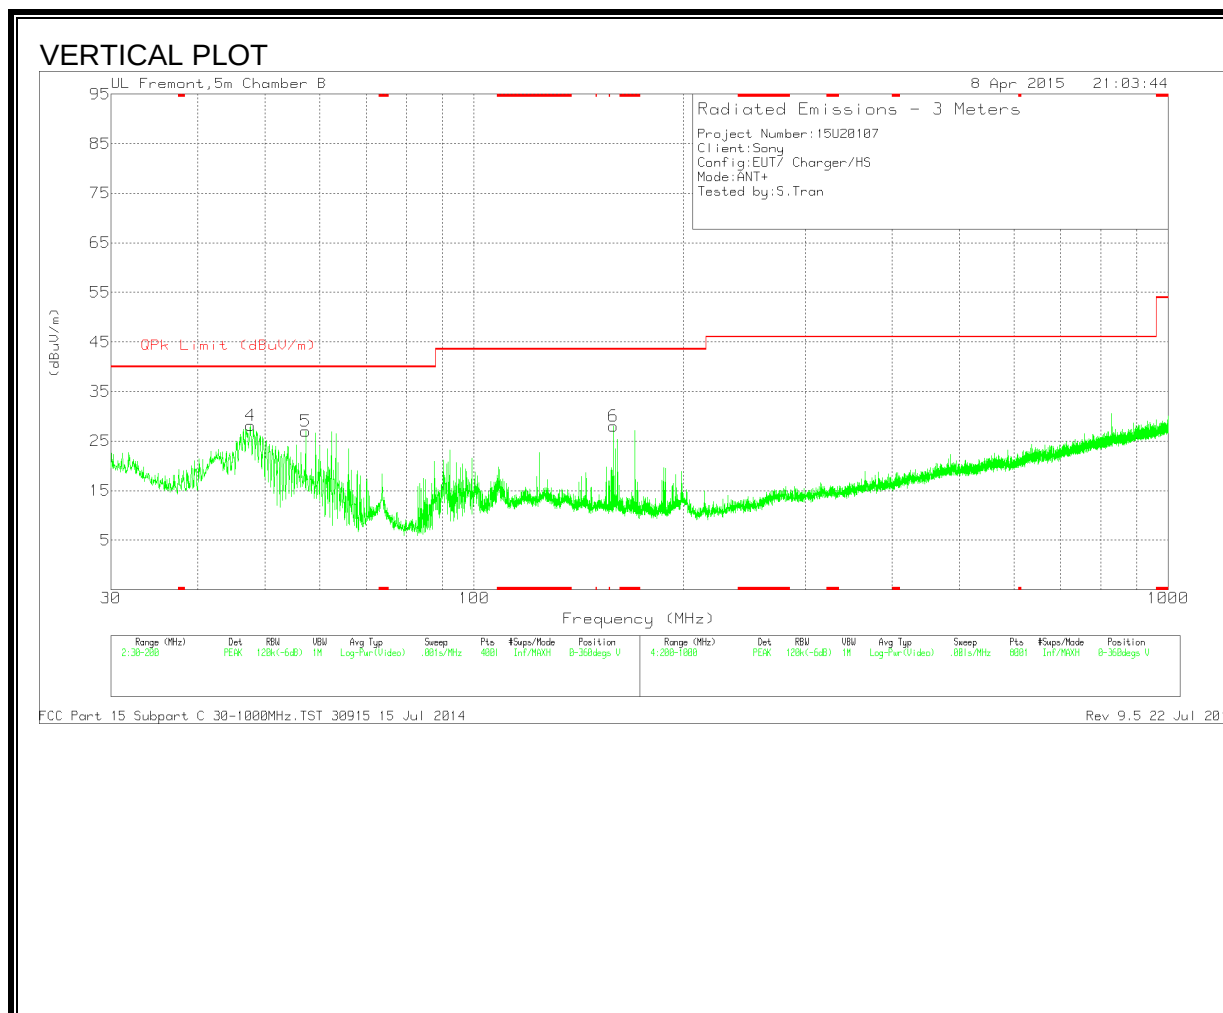

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 110.495	31.8	PK	12.7	-28	16.5	43.52	-27.02	0-360	300	H
4	47.6375	47.63	PK	9.2	-28.7	28.13	40	-11.87	0-360	101	V
1	48.02	40.11	PK	9	-28.6	20.51	40	-19.49	0-360	300	H
5	57.2	48.06	PK	7.4	-28.5	26.96	40	-13.04	0-360	101	V
3	157.9675	38.72	PK	12.3	-27.4	23.62	43.52	-19.9	0-360	300	H
6	158.86	43.11	PK	12.3	-27.4	28.01	43.52	-15.51	0-360	101	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50


^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4 - 2009

RESULTS

LINE 1 RESULTS

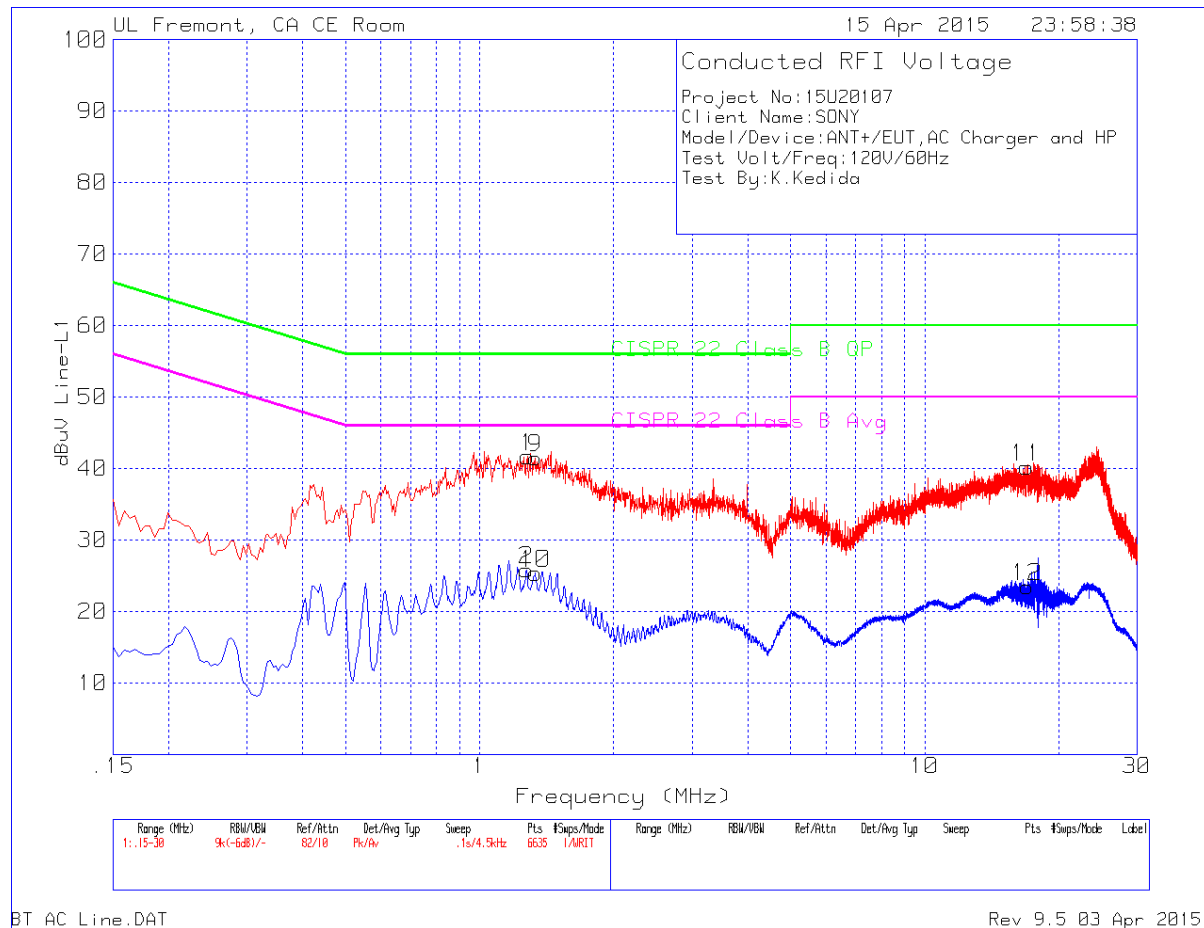

LINE 2 RESULTS

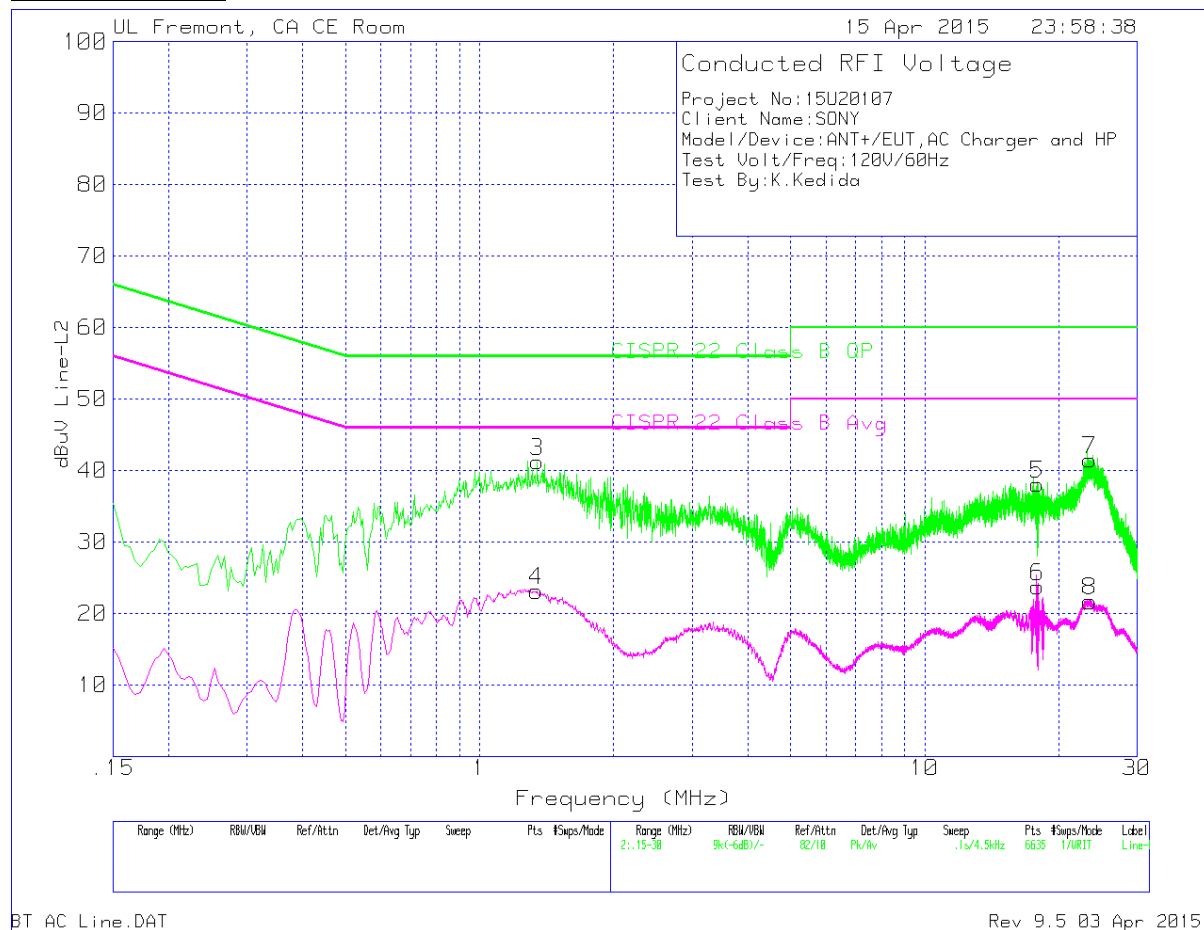

Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
1	1.2795	41.39	Pk	.2	.1	41.69	56	-14.31	46	-4.31
2	1.275	25.51	Av	.2	.1	25.81	56	-30.19	46	-20.19
9	1.3335	41.2	Pk	.2	.1	41.5	56	-14.5	46	-4.5
10	1.3335	25.07	Av	.2	.1	25.37	56	-30.63	46	-20.63
11	16.9485	39.72	Pk	.3	.2	40.22	60	-19.78	50	-9.78
12	16.9845	22.98	Av	.3	.2	23.48	60	-36.52	50	-26.52

Pk - Peak detector

Av - Average detection

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
3	1.347	40.93	Pk	.2	.1	41.23	56	-14.77	46	-4.77
4	1.3425	22.97	Av	.2	0	23.17	56	-32.83	46	-22.83
5	17.907	37.58	Pk	.3	.2	38.08	60	-21.92	50	-11.92
6	17.9205	23.27	Av	.3	.2	23.77	60	-36.23	50	-26.23
7	23.5095	40.99	Pk	.3	.2	41.49	60	-18.51	50	-8.51
8	23.505	21.22	Av	.3	.2	21.72	60	-38.28	50	-28.28

Pk - Peak detector

Av - Average detection