

TEST REPORT

Test report no.: 1-5831/13-10-08



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Sony Mobile Communications AB
Nya Vattentorget
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 1 08 00 24 41
Contact: Fredrik Björk
e-mail: Fredrik.Bjork@sonymobile.com
Phone: +46 1 08 01 46 75
Mobile: +46 70 32 40 14 0

Manufacturer

Sony Mobile Communications AB
Nya Vattentorget
22188 Lund / SWEDEN

Test standard/s

47 CFR Part 27 Title 47 of the Code of Federal Regulations; Chapter I
Part 27 - Miscellaneous Wireless Communications Service
RSS - 199 Issue 1 Broadband Radio Service (BRS) Equipment Operating in the Band 2500-2690 MHz

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Tablet PC GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VIII; LTE FDD1/3/5/7/8/20; WLAN a/b/g/n; BT 3.1; RFID; FM Rx; A-GPS
Model name: SGP321
FCC ID: PY7TM-0030
IC: 4170B-TM0030
Frequency: LTE E-UTRA band 7 – 2500 MHz to 2570 MHz
Technology tested: LTE
Antenna: Integrated antenna
Power Supply: 3.7 V DC by Li - Ion battery
Temperature Range: -30°C to +60°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

cn=Marco Bertolino, o=CETECOM ICT Services GmbH, ou=BTL-100826, email=marco.bertolino@cetecom.com, c=DE
2013.04.13 15:38:36 +02'00'

Marco Bertolino
Testing Manager

Test performed:

cn=Andreas Luckenbill, o=CETECOM ICT Services GmbH, ou=LUC-111202, email=andreas.luckenbill@cetecom.com, c=DE
2013.04.13 15:40:14 +02'00'

Andreas Luckenbill
Expert

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s	3
4	Test environment	4
5	Test item	4
5.1	Additional information	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
7.1	LTE – Band 7	5
8	RF measurements	6
8.1	Description of test setup	6
8.1.1	Radiated measurements.....	6
8.1.2	Conducted measurements.....	7
8.2	RSP100 test report cover sheet / performance test data	8
8.3	LTE technologies supported by EUT	9
8.4	Results LTE – Band 7	10
8.4.1	RF output power	10
8.4.2	Frequency stability	14
8.4.3	Spurious emissions radiated	17
8.4.4	Spurious emissions conducted	24
8.4.5	Block edge compliance.....	45
8.4.6	Occupied bandwidth	54
9	Test equipment and ancillaries used for tests	60
10	Observations	61
Annex A	Document history	62
Annex B	Further information	62
Annex C	Accreditation Certificate	63

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2013-01-30
Date of receipt of test item:	2013-04-01
Start of test:	2013-04-01
End of test:	2013-04-13
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 27	2012-10	Title 47 of the Code of Federal Regulations; Chapter I Part 27 - Miscellaneous Wireless Communications Service
RSS - 199 Issue 1	2012-01	Broadband Radio Service (BRS) Equipment Operating in the Band 2500-2690 MHz

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+60 °C during high temperature tests
	T_{min}	-30 °C during low temperature tests
Relative humidity content:		42 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li - Ion battery
	V_{max}	4.4 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	Tablet PC GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VIII; LTE FDD1/3/5/7/8/20; WLAN a/b/g/n; BT 3.1; RFID; FM Rx; A-GPS
Type identification	:	SGP321
S/N serial number	:	Rad. CB5A1NY06E / CB5A1NY06U Cond. CB5A1NY06A / CB5A1NY06M
HW hardware status	:	AP1
SW software status	:	10.1.1.A.1.11
Frequency band [MHz]	:	LTE E-UTRA band 7 2500 MHz to 2570 MHz
Type of modulation	:	QPSK, 16-QAM
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li - Ion battery
Temperature range	:	-30°C to +60 °C

5.1 Additional information

Test setup- and EUT-photos are included in test report:

1-5831/13-10-01_AnnexA
1-5831/13-10-01_AnnexB
1-5831/13-10-01_AnnexC

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 27 RSS 199	passed	2013-04-13	-/-

7.1 LTE – Band 7

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Note: NA = Not applicable; NP = Not performed

8 RF measurements


8.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

8.1.1 Radiated measurements

The radiated emissions from the EUT are performed in a semi anechoic chamber. The EUT is placed on a conductive turntable and powered with nominal voltage. The signalling is performed either from outside the chamber with a signalling unit (AP or other) by air link using a signalling antenna or directly by special test software from the customer.

Semi anechoic chamber

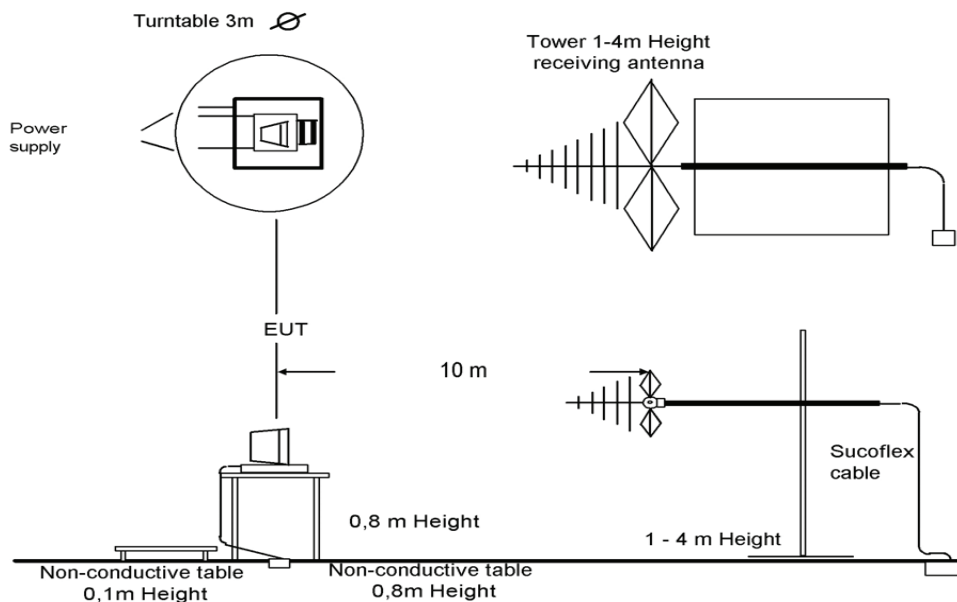


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the signalling unit (AP or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm. If special software is used, there is no power divider necessary.

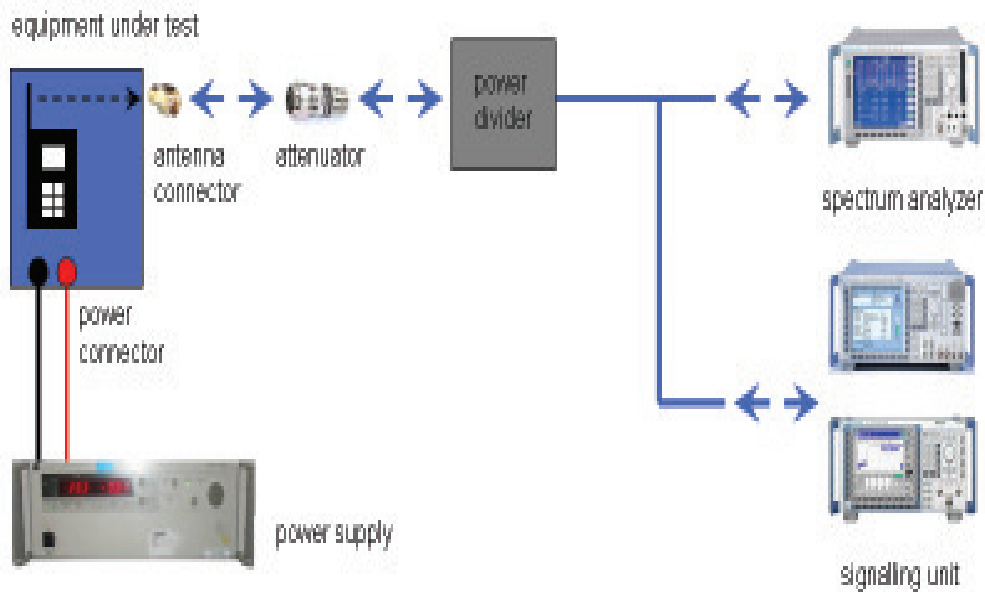

Picture 2: Diagram conducted measurements

The term measuring receiver refers to either a selective voltmeter or a spectrum analyser.

Frequency being measured f	Measuring receiver bandwidth 6 dB	Spectrum analyser bandwidth 3dB
$f < 150 \text{ kHz}$	200 Hz or	300 Hz
$150 \text{ kHz} \leq f < 25 \text{ MHz}$	9 kHz or	10 kHz
$25 \text{ MHz} \leq f < 1000 \text{ MHz}$	120 kHz or	100 kHz
$1000 \text{ MHz} \leq f$		1 MHz
NOTE: Specific requirements in CEPT/ERC/Recommendation 70-03 [2] shall be applied where applicable.		

8.2 RSP100 test report cover sheet / performance test data

Test Report Number	:	1-5831/13-10-08						
Equipment Model Number	:	SGP321						
Certification Number	:	4170B-TM0030						
Manufacturer (complete Address)	:	Sony Mobile Communications AB Nya Vattentorget 22188 Lund / SWEDEN						
Tested to radio standards specification no.	:	RSS - 199						
Open Area Test Site IC No.	:	IC 3462C-1						
Frequency Range	:	LTE: 2502.50 MHz – 2567.5 MHz						
GPS receiver turned	:	On						
RF-power [dBm] (max.)	:	Band	Channel bandwidth	Conducted [dBm]	ERP / EIRP [dBm]	Mode		
				LTE – Band 7	5	23.5	20.9	QPSK
		22.7	20.0			16-QAM		
		10	23.5		20.8	QPSK		
			22.6		19.9	16-QAM		
		15	23.5		21.0	QPSK		
			22.9		20.0	16-QAM		
		20	23.5		21.1	QPSK		
			22.8		20.1	16-QAM		
		99% Bandwidth [MHz]	:		LTE – Band 7	5	4529	QPSK
4549	16-QAM							
10	9138			QPSK				
	9138			16-QAM				
15	13466			QPSK				
	13527			16-QAM				
20	18116			QPSK				
	18116			16-QAM				
Type of modulation	:	QPSK; 16-QAM						
Antenna Information	:	LTE – Band 7	5	4M53G7D	QPSK			
				4M55W7D	16-QAM			
			10	9M14G7D	QPSK			
				9M14W7D	16-QAM			
			15	13M5G7D	QPSK			
				13M5W7D	16-QAM			
			20	18M1G7D	QPSK			
				18M1W7D	16-QAM			
			Transmitter Spurious (worst case) [dBm]	:	-44 (noise floor)			

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager:

2013-04-13

Andreas Luckenbill

Date

Name

Signature

cn=Andreas Luckenbill, o=CETECOM ICT
Services GmbH, ou=LUC-111202,
email=andreas.luckenbill@cetecom.com,
c=DE
2013.04.13 15:39:51 +02'00'

8.3 LTE technologies supported by EUT

Channel bandwidth

[MHz]	-/-	Band 7	-/-
1.4	-/-	<input type="checkbox"/>	-/-
3		<input type="checkbox"/>	
5		<input checked="" type="checkbox"/>	
10		<input checked="" type="checkbox"/>	
15		<input checked="" type="checkbox"/>	
20		<input checked="" type="checkbox"/>	

Antenna

SISO	<input type="checkbox"/>
SIMO	<input type="checkbox"/>
MISO	<input checked="" type="checkbox"/>
MIMO	<input type="checkbox"/>

8.4 Results LTE – Band 7

The EUT was set to transmit the maximum power.

8.4.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	Depends on Channel Bandwidth
Resolution bandwidth:	Depends on Channel Bandwidth
Span:	Zero Span
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 27.1101 CFR Part 2.1046	RSS 199
Nominal Peak Output Power	
+30.00 dBm	
In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
5	2502.5	1 RB low	23.4	4.4	22.6	5.2
		1 RB high	23.3	4.6	22.4	5.6
		50% RB mid	22.6	5.4	21.6	6.1
		100% RB	22.5	5.9	21.5	6.8
	2535	1 RB low	23.4	4.5	22.6	4.9
		1 RB high	23.4	3.9	22.7	4.8
		50% RB mid	22.6	4.6	21.6	5.8
		100% RB	22.4	5.6	21.5	6.5
	2567.5	1 RB low	23.5	3.5	22.3	4.6
		1 RB high	23.5	3.3	22.6	4.1
		50% RB mid	22.5	4.6	21.6	5.3
		100% RB	22.4	5.4	21.5	6.3
10	2505	1 RB low	23.4	4.2	22.6	5.3
		1 RB high	23.5	4.3	22.5	5.7
		50% RB mid	22.4	5.5	21.4	6.6
		100% RB	22.4	5.9	21.4	7.2
	2535	1 RB low	23.5	3.8	22.5	4.5
		1 RB high	23.5	3.8	22.4	4.5
		50% RB mid	22.5	5.0	21.5	6.0
		100% RB	22.3	5.4	21.4	6.5
	2565	1 RB low	23.5	4.0	22.2	4.6
		1 RB high	23.5	3.5	22.5	4.0
		50% RB mid	22.3	5.0	21.4	5.9
		100% RB	22.4	5.4	21.4	6.3
15	2507.5	1 RB low	23.4	4.4	22.7	4.5
		1 RB high	23.5	4.5	22.8	4.6
		50% RB mid	22.4	5.6	21.4	6.6
		100% RB	22.4	6.1	21.3	7.0
	2535	1 RB low	23.5	3.9	22.8	4.4
		1 RB high	23.5	3.7	22.8	4.2
		50% RB mid	22.6	4.9	21.6	5.9
		100% RB	22.5	5.8	21.5	6.5
	2562.5	1 RB low	23.4	4.1	22.9	4.9
		1 RB high	23.5	3.4	22.8	4.3
		50% RB mid	22.5	5.1	21.4	6.2
		100% RB	22.4	5.9	21.3	6.8

20	2510	1 RB low	23.5	4.4	22.8	4.5
		1 RB high	23.5	4.4	22.8	4.5
		50% RB mid	22.5	5.6	21.4	6.6
		100% RB	22.6	5.8	21.5	6.9
	2535	1 RB low	23.5	4.1	22.7	4.5
		1 RB high	23.5	3.9	22.6	4.5
		50% RB mid	22.5	5.1	21.7	5.8
		100% RB	22.6	5.8	21.6	6.5
	2560	1 RB low	23.5	3.9	22.7	4.7
		1 RB high	23.4	3.5	22.7	4.2
		50% RB mid	22.4	5.2	21.5	6.1
		100% RB	22.6	5.6	21.7	6.7
Measurement uncertainty		± 0.5 dB				

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (dBm)
		QPSK	16-QAM
5	2502.5	20.5	19.5
	2535	20.9	20.0
	2567.5	20.2	19.3
10	2505	20.4	19.4
	2535	20.8	19.9
	2565	20.2	19.2
15	2507.5	20.4	19.3
	2535	21.0	20.0
	2562.5	20.2	19.1
20	2510	20.6	19.5
	2535	21.1	20.1
	2560	20.4	19.5
Measurement uncertainty		± 3.0 dB	

Result: Passed

8.4.2 Frequency stability

Description:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMW500 DIGITAL RADIOCOMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with V_{nom} , connected to the CMW500 and in a simulated call on channel 1412 (centre channel), measure the carrier frequency. These measurements should be made within two minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10°C increments from -30°C to +60°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with V_{nom} . Vary supply voltage from V_{min} to V_{max} , in 0.1 Volt steps remeasuring carrier frequency at each voltage. Pause at V_{nom} for 1.5 hours unpowered, to allow any self heating to stabilize, before continuing.
6. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

This measurement was performed with the highest channel bandwidth supported from the EUT on the middle channel

Measurement:

Measurement parameters	
Detector:	Measured with CMW500
Sweep time:	
Video bandwidth:	
Resolution bandwidth:	
Span:	
Trace-Mode:	

Limits:

FCC	IC
CFR Part 27.54 CFR Part 2.1055	RSS 199
Frequency Stability	
< 2.5 ppm	


Results:**FREQ ERROR versus VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	15	0.0000087	0.0087
3.4	23	0.0000133	0.0133
3.5	21	0.0000121	0.0121
3.6	20	0.0000115	0.0115
3.7	19	0.0000110	0.0110
3.8	10	0.0000058	0.0058
3.9	12	0.0000069	0.0069
4.0	17	0.0000098	0.0098
4.1	15	0.0000087	0.0087
4.2	21	0.0000121	0.0121
4.3	18	0.0000104	0.0104
4.4	16	0.0000092	0.0092


FREQ ERROR versus TEMPERATURE

Temperature (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	10	0.0000058	0.0058
-20	13	0.0000075	0.0075
-10	18	0.0000104	0.0104
± 0	19	0.0000110	0.0110
10	20	0.0000115	0.0115
20	22	0.0000127	0.0127
30	17	0.0000098	0.0098
40	18	0.0000104	0.0104
50	19	0.0000110	0.0110
60	21	0.0000121	0.0121

Frequency Error vs. Voltage

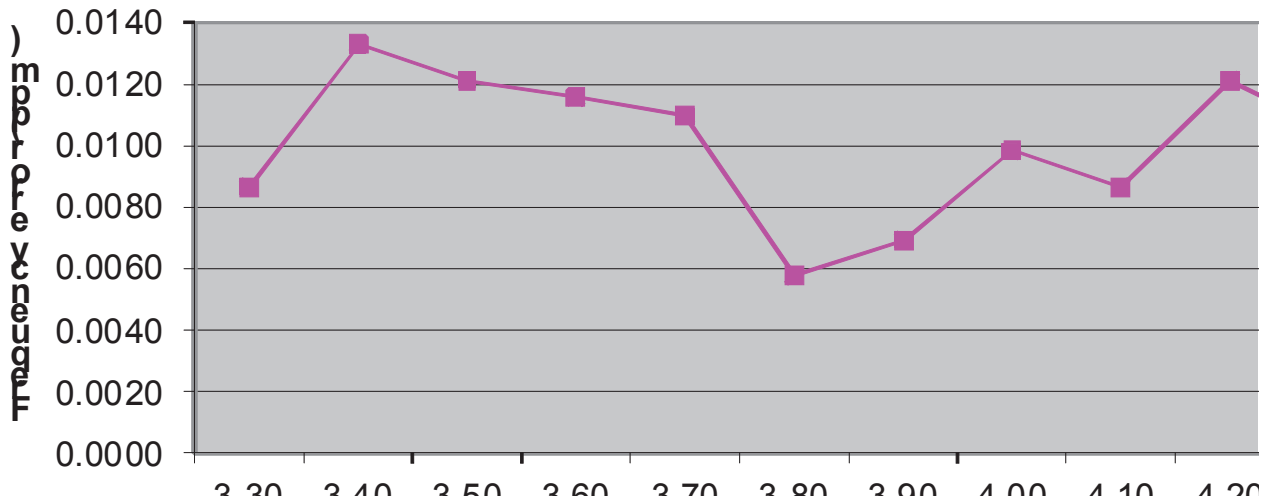

Frequency Error vs. Temperature

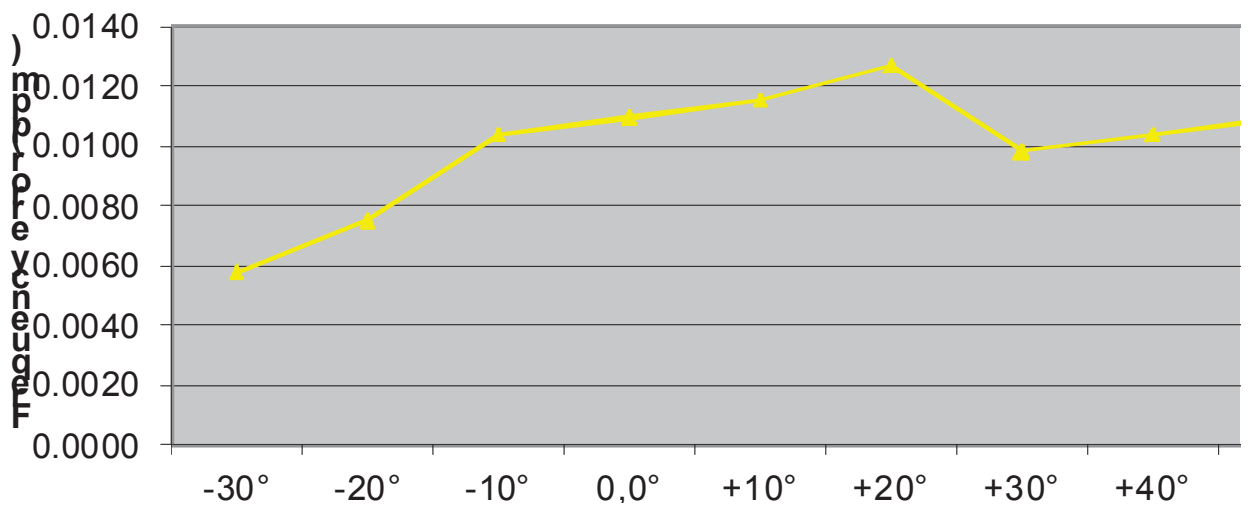

Result: Passed

8.4.3 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1755 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 4.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 27.53(g) CFR Part 2.1053	RSS 199
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the LTE band 7 (2505 MHz, 2535 MHz and 2565 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE band 7 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel at the channel bandwidth and resource blocks with the highest output power. If spurious were detected, the lowest and highest channel and all supported channel bandwidths were checked, too.

As can be seen from this data, the emissions from the test item were within the specification limit.

QPSK

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		


16-QAM

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		


Result: Passed

QPSK with 10 MHz channel bandwidth


Plot 1: Middle channel, up to 30 MHz

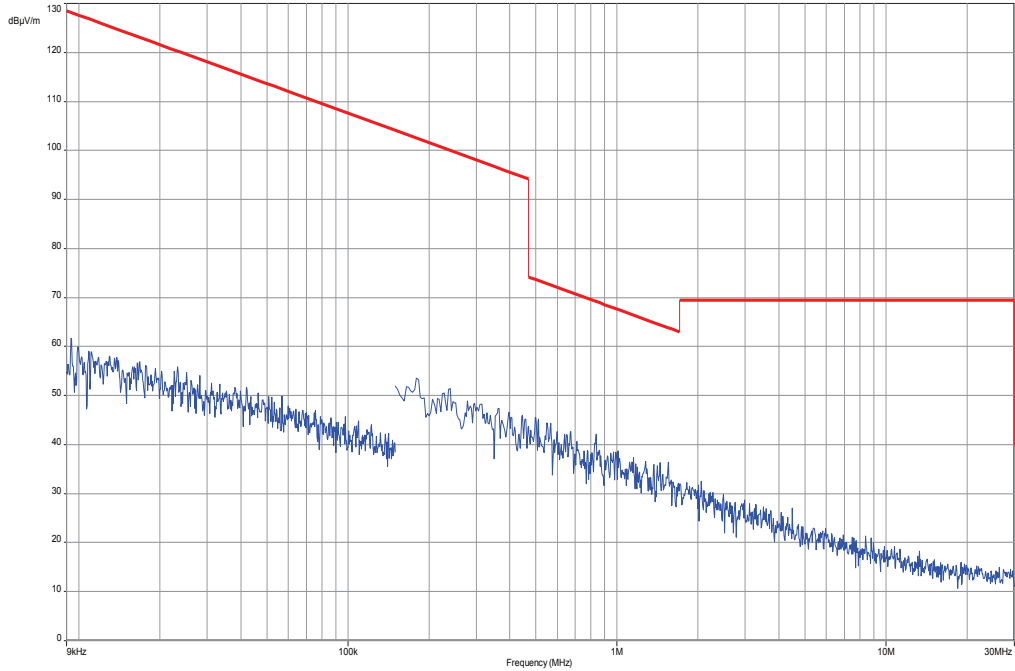

Plot 2: Middle channel, 30 MHz to 12.75 GHz

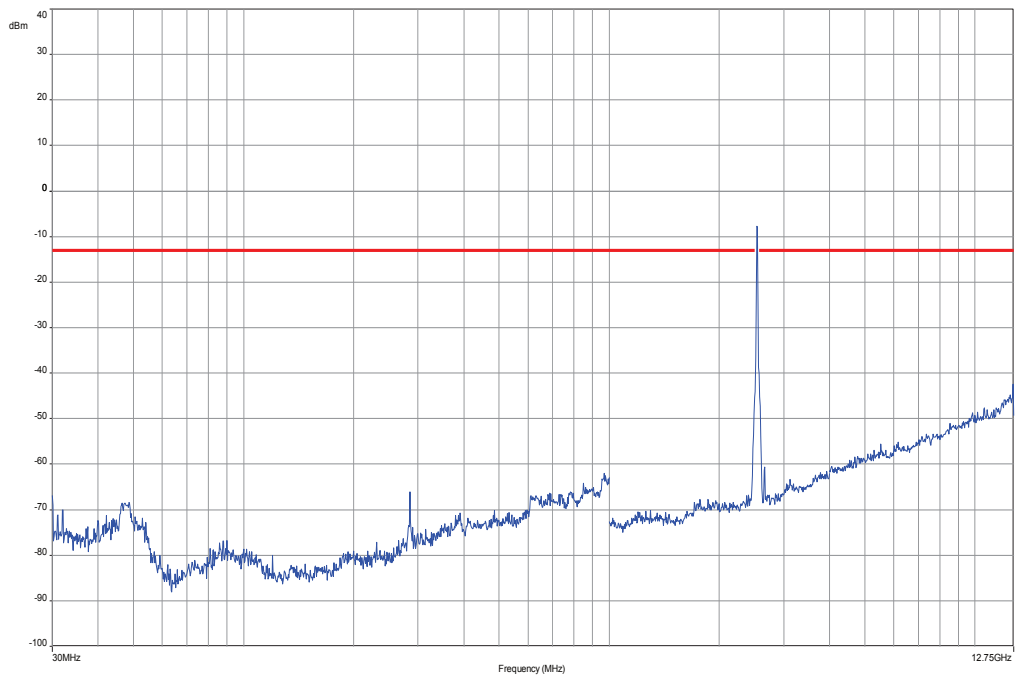


Plot 3: Middle channel, 12GHz to 26 GHz

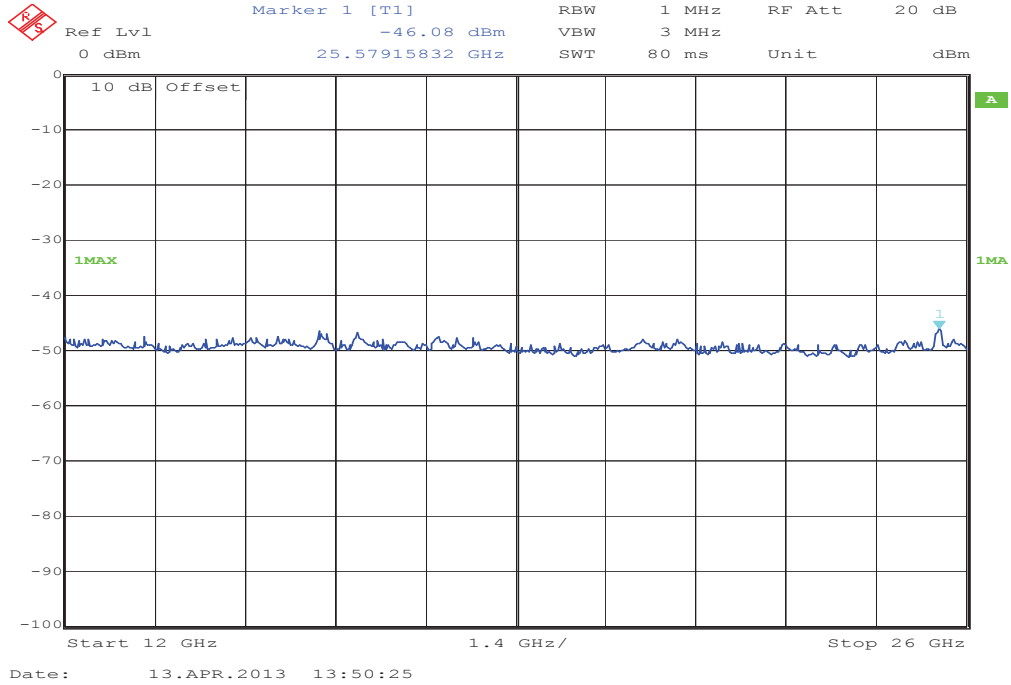


16-QAM with 10 MHz channel bandwidth


Plot 4: Middle channel, up to 30 MHz

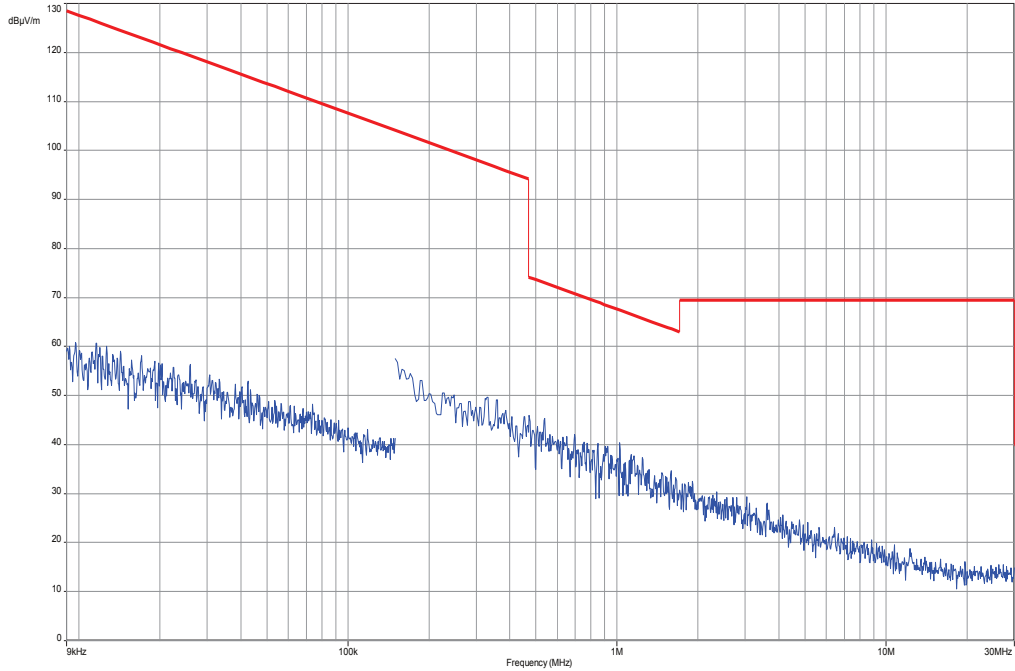

Plot 5: Middle channel, 30 MHz to 12.75 GHz

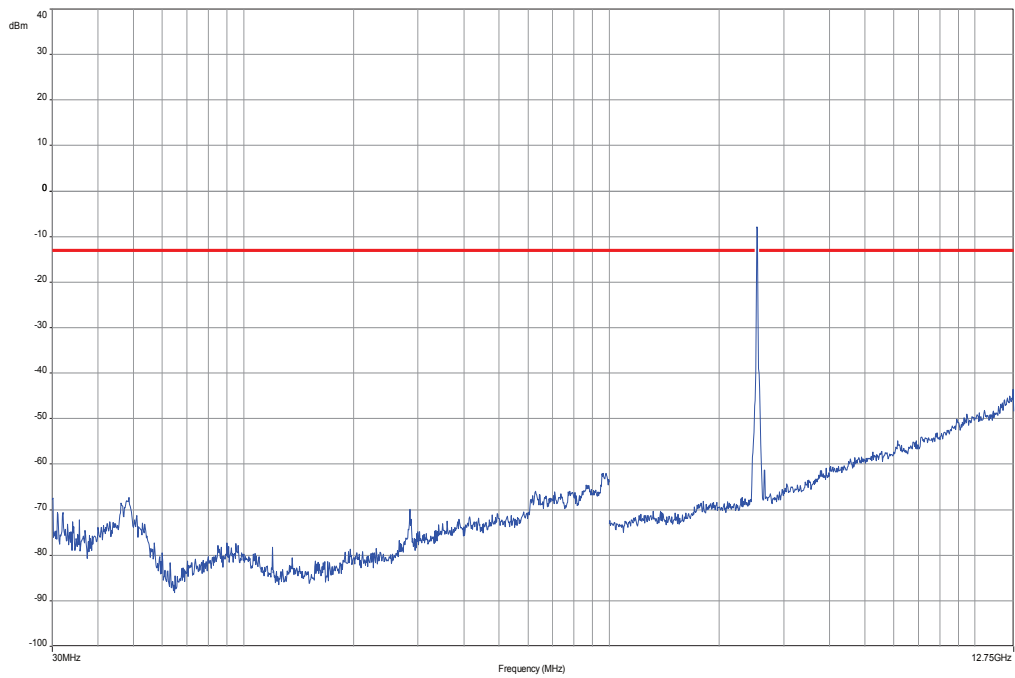

Plot 6: Middle channel, 12 GHz to 26 GHz

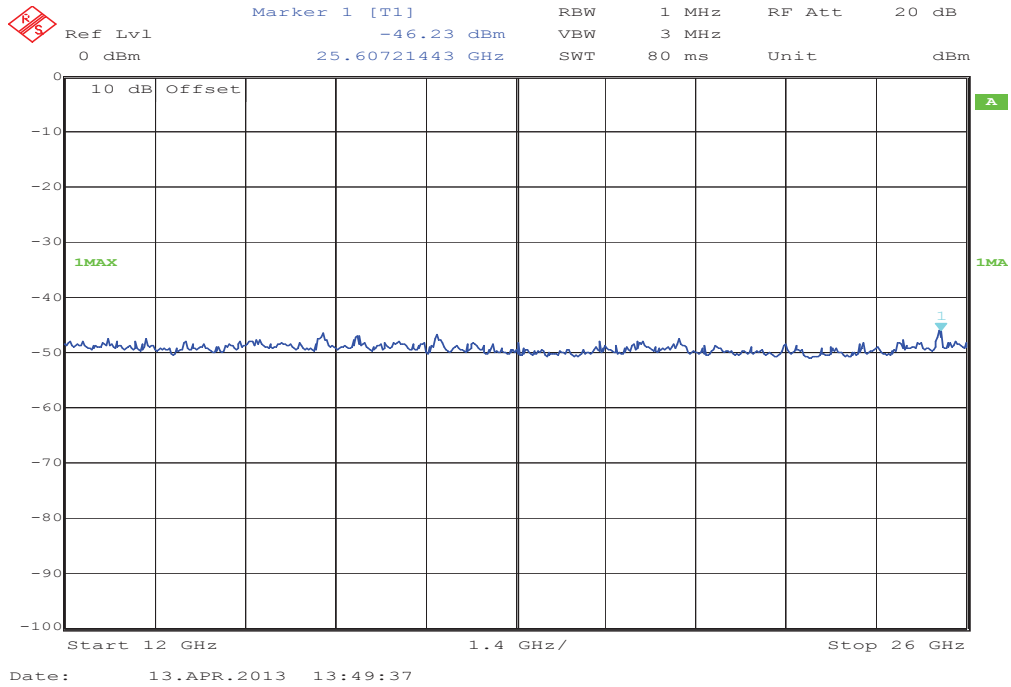

8.4.4 Spurious emissions conducted

Description:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 17.6 GHz, data taken from 10 MHz to 25 GHz.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

For the measurement the lowest, middle and highest channel bandwidth was used. If spurious were found the other bandwidths were measured, too.

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz
Resolution bandwidth:	Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz
Span:	10 MHz – 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 27.53(g) CFR Part 2.1053	RSS 199
Spurious Emissions Conducted	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

Results: for 5 MHz channel bandwidth

QPSK

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		

16-QAM

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		

Result: Passed

Results: for 10 MHz channel bandwidth

QPSK

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		

16-QAM

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		

Result: Passed

Results: for 15 MHz channel bandwidth

QPSK

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		

16-QAM

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		

Result: Passed

Results: for 20 MHz channel bandwidth

QPSK

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		


16-QAM

SPURIOUS EMISSION LEVEL (dBm)					
LOWEST CHANNEL		MIDDLE CHANNEL		HIGHEST CHANNEL	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
-/-	-/-	-/-	-/-	-/-	-/-
Measurement uncertainty			± 3dB		


Result: Passed

Results for 5 MHz channel bandwidth QPSK


Plot 1: Lowest channel, 10 MHz to 25 GHz

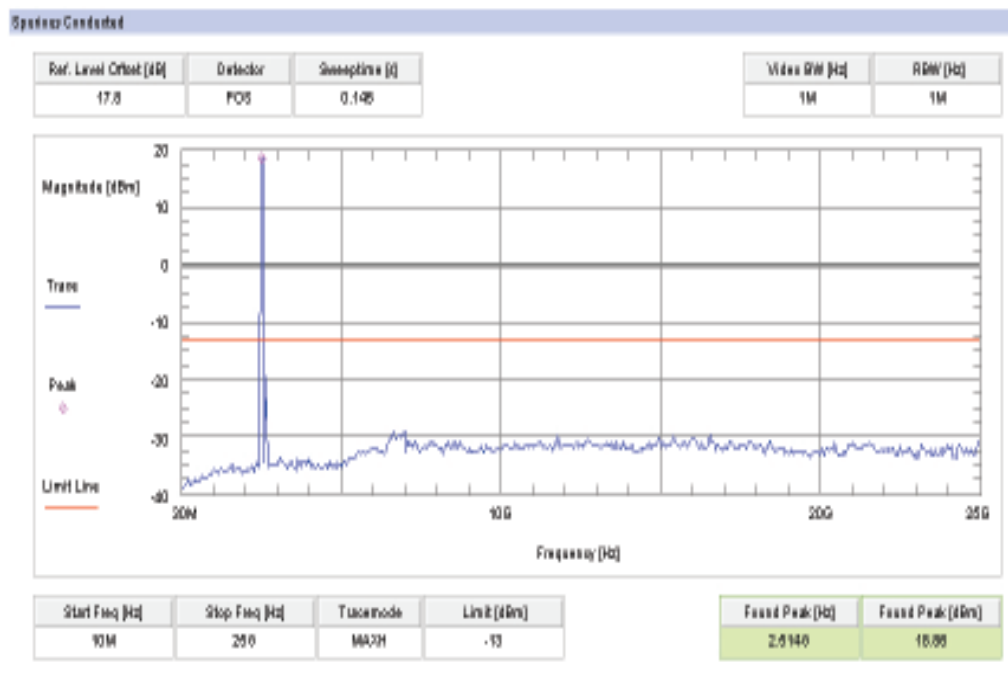

Plot 2: Middle channel, 10 MHz to 25 GHz

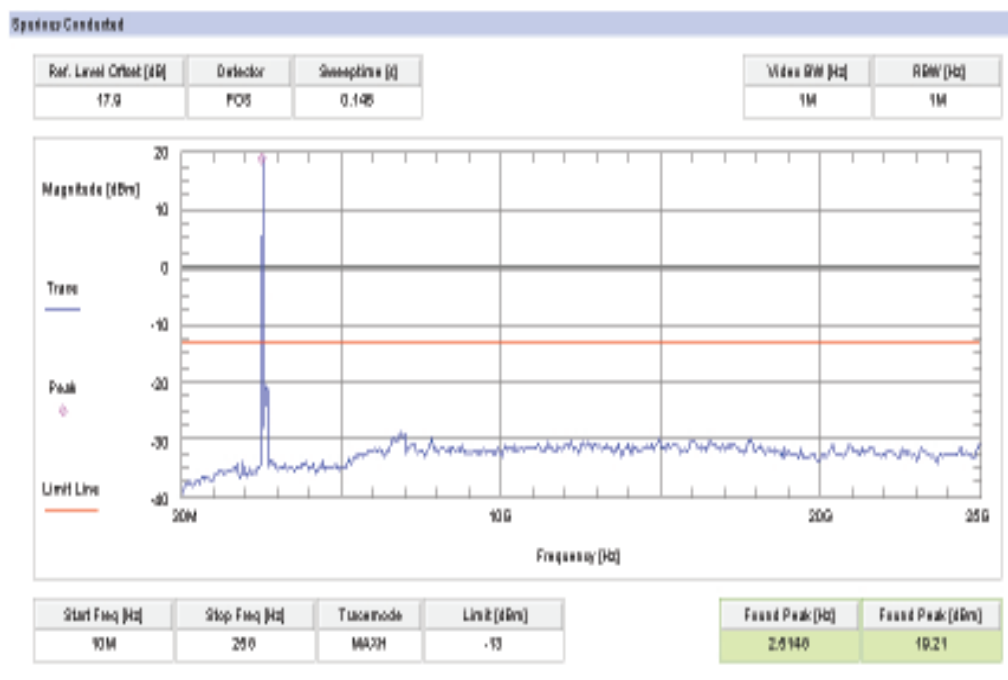


Plot 3: Highest channel, 10 MHz to 25 GHz

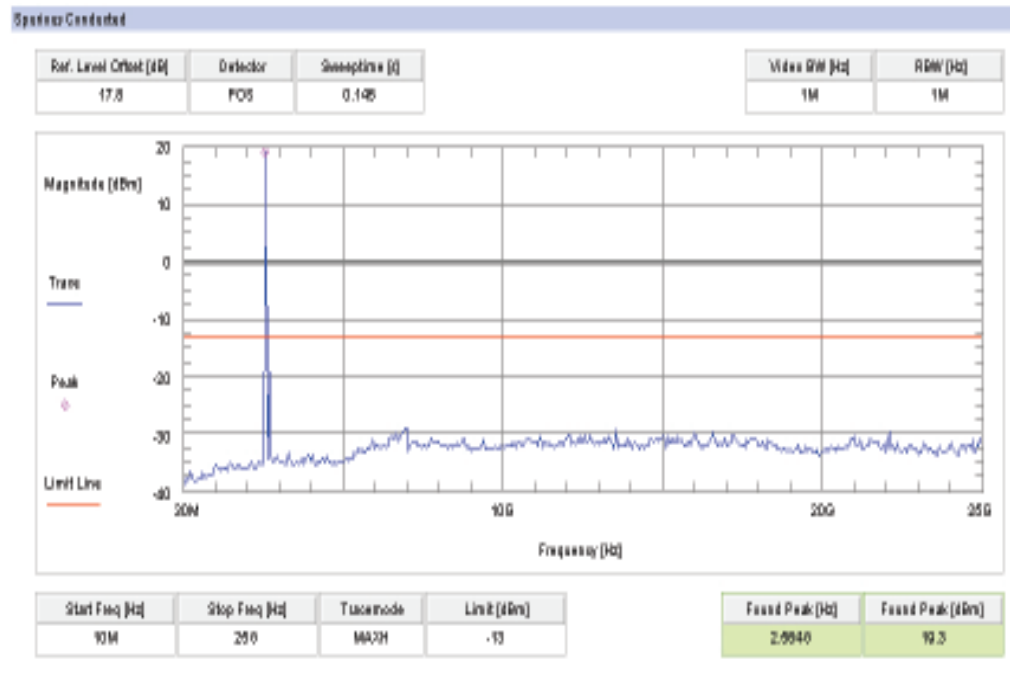


Results for 5 MHz channel bandwidth 16-QAM


Plot 4: Lowest channel, 10 MHz to 25 GHz

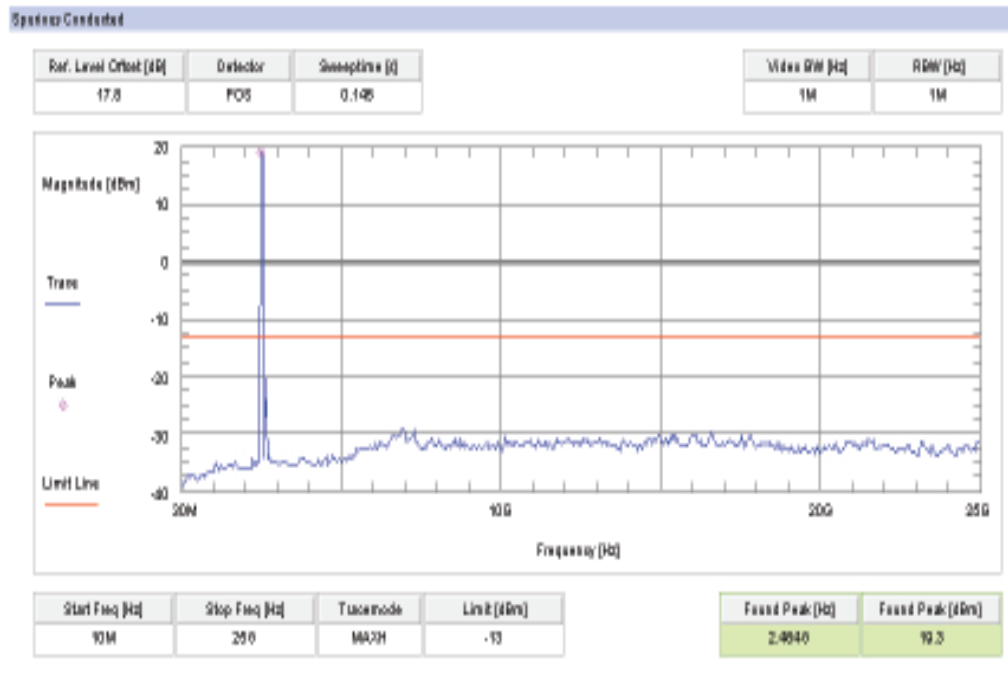

Plot 5: Middle channel, 10 MHz to 25 GHz

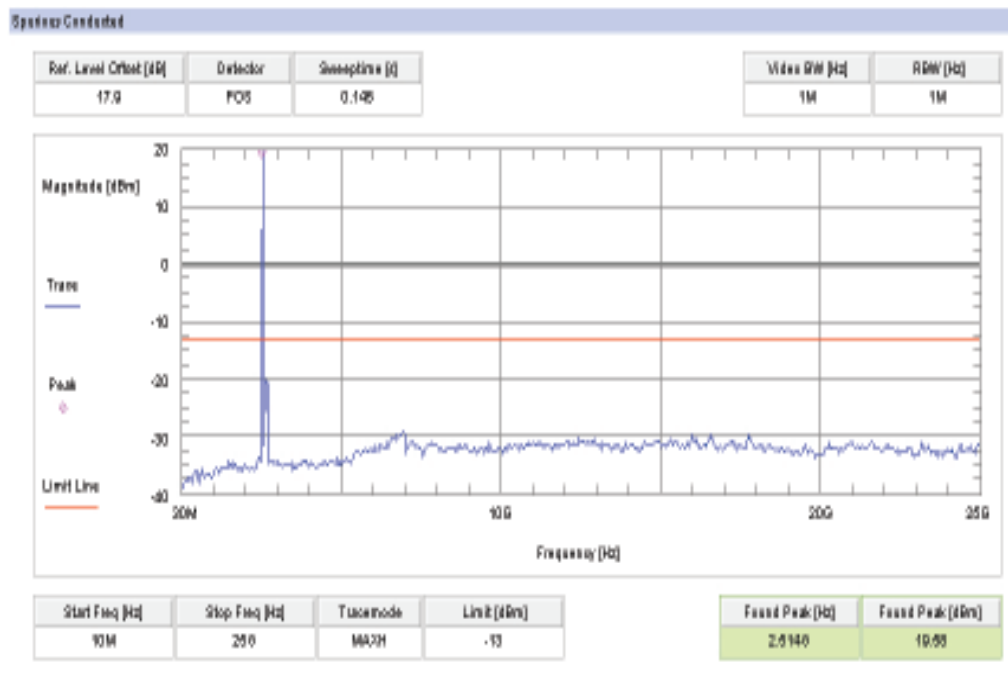


Plot 6: Highest channel, 10 MHz to 25 GHz

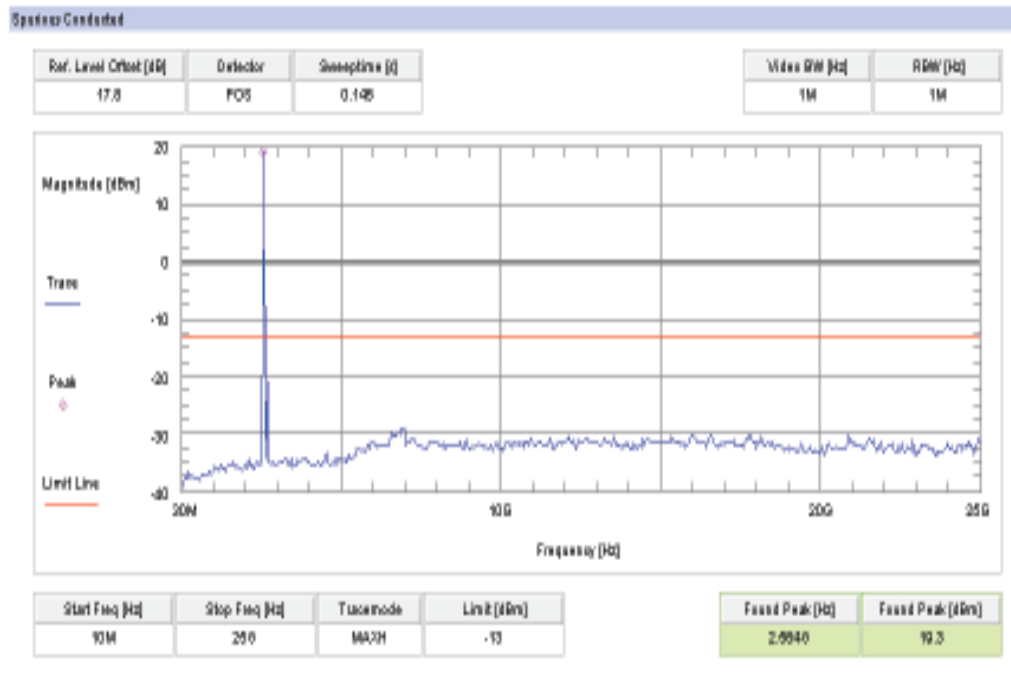


Results for 10 MHz channel bandwidth QPSK


Plot 1: Lowest channel, 10 MHz to 25 GHz

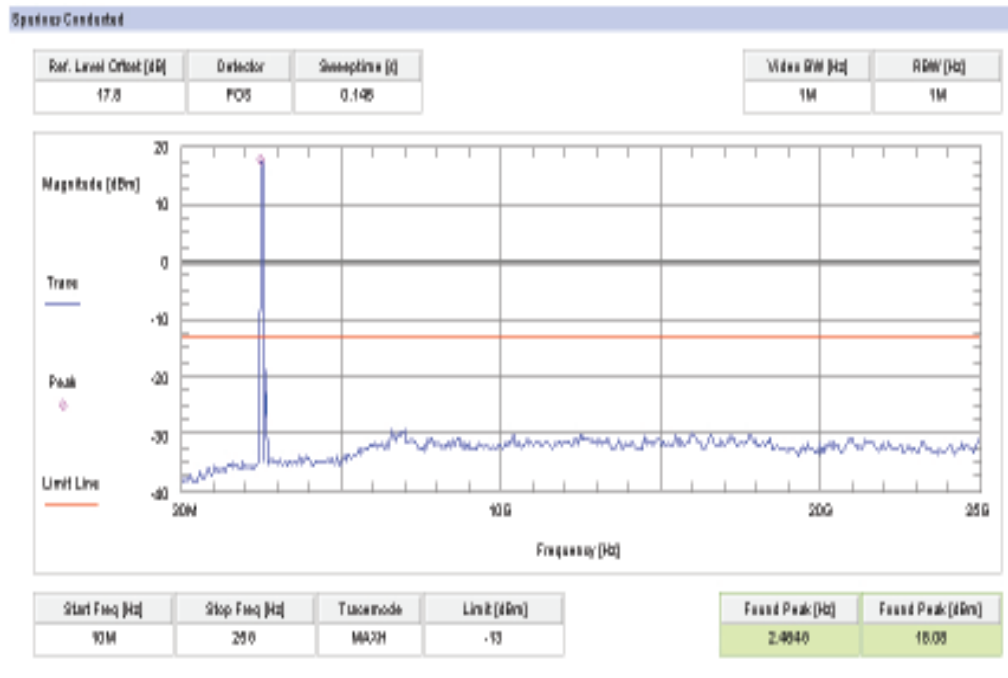

Plot 2: Middle channel, 10 MHz to 25 GHz

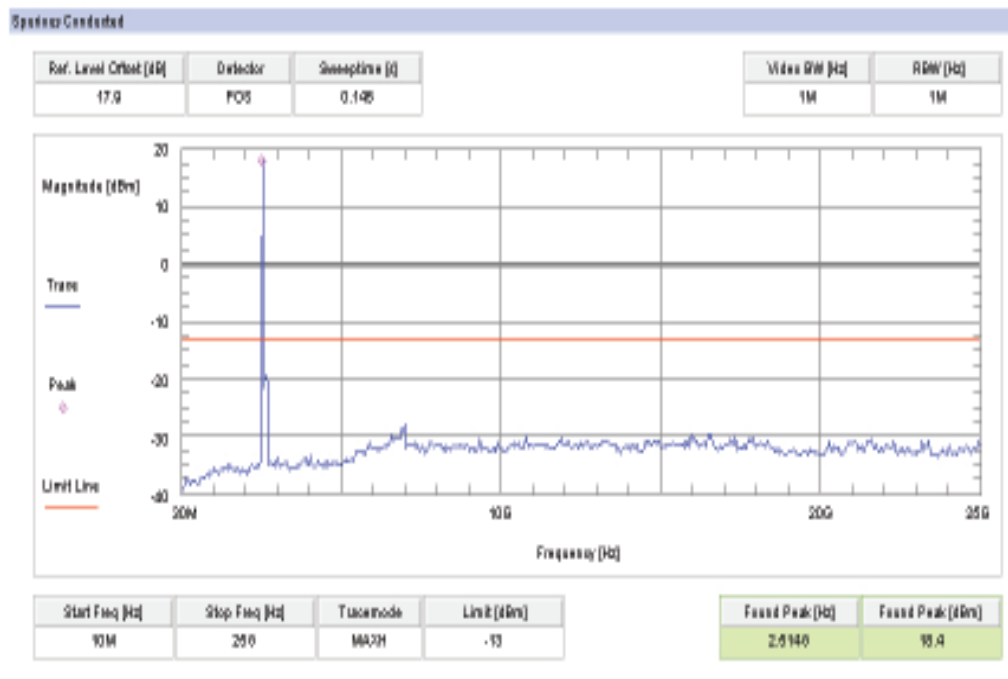


Plot 3: Highest channel, 10 MHz to 25 GHz

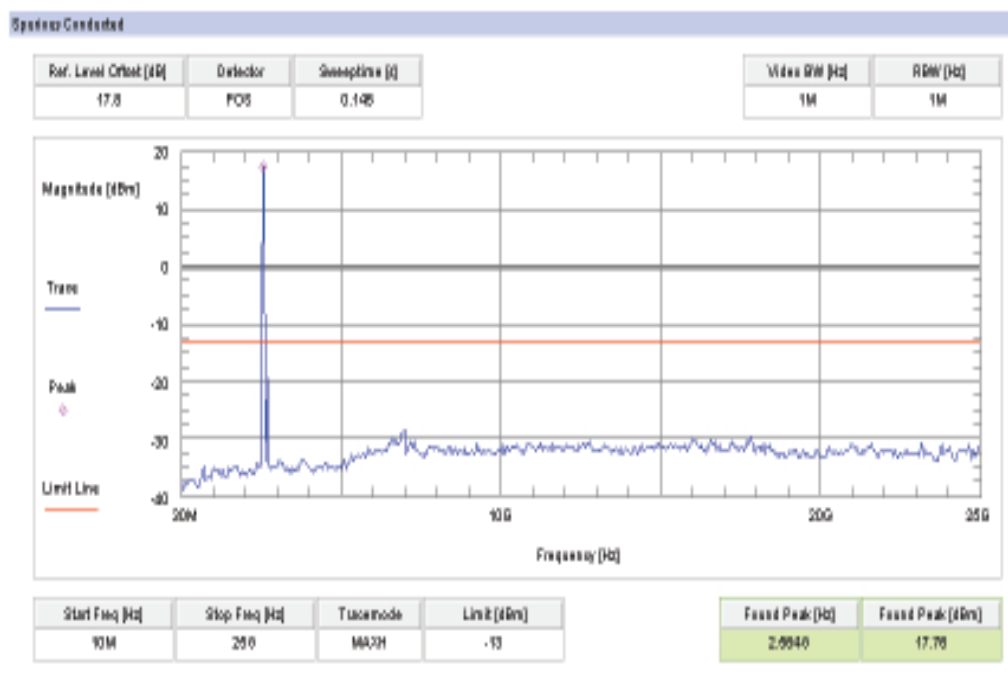


Results for 10 MHz channel bandwidth 16-QAM


Plot 4: Lowest channel, 10 MHz to 25 GHz

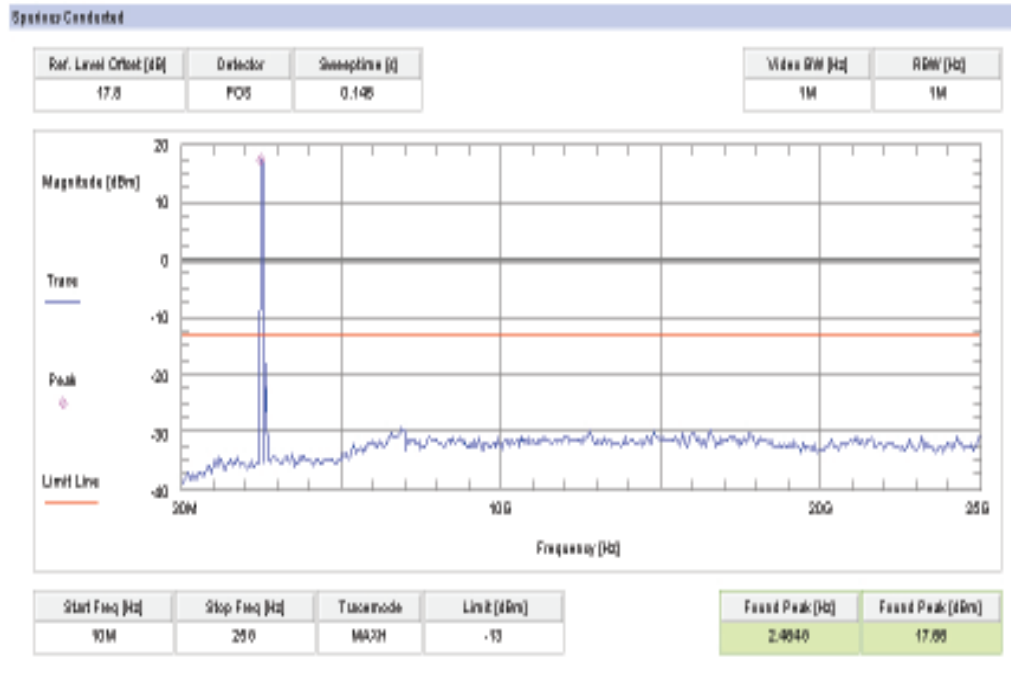

Plot 5: Middle channel, 10 MHz to 25 GHz

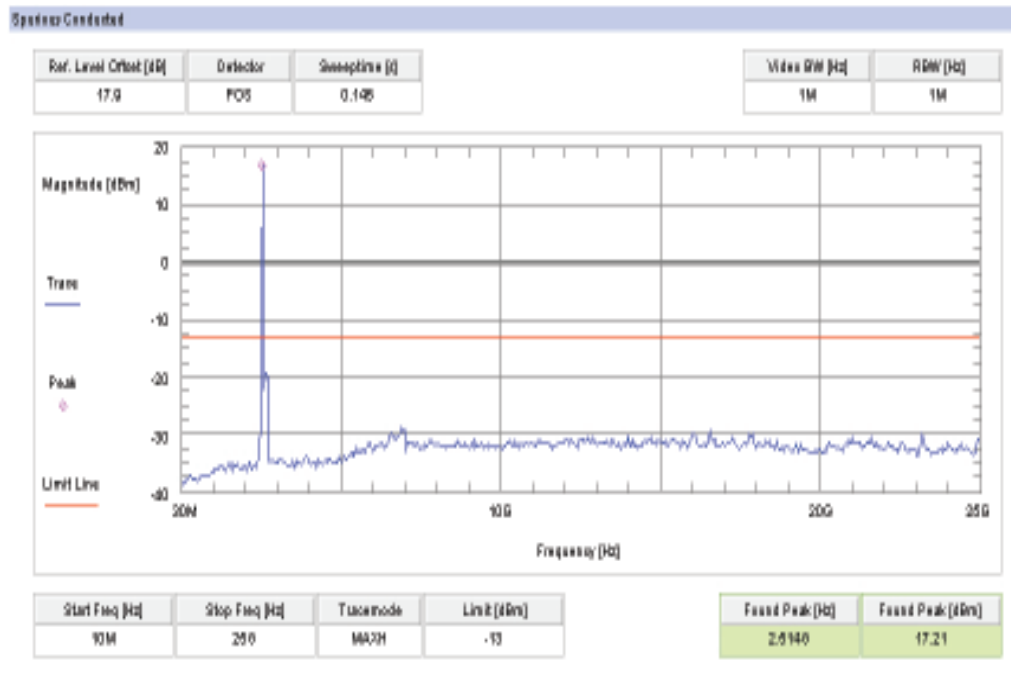


Plot 6: Highest channel, 10 MHz to 25 GHz

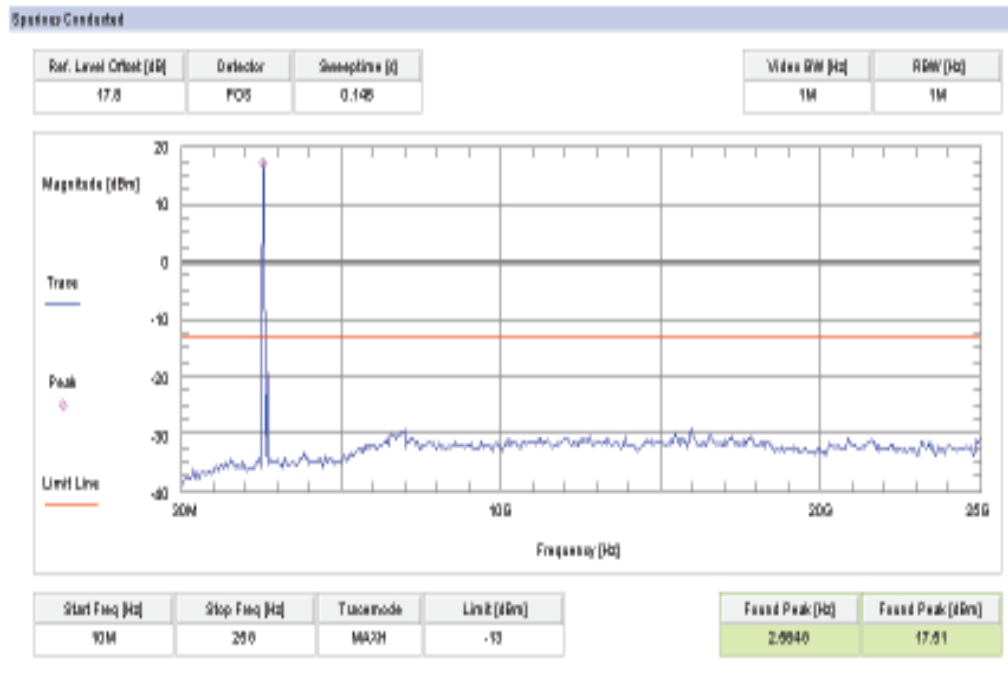


Results for 15 MHz channel bandwidth QPSK


Plot 1: Lowest channel, 10 MHz to 25 GHz

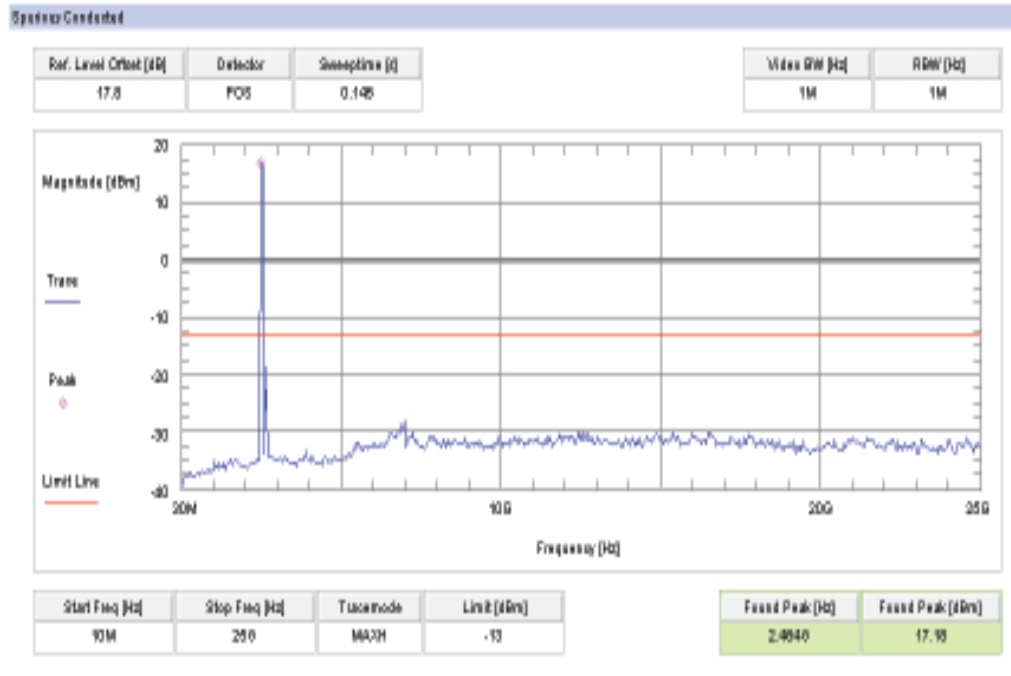

Plot 2: Middle channel, 10 MHz to 25 GHz

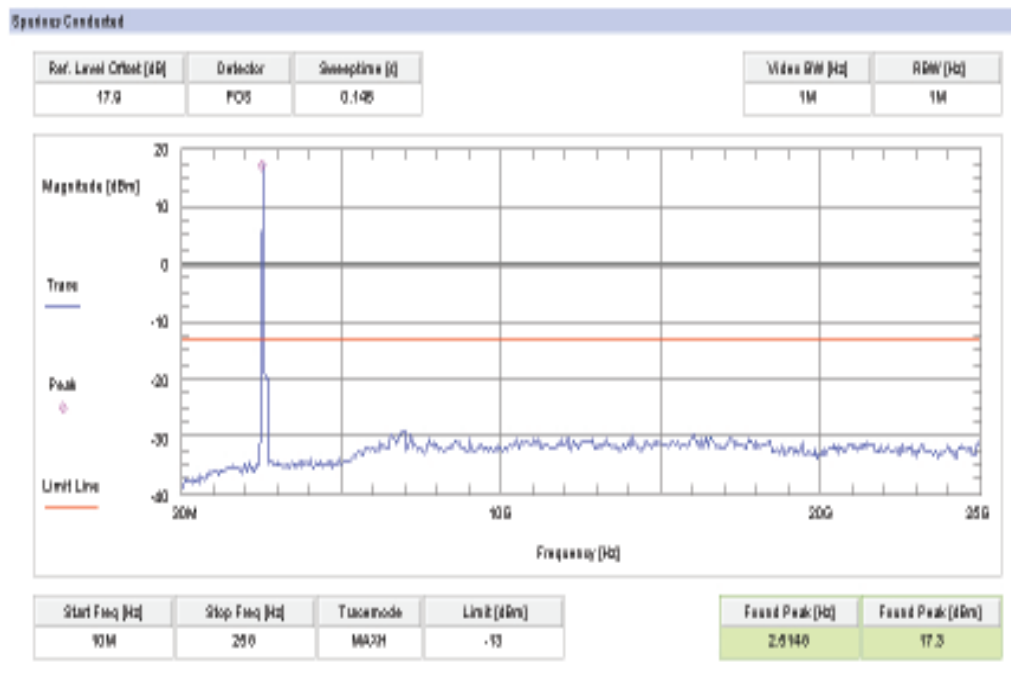


Plot 3: Highest channel, 10 MHz to 25 GHz

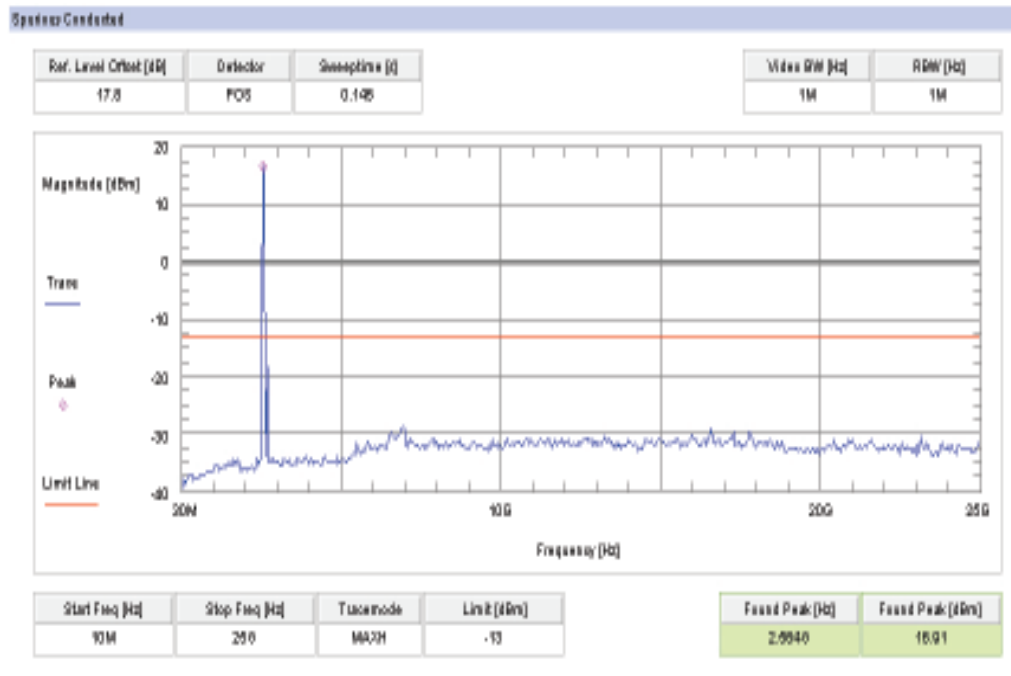


Results for 15 MHz channel bandwidth 16-QAM


Plot 4: Lowest channel, 10 MHz to 25 GHz

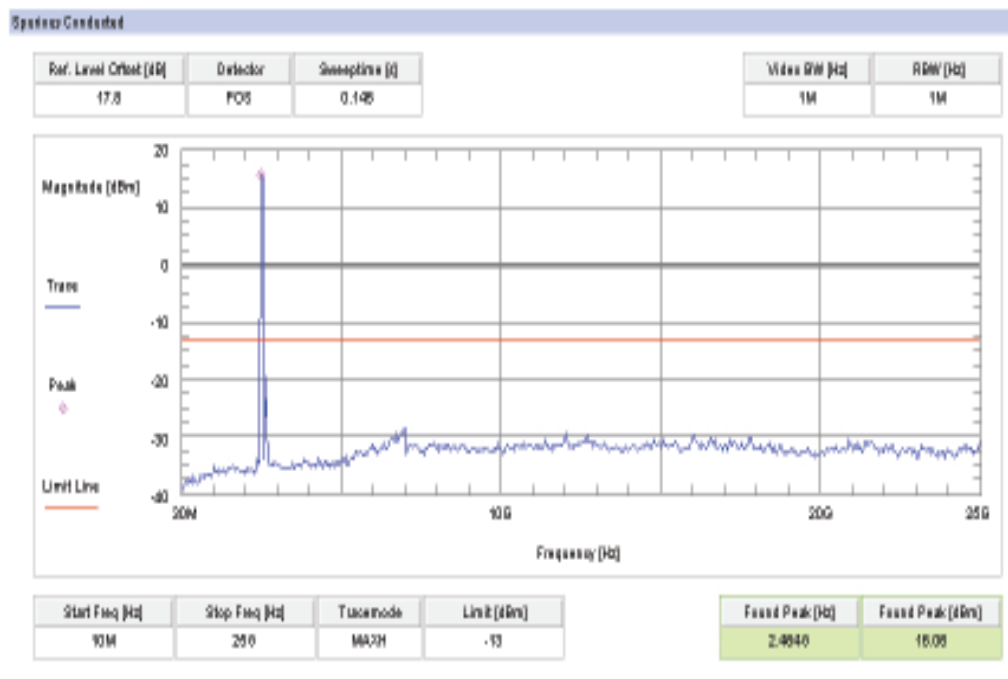

Plot 5: Middle channel, 10 MHz to 25 GHz

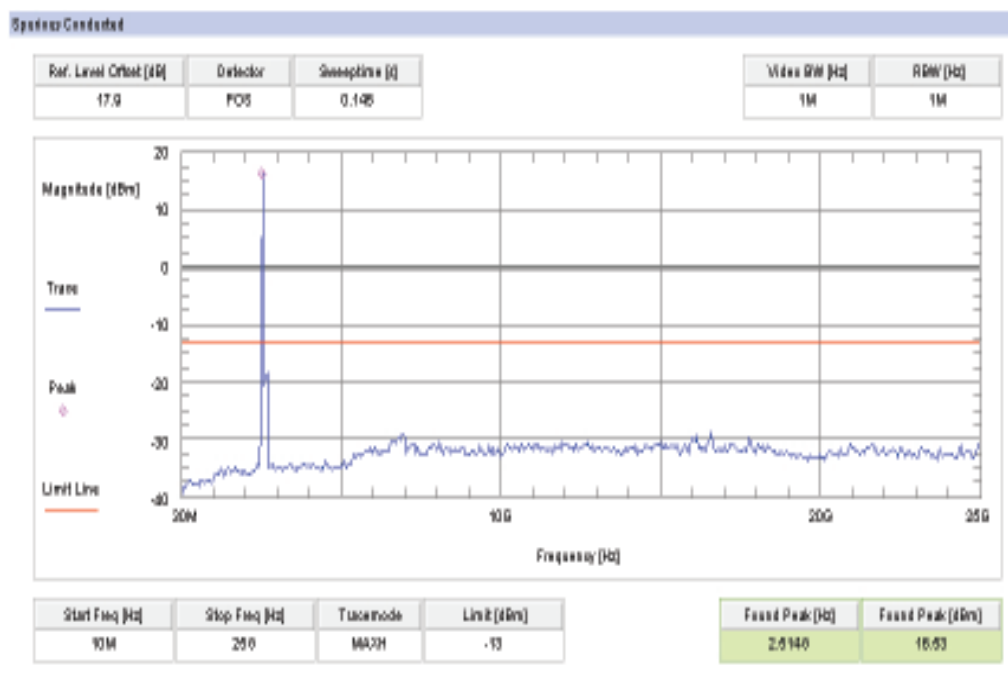


Plot 6: Highest channel, 10 MHz to 25 GHz

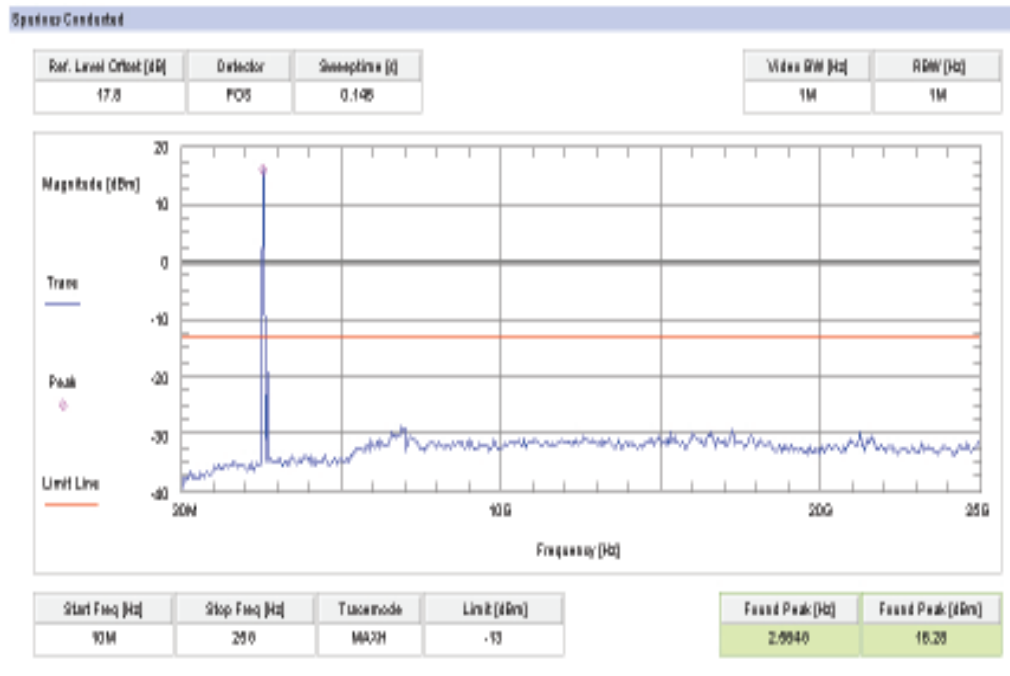


Results for 20 MHz channel bandwidth QPSK


Plot 1: Lowest channel, 10 MHz to 25 GHz

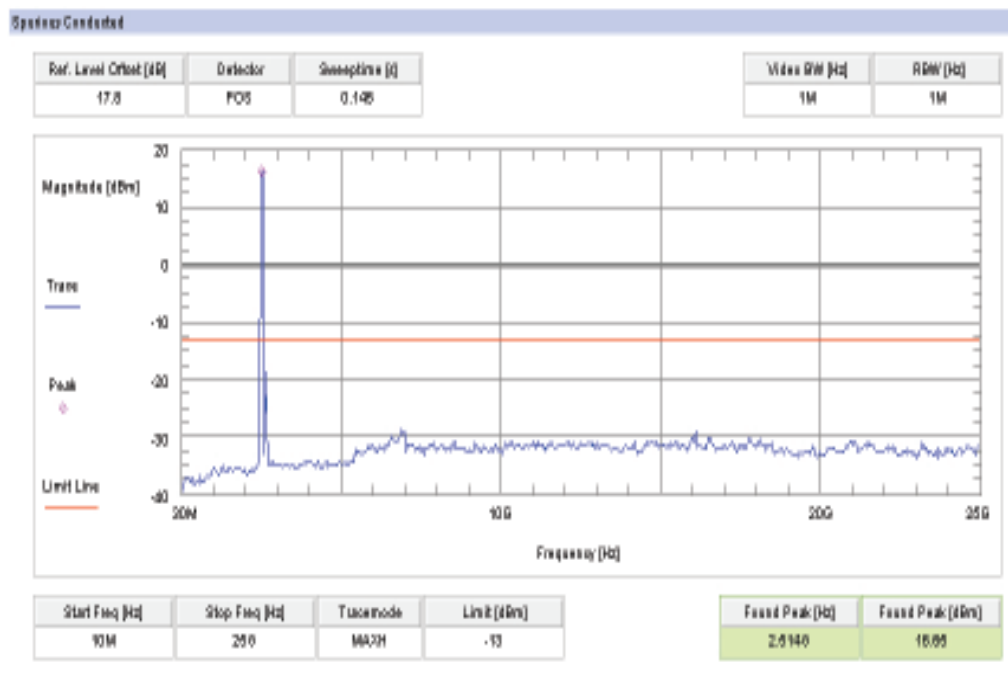

Plot 2: Middle channel, 10 MHz to 25 GHz

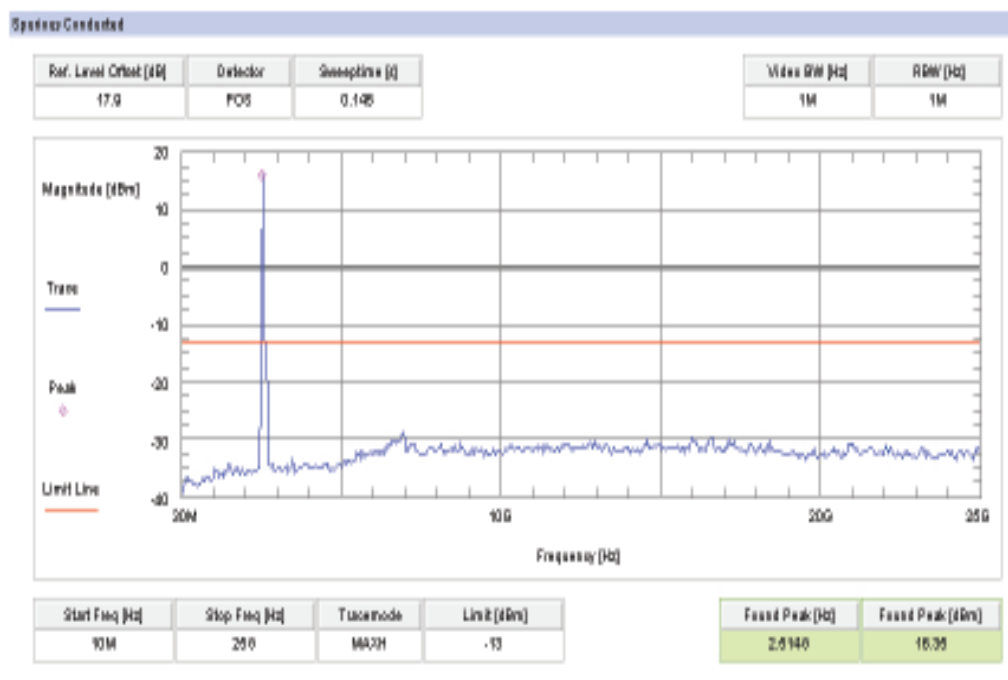


Plot 3: Highest channel, 10 MHz to 25 GHz

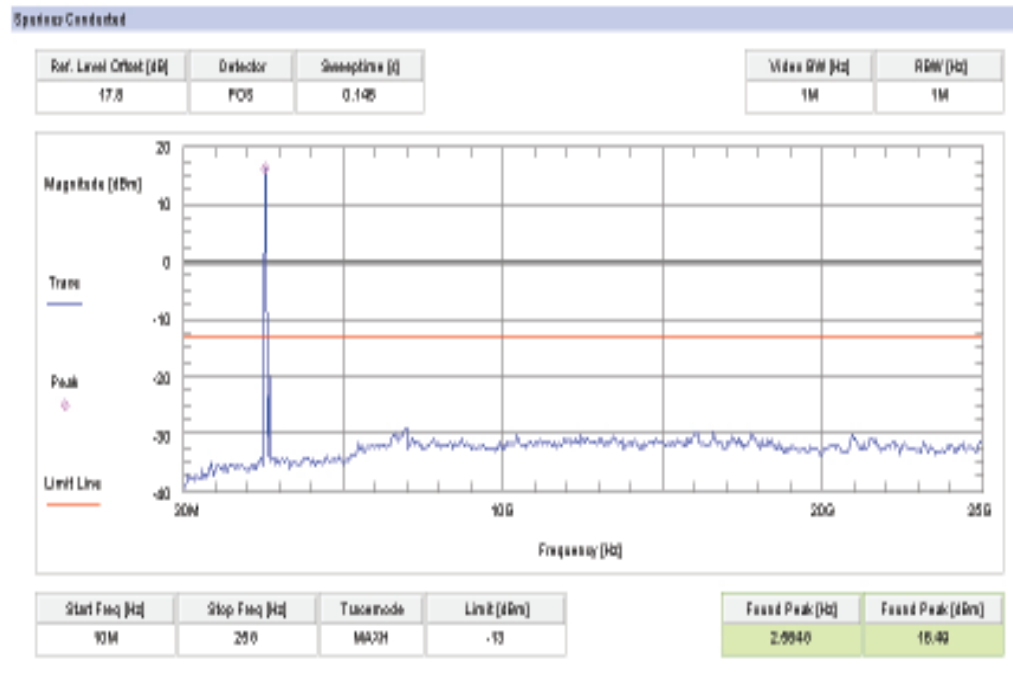


Results for 20 MHz channel bandwidth 16-QAM


Plot 4: Lowest channel, 10 MHz to 25 GHz

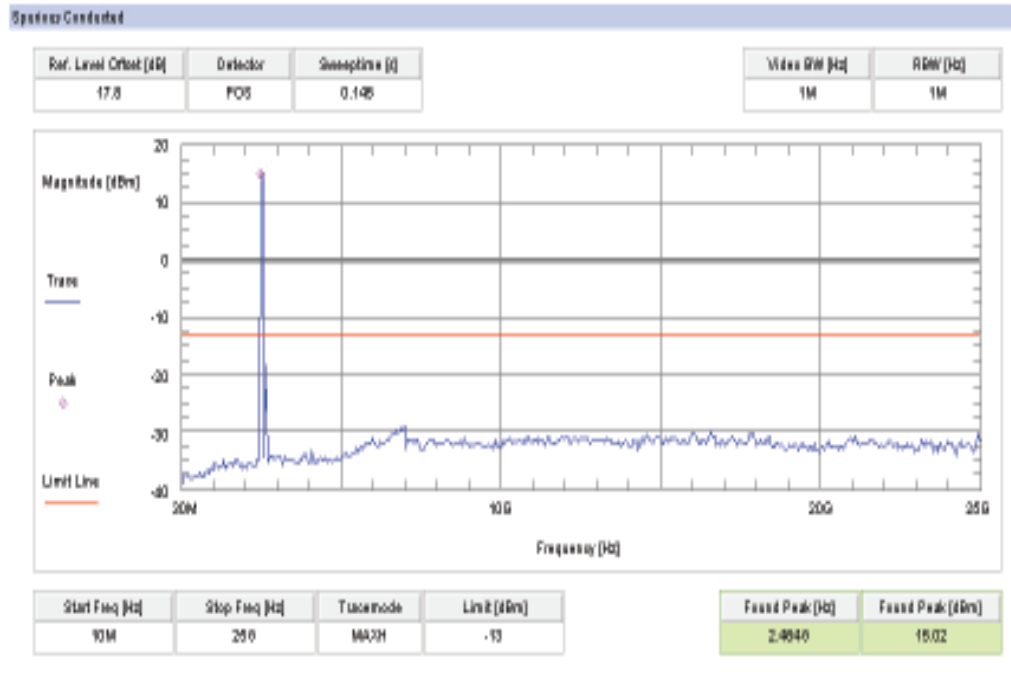

Plot 5: Middle channel, 10 MHz to 25 GHz

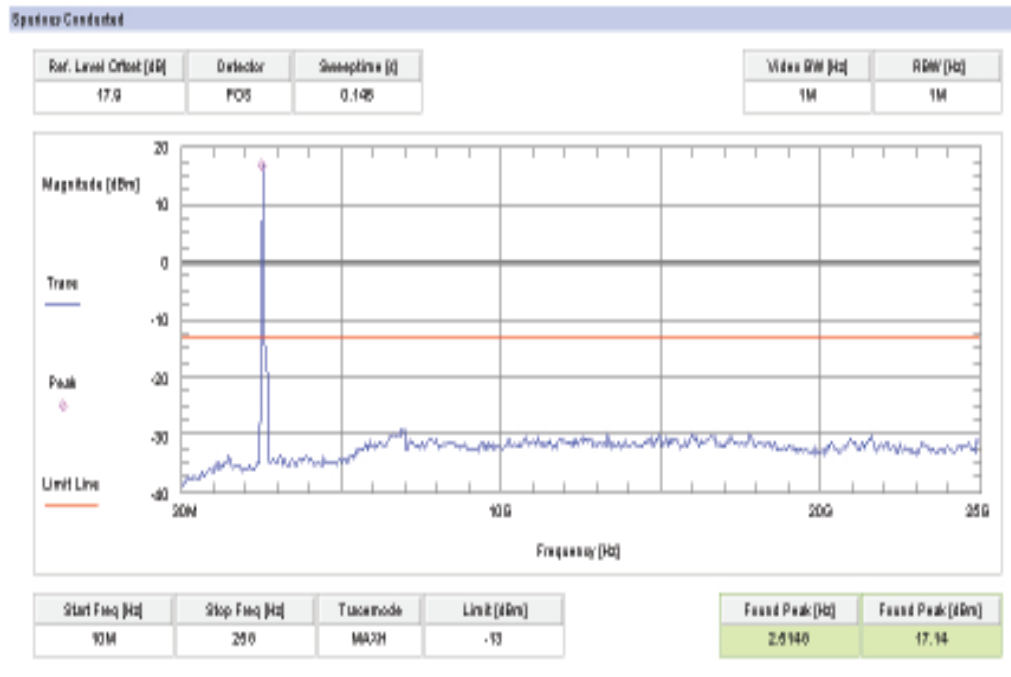

Plot 6: Highest channel, 10 MHz to 25 GHz

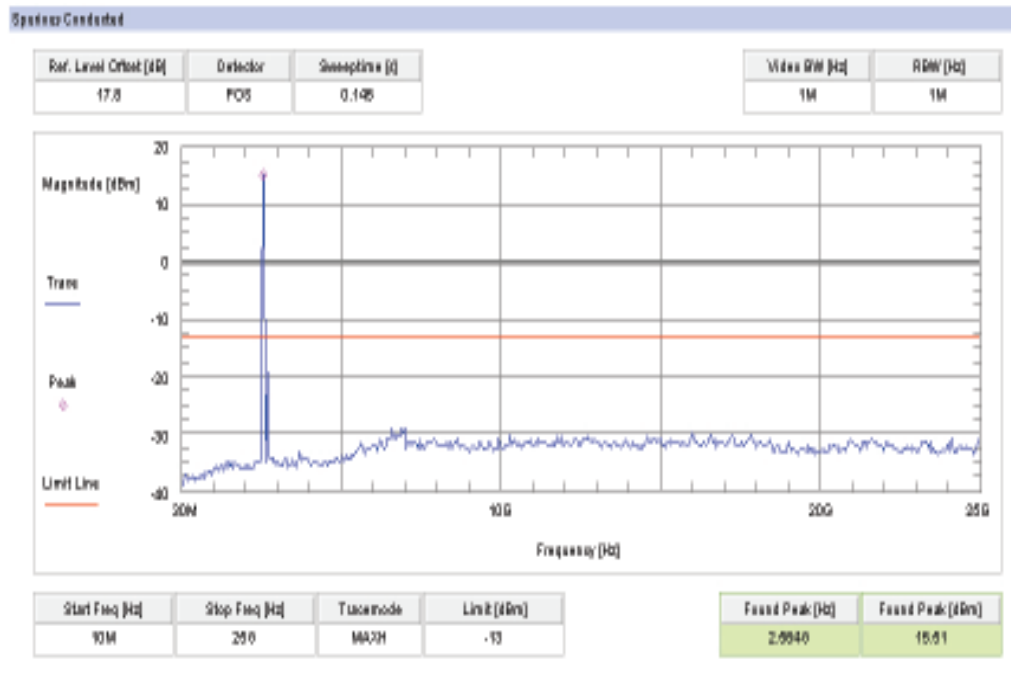

8.4.5 Block edge compliance

Description:

The spectrum at the band edges must comply with the spurious emissions limits.

For the measurement the lowest, middle and highest channel bandwidth was used. If spurious were found the other bandwidths were measured, too.

Measurement:


Measurement parameters	
Detector:	RMS
Sweep time:	20 sec.
Video bandwidth:	30 kHz
Resolution bandwidth:	30 kHz
Span:	1 MHz
Trace-Mode:	Max Hold

Limits:


FCC	IC
CFR Part 27.53(h) CFR Part 2.1053	RSS 199
Block Edge Compliance	
<p>Part 27.53 specifies that “the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.”</p> <p>However, in publication number 890810, The FCC Office of Engineering and Technology specified the following correction to the limits when a resolution bandwidth smaller than 1% of the emission bandwidth is used:</p> <p>“An alternative is to add an additional correction factor of 10 Log (RBW1/ RBW2) to the 43 +10 log(P) limit. RBW1 is the narrower measurement resolution bandwidth and RBW2 is either the 1% emissions bandwidth or 1 MHz.”</p> <p>When using a 30 kHz bandwidth, this yields a -8.239 adjustment to the limit [10 log(30kHz/200kHz) = -8.239]. When this adjustment is applied to the limit, the limit becomes -21.239.</p>	
-21.239 dBm	

Results: 5 MHz channel bandwidth


Plot 1: Lowest channel, QPSK modulation

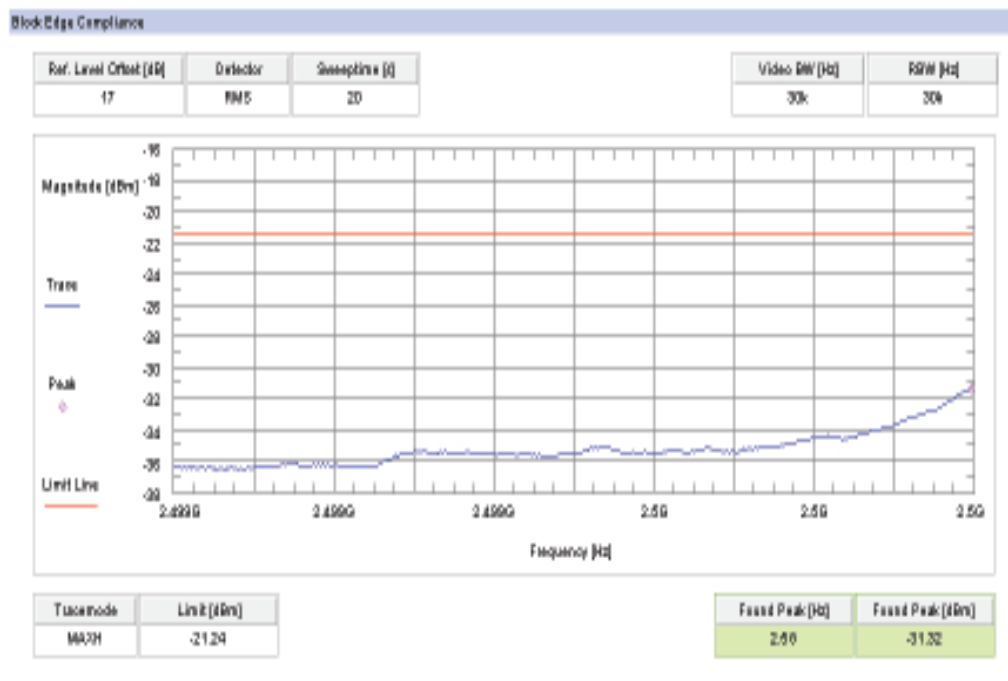


Plot 2: Highest channel, QPSK modulation

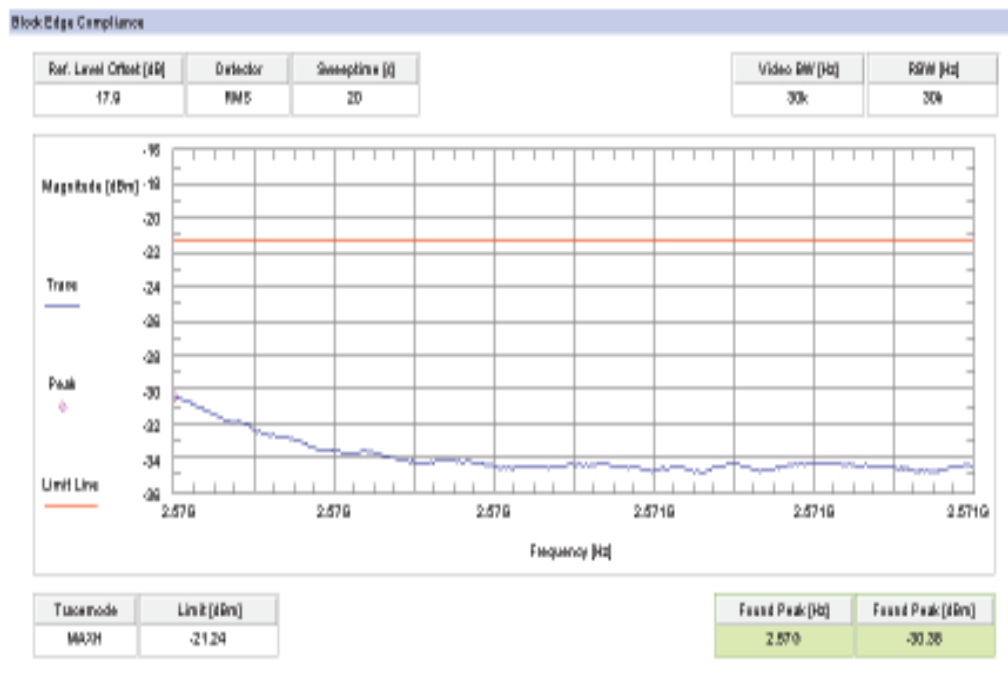

Plot 3: Lowest channel, 16 – QAM modulation

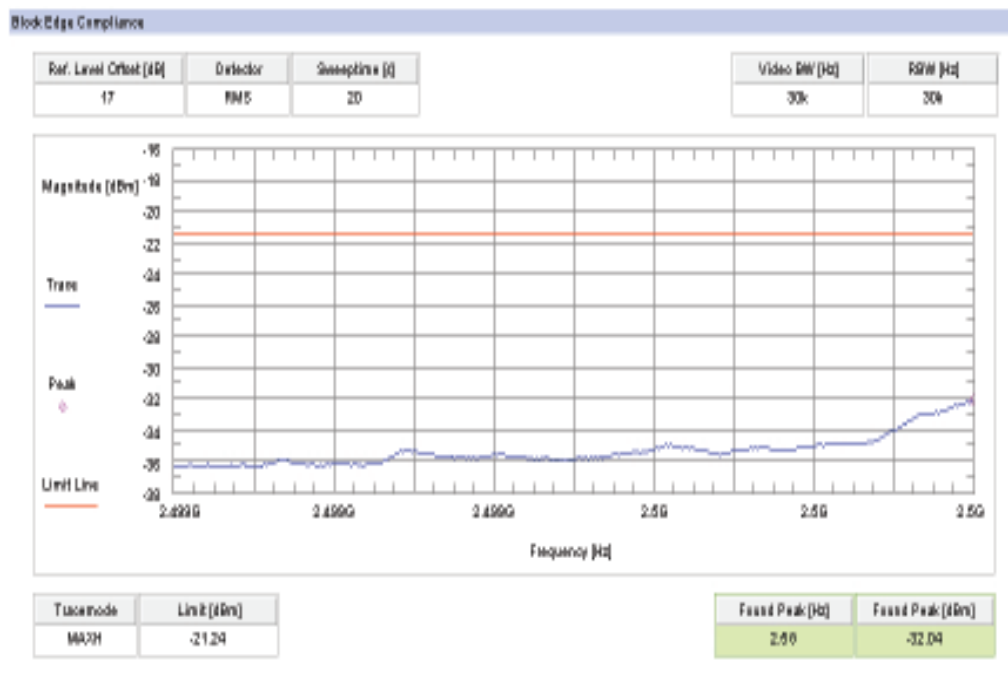


Plot 4: Highest channel, 16 – QAM modulation

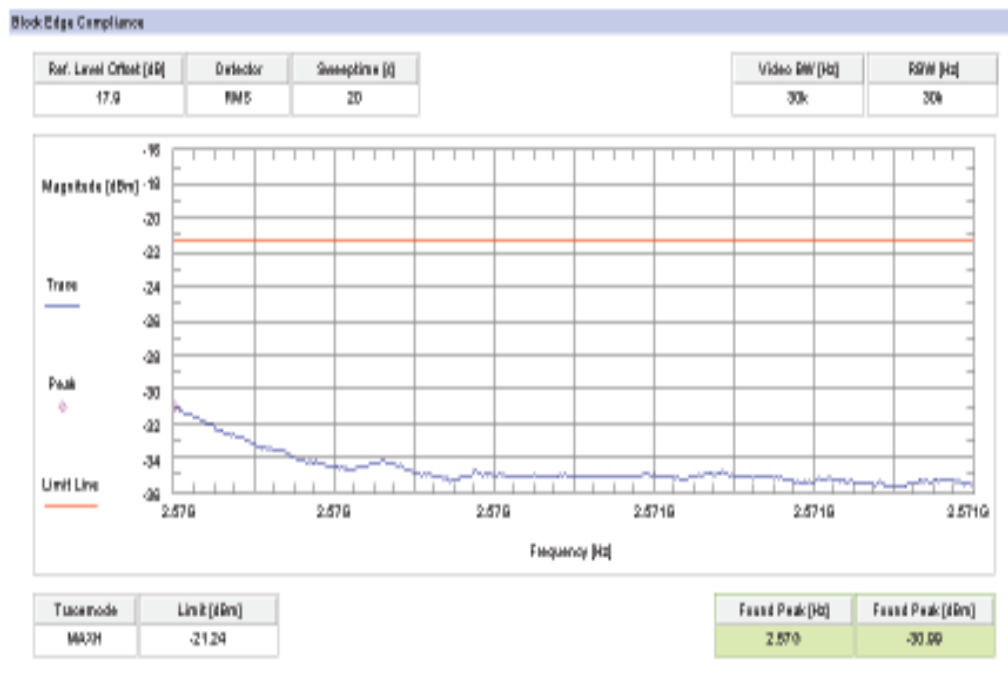


Results: 10 MHz channel bandwidth


Plot 1: Lowest channel, QPSK modulation

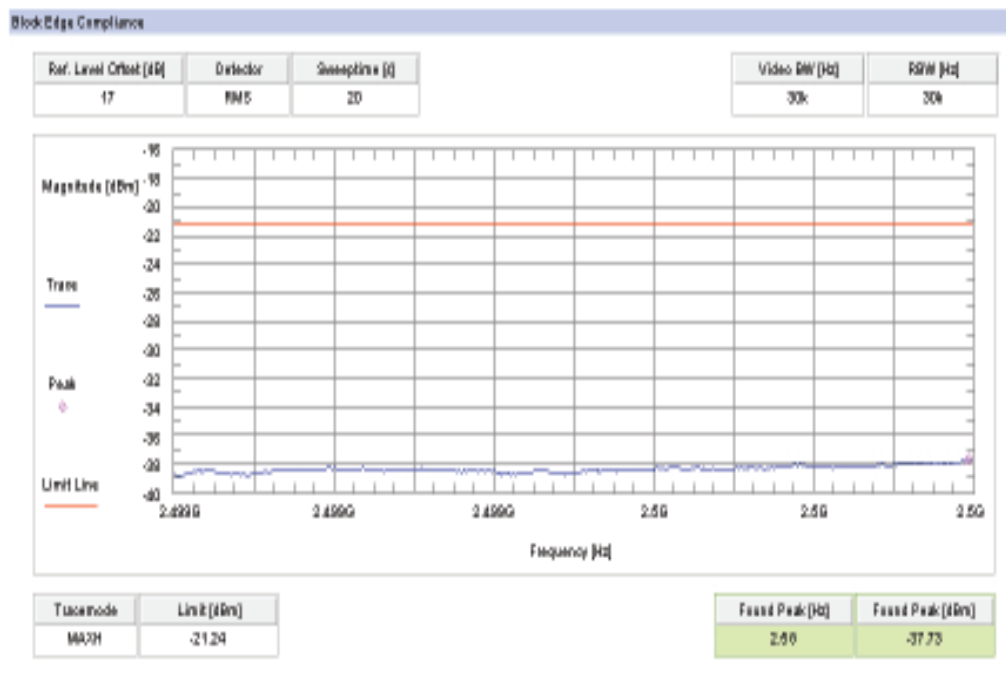


Plot 2: Highest channel, QPSK modulation

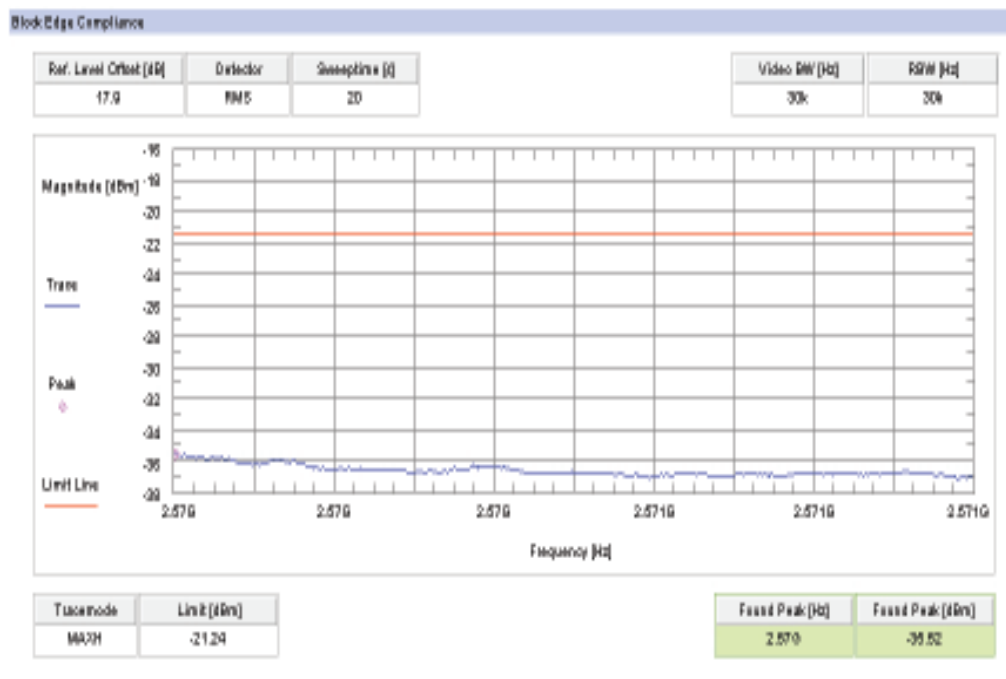

Plot 3: Lowest channel, 16 – QAM modulation

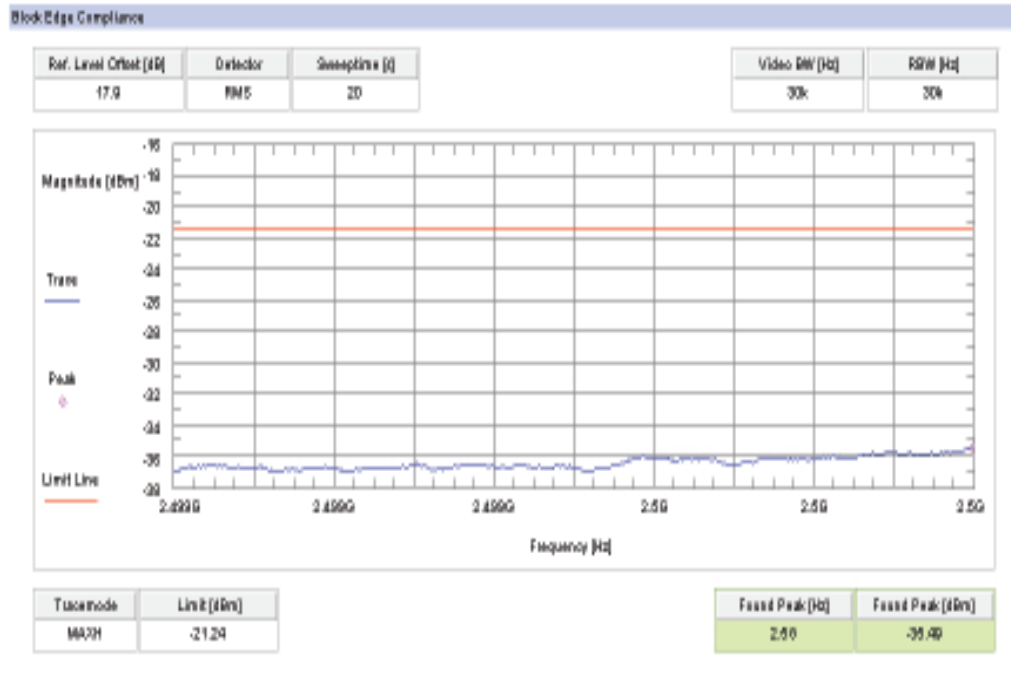


Plot 4: Highest channel, 16 – QAM modulation

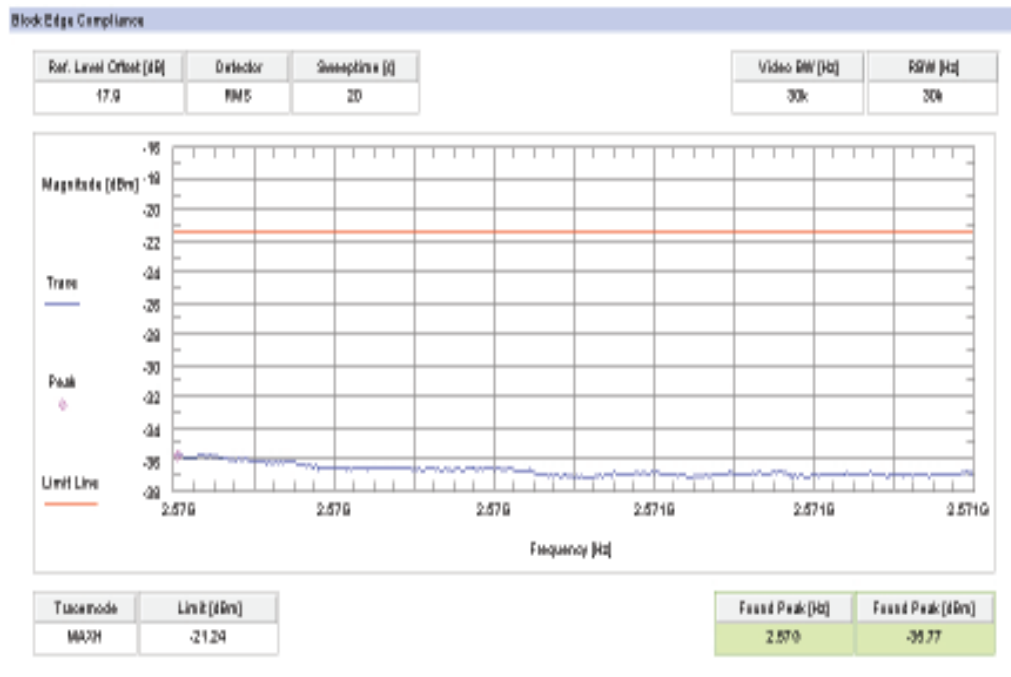


Results: 15 MHz channel bandwidth


Plot 1: Lowest channel, QPSK modulation

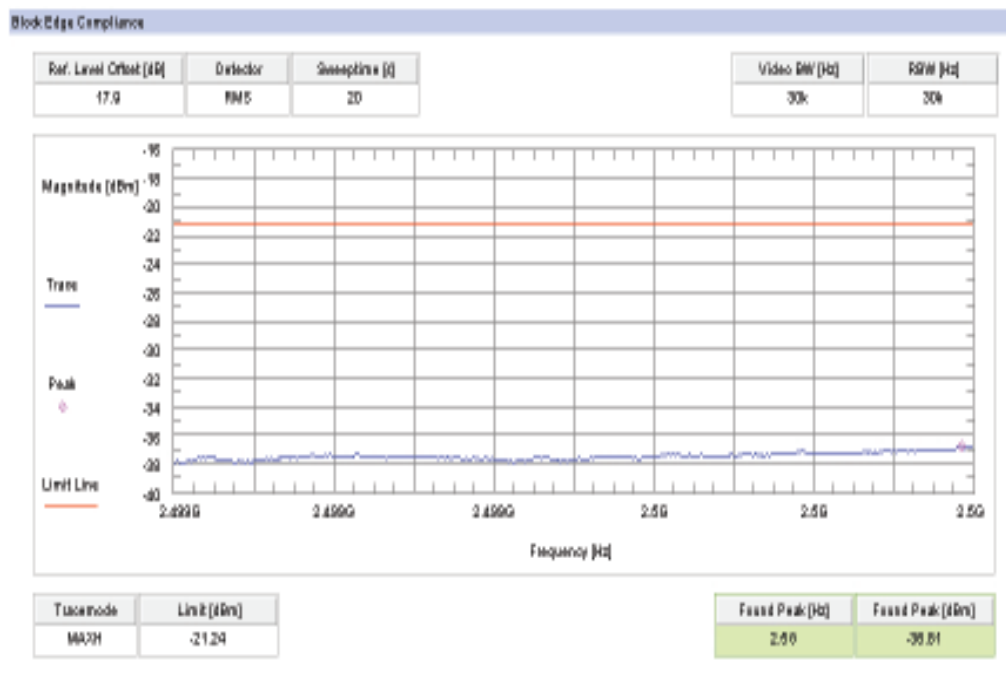

Plot 2: Highest channel, QPSK modulation

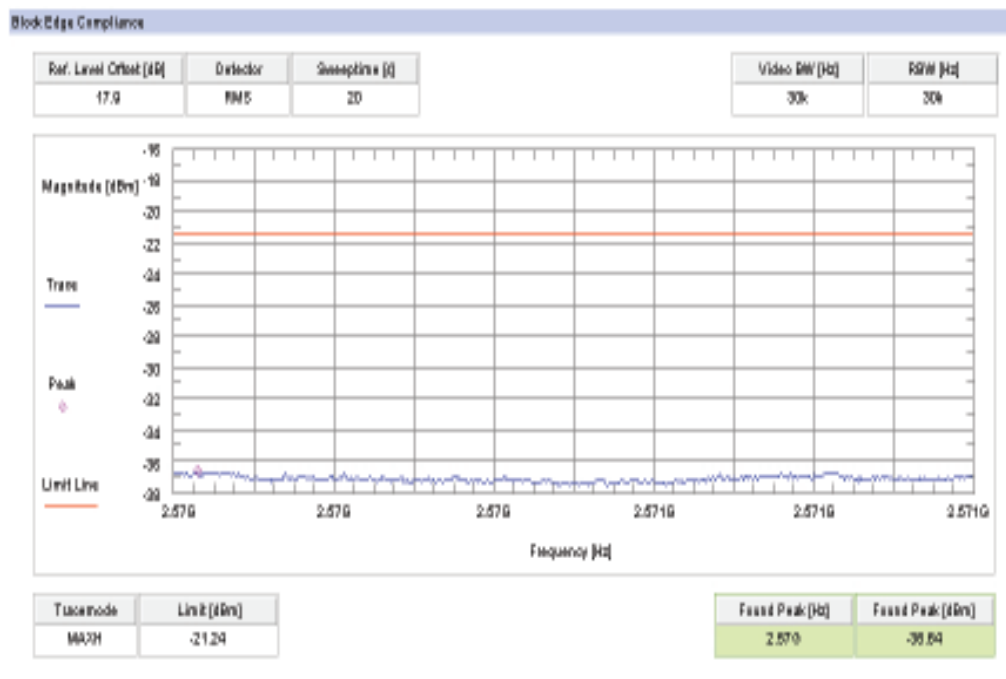

Plot 3: Lowest channel, 16 – QAM modulation

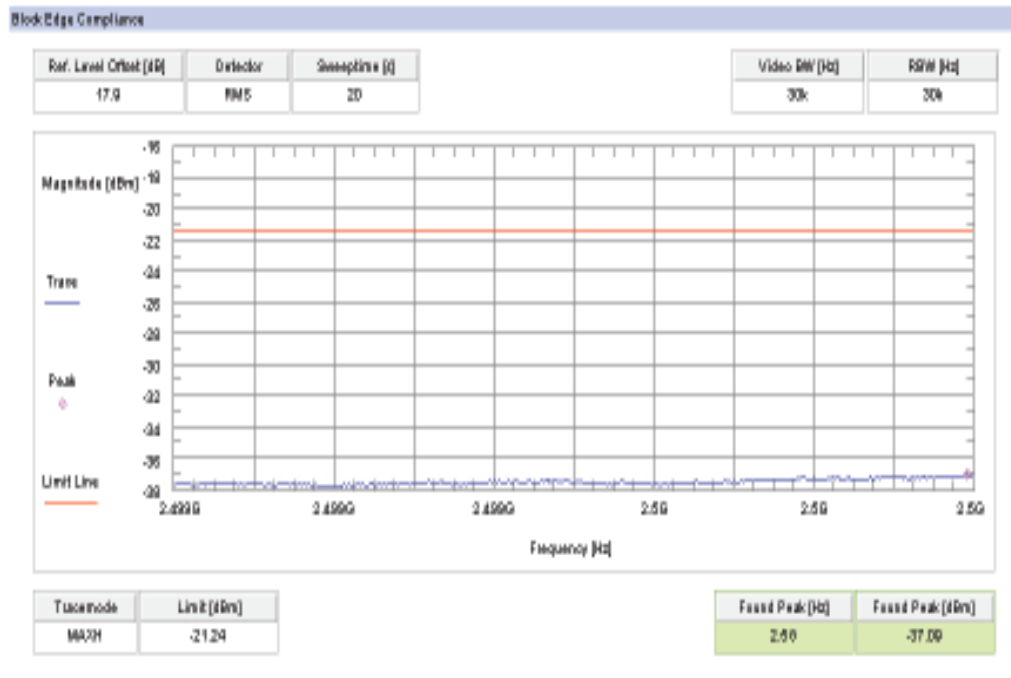


Plot 4: Highest channel, 16 – QAM modulation



Results: 20 MHz channel bandwidth


Plot 1: Lowest channel, QPSK modulation

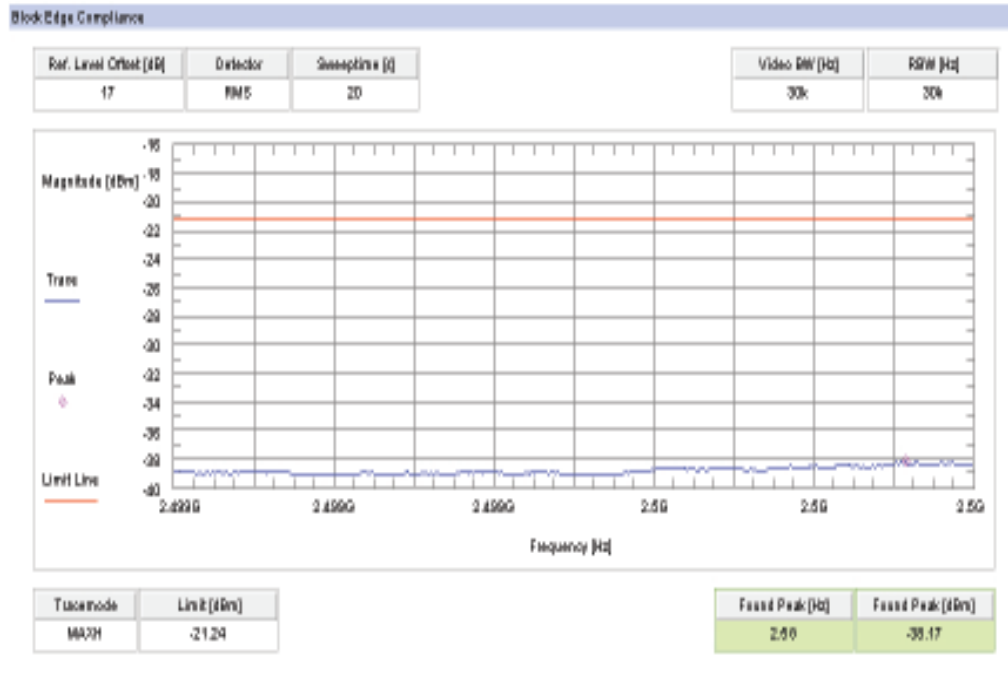

Plot 2: Highest channel, QPSK modulation



Plot 3: Lowest channel, 16 – QAM modulation

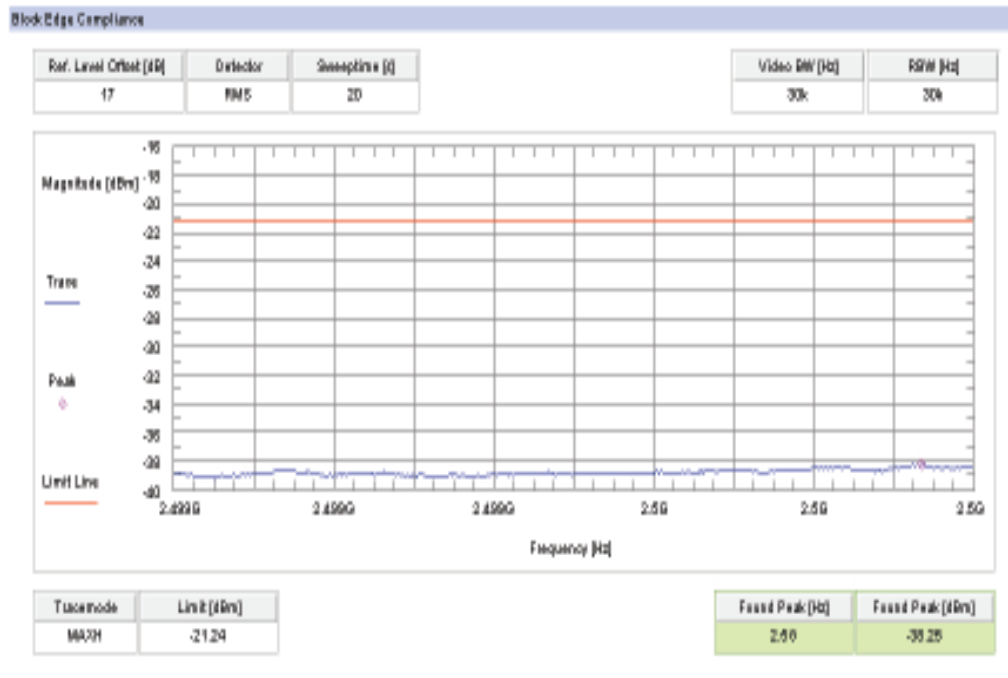

Plot 4: Highest channel, 16 – QAM modulation



Result: Passed

8.4.6 Occupied bandwidth

Description:

Measurement of the occupied bandwidth of the transmitted signal.

Measurement:

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the mid frequencies of the LTE band 4 frequency band. The table below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Part 27.53 requires a measurement bandwidth of at least 1% of the occupied bandwidth.

Measurement parameters	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	Depends on Channel Bandwidth
Resolution bandwidth:	Depends on Channel Bandwidth
Span:	Depends on Channel Bandwidth
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 27.53(h) CFR Part 2.1049	RSS 199
Occupied Bandwidth	
Spectrum must fall completely in the specified band	

Results:


Occupied Bandwidth - QPSK		
Bandwidth [MHz]	99% OBW (kHz)	Measurement uncertainty
5	4529	100 kHz
10	9138	300 kHz
15	13466	300 kHz
20	18116	500 kHz

Occupied Bandwidth – 16-QAM		
Bandwidth [MHz]	99% OBW (kHz)	Measurement uncertainty
5	4549	100 kHz
10	9138	300 kHz
15	13527	300 kHz
20	18116	500 kHz


Result: [Passed](#)

Plots: QPSK


Plot 1: 5 MHz, 99% OBW

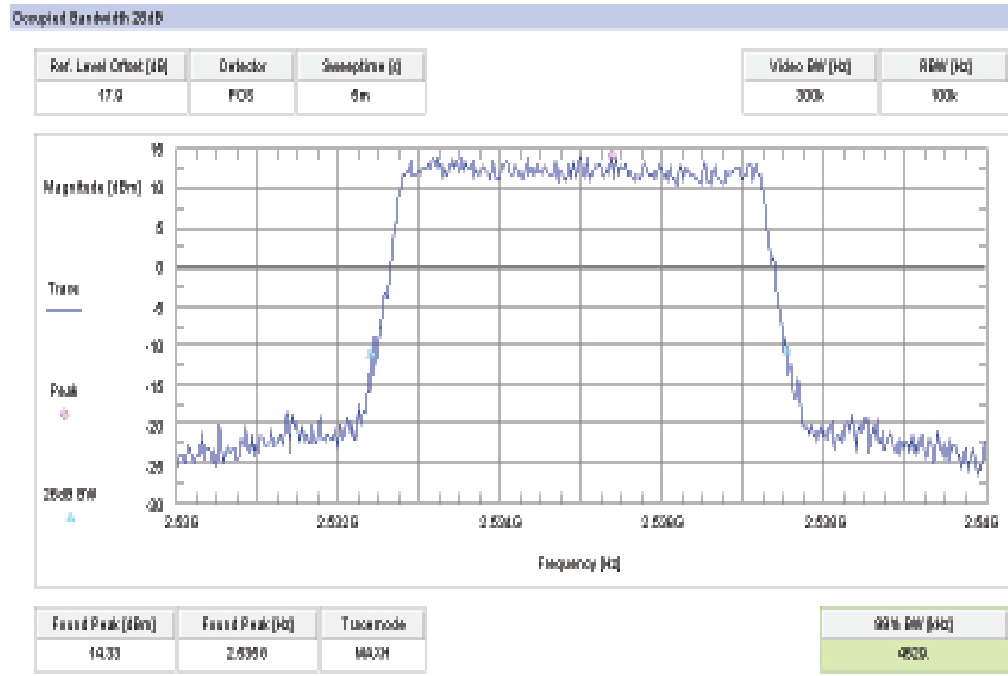


Plot 2: 10 MHz, 99% OBW

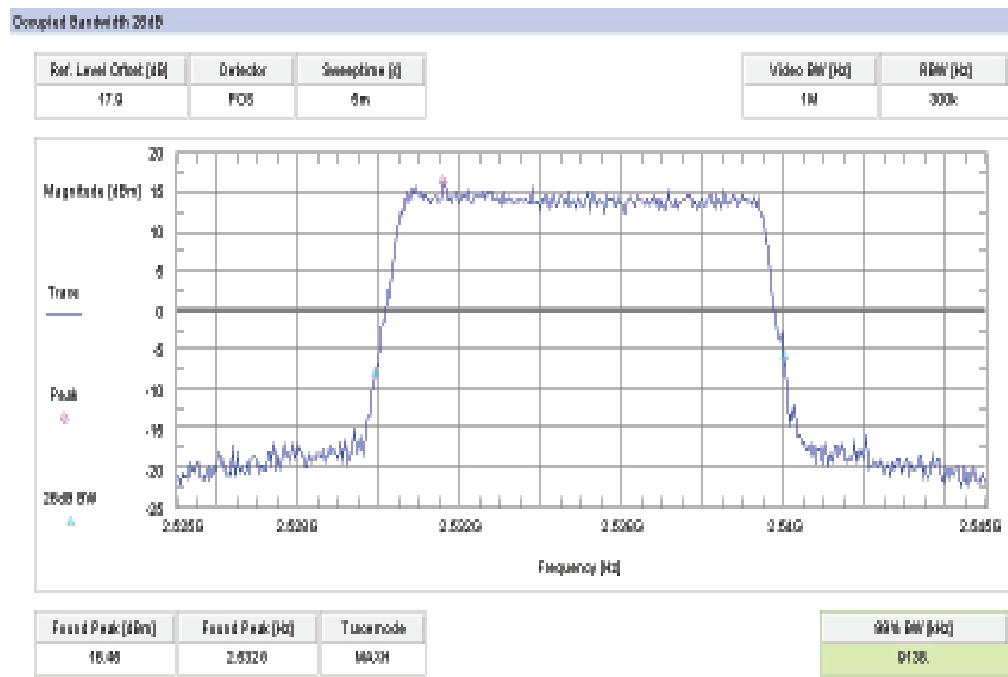

Plot 3: 15 MHz, 99% OBW

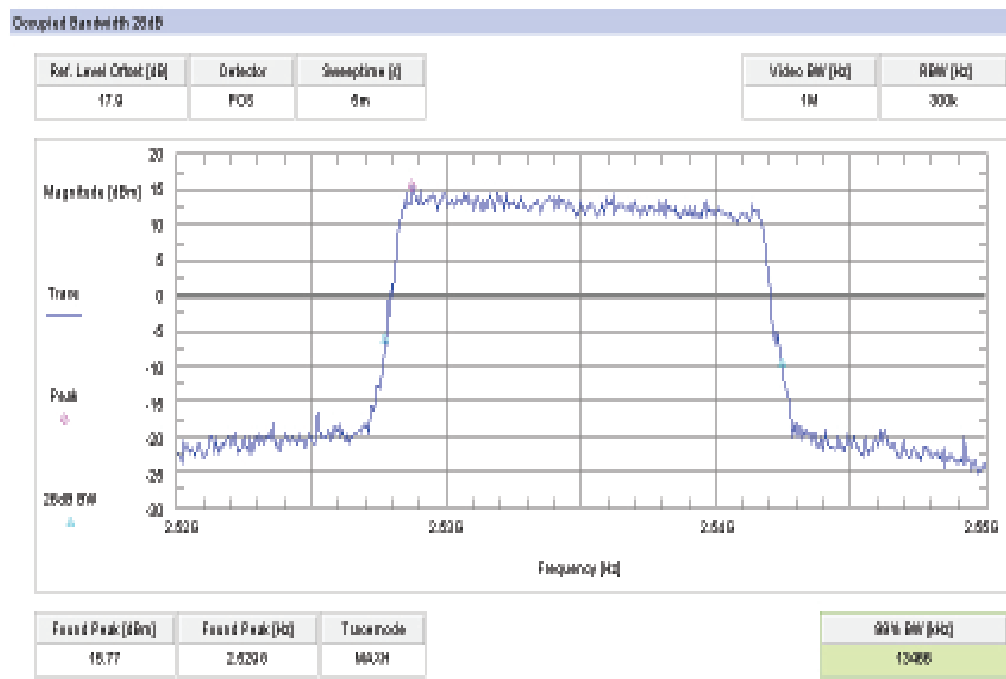


Plot 4: 20 MHz, 99% OBW

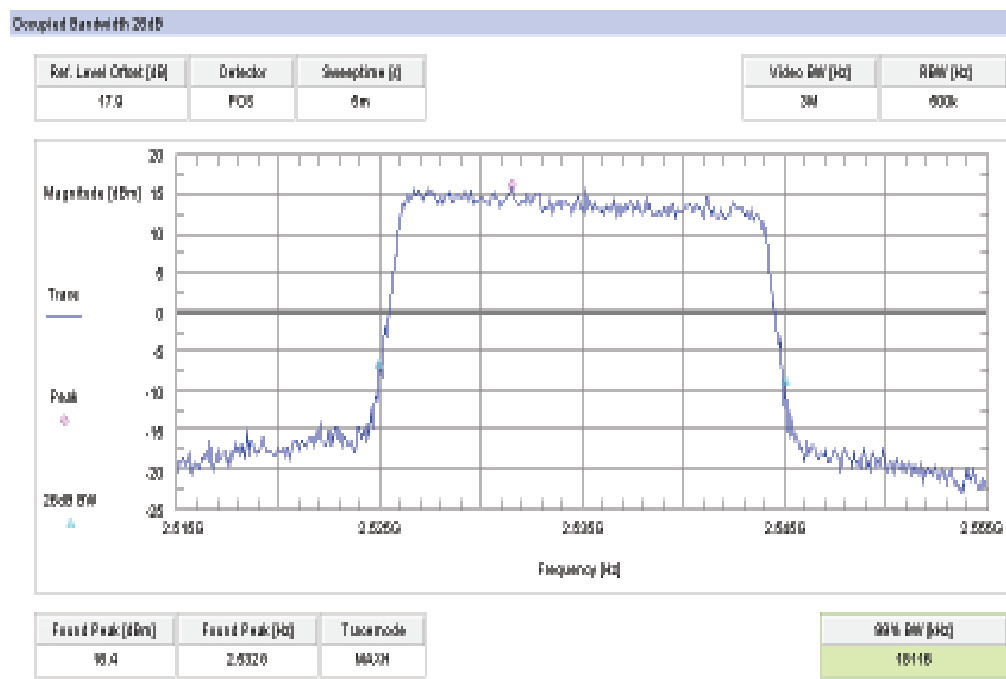


Plots: 16-QAM


Plot 1: 5 MHz, 99% OBW

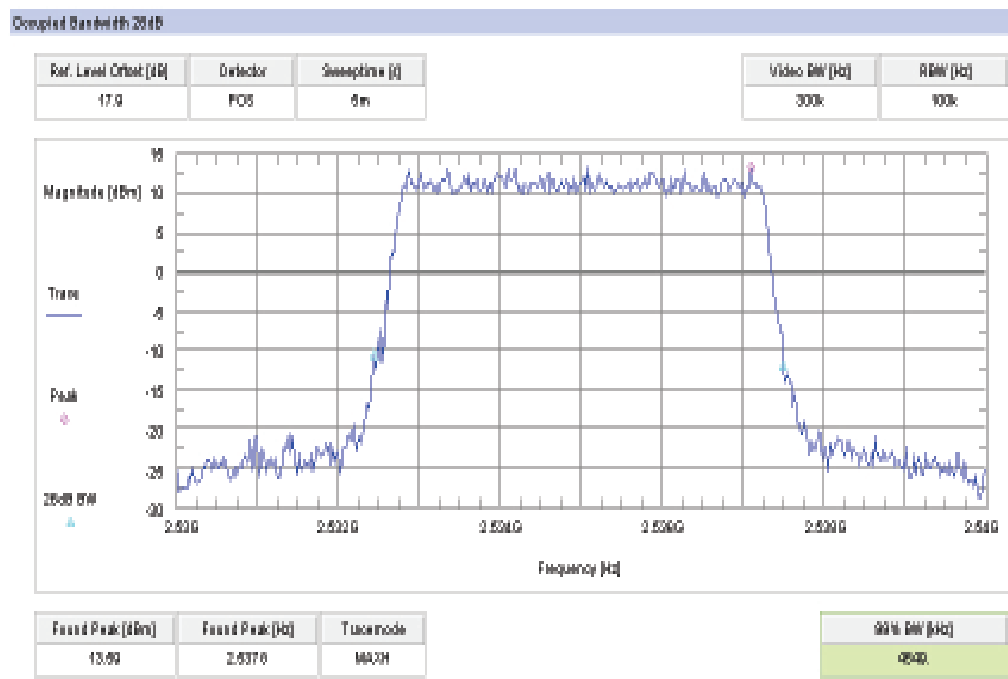


Plot 2: 10 MHz, 99% OBW

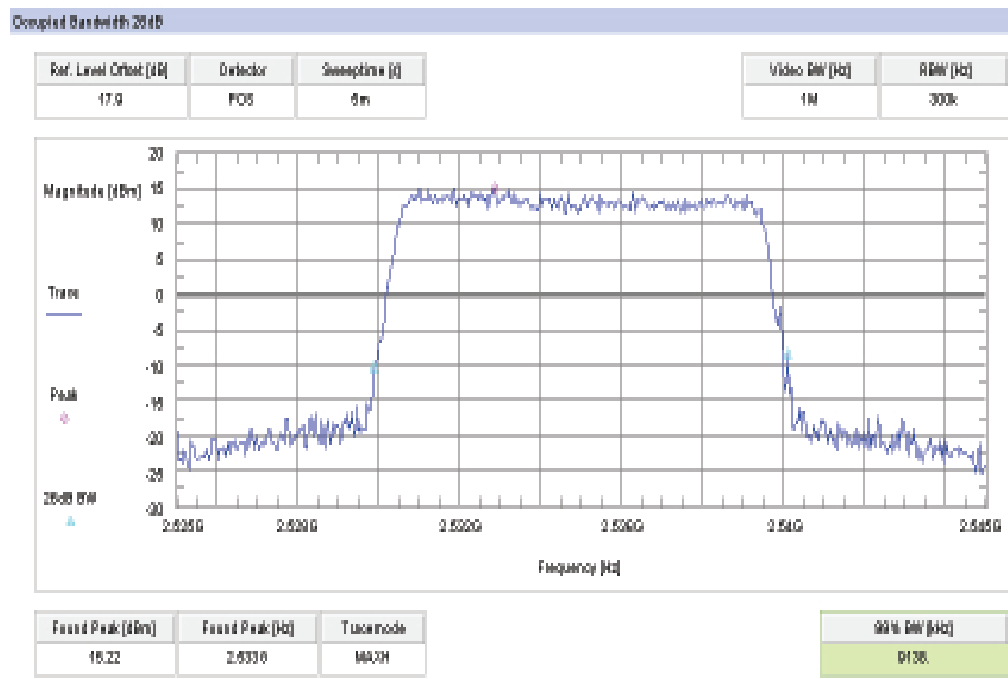

Plot 3: 15 MHz, 99% OBW

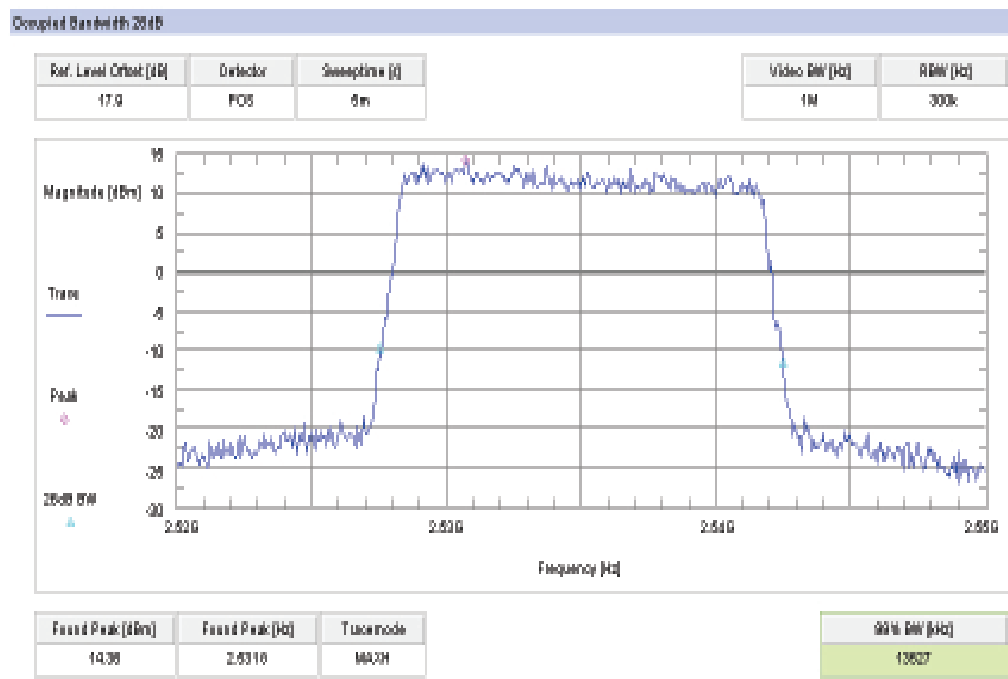

Plot 4: 20 MHz, 99% OBW

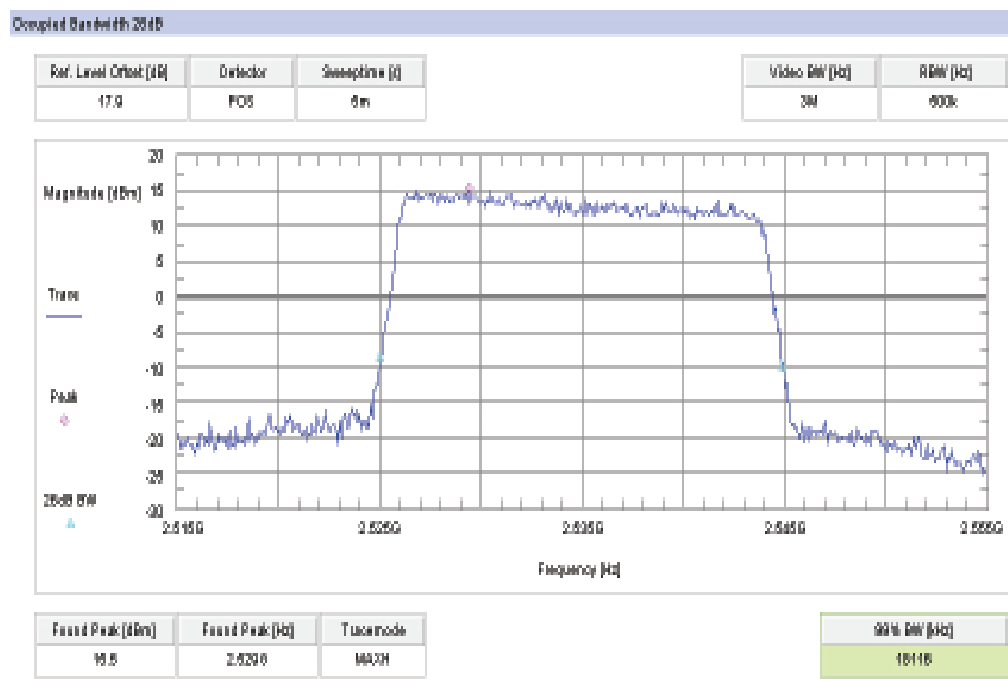

9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vkI!	11.05.2011	11.05.2013
2	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
3	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
4	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
5	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
6	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vkI!	14.10.2011	14.10.2014
7	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	21.02.2013	21.02.2014
8	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
9	A025	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000786	ne		
10	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000787	ne		
11	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	Ve	09.10.2012	09.10.2014
12	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2605e08770	300001443	ne		
13	n. a.	Signal Analyzer 20Hz-26,5GHz-150 to + 30 DBM	FSiQ26	R&S	835111/0004	300002678	Ve	15.01.2013	15.01.2015
14	n. a.	Power Supply 0-20V; 0-5A	6632B	HP	US37478366	400000117	vkI!	20.08.2012	20.08.2014
15	n. a.	Wideband Radio Communication Tester	CMW500	R&S	102375	300004187_0	k	18.01.2013	18.01.2015

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vkI!	Attention: extended calibration interval	*	next calibration ordered / currently in progress
NK!	Attention: not calibrated		

10 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
1.0	Initial release	2013-04-13

Annex B Further information

Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate

Front side of certificate



Back side of certificate



Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>