

TEST REPORT

Test report no.: 1-5831/13-10-02



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 1 08 00 24 41
Contact: Fredrik Björk
e-mail: Fredrik.Bjork@sonymobile.com
Phone: +46 1 08 01 46 75
Mobile: +46 70 32 40 14 0

Manufacturer

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN

Test standard/s

47 CFR Part 22 Title 47 of the Code of Federal Regulations; Chapter I
Part 22 - Public mobile services
47 CFR Part 24 Title 47 of the Code of Federal Regulations; Chapter I
Part 24 - Personal communications services

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Tablet PC GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VIII; LTE FDD1/3/5/7/8/20; WLAN a/b/g/n; BT 3.1; RFID; FM Rx; A-GPS
Model name: SGP321
FCC ID: PY7TM-0030
IC: 4170B-TM0030
Frequency: GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8
UMTS: 826.4 – 846.6 MHz
Technology tested: GSM, UMTS
Antenna: Integrated antenna
Power Supply: 3.7V DC by Li - Ion battery
Temperature Range: -30°C to +60°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

Stefan Bös
Senior Testing Manager

Test performed:

Andreas Luckenbill
Expert

1 Table of contents

| | | |
|---------|--|----|
| 1 | Table of contents | 2 |
| 2 | General information | 3 |
| 2.1 | Notes and disclaimer | 3 |
| 2.2 | Application details..... | 3 |
| 3 | Test standard/s | 3 |
| 4 | Test environment..... | 4 |
| 5 | Test item..... | 4 |
| 5.1 | Additional information | 4 |
| 6 | Test laboratories sub-contracted | 4 |
| 7 | Summary of measurement results | 5 |
| 7.1 | GSM 850..... | 5 |
| 7.2 | PCS 1900 | 5 |
| 7.3 | UMTS band V..... | 6 |
| 8 | RF measurements | 7 |
| 8.1 | Description of test setup | 7 |
| 8.1.1 | Radiated measurements..... | 7 |
| 8.1.2 | Conducted measurements..... | 8 |
| 8.2 | RSP100 test report cover sheet / performance test data | 9 |
| 8.3 | Results GSM 850 | 10 |
| 8.3.1 | RF output power | 10 |
| 8.3.2 | Frequency stability..... | 12 |
| 8.3.3 | Spurious emissions radiated | 15 |
| 8.3.4 | Spurious emissions conducted..... | 18 |
| 8.3.5 | Block edge compliance..... | 22 |
| 8.3.6 | Occupied bandwidth | 25 |
| 8.4 | Results PCS 1900 | 30 |
| 8.4.1 | RF output power | 30 |
| 8.4.2 | Frequency stability..... | 32 |
| 8.4.3 | Spurious emissions radiated | 35 |
| 8.4.4 | Spurious emissions conducted..... | 39 |
| 8.4.5 | Block edge compliance..... | 43 |
| 8.4.6 | Occupied bandwidth | 46 |
| 8.5 | Results UMTS band V | 51 |
| 8.5.1 | RF output power | 51 |
| 8.5.2 | Frequency stability..... | 53 |
| 8.5.3 | Spurious emissions radiated | 56 |
| 8.5.4 | Spurious emissions conducted..... | 59 |
| 8.5.5 | Block edge compliance..... | 63 |
| 8.5.6 | Occupied bandwidth | 65 |
| 9 | Test equipment and ancillaries used for tests | 69 |
| 10 | Observations | 70 |
| Annex A | Document history | 71 |
| Annex B | Further information..... | 71 |
| Annex C | Accreditation Certificate | 72 |

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

| | |
|------------------------------------|------------|
| Date of receipt of order: | 2013-01-30 |
| Date of receipt of test item: | 2013-04-01 |
| Start of test: | 2013-04-01 |
| End of test: | 2013-04-09 |
| Person(s) present during the test: | -/- |

3 Test standard/s

| Test standard | Date | Test standard description |
|-------------------|---------|---|
| 47 CFR Part 22 | 2010-10 | Title 47 of the Code of Federal Regulations; Chapter I Part 22 - Public mobile services |
| 47 CFR Part 24 | 2010-10 | Title 47 of the Code of Federal Regulations; Chapter I Part 24 - Personal communications services |
| RSS - 132 Issue 3 | 2013-01 | Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz |
| RSS - 133 Issue 6 | 2013-01 | Spectrum Management and Telecommunications Policy - Radio Standards Specifications 2 GHz Personal Communication Services |

4 Test environment

| | | |
|----------------------------|-----------|---------------------------------------|
| Temperature: | T_{nom} | +22 °C during room temperature tests |
| | T_{max} | +60 °C during high temperature tests |
| | T_{min} | -30 °C during low temperature tests |
| Relative humidity content: | | 42 % |
| Barometric pressure: | | not relevant for this kind of testing |
| Power supply: | V_{nom} | 3.7 V DC by Li - Ion battery |
| | V_{max} | 4.4 V |
| | V_{min} | 3.3 V |

5 Test item

| | | |
|----------------------|---|--|
| Kind of test item | : | Tablet PC GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VIII; LTE FDD1/3/5/7/8/20; WLAN a/b/g/n; BT 3.1; RFID; FM Rx; A-GPS |
| Type identification | : | SGP321 |
| S/N serial number | : | Rad. CB5A1NY06E / CB5A1NY06U Cond. CB5A1NY06A / CB5A1NY06M |
| HW hardware status | : | AP1 |
| SW software status | : | 10.1.1.A.1.11 |
| Frequency band [MHz] | : | GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 UMTS: 826.4 – 846.6 MHz |
| Type of modulation | : | GMSK, 8-PSK, QPSK |
| Antenna | : | Integrated antenna |
| Power supply | : | 3.7 V DC by Li - Ion battery |
| Temperature range | : | -30°C to +60 °C |

5.1 Additional information

Test setup- and EUT-photos are included in test report:

1-5831/13-10-01_AnnexA
1-5831/13-10-01_AnnexB
1-5831/13-10-01_AnnexC

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

| TC identifier | Description | verdict | date | Remark |
|---------------|---------------------------------|---------|------------|--------|
| RF-Testing | CFR Part 22, 24 RSS 132, 133 | passed | 2013-04-09 | -/- |

7.1 GSM 850

| Test Case | temperature conditions | power source voltages | Pass | Fail | NA | NP | Remark |
|------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--------|
| RF Output Power | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Frequency Stability | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Spurious Emissions Radiated | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Spurious Emissions Conducted | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Block Edge Compliance | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Occupied Bandwidth | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |

Note: NA = Not applicable; NP = Not performed

7.2 PCS 1900

| Test Case | temperature conditions | power source voltages | Pass | Fail | NA | NP | Remark |
|------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--------|
| RF Output Power | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Frequency Stability | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Spurious Emissions Radiated | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Spurious Emissions Conducted | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Block Edge Compliance | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Occupied Bandwidth | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |

Note: NA = Not applicable; NP = Not performed

7.3 UMTS band V

| Test Case | temperature conditions | power source voltages | Pass | Fail | NA | NP | Remark |
|------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--------|
| RF Output Power | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Frequency Stability | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Spurious Emissions Radiated | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Spurious Emissions Conducted | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Block Edge Compliance | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| Occupied Bandwidth | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |

Note: NA = Not applicable; NP = Not performed

8 RF measurements


8.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

8.1.1 Radiated measurements

The radiated emissions from the EUT are performed in a semi anechoic chamber. The EUT is placed on a conductive turntable and powered with nominal voltage. The signalling is performed either from outside the chamber with a signalling unit (AP or other) by air link using a signalling antenna or directly by special test software from the customer.

Semi anechoic chamber

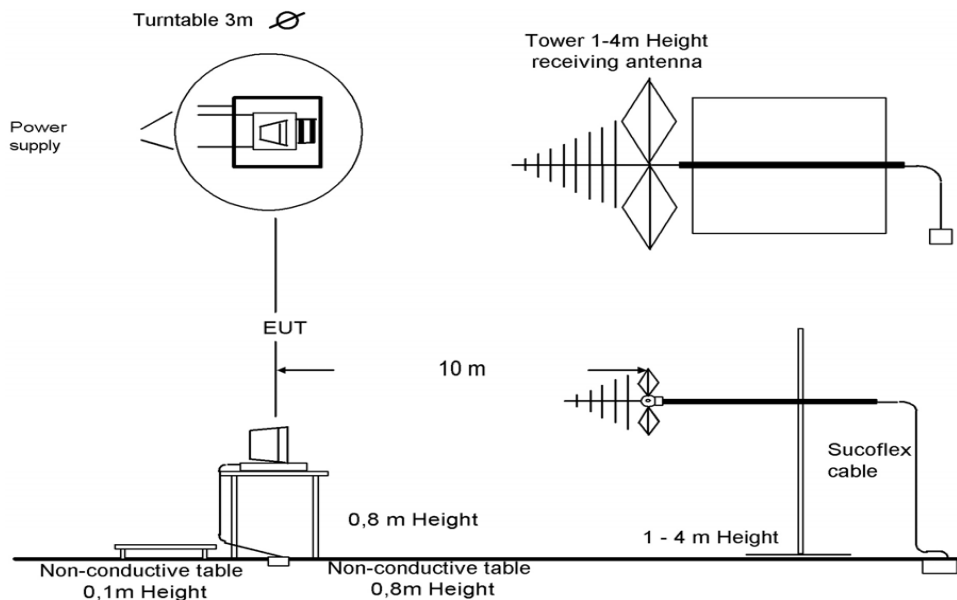


Picture 1: Diagram radiated measurements

| | |
|-----------------|---------------------|
| 9 kHz - 30 MHz: | active loop antenna |
| 30 MHz – 1 GHz: | tri-log antenna |
| > 1 GHz: | horn antenna |

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the signalling unit (AP or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm. If special software is used, there is no power divider necessary.

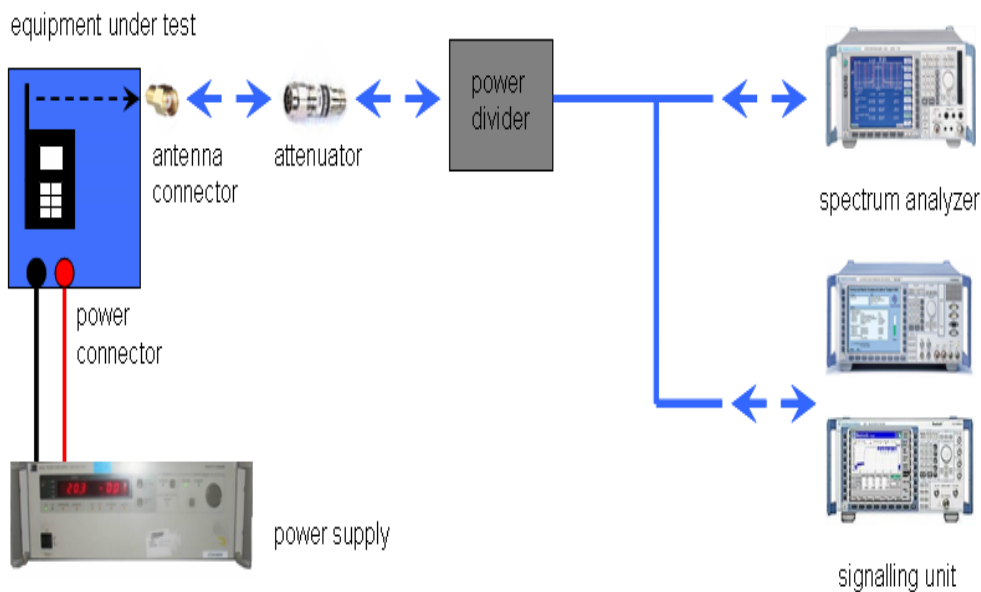

Picture 2: Diagram conducted measurements

The term measuring receiver refers to either a selective voltmeter or a spectrum analyser.

| Frequency being measured f | Measuring receiver bandwidth 6 dB | Spectrum analyser bandwidth 3dB |
|---|--------------------------------------|------------------------------------|
| $f < 150 \text{ kHz}$ | 200 Hz or | 300 Hz |
| $150 \text{ kHz} \leq f < 25 \text{ MHz}$ | 9 kHz or | 10 kHz |
| $25 \text{ MHz} \leq f < 1000 \text{ MHz}$ | 120 kHz or | 100 kHz |
| $1000 \text{ MHz} \leq f$ | | 1 MHz |
| NOTE: Specific requirements in CEPT/ERC/Recommendation 70-03 [2] shall be applied where applicable. | | |

8.2 RSP100 test report cover sheet / performance test data

| | | | | | |
|---|----------|--|-----------|------------|-------|
| Test Report Number | : | 1-5831/13-10-02 | | | |
| Equipment Model Number | : | SGP321 | | | |
| Certification Number | : | 4170B-TM0030 | | | |
| Manufacturer (complete Address) | : | Sony Mobile Communications AB Nya Vattentorget 22188 Lund / SWEDEN | | | |
| Tested to radio standards specification no. | : | RSS - 132, RSS - 133 | | | |
| Open Area Test Site IC No. | : | IC 3462C-1 | | | |
| Frequency Range | : | GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz UMTS: 826.4 – 846.6 MHz | | | |
| GPS receiver turned | : | Off | | | |
| RF-power [dBm] (max.) | : | Band | Conducted | ERP / EIRP | Mode |
| | | GSM850 | 32.4 dBm | 30.4 dBm | GMSK |
| | | | 26.9 dBm | 24.8 dBm | 8-PSK |
| | | GSM1900 | 29.9 dBm | 31.2 dBm | GMSK |
| | | | 27.0 dBm | 28.0 dBm | 8-PSK |
| WCDMA 850 | 23.7 dBm | 22.0 dBm | QPSK | | |
| Occupied bandwidth (99%-BW) [kHz] | : | GSM850 | 291 | | GMSK |
| | | | 283 | | 8-PSK |
| | | GSM1900 | 281 | | GMSK |
| | | | 279 | | 8-PSK |
| | | WCDMA 850 | 4569 | | QPSK |
| Type of modulation | : | GMSK; 8-PSK; QPSK | | | |
| Emission Designator (TRC-43) | : | GSM850 | 291KGXW | | GMSK |
| | | | 283KG7W | | 8-PSK |
| | | GSM1900 | 281KGXW | | GMSK |
| | | | 279KG7W | | 8-PSK |
| | | WCDMA 850 | 4M57F9W | | QPSK |
| Antenna Information | : | integrated antenna | | | |
| Transmitter Spurious (worst case) [dBm] | : | -43 dBm @ 2509.2 MHz | | | |

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager:

2013-04-09

Andreas Luckenbill

Date

Name

Signature

8.3 Results GSM 850

All GSM-band measurements are done in GSM mode only (circuit switched).

All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

8.3.1 RF output power

Description:

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

| Measurement parameters | |
|------------------------|-------------------------------|
| Detector: | Peak and RMS (Power in Burst) |
| Sweep time: | Auto |
| Video bandwidth: | 1 MHz |
| Resolution bandwidth: | 1 MHz |
| Span: | Zero Span |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|---|---------|
| CFR Part 22.913 CFR Part 2.1046 | RSS 132 |
| Nominal Peak Output Power | |
| +38.45 dBm | |
| In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. | |

Results:

| Output Power (conducted) GMSK mode | | |
|------------------------------------|----------------------------|----------------------------|
| Frequency (MHz) | Average Output Power (dBm) | Peak to Average Ratio (dB) |
| 824.2 | 32.4 | 0.54 |
| 836.4 | 32.2 | 0.31 |
| 848.8 | 31.9 | 0.26 |
| Measurement uncertainty | ± 0.5 dB | |

| Output Power (conducted) 8-PSK mode | | |
|-------------------------------------|----------------------------|----------------------------|
| Frequency (MHz) | Average Output Power (dBm) | Peak to Average Ratio (dB) |
| 824.2 | 26.9 | 3.17 |
| 836.4 | 26.8 | 2.94 |
| 848.8 | 26.3 | 3.33 |
| Measurement uncertainty | ± 0.5 dB | |

| Output Power (radiated) GMSK mode | |
|-----------------------------------|----------------------------------|
| Frequency (MHz) | Average Output Power (dBm) - ERP |
| 824.2 | 30.0 |
| 836.4 | 30.0 |
| 848.8 | 30.4 |
| Measurement uncertainty | ± 2.0 dB |

| Output Power (radiated) 8-PSK mode | |
|------------------------------------|----------------------------------|
| Frequency (MHz) | Average Output Power (dBm) - ERP |
| 824.2 | 24.5 |
| 836.4 | 24.6 |
| 848.8 | 24.8 |
| Measurement uncertainty | ± 2.0 dB |

Result: Passed

8.3.2 Frequency stability

Description:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU200 DIGITAL RADIOCOMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with V_{nom} , connected to the CMU200 and in a simulated call on channel 189 (centre channel), measure the carrier frequency. These measurements should be made within two minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10°C increments from -30°C to +60°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with V_{nom} . Vary supply voltage from V_{min} to V_{max} , in 0.1 Volt steps remeasuring carrier frequency at each voltage. Pause at V_{nom} for 1.5 hours unpowered, to allow any self heating to stabilize, before continuing.
6. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Measurement:

| Measurement parameters | |
|------------------------|----------------------|
| Detector: | Measured with CMU200 |
| Sweep time: | |
| Video bandwidth: | |
| Resolution bandwidth: | |
| Span: | |
| Trace-Mode: | |

Limits:

| FCC | IC |
|------------------------------------|---------|
| CFR Part 22.355 CFR Part 2.1055 | RSS 132 |
| Frequency Stability | |
| ± 2.5 ppm | |


Results:**AFC FREQ ERROR versus VOLTAGE**

| Voltage (V) | Frequency Error (Hz) | Frequency Error (%) | Frequency Error (ppm) |
|-------------|----------------------|---------------------|-----------------------|
| 3.3 | -11 | -0.00000132 | -0.0132 |
| 3.4 | -11 | -0.00000132 | -0.0132 |
| 3.5 | -8 | -0.00000096 | -0.0096 |
| 3.6 | -13 | -0.00000155 | -0.0155 |
| 3.7 | -17 | -0.00000203 | -0.0203 |
| 3.8 | -9 | -0.00000108 | -0.0108 |
| 3.9 | -11 | -0.00000132 | -0.0132 |
| 4.0 | -18 | -0.00000215 | -0.0215 |
| 4.1 | -13 | -0.00000155 | -0.0155 |
| 4.2 | -16 | -0.00000191 | -0.0191 |
| 4.3 | -9 | -0.00000108 | -0.0108 |
| 4.4 | -17 | -0.00000203 | -0.0203 |


AFC FREQ ERROR versus TEMPERATURE

| Temperature (°C) | Frequency Error (Hz) | Frequency Error (%) | Frequency Error (ppm) |
|------------------|----------------------|---------------------|-----------------------|
| -30 | 10 | 0.00000120 | 0.0120 |
| -20 | -10 | -0.00000120 | -0.0120 |
| -10 | 9 | 0.00000108 | 0.0108 |
| ± 0 | -5 | -0.00000060 | -0.0060 |
| 10 | 13 | 0.00000155 | 0.0155 |
| 20 | -8 | -0.00000096 | -0.0096 |
| 30 | 11 | 0.00000132 | 0.0132 |
| 40 | 9 | 0.00000108 | 0.0108 |
| 50 | -12 | -0.00000143 | -0.0143 |
| 60 | -17 | -0.00000203 | -0.0203 |

Frequency Error vs. Voltage

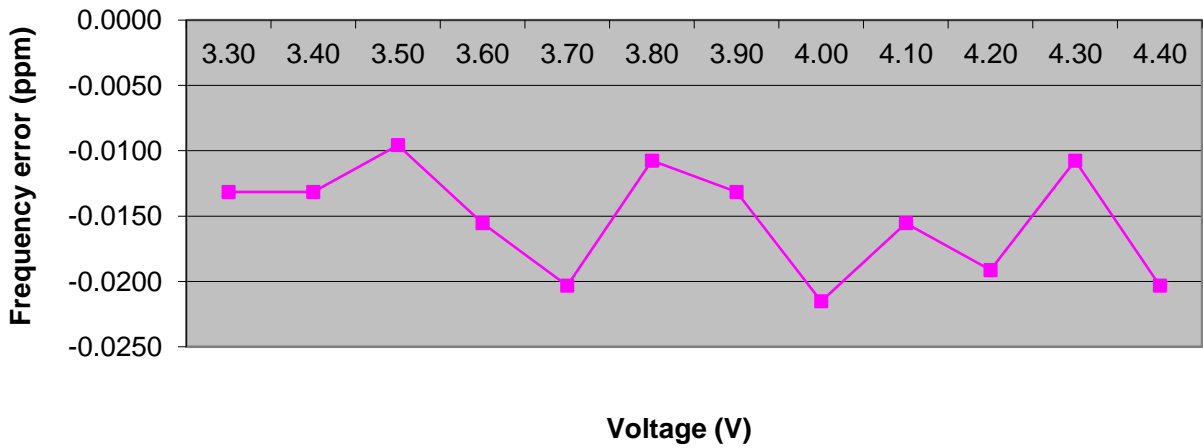

Frequency Error vs. Temperature

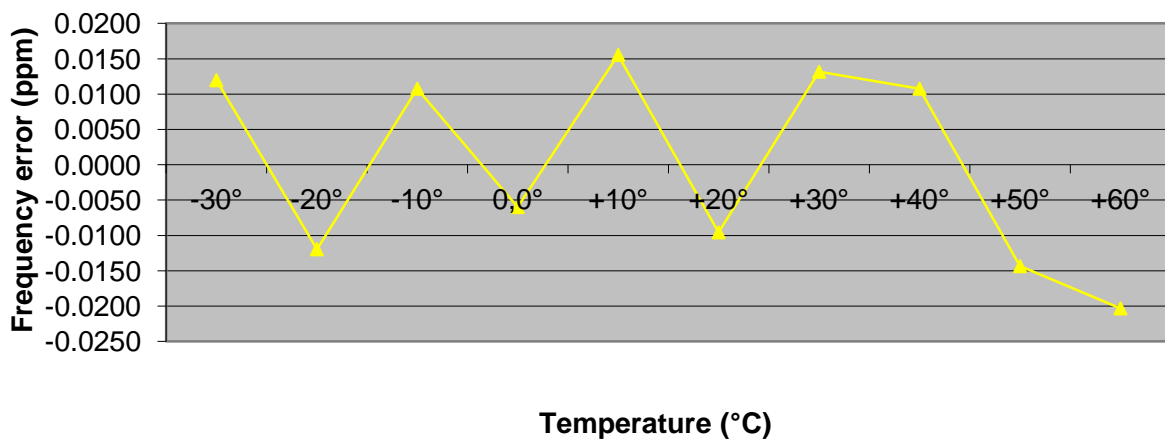

Result: Passed

8.3.3 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the GSM-850 band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

Measurement:

| Measurement parameters | |
|------------------------|--|
| Detector: | Peak |
| Sweep time: | 2 sec. |
| Video bandwidth: | Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz |
| Resolution bandwidth: | Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz |
| Span: | 100 MHz Steps |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|--|---------|
| CFR Part 22.917 CFR Part 2.1053 | RSS 132 |
| Spurious Emissions Radiated | |
| Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts) | |
| -13 dBm | |

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the GSM-850 band (824.2 MHz, 836.4 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

| SPURIOUS EMISSION LEVEL (dBm) | | | | | | | | |
|-------------------------------|------------------------|----------------|----------|------------------------|----------------|----------|------------------------|----------------|
| Harmonic | Ch. 128 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 189 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 251 Freq. (MHz) | Level [dBm] |
| 2 | 1648.4 | - | 2 | 1672.8 | -48 | 2 | 1697.6 | - |
| 3 | 2472.6 | - | 3 | 2509.2 | -43 | 3 | 2546.4 | - |
| 4 | 3296.8 | - | 4 | 3345.6 | - | 4 | 3395.2 | - |
| 5 | 4121.0 | - | 5 | 4182.0 | - | 5 | 4244.0 | - |
| 6 | 4945.2 | - | 6 | 5018.4 | - | 6 | 5092.8 | - |
| 7 | 5769.4 | - | 7 | 5854.8 | - | 7 | 5941.6 | - |
| 8 | 6593.6 | - | 8 | 6691.2 | - | 8 | 6790.4 | - |
| 9 | 7417.8 | - | 9 | 7527.6 | - | 9 | 7639.2 | - |
| 10 | 8242.0 | - | 10 | 8364.0 | - | 10 | 8488.0 | - |
| Measurement uncertainty | | | | | ± 3dB | | | |


Result: Passed

Plots:

Plot 1: Channel 189 (Traffic mode up to 30 MHz)

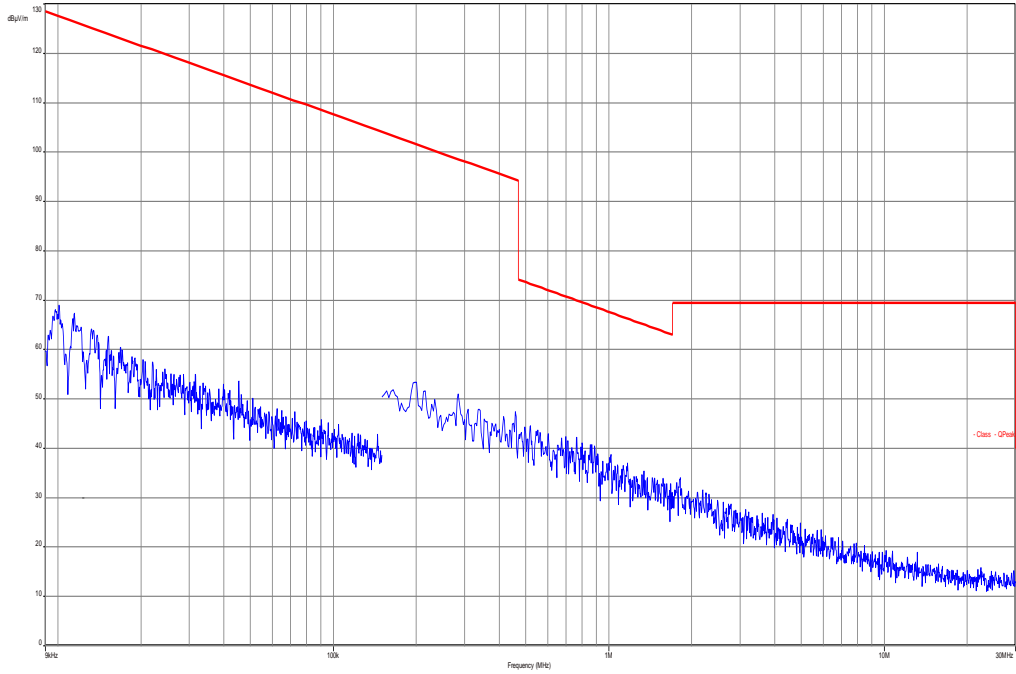

Plot 2: Channel 189 (30 MHz – 12.75 GHz)

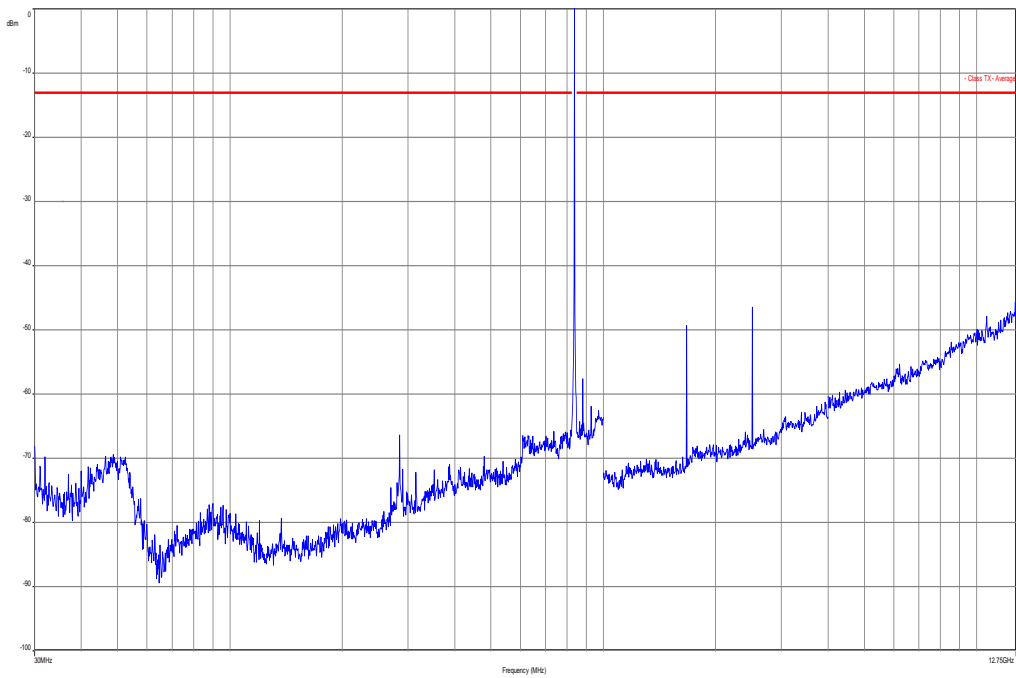

8.3.4 Spurious emissions conducted

Description:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 12 GHz.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM-850 Transmitter Channel Frequency

128 824.2 MHz

189 836.4 MHz

251 848.8 MHz

Measurement:

| Measurement parameters | |
|------------------------|---|
| Detector: | Peak |
| Sweep time: | Auto |
| Video bandwidth: | Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz |
| Resolution bandwidth: | Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz |
| Span: | 30 MHz – 25 GHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|--|---------|
| CFR Part 22.917 CFR Part 2.1051 | RSS 132 |
| Spurious Emissions Conducted | |
| Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts) | |
| -13 dBm | |


Results:

| SPURIOUS EMISSION LEVEL (dBm) | | | | | | | | |
|-------------------------------|------------------------|----------------|----------|------------------------|----------------|----------|------------------------|----------------|
| Harmonic | Ch. 128 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 189 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 251 Freq. (MHz) | Level [dBm] |
| 2 | 1648.4 | - | 2 | 1672.8 | - | 2 | 1697.6 | - |
| 3 | 2472.6 | - | 3 | 2509.2 | - | 3 | 2546.4 | - |
| 4 | 3296.8 | - | 4 | 3345.6 | - | 4 | 3395.2 | - |
| 5 | 4121.0 | - | 5 | 4182.0 | - | 5 | 4244.0 | - |
| 6 | 4945.2 | - | 6 | 5018.4 | - | 6 | 5092.8 | - |
| 7 | 5769.4 | - | 7 | 5854.8 | - | 7 | 5941.6 | - |
| 8 | 6593.6 | - | 8 | 6691.2 | - | 8 | 6790.4 | - |
| 9 | 7417.8 | - | 9 | 7527.6 | - | 9 | 7639.2 | - |
| 10 | 8242.0 | - | 10 | 8364.0 | - | 10 | 8488.0 | - |
| Measurement uncertainty | | | | | ± 3dB | | | |


Result: Passed

Plots:


Plot 1: Channel 128 (10 MHz - 25 GHz)

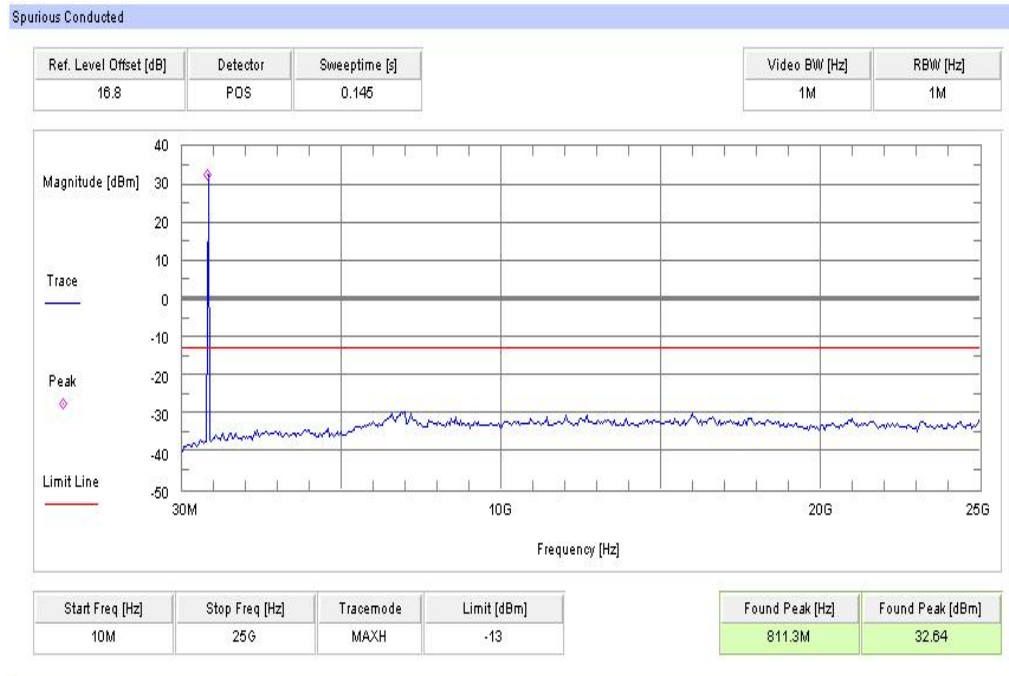

Plot 2: Channel 189 (10 MHz - 25 GHz)

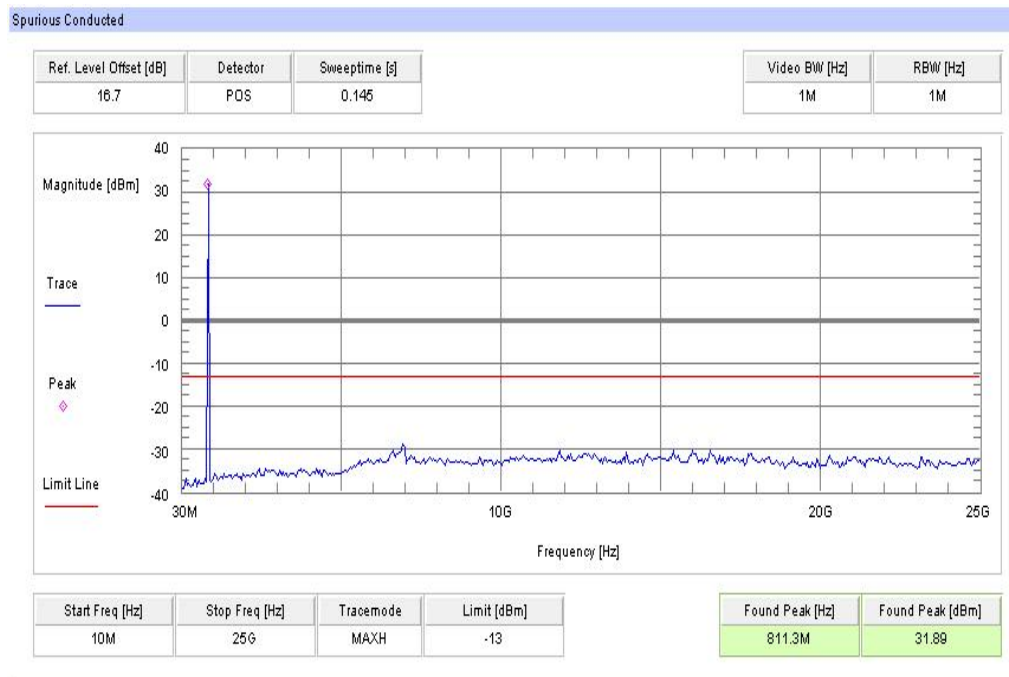

Plot 3: Channel 251 (10 MHz - 25 GHz)

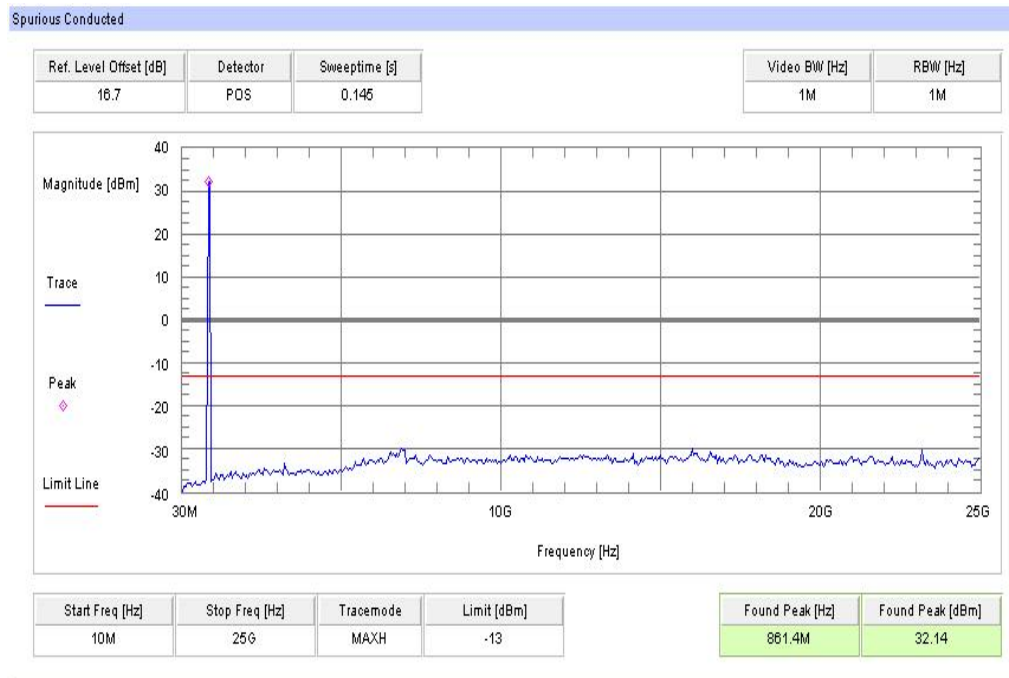

8.3.5 Block edge compliance

Description:

The spectrum at the band edges must comply with the spurious emissions limits.

Measurement:


| Measurement parameters | |
|------------------------|----------|
| Detector: | RMS |
| Sweep time: | Auto |
| Video bandwidth: | 3 kHz |
| Resolution bandwidth: | 3 kHz |
| Span: | 1 MHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|--|---------|
| CFR Part 22.917 CFR Part 2.1051 | RSS 132 |
| Block Edge Compliance | |
| Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts) | |
| -13 dBm | |

Plots:


Plot 1: Channel 128 (GSM-mode)

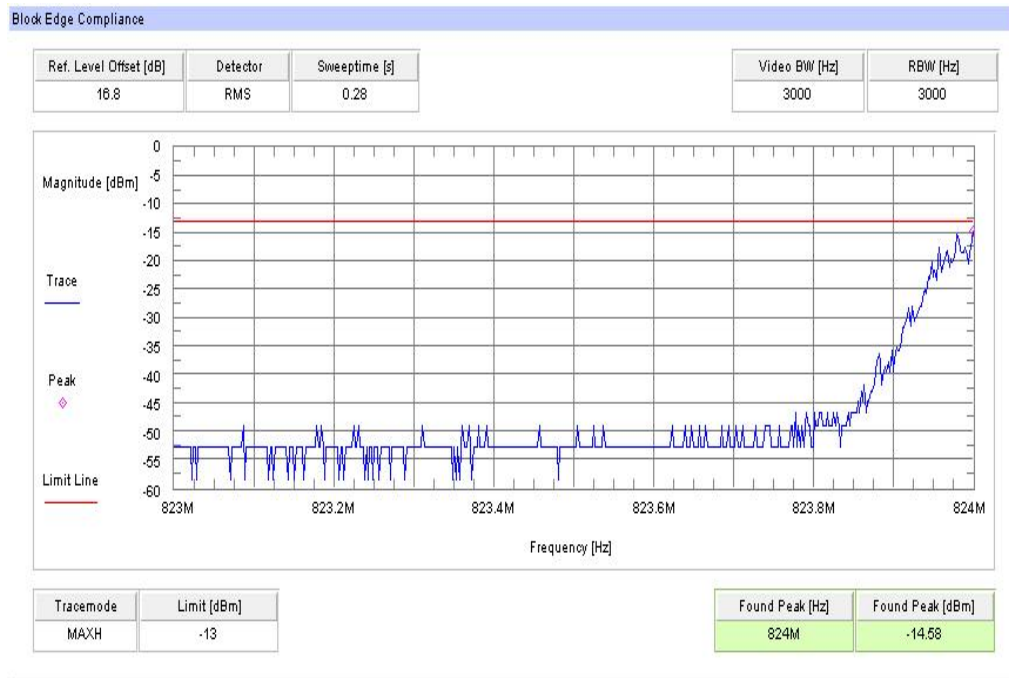


Plot 2: Channel 251 (GSM-mode)



Plot 3: Channel 128 (EDGE-mode)

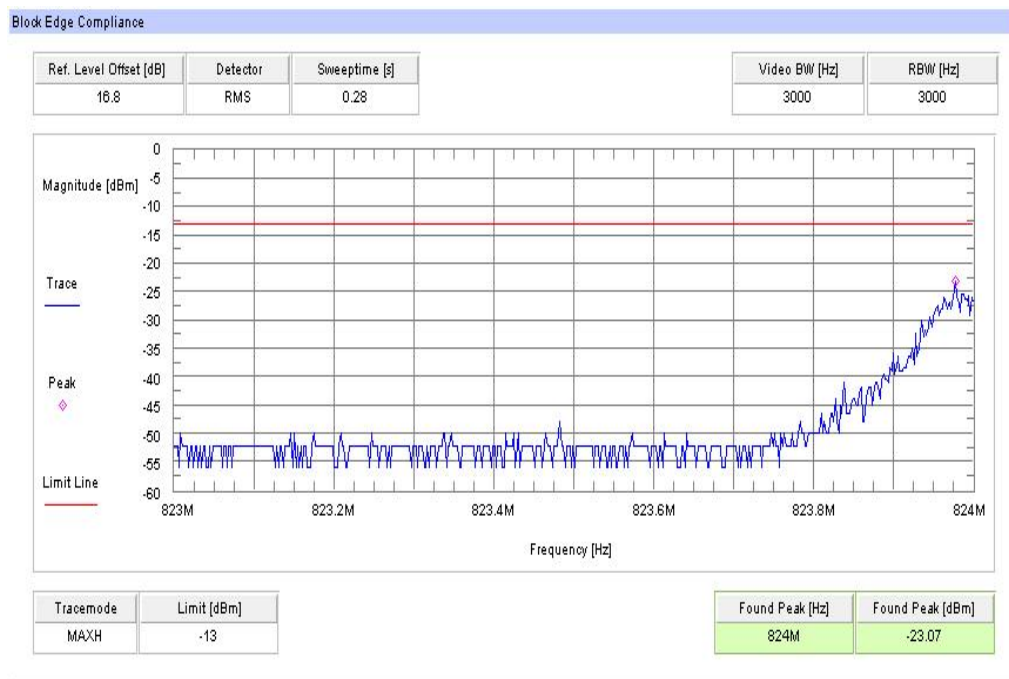

Plot 4: Channel 251 (EDGE-mode)

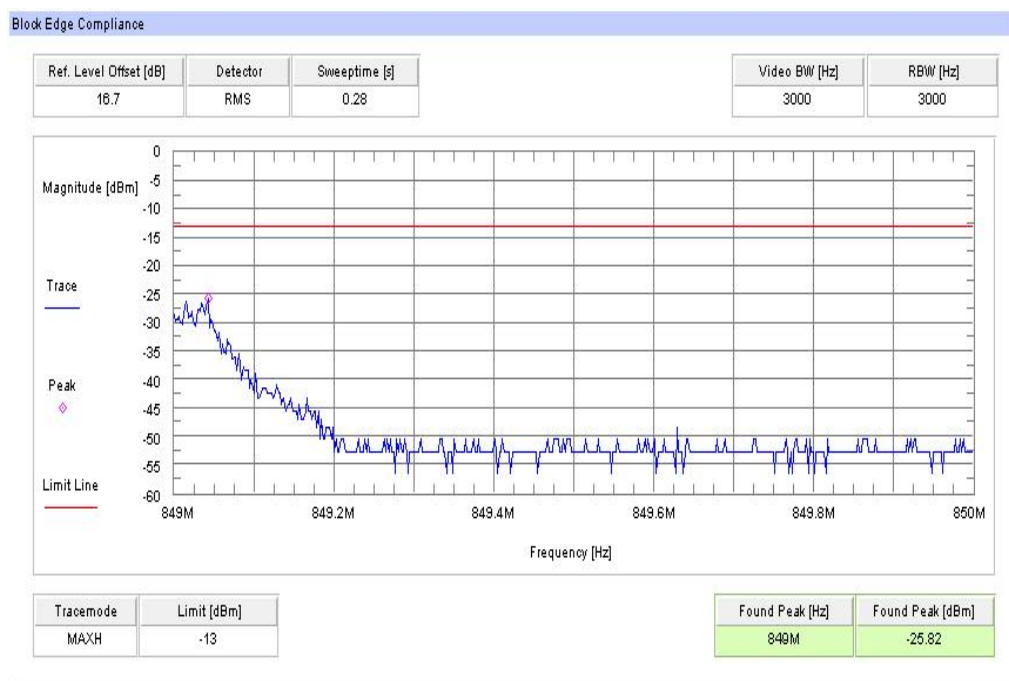

Result: Passed

8.3.6 Occupied bandwidth

Description:

Measurement of the occupied bandwidth of the transmitted signal.

Measurement:

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the GSM-850 frequency band. The table below lists the measured 99% power occupied bandwidth. Spectrum analyzer plots are included on the following pages.

Part 22.917 requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300 kHz, this equates to a resolution bandwidth of at least 3 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

| Measurement parameters | |
|------------------------|----------|
| Detector: | Peak |
| Sweep time: | Auto |
| Video bandwidth: | 30 kHz |
| Resolution bandwidth: | 10 kHz |
| Span: | 1 MHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|---|---------|
| CFR Part 22.917 CFR Part 2.1049 | RSS 132 |
| Occupied Bandwidth | |
| Spectrum must fall completely in the specified band | |

Results:


| Occupied Bandwidth - GMSK mode | | |
|--------------------------------|---------------|--|
| Frequency (MHz) | 99% OBW (kHz) | |
| 824.2 | 291 | |
| 836.4 | 285 | |
| 848.8 | 271 | |
| Measurement uncertainty | ± 3 kHz | |

| Occupied Bandwidth – 8-PSK mode | | |
|---------------------------------|---------------|--|
| Frequency (MHz) | 99% OBW (kHz) | |
| 824.2 | 281 | |
| 836.4 | 279 | |
| 848.8 | 283 | |
| Measurement uncertainty | ± 3 kHz | |


Result: Passed

Plots:


Plot 1: Channel 128 (99% - OBW)

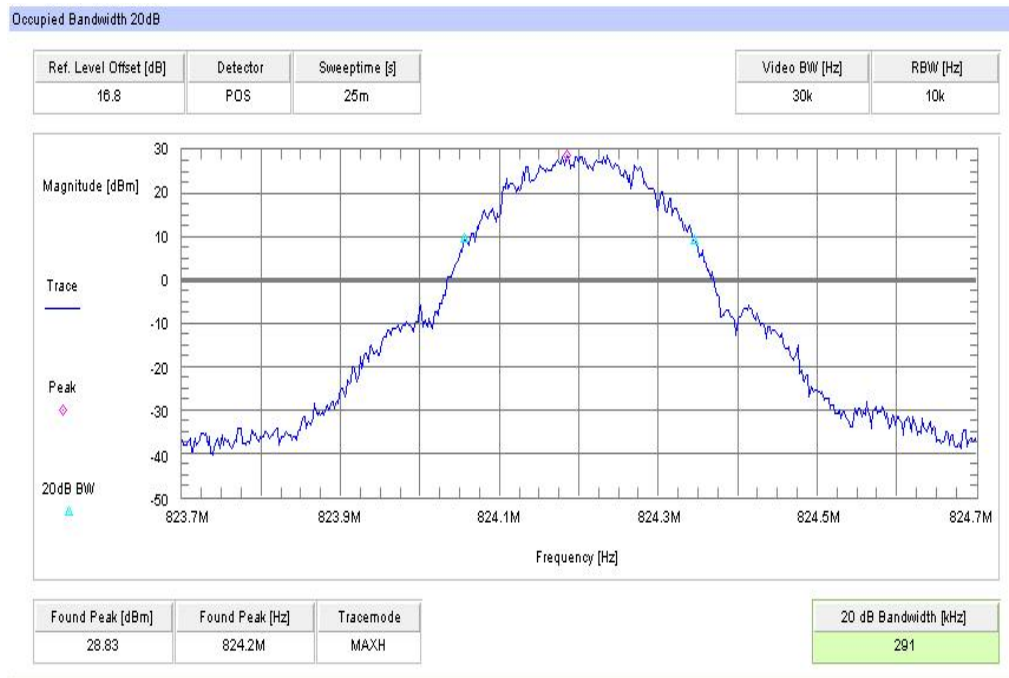


Plot 2: Channel 189 (99% - OBW)

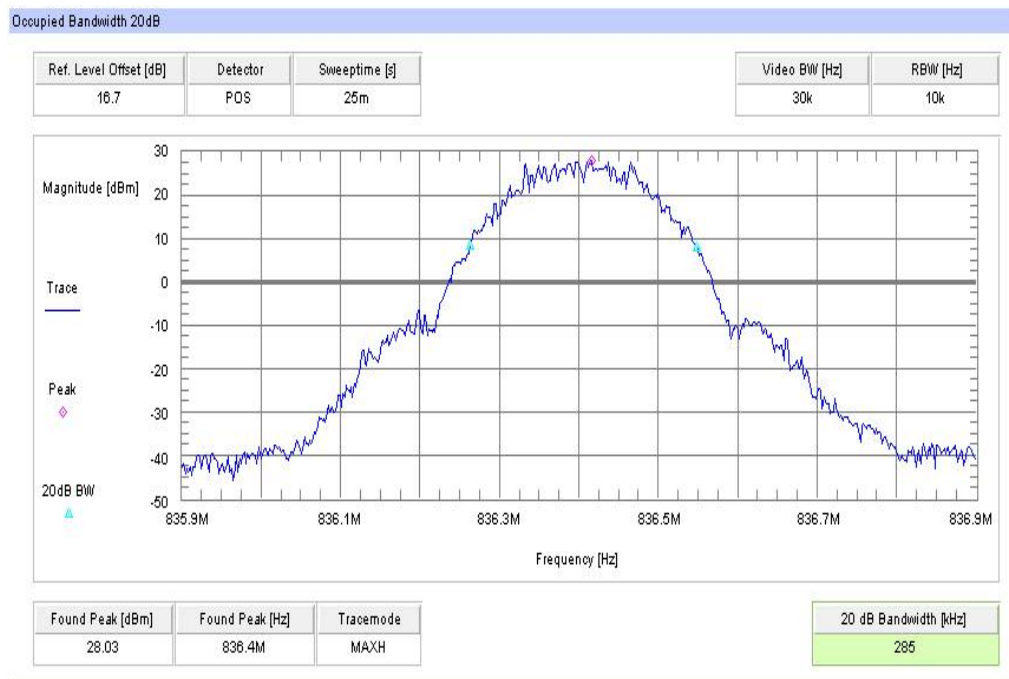

Plot 3: Channel 251 (99% - OBW)

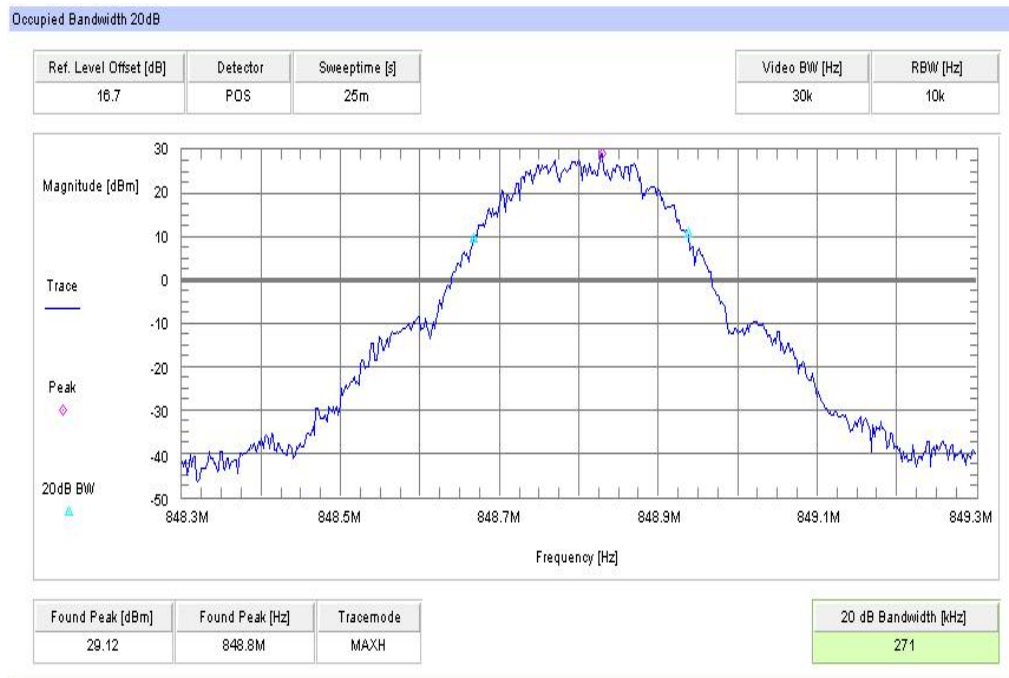


Plot 4: Channel 128 (99% - OBW) – 8-PSK

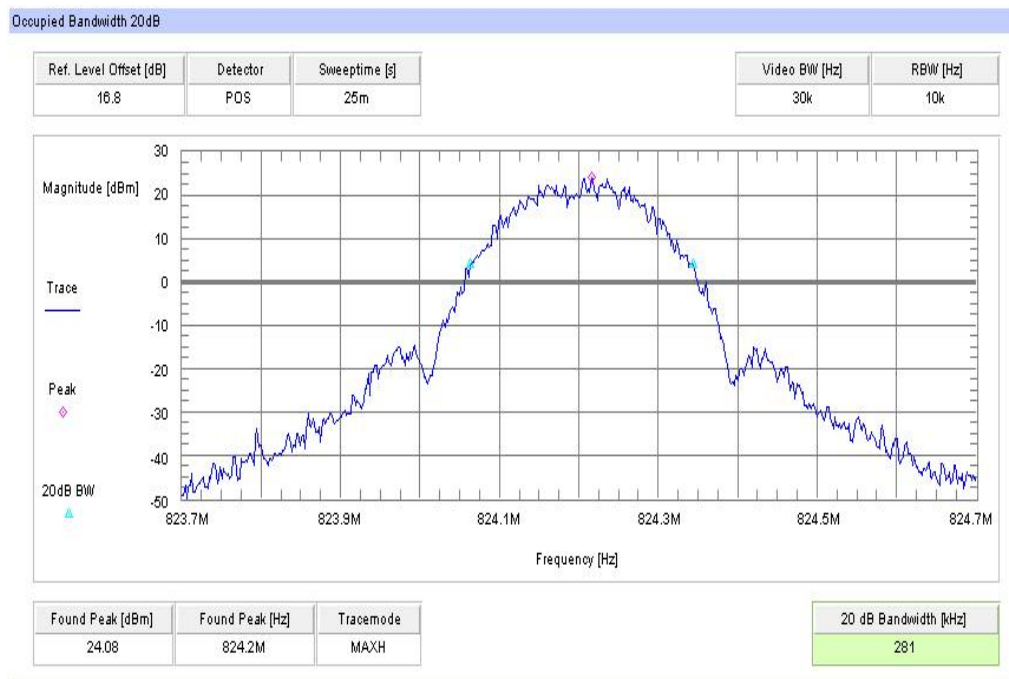

Plot 5: Channel 189 (99% - OBW) - 8-PSK



Plot 6: Channel 251 (99% - OBW) - 8-PSK

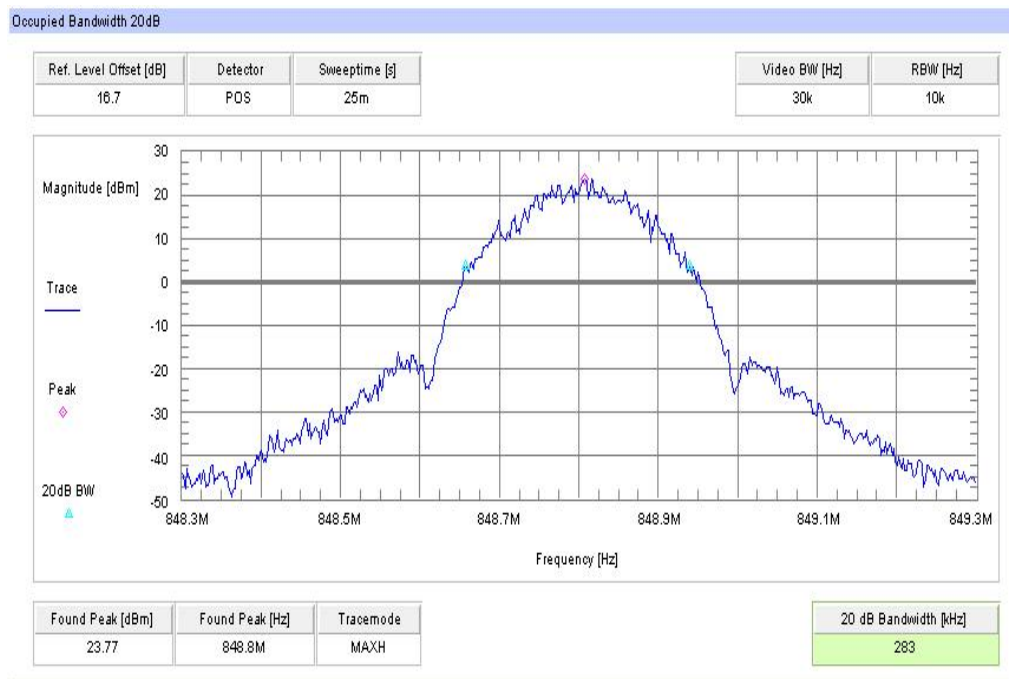

8.4 Results PCS 1900

All GSM-band measurements are done in GSM mode only (circuit switched).

All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

8.4.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

| Measurement parameters | |
|------------------------|-------------------------------|
| Detector: | Peak and RMS (Power in Burst) |
| Sweep time: | Auto |
| Video bandwidth: | 1 MHz |
| Resolution bandwidth: | 1 MHz |
| Span: | Zero Span |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|---|---------|
| CFR Part 24.232 CFR Part 2.1046 | RSS 133 |
| Nominal Peak Output Power | |
| +33.00 dBm | |
| In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. | |

Results:

| Output Power (conducted) GMSK mode | | |
|------------------------------------|----------------------------|----------------------------|
| Frequency (MHz) | Average Output Power (dBm) | Peak to Average Ratio (dB) |
| 1850.2 | 29.8 | 0.13 |
| 1880.0 | 29.6 | 0.12 |
| 1909.8 | 29.9 | 0.16 |
| Measurement uncertainty | ± 0.5 dB | |

| Output Power (conducted) 8-PSK mode | | |
|-------------------------------------|----------------------------|----------------------------|
| Frequency (MHz) | Average Output Power (dBm) | Peak to Average Ratio (dB) |
| 1850.2 | 26.6 | 3.13 |
| 1880.0 | 27.0 | 3.12 |
| 1909.8 | 27.0 | 3.08 |
| Measurement uncertainty | ± 0.5 dB | |

| Output Power (radiated) GMSK mode | |
|-----------------------------------|-----------------------------------|
| Frequency (MHz) | Average Output Power (dBm) - EIRP |
| 1850.2 | 31.2 |
| 1880.0 | 28.7 |
| 1909.8 | 29.1 |
| Measurement uncertainty | ± 2.0 dB |

| Output Power (radiated) 8-PSK mode | |
|------------------------------------|-----------------------------------|
| Frequency (MHz) | Average Output Power (dBm) - EIRP |
| 1850.2 | 28.0 |
| 1880.0 | 26.1 |
| 1909.8 | 26.2 |
| Measurement uncertainty | ± 2.0 dB |

Result: Passed

8.4.2 Frequency stability

Description:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU200 DIGITAL RADIOCOMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with V_{nom} , connected to the CMU200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within two minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10°C increments from -30°C to +60°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with V_{nom} . Vary supply voltage from V_{min} to V_{max} , in 0.1 Volt steps remeasuring carrier frequency at each voltage. Pause at V_{nom} for 1.5 hours unpowered, to allow any self heating to stabilize, before continuing.
6. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Measurement:

| Measurement parameters | |
|------------------------|----------------------|
| Detector: | Measured with CMU200 |
| Sweep time: | |
| Video bandwidth: | |
| Resolution bandwidth: | |
| Span: | |
| Trace-Mode: | |

Limits:

| FCC | IC |
|--|---------|
| CFR Part 24.235 CFR Part 2.1055 | RSS 133 |
| Frequency Stability | |
| The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. | |


Results:**AFC FREQ ERROR versus VOLTAGE**

| Voltage (V) | Frequency Error (Hz) | Frequency Error (%) | Frequency Error (ppm) |
|-------------|----------------------|---------------------|-----------------------|
| 3.3 | -17 | -0.00000090 | -0.0090 |
| 3.4 | -17 | -0.00000090 | -0.0090 |
| 3.5 | 6 | 0.00000032 | 0.0032 |
| 3.6 | -10 | -0.00000053 | -0.0053 |
| 3.7 | -13 | -0.00000069 | -0.0069 |
| 3.8 | -11 | -0.00000059 | -0.0059 |
| 3.9 | -17 | -0.00000090 | -0.0090 |
| 4.0 | -19 | -0.00000101 | -0.0101 |
| 4.1 | -17 | -0.00000090 | -0.0090 |
| 4.2 | -29 | -0.00000154 | -0.0154 |
| 4.3 | -24 | -0.00000128 | -0.0128 |
| 4.4 | -28 | -0.00000149 | -0.0149 |


AFC FREQ ERROR versus TEMPERATURE

| Temperature (°C) | Frequency Error (Hz) | Frequency Error (%) | Frequency Error (ppm) |
|------------------|----------------------|---------------------|-----------------------|
| -30 | -39 | -0.00000207 | -0.0207 |
| -20 | -16 | -0.00000085 | -0.0085 |
| -10 | -22 | -0.00000117 | -0.0117 |
| ± 0 | -20 | -0.00000106 | -0.0106 |
| 10 | -16 | -0.00000085 | -0.0085 |
| 20 | -18 | -0.00000096 | -0.0096 |
| 30 | -28 | -0.00000149 | -0.0149 |
| 40 | -14 | -0.00000074 | -0.0074 |
| 50 | -24 | -0.00000128 | -0.0128 |
| 60 | -24 | -0.00000128 | -0.0128 |

Frequency Error vs. Voltage

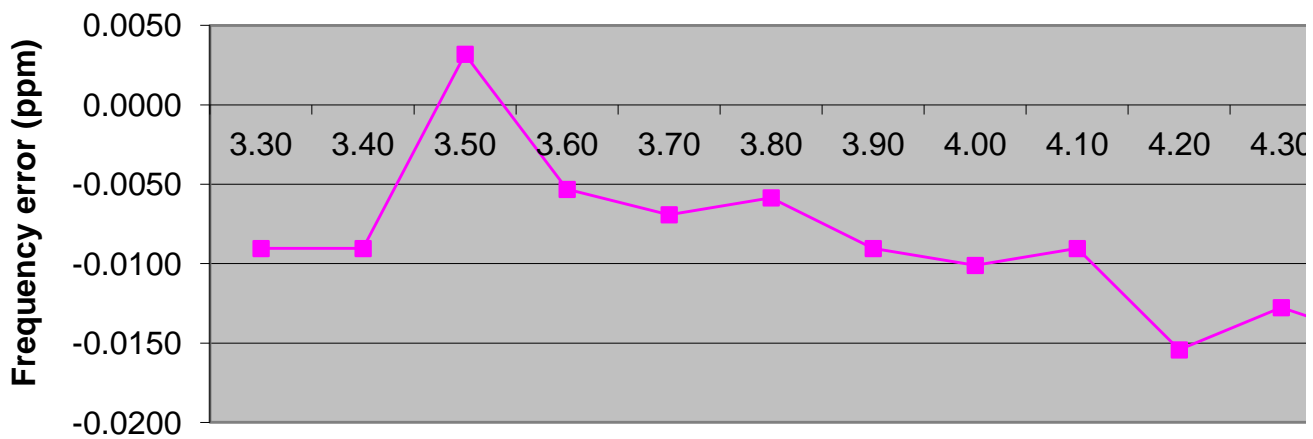

Frequency Error vs. Temperature

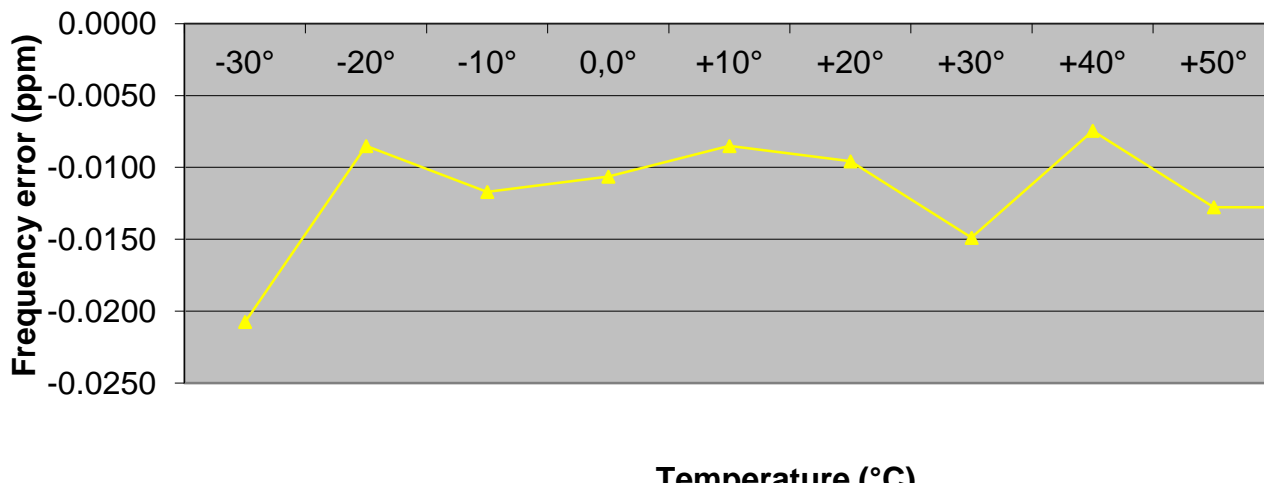

Result: Passed

8.4.3 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the PCS1900 band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

Measurement:

| Measurement parameters | |
|------------------------|--|
| Detector: | Peak |
| Sweep time: | 2 sec. |
| Video bandwidth: | Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz |
| Resolution bandwidth: | Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz |
| Span: | 100 MHz Steps |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|--|---------|
| CFR Part 24.238 CFR Part 2.1053 | RSS 133 |
| Spurious Emissions Radiated | |
| Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts) | |
| -13 dBm | |

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880.0 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages. All measurements were done in horizontal and vertical polarization; the plots show the worst case. The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

| SPURIOUS EMISSION LEVEL (dBm) | | | | | | | | |
|-------------------------------|---------------------|-------------|----------|---------------------|-------------|----------|---------------------|-------------|
| Harmonic | Ch. 512 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 661 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 810 Freq. (MHz) | Level [dBm] |
| 2 | 3700.4 | - | 2 | 3760.0 | - | 2 | 3819.6 | - |
| 3 | 5550.6 | - | 3 | 5640.0 | - | 3 | 5729.4 | - |
| 4 | 7400.8 | - | 4 | 7520.0 | - | 4 | 7639.2 | - |
| 5 | 9251.0 | - | 5 | 9400.0 | - | 5 | 9549.0 | - |
| 6 | 11101.2 | - | 6 | 11280.0 | - | 6 | 11458.8 | - |
| 7 | 12951.4 | - | 7 | 13160.0 | - | 7 | 13368.6 | - |
| 8 | 14801.6 | - | 8 | 15040.0 | - | 8 | 15278.4 | - |
| 9 | 16651.8 | - | 9 | 16920.0 | - | 9 | 17188.2 | - |
| 10 | 18502.0 | - | 10 | 18800.0 | - | 10 | 19098.0 | - |
| Measurement uncertainty | | | | | ± 3dB | | | |


Result: Passed

Plots:

Plot 1: Channel 661 (Traffic mode up to 30 MHz)

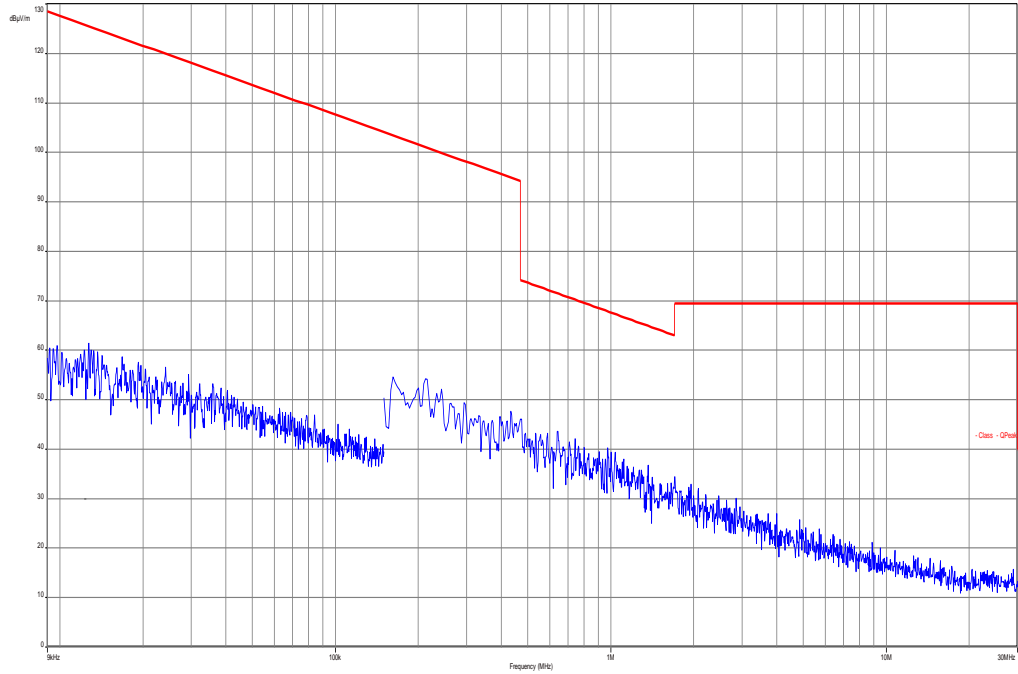


Plot 2: Channel 661 (30 MHz – 12.75 GHz)

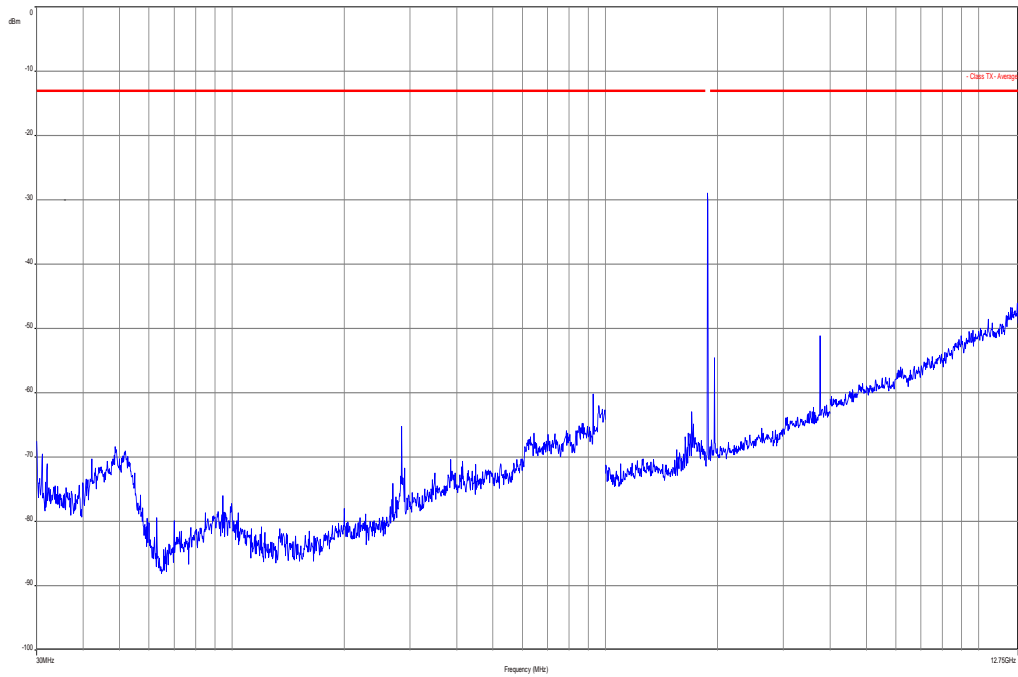

Carrier notched with 1.9 GHz rejection filter

Plot 3: Channel 661 (12.75 GHz - 25 GHz)

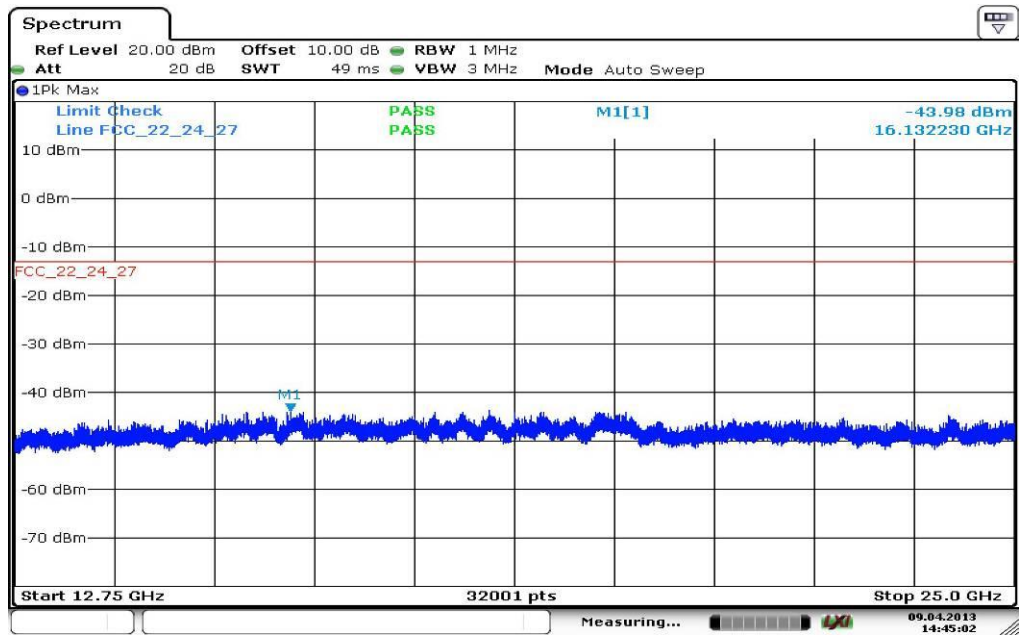

Date: 9.APR.2013 14:45:03

8.4.4 Spurious emissions conducted

Description:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

PCS1900 Transmitter Channel Frequency
 512 1850.2 MHz
 661 1880.0 MHz
 810 1909.8 MHz

Measurement:

| Measurement parameters | |
|------------------------|---|
| Detector: | Peak |
| Sweep time: | Auto |
| Video bandwidth: | Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz |
| Resolution bandwidth: | Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz |
| Span: | 30 MHz – 25 GHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|--|---------|
| CFR Part 24.238 CFR Part 2.1051 | RSS 133 |
| Spurious Emissions Conducted | |
| Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts) | |
| -13 dBm | |


Results:

| SPURIOUS EMISSION LEVEL (dBm) | | | | | | | | |
|-------------------------------|------------------------|----------------|----------|------------------------|----------------|----------|------------------------|----------------|
| Harmonic | Ch. 512 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 661 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 810 Freq. (MHz) | Level [dBm] |
| 2 | 3700.4 | - | 2 | 3760.0 | - | 2 | 3819.6 | - |
| 3 | 5550.6 | - | 3 | 5640.0 | - | 3 | 5729.4 | - |
| 4 | 7400.8 | - | 4 | 7520.0 | - | 4 | 7639.2 | - |
| 5 | 9251.0 | - | 5 | 9400.0 | - | 5 | 9549.0 | - |
| 6 | 11101.2 | - | 6 | 11280.0 | - | 6 | 11458.8 | - |
| 7 | 12951.4 | - | 7 | 13160.0 | - | 7 | 13368.6 | - |
| 8 | 14801.6 | - | 8 | 15040.0 | - | 8 | 15278.4 | - |
| 9 | 16651.8 | - | 9 | 16920.0 | - | 9 | 17188.2 | - |
| 10 | 18502.0 | - | 10 | 18800.0 | - | 10 | 19098.0 | - |
| Measurement uncertainty | | | | | ± 3dB | | | |


Result: Passed

Plots:


Plot 1: Channel 512 (10 MHz - 25 GHz)

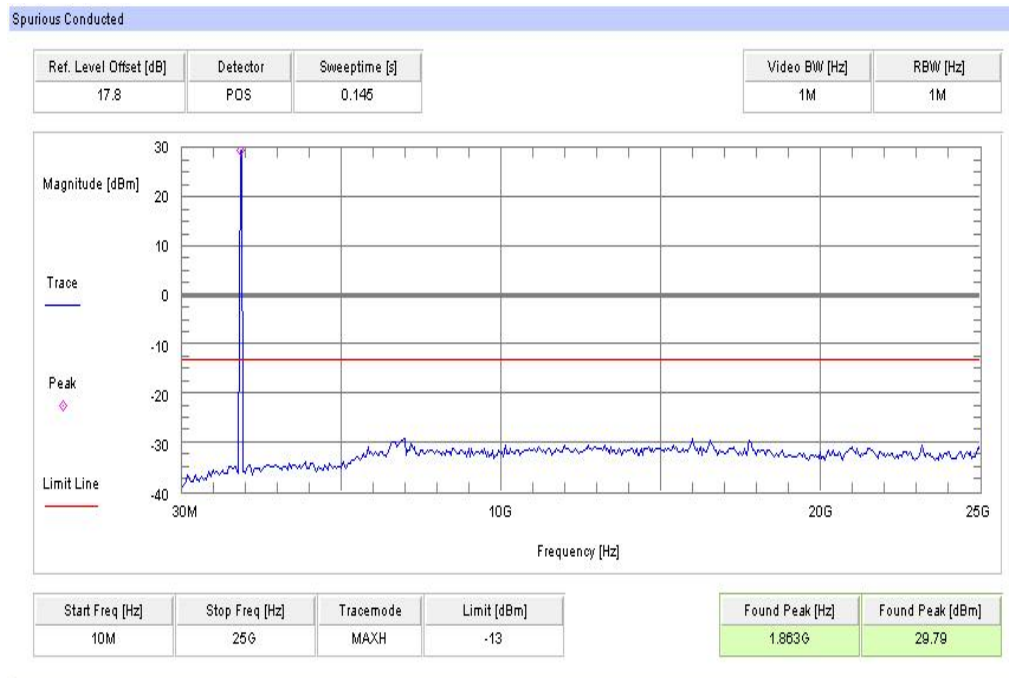

Plot 2: Channel 661 (10 MHz - 25 GHz)

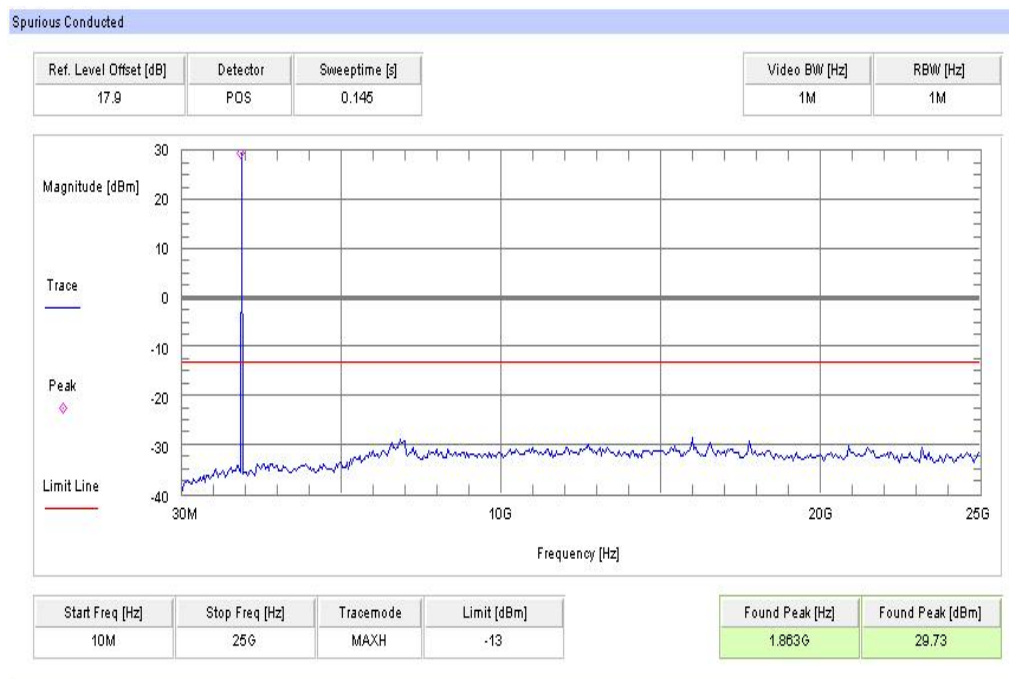

Plot 3: Channel 810 (10 MHz - 25 GHz)

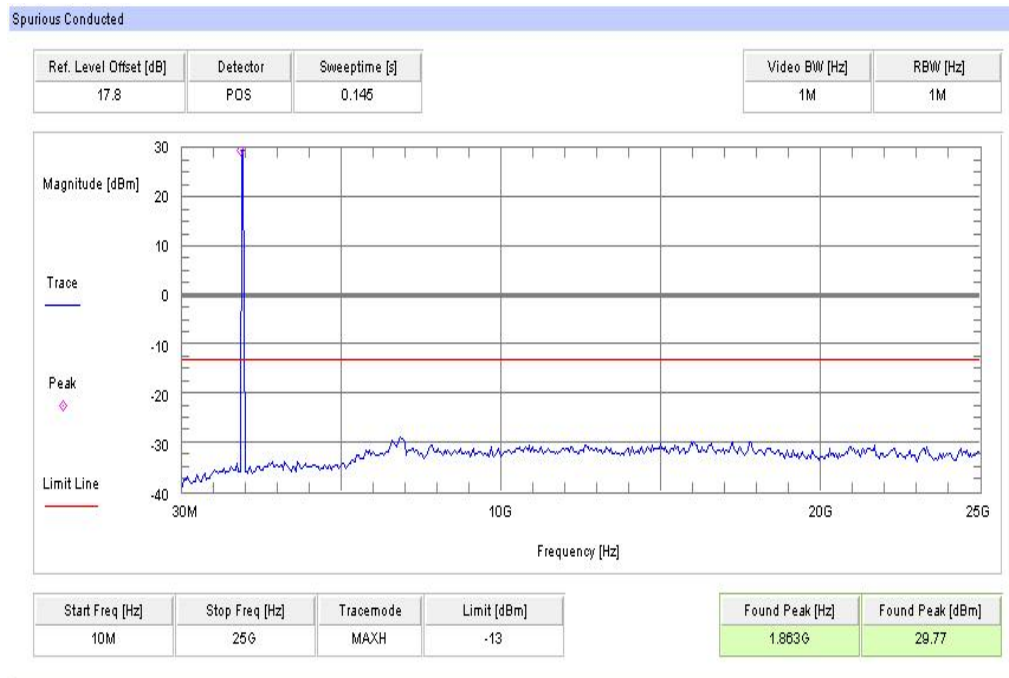

8.4.5 Block edge compliance

Description:

The spectrum at the band edges must comply with the spurious emissions limits.

Measurement:


| Measurement parameters | |
|------------------------|----------|
| Detector: | RMS |
| Sweep time: | Auto |
| Video bandwidth: | 3 kHz |
| Resolution bandwidth: | 3 kHz |
| Span: | 1 MHz |
| Trace-Mode: | Max Hold |

Limits:


| FCC | IC |
|--|---------|
| CFR Part 24.238 CFR Part 2.1051 | RSS 133 |
| Block Edge Compliance | |
| Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts) | |
| -13 dBm | |

Plots:


Plot 1: Channel 512 (GSM-mode)

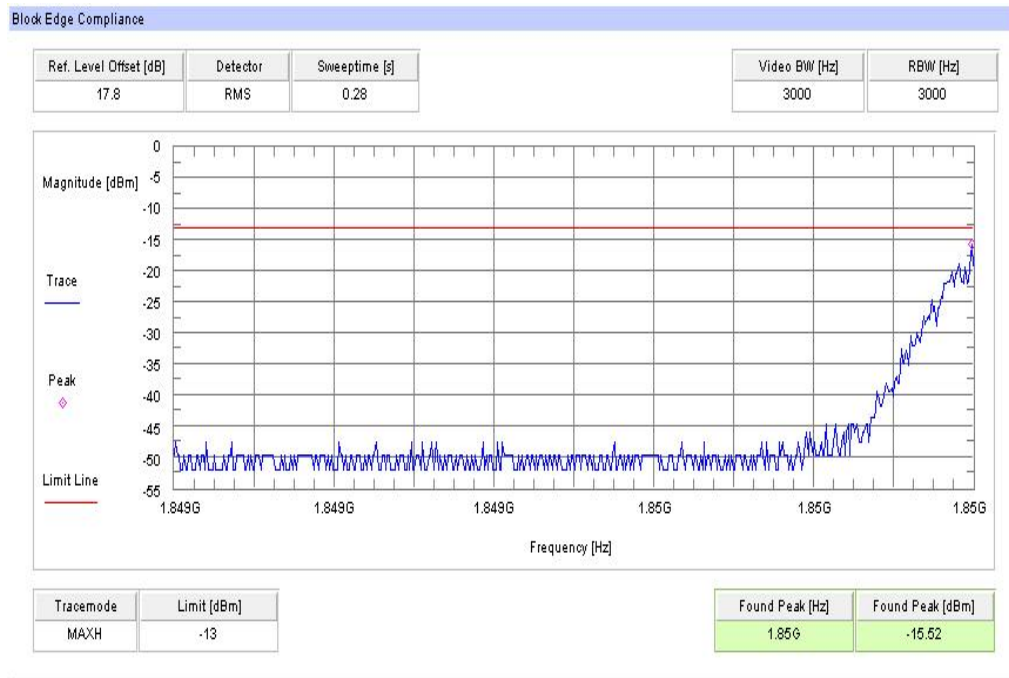


Plot 2: Channel 810 (GSM-mode)

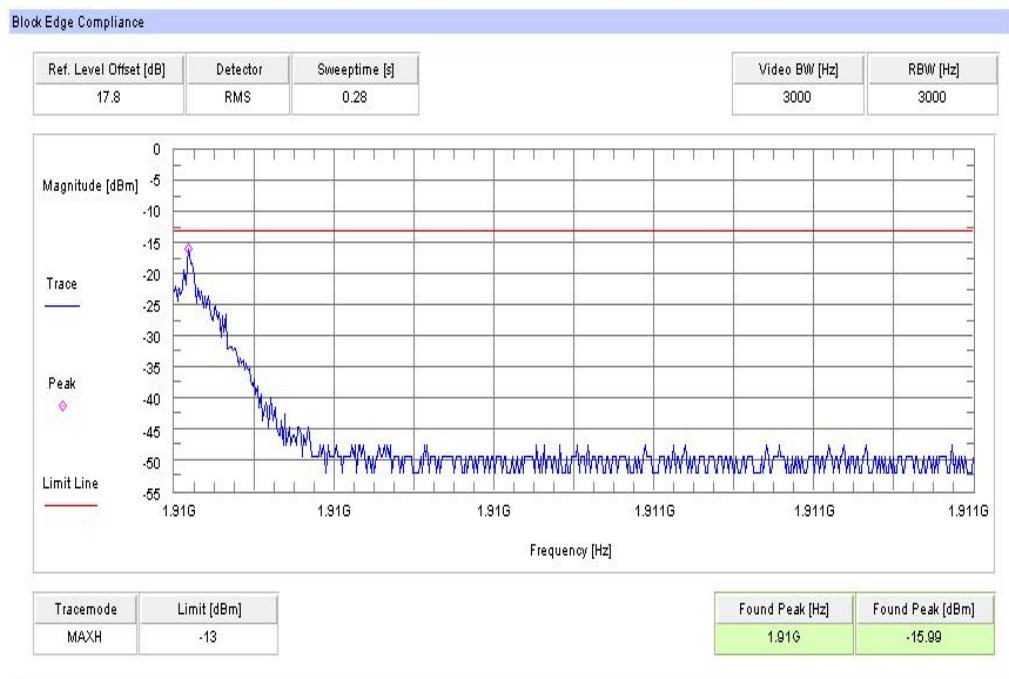

Plot 3: Channel 512 (EDGE-mode)

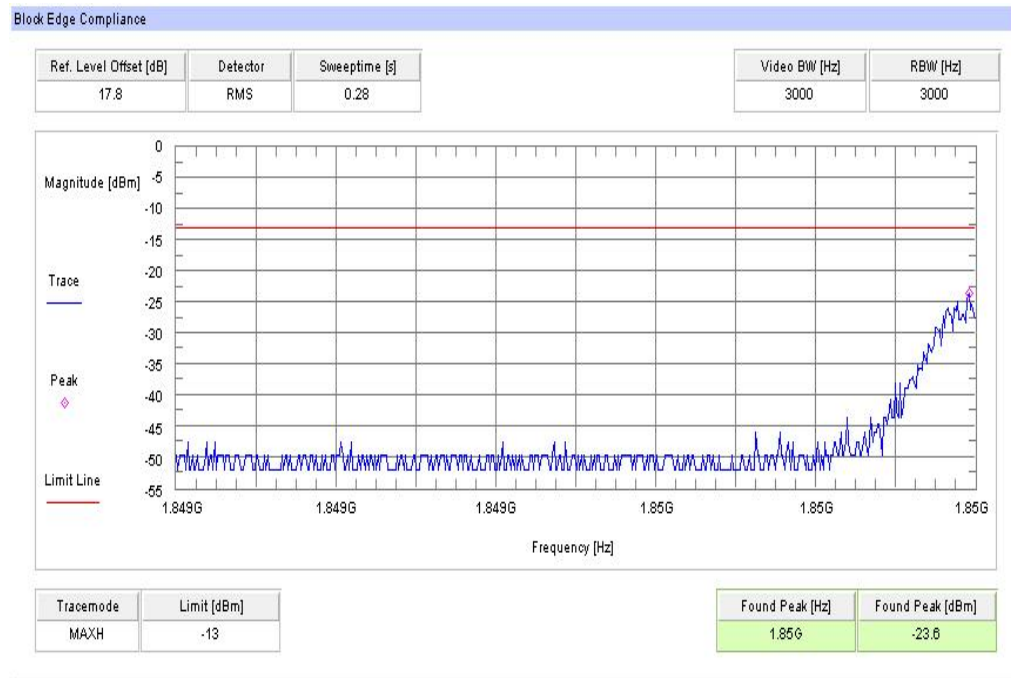

Plot 4: Channel 810 (EDGE-mode)

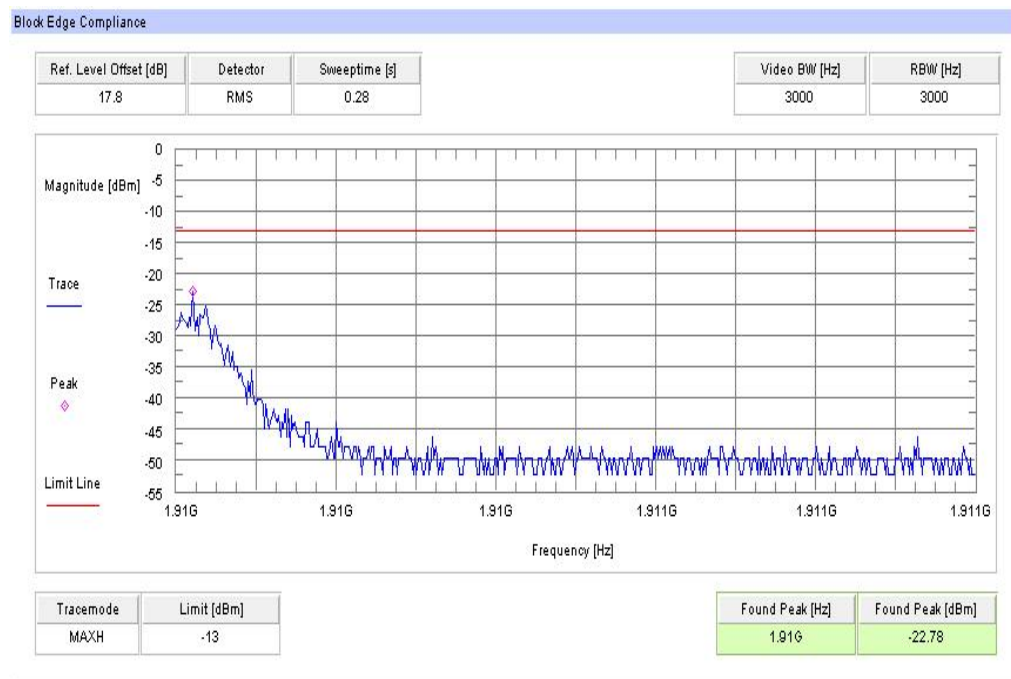

Result: Passed

8.4.6 Occupied bandwidth

Description:

Measurement of the occupied bandwidth of the transmitted signal.

Measurement:

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the PCS1900 frequency band. The table below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Part 24.238 requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

| Measurement parameters | |
|------------------------|----------|
| Detector: | Peak |
| Sweep time: | Auto |
| Video bandwidth: | 30 kHz |
| Resolution bandwidth: | 10 kHz |
| Span: | 1 MHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|---|---------|
| CFR Part 24.238 CFR Part 2.1049 | RSS 133 |
| Occupied Bandwidth | |
| Spectrum must fall completely in the specified band | |

Results:


| Occupied Bandwidth - GMSK mode | | |
|--------------------------------|---------------|--|
| Frequency (MHz) | 99% OBW (kHz) | |
| 1850.2 | 279 | |
| 1880.0 | 281 | |
| 1909.8 | 279 | |
| Measurement uncertainty | ± 3 kHz | |

| Occupied Bandwidth - EDGE mode | | |
|--------------------------------|---------------|--|
| Frequency (MHz) | 99% OBW (kHz) | |
| 1850.2 | 275 | |
| 1880.0 | 277 | |
| 1909.8 | 279 | |
| Measurement uncertainty | ± 3 kHz | |


Result: Passed

Plots:


Plot 1: Channel 512 (99% - OBW)

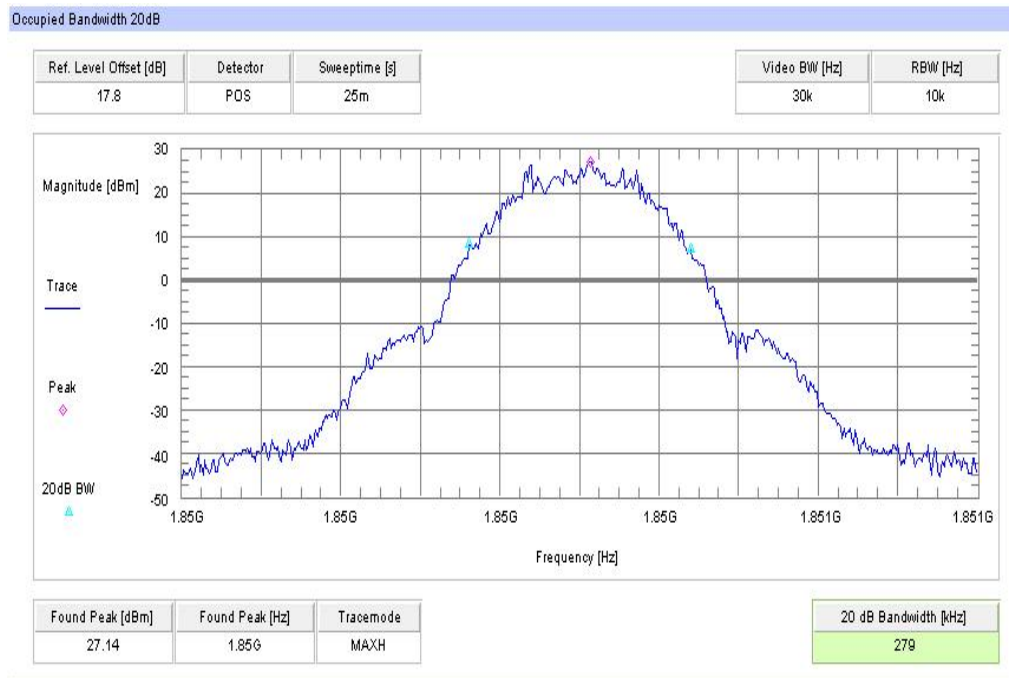


Plot 2: Channel 661 (99% - OBW)

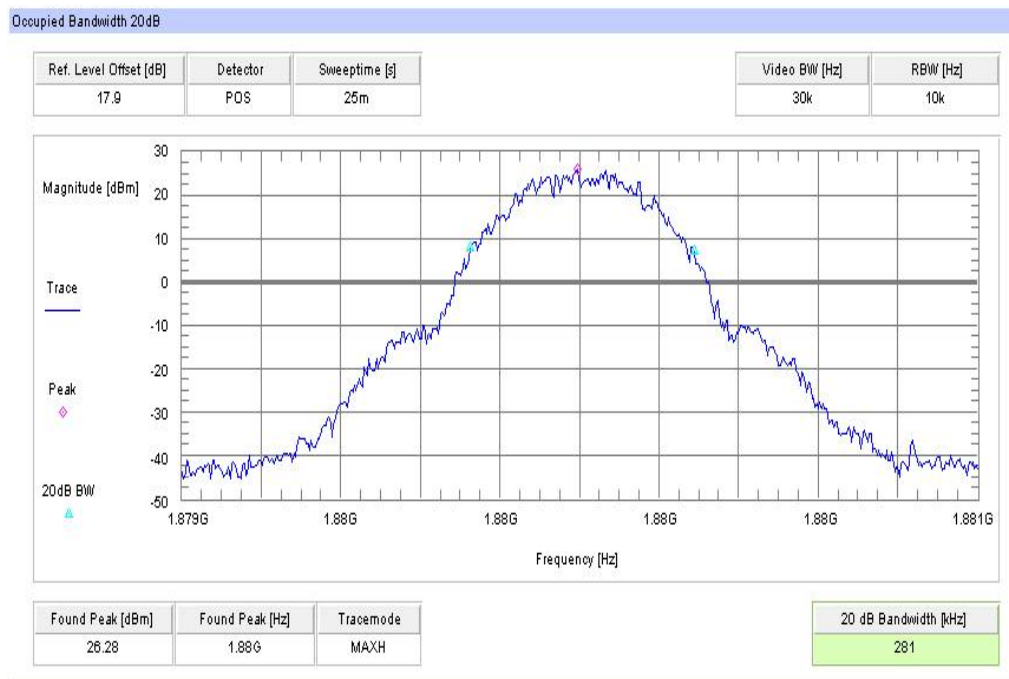


Plot 3: Channel 810 (99% - OBW)

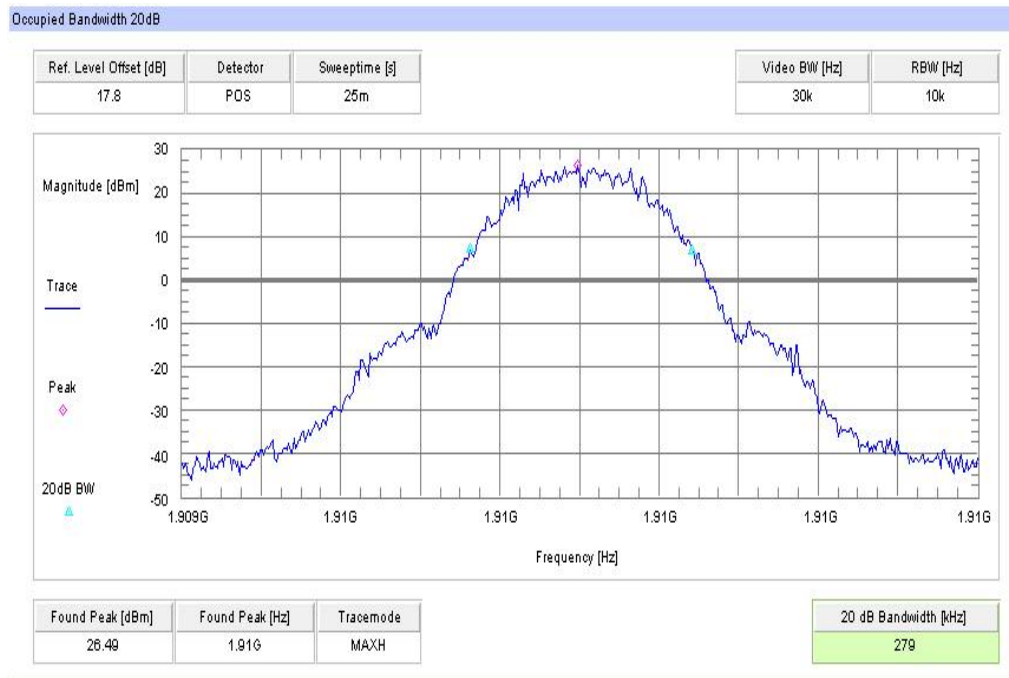


Plot 4: Channel 512 (99% - OBW) - EDGE

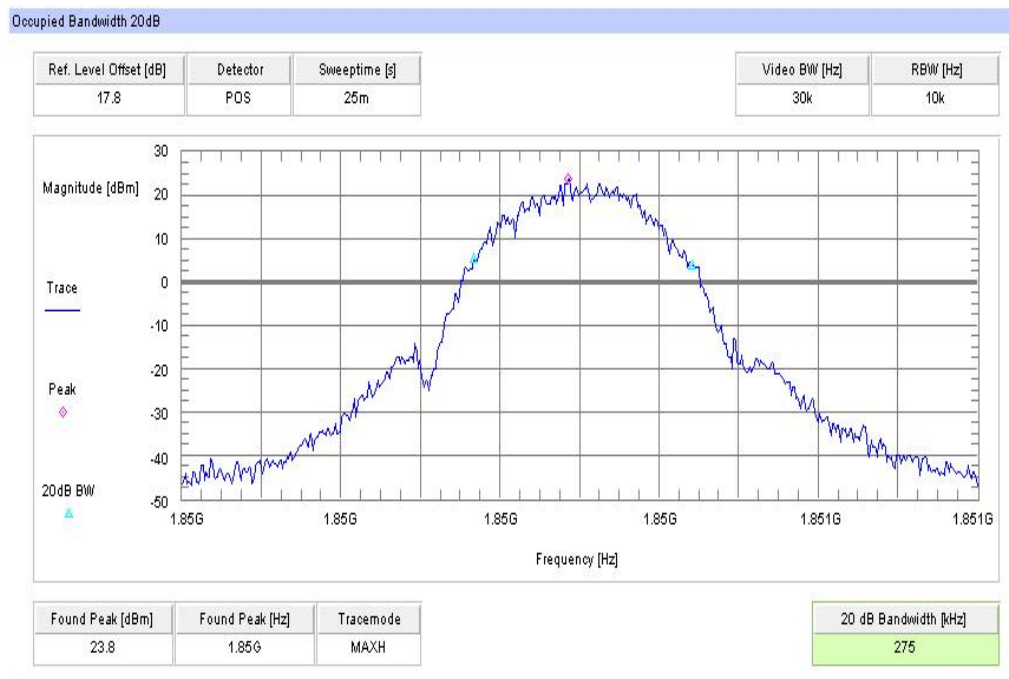

Plot 5: Channel 661 (99% - OBW) - EDGE

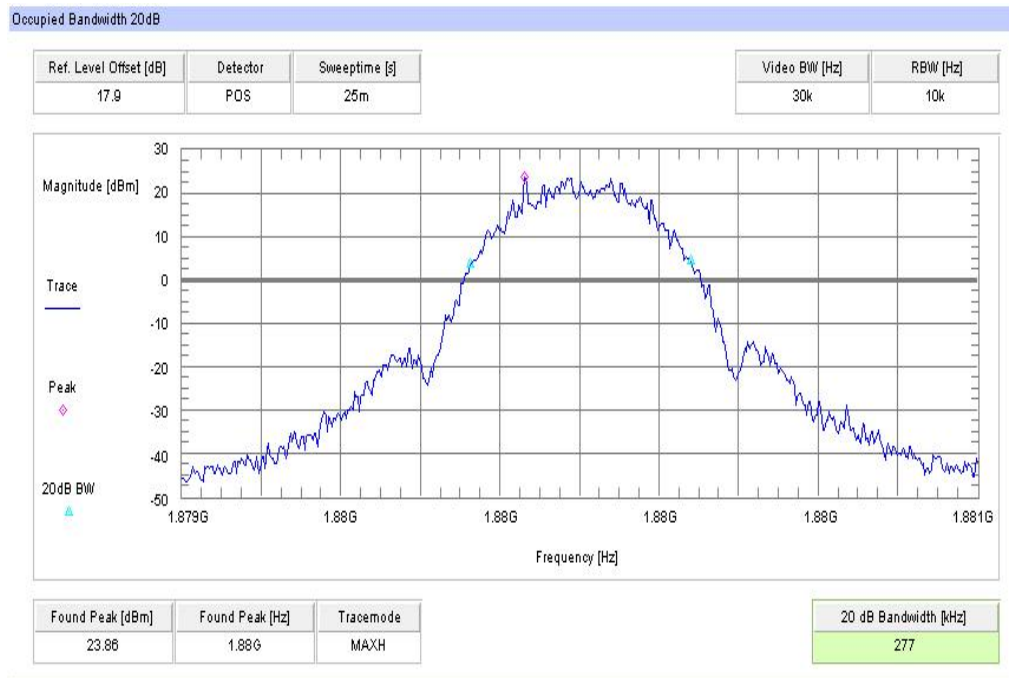

Plot 6: Channel 810 (99% - OBW) - EDGE

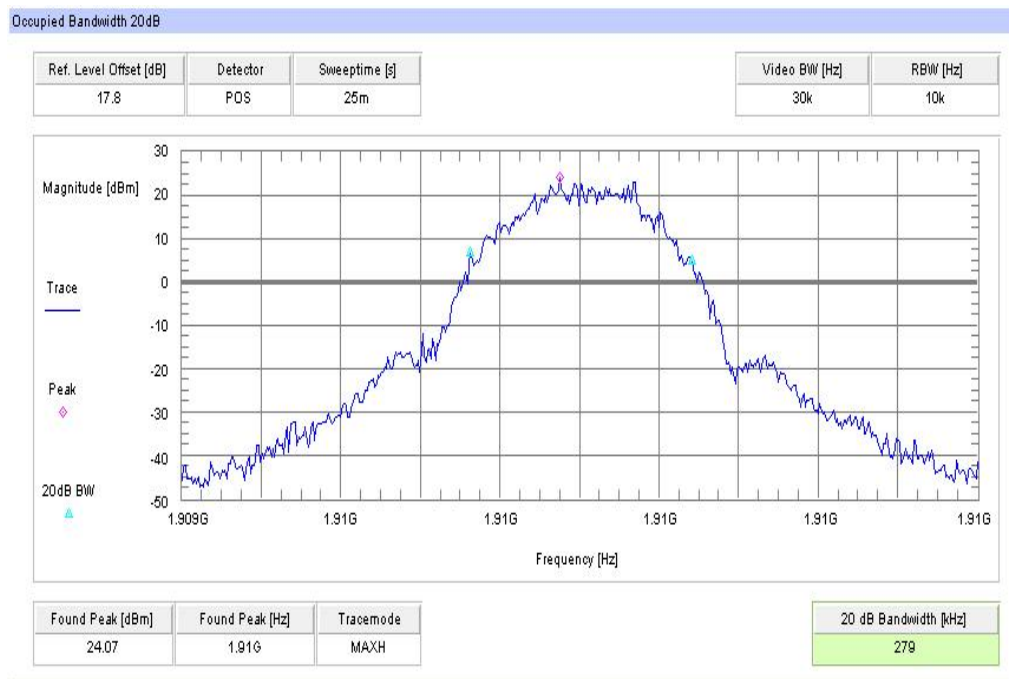

8.5 Results UMTS band V

All UMTS-band measurements are done in WCDMA mode only.
 The connection was established with the following setup: WCDMA CS-RMC, Max Power (All Bit up)

8.5.1 RF output power

Description:

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

| Measurement parameters | |
|------------------------|-------------------------------|
| Detector: | Peak and RMS (Power in Burst) |
| Sweep time: | Auto |
| Video bandwidth: | 10 MHz |
| Resolution bandwidth: | 10 MHz |
| Span: | Zero Span |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|---|---------|
| CFR Part 22.913 CFR Part 2.1046 | RSS 132 |
| Nominal Peak Output Power | |
| +38.45 dBm | |
| In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. | |

Results:

| Output Power (conducted) WCDMA mode | | |
|-------------------------------------|----------------------------|----------------------------|
| Frequency (MHz) | Average Output Power (dBm) | Peak to Average Ratio (dB) |
| 826.4 | 23.7 | 3.33 |
| 836.0 | 23.6 | 3.25 |
| 846.6 | 23.5 | 3.29 |
| Measurement uncertainty | ± 0.5 dB | |

| Output Power (radiated) WCDMA mode | |
|------------------------------------|----------------------------------|
| Frequency (MHz) | Average Output Power (dBm) - ERP |
| 826.4 | 21.3 |
| 836.0 | 21.4 |
| 846.6 | 22.0 |
| Measurement uncertainty | ± 2.0 dB |

Result: **Passed**

8.5.2 Frequency stability

Description:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU200 DIGITAL RADIOCOMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with V_{nom} , connected to the CMU200 and in a simulated call on channel 4180 (centre channel), measure the carrier frequency. These measurements should be made within two minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10°C increments from -30°C to +60°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with V_{nom} . Vary supply voltage from V_{min} to V_{max} , in 0.1 Volt steps remeasuring carrier frequency at each voltage. Pause at V_{nom} for 1.5 hours unpowered, to allow any self heating to stabilize, before continuing.
6. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Measurement:

| Measurement parameters | |
|------------------------|----------------------|
| Detector: | Measured with CMU200 |
| Sweep time: | |
| Video bandwidth: | |
| Resolution bandwidth: | |
| Span: | |
| Trace-Mode: | |

Limits:



| FCC | IC |
|------------------------------------|---------|
| CFR Part 22.355 CFR Part 2.1055 | RSS 132 |
| Frequency Stability | |
| ± 0.1 ppm | |

Results:**AFC FREQ ERROR versus VOLTAGE**

| Voltage (V) | Frequency Error (Hz) | Frequency Error (%) | Frequency Error (ppm) |
|-------------|----------------------|---------------------|-----------------------|
| 3.3 | 2 | 0.00000024 | 0.0024 |
| 3.4 | 2 | 0.00000024 | 0.0024 |
| 3.5 | -2 | -0.00000024 | -0.0024 |
| 3.6 | -2 | -0.00000024 | -0.0024 |
| 3.7 | 3 | 0.00000036 | 0.0036 |
| 3.8 | 2 | 0.00000024 | 0.0024 |
| 3.9 | 2 | 0.00000024 | 0.0024 |
| 4.0 | -3 | -0.00000036 | -0.0036 |
| 4.1 | -4 | -0.00000048 | -0.0048 |
| 4.2 | -4 | -0.00000048 | -0.0048 |
| 4.3 | 1 | 0.00000012 | 0.0012 |
| 4.4 | -2 | -0.00000024 | -0.0024 |

AFC FREQ ERROR versus TEMPERATURE

| Temperature (°C) | Frequency Error (Hz) | Frequency Error (%) | Frequency Error (ppm) |
|------------------|----------------------|---------------------|-----------------------|
| -30 | 3 | 0.00000036 | 0.0036 |
| -20 | 3 | 0.00000036 | 0.0036 |
| -10 | 2 | 0.00000024 | 0.0024 |
| ± 0 | 3 | 0.00000036 | 0.0036 |
| 10 | 3 | 0.00000036 | 0.0036 |
| 20 | -2 | -0.00000024 | -0.0024 |
| 30 | 3 | 0.00000036 | 0.0036 |
| 40 | -3 | -0.00000036 | -0.0036 |
| 50 | -3 | -0.00000036 | -0.0036 |
| 60 | -2 | -0.00000024 | -0.0024 |

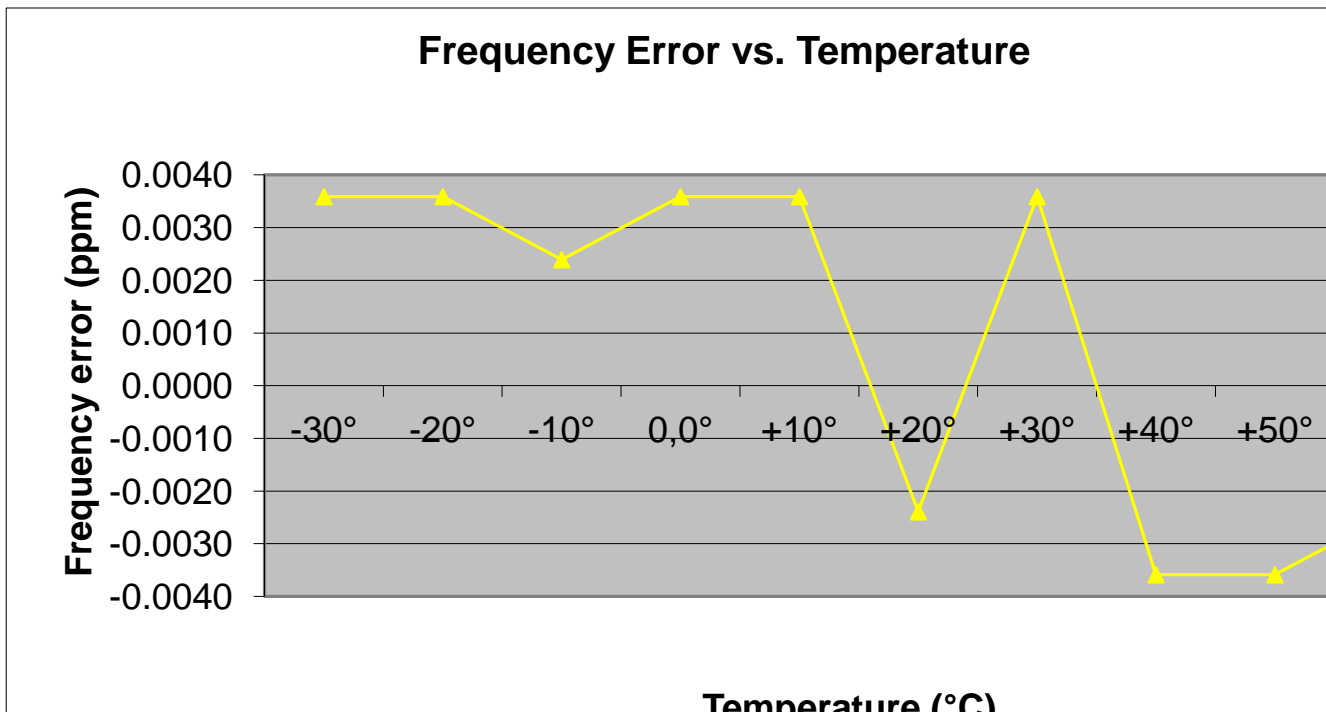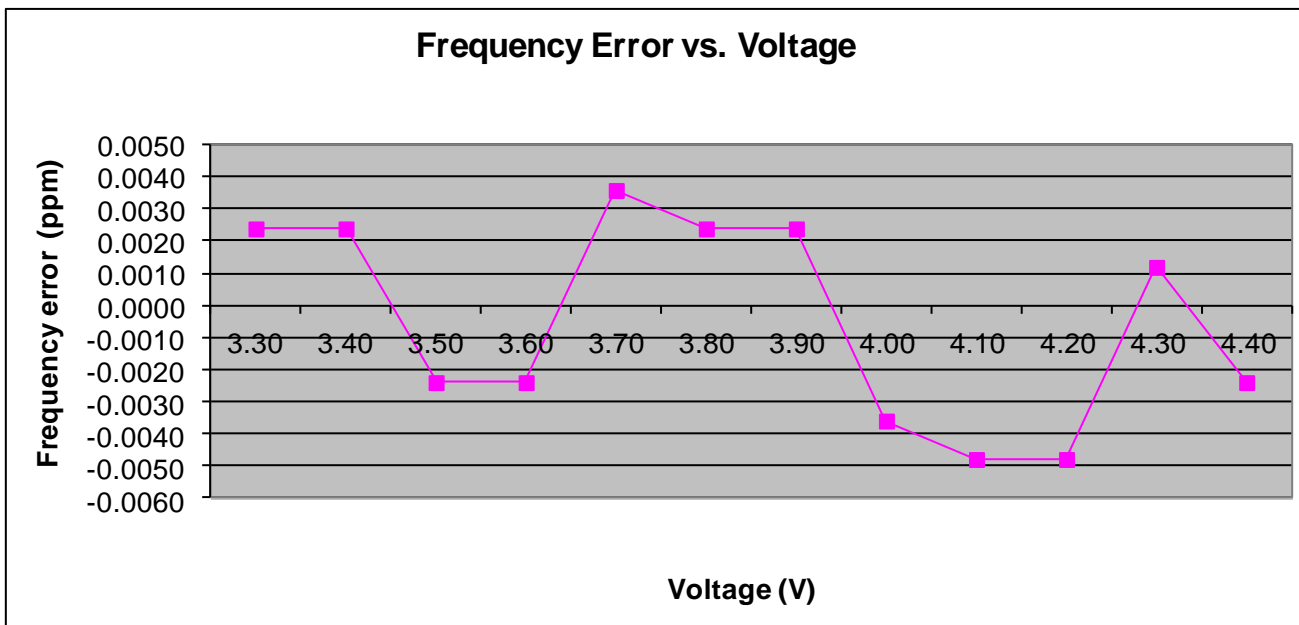

Result: Passed

8.5.3 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 846.6 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band V.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

Measurement:

| Measurement parameters | |
|------------------------|--|
| Detector: | Peak |
| Sweep time: | 2 sec. |
| Video bandwidth: | Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz |
| Resolution bandwidth: | Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz |
| Span: | 100 MHz Steps |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|--|---------|
| CFR Part 22.917 CFR Part 2.1053 | RSS 132 |
| Spurious Emissions Radiated | |
| Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts) | |
| -13 dBm | |

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band V (826.4 MHz, 836.0 MHz and 846.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages. All measurements were done in horizontal and vertical polarization; the plots show the worst case. The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

| SPURIOUS EMISSION LEVEL (dBm) | | | | | | | | |
|-------------------------------|----------------------|-------------|----------|----------------------|-------------|----------|----------------------|-------------|
| Harmonic | Ch. 4132 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 4180 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 4233 Freq. (MHz) | Level [dBm] |
| 2 | 1652.8 | - | 2 | 1672.0 | - | 2 | 1693.2 | - |
| 3 | 2479.2 | - | 3 | 2508.0 | - | 3 | 2539.8 | - |
| 4 | 3305.6 | - | 4 | 3344.0 | - | 4 | 3386.4 | - |
| 5 | 4132.0 | - | 5 | 4180.0 | - | 5 | 4233.0 | - |
| 6 | 4958.4 | - | 6 | 5016.0 | - | 6 | 5079.6 | - |
| 7 | 5784.8 | - | 7 | 5852.0 | - | 7 | 5926.2 | - |
| 8 | 6611.2 | - | 8 | 6688.0 | - | 8 | 6772.8 | - |
| 9 | 7437.6 | - | 9 | 7524.0 | - | 9 | 7619.4 | - |
| 10 | 8264.0 | - | 10 | 8360.0 | - | 10 | 8466.0 | - |
| Measurement uncertainty | | | | | ± 3dB | | | |


Result: Passed

Plots:

Plot 1: Channel 4180 (Traffic mode up to 30 MHz)

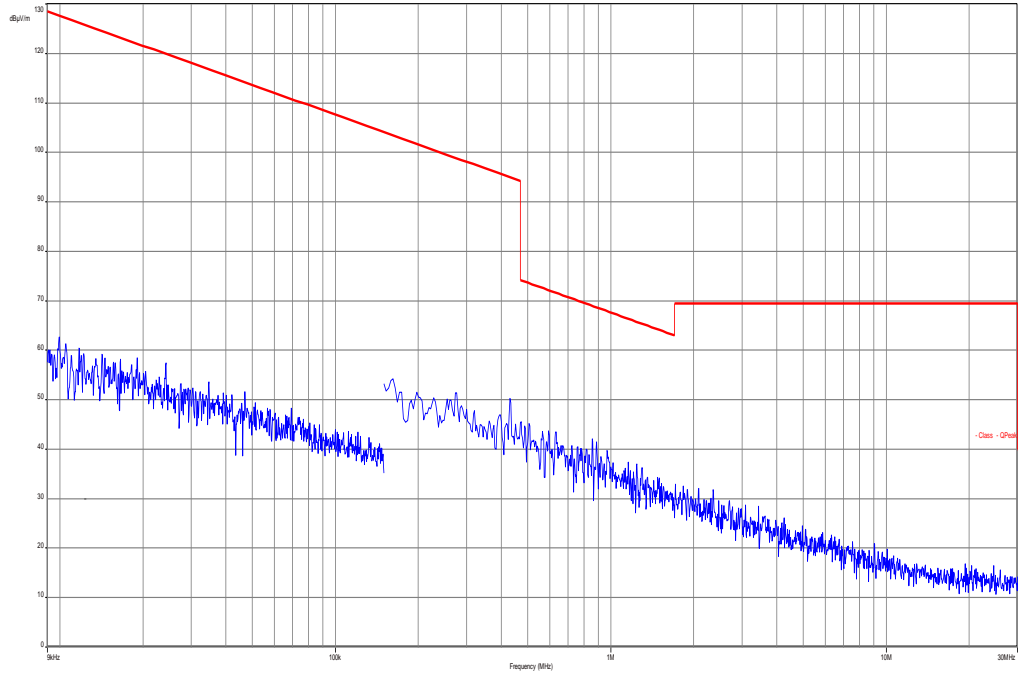

Plot 2: Channel 4180 (30 MHz – 12.75 GHz)

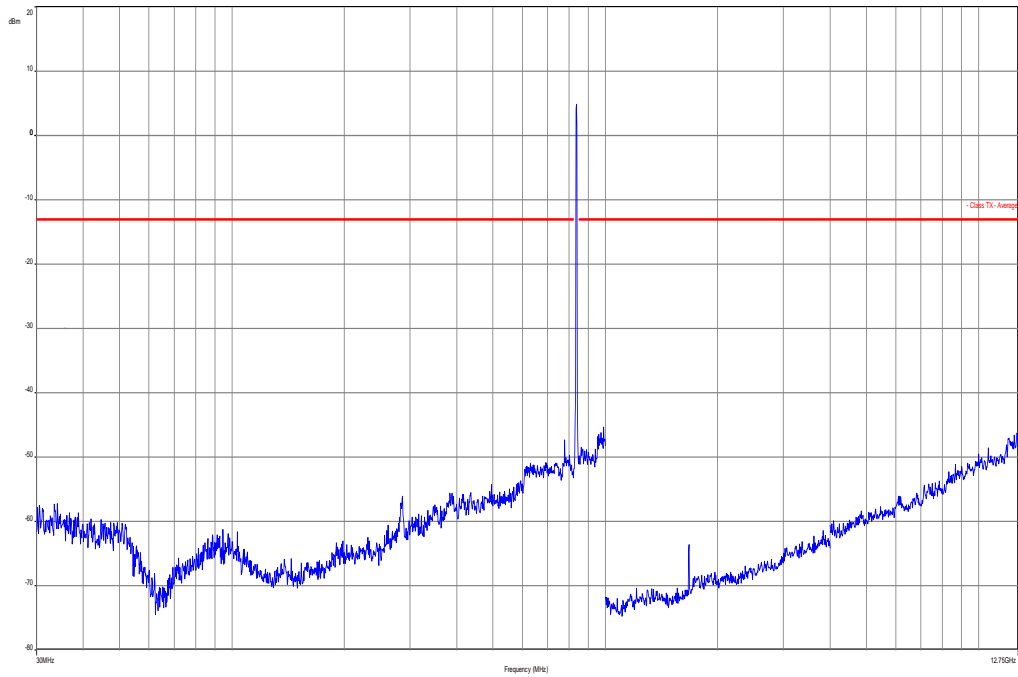

8.5.4 Spurious emissions conducted

Description:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 12 GHz.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

UMTS band V Transmitter Channel Frequency
 4132 826.4 MHz
 4180 836.0 MHz
 4233 846.6 MHz

Measurement:

| Measurement parameters | |
|------------------------|---|
| Detector: | Peak |
| Sweep time: | Auto |
| Video bandwidth: | Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz |
| Resolution bandwidth: | Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz |
| Span: | 30 MHz – 25 GHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|--|---------|
| CFR Part 22.917 CFR Part 2.1051 | RSS 132 |
| Spurious Emissions Conducted | |
| Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts) | |
| -13 dBm | |


Results:

| SPURIOUS EMISSION LEVEL (dBm) | | | | | | | | |
|-------------------------------|----------------------|-------------|----------|----------------------|-------------|----------|----------------------|-------------|
| Harmonic | Ch. 4132 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 4180 Freq. (MHz) | Level [dBm] | Harmonic | Ch. 4233 Freq. (MHz) | Level [dBm] |
| 2 | 1652.8 | - | 2 | 1672.0 | - | 2 | 1693.2 | - |
| 3 | 2479.2 | - | 3 | 2508.0 | - | 3 | 2539.8 | - |
| 4 | 3305.6 | - | 4 | 3344.0 | - | 4 | 3386.4 | - |
| 5 | 4132.0 | - | 5 | 4180.0 | - | 5 | 4233.0 | - |
| 6 | 4958.4 | - | 6 | 5016.0 | - | 6 | 5079.6 | - |
| 7 | 5784.8 | - | 7 | 5852.0 | - | 7 | 5926.2 | - |
| 8 | 6611.2 | - | 8 | 6688.0 | - | 8 | 6772.8 | - |
| 9 | 7437.6 | - | 9 | 7524.0 | - | 9 | 7619.4 | - |
| 10 | 8264.0 | - | 10 | 8360.0 | - | 10 | 8466.0 | - |
| Measurement uncertainty | | | | | ± 3dB | | | |


Result: Passed

Plots:


Plot 1: Channel 4132 (10 MHz - 12 GHz)

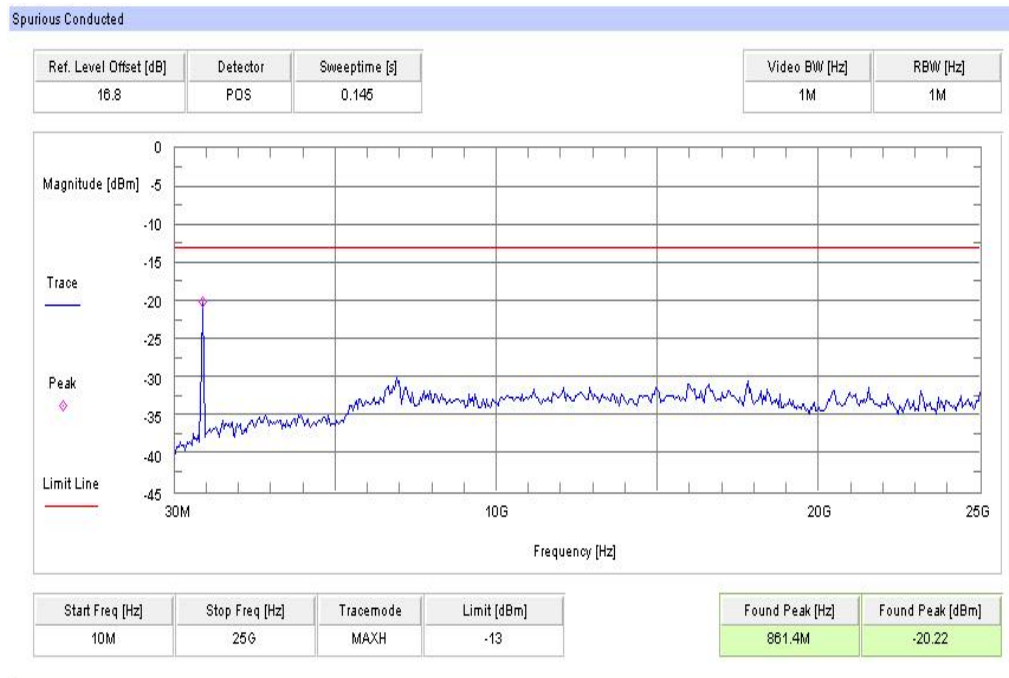

Plot 2: Channel 4180 (10 MHz - 12 GHz)

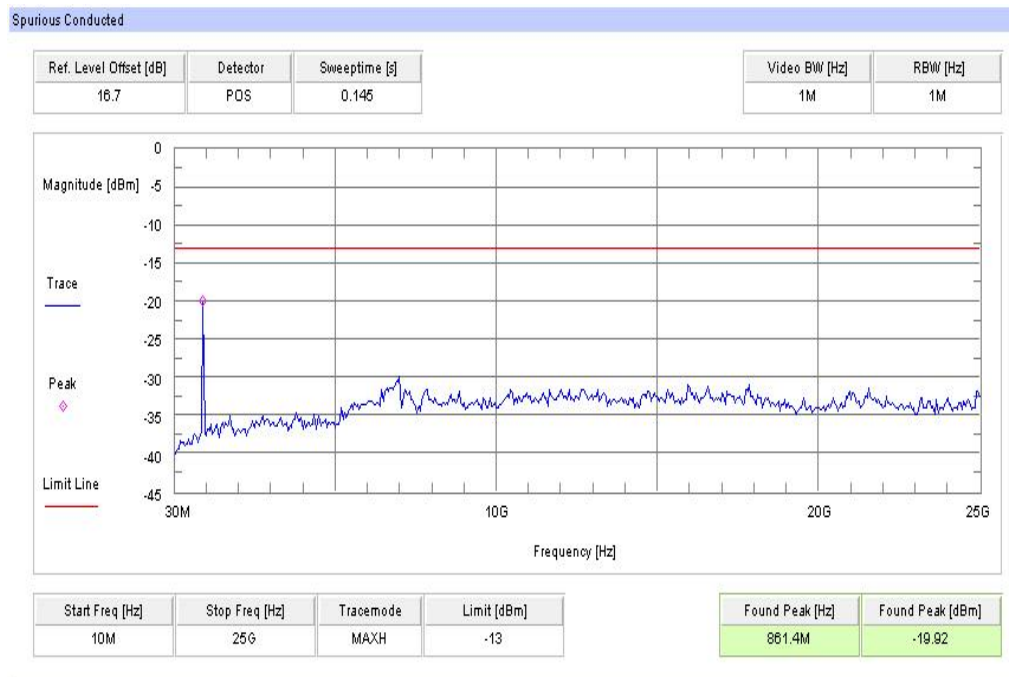

Plot 3: Channel 4233 (10 MHz - 12 GHz)

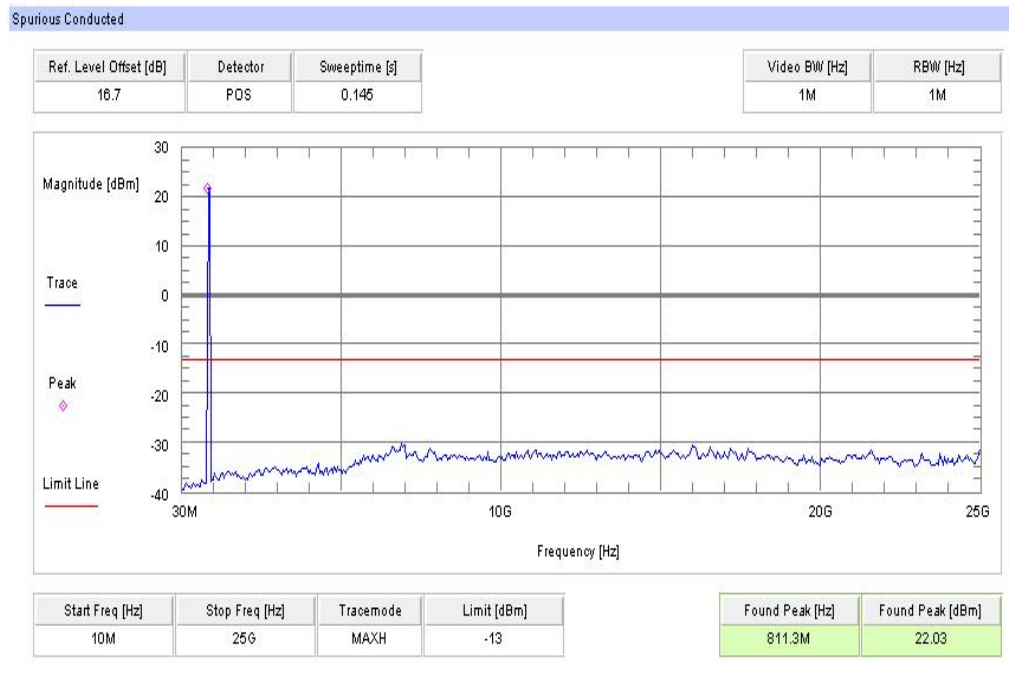

8.5.5 Block edge compliance

Description:

The spectrum at the band edges must comply with the spurious emissions limits.

Measurement:

| Measurement parameters | |
|------------------------|----------|
| Detector: | RMS |
| Sweep time: | 20 sec. |
| Video bandwidth: | 30 kHz |
| Resolution bandwidth: | 30 kHz |
| Span: | 1 MHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|--|---------|
| CFR Part 22.917 CFR Part 2.1051 | RSS 132 |
| Block Edge Compliance | |
| <p>Part 22.917 specifies that “the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.”</p> <p>However, in publication number 890810, The FCC Office of Engineering and Technology specified the following correction to the limits when a resolution bandwidth smaller than 1% of the emission bandwidth is used:</p> <p>“An alternative is to add an additional correction factor of 10 Log (RBW1/ RBW2) to the 43 +10 log(P) limit. RBW1 is the narrower measurement resolution bandwidth and RBW2 is either the 1% emissions bandwidth or 1 MHz.”</p> <p>When using a 30 kHz bandwidth, this yields a -2.2185 adjustment to the limit [10 log(30kHz/50kHz) = -2.2185]. When this adjustment is applied to the limit, the limit becomes -15.2185.</p> | |
| -15.22 dBm | |

Plots:

Plot 1: Channel 4132



Plot 2: Channel 4233



Result: Passed

8.5.6 Occupied bandwidth

Description:

Measurement of the occupied bandwidth of the transmitted signal.

Measurement:

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the UMTS band V. The table below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Part 22.917 requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 4700 kHz, this equates to a resolution bandwidth of at least 50 kHz. For this testing, a resolution bandwidth 100 kHz was used.

| Measurement parameters | |
|------------------------|----------|
| Detector: | Peak |
| Sweep time: | Auto |
| Video bandwidth: | 300 kHz |
| Resolution bandwidth: | 100 kHz |
| Span: | 6 MHz |
| Trace-Mode: | Max Hold |

Limits:

| FCC | IC |
|---|---------|
| CFR Part 22.917 CFR Part 2.1049 | RSS 132 |
| Occupied Bandwidth | |
| Spectrum must fall completely in the specified band | |


Results:

| Occupied Bandwidth | | |
|-------------------------|---------------|--|
| Frequency (MHz) | 99% OBW (kHz) | |
| 826.4 | 4557 | |
| 836.0 | 4569 | |
| 846.6 | 4557 | |
| Measurement uncertainty | ± 100 kHz | |


Result: **Passed**

Plots:


Plot 1: Channel 4132 (99% - OBW)

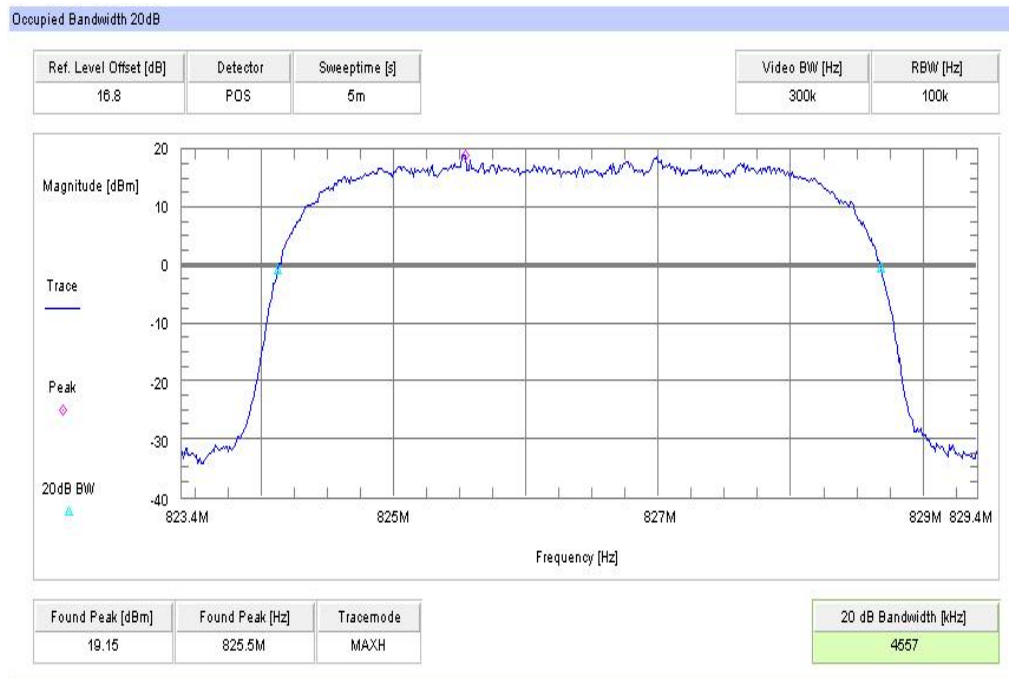

Plot 2: Channel 4180 (99% - OBW)

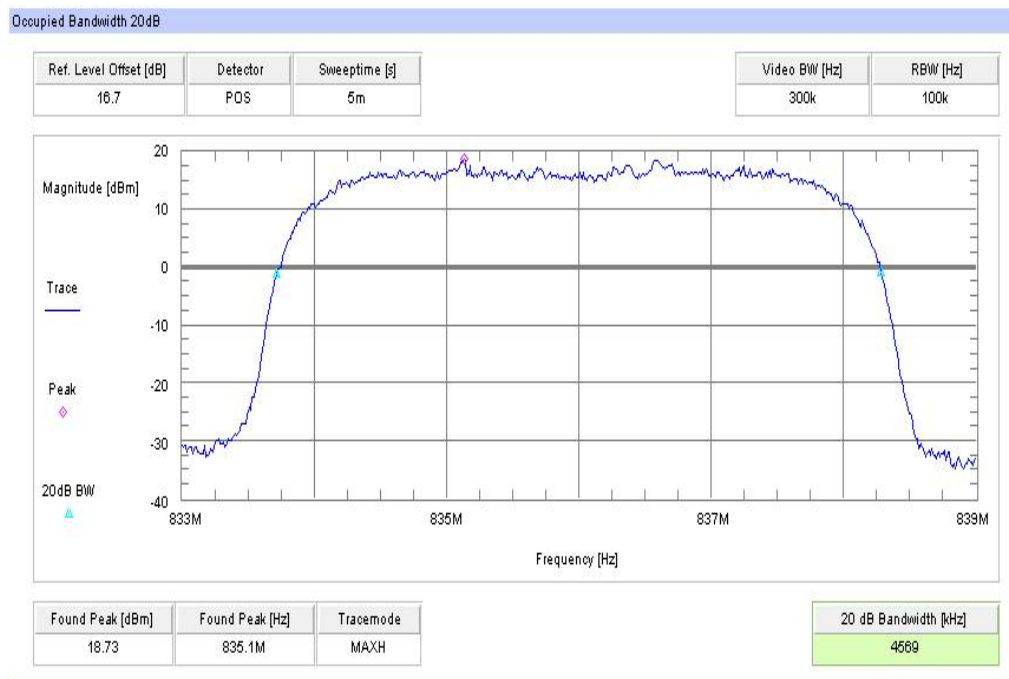

Plot 3: Channel 4233 (99% - OBW)

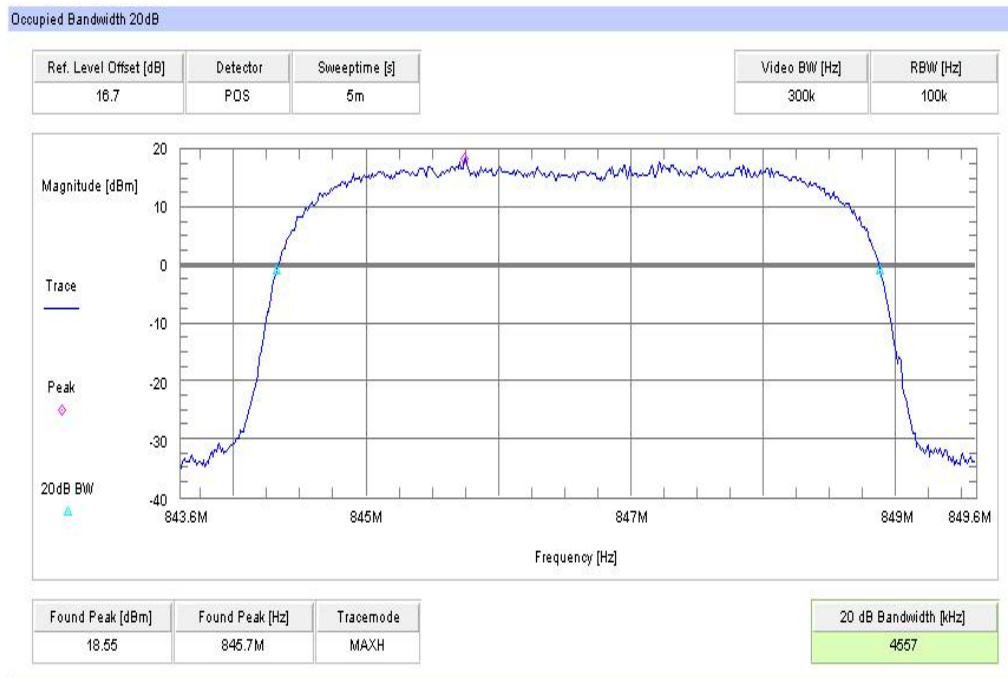

9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

| No. | Lab / Item | Equipment | Type | Manufact. | Serial No. | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|--|--------------------------------|----------------------|-------------|-----------------|---------------------|------------------|------------------|
| 1 | n. a. | Switch / Control Unit | 3488A | HP Meßtechnik | 2605e08770 | 300001443 | ne | | |
| 2 | n. a. | Signal Analyzer 20Hz-26,5GHz-150 to + 30 DBM | FSiQ26 | R&S | 835111/0004 | 300002678 | Ve | 15.01.2013 | 15.01.2015 |
| 3 | n. a. | Power Supply 0-20V; 0-5A | 6632B | HP | US37478366 | 400000117 | vIKI! | 20.08.2012 | 20.08.2014 |
| 4 | n. a. | Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115 | EMCO | 8812-3088 | 300001032 | vIKI! | 11.05.2011 | 11.05.2013 |
| 5 | n. a. | Active Loop Antenna | 6502 | EMCO | 2210 | 300001015 | ne | | |
| 6 | n. a. | Anechoic chamber | FAC 3/5m | MWB / TDK | 87400/02 | 300000996 | ev | | |
| 7 | n. a. | Switch / Control Unit | 3488A | HP Meßtechnik | * | 300000199 | ne | | |
| 8 | n. a. | Switch / Control Unit | 3488A | HP Meßtechnik | 2719A15013 | 300001156 | ne | | |
| 9 | n. a. | Three-Way Power Splitter, 50 Ohm | 11850C | HP Meßtechnik | | 300000997 | ne | | |
| 10 | n. a. | Amplifier | js42-00502650-28-5a | Parzich GMBH | 928979 | 300003143 | ne | | |
| 11 | n. a. | Band Reject filter | WRCG1855/1910-1835/1925-40/8SS | Wainwright | 7 | 300003350 | ev | | |
| 12 | n. a. | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163 | Schwarzbeck | 371 | 300003854 | vIKI! | 14.10.2011 | 14.10.2014 |
| 13 | n. a. | MXE EMI Receiver 20 Hz bis 26,5 GHz | N9038A | Agilent Technologies | MY51210197 | 300004405 | k | 21.02.2013 | 21.02.2014 |
| 14 | 11b | Microwave System Amplifier, 0.5-26.5 GHz | 83017A | HP Meßtechnik | 00419 | 300002268 | ev | | |
| 15 | A025 | Std. Gain Horn Antenna 12.4 to 18.0 GHz | 639 | Narda | | 300000786 | ne | | |
| 16 | A027 | Std. Gain Horn Antenna 18.0 to 26.5 GHz | 638 | Narda | | 300000486 | ne | | |

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vIKI! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

10 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| 1.0 | Initial release | 2013-04-09 |

Annex B Further information**Glossary**

| | | |
|----------|---|--|
| AVG | - | Average |
| DUT | - | Device under test |
| EMC | - | Electromagnetic Compatibility |
| EN | - | European Standard |
| EUT | - | Equipment under test |
| ETSI | - | European Telecommunications Standard Institute |
| FCC | - | Federal Communication Commission |
| FCC ID | - | Company Identifier at FCC |
| HW | - | Hardware |
| IC | - | Industry Canada |
| Inv. No. | - | Inventory number |
| N/A | - | Not applicable |
| PP | - | Positive peak |
| QP | - | Quasi peak |
| S/N | - | Serial number |
| SW | - | Software |

Annex C Accreditation Certificate

Front side of certificate

Deutsche Akkreditierungsstelle GmbH

Befehlense gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
 Unterzeichnerin der Multilateralen Abkommen
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung

Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium
CETECOM ICT Services GmbH
 Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

- Drahtgebundene Kommunikation einschließlich xDSL
- VoIP und DECT
- Akustik
- Funk einschließlich WLAN
- Short Range Devices (SRD)
- RFID
- WiMax und Richtfunk
- Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)
- Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive
- Produktsicherheit
- SAR und Hearing Aid Compatibility (HAC)
- Umweltsimulation
- Smart Card Terminals
- Bluetooth
- Wi-Fi- Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 18.01.2013 mit der Akkreditierungsnummer D-PI-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 80 Seiten.

Registrierungsnummer der Urkunde: D-PI-12076-01-01

Frankfurt am Main, 18.01.2013

Im Auftrag
 Dr. Ingrid Pflüger
 Abteilungsleiter

Siehe Hinweise auf der Rückseite

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

| | | |
|--|---|--|
| Standort Berlin Spittelmarkt 10 10117 Berlin | Standort Frankfurt am Main Gartenstraße 6 60594 Frankfurt am Main | Standort Braunschweig Rundesallee 100 38116 Braunschweig |
|--|---|--|

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (AbL L 218 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
 EA: www.european-accreditation.org
 ILAC: www.ilac.org
 IAF: www.iaf.nu

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>