**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>**TEST REPORT**

Test report no.: 1-6965/13-13-19

Deutsche
Akkreditierungsstelle
D-PL-12076-01-01**Testing laboratory****CETECOM ICT Services GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>e-mail: ict@cetecom.com**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Area of Testing:

Radio Communications & EMC (RCE)

Applicant**Sony Mobile Communications AB**

Nya Vattentornet

22188 Lund / SWEDEN

Phone: +46 46 19 30 00

Fax: -/-

Contact: Mikael Nilsson

e-mail: Micke.nilsson@sonymobile.com

Phone: +46 7 03 22 75 03

Manufacturer**Sony Mobile Communications AB**

Nya Vattentornet

22188 Lund / SWEDEN

Test standard/s

RSS - 210 Issue 8

Spectrum Management and Telecommunications Radio Standards Specification -
Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item**Kind of test item:** Tablet PC WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS**Type name:** TS-0020-BV**Model name:** SGP511**IC:** 4170B-TS0020**Frequency:** UNII bands 5150 MHz to 5725 MHz
(lowest channel 36 – 5180 MHz; highest channel 140 – 5700 MHz)**Technology tested:** WLAN (OFDM/a – mode; n/ac HT20 / HT40 – mode; ac – HT80 – mode)**Antenna:** Integrated antenna**Power supply:** 3.7 V DC by Li - polymer battery**Temperature range:** -20°C to +55°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:Marco Bertolino
Testing Manager**Test performed:**Andreas Luckenbill
Expert

1 Table of contents	
1	Table of contents2
2	General information3
2.1	Notes and disclaimer3
2.2	Application details.....3
3	Test standard/s3
3.1	Measurement guidance.....3
4	Test environment.....4
5	Test item4
5.1	Additional information4
6	Test laboratories sub-contracted4
7	Description of the test setup5
7.1	Radiated measurements chamber F.....5
7.2	Radiated measurements chamber C6
7.3	Radiated measurements 12.75 GHz to 40 GHz7
7.4	AC conducted8
7.5	Conducted measurements9
8	Summary of measurement results10
9	Additional comments11
10	RSP100 test report cover sheet / performance test data12
11	Measurement results14
11.1	Identify worst case data rate.....14
11.2	Antenna Gain.....15
11.3	Duty cycle16
11.4	Maximum output power conducted19
11.5	Power spectral density24
11.6	Spectrum bandwidth – 26 dB bandwidth40
11.7	Peak excursion measurements56
11.8	Band edge compliance radiated.....72
11.9	TX spurious emissions radiated.....86
11.10	RX spurious emissions radiated166
11.11	Spurious emissions radiated < 30 MHz170
11.12	Spurious emissions conducted < 30 MHz172
12	Test equipment and ancillaries used for tests175
13	Observations176
Annex A	Document history177
Annex B	Further information.....177
Annex C	Accreditation Certificate178

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2013-12-19
Date of receipt of test item:	2014-01-14
Start of test:	2014-01-14
End of test:	2014-02-03
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
RSS - 210 Issue 8	01.12.2010	Spectrum Management and Telecommunications Radio Standards Specification - Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

3.1 Measurement guidance

UNII: KDB 789033	2013-04	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E
------------------	---------	--

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		40 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li - polymer battery
	V_{max}	4.2 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	Tablet PC WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS
Type name	:	TS-0020-BV
Model name	:	SGP511
S/N serial number	:	Rad. CB51268FN3 Cond. CB51268F6N, CB51268F4Y
HW hardware status	:	AP1
SW software status	:	RF test software
Frequency band [MHz]	:	UNII bands 5150 MHz to 5725 MHz (lowest channel 36 – 5180 MHz; highest channel 140 – 5700 MHz)
Type of radio transmission	:	OFDM
Use of frequency spectrum	:	
Type of modulation	:	BPSK, QPSK, 16-QAM, 64-QAM and 256-QAM
Number of channels	:	19
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li - polymer battery
Temperature range	:	-20°C to +55 °C

5.1 Additional information

Test setup- and EUT-photos are included in test report: 1-6965/13-13-01_AnnexA
1-6965/13-13-01_AnnexB
1-6965/13-13-01_AnnexD


6 Test laboratories sub-contracted

None

7 Description of the test setup

7.1 Radiated measurements chamber F


The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

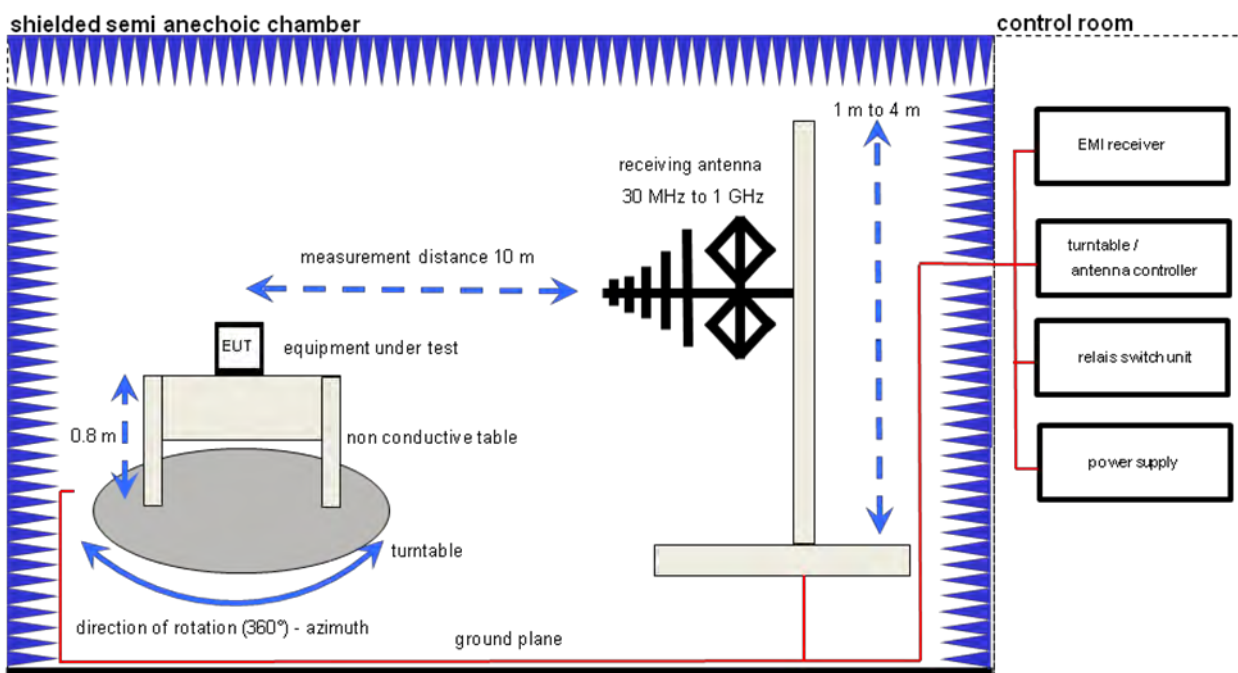

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368
DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580
EMI Test Receiver	ESCI 3	R&S	100083	300003312
Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379
Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745
Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746
Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787


7.2 Radiated measurements chamber C

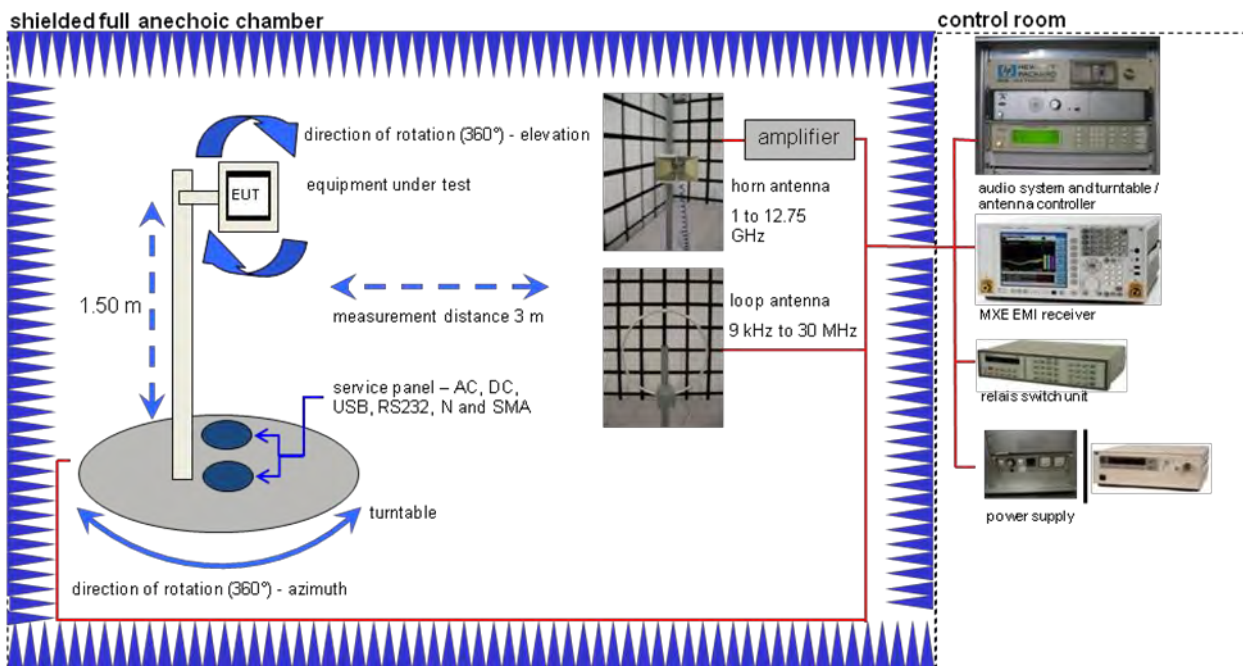

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789
Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032
Active Loop Antenna	6502	EMCO	8905-2342	300000256
Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997
Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143


7.3 Radiated measurements 12.75 GHz to 40 GHz

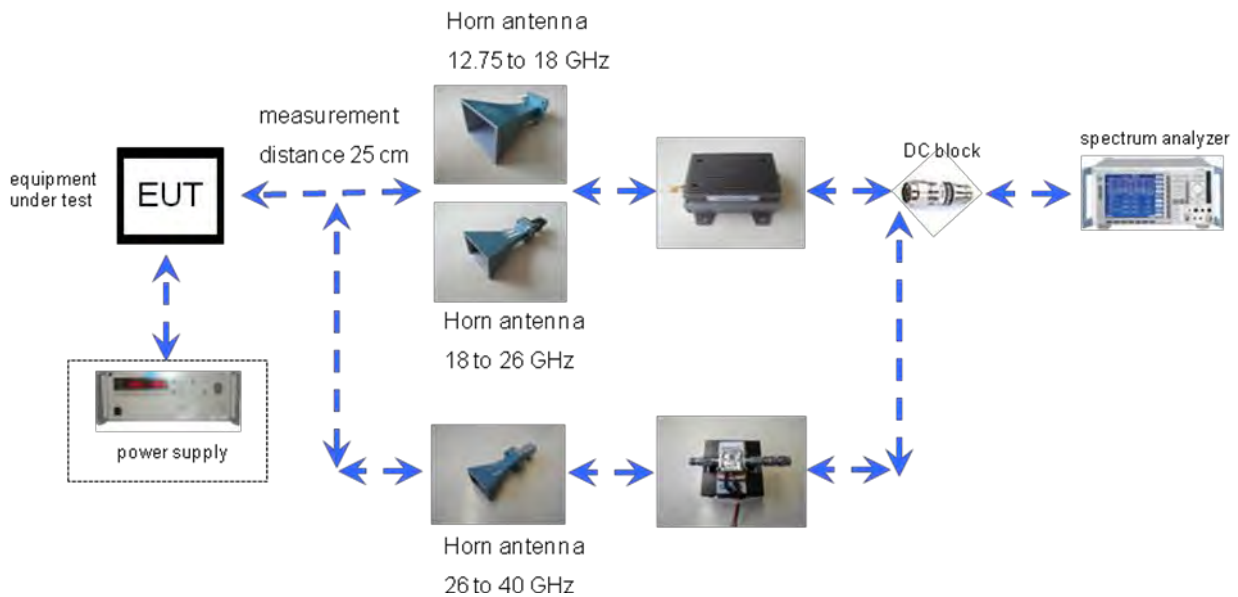

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787
Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442
Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268
Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	7911	300001751
Broadband Low Noise Amplifier 18-50 GHz	CBL18503070-XX	CERNEX	19338	300004273
Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517


7.4 AC conducted

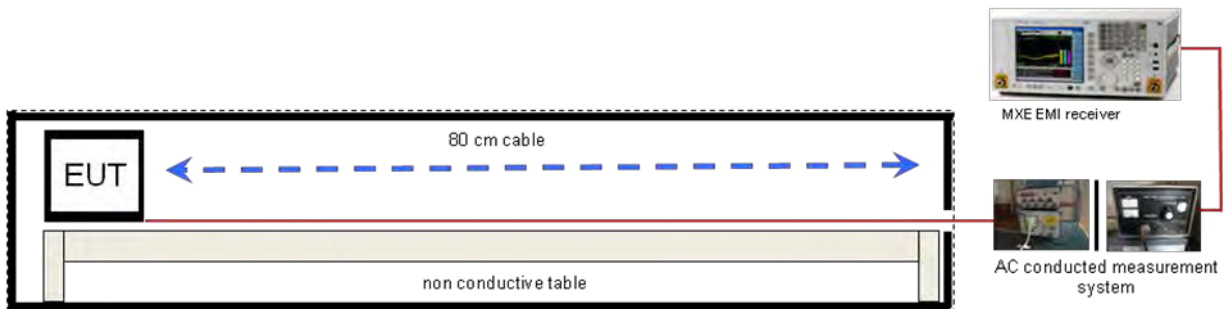

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001168
Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210

7.5 Conducted measurements

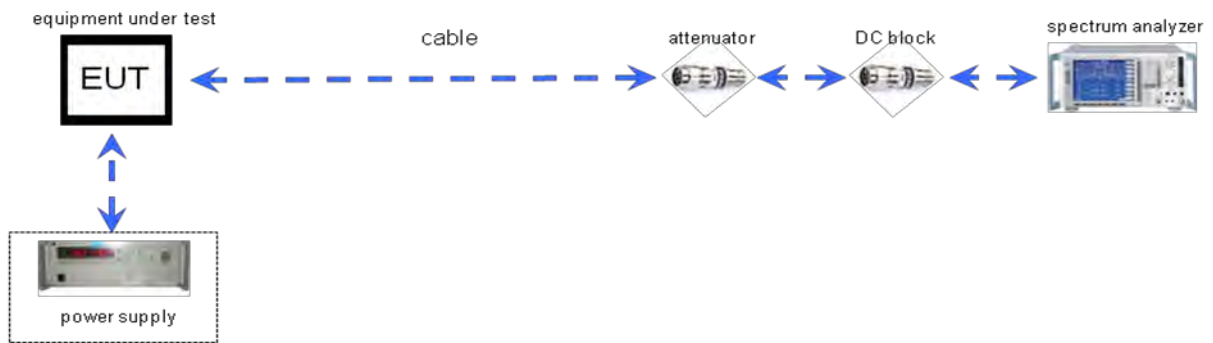

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517

8 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	RSS 210, Issue 8, Annex 9	Passed	2014-02-06	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Pass	Fail	NA	NP	Remark
-/-	Output power verification (conducted)	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No passed / fail criteria!
-/-	Gain	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No passed / fail criteria!
U-NII Part 15	Duty cycle	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No passed / fail criteria!
RSS-210	Maximum output power (conducted & radiated)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
RSS-210	Power spectral density	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
RSS-210	Spectrum bandwidth 26dB bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
RSS-210	Peak excursion measurements	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
RSS-210	Band edge compliance radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
RSS-210	TX spurious emissions radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
RSS-Gen.	RX spurious emissions radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
RSS-Gen.	Spurious emissions radiated < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
-/-	Spurious emissions conducted emissions < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

9 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode: No test mode available.

Special software is used.
EUT is transmitting pseudo random data by itself

10 RSP100 test report cover sheet / performance test data

Test report number	:	1-6965/13-13-19			
Equipment model number:		SGP511			
Certification number	:	4170B-TS0020			
Manufacturer (complete address)	:	Sony Mobile Communications AB Nya Vattentorget 22188 Lund / SWEDEN			
Tested to radio standards Specification no.	:	RSS 210, Issue 8, Annex 9			
Open area test site IC No.:		IC 3462C-1			
Frequency range	:	UNII bands: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz 5470 MHz to 5600 MHz; 5650 MHz to 5725 MHz			
RF-power (max.)	:	Conducted values:			
		Band	a	n HT20	n HT40
		5180 – 5240 MHz	14.06 mW	12.59 mW	
		5190 – 5230 MHz			12.53 mW
		5260 – 5320 MHz	13.93 mW	12.56 mW	
		5270 – 5310 MHz			12.59 mW
		5500 – 5700 MHz	11.51 mW	11.30 mW	
		5510 – 5670 MHz			11.02 mW
		5210 – 5290 MHz		10.79 mW	
		5530 – 5610 MHz		10.50 mW	
		Radiated values:			
		Band	a	n HT20	n HT40
		5180 – 5240 MHz	22.96 mW	21.38 mW	
		5190 – 5230 MHz			21.04 mW
		5260 – 5320 MHz	25.35 mW	22.86 mW	
		5270 – 5310 MHz			22.91 mW
		5500 – 5700 MHz	18.24 mW	17.10 mW	
5510 – 5670 MHz			17.46 mW		
5210 – 5290 MHz		19.63 mW			
5530 – 5610 MHz		16.63 mW			
Occupied bandwidth (99%-BW)	:	Band	a	n HT20	n HT40
		5180 – 5240 MHz	17.31 MHz	18.37 MHz	
		5190 – 5230 MHz			36.62 MHz
		5260 – 5320 MHz	17.36 MHz	18.37 MHz	
		5270 – 5310 MHz			36.62 MHz
		5500 – 5700 MHz	17.36 MHz	18.37 MHz	
		5510 – 5670 MHz			36.54 MHz
		5210 – 5290 MHz		76.12 MHz	
5530 – 5610 MHz		76.12 MHz			
Necessary bandwidth (calculated)	:	Band	a	n HT20	n HT40
		5180 – 5240 MHz	16.88 MHz	16.88 MHz	
		5190 – 5230 MHz			33.75 MHz
		5260 – 5320 MHz	16.88 MHz	16.88 MHz	
		5270 – 5310 MHz			33.75 MHz
		5500 – 5700 MHz	16.88 MHz	16.88 MHz	
		5510 – 5670 MHz			33.75 MHz
		5210 – 5290 MHz		80 MHz	
5530 – 5610 MHz		80 MHz			
Emission classification	:	(according TRC-43)		G7D	
Type of modulation	:	QPSK, 16 – QAM, 64 – QAM, 256 – QAM			
Antenna information	:	Integrated antenna			
Transmitter spurious [dBµV/m @ 3m]	:	57.64 @ 5.37 GHz (peak) 39.93 @ 5.37 GHz (peak)			

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2014-02-06	Andreas Luckenbill	<div style="border: 1px solid black; height: 45px; width: 100%;"></div>
Date	Name	

11 Measurement results

11.1 Identify worst case data rate

Measurement:

All modes of the module will be measured with an average power meter to identify the maximum transmission power on low, mid and high channel. In the case that only one or two channels are available, only these will be measured.

In further tests only the identified worst case modulation scheme or bandwidth will be measured. Additional the band edge compliance test will be performed in the lowest and highest modulation scheme.

Measurement parameters:

Average Power Meter

Results:

Modulation	Modulation scheme / bandwidth						
	5180 MHz	5240 MHz	5260 MHz	5320 MHz	5500 MHz	5600 MHz	5700 MHz
Frequency	6Mbit/s	6Mbit/s	6Mbit/s	6Mbit/s	6Mbit/s	6Mbit/s	6Mbit/s
OFDM / a – mode	6Mbit/s	6Mbit/s	6Mbit/s	6Mbit/s	6Mbit/s	6Mbit/s	6Mbit/s
OFDM / n/ac – mode HT20	MCS0	MCS0	MCS0	MCS1	MCS0	MCS1	MCS0
Frequency	5190 MHz	5230 MHz	5270 MHz	5310 MHz	5510 MHz	5590 MHz	5670 MHz
OFDM / n/ac – mode HT40	MCS0	MCS0	MCS1	MCS0	MCS0	MCS0	MCS0
Frequency	5210 MHz		5290 MHz		5530 MHz		5610 MHz
OFDM / ac – mode HT80	MCS0		MCS0		MCS0		MCS0

11.2 Antenna Gain

Limits:

Antenna Gain
Maximum 6 dBi

Result:

OFDM Band 5150 MHz to 5250 MHz	Gain		
Channel	Lowest 5180 MHz	-/-	Highest 5240 MHz
Gain Declared by the manufacturer	2.3	-/-	2.1
Measurement uncertainty	± 3 dB		

OFDM Band 5250 MHz to 5350 MHz	Gain		
Channel	Lowest 5260 MHz	-/-	Highest 5320 MHz
Gain Declared by the manufacturer	2.0	-/-	2.6
Measurement uncertainty	± 3 dB		

OFDM Band 5470 MHz to 5725 MHz	Gain		
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz
Gain Declared by the manufacturer	2.0	1.8	1.5
Measurement uncertainty	± 3 dB		

Result: Passed

11.3 Duty cycle

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	10 MHz
Video bandwidth:	10 MHz
Span:	Zero
Trace-Mode:	Video trigger / view / single sweep


Results:

Duty cycle and correction factor:

OFDM / a – mode: 94.85 % duty cycle => 0.23 dB
 OFDM / n/ac – mode HT20: 96.24 % duty cycle => 0.17 dB
 OFDM / n/ac – mode HT40: 82.46 % duty cycle => 0.84 dB
 OFDM / ac – mode HT80: 87.08 % duty cycle => 0.60 dB


Plots:

Plot 1: duty cycle of the transmitter – OFDM / a – mode

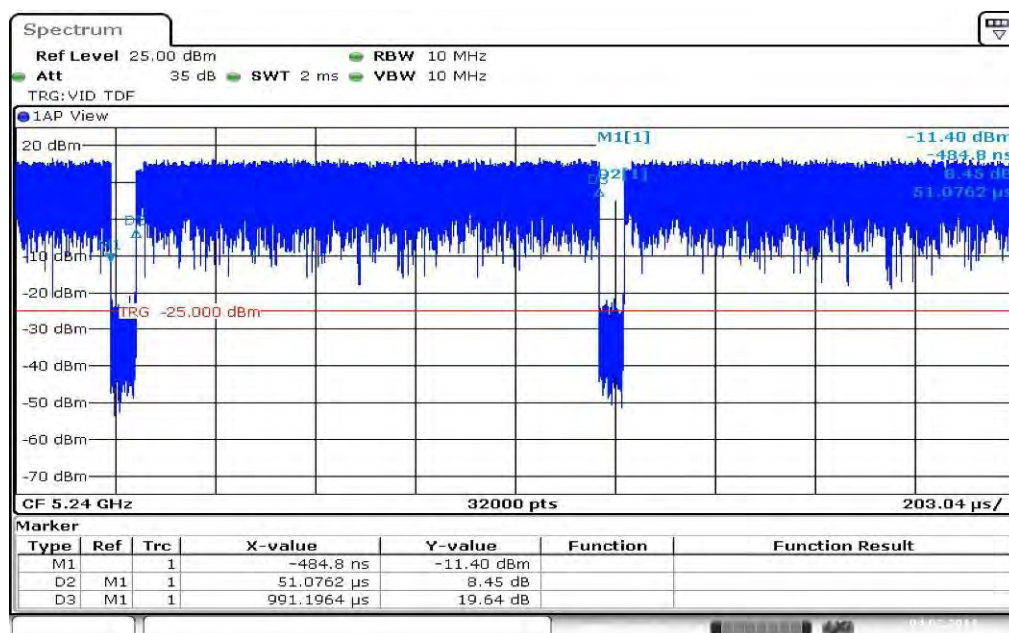


Date: 4.FEB.2014 09:14:06


Plot 2: duty cycle of the transmitter – OFDM / n/ac – mode HT20

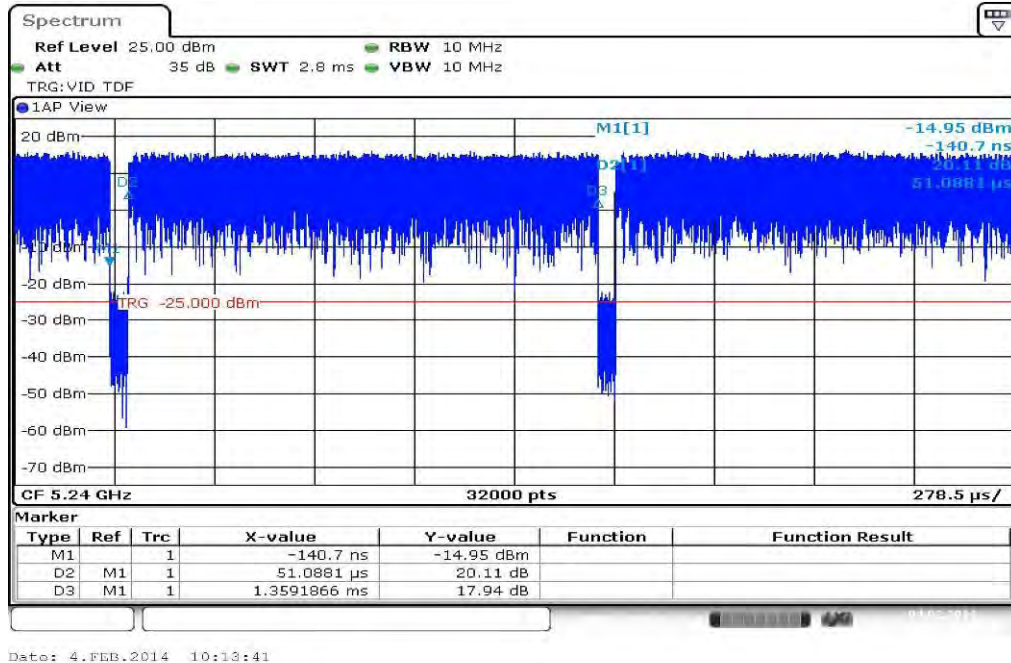

Plot 3: duty cycle of the transmitter – OFDM / n/ac – mode HT40

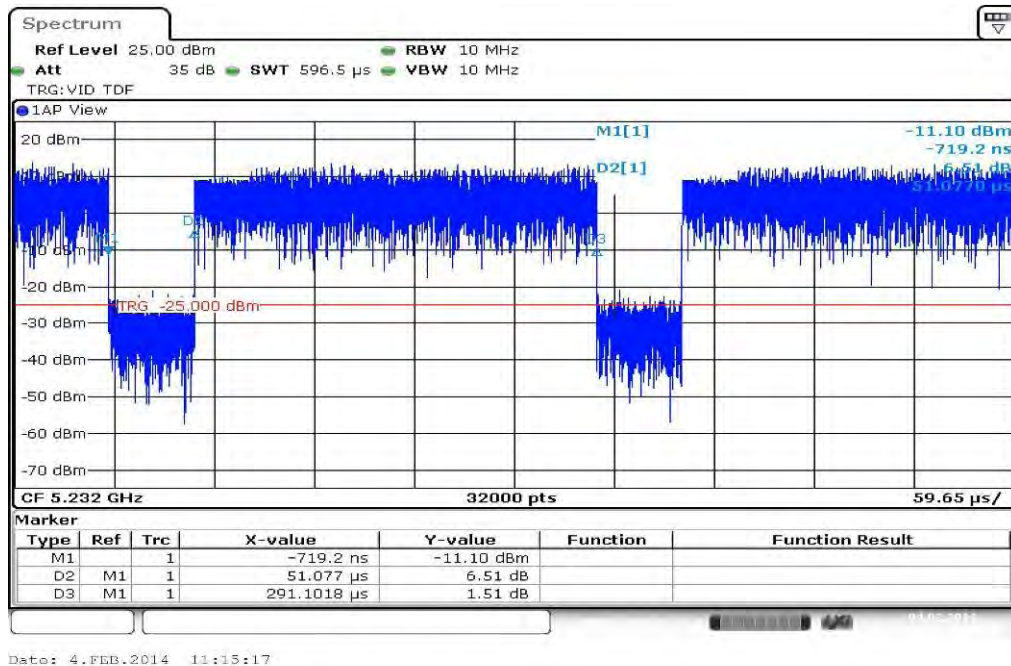

Plot 4: duty cycle of the transmitter – OFDM / ac – mode HT80

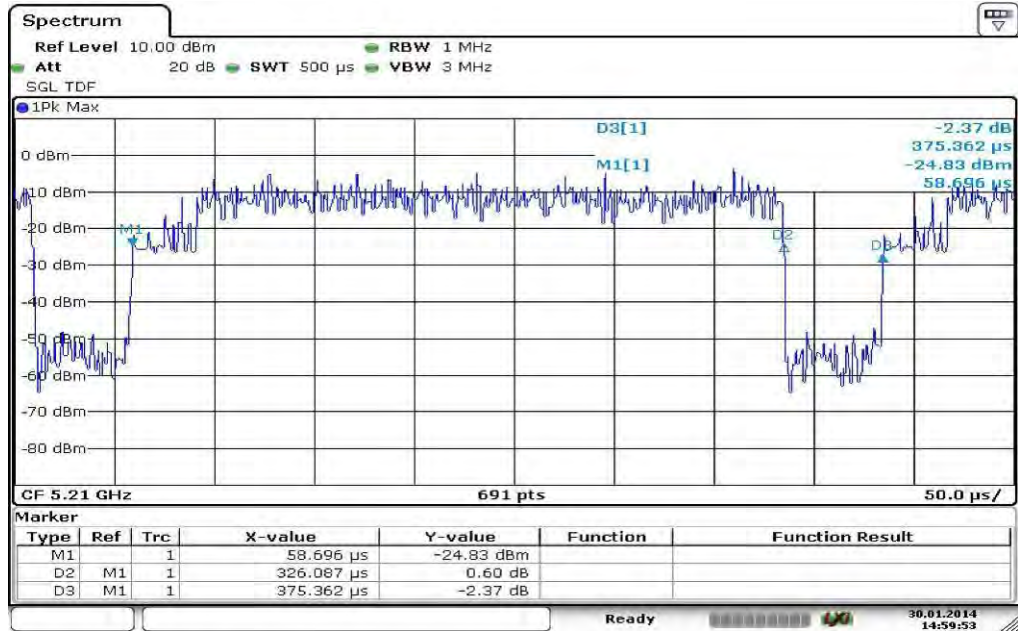

Date: 30.JAN.2014 14:59:53

11.4 Maximum output power conducted

Description:

Measurement of the maximum output power conducted and radiated

Measurement:

Measurement parameter	
Detector:	RMS
Sweep time:	60s
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 MHz
Span:	> EBW
Trace-Mode:	Max hold
Analyzer function	Band power / channel power Interval > 26 dB EBW

Limits:

Radiated output power	Conducted output power
Conducted power + 6dBi antenna gain	The lesser one of 50mW or 4 dBm + 10 log Bandwidth 5.150-5.250 GHz 250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz 250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 26dB Bandwidth [MHz])

Result: OFDM / a – mode

OFDM / a – mode Channel	Maximum output power conducted [dBm]			
	Lowest 5180 MHz	Highest 5240 MHz	Lowest 5260 MHz	Highest 5320 MHz
+0.23 dB duty cycle correction	11.31	11.48	11.36	11.44
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.23 dB duty cycle correction	10.61	10.32	9.96	-/-
Measurement uncertainty	± 1 dB			

Result: Passed**Result: OFDM / a – mode**

OFDM / a – mode Channel	Maximum output power radiated [dBm]			
	Lowest 5180 MHz	Highest 5240 MHz	Lowest 5260 MHz	Highest 5320 MHz
+0.23 dB duty cycle correction	13.61	13.58	13.36	14.04
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.23 dB duty cycle correction	12.61	12.12	11.46	-/-
Measurement uncertainty	± 3 dB			

Result: Passed

Result: OFDM / n/ac – mode HT20

OFDM / n/ac – mode HT20 Channel	Maximum output power radiated [dBm]			
	Lowest 5180 MHz	Highest 5240 MHz	Lowest 5260 MHz	Highest 5320 MHz
+0.17 dB duty cycle correction	11.00	10.95	10.65	10.99
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.17 dB duty cycle correction	9.84	10.53	10.20	-/-
Measurement uncertainty	± 3 dB			

Result: Passed**Result: OFDM / n/ac – mode HT20**

OFDM / n/ac – mode HT20 Channel	Maximum output power radiated [dBm]			
	Lowest 5180 MHz	Highest 5240 MHz	Lowest 5260 MHz	Highest 5320 MHz
+0.17 dB duty cycle correction	13.30	13.05	12.65	13.59
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
+0.17 dB duty cycle correction	11.84	12.33	11.70	-/-
Measurement uncertainty	± 3 dB			

Result: Passed

Result: OFDM / n/ac – mode HT40

OFDM / n/ac – mode HT40 Channel	Maximum output power conducted [dBm]			
	Lowest 5190 MHz	Highest 5230 MHz	Lowest 5270 MHz	Highest 5310 MHz
+0.84 dB duty cycle correction	10.93	10.98	10.23	11.00
Channel	Lowest 5510 MHz	Middle 5590 MHz	Highest 5670 MHz	-/-
+0.84 dB duty cycle correction	10.42	10.37	9.62	-/-
Measurement uncertainty	± 1 dB			

Result: Passed**Result: OFDM / n/ac – mode HT40**

OFDM / n/ac – mode HT40 Channel	Maximum output power radiated [dBm]			
	Lowest 5190 MHz	Highest 5230 MHz	Lowest 5270 MHz	Highest 5310 MHz
+0.84 dB duty cycle correction	13.23	13.08	12.23	13.60
Channel	Lowest 5510 MHz	Middle 5590 MHz	Highest 5670 MHz	-/-
+0.84 dB duty cycle correction	12.42	12.17	11.12	-/-
Measurement uncertainty	± 3 dB			

Result: Passed

Result: OFDM / ac – mode HT80

OFDM / ac – mode HT80 Channel	Maximum output power conducted [dBm]			
	Lowest 5210 MHz	Highest 5290 MHz	Lowest 5530 MHz	Highest 5610 MHz
+0.60 dB duty cycle correction	10.21	10.33	10.21	10.09
Measurement uncertainty	± 1 dB			

Result: Passed

Result: OFDM / ac – mode HT80

OFDM / ac – mode HT80 Channel	Maximum output power radiated [dBm]			
	Lowest 5210 MHz	Highest 5290 MHz	Lowest 5530 MHz	Highest 5610 MHz
+0.60 dB duty cycle correction	12.51	12.93	12.21	11.89
Measurement uncertainty	± 3 dB			

Result: Passed

11.5 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	RMS
Sweep time:	60 s / 120 s
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 MHz
Span:	> EBW
Trace-Mode:	Max hold

Limits:

Power Spectral Density
power spectral density conducted ≤ 4 dBm in any 1 MHz band (band 5150 – 5250 MHz) power spectral density conducted ≤ 11 dBm in any 1 MHz band (band 5250 – 5350 MHz) power spectral density conducted ≤ 11 dBm in any 1 MHz band (band 5470 – 5725 MHz)

Result: OFDM / a – mode

OFDM / a – mode Channel	Power Spectral density [dBm/MHz]			
	Lowest 5180 MHz	Highest 5240 MHz	Lowest 5260 MHz	Highest 5320 MHz
Included duty cycle correction	0.01	0.45	-0.36	0.25
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
Included duty cycle correction	-1.05	-0.70	-0.55	-/-
Measurement uncertainty	± 1 dB			

Result: Passed

Result: OFDM / n/ac – mode HT20

OFDM / n/ac – mode HT20 Channel	Power Spectral density [dBm/MHz]			
	Lowest 5180 MHz	Highest 5240 MHz	Lowest 5260 MHz	Highest 5320 MHz
Included duty cycle correction	-0.50	-0.20	-1.26	-0.47
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
Included duty cycle correction	-1.86	-1.47	-1.73	-/-
Measurement uncertainty	± 1 dB			

Result: Passed**Result: OFDM / n/ac – mode HT40**

OFDM / n/ac – mode HT40 Channel	Power Spectral density [dBm/MHz]			
	Lowest 5190 MHz	Highest 5230 MHz	Lowest 5270 MHz	Highest 5310 MHz
Included duty cycle correction	-3.57	-3.35	-4.54	-3.39
Channel	Lowest 5510 MHz	Middle 5590 MHz	Highest 5670 MHz	-/-
Included duty cycle correction	-4.54	-4.68	-4.70	-/-
Measurement uncertainty	± 1 dB			

Result: Passed**Result: OFDM / ac – mode HT80**

OFDM / ac – mode HT80 Channel	Power Spectral density [dBm/MHz]			
	Lowest 5210 MHz	Highest 5290 MHz	Lowest 5530 MHz	Highest 5610 MHz
Included duty cycle correction	-9.29	-8.73	-9.88	-9.97
Measurement uncertainty	± 1 dB			

Result: Passed

Plots: OFDM / a – mode

Plot 1: 5180 MHz



Plot 2: 5240 MHz



Plot 3: 5260 MHz



Plot 4: 5320 MHz



Plot 5: 5500 MHz



Plot 6: 5600 MHz



Plot 7: 5700 MHz



Date: 4.FEB.2014 09:41:04

Plots: OFDM / n/ac – mode HT20

Plot 1: 5180 MHz



Plot 2: 5240 MHz



Plot 3: 5260 MHz



Plot 4: 5320 MHz



Plot 5: 5500 MHz



Plot 6: 5600 MHz




Plot 7: 5700 MHz



Date: 4.FEB.2014 10:40:40

Plots: OFDM / n/ac – mode HT40

Plot 1: 5190 MHz

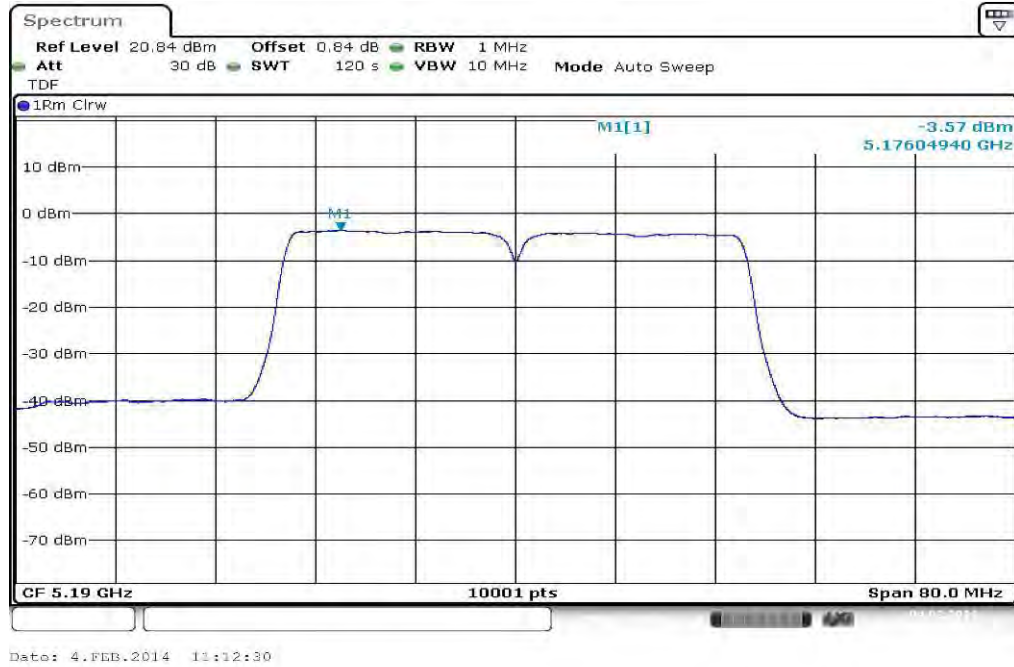


Plot 2: 5230 MHz



Plot 3: 5270 MHz




Plot 4: 5310 MHz

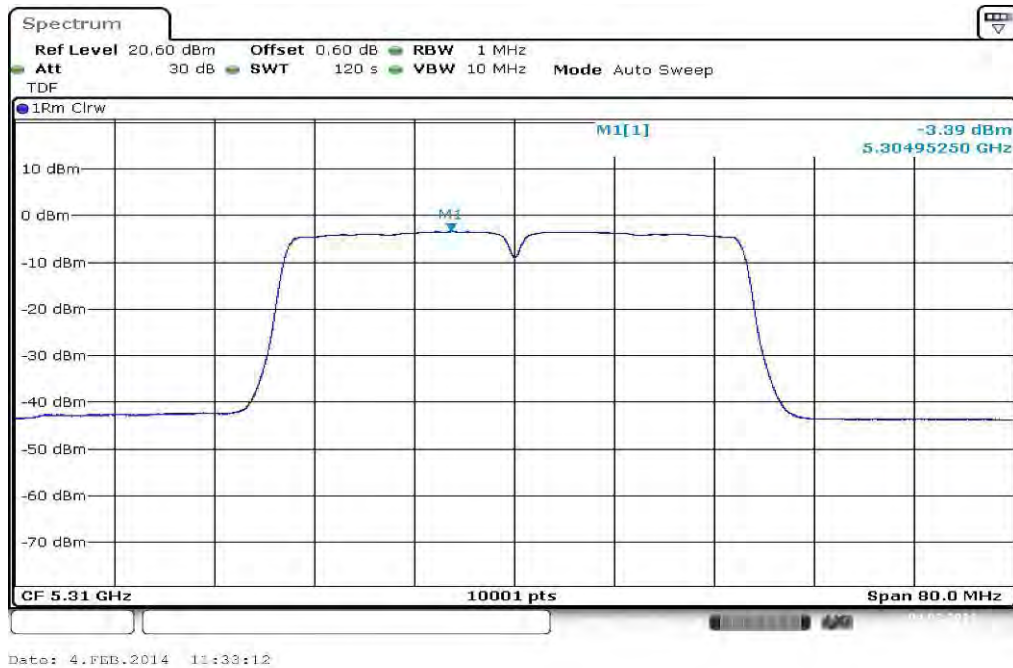


Plot 5: 5510 MHz



Plot 6: 5590 MHz

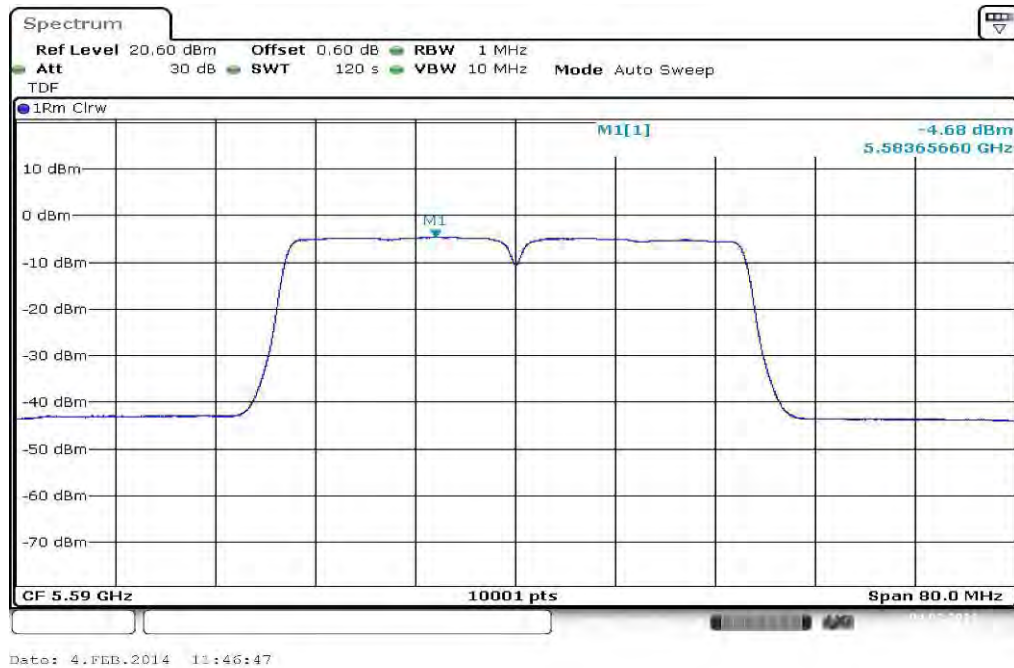


Plot 7: 5670 MHz

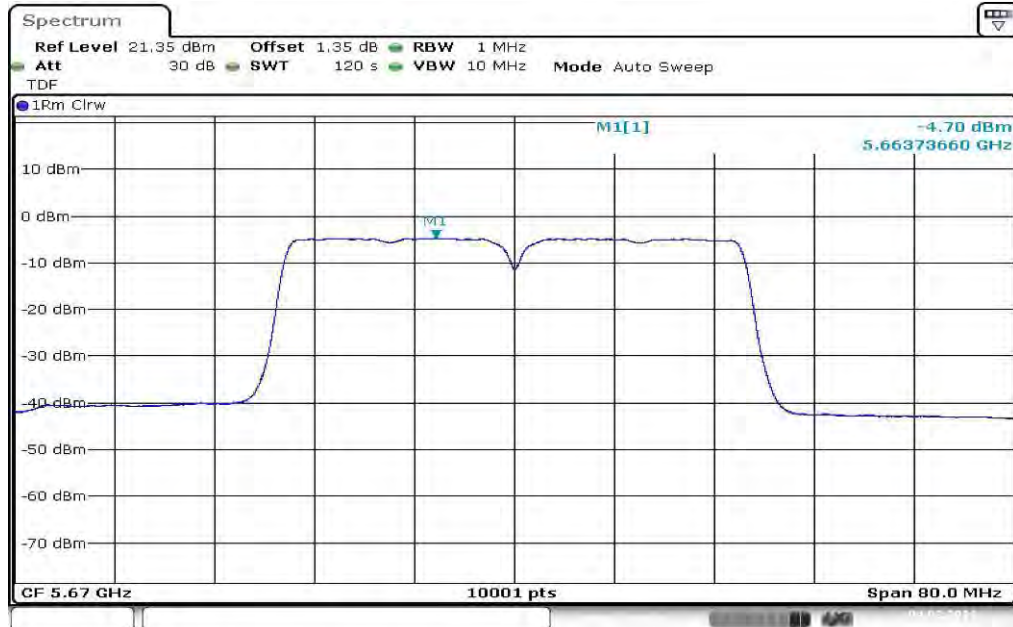

Date: 4.FEB.2014 11:53:35


Plots: OFDM / ac – mode HT80

Plot 8: 5210 MHz

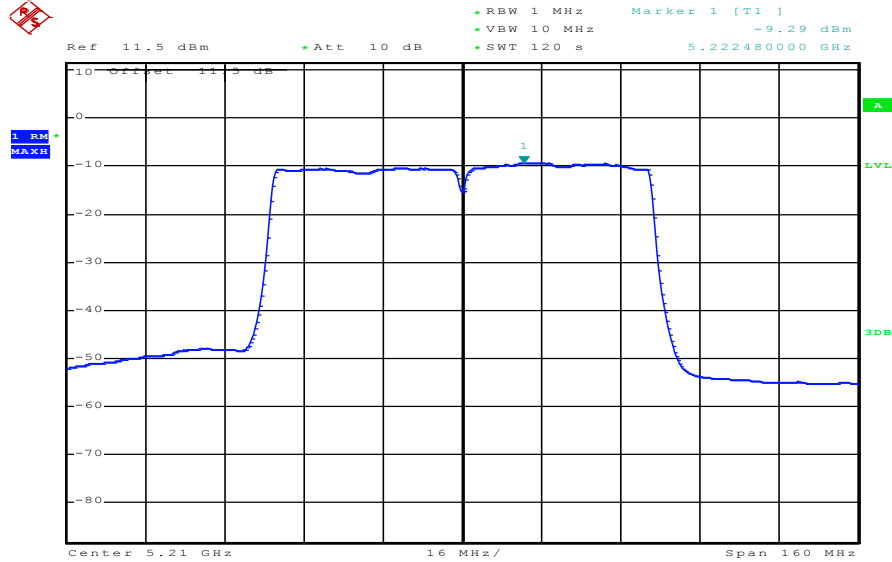


Date: 1.FEB.2014 10:25:56

Plot 9: 5290 MHz

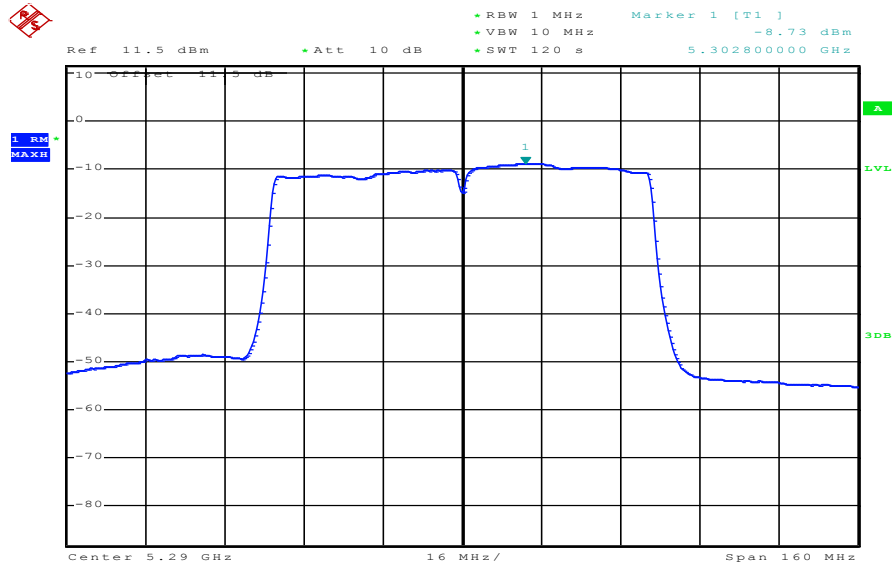


Date: 1.FEB.2014 10:29:08

Plot 10: 5530 MHz

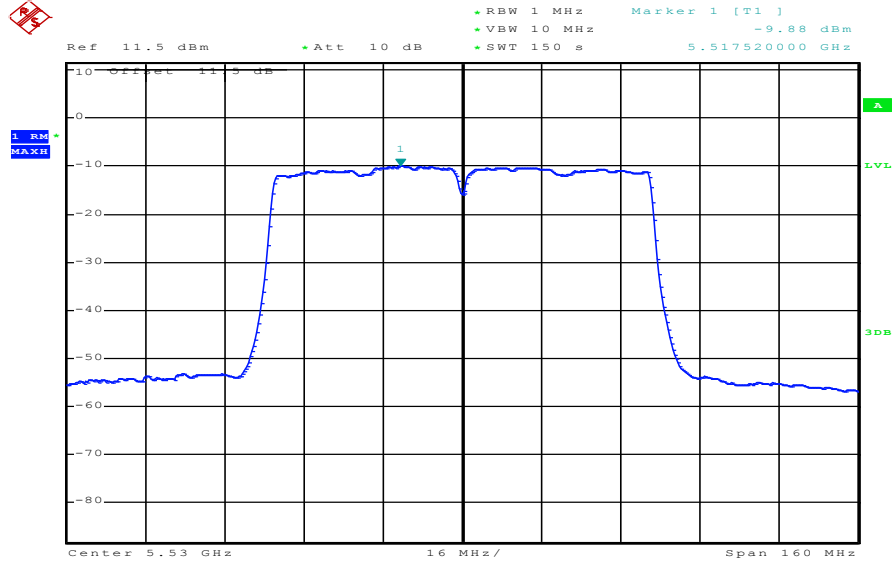

Date: 1.FEB.2014 10:59:31

Plot 11: 5610 MHz

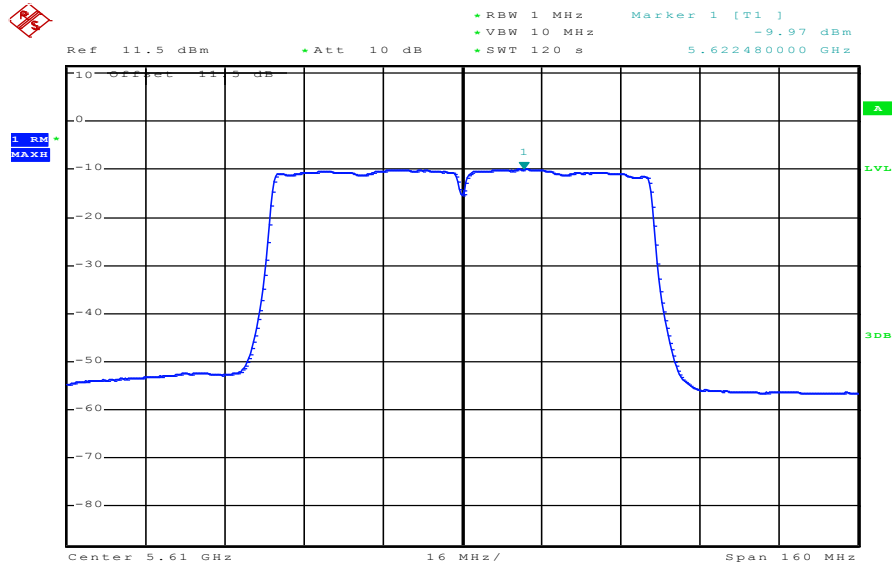

Date: 1.FEB.2014 11:07:26

11.6 Spectrum bandwidth – 26 dB bandwidth

Description:

Measurement of the 26 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1% EBW
Video bandwidth:	≥ RBW
Span:	> complete signal!
Trace-Mode:	Max hold

Limits:

Spectrum Bandwidth – 26 dB Bandwidth
-/-

Result: OFDM / a – mode

OFDM / a – mode Channel	26 dB BANDWIDTH [MHz]			
	Lowest 5180 MHz	Highest 5240 MHz	Lowest 5260 MHz	Highest 5320 MHz
	21.58	21.78	21.88	21.88
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
	21.83	21.58	21.28	-/-
Measurement uncertainty	± 1 dB			

Result: Passed

Result: OFDM / n/ac – mode HT20

OFDM / n/ac – mode HT20 Channel	26 dB BANDWIDTH [MHz]			
	Lowest 5180 MHz	Highest 5240 MHz	Lowest 5260 MHz	Highest 5320 MHz
	22.08	22.23	22.08	22.23
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz	-/-
	22.03	22.13	22.18	-/-
Measurement uncertainty	± 1 dB			

Result: Passed

Result: OFDM / n/ac – mode HT40

OFDM / n/ac – mode HT40 Channel	26 dB BANDWIDTH [MHz]			
	Lowest 5190 MHz	Highest 5230 MHz	Lowest 5270 MHz	Highest 5310 MHz
	39.88	39.72	40.04	39.80
Channel	Lowest 5510 MHz	Middle 5590 MHz	Highest 5670 MHz	-/-
	39.88	39.88	39.80	-/-
Measurement uncertainty	± 1 dB			

Result: Passed

Result: OFDM / n/ac – mode HT80

OFDM / n/ac – mode HT40 Channel	26 dB BANDWIDTH [MHz]			
	Lowest 5210 MHz	Highest 5290 MHz	Lowest 5530 MHz	Highest 5610 MHz
	81.54	81.54	81.54	81.35
Measurement uncertainty	± 1 dB			


Result: Passed

Plots: OFDM / a – mode


Plot 1: 5180 MHz



Plot 2: 5240 MHz

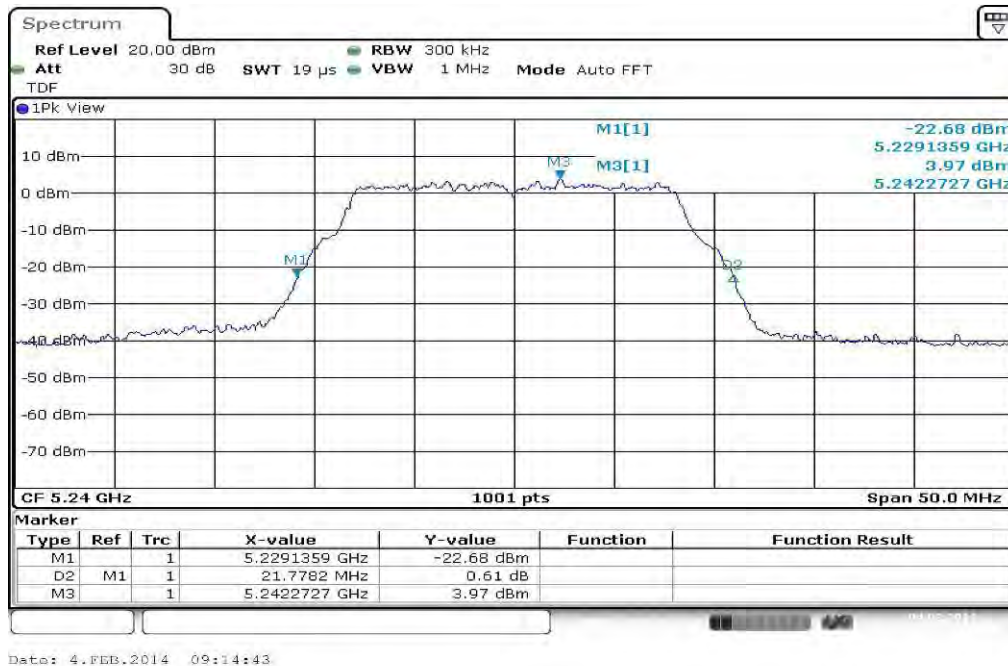


Plot 3: 5260 MHz

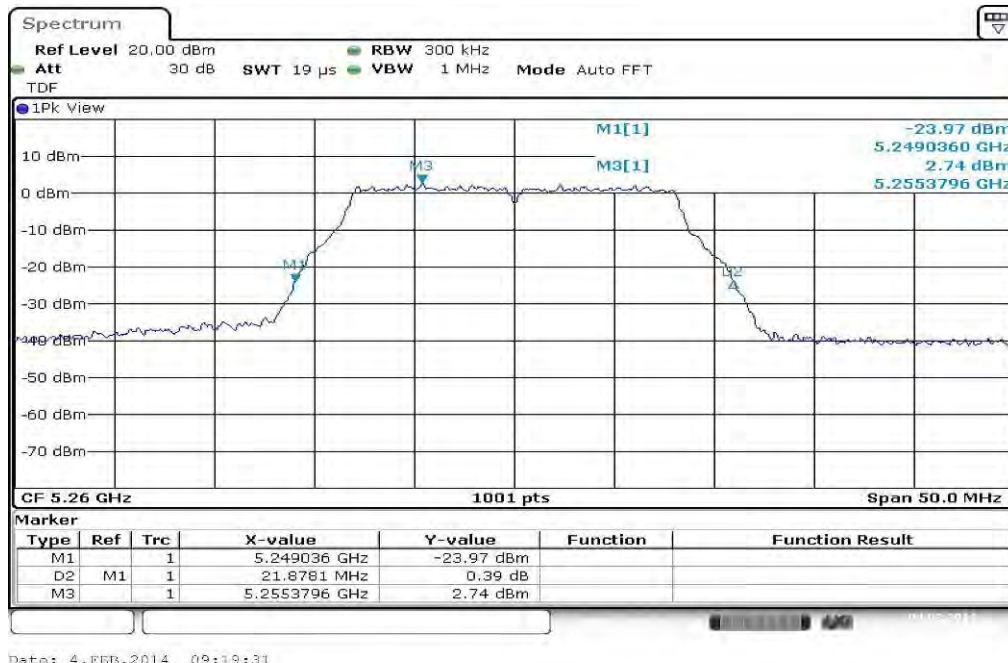


Plot 4: 5320 MHz




Plot 5: 5500 MHz

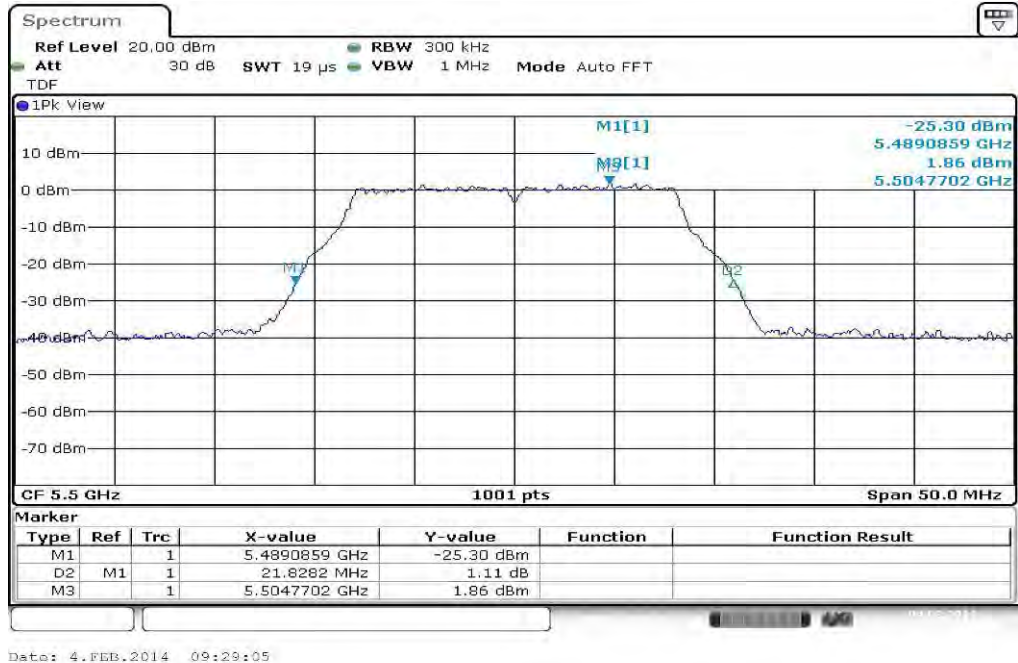

Plot 6: 5600 MHz

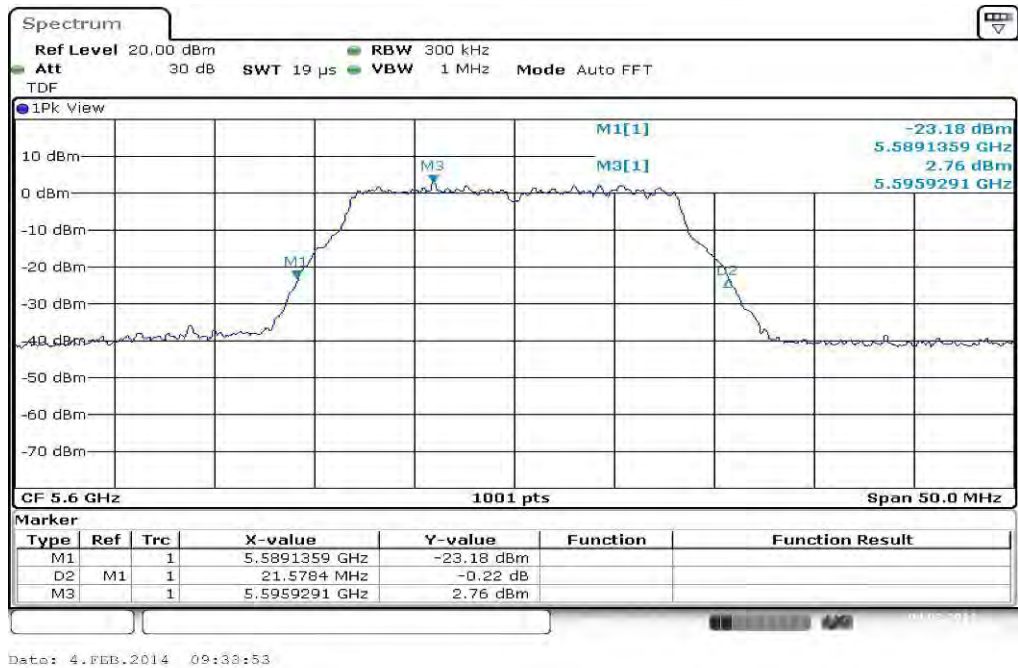

Plot 7: 5700 MHz

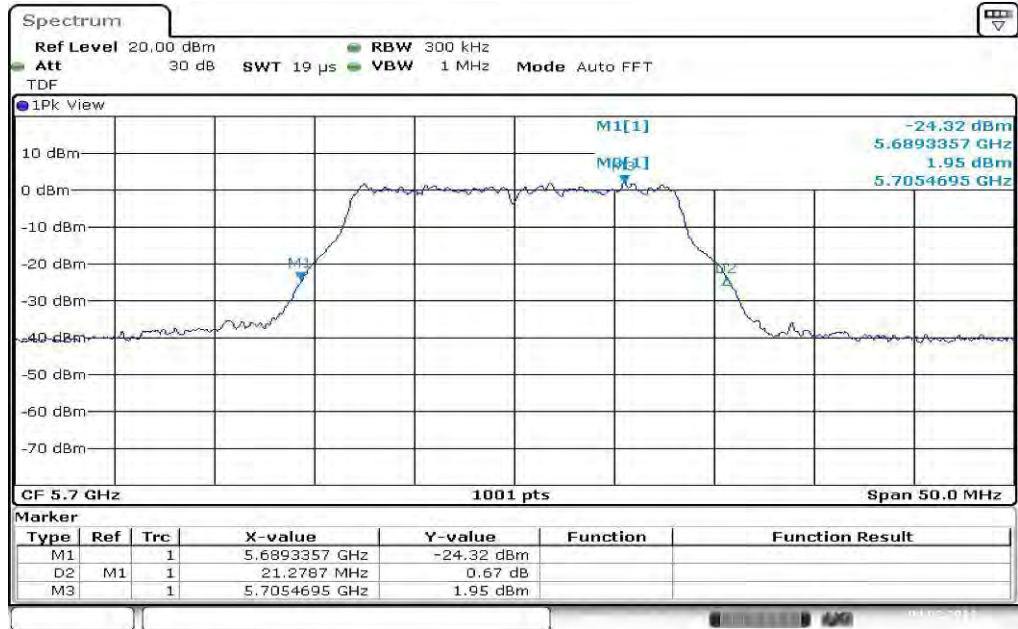


Date: 4.FEB.2014 09:38:40

Plots: OFDM / n/ac – mode HT20


Plot 1: 5180 MHz




Plot 2: 5240 MHz

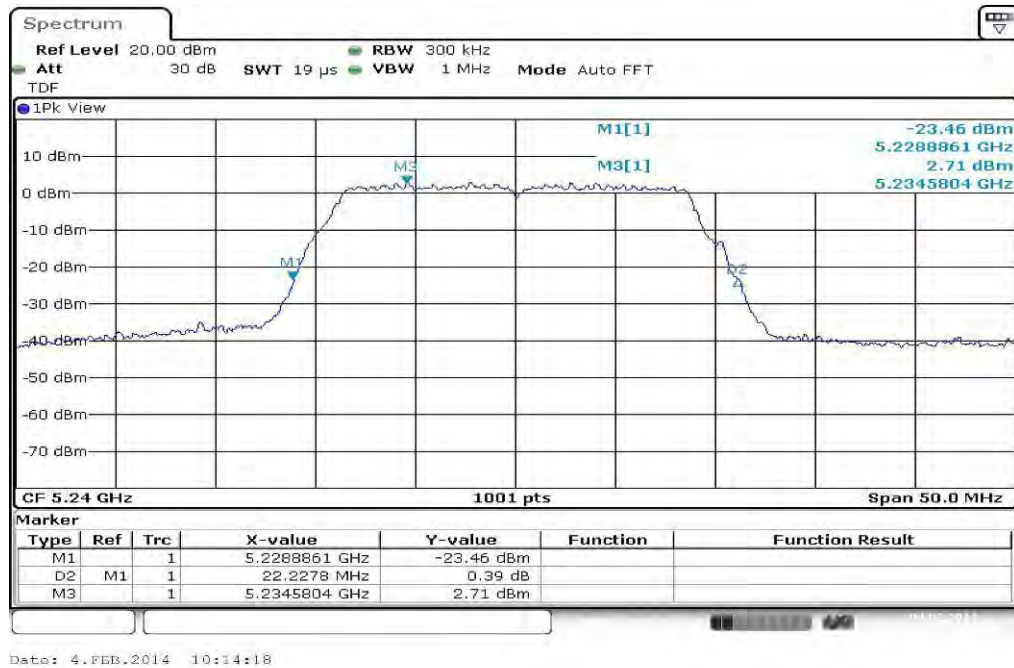


Plot 3: 5260 MHz

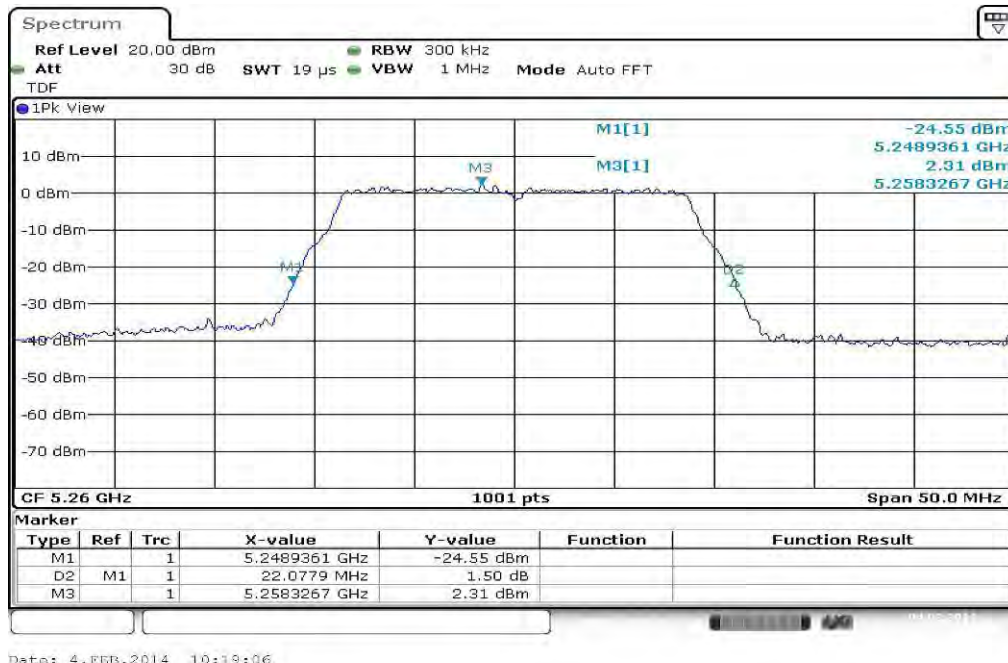


Plot 4: 5320 MHz

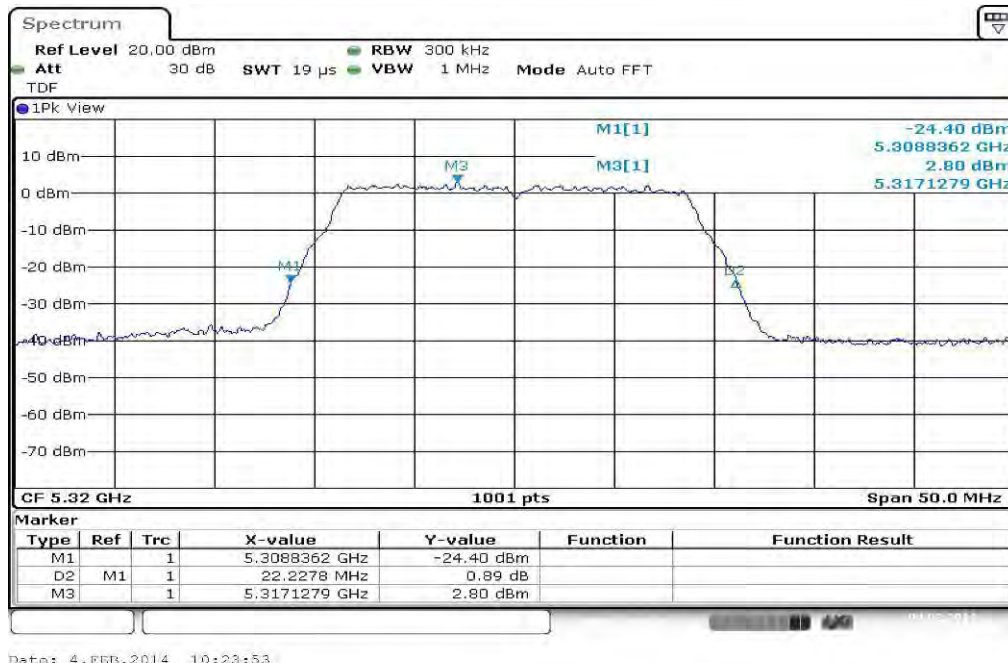


Plot 5: 5500 MHz

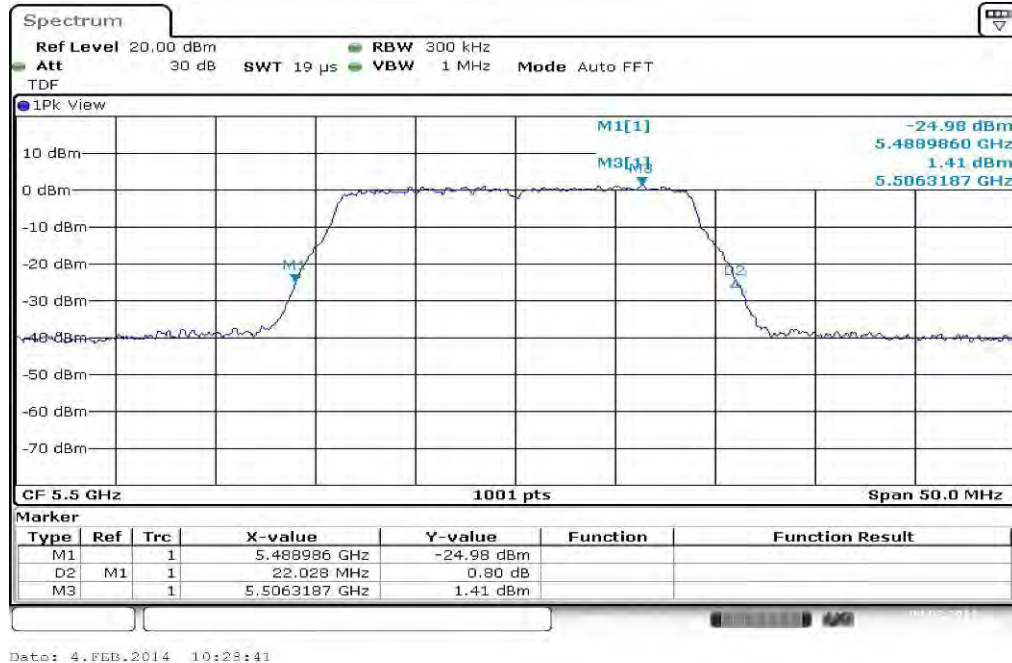

Plot 6: 5600 MHz

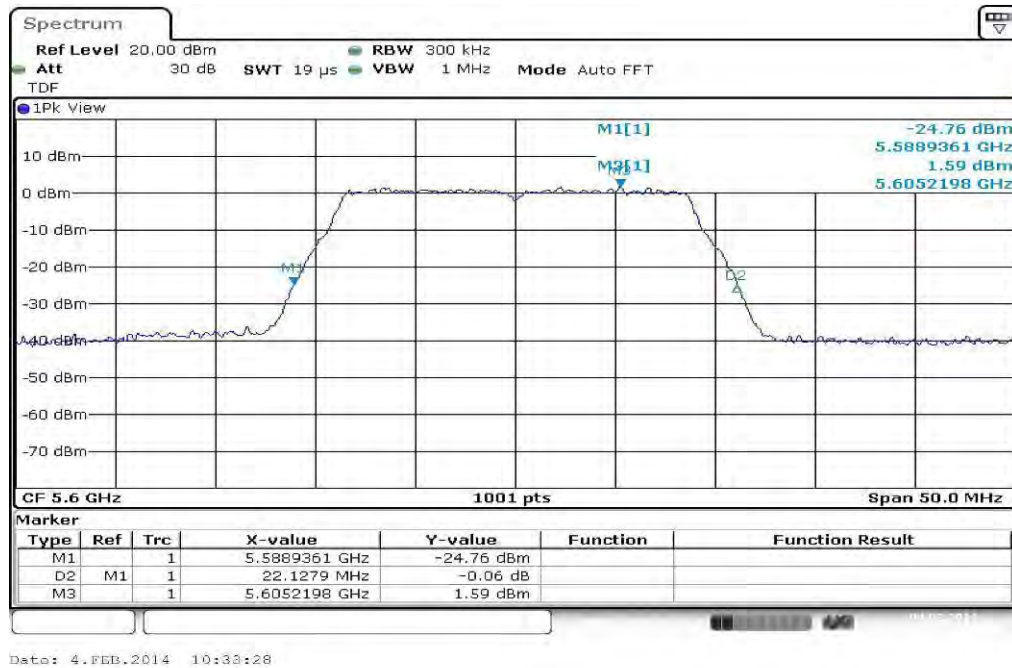


Plot 7: 5700 MHz

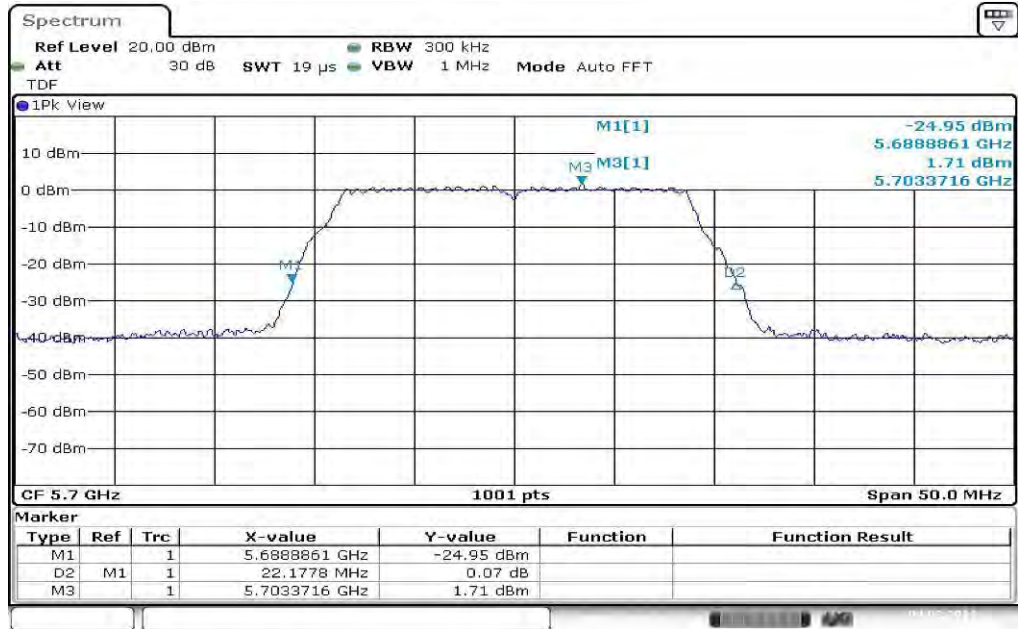


Date: 4.FEB.2014 10:38:16

Plots: OFDM / n/ac – mode HT40


Plot 1: 5190 MHz

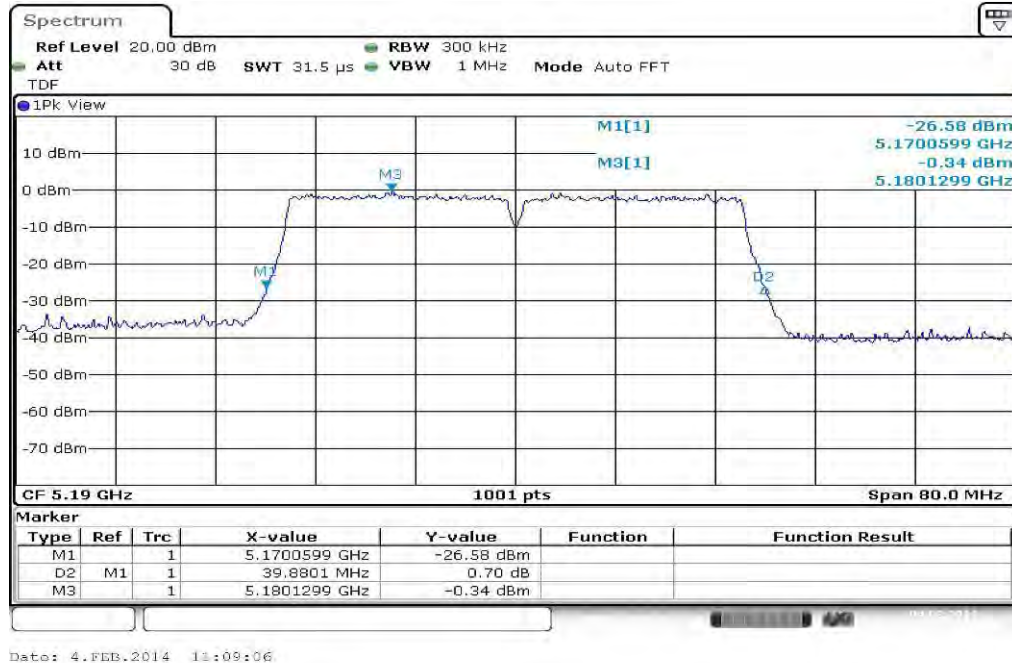


Plot 2: 5230 MHz

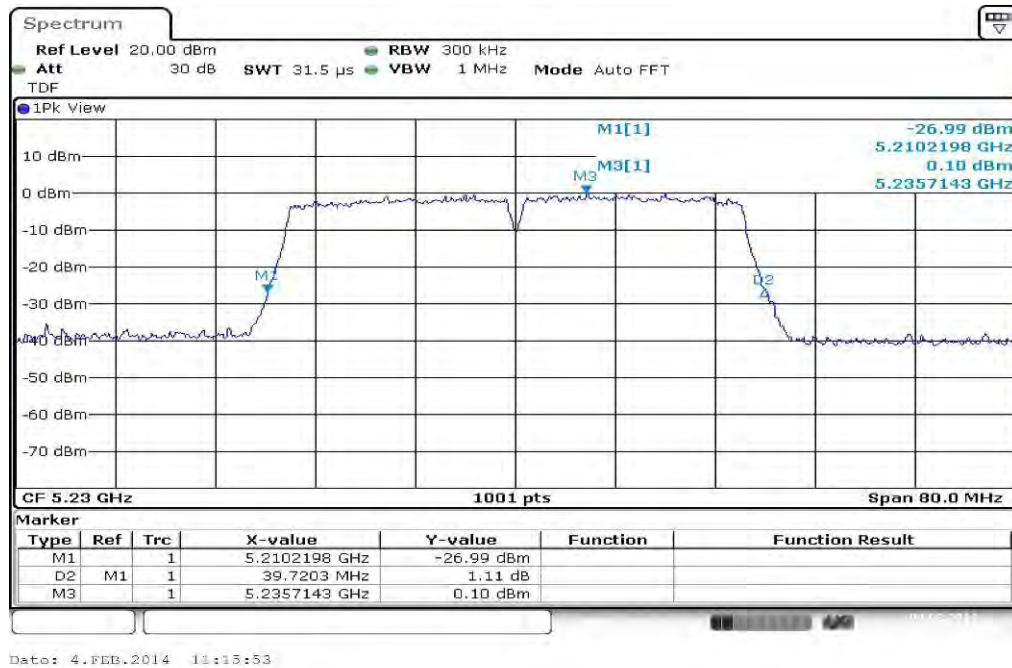


Plot 3: 5270 MHz

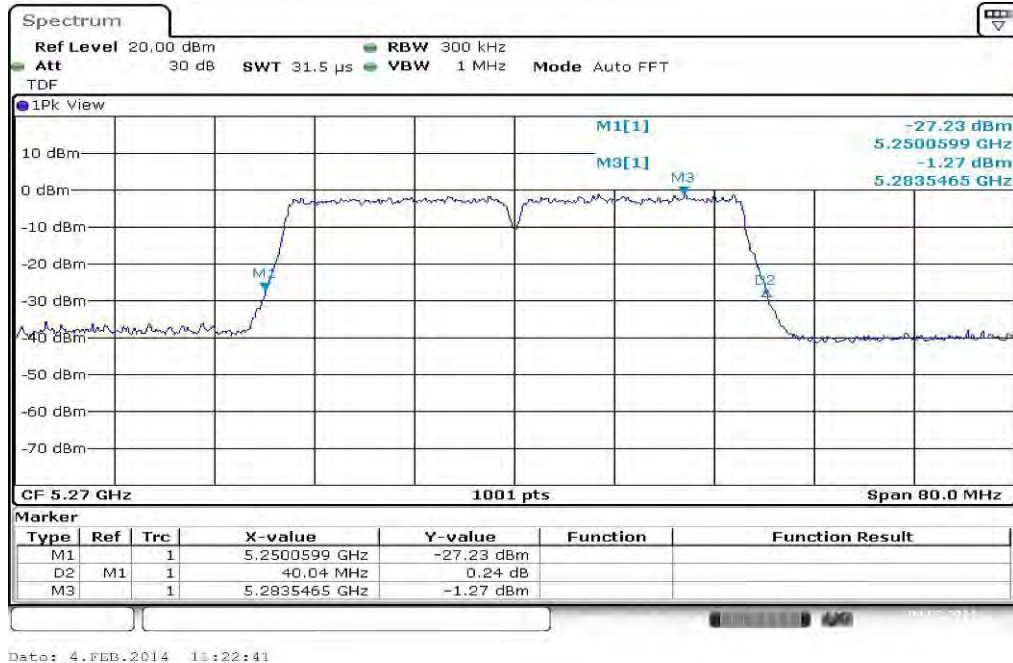


Plot 4: 5310 MHz

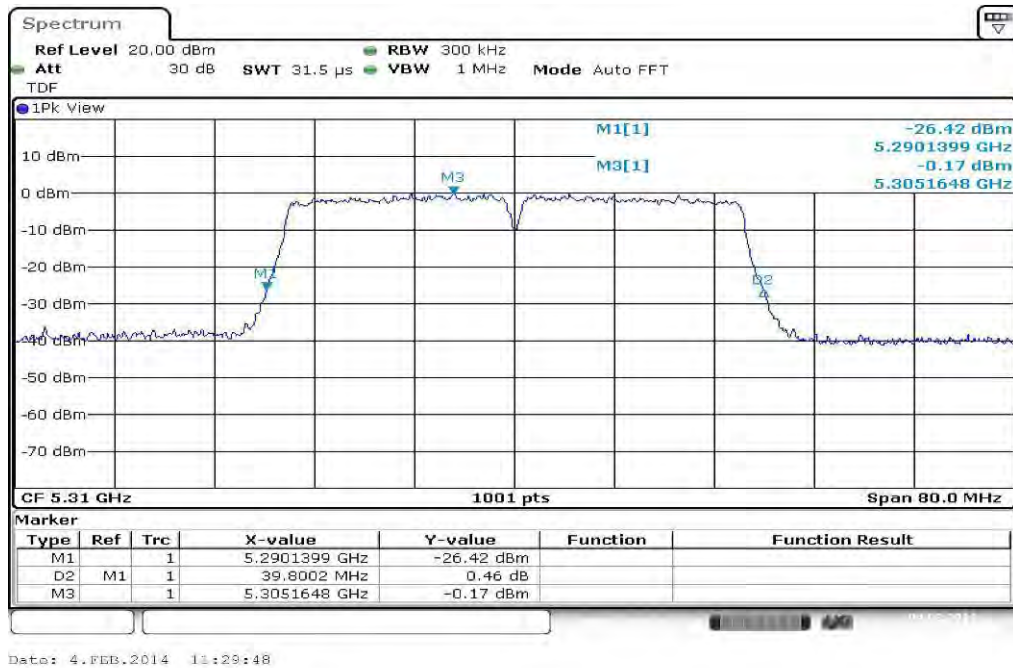


Plot 5: 5510 MHz

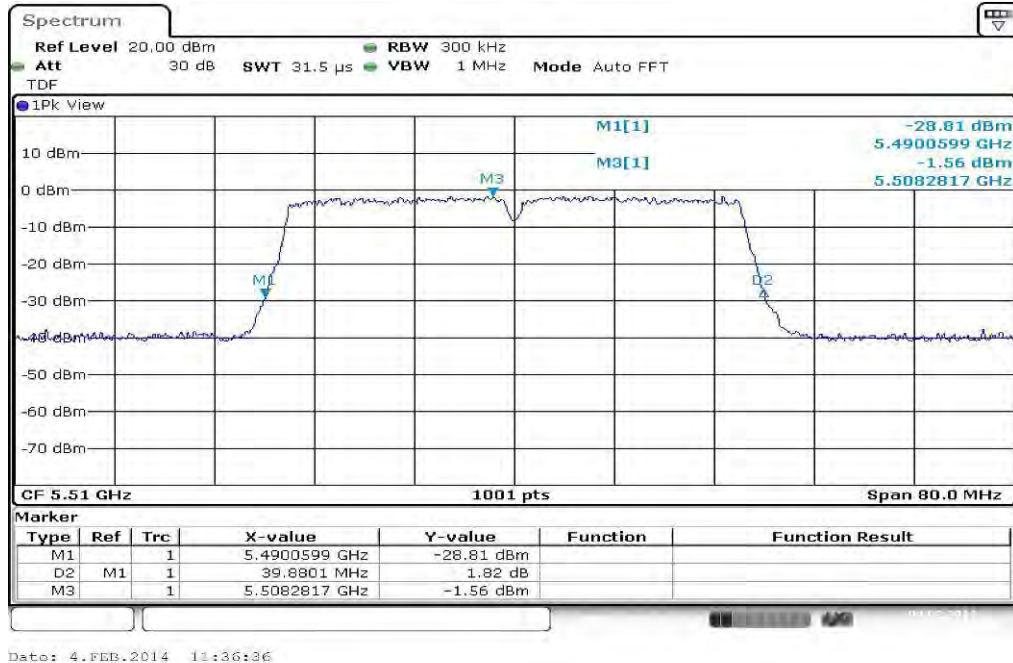

Plot 6: 5590 MHz

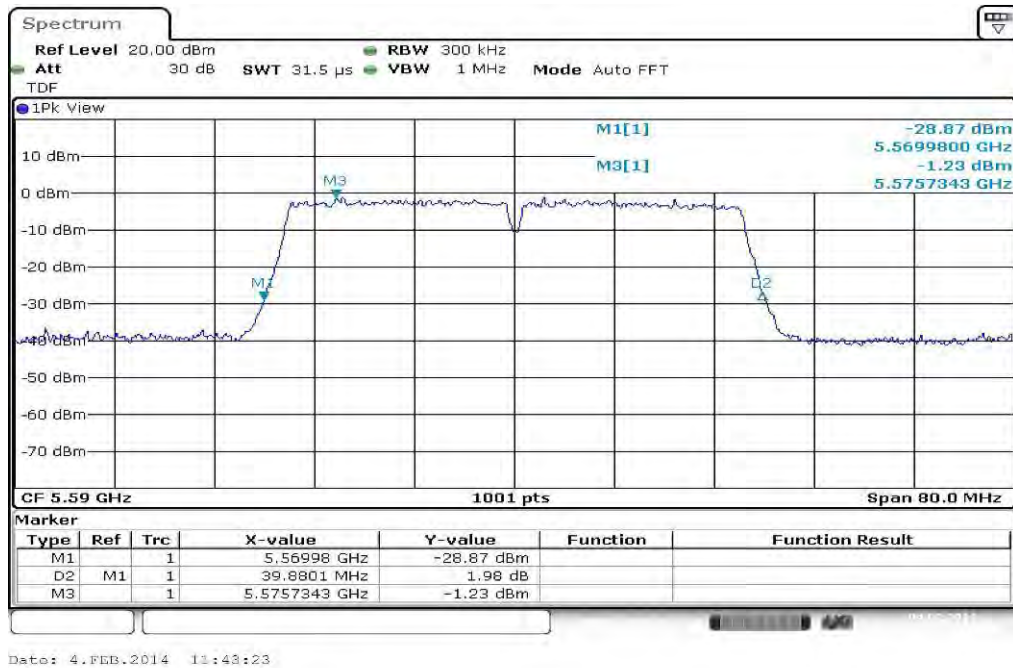


Plot 7: 5670 MHz

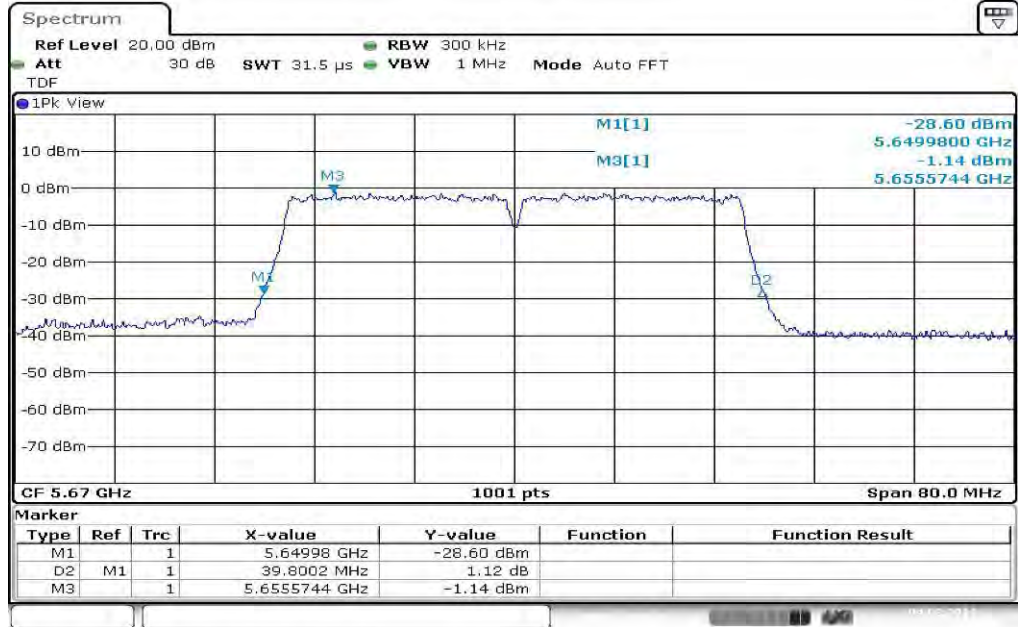

Date: 4.FEB.2014 11:50:11


Plots: OFDM / ac – mode HT80

Plot 1: 5210 MHz

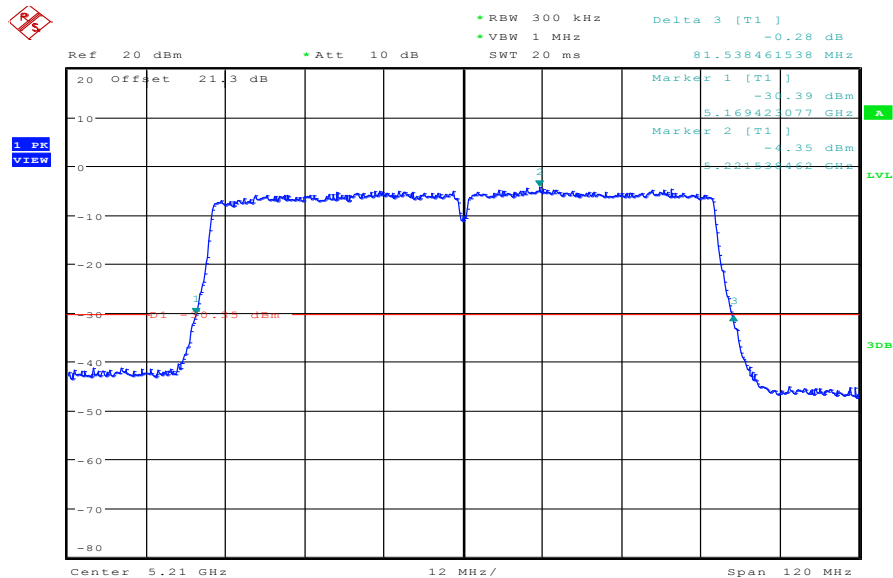


Date: 5.FEB.2014 13:53:52

Plot 2: 5290 MHz

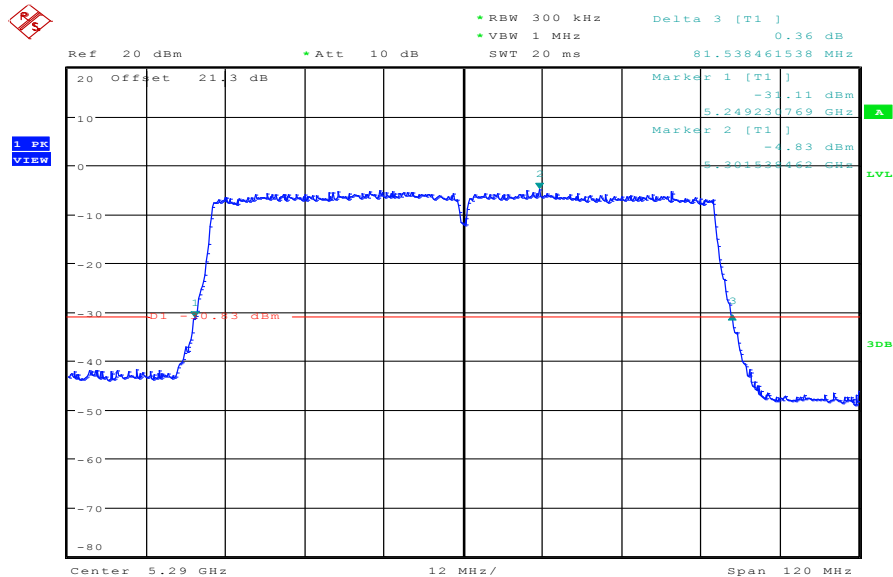


Date: 5.FEB.2014 13:55:30

Plot 3: 5210 MHz

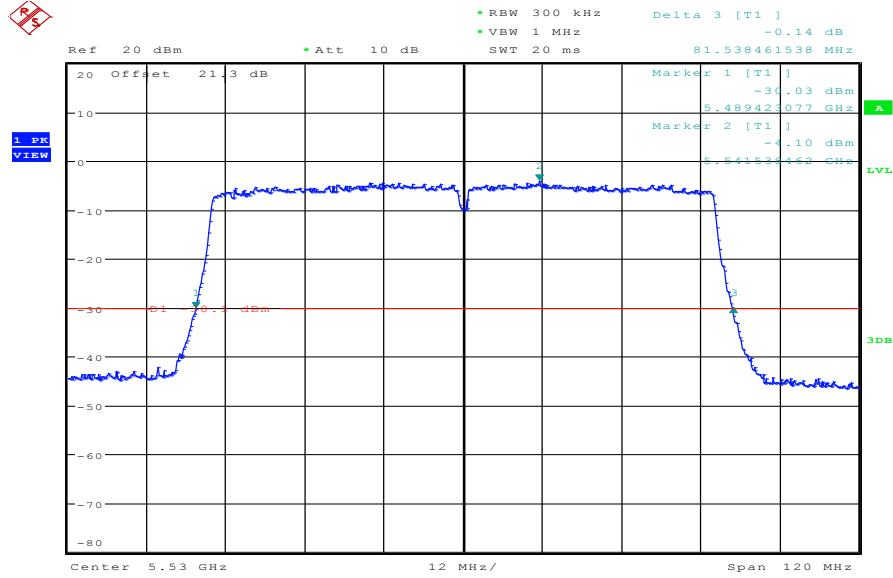

Date: 5.FEB.2014 14:23:51

Plot 4: 5290 MHz

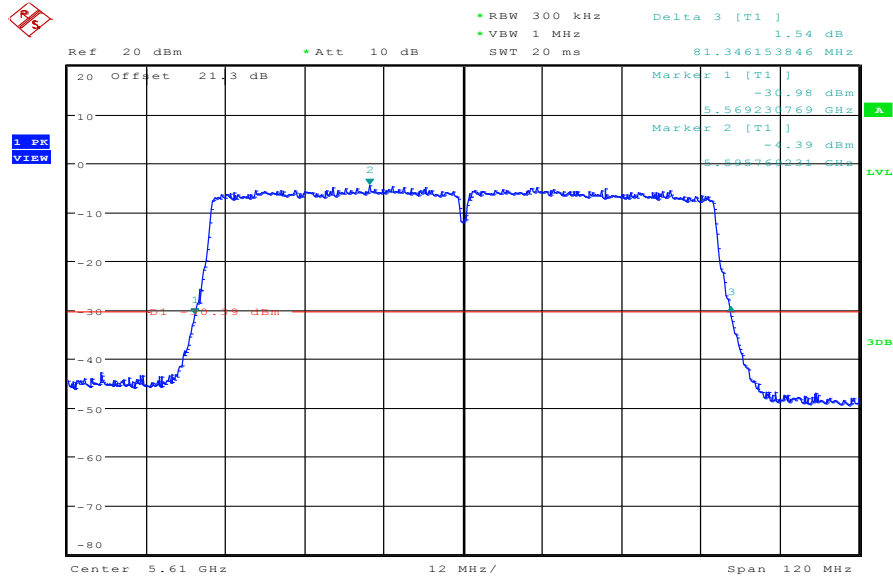

Date: 5.FEB.2014 14:25:05

11.7 Peak excursion measurements

Description:

Peak to average value.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	60 s / 120 s
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 MHz
Span:	> Complete signal
Trace-Mode:	Max hold

Limits:

Peak excursion value
Does not exceed 13 dB.

Results:

Modulation OFDM / a – mode	Peak excursion value		
	5180 MHz	-/-	5240 MHz
Channel	5180 MHz	-/-	5240 MHz
RMS	0.01	-/-	0.45
Peak	9.22	-/-	9.07
Peak excursion value	9.21	-/-	8.62
Channel	5260 MHz	-/-	5320 MHz
RMS	-0.36	-/-	0.25
Peak	8.31	-/-	8.89
Peak excursion value	8.67	-/-	8.64
Channel	5500 MHz	5600 MHz	5700 MHz
RMS	-1.05	-0.70	-0.55
Peak	7.47	8.48	8.73
Peak excursion value	8.52	9.18	9.28
Measurement uncertainty	± 1 dB		

Result: Passed

Results:

Modulation OFDM / n/ac – mode HT20	Peak excursion value		
	Channel	5180 MHz	-/-
RMS	-0.50	-/-	-0.20
Peak	9.32	-/-	9.66
Peak excursion value	9.82	-/-	9.86
Channel	5260 MHz	-/-	5320 MHz
RMS	-1.26	-/-	-0.47
Peak	8.62	-/-	9.41
Peak excursion value	9.88	-/-	9.88
Channel	5500 MHz	5600 MHz	5700 MHz
RMS	-1.86	-1.47	-1.73
Peak	9.06	8.35	8.16
Peak excursion value	10.92	9.82	9.89
Measurement uncertainty	± 1 dB		

Modulation OFDM / n/ac – mode HT40	Peak excursion value		
	Channel	5190 MHz	-/-
RMS	-3.57	-/-	-3.35
Peak	6.22	-/-	6.84
Peak excursion value	9.79	-/-	10.19
Channel	5270 MHz	-/-	5310 MHz
RMS	-4.54	-/-	-3.39
Peak	5.27	-/-	6.97
Peak excursion value	9.81	-/-	10.36
Channel	5510 MHz	5590 MHz	5670 MHz
RMS	-4.54	-4.68	-4.70
Peak	5.77	5.53	5.87
Peak excursion value	10.31	10.21	10.57
Measurement uncertainty	± 1 dB		

Modulation OFDM / ac – mode HT80	Peak excursion value		
	Channel	5210 MHz	
RMS	-9.29		-8.73
Peak	2.48		1.82
Peak excursion value	11.77		10.55
Channel	5530 MHz		5610 MHz
RMS	-9.88		-9.97
Peak	2.55		2.28
Peak excursion value	12.43		12.25
Measurement uncertainty	± 1 dB		

Result: Passed

Plots: OFDM / a – mode

Plot 1: 5180 MHz



Plot 2: 5240 MHz



Plot 3: 5260 MHz




Plot 4: 5320 MHz



Plot 5: 5500 MHz



Plot 6: 5600 MHz

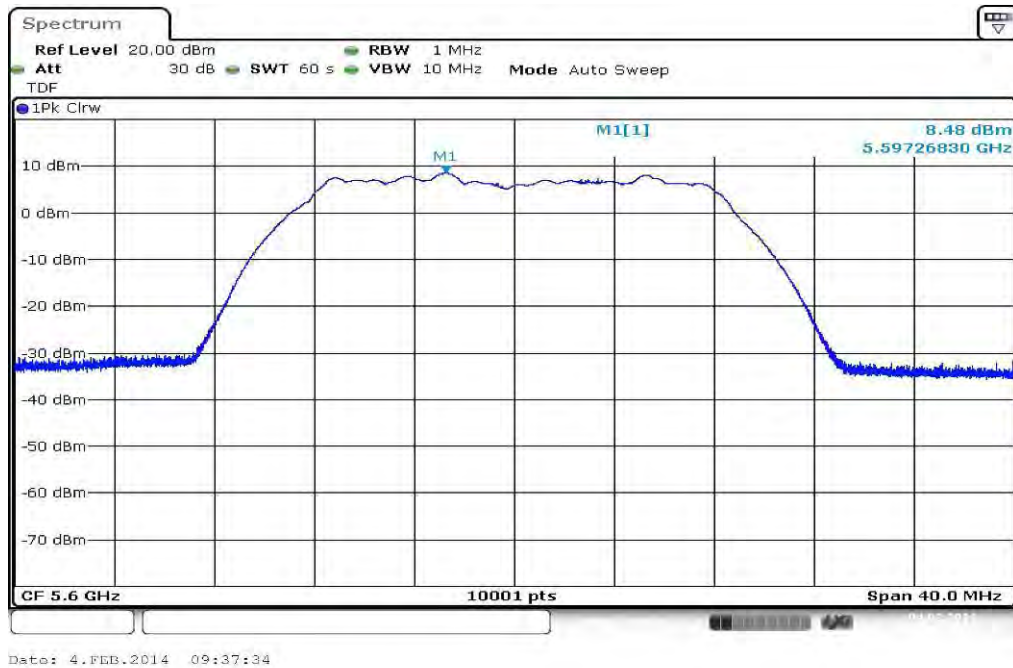

Plot 7: 5700 MHz



Date: 4.FEB.2014 09:42:21

Plots: OFDM / n/ac – mode HT20


Plot 1: 5180 MHz



Plot 2: 5240 MHz



Plot 3: 5260 MHz

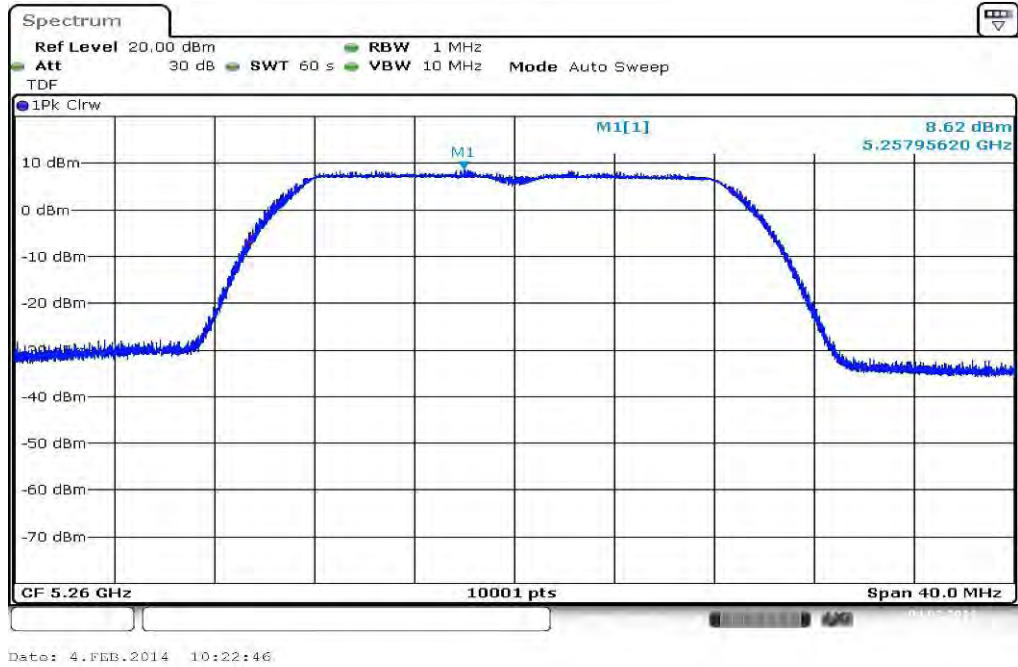


Plot 4: 5320 MHz



Plot 5: 5500 MHz



Plot 6: 5600 MHz

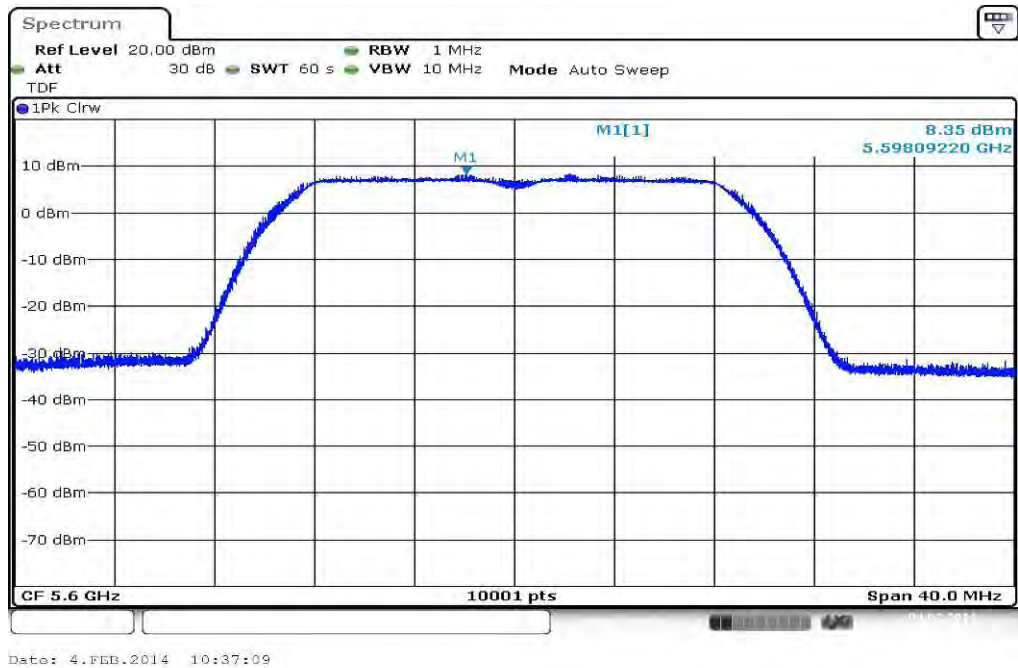

Plot 7: 5700 MHz



Plots: OFDM / n/ac – mode HT40


Plot 1: 5190 MHz




Plot 2: 5230 MHz



Plot 3: 5270 MHz

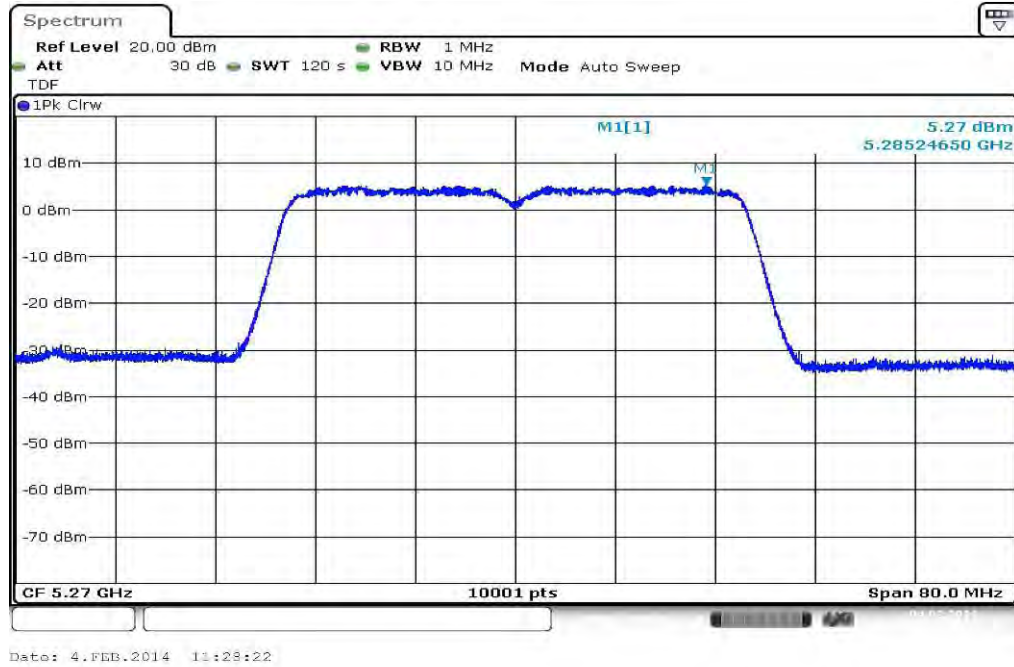

Plot 4: 5310 MHz

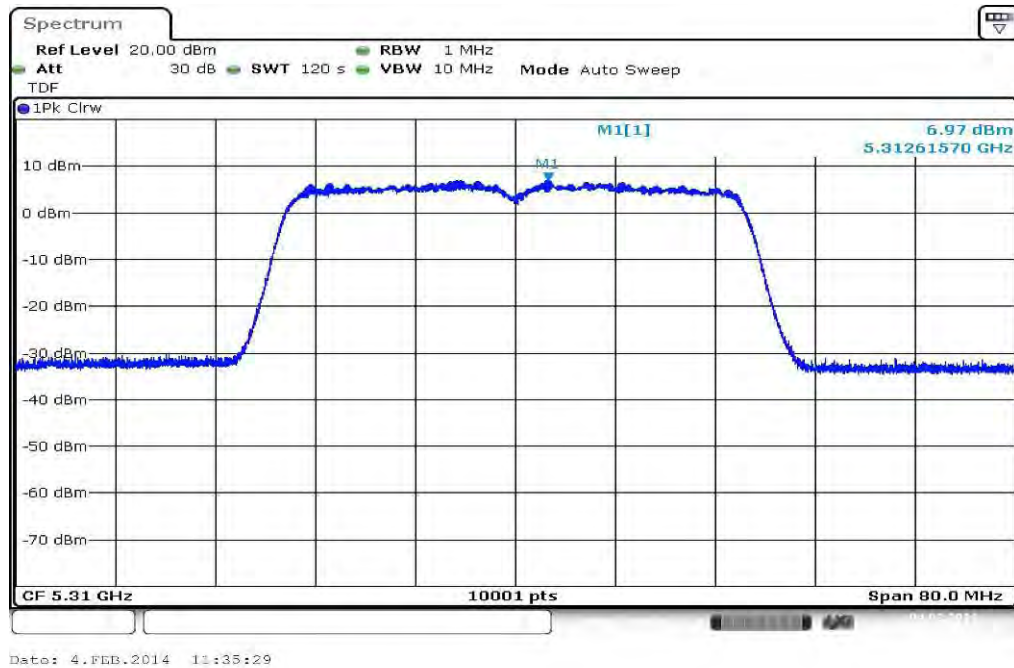


Plot 5: 5510 MHz



Plot 6: 5590 MHz




Plot 7: 5670 MHz

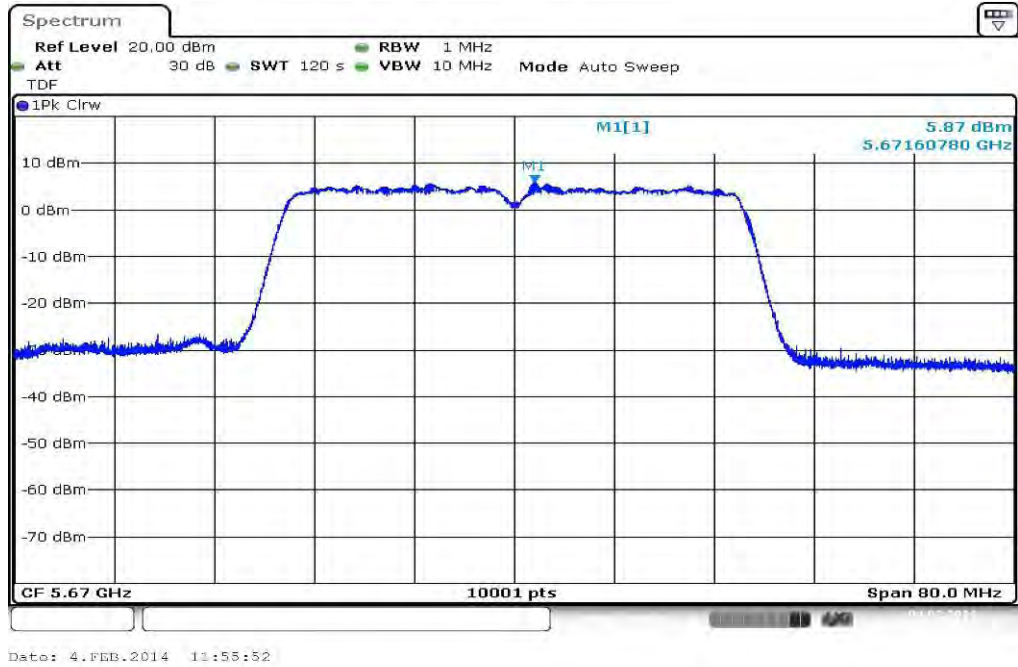


Plots: OFDM / ac – mode HT80

Plot 1: 5190 MHz

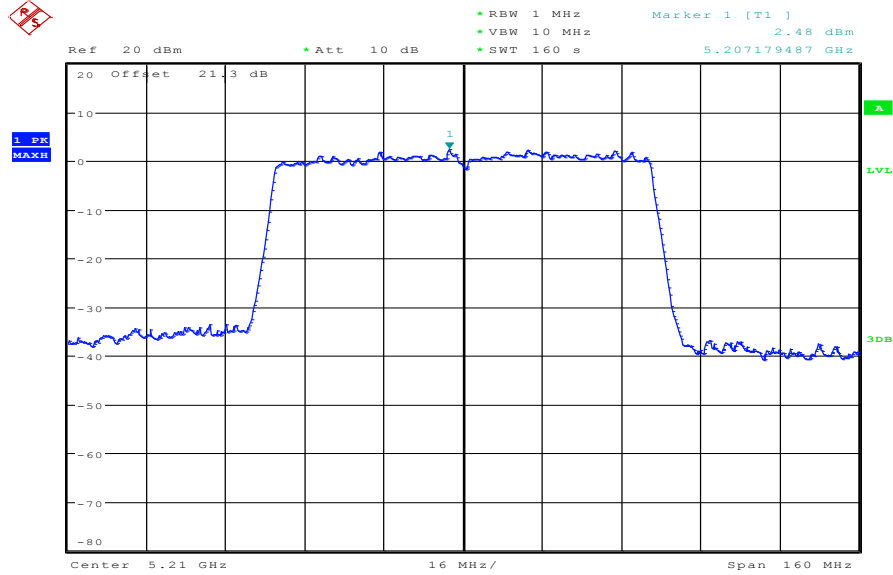


Date: 5.FEB.2014 14:42:41

Plot 2: 5290 MHz

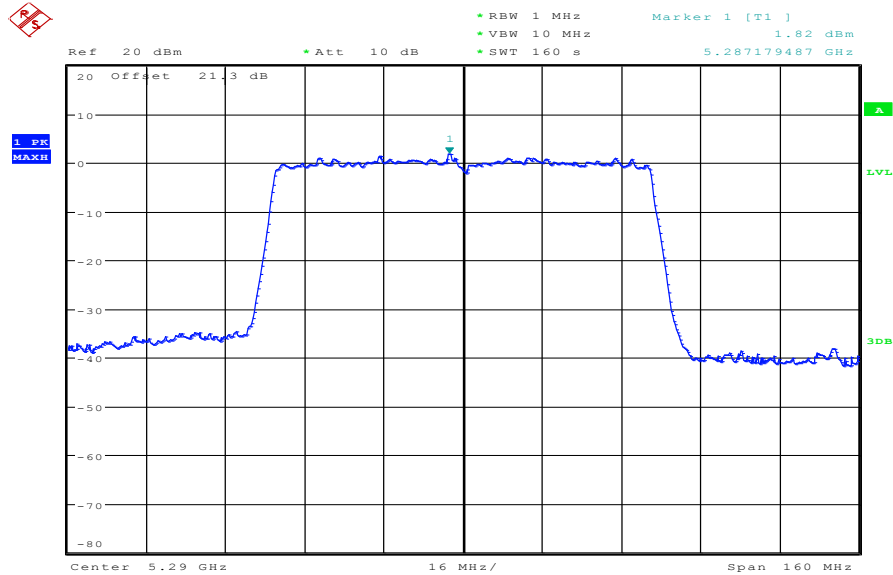


Date: 5.FEB.2014 14:46:39

Plot 3: 5530 MHz

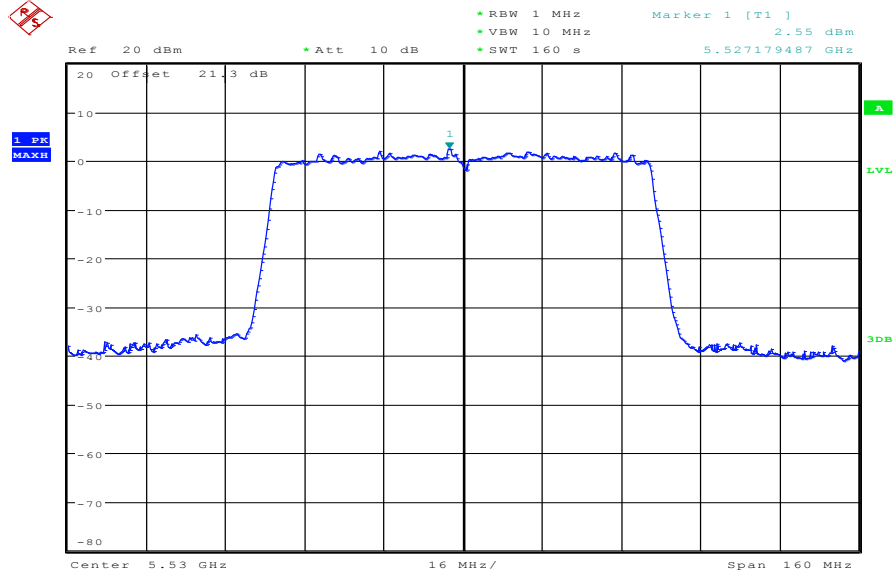

Date: 5.FEB.2014 14:52:13

Plot 4: 5610 MHz

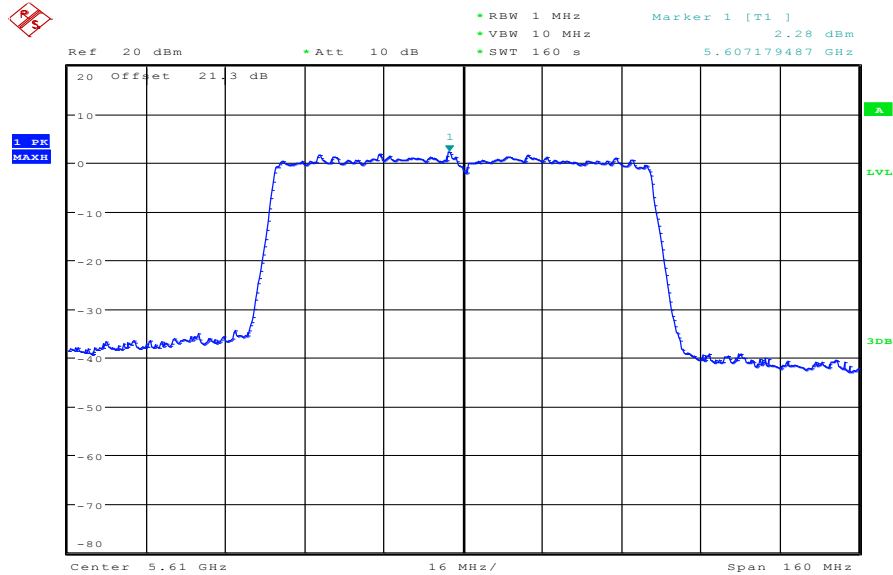

Date: 5.FEB.2014 14:55:20