

TEST REPORT

Test report no.: 1-6965/13-05-47



Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>

e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Area of Testing:

Radio Communications & Compatibility Testing (RCT)

Applicant

Sony Mobile Communications AB

Nya Vattentorget

22188 Lund / SWEDEN

Phone: +46 46 19 30 00

Fax: -/-

Contact: Mikael Nilsson

e-mail: Micke.nilsson@sonymobile.com

Phone: +46 7 03 22 75 03

Manufacturer

Sony Mobile Communications AB

Nya Vattentorget

22188 Lund / SWEDEN

Test standard/s

RSS - 210 Issue 8

Spectrum Management and Telecommunications Radio Standards Specification -
Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Tablet PC GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDD/III/IV/V/VIII; LTE FDD1/2/3/4/5/7/8/13/17/20; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS

Type name: TM-0040-BV

Model name: SGP521

IC: 4170B-TM0040

Frequency: DTS band 2400 MHz to 2483.5 MHz
(lowest channel 01 – 2412 MHz; highest channel 11 – 2462 MHz)

Technology tested: WLAN (DSSS/b – mode; OFDM/g - & n HT20 – mode)

Antenna: Integrated antenna

Power supply: 3.7 V DC by Li - polymer battery

Temperature range: -20°C to +55°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

p. o.

Stefan BöS
Senior Testing Manager

Test performed:

Marco Bertolino
Testing Manager

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details.....	3
3	Test standard/s	3
3.1	Measurement guidance.....	3
4	Test environment.....	4
5	Test item	4
5.1	Additional information	4
6	Test laboratories sub-contracted	4
7	Description of the test setup	5
7.1	Radiated measurements chamber F.....	5
7.2	Radiated measurements chamber C	6
7.3	Radiated measurements 12.75 GHz to 26 GHz	7
7.4	AC conducted	8
7.5	Conducted measurements	9
8	Summary of measurement results	10
9	Additional comments	11
10	RSP100 test report cover sheet / performance test data	12
11	Measurement results	13
11.1	Antenna gain	13
11.2	Maximum output power.....	16
11.3	Power spectral density	20
11.4	DTS spectrum bandwidth – 6 dB.....	27
11.5	Occupied bandwidth – 99% emission bandwidth.....	30
11.6	Band edge compliance conducted	37
11.7	Band edge compliance radiated.....	41
11.8	TX spurious emissions conducted	49
11.9	TX spurious emissions radiated.....	58
11.10	RX spurious emissions radiated	87
11.11	Spurious emissions radiated < 30 MHz	91
11.12	Spurious emissions conducted < 30 MHz	93
12	Test equipment and ancillaries used for tests	96
13	Observations	97
Annex A	Document history	98
Annex B	Further information.....	98
Annex C	Accreditation Certificate	99

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2013-12-09
Date of receipt of test item:	2013-12-02
Start of test:	2013-12-14
End of test:	2013-12-19
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
RSS - 210 Issue 8	01.12.2010	Spectrum Management and Telecommunications Radio Standards Specification - Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

3.1 Measurement guidance

DTS : KDB 558074	2013-04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
------------------	---------	---

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		40 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li - polymer battery
	V_{max}	4.2 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	Tablet PC GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/II/IV/V/VIII; LTE FDD1/2/3/4/5/7/8/13/17/20; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS
Type name	:	TM-0040-BV
Model name	:	SGP521
S/N serial number	:	Conducted unit: CB51267QQY Radiated units: CB51267Q5X; CB51267Q47
HW hardware status	:	Prototype build: AP1
SW software status	:	RF test software
Frequency band [MHz]	:	DTS band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412 MHz; highest channel 11 – 2462 MHz)
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	BPSK, QPSK, 16 – QAM und 64 - QAM
Number of channels	:	11
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li - polymer battery
Temperature range	:	-20°C to +55°C

5.1 Additional information

Test setup- and EUT-photos are included in test report: 1-6965/13-05-01_AnnexA
1-6965/13-05-01_AnnexB
1-6965/13-05-01_AnnexD

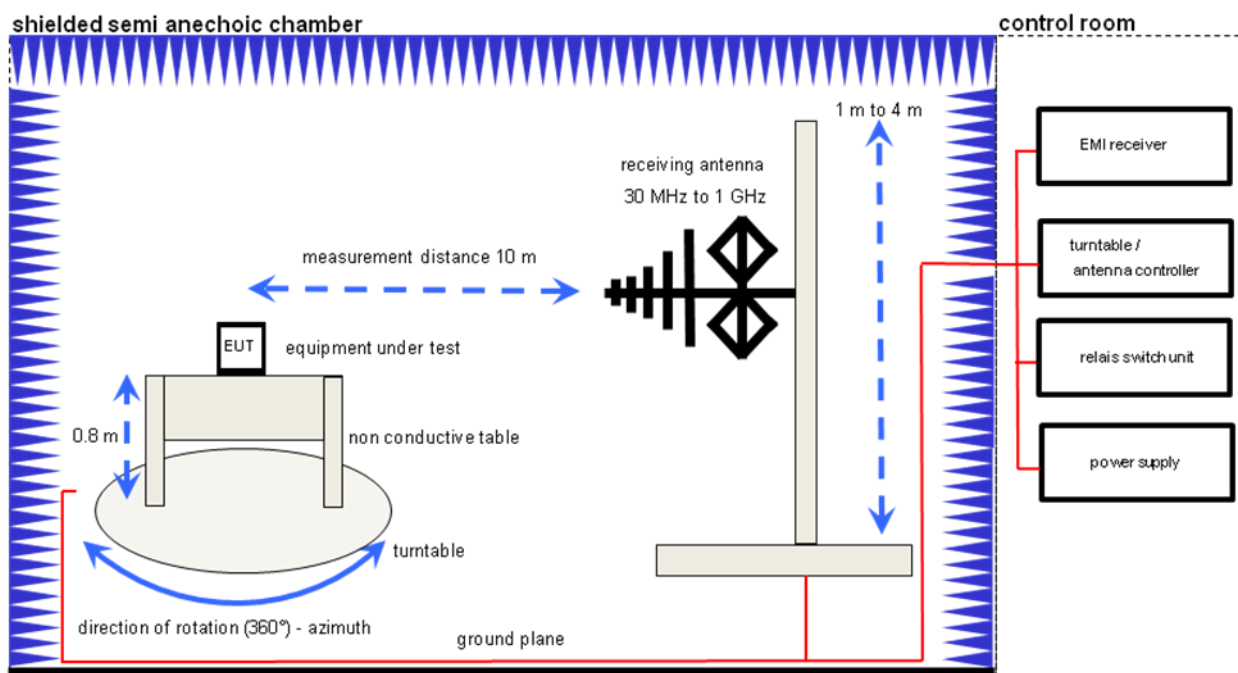
6 Test laboratories sub-contracted

None

7 Description of the test setup

7.1 Radiated measurements chamber F

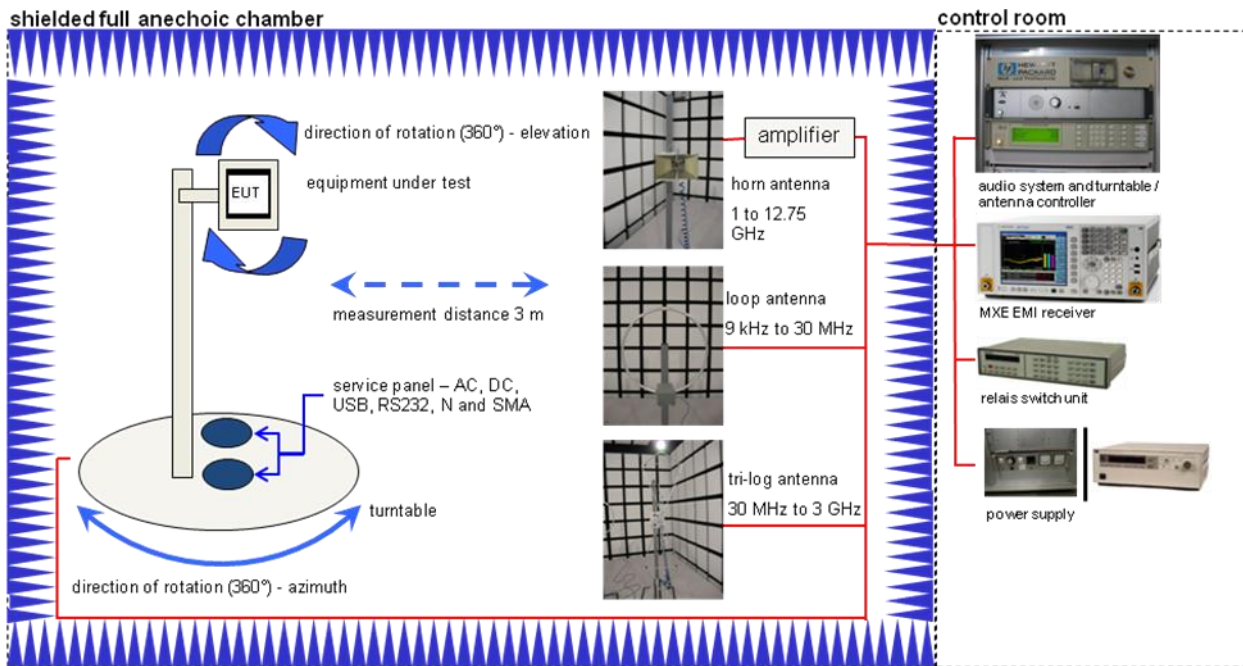
The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368
DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580
EMI Test Receiver	ESCI 3	R&S	100083	300003312
Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379
Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745
Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746
Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787

7.2 Radiated measurements chamber C



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854
Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789
Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032
Active Loop Antenna	6502	EMCO	8905-2342	300000256
Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997
Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143

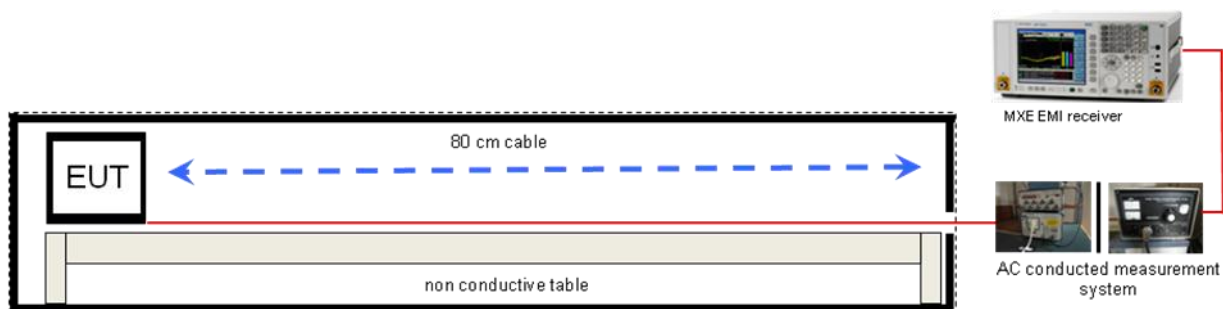
7.3 Radiated measurements 12.75 GHz to 26 GHz



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268
Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787
Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442
Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443
Spectrum Analyzer 9kHz to 30GHz -140..+30dBm	FSP30	R&S	100886	300003575

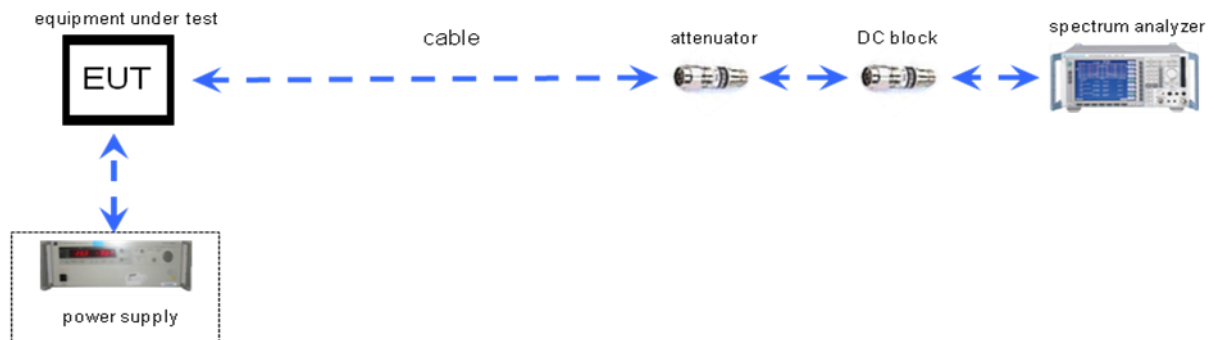
7.4 AC conducted



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erft	91350	300001155
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001168
Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210

7.5 Conducted measurements



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517
Power Supply 0-20V, 0-5A	6632B	Agilent Technologies	GB42110541	400000562

8 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	RSS 210, Issue 8	Passed	2014-02-06	-/-

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
RSS 210 / A8.4(2)	Antenna gain	-/-	Nominal	Nominal	DSSS	☒	☐	☐	☐	complies
RSS 210 / A8.2(b)	Power spectral density	KDB 558074 DTS clause: 10.2	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
RSS 210 / A8.2(a)	Spectrum bandwidth – 6 dB bandwidth	KDB 558074 DTS clause: 8.2	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
RSS-210 / A8.4(4)	Maximum output power	KDB 558074 DTS clause: 9.1.2	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
RSS-210 / A8.5	Band edge compliance conducted	KDB 558074 DTS clause: 13.2.1	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
RSS-210 / A8.5	Band edge compliance radiated	-/-	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
RSS-210 / A8.5	TX spurious emissions conducted	KDB 558074 DTS clause: 11.1 & 11.2	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
RSS-210 / A8.5	TX spurious emissions radiated	-/-	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
RSS-Gen	RX spurious emissions radiated	-/-	Nominal	Nominal	-/-	☒	☐	☐	☐	complies
RSS-Gen	TX spurious emissions radiated < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
RSS-Gen	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies

Note: NA = Not Applicable; NP = Not Performed

9 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:

- ☐ No test mode available.
Iperf was used to ping another device with the largest support packet size
- ☒ Special software is used.
EUT is transmitting pseudo random data by itself

10 RSP100 test report cover sheet / performance test data

Test report number	:	1-6965/13-05-47				
Equipment model number:		SGP521				
Certification number	:	4170B-TM0040				
Manufacturer (complete address)	:	Sony Mobile Communications AB Nya Vattentorget 22188 Lund / SWEDEN				
Tested to radio standards specification no.	:	RSS 210, Issue 8				
Open area test site IC No. :		IC 3462C-1				
Frequency range	:	ISM band 2400 MHz to 2483.5 MHz				
RF-power (max.)	:	Conducted values:				
		Band	b – mode	g – mode	n HT20 – mode	n HT40 – mode
		2412 – 2462 MHz	154.88 mW	190.55 mW	208.93 mW	
		2422 – 2462 MHz				-/-
		Radiated values:				
		Band	b – mode	g – mode	n HT20 – mode	n HT40 – mode
		2412 – 2462 MHz	186.21 mW	229.09 mW	251.19 mW	
		2422 – 2462 MHz				-/-
Occupied bandwidth (99%-BW)	:	Band	b – mode	g – mode	n HT20 – mode	n HT40 – mode
		2412 – 2462 MHz	11.19 MHz	17.19 MHz	18.15 MHz	
		2422 – 2462 MHz				-/-
Necessary bandwidth (calculated)	:	Band	b – mode	g – mode	n HT20 – mode	n HT40 – mode
		2412 – 2462 MHz	12.80 MHz	16.88 MHz	16.88 MHz	
		2422 – 2462 MHz				-/-
Emission classification	:	(according TRC-43)	G1D	G7D	G7D	-/-
Type of modulation	:	DSSS & OFDM technology with BPSK, QPSK, 16 – and 64 QAM modulation.				
Antenna information	:	Integrated antenna				
Transmitter spurious [dBuV/m @ 3m]	:	56 @ 2484.5 MHz (peak) / 34 @ 2484.5 MHz (AVG)				

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2014-02-06

Marco Bertolino

Date

Name

Signature

11 Measurement results

11.1 Antenna gain

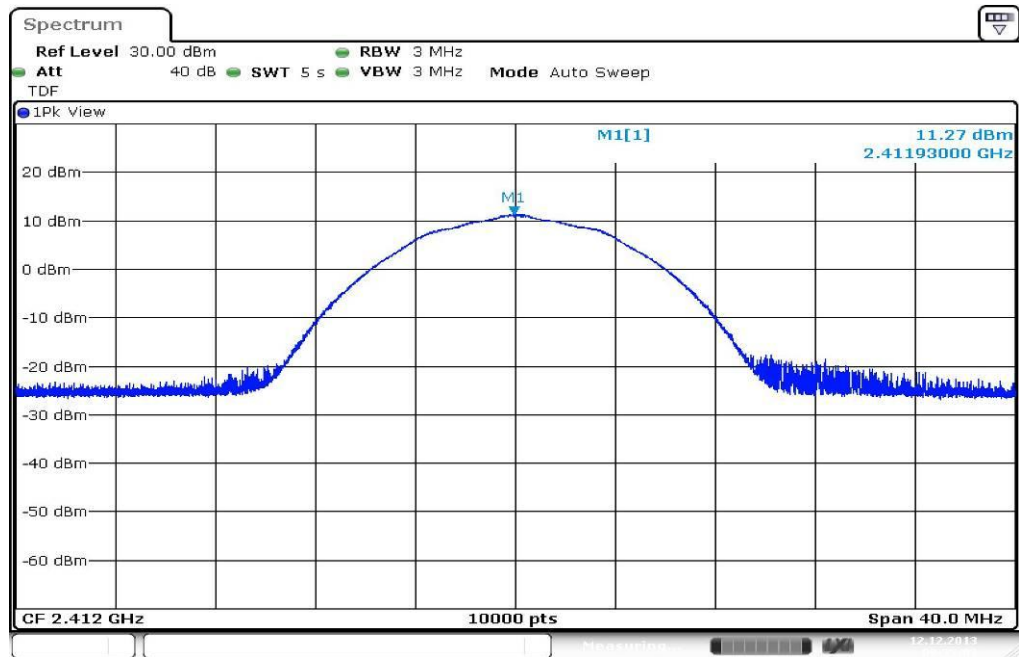
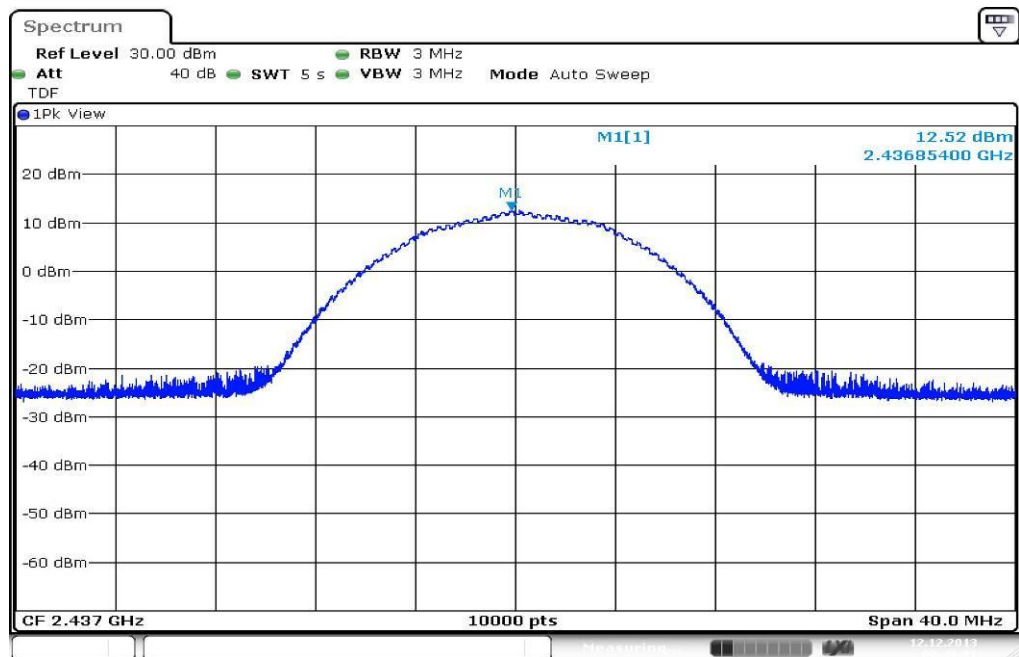
Limits:

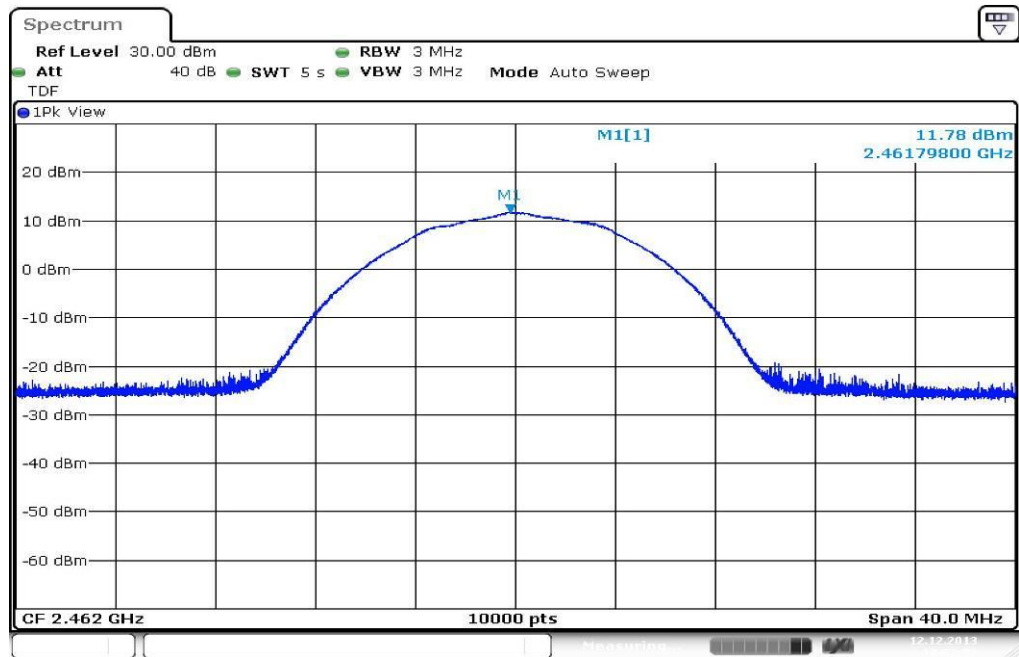
FCC	IC
Antenna Gain	
6 dBi	

Results:

T _{nom}	V _{nom}	lowest channel 2412 MHz	middle channel 2437 MHz	highest channel 2462 MHz
Gain [dBi] Declared by the manufacturer		0.9	0.8	0.3

Result: **Passed**

Plots: DSSS / b – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel

11.2 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power.

Measurement:

Measurement parameter	
According to DTS clause: 9.1.2	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	40 MHz
Integration bandwidth:	75 % power - bandwidth (DTS BW)
Trace-Mode:	Max hold (allow trace to fully stabilize)
Measurement function:	Channel power with DTS BW

Limits:

FCC	IC
Maximum Output Power	
Conducted: 1.0 W – Antenna Gain max. 6 dBi	

Results: DSSS / b – mode

DSSS / b – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak output power conducted 1 MBit/s	17.0	18.4	17.2
Peak output power conducted 2 MBit/s	16.9	18.7	17.0
Peak output power conducted 5.5 MBit/s	18.4	19.9	18.4
Peak output power conducted 11 MBit/s	20.1	21.9	20.2
Output Power Radiated – EIRP*) Worst case	21.0	22.7	20.5
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed

Results: OFDM / g – mode

OFDM / g – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak output power conducted 6 MBit/s	21.9	22.8	21.8
Peak output power conducted 9 MBit/s	21.3	22.8	21.2
Peak output power conducted 12 MBit/s	20.9	22.3	20.7
Peak output power conducted 18 MBit/s	21.4	22.3	20.8
Peak output power conducted 24 MBit/s	21.3	22.6	21.2
Peak output power conducted 36 MBit/s	21.6	22.6	21.4
Peak output power conducted 48 MBit/s	21.2	22.7	21.2
Peak output power conducted 54 MBit/s	21.3	22.7	21.1
Output Power Radiated – EIRP*) Worst case	22.8	23.6	22.1
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed

Results: OFDM / n – mode HT 20

OFDM / n – mode HT20 Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak output power conducted MCS0	21.7	22.9	21.6
Peak output power conducted MCS1	21.2	22.9	21.3
Peak output power conducted MCS2	21.1	22.8	21.3
Peak output power conducted MCS3	21.8	23.2	21.8
Peak output power conducted MCS4	22.0	23.2	21.5
Peak output power conducted MCS5	21.7	23.0	21.6
Peak output power conducted MCS6	21.8	23.1	21.7
Peak output power conducted MCS7	21.6	22.9	21.5
Output Power Radiated – EIRP*) Worst case	22.9	24.0	22.1
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed

11.3 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to DTS clause: 10.2	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 kHz
Video bandwidth:	10 kHz
Span:	40 MHz
Trace-Mode:	Max hold (allow trace to fully stabilize)

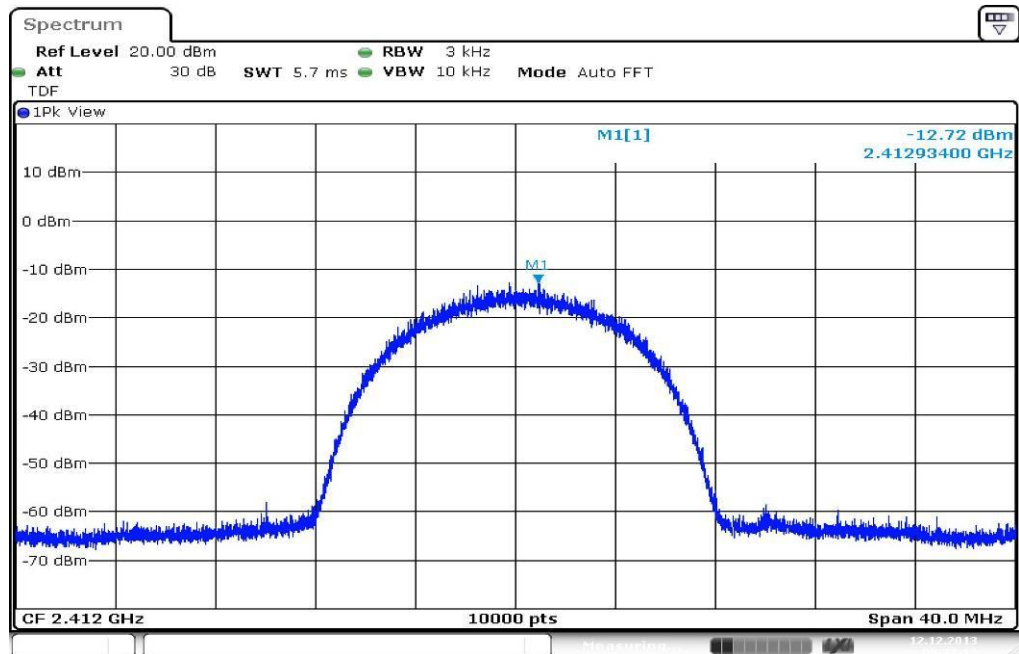
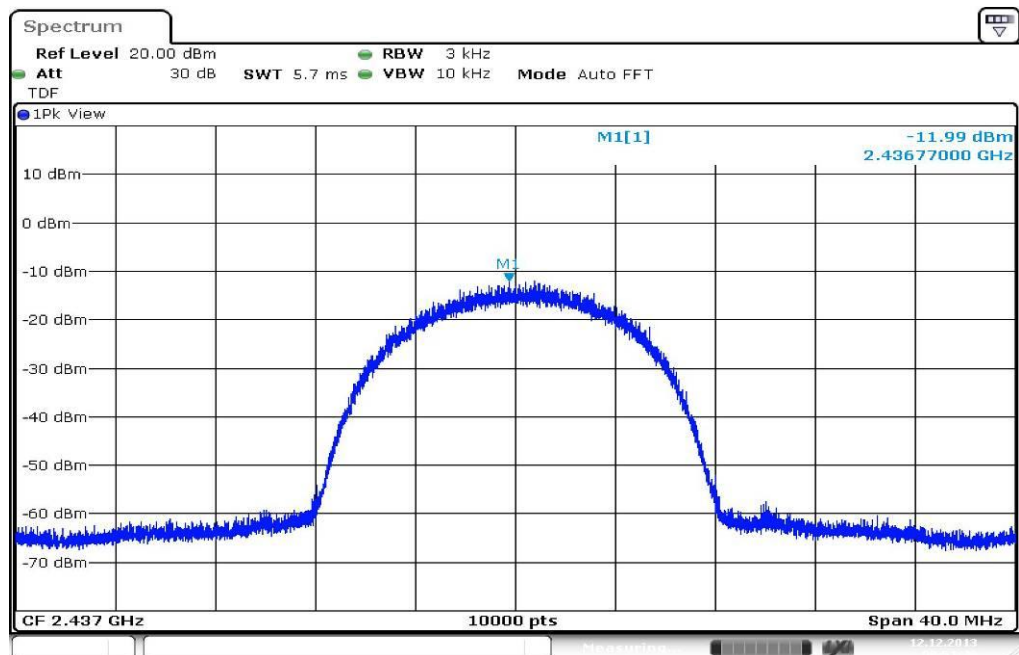
Limits:

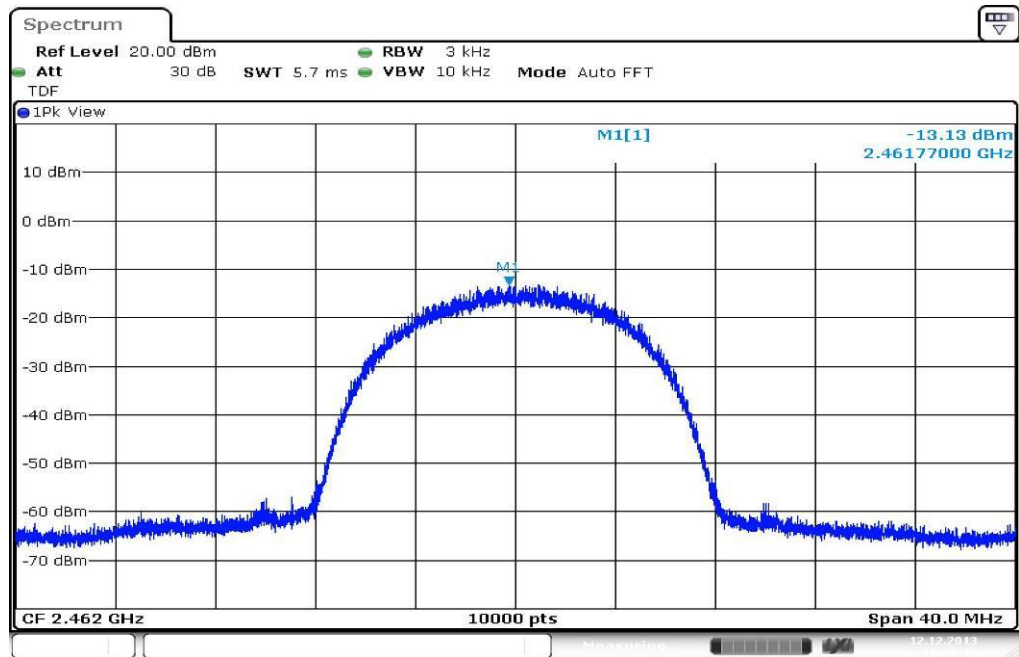
FCC	IC
Power Spectral Density	
8 dBm (conducted)	

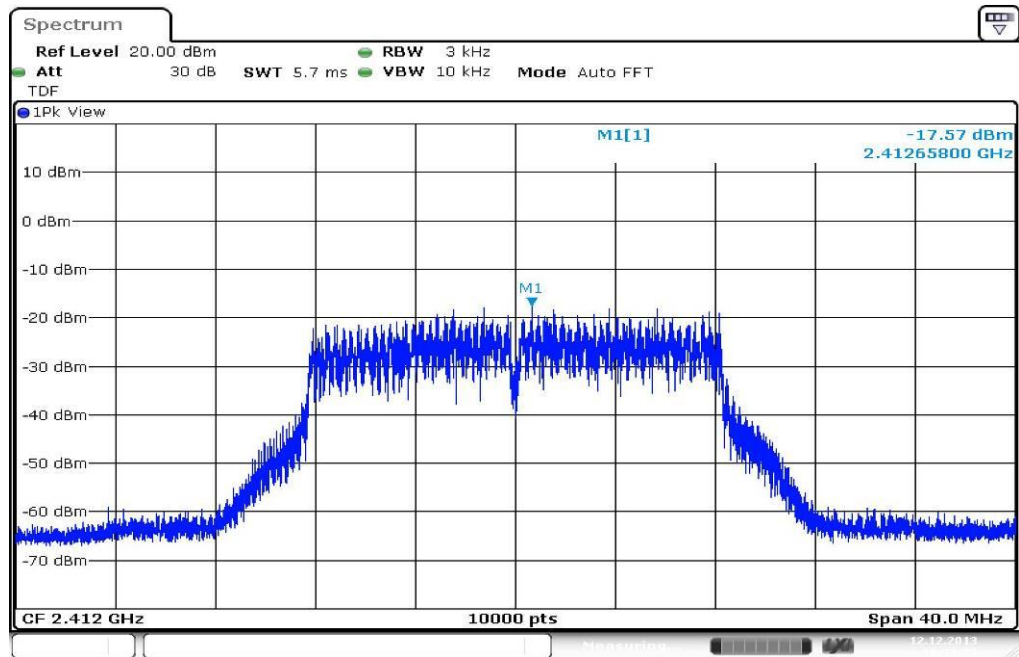
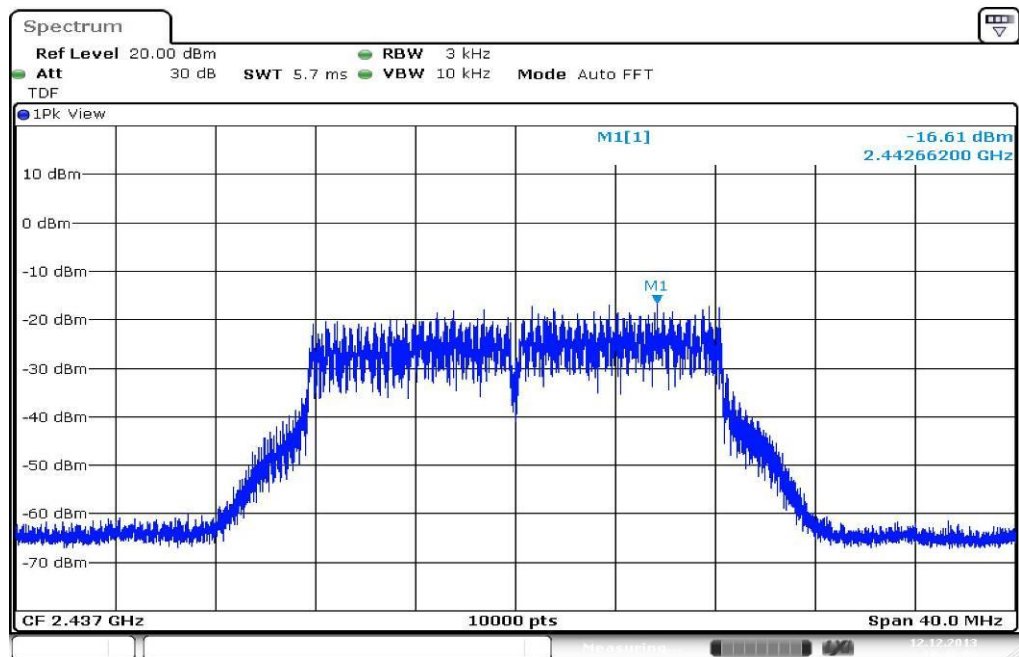
Results:

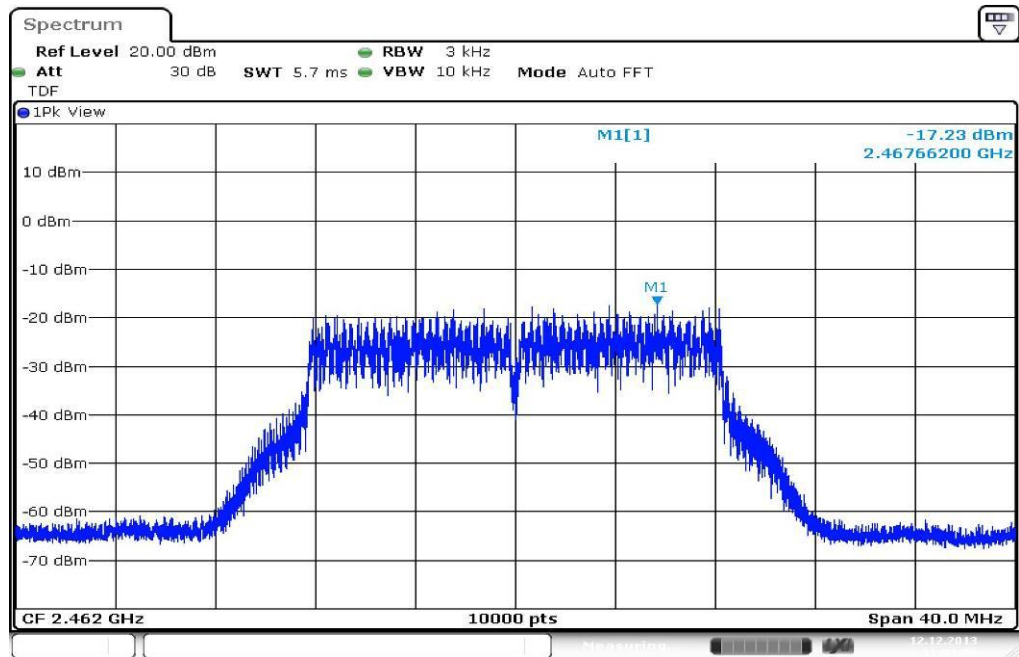
Modulation	Power Spectral density [dBm]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	-12.72	-11.99	-13.13
OFDM / g – mode	-17.57	-16.61	-17.23
OFDM / n – mode	-17.02	-15.64	-16.21
Measurement uncertainty	± 1.5 dB		

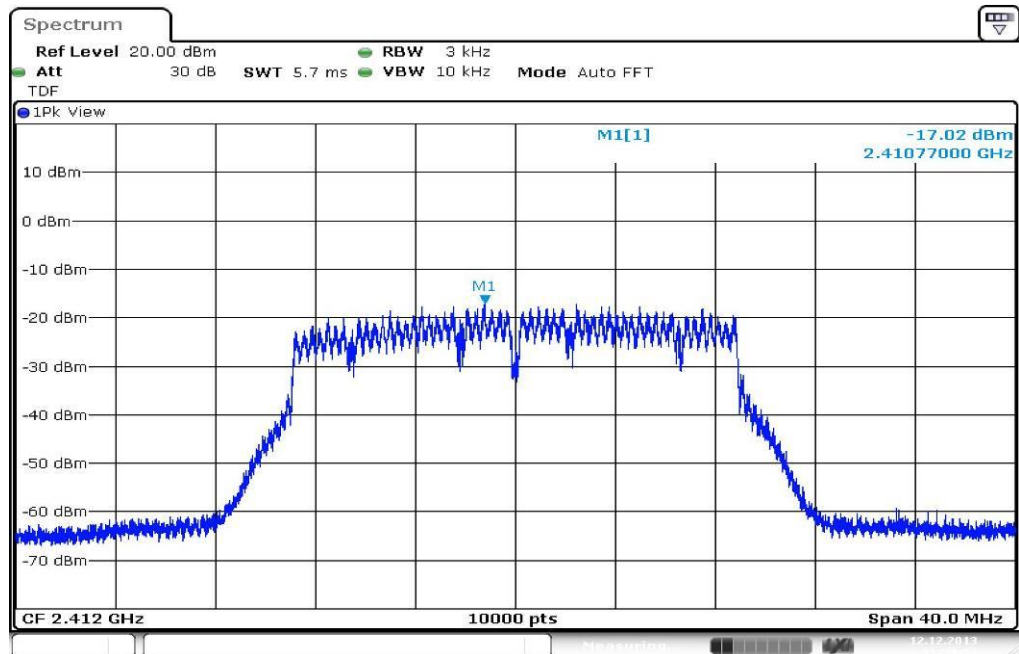
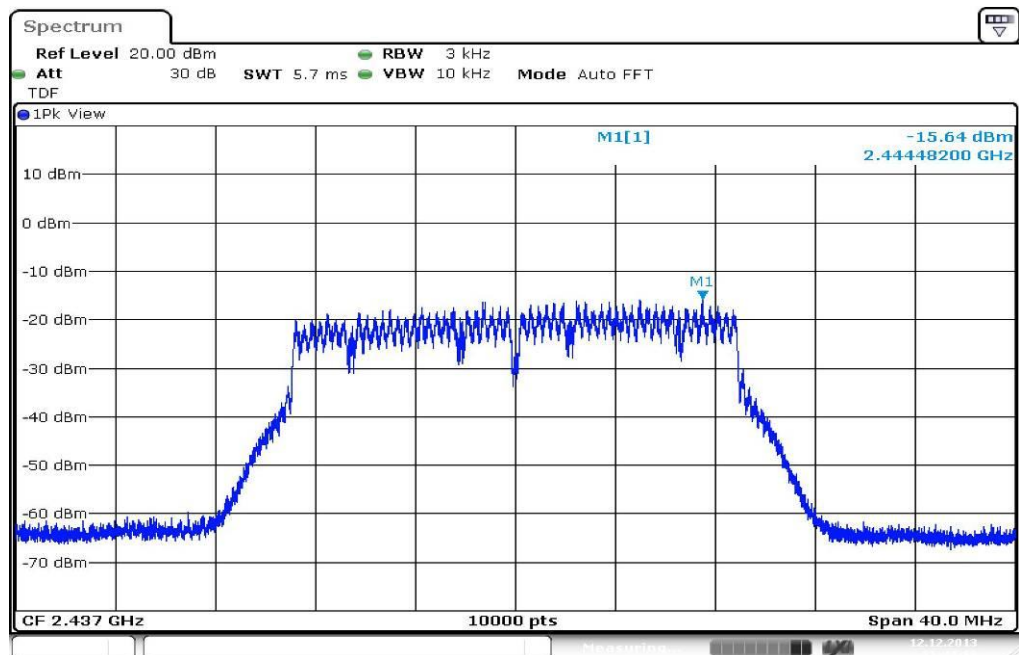
Result: **Passed**

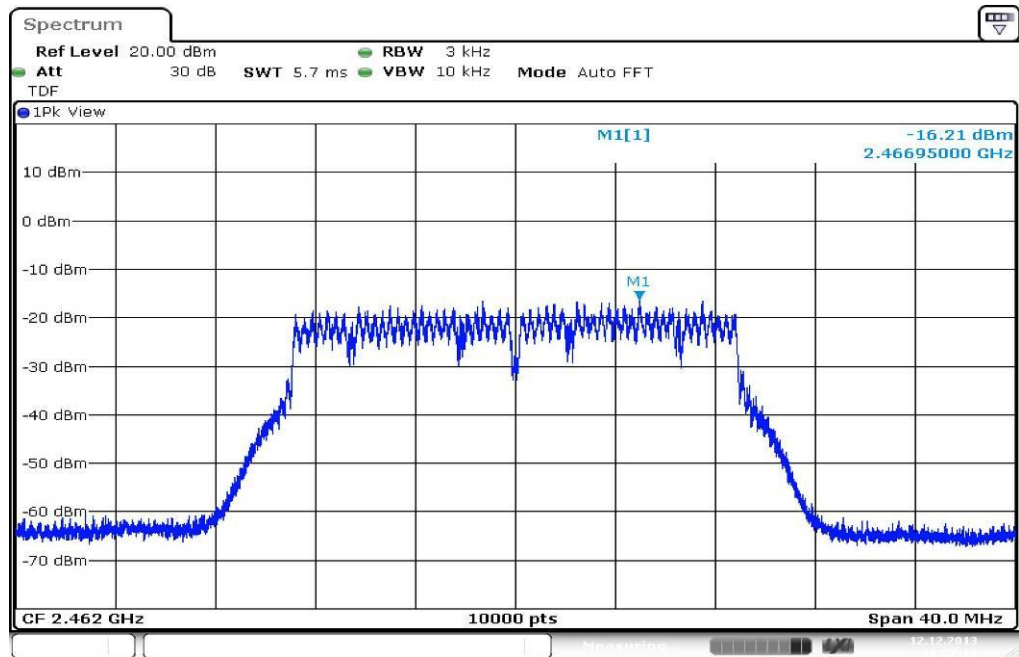
Plots: DSSS / b – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel

Plots: OFDM / g – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel

Plots: OFDM / n – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel

11.4 DTS spectrum bandwidth – 6 dB

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to DTS clause: 8.2	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	40 MHz
Measurement procedure:	Measurement of the 75% bandwidth using the integration function of the analyzer
Trace-Mode:	Max hold (allow trace to stabilize)

Limits:

FCC	IC
Spectrum Bandwidth – 6 dB	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results: DSSS / b – mode

Modulation Frequency	6 dB bandwidth [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode 1 Mbit/s	5.4	5.6	5.5
DSSS / b – mode 2 Mbit/s	5.4	5.5	5.5
DSSS / b – mode 5.5 Mbit/s	5.3	5.5	5.6
DSSS / b – mode 11 Mbit/s	5.5	5.4	5.5
Measurement uncertainty	± RBW		

Result: Passed

Results: OFDM / g – mode

Modulation Frequency	6 dB bandwidth [MHz]		
	2412 MHz	2437 MHz	2462 MHz
OFDM / g – mode 6 Mbit/s	11.6	11.8	11.7
OFDM / g – mode 9 Mbit/s	11.6	11.8	11.8
OFDM / g – mode 12 Mbit/s	11.5	11.6	11.7
OFDM / g – mode 18 Mbit/s	11.7	11.7	11.8
OFDM / g – mode 24 Mbit/s	11.7	11.8	11.8
OFDM / g – mode 36 Mbit/s	11.8	11.8	11.8
OFDM / g – mode 48 Mbit/s	11.7	11.8	11.9
OFDM / g – mode 54 Mbit/s	11.6	11.8	11.8
Measurement uncertainty	± RBW		

Result: **Passed**

Results: OFDM / n – mode

Modulation Frequency	6 dB bandwidth [MHz]		
	2412 MHz	2437 MHz	2462 MHz
OFDM / n – mode HT20 MCS0	12.2	12.5	12.5
OFDM / n – mode HT20 MCS1	12.3	12.4	12.5
OFDM / n – mode HT20 MCS2	12.3	12.4	12.4
OFDM / n – mode HT20 MCS3	12.4	12.4	12.7
OFDM / n – mode HT20 MCS4	12.2	12.3	12.5
OFDM / n – mode HT20 MCS5	12.3	12.3	12.5
OFDM / n – mode HT20 MCS6	12.3	12.3	12.6
OFDM / n – mode HT20 MCS7	12.2	12.4	12.5
Measurement uncertainty	± RBW		

Result: Passed

11.5 Occupied bandwidth – 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	500 kHz
Video bandwidth:	3 MHz
Span:	40 MHz
Measurement procedure:	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace-Mode:	Max hold (allow trace to stabilize)

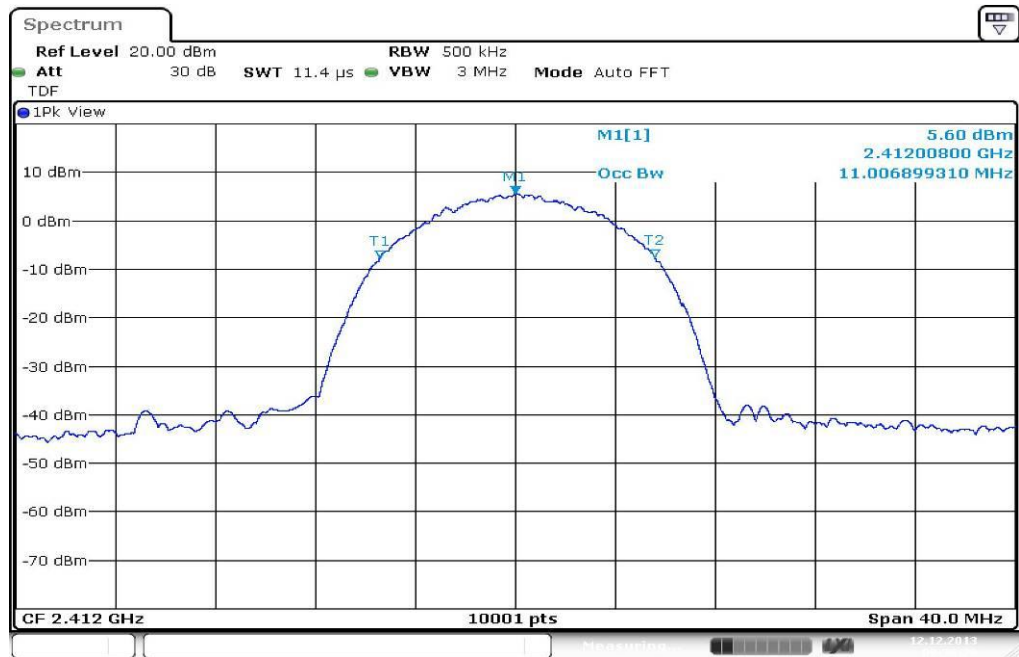
Usage:

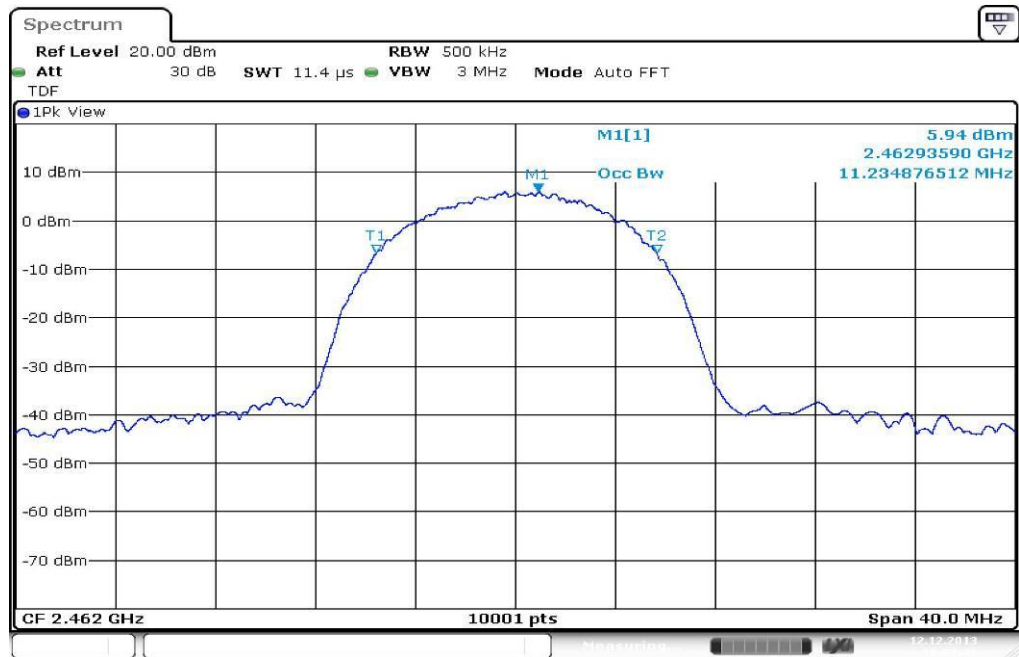
-/-	IC
Occupied Bandwidth – 99% emission bandwidth	
OBW is necessary for Emission Designator	

Results:

Modulation Frequency	99% - bandwidth [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	11.01	11.19	11.23
OFDM / g – mode	17.00	17.13	17.19
OFDM / n – mode	18.15	18.15	18.04
Measurement uncertainty	± RBW		

Result: Passed

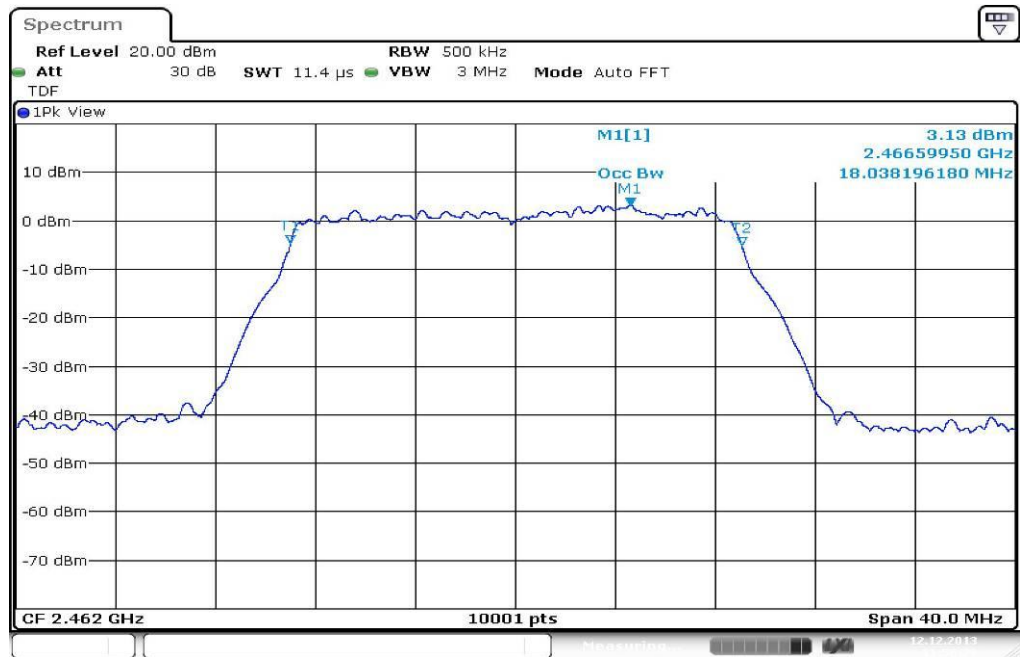
Plots: DSSS / b – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel

Plots: OFDM / g – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel

Plots: OFDM / n – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel

11.6 Band edge compliance conducted

Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in both modes.

Measurement:

Measurement parameter	
According to DTS clause: 13.2.1	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	500 kHz
Span:	Lower Band Edge: 2300 – 2425 MHz Upper Band Edge: 2450 – 2550 MHz
Trace-Mode:	Max hold

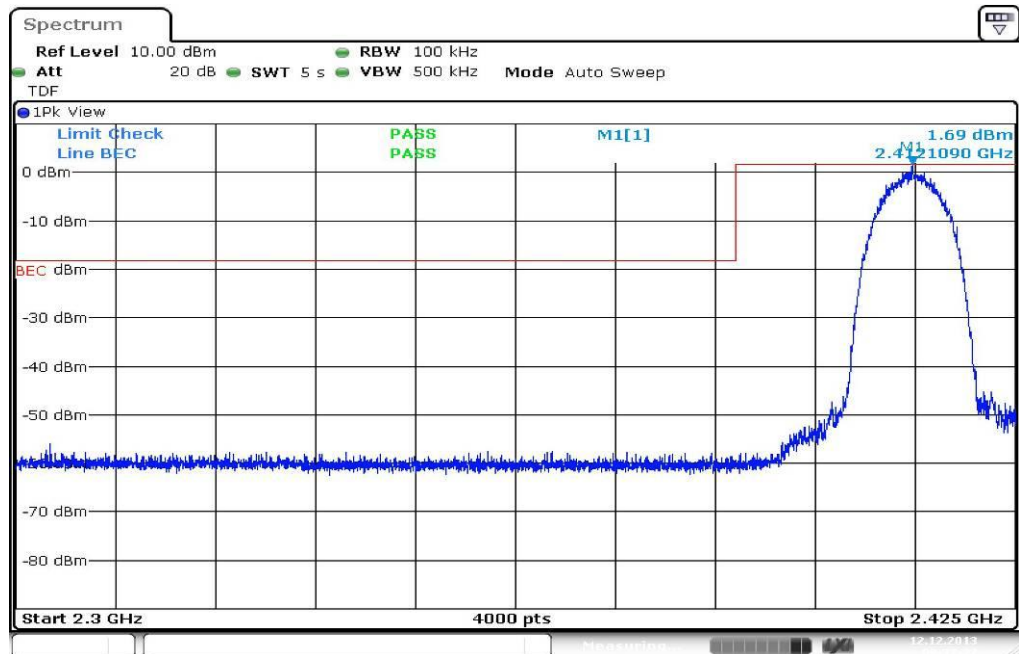
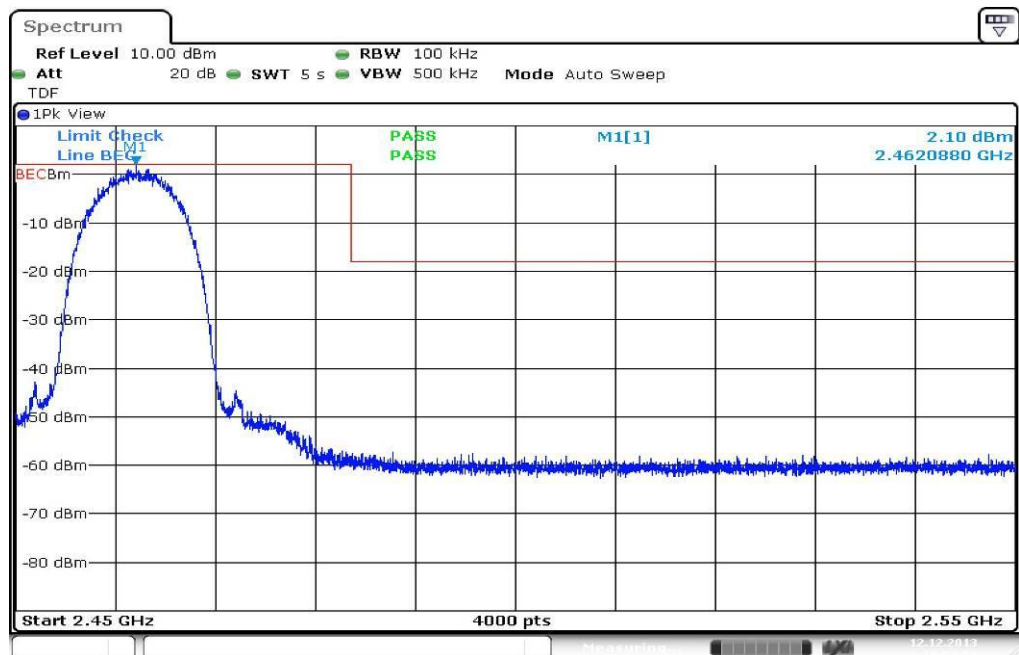
Limits:

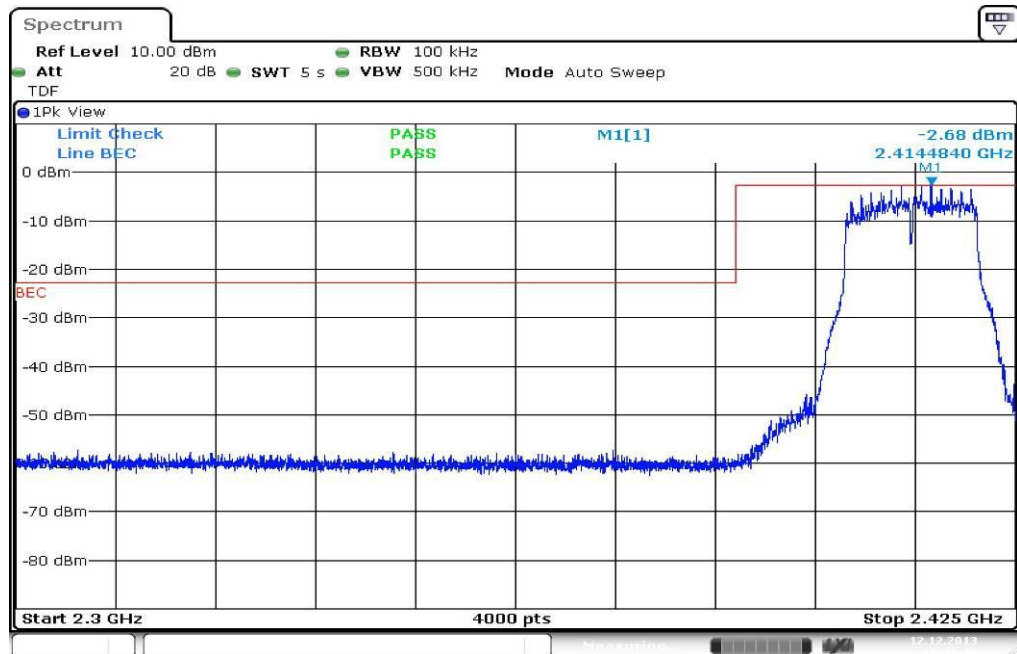
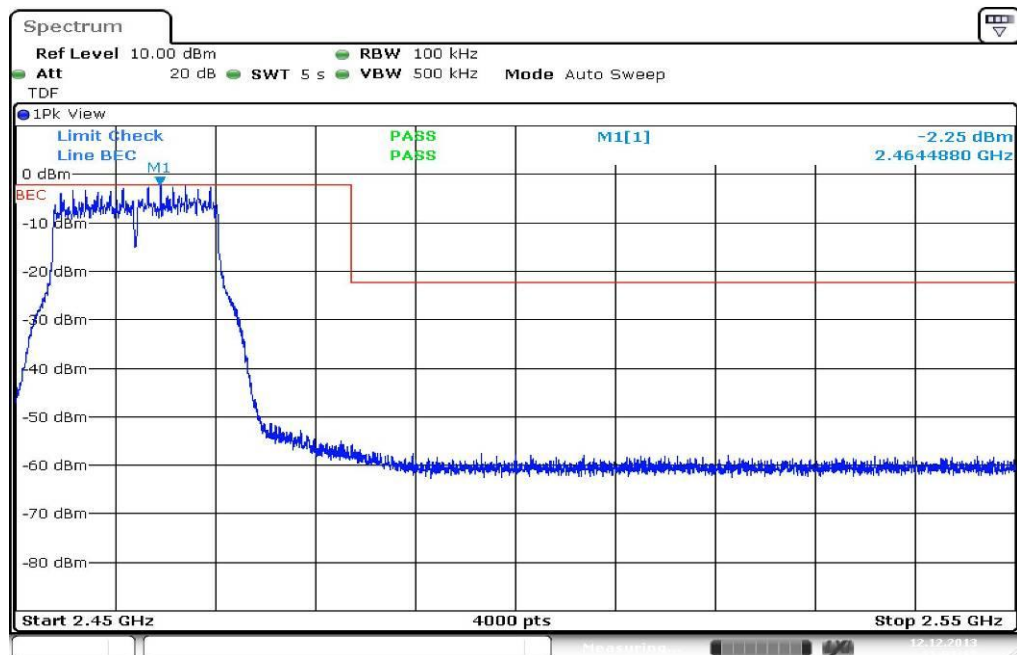
FCC	IC
Band Edge Compliance Conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	

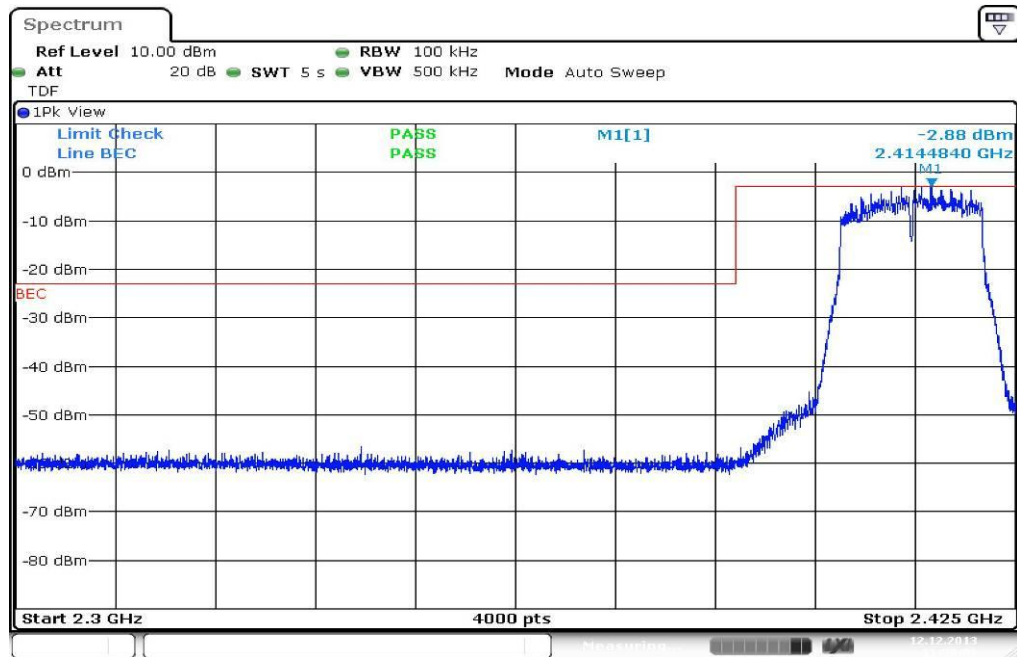
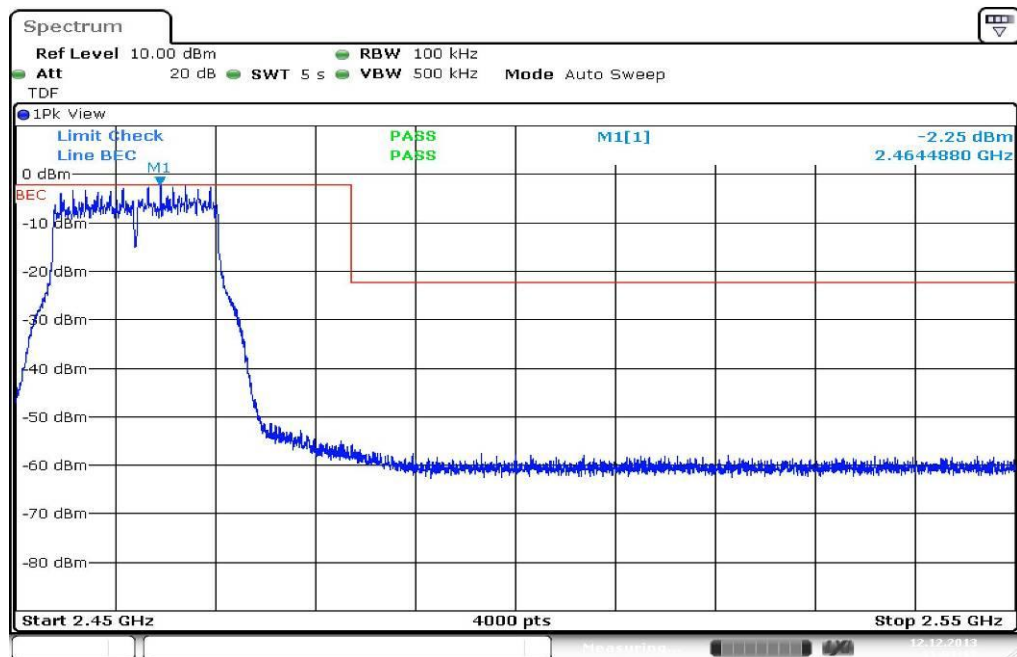
Results:

Scenario Modulation	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB	> 20 dB	> 20 dB
Upper Band Edge – Channel 11	> 20 dB	> 20 dB	> 20 dB
Measurement uncertainty	± 1.5 dB		

Result: Passed

Plots: DSSS / b – mode**Plot 1: TX mode, lower band edge****Plot 2: TX mode, upper band edge**

Plots: OFDM / g – mode**Plot 1: TX mode, lower band edge****Plot 2: TX mode, upper band edge**

Plots: OFDM / n – mode**Plot 1: TX mode, lower band edge****Plot 2: TX mode, upper band edge**

11.7 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz / 1 MHz
Video bandwidth:	1 MHz / 10 Hz
Span:	See plot!
Trace-Mode:	Max Hold

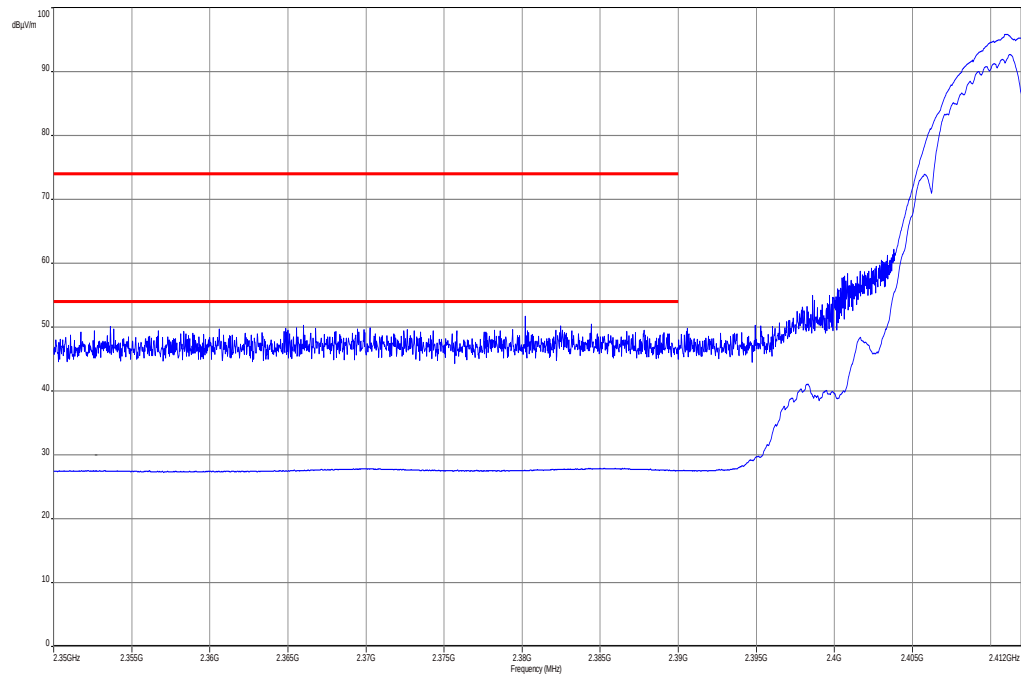
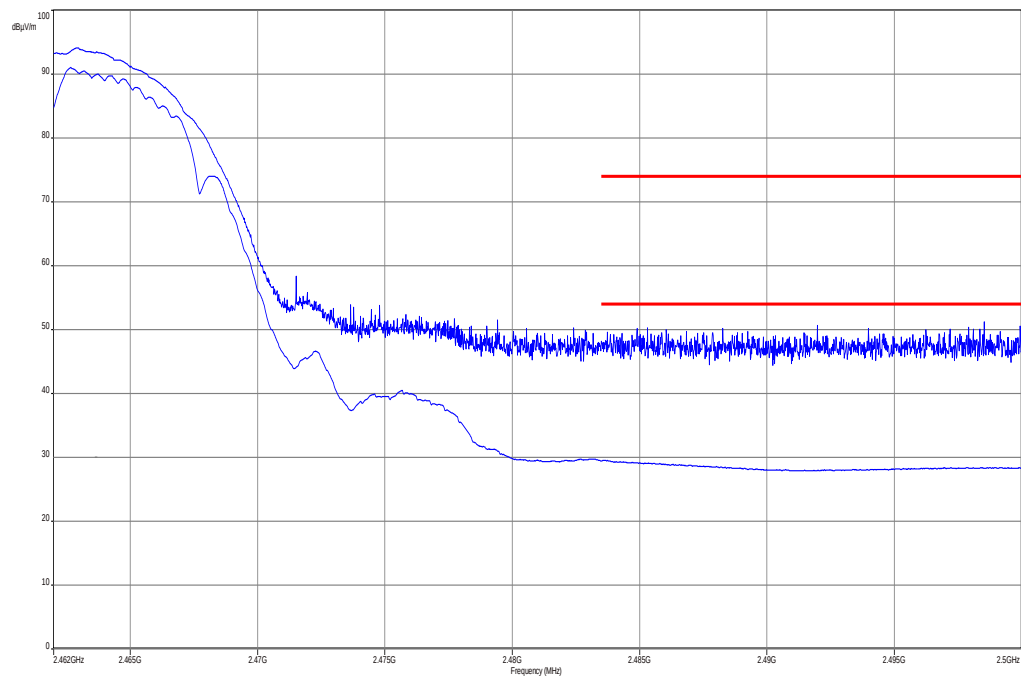
Limits:

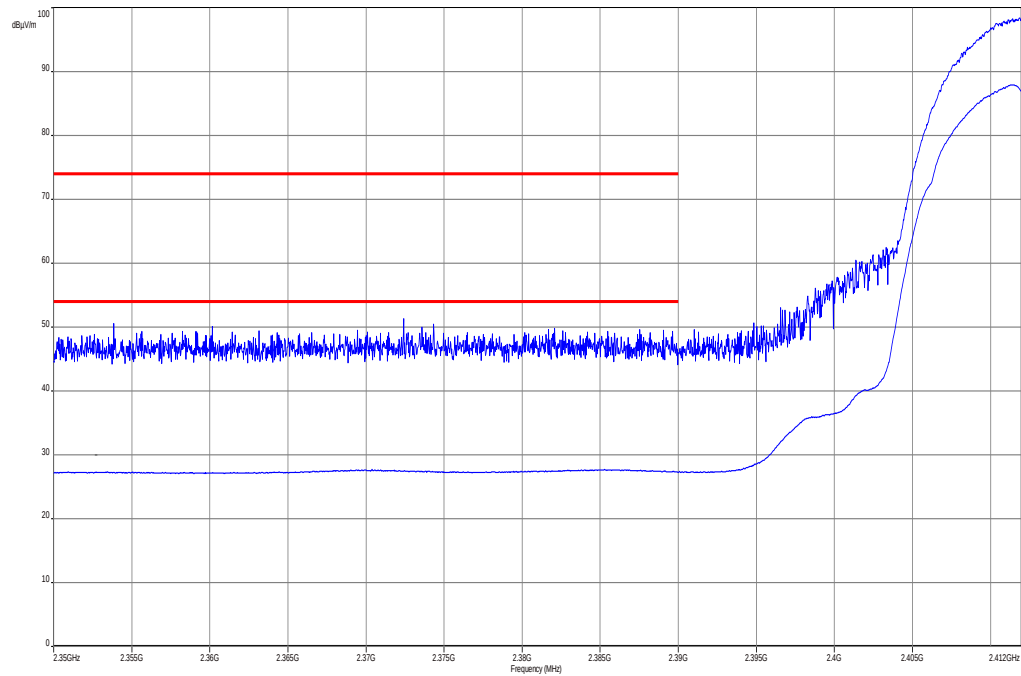
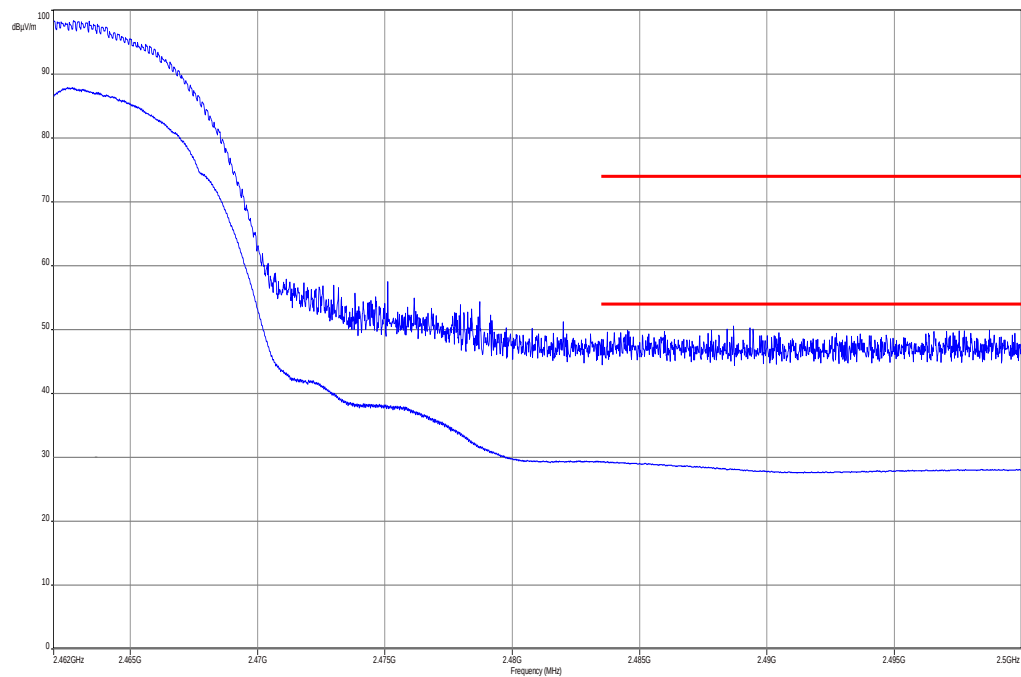
FCC	IC
Band Edge Compliance Radiated	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
54 dB μ V/m AVG	

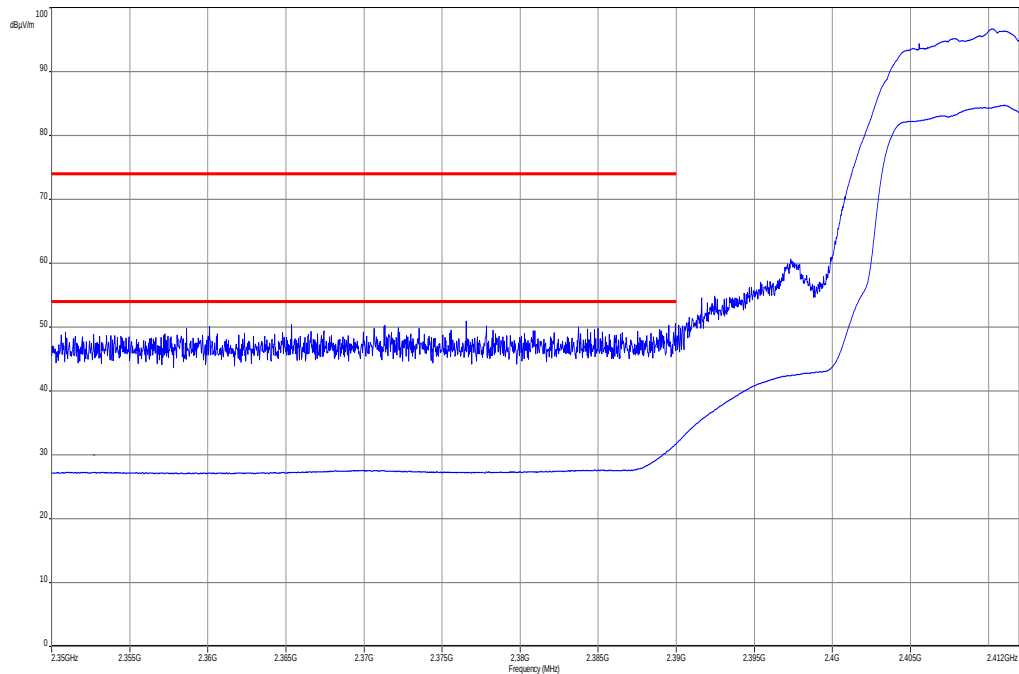
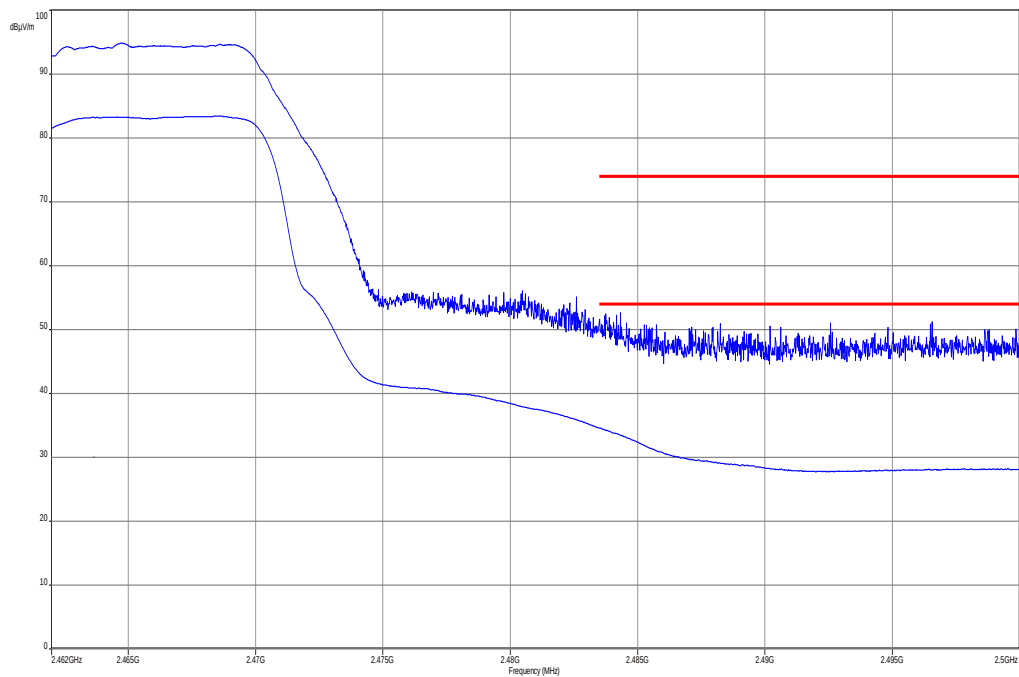
Results:

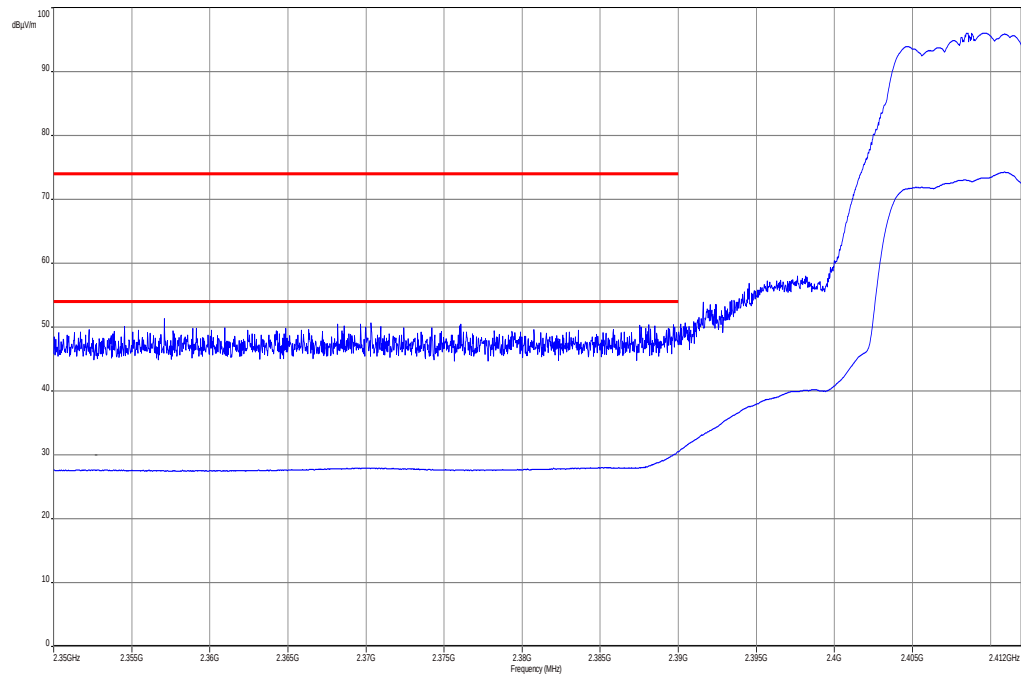
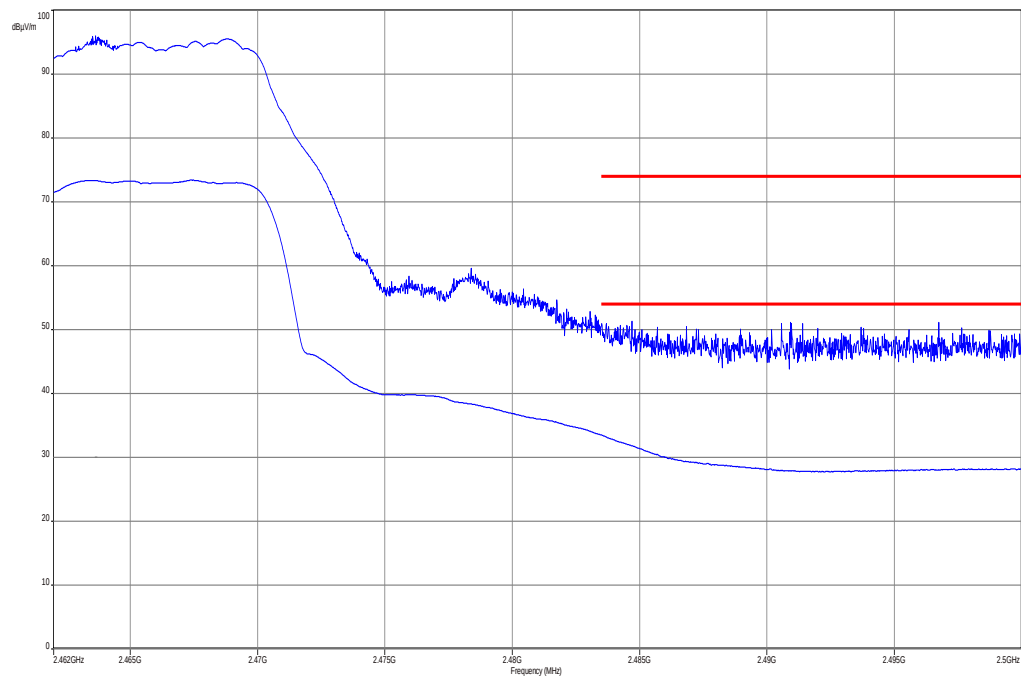
Scenario Modulation	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB (Peak) > 20 dB (AVG)	> 10 dB (Peak) > 10 dB (AVG)	> 10 dB (Peak) > 10 dB (AVG)
Upper Band Edge – Channel 11	> 20 dB (Peak) > 20 dB (AVG)	> 10 dB (Peak) > 10 dB (AVG)	> 10 dB (Peak) > 10 dB (AVG)
Measurement uncertainty	± 3 dB		

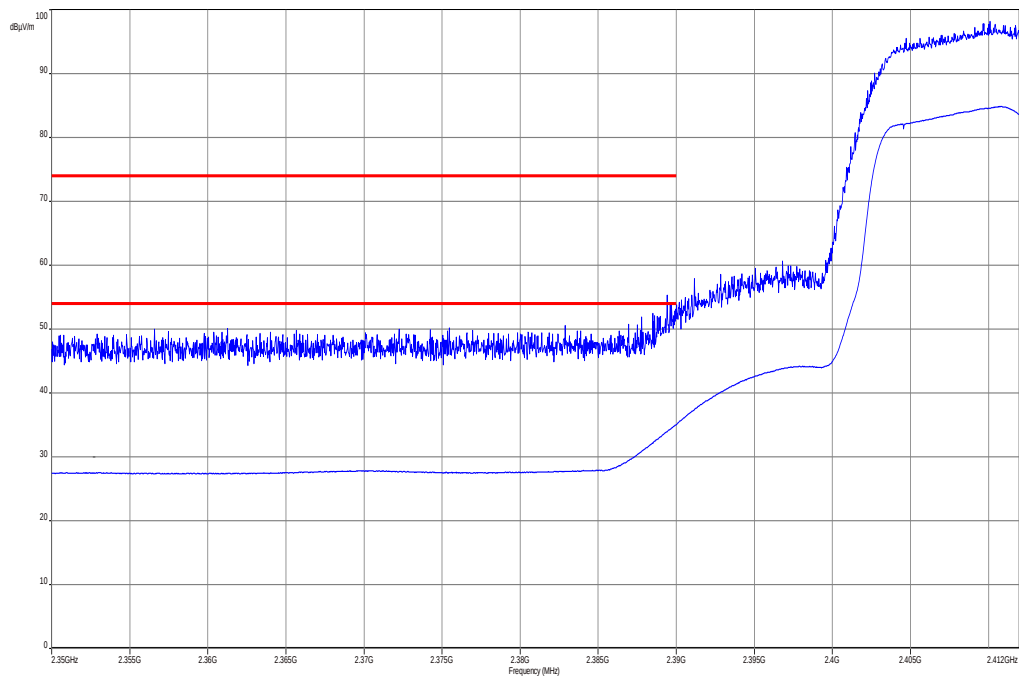
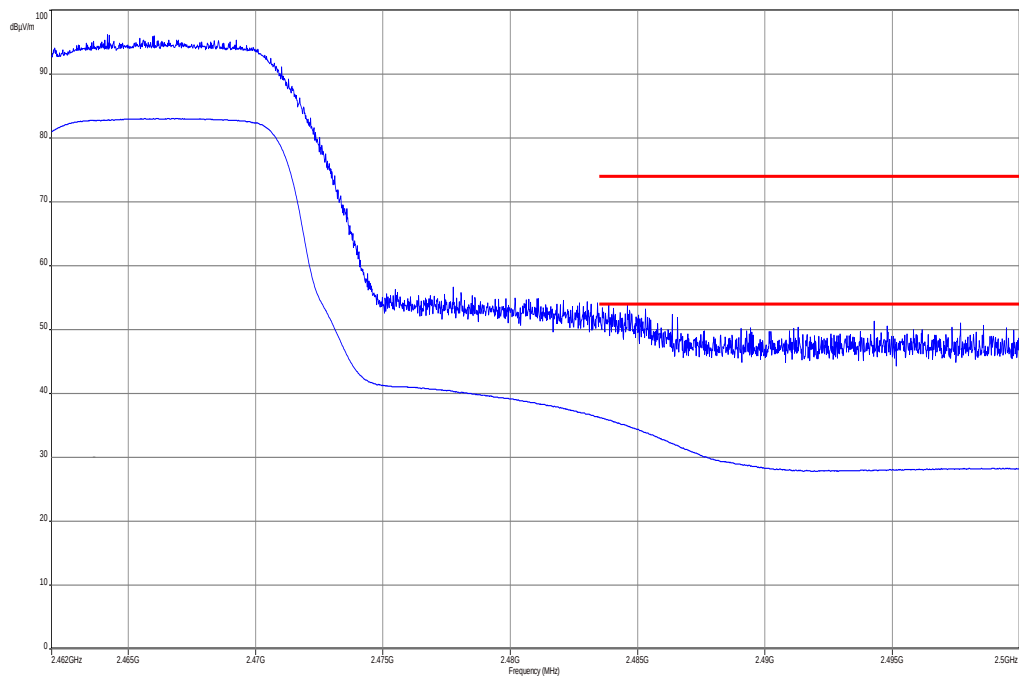
Result: Passed

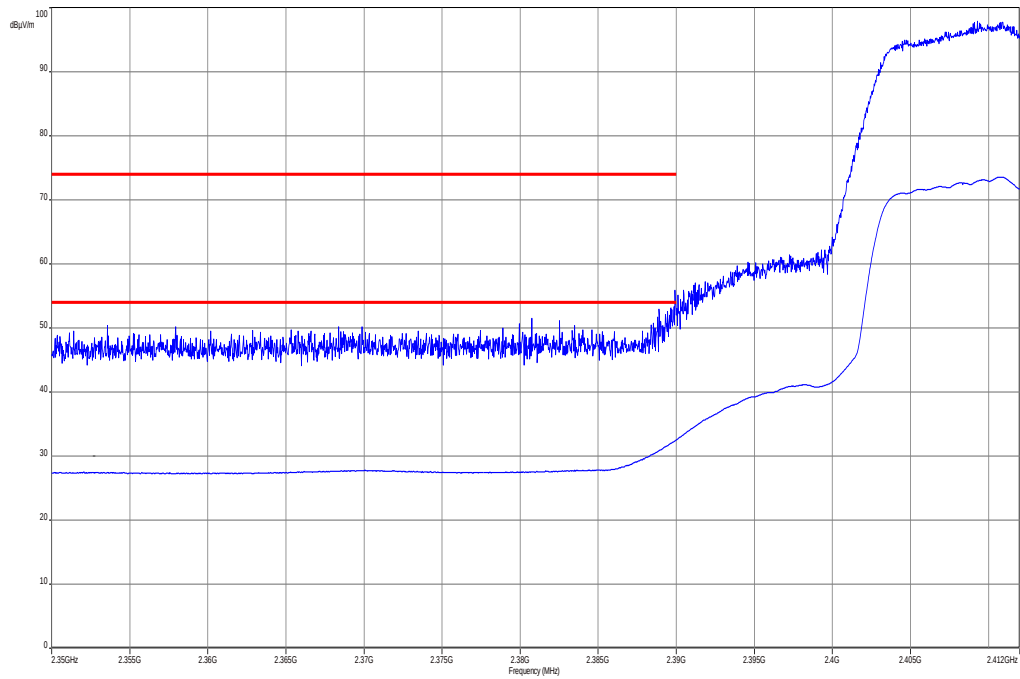
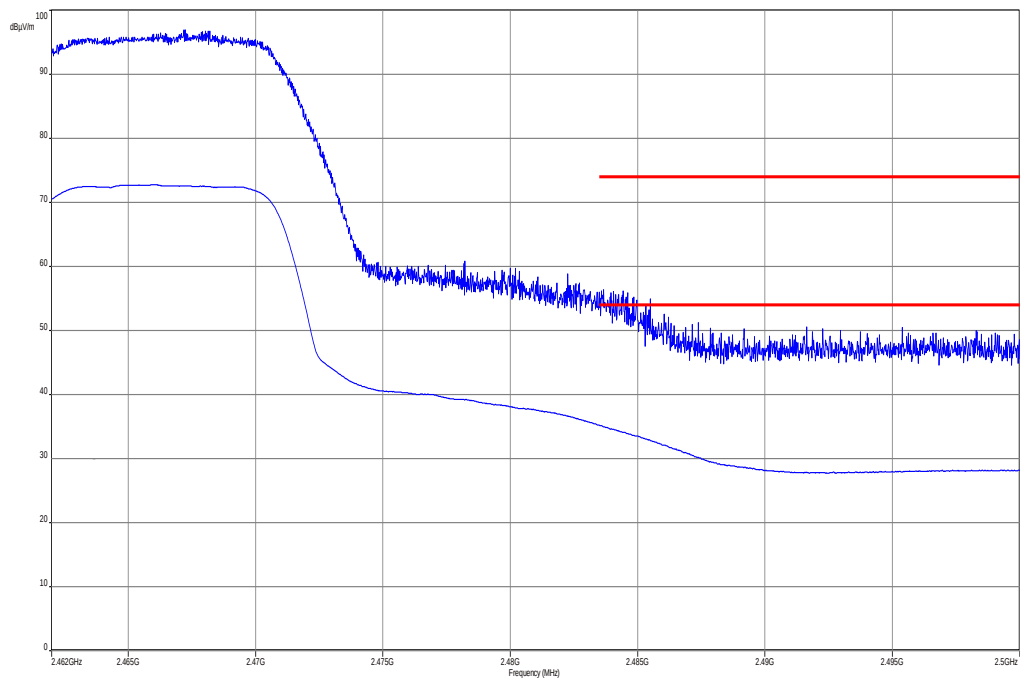
Plots: DSSS/ b – mode peak / average**Plot 1: TX mode, lower band edge, vertical & horizontal polarization, low data rate****Plot 2: TX mode, upper band edge, vertical & horizontal polarization, low data rate**

Plot 3: TX mode, lower band edge, vertical & horizontal polarization, high data rate**Plot 4:** TX mode, upper band edge, vertical & horizontal polarization, high data rate

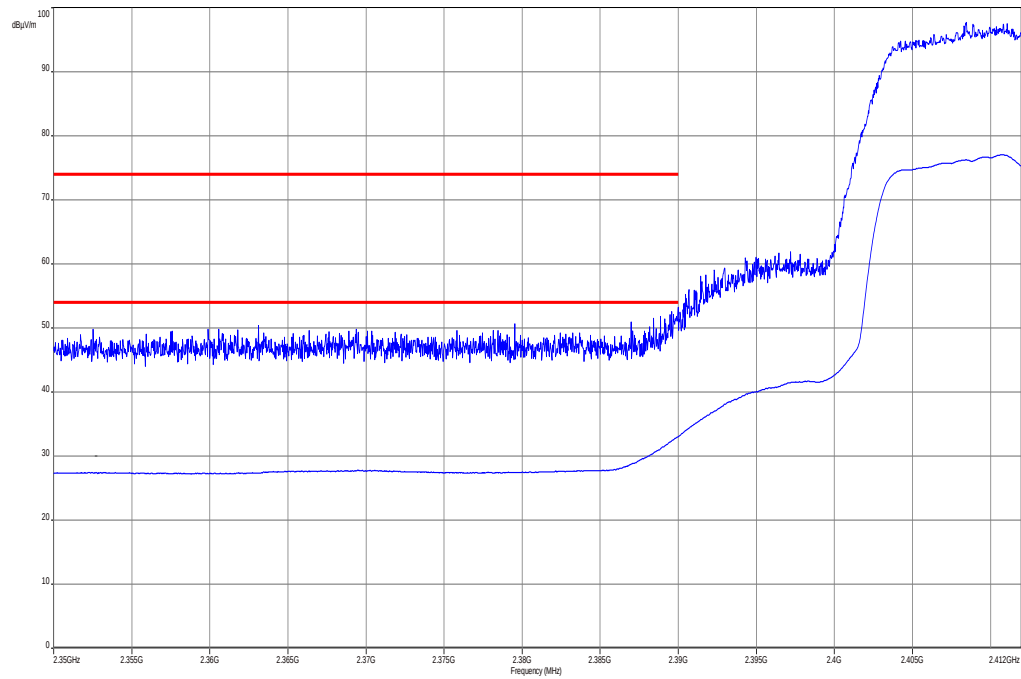
Plots: OFDM / g – mode peak / average**Plot 1: TX mode, lower band edge, vertical & horizontal polarization, low data rate****Plot 2: TX mode, upper band edge, vertical & horizontal polarization, low data rate**

Plot 3: TX mode, lower band edge, vertical & horizontal polarization, high data rate**Plot 4:** TX mode, upper band edge, vertical & horizontal polarization, high data rate

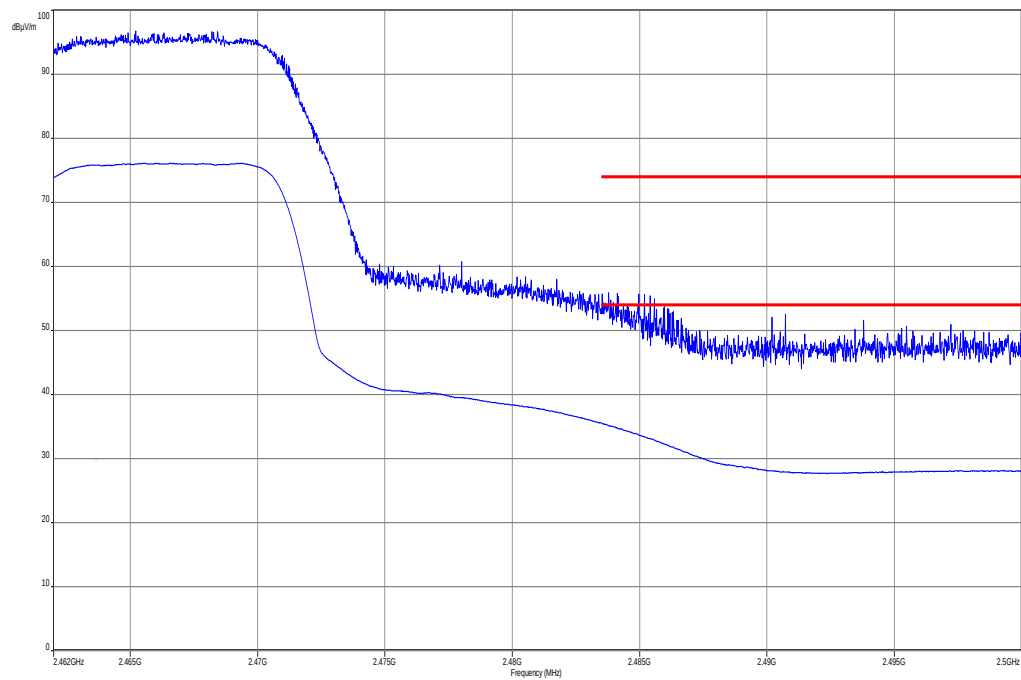
Plots: OFDM / n – mode peak / average**Plot 1: TX mode, lower band edge, vertical & horizontal polarization, low data rate****Plot 2: TX mode, upper band edge, vertical & horizontal polarization, low data rate**

Plot 3: TX mode, lower band edge, vertical & horizontal polarization, high data rate**Plot 4:** TX mode, upper band edge, vertical & horizontal polarization, high data rate

Plot 5: TX mode, lower band edge, vertical & horizontal polarization, highest power data rate



Plot 6: TX mode, upper band edge, vertical & horizontal polarization, highest power data rate



11.8 TX spurious emissions conducted**Description:**

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
According to: DTS clause 11.0	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	500 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
TX Spurious Emissions Conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

Results: DSSS / b – mode

TX Spurious Emissions Conducted					
DSSS / b – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		0.46	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak)		complies
			-30 dBc (average)		
2437		2.40	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak)		complies
			-30 dBc (average)		
2462		2.20	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak)		complies
			-30 dBc (average)		
Measurement uncertainty		± 3 dB			

Result: Passed**Results: OFDM / g – mode**

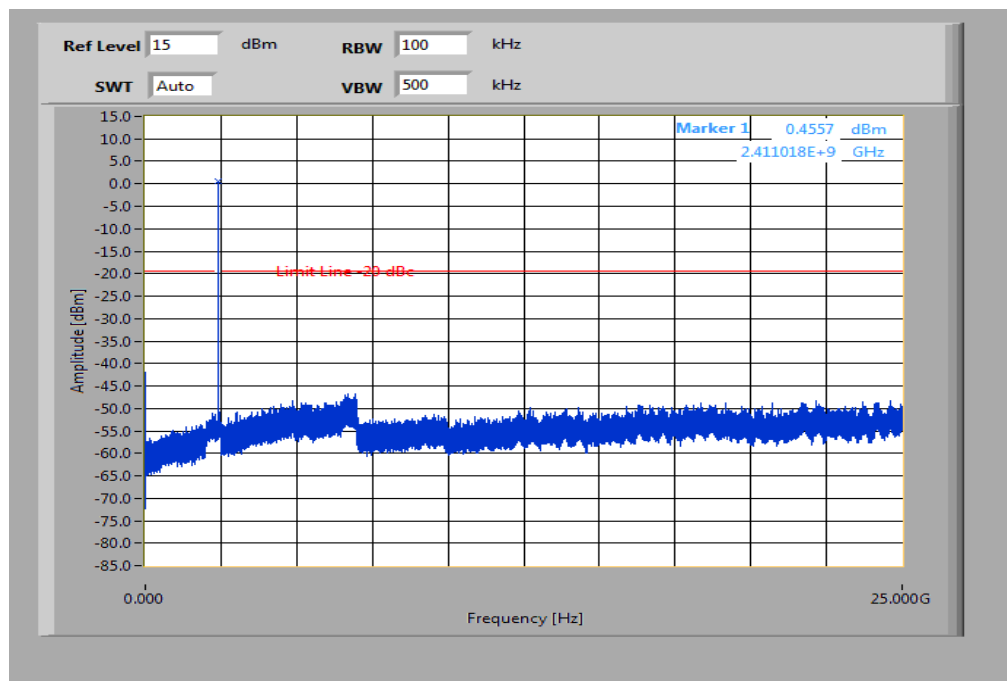
TX Spurious Emissions Conducted					
OFDM / g – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		-2.63	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak)		complies
			-30 dBc (average)		
2437		-1.67	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak)		complies
			-30 dBc (average)		
2462		-2.21	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak)		complies
			-30 dBc (average)		
Measurement uncertainty		± 3 dB			

Result: Passed

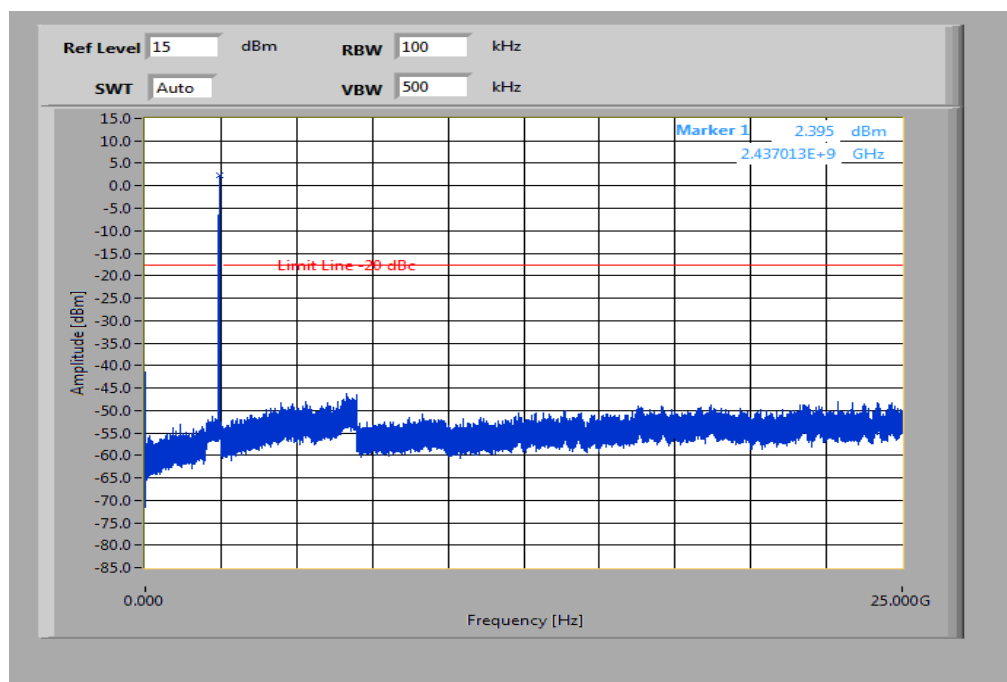
Results: OFDM / n – mode

TX Spurious Emissions Conducted					
OFDM / n – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		-2.83	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
2437		-1.52	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
2462		-2.22	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
Measurement uncertainty		± 3 dB			

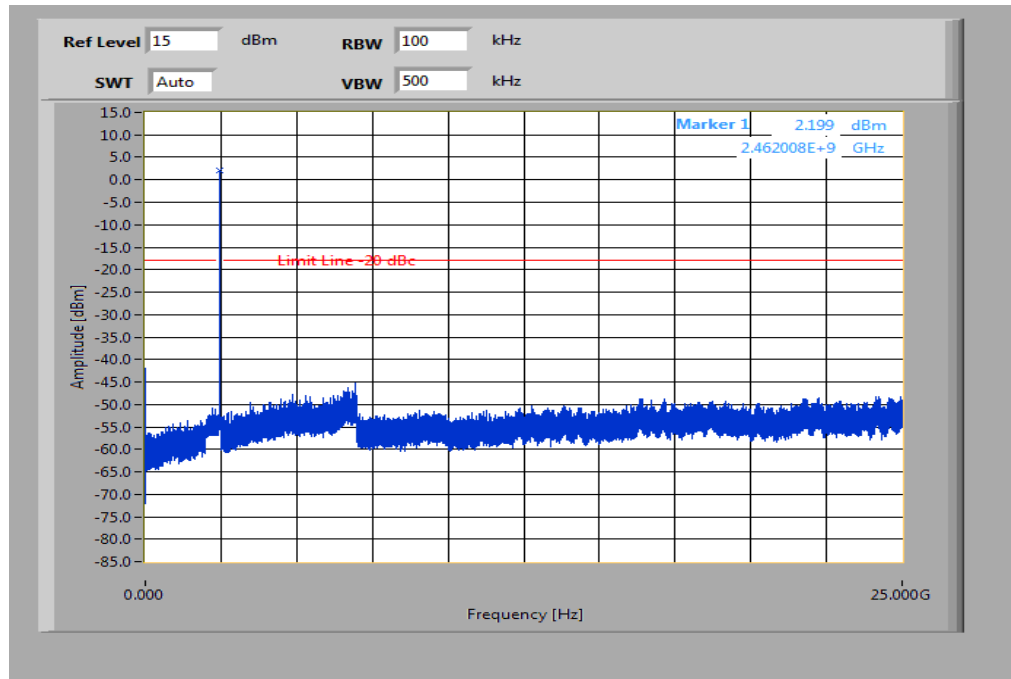
Result: Passed

Plots: DSSS / b – mode**Plot 1: TX mode, lowest channel, up to 25 GHz**

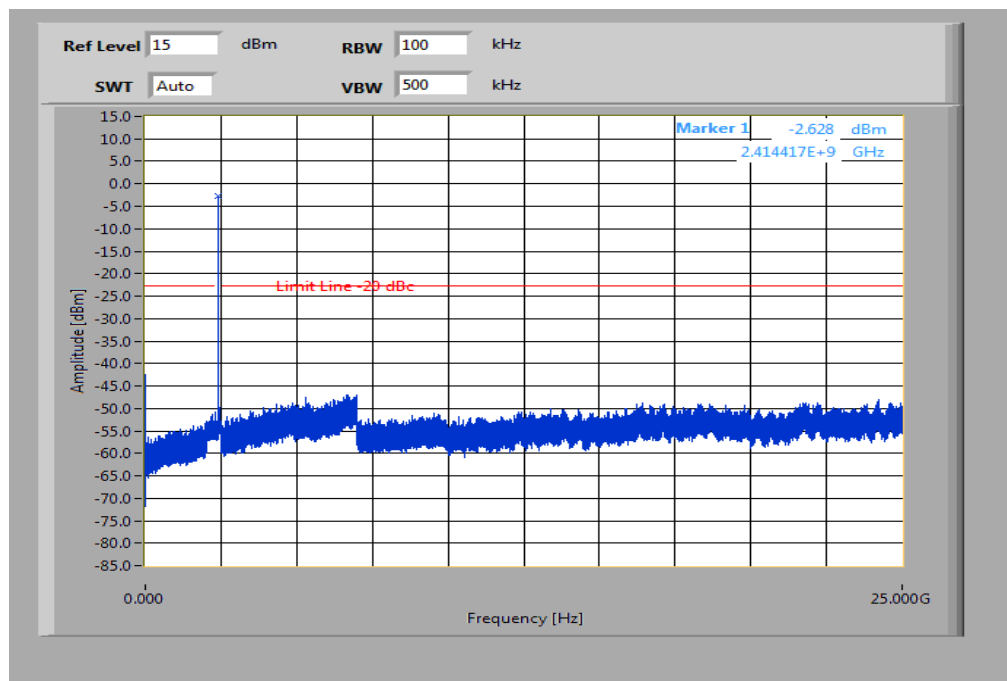
The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 25 GHz

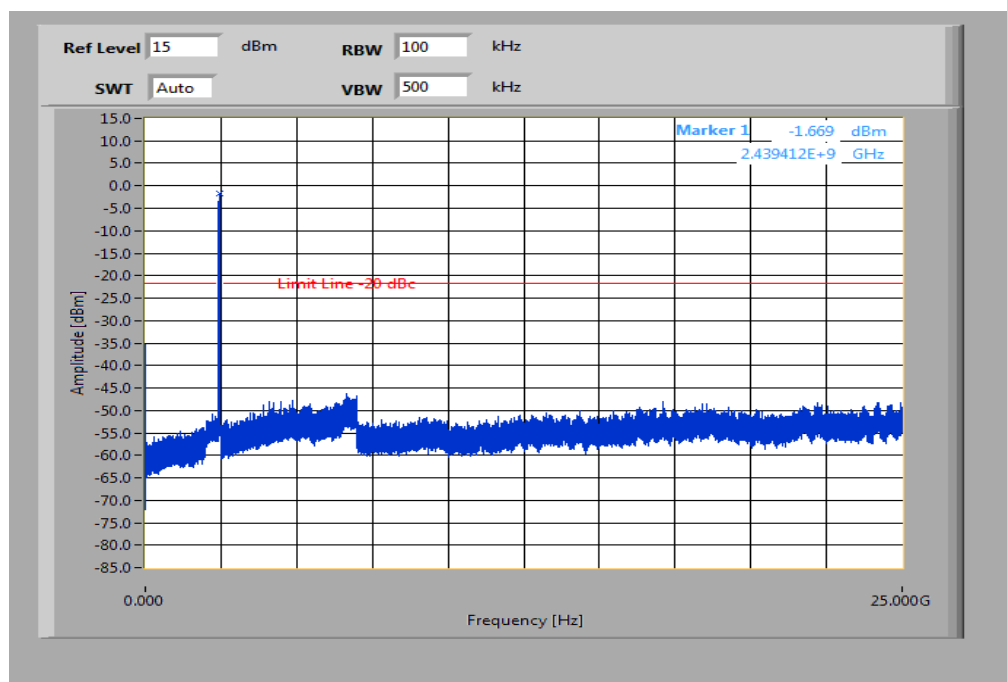
The peak at the beginning of the plot is the LO from the SA.

Plot 3: TX mode, highest channel, up to 25 GHz

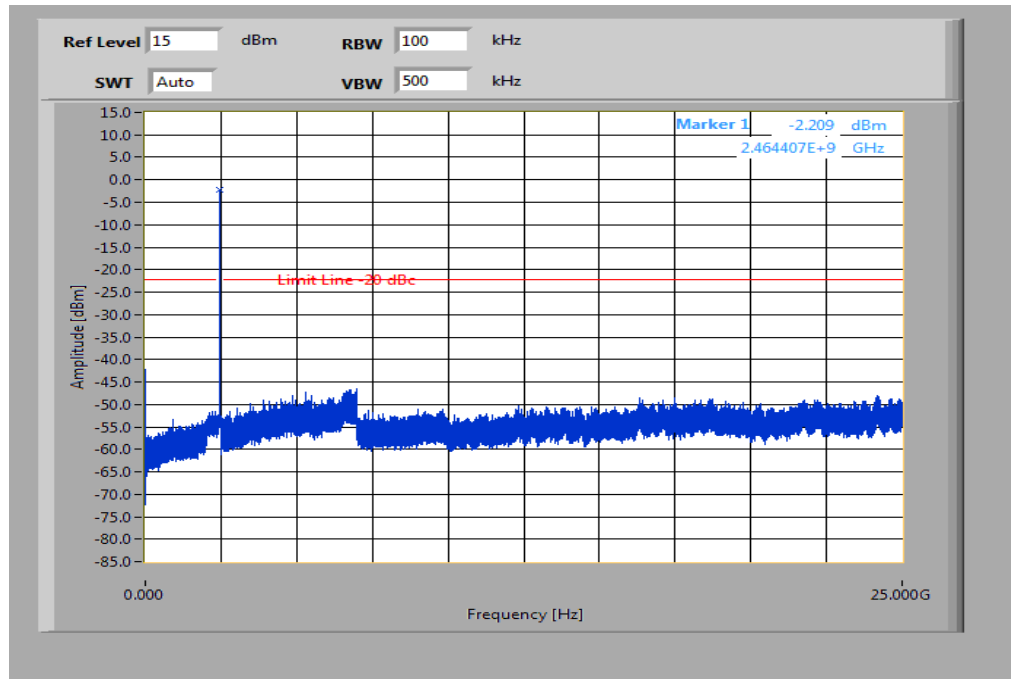
The peak at the beginning of the plot is the LO from the SA.

Plots: OFDM / g – mode**Plot 1: TX mode, lowest channel, up to 25 GHz**

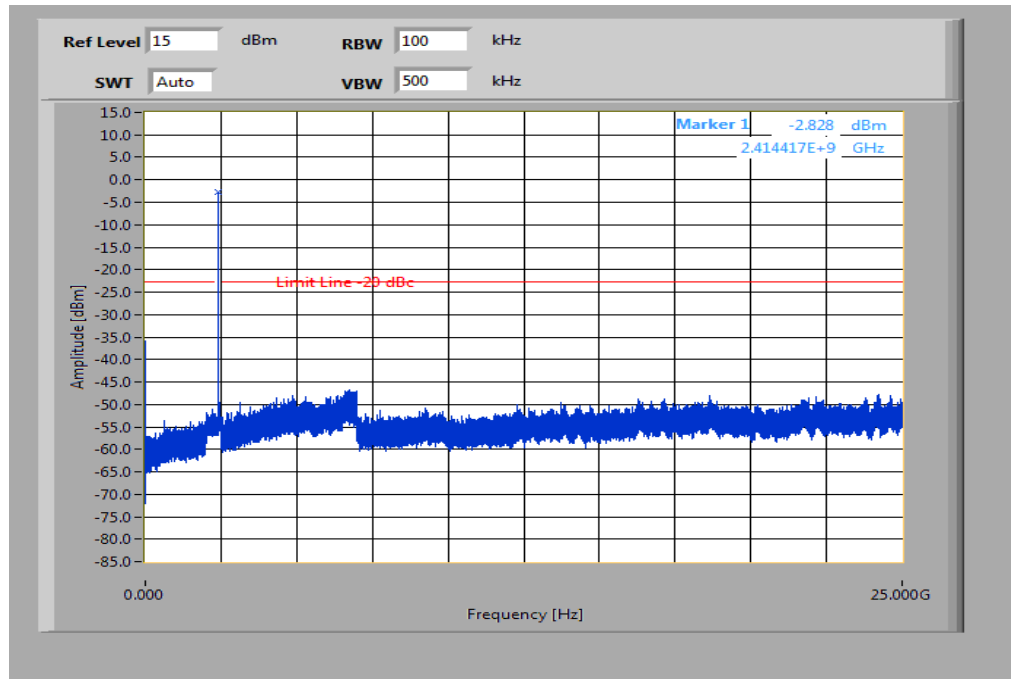
The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 25 GHz

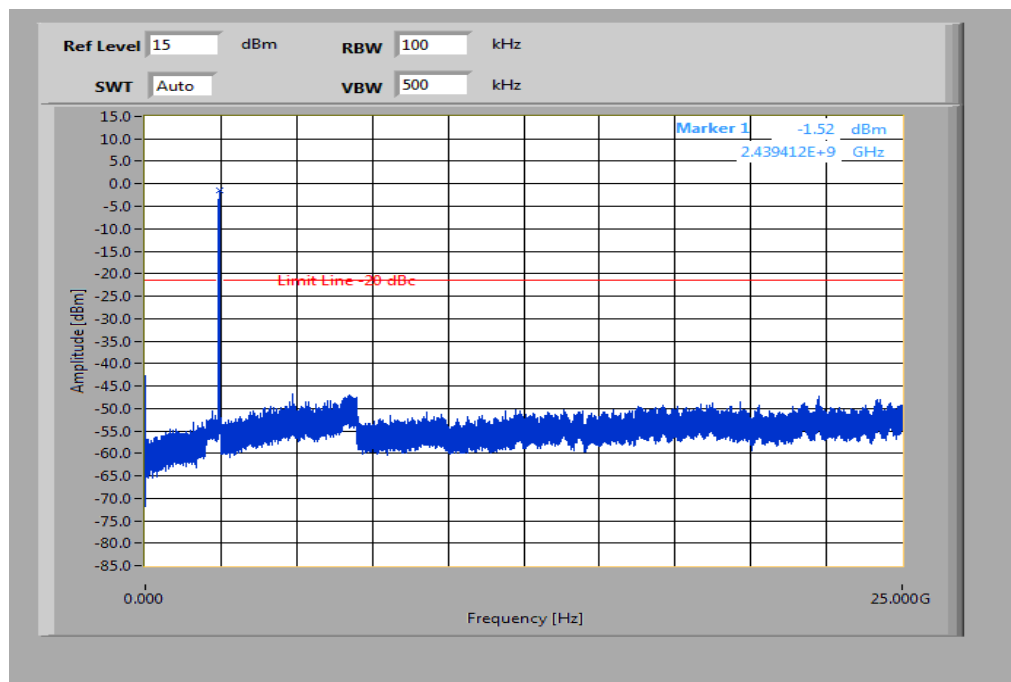
The peak at the beginning of the plot is the LO from the SA.

Plot 3: TX mode, highest channel, up to 25 GHz

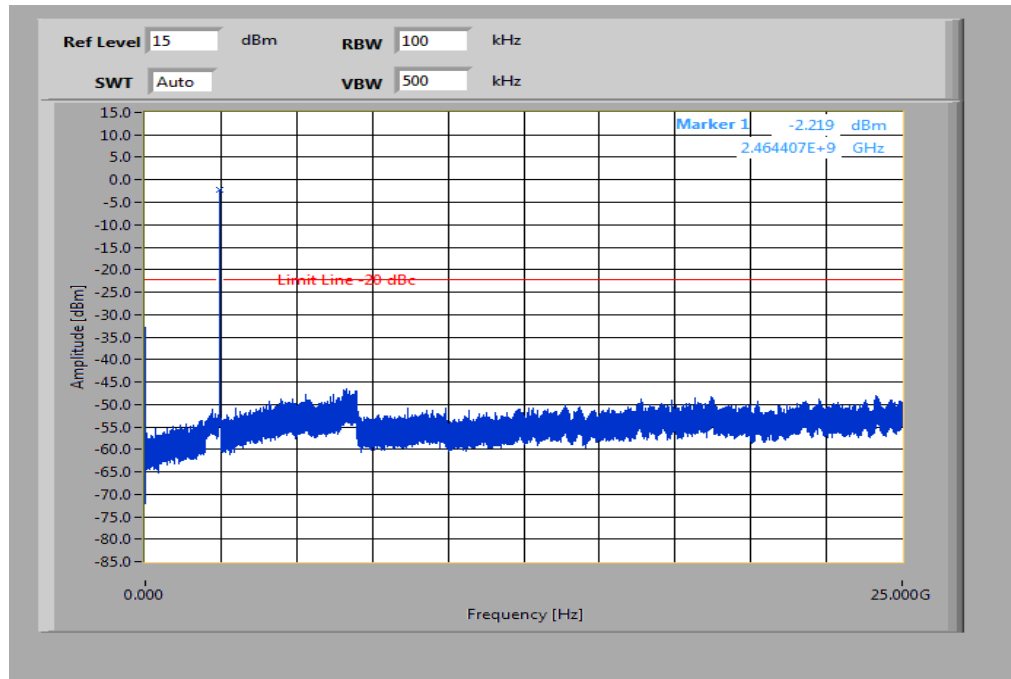
The peak at the beginning of the plot is the LO from the SA.

Plots: OFDM / n – mode**Plot 1: TX mode, lowest channel, up to 25 GHz**

The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

Plot 3: TX mode, highest channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

11.9 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz
Video bandwidth:	3 x RBW Remeasurement: 10 Hz / 3 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold
Measured Modulation	☒ DSSS b – mode ☒ OFDM g – mode ☒ OFDM n – mode

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

FCC		IC
TX Spurious Emissions Radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency (MHz)	Field Strength (dBμV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results: DSSS / b – mode

TX Spurious Emissions Radiated [dBμV/m]								
DSSS / b – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Above 1 GHz: No spurious emissions detected.			Above 1 GHz: No spurious emissions detected.			Above 1 GHz: No spurious emissions detected.		
Measurement uncertainty			± 3 dB					

Result: Passed**Results: OFDM / g – mode**

TX Spurious Emissions Radiated [dBμV/m]								
OFDM / g – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Above 1 GHz: No spurious emissions detected.			Above 1 GHz: No spurious emissions detected.			Above 1 GHz: No spurious emissions detected.		
Measurement uncertainty			± 3 dB					

Result: Passed**Results: OFDM / n – mode**

TX Spurious Emissions Radiated [dBμV/m]								
OFDM / n – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Above 1 GHz: No spurious emissions detected.			Above 1 GHz: No spurious emissions detected.			Above 1 GHz: No spurious emissions detected.		
Measurement uncertainty			± 3 dB					

Result: Passed

Note: The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

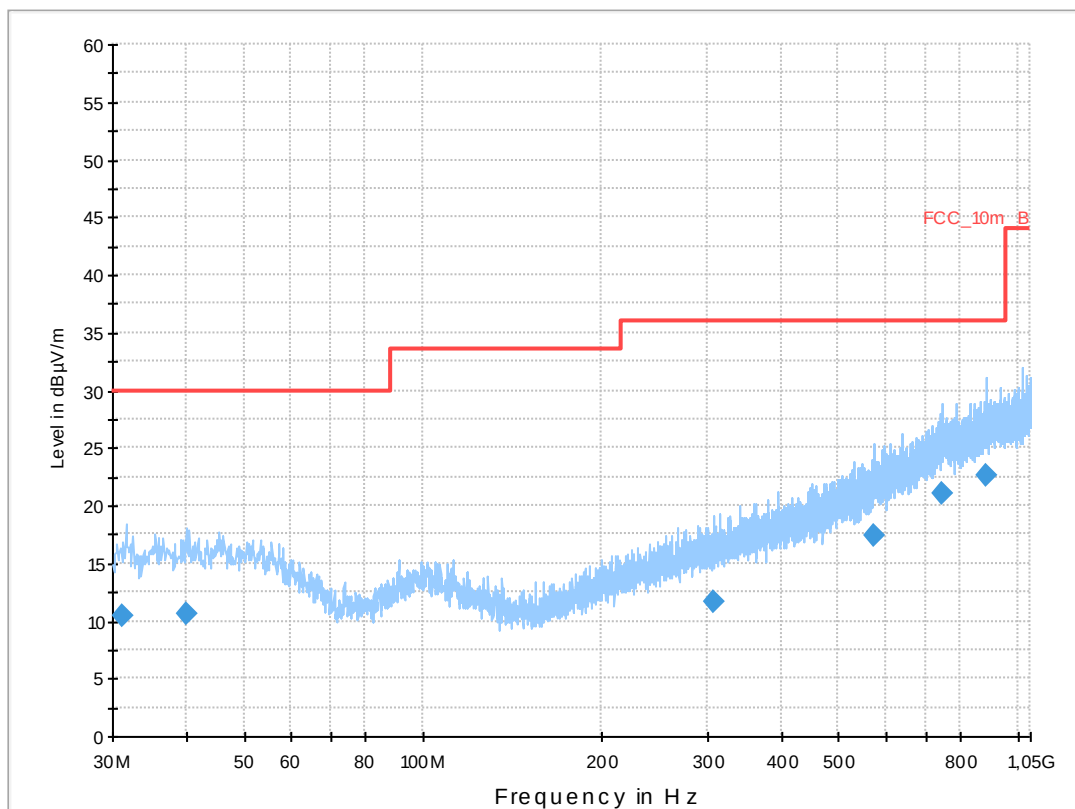
Plots: DSSS / b – mode**Plot 1:** Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan b-mode tx ch 1
 Operator Name: Wolsdorfer
 Comment: battery powered

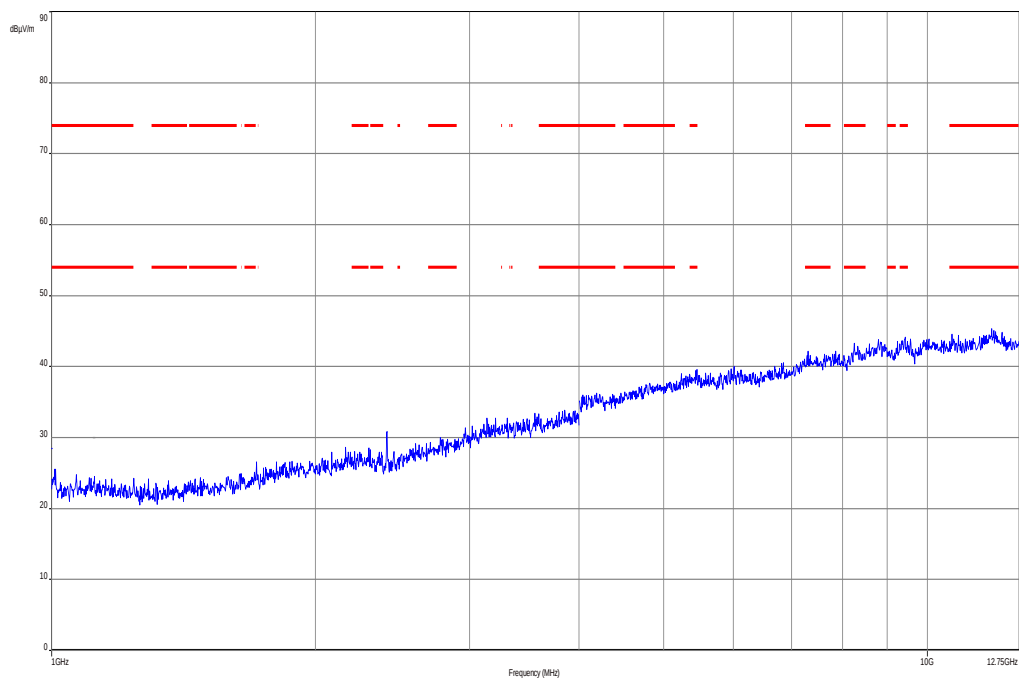
Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dB μ V/m

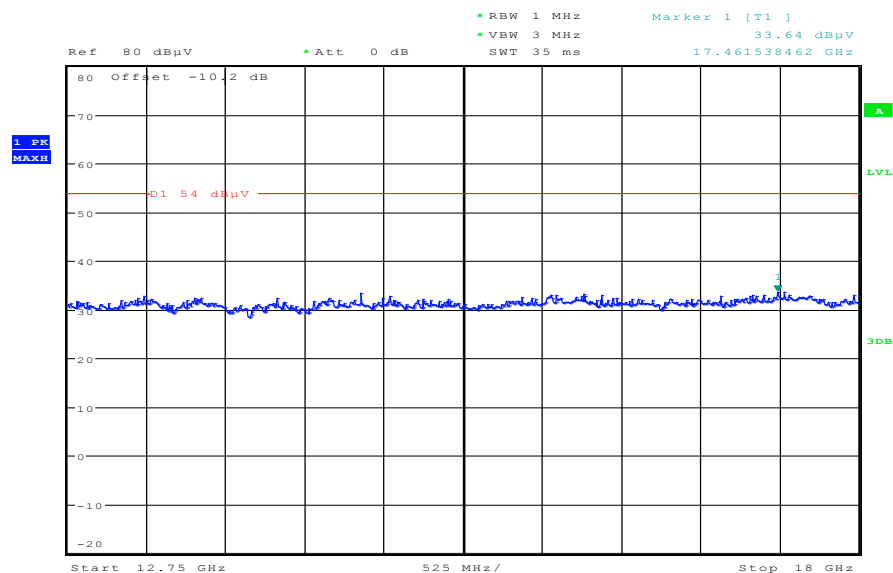
Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
31.212150	10.4	1000.0	120.000	170.0	H	-10.0	12.6	19.6	30.0	
39.864150	10.6	1000.0	120.000	170.0	V	90.0	13.4	19.4	30.0	
308.757000	11.7	1000.0	120.000	170.0	H	280.0	14.8	24.3	36.0	
573.272550	17.5	1000.0	120.000	170.0	H	-9.0	20.0	18.5	36.0	
743.896800	21.1	1000.0	120.000	144.0	V	280.0	23.5	15.0	36.0	
883.411200	22.6	1000.0	120.000	170.0	H	90.0	25.0	13.4	36.0	

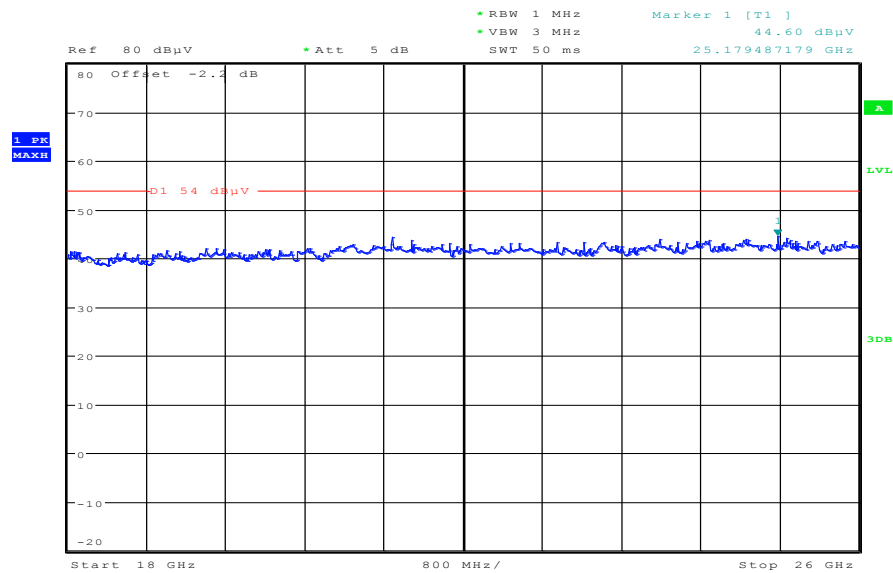
Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 18.DEC.2013 17:55:42

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 18:18:17

Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

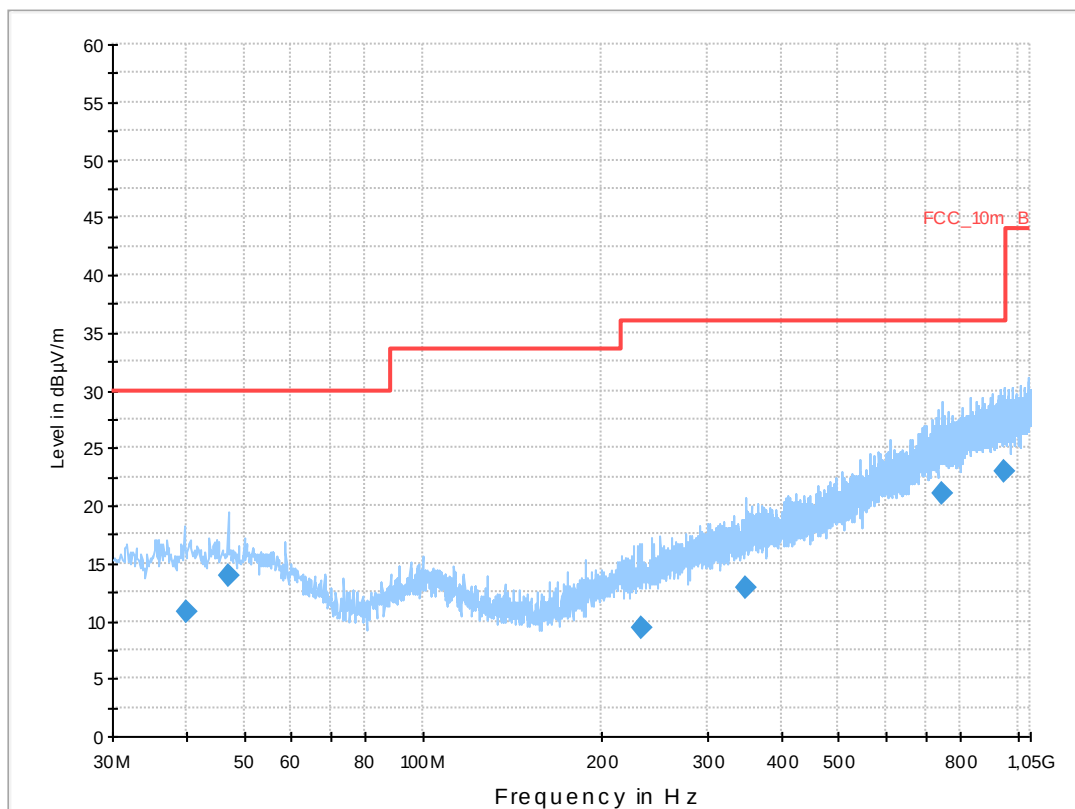
Common Information

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan b-mode tx ch 6
 Operator Name: Wolsdorfer
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m

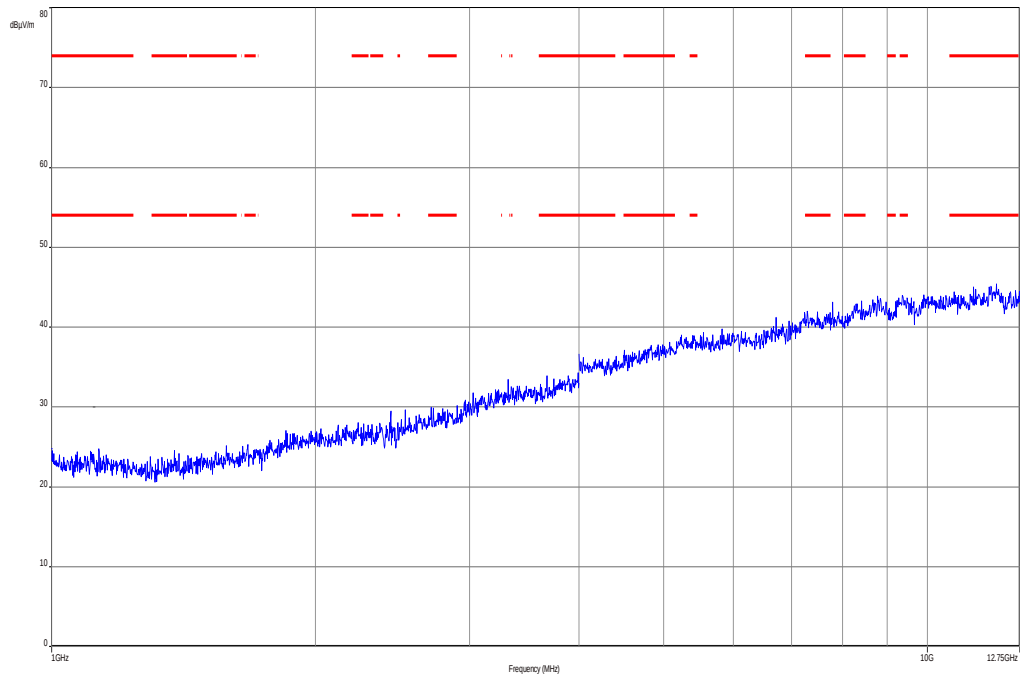
Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB



Final Result 1

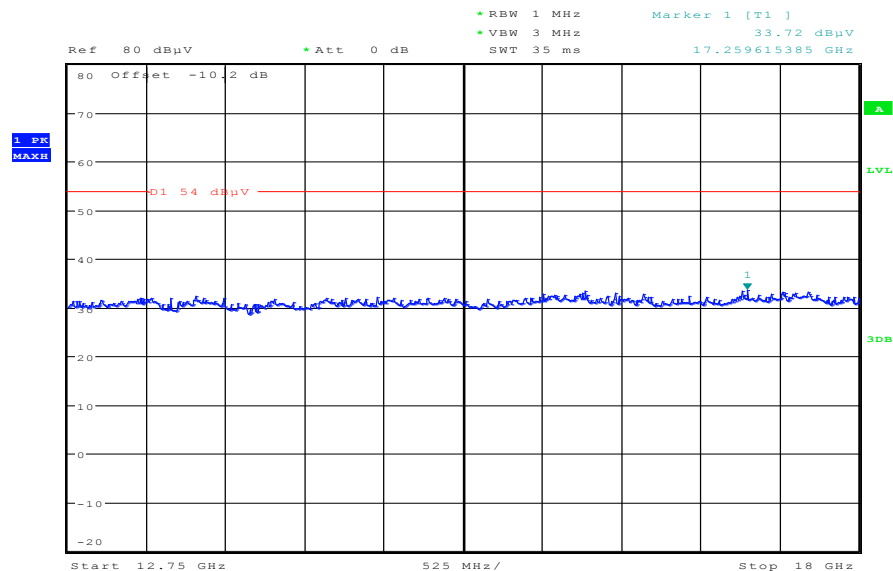
Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
40.060950	10.7	1000.0	120.000	152.0	H	-10.0	13.4	19.3	30.0	
46.970850	14.0	1000.0	120.000	110.0	V	100.0	13.3	16.0	30.0	
232.836300	9.4	1000.0	120.000	111.0	V	10.0	12.8	26.6	36.0	
348.710850	12.9	1000.0	120.000	155.0	V	270.0	16.0	23.1	36.0	
745.561050	21.1	1000.0	120.000	170.0	V	190.0	23.6	14.9	36.0	
947.784150	22.9	1000.0	120.000	170.0	V	182.0	25.3	13.1	36.0	

Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization



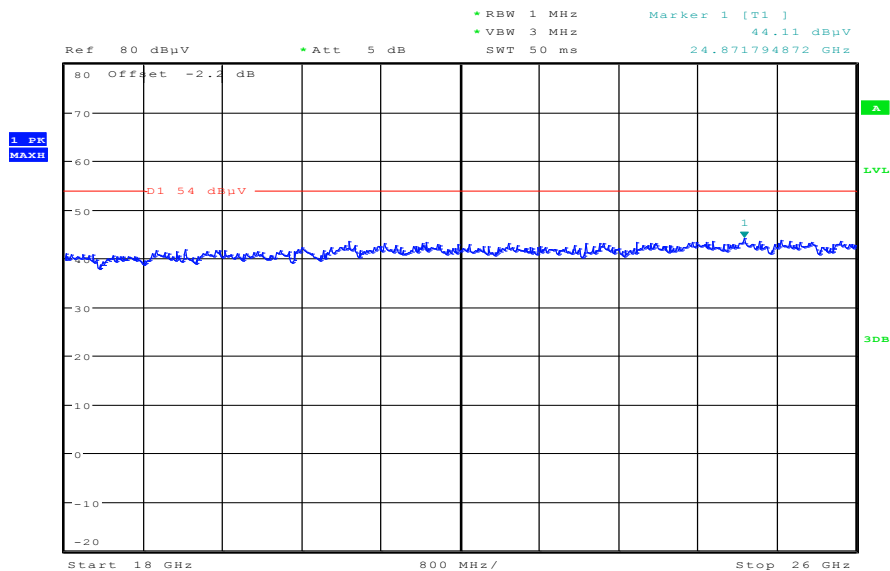
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 17:56:53

Plot 8: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 18:17:17

Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

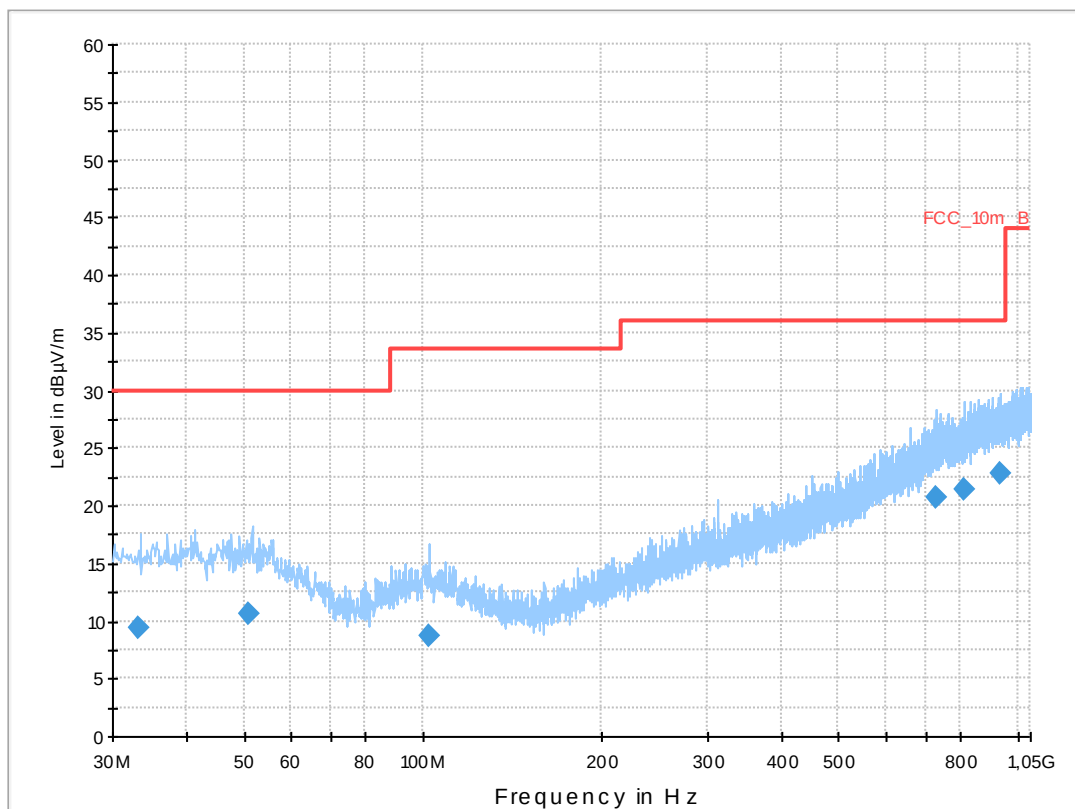
Common Information

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan b-mode tx ch 11
 Operator Name: Wolsdorfer
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

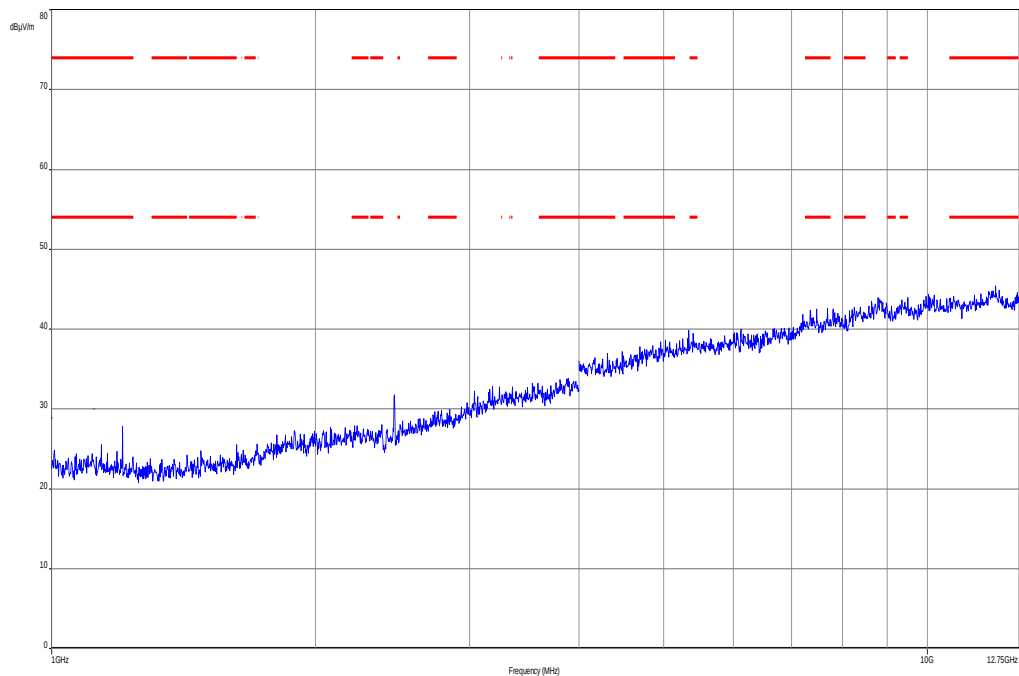
Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dBμV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

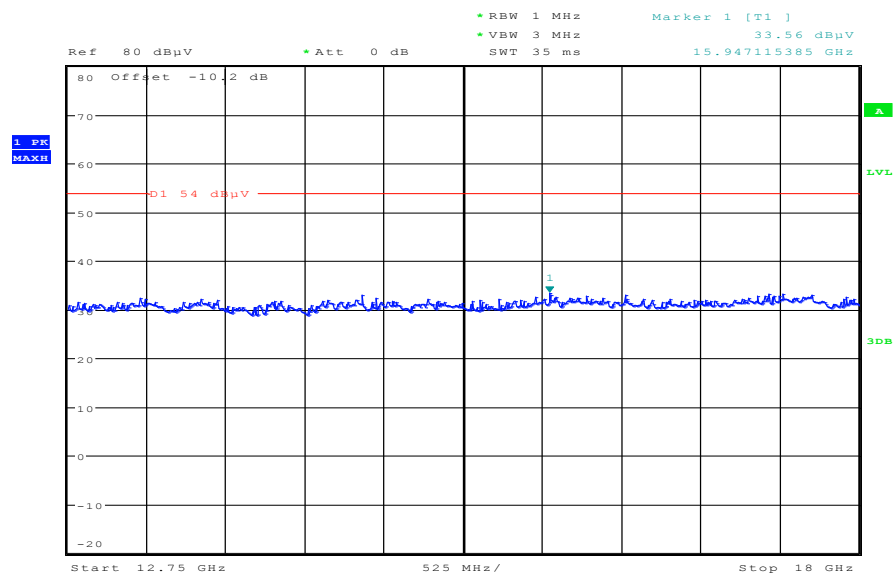


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
33.181650	9.4	1000.0	120.000	144.0	H	175.0	12.8	20.6	30.0	
50.984100	10.5	1000.0	120.000	170.0	H	10.0	13.3	19.5	30.0	
102.131100	8.7	1000.0	120.000	120.0	V	280.0	11.7	24.8	33.5	
731.000250	20.7	1000.0	120.000	143.0	H	265.0	23.2	15.3	36.0	
811.240950	21.3	1000.0	120.000	98.0	V	176.0	24.0	14.7	36.0	
932.875050	22.7	1000.0	120.000	170.0	V	81.0	25.3	13.3	36.0	

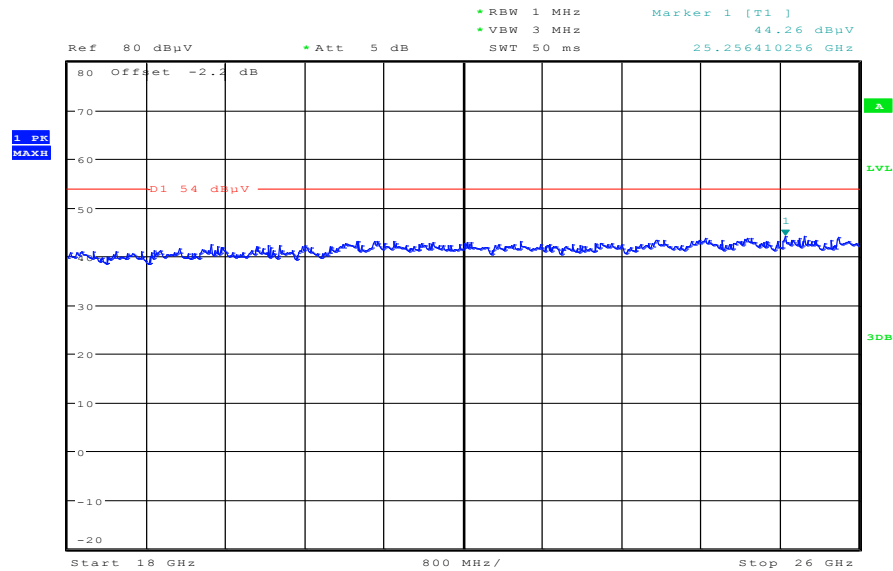
Plot 10: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 18.DEC.2013 17:57:45

Plot 12: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 18:16:26

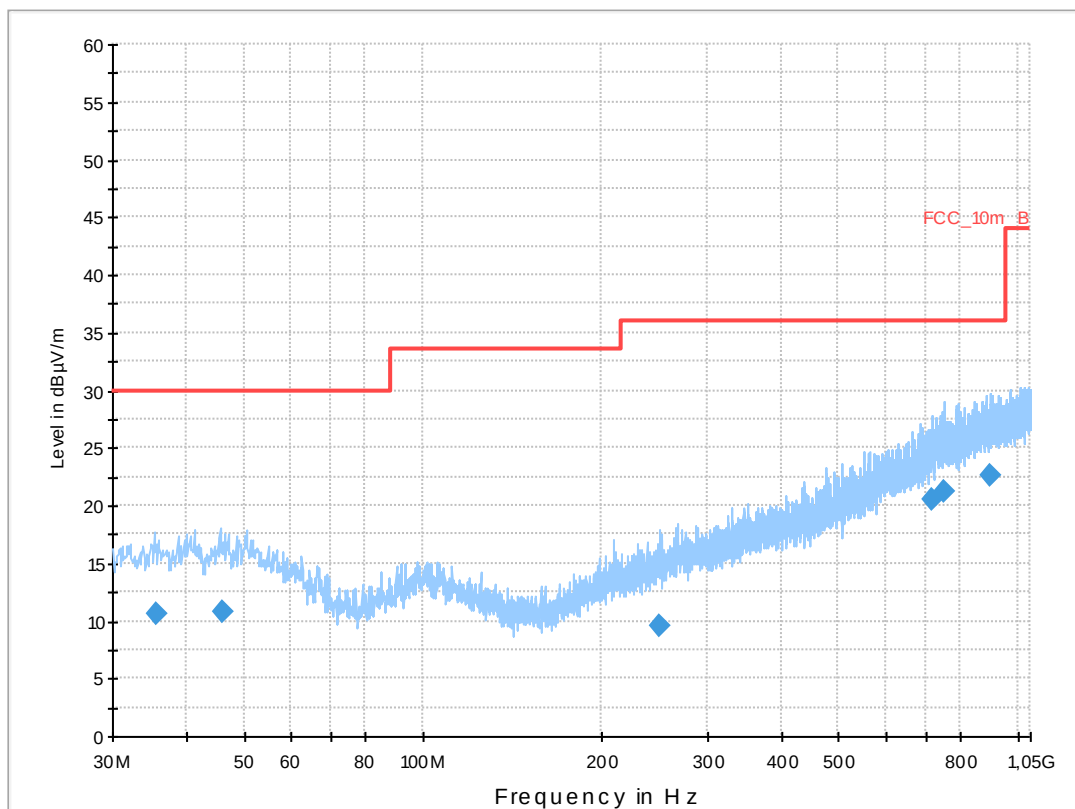
Plots: OFDM / g – mode**Plot 1:** Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan g-mode tx ch 1
 Operator Name: Wolsdorfer
 Comment: battery powered

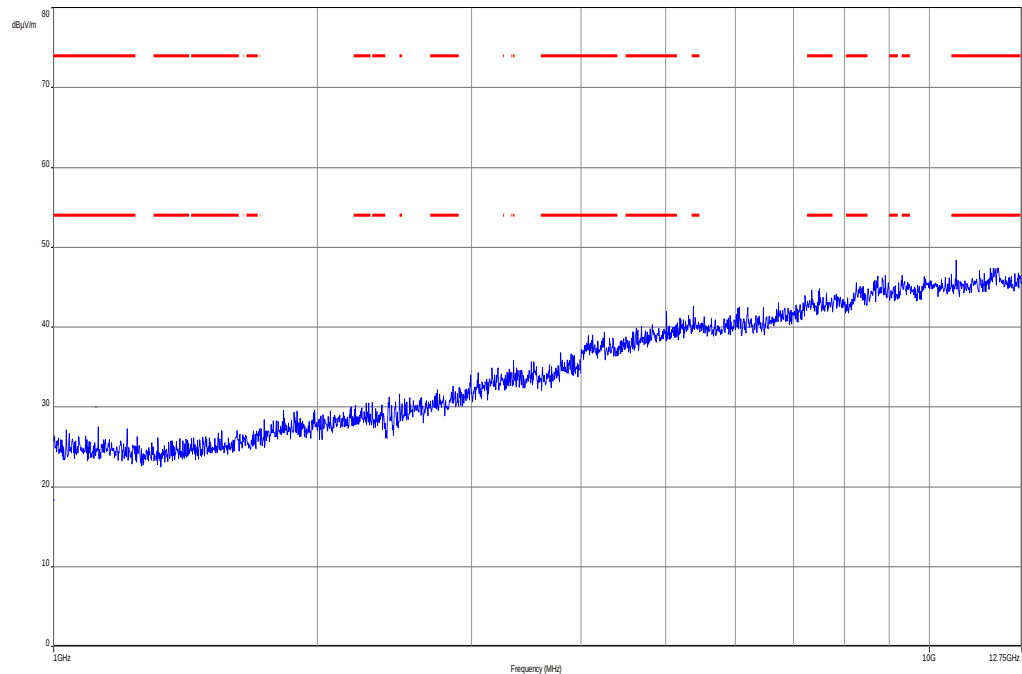
Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dB μ V/m

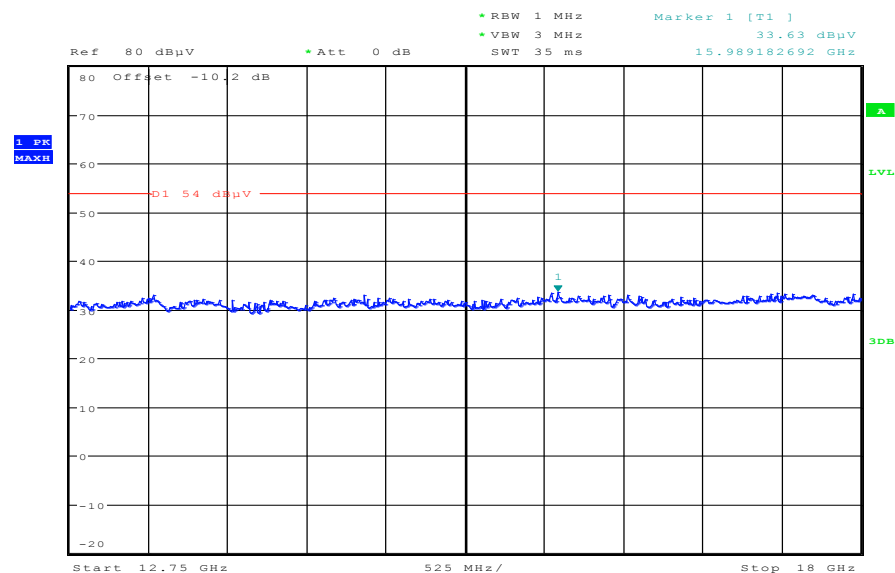
Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
35.550150	10.6	1000.0	120.000	120.0	H	81.0	13.1	19.4	30.0	
45.939000	10.8	1000.0	120.000	170.0	H	10.0	13.3	19.2	30.0	
249.944400	9.6	1000.0	120.000	170.0	H	272.0	13.3	26.4	36.0	
717.372450	20.5	1000.0	120.000	104.0	V	170.0	22.9	15.5	36.0	
749.911350	21.2	1000.0	120.000	170.0	H	190.0	23.6	14.8	36.0	
900.468450	22.7	1000.0	120.000	170.0	H	280.0	25.2	13.3	36.0	

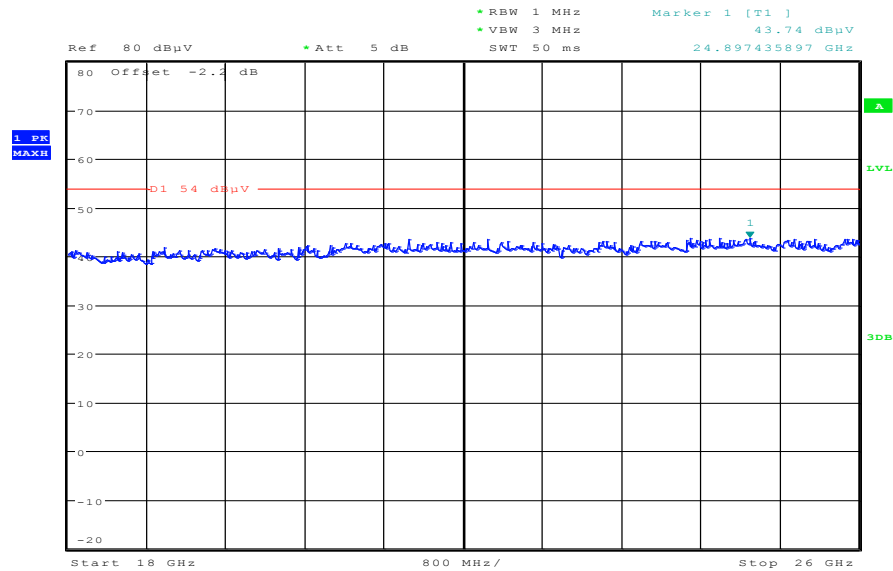
Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 18.DEC.2013 17:58:56

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 18:13:12

Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

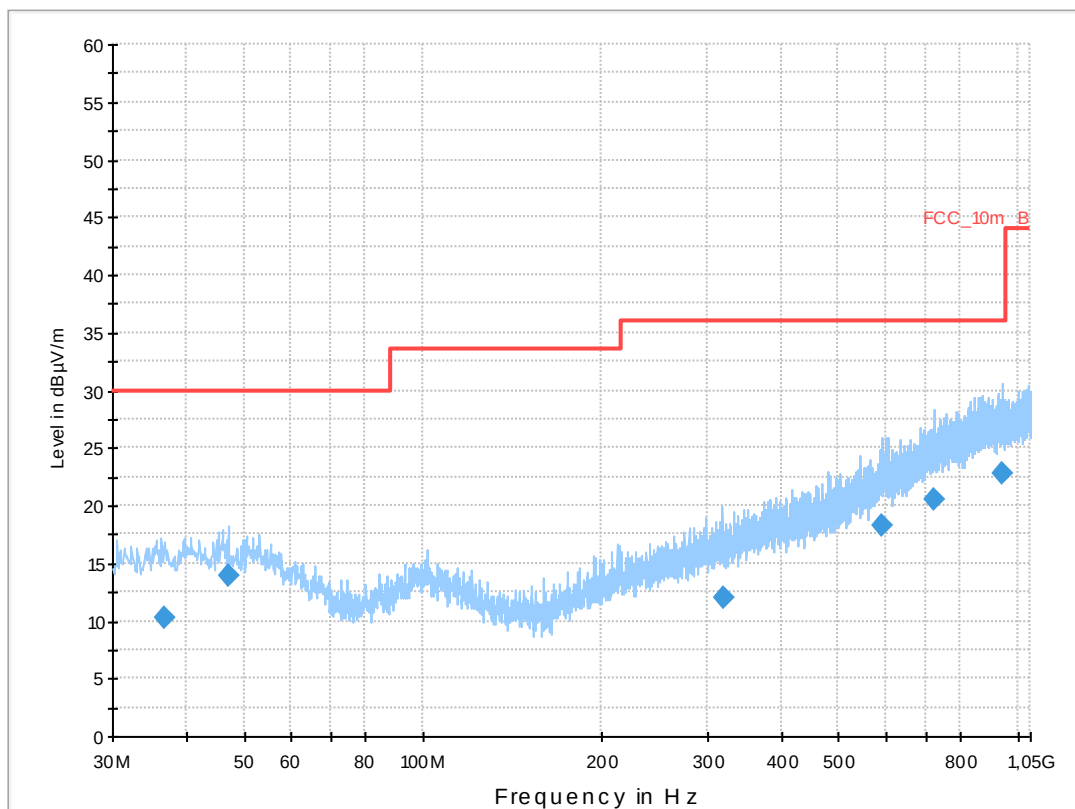
Common Information

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan g-mode tx ch 6
 Operator Name: Wolsdorfer
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

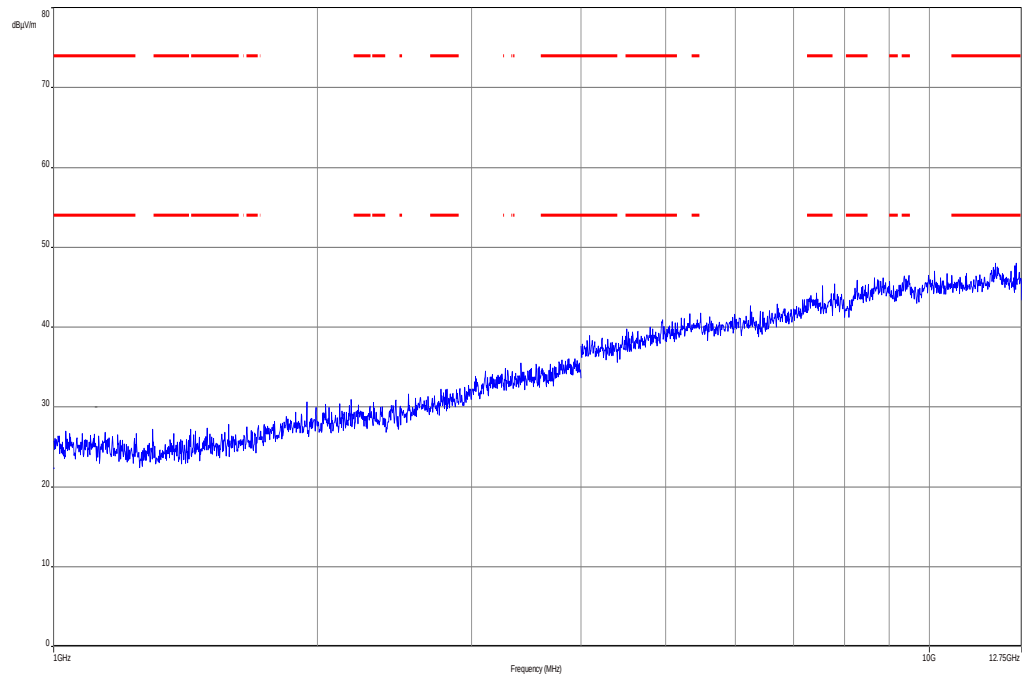
Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

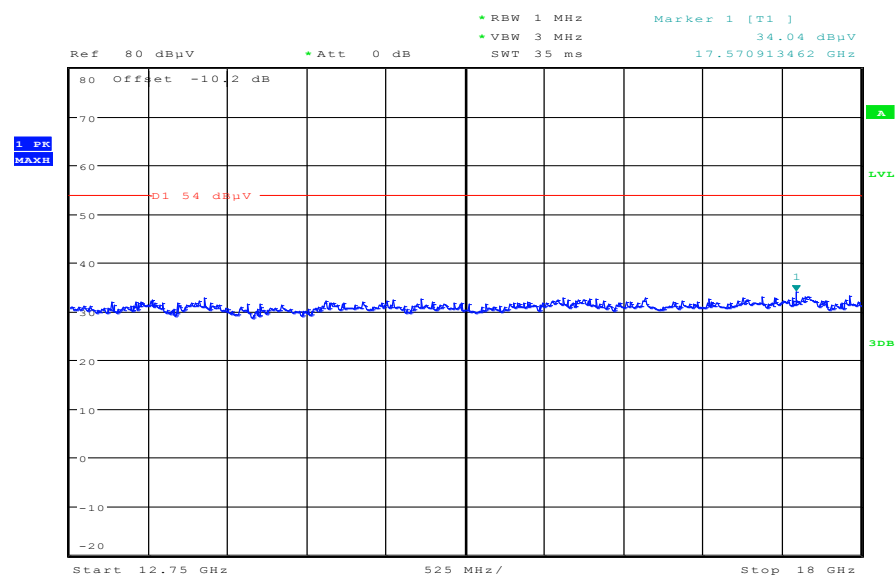


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
36.834000	10.3	1000.0	120.000	143.0	V	175.0	13.2	19.7	30.0	
46.962450	13.9	1000.0	120.000	98.0	V	-10.0	13.3	16.1	30.0	
319.016100	12.0	1000.0	120.000	170.0	H	-9.0	15.1	24.0	36.0	
590.748000	18.2	1000.0	120.000	170.0	V	272.0	20.5	17.8	36.0	
722.291700	20.6	1000.0	120.000	104.0	H	180.0	23.0	15.4	36.0	
941.849700	22.7	1000.0	120.000	105.0	H	92.0	25.3	13.3	36.0	

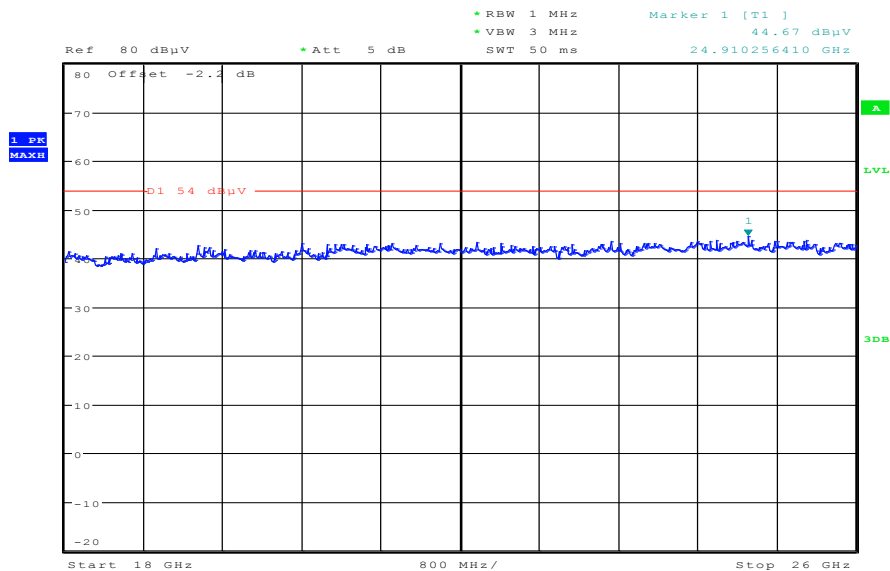
Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 18.DEC.2013 17:59:43

Plot 8: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 18:14:30

Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

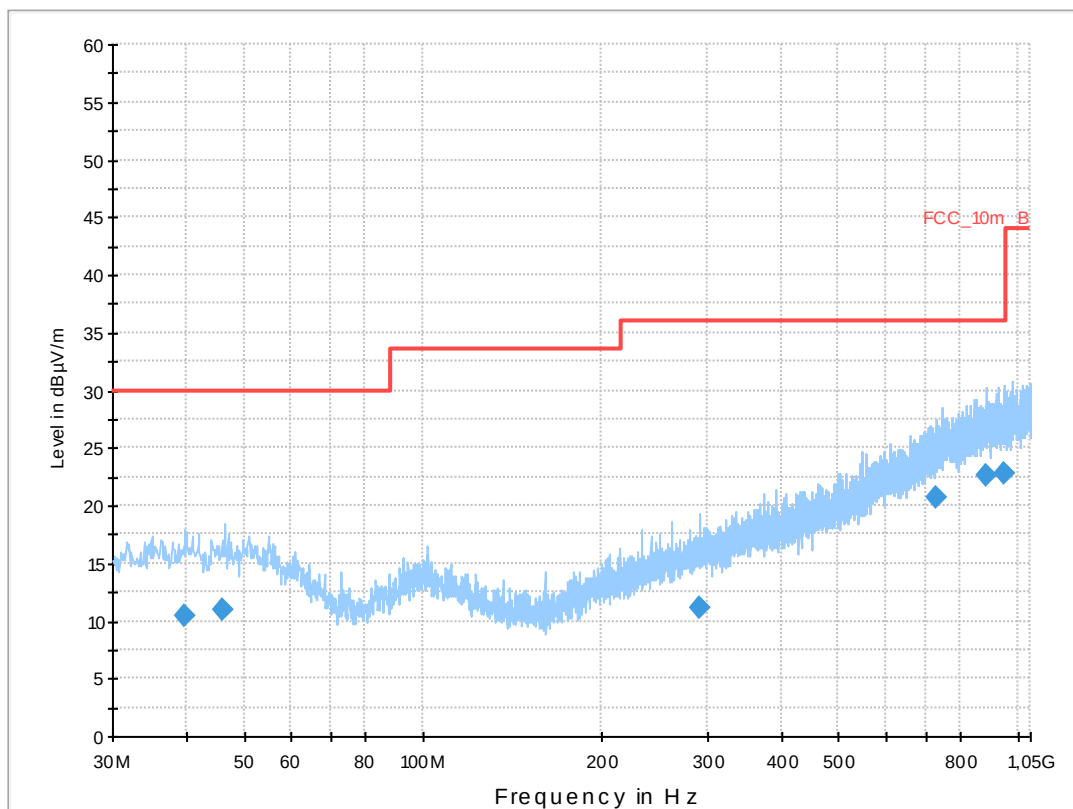
Common Information

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan g-mode tx ch 11
 Operator Name: Wolsdorfer
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

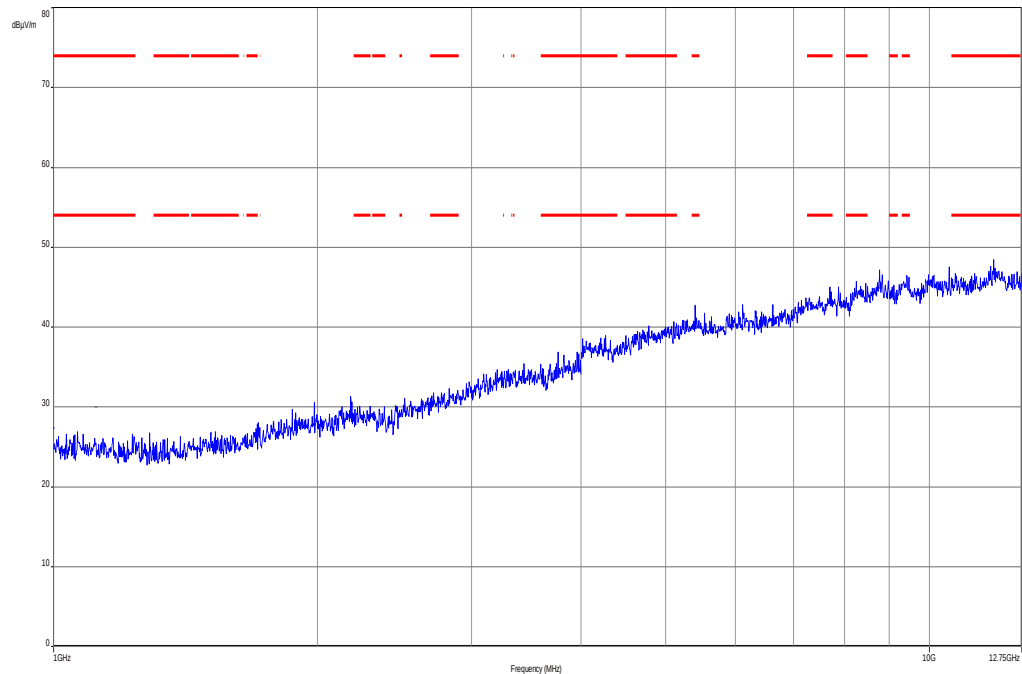
Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

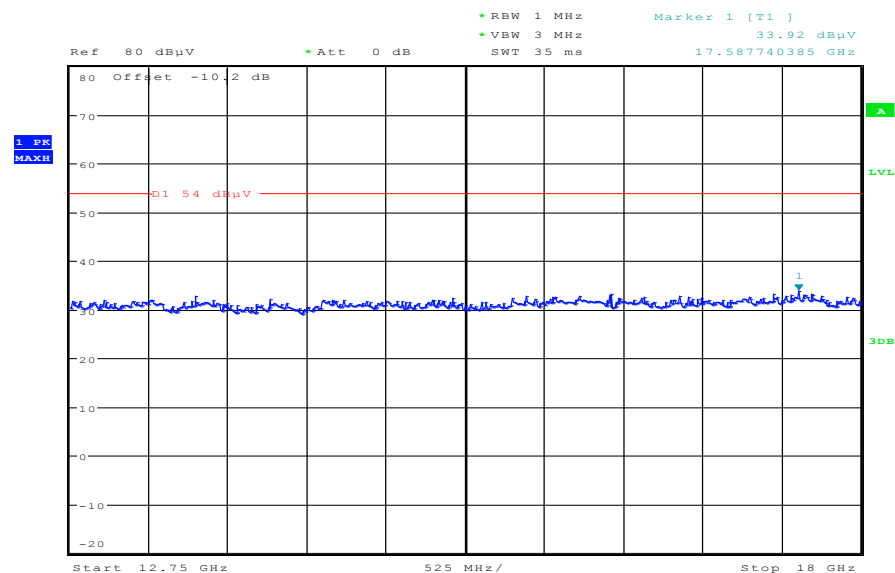


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
39.704100	10.4	1000.0	120.000	119.0	H	280.0	13.4	19.6	30.0	
46.095450	11.0	1000.0	120.000	111.0	V	10.0	13.3	19.0	30.0	
292.440450	11.1	1000.0	120.000	170.0	H	81.0	14.3	24.9	36.0	
728.612700	20.7	1000.0	120.000	170.0	H	190.0	23.2	15.3	36.0	
883.212450	22.6	1000.0	120.000	143.0	H	180.0	25.0	13.4	36.0	
952.224900	22.7	1000.0	120.000	170.0	H	-10.0	25.4	13.3	36.0	

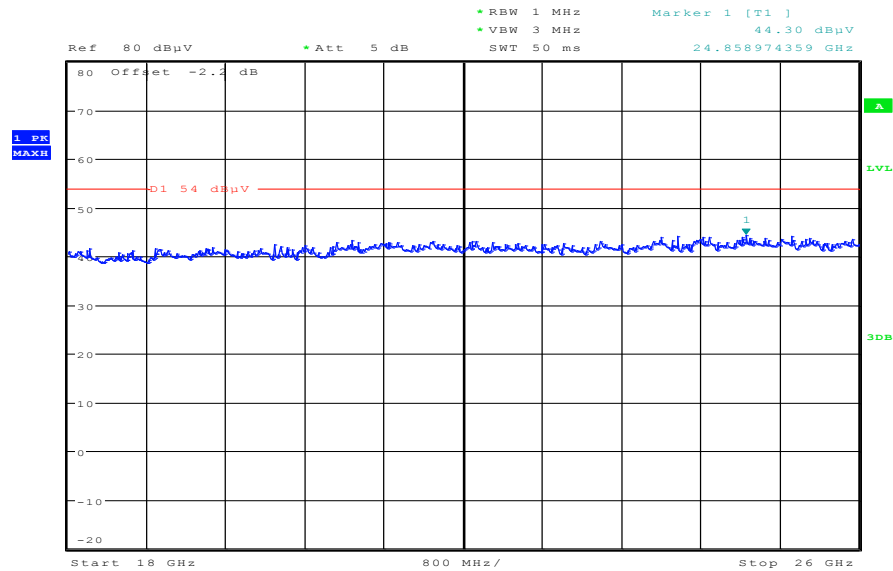
Plot 10: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 18.DEC.2013 18:00:46

Plot 12: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 18:15:20

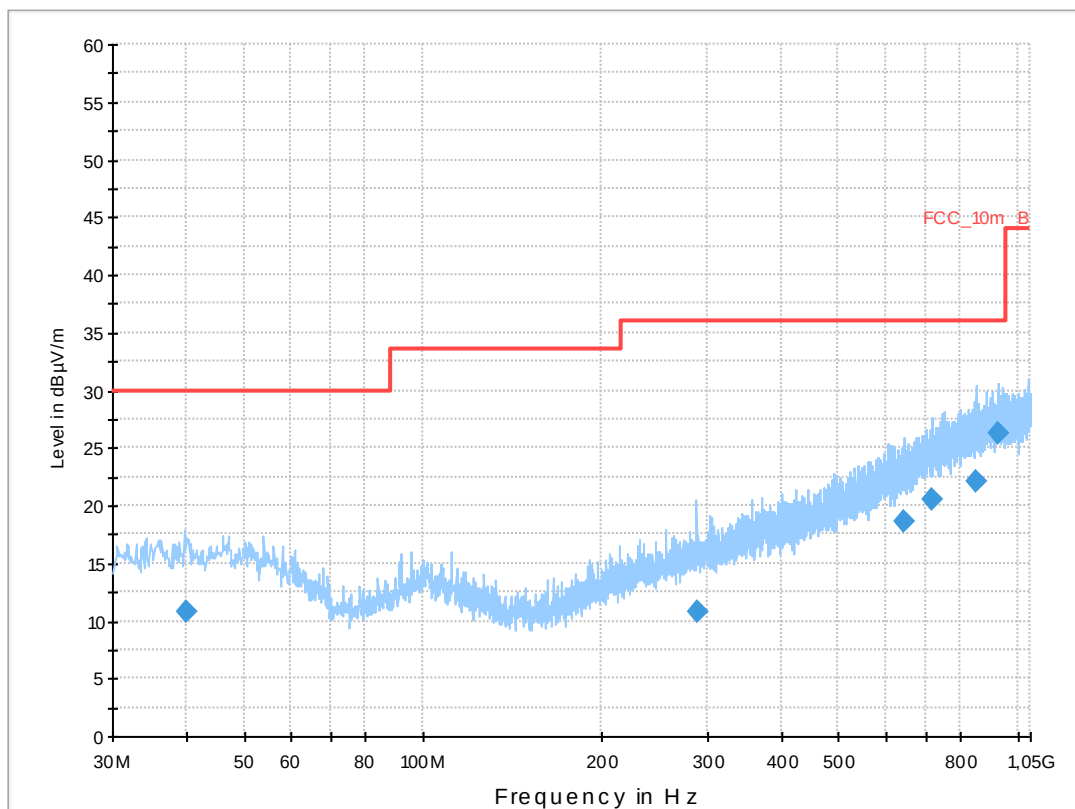
Plots: OFDM / n – mode**Plot 1:** Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan n-mode (HT20) tx ch 1
 Operator Name: Wolsdorfer
 Comment: battery powered

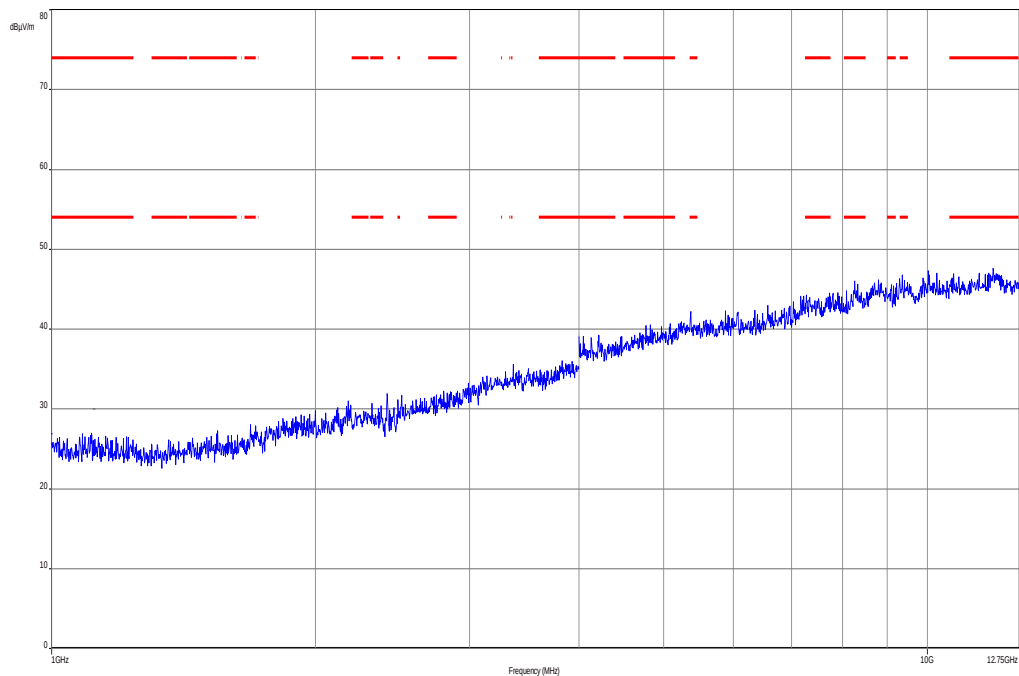
Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dB μ V/m

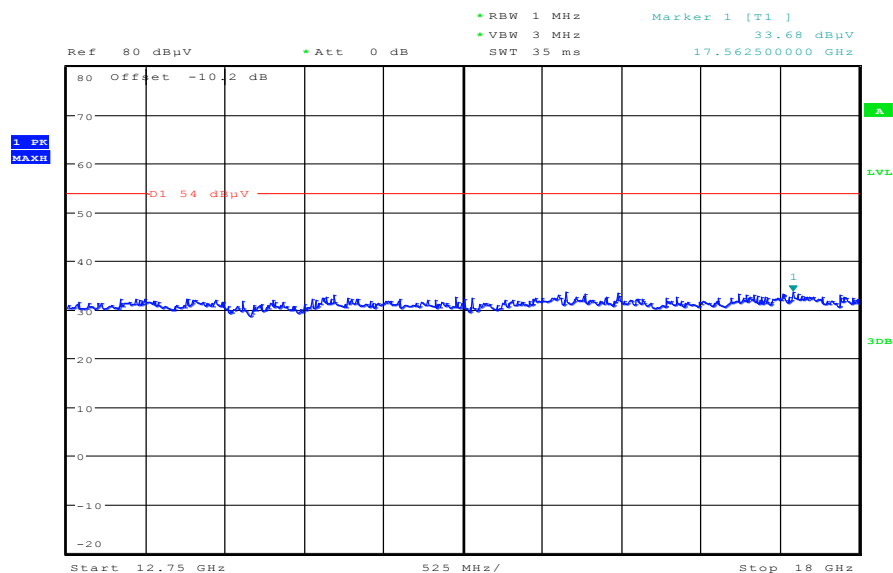
Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
39.870000	10.8	1000.0	120.000	105.0	V	280.0	13.4	19.2	30.0	
288.433800	10.8	1000.0	120.000	170.0	V	182.0	14.2	25.2	36.0	
646.328400	18.6	1000.0	120.000	170.0	H	-5.0	21.1	17.4	36.0	
716.645850	20.5	1000.0	120.000	170.0	V	180.0	22.9	15.5	36.0	
852.929700	22.1	1000.0	120.000	144.0	H	-4.0	24.6	13.9	36.0	
927.409500	26.3	1000.0	120.000	170.0	V	-9.0	25.3	9.7	36.0	

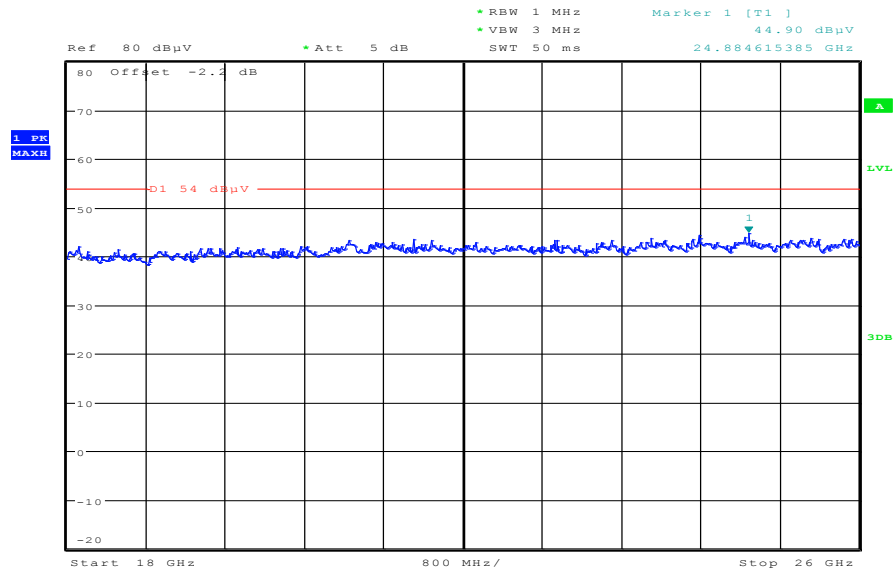
Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 18.DEC.2013 18:02:28

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 18:12:18

Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

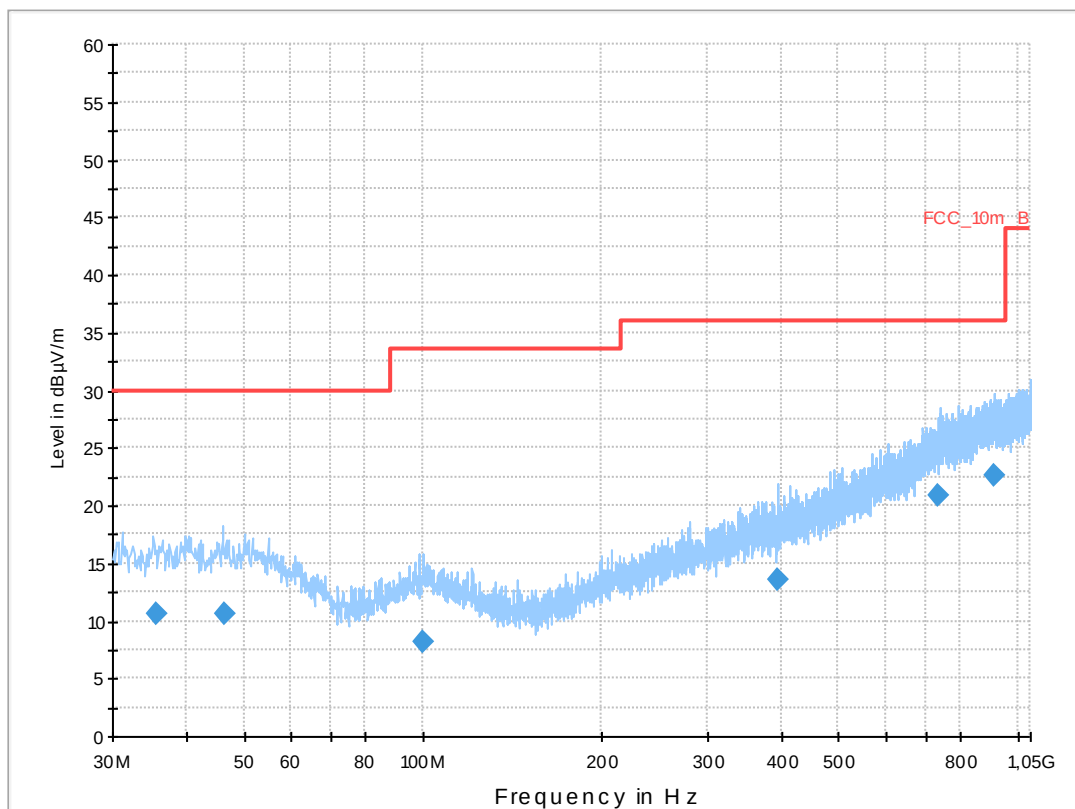
Common Information

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan n-mode (HT20) tx ch 6
 Operator Name: Wolsdorfer
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

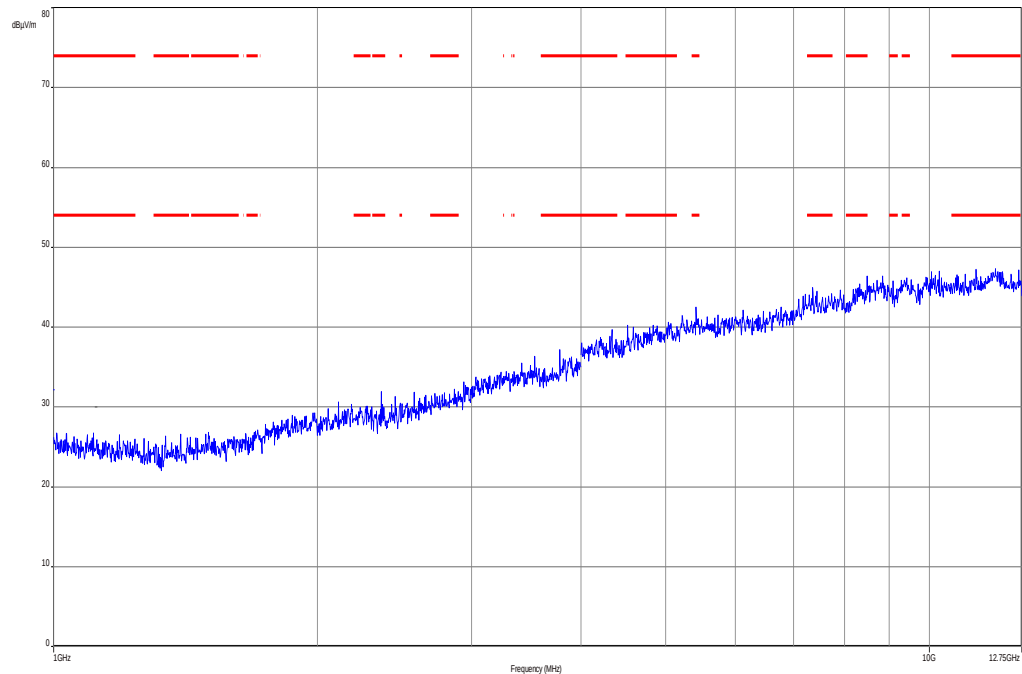
Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBμV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

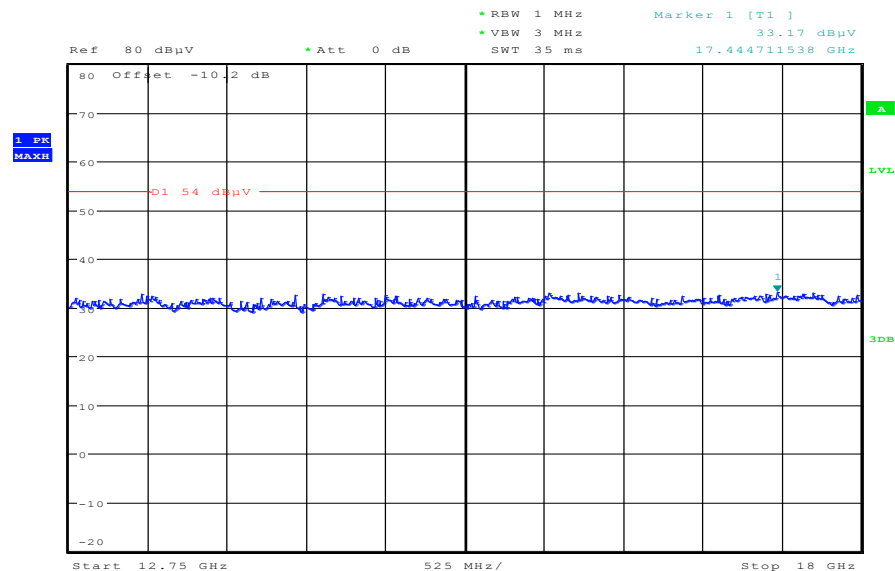


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
35.632350	10.6	1000.0	120.000	142.0	H	88.0	13.1	19.4	30.0	
46.187700	10.7	1000.0	120.000	161.0	V	-5.0	13.3	19.3	30.0	
100.120950	8.1	1000.0	120.000	170.0	V	190.0	11.9	25.4	33.5	
394.968150	13.6	1000.0	120.000	161.0	V	10.0	16.8	22.4	36.0	
732.421950	20.8	1000.0	120.000	98.0	V	170.0	23.3	15.2	36.0	
913.657950	22.7	1000.0	120.000	170.0	V	88.0	25.2	13.3	36.0	

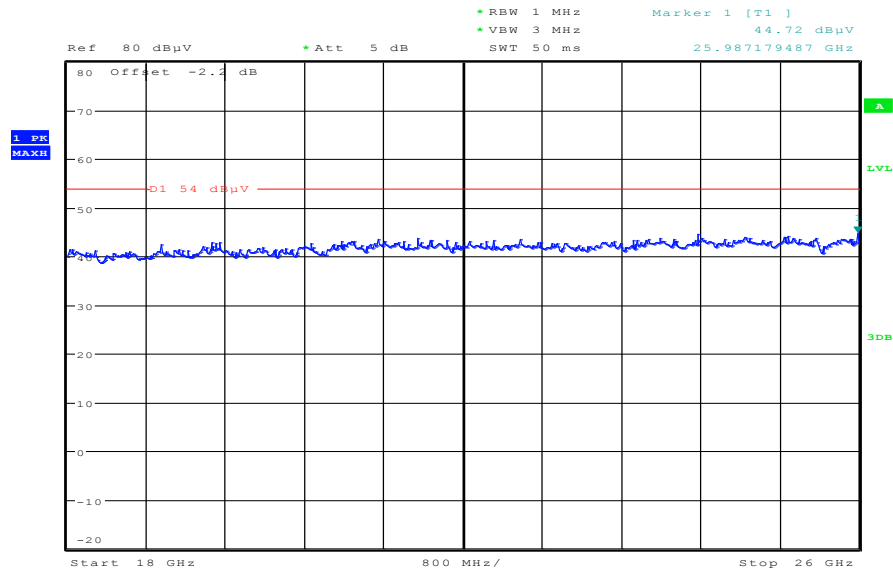
Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 18.DEC.2013 18:05:13

Plot 8: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 18:11:27

Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

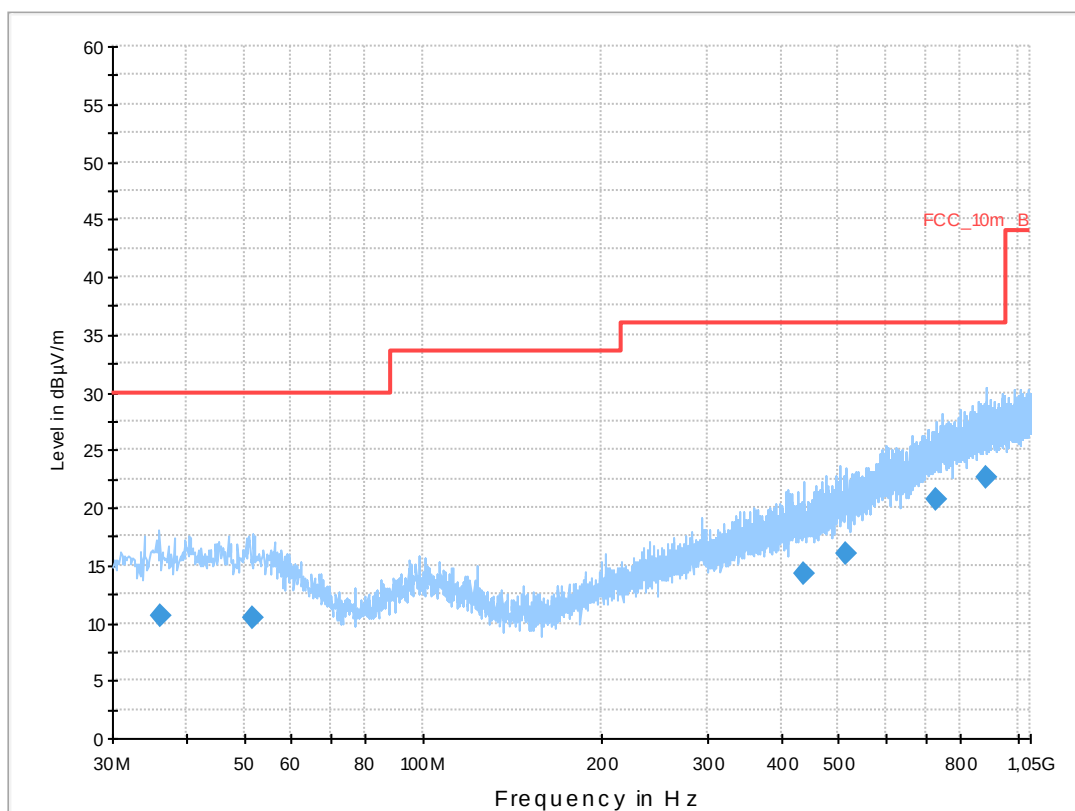
Common Information

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan n-mode (HT20) tx ch 11
 Operator Name: Wolsdorfer
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

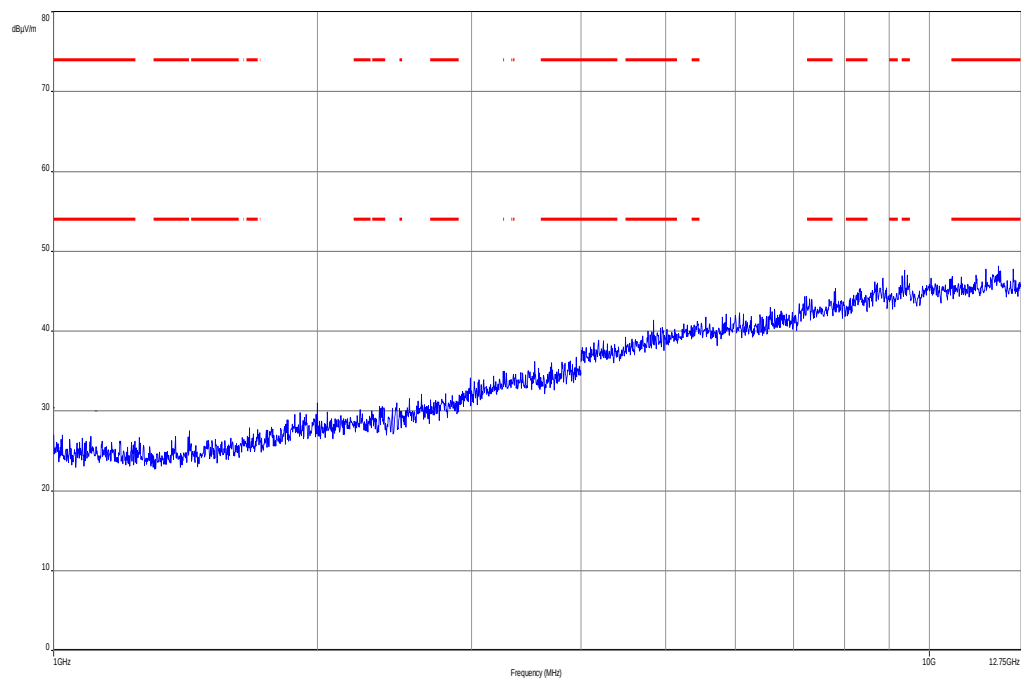
Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

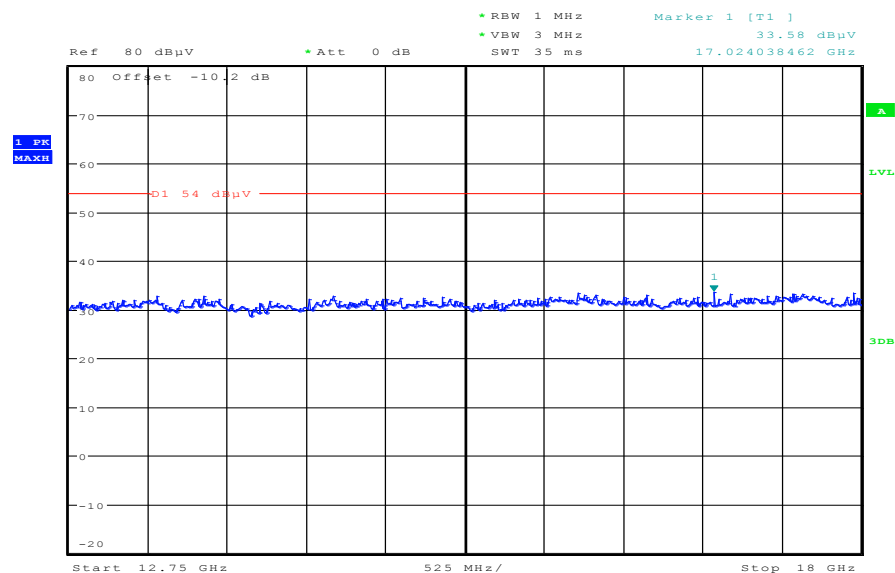


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
36.184650	10.7	1000.0	120.000	98.0	H	171.0	13.1	19.3	30.0	
51.577650	10.4	1000.0	120.000	132.0	V	177.0	13.2	19.6	30.0	
438.070650	14.3	1000.0	120.000	170.0	V	100.0	17.5	21.7	36.0	
514.197450	16.0	1000.0	120.000	135.0	V	182.0	18.9	20.0	36.0	
731.301300	20.8	1000.0	120.000	155.0	V	261.0	23.2	15.2	36.0	
884.866500	22.6	1000.0	120.000	170.0	V	171.0	25.0	13.4	36.0	

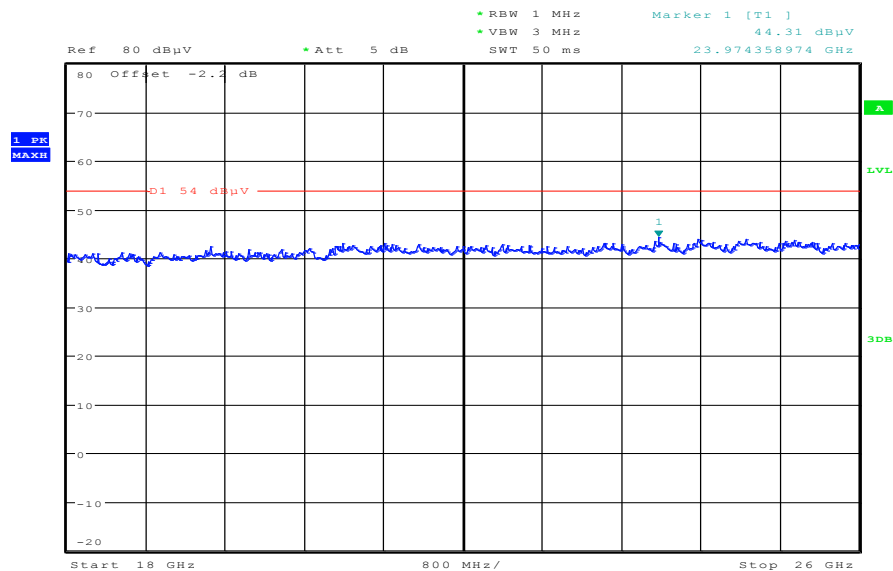
Plot 10: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 18.DEC.2013 18:06:09

Plot 12: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 18.DEC.2013 18:09:11

11.10 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode. The results are valid for both modes.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz
Video bandwidth:	3 x RBW Remeasurement: 10 Hz / 3 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Above 1 GHz: No spurious emissions detected.		
Measurement uncertainty	± 3 dB	

Result: Passed.

Note: The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

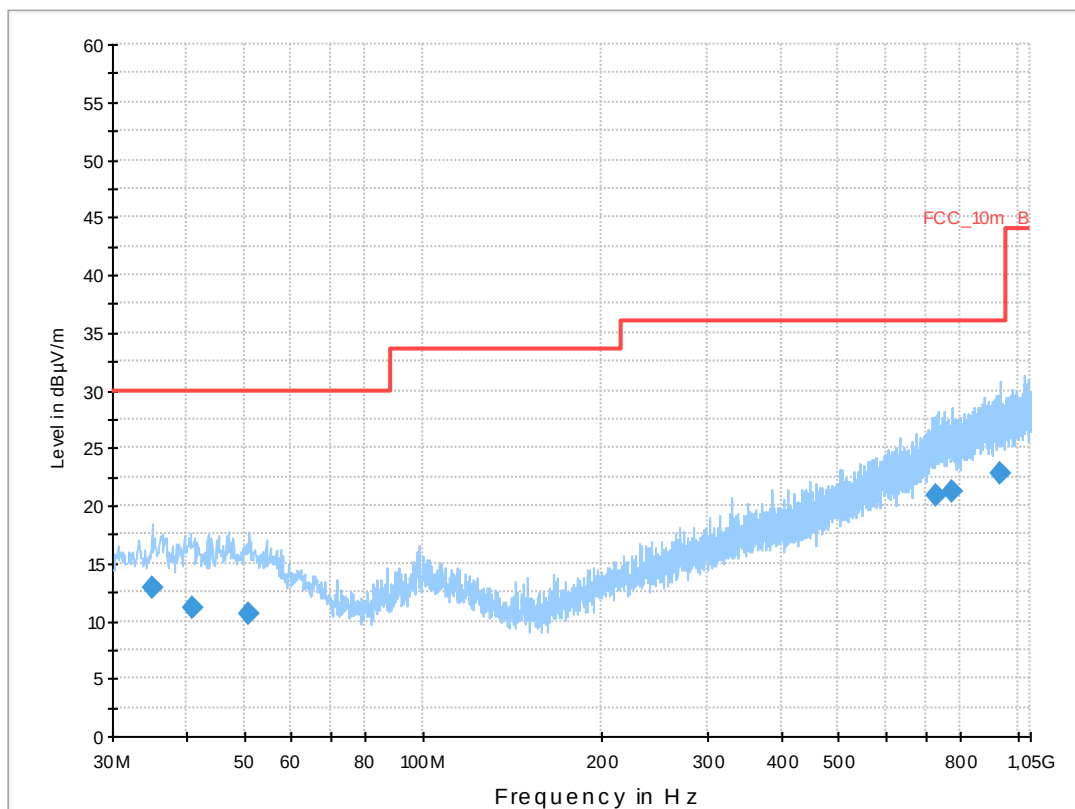
Plots: RX / Idle – mode**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**

EUT: TM-0040-BV
 Serial Number: CB51267Q5X
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: w-lan idle
 Operator Name: Hennemann
 Comment: battery powered

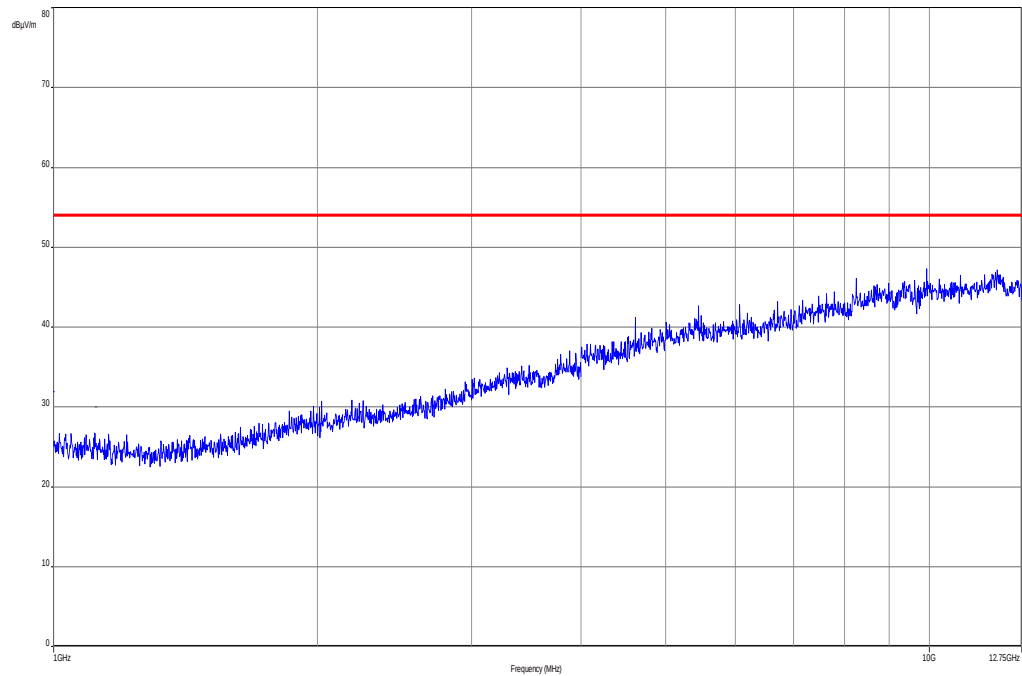
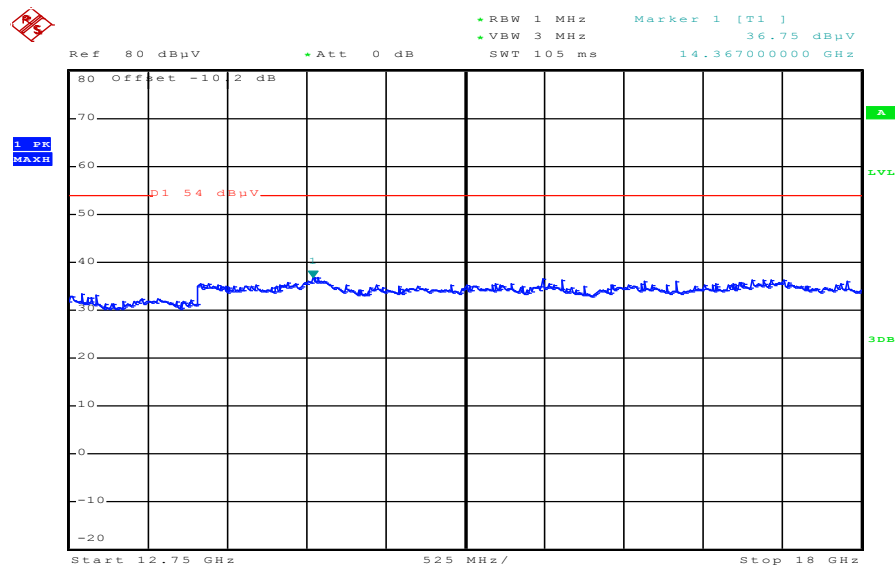
Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

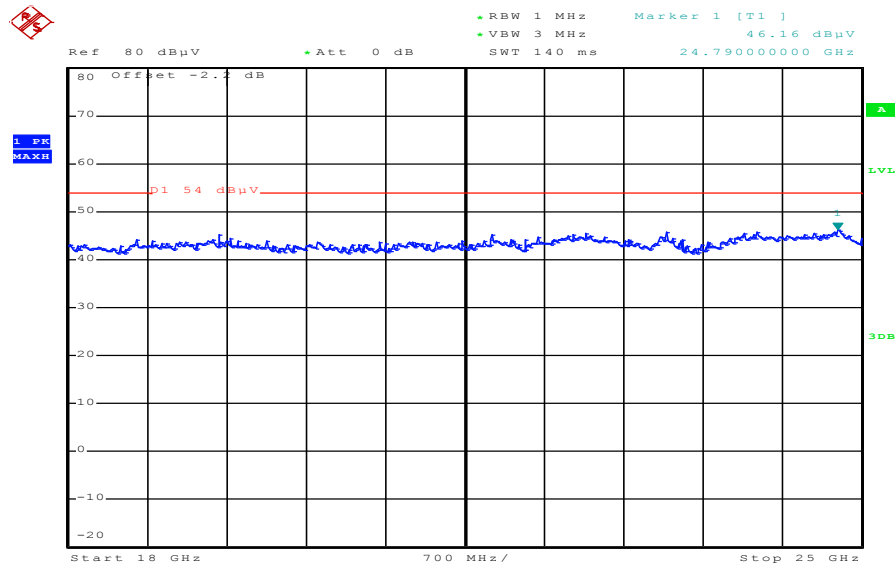
**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
35.043300	12.9	1000.0	120.000	111.0	V	100.0	13.0	17.1	30.0	
40.978500	11.1	1000.0	120.000	104.0	V	170.0	13.4	18.9	30.0	
51.018600	10.7	1000.0	120.000	105.0	V	182.0	13.3	19.3	30.0	
730.311300	20.8	1000.0	120.000	120.0	H	-5.0	23.2	15.2	36.0	
773.669700	21.3	1000.0	120.000	170.0	V	10.0	23.7	14.7	36.0	
937.372650	22.8	1000.0	120.000	170.0	V	80.0	25.3	13.2	36.0	

Plot 2: 1 GHz to 12.75 GHz, vertical & horizontal polarization**Plot 3:** 12.75 GHz to 18 GHz, vertical & horizontal polarization

Date: 19.DEC.2013 10:18:46

Plot 4: 18 GHz to 26 GHz, vertical & horizontal polarization



Date: 19.DEC.2013 10:40:26

11.11 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is representative for all channels and modes. If peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

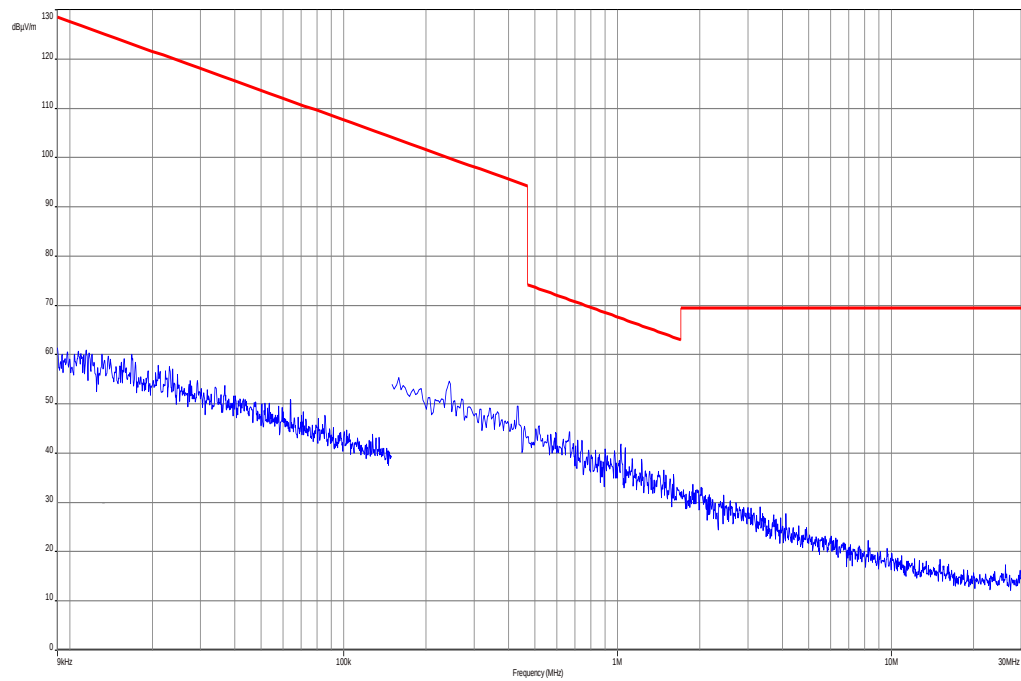
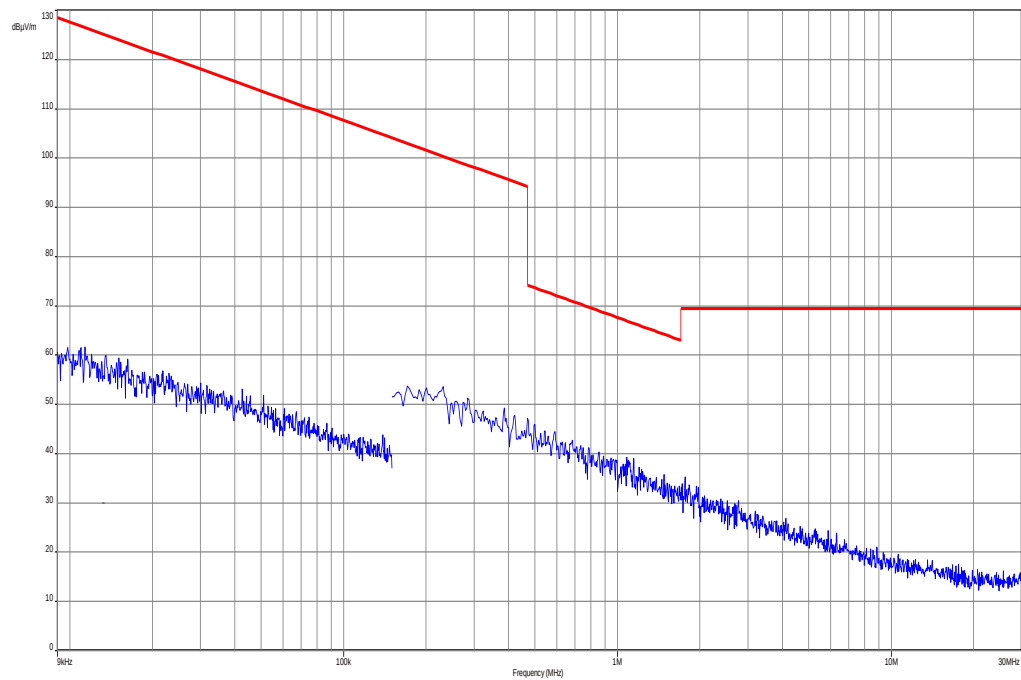
Limits:

FCC		IC
TX Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dBμV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:

TX Spurious Emissions Radiated < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
No peaks found.		
Measurement uncertainty	± 3 dB	

Result: Passed

Plots: TX mode**Plot 1: 9 kHz to 30 MHz****Plots: RX / Idle – mode****Plot 1: 9 kHz to 30 MHz**

11.12 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

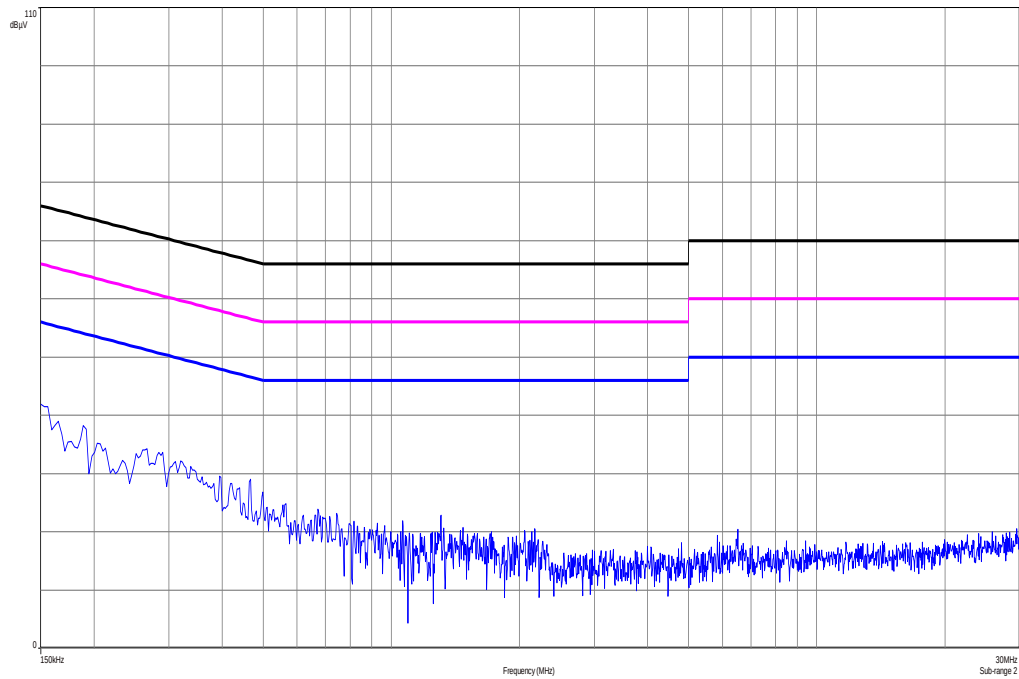
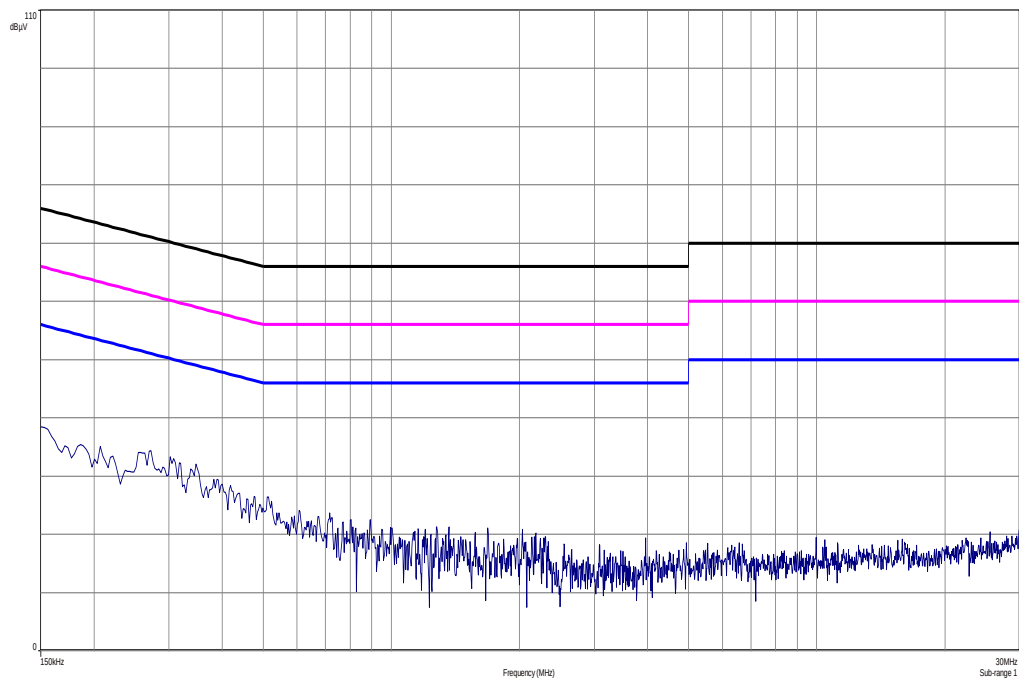
FCC		IC
TX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dBμV/m)	Average (dBμV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency

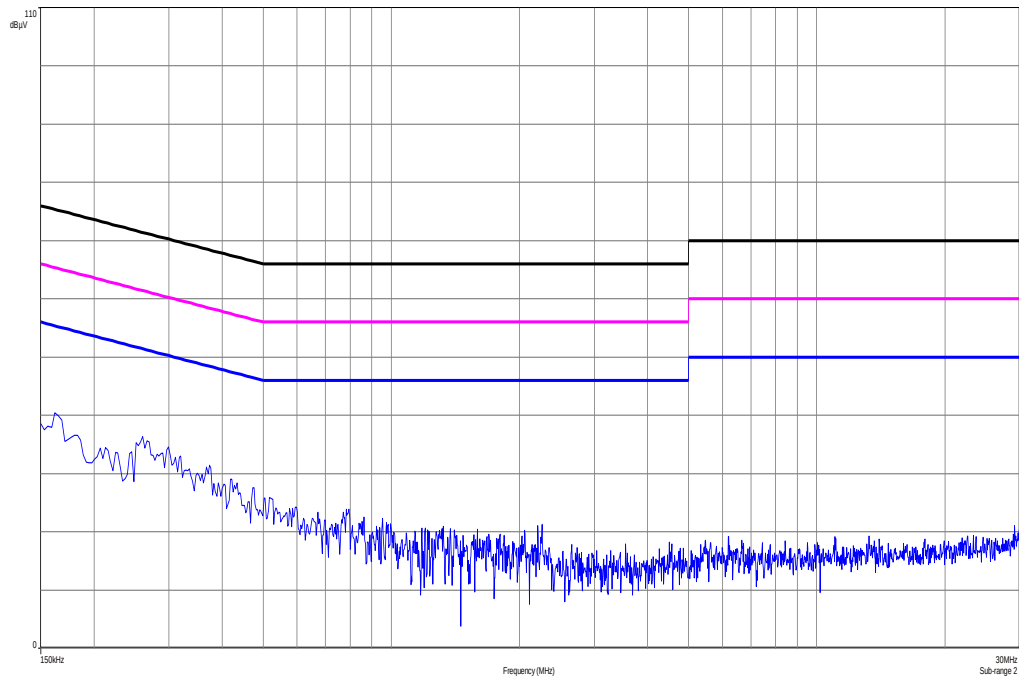
Results:

TX Spurious Emissions Conducted < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
No peaks detected. All detected peak values are below the average limits.		
Measurement uncertainty	± 3 dB	

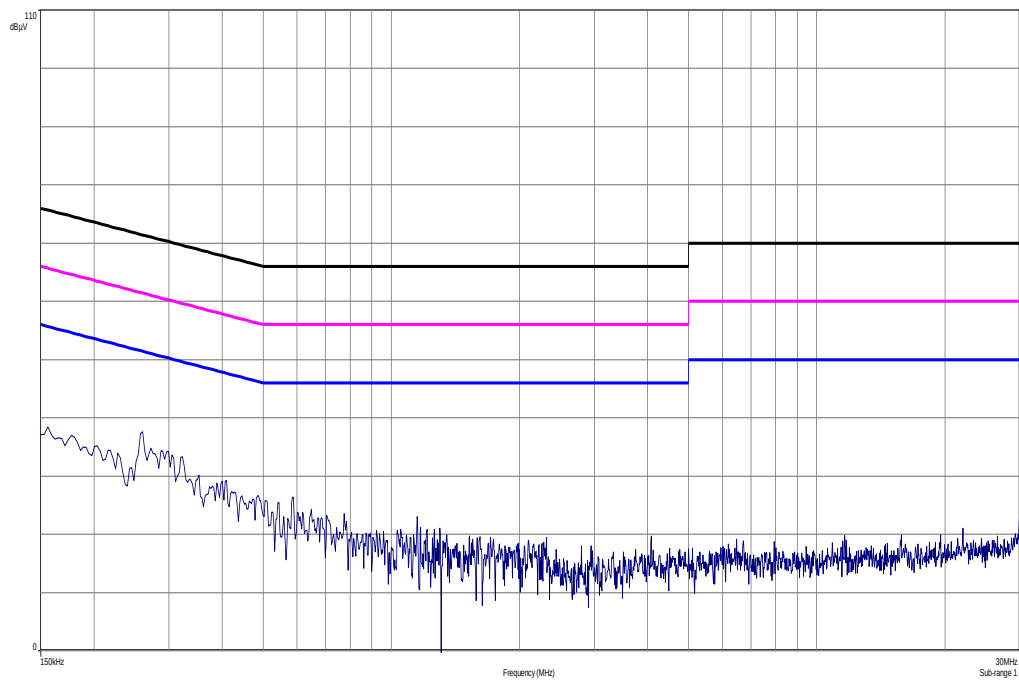
Result: Passed

Plots:**Plot 1:** TX mode, 150 kHz to 30 MHz, phase line**Plot 2:** TX mode, 150 kHz to 30 MHz, neutral line

Plot 3: RX / Idle – mode, 150 kHz to 30 MHz, phase line



Plot 4: RX / Idle – mode, 150 kHz to 30 MHz, neutral line



12 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081; B5979	300000210	ne		
4	n. a.	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	09.01.2013	09.01.2014
5	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	14.07.2011	14.01.2014
6	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
7	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
8	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
9	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
10	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	12.04.2012	12.04.2014
11	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	16.01.2013	16.01.2014
12	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKII	08.05.2013	08.05.2015
13	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
14	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
15	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
16	9	Isolating Transformer	MPL IEC625 Bus Regeltrennt ravo	Erfi	91350	300001155	ne		
17	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
18	90	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	13.06.2013	13.06.2015
19	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
20	n. a.	Band Reject filter	WRCG240 0/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
21	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKII	14.10.2011	14.10.2014
22	n. a.	MXE EMI	N9038A	Agilent	MY51210197	300004405	k	21.02.2013	21.02.2014

		Receiver 20 Hz bis 26,5 GHz		Technologi es					
23	11b	Microwave System Amplifier, 0.5- 26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
24	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787	k	22.07.2013	22.07.2015
25	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442	k	19.07.2013	19.07.2015
26	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	Ve	09.10.2012	09.10.2014
27	n. a.	Temperature Test Chamber	VT 4002	Heraeus Voetsch	521/84193	300003889	Ve	26.09.2013	26.09.2015
28	n. a.	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	22.10.2012	22.01.2014
29	n. a.	Power Supply 0-20V, 0-5A	6632B	Agilent Technologi es	GB42110541	400000562	vlk!!	10.01.2013	10.01.2016

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vlk!! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

13 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
	Initial release	2014-02-06

Annex B Further information**Glossary**

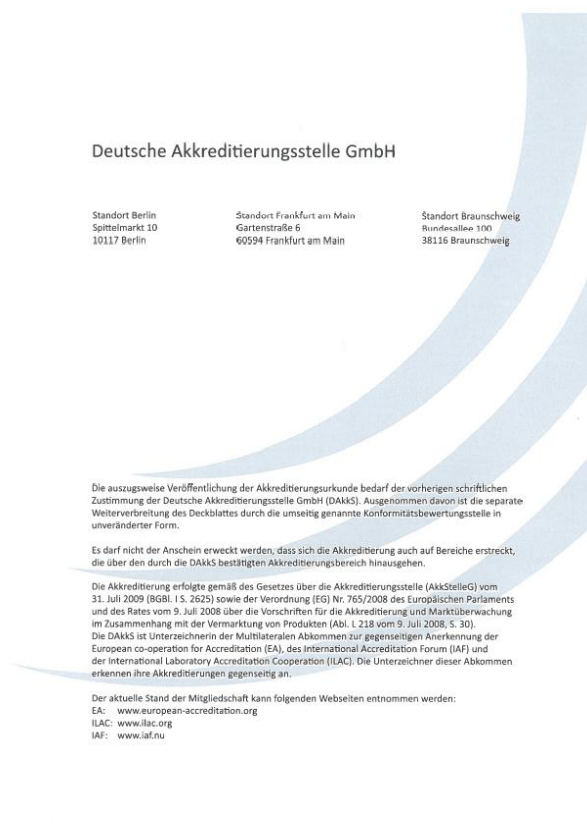
AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate

Front side of certificate



Back side of certificate



Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>