

## TEST REPORT

Test report no.: 1-6965/13-12-07-A



Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing laboratory

**CETECOM ICT Services GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>

e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Area of Testing:

Radio Communications & EMC (RCE)

### Applicant

**Sony Mobile Communications AB**

Nya Vattentornet

22188 Lund / SWEDEN

Phone: +46 46 19 30 00

Fax: -/-

Contact: Mikael Nilsson

e-mail: [Micke.nilsson@sonymobile.com](mailto:Micke.nilsson@sonymobile.com)

Phone: +46 7 03 22 75 03

### Manufacturer

**Sony Mobile Communications AB**

Nya Vattentornet

22188 Lund / SWEDEN

### Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** Tablet PC GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDD/III/V; LTE FDD1/3/17/18; LTE TDD41; CDMA 2K C00/C06; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS  
**FCC ID:** PY7TM-0044  
**Frequency:** 13.56 MHz  
**Technology tested:** RFID  
**Antenna:** Integrated antenna  
**Power supply:** 3.7 V DC by Li - polymer battery  
**Temperature range:** -30°C to +60°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorised:

Andreas Luckenbill  
Expert

### Test performed:

Marco Bertolino  
Testing Manager

**1 Table of contents**

|         |                                                     |    |
|---------|-----------------------------------------------------|----|
| 1       | Table of contents .....                             | 2  |
| 2       | General information .....                           | 3  |
| 2.1     | Notes and disclaimer .....                          | 3  |
| 2.2     | Application details .....                           | 3  |
| 3       | Test standard/s .....                               | 3  |
| 4       | Test environment .....                              | 4  |
| 5       | Test item .....                                     | 4  |
| 5.1     | Additional information .....                        | 4  |
| 6       | Test laboratories sub-contracted .....              | 4  |
| 7       | Description of the test setup .....                 | 5  |
| 7.1     | Radiated measurements .....                         | 5  |
| 7.2     | Open area site .....                                | 6  |
| 7.3     | AC conducted .....                                  | 7  |
| 7.4     | Conducted measurements .....                        | 8  |
| 8       | Summary of measurement results .....                | 9  |
| 9       | Additional comments .....                           | 10 |
| 10      | Measurement results .....                           | 11 |
| 10.1    | Timing of the transmitter .....                     | 11 |
| 10.2    | Field strength of the fundamental .....             | 12 |
| 10.3    | 99 % emission bandwidth .....                       | 13 |
| 10.4    | Field strength of the harmonics and spurious .....  | 14 |
| 10.5    | Frequency tolerance .....                           | 18 |
| 10.6    | AC line conducted .....                             | 19 |
| 11      | Test equipment and ancillaries used for tests ..... | 21 |
| 12      | Observations .....                                  | 22 |
| Annex A | Document history .....                              | 23 |
| Annex B | Further information .....                           | 23 |
| Annex C | Accreditation Certificate .....                     | 24 |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 2013-12-19 |
| Date of receipt of test item:      | 2014-02-17 |
| Start of test:                     | 2014-02-17 |
| End of test:                       | 2014-02-26 |
| Person(s) present during the test: | -/-        |

## 3 Test standard/s

| Test standard  | Date | Test standard description                                                                 |
|----------------|------|-------------------------------------------------------------------------------------------|
| 47 CFR Part 15 | -/-  | Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices |

#### 4 Test environment

|                            |           |                                       |
|----------------------------|-----------|---------------------------------------|
| Temperature:               | $T_{nom}$ | +22 °C during room temperature tests  |
|                            | $T_{max}$ | +60 °C during high temperature tests  |
|                            | $T_{min}$ | -30 °C during low temperature tests   |
| Relative humidity content: |           | 41 %                                  |
| Barometric pressure:       |           | not relevant for this kind of testing |
| Power supply:              | $V_{nom}$ | 3.7 V DC by Li - polymer battery      |
|                            | $V_{max}$ | 4.2 V                                 |
|                            | $V_{min}$ | 3.3 V                                 |

#### 5 Test item

|                            |   |                                                                                                                                                  |
|----------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Kind of test item          | : | Tablet PC GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/III/V; LTE FDD1/3/17/18; LTE TDD41; CDMA 2K C00/C06; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS |
| S/N serial number          | : | Radiated unit: CB5126DAH7                                                                                                                        |
| HW hardware status         | : | AP1                                                                                                                                              |
| SW software status         | : | 17.1.C.0.97                                                                                                                                      |
| Frequency band [MHz]       | : | 13.56 MHz                                                                                                                                        |
| Type of radio transmission | : | Modulated carrier                                                                                                                                |
| Use of frequency spectrum  | : |                                                                                                                                                  |
| Type of modulation         | : | N0N                                                                                                                                              |
| Number of channels         | : | 1                                                                                                                                                |
| Antenna                    | : | Integrated antenna                                                                                                                               |
| Power supply               | : | 3.7 V DC by Li - polymer battery                                                                                                                 |
| Temperature range          | : | -30°C to +60 °C                                                                                                                                  |

##### 5.1 Additional information

Test setup- and EUT-photos are included in test report: 1-6965/13-12-01\_AnnexA  
 1-6965/13-12-01\_AnnexB  
 1-6965/13-12-01\_AnnexE


#### 6 Test laboratories sub-contracted

None

## 7 Description of the test setup

### 7.1 Radiated measurements


The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

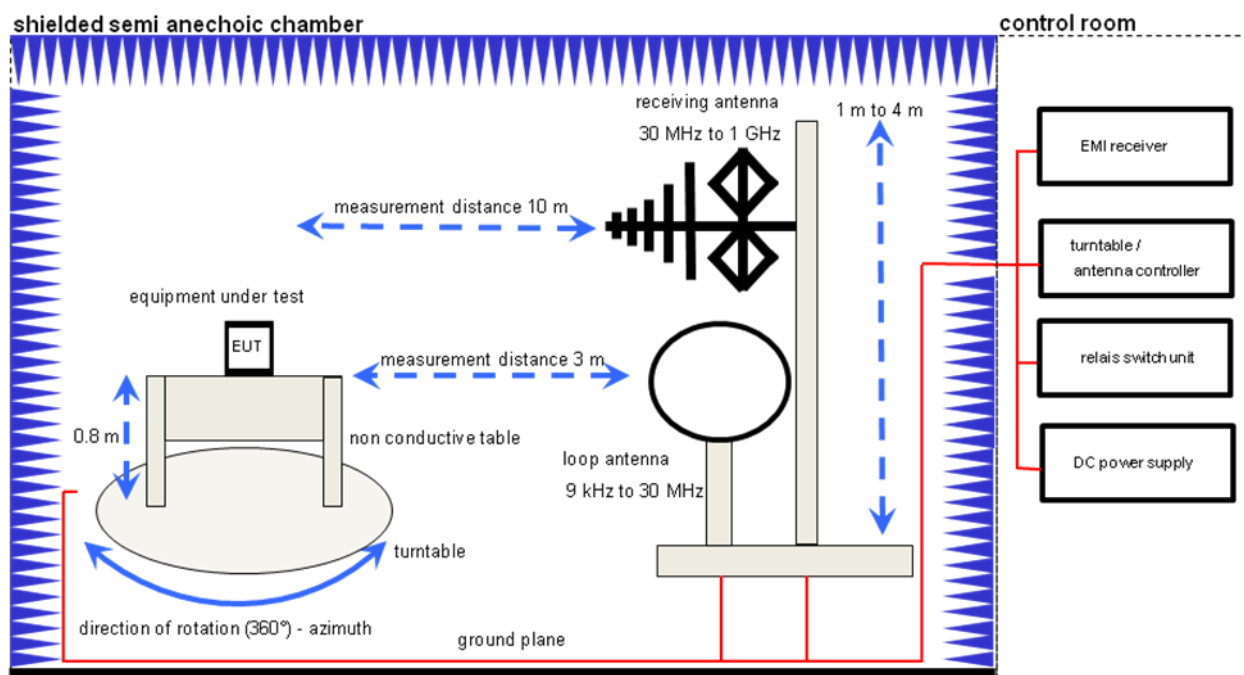

#### Equipment table:

| Equipment                                         | Type                | Manufacturer  | Serial No. | INV. No Cetecom |
|---------------------------------------------------|---------------------|---------------|------------|-----------------|
| Switch-Unit                                       | 3488A               | HP Meßtechnik | 2719A14505 | 300000368       |
| DC power supply, 60Vdc, 50A, 1200 W               | 6032A               | HP Meßtechnik | 2920A04466 | 300000580       |
| EMI Test Receiver                                 | ESCI 3              | R&S           | 100083     | 300003312       |
| Amplifier                                         | JS42-00502650-28-5A | MITEQ         | 1084532    | 300003379       |
| Antenna Tower                                     | Model 2175          | ETS-LINDGREN  | 64762      | 300003745       |
| Positioning Controller                            | Model 2090          | ETS-LINDGREN  | 64672      | 300003746       |
| Turntable Interface-Box                           | Model 105637        | ETS-LINDGREN  | 44583      | 300003747       |
| TRILOG Broadband Test-Antenna 30 MHz - 3 GHz      | VULB9163            | Schwarzbeck   | 295        | 300003787       |
| Test Receiver                                     | ESH2                | R&S           | 871921/095 | 300002505       |
| Loop Antenna 9 KHz - 30 MHz                       | HFH2-Z2             | R&S           | 872096/61  | 300001824       |
| EMI Test Receiver 9 kHz - 3 GHz incl. Preselector | ESPI3               | R&S           | 101713     | 300004059       |


## 7.2 Open area site

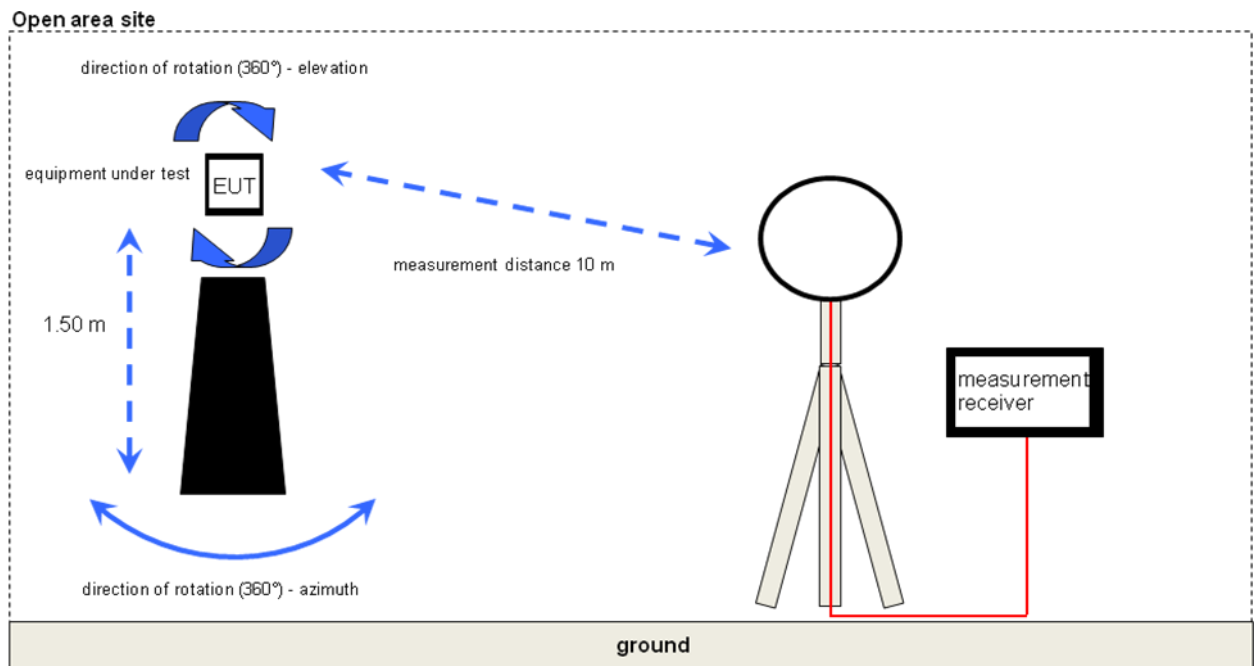

### Equipment table:

| Equipment                   | Type    | Manufacturer | Serial No. | INV. No Cetecom |
|-----------------------------|---------|--------------|------------|-----------------|
| Test Receiver               | ESH2    | R&S          | 871921/095 | 300002505       |
| Loop Antenna 9 KHz - 30 MHz | HFH2-Z2 | R&S          | 872096/61  | 300001824       |


### 7.3 AC conducted

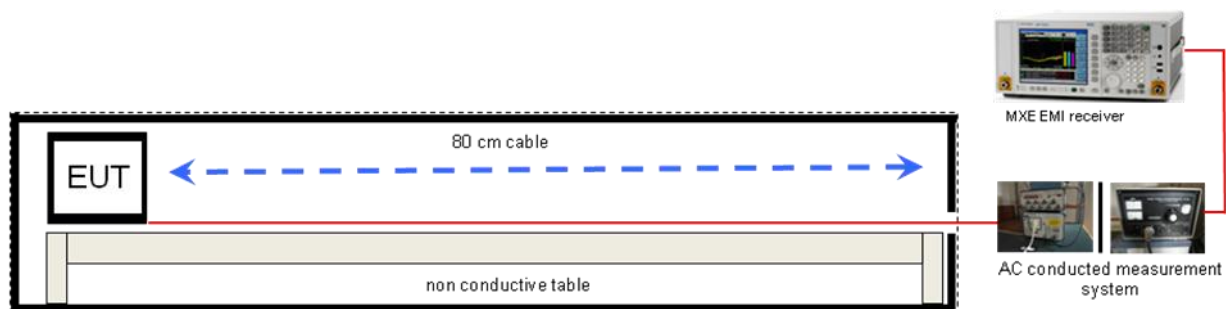

#### Equipment table:

| Equipment                           | Type                           | Manufacturer         | Serial No. | INV. No Cetecom |
|-------------------------------------|--------------------------------|----------------------|------------|-----------------|
| MXE EMI Receiver 20 Hz bis 26,5 GHz | N9038A                         | Agilent Technologies | MY51210197 | 300004405       |
| Isolating Transformer               | MPL IEC625 Bus Regeltrenntravo | Erft                 | 91350      | 300001155       |
| Switch / Control Unit               | 3488A                          | HP Meßtechnik        | *          | 300000199       |
| Switch / Control Unit               | 3488A                          | HP Meßtechnik        | 2719A15013 | 300001168       |
| Artificial Mains 9 kHz to 30 MHz    | ESH3-Z5                        | R&S                  | 828576/020 | 300001210       |

## 7.4 Conducted measurements

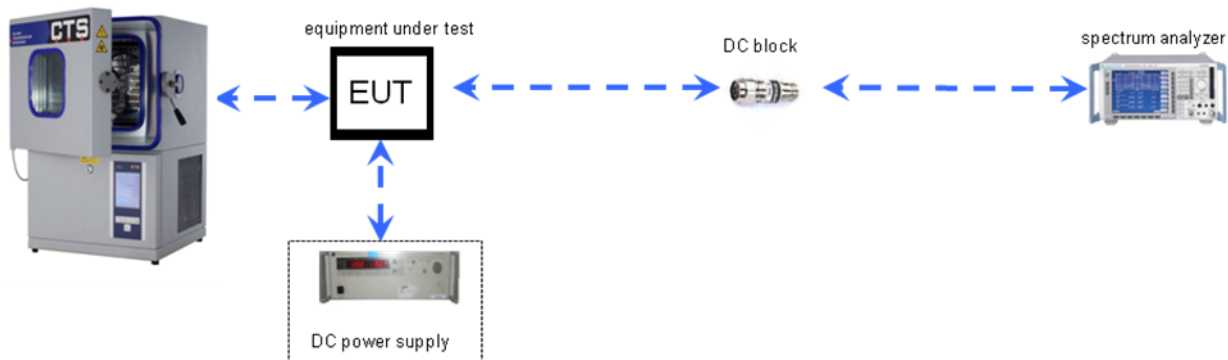

### Equipment table:

| Equipment                        | Type    | Manufacturer | Serial No. | INV. No Cetecom |
|----------------------------------|---------|--------------|------------|-----------------|
| DC Power Supply 0 – 32V          | 1108-32 | Heiden       | 001802     | 300001383       |
| Temperature Test Chamber         | T-40/50 | CTS GmbH     | 064023     | 300003540       |
| Spectrum Analyzer 20 Hz - 50 GHz | FSU50   | R&S          | 200012     | 300003443       |



## 8 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

| TC Identifier | Description | Verdict | Date       | Remark |
|---------------|-------------|---------|------------|--------|
| RF-Testing    | CFR Part 15 | Passed  | 2014-03-17 | -/-    |

| Test Specification Clause | Test Case                                                | Temperature Conditions | Power Source Voltages | Pass                                | Fail                     | NA                       | NP                       | Remark   |
|---------------------------|----------------------------------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|----------|
| § 15.35 (c)               | Timing of the transmitter (Duty cycle correction factor) | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| -/-                       | 99 % emission bandwidth                                  | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| § 15.225 (a)              | Fieldstrength of Fundamental                             | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| § 15.209                  | Fieldstrength of harmonics and spurious                  | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| § 15.225 (e)              | Frequency tolerance                                      | Nominal                | Extreme               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
|                           |                                                          | Extreme                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |          |
| §15.107<br>§15.207        | Conducted emissions < 30 MHz                             | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |

**Note:** NA = Not Applicable; NP = Not Performed

## 9 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

## 10 Measurement results

### 10.1 Timing of the transmitter

#### Measurement:

| Measurement parameter |               |
|-----------------------|---------------|
| Detector:             | Positive peak |
| Sweep time:           | 100 ms        |
| Resolution bandwidth: | 100 kHz       |
| Video bandwidth:      | 300 kHz       |
| Span:                 | Zero span     |
| Trace-Mode:           | Single sweep  |

#### **Limits:**

| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Timing of the transmitter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| (c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification. |

#### Result:

Duty cycle of the EUT: 100 %

**Result:** **passed**

## 10.2 Field strength of the fundamental

### Measurement:

| Measurement parameter |                                                                     |
|-----------------------|---------------------------------------------------------------------|
| Detector:             | Quasi Peak                                                          |
| Resolution bandwidth: | 200 Hz up to 150 kHz,<br>9 kHz up to 30 MHz,<br>120 kHz up to 1 GHz |
| Video bandwidth:      | ≥ RBW                                                               |
| Trace-Mode:           | Max Hold                                                            |

### Limits:

| FCC                         |                                                                                 |                                                    |
|-----------------------------|---------------------------------------------------------------------------------|----------------------------------------------------|
| Fundamental Frequency (MHz) | Field strength of Fundamental<br>( $\mu\text{V/m}$ / $\text{dB}\mu\text{V/m}$ ) | Measurement distance (m)                           |
| 13.553 to 13.567            | 15848 $\mu\text{V/m}$ (84 $\text{dB}\mu\text{V/m}$ )                            | 30                                                 |
|                             | 158489 $\mu\text{V/m}$<br>(104 $\text{dB}\mu\text{V/m}$ )                       | 10<br>(Recalculated acc. to FCC<br>part15.31 (f2)) |

### Result:

| TEST CONDITIONS         |                  | MAXIMUM POWER ( $\text{dB}\mu\text{V/m}$ ) |                 |
|-------------------------|------------------|--------------------------------------------|-----------------|
| Frequency               |                  | 13.56 MHz                                  | 13.56 MHz       |
| Mode                    |                  | @ 10 m distance                            | @ 30 m distance |
| $T_{\text{nom}}$        | $V_{\text{nom}}$ | 46.5                                       | 26.5*           |
| Measurement uncertainty |                  | $\pm 3\text{dB}$                           |                 |

\* Limits recalculated from 10m to 30m with 40 dB/decade according to FCC 15.31 (f2).

**Result:** passed

### 10.3 99 % emission bandwidth


#### Measurement:

| Measurement parameter |            |
|-----------------------|------------|
| Detector:             | Peak       |
| Resolution bandwidth: | > 1 % span |
| Video bandwidth:      | ≥ RBW      |
| Trace-Mode:           | Max Hold   |

#### Results:

| TEST CONDITIONS         |                  | 99 % emission bandwidth (kHz) |
|-------------------------|------------------|-------------------------------|
| Frequency               |                  | 13.56 MHz                     |
| T <sub>nom</sub>        | V <sub>nom</sub> | 484                           |
| Measurement uncertainty |                  | ± RBW                         |

#### Plot:

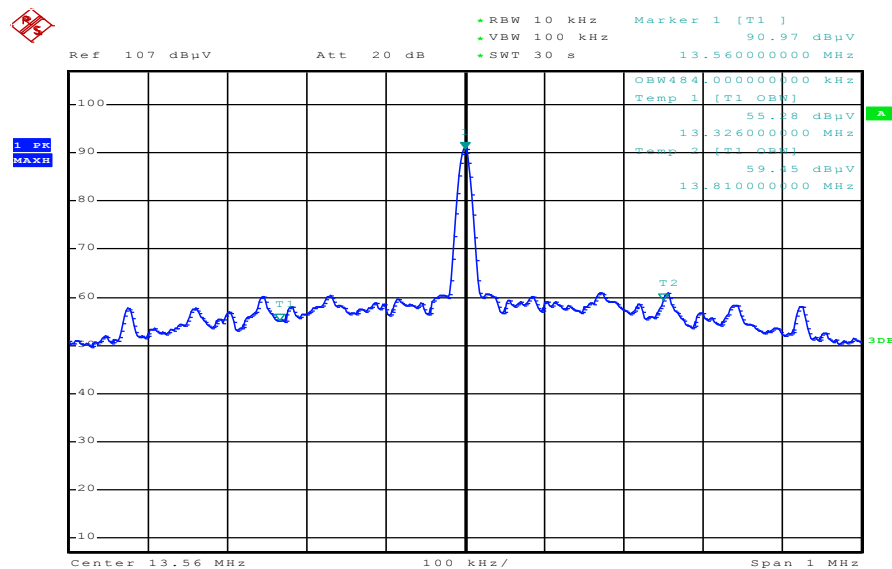

Date: 26.FEB.2014 10:46:33

## 10.4 Field strength of the harmonics and spurious

### Measurement:

| Measurement parameter |                                                                            |
|-----------------------|----------------------------------------------------------------------------|
| Detector:             | Quasi Peak / Average                                                       |
| Sweep time:           | Auto                                                                       |
| Resolution bandwidth: | F < 150 kHz: 200 Hz<br>150 kHz > F > 30 MHz: 9 kHz<br>F > 30 MHz: 120 kHz  |
| Video bandwidth:      | F < 150 kHz: 1 kHz<br>150 kHz > F > 30 MHz: 100 kHz<br>F > 30 MHz: 300 kHz |
| Span:                 | See plots!                                                                 |
| Trace-Mode:           | Max hold                                                                   |

### Limits:

| FCC                                           |                       |                          |
|-----------------------------------------------|-----------------------|--------------------------|
| Field strength of the harmonics and spurious. |                       |                          |
| Frequency (MHz)                               | Field strength (µV/m) | Measurement distance (m) |
| 0.009 – 0.490                                 | 2400/F(kHz)           | 300                      |
| 0.490 – 1.705                                 | 24000/F(kHz)          | 30                       |
| 1.705 – 30                                    | 30 (29.5 dBµV/m)      | 30                       |
| 30 – 88                                       | 100 (40 dBµV/m)       | 3                        |
| 88 – 216                                      | 150 (43.5 dBµV/m)     | 3                        |
| 216 – 960                                     | 200 (46 dBµV/m)       | 3                        |

### Result:


| EMISSION LIMITATIONS   |          |                                   |                                   |         |
|------------------------|----------|-----------------------------------|-----------------------------------|---------|
| f<br>[MHz]             | Detector | Limit<br>max. allowed<br>[dBµV/m] | Amplitude of emission<br>[dBµV/m] | Results |
| No emissions detected. |          |                                   |                                   |         |
|                        |          |                                   |                                   |         |

**Result:** **passed**

**Note:** The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

**Plots of the measurements:**

**Plot 1: 9 kHz – 30 MHz**

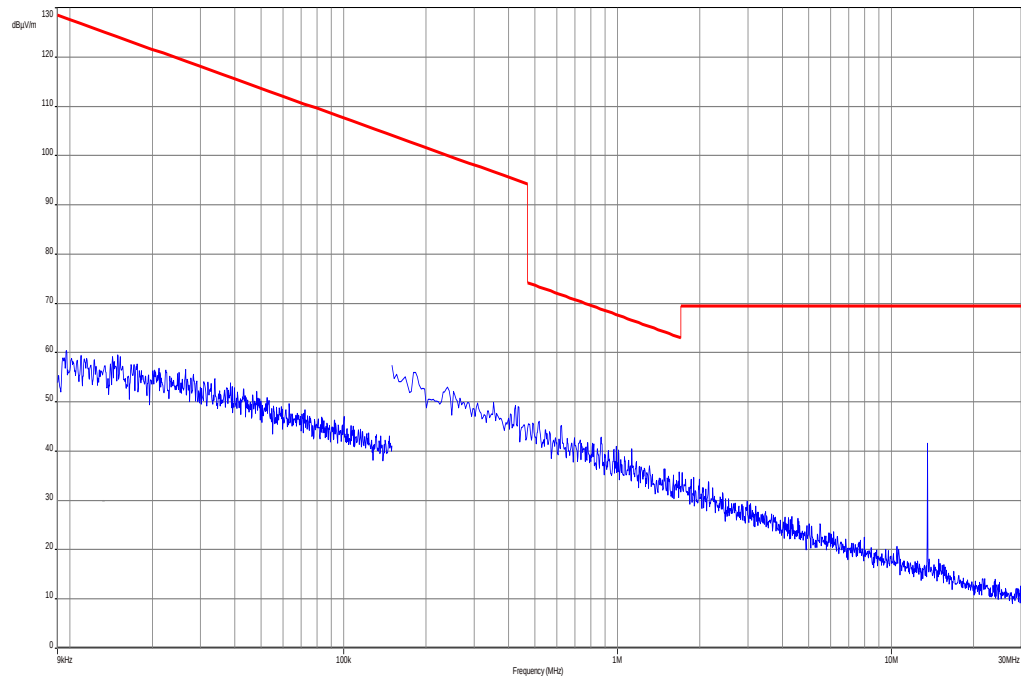

**Plot 2:** 30 MHz – 1000 MHz, vertical & horizontal polarization


## Common Information

Serial Number: CB5126DAH7  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: NFC test mode  
 Operator Name: Wolsdorfer  
 Comment: battery powered

## Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dB $\mu$ V/m

| Subrange       | Step Size | Detectors | IF BW   | Meas. Time | Preamp |
|----------------|-----------|-----------|---------|------------|--------|
| 30 MHz - 2 GHz | 60 kHz    | QPK       | 120 kHz | 1 s        | 20 dB  |

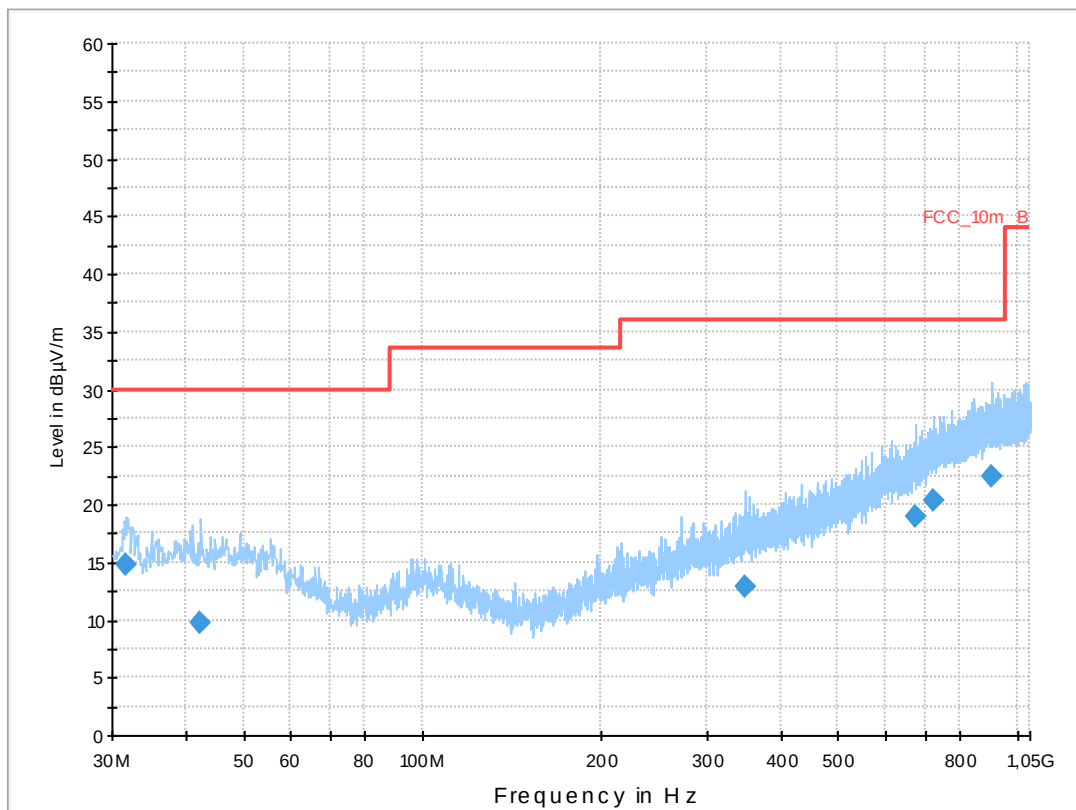


## Final Result 1

| Frequency (MHz) | QuasiPeak (dB $\mu$ V/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V/m) | Comment |
|-----------------|--------------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------------|---------|
| 31.668000       | 14.8                     | 1000.0          | 120.000         | 145.0       | V            | 190.0         | 12.7       | 15.2        | 30.0                 |         |
| 42.325050       | 9.8                      | 1000.0          | 120.000         | 170.0       | V            | 86.0          | 13.4       | 20.2        | 30.0                 |         |
| 349.182600      | 12.8                     | 1000.0          | 120.000         | 170.0       | V            | 3.0           | 16.0       | 23.2        | 36.0                 |         |
| 672.847200      | 19.0                     | 1000.0          | 120.000         | 98.0        | H            | 10.0          | 21.8       | 17.0        | 36.0                 |         |
| 722.966550      | 20.3                     | 1000.0          | 120.000         | 170.0       | H            | 86.0          | 23.0       | 15.7        | 36.0                 |         |
| 904.349400      | 22.4                     | 1000.0          | 120.000         | 170.0       | H            | 3.0           | 25.2       | 13.6        | 36.0                 |         |



**Plot 3: Spectrum mask**

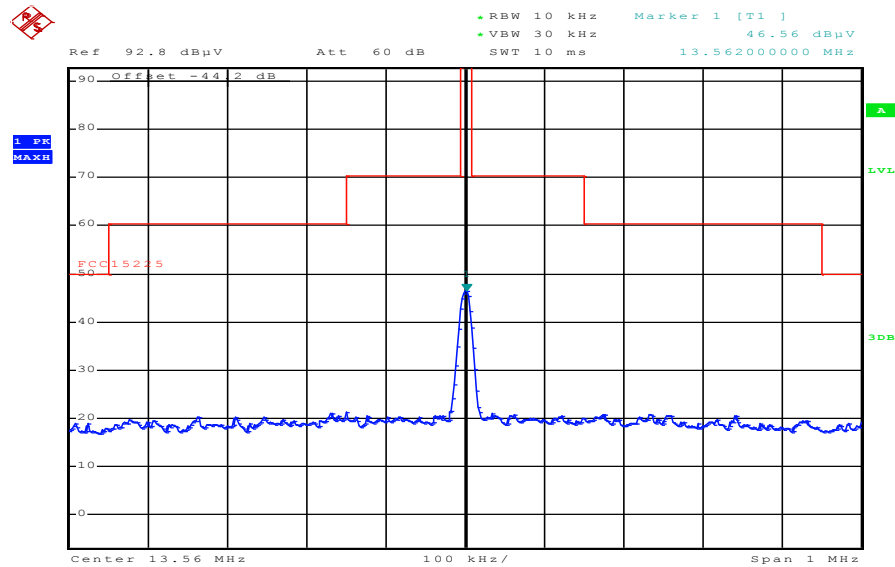

Date: 26.FEB.2014 10:56:43

Limits recalculated from 30 m to 10 m with 40 dB/decade according to FCC 15.31 (f2)

## 10.5 Frequency tolerance

### Measurement:

| Measurement parameter |               |
|-----------------------|---------------|
| Detector:             | Positive peak |
| Sweep time:           | Auto          |
| Resolution bandwidth: | 10 Hz         |
| Video bandwidth:      | 1 MHz         |
| Span:                 | 1 kHz         |
| Trace-Mode:           | Clear – write |

### Limits:

| FCC                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. |

### Result: **passed**

| Frequency tolerance        |           |        |                        |           |        |         |          |              |
|----------------------------|-----------|--------|------------------------|-----------|--------|---------|----------|--------------|
| Over temperature variation |           |        | Over voltage variation |           |        |         |          |              |
| Limit is +/- 1.356 kHz     |           |        | Limit is +/- 1.356 kHz |           |        | -/-     |          |              |
| T (°C)]                    | Frequency | result | Power voltage          | Frequency | result | F [MHz] | Detector | Level [μV/m] |
| -30°                       | 13.559958 | Passed | 3.3 V                  | 13.559949 | Passed | -/-     |          |              |
| -20°                       | 13.559967 | Passed | 3.4 V                  | 13.559950 | Passed |         |          |              |
| -10°                       | 13.559780 | Passed | 3.5 V                  | 13.559955 | Passed |         |          |              |
| 0°                         | 13.560024 | Passed | 3.6 V                  | 13.559955 | Passed |         |          |              |
| 10°                        | 13.560004 | Passed | 3.7 V                  | 13.559955 | Passed |         |          |              |
| 20°                        | 13.559955 | Passed | 3.8 V                  | 13.559954 | Passed |         |          |              |
| 30°                        | 13.559911 | Passed | 3.9 V                  | 13.559954 | Passed |         |          |              |
| 40°                        | 13.559867 | Passed | 4.0 V                  | 13.559954 | Passed |         |          |              |
| 50°                        | 13.559839 | Passed | 4.1 V                  | 13.559954 | Passed |         |          |              |
| 60°                        | 13.559796 | Passed | 4.2 V                  | 13.559954 | Passed |         |          |              |
|                            |           |        | 4.3 V                  | 13.559954 | Passed |         |          |              |
|                            |           |        | 4.4 V                  | 13.559954 | Passed |         |          |              |
| Measurement uncertainty    |           |        | ±100 Hz                |           |        |         |          |              |

## 10.6 AC line conducted

### Measurement:

| Measurement parameter |                                            |
|-----------------------|--------------------------------------------|
| Detector:             | Peak / Quasi peak / Average                |
| Sweep time:           | Auto                                       |
| Resolution bandwidth: | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Video bandwidth:      | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span:                 | 9 kHz to 30 MHz                            |
| Trace-Mode:           | Max hold                                   |


### Limits:

| FCC                         |                              |            |
|-----------------------------|------------------------------|------------|
| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) |            |
|                             | Quasi-peak                   | Average    |
| 0.15 – 0.5                  | 66 to 56 *                   | 56 to 46 * |
| 0.5 – 5                     | 56                           | 46         |
| 5 - 30                      | 60                           | 50         |


Result: **passed**

**Plots:**

**Plot 1: phase line**

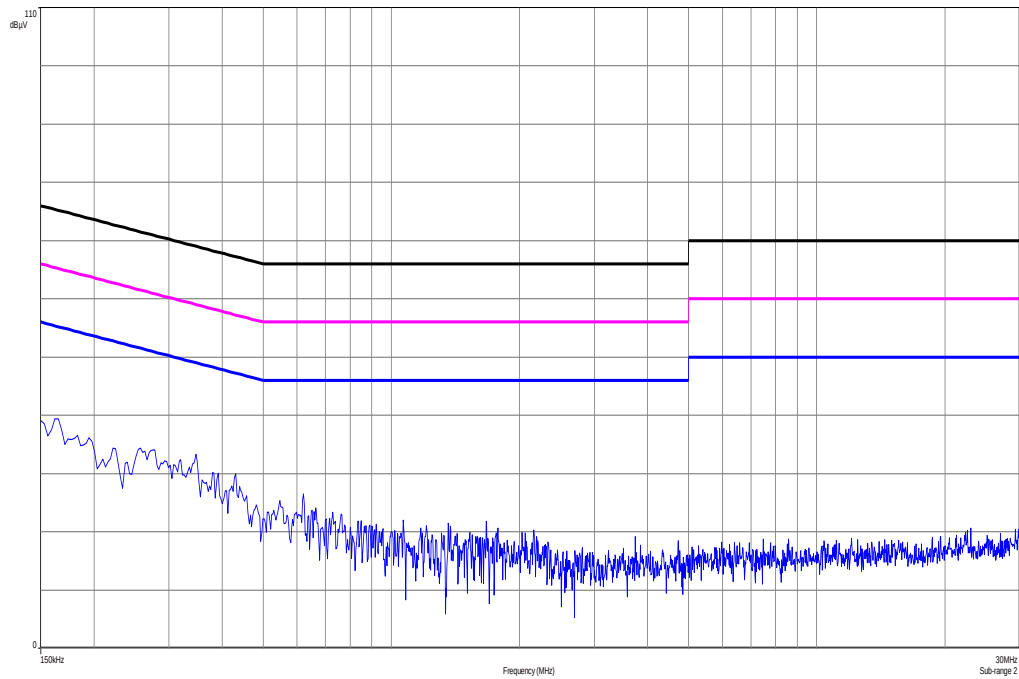

**Plot 2: neutral line**

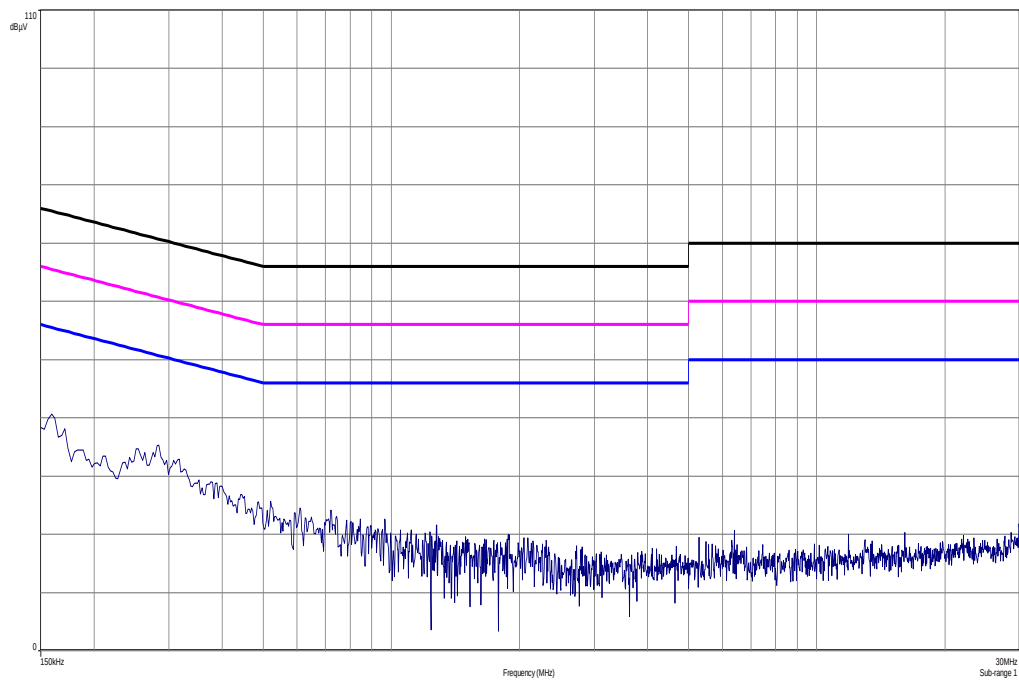

## 11 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

| No. | Lab / Item   | Equipment                                    | Type         | Manufact.            | Serial No. | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|--------------|----------------------------------------------|--------------|----------------------|------------|-----------------|---------------------|------------------|------------------|
| 1   | 45           | Switch-Unit                                  | 3488A        | HP Meßtechnik        | 2719A14505 | 300000368       | g                   |                  |                  |
| 2   | 50           | DC power supply, 60Vdc, 50A, 1200 W          | 6032A        | HP Meßtechnik        | 2920A04466 | 300000580       | ne                  |                  |                  |
| 3   | n. a.        | EMI Test Receiver                            | ESCI 3       | R&S                  | 100083     | 300003312       | k                   | 27.01.2014       | 27.01.2015       |
| 4   | n. a.        | Antenna Tower                                | Model 2175   | ETS-LINDGREN         | 64762      | 300003745       | izw                 |                  |                  |
| 5   | n. a.        | Positioning Controller                       | Model 2090   | ETS-LINDGREN         | 64672      | 300003746       | izw                 |                  |                  |
| 6   | n. a.        | Turntable Interface-Box                      | Model 105637 | ETS-LINDGREN         | 44583      | 300003747       | izw                 |                  |                  |
| 7   | n. a.        | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163     | Schwarzbeck          | 295        | 300003787       | k                   | 12.04.2012       | 12.04.2014       |
| 8   | n. a.        | Active Loop Antenna 10 kHz to 30 MHz         | 6502         | EMCO                 | 2210       | 300001015       | ne                  |                  |                  |
| 9   | n. a.        | Anechoic chamber                             | FAC 3/5m     | MWB / TDK            | 87400/02   | 300000996       | ev                  |                  |                  |
| 10  | Spec.A. 2 2e | System rack for EMI measurement solution     | 85900        | HP I.V.              | *          | 300000222       | ne                  |                  |                  |
| 11  | n. a.        | Switch / Control Unit                        | 3488A        | HP Meßtechnik        | 2719A15013 | 300001156       | ne                  |                  |                  |
| 12  | n. a.        | Relais Matrix                                | PSU          | R&S                  | 890167/024 | 300001168       | ne                  |                  |                  |
| 13  | n. a.        | Isolating Transformer                        | RT5A         | Grundig              | 9242       | 300001263       | ne                  |                  |                  |
| 14  | n. a.        | Three-Way Power Splitter, 50 Ohm             | 11850C       | HP Meßtechnik        |            | 300000997       | ne                  |                  |                  |
| 15  | n. a.        | Switch / Control Unit                        | 3488A        | HP Meßtechnik        | 2605e08770 | 300001443       | ne                  |                  |                  |
| 16  | n. a.        | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163     | Schwarzbeck          | 371        | 300003854       | vKI!                | 14.10.2011       | 14.10.2014       |
| 17  | n. a.        | MXE EMI Receiver 20 Hz bis 26,5 GHz          | N9038A       | Agilent Technologies | MY51210197 | 300004405       | k                   | 21.02.2013       | 21.02.2015       |
| 18  | n. a.        | Signal Analyzer 40 GHz                       | FSV40        | R&S                  | 101042     | 300004517       | k                   | 21.01.2014       | 21.01.2015       |
| 19  | n. a.        | Test Receiver                                | ESH2         | R&S                  | 871921/095 | 300002505       | Ve                  | 24.01.2014       | 24.01.2016       |
| 20  | n. a.        | Loop Antenna 9 KHz - 30 MHz                  | HFH2-Z2      | R&S                  | 872096/61  | 300001824       | vKI!                | 09.03.2012       | 09.03.2015       |
| 21  | n. a.        | DC Power Supply 0 – 32V                      | 1108-32      | Heiden               | 001802     | 300001383       | Ve                  | 29.01.2014       | 29.01.2017       |
| 22  | n. a.        | Temperature Test Chamber                     | VT 4002      | Heraeus Voetsch      | 521/83761  | 300002326       | Ve                  | 26.09.2013       | 26.09.2015       |

### Agenda: Kind of Calibration

k calibration / calibrated  
 ne not required (k, ev, izw, zw not required)  
 ev periodic self verification  
 Ve long-term stability recognized  
 vKI! Attention: extended calibration interval  
 NK! Attention: not calibrated

EK limited calibration  
 zw cyclical maintenance (external cyclical maintenance)  
 izw internal cyclical maintenance  
 g blocked for accredited testing  
 \*) next calibration ordered / currently in progress

## 12 Observations

No observations exceeding those reported with the single test cases have been made.

**Annex A Document history**

| Version | Applied changes  | Date of release |
|---------|------------------|-----------------|
|         | Initial release  | 2014-02-26      |
| A       | Editorial change | 2014-03-17      |

**Annex B Further information****Glossary**


|          |   |                                                |
|----------|---|------------------------------------------------|
| AVG      | - | Average                                        |
| DUT      | - | Device under test                              |
| EMC      | - | Electromagnetic Compatibility                  |
| EN       | - | European Standard                              |
| EUT      | - | Equipment under test                           |
| ETSI     | - | European Telecommunications Standard Institute |
| FCC      | - | Federal Communication Commission               |
| FCC ID   | - | Company Identifier at FCC                      |
| HW       | - | Hardware                                       |
| IC       | - | Industry Canada                                |
| Inv. No. | - | Inventory number                               |
| N/A      | - | Not applicable                                 |
| PP       | - | Positive peak                                  |
| QP       | - | Quasi peak                                     |
| S/N      | - | Serial number                                  |
| SW       | - | Software                                       |

## Annex C Accreditation Certificate

Front side of certificate



Back side of certificate

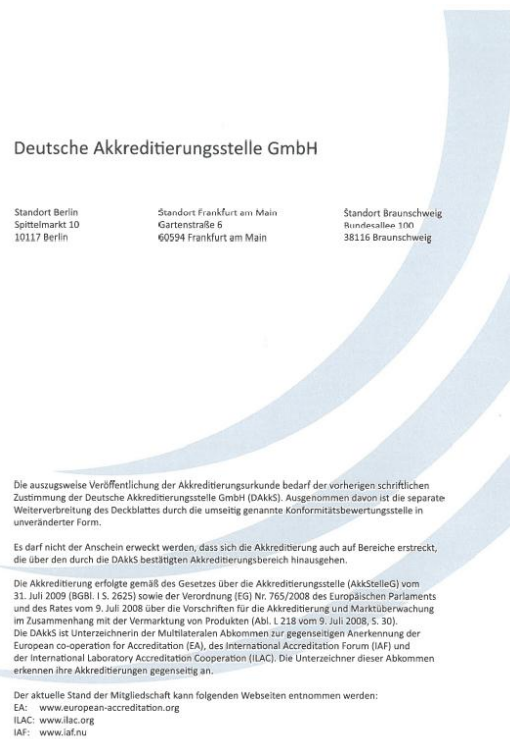

### Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>