


TEST REPORT

Test report no.: 1-6965/13-13-05-A



Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>

e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Area of Testing:

Radio Communications & EMC (RCE)

Applicant

Sony Mobile Communications AB

Nya Vattentorget

22188 Lund / SWEDEN

Phone: +46 46 19 30 00

Fax: -/-

Contact: Mikael Nilsson

e-mail: Micke.nilsson@sonymobile.com

Phone: +46 7 03 22 75 03

Manufacturer

Sony Mobile Communications AB

Nya Vattentorget

22188 Lund / SWEDEN

Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Tablet PC WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS

FCC ID: PY7TS-0020

Frequency: 13.56 MHz

Technology tested: RFID

Antenna: Integrated antenna

Power supply: 3.7 V DC by Li - polymer battery

Temperature range: -20°C to +55°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

Marco Bertolino
Testing Manager

Test performed:

Andreas Luckenbill
Expert

1 Table of contents

1 Table of contents2

2 General information3

 2.1 Notes and disclaimer3

 2.2 Application details.....3

3 Test standard/s3

4 Test environment.....4

5 Test item4

 5.1 Additional information4

6 Test laboratories sub-contracted4

7 Summary of measurement results5

8 Additional comments6

9 Measurement results.....7

 9.1 Timing of the transmitter7

 9.2 Field strength of the fundamental8

 9.3 99 % emission bandwidth.....9

 9.4 Field strength of the harmonics and spurious10

 9.5 Frequency tolerance14

 9.6 AC line conducted15

10 Test equipment and ancillaries used for tests17

11 Observations18

Annex A Document history18

Annex B Further information.....18

Annex C Accreditation Certificate19

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2013-12-19
Date of receipt of test item:	2014-02-04
Start of test:	2014-02-04
End of test:	2014-02-06
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15		Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		42 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li - polymer battery
	V_{max}	4.2 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	Tablet PC WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS
FCC ID	:	PY7TS-0020
S/N serial number	:	Rad. CB5126CSLU, CB5126CSJU
HW hardware status	:	TP1
SW software status	:	17.0.A.0.274
Frequency band [MHz]	:	13.56 MHz
Type of radio transmission	:	Modulated carrier
Use of frequency spectrum	:	
Type of modulation	:	NON
Number of channels	:	1
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li - polymer battery
Temperature range	:	-20°C to +55°C

5.1 Additional information

Test setup- and EUT-photos are included in test report: 1-6965/13-13-01_AnnexA
 1-6965/13-13-01_AnnexB
 1-6965/13-13-01_AnnexE

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained**
- There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15	Passed	2014-02-13	-/-

Test Specification Clause	Test Case	Temperature Conditions	Power Source Voltages	Pass	Fail	NA	NP	Remark
§ 15.35 (c)	Timing of the transmitter (Duty cycle correction factor)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
-/-	99 % emission bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.225 (a)	Fieldstrength of Fundamental	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.209	Fieldstrength of harmonics and spurious	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.225 (e)	Frequency tolerance	Nominal	Extreme	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
		Extreme	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
§15.107 §15.207	Conducted emissions < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

9 Measurement results

9.1 Timing of the transmitter

Measurement:

Measurement parameter	
Detector:	Positive peak
Sweep time:	100 ms
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	Zero span
Trace-Mode:	Single sweep

Limits:

FCC	IC
Timing of the transmitter	
<p>(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.</p>	

Result:

Duty cycle of the EUT: 100 %

Result: passed

9.2 Field strength of the fundamental

Measurement:

Measurement parameter	
Detector:	Quasi Peak
Resolution bandwidth:	200 Hz up to 150 kHz, 9 kHz up to 30 MHz, 120 kHz up to 1 GHz
Video bandwidth:	≥ RBW
Trace-Mode:	Max Hold

Limits:

FCC		IC
Fundamental Frequency (MHz)	Field strength of Fundamental (μV/m / dBμV/m)	Measurement distance (m)
13.553 to 13.567	15848 μV/m (84 dBμV/m)	30
	158489 μV/m (104 dBμV/m)	10 (Recalculated acc. to FCC part15.31 (f2))

Result:

TEST CONDITIONS		MAXIMUM POWER (dBμV/m)	
Frequency		13.56 MHz	13.56 MHz
Mode		@ 10 m distance	@ 30 m distance
T _{nom}	V _{nom}	44	24*
Measurement uncertainty		±3dB	

* Limits recalculated from 10m to 30m with 40 dB/decade according to FCC 15.31 (f2).

Result: passed

9.3 99 % emission bandwidth


Measurement:

Measurement parameter	
Detector:	Peak
Resolution bandwidth:	> 1 % span
Video bandwidth:	≥ RBW
Trace-Mode:	Max Hold

Results:

TEST CONDITIONS		99 % emission bandwidth (kHz)
Frequency		13.56 MHz
T _{nom}	V _{nom}	522.00
Measurement uncertainty		± RBW

Plot:

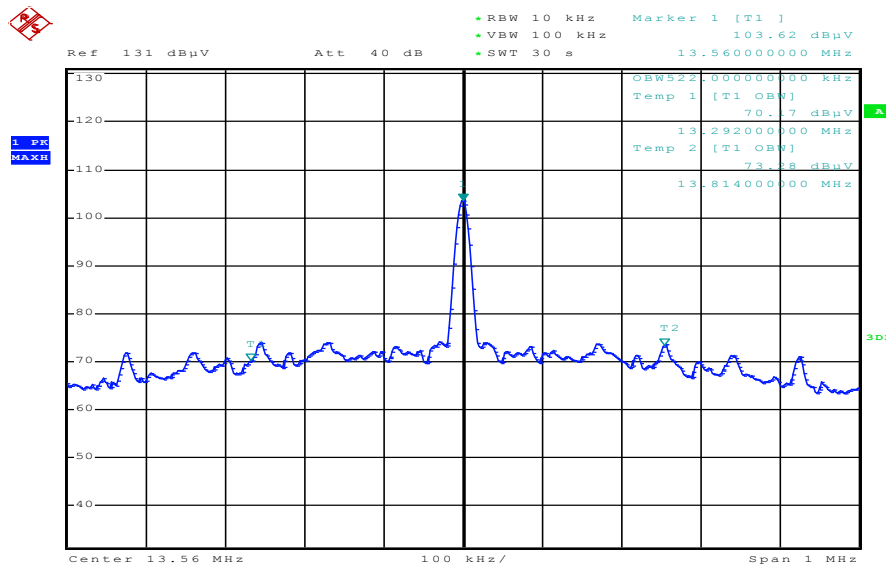

Date: 6.FEB.2014 09:16:57

9.4 Field strength of the harmonics and spurious

Measurement:

Measurement parameter	
Detector:	Quasi Peak / Average
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 200 Hz 150 kHz > F > 30 MHz: 9 kHz F > 30 MHz: 120 kHz
Video bandwidth:	F < 150 kHz: 1 kHz 150 kHz > F > 30 MHz: 100 kHz F > 30 MHz: 300 kHz
Span:	See plots!
Trace-Mode:	Max hold

Limits:

FCC		IC	
Field strength of the harmonics and spurious.			
Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)	
0.009 – 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30	30 (29.5 dBµV/m)	30	
30 – 88	100 (40 dBµV/m)	3	
88 – 216	150 (43.5 dBµV/m)	3	
216 – 960	200 (46 dBµV/m)	3	

Result:


EMISSION LIMITATIONS				
f [MHz]	Detector	Limit max. allowed [dBµV/m]	Amplitude of emission [dBµV/m]	Results
No emissions detected.				

Result: passed

Note: The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

Plots of the measurements:

Plot 1: 9 kHz – 30 MHz

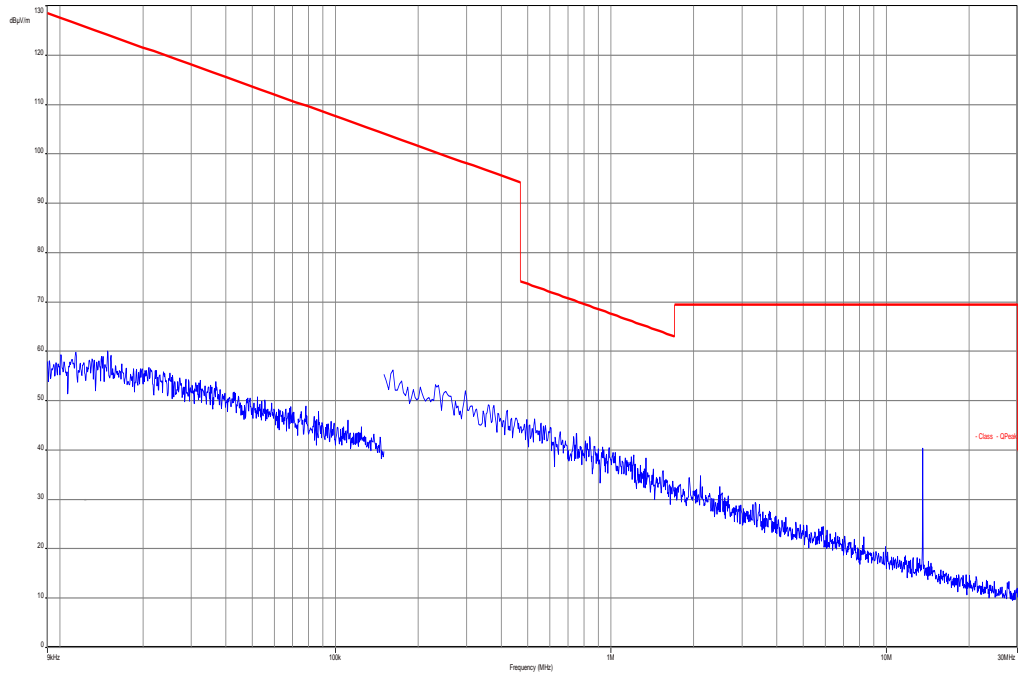

Plot 2: 30 MHz – 1000 MHz, vertical & horizontal polarization


Common Information

EUT: PY7TS-0020
 Serial Number: CB5126CSJU
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: NFC test mode
 Operator Name: Wolsdorfer
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

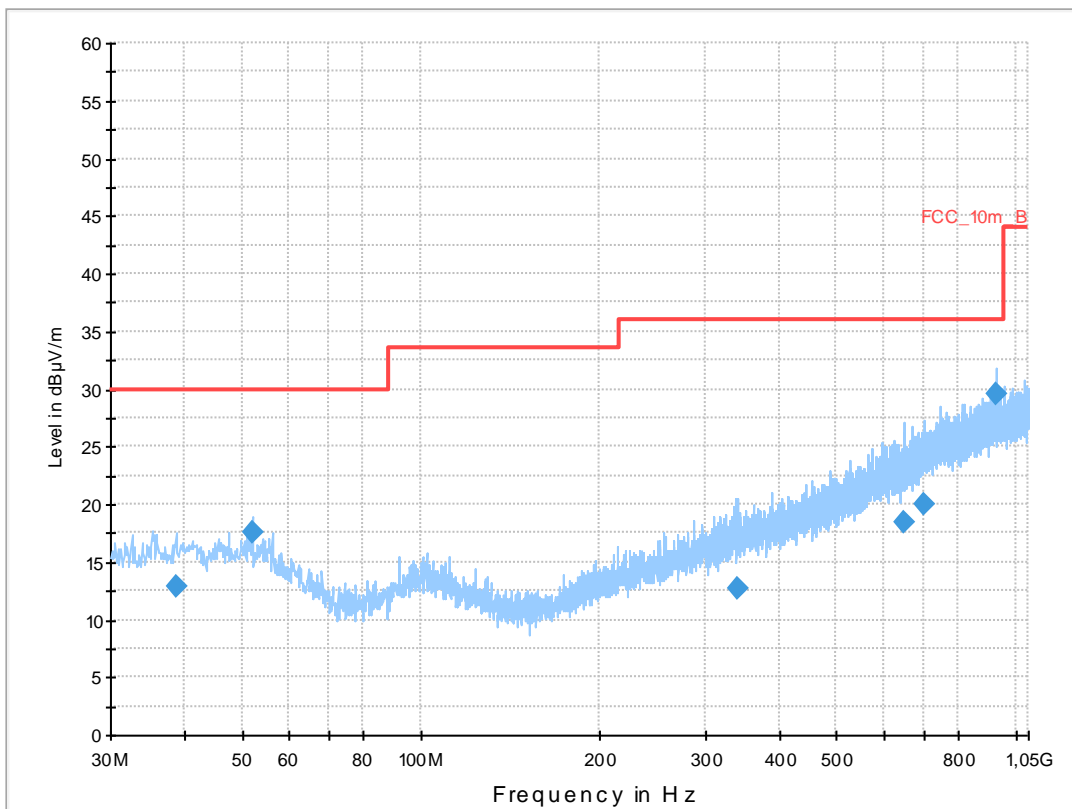

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
38.696700	12.8	1000.0	120.000	170.0	V	171.0	13.3	17.2	30.0	
51.997650	17.6	1000.0	120.000	98.0	V	81.0	13.2	12.4	30.0	
341.015850	12.6	1000.0	120.000	170.0	H	80.0	15.8	23.4	36.0	
648.142500	18.4	1000.0	120.000	170.0	V	171.0	21.1	17.6	36.0	
700.737300	20.0	1000.0	120.000	170.0	V	90.0	22.5	16.0	36.0	
927.474000	29.5	1000.0	120.000	122.0	V	93.0	25.3	6.5	36.0	

Plot 3: Spectrum mask

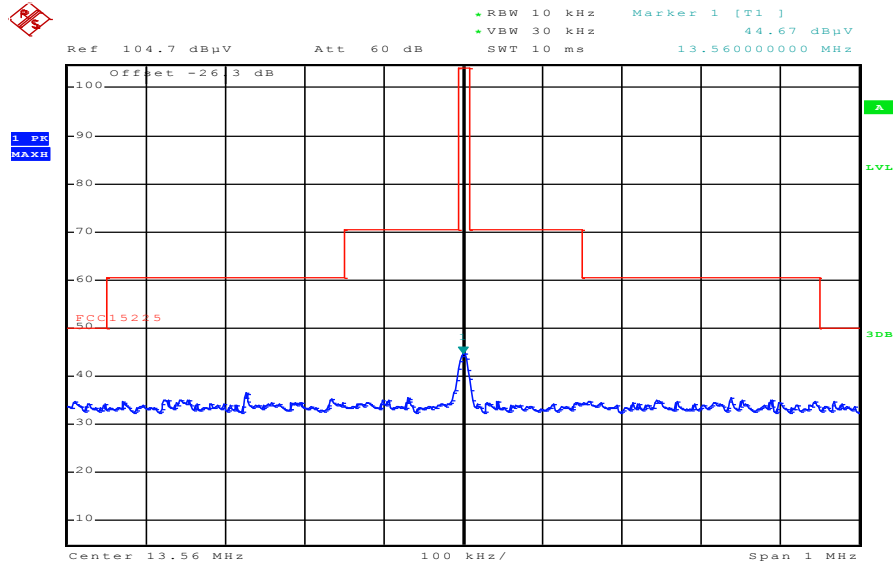

Date: 6.FEB.2014 09:13:59

Limits recalculated from 30 m to 10 m with 40 dB/decade according to FCC 15.31 (f2)

9.5 Frequency tolerance

Measurement:

Measurement parameter	
Detector:	Positive peak
Sweep time:	Auto
Resolution bandwidth:	10 Hz
Video bandwidth:	1 MHz
Span:	1 kHz
Trace-Mode:	Clear – write

Limits:

FCC	IC
The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.	

Result: passed

Frequency tolerance								
Over temperature variation			Over voltage variation					
Limit is +/- 1.356 kHz			Limit is +/- 1.356 kHz			-/-		
T (°C)]	Frequency	result	Power voltage	Frequency	result	F [MHz]	Detector	Level [µV/m]
-20°	13.559661	Pass	3.3 V	13.560068	Pass	-/-		
-10°	13.559820	Pass	3.4 V	13.560071	Pass			
0°	13.559903	Pass	3.5 V	13.560075	Pass			
10°	13.559936	Pass	3.6 V	13.560077	Pass			
20°	13.560079	Pass	3.7 V	13.560079	Pass			
30°	13.559506	Pass	3.8 V	13.560079	Pass			
40°	13.559241	Pass	3.9 V	13.560082	Pass			
50°	13.559876	Pass	4.0 V	13.560084	Pass			
55°	13.559847	Pass	4.1 V	13.560084	Pass			
			4.2 V	13.560085	Pass			
			4.3 V	13.560087	Pass			
Measurement uncertainty			±100 Hz					

9.6 AC line conducted

Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak / Average
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max hold


Limits:

FCC	IC	
Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50


Result: **passed**

Plots:

Plot 1: phase line

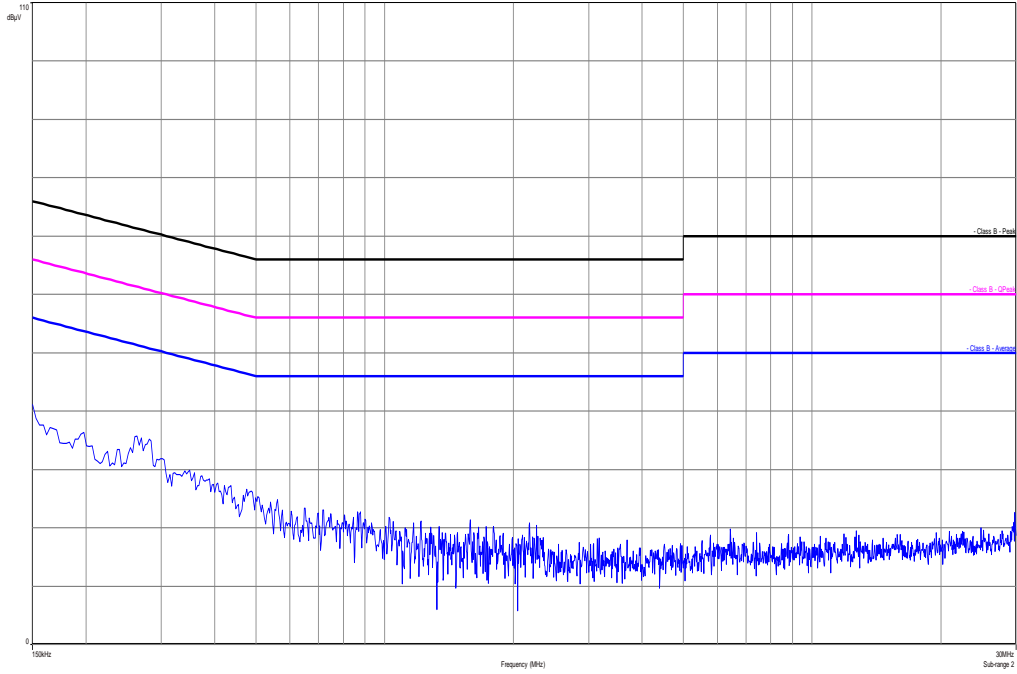

Plot 2: neutral line

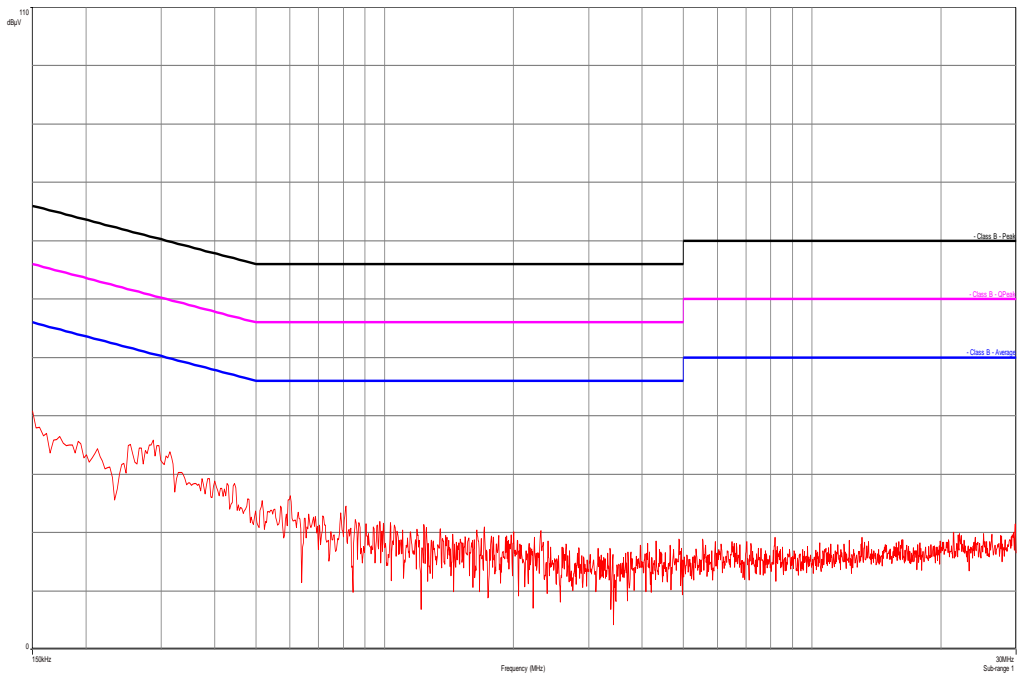

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vKI!	08.05.2013	08.05.2015
2	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
3	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
4	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	30.01.2014	30.01.2016
5	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
6	9	Isolating Transformer	MPL IEC625 Bus Regeltrennt ravo	Erfi	91350	300001155	ne		
7	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
8	90	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	13.06.2013	13.06.2015
9	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
10	n. a.	TRIOLOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vKI!	14.10.2011	14.10.2014
11	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	21.02.2013	21.02.2014
12	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
13	n. a.	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	27.01.2014	27.01.2015
14	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
15	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
16	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
17	n. a.	TRIOLOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	12.04.2012	12.04.2014
18	n. a.	Loop Antenna 9 KHz - 30 MHz	HFH2-Z2	R&S	872096/61	300001824	vKI!	09.03.2012	09.03.2015

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vKI! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

11 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
	Initial release	2014-02-06
-A	Type name removed on customer request.	2014-02-13

Annex B Further information

Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate

Front side of certificate

DAkKS
Deutsche
Akkreditierungsstelle

Deutsche Akkreditierungsstelle GmbH

Befehlense gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
Unterzeichnerin der Multilateralen Abkommen
von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung

Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium
CETECOM ICT Services GmbH
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

- Drahtgebundene Kommunikation einschließlich xDSL
- VoIP und DECT
- Akustik
- Funk einschließlich WLAN
- Short Range Devices (SRD)
- RFID
- WiMax und Richtfunk
- Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)
- Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive
- Produktsicherheit
- SAR und Hearing Aid Compatibility (HAC)
- Umweltsimulation
- Smart Card Terminals
- Bluetooth
- Wi-Fi-Services

Die Akkreditierungskunde gilt nur in Verbindung mit dem Bescheid vom 18.01.2013 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 80 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt am Main, 18.01.2013

Im Auftrag
Dirk von Pöhl, Abteilungsleiter

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin Spittelmarkt 10 10117 Berlin	Standort Frankfurt am Main Gartenstraße 6 60594 Frankfurt am Main	Standort Braunschweig Rundesalle 100 38116 Braunschweig
--	---	---

Die auszugsweise Veröffentlichung der Akkreditierungskunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkKS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblatts durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkKS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30). Die DAkKS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
EA: www.european-accreditation.org
ILAC: www.ilac.org
IAF: www.iaf.nu

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>