

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-940_05.docx	Date of Report:	13-Sep-2013
Number of pages:	18	Customer's Contact person:	Lasse Vaattovaara
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation P.O.Box(86) Joensuunkatu 7H FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-940 / Data Cable CA-190CD / Headset WH-208 / Laptop T61p		
FCC ID:	PYAB	IC:	661V-B
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22, RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Sami Lehtonen, Specialist, EMC

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	19-Jul-2013
Testing completed	19-Aug-2013
The customer's contact person	Lasse Vaattovaara
Test Plan referred to	T:\Projects\RM-940\TestPlan\RS_Testplan_RM-940.xlsm
Notes	-
Document name	T:\Projects\RM-940\EMC\FCC15B_RM-940_05.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-940	004402473425951	2100	-	1028.0301.1326.10115	17583
Data Cable	CA-190CD	-	CE	-	-	17585
Headset	WH-208	2131731	CE	-	-	17586
Laptop	T61p	4FIL44044	-	-	-	16517
Phone	RM-940	004402473425910	2100	-	1028.0305.1328.0000	17589
AC-Charger	AC-60E	409049315461030267600675677	-	-	-	17580
Headset	WH-208	2131731	-	-	-	17581
USB-Cable	CA-190CD	07304563083v2f	-	-	-	17608

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (4.6)	Radiated emissions	PASSED

GSM1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

WCDMA 1900 (Band II):

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

LTE700 (Band 17)):

Section in CFR 47	Section in ICES-003 (RSS-139)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

PASSED
FAILED

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	5
2.1. Test Setup.....	5
2.2. Test method and limit.....	5
2.3. GSM 1900 Test results	6
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6).....	7
3.2. Test method and limit.....	7
3.3. GSM850 test results FM receiver active.....	9
3.4. GSM1900 test results, Data peripherals.....	10
3.5. WCDMA 1900 (Band II) test results, GPS active.....	13
3.6. LTE700 Lower (Band 17) test results, GPS active	15
4. Test Equipment.....	17
4.1. Conducted measurements	17
4.2. Radiated measurements	17

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-940, DUT 17583
Accessories with DUT numbers	CA-190CD, DUT 17585 ; WH-208, DUT 17586 ; T61p, DUT 16517
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 101.1
Date of measurements	02-Aug-2013
Measured by	Tomi Lipponen

2.1. Test Setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 1900 Test results

Channel 661 / 1880.0 MHz

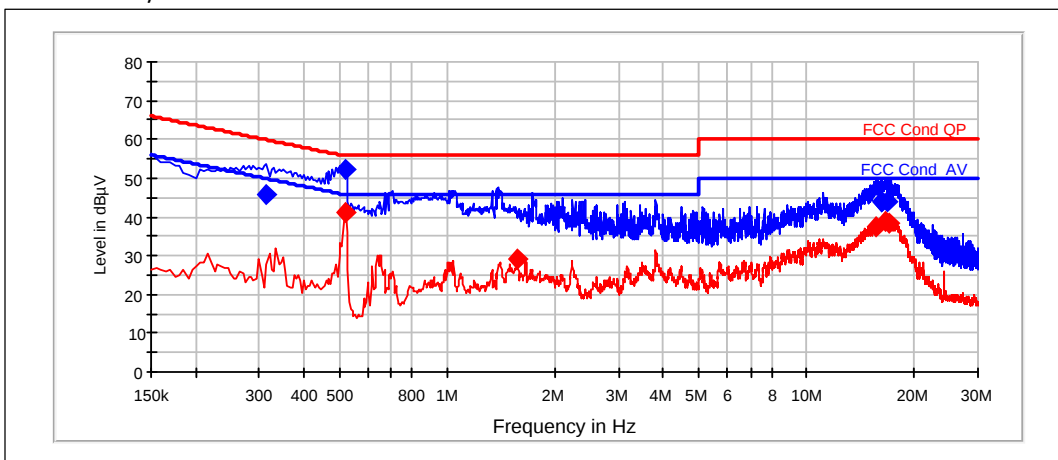

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.315	45.86	N	PASSED
0.52	52.43	L1	PASSED
16.14	43.86	L1	PASSED
16.145	44	L1	PASSED
16.88	43.93	N	PASSED

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.52	41.3	L1	PASSED
1.565	29.33	L1	PASSED
15.675	37.39	N	PASSED
16.625	38.87	L1	PASSED
16.935	38.2	N	PASSED

3. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RM-940, DUT 17589
Accessories with DUT numbers	AC-60E, DUT 17580 ; WH-208, DUT 17581 ; CA-190CD, DUT 17608
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 62 / 101.3
Date of measurements	07-Aug-2013
Measured by	Jari Keto

3.1.1 Test setup

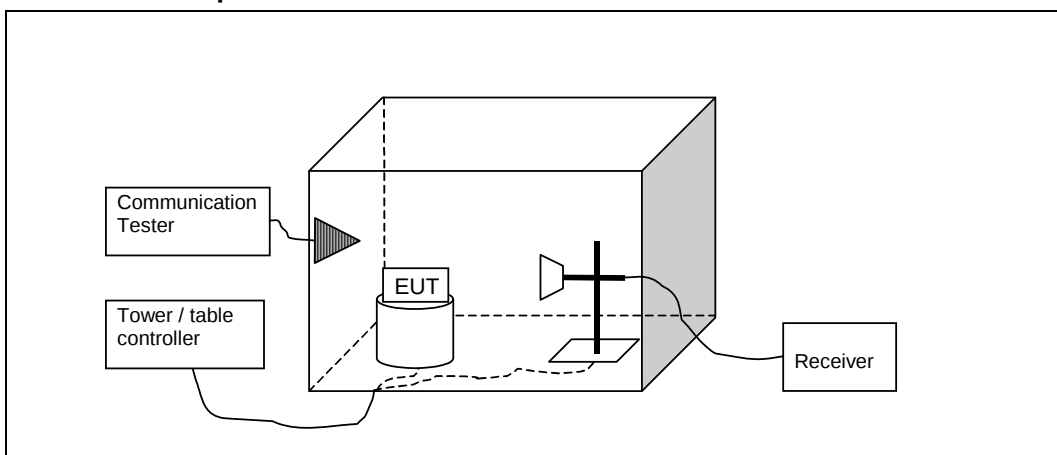

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E \text{ [dB}\mu\text{V/m]} = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dB μ V/m]	Average limit [dB μ V/m]	Peak limit [dB μ V/m]
30 - 230	40	-	-
230 – 1000	47	-	-
1000 - 3000	-	50	70
Above 3000	-	54	74

3.3. GSM850 test results FM receiver active

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3477.1	37.03	71.023	42.38	-5.35	37	74	PASSED
6955.1	47.22	229.668	44.54	2.68	26.8	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3477.1	24.4	16.6	29.75	-5.35	29.6	54	PASSED
6955.1	34.11	50.781	31.43	2.68	19.9	54	PASSED

RX mode, channel 190 / 881.6 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
7828.655	47.25	230.409	41.52	5.73	26.8	74	PASSED
7837.779	47.1	226.569	41.27	5.83	26.9	74	PASSED
7851.099	47.26	230.569	41.28	5.98	26.7	74	PASSED
7853.307	46.93	222.177	40.9	6.03	27.1	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
31.86	19	8.911	30.24	-11.24	21	40	PASSED
43.709	16.36	6.577	35.44	-19.08	23.6	40	PASSED
56.525	17.73	7.699	45.29	-27.56	22.3	40	PASSED
98.096	65.3	1840.348	88.77	-23.47	-25.3	40	*PASSED
127.537	3.32	1.465	26.85	-23.53	36.7	40	PASSED
297.596	27.46	23.602	48.24	-20.78	19.5	47	PASSED

*98.1 MHz frequency is FM-Radio signal and thus ignored."

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
7828.655	34.42	52.596	28.69	5.73	19.6	54	PASSED
7837.779	34.46	52.838	28.63	5.83	19.5	54	PASSED
7851.099	34.4	52.457	28.42	5.98	19.6	54	PASSED
7853.307	34.42	52.584	28.39	6.03	19.6	54	PASSED

RX mode, channel 190 / 881.6 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
-----------------	------------	----------	------------------------	-----------------------	--------	----------------	---------

3000.5	38.03	79.717	42.13	-4.1	36	74	PASSED
3525.6	38.36	82.813	43.38	-5.02	35.6	74	PASSED
7053.6	45.54	189.256	42.13	3.41	28.5	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
31.08	24.47	16.73	29.2	-4.73	15.5	40	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3000.5	25.3	18.41	29.4	-4.1	28.7	54	PASSED
3525.6	24.44	16.676	29.46	-5.02	29.6	54	PASSED
7053.6	32.78	43.541	29.37	3.41	21.2	54	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3576.4	37.89	78.442	42.5	-4.61	36.1	74	PASSED
7150.6	45.89	196.902	41.89	4	28.1	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3576.4	24.52	16.823	29.13	-4.61	29.5	54	PASSED
7150.6	33.47	47.174	29.47	4	20.5	54	PASSED

3.4. GSM1900 test results, Data peripherals

*Continuous data transfer was active between the phone and the computer during the test."

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3858.9	38.53	84.401	42.82	-4.29	35.5	74	PASSED
7718	46.84	219.887	41.58	5.26	27.2	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3858.9	25.22	18.245	29.51	-4.29	28.8	54	PASSED
7718	34.19	51.215	28.93	5.26	19.8	54	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
35.422	39.25	91.759	52.82	-13.57	0.7	40	PASSED
36.13	36.67	68.14	50.71	-14.04	3.3	40	PASSED
46.253	25.23	18.262	46.08	-20.85	14.8	40	PASSED
88.218	24.77	17.318	48.36	-23.59	15.2	40	PASSED
105.289	24.8	17.374	48.06	-23.26	15.2	40	PASSED
133.891	22.88	13.927	46.83	-23.95	17.1	40	PASSED
188.396	26.98	22.336	52.23	-25.25	13	40	PASSED
198.75	27.67	24.169	52.72	-25.05	12.3	40	PASSED
666.322	32	39.824	44.81	-12.81	15	47	PASSED
701.179	28.1	25.404	40.34	-12.24	18.9	47	PASSED

RX mode, channel 661 / 1960.0 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3735.068	54.08	505.825	58.48	-4.4	19.9	74	PASSED
3737.277	54.48	529.541	58.9	-4.42	19.5	74	PASSED
3742.288	56.16	642.318	60.6	-4.44	17.8	74	PASSED
3746.697	55.57	600.551	60.04	-4.47	18.4	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3735.068	25.25	18.306	29.65	-4.4	28.7	54	PASSED
3737.277	25.34	18.495	29.76	-4.42	28.7	54	PASSED
3742.288	25.41	18.649	29.85	-4.44	28.6	54	PASSED
3746.697	25.44	18.711	29.91	-4.47	28.6	54	PASSED

RX mode, channel 661 / 1960.0 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3000.1	38.97	88.828	43.07	-4.1	35	74	PASSED
3918.9	38.86	87.69	42.69	-3.83	35.1	74	PASSED
7840	47.07	225.762	41.22	5.85	26.9	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
31.56	26.16	20.333	31.2	-5.04	13.8	40	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3000.1	26.52	21.174	30.62	-4.1	27.5	54	PASSED
3918.9	25.58	19.011	29.41	-3.83	28.4	54	PASSED
7840	34.27	51.689	28.42	5.85	19.7	54	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3981.9	41.58	119.991	45.67	-4.09	32.4	74	PASSED
7961.4	48.89	278.227	42.32	6.57	25.1	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3981.9	25.6	19.046	29.69	-4.09	28.4	54	PASSED
7961.4	34.95	55.924	28.38	6.57	19	54	PASSED

3.5. WCDMA 1900 (Band II) test results, GPS active

Channel 9262 / 1852.4 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3865.7	38.1	80.325	42.34	-4.24	35.9	74	PASSED
5795.2	43.48	149.279	44.26	-0.78	30.5	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3865.7	25.54	18.919	29.78	-4.24	28.5	54	PASSED
5795.2	30.47	33.366	31.25	-0.78	23.5	54	PASSED

Channel 9262 / 1852.4 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
30.39	14.67	5.411	24.94	-10.27	25.3	40	PASSED
276.18	6.15	2.031	27.66	-21.51	40.8	47	PASSED
279.437	8.6	2.692	29.96	-21.36	38.4	47	PASSED
281.684	6.52	2.117	27.79	-21.27	40.5	47	PASSED
285.76	9.98	3.155	31.08	-21.1	37	47	PASSED
288.006	11.42	3.723	32.46	-21.04	35.6	47	PASSED
295.649	5.97	1.989	26.84	-20.87	41	47	PASSED
389.365	8.35	2.615	26.58	-18.23	38.6	47	PASSED

Channel 9400 / 1880 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
7822.148	46.78	218.172	41.12	5.67	27.2	74	PASSED
7830.965	47.36	233.346	41.6	5.76	26.6	74	PASSED
7838.08	47.8	245.556	41.97	5.83	26.2	74	PASSED
7845.892	47.39	234.234	41.48	5.91	26.6	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
7822.148	34.49	53.052	28.83	5.67	19.5	54	PASSED
7830.965	34.56	53.475	28.8	5.76	19.4	54	PASSED
7838.08	34.62	53.852	28.79	5.83	19.4	54	PASSED
7845.892	34.5	53.107	28.59	5.91	19.5	54	PASSED

Channel 9400 / 1880 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
1961.9	40.49	105.816	43.08	-2.59	29.5	70	PASSED
3000	45.99	199.182	41.24	4.75	28	74	PASSED
3921.8	39.26	91.791	43.09	-3.83	34.7	74	PASSED
5881.6	43.57	150.834	44.39	-0.82	30.4	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
1961.9	27.82	24.592	30.41	-2.59	22.2	50	PASSED
3000	33.53	47.484	28.78	4.75	20.5	54	PASSED
3921.8	26.13	20.258	29.96	-3.83	27.9	54	PASSED
5881.6	30.7	34.261	31.52	-0.82	23.3	54	PASSED

Channel 9538 / 1907.6 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3974.6	38.28	82.054	42.34	-4.06	35.7	74	PASSED
5961.8	43.66	152.335	44.39	-0.73	30.3	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3974.6	25.41	18.638	29.47	-4.06	28.6	54	PASSED
5961.8	31.14	36.054	31.87	-0.73	22.9	54	PASSED

3.6. LTE700 Lower (Band 17) test results, GPS active

Channel 23755 / 706.5 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
1473.1	37.17	72.219	42.58	-5.41	32.8	70	PASSED
2211.3	42.65	135.597	43.35	-0.7	27.4	70	PASSED
3001.1	37.75	77.188	41.85	-4.1	36.2	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
1473.1	24.4	16.598	29.81	-5.41	25.6	50	PASSED
2211.3	29.35	29.343	30.05	-0.7	20.6	50	PASSED
3001.1	25.12	18.038	29.22	-4.1	28.9	54	PASSED

Channel 23755 / 706.5 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
2131.362	41.55	119.509	42.84	-1.29	28.5	70	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
30.385	17.51	7.508	27.78	-10.27	22.5	40	PASSED
45.17	20.22	10.253	40.29	-20.07	19.8	40	PASSED
275.211	29.57	30.106	51.12	-21.55	17.4	47	PASSED
278.417	28.93	27.954	50.34	-21.41	18.1	47	PASSED
288.006	29.25	29.007	50.29	-21.04	17.8	47	PASSED
737.718	52.43	418.456	64.38	-11.95	-5.4	47	*PASSED
738.636	49.81	309.279	61.76	-11.95	-2.8	47	*PASSED
739.659	57.86	781.358	69.81	-11.95	-10.9	47	*PASSED
740.443	56.37	658.415	68.33	-11.96	-9.4	47	*PASSED

*737.718 to 740.443 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
2131.362	28.85	27.708	30.14	-1.29	21.1	50	PASSED

Channel 23790 / 710 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
7820.54	47.5	237.083	41.85	5.65	26.5	74	PASSED
7829.056	46.97	223.152	41.23	5.74	27	74	PASSED
7831.264	46.87	220.572	41.11	5.76	27.1	74	PASSED
7849.301	47.06	225.45	41.11	5.95	26.9	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
7820.54	34.22	51.416	28.57	5.65	19.8	54	PASSED
7829.056	34.35	52.204	28.61	5.74	19.6	54	PASSED
7831.264	34.35	52.186	28.59	5.76	19.6	54	PASSED
7849.301	34.11	50.752	28.16	5.95	19.9	54	PASSED

Channel 23790 / 710 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
1481.2	37.58	75.666	42.98	-5.4	32.4	70	PASSED
2218.6	41.92	124.71	42.73	-0.81	28.1	70	PASSED
3000.6	38.26	81.865	42.36	-4.1	35.7	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
1481.2	24.4	16.592	29.8	-5.4	25.6	50	PASSED
2218.6	29.21	28.88	30.02	-0.81	20.8	50	PASSED
3000.6	25.56	18.963	29.66	-4.1	28.4	54	PASSED

Channel 23825 / 713.5 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
1485.6	37.23	72.652	42.61	-5.38	32.8	70	PASSED
2229.9	42.43	132.282	42.73	-0.3	27.6	70	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
1485.6	24.36	16.518	29.74	-5.38	25.6	50	PASSED
2229.9	29.56	30.075	29.86	-0.3	20.4	50	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1916	Communication Tester	CMTA84	R&S	15B
1992	Signal Generator	83630B	Agilent	15C, 15B
1999	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2039	Power Supply	PL330QMD	Thurlby	15C, 15B
2059	V-network	ESH3-Z6	R&S	-
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2206	Signal Generator	SMX	R&S	15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C
2359	Temperature Test Chamber	VT4002	Vötsch	22/24/27
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2390	Directional Coupler	DC2600	AR	-
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6012	CDN	CDN USB/c	Teseq	-
6015	Receiver	ESI	R&S	22/24, 15C, 15B
6036	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B
6044	V-network	ESH3-Z6	R&S	-
6045	Power splitter	11667B	Agilent	22/24/27, 15C
6046	Attenuator 10dB	8493C	Agilent	22/24/27, 15C
6047	Attenuator 20dB	8493C	Agilent	22/24/27, 15C
6094	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
6096	EMC Analyzer	E7405A	HP	-
6098	Signal Generator	8648C	Agilent	-
6103	Bluetooth tester	CBT	R&S	15B
6113	Signal Generator	SMF100A	R&S	22/24/27, 15C 15B
6120	Thermal Chamber	WT 20/40	Weiss	22/24/27, 15C 15B
6121	Power Splitter	HP11667B	Agilent	22/24/27, 15C 15B
6122	Power Splitter	HP11667B	Agilent	22/24/27, 15C 15B
6134	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	22/24/27, 15C
6136	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	22/24/27, 15C
10479	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1917	Communication Tester	CMTA84	R&S	15B
1984	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B
2009	Signal Generator	SMP 22	R&S	22/24/27, 15C, 15B
2027	CDN	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	CDN	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	Thurlby	22/24/27, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
2135	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2140	Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Antenna	3146	EMCO	22/24/27, 15C
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2176	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2353	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	22/24/27, 15C, 15B
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
6017	Antenna	SBA 9113	Schwarzbeck	22 / 24 / 27
6037	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B
6087	Antenna	BBHA 9120D	Scharzbeck	22/24/27, 15C
6088	Antenna	VUBA 9117	Scharzbeck	22/24/27, 15C
6089	Antenna	HFH2-Z2	R&S	15C, 15B
6094	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
6103	Bluetooth tester	CBT	R&S	15B
6113	Signal Generator	SMF100A	R&S	22/24/27, 15C 15B
6115	Open switch and control unit	OSP 130	R&S	22/24/27, 15C 15B
6116	Open switch and control unit	OSP 150	R&S	22/24/27, 15C 15B
6130	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	22/24/27
6131	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	-
6135	Notch Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	22/24/27
10479	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B