

FCC TEST REPORT

REPORT NO.: RF991018D08

MODEL NO.: BH-806

VERSION: Proto B4.1, HW v1.0, SW v1.0, ME v1.0

FCC ID: PYABH-806

RECEIVED: Oct. 18, 2010

TESTED: Oct. 19 ~ 26, 2010

ISSUED: Oct. 28, 2010

APPLICANT: Nokia Corporation

ADDRESS: Joensuunkatu 7G, FIN-24100 Salo, Finland

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB LOCATION: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,
Taipei Hsien, 244 Taiwan

This test report consists of 106 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	9
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	10
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.2.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.2.4	DESCRIPTION OF SUPPORT UNITS	14
4.	TEST TYPES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS	16
4.1.3	TEST PROCEDURES	17
4.1.4	DEVIATION FROM TEST STANDARD	17
4.1.5	TEST SETUP	17
4.1.6	EUT OPERATING CONDITIONS	18
4.1.7	TEST RESULTS	19
4.2	RADIATED EMISSION MEASUREMENT	41
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	41
4.2.2	TEST INSTRUMENTS	42
4.2.3	TEST PROCEDURES	43
4.2.4	DEVIATION FROM TEST STANDARD	43
4.2.5	TEST SETUP	44
4.2.6	EUT OPERATING CONDITIONS	45
4.2.7	TEST RESULTS	46
4.3	NUMBER OF HOPPING FREQUENCY USED	66
4.3.1	LIMIT OF HOPPING FREQUENCY USED	66
4.3.2	TEST INSTRUMENTS	66
4.3.3	TEST PROCEDURES	66
4.3.4	DEVIATION FROM TEST STANDARD	67
4.3.5	TEST SETUP	67
4.3.6	TEST RESULTS	67
4.4	DWELL TIME ON EACH CHANNEL	70
4.4.1	LIMIT OF DWELL TIME USED	70
4.4.2	TEST INSTRUMENTS	70
4.4.3	TEST PROCEDURES	70
4.4.4	DEVIATION FROM TEST STANDARD	70
4.4.5	TEST SETUP	71
4.4.6	TEST RESULTS	71
4.5	CHANNEL BANDWIDTH	79
4.5.1	LIMITS OF CHANNEL BANDWIDTH	79
4.5.2	TEST INSTRUMENTS	79
4.5.3	TEST PROCEDURE	79
4.5.4	DEVIATION FROM TEST STANDARD	80



4.5.5	TEST SETUP	80
4.5.6	EUT OPERATING CONDITION	80
4.5.7	TEST RESULTS	81
4.6	HOPPING CHANNEL SEPARATION	85
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	85
4.6.2	TEST INSTRUMENTS	85
4.6.3	TEST PROCEDURES	85
4.6.4	DEVIATION FROM TEST STANDARD	86
4.6.5	TEST SETUP	86
4.6.6	TEST RESULTS	87
4.7	MAXIMUM PEAK OUTPUT POWER	91
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	91
4.7.2	TEST INSTRUMENTS	91
4.7.3	TEST PROCEDURES	91
4.7.4	DEVIATION FROM TEST STANDARD	91
4.7.5	TEST SETUP	92
4.7.6	EUT OPERATING CONDITION	92
4.7.7	TEST RESULTS	93
4.8	BAND EDGES MEASUREMENT	97
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	97
4.8.2	TEST INSTRUMENTS	97
4.8.3	TEST PROCEDURE	97
4.8.4	DEVIATION FROM TEST STANDARD	97
4.8.5	EUT OPERATING CONDITION	97
4.8.6	TEST RESULTS	98
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	104
6.	INFORMATION ON THE TESTING LABORATORIES	105
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	106



A D T

1. CERTIFICATION

PRODUCT: Bluetooth Headset
BRAND NAME: NOKIA
MODEL NO.: BH-806
APPLICANT: Nokia Corporation
TESTED: Oct. 19 ~ 26, 2010
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jessica Cheng , **DATE:** Oct. 28, 2010
(Jessica Cheng / Specialist)

TECHNICAL ACCEPTANCE : Jamison Chan , **DATE:** Oct. 28, 2010
Responsible for RF (Jamison Chan / Supervisor)

APPROVED BY : Ken Liu , **DATE:** Oct. 28, 2010
(Ken Liu / Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meets Class B Limit Minimum passing margin is -18.63dB at 0.279MHz
15.247(a)(1)(iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater (see Note) 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Spec.: max. 21dBm (see Note)	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -6.3dB at 36.22MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	2.41 dB
Radiated emissions	30MHz ~ 1GHz	3.67 dB
	Above 1GHz	2.89 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth Headset
MODEL NO.	BH-806
FCC ID	PYABH-806
POWER SUPPLY	5Vdc from host equipment, 3.7Vdc from battery
MODULATION TYPE	GFSK, $\pi/4$ -DQPSK, 8DPSK
RADIO TECHNOLOGY	FHSS
TRANSFER RATE	1/2/3Mbps
OPERATING FREQUENCY	2402 ~ 2480MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	1.1mW
ANTENNA TYPE	monopole antenna with 3.95dBi gain
ANTENNA CONNECTOR	N/A
I/O PORTS	Refer to user's manual
DATA CABLE	N/A
ASSOCIATED DEVICES	Refer to note 2 as below

NOTE:

1. The EUT is a Bluetooth Headset.

2. The EUT was power supplied from the following items:

Item		Plug	Brand	Model	Cradle	Spec.
Adapter	A	2mm Type	NOKIA	AC-3U	CR-123	AC I/P: 100-240V, 50-60Hz, 100mA DC O/P: 5V, 350mA Non-shielded DC cable (1.8m), AC 2 pin
	B		NOKIA	AC-15U	CR-123	AC I/P: 100-240V, 50-60Hz, 150mA DC O/P: 5V, 800mA Non-shielded DC cable (1.8m), AC 2 pin
	C	USB Type	NOKIA	AC-6U	CR-123 CH-1 (USB port only)	AC I/P: 100-240V, 50-60Hz, 150mA DC O/P: 5V, 550mA Non-shielded DC cable (1.8m), AC 2 pin
	D		NOKIA	AC-10U	CR-123 CH-1 (USB port only)	AC I/P: 100-240V, 50-60Hz, 160mA DC O/P: 5V, 1200mA Non-shielded DC cable (1.8m), AC 2 pin
Cable charger	A	2mm to USB Type	NOKIA	CA-100C	CR-123	Shielded (1.5m)
	B	USB Type	NOKIA	CA-179	CR-123	Shielded (0.8m)
	C		NOKIA	CA-180	CH-1 (USB port only)	Shielded (1.2m)
Battery			NOKIA	-		3.7Vdc

3. The EUT's battery can be charged via USB connector. A computer or charger can be used as charging device. The USB function on this product is for battery charging only, no data transmitting and/or receiving function involved.

4. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:


CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST


For Mode A

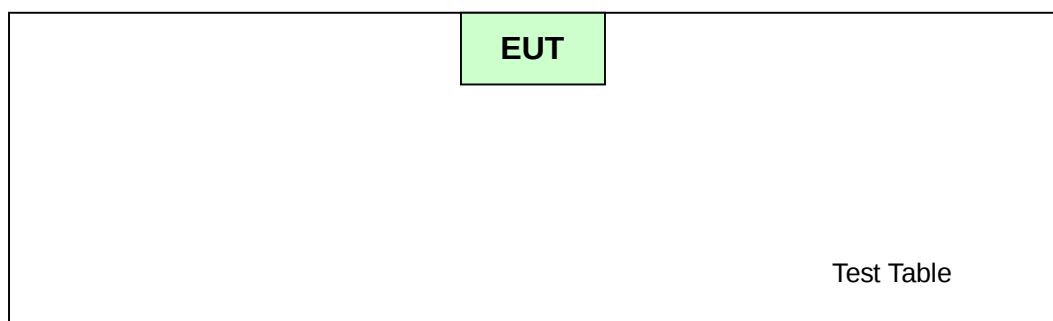

For Mode B

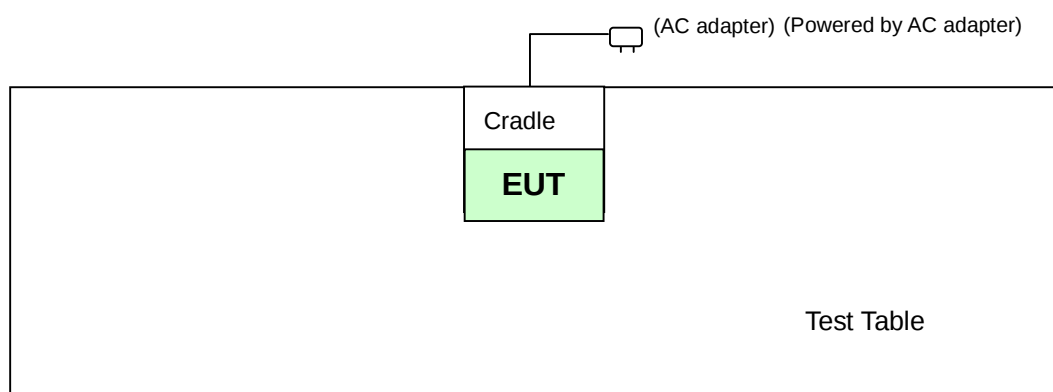

For Mode C

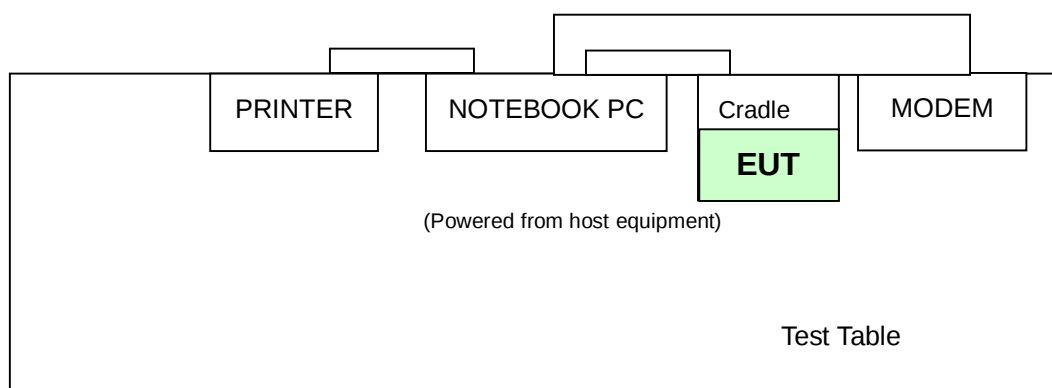

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	Applicable to				Description
	PLC	RE<1G	RE ³ 1G	APCM	
A	Note	√	√	√	Operating Mode (EUT only)
B	√	√	-	-	Charging Mode (EUT with AC adapter A ~ D)
C	√	√	-	-	Charging Mode (EUT link to Notebook via cable A ~ C)

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE³1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE
B	-	-	-	-	-	-
C	-	-	-	-	-	-

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types data rate, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE	AXIS
A	0 to 78	78	FHSS	GFSK	DH5	1	Y
B & C	-	-	-	-	-	-	-

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types data rate, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE	AXIS
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5	1	Y
A	0 to 78	0, 39, 78	FHSS	8DPSK	DH5	3	Y

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types of the antenna and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE
A	0 to 78	0, 78	FHSS	GFSK	DH5	1
A	0 to 78	0, 78	FHSS	8DPSK	DH5	3

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types of the antenna and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5	1
A	0 to 78	0, 39, 78	FHSS	8DPSK	DH5	3

**A D T****TEST CONDITION:**

APPLICABLE TO	EUT CONFIGURE MODE	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	B	26deg. C, 77% RH, 1006hPa	120Vac, 60Hz	Brad Tung
	C	26deg. C, 77% RH, 1006hPa	120Vac, 60Hz (System)	Brad Tung
RE<1G	A	23deg. C, 71% RH, 1019hPa	3.7Vdc	Nick Chen
	B	23deg. C, 71% RH, 1019hPa	120Vac, 60Hz	Nick Chen
	C	23deg. C, 71% RH, 1019hPa	120Vac, 60Hz (System)	Nick Chen
RE ³ 1G	A	23deg. C, 85% RH, 1009hPa	3.7Vdc	Nick Chen
APCM	A	25deg. C, 78% RH, 1009hPa	3.7Vdc	Jun Wu

3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

3.2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	20375526736	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY017054	FCC DoC Approved
3	MODEM	ACEEX	1414	980020520	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100276	Dec. 15, 2009	Dec. 14, 2010
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Nov. 24, 2009	Nov. 23, 2010
LISN With Adapter (for EUT)	AD10	C10Ada-001	Nov. 24, 2009	Nov. 23, 2010
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Nov. 23, 2009	Nov. 22, 2010
Software	ADT_Cond_V7.3.7	NA	NA	NA
Software	ADT_ISN_V7.3.7	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Feb. 23, 2010	Feb. 22, 2011
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Feb. 23, 2010	Feb. 22, 2011

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in Shielded Room No. 10.
 3. The VCCI Site Registration No. C-1852.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

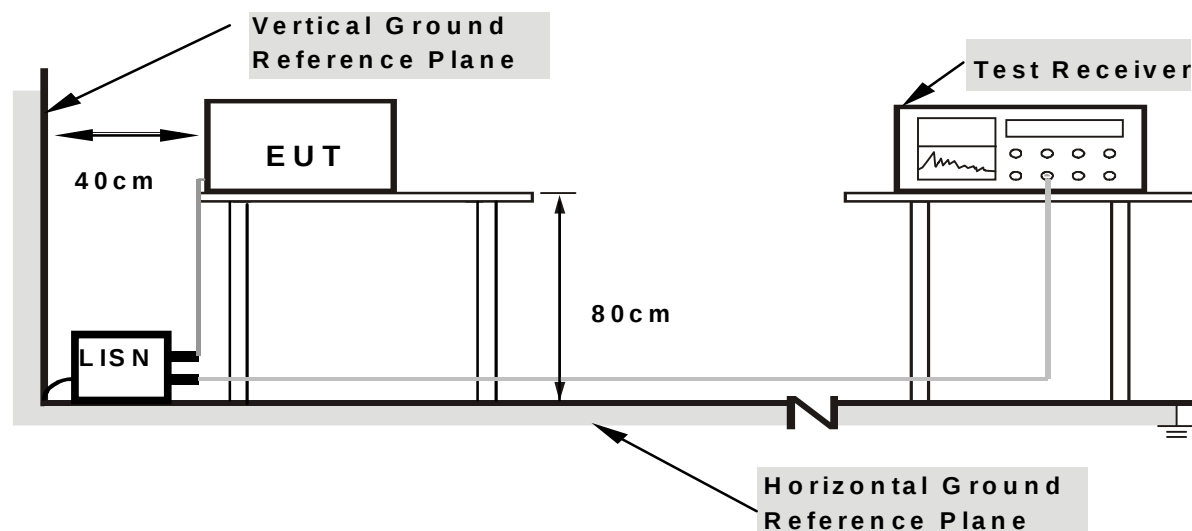

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

For Mode B:

- a. Connected the EUT with AC adapter placed on testing table.
- b. Set the EUT under charging condition.
- c. Steps b-c were repeated.

For Mode C:


- a. Connected the EUT to a notebook placed on a testing table.
- b. Set the EUT under charging condition.
- c. The notebook sent messages to printer and the printer printed them out
- d. The notebook sent messages to modem.
- e. Repeated c ~ e.

4.1.7 TEST RESULTS

TEST MODE	Mode B w. adapter A (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.12	35.22	-	35.34	-	65.18	55.18	-29.84	-
2	0.267	0.15	25.03	-	25.18	-	61.20	51.20	-36.02	-
3	0.459	0.22	20.22	-	20.44	-	56.72	46.72	-36.28	-
4	2.555	0.30	24.13	-	24.43	-	56.00	46.00	-31.57	-
5	3.602	0.34	24.05	-	24.39	-	56.00	46.00	-31.61	-
6	9.035	0.60	17.39	-	17.99	-	60.00	50.00	-42.01	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

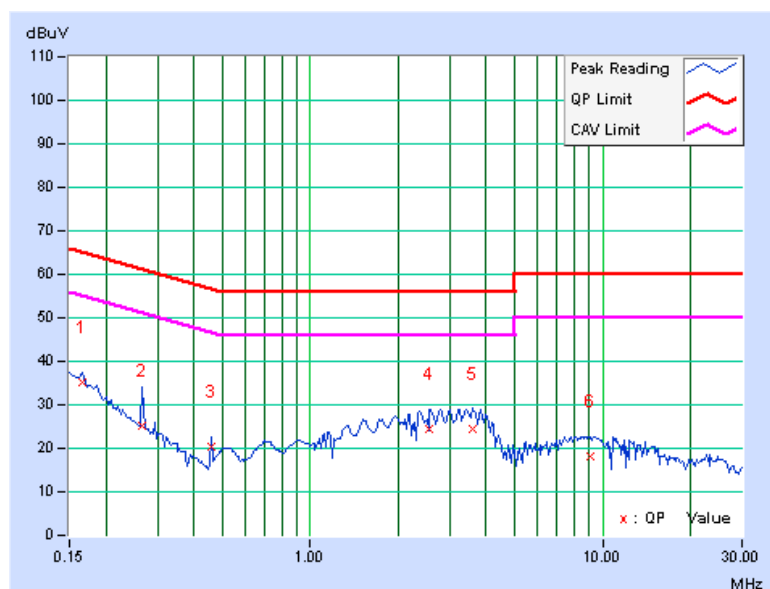

TEST MODE	Mode B w. adapter A (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.09	43.06	-	43.15	-	66.00	56.00	-22.85	-
2	0.236	0.11	32.37	-	32.48	-	62.24	52.24	-29.76	-
3	0.412	0.20	18.16	-	18.36	-	57.61	47.61	-39.25	-
4	2.145	0.25	22.13	-	22.38	-	56.00	46.00	-33.62	-
5	3.988	0.31	23.13	-	23.44	-	56.00	46.00	-32.56	-
6	9.359	0.50	15.51	-	16.01	-	60.00	50.00	-43.99	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

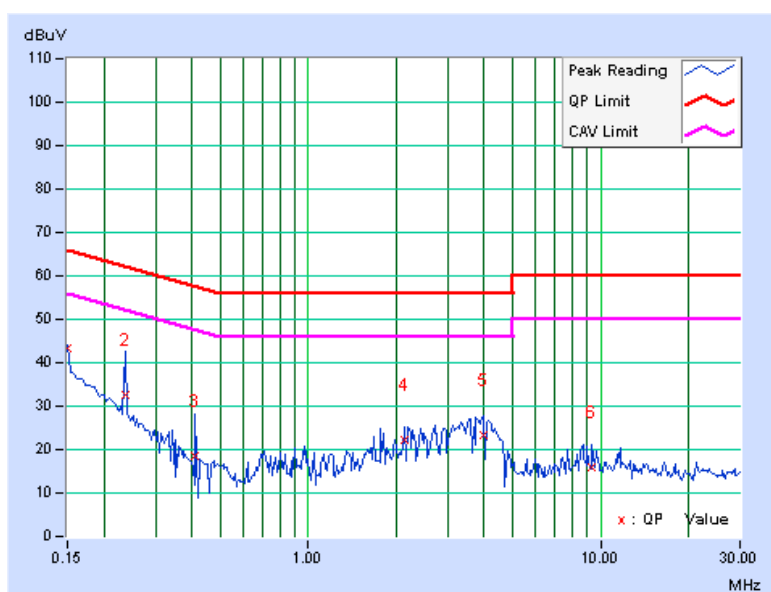

TEST MODE	Mode B w. adapter B (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.12	33.62	-	33.74	-	65.79	55.79	-32.05	-
2	0.396	0.22	29.40	-	29.62	-	57.93	47.93	-28.32	-
3	4.105	0.37	28.66	-	29.03	-	56.00	46.00	-26.97	-
4	4.766	0.40	27.88	-	28.28	-	56.00	46.00	-27.72	-
5	5.586	0.44	25.81	-	26.25	-	60.00	50.00	-33.75	-
6	13.402	0.91	23.51	-	24.42	-	60.00	50.00	-35.58	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

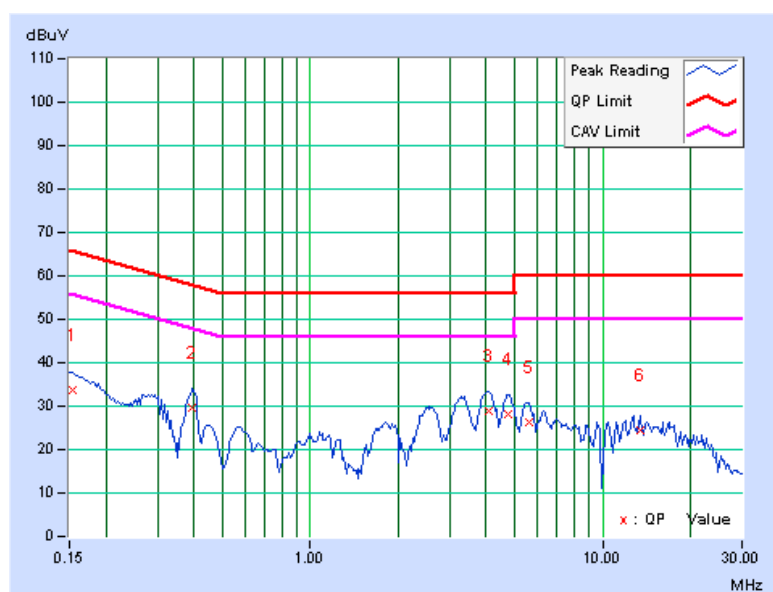

TEST MODE	Mode B w. adapter B (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.151	0.09	33.52	-	33.61	-	65.97	55.97	-32.36	-
2	0.388	0.19	26.83	-	27.02	-	58.10	48.10	-31.08	-
3	3.496	0.29	22.14	-	22.43	-	56.00	46.00	-33.57	-
4	4.164	0.32	24.06	-	24.38	-	56.00	46.00	-31.62	-
5	4.711	0.33	23.78	-	24.11	-	56.00	46.00	-31.89	-
6	5.563	0.36	21.43	-	21.79	-	60.00	50.00	-38.21	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

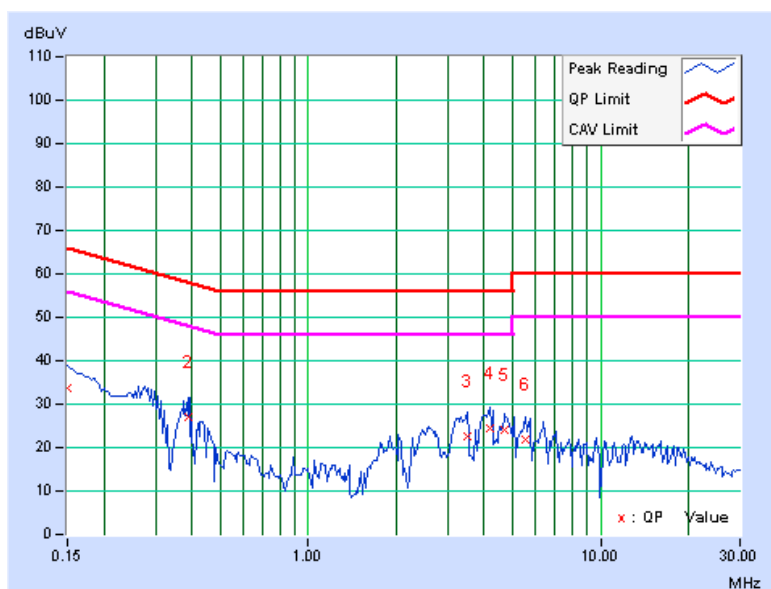

TEST MODE	Mode B w. adapter C (CH-1)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.12	47.07	-	47.19	-	66.00	56.00	-18.81	-
2	0.248	0.14	42.25	-	42.39	-	61.84	51.84	-19.44	-
3	0.713	0.23	28.94	-	29.17	-	56.00	46.00	-26.83	-
4	0.869	0.24	27.50	-	27.74	-	56.00	46.00	-28.26	-
5	3.379	0.34	25.99	-	26.33	-	56.00	46.00	-29.67	-
6	17.836	1.25	21.43	-	22.68	-	60.00	50.00	-37.32	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

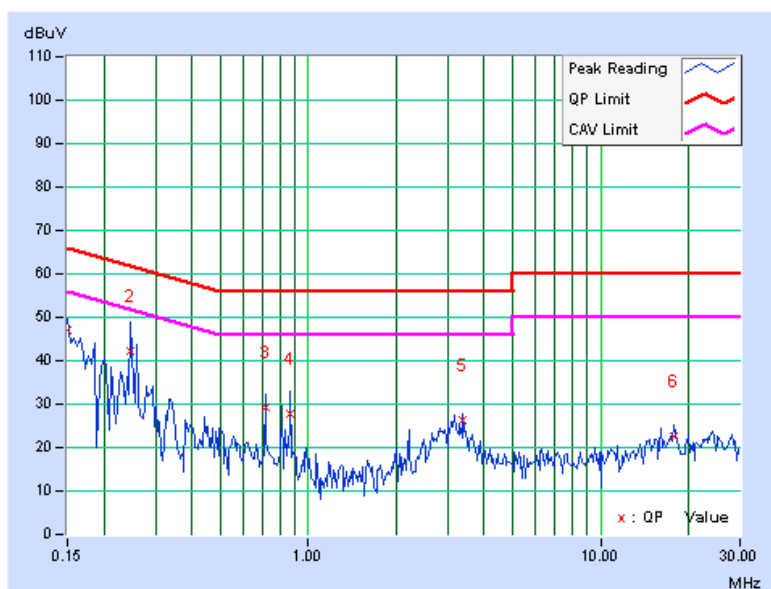

TEST MODE	Mode B w. adapter C (CH-1)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.09	42.46	-	42.55	-	64.43	54.43	-21.88	-
2	0.279	0.13	42.08	-	42.21	-	60.85	50.85	-18.63	-
3	0.455	0.20	32.80	-	33.00	-	56.79	46.79	-23.79	-
4	0.818	0.21	28.04	-	28.25	-	56.00	46.00	-27.75	-
5	3.352	0.29	20.88	-	21.17	-	56.00	46.00	-34.83	-
6	13.281	0.70	18.91	-	19.61	-	60.00	50.00	-40.39	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

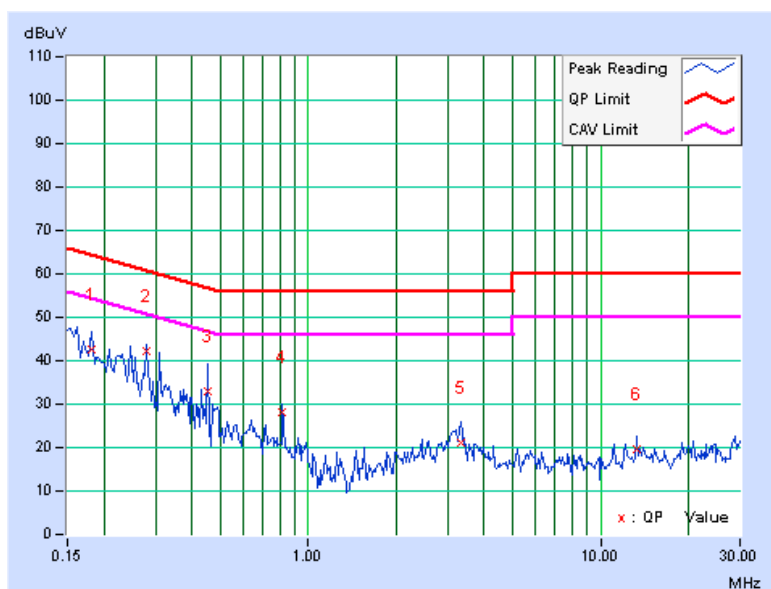

TEST MODE	Mode B w. adapter C (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.12	44.63	-	44.75	-	64.25	54.25	-19.50	-
2	0.220	0.13	39.46	-	39.59	-	62.81	52.81	-23.22	-
3	0.263	0.15	38.23	-	38.38	-	61.33	51.33	-22.95	-
4	0.455	0.22	35.85	-	36.07	-	56.79	46.79	-20.72	-
5	0.685	0.23	32.93	-	33.16	-	56.00	46.00	-22.84	-
6	3.367	0.33	24.88	-	25.21	-	56.00	46.00	-30.79	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

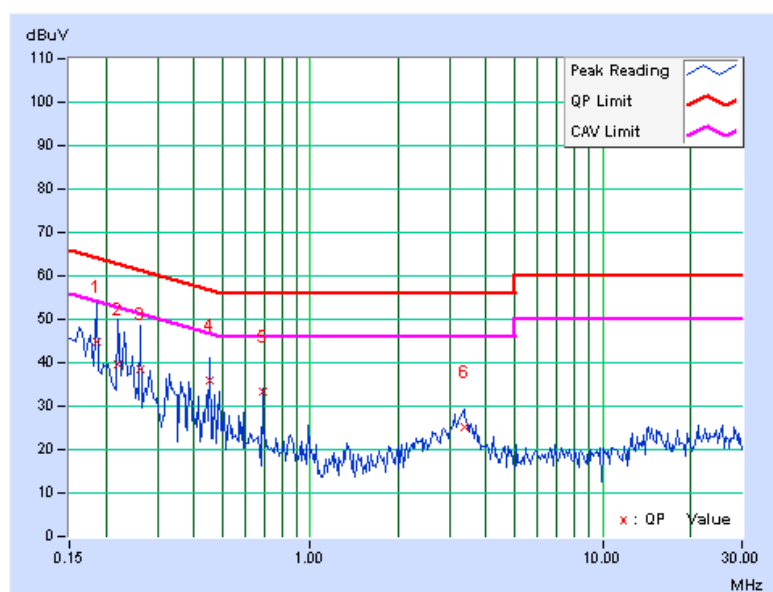

TEST MODE	Mode B w. adapter C (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.09	40.09	-	40.18	-	64.61	54.61	-24.43	-
2	0.384	0.19	29.88	-	30.07	-	58.18	48.18	-28.11	-
3	0.552	0.21	25.51	-	25.72	-	56.00	46.00	-30.28	-
4	0.642	0.21	26.90	-	27.11	-	56.00	46.00	-28.89	-
5	3.336	0.29	21.62	-	21.91	-	56.00	46.00	-34.09	-
6	19.707	1.04	18.00	-	19.04	-	60.00	50.00	-40.96	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

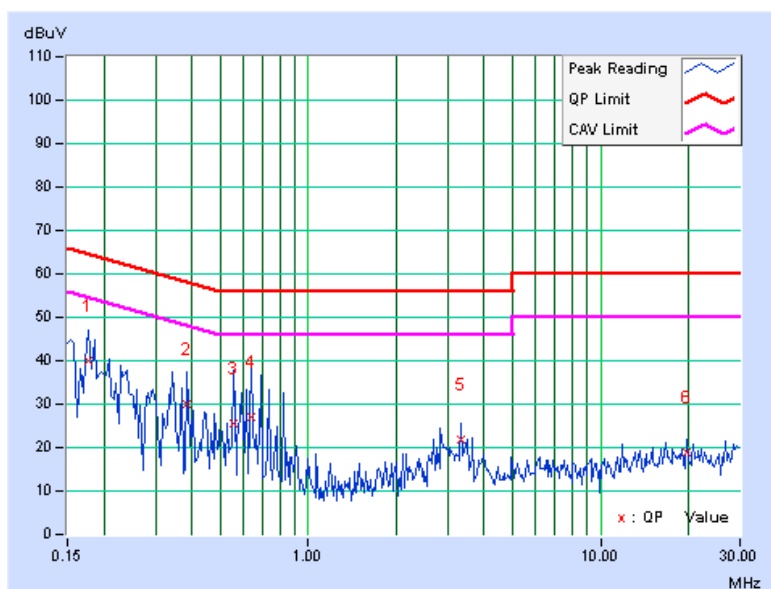

TEST MODE	Mode B w. adapter D (CH-1)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.12	23.62	-	23.74	-	64.25	54.25	-40.51	-
2	0.494	0.22	26.77	-	26.99	-	56.10	46.10	-29.11	-
3	0.697	0.23	16.10	-	16.33	-	56.00	46.00	-39.67	-
4	2.059	0.28	17.12	-	17.40	-	56.00	46.00	-38.60	-
5	3.113	0.32	16.68	-	17.00	-	56.00	46.00	-39.00	-
6	24.410	1.50	9.18	-	10.68	-	60.00	50.00	-49.32	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

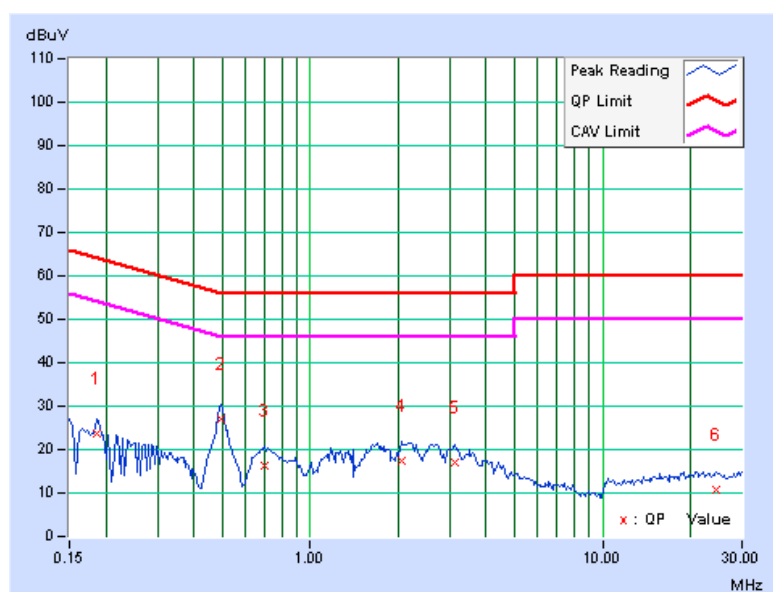

TEST MODE	Mode B w. adapter D (CH-1)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.09	22.04	-	22.13	-	64.25	54.25	-42.12	-
2	0.494	0.20	21.35	-	21.55	-	56.10	46.10	-34.55	-
3	0.689	0.21	16.09	-	16.30	-	56.00	46.00	-39.70	-
4	1.641	0.24	15.06	-	15.30	-	56.00	46.00	-40.70	-
5	3.758	0.30	12.89	-	13.19	-	56.00	46.00	-42.81	-
6	24.516	1.13	8.74	-	9.87	-	60.00	50.00	-50.13	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

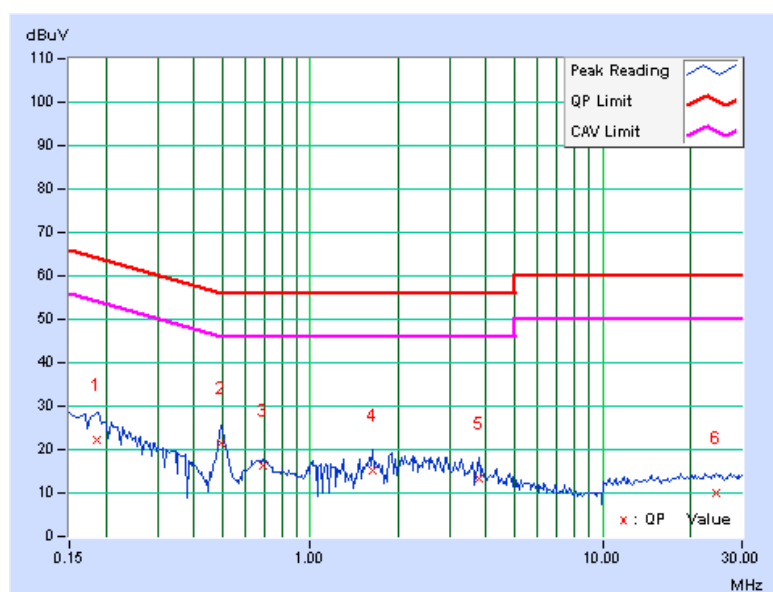

TEST MODE	Mode B w. adapter D (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.12	22.84	-	22.96	-	64.98	54.98	-42.02	-
2	0.494	0.22	26.83	-	27.05	-	56.10	46.10	-29.05	-
3	0.705	0.23	16.00	-	16.23	-	56.00	46.00	-39.77	-
4	2.148	0.29	18.53	-	18.82	-	56.00	46.00	-37.18	-
5	2.684	0.31	17.76	-	18.07	-	56.00	46.00	-37.93	-
6	23.035	1.47	10.14	-	11.61	-	60.00	50.00	-48.39	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

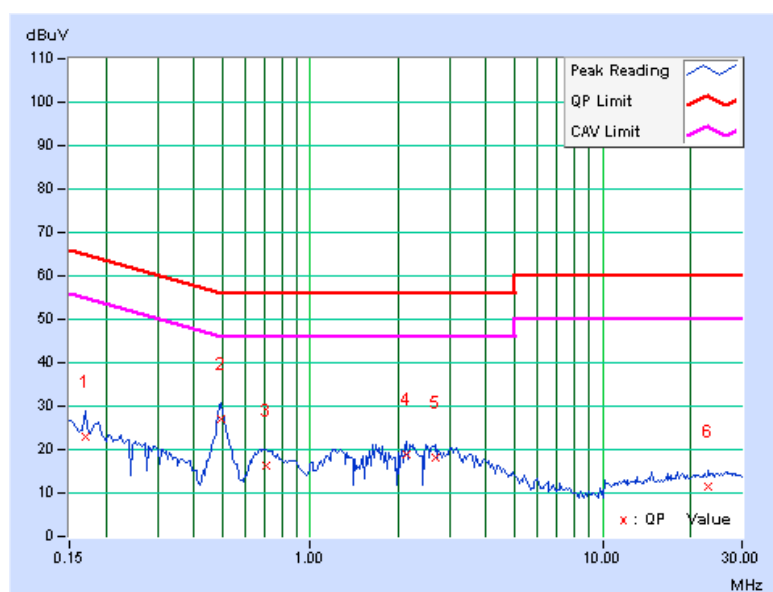

TEST MODE	Mode B w. adapter D (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.09	20.67	-	20.76	-	64.25	54.25	-43.49	-
2	0.494	0.20	20.08	-	20.28	-	56.10	46.10	-35.82	-
3	0.701	0.21	15.27	-	15.48	-	56.00	46.00	-40.52	-
4	2.141	0.25	12.70	-	12.95	-	56.00	46.00	-43.05	-
5	2.586	0.27	13.83	-	14.10	-	56.00	46.00	-41.90	-
6	28.465	1.19	8.01	-	9.20	-	60.00	50.00	-50.80	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

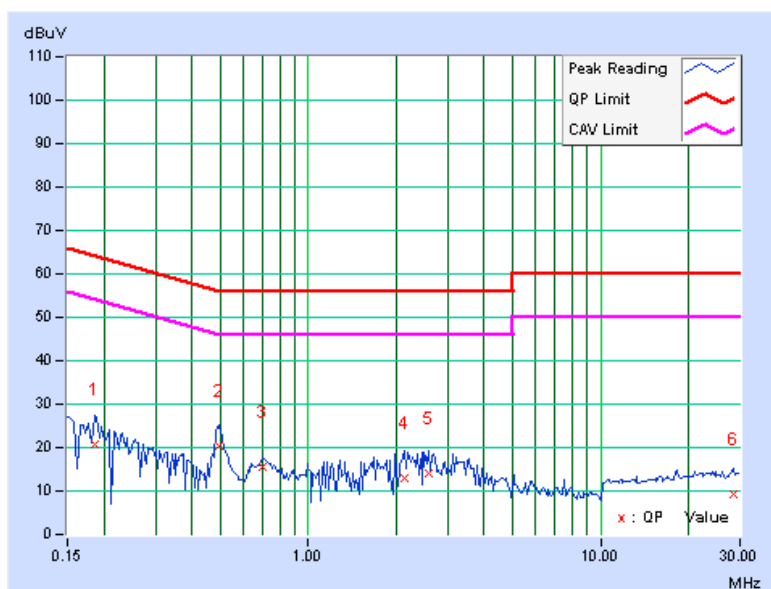

TEST MODE	Mode C w. cable A (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.19	38.83	-	39.02	-	66.00	56.00	-26.98	-
2	0.173	0.19	34.15	-	34.34	-	64.79	54.79	-30.45	-
3	0.838	0.31	29.75	-	30.06	-	56.00	46.00	-25.94	-
4	0.959	0.31	31.23	-	31.54	-	56.00	46.00	-24.46	-
5	8.383	0.55	36.21	-	36.76	-	60.00	50.00	-23.24	-
6	14.383	0.89	28.25	-	29.14	-	60.00	50.00	-30.86	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

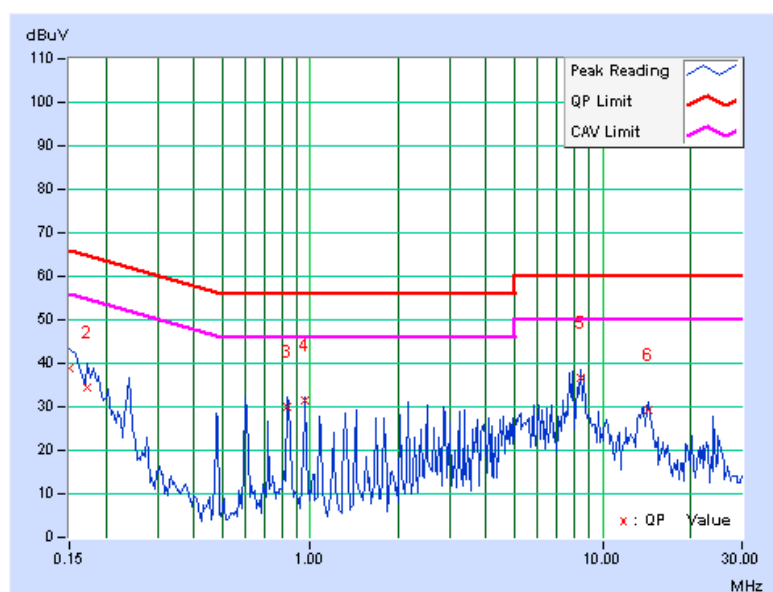

TEST MODE	Mode C w. cable A (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.240	0.30	38.29	-	38.59	-	62.10	52.10	-23.51	-
2	0.361	0.36	26.25	-	26.61	-	58.71	48.71	-32.10	-
3	0.838	0.39	28.82	-	29.21	-	56.00	46.00	-26.79	-
4	1.316	0.40	27.96	-	28.36	-	56.00	46.00	-27.64	-
5	7.949	0.55	36.42	-	36.97	-	60.00	50.00	-23.03	-
6	13.781	0.77	38.47	-	39.24	-	60.00	50.00	-20.76	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

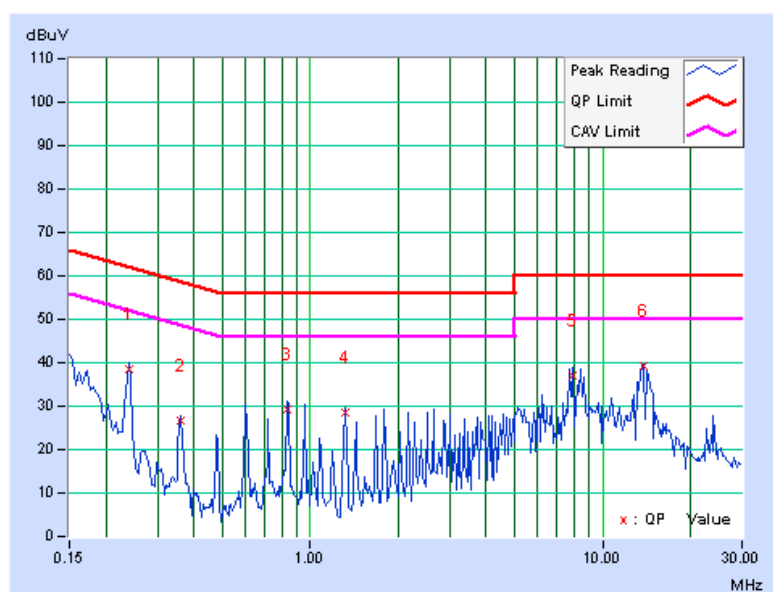

TEST MODE	Mode C w. cable B (CH-1)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.19	40.81	-	41.00	-	66.00	56.00	-25.00	-
2	0.240	0.21	34.40	-	34.61	-	62.10	52.10	-27.49	-
3	0.837	0.31	29.64	-	29.95	-	56.00	46.00	-26.05	-
4	0.959	0.31	31.19	-	31.50	-	56.00	46.00	-24.50	-
5	5.371	0.44	23.75	-	24.19	-	60.00	50.00	-35.81	-
6	8.375	0.55	36.78	-	37.33	-	60.00	50.00	-22.67	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

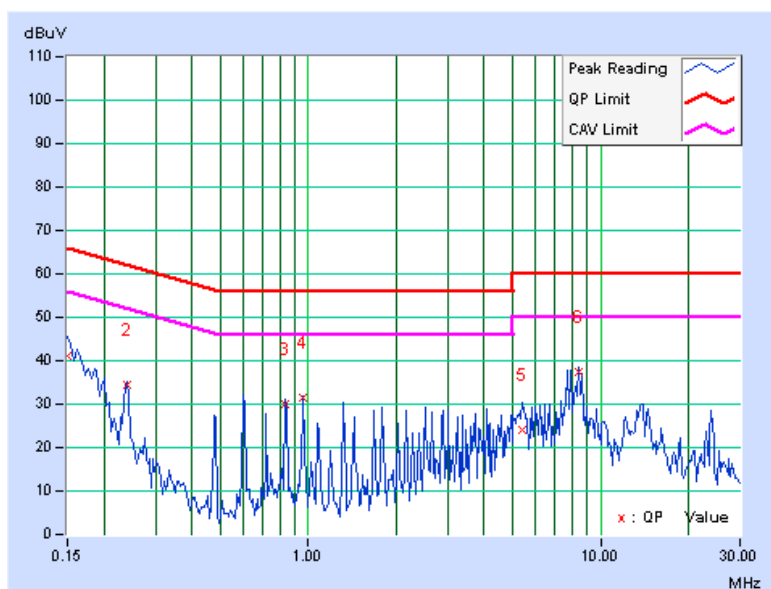

TEST MODE	Mode C w. cable B (CH-1)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.29	41.51	-	41.80	-	65.98	55.98	-24.18	-
2	0.240	0.30	38.05	-	38.35	-	62.10	52.10	-23.75	-
3	0.599	0.38	29.41	-	29.79	-	56.00	46.00	-26.21	-
4	0.959	0.39	29.30	-	29.69	-	56.00	46.00	-26.31	-
5	7.949	0.55	36.37	-	36.92	-	60.00	50.00	-23.08	-
6	13.793	0.77	38.41	-	39.18	-	60.00	50.00	-20.82	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

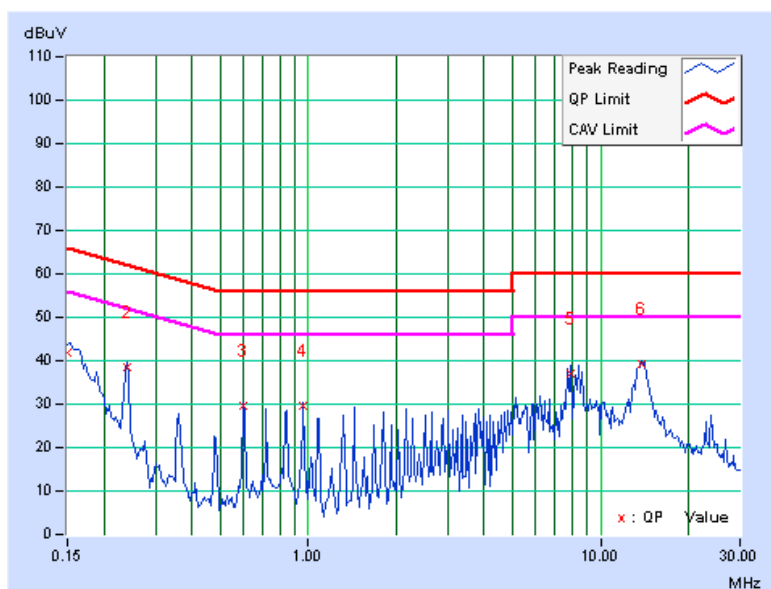

TEST MODE	Mode C w. cable B (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.151	0.19	41.01	-	41.20	-	65.93	55.93	-24.73	-
2	0.240	0.21	34.20	-	34.41	-	62.10	52.10	-27.69	-
3	0.842	0.31	29.81	-	30.12	-	56.00	46.00	-25.88	-
4	0.959	0.31	31.23	-	31.54	-	56.00	46.00	-24.46	-
5	5.395	0.44	29.87	-	30.31	-	60.00	50.00	-29.69	-
6	8.379	0.55	36.90	-	37.45	-	60.00	50.00	-22.55	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

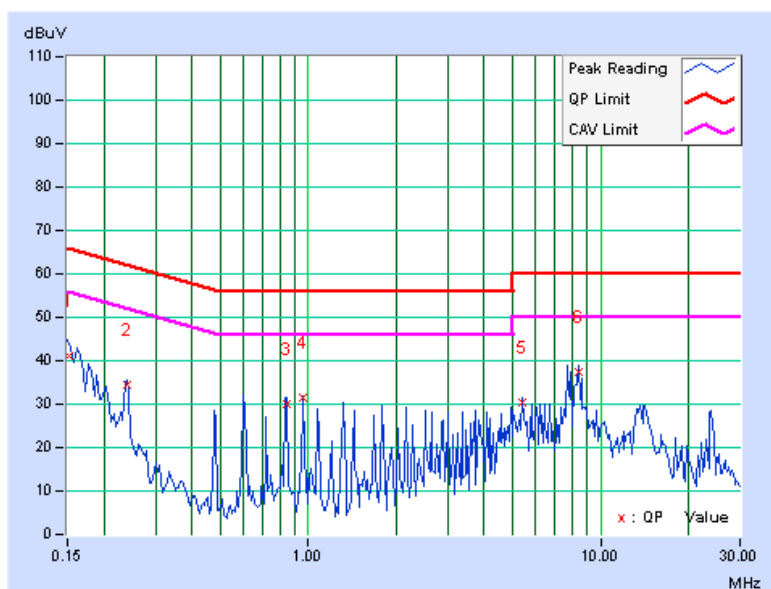

TEST MODE	Mode C w. cable B (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.151	0.29	41.01	-	41.30	-	65.92	55.92	-24.62	-
2	0.240	0.30	38.15	-	38.45	-	62.10	52.10	-23.65	-
3	0.837	0.39	28.17	-	28.56	-	56.00	46.00	-27.44	-
4	2.156	0.41	28.47	-	28.88	-	56.00	46.00	-27.12	-
5	7.949	0.55	36.35	-	36.90	-	60.00	50.00	-23.10	-
6	14.145	0.79	37.77	-	38.56	-	60.00	50.00	-21.44	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

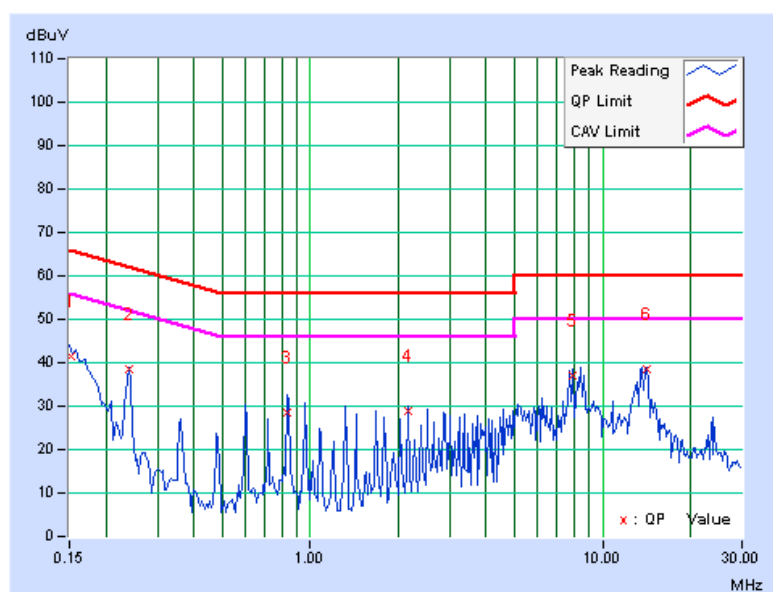

TEST MODE	Mode C w. cable C (CH-1)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.19	41.78	-	41.97	-	66.00	56.00	-24.03	-
2	0.240	0.21	34.30	-	34.51	-	62.10	52.10	-27.59	-
3	0.599	0.30	31.66	-	31.96	-	56.00	46.00	-24.04	-
4	0.959	0.31	30.68	-	30.99	-	56.00	46.00	-25.01	-
5	8.375	0.55	37.09	-	37.64	-	60.00	50.00	-22.36	-
6	13.922	0.86	26.21	-	27.07	-	60.00	50.00	-32.93	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

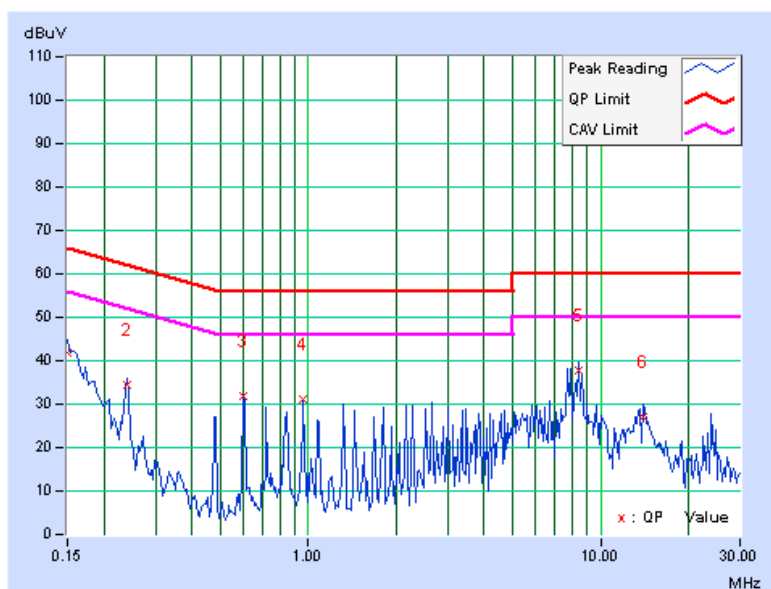

TEST MODE	Mode C w. cable C (CH-1)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.29	42.13	-	42.42	-	65.99	55.99	-23.57	-
2	0.240	0.30	38.11	-	38.41	-	62.10	52.10	-23.69	-
3	1.320	0.40	28.23	-	28.63	-	56.00	46.00	-27.37	-
4	2.520	0.42	26.95	-	27.37	-	56.00	46.00	-28.63	-
5	8.379	0.56	37.33	-	37.89	-	60.00	50.00	-22.11	-
6	13.676	0.77	38.32	-	39.09	-	60.00	50.00	-20.91	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

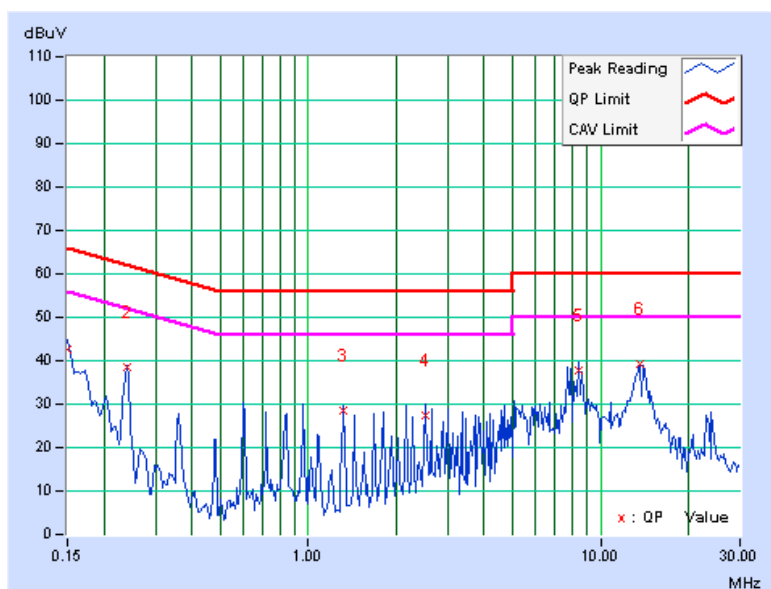

TEST MODE	Mode C w. cable C (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.19	40.93	-	41.12	-	65.99	55.99	-24.87	-
2	0.240	0.21	34.56	-	34.77	-	62.10	52.10	-27.33	-
3	0.599	0.30	31.01	-	31.31	-	56.00	46.00	-24.69	-
4	0.837	0.31	29.06	-	29.37	-	56.00	46.00	-26.63	-
5	6.114	0.47	25.61	-	26.08	-	60.00	50.00	-33.92	-
6	7.945	0.53	35.99	-	36.52	-	60.00	50.00	-23.48	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

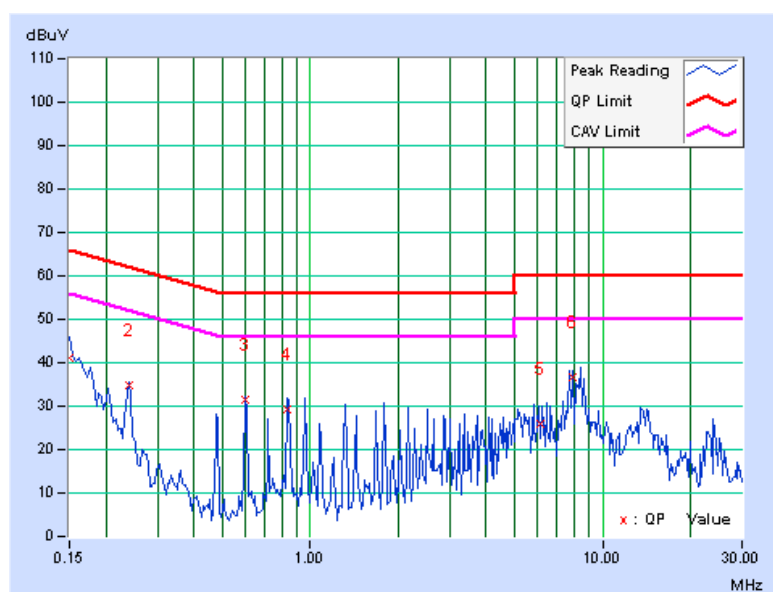

TEST MODE	Mode C w. cable C (CR-123)		
6dB BANDWIDTH	9 kHz	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.151	0.29	41.01	-	41.30	-	65.93	55.93	-24.63	-
2	0.240	0.30	38.23	-	38.53	-	62.10	52.10	-23.57	-
3	0.959	0.39	29.54	-	29.93	-	56.00	46.00	-26.07	-
4	1.798	0.41	29.04	-	29.45	-	56.00	46.00	-26.55	-
5	7.948	0.55	36.45	-	37.00	-	60.00	50.00	-23.00	-
6	13.663	0.76	38.02	-	38.78	-	60.00	50.00	-21.22	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

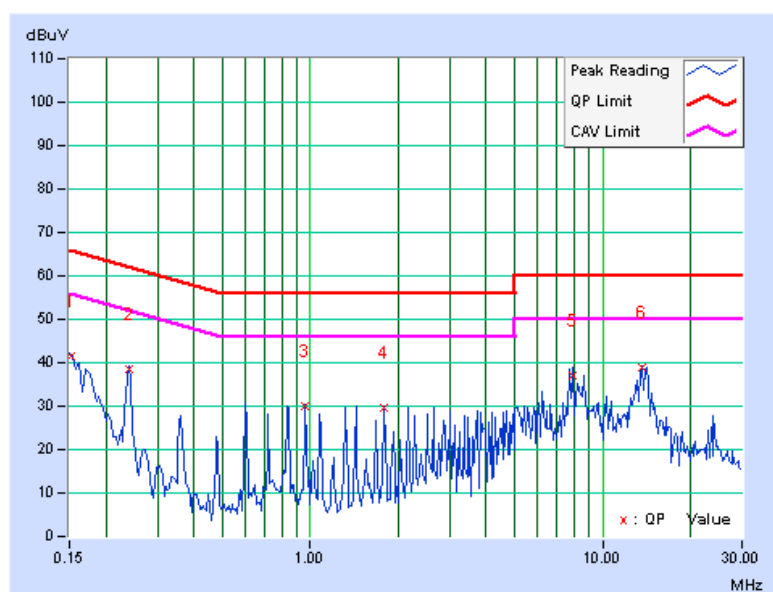

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 06, 2010	May 05, 2011
HP Preamplifier	8449B	3008A01924	Jul. 14, 2010	Jul. 13, 2011
HP Preamplifier	8449B	3008A01292	Jul. 14, 2010	Jul. 13, 2011
ROHDE & SCHWARZ TEST RECEIVER	ESU26	100005	Jun. 10, 2010	Jun. 09, 2011
Schwarzbeck Antenna	VULB 9168	137	Apr. 29, 2010	Apr. 28, 2011
Schwarzbeck Antenna	VHBA 9123	480	Apr. 29, 2010	Apr. 28, 2011
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF102	CABLE-CH6	Aug. 20, 2010	Aug. 19, 2011
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	Apr. 06, 2010	Apr. 05, 2011
EMCO Horn Antenna	3115	6714	Oct. 26, 2010	Oct. 25, 2011
EMCO Horn Antenna	3115	9312-4192	Apr. 23, 2010	Apr. 22, 2011
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

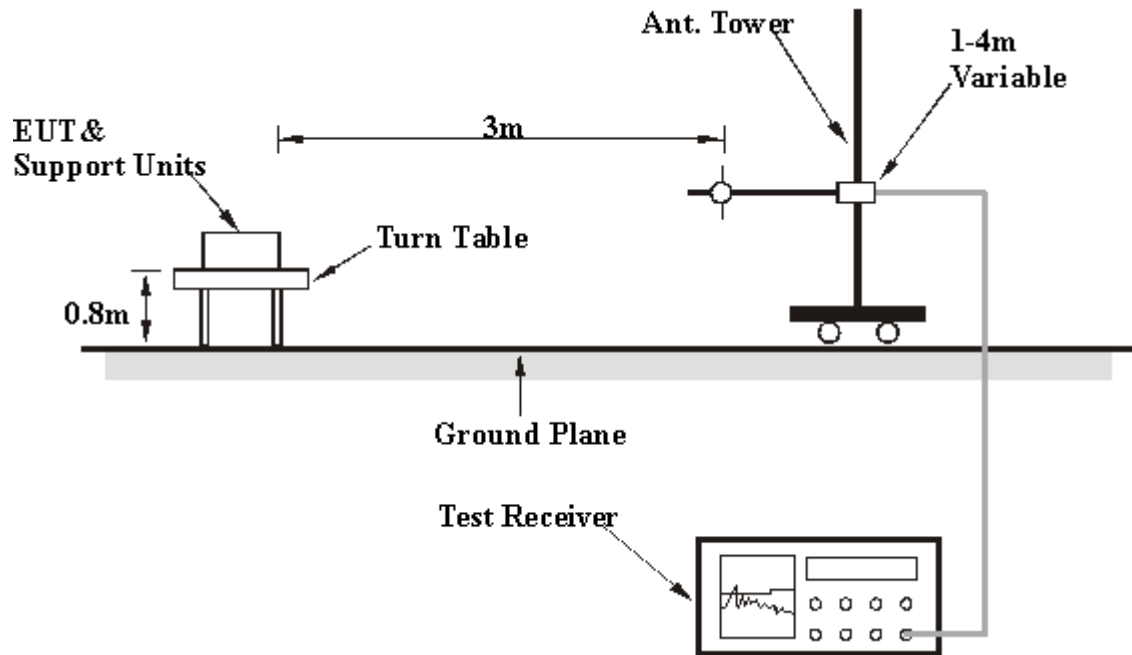

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

For Mode A:

Set the EUT under transmission/receiving condition continuously at specific channel frequency.

For Mode B:

- a. Connected the EUT with AC adapter placed on testing table.
- b. Set the EUT under charging condition.
- c. Steps b-c were repeated.

For Mode C:

- a. Connected the EUT to a notebook placed on a testing table.
- b. Set the EUT under charging condition.
- c. The notebook sent messages to printer and the printer printed them out
- d. The notebook sent messages to modem.
- e. Repeated c ~ e.

4.2.7 TEST RESULTS

GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 85%RH 1009 hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.00 H	88	26.67	32.47
2	2390.00	47.3 AV	54.0	-6.7	1.00 H	88	14.86	32.47
3	#2400.00	46.5 PK	82.0	-35.5	1.00 H	88	13.94	32.51
4	#2400.00	16.4 AV	51.9	-35.5	1.00 H	88	-16.16	32.51
5	*2402.00	102.0 PK			1.00 H	88	69.43	32.52
6	*2402.00	71.9 AV			1.00 H	88	39.33	32.52
7	#3202.00	47.5 PK	82.0	-34.5	1.00 H	294	11.85	35.65
8	#3202.00	40.1 AV	51.9	-11.7	1.00 H	294	4.46	35.65
9	4804.00	57.2 PK	74.0	-16.8	1.00 H	89	17.36	39.85
10	4804.00	27.1 AV	54.0	-26.9	1.00 H	89	-12.74	39.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 85%RH 1009 hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.4 PK	74.0	-14.6	1.00 V	339	26.94	32.47
2	2390.00	47.1 AV	54.0	-6.9	1.00 V	339	14.67	32.47
3	#2400.00	37.3 PK	72.8	-35.5	1.00 V	339	4.78	32.51
4	#2400.00	7.2 AV	42.7	-35.5	1.00 V	339	-25.32	32.51
5	*2402.00	92.8 PK			1.00 V	339	60.27	32.52
6	*2402.00	62.7 AV			1.00 V	339	30.17	32.52
7	#3202.00	46.0 PK	72.8	-26.8	1.03 V	81	10.36	35.65
8	#3202.00	34.6 AV	42.7	-8.1	1.03 V	81	-1.04	35.65
9	4804.00	56.1 PK	74.0	-17.9	1.00 V	343	16.27	39.85
10	4804.00	26.0 AV	54.0	-28.0	1.00 V	343	-13.83	39.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#": The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 85%RH 1009 hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.0 PK			1.01 H	116	70.36	32.66
2	*2441.00	72.9 AV			1.01 H	116	40.26	32.66
3	#3254.00	48.4 PK	83.0	-34.6	1.00 H	294	12.63	35.77
4	#3254.00	40.7 AV	52.9	-12.2	1.00 H	294	4.94	35.77
5	4882.00	56.6 PK	74.0	-17.4	1.00 H	110	16.48	40.11
6	4882.00	26.5 AV	54.0	-27.5	1.00 H	110	-13.62	40.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	93.3 PK			1.00 V	30	60.66	32.66
2	*2441.00	63.2 AV			1.00 V	30	30.56	32.66
3	#3254.00	46.1 PK	73.3	-27.2	1.00 V	95	10.35	35.77
4	#3254.00	35.0 AV	43.2	-8.2	1.00 V	95	-0.75	35.77
5	4882.00	54.8 PK	74.0	-19.2	1.00 V	100	14.65	40.11
6	4882.00	24.7 AV	54.0	-29.3	1.00 V	100	-15.45	40.11

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#":The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 85%RH 1009 hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	101.1 PK			1.00 H	67	68.32	32.80
2	*2480.00	71.0 AV			1.00 H	67	38.22	32.80
3	2483.50	41.8 PK	74.0	-32.2	1.00 H	67	9.01	32.81
4	2483.50	11.7 AV	54.0	-42.3	1.00 H	67	-21.09	32.81
5	#3306.00	47.2 PK	81.1	-34.0	1.00 H	55	11.27	35.88
6	#3306.00	34.3 AV	51.0	-16.8	1.00 H	55	-1.62	35.88
7	4960.00	57.4 PK	74.0	-16.6	1.02 H	293	17.03	40.34
8	4960.00	27.3 AV	54.0	-26.7	1.02 H	293	-13.07	40.34
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.7 PK			1.19 V	3	58.86	32.80
2	*2480.00	61.6 AV			1.19 V	3	28.76	32.80
3	2483.50	32.4 PK	74.0	-41.6	1.19 V	3	-0.45	32.81
4	2483.50	2.3 AV	54.0	-51.7	1.19 V	3	-30.55	32.81
5	#3306.00	47.1 PK	71.7	-24.6	1.04 V	334	11.21	35.88
6	#3306.00	33.4 AV	41.6	-8.2	1.04 V	334	-2.48	35.88
7	4960.00	54.6 PK	74.0	-19.4	1.03 V	17	14.26	40.34
8	4960.00	24.5 AV	54.0	-29.5	1.03 V	17	-15.84	40.34

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#":The radiated frequency is out the restricted band.

8DPSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 85%RH 1009 hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.05 H	296	27.87	32.47
2	2390.00	47.5 AV	54.0	-6.5	1.05 H	296	15.02	32.47
3	#2400.00	53.2 PK	85.2	-32.0	1.05 H	296	20.66	32.51
4	#2400.00	23.1 AV	55.1	-32.0	1.05 H	296	-9.44	32.51
5	*2402.00	105.2 PK			1.05 H	296	72.63	32.52
6	*2402.00	75.1 AV			1.05 H	296	42.53	32.52
7	#3202.00	48.7 PK	85.2	-36.5	1.00 H	290	13.04	35.65
8	#3202.00	40.2 AV	55.1	-14.9	1.00 H	290	4.54	35.65
9	4804.00	61.5 PK	74.0	-12.5	1.08 H	216	21.65	39.85
10	4804.00	31.4 AV	54.0	-22.6	1.08 H	216	-8.45	39.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#": The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 85%RH 1009 hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.0 PK	74.0	-15.0	1.25 V	26	26.52	32.47
2	2390.00	47.1 AV	54.0	-6.9	1.25 V	26	14.63	32.47
3	#2400.00	44.0 PK	76.0	-32.0	1.25 V	26	11.46	32.51
4	#2400.00	13.9 AV	45.9	-32.0	1.25 V	26	-18.64	32.51
5	*2402.00	96.0 PK			1.25 V	26	63.43	32.52
6	*2402.00	65.9 AV			1.25 V	26	33.33	32.52
7	#3202.00	45.2 PK	76.0	-30.7	1.00 V	270	9.56	35.65
8	#3202.00	34.3 AV	45.9	-11.6	1.00 V	270	-1.36	35.65
9	4804.00	56.1 PK	74.0	-17.9	1.00 V	15	16.25	39.85
10	4804.00	26.0 AV	54.0	-28.0	1.00 V	15	-13.85	39.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 85%RH 1009 hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	106.1 PK			1.03 H	298	73.39	32.66
2	*2441.00	76.0 AV			1.03 H	298	43.29	32.66
3	#3254.00	48.0 PK	86.1	-38.1	1.00 H	294	12.21	35.77
4	#3254.00	39.9 AV	56.0	-16.1	1.00 H	294	4.13	35.77
5	4882.00	60.7 PK	74.0	-13.3	1.02 H	292	20.58	40.11
6	4882.00	30.6 AV	54.0	-23.4	1.02 H	292	-9.52	40.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	95.5 PK			1.23 V	28	62.85	32.66
2	*2441.00	65.4 AV			1.23 V	28	32.75	32.66
3	#3254.00	46.1 PK	75.5	-29.4	1.08 V	270	10.35	35.77
4	#3254.00	34.1 AV	45.4	-11.3	1.08 V	270	-1.67	35.77
5	4882.00	56.4 PK	74.0	-17.6	1.09 V	353	16.25	40.11
6	4882.00	26.3 AV	54.0	-27.7	1.09 V	353	-13.85	40.11

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#": The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 85%RH 1009 hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	104.5 PK			1.02 H	294	71.69	32.80
2	*2480.00	74.4 AV			1.02 H	294	41.59	32.80
3	2483.50	47.9 PK	74.0	-26.1	1.02 H	294	15.08	32.81
4	2483.50	17.8 AV	54.0	-36.2	1.02 H	294	-15.02	32.81
5	#3306.00	47.7 PK	84.5	-36.8	1.00 H	293	11.81	35.88
6	#3306.00	38.1 AV	54.4	-16.3	1.00 H	293	2.19	35.88
7	4960.00	59.4 PK	74.0	-14.6	1.03 H	299	19.06	40.34
8	4960.00	29.3 AV	54.0	-24.7	1.03 H	299	-11.04	40.34
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	93.7 PK			1.18 V	15	60.89	32.80
2	*2480.00	63.6 AV			1.18 V	15	30.79	32.80
3	2483.50	37.1 PK	74.0	-36.9	1.18 V	15	4.28	32.81
4	2483.50	7.0 AV	54.0	-47.0	1.18 V	15	-25.82	32.81
5	#3306.00	47.2 PK	73.7	-26.5	1.00 V	266	11.28	35.88
6	#3306.00	34.3 AV	43.6	-9.3	1.00 V	266	-1.62	35.88
7	4960.00	53.5 PK	74.0	-20.5	1.00 V	88	13.12	40.34
8	4960.00	23.4 AV	54.0	-30.6	1.00 V	88	-16.98	40.34

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. “#”: The radiated frequency is out the restricted band.



A D T

BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.76	24.6 QP	40.0	-15.4	1.07 H	139	11.09	13.54
2	62.64	21.3 QP	40.0	-18.7	1.13 H	226	8.07	13.21
3	605.16	33.1 QP	46.0	-12.9	1.32 H	169	9.75	23.38
4	835.22	24.7 QP	46.0	-21.3	1.22 H	331	-2.13	26.87
5	888.08	25.8 QP	46.0	-20.2	1.06 H	10	-1.96	27.73
6	936.27	26.3 QP	46.0	-19.7	1.27 H	10	-2.09	28.40
7	950.26	27.2 QP	46.0	-18.8	1.00 H	178	-1.38	28.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.64	25.2 QP	40.0	-14.8	1.28 V	193	11.97	13.21
2	107.72	27.2 QP	43.5	-16.3	1.27 V	238	16.90	10.34
3	451.27	29.2 QP	46.0	-16.8	1.15 V	19	9.93	19.29
4	727.96	31.5 QP	46.0	-14.5	1.03 V	22	6.27	25.23
5	766.83	28.7 QP	46.0	-17.3	1.42 V	139	2.91	25.77
6	787.04	30.2 QP	46.0	-15.8	1.32 V	133	4.14	26.05
7	853.88	28.2 QP	46.0	-17.8	1.00 V	19	0.95	27.20

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode B w. adapter A (CR-123)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.66	32.7 QP	40.0	-7.3	1.14 H	190	19.91	12.81
2	765.27	25.0 QP	46.0	-21.1	1.26 H	79	-0.79	25.74
3	793.25	24.7 QP	46.0	-21.3	1.05 H	178	-1.47	26.14
4	825.90	25.4 QP	46.0	-20.6	1.38 H	127	-1.28	26.70
5	875.64	25.4 QP	46.0	-20.6	1.07 H	292	-2.17	27.54
6	900.51	26.5 QP	46.0	-19.5	1.13 H	133	-1.42	27.92
7	931.60	26.2 QP	46.0	-19.8	1.02 H	295	-2.12	28.33
8	944.04	26.5 QP	46.0	-19.5	1.00 H	277	-2.00	28.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.66	32.5 QP	40.0	-7.5	1.05 V	172	19.72	12.81
2	85.96	24.7 QP	40.0	-15.3	1.11 V	13	15.78	8.91
3	791.70	24.6 QP	46.0	-21.4	1.03 V	271	-1.49	26.11
4	858.54	25.7 QP	46.0	-20.3	1.08 V	319	-1.56	27.28
5	902.07	26.9 QP	46.0	-19.1	1.25 V	295	-1.03	27.94
6	956.47	26.8 QP	46.0	-19.2	1.26 V	85	-1.86	28.65

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode B w. adapter B (CR-123)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.55	27.8 QP	40.0	-12.3	1.27 H	226	15.51	12.24
2	67.31	22.4 QP	40.0	-17.6	1.32 H	277	9.83	12.61
3	698.43	24.2 QP	46.0	-21.8	1.07 H	208	-0.65	24.82
4	765.27	24.2 QP	46.0	-21.8	1.53 H	325	-1.57	25.74
5	783.93	24.2 QP	46.0	-21.8	1.27 H	133	-1.78	26.01
6	853.88	25.7 QP	46.0	-20.3	1.23 H	10	-1.54	27.20
7	917.61	26.7 QP	46.0	-19.3	1.00 H	235	-1.42	28.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.65	31.9 QP	40.0	-8.1	1.12 V	10	18.12	13.80
2	64.20	26.3 QP	40.0	-13.7	1.27 V	352	13.30	13.01
3	805.69	24.7 QP	46.0	-21.3	1.02 V	256	-1.60	26.33
4	827.45	25.7 QP	46.0	-20.3	1.32 V	271	-1.04	26.73
5	866.31	25.4 QP	46.0	-20.6	1.18 V	43	-2.01	27.39
6	905.18	26.4 QP	46.0	-19.6	1.03 V	10	-1.61	27.98
7	930.05	26.8 QP	46.0	-19.2	1.00 V	202	-1.52	28.31

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode B w. adapter C (CH-1)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	65.75	25.2 QP	40.0	-14.8	1.02 H	145	12.42	12.81
2	777.71	24.1 QP	46.0	-21.9	1.11 H	241	-1.78	25.92
3	791.70	24.4 QP	46.0	-21.6	1.07 H	241	-1.71	26.11
4	839.89	24.8 QP	46.0	-21.2	1.03 H	277	-2.13	26.96
5	874.09	26.0 QP	46.0	-20.0	1.15 H	292	-1.49	27.51
6	906.73	26.2 QP	46.0	-19.8	1.36 H	271	-1.79	28.00
7	931.60	26.2 QP	46.0	-19.9	1.00 H	292	-2.18	28.33
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.22	33.7 QP	40.0	-6.3	1.24 V	250	20.71	13.03
2	64.20	28.2 QP	40.0	-11.8	1.11 V	262	15.15	13.01
3	801.03	24.1 QP	46.0	-21.9	1.07 V	58	-2.11	26.25
4	825.90	26.2 QP	46.0	-19.8	1.09 V	262	-0.52	26.70
5	850.77	25.5 QP	46.0	-20.5	1.11 V	304	-1.70	27.16
6	889.63	26.1 QP	46.0	-19.9	1.23 V	337	-1.63	27.75
7	956.47	26.6 QP	46.0	-19.4	1.00 V	184	-2.08	28.65

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode B w. adapter C (CR-123)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.22	30.0 QP	40.0	-10.0	1.07 H	133	16.95	13.03
2	759.05	24.5 QP	46.0	-21.5	1.11 H	7	-1.17	25.66
3	799.47	24.6 QP	46.0	-21.4	1.36 H	313	-1.64	26.22
4	841.44	25.6 QP	46.0	-20.4	1.09 H	10	-1.37	26.99
5	858.54	25.7 QP	46.0	-20.3	1.08 H	49	-1.60	27.28
6	931.60	26.4 QP	46.0	-19.6	1.12 H	10	-1.97	28.33
7	950.26	26.9 QP	46.0	-19.1	1.00 H	145	-1.66	28.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.22	33.4 QP	40.0	-6.6	1.18 V	10	20.34	13.03
2	65.75	20.7 QP	40.0	-19.3	1.26 V	229	7.87	12.81
3	698.43	24.4 QP	46.0	-21.6	1.04 V	196	-0.38	24.82
4	847.66	25.9 QP	46.0	-20.1	1.07 V	112	-1.20	27.10
5	919.17	26.9 QP	46.0	-19.1	1.22 V	280	-1.28	28.17
6	958.03	26.9 QP	46.0	-19.1	1.00 V	31	-1.74	28.67

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode B w. adapter D (CH-1)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.11	30.2 QP	40.0	-9.8	1.17 H	67	17.69	12.52
2	776.15	24.6 QP	46.0	-21.4	1.05 H	4	-1.31	25.90
3	813.46	25.0 QP	46.0	-21.0	1.23 H	10	-1.44	26.48
4	861.65	26.0 QP	46.0	-20.0	1.28 H	310	-1.33	27.32
5	914.50	27.5 QP	46.0	-18.5	1.13 H	10	-0.58	28.10
6	951.81	26.5 QP	46.0	-19.5	1.00 H	10	-2.13	28.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.65	31.8 QP	40.0	-8.3	1.02 V	124	17.95	13.80
2	73.53	27.2 QP	40.0	-12.8	1.37 V	343	15.89	11.31
3	707.76	24.2 QP	46.0	-21.8	1.28 V	103	-0.78	24.95
4	829.01	24.8 QP	46.0	-21.2	1.11 V	232	-2.00	26.76
5	869.42	25.1 QP	46.0	-20.9	1.29 V	55	-2.38	27.44
6	897.40	26.2 QP	46.0	-19.9	1.24 V	10	-1.72	27.87
7	919.17	26.4 QP	46.0	-19.6	1.00 V	331	-1.81	28.17

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode B w. adapter D (CR-123)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.66	29.3 QP	40.0	-10.7	1.12 H	313	16.53	12.81
2	68.86	20.5 QP	40.0	-19.5	1.27 H	103	8.11	12.41
3	811.91	24.4 QP	46.0	-21.6	1.03 H	10	-2.04	26.45
4	846.11	25.7 QP	46.0	-20.4	1.13 H	127	-1.42	27.07
5	898.96	25.8 QP	46.0	-20.2	1.07 H	229	-2.11	27.89
6	919.17	26.9 QP	46.0	-19.1	1.28 H	10	-1.29	28.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.33	31.1 QP	40.0	-9.0	1.18 V	13	17.63	13.42
2	71.97	22.3 QP	40.0	-17.7	1.26 V	151	10.57	11.73
3	777.71	24.2 QP	46.0	-21.8	1.00 V	247	-1.74	25.92
4	801.03	24.7 QP	46.0	-21.3	1.01 V	67	-1.52	26.25
5	863.21	26.3 QP	46.0	-19.7	1.30 V	178	-1.03	27.35
6	905.18	26.2 QP	46.0	-19.8	1.23 V	283	-1.77	27.98
7	959.58	26.6 QP	46.0	-19.4	1.03 V	295	-2.10	28.69

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER (SYSTEM)	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode C w. cable A (CR-123)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.10	31.9 QP	40.0	-8.1	1.14 H	259	17.77	14.11
2	67.31	32.3 QP	40.0	-7.7	1.32 H	232	19.71	12.61
3	316.03	35.0 QP	46.0	-11.0	1.07 H	184	18.77	16.20
4	399.97	35.2 QP	46.0	-10.8	1.28 H	298	16.80	18.41
5	451.27	37.9 QP	46.0	-8.2	1.52 H	112	18.56	19.29
6	667.34	37.3 QP	46.0	-8.7	1.00 H	52	12.99	24.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.10	32.3 QP	40.0	-7.7	1.07 V	49	18.16	14.11
2	67.31	32.1 QP	40.0	-7.9	1.11 V	250	19.49	12.61
3	126.38	36.1 QP	43.5	-7.4	1.34 V	148	23.14	12.97
4	162.13	36.8 QP	43.5	-6.7	1.08 V	127	22.13	14.71
5	316.03	34.9 QP	46.0	-11.1	1.03 V	220	18.73	16.20
6	451.27	38.0 QP	46.0	-8.0	1.05 V	145	18.71	19.29
7	902.07	34.7 QP	46.0	-11.3	1.11 V	292	6.75	27.94

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER (SYSTEM)	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode C w. cable B (CH-1)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	160.58	34.5 QP	43.5	-9.0	1.19 H	253	19.60	14.94
2	193.22	33.8 QP	43.5	-9.7	1.28 H	112	22.54	11.29
3	235.19	34.4 QP	46.0	-11.7	1.31 H	145	21.47	12.88
4	266.28	34.8 QP	46.0	-11.2	1.07 H	280	20.44	14.37
5	316.03	34.3 QP	46.0	-11.7	1.02 H	115	18.08	16.20
6	371.99	37.3 QP	46.0	-8.7	1.05 H	13	19.63	17.67
7	867.87	34.5 QP	46.0	-11.5	1.17 H	358	7.08	27.42
8	902.07	35.1 QP	46.0	-11.0	1.03 H	10	7.11	27.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	67.31	31.0 QP	40.0	-9.0	1.07 V	226	18.42	12.61
2	107.72	34.2 QP	43.5	-9.3	1.22 V	25	23.89	10.34
3	165.24	37.1 QP	43.5	-6.4	1.03 V	88	22.83	14.26
4	316.03	32.2 QP	46.0	-13.9	1.07 V	178	15.95	16.20
5	451.27	38.9 QP	46.0	-7.1	1.06 V	133	19.57	19.29
6	679.78	35.5 QP	46.0	-10.5	1.11 V	112	10.94	24.53

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER (SYSTEM)	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode C w. cable B (CR-123)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.88	30.8 QP	40.0	-9.2	1.04 H	109	17.08	13.69
2	67.31	31.8 QP	40.0	-8.2	1.02 H	253	19.15	12.61
3	117.05	34.7 QP	43.5	-8.8	1.00 H	202	22.91	11.81
4	159.02	35.3 QP	43.5	-8.2	1.17 H	172	20.37	14.89
5	316.03	35.3 QP	46.0	-10.7	1.24 H	196	19.08	16.20
6	451.27	38.9 QP	46.0	-7.1	1.32 H	157	19.61	19.29
7	665.79	39.5 QP	46.0	-6.5	1.00 H	142	15.20	24.32
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.88	30.8 QP	40.0	-9.2	1.12 V	49	17.10	13.69
2	67.31	30.9 QP	40.0	-9.1	1.07 V	223	18.28	12.61
3	107.72	33.5 QP	43.5	-10.0	1.09 V	10	23.14	10.34
4	316.03	35.4 QP	46.0	-10.7	1.26 V	181	19.15	16.20
5	455.93	38.9 QP	46.0	-7.1	1.24 V	118	19.44	19.44
6	532.10	35.3 QP	46.0	-10.7	1.33 V	76	13.61	21.68
7	665.79	38.2 QP	46.0	-7.8	1.00 V	82	13.85	24.32

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER (SYSTEM)	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode C w. cable C (CH-1)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	73.53	32.0 QP	40.0	-8.0	1.05 H	163	20.68	11.31
2	127.93	31.7 QP	43.5	-11.8	1.11 H	64	18.52	13.15
3	166.79	32.0 QP	43.5	-11.5	1.32 H	250	17.96	14.04
4	194.78	34.8 QP	43.5	-8.7	1.07 H	205	23.60	11.21
5	455.93	34.4 QP	46.0	-11.6	1.18 H	193	14.92	19.44
6	867.87	34.0 QP	46.0	-12.0	1.02 H	10	6.62	27.42
7	902.07	36.4 QP	46.0	-9.6	1.00 H	331	8.50	27.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.54	31.2 QP	40.0	-8.8	1.07 V	250	16.83	14.41
2	106.17	34.7 QP	43.5	-8.9	1.22 V	22	24.56	10.09
3	159.02	36.1 QP	43.5	-7.4	1.35 V	199	21.20	14.89
4	193.22	32.3 QP	43.5	-11.2	1.17 V	166	21.00	11.29
5	316.03	34.2 QP	46.0	-11.8	1.02 V	205	17.96	16.20
6	451.27	36.3 QP	46.0	-9.8	1.03 V	145	16.96	19.29
7	533.65	34.5 QP	46.0	-11.5	1.00 V	286	12.77	21.71

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER (SYSTEM)	120Vac, 60Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1019 hPa	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode C w. cable C (CR-123)	TESTED BY	Nick Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.54	31.8 QP	40.0	-8.3	1.07 H	37	17.34	14.41
2	120.16	36.2 QP	43.5	-7.4	1.11 H	193	23.86	12.29
3	213.43	34.6 QP	43.5	-8.9	1.28 H	310	22.96	11.68
4	316.03	35.7 QP	46.0	-10.4	1.10 H	205	19.45	16.20
5	451.27	37.1 QP	46.0	-8.9	1.03 H	145	17.83	19.29
6	763.72	33.2 QP	46.0	-12.8	1.00 H	217	7.51	25.72
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.66	30.7 QP	40.0	-9.3	1.15 V	208	17.88	12.81
2	117.05	35.1 QP	43.5	-8.5	1.03 V	157	23.24	11.81
3	157.47	35.6 QP	43.5	-7.9	1.17 V	157	20.91	14.67
4	316.03	35.2 QP	46.0	-10.8	1.06 V	190	19.04	16.20
5	455.93	37.2 QP	46.0	-8.8	1.10 V	124	17.77	19.44
6	670.45	33.1 QP	46.0	-13.0	1.32 V	43	8.66	24.39

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

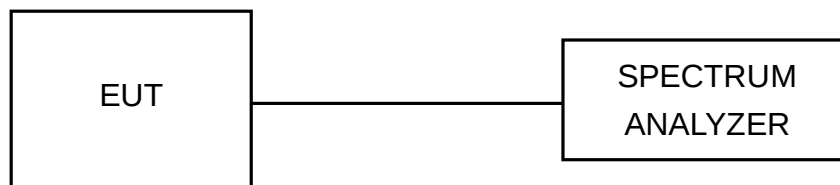



4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T



Mode A: FOR GFSK

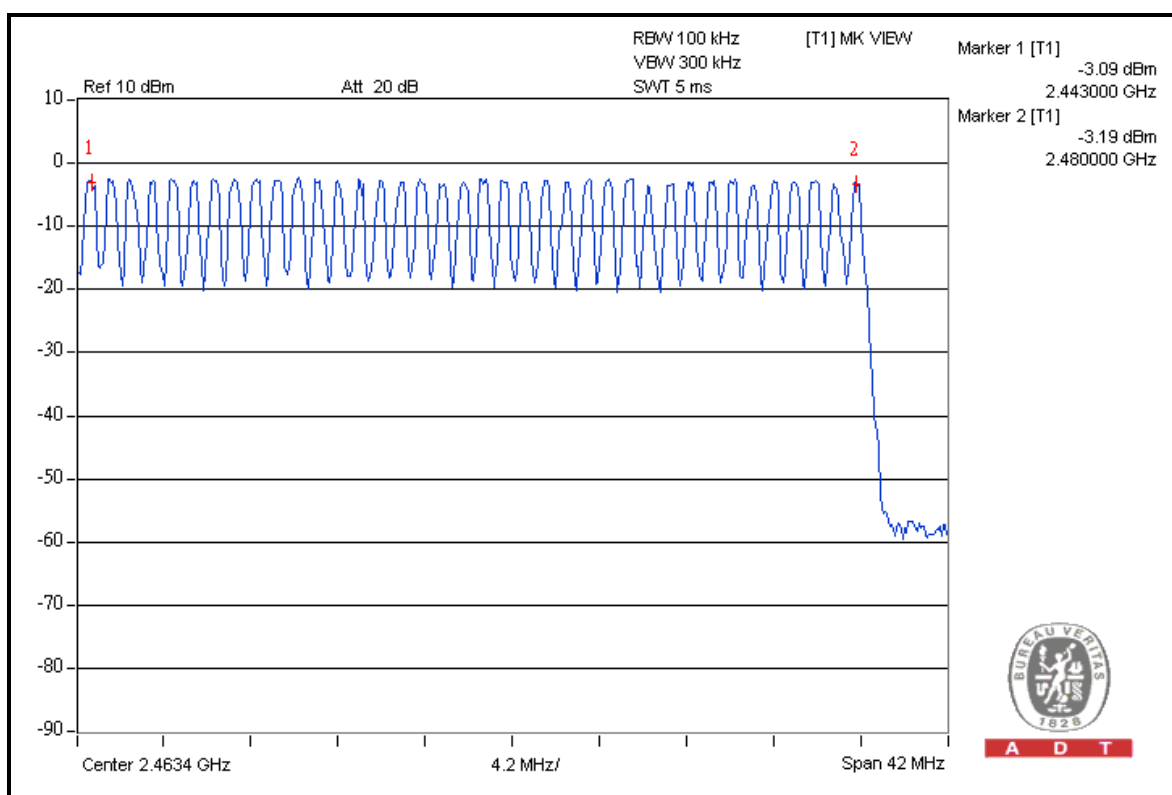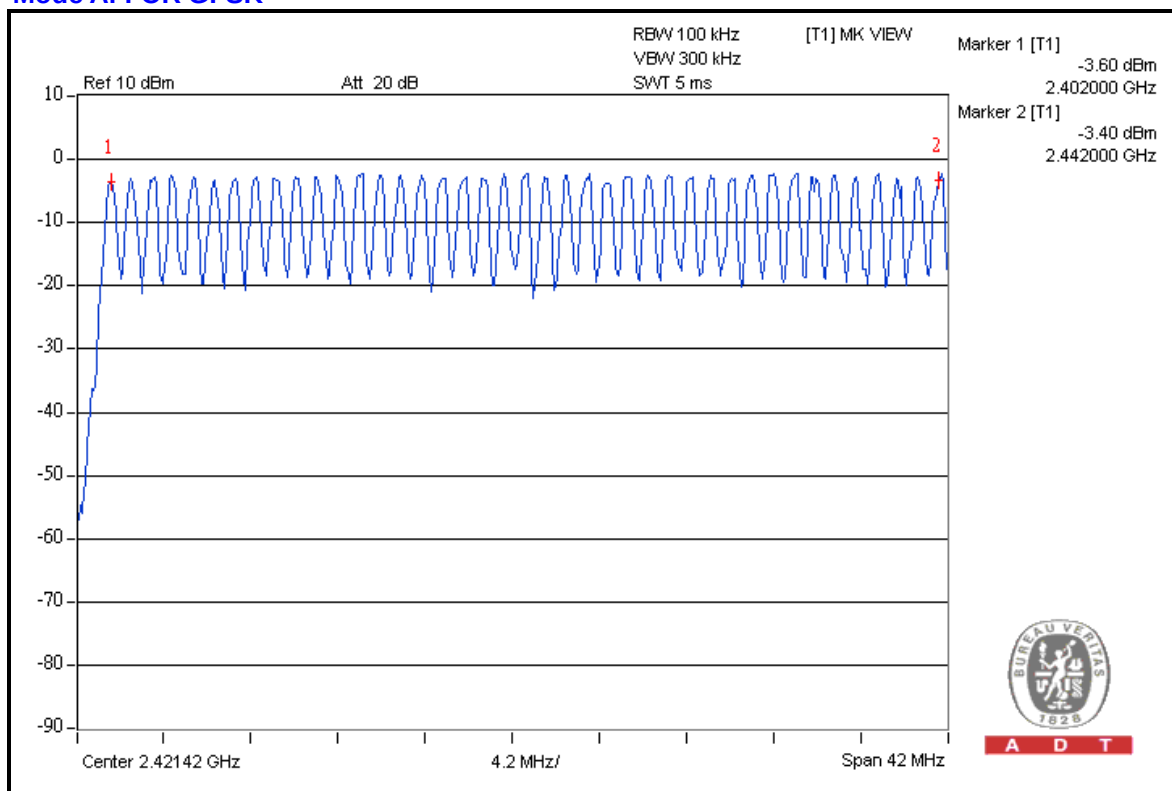



A D T

Mode A: FOR 8DPSK

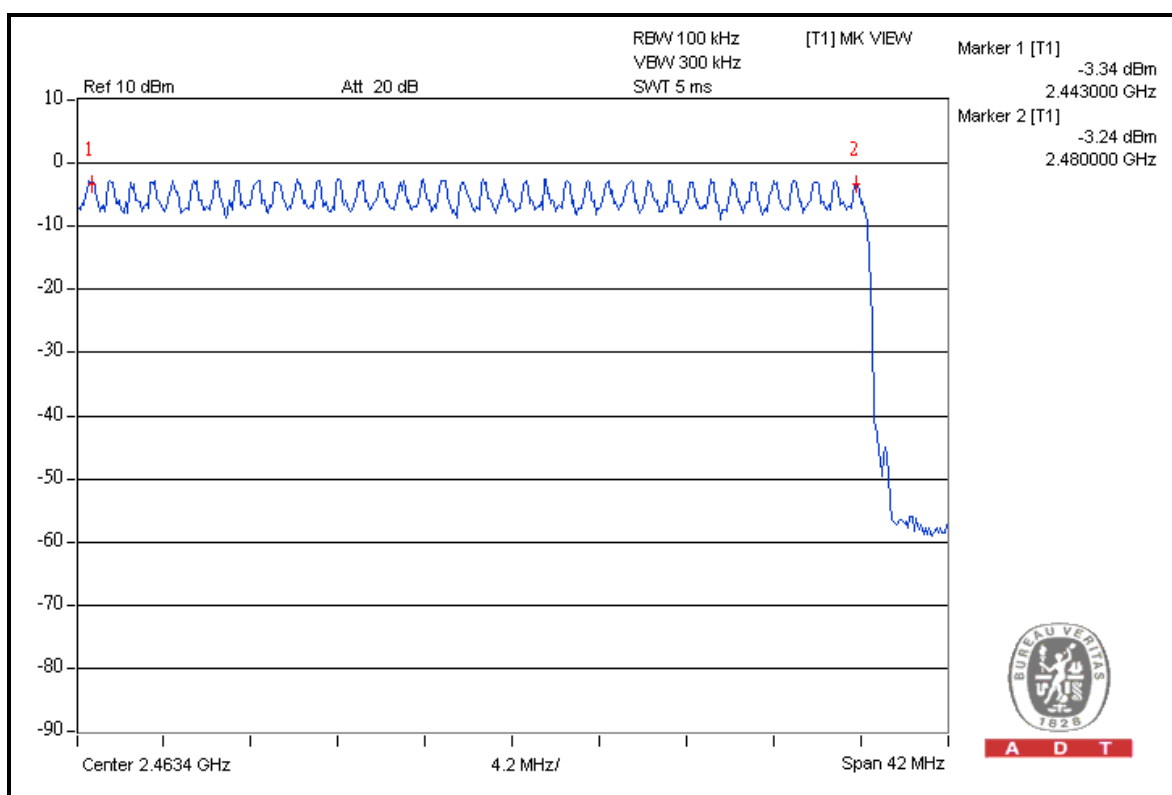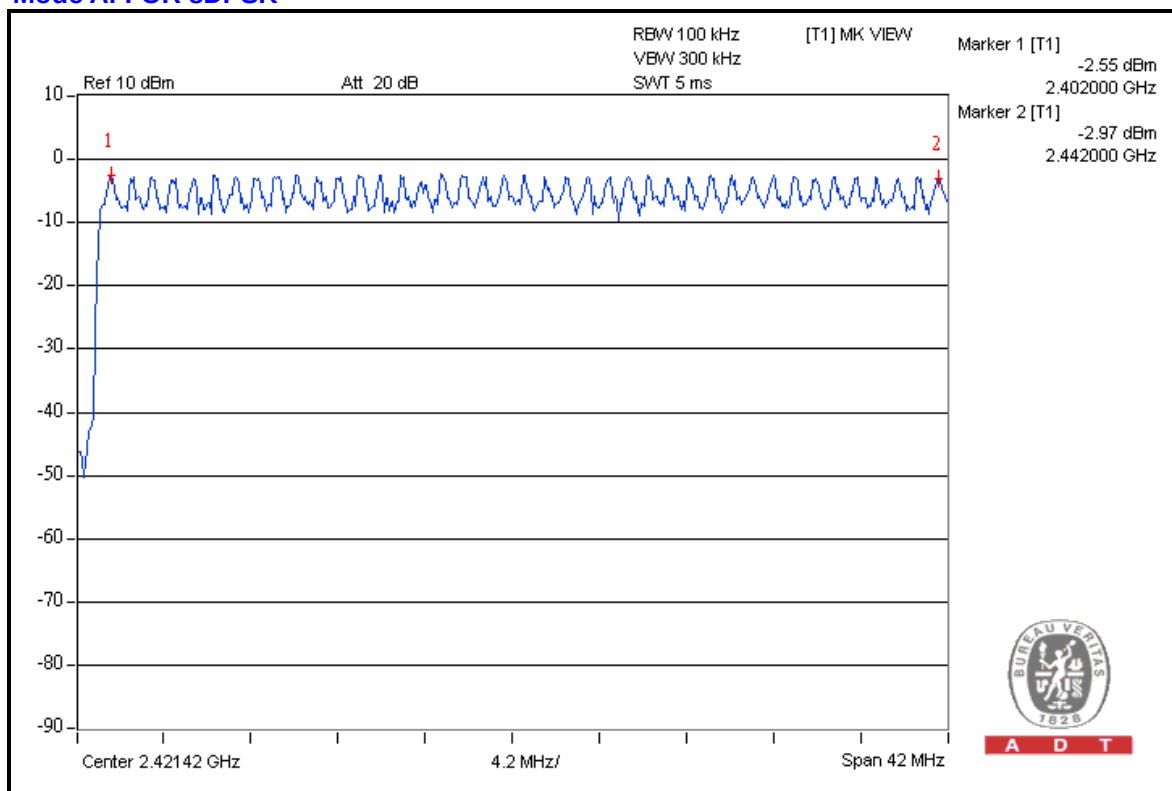

4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

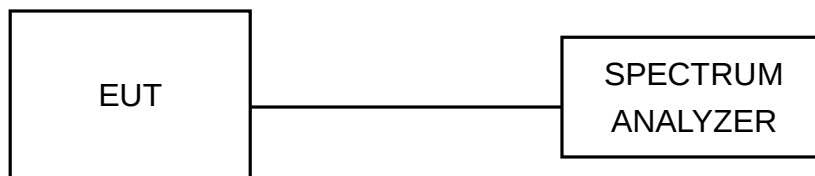

4.4.6 TEST RESULTS

Mode A: FOR GFSK



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316.00 times	0.432	136.5120	400
DH3	27 (times / 5 sec) *6.32=170.64 times	1.710	291.7944	400
DH5	17 (times / 5 sec) *6.32=107.44 times	2.940	315.8736	400

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.





A D T

DH1

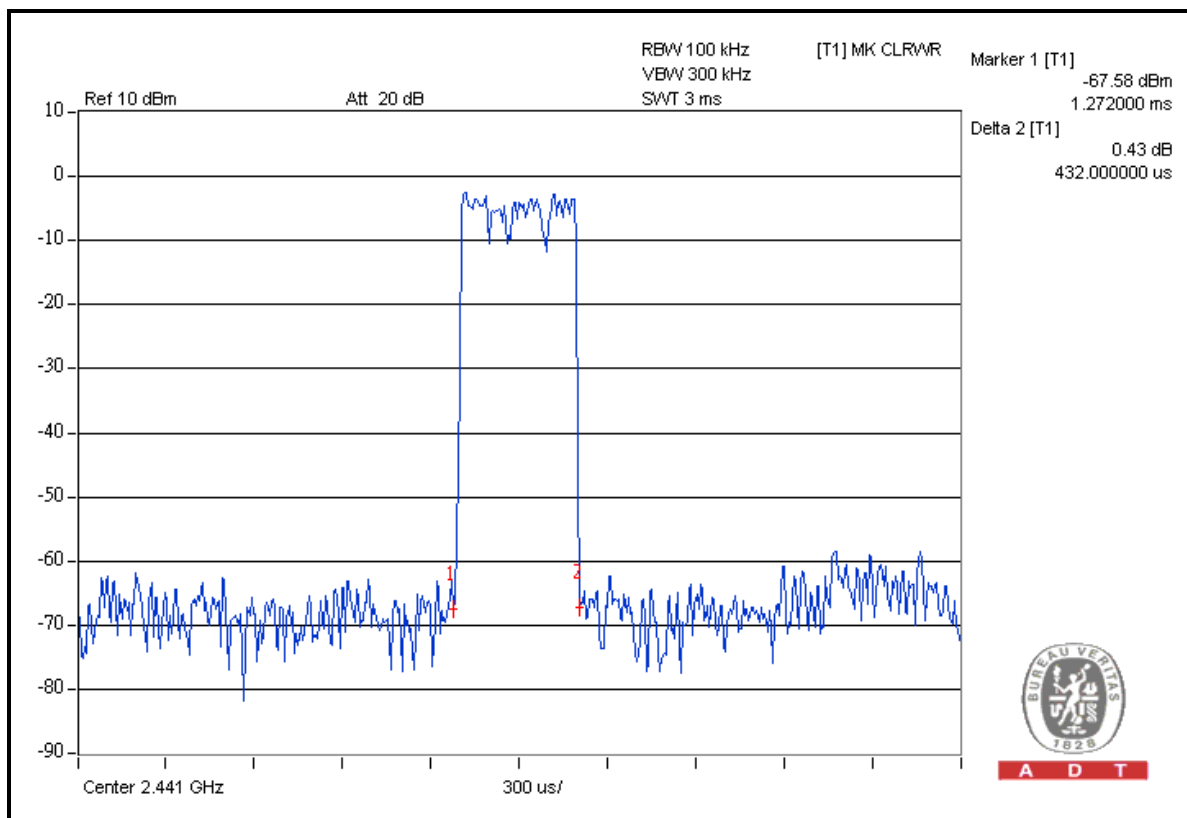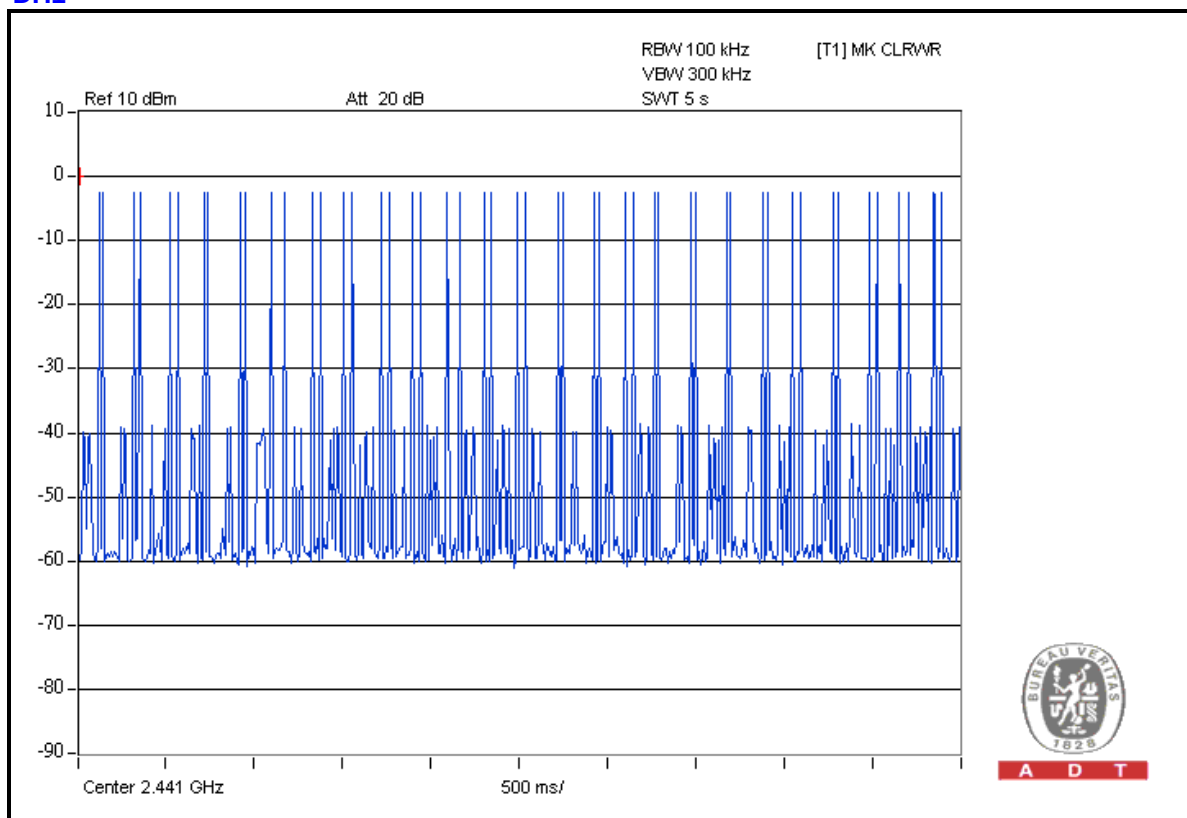



DH3

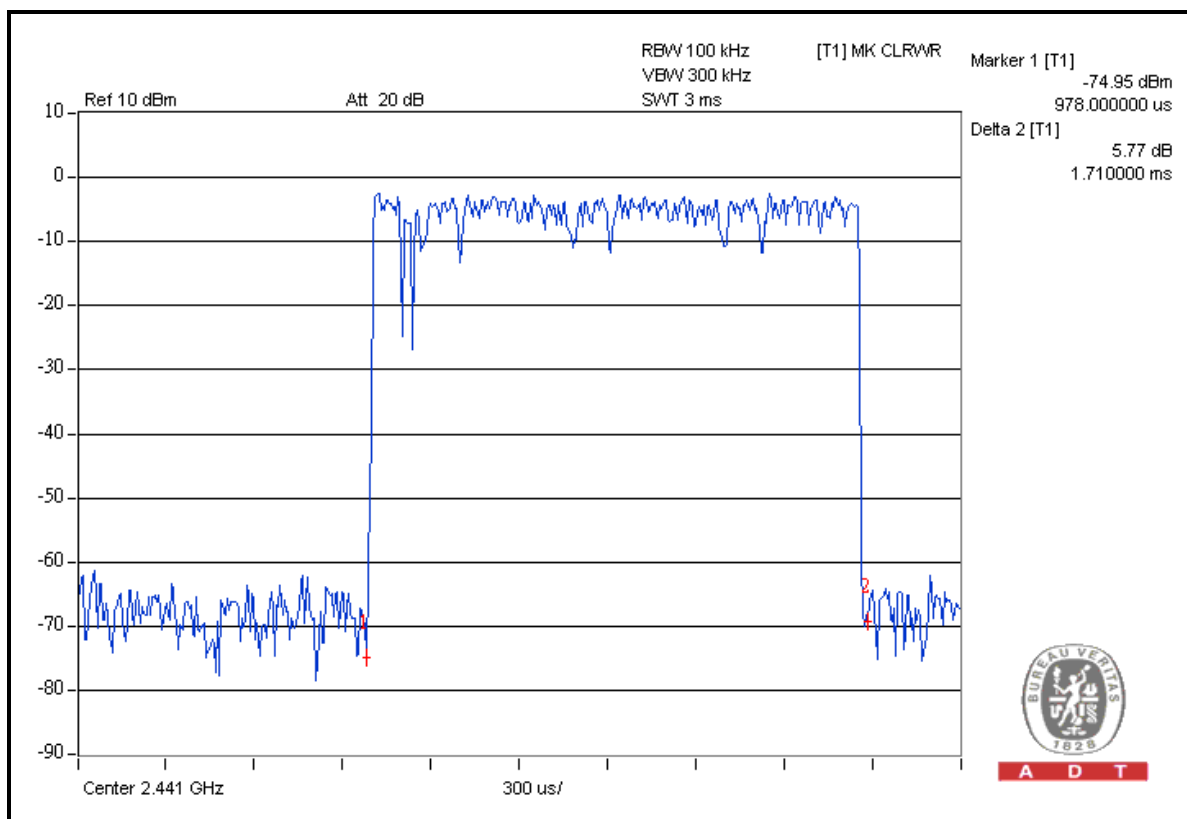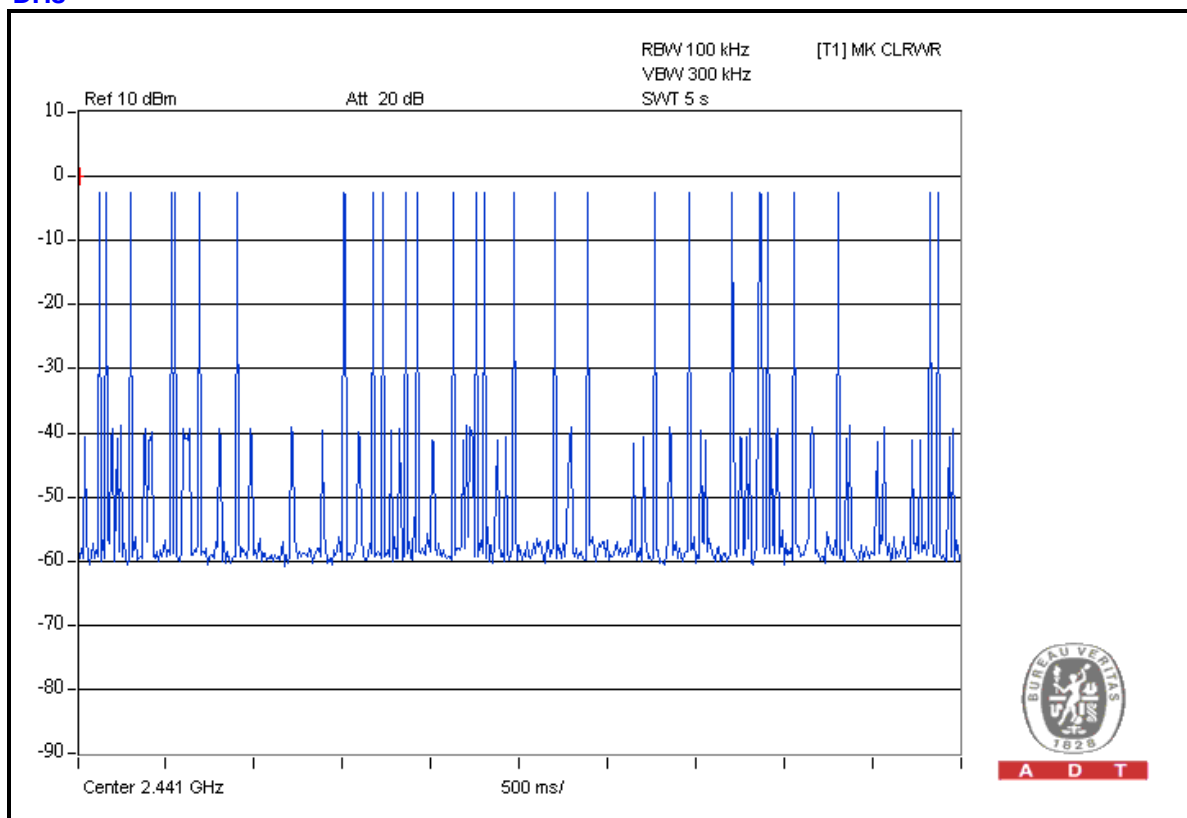



A D T

DH5

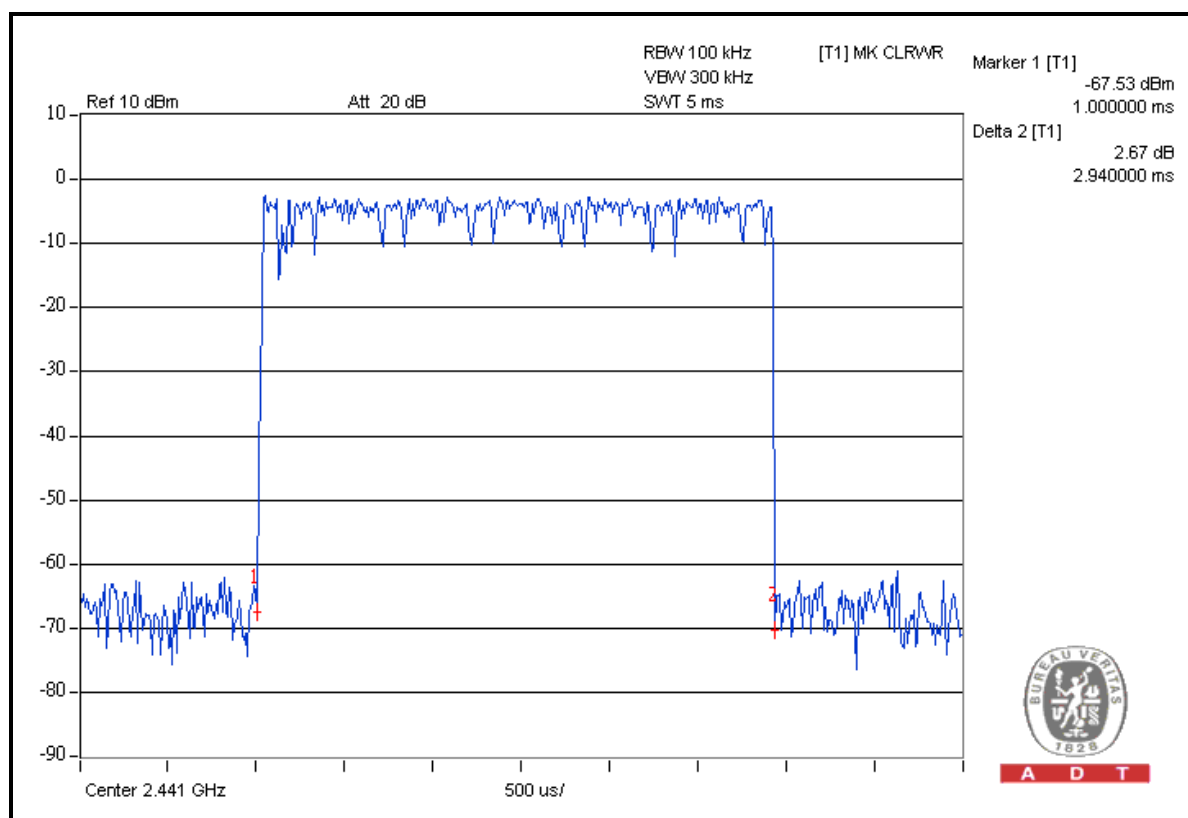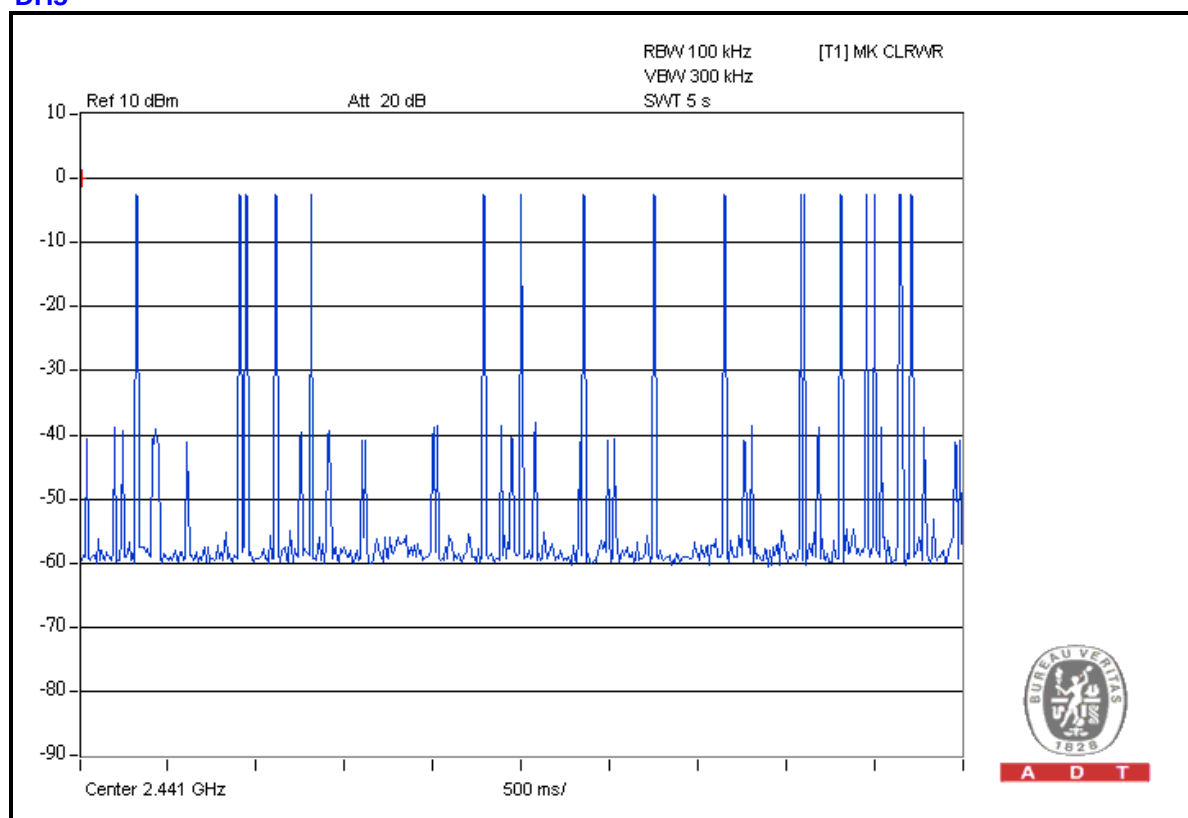

**Mode A: FOR 8DPSK**



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316.00 times	0.432	136.51200	400
DH3	27 (times / 5 sec) *6.32=170.64 times	1.596	272.34144	400
DH5	16 (times / 5 sec) *6.32=101.12 times	2.990	302.3488	400

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.





A D T

DH1

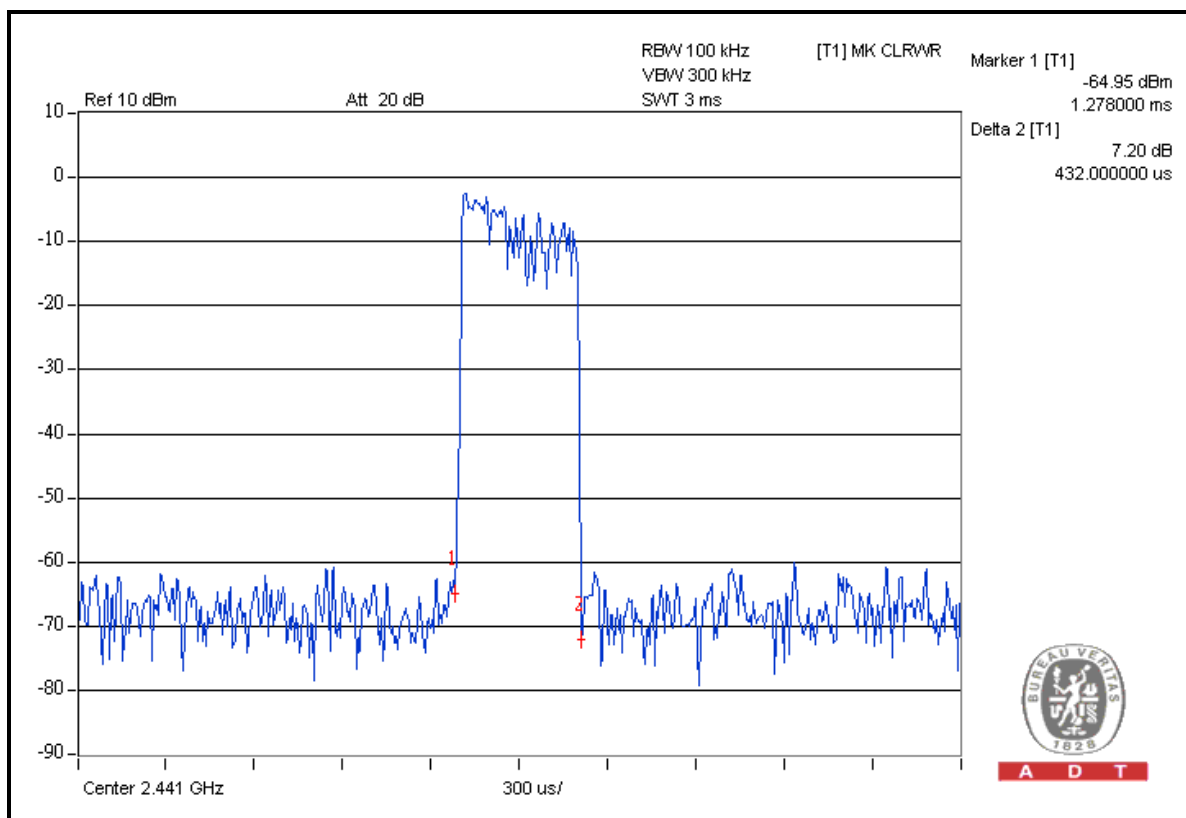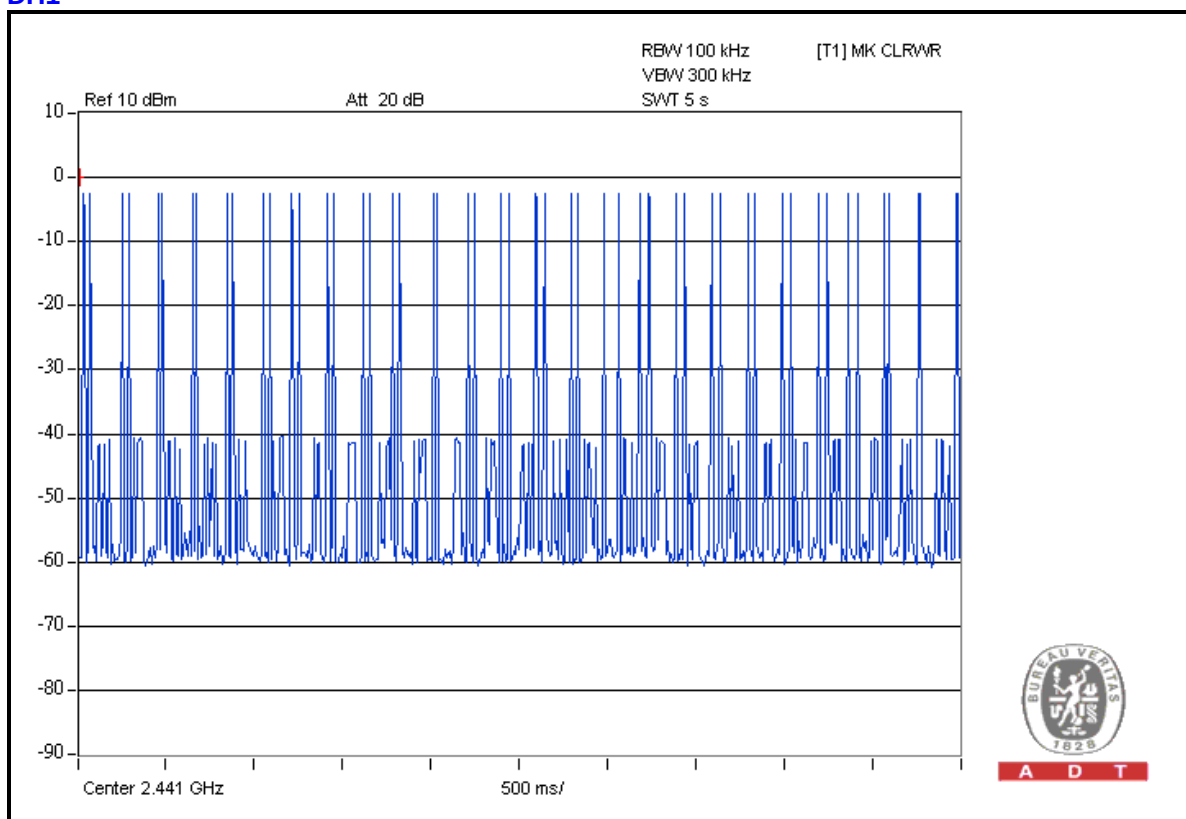



DH3

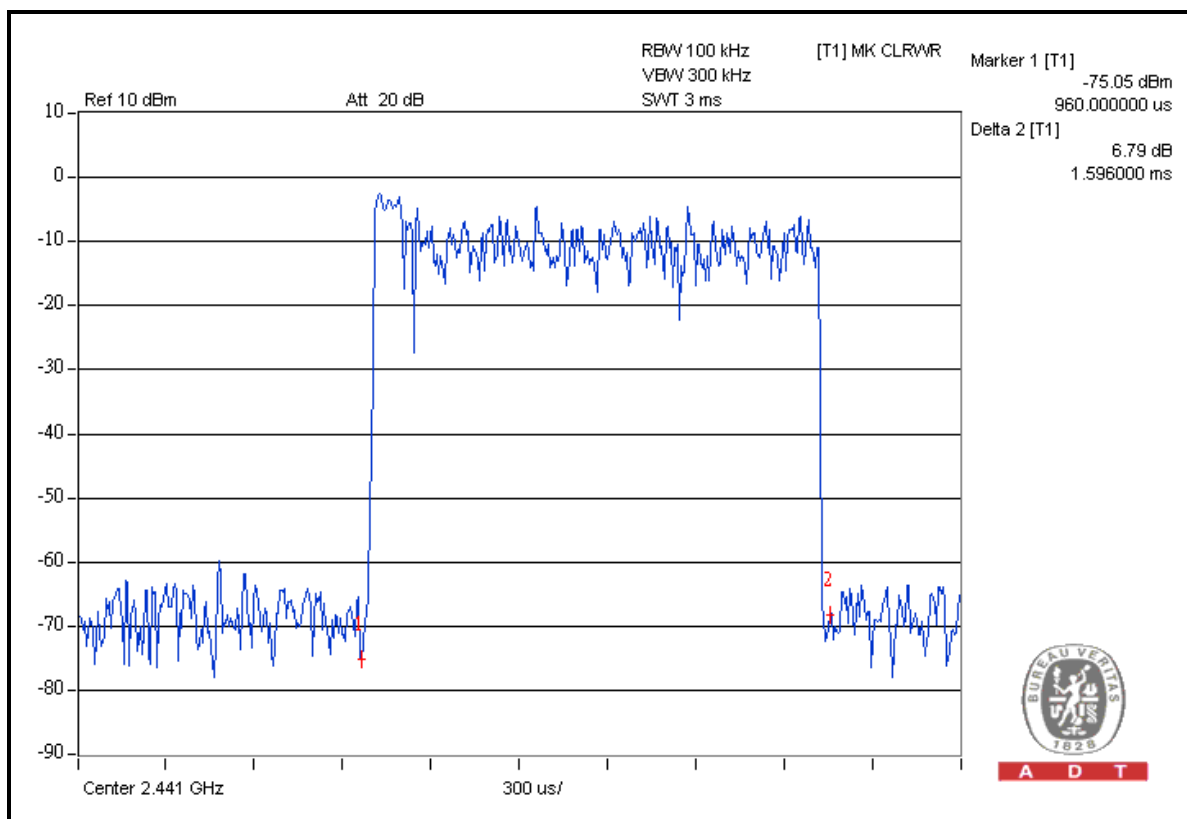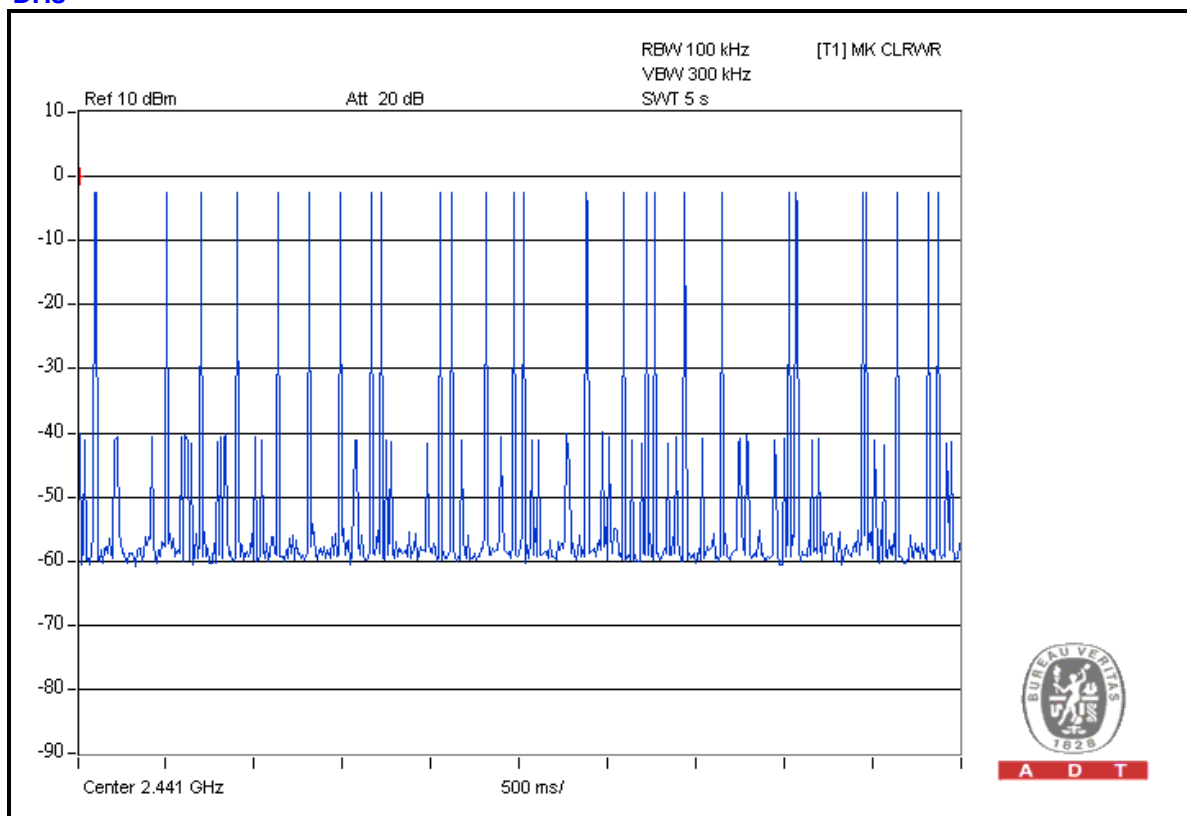



A D T

DH5

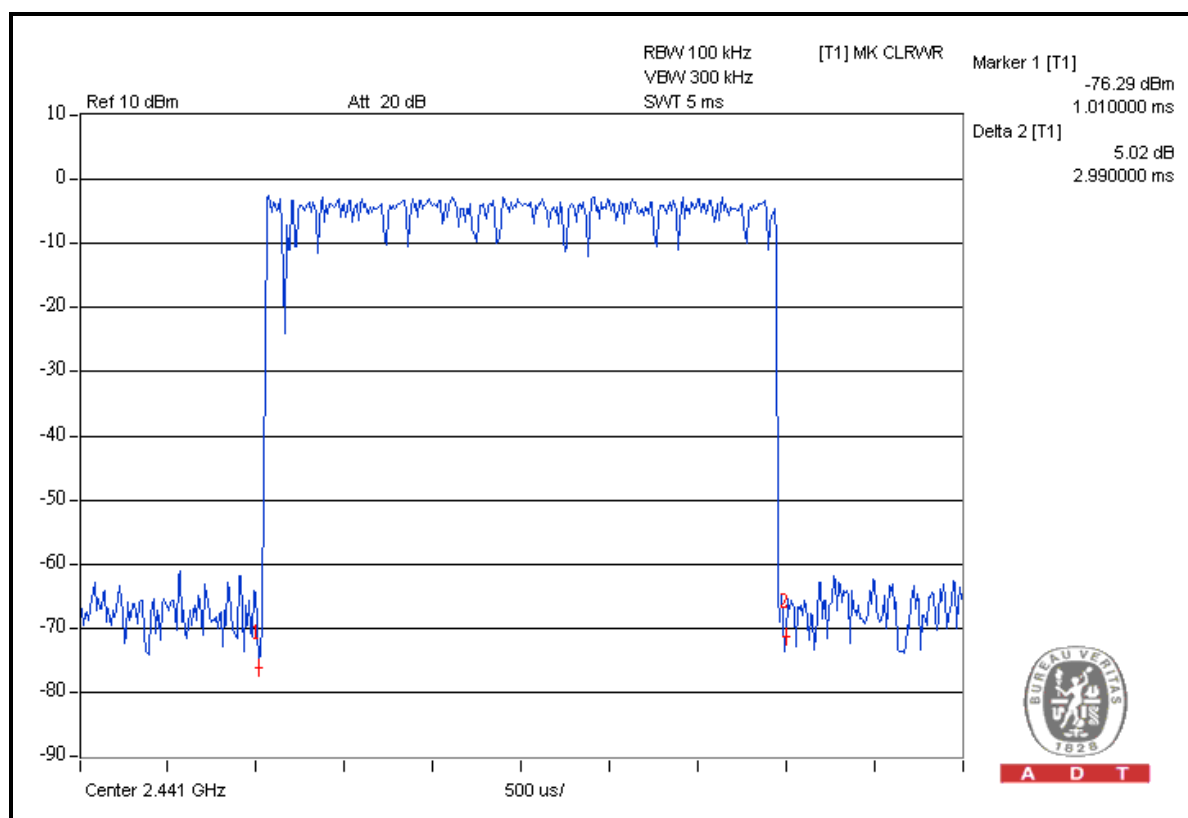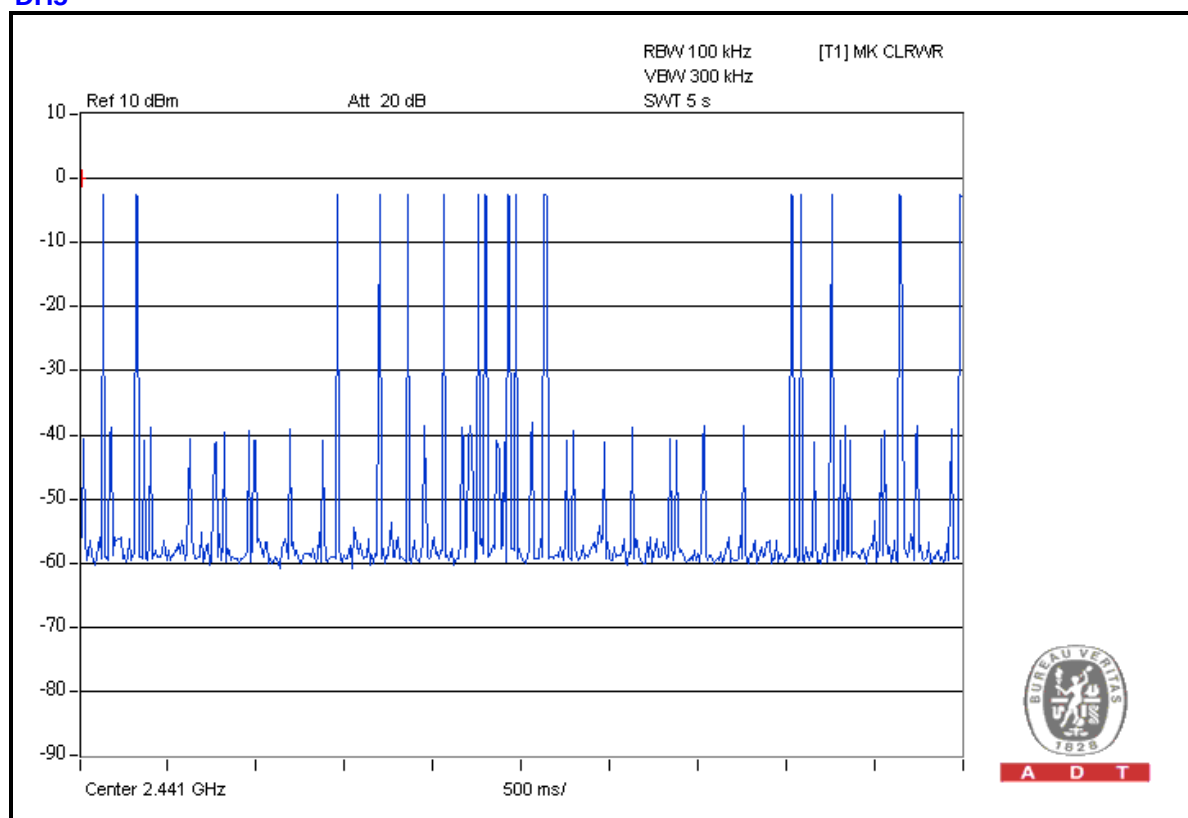

4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

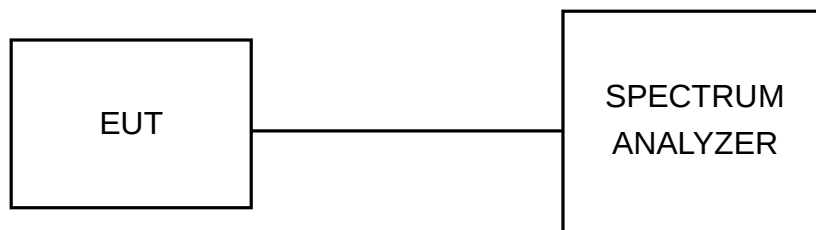

4.5.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS

Mode A: FOR GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.96
39	2441	0.95
78	2480	0.96


CH 0

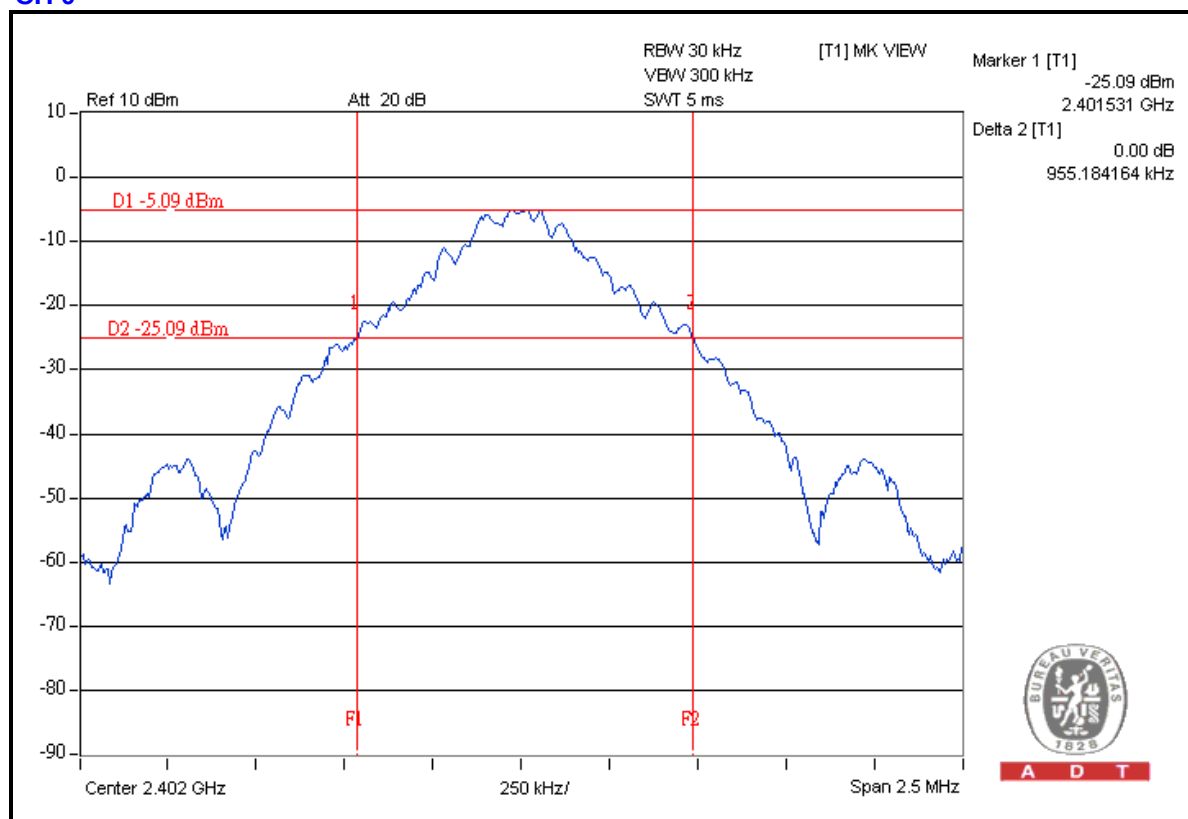




A D T

CH 39

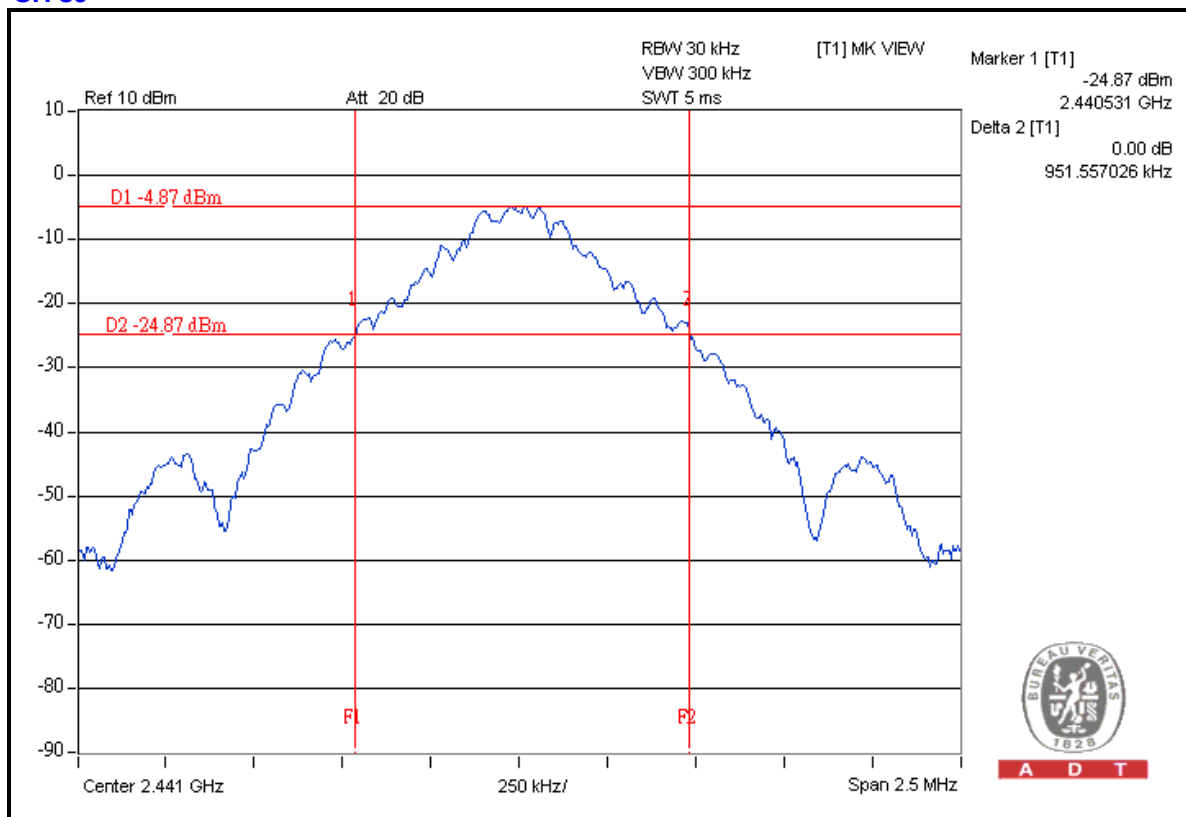


CH 78

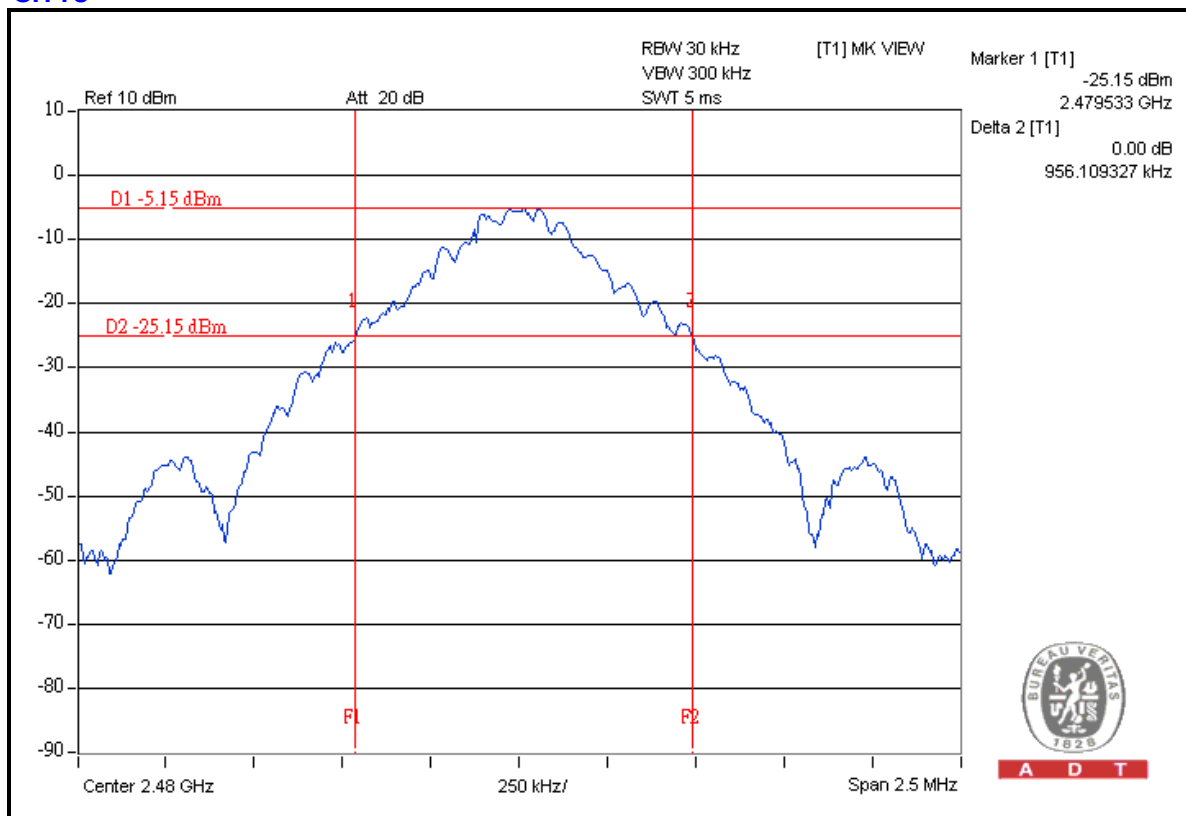

Mode A: FOR 8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.35
39	2441	1.35
78	2480	1.35


CH 0

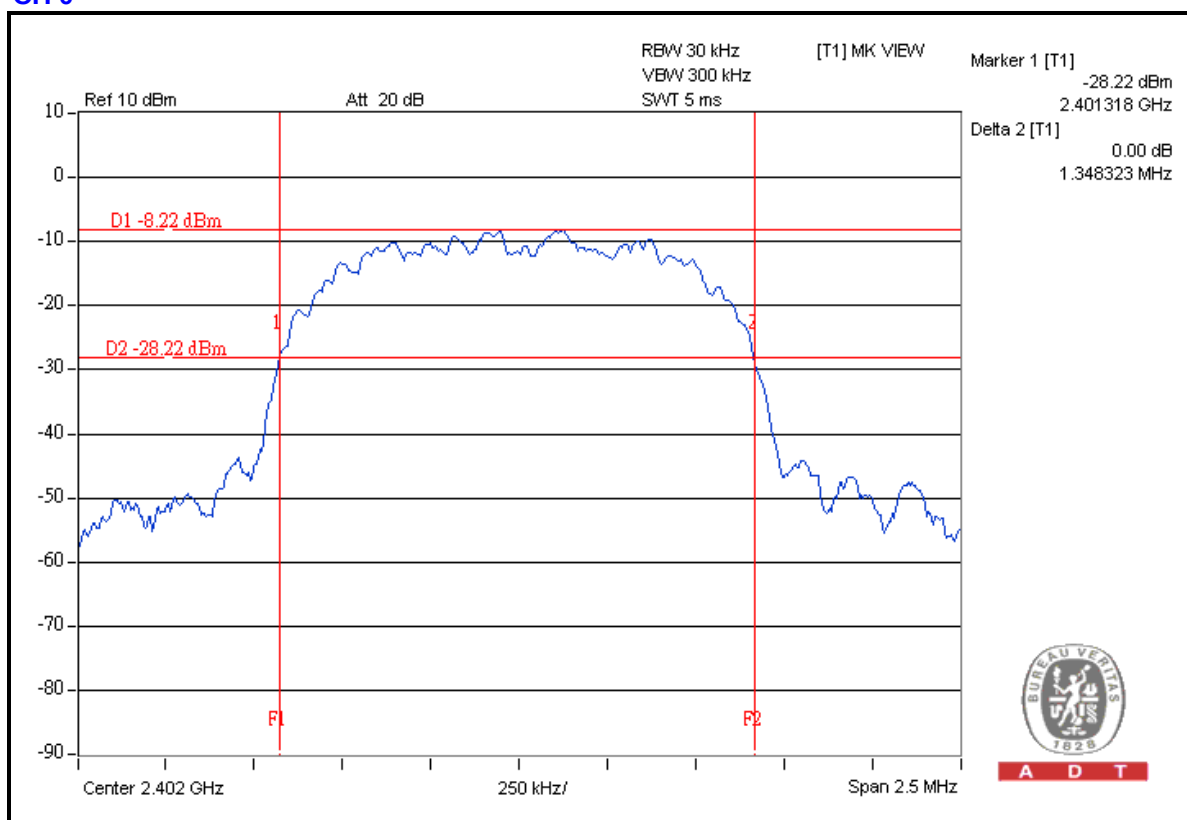




A D T

CH 39

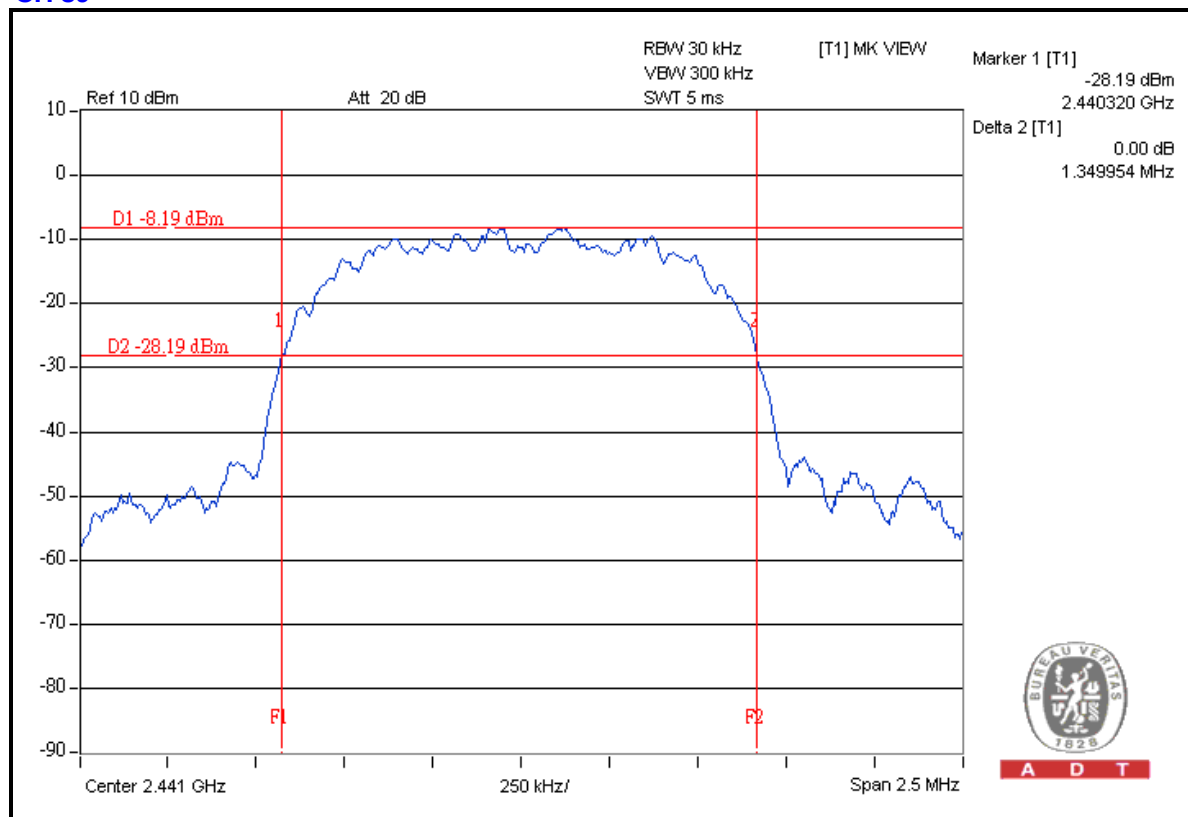

CH 78

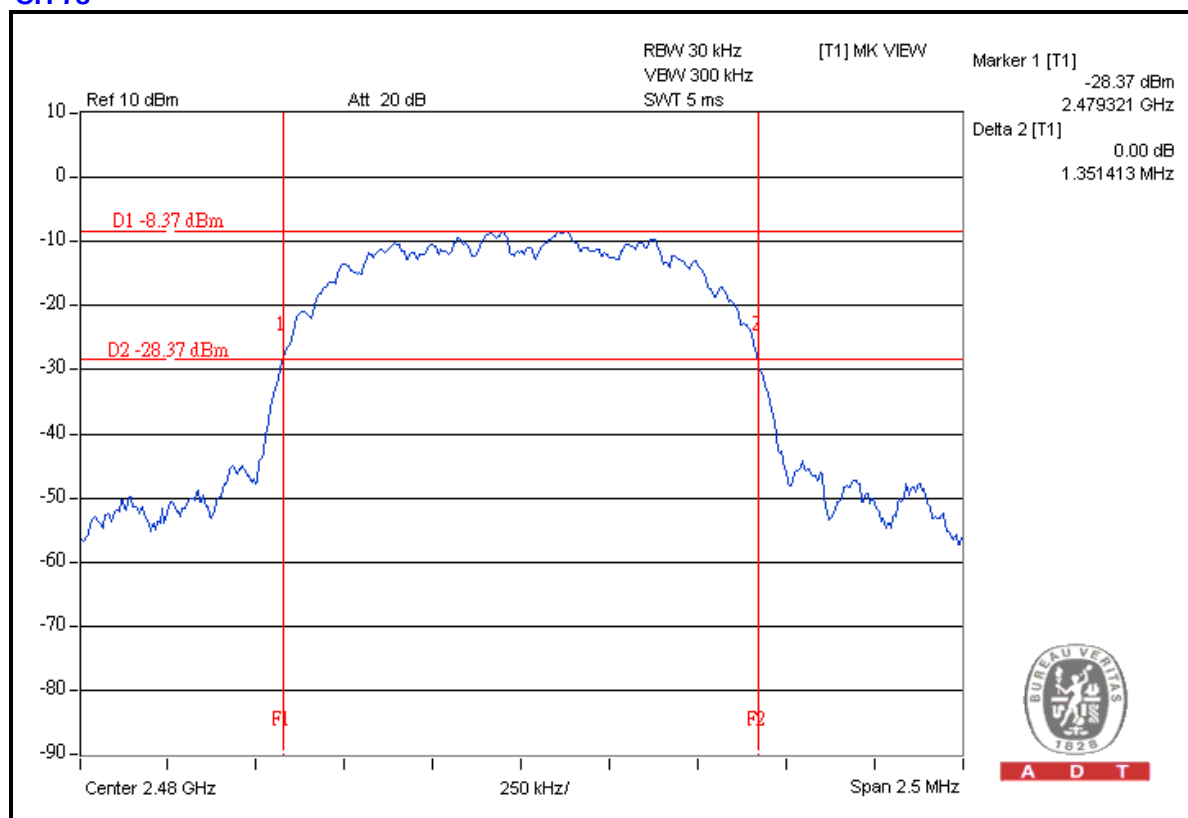

4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP

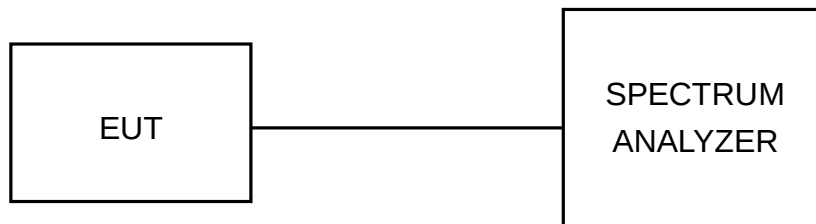


4.6.6 TEST RESULTS

Mode A: FOR GFSK


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.01	0.96	0.64	PASS
39	2441	1.00	0.95	0.63	PASS
78	2480	1.00	0.96	0.64	PASS

NOTE: The minimum limit is two-third 20dB bandwidth. Test results please refer to following three plots.


CH 0

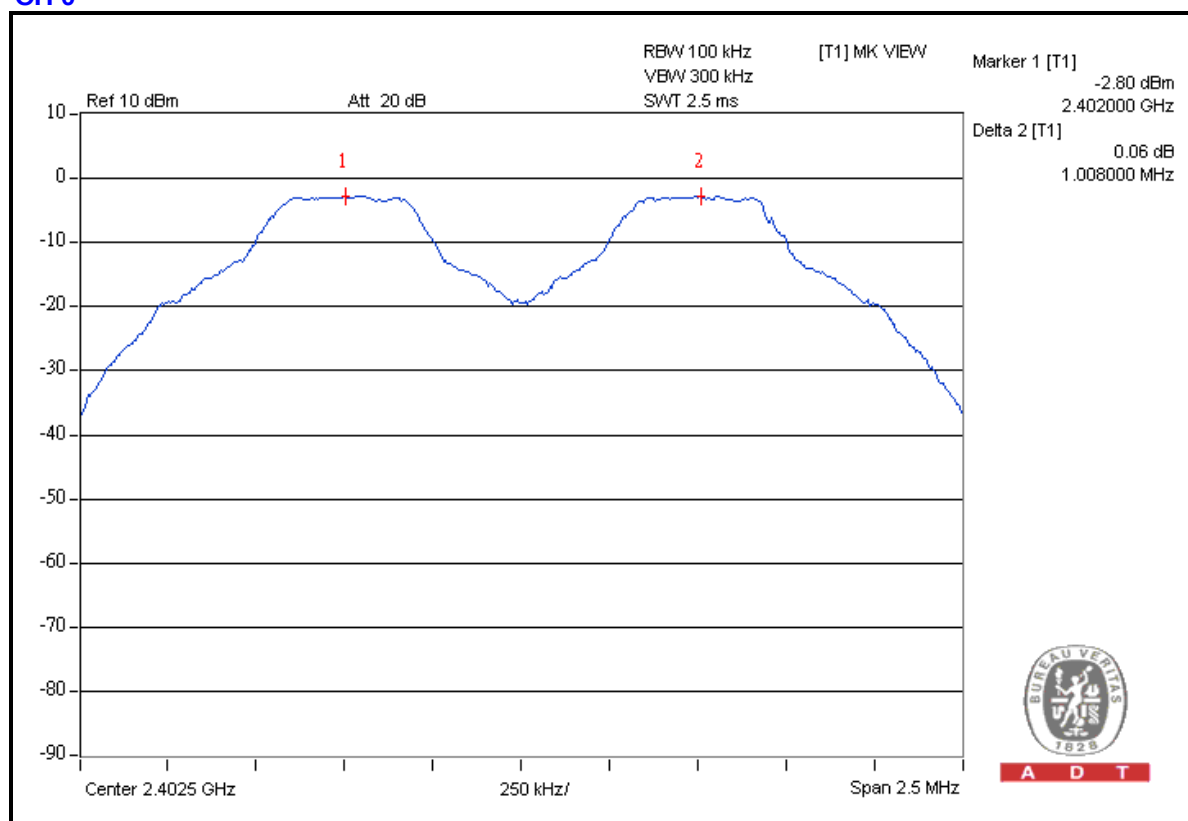

CH 39

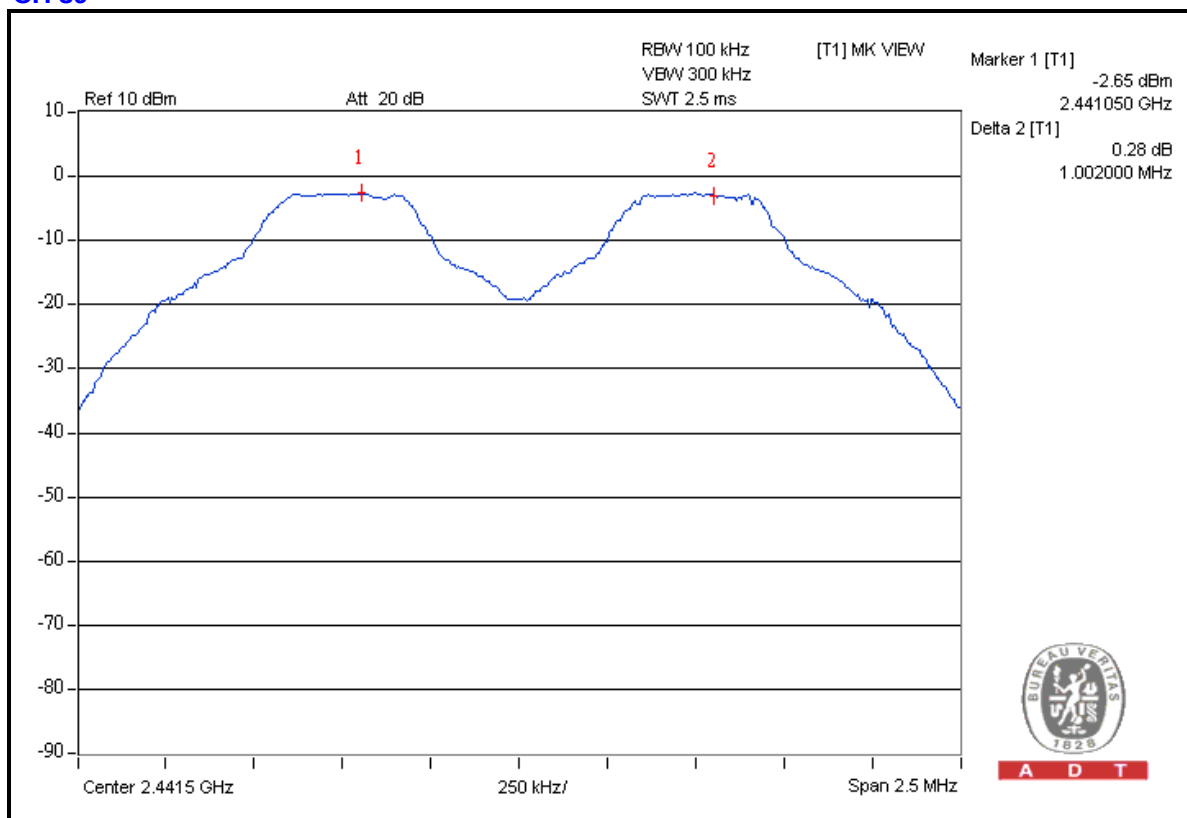

CH 78

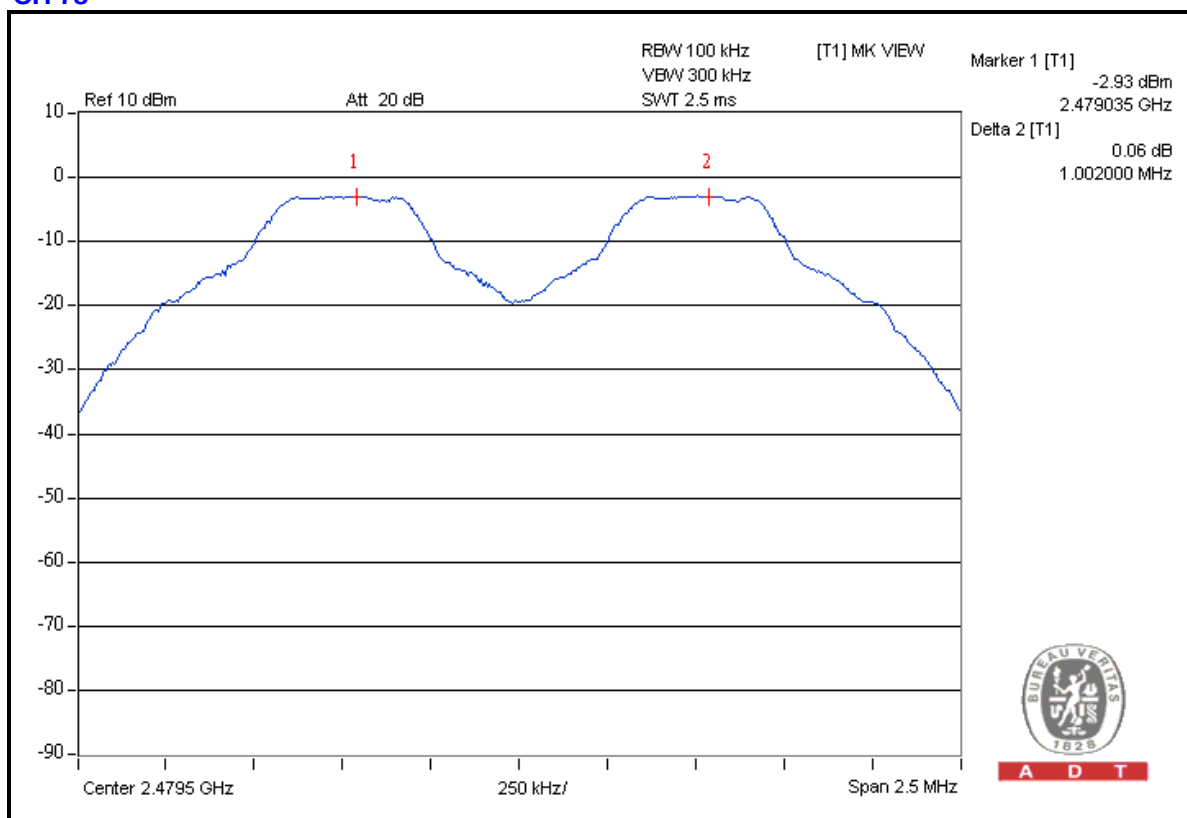


Mode A: FOR 8DPSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.01	1.35	0.9	PASS
39	2441	1.01	1.35	0.9	PASS
78	2480	1.01	1.35	0.9	PASS

NOTE: The minimum limit is two-third 20dB bandwidth. Test results please refer to following three plots.


CH 0

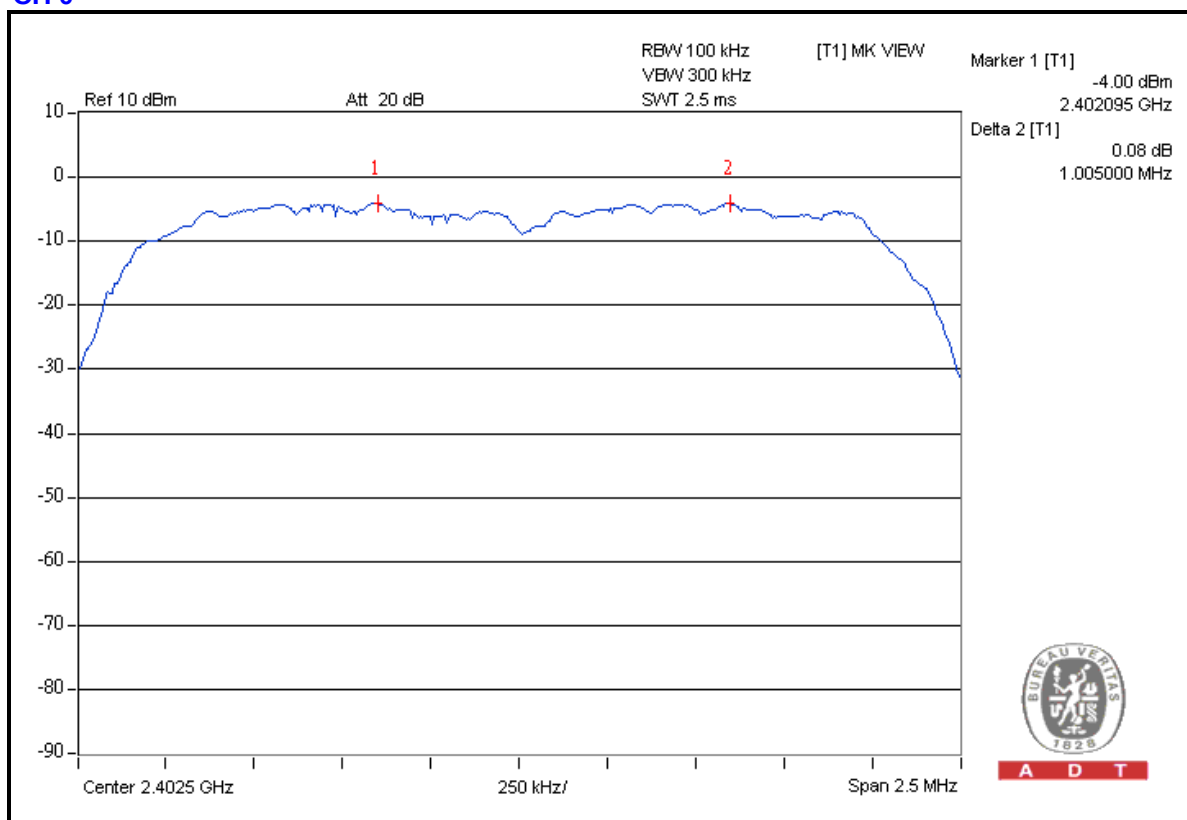




A D T

CH 39

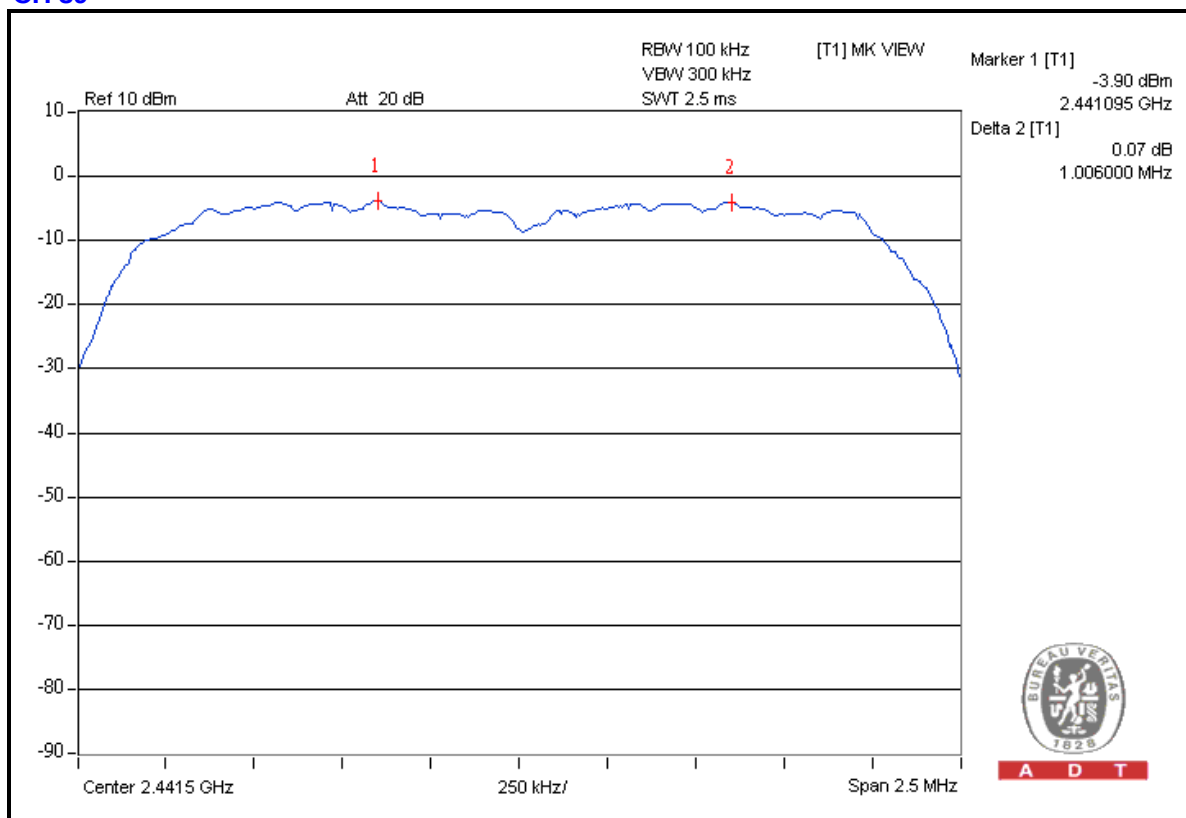

CH 78

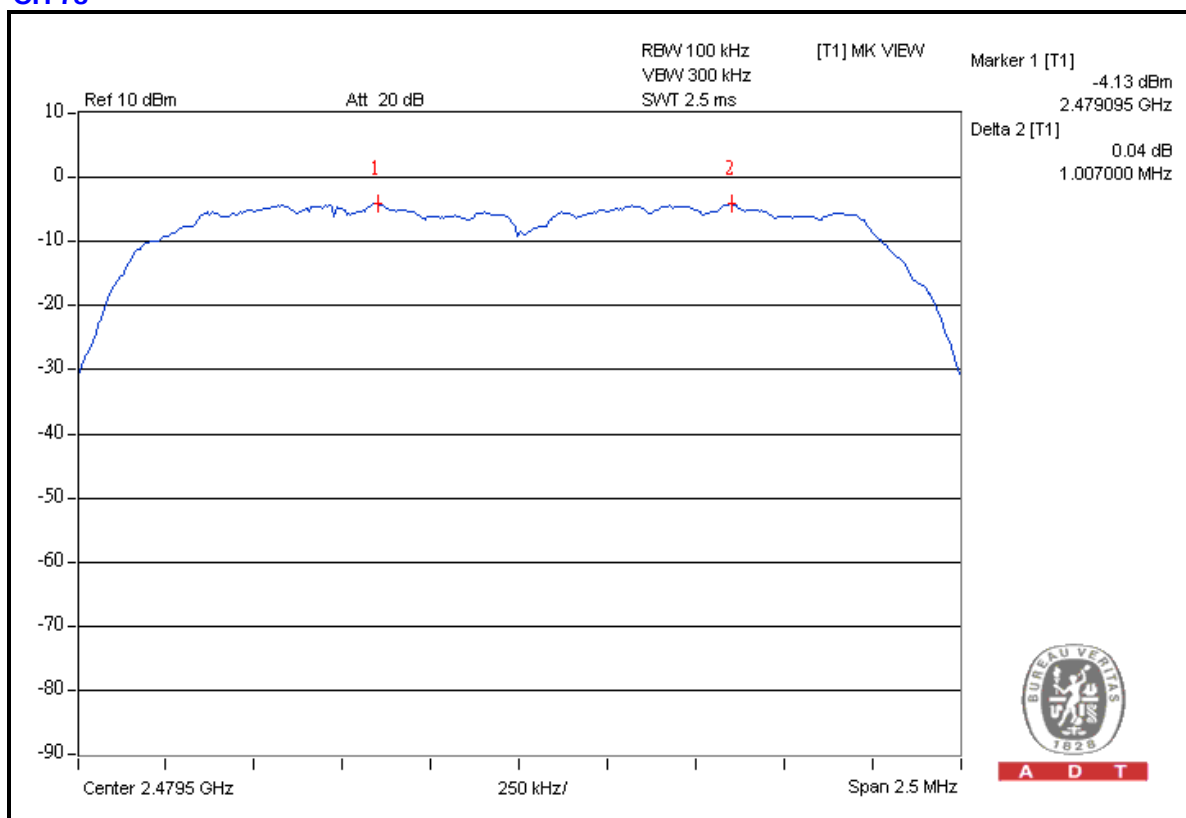

4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.7.3 TEST PROCEDURES

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

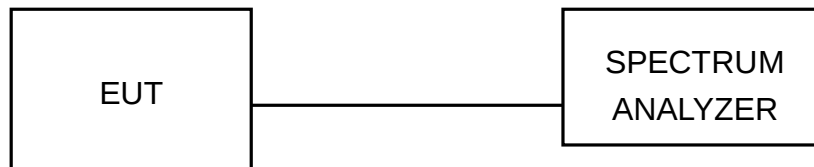

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS

Mode A: FOR GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	-2.2	0.6	125	PASS
39	2441	-1.9	0.6	125	PASS
78	2480	-2.2	0.6	125	PASS


CH 0

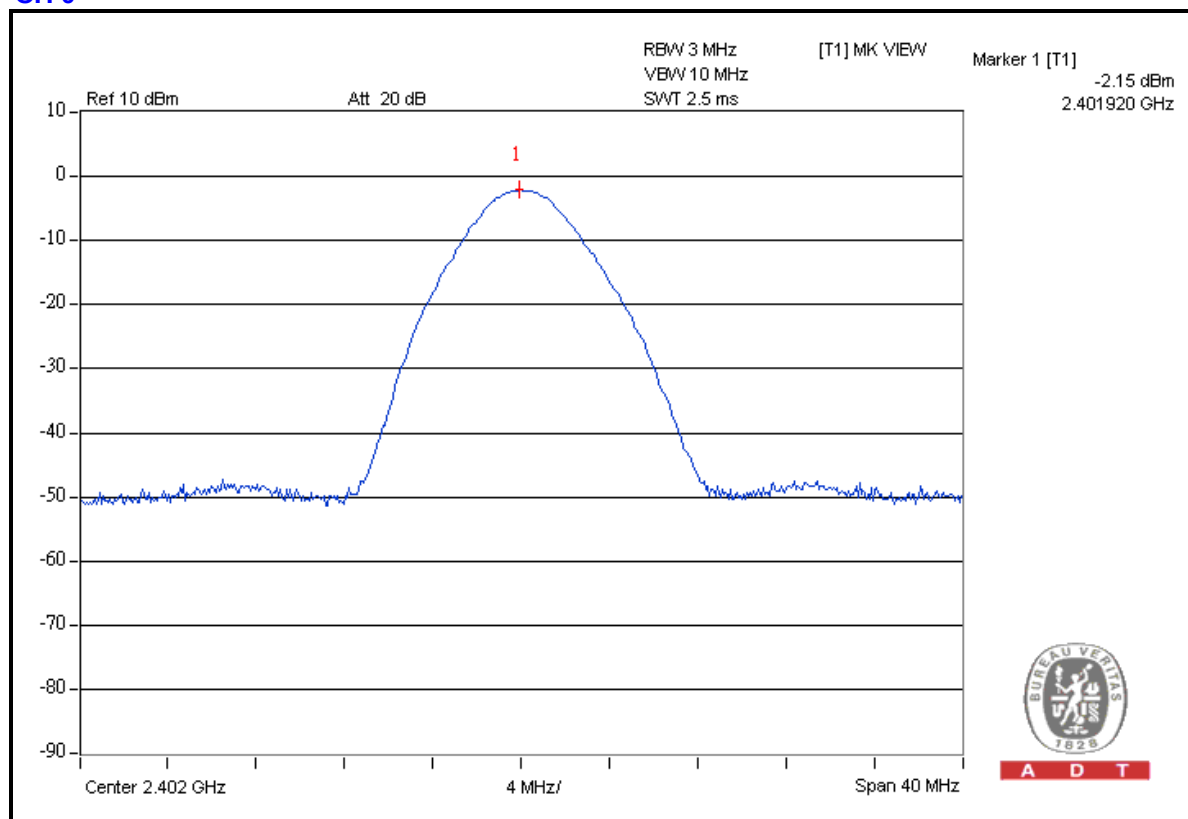




A D T

CH 39

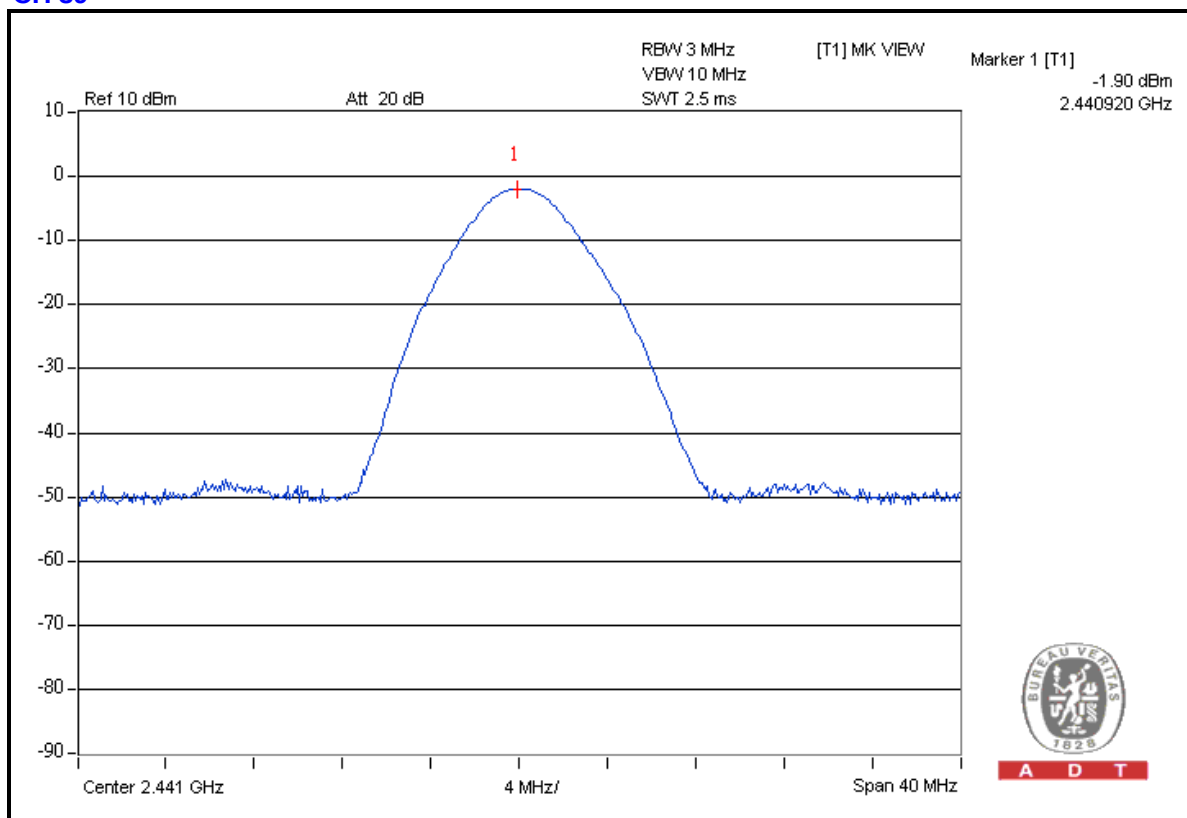

CH 79

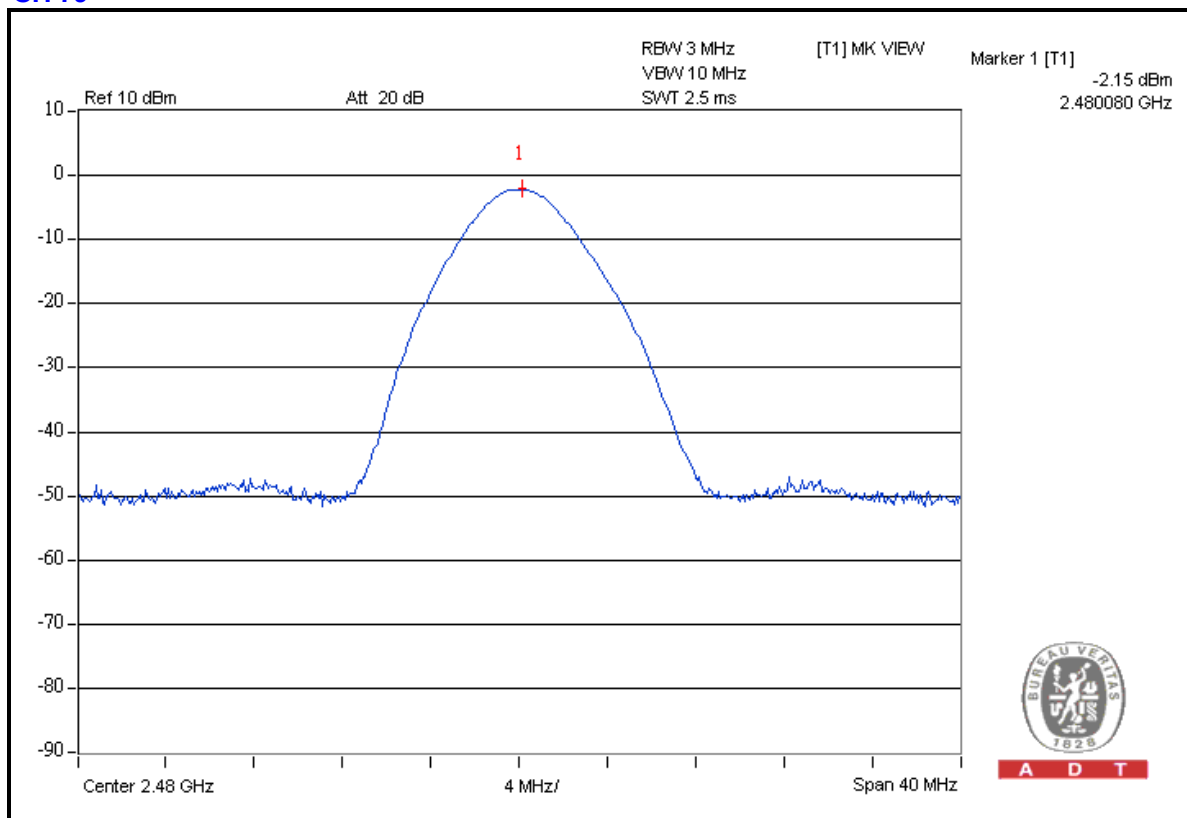




A D T

Mode A: FOR 8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	0.5	1.1	125	PASS
39	2441	0.6	1.1	125	PASS
78	2480	0.4	1.1	125	PASS


CH 0

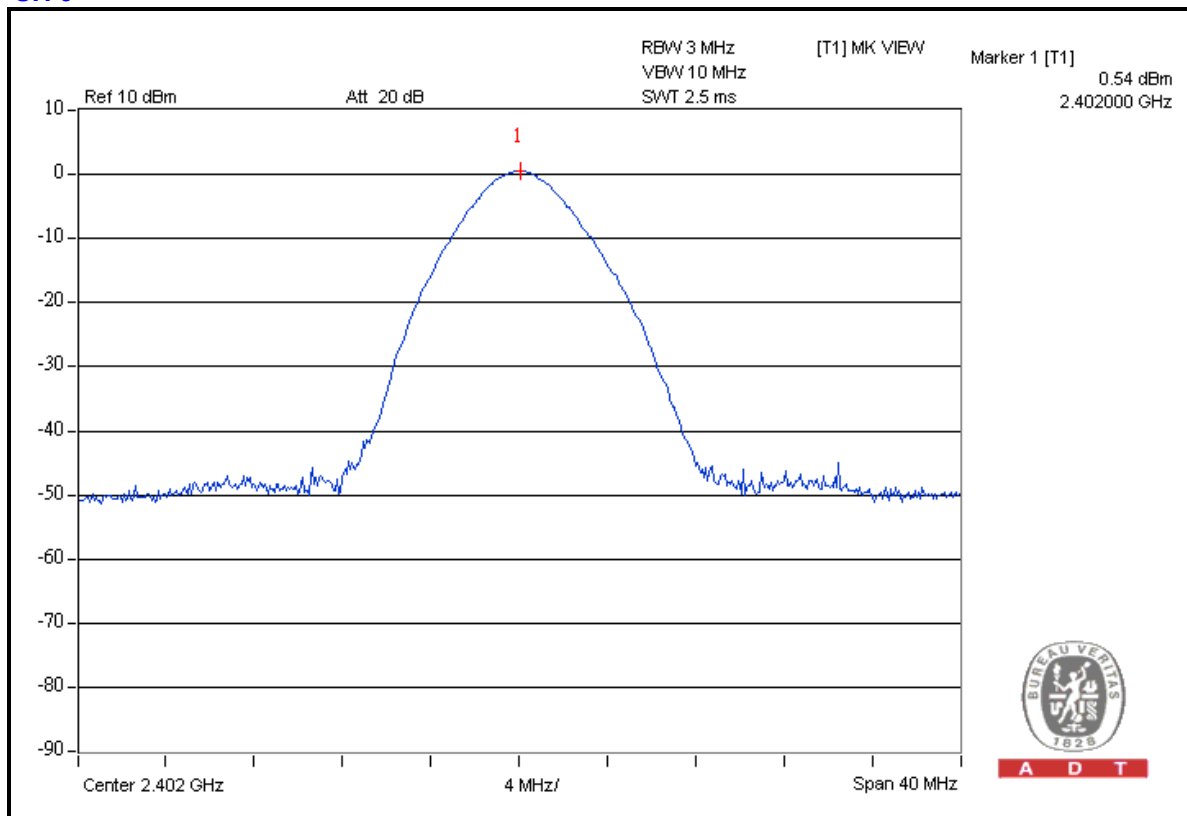




A D T

CH 39

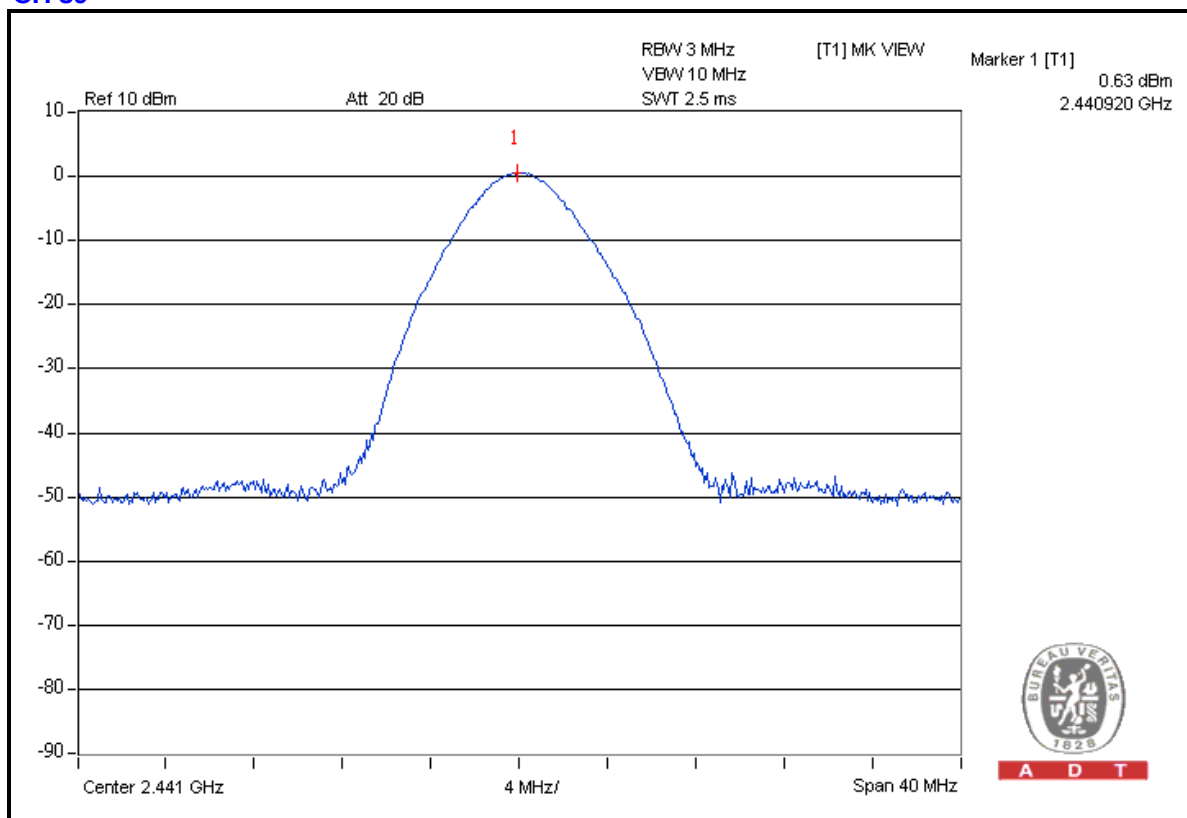

CH 79

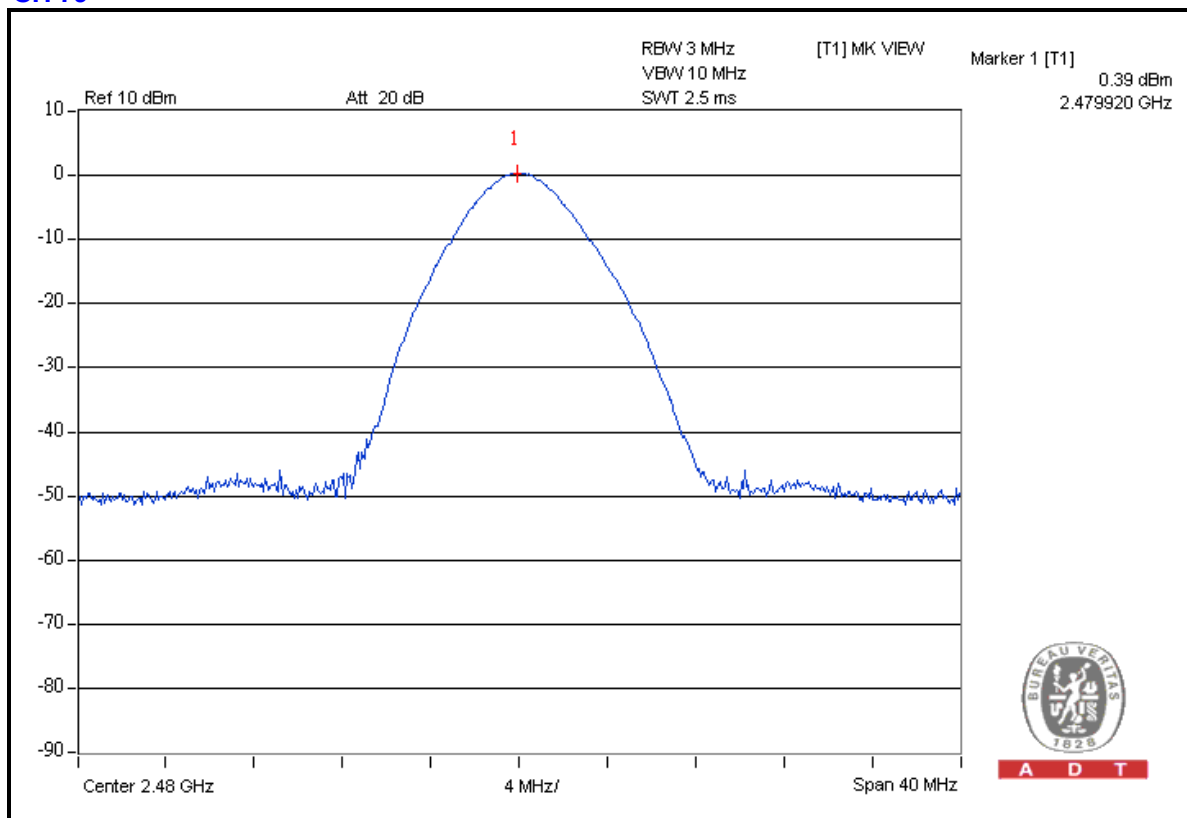

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 8 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

Mode A: FOR GFSK

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2402.00 (PK)	102.0	53.1	48.9	74.00
2402.00 (AV)	-	-	18.8	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2480.00 (PK)	101.1	54.2	46.9	74.00
2480.00 (AV)	-	-	16.8	54.00

NOTE:


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 2 pages.
2. Maximum field strength in restrict band (PK value) = Fundamental emission (PK value) – Delta.
3. Average value = Peak value + 20 Log (duty cycle) = Peak value –30.1dB.
4. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1 \text{ dB}$.



A D T

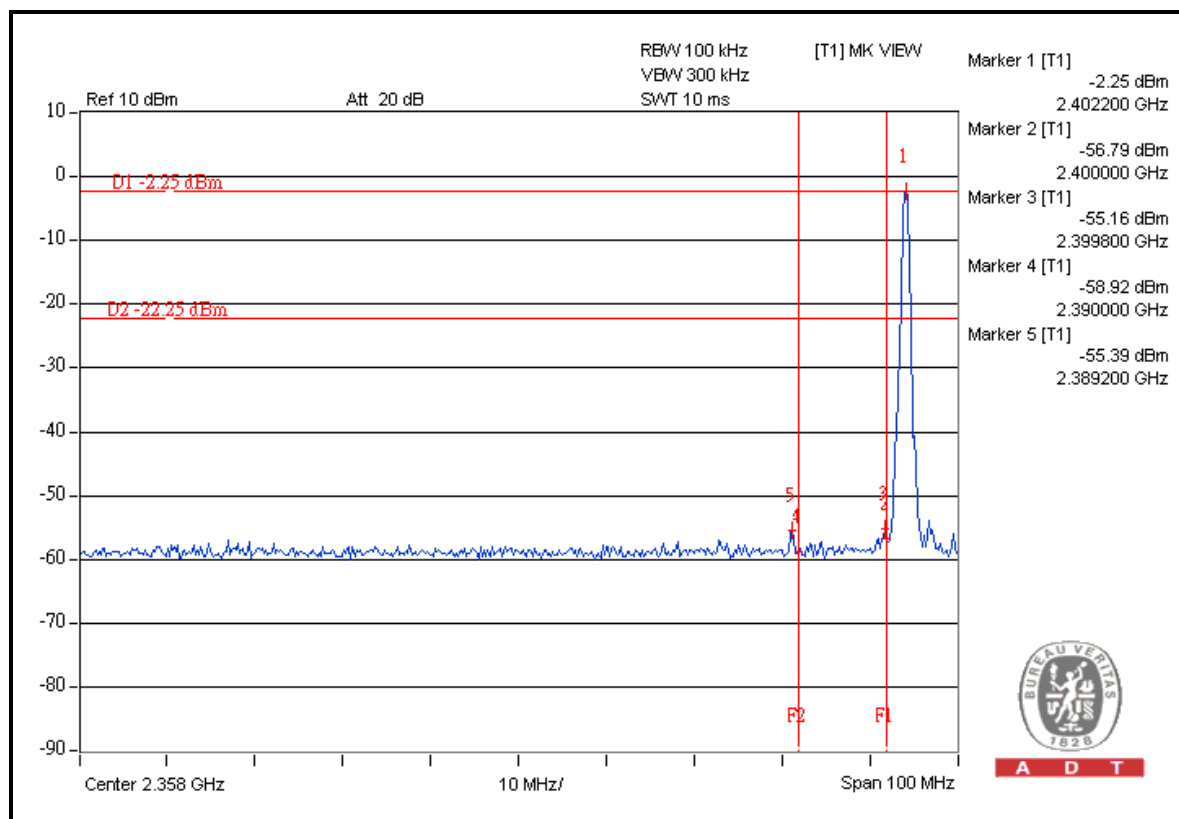


A D T

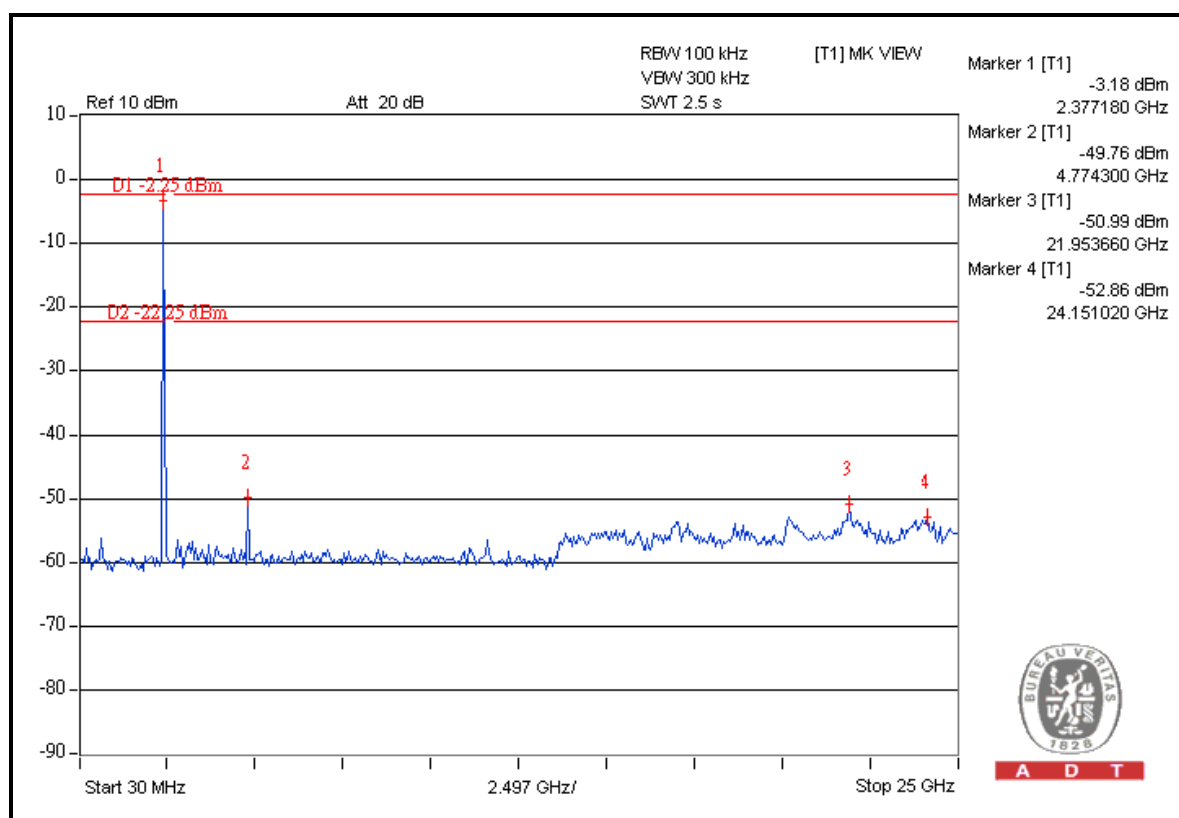


A D T



A D T

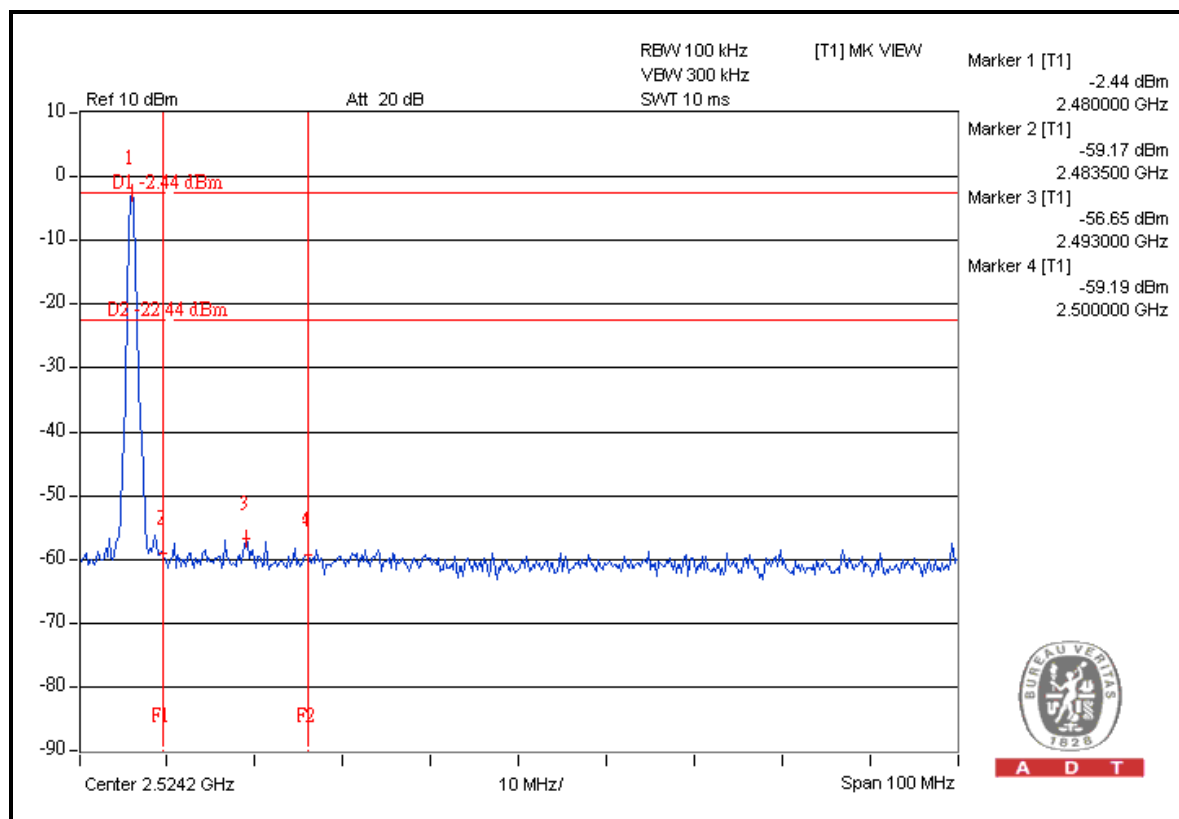

A D T

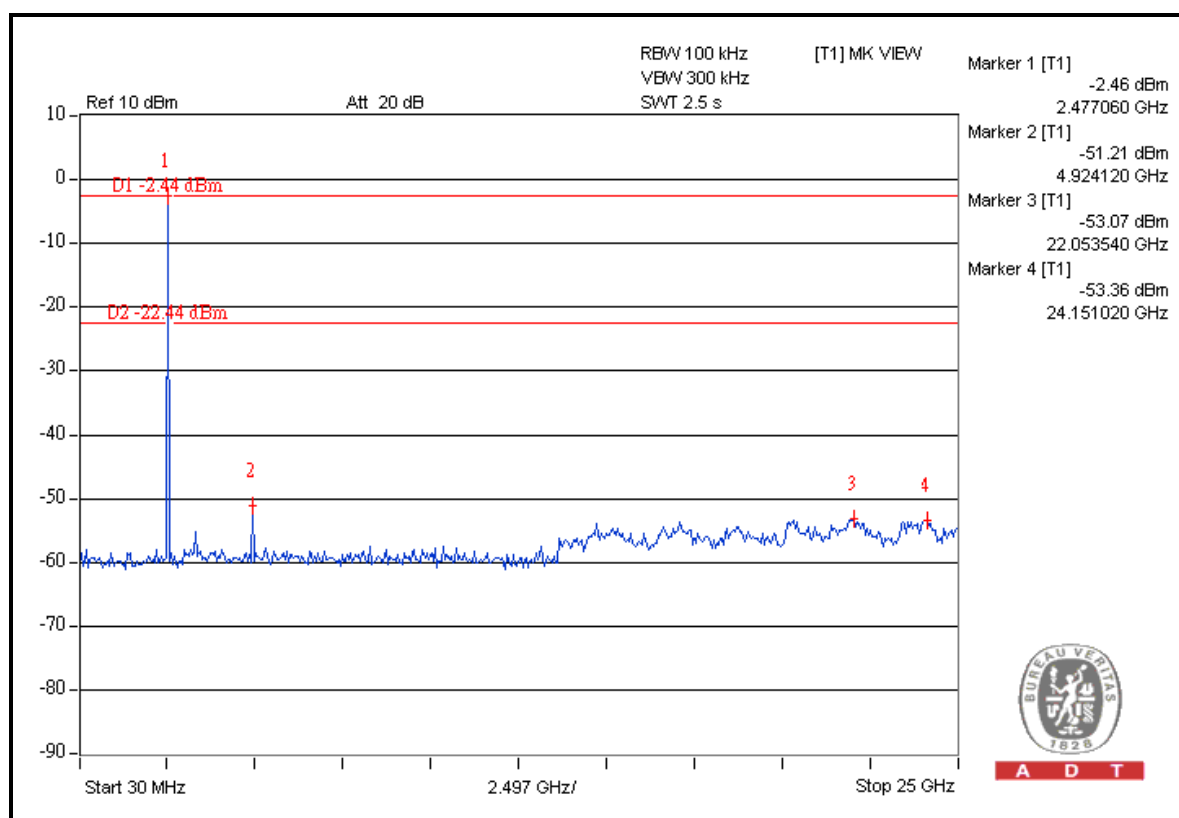

A D T

Mode A: FOR 8DPSK

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2402.00 (PK)	105.2	52.1	53.1	74.00
2402.00 (AV)	-	-	23.0	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2480.00 (PK)	104.5	53.8	50.7	74.00
2480.00 (AV)	-	-	20.6	54.00

NOTE:


- Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 2 pages.
- Maximum field strength in restrict band (PK value) = Fundamental emission (PK value) – Delta.
- Average value = Peak value + 20 Log (duty cycle) = Peak value –30.1dB.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1 \text{ dB}$.



A D T

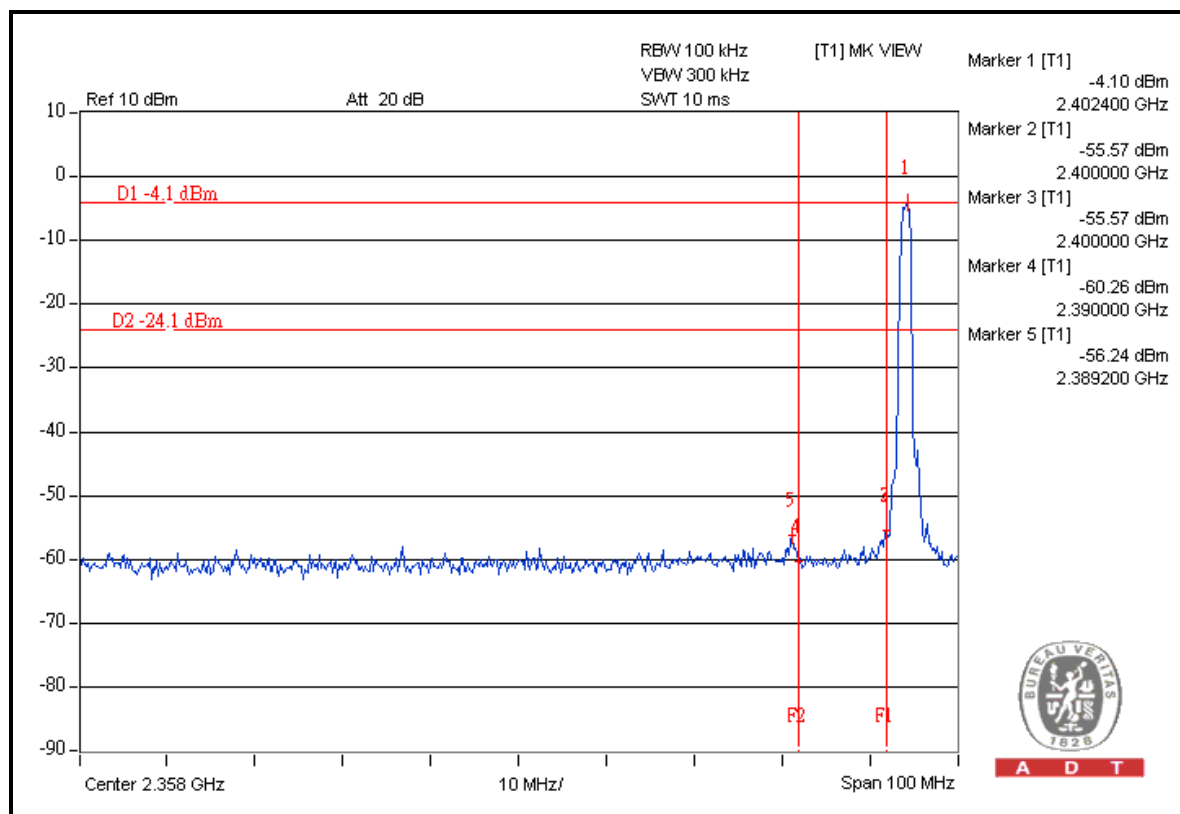

A D T

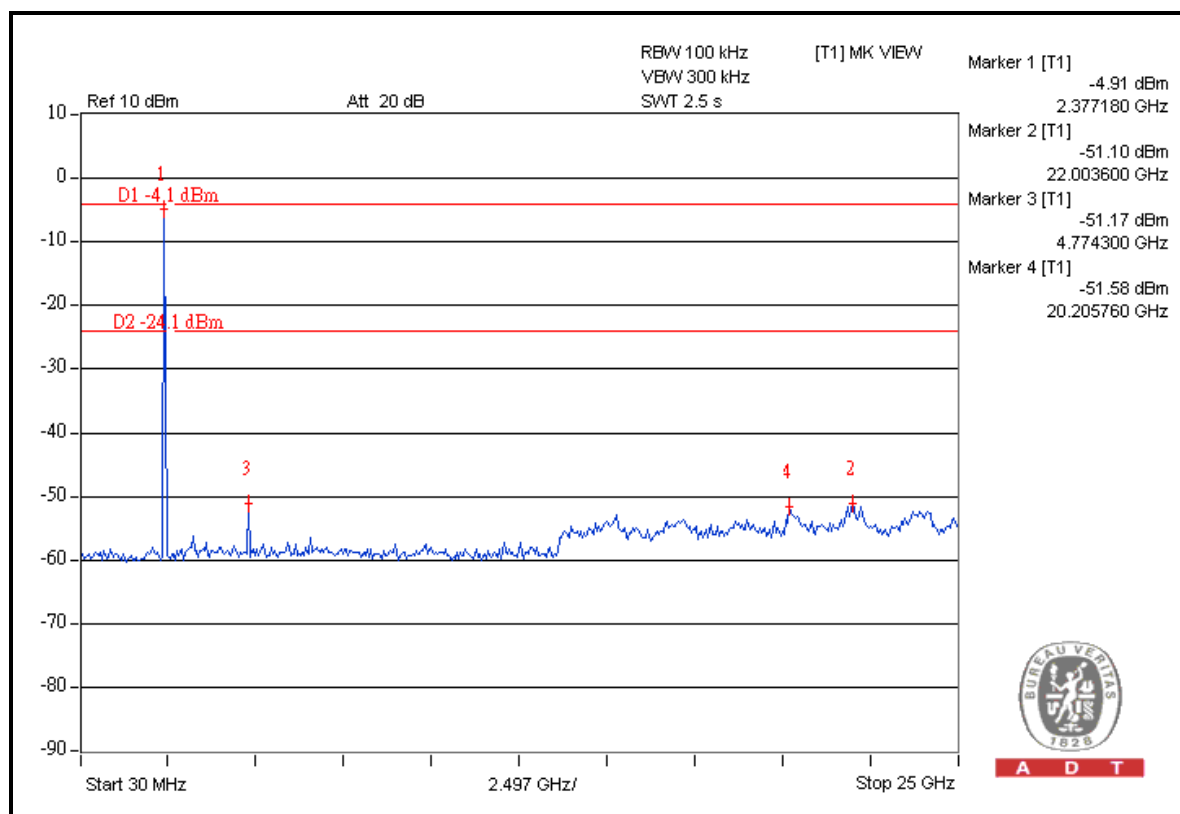

A D T



5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---