

FCC Part 15C Compliance Test Report

Test Report no.:	Salo_FCC_0527_01.doc	Date of Report:	04.07.2005
Number of pages:	19	Customer's Contact person:	Lasse Vaattovaara
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	533467		
IC recognition no.:	5385		
Tested devices/ accessories:	Phone RA-8 / Battery BP-6M, Dummy Battery SF-24D, Memory Unit MU-8 and AC- Charger ACP-12		
FCC ID:	PYARA-8	IC:	661V-RA8
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003) and IC standard RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Tomi Lipponen
Design Engineer, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	13.06.2005
Testing completed	04.07.2005
The customer's contact person	Lasse Vaattovaara
Test Plan referred to	T:\Projects\RA-8\testplans\EMC\TCC\RA-8_EMC_TESTPLAN.xls
Notes	-
Document name	T:\Projects\RA-8\results\emc\FCC\Salo_FCC_0527_01.doc

1.1. EUT and Accessory Information

The EUT is a triple band (GSM900/1800/1900) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RA-8	004400/65/171146/5	4102	-	05.20(01)	10655
Phone	RA-8	004400/65/171140/8	4102	-	05.20(01)	10634
Dummy Battery	SF-24D	-	3.054	-	-	10656
Battery	BP-6M	0670467393213M053210116387	-	-	-	10666
Headset	HS-5	-	1.0	1.2	-	07192
Memory Unit	MU-8	F276780444KAD	-	-	-	10635
AC-Charger	ACP-12	067529439439L474811094951	-	-	-	10587

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-210	Name of the test	Result
15.247(b)(1)	6.2.2(o)(a3)	Peak output power	PASSED
15.247(c)	6.2.2 (o)(e1)	Band edge compliance of RF emissions	PASSED
15.247(c)	6.2.2 (o)(e1)	Spurious RF conducted emissions	PASSED
15.247(c), 15.209	6.2.2 (o)(e1)	Spurious radiated emissions	PASSED
15.207	6.6	AC powerline conducted emissions	PASSED
15.247(a)(1)	6.2.2(o)(a3)	20 dB bandwidth	PASSED
15.247(a)(1)	6.2.2(o)(a1)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	Amend I(ii)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	Amend I(ii)	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Salo Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Spurious radiated emissions test setup	4
3. Peak output power (FCC §15.247(b)(1), RSS-210 6.2.2(o)(a3))	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	5
4. Spurious RF conducted emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1))	7
4.1. Test method and limit.....	7
4.2. Bluetooth Test results	7
5. AC powerline conducted emissions (FCC §15.207, RSS-210 6.6).....	9
5.1. Test method and limit.....	9
5.2. Bluetooth Test results	10
6. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a3))	11
6.1. Test method and limit.....	11
6.2. Bluetooth Test results	11
7. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))	14
7.1. Test method and limit.....	14
7.2. Bluetooth Test results	14
8. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii)).....	16
8.1. Test method and limit.....	16
8.2. Bluetooth test results.....	16
9. Test Equipment.....	18
9.1. Conducted measurements	18
9.2. Radiated measurements	18

2. Test setups


2.1. Conducted RF test setup

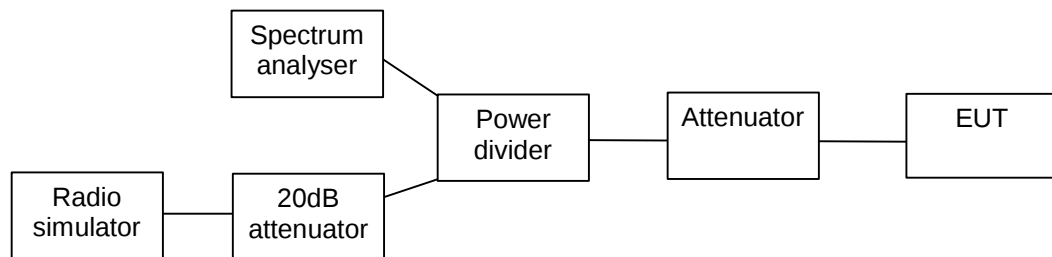

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

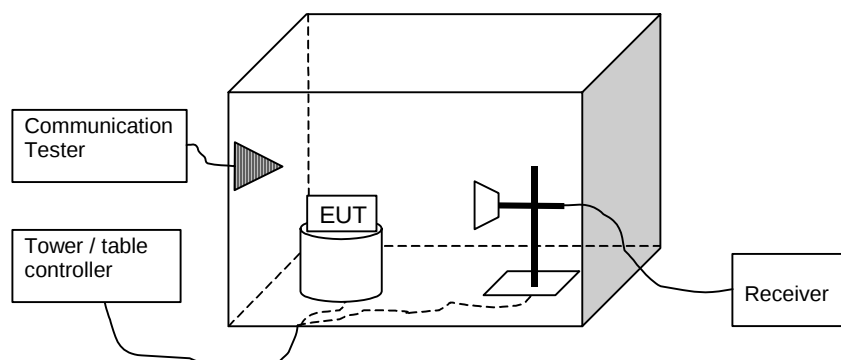

3. Peak output power (FCC §15.247(b)(1), RSS-210 6.2.2(o)(a3))

EUT with DUT number	RA-8, DUT 10655
Accessories with DUT numbers	SF-24D, DUT 10656; MU-8, DUT 10635
Operation Voltage [V] / [Hz]	115 V/ 60 Hz
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 55 / 101.9
Date of measurements	04.07.2005
Measured by	Sami Lehtonen

3.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GSKF modulation, PRBS packet type

Channel	P [dBm]	P [mW]	Result
0	-0.40	0.912	PASSED
40	-0.60	0.871	PASSED
78	-1.20	0.759	PASSED


Channel 0 (Peak detector, RBW: 1 MHz)

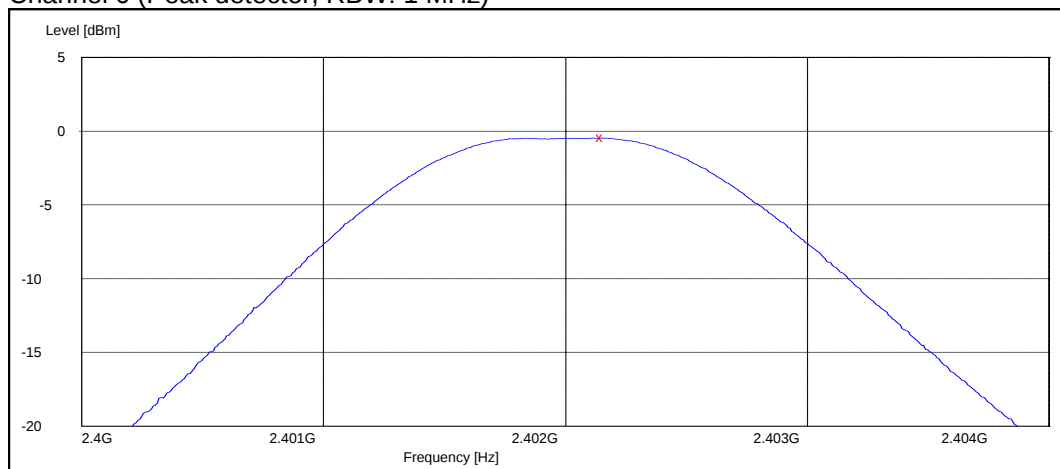

Channel 40 (Peak detector, RBW: 1 MHz)

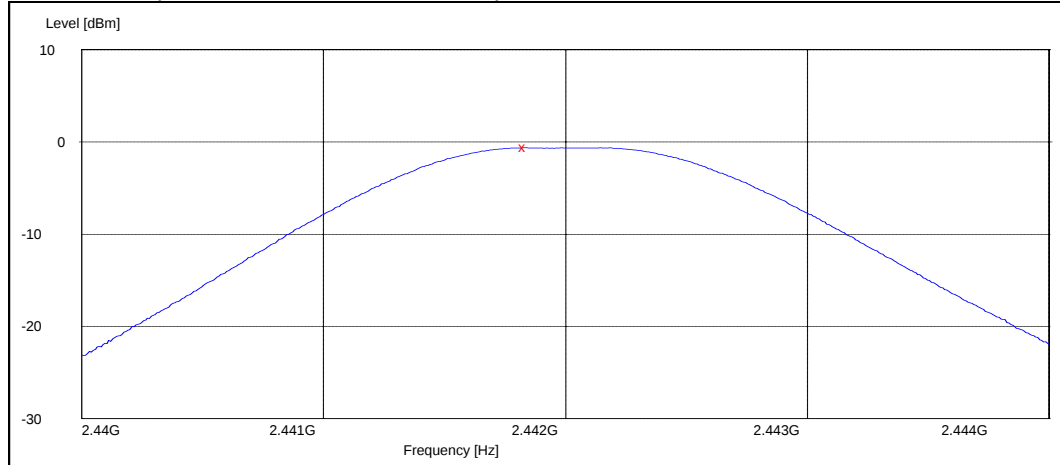

Channel 78 (Peak detector, RBW: 1 MHz)

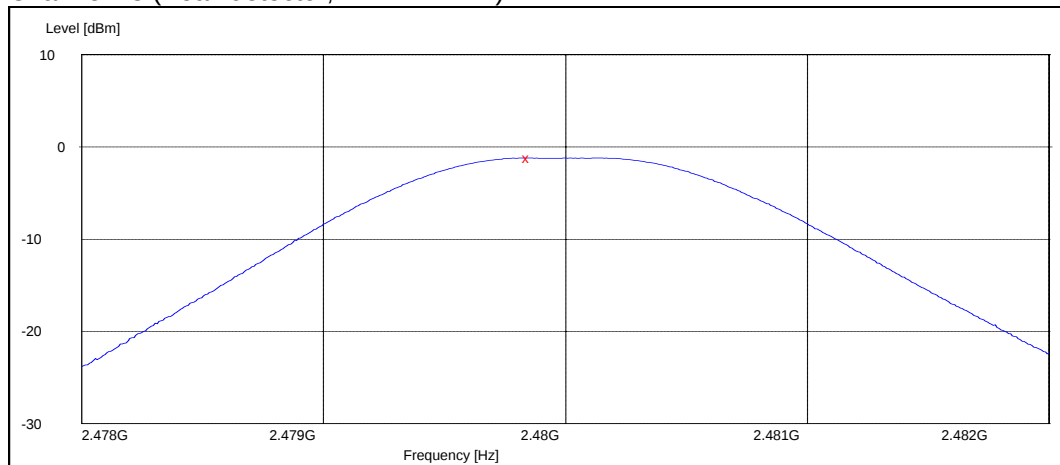

4. Spurious RF conducted emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1))

EUT with DUT number	RA-8, DUT 10655
Accessories with DUT numbers	SF-24D, DUT 10656; MU-8, DUT 10635
Operation Voltage [V] / [Hz]	115 V/ 60 Hz
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 55 / 101.9
Date of measurements	04.07.2005
Measured by	Sami Lehtonen

4.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0

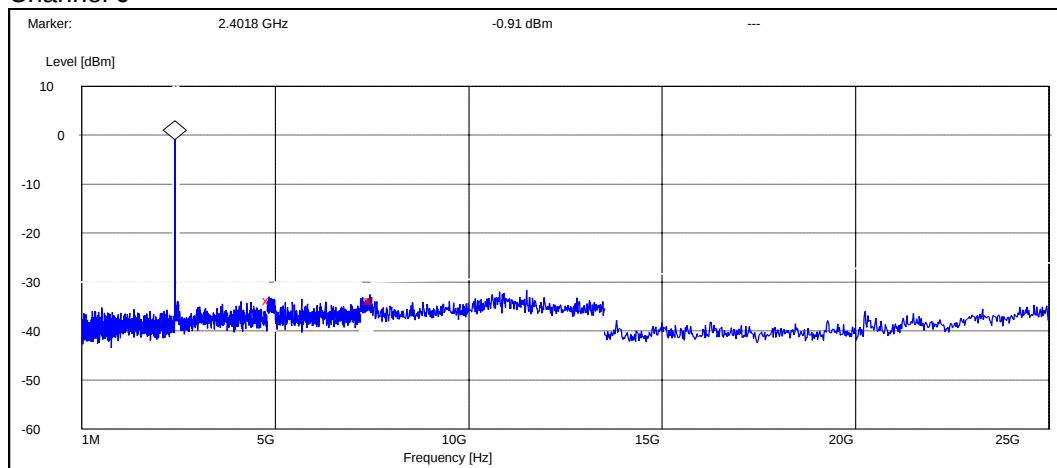


Frequency [MHz]	P [dBc]	Result
4840.800000	-32.788065	PASSED
7444.800000	-32.888065	PASSED
7500.000000	-32.788065	PASSED

Channel 40

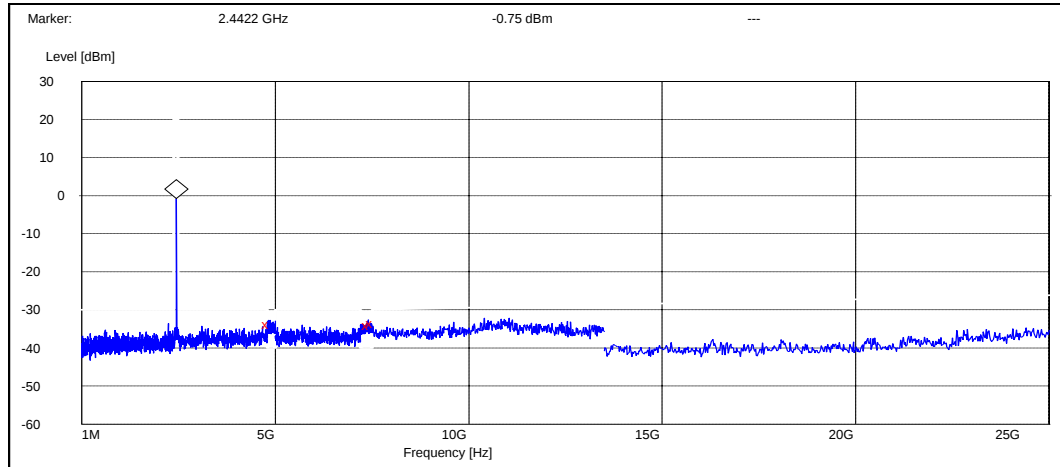

Frequency [MHz]	P [dBc]	Result
4820.800000	-33.047046	PASSED
7404.600000	-33.247046	PASSED
7500.000000	-32.747046	PASSED

Channel 78

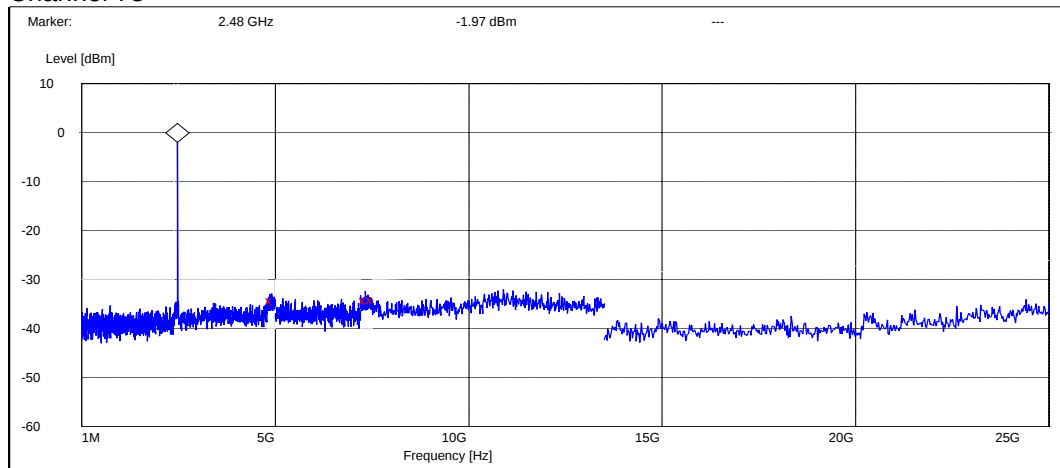

Frequency [MHz]	P [dBc]	Result
4907.200000	-32.325168	PASSED
7332.600000	-32.225168	PASSED
7500.000000	-32.125168	PASSED

5. AC powerline conducted emissions (FCC §15.207, RSS-210 6.6)

EUT with DUT number	RA-8, DUT 10634
Accessories with DUT numbers	BP-6M, DUT 10666; DTS-128, DUT10635; ACP-12E, DUT 10587
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 55 / 101.9
Date of measurements	04.07.2005
Measured by	Sami Lehtonen

5.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type

Channel 40

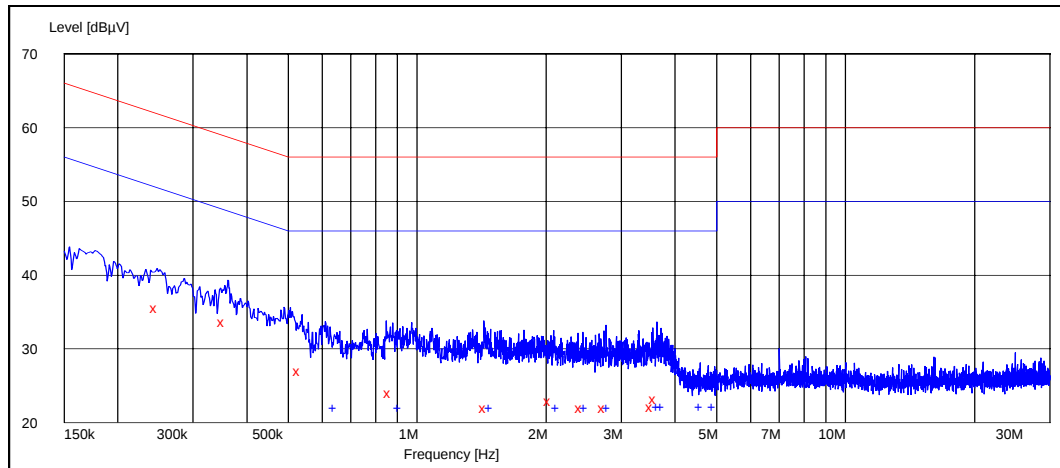

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.249000	35.60	N	PASSED
0.357000	33.70	N	PASSED
0.537000	27.00	L1	PASSED
0.874500	24.00	L1	PASSED
1.459500	22.00	L1	PASSED
2.062500	22.90	L1	PASSED
2.440500	22.00	L1	PASSED
2.769000	22.00	L1	PASSED
3.574500	22.10	L1	PASSED
3.642000	23.20	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.649500	22.00	N	PASSED
0.919500	22.00	N	PASSED
1.504500	22.00	N	PASSED
2.152500	22.00	N	PASSED
2.508000	22.00	N	PASSED
2.832000	22.00	N	PASSED
3.700500	22.10	N	PASSED
3.786000	22.10	N	PASSED
4.650000	22.10	N	PASSED
4.996500	22.10	N	PASSED

6. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a3))

EUT with DUT number	RA-8, DUT 10655
Accessories with DUT numbers	SF-24D, DUT 10656; MU-8, DUT 10635
Operation Voltage [V] / [Hz]	115 V/ 60 Hz
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 55 / 101.9
Date of measurements	04.07.2005
Measured by	Sami Lehtonen

6.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
≤ 1

6.2. Bluetooth Test results


6.2.1 GFSK modulation, PRBS packet type

Channel	20 dB bandwidth [kHz]	Result
0	748.000	PASSED
40	760.000	PASSED
78	748.000	PASSED


Channel 0

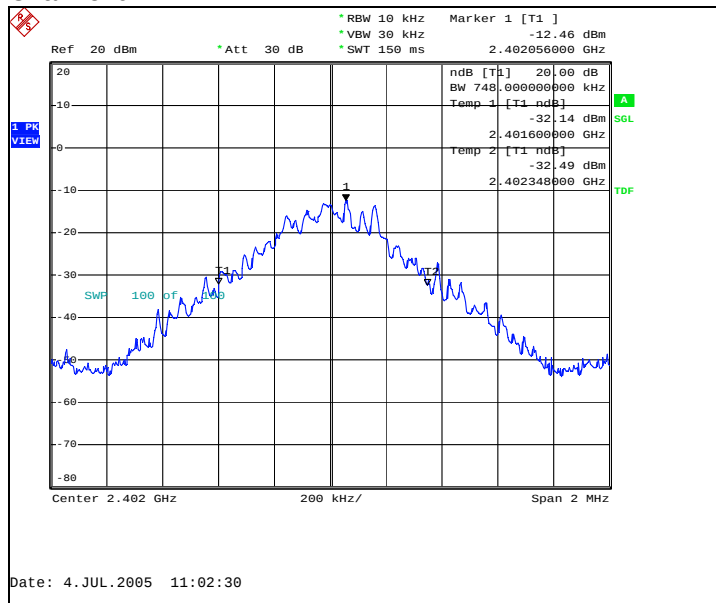

Channel 40

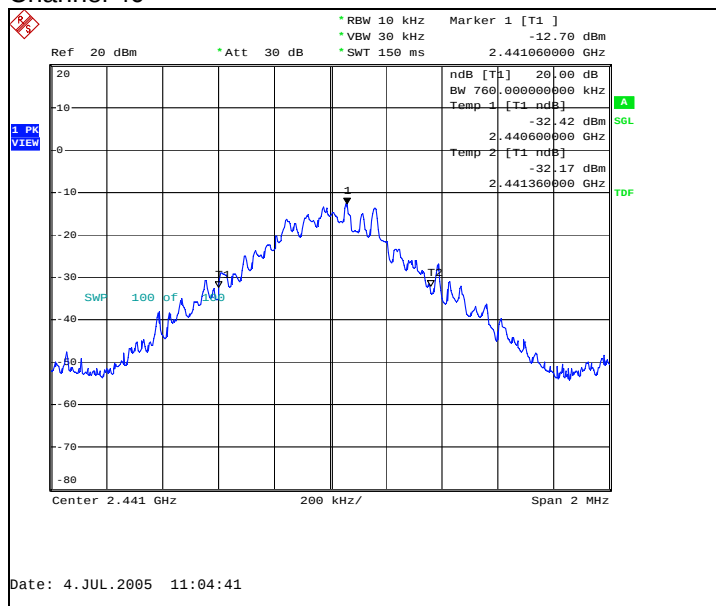

Channel 78

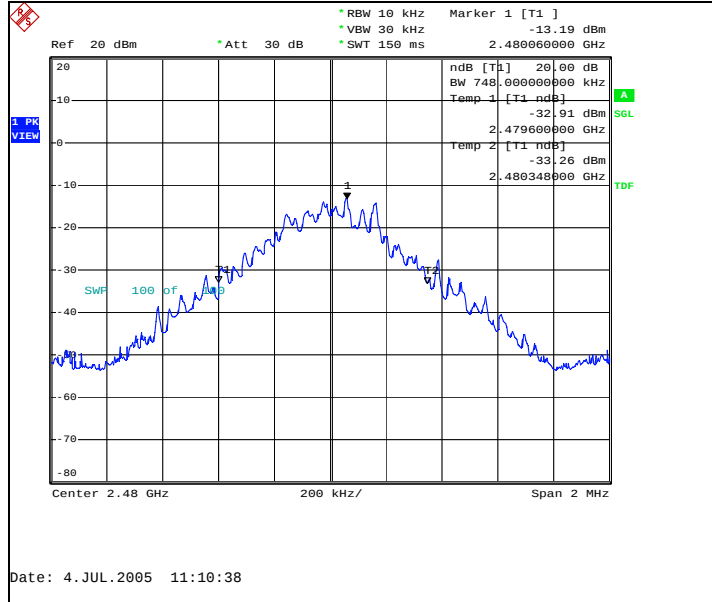

7. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))

EUT with DUT number	RA-8, DUT 10655
Accessories with DUT numbers	SF-24D, DUT 10656; MU-8, DUT 10635
Operation Voltage [V] / [Hz]	115 V/ 60 Hz
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 55 / 101.9
Date of measurements	04.07.2005
Measured by	Sami Lehtonen

7.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 75

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED

Hopping on, number of hopping frequencies

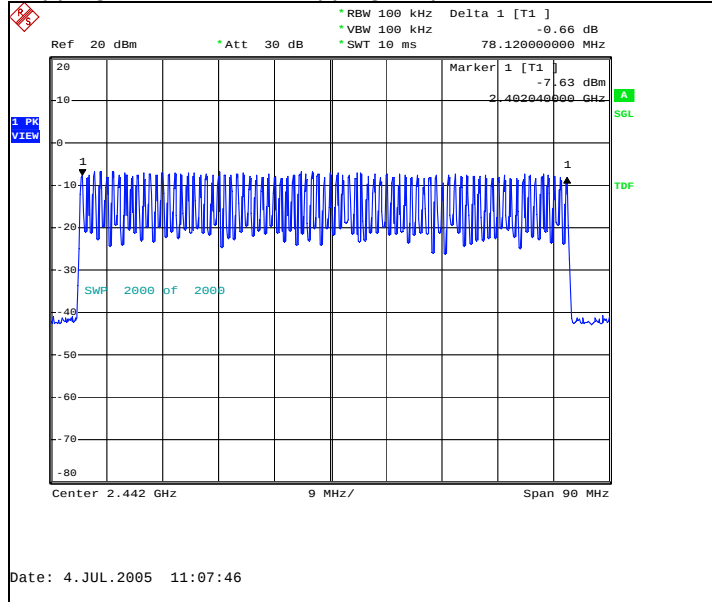

8. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))

EUT with DUT number	RA-8, DUT 10655
Accessories with DUT numbers	SF-24D, DUT 10656; MU-8, DUT 10635
Operation Voltage [V] / [Hz]	115 V/ 60 Hz
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 55 / 101.9
Date of measurements	04.07.2005
Measured by	Sami Lehtonen

8.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

8.2. Bluetooth test results


8.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
56	2952.000	0.165312	PASSED

Hopping on, number of transmissions, channel 40

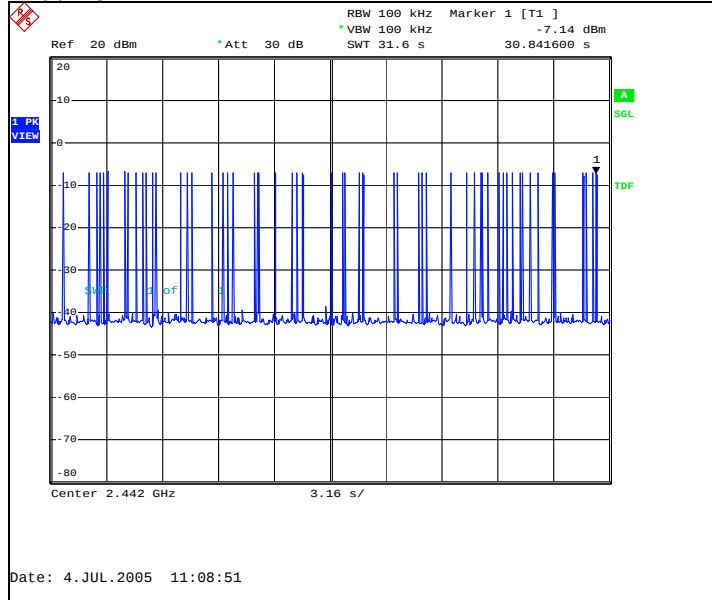

Hopping on, duration of one transmission, channel 40

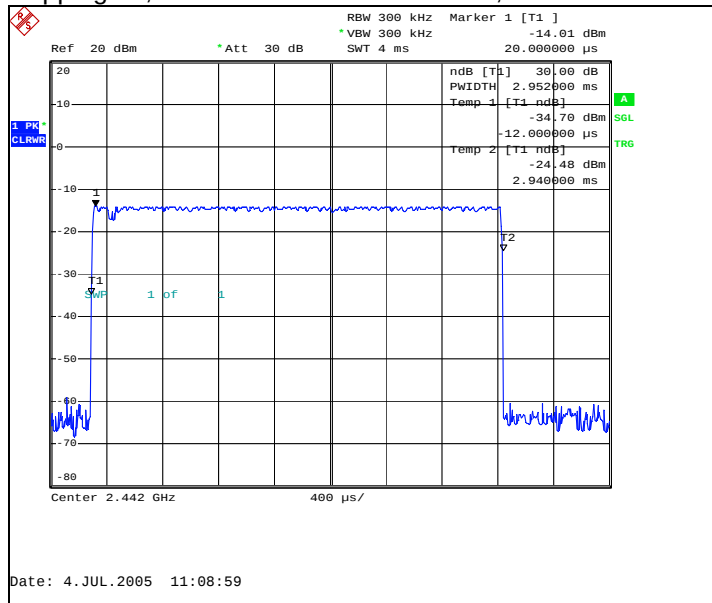

9. Test Equipment

9.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIB Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24
2362	Power Supply	NGPX 70/5	R&S	22/24
-	RF Emission Software	ES-K1 v.1.60	R&S	15C, 15B

9.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24, 15C
1749	Log. per. Antenna	HL025	R&S	22/24, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24, 15C
2004	Relay Switch Unit	RSU	R&S	22/24, 15C, 15B
2006	Radiation Reference Source	VSQ	MEB	22/24, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24, 15C, 15B
2019	Multimeter	34401A	HP	22/24, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22/24, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0,2-10SS	Wainwright	22/24, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24, 15C
2057	Log. per. Antenna	HL025	R&S	22/24, 15C

Eq. No	Equipment	Type	Manufacturer	Used in
2109	Power Supply	PL330QMD	THURLBY	22/24, 15C, 15B
2110	Multimeter	34401A	HP	22/24, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2138	Ultra Broadband Antenna	HL562	R&S	22/24, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24, 15C, 15B
2334	GPIB Switch 2 to 1	-	National Instruments	22/24, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24, 15C
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24, 15C, 15B