

FCC Part 15C Compliance Test Report

Test Report no.:	Cph_FCC_0650_01.doc	Date of Report:	11-12-2006
Number of pages:	11	Customer's Contact person:	Timo Seppälä
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone; RM-294 (HW: 2020), Battery; BP-4L. AC-Charger; AC-4, Data Cable; CA-53		
FCC ID:	PYARM-294	IC:	661V-RM294
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Allan F. Henriksen, Engineer

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	30-11-2006
Testing completed	11-12-2006
The customer's contact person	Timo Seppälä
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	None
Document name	T:\\Projects\\RM-294\\EMC\\Results\\FCC\\Cph_FCC_0650_01.doc

1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-294	004400/01/028254/5	2020	-	1.0633.08.01	27762
Battery	BP-4L	Proto 4/06wk28/Tue	-	-	-	27763
Data Cable	CA-53	108882607250	-	-	-	29067
AC Charger	AC-4E	4090496113960100313; 0675384	3.22	-	-	27778

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	NP
15.247(c)	A8.5	Band edge compliance of RF emissions	NP
15.247(c)	A8.5	Spurious RF conducted emissions	NP
15.247(c), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	Passed
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	NP

WLAN:

Section in CFR 47	Section in RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	NP
15.247(c)	A8.5	Band edge compliance of RF emissions	NP
15.247(c)	A8.5	Spurious RF conducted emissions	NP
15.247(c), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	Passed
15.247(a)(2)	A8.2 (1)	6 dB bandwidth	NP
15.247(e)	A8.2 (2)	Power spectral density	NP

PASSED
FAILED
NP


The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Copenhagen Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Spurious radiated emissions test setup	4
3. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	7
4.1. Test method and limit.....	7
4.2. WLAN Test results	8
5. Test Equipment.....	10
5.1. Conducted measurements	10
5.2. Radiated measurements	10

2. Test setups


2.1. Conducted RF test setup

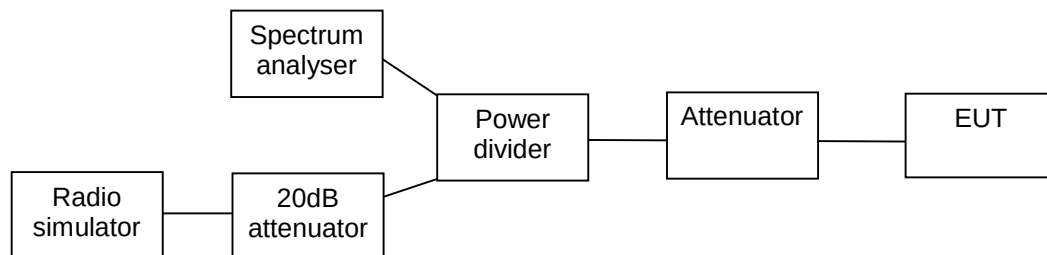

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

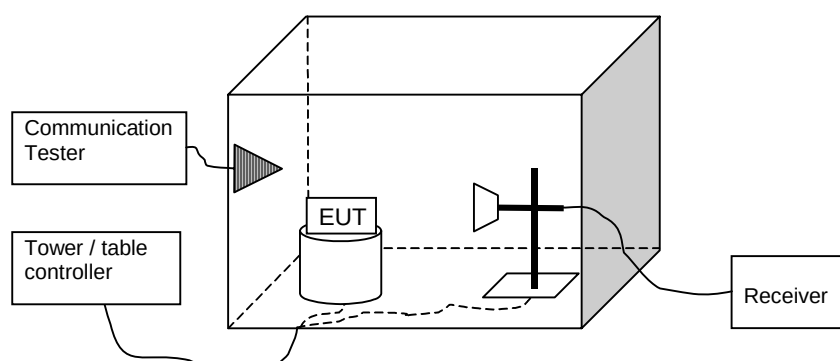

3. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-294 Dut # 27762
Accessories with DUT numbers	BP-4L Dut # 27763 + AC-4E Dut # 27778 + CA-53 Dut # 29067
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	22.7 / 36.5 1012
Date of measurements	11-12-2006
Measured by	Allan F. Henriksen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

3.2. Bluetooth Test results

3.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

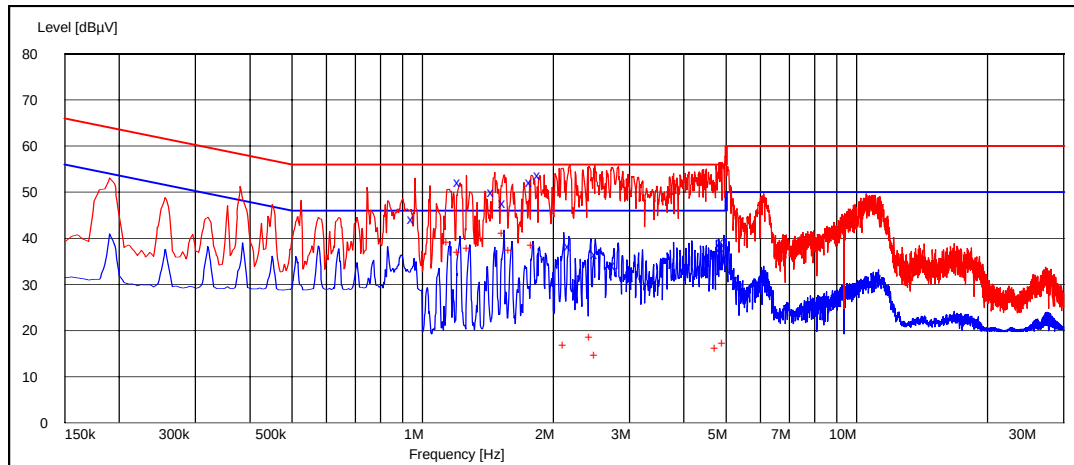

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.955000	44.10	N	Passed
1.220000	52.20	N	Passed
1.460000	50.10	N	Passed
1.550000	47.70	N	Passed
1.785000	52.10	N	Passed
1.865000	53.80	N	Passed
2.190000	38.30	N	Passed
2.530000	36.60	N	Passed
2.775000	34.20	N	Passed
4.920000	38.00	N	Passed
4.935000	38.10	N	Passed
4.940000	39.30	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.150000	39.30	N	Passed
1.215000	37.00	N	Passed
1.280000	37.90	N	Passed
1.540000	41.20	N	Passed
1.600000	37.40	N	Passed
1.800000	38.50	N	Passed
2.130000	16.90	N	Passed
2.450000	18.60	N	Passed
2.510000	14.60	L1	Passed
4.770000	16.20	N	Passed
4.960000	17.40	N	Passed

4. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-294 Dut # 27762
Accessories with DUT numbers	BP-4L Dut # 27763 + AC-4E Dut # 27778 + CA-53 Dut # 29067
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.7 / 36.5 1012
Date of measurements	11-12-2006
Measured by	Allan F. Henriksen

4.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

4.2. WLAN Test results

4.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 7 / 2442 MHz

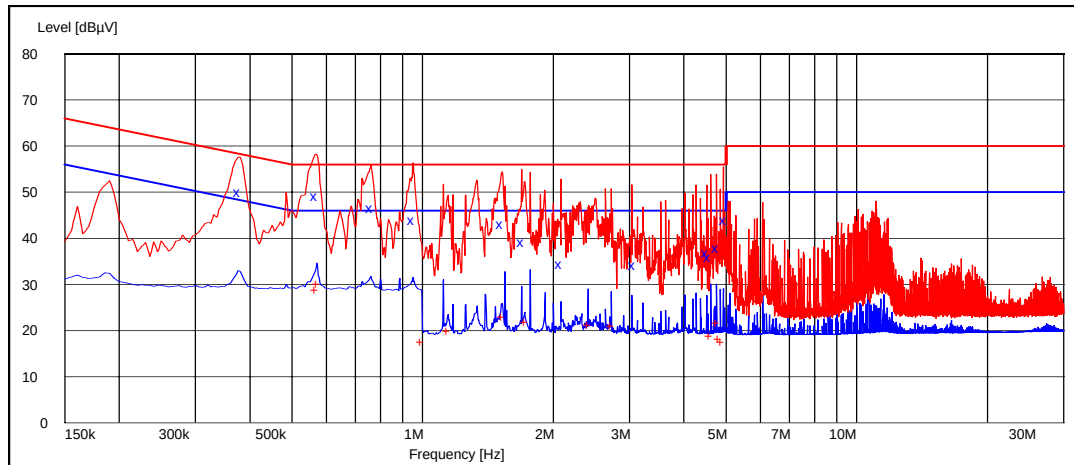

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.380000	50.00	N	Passed
0.570000	49.20	N	Passed
0.765000	46.70	N	Passed
0.955000	44.00	N	Passed
1.525000	43.10	N	Passed
1.705000	39.20	N	Passed
2.090000	34.50	L1	Passed
3.085000	34.30	L1	Passed
4.540000	36.80	L1	Passed
4.595000	35.90	L1	Passed
4.795000	37.80	L1	Passed
4.985000	44.00	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.570000	28.90	N	Passed
0.575000	30.10	N	Passed
1.000000	17.60	N	Passed
1.150000	19.80	N	Passed
1.535000	23.00	N	Passed
1.735000	21.80	N	Passed
2.420000	21.10	N	Passed
2.735000	21.00	N	Passed
4.615000	18.80	N	Passed
4.785000	21.60	N	Passed
4.845000	18.10	L1	Passed
4.915000	17.50	L1	Passed

4.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 7 / 2442 MHz

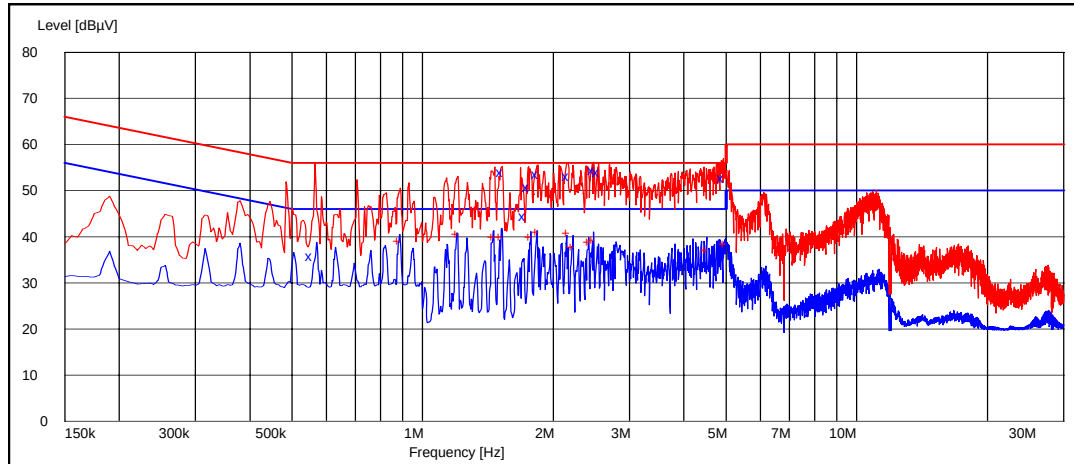

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.555000	35.80	L1	Passed
1.525000	54.00	N	Passed
1.720000	44.50	N	Passed
1.755000	50.80	N	Passed
1.840000	53.60	N	Passed
2.165000	53.10	N	Passed
2.485000	54.40	N	Passed
2.550000	54.00	N	Passed
4.940000	52.70	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.885000	39.10	N	Passed
1.205000	40.60	N	Passed
1.460000	39.90	N	Passed
1.520000	40.00	N	Passed
1.775000	39.80	N	Passed
1.840000	41.10	N	Passed
2.165000	40.70	N	Passed
2.225000	37.80	N	Passed
2.420000	38.90	N	Passed
2.480000	39.20	N	Passed
4.520000	37.00	N	Passed
4.970000	38.50	N	Passed

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24, 15C, 15B

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24, 15C, 15B
14963	RF Preampifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
19830	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24, 15C, 15B
19151	High Pass Filter 3GHz WHK3.0/18G-10ss	WHJS3000-10SS	Wainwright	22/24, 15C, 15B
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright Instruments	22/24, 15C, 15B
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	22/24, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483- 2390/2493-35/10SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 4 filter	WRCG1737/1743- 1733/1747-40/6SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 5&6 filter	WRCG832/83/-825/845- 40/5SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 8 filter	WRCG894.6/900.6- 890.6/904.6-40/80SS	Wainwright	22/24, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953- 1940/1960-40/6SS	Wainwright	22/24, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24, 15C, 15B
15190	Infra Red Remote Control Unit	4630	Emco	22/24, 15C, 15B
14993	EMI Test Receiver 9KHz- 2750MHz	ESCS30	Rohde&Schwarz	22/24, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24, 15C, 15B
15105	Attenuator 30dB DC-1000MHz 50 Ohm Nf - Nm	NAT-30	Mini-Circuits	22/24, 15C, 15B
13302	Spectrum Analyzer 9KHz- 12.8GHz	HP8596E	Hewlett Packard	22/24, 15C, 15B
11584	Spectrum analyzer 50Hz- 6,5GHz	HP8561B	Hewlett Packard	22/24, 15C, 15B
13134	Tracking generator	HP85645A	Hewlett Packard	22/24, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
11487	Network analyzer 300KHz- 3,0GHz	HP8753A	Hewlett Packard	22/24, 15C, 15B
14807	S - Parameter Test Set 300KHz- 6GHz	HP85047A	Hewlett Packard	22/24, 15C, 15B
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22/24, 15C, 15B