

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RM-821_11	Date of Report:	10-Sep-2012
Number of pages:	14	Customer's Contact person:	Lasse Vaattovaara
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-821 / AC-Charger AC-50U / Headset WH-208		
FCC ID:	PYARM-821	IC:	661V-RM821
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24 , TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009) Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Hannu Söderholm, Senior Engineer, EMC

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	28-Aug-2012
Testing completed	05-Jul-2012
The customer's contact person	Lasse Vaattovaara
Test Plan referred to	T:\Projects\RM-820\TestPlan\RS_testplan_RM-820_EMC_FCC_SAR_HAC.xlsm
Notes	-
Document name	T:\Projects\RM-821\EMC\FCC22&24_RM-821_11.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-820	004402138707215	2003		1123.0005.8325.9680.139	16361
AC-Charger	AC-50U	4090432185270513678;0675620	-	-	-	16341
Headset	WH-208	-	-	-	-	16345
Phone	RM-820	004402138707520	2003		1123.0005.8325.9680.139	16349
Phone	RM-820	004402138707280	2003		1123.0005.8325.9680.139	16350
Phone	RM-820	004402138707488	2003		1123.0005.8325.9680.139	16356
Phone	RM-820	004402138707223	2003		1123.0005.8325.9680.139	16352
Phone	RM-820	004402138707512	2003		1123.0005.8325.9680.139	16351
Phone	RM-820	004402138708825	2003	-	1123.0000.8325.9680.139.	16334
AC-Charger	AC-50U	4090432185270513671;0675620	-	-	-	16340
Headset	WH-208	-	-	-	-	16344
Phone	RM-820	004402138707389	2003	-	1230.0035.9754.12312	42882

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	4.3	Frequency stability, voltage variation	PASSED

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	6.3	Frequency stability, voltage variation	PASSED

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 22/24/27 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	3
2. 99% occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1).....	5
2.1. Test Setup	5
2.2. Test method and limit	5
2.3. GSM 1900 Test results	6
2.4. GSM 850 Test results	7
2.5. WCDMA 1900 Test results	8
2.6. WCDMA 850 Test results	8
3. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3).....	9
3.1. Test Setup	9
3.2. Test method and limit	9
3.3. GSM 850 Test results	10
3.4. GSM 1900 Test results	10
4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3).....	11
4.1. Test Setup	11
4.2. Test method and limit	11
4.3. GSM 850 Test results	12
4.4. GSM 1900 Test results	12
5. Test Equipment.....	13
5.1. Conducted measurements	13
5.2. Radiated measurements	14

2. 99% occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-820, DUT 16334
Accessories with DUT numbers	AC-50U , DUT 16340 ; WH-208, DUT 16344
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 43 / 100
Date of measurements	05-Jun-2012
Measured by	Tomi Lipponen

2.1. Test Setup

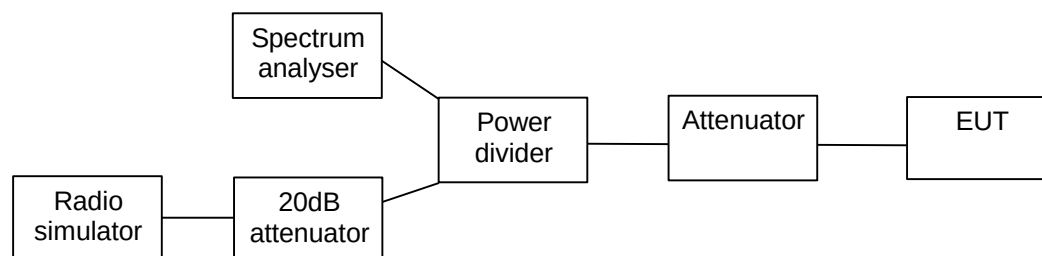


2.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24, 27 and IC standard RSS-GEN.


2.3. GSM 1900 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
GSM	248
EGPRS	248

GSM, Channel 661 / 1880.0 MHz

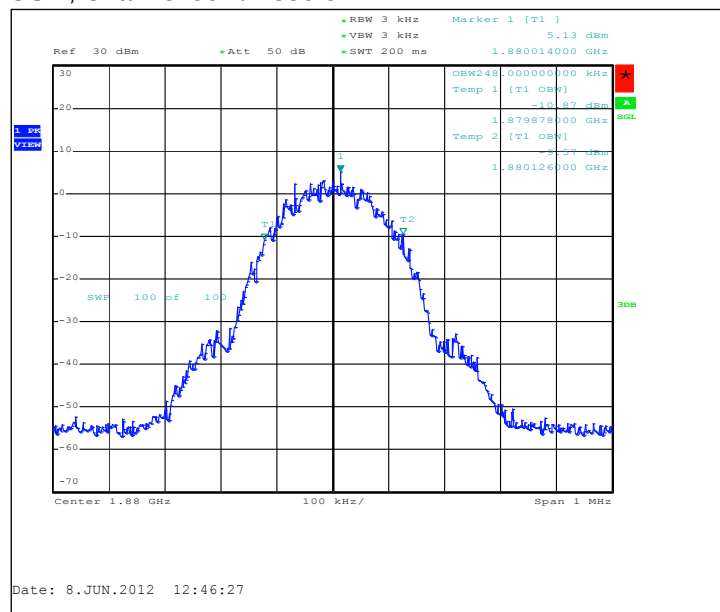


EGPRS, Channel 661 / 1880.0 MHz

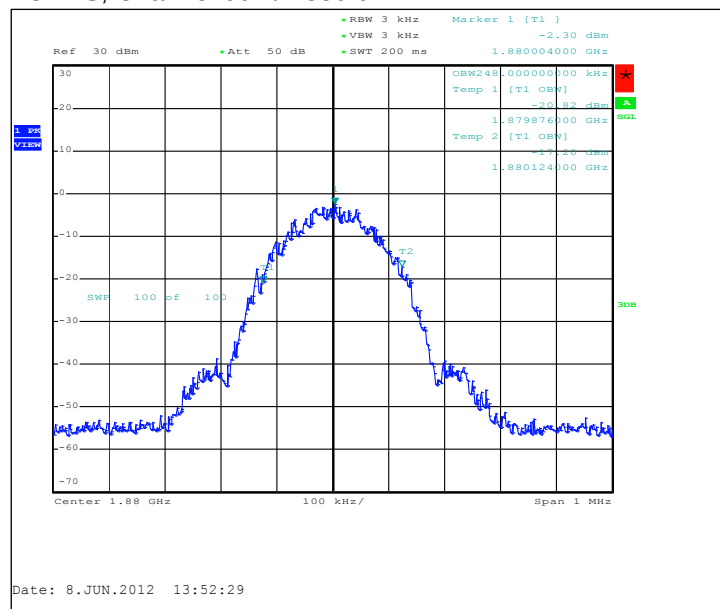


2.4. GSM 850 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
GSM	244
EGPRS	244

GSM, Channel 190 / 836.6 MHz

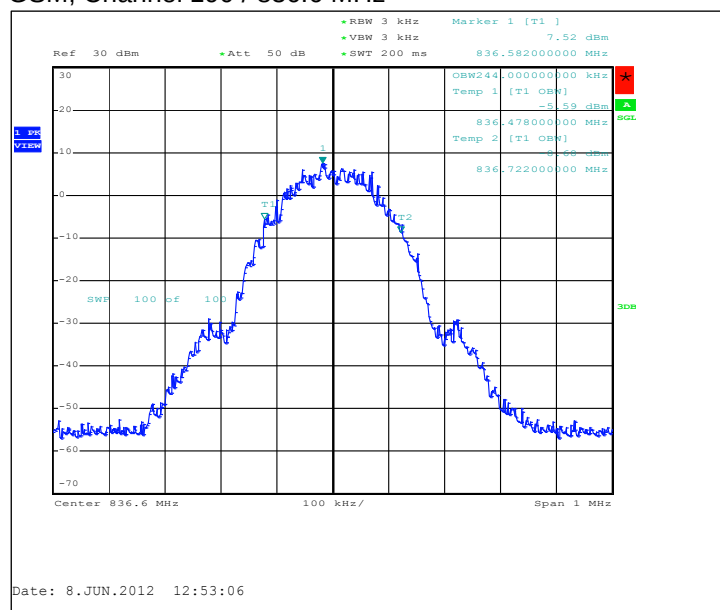


EGPRS, Channel 190 / 836.6 MHz

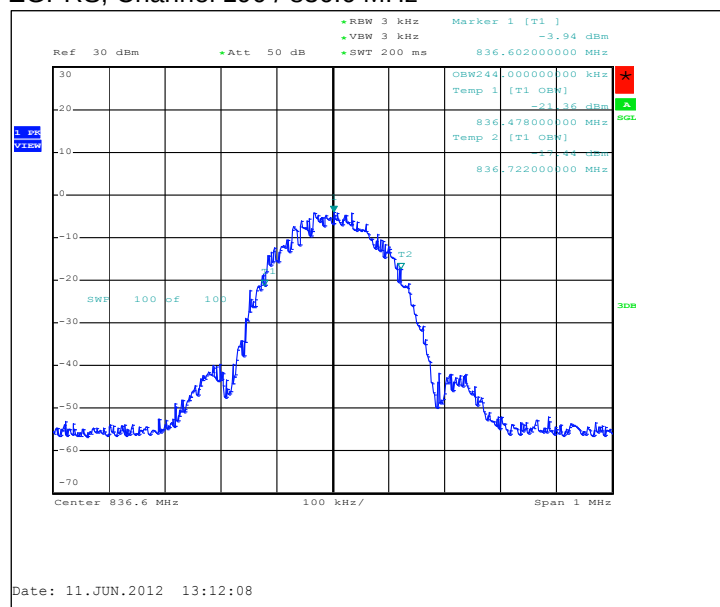

2.5. WCDMA 1900 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
FDD	4200


FDD, Channel 9400 / 1880.0 MHz

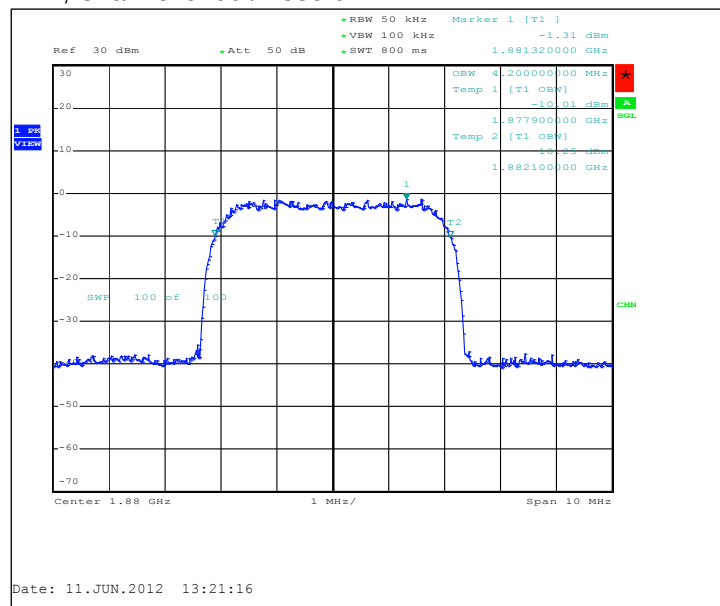

2.6. WCDMA 850 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
FDD	4180


FDD, Channel 4175 / 835.0 MHz

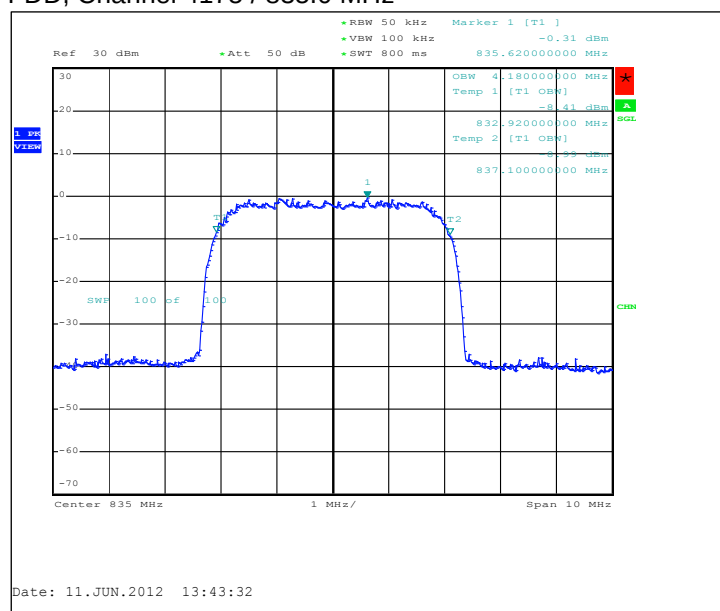

3. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)

EUT with DUT number	RM-820, DUT 16334
Accessories with DUT numbers	AC-50U , DUT 16340 ; WH-208, DUT 16344
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 43 / 100
Date of measurements	05-Jun-2012
Measured by	Tomi Lipponen

3.1. Test Setup

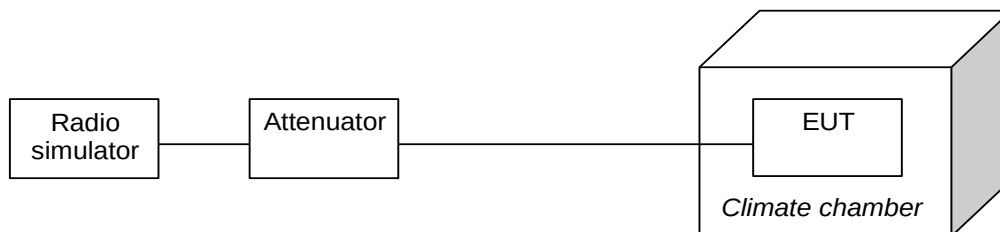

3.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24, 27 and IC standard RSS-132, RSS-133 and RSS-139 as follows:

The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize. The EUT is placed in the chamber. The EUT is set in idle mode for 15 minutes. The EUT is set to transmit. The transmit frequency error was measured immediately. The steps c - e were repeated for each temperature. Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
+/- 2.5

3.3. GSM 850 Test results

GSM, Channel 190 / 836.6 MHz

Temperature [°C]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
50	836.6	-13.75	-0.0164	PASSED
40	836.6	-21.95	-0.0262	PASSED
30	836.6	-9.62	-0.0115	PASSED
20	836.6	-18.6	-0.0222	PASSED
10	836.6	-12.72	-0.0152	PASSED
0	836.6	-2.97	-0.0036	PASSED
-10	836.6	8.2	0.0098	PASSED
-20	836.6	-2.39	-0.0029	PASSED
-30	836.6	-15.24	-0.0182	PASSED

3.4. GSM 1900 Test results


GSM, Channel 661 / 1880.0 MHz

Temperature [°C]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
50	1880	0.84	0.0004	PASSED
40	1880	-4.78	-0.0025	PASSED
30	1880	2.84	0.0015	PASSED
20	1880	7.1	0.0038	PASSED
10	1880	5.75	0.0031	PASSED
0	1880	32.09	0.0171	PASSED
-10	1880	44.81	0.0238	PASSED
-20	1880	19.37	0.0103	PASSED
-30	1880	-8.65	-0.0046	PASSED

4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)

EUT with DUT number	RM-820, DUT 16334
Accessories with DUT numbers	AC-50U , DUT 16340 ; WH-208, DUT 16344
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 43 / 100
Date of measurements	19-Jun-2012
Measured by	Tomi Lipponen

4.1. Test Setup



4.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24, 27 and IC standard RSS-132, RSS-133 and RSS-139 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
+/- 2.5

4.3. GSM 850 Test results

GSM, Channel 190 / 836.6 MHz

Voltage level [V]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
Max / 4.1	836.6	-6.65	-0.0079	PASSED
Nominal / 3.7	836.6	-23.7	-0.0283	PASSED
Battery cut-off point / 3.5	836.6	1.94	0.0023	PASSED

4.4. GSM 1900 Test results

GSM, Channel 661 / 1880.0 MHz

Voltage level [V]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
Max / 4.1	1880	24.54	0.0131	PASSED
Nominal / 3.7	1880	6.01	0.0032	PASSED
Battery cut-off point / 3.52	1880	5.75	0.0031	PASSED

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
6038	Data Logger	Testo 580	Testo	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
6015	Receiver	ESI	R&S	-
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
1759	LISN 50 μ H	ESH3-Z5	R&S	-
2390	Directional Coupler	DC2600	AR	-
1916	Communication Tester	CMTA84	R&S	-
6012	CDN	CDN USB/c	Teseq	-
2388	Bluetooth Tester	CBT	R&S	-
6046	Attenuator 10dB	8493C	Agilent	-
6047	Attenuator 20dB	8493C	Agilent	-
6036	Data Logger	175-H2	Testo	-
6045	Power splitter	11667B	Agilent	-
6039	USB Interface	5541765	Testo	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6096	EMC Analyzer	E7405A	HP	-
6098	Signal Generator	8648C	Agilent	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6120	Thermal Chamber	WT 20/40	Weiss	-
6121	Power Splitter	HP11667B	Agilent	-
6122	Power Splitter	HP11667B	Agilent	-
6134	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	-
6136	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	-
2359	Temperature Test Chamber	VT4002	Vötsch	-
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
1999	Receiver	ESIB26	R&S	-
2352	Spectrum Analyzer	FSP-30	R&S	-
2097	Pulse Limiter	ESH3-Z2	R&S	-
2039	Power Supply	PL330QMD	Thurlby	-
1992	Signal Generator	83630B	Agilent	-
2206	Signal Generator	SMX	R&S	-

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6038	Data Logger	Testo 580	Testo	-
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
1988	Antenna	HL562	R&S	-
-	RF immunity / Emission Software	EMC32	R&S	-
1917	Communication Tester	CMTA84	R&S	-
2388	Bluetooth Tester	CBT	R&S	-
6037	Data Logger	175-H2	Testo	-
6039	USB Interface	5541765	Testo	-
6087	Antenna	BBHA 9120D	Scharzbeck	-
6088	Antenna	VUBA 9117	Scharzbeck	-
6089	Antenna	HFH2-Z2	R&S	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6115	Open switch and control unit	OSP 130	R&S	-
6116	Open switch and control unit	OSP 150	R&S	-
6130	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	-
6131	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	-
6135	Notch Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	-
2140	Antenna	EMCO93110B	EMCO	-
2142	Antenna	3146	EMCO	-
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	-
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
2176	CDN	CDN 801-M3	Lüthi	-
2027	CDN	M2 (modified) DC1	MEB	-
2028	CDN	M3 (modified) DC2	MEB	-
1984	Antenna	BBHA 9120 D	Schwarzbeck	-
6017	Antenna	SBA 9113	Schwarzbeck	-
2009	Signal Generator	SMP 22	R&S	-
2029	Power Supply	PL330	Thurlby	-
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	-
2353	Receiver	ESIB26	R&S	-
2135	CDN	CDN 801-M3	Lüthi	-