

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-824_02	Date of Report:	13-Jul-2012
Number of pages:	37	Customer's Contact person:	Melava Tia
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-824 / Battery BP-5T / Charger AC-50E / Data Cable CA-190CD / Headset WH-208		
FCC ID:	PYARM-824	IC:	661V-RM824
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Hannu Söderholm, Senior Engineer, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	29-Jun-2012
Testing completed	02-Jun-2012
The customer's contact person	Melava Tia
Test Plan referred to	T:\Projects\RM-824\TestPlan\RS_testplan_RM-824.xls
Notes	-
Document name	T:\Projects\RM-824\EMC\FCC15CBT_RM-824_02.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-824	004402139761484	2210	-	1121.0002.8297.9657.110	42842
Battery	BP-5T	3932132224140100128;0670665	-	-	-	42845
Phone	RM-824	004402139761476	2210	-	1121.0002.8297.9657.110	42843
Battery	BP-5T	3932132224140100129;0670665	-	-	-	42844
Charger	AC-50E	4090492023260400312;0675619	0.5	0.4	-	42776
Data Cable	CA-190CD	-	-	-	-	42778
Headset	WH-208	-	-	-	-	42831

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	PASSED
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.

CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	3
2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2)).....	6
2.1. Test Setup	6
2.2. Test method and limit	6
2.3. Bluetooth Test results	7
3. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)	10
3.2. Test method and limit	10
3.3. Bluetooth Test results	11
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)	15
4.1. Test Setup	15
4.2. Test method and limit	15
4.3. Bluetooth Test results	16
5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	19
5.2. Test method and limit	20
5.3. Bluetooth Test results	21
6. AC powerline conducted emissions FCC §15.207, RSS-GEN 7.2.2.....	23
6.1. Test Setup	23
6.2. Test method and limit	23
6.3. Bluetooth Test results	24
7. 20 dB bandwidth 15.247(a)(1), A8.1 (a).....	25
7.1. Test Setup	25
7.2. Test method and limit	25
7.3. Bluetooth Test results	26
8. Carrier frequency separation 15.247(a)(1), A8.1 (b)	29
8.1. Test Setup	29
8.2. Test method and limit	29
8.3. Bluetooth Test results	30

9. Number of hopping frequencies

15.247(a)(1)(iii), A8.1 (d) 31

9.1. Test Setup 31

9.2. Test method and limit 31

9.3. Bluetooth Test results 32

10. Time of occupancy

15.247(a)(1)(iii), A8.1 (d) 33

10.1. Test Setup 33

10.2. Test method and limit 33

10.3. Bluetooth Test results 34

11. Test Equipment..... 36


11.1. Conducted measurements 36

11.2. Radiated measurements 37

2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-824, DUT 42842
Accessories with DUT numbers	BP-5T, DUT 42845
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 47 / 99.5
Date of measurements	02-Jul-2012
Measured by	Hannu Söderholm

2.1. Test Setup

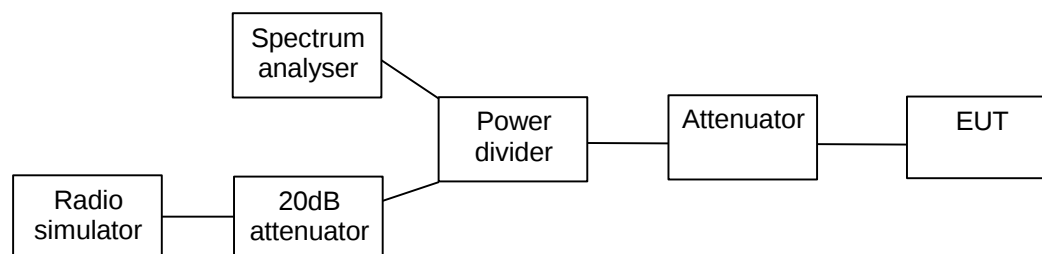

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	≤ 1	≤ 30

2.3. Bluetooth Test results


2.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	7.14	5.176	PASSED
40 / 2442	7.5	5.623	PASSED
78 / 2480	6.85	4.842	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

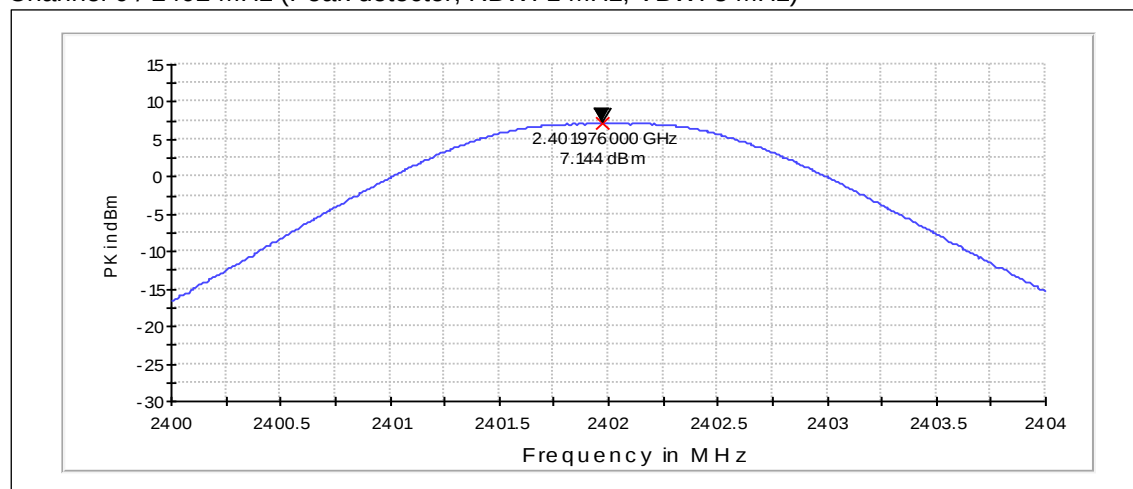

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

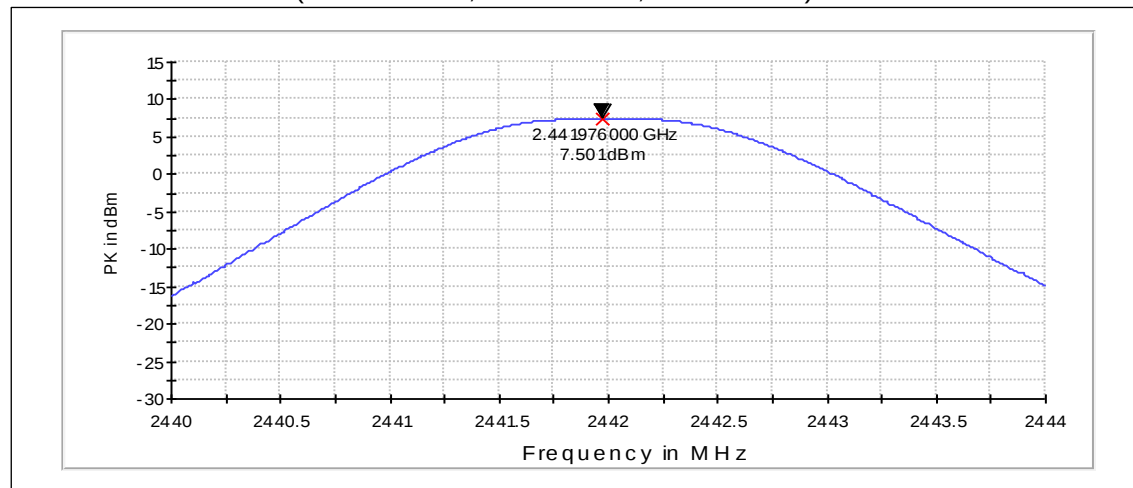


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

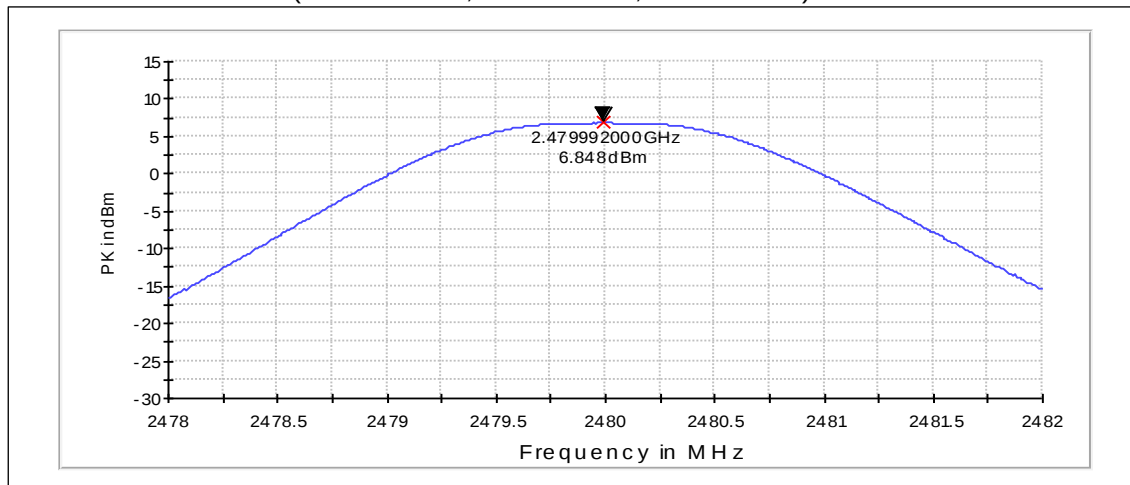


2.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	7.7	5.888	PASSED
40 / 2442	8.06	6.397	PASSED
78 / 2480	7.41	5.508	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

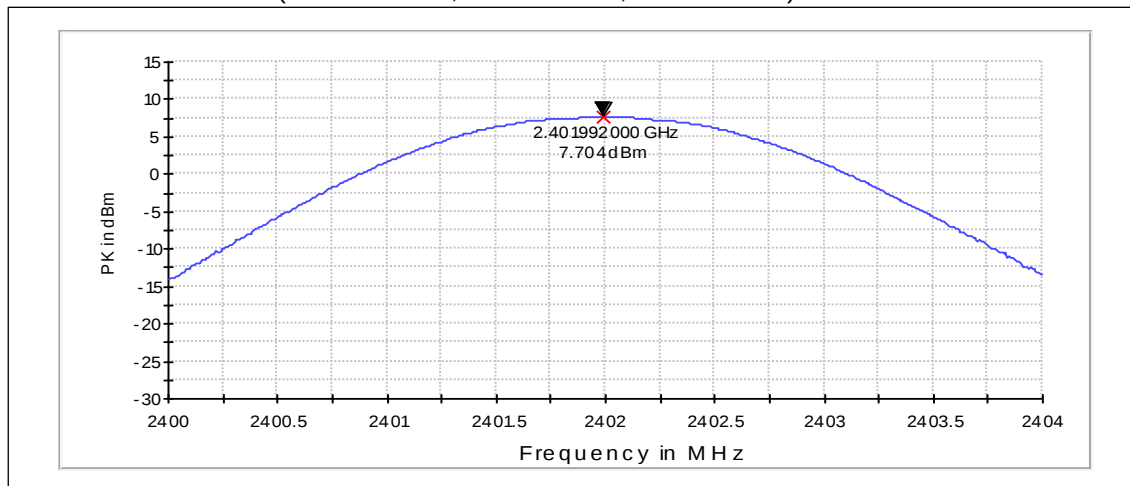

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

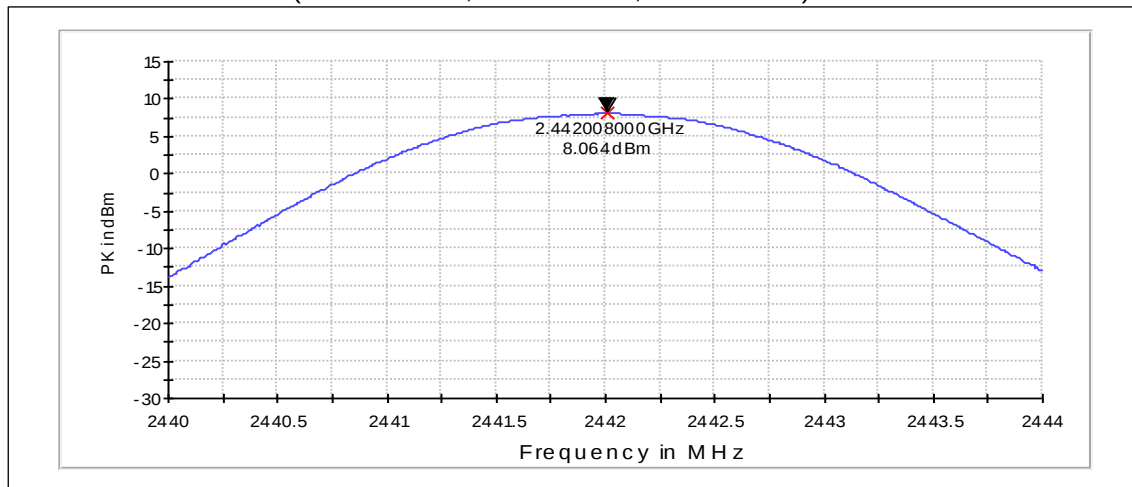


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

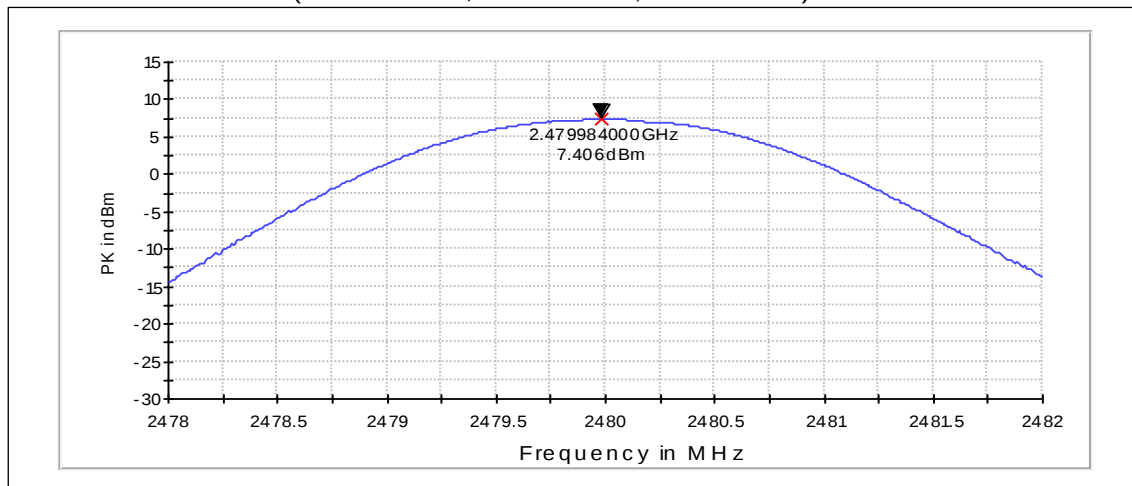

3. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)

EUT with DUT number	RM-824, DUT 42843
Accessories with DUT numbers	BP-5T, DUT 42844 ; AC-50E, DUT 42776 ; CA-190CD, DUT 42778 ; WH-208, DUT 42831
Operation Voltage [V] / [Hz]	110 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 48 / 100
Date of measurements	04-Jul-2012
Measured by	Timo Raiskio

3.1.1 Test Setup

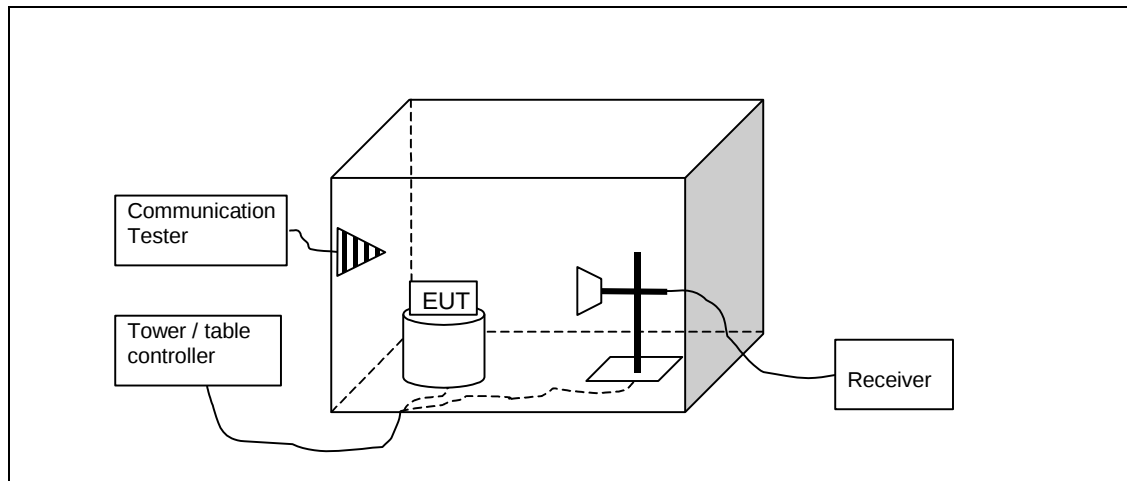

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 10 Hz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	34.67	54.124	42.69	-8.02	PASSED
Hopping on, low end	34.67	54.124	42.69	-8.02	PASSED
78 / 2480	36.12	63.97	43.79	-7.67	PASSED
Hopping on, high end	35.62	60.399	43.29	-7.67	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	48.06	252.816	56.08	-8.02	PASSED
Hopping on, low end	48.65	270.827	56.67	-8.02	PASSED
78 / 2480	51.67	383.079	59.34	-7.67	PASSED
Hopping on, high end	49.78	308.411	57.45	-7.67	PASSED


GFSK mode. Channel 0 / 2402 MHz

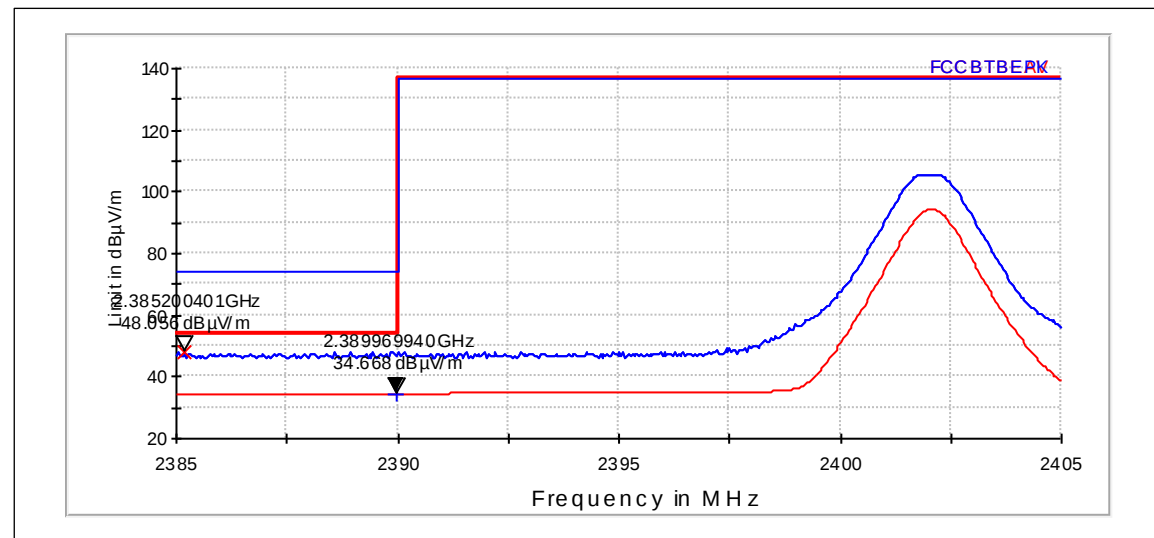


GFSK mode. Hopping on, low end

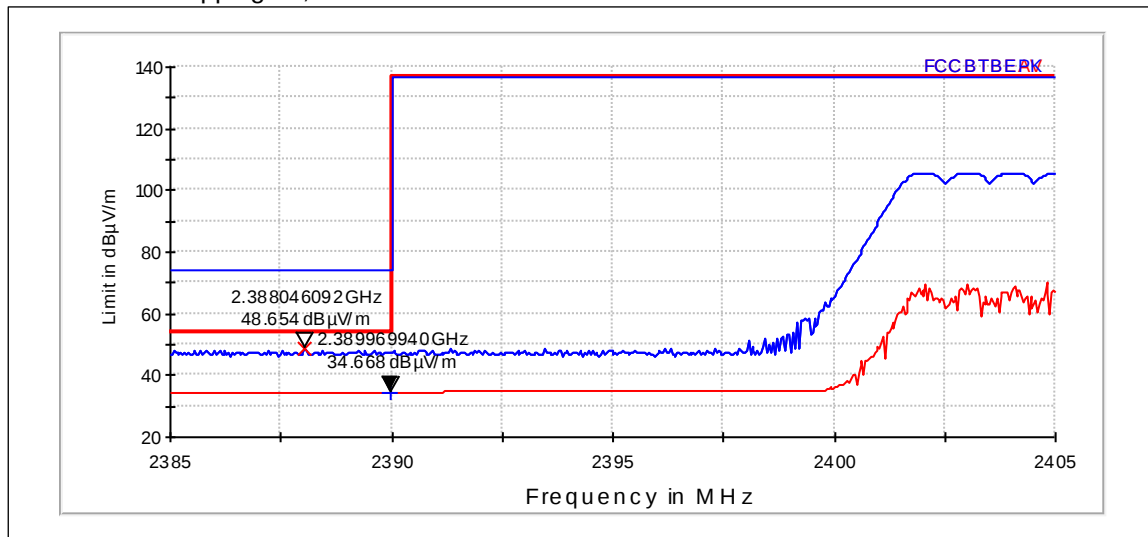

GFSK mode. Channel 78 / 2480 MHz

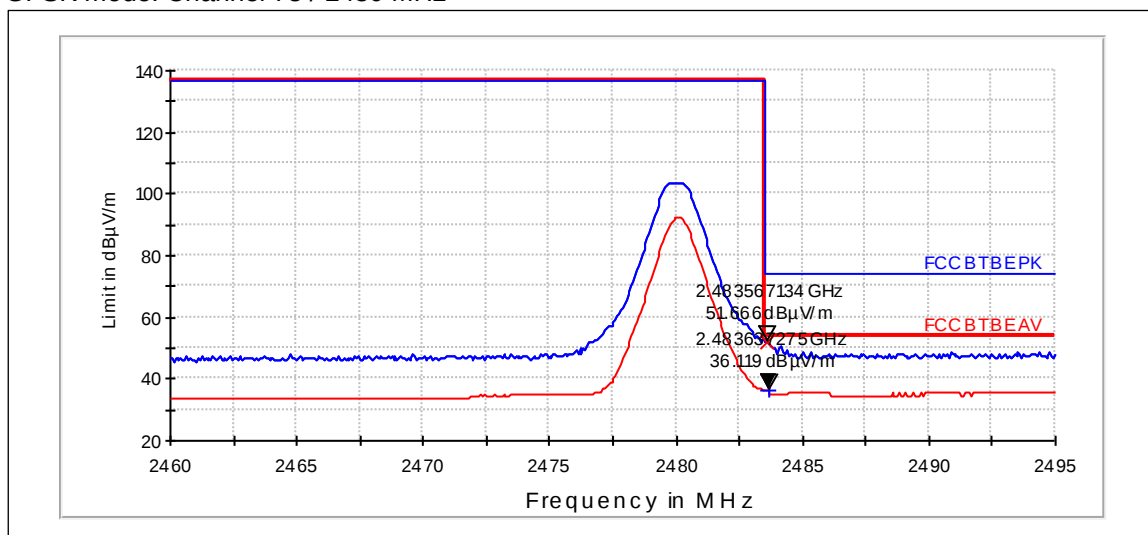

GFSK mode. Hopping on, high end

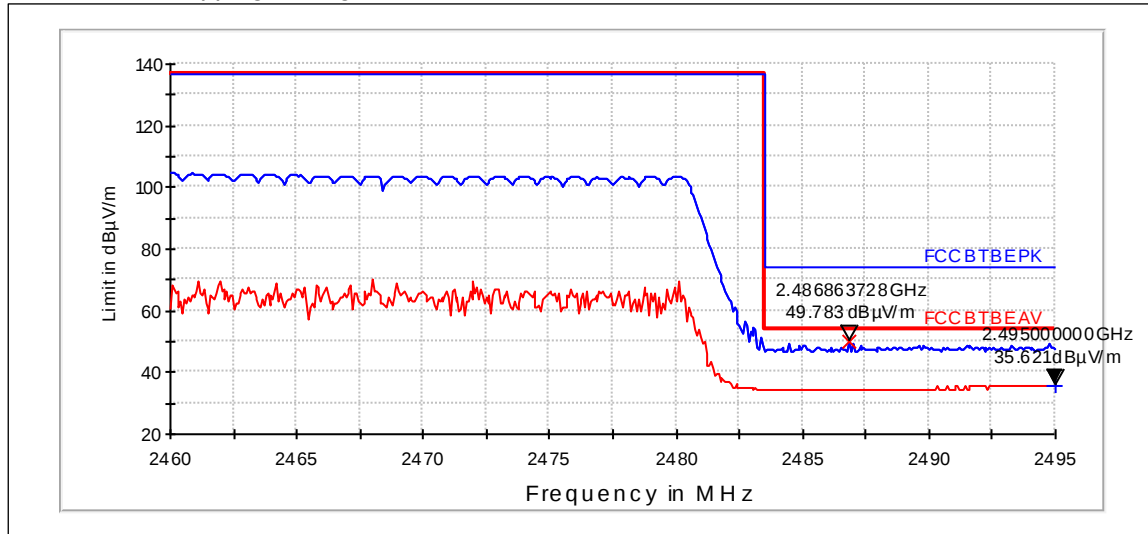

3.3.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 10 Hz)

Channel / f_c [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Result
0 / 2402	34.67	54.124	42.69	-8.02	PASSED
Hopping on, low end	34.67	54.124	42.69	-8.02	PASSED
78 / 2480	37.57	75.574	45.24	-7.67	PASSED
Hopping on, high end	35.62	60.399	43.29	-7.67	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Result
0 / 2402	48.31	260.237	56.33	-8.02	PASSED
Hopping on, low end	48.54	267.443	56.56	-8.02	PASSED
78 / 2480	49.92	313.474	57.59	-7.67	PASSED
Hopping on, high end	49.28	290.966	56.95	-7.67	PASSED


8DPSK mode. Channel 0 / 2402 MHz

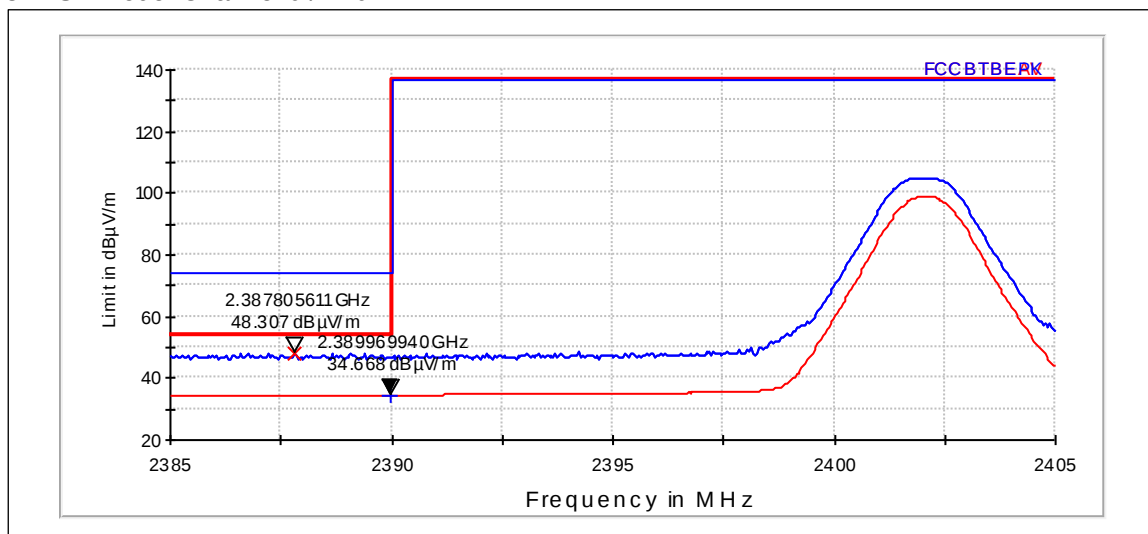


8DPSK mode. Hopping on, low end

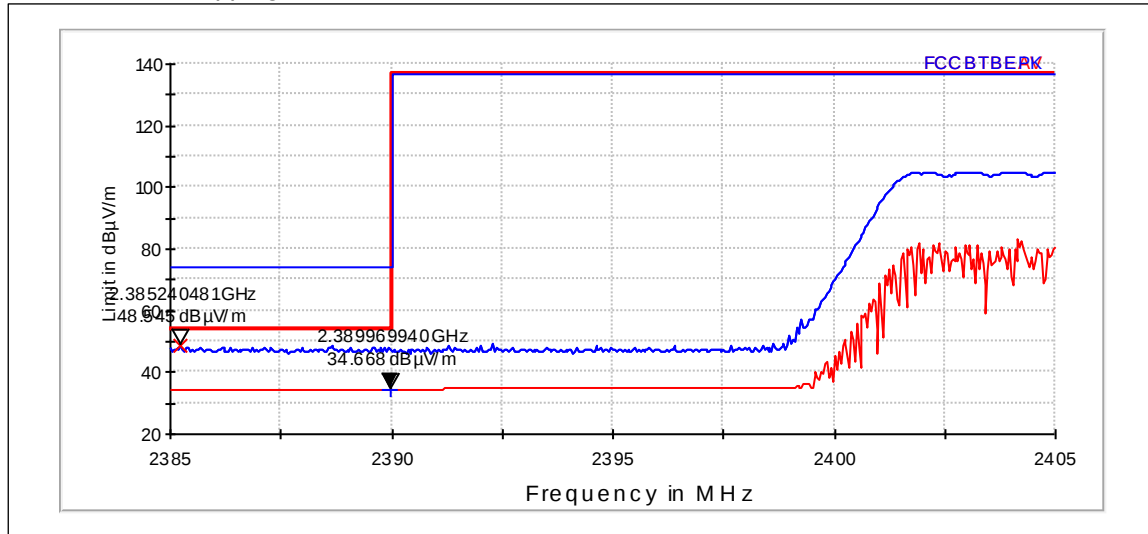

8DPSK mode. Channel 78 / 2480 MHz

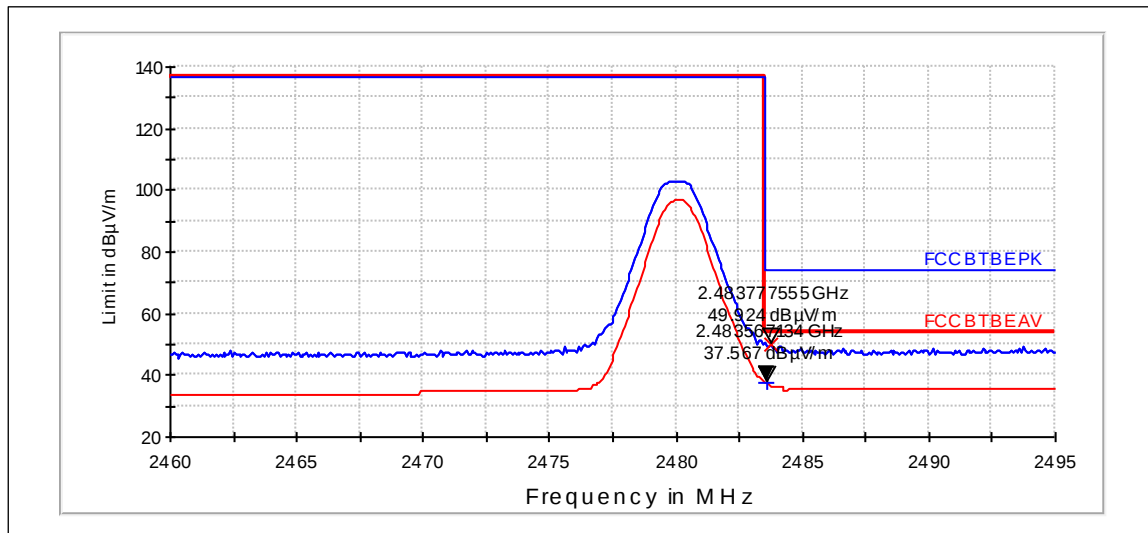


8DPSK mode. Hopping on, high end

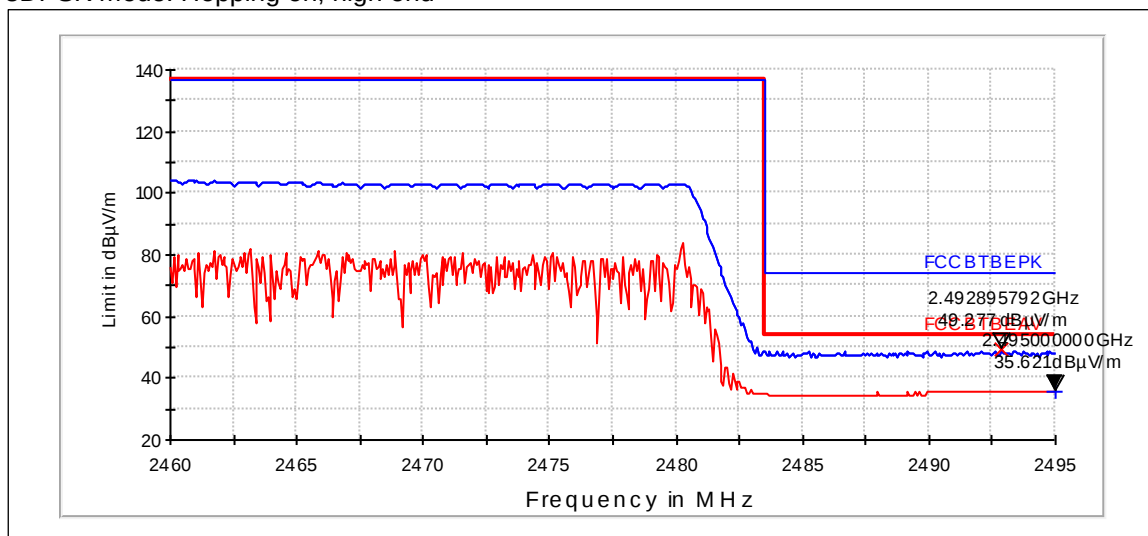

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-824, DUT 42842
Accessories with DUT numbers	BP-5T, DUT 42845
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 47 / 99.5
Date of measurements	02-Jul-2012
Measured by	Hannu Söderholm

4.1. Test Setup

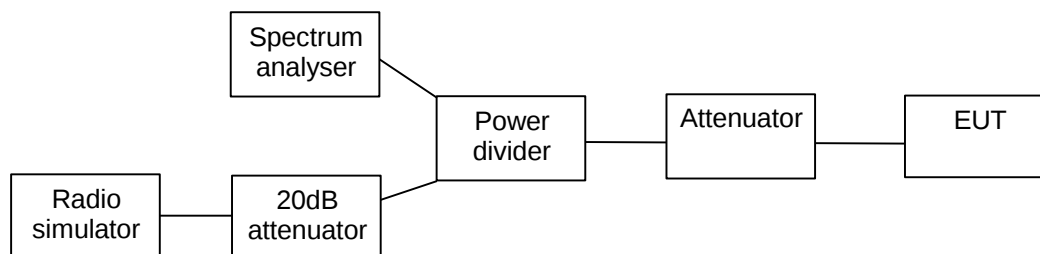

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
	≤ -20

4.3. Bluetooth Test results

4.3.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

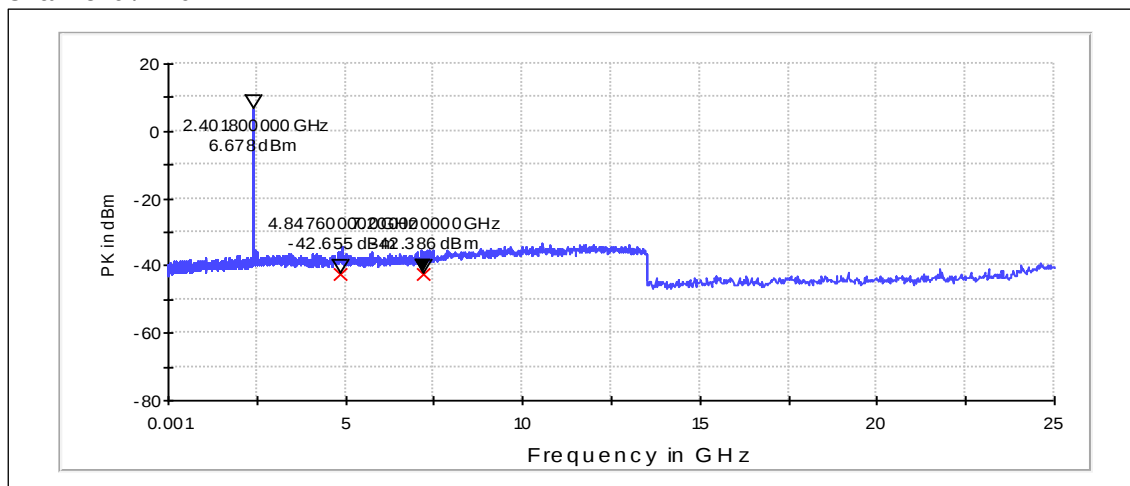

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4847.6	-42.65	PASSED
7200	-42.39	PASSED


Channel 40 / 2442 MHz

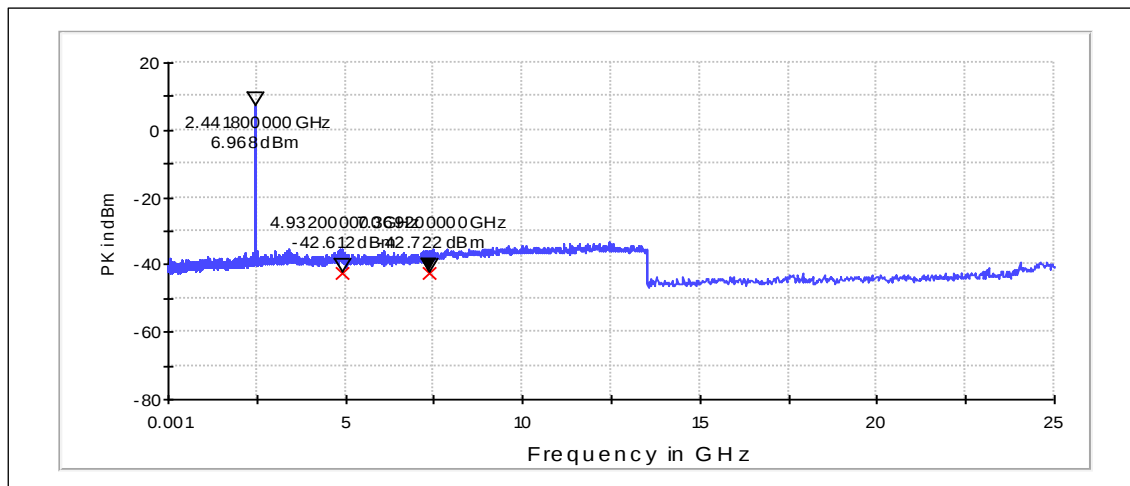

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4932	-42.61	PASSED
7369.2	-42.72	PASSED

Channel 78 / 2480 MHz

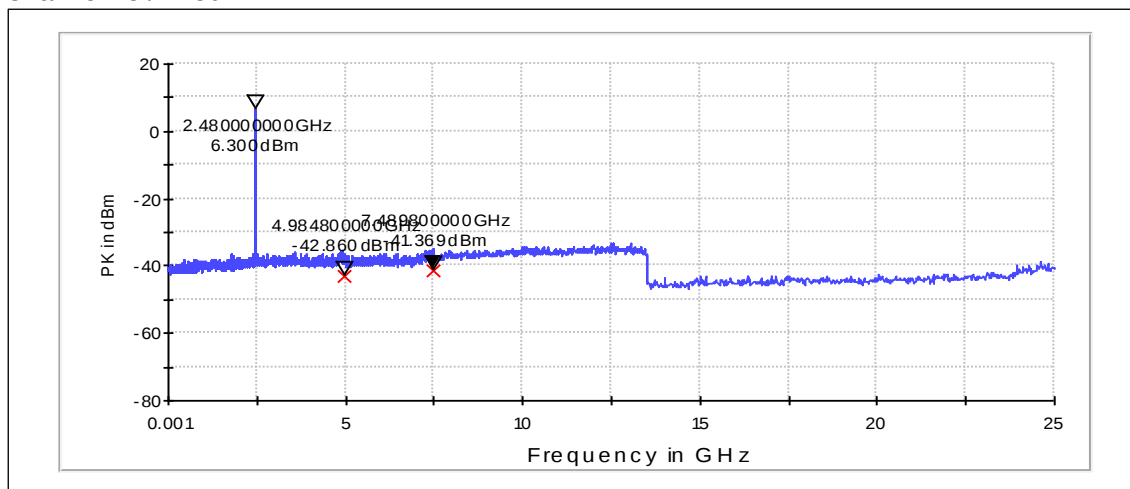


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4984.8	-42.86	PASSED
7489.8	-41.37	PASSED

4.3.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

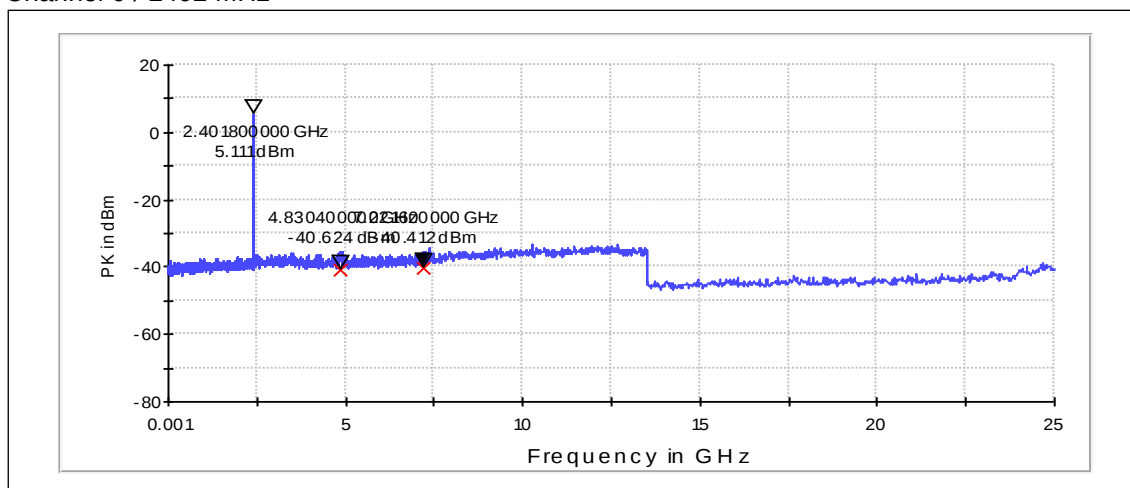

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4830.4	-40.62	PASSED
7221.6	-40.41	PASSED


Channel 40 / 2442 MHz

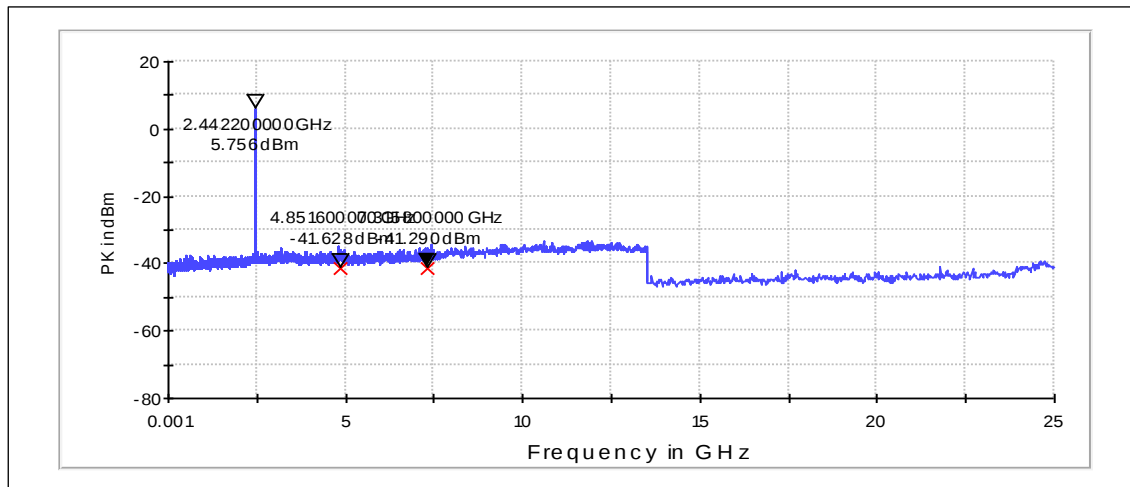

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4851.6	-41.63	PASSED
7315.8	-41.29	PASSED

Channel 78 / 2480 MHz

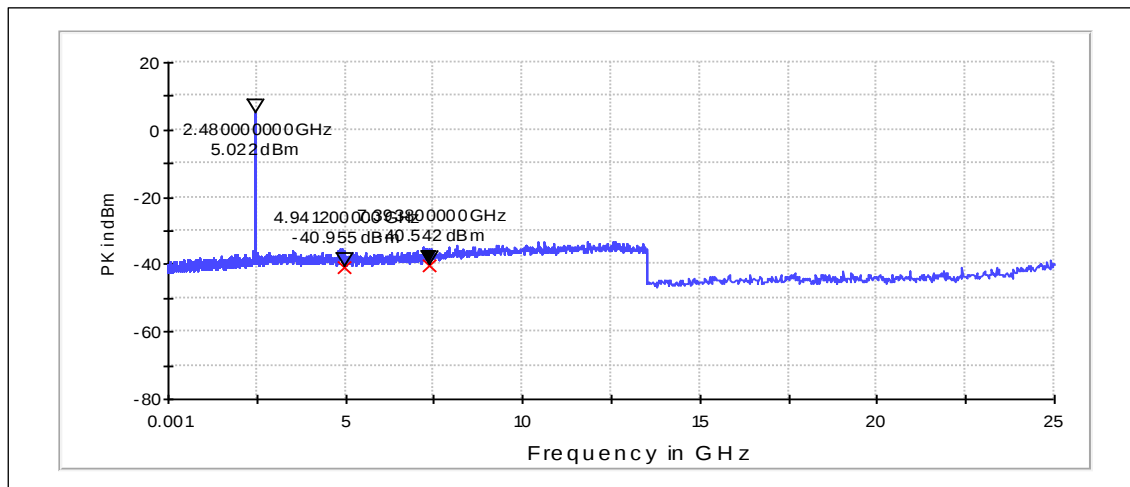


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4941.2	-40.96	PASSED
7393.8	-40.54	PASSED

5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-824, DUT 42843
Accessories with DUT numbers	BP-5T, DUT 42844 ; AC-50E, DUT 42776 ; CA-190CD, DUT 42778 ; WH-208, DUT 42831
Operation Voltage [V] / [Hz]	110 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 48 / 100
Date of measurements	04-Jul-2012
Measured by	Timo Raiskio

5.1.1 Test Setup

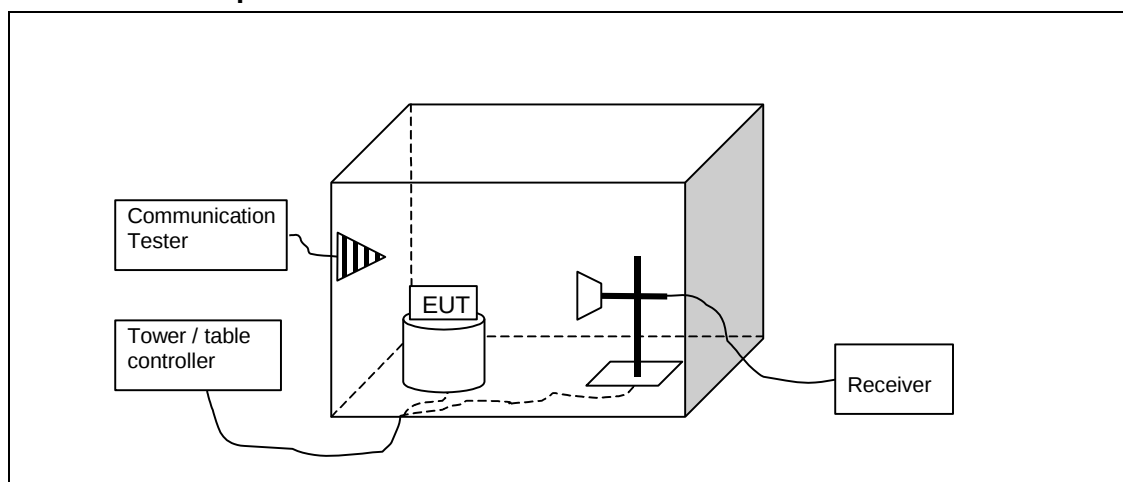

5.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.
The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

5.3. Bluetooth Test results

5.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4802.5	40.43	105.039	42.79	-2.36	VERTICAL	PASSED
7205.3	43.9	156.657	42.4	1.5	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4802.5	27.66	24.163	30.02	-2.36	VERTICAL	PASSED
7205.3	31.05	35.678	29.55	1.5	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.39	22.56	13.426	42.22	-19.66	HORIZONTAL	PASSED
163.196	26.64	21.483	55.64	-29	VERTICAL	PASSED
172.815	26.15	20.293	54.51	-28.36	VERTICAL	PASSED
872.325	34.4	52.499	49.81	-15.41	HORIZONTAL	PASSED
937.525	22.75	13.725	37.16	-14.41	HORIZONTAL	PASSED
946.052	28.76	27.422	43.33	-14.57	HORIZONTAL	PASSED
955.972	32.55	42.394	47.19	-14.64	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3898.2	39.53	94.689	42.79	-3.26	VERTICAL	PASSED
3930.658	40.22	102.506	43.45	-3.23	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3898.2	26.84	21.968	30.1	-3.26	VERTICAL	PASSED
3930.658	27.06	22.548	30.29	-3.23	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4958.6	42.31	130.497	43.98	-1.67	HORIZONTAL	PASSED
7440.3	43.82	155.239	41.64	2.18	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4958.6	29.29	29.137	30.96	-1.67	HORIZONTAL	PASSED
7440.3	31.12	35.954	28.94	2.18	HORIZONTAL	PASSED

5.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4802.3	40.82	109.913	43.18	-2.36	VERTICAL	PASSED
7205.9	43.92	157	42.4	1.52	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4802.3	27.65	24.113	30.01	-2.36	VERTICAL	PASSED
7205.9	31.08	35.814	29.56	1.52	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
44.712	8.97	2.809	36.34	-27.37	VERTICAL	PASSED
46.637	9.01	2.822	37.54	-28.53	VERTICAL	PASSED
47.338	9.33	2.927	38.29	-28.96	VERTICAL	PASSED
57.883	6.68	2.157	41.42	-34.74	VERTICAL	PASSED
59.616	8.57	2.683	43.58	-35.01	VERTICAL	PASSED
872.465	34.85	55.252	50.25	-15.4	HORIZONTAL	PASSED
956.002	32.68	43.048	47.32	-14.64	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3900.5	39.52	94.646	42.78	-3.26	VERTICAL	PASSED
3938.276	40.47	105.548	43.58	-3.11	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3900.5	26.82	21.918	30.08	-3.26	VERTICAL	PASSED
3938.276	27.12	22.691	30.23	-3.11	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.5	42.44	132.358	44.12	-1.68	HORIZONTAL	PASSED
7441	44.19	162.032	42.02	2.17	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.5	29.3	29.181	30.98	-1.68	HORIZONTAL	PASSED
7441	31.41	37.179	29.24	2.17	HORIZONTAL	PASSED

6. AC powerline conducted emissions

FCC §15.207, RSS-GEN 7.2.2

EUT with DUT number	RM-824, DUT 42843
Accessories with DUT numbers	BP-5T, DUT 42844 ; AC-50E, DUT 42776 ; CA-190CD, DUT 42778 ; WH-208, DUT 42831
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 49 / 98.5
Date of measurements	10-Jul-2012
Measured by	Jari Jantunen

6.1. Test Setup



6.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.3. Bluetooth Test results

6.3.1 GFSK modulation, PRBS packet type


Channel 40 / 2442 MHz

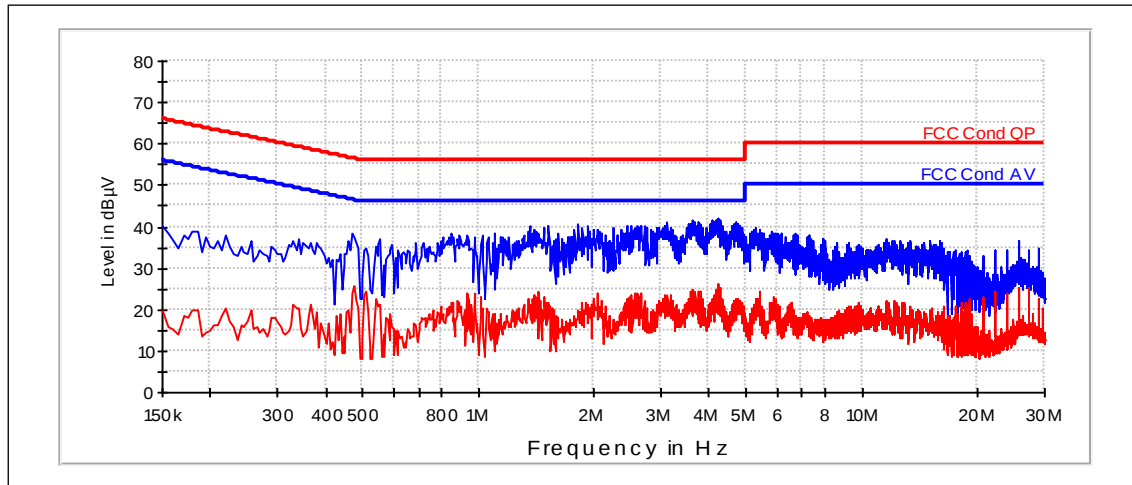

7. 20 dB bandwidth 15.247(a)(1), A8.1 (a)

EUT with DUT number	RM-824, DUT 42842
Accessories with DUT numbers	BP-5T, DUT 42845
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 47 / 99.5
Date of measurements	02-Jul-2012
Measured by	Hannu Söderholm

7.1. Test Setup

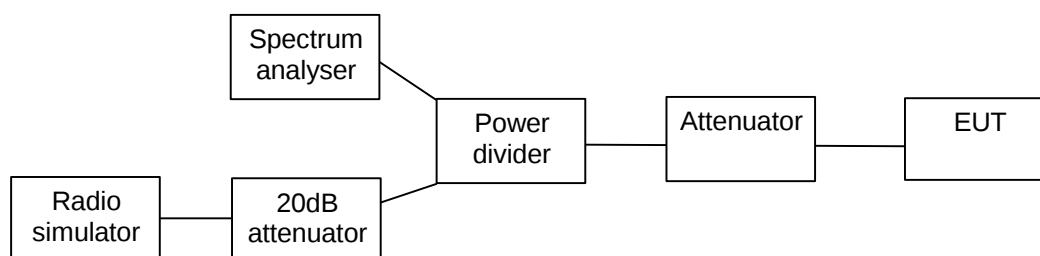

7.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

7.3. Bluetooth Test results


7.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	891
40 / 2442	852.6
78 / 2480	849.4


Channel 0 / 2402 MHz

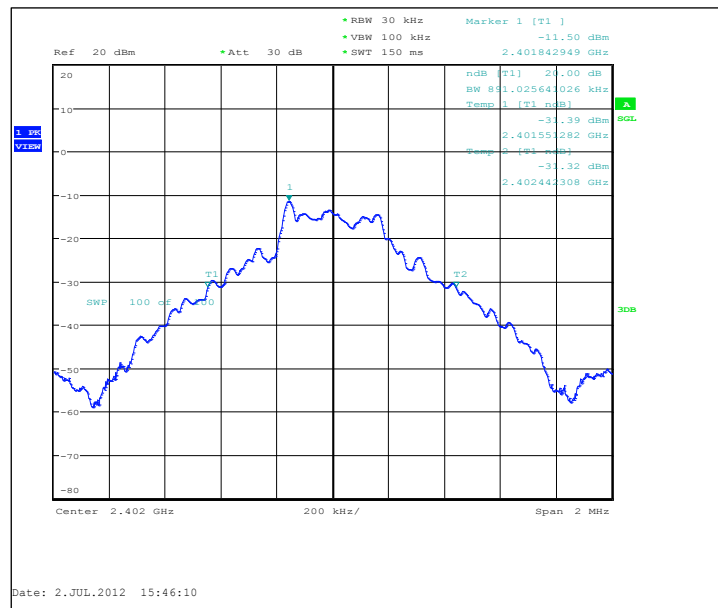

Channel 40 / 2442 MHz

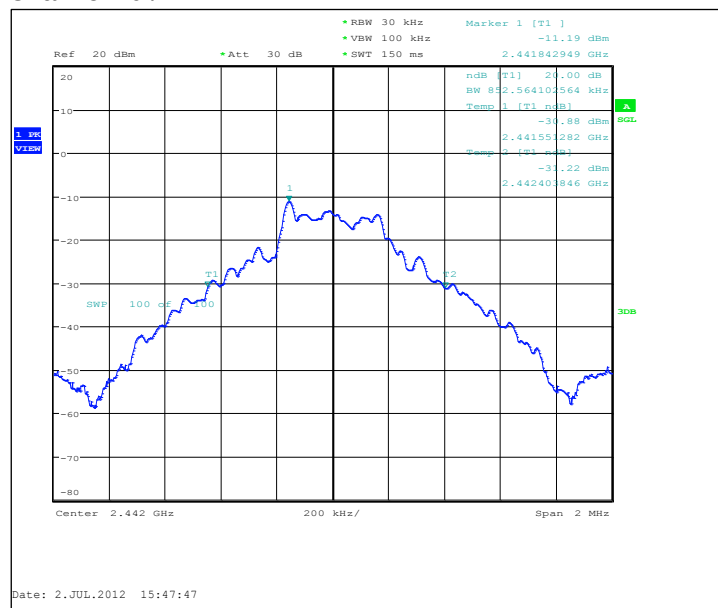


Channel 78 / 2480 MHz

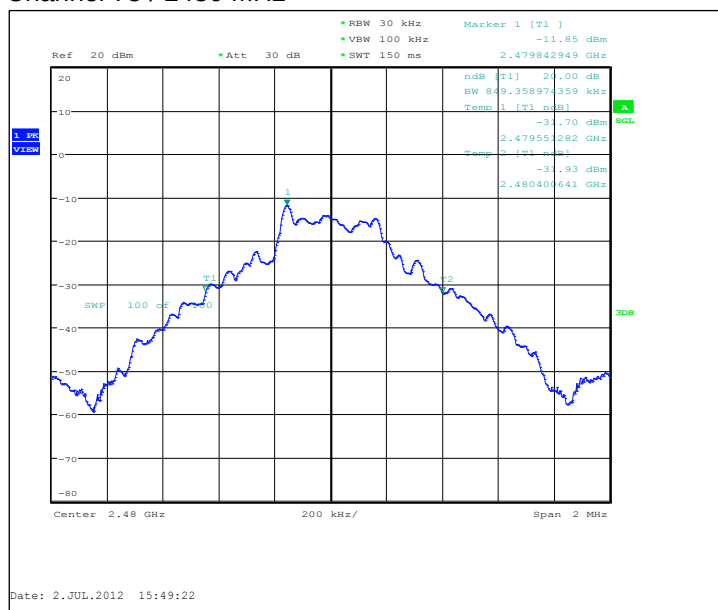


7.3.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]
0 / 2402	1304.5
40 / 2442	1304.5
78 / 2480	1307.7


Channel 0 / 2402 MHz

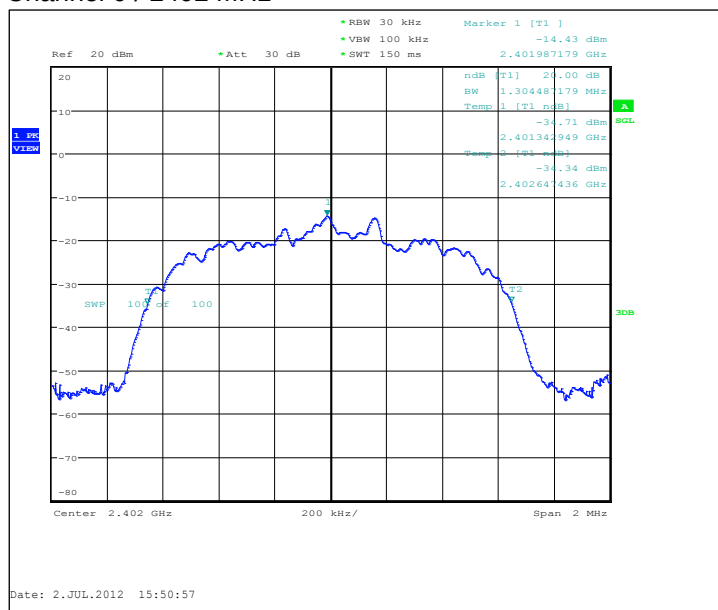

Channel 40 / 2442 MHz

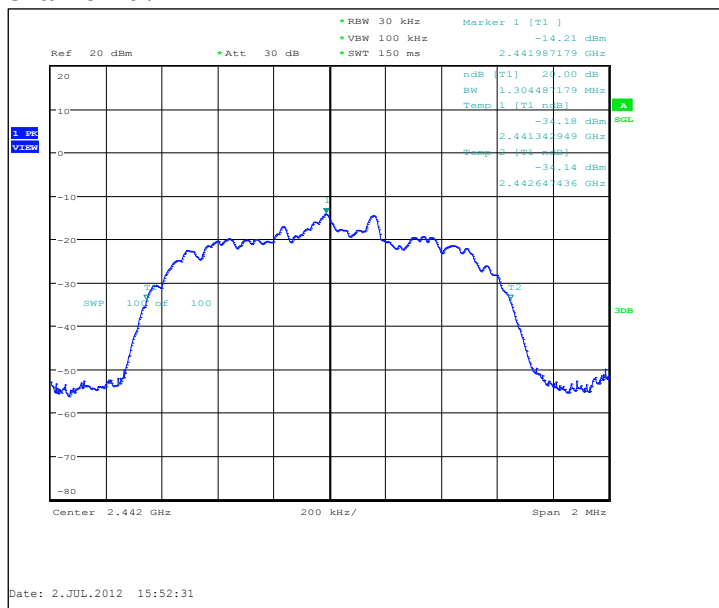

Channel 78 / 2480 MHz

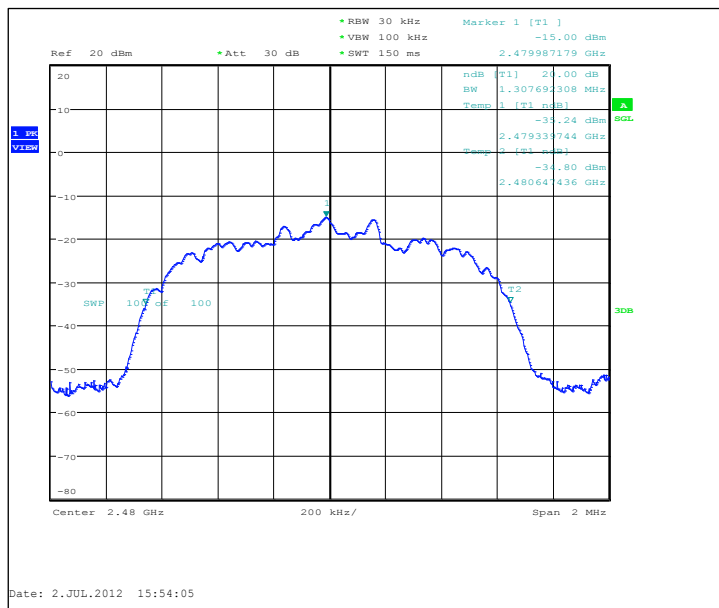


8. Carrier frequency separation

15.247(a)(1), A8.1 (b)

EUT with DUT number	RM-824, DUT 42842
Accessories with DUT numbers	BP-5T, DUT 42845
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 47 / 99.5
Date of measurements	02-Jul-2012
Measured by	Hannu Söderholm

8.1. Test Setup

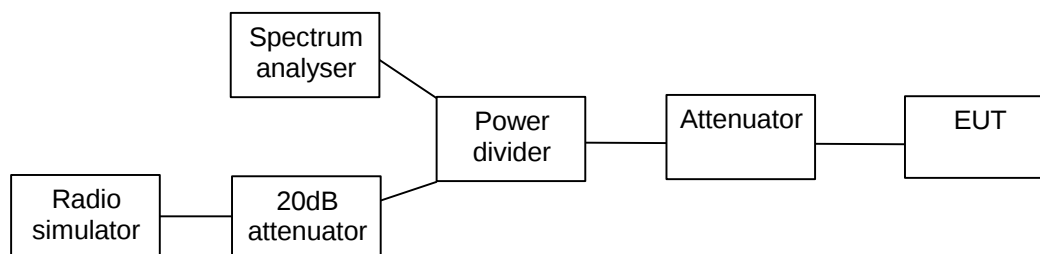

8.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

8.3. Bluetooth Test results

8.3.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1009.6	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

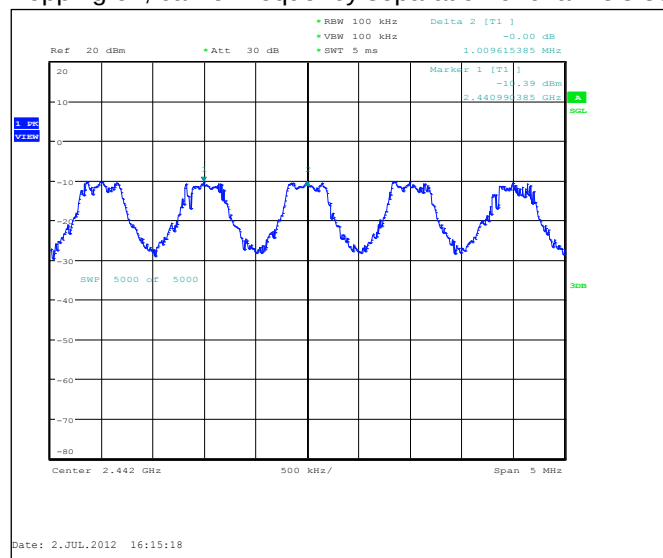

8.3.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
977.6	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

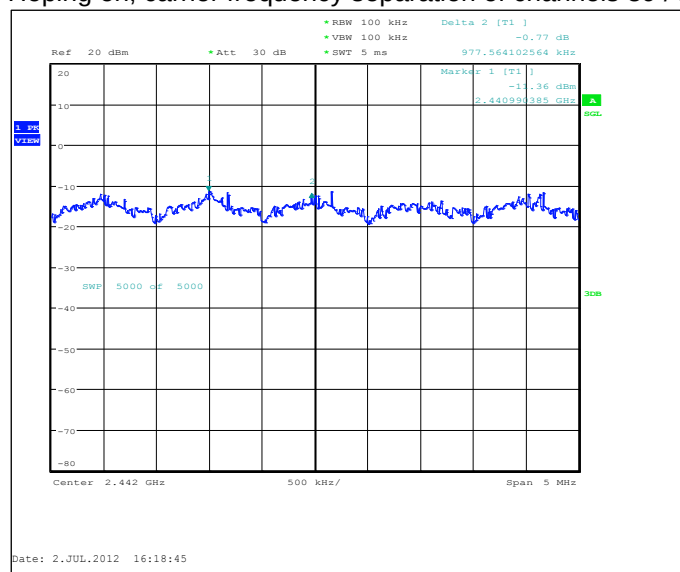


9. Number of hopping frequencies

15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-824, DUT 42842
Accessories with DUT numbers	BP-5T, DUT 42845
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 47 / 99.5
Date of measurements	02-Jul-2012
Measured by	Hannu Söderholm

9.1. Test Setup

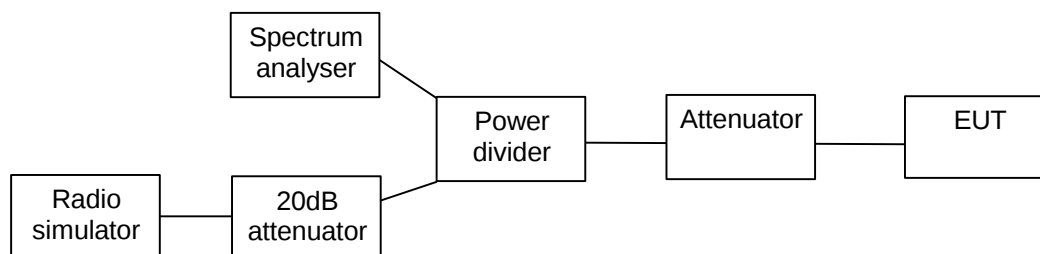

9.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

9.3. Bluetooth Test results

9.3.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

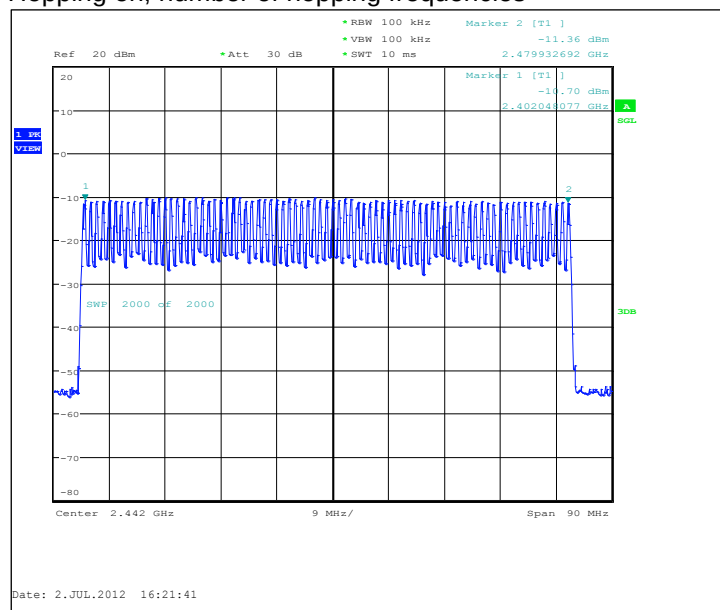

9.3.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
74	PASSED

Hopping on, number of hopping frequencies

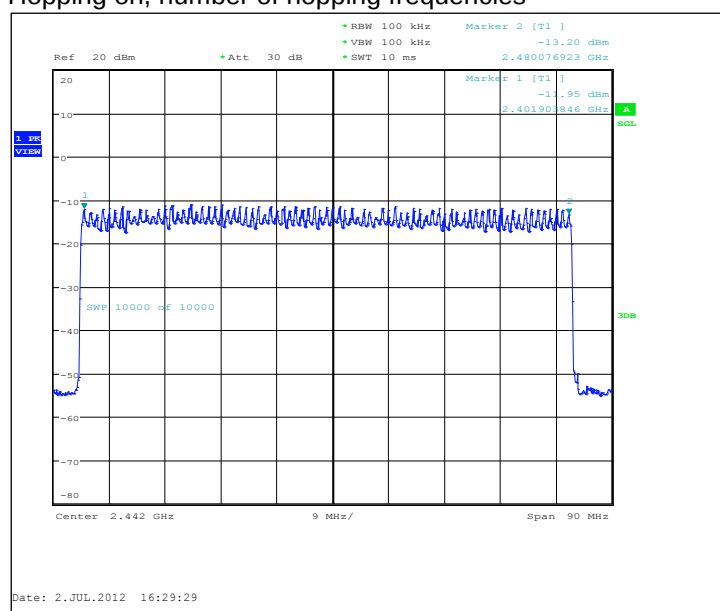


10. Time of occupancy

15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-824, DUT 42842
Accessories with DUT numbers	BP-5T, DUT 42845
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 47 / 99.5
Date of measurements	02-Jul-2012
Measured by	Hannu Söderholm

10.1. Test Setup

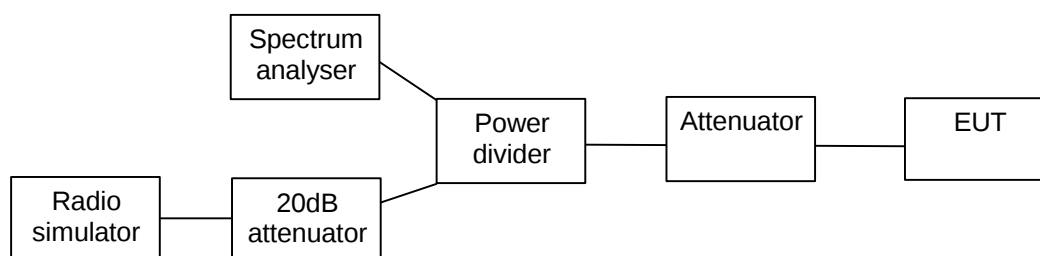

10.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

10.3. Bluetooth Test results


10.3.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
93	2.917	0.271	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

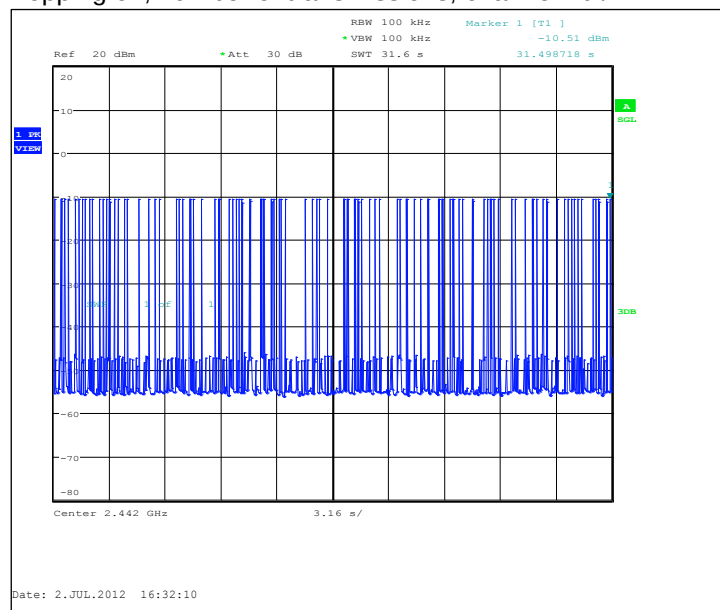


Hopping on, duration of one transmission, channel 40 / 2442 MHz

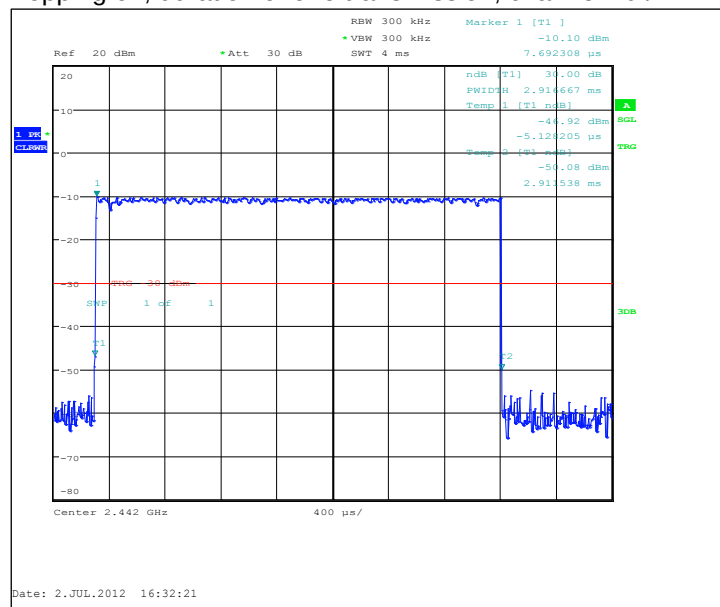


10.3.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
96	2.923	0.281	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

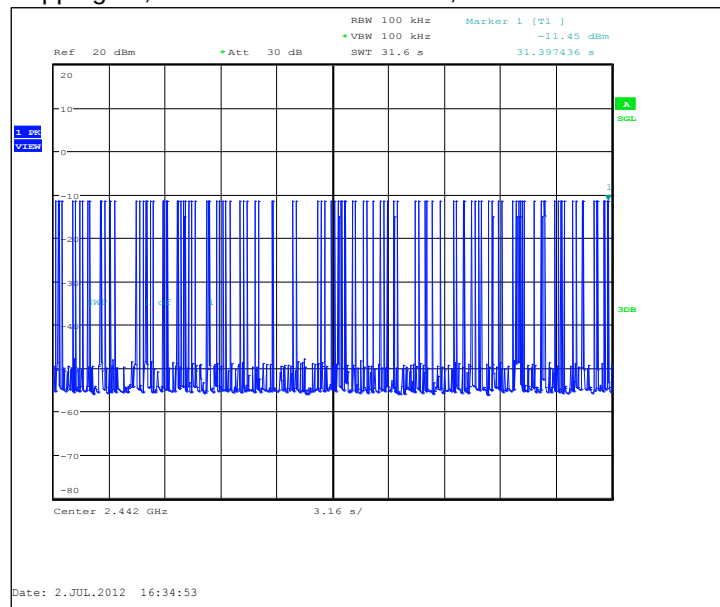

Hopping on, duration of one transmission, channel 40 / 2442 MHz

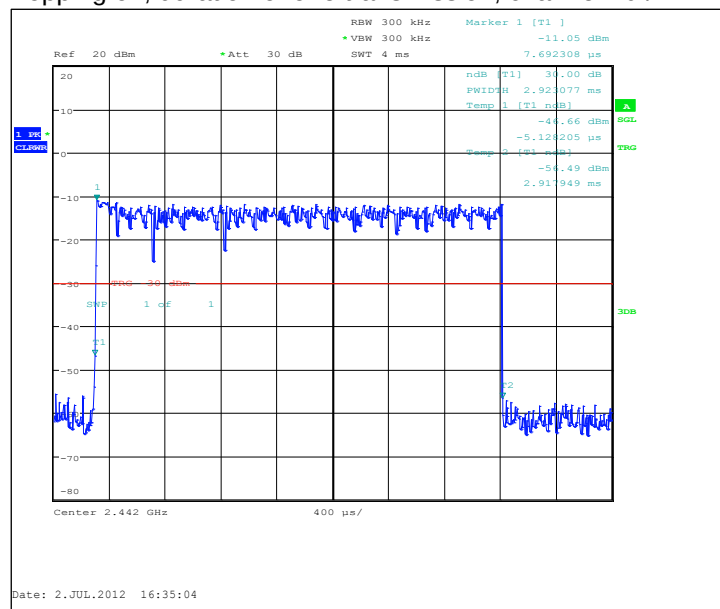

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM06312	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27, 15C
2009	LISN 50 μ H	ENV216	R&S	15C, 15B
2010	LISN 50 μ H	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2023	Spectrum Analyzer	ESMI-RF	R&S	15B/15C
2024	Analyzer display unit	ESAI-D	R&S	15B/15C

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
-	High pass filter	WHKX 1.6/15G-12SS	Wainwright	22/24/27, 15C, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	22
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C