

**FCC TEST REPORT
FOR THE
ALL AMERICAN SPORTS CORPORATION
RIDDELL
MODEL R63311 ALERT MONITOR (FCC ID PYVR63311)**

Prepared for:

All American Sports Corporation
Riddell
9801 West Higgins Road, 8th Floor
Rosemont, IL 60018
USA

Submitted by:

Green Mountain Electromagnetics, Inc.



(802) 388-3390
(802) 388-6279 Fax
gme@gmelectro.com
219 Blake Roy Road • Middlebury, Vermont 05753

Copyright: September 20, 2012



This report shall not be reproduced, except
in full, without the written approval of GME.

**All American Sports/Riddell
FCC Testing
At
Green Mountain Electromagnetics, Inc.**

Unit: Model R63311 Alert Monitor (FCC ID PYVR63311)

Received: 8/22/12

Tested: August 23 - 28, 2012

I. Applicable Standards:

The units described in this report were measured for verification of compliance with "47 CFR, Part 15 – Radio Frequency Devices, Subpart C: Intentional Radiators," paragraph 15.207, Conducted Limits, paragraph 15.209, Radiated Emissions, and 15.249, Operation within the 2400 – 2483.5 MHz Band. Measurement procedures were in accordance with ANSI C63.4, "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2009)," and FCC OET Bulletin 65, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields (Jan. 2001)."

Additionally, the units described in this report were measured for certification with the Code of Federal Regulations Chapter 47 – "Telecommunication, Part 2 – Frequency Allocations and Radio Treaty Matters: General Rules and Regulations, Subpart J – Equipment Authorization Procedures." Measurements required were per paragraphs 2.1046 RF Power Output, 2.1049 Occupied Bandwidth, 2.1053 Field Strength of Spurious Radiation, 2.1055 Frequency Stability, and 2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices.

II. Unit Tested:

The Riddell Model R63311 (FCC ID PYVR63311) Alert Monitor is used in conjunction with the Model R64001 (FCC ID PYVR64001) Player Unit for football-player helmet impact sensing and recording. The Alert Monitor consists of a hand-held plastic enclosure with LCD screen, keypad, and the 5-channel (2.410, 2.425, 2.450, 2.475 and 2.480) GHz intermittent data transceiver mounted in the enclosure. The Alert Monitor uses two AA batteries and may also be powered by a USB, AC power supply. It employs the Texas Instruments CC2530F series, IEEE 802.15.4 compliant chip-set with an integral antenna.



The table below describes the unit that was subjected to measurements determining compliance with applicable EMC standards:

Model	Manufacturer	Serial Number
R63311 Alert Monitor	Riddell	00020

The following table describes the system physical and electrical properties:

Model	Volts	H/W/D in cm
R63311 Alert Monitor	EUT: 3-VDC Batteries PS: 100-240 AC, 100 mA, 50/60 Hz	12/6/3

The following table describes the support equipment used during testing:

Product	Manufacturer	Model #	Serial Number
Laptop PC	Dell	PP05L	CN-0X2034-48643-3A6
PC Power Supply	Dell	1650-05D	CN-05V092-7165-ABH
Power Supply (AC/USB)	Phihong	PSM03A-050Q1	PC04001046

Signal cables were used for testing and are supplied by the manufacturer. The following table describes the system cables:

Cable	Mfr/Description	Agency Rating
Signal	High-Speed USB	UL 338413

Riddell "InSite" software was used to evaluate the unit.

III. Measurement Location:

The GME laboratory and Open Area Test Site (OATS) are located at 219 Blake Roy Road, Middlebury, VT. The OATS is a 10/3/1-meter site complete with antenna positioner, ground plane and motorized turntable. The OATS is constructed in accordance with ANSI C63.7-2005 and complies with the requirements for radiated emissions testing in ANSI C63.4-2009 and CISPR standards. GME is internationally accredited by the American Association for Laboratory Accreditation (A2LA) and meets the quality requirements in ISO/IEC 17025 (2005), "General Requirements for the Competence of Testing and Calibration Laboratories."



IV. Summary of Results:

The Riddell Model R63311 (FCC ID PYVR63311) Alert Monitor complies with the requirements in FCC 47 CFR, Paragraphs 2 and 15. Section X contains the results summarized in the table below.


	Test	Mode/Port	CFR 47 Paragraph	Frequency or Range	Specified Values	Measured Values
1	RF Power Output	Transmit	2.1046 15.249	2.465 GHz	-13 dBm (<50,000 uV/m)	-25 dBm
2	Occupied Bandwidth	Transmit	2.1049 15.249	20-dB down at 0.5% of Fundamental	<12 MHz	3 MHz
3	Frequency Stability	Transmit	2.1055	2.4 – 2.4835 GHz	Battery End Point	2.4 – 2.4835 GHz
4	Radiated and Spurious Emissions	Enclosure	15.209 15.249 2.1053	30 – 88 MHz 88 – 216 MHz 216 – 960 MHz 960 – 24 GHz	40 dBuV/m 43.5 dBuV/m 46 dBuV/m 54 dBuV/m	Within 3m and 1m Limits
5	Conducted Emissions	AC Port	15.207	150 kHz – 500 kHz 0.5 – 5 MHz 5 – 30 MHz	66-56 dBuV 56 dBuV 60 dBuV	Within All Limits
6	Exposure Evaluation	Enclosure	2.1093	2.4 GHz	0.08 W/kg Body 1.6 W/kg 1g Vol	Within All Limits

Exploratory measurements indicate maximum radiation is found when antenna polarization is aligned with the EUT antenna and when antenna is pointed directly at the EUT at scan heights >10% of EUT height.



Testing was performed by Kyle R. Kowalczyk, president, Green Mountain Electromagnetics and requested by:

All American Sports Corporation/Riddell
9801 West Higgins Road, 8th Floor
Rosemont, IL 60018
USA



Kyle R. Kowalczyk
9/20/12

V. Units of Measurement and Uncertainty:

Measurements of radiated electric fields were made in units of dB referenced to 1 microvolt per meter (dBuV/m). Limits appearing on the spectrum analyzer data were corrected for the appropriate antenna factor, cable loss, amplifier gain (when used) and measurement distances X_{std} and X_{site} in meters.

The following equation was employed:

Corrected Limit (dBuV) = Limit (dBuV/m) + 20 Log(X_{std}/X_{site}) + Amplifier Gain (dB) – Antenna Factor (dB/m) – Cable Loss (dB).

Sample calculation at 30 MHz (Vertical Polarization):

42 dBuV corrected limit = 40.0 dBuV/m limit + 20 log(3/3) dB distance + 20 dB amp gain – 17 dB/m AF – 1 dB cable loss.

Measurements of conducted emissions were made in units of dB referenced to 1 microvolt (dBuV). Limits appearing on the spectrum analyzer data were corrected for the appropriate insertion loss.

The following equations were employed:

Corrected Limit (dBuV) = Limit (dBuV) – LISN Insertion Loss (dB).

Sample calculations at 30 MHz:

58 dBuV corrected limit = 60 dBuV limit – 2 dB IL.



Uncertainty

The uncertainty budgets in GME EMC measurements are identified as follows:

1. Field strength between 30 MHz and 26 GHz on a ten-meter OATS using broadband antennas:

Contribution	Probability Distribution	Uncertainty (dB)
antenna factor calibration	normal k=2	0.5
cable loss calibration	normal k=2	0.5
analyzer specification	rectangular	1.5
distance variation	rectangular	0.6
height variation	rectangular	0.5
site imperfection	rectangular	2.0
mismatch	u-shaped	1.5
repeatability	standard deviation	0.5
combined uncertainty u(y)	normal	1.946
expanded uncertainty U	normal k=2	3.892

$$u(y) = \sqrt{\left(\frac{0.5}{2}\right)^2 + \left(\frac{0.5}{2}\right)^2 + \frac{1.5^2 + 0.6^2 + .5^2 + 2.0^2}{3} + \frac{1.5^2}{2} + 0.5^2}$$

2. Conducted emissions between 150 kHz and 30 MHz:

Contribution	Probability Distribution	Uncertainty (dB)
cable loss calibration	normal k=2	0.5
analyzer specification	rectangular	1.5
probe specification	rectangular	1.5
mismatch	u-shaped	0.05
repeatability	standard deviation	0.35
combined uncertainty u(y)	normal	1.298
expanded uncertainty U	normal k=2	2.596

$$u(y) = \sqrt{\left(\frac{0.5}{2}\right)^2 + \frac{1.5^2 + 1.5^2}{3} + \frac{0.05^2}{2} + 0.35^2}$$


$$U = k u(y)$$

Other GME uncertainty values are available upon request. Note: "U" represents an expanded uncertainty expressed at an approximately 95% confidence level using a coverage factor of k=2.



VI. Equipment Configuration:

GME witnessed the unit in satisfactory condition for testing, however the manufacturer is responsible for ensuring that the equipment under test (EUT) represents the product line. The manufacturer is also responsible for the EMC test plan and for assuring that this report is consistent with that plan. The EUT configuration was arranged to produce maximum radiated emissions as shown in the block diagram below the procedure. The equipment was subjected to complete emissions tests per the manufacturer's test plan. The EUT was operating in a continuous mode utilizing and testing its functions. The EUT was also tested upon power up.

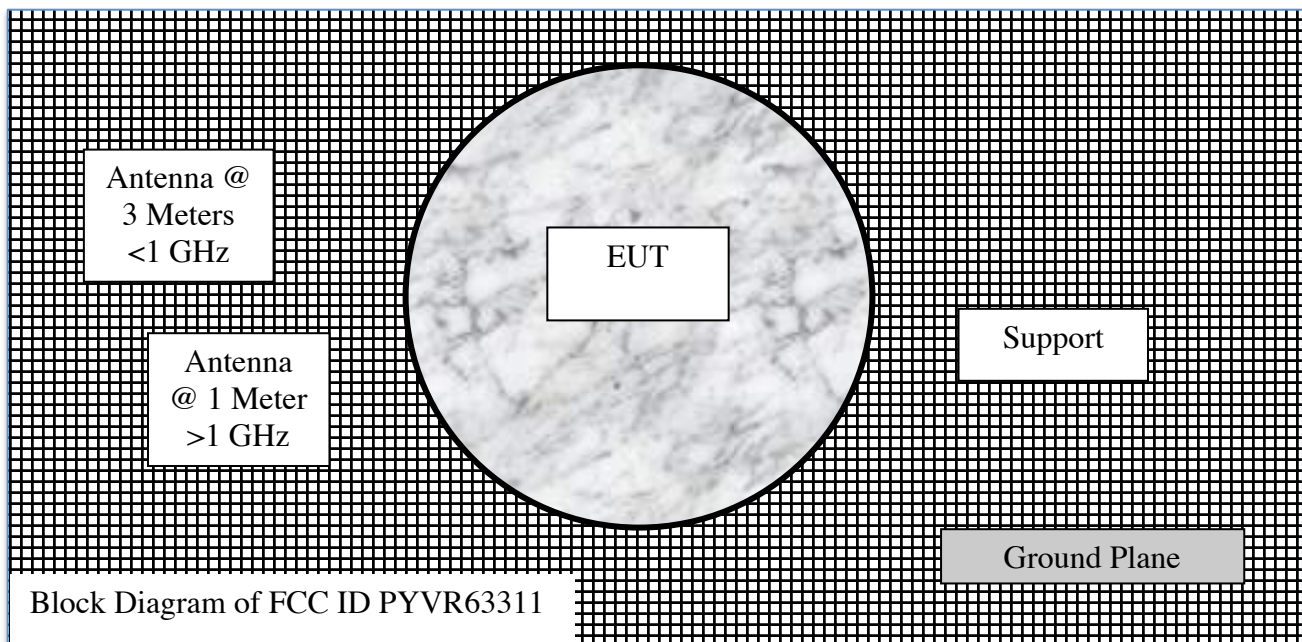

VII. Measuring Equipment:

The table below describes the instrumentation used by Green Mountain Electromagnetics to perform this testing:

Unit	Manufacturer	Model	Serial #	Last Cal.	Next Cal.
Spectrum Analyzer	GW Instek	GSP-830	E1180708	8/28/12	8/28/13
Spectrum Analyzer	Hewlett-Packard	8592 L	3624A00631	11/1/11	11/1/12
Broadband E-field Antenna	ARA	LPB-2513/A	1224	10/25/11	10/25/12
Horn Antenna	EMCO	3115	2418	10/27/11	10/27/12
Pre-Amplifier	MiniCircuits	ZFL-2500VH+	041012	5/4/12	5/4/13
Weather Station	Davis Instruments	Perception II	PC30923A07	1/24/12	1/24/13
Plotter	HP	7550A	2444A05912	n/a	n/a
LISN	Com-Power	LI-115	241031	12/19/11	12/19/12

VIII. Measurement Procedures:

1. RF Power Output.

Specification: $\leq 50,000$ uV/m (100% Duty Non-Normal Operation)

- Set up EUT and test instrumentation in laboratory.
- Verify spectrum analyzer and EUT operation.
 - Spectrum analyzer uses internal attenuators.
 - Set analyzer to carrier frequency and use 3-MHz span.
- Operate EUT at normal power unmodulated.
- Record level displayed on analyzer.

2. Occupied Bandwidth.

Specification: >20 dB at 0.5% of Fundamental (12 MHz at 2.4 GHz)

- Set up EUT and test instrumentation in laboratory.
- Verify analyzer and EUT operation.
 - Spectrum analyzer uses internal attenuators.
 - Set analyzer to carrier frequency and use 2.4 – 2.4835 GHz span.



- c. Operate EUT with standard modulation.
- d. Record signal displayed on analyzer.

3. Frequency Stability.

Frequency Band: 2.4 – 2.4835 GHz

Voltage Specification: Battery End Point Normal Operation

- a. Set up EUT and test instrumentation in laboratory.
- b. Verify analyzer and EUT operation.
 - i. Spectrum analyzer uses internal attenuators.
 - ii. Set analyzer to carrier frequency and use 2.4 – 2.4835 GHz span.
- c. Operate EUT with standard modulation.
- d. Record signal displayed on analyzer.

4. Radiated Emissions.

Frequency range: 30 MHz to 88 MHz

Limit: 40 dBuV/m @ 3 meters

Frequency range: 88 kHz to 216 MHz

Limit: 43.5 dBuV/m @ 3 meters

Frequency range: 216 MHz to 960 MHz

Limit: 46 dBuV/m @ 3 meters

Frequency range: 960 MHz to 24 GHz Spurious

Limit: 54 dBuV/m @ 3 meters

- a. Set up instrumentation at open area test site.
 - i. Mount EUT on ground plane and broadband antenna on antenna positioner.
 - ii. Observe temperature, humidity and atmospheric pressure.
 - iii. Measurement distance is 3 meters <1 GHz/1 meter >1 GHz and antenna scan height is 1 to 4 meters. Use RF absorber on ground plane >1 GHz.
- b. Verify spectrum analyzer and antenna operation.
 - i. Spectrum analyzer is connected to antenna. Use broadband horn > 1 GHz.
 - ii. Preamplifier is inserted between antenna and analyzer to ensure analyzer noise threshold is at least 6 dB below specification limit.
- c. Set up, power and operate EUT as in block diagram in Section VI.
- d. Perform preliminary evaluation of equipment in the near field.
 - i. Vary antenna height, antenna polarization, and antenna orientation to EUT.
 - ii. Repeat step d.i. while evaluating radiation in the 30-MHz to 24-GHz spectrum.
 - iii. Refer to ANSI C63.4-2009: for exploratory measurements >1 GHz.
- e. Determine frequencies and equipment orientations that produce maximum radiation.
 - i. Identify processor, clock and beat frequencies, and harmonics.
- f. Perform final evaluation of unit by recording spectrum analyzer data on the plotter.



- i. Ensure the EUT is producing the maximum radiation found in step e.
- ii. Collect data over the entire frequency range.
- iii. Refer to ANSI C63.4-2009: for final measurements >1 GHz – Manually ensure measurement antenna is in cone of radiation for emission areas determined in steps d.-e. by adjusting in both azimuth and elevation positions. Polarization is oriented for maximum response.

5. Conducted Emissions:

Frequency range: 150 kHz to 500 kHz
Limit: 66 dBuV log decrease to 56 dBuV
Frequency range: 500 kHz to 5 MHz
Limit: 56 dBuV
Frequency range: 5 MHz to 30 MHz
Limit: 60 dBuV

- a. Set up instrumentation in laboratory.
 - i. Observe temperature, humidity and atmospheric pressure.
- b. Perform measurement check.
 - i. Use internal attenuation of spectrum analyzer.
 - ii. Determine conducted ambient.
- c. Set up instrumentation as in Section VI.
 - i. Use internal attenuation of spectrum analyzer.
 - ii. Connect spectrum analyzer to LISN, apply power and stabilize EUT.
 - iii. Scan over the frequency range with appropriate bandwidth and measurement times.
- d. Perform evaluation of EUT by recording spectrum analyzer data.
 - i. Perform test on VAC 1 and repeat for other leads.
 - ii. Automatically collect continuous data over the entire frequency range.

6. Exposure Evaluation.

Frequency: 2.4 GHz
Limit: 0.8 W/kg and 1.6 W/kg

- a. Set up instrumentation at open area test site.
 - i. Mount EUT on table and isotropic probe or loop on antenna positioner.
 - ii. Observe temperature, humidity and atmospheric pressure.
 - iii. Measurement distance is 1 meter and antenna scan height is varied over human body dimensions (0.1 to 2 meters).
- b. Verify spectrum analyzer and antenna operation.
 - i. Spectrum analyzer is connected to antenna.



- ii. Preamplifier is inserted between antenna and analyzer to ensure analyzer noise threshold is at least 6 dB below specification limit (not normally necessary below 30 MHz).
- c. Set up, power and operate EUT as described in Section VI.
- d. Perform preliminary evaluation of equipment in the near field.
 - i. Vary antenna height, antenna polarization, and antenna orientation to EUT.
 - ii. Repeat step d.i. while evaluating electromagnetic radiation at 2.4 GHz.
 - iii. Ensure appropriate resolution bandwidth is set and less than or equal to VBW.
 - iv. Near field measurements of unit emissions are made at ambient frequencies.
- e. Determine equipment orientations that produce maximum radiation.
 - i. Set peak hold on analyzer for 30 minutes while slowly varying antenna height.
- f. Perform final evaluation of unit by recording spectrum analyzer data.
 - i. Ensure the EUT is producing the maximum radiation found in step e.
 - ii. Collect data over the entire frequency range.
 - iii. Identify all ambient signals.



IX. Photographs of Measurement Setup:

The following pages are photographs of the equipment as it was tested.



Photograph 1 – Radiated Emissions <1 GHz - FCC ID PYVR63311



Photograph 2 – Radiated Emissions >1 GHz - FCC ID PYVR63311



Photograph 3 – Conducted Emissions - FCC ID PYVR63311



X. Measurement Results:

1. RF Power Output.


Specification	Specification	Amplifier	Antenna Factor	Cable Loss	Corrected Power	Corrected Power
uV/m	dBuV/m	dB	dB	dB	dBuV	dBm
50,000	94	20.0	28.0	1	85.0	-22.0

Corrected Power (dBm) = Specification (dBuV/m) + Amplifier (dB) – Antenna Factor (dB/m) – Cable Loss (dB).

dBuV/m = 20 log (uV/m)

dBm = dBuV – 107 for 50 Ω System

R63311

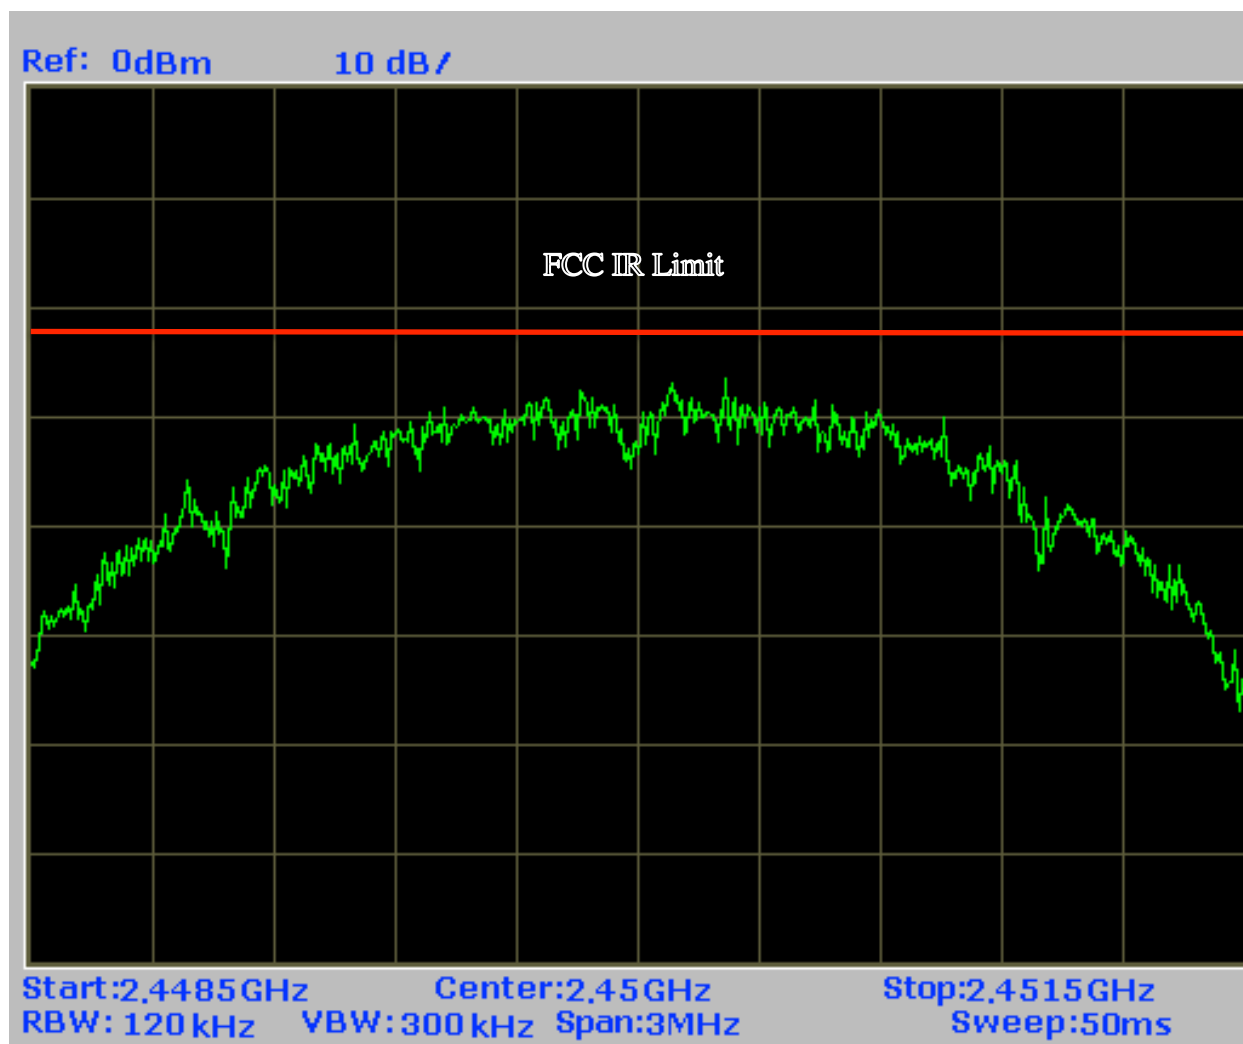


X. Measurement Results Cont'd:

2. Occupied Bandwidth.

Measured 3 MHz; Limit <12 MHz @ 20-dB down.

R63311

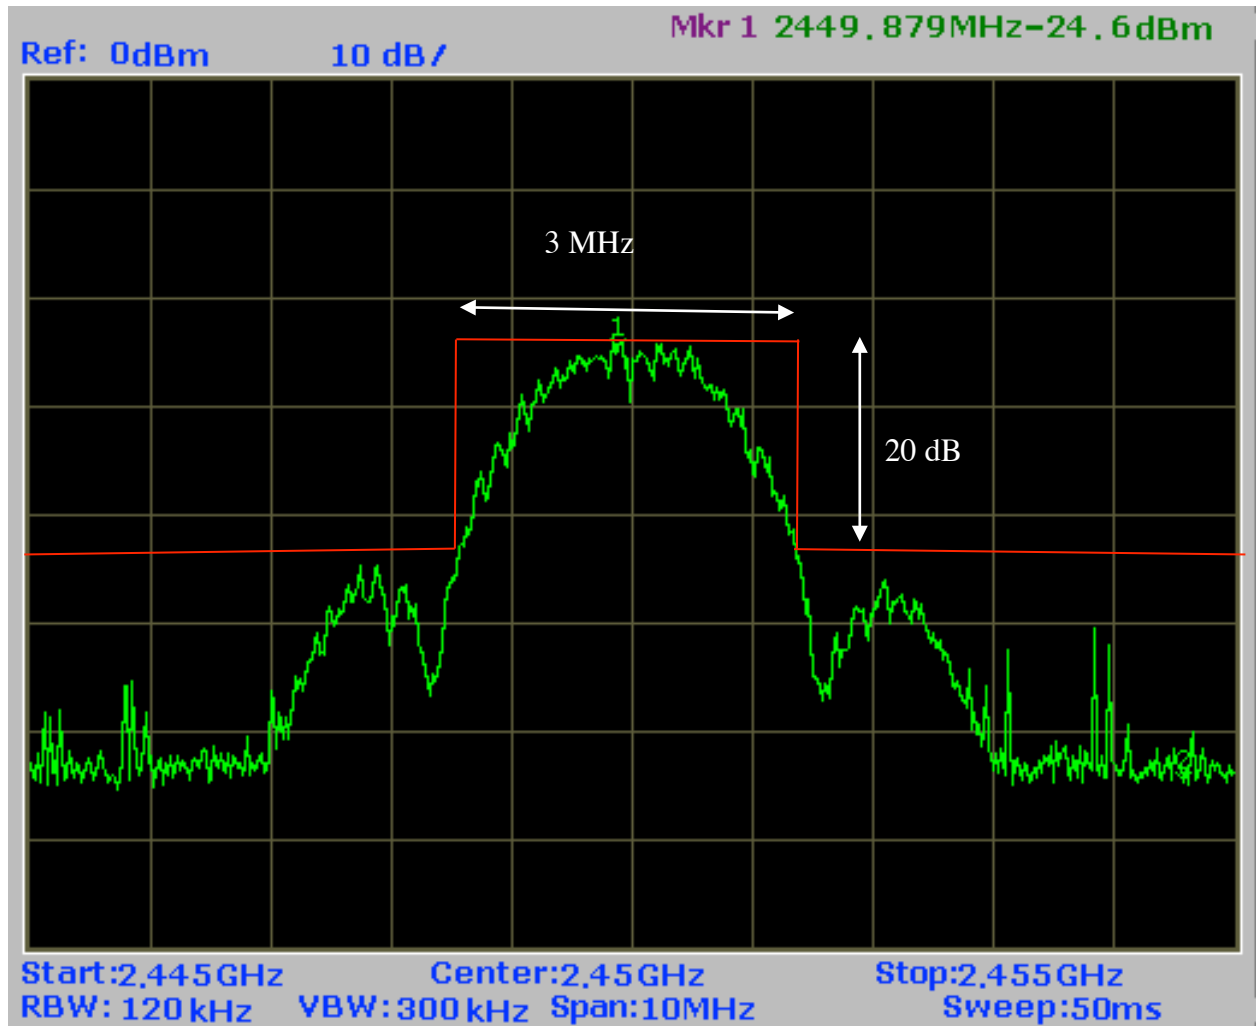

X. Measurement Results Cont'd:

3. Frequency Stability.

Frequency: 2448.5 MHz

Specification: 3.5 VDC through battery end (Normal Operation)

The table below shows there is not any variation in frequency with selected applied voltage:

Voltage (VDC)	% Nominal	Frequency (MHz)
3.5	Nominal	2448.5
3.4	Nominal	2448.5
3.3	Nominal	2448.5
3.2	Nominal	2448.5
3.1	Nominal	2448.5
3.0	Nominal	2448.5
2.9	Nominal	2448.5
2.8	Nominal	2448.5

Table 1 – Frequency Vs. Voltage – R63311



X. Measurement Results Cont'd:

4. Radiated Emissions.

Vertical Polarization

The table below describes the correction factors necessary to apply the limit to the spectrum analyzer output. The following pages contain the spectrum analyzer output with the corrected specification limits superimposed. The green trace is the ambient condition, and the orange trace identifies EUT emissions. Maximum amplitudes of vertical polarization are shown in the results below.

Frequency MHz	IR limit @ 3m dBuV	Amp Gain dB	Antenna Factor dB	Cable Loss dB	Corrected Limit dBuV
30	40	20	17.0	1	42.0
50	40	20	13.6	1	45.4
88	40	20	8.1	1	50.9
89	43.5	20	8.1	1	54.4
108	43.5	20	10.1	2	51.4
125	43.5	20	9.4	2	52.1
150	43.5	20	8.5	3	52.0
216	43.5	20	11.3	3	49.2
217	46	20	11.3	3	51.7
300	46	20	13.5	3	49.5
500	46	20	17.8	4	44.2
960	46	20	23.8	4	38.2
961	54	20	23.8	4	46.2

Table 2 – Corrected Limit - Vertical Polarization




X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Vertical Polarization

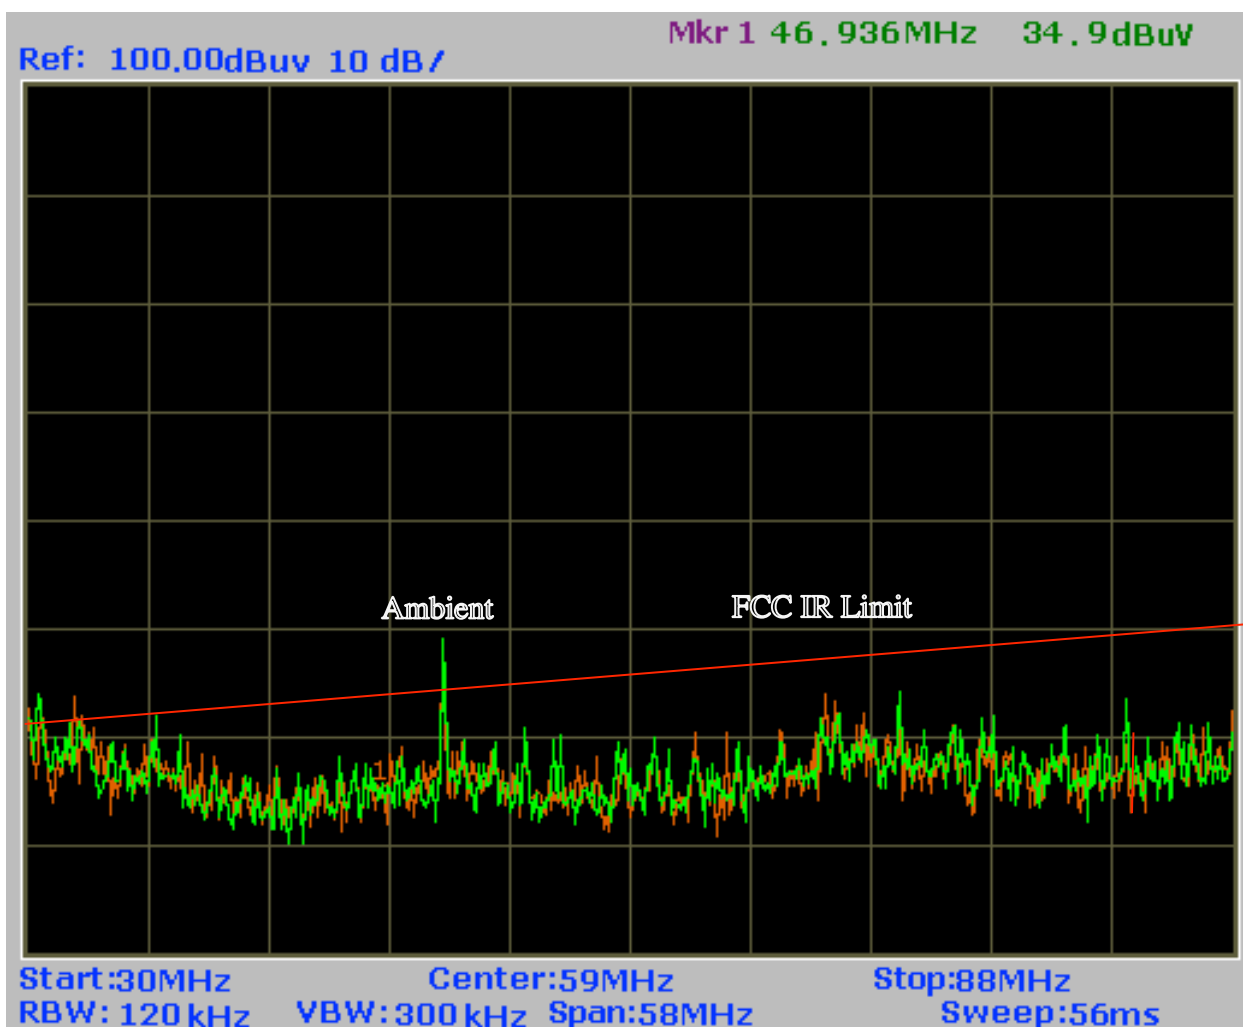


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Vertical Polarization
All Ambient – No Discernible Emissions

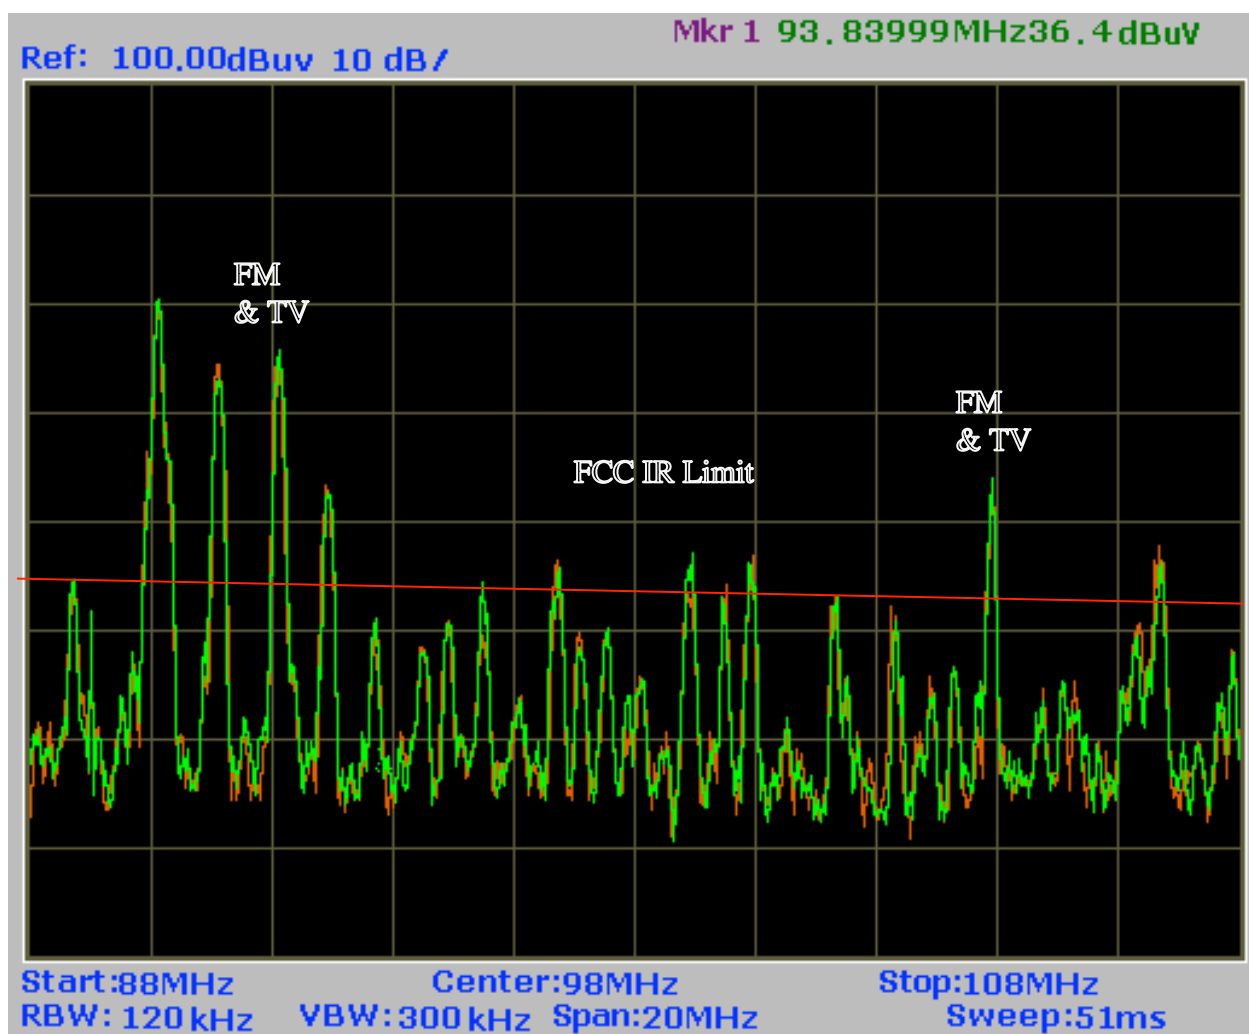


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Vertical Polarization

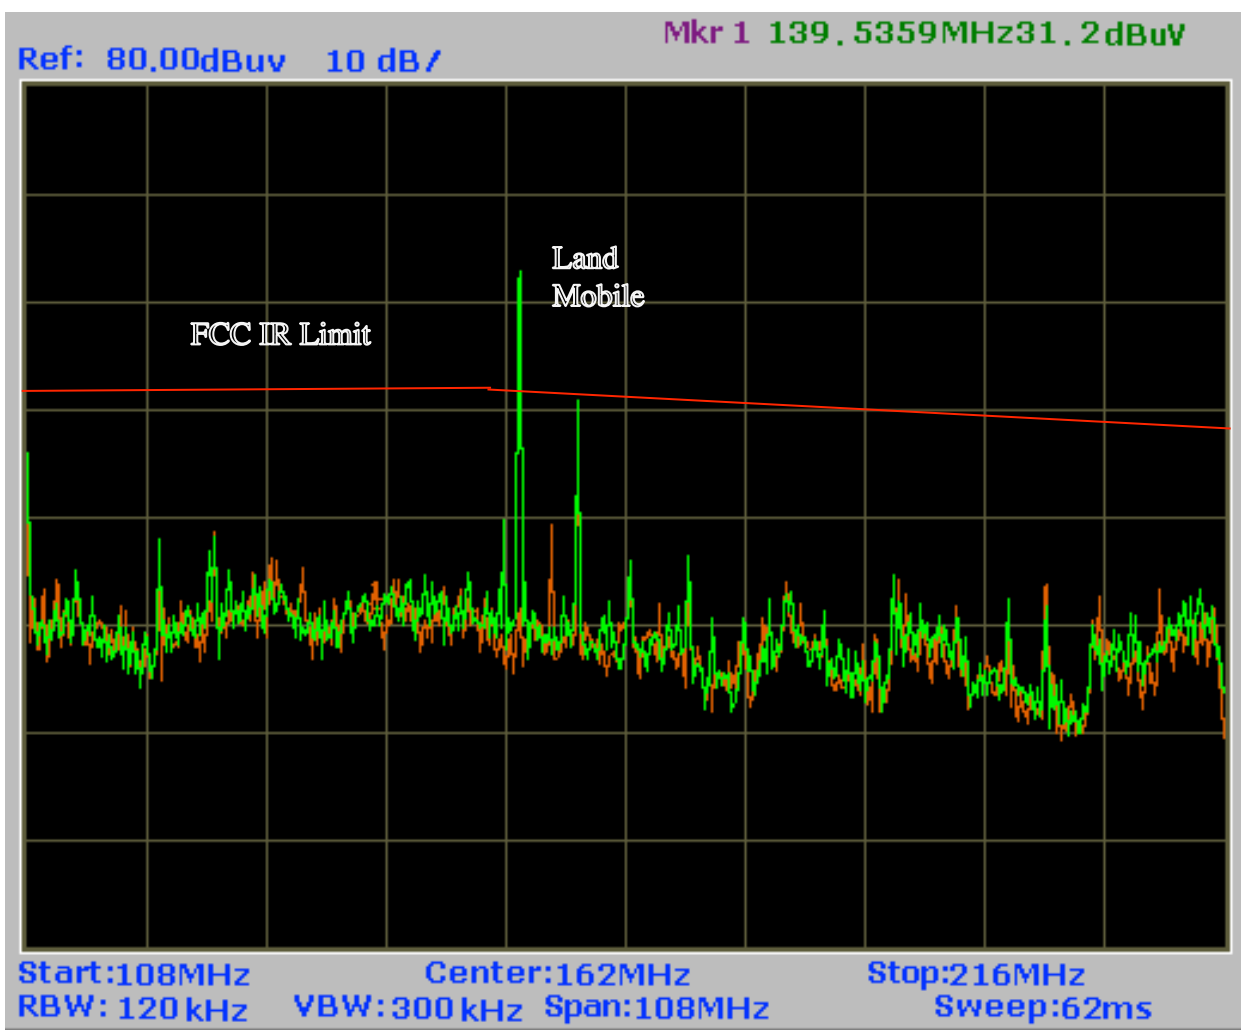


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Vertical Polarization

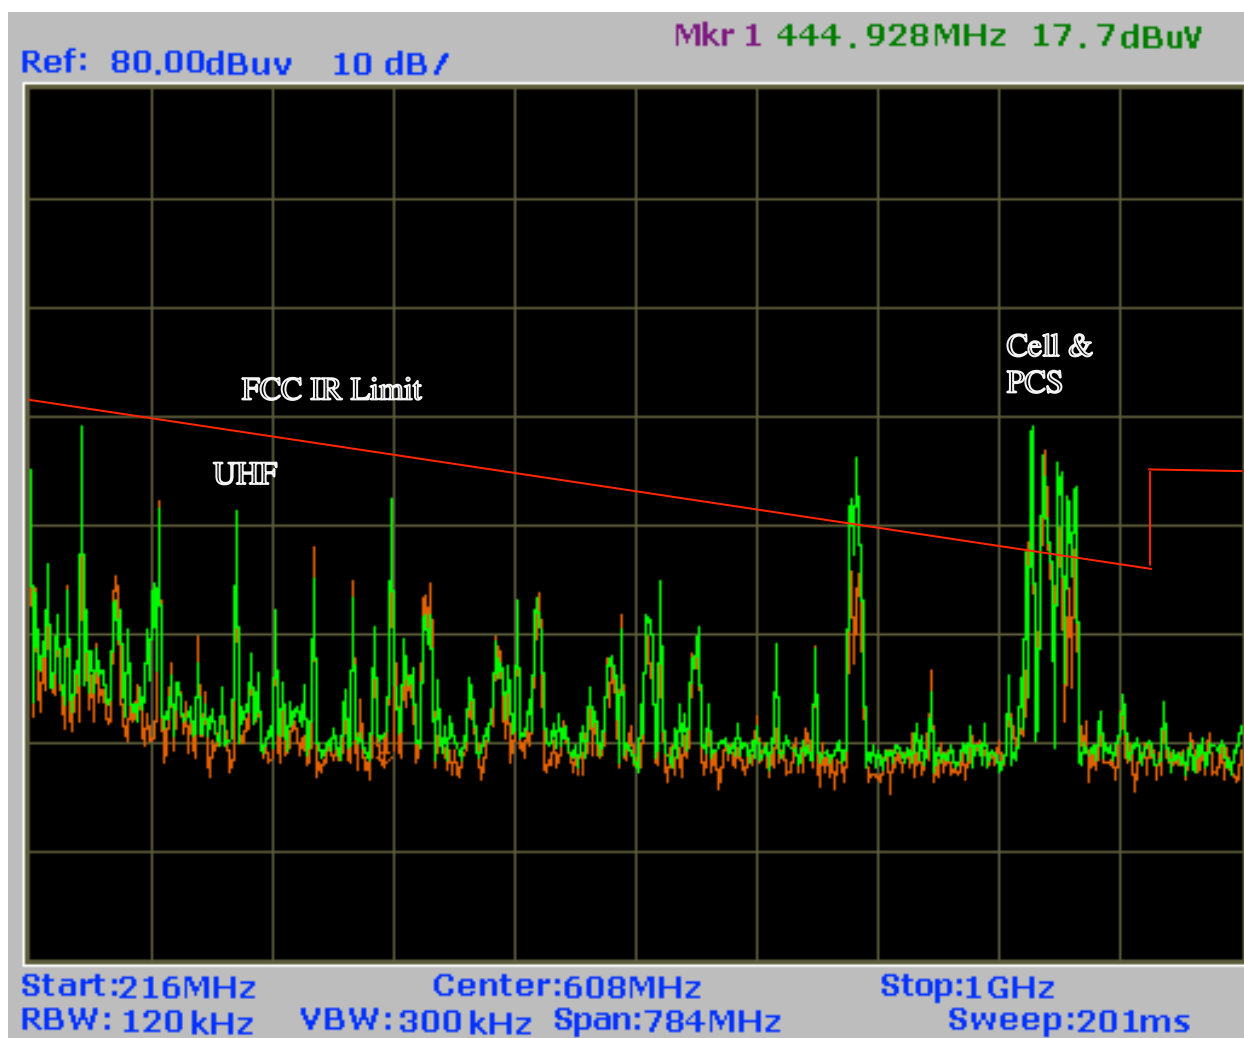

X. Measurement Results Cont'd:

4. Radiated Emissions.

Horizontal Polarization

The table below describes the correction factors necessary to apply the limit to the spectrum analyzer output. The following pages contain the spectrum analyzer output with the corrected specification limits superimposed. The green trace is the ambient condition, and the orange trace identifies EUT emissions. Maximum amplitudes of horizontal polarization are shown in the results below.

Frequency MHz	IR limit @ 3m dBuV	Amp Gain dB	Antenna Factor dB	Cable Loss dB	Corrected Limit dBuV
30	40	20	17.5	1	41.5
50	40	20	14.5	1	44.5
88	40	20	6.7	1	52.3
89	43.5	20	6.7	1	55.8
108	43.5	20	9.4	2	52.1
125	43.5	20	10.7	2	50.8
150	43.5	20	8.2	3	52.3
216	43.5	20	11.8	3	48.7
217	46	20	11.8	3	51.2
300	46	20	13	3	50.0
500	46	20	16.7	4	45.3
960	46	20	23.2	4	38.8
961	54	20	23.2	4	46.8

Table 3 – Corrected Limit - Horizontal Polarization




X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Horizontal Polarization

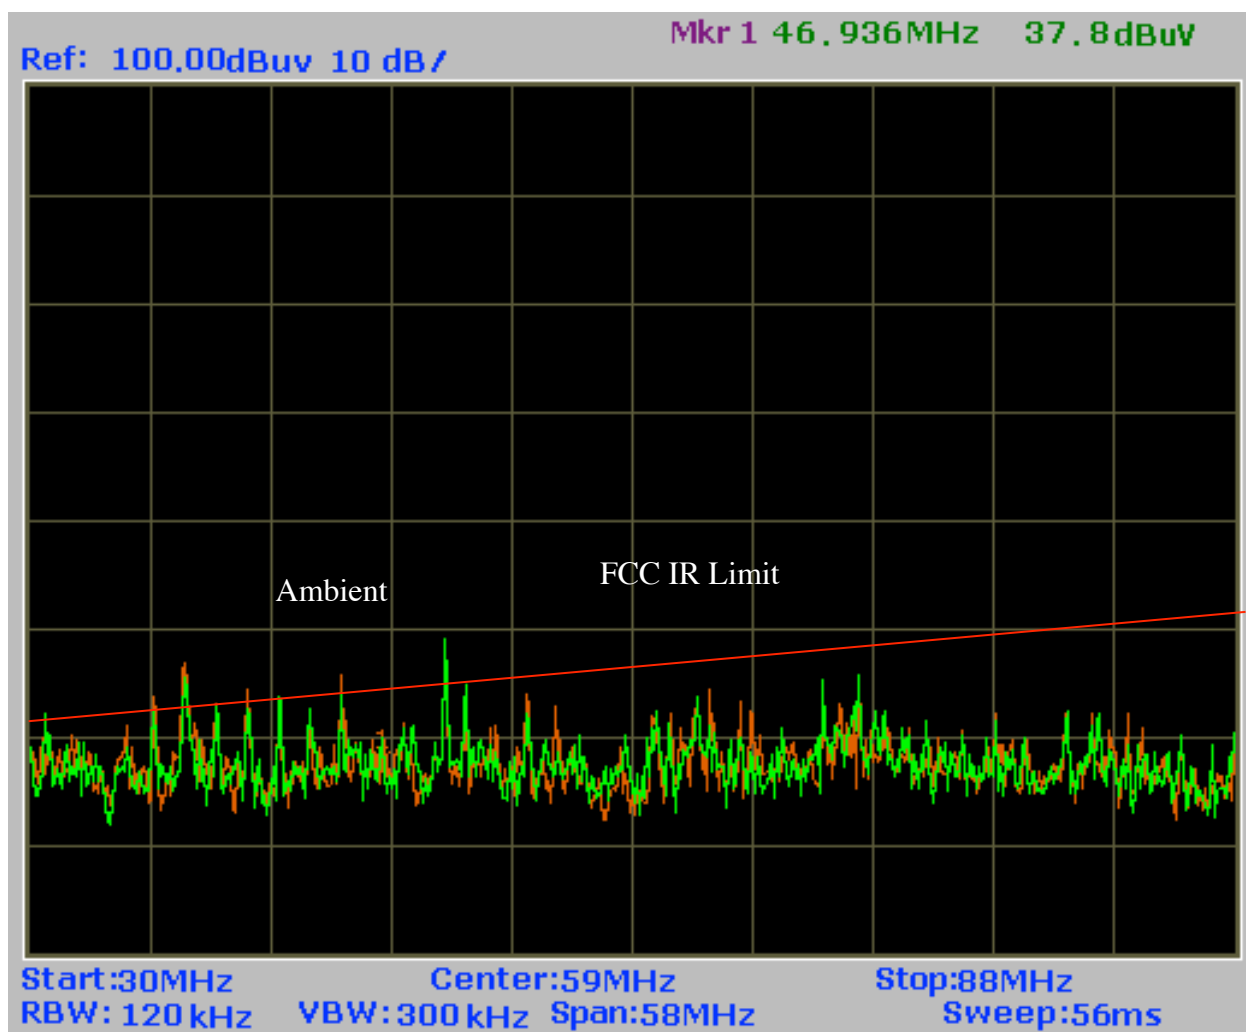


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Horizontal Polarization
All Ambient – No Discernible Emissions

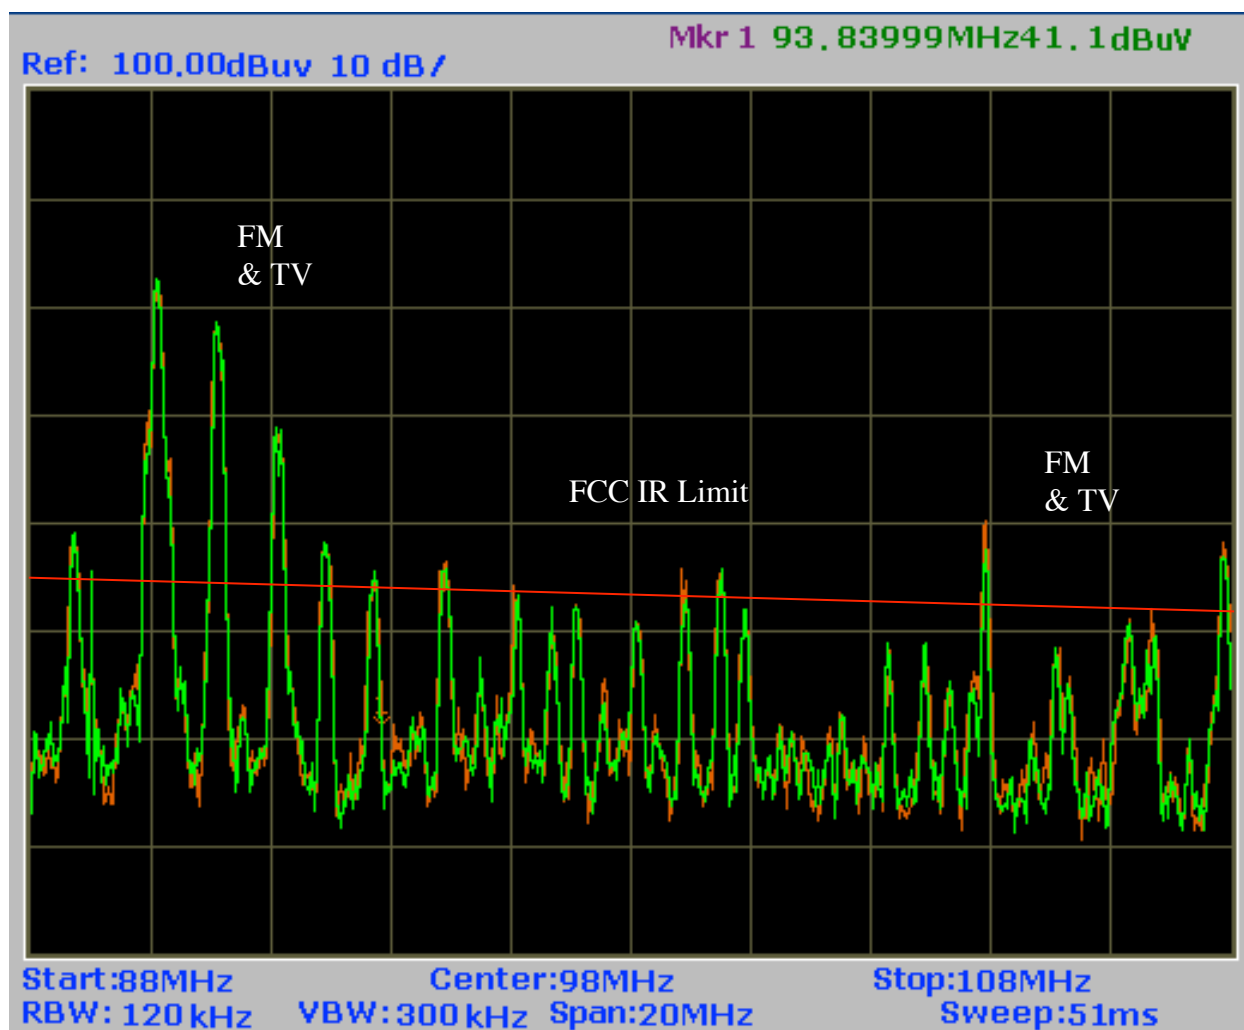


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Horizontal Polarization

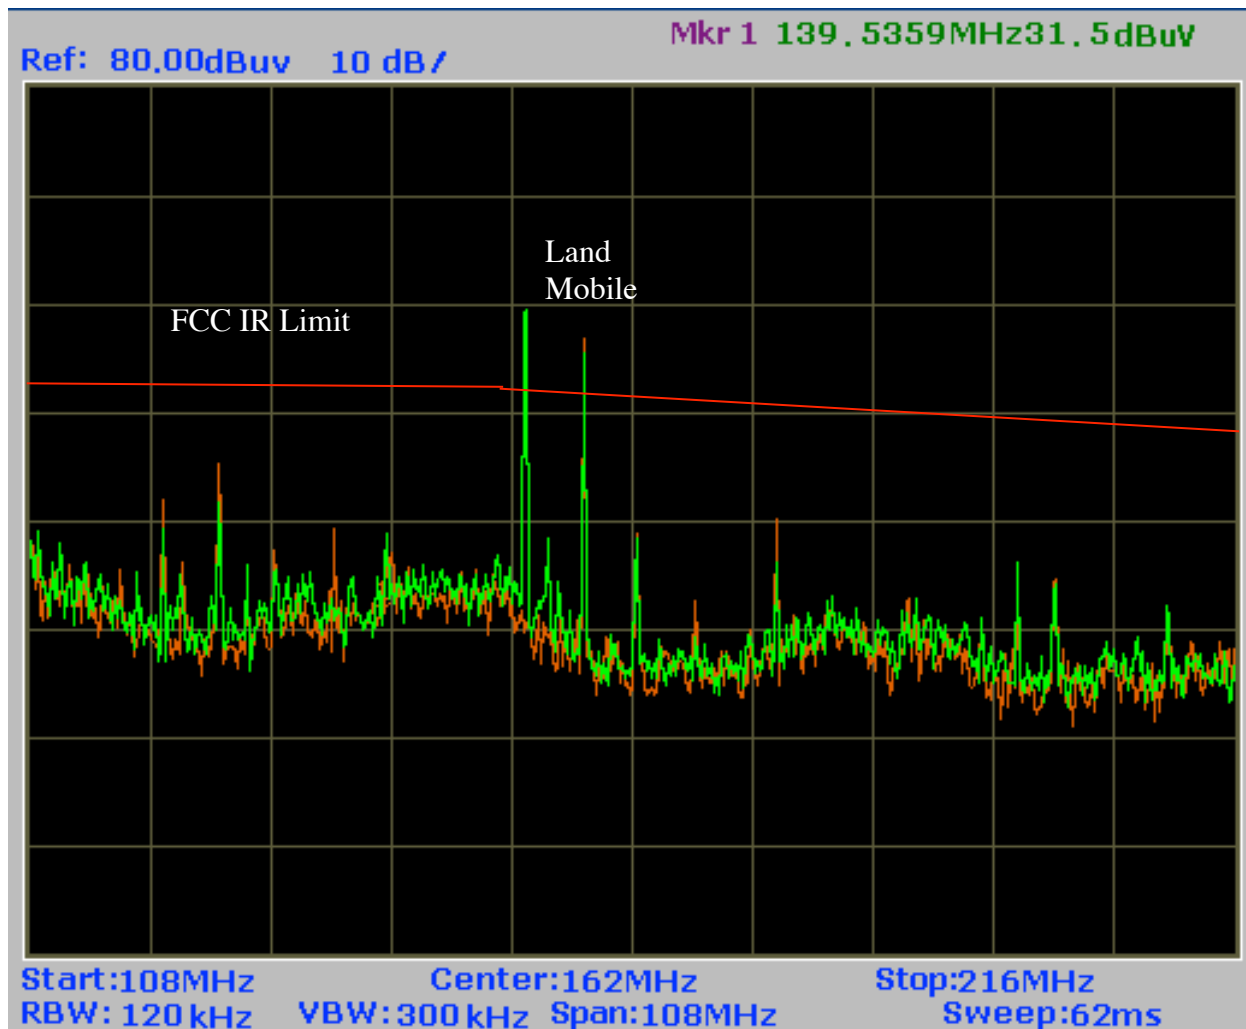


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Horizontal Polarization

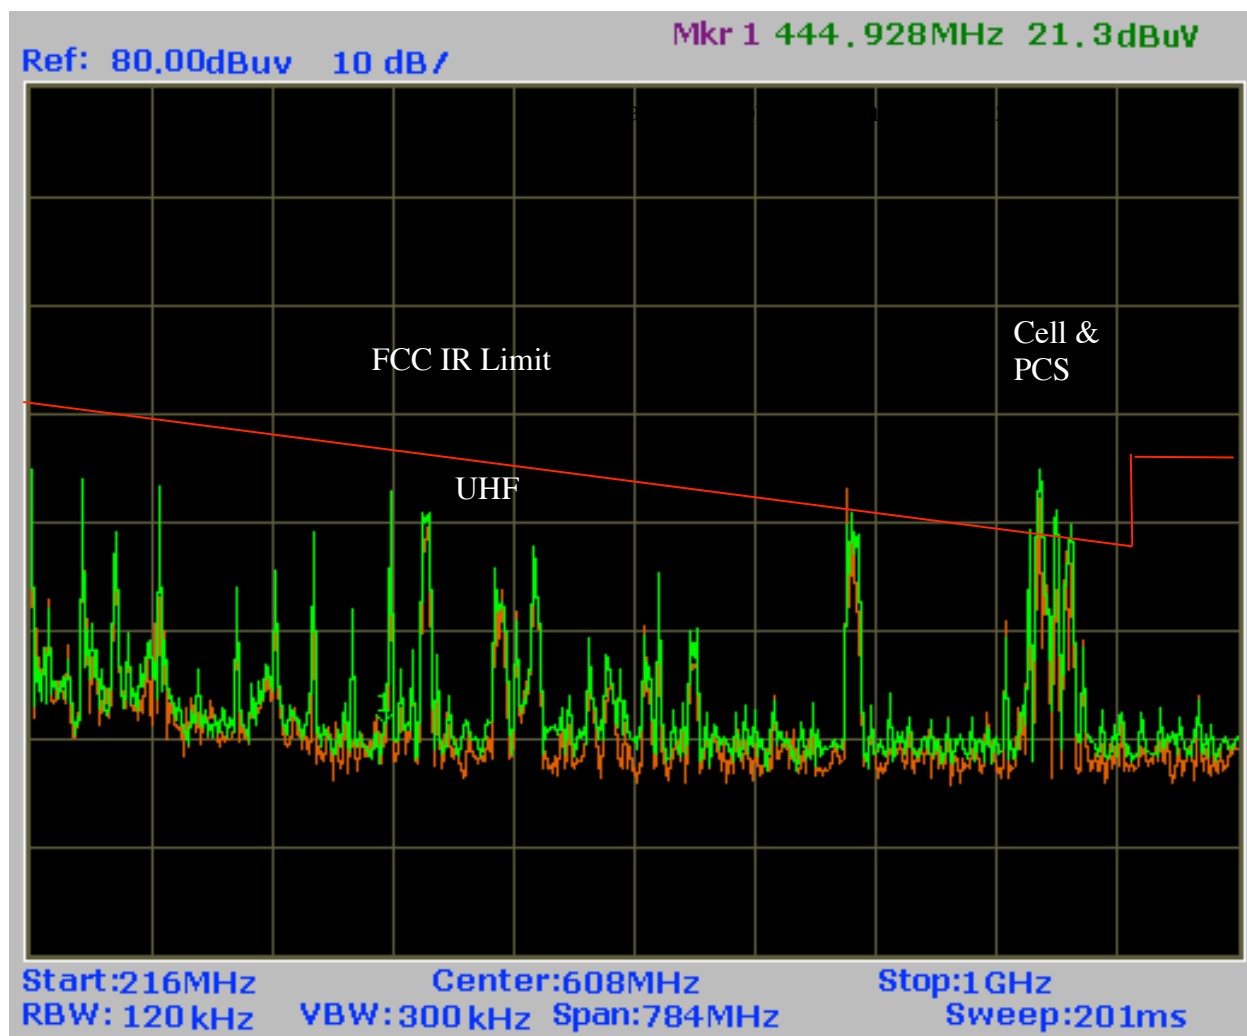

X. Measurement Results Cont'd:

4. Radiated Emissions.

Vertical & Horizontal Polarization >1 GHz.

The table below describes the correction factors necessary to apply the limit to the spectrum analyzer output. The following pages contain the spectrum analyzer output with the corrected specification limits superimposed. The green trace is the ambient condition, and the orange trace identifies EUT emissions. Maximum amplitudes of both polarizations are shown in the results below.

Frequency	IR limit @ 1m	Amp Gain	Antenna Factor	Cable Loss	Corrected Limit
MHz	dBuV	dB	dB	dB	dBuV
1000	54	30	24	3	57
1900	54	30	26	4	54
2399	54	30	28	5	51
2484	54	30	28	6	50
3000	54	30	31	7	46

Table 4 – Corrected Limit - >1 GHz




X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Vertical
Polarization

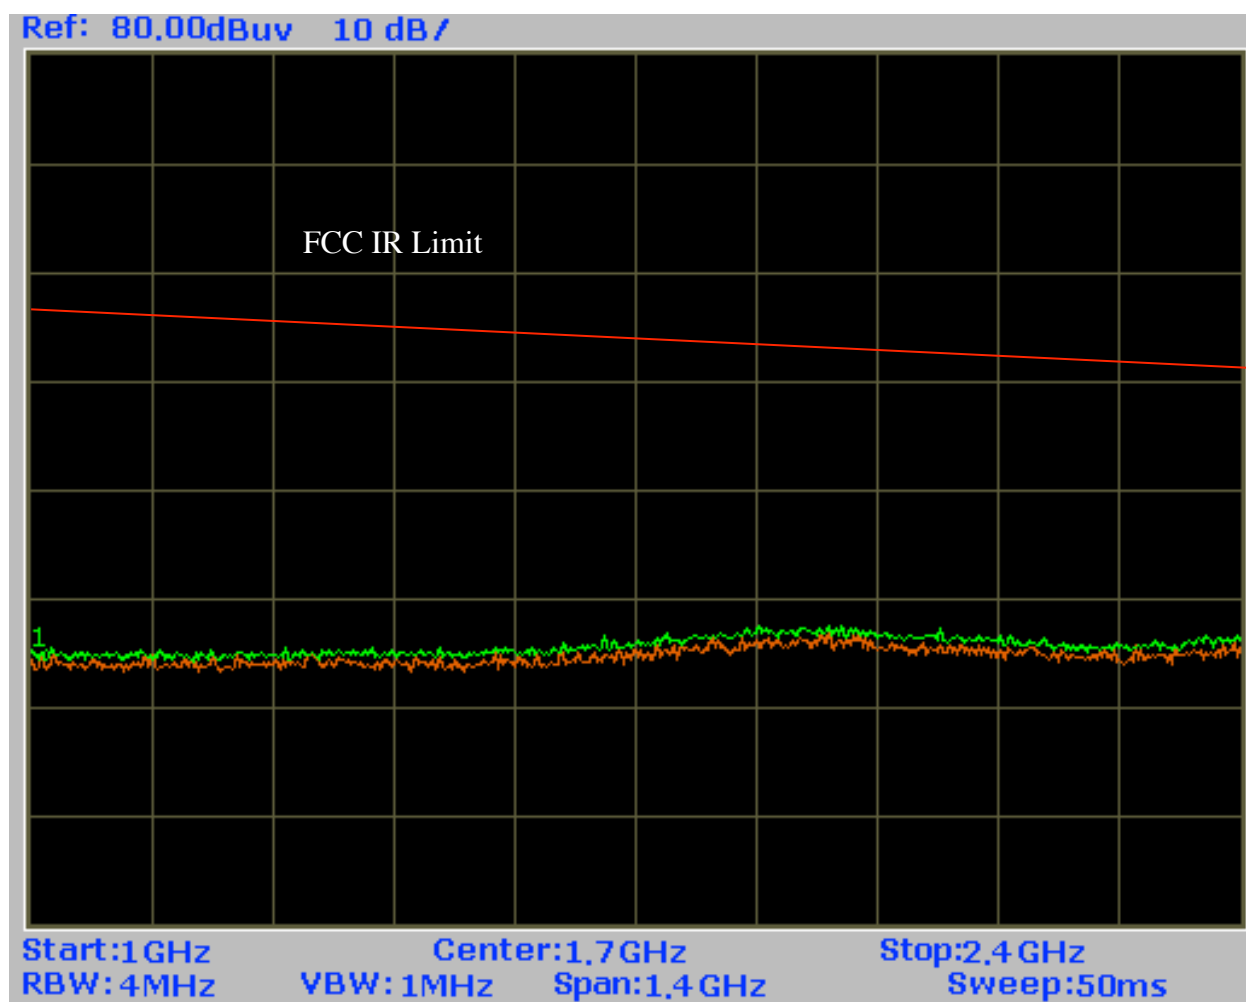


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Vertical
Polarization

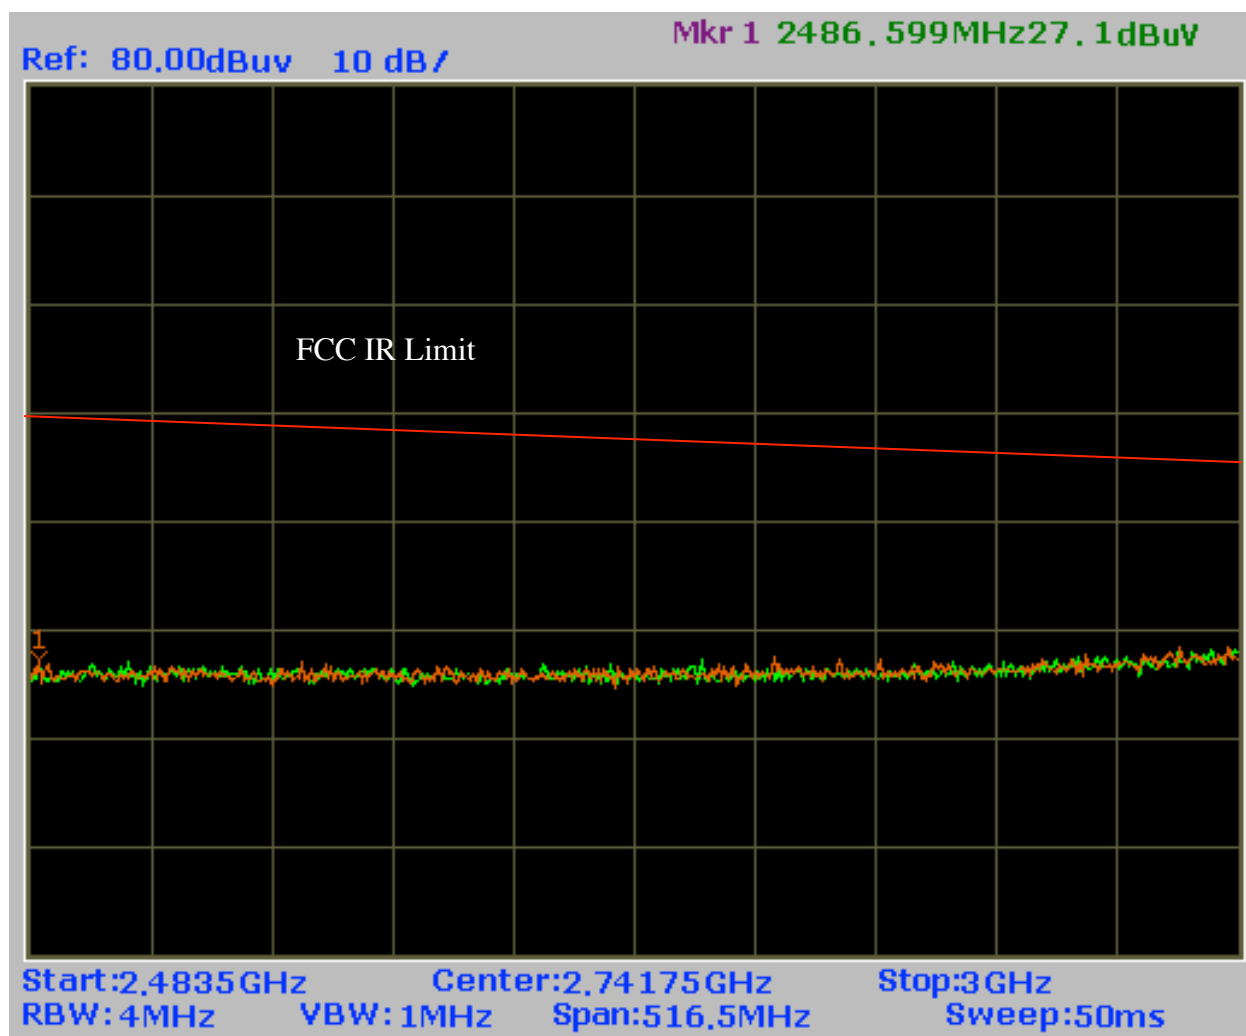


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Horizontal Polarization

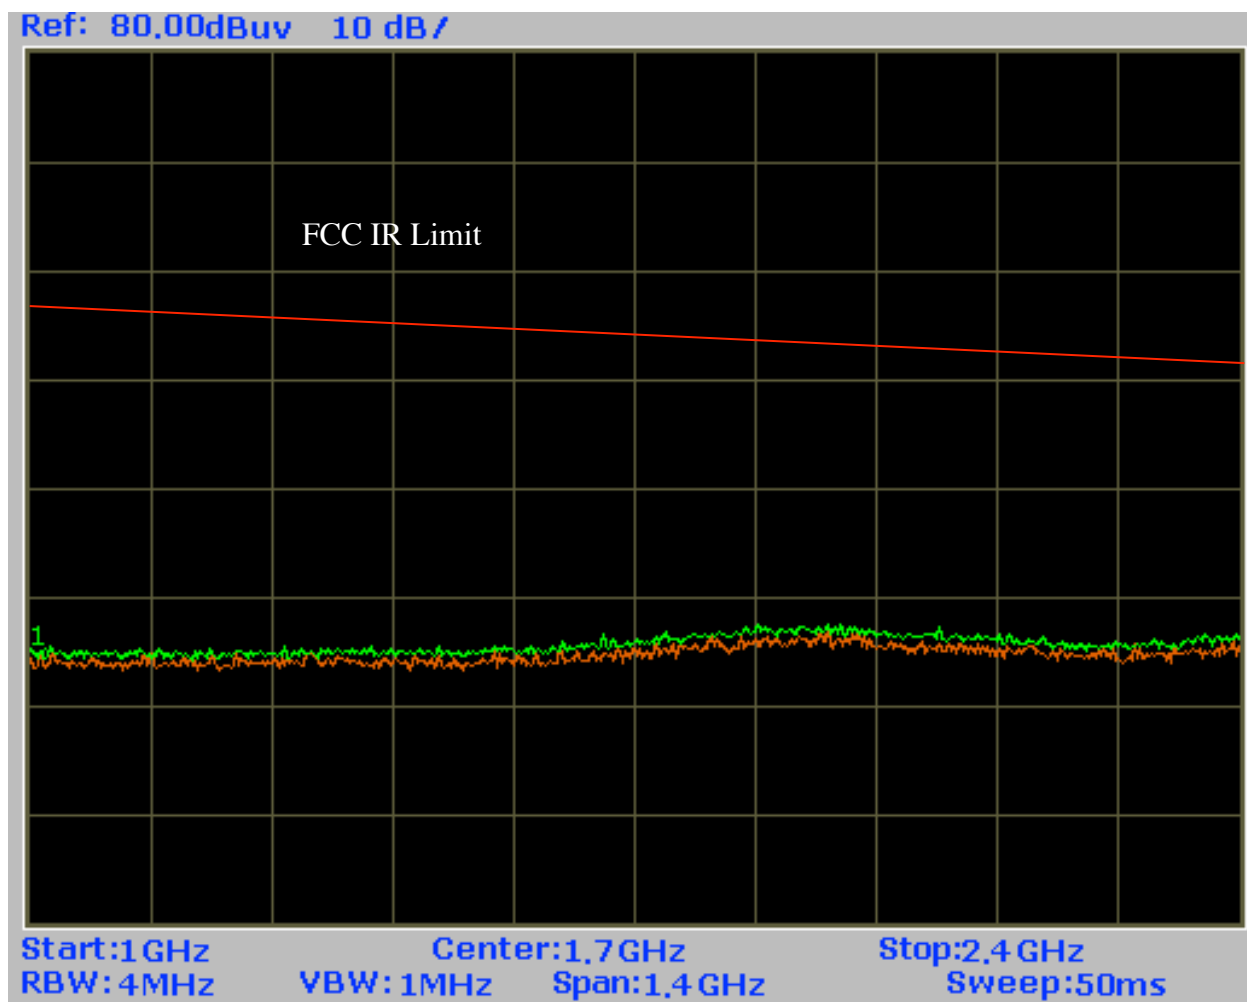


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Horizontal Polarization

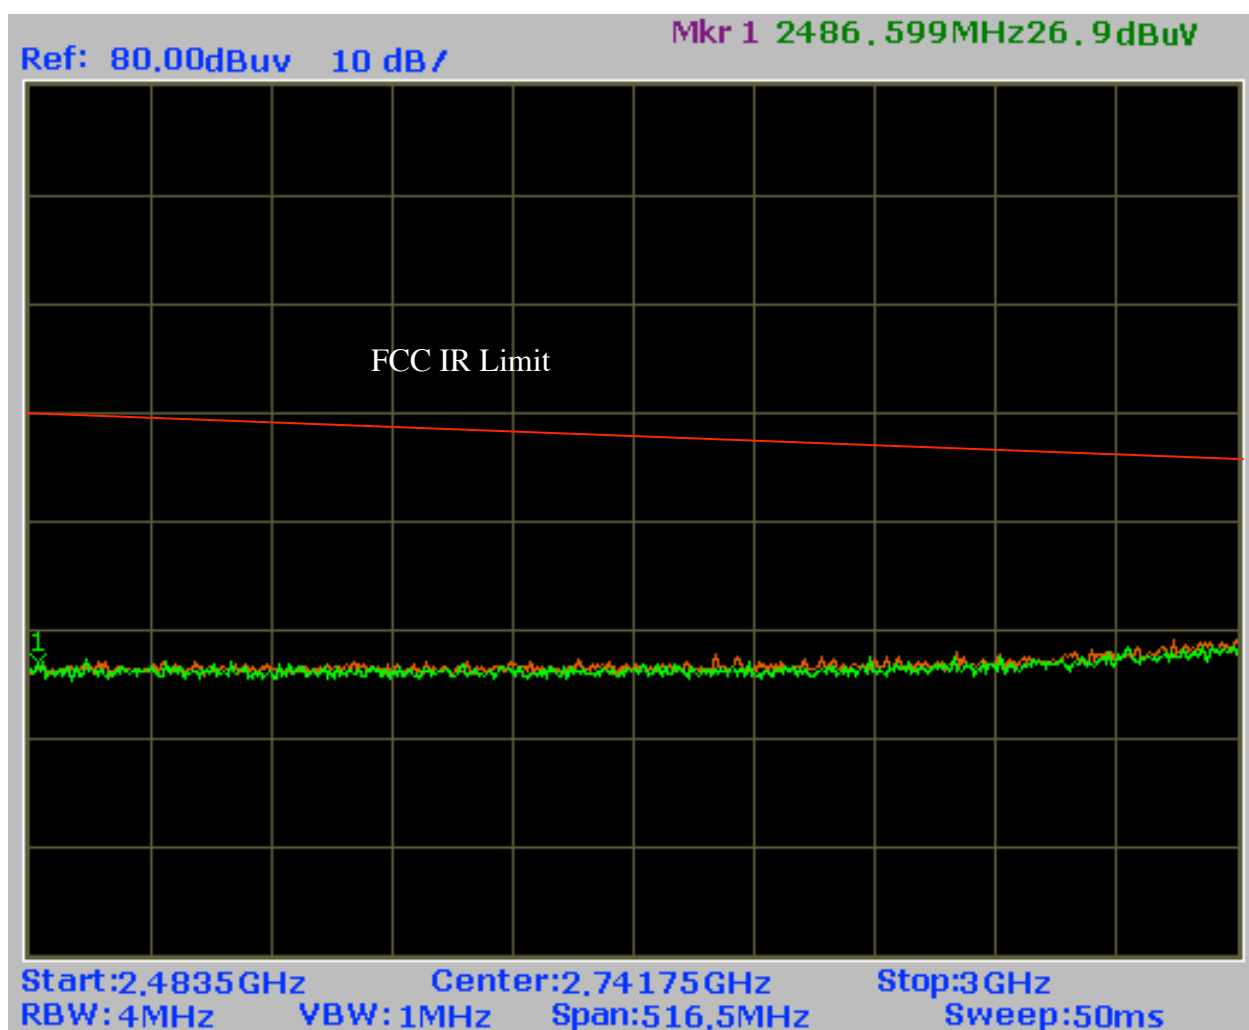

X. Measurement Results Cont'd:

4. Radiated Emissions.

Vertical & Horizontal Polarization >3 GHz.

The table below describes the correction factors necessary to apply the limit to the spectrum analyzer output. The following pages contain the spectrum analyzer output with the corrected specification limits superimposed. Maximum amplitudes of both polarizations are shown in the results below.

Frequency	IR limit @ 1m	Distance Correction *	Amp Gain	Antenna Factor	Cable Loss	Corrected Limit
MHz	dBuV	dB	dB	dB	dB	dBuV
3000	54	30	40	35.0	8	81
25000	54	30	40	46.0	12	66

* Unit brought to 3cm of antenna

Table 5 – Corrected Limit - >3 GHz




X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Vertical
Polarization

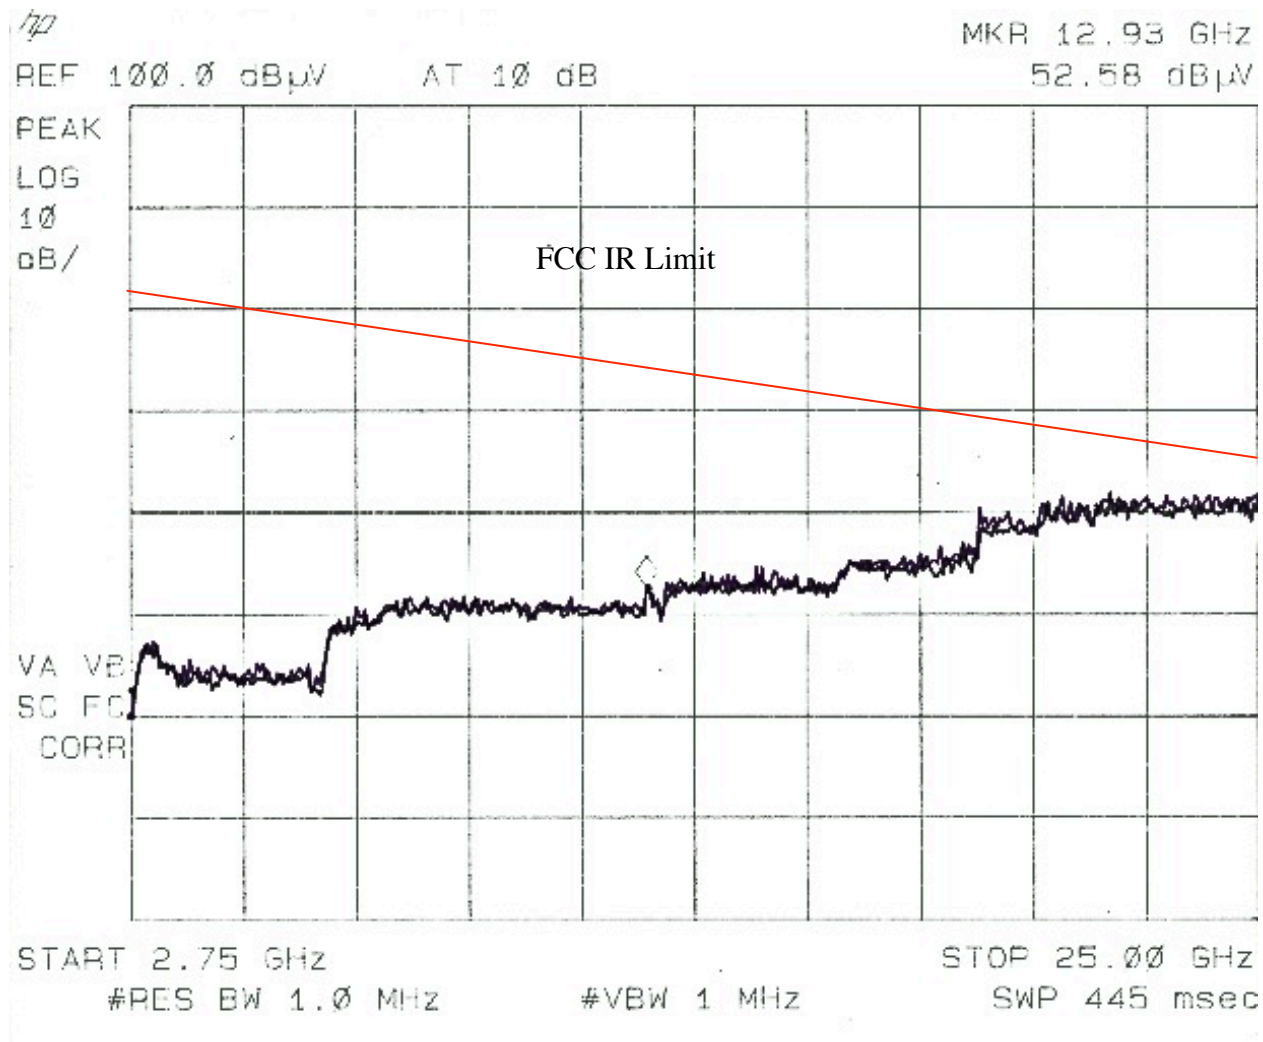


X. Measurement Results Cont'd:

4. Radiated Emissions.

R63311

Maximum of Horizontal Polarization

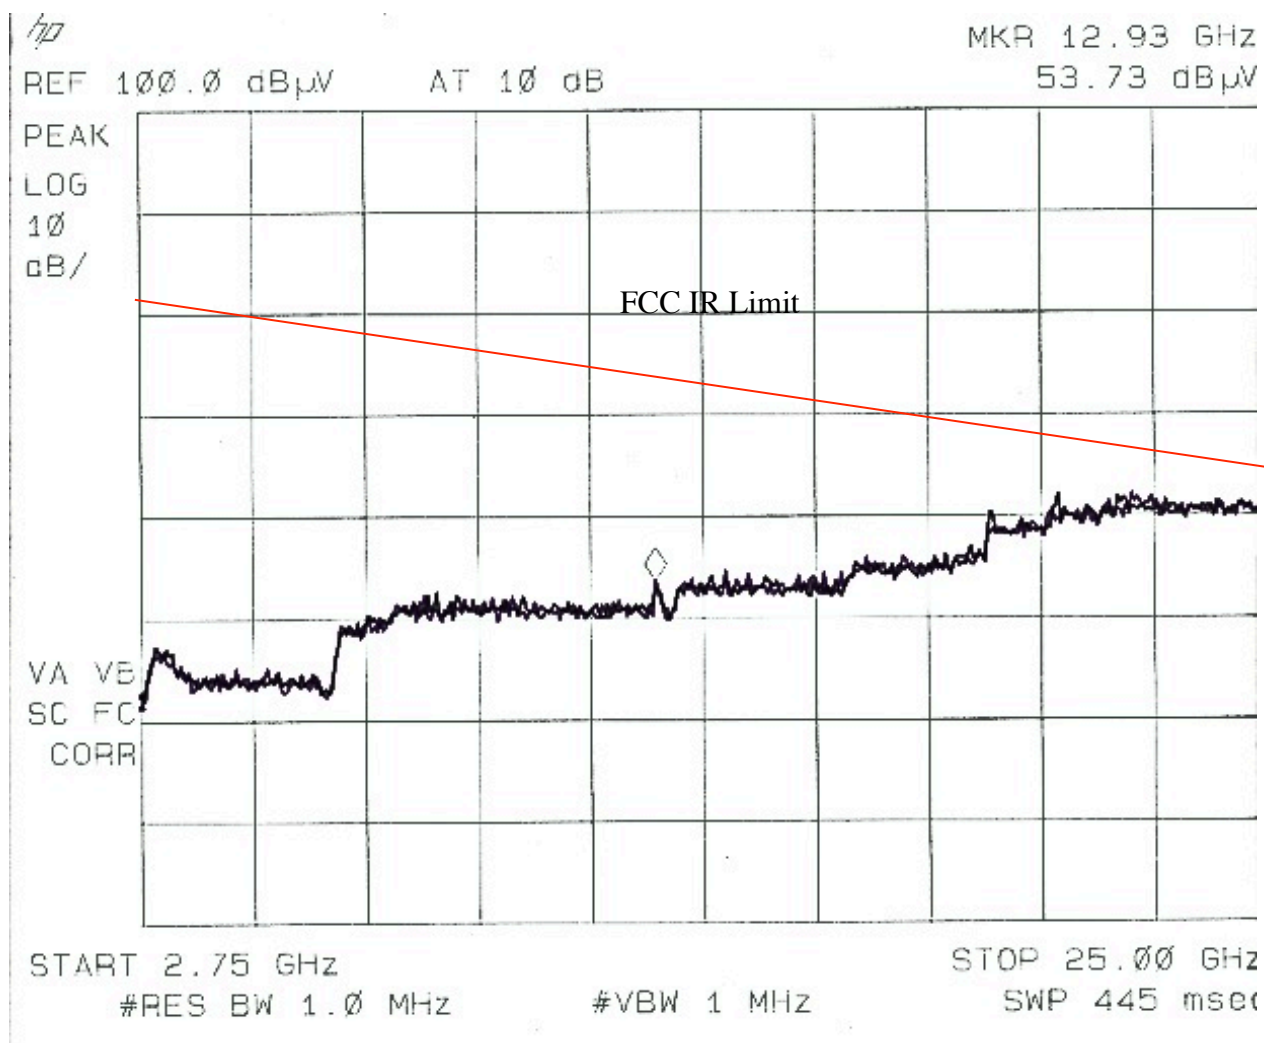

X. Measurement Results Cont'd:

5. Conducted Emissions Data:

The following pages contain the spectrum analyzer output from the testing. Limits superimposed on the data are corrected for transducer and measurement system gain or loss. Correction factors at selected frequencies are shown below:

Corrected Limit (dBuV) = Limit (dBuV) - LISN Insertion Loss (dB).

Frequency	Limit	Insertion Loss	Corrected Limit
MHz	dBuV	dB	dBuV
0.15	66	0	66
0.5	56	0	56
5	60	1	59
30	60	2	58


Table 6 – Corrected Cond. Ems. CE Limit



X. Measurement Results Cont'd:

5. Conducted Emissions Data:


R63311
L1

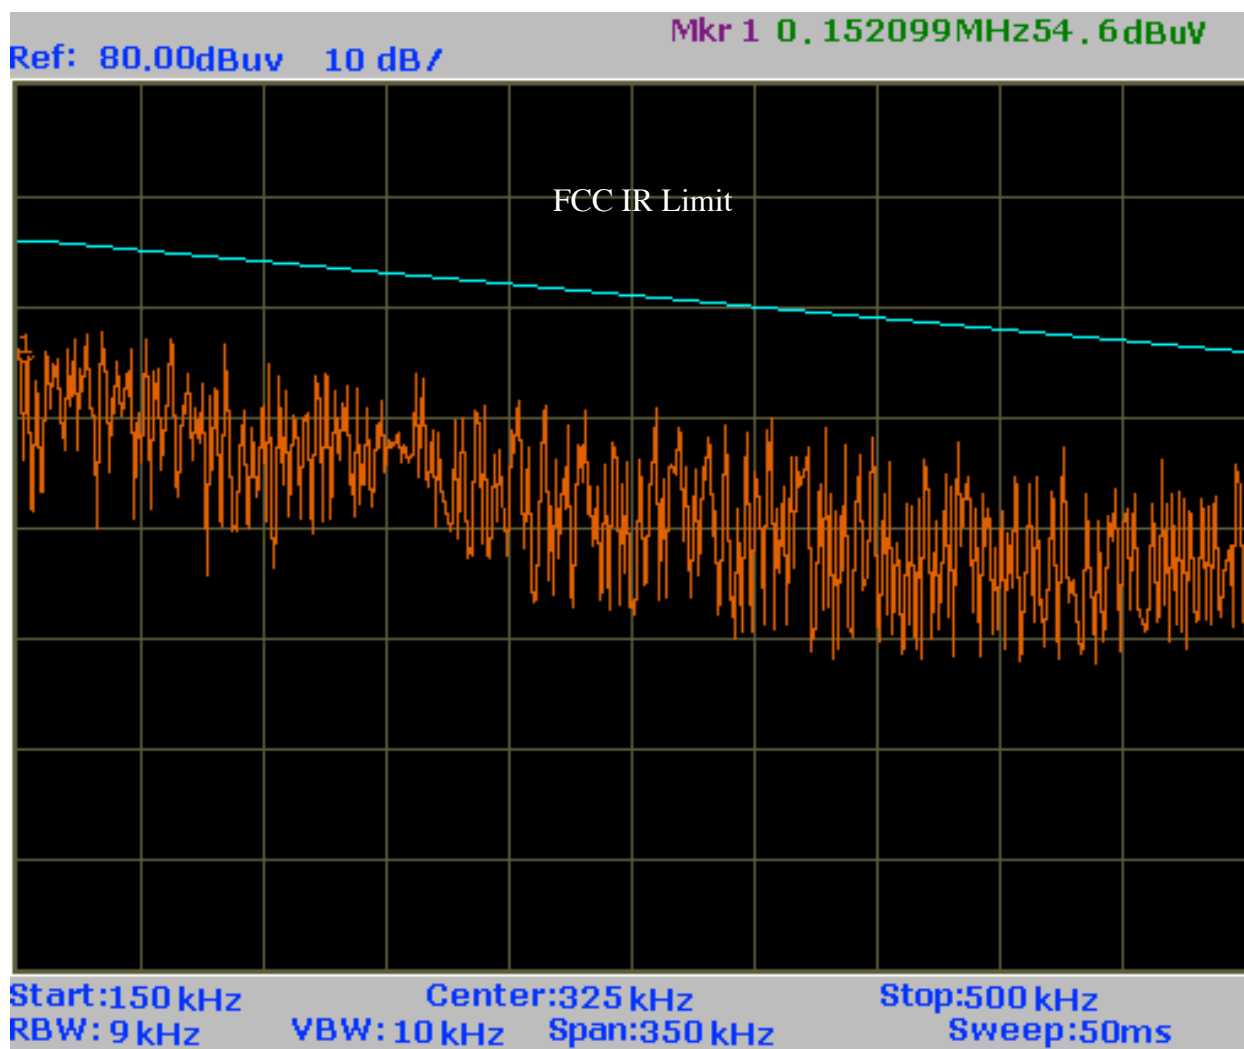

X. Measurement Results Cont'd:

5. Conducted Emissions Data:


R63311
L1

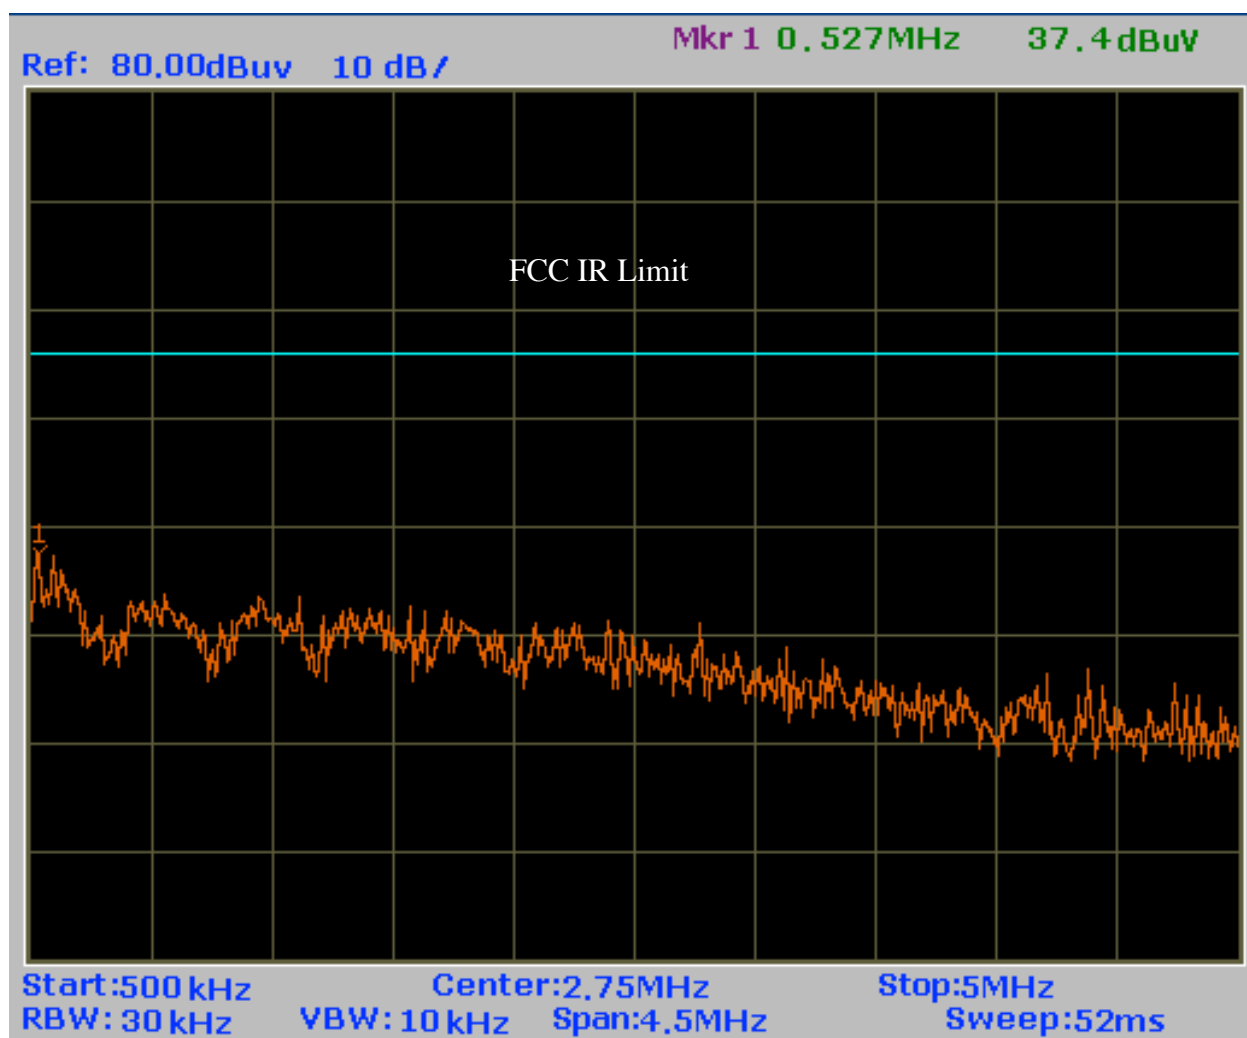

X. Measurement Results Cont'd:

5. Conducted Emissions Data:


R63311
L1

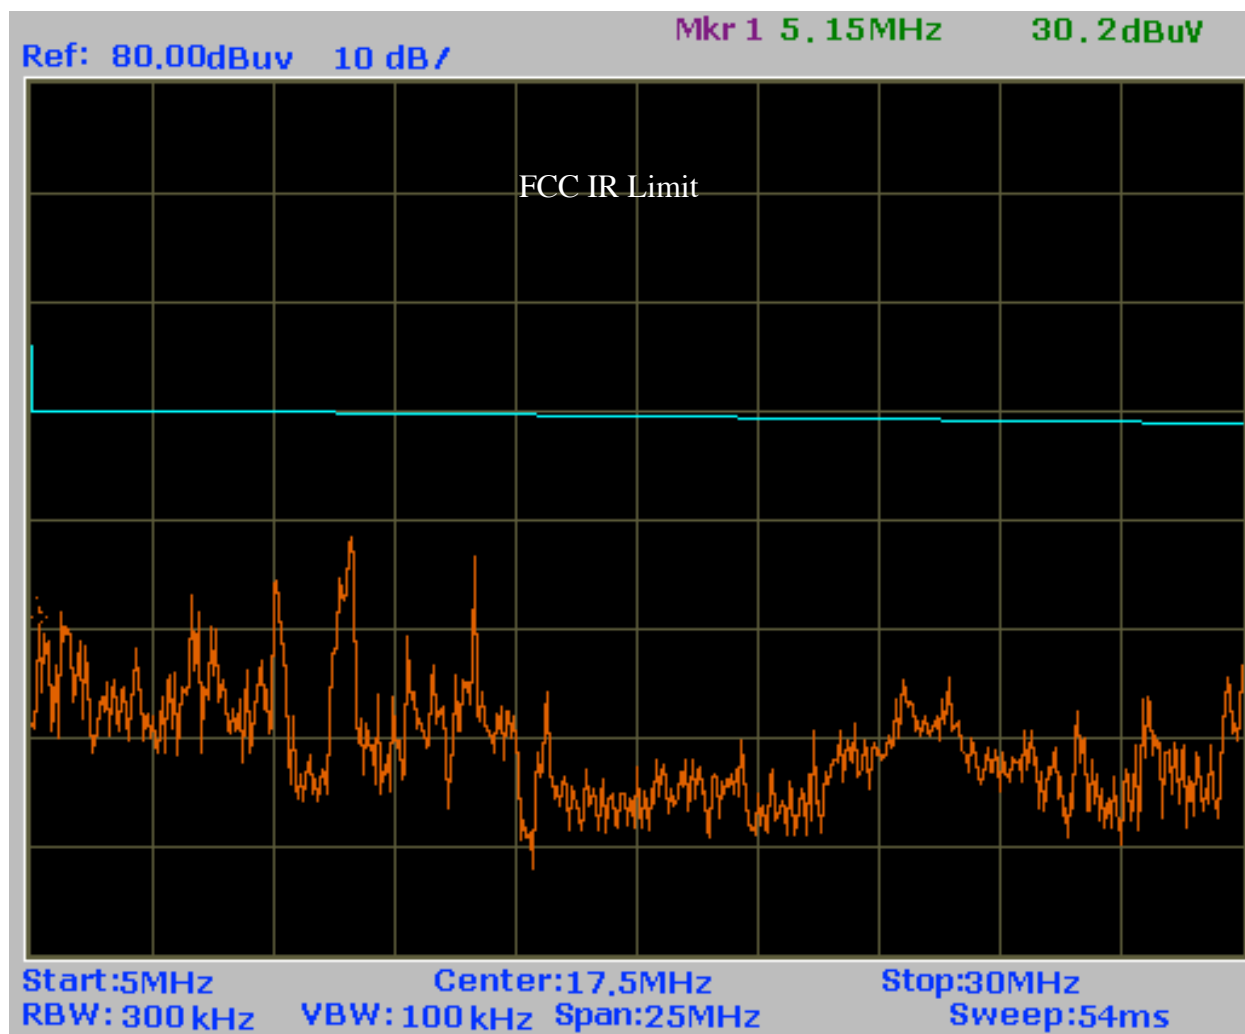

X. Measurement Results Cont'd:

5. Conducted Emissions Data:


R63311
L2

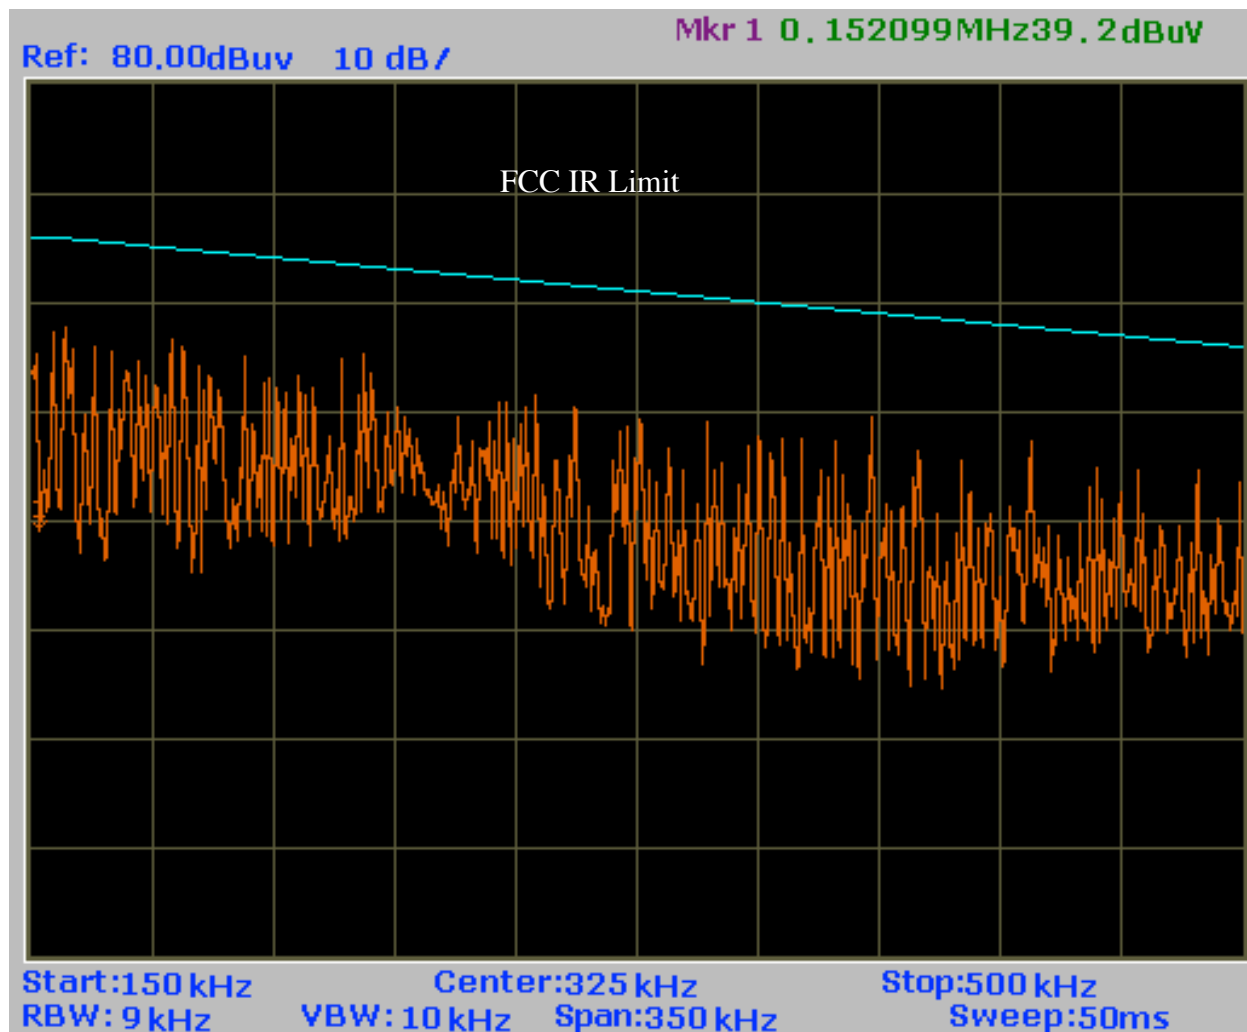

X. Measurement Results Cont'd:

5. Conducted Emissions Data:

R63311
L2

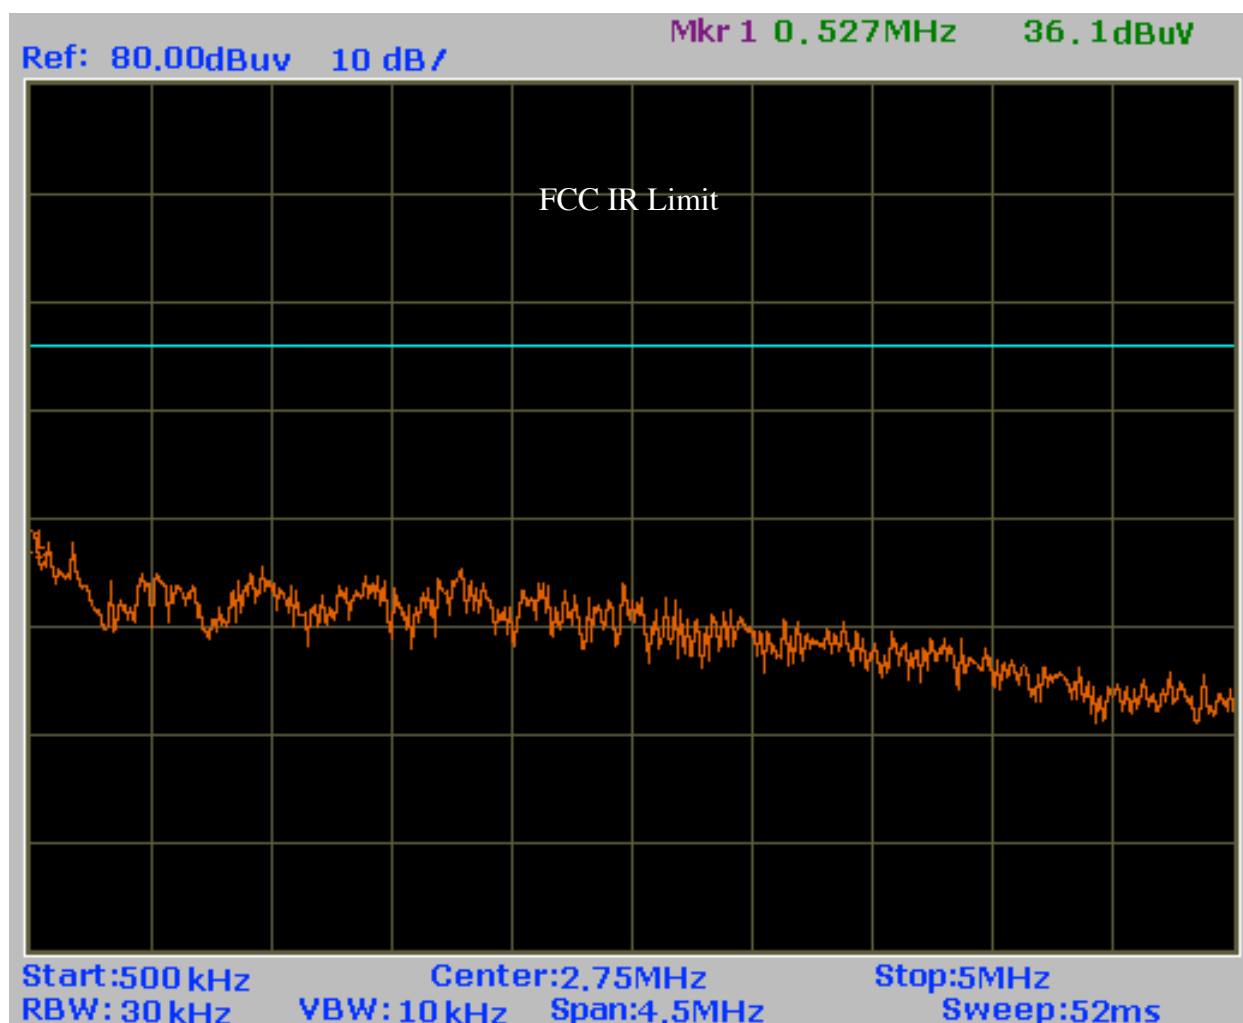

X. Measurement Results Cont'd:

5. Conducted Emissions Data:

R63311
L2



X. Measurement Results Cont'd:

6. Exposure Evaluation.

The analysis below compares the measured power to the maximum permissible exposure limit for general population with uncontrolled access. The R63311 can be used continuously; no special averaging time or limit relaxations are employed. Maximum peak available power is used in calculations.

Unit Frequency: 2.4 GHz

Unit Maximum Average Power .001 Watt available (0 dBm from design)

Standard User Weight: 100 kg

Specific Absorption Rate (SAR) Limit for whole-body: 0.08 W/kg

Specific Absorption Rate (SAR) Limit for one-gram tissue volume: 1.6 W/kg

SAR Whole body = .001 W/100 kg = 0.00001 W/kg for Alert Monitor

SAR 1g tissue = .001 W/001 kg * = 1 W/kg for Alert Monitor

In addition per IEEE C95.1 paragraph 6.10 (2): low power devices are unlikely to expose users in excess of the criteria when power is less than or equal to:

$P_{max} = 1.4 * (450/f)$ Watts where f is in MHz.

P_{max} is significantly greater than the power available at the Alert Monitor:

$P_{max} = 1.4 * (450/2400) = 0.26 \text{ W.}$

