



FCC PART 15.247
TEST REPORT

For

Summer Infant, Inc.

1275 Park East Drive, Woonsocket, Rhode Island 02895 United States

FCC ID: PZK-868R

Report Type: Original Report	Product Type: Digital FHSS Device (Monitor Unit)
Test Engineer: Gardon Zhang	<i>Gardon Zhang</i>
Report Number: RSZ121011002-00	
Report Date: 2012-11-22	
Reviewed By: Alvin Huang RF Leader	<i>Alvin Huang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	8
STANDARD APPLICABLE	8
FCC §15.203 – ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.247(a) (1) – 20 dB BANDWIDTH.....	23
APPLICABLE STANDARD	23

TEST PROCEDURE23
TEST EQUIPMENT LIST AND DETAILS.....23
TEST DATA23

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL26
APPLICABLE STANDARD26
TEST PROCEDURE26
TEST EQUIPMENT LIST AND DETAILS.....26
TEST DATA26

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....28
APPLICABLE STANDARD28
TEST PROCEDURE28
TEST EQUIPMENT LIST AND DETAILS.....28
TEST DATA28

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT31
APPLICABLE STANDARD31
TEST PROCEDURE31
TEST EQUIPMENT LIST AND DETAILS.....31
TEST DATA31

FCC §15.247(d) - BAND EDGES36
APPLICABLE STANDARD36
TEST PROCEDURE36
TEST EQUIPMENT LIST AND DETAILS.....36
TEST DATA37

PRODUCT SIMILARITY DECLARATION LETTER.....39

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Summer Infant, Inc.*'s product, model number: 28680 (FCC ID: PZK-868R) (the "EUT") in this report was a monitor unit of Digital FHSS Device, named as Baby Touch Digital Color Video Monitor by the applicant, which was measured approximately: 11.8 cm (L) x 7.8 cm (W) x 2.4 cm (H), rated input voltage: 3.7V battery or DC 7.5V from adapter.

Adapter Information:

Manufacturer: EXVISION INDUSTRIES (SHENZHEN) CO., LTD

Model: ADN050750500

Input: AC 120V, 250mA, 60Hz

Output: DC 7.5V, 500mA

Note: The models 28680 and 28810, the difference between them are color, appearance shape, packaging and model number which were explained in the attached product similarity declaration letter provided by applicant, and we select 28680 to test.

** All measurement and test data in this report was gathered from production sample serial number: 1210044 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2012-10-11.*

Objective

This report is prepared on behalf of *Summer Infant, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Submitted with the transmitter part of a system with FCC ID: PZK-868T

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was selected by manufacturer.

EUT Exercise Software


No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Block Diagram of Test Setup

For Conducted Emission

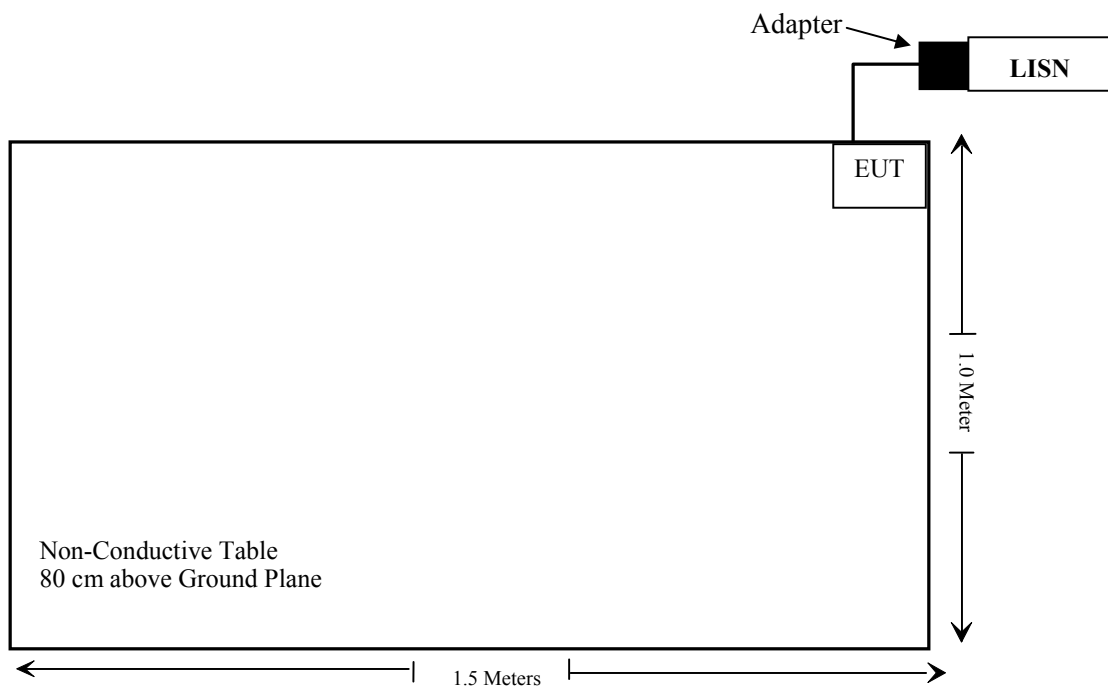

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Standard Applicable

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mw/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Calculation

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally *numeric* gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

AC Power supply:

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2409.10	0	1	18.86	76.913	20	0.0153	1.0
2439.40	0	1	18.98	79.068	20	0.0157	1.0
2474.20	0	1	19.04	80.168	20	0.0160	1.0

Battery Power supply:

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2409.10	0	1	19.13	81.846	20	0.0163	1.0
2439.40	0	1	18.92	77.983	20	0.0155	1.0
2474.20	0	1	18.98	79.068	20	0.0157	1.0

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a monopole antenna connected to RF board, which is in accordance to section 15.203, the maximum gain is 0 dBi; please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR-16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

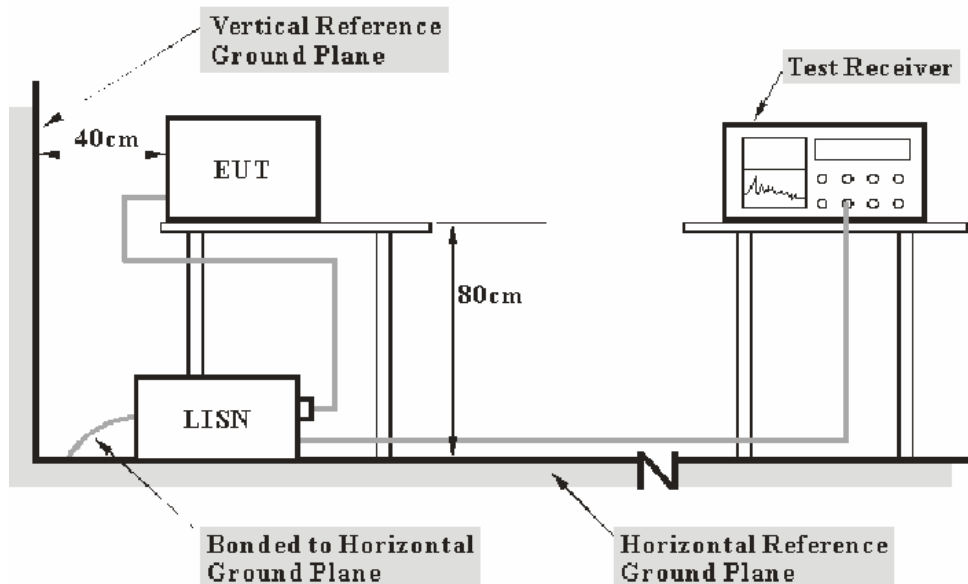

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2011-11-24	2012-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2012-08-22	2013-08-21
Rohde & Schwarz	Attenuator	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed using suitable standards traceable to National Institute of Metrology (NIM).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

3.90 dB at 0.620 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Gardon Zhang on 2012-11-10.


Test Mode: Charging & Transmitting

AC 120 V, 60 Hz, Line:

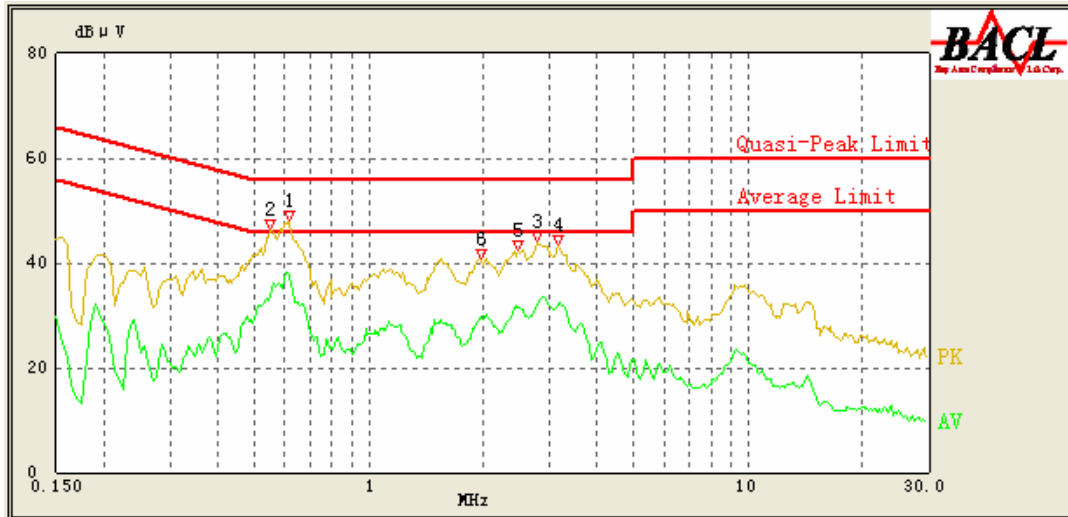

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.615	37.88	10.23	46.00	8.12	Ave.
0.555	34.78	10.24	46.00	11.22	Ave.
2.800	32.44	10.23	46.00	13.56	Ave.
0.615	42.39	10.23	56.00	13.61	QP
3.150	31.67	10.24	46.00	14.33	Ave.
2.455	31.58	10.22	46.00	14.42	Ave.
0.550	41.43	10.24	56.00	14.57	QP
1.975	29.72	10.20	46.00	16.28	Ave.
2.780	37.79	10.23	56.00	18.21	QP
2.475	37.54	10.22	56.00	18.46	QP
3.150	37.32	10.24	56.00	18.68	QP
1.985	35.51	10.20	56.00	20.49	QP

AC 120V, 60 Hz, Neutral:

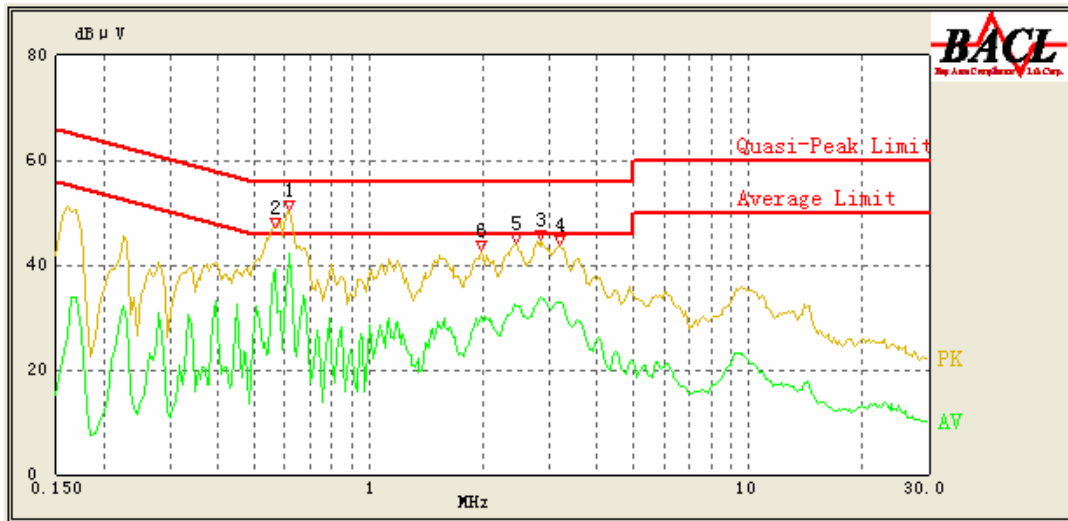

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.620	42.10	10.23	46.00	3.90	Ave.
0.565	39.17	10.23	46.00	6.83	Ave.
2.875	33.46	10.23	46.00	12.54	Ave.
3.165	32.86	10.23	46.00	13.14	Ave.
2.430	32.29	10.21	46.00	13.71	Ave.
0.620	42.24	10.23	56.00	13.76	QP
0.570	41.92	10.23	56.00	14.08	QP
2.010	29.06	10.20	46.00	16.94	Ave.
2.850	38.68	10.23	56.00	17.32	QP
2.440	37.72	10.21	56.00	18.28	QP
3.190	37.25	10.24	56.00	18.75	QP
1.990	35.12	10.20	56.00	20.88	QP

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Pulse Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

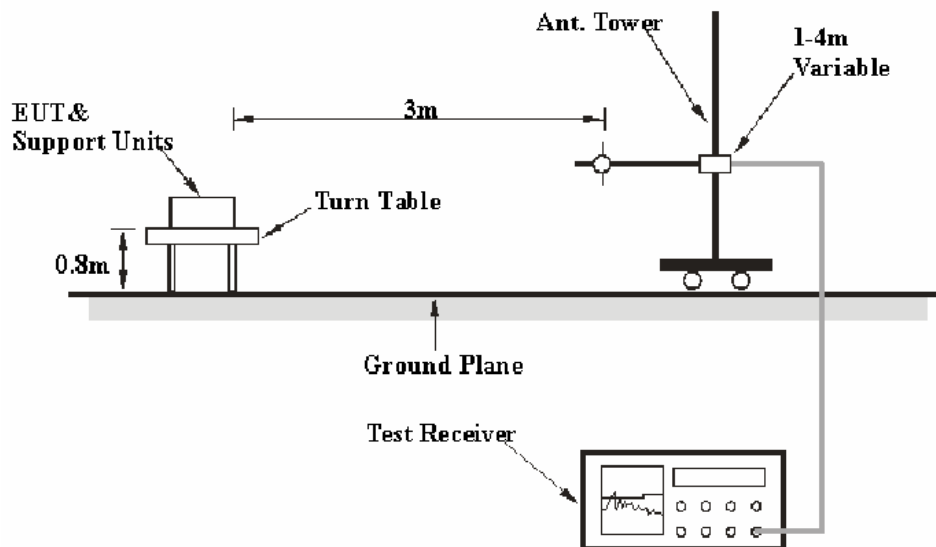

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz to 1GHz and peak and Average detection modes for frequencies above 1GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2012-04-12	2013-04-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2012-10-14	2013-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

1.26 dB at 4877.2 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Gardon Zhang on 2012-11-16.

Test mode: Transmitting (worst case at AC power supply)

30MHz-25GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBUV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2409.10 MHz)									
2409.1	98.56	PK	95	1.3	H	6.13	104.69	/	/
2409.1	68.69	Ave.	95	1.3	H	6.13	74.82	/	/
2409.1	94.86	PK	255	1.3	V	6.13	100.99	/	/
2409.1	64.22	Ave.	255	1.3	V	6.13	70.35	/	/
4819.6	60.33	PK	302	1.1	V	12.40	72.73	74	1.27
2483.6	64.15	PK	85	1.2	V	7.21	71.36	74	2.64
122.83	51.22	QP	39	1.0	H	-13.5	38.72	43.5	4.78
2389.3	55.93	PK	221	1.2	V	6.13	62.06	74	11.94
4819.6	29.54	Ave.	302	1.1	V	12.40	41.94	54	12.06
75.71	49.95	QP	123	1.0	V	-20.2	27.75	40.0	12.25
2360.6	52.16	PK	36	1.2	H	5.48	57.64	74	16.36
9633.6	18.29	Ave.	25	1.3	H	19.28	37.57	54	16.43
2483.6	28.96	Ave.	85	1.2	V	7.21	36.17	54	17.83
7225.1	17.63	Ave.	56	1.3	V	16.62	34.25	54	19.75
2389.3	27.63	Ave.	221	1.2	V	6.13	33.76	54	20.24
9633.6	33.15	PK	25	1.3	H	19.28	52.43	74	21.57
2360.6	24.88	Ave.	36	1.2	H	5.48	30.36	54	23.64
7225.1	32.87	PK	56	1.3	V	16.62	49.49	74	24.51
Middle Channel (2439.4 MHz)									
2439.4	98.55	PK	58	1.1	H	7.21	105.76	/	/
2439.4	68.36	Ave.	58	1.1	H	7.21	75.57	/	/
2439.4	95.26	PK	6	1.3	V	7.21	102.47	/	/
2439.4	65.02	Ave.	6	1.3	V	7.21	72.23	/	/
4877.2	60.28	PK	258	1.1	V	12.46	72.74	74	1.26
2483.6	64.18	PK	69	1.2	V	7.21	71.39	74	2.61
129.01	53.22	QP	28	1.1	V	-13.4	39.82	43.5	3.68
211.54	54.27	QP	147	1.6	H	-16.5	37.77	43.5	5.73
2389.3	55.69	PK	32	1.3	V	6.13	61.82	74	12.18
4877.2	29.03	Ave.	258	1.1	V	12.46	41.49	54	12.51
2360.6	52.28	PK	155	1.2	H	5.48	57.76	74	16.24
9739.9	17.15	Ave.	73	1.3	H	19.40	36.55	54	17.45
2483.6	28.03	Ave.	69	1.2	V	7.21	35.24	54	18.76
7315.9	18.02	Ave.	67	1.3	V	16.49	34.51	54	19.49
2389.3	27.33	Ave.	32	1.2	V	6.13	33.46	54	20.54
9739.9	32.69	PK	73	1.3	H	19.40	52.09	74	21.91
2360.6	24.75	Ave.	155	1.3	H	5.48	30.23	54	23.77
7315.9	33.26	PK	67	1.3	V	16.49	49.75	74	24.25

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBuV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBuV/m)	Margin (dB)
High Channel (2474.20 MHz)									
2474.2	97.85	PK	5	1.3	H	7.21	105.06	/	/
2474.2	67.22	Ave.	5	1.3	H	7.21	74.43	/	/
2474.2	94.58	PK	42	1.2	V	7.21	101.79	/	/
2474.2	64.15	Ave.	42	1.2	V	7.21	71.36	/	/
4949.8	60.02	PK	281	1.2	V	12.50	72.52	74	1.48
2483.6	63.97	PK	99	1.4	V	7.21	71.18	74	2.82
215.26	53.78	QP	169	1.4	V	-16.4	3738	43.5	6.12
277.50	49.19	QP	0	1.3	H	-14.3	35.89	46.0	10.11
2389.3	55.58	PK	62	1.2	V	6.13	61.71	74	12.29
4949.8	28.99	Ave.	281	1.2	V	12.50	41.49	54	12.51
9862.7	18.13	Ave.	95	1.1	H	19.39	37.52	54	16.48
2360.6	51.28	PK	58	1.2	H	5.48	56.76	74	17.24
2483.6	27.81	Ave.	99	1.2	V	7.21	35.02	54	18.98
2389.3	27.87	Ave.	62	1.4	V	6.13	34.00	54	20.00
7425.3	17.45	Ave.	226	1.3	V	15.90	33.35	54	20.65
9862.7	33.67	PK	95	1.1	H	19.39	53.06	74	20.94
2360.6	23.66	Ave.	58	1.2	H	5.48	29.14	54	24.86
7425.3	32.58	PK	226	1.3	V	15.90	48.48	74	25.52

Note:

1. Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor
2. Corrected Amplitude = Corrected Factor + Receiver Reading
3. Margin = Limit- Corrected Amplitude

FCC §15.247(a) (1)-CHANNEL SEPARATION

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in operating mode, RBW was set at 100 kHz, VBW \geq 3RBW maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

* The testing was performed by Gardon Zhang on 2012-11-06.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	>Limit (MHz)	Result
Low	2409.10	3.374	2.400	Pass
Adjacent	2412.46			
Middle	2439.40	4.500	2.400	
Adjacent	2443.90			
High	2474.20	3.374	2.360	
Adjacent	2470.84			

Note: limit =2/3 of bandwidth


Please refer to the following plots.

Low Channel

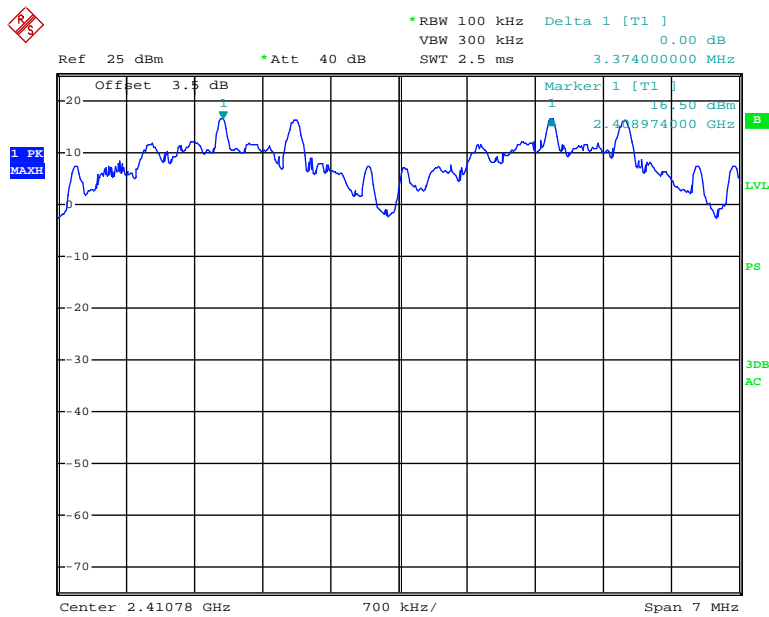


Date: 6.NOV.2012 12:42:15

Middle Channel

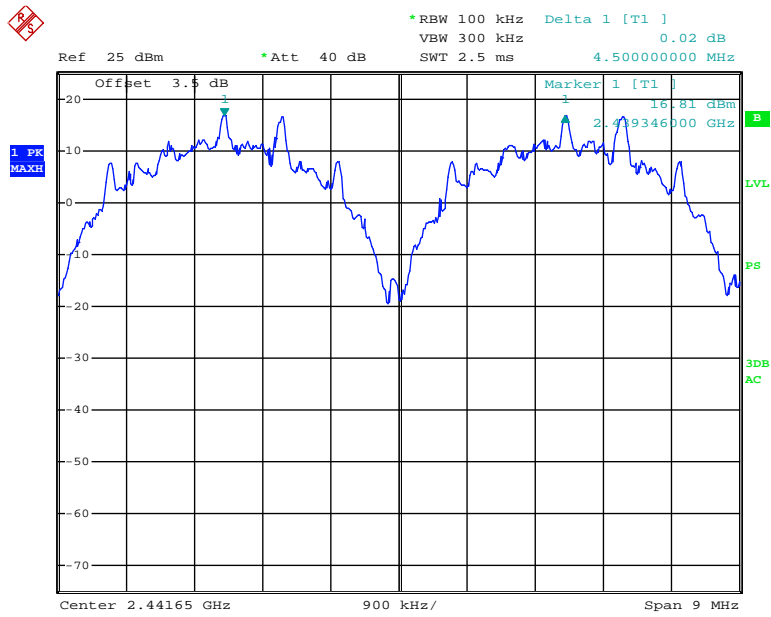

Date: 6.NOV.2012 12:50:14

High Channel

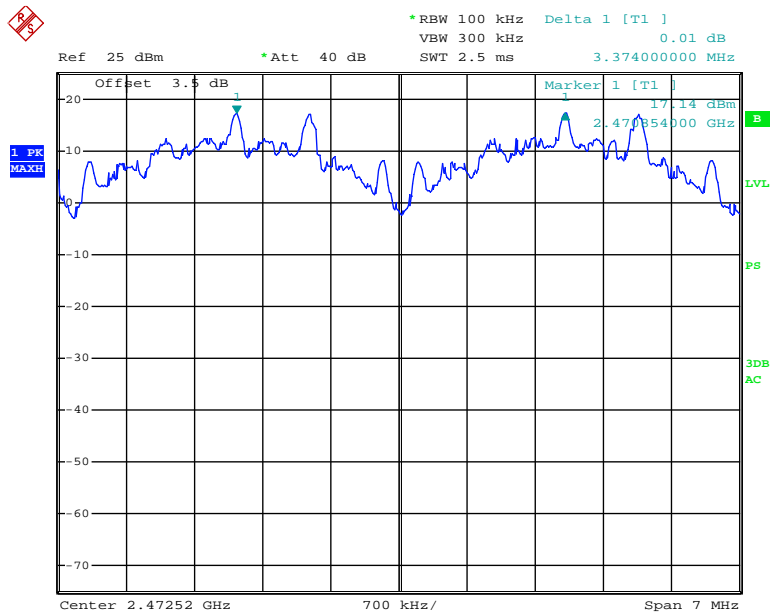

Date: 6.NOV.2012 12:57:49

FCC §15.247(a) (1) – 20 dB BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* *The testing was performed by Gardon Zhang on 2012-11-13.*

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2409.10	3.600
Middle	2439.40	3.600
High	2474.20	3.540


Please refer to the following plots.

Low Channel

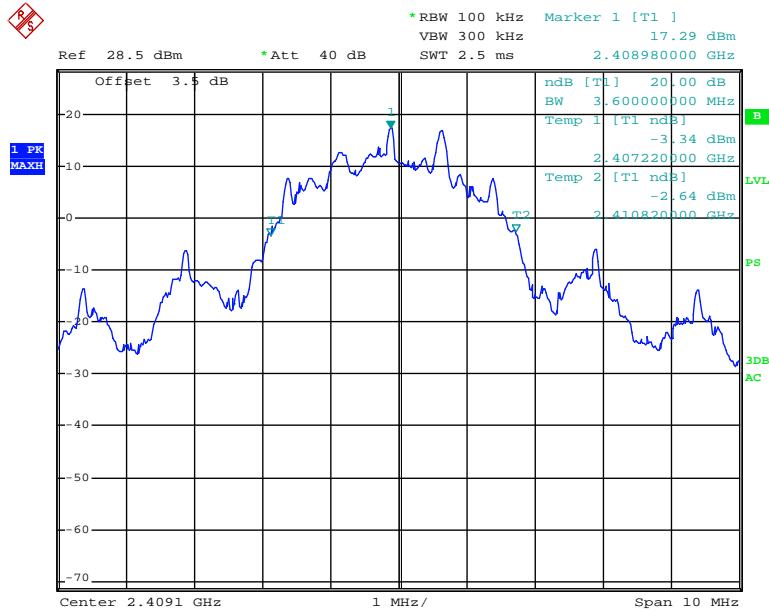


Date: 13.NOV.2012 15:25:41

Middle Channel

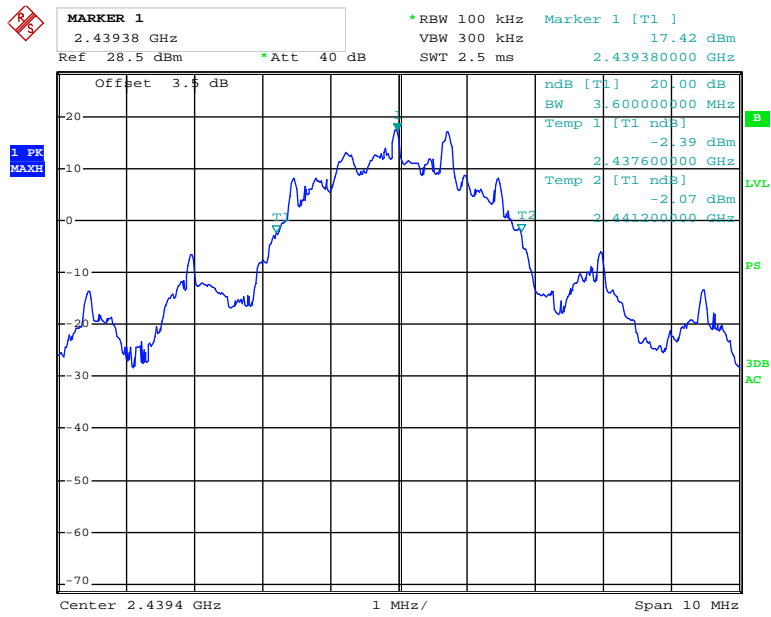

Date: 13.NOV.2012 15:38:39

High Channel

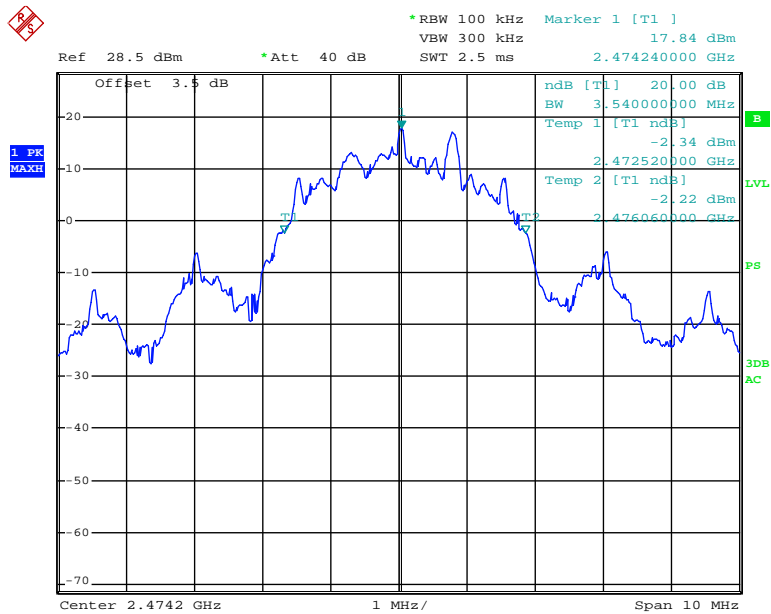

Date: 13.NOV.2012 15:48:28

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Gardon Zhang on 2012-11-06.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Operating

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.50	18	≥ 15

Number of Hopping Channels

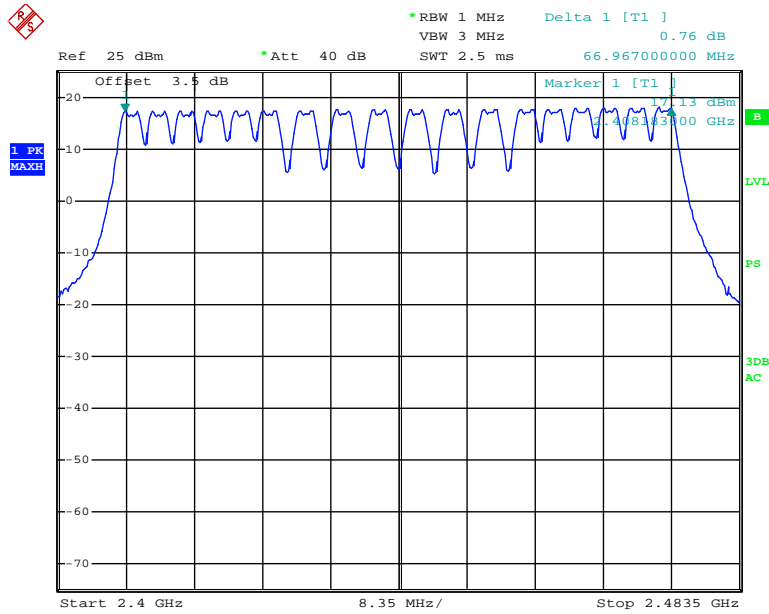

Date: 6.NOV.2012 12:24:30

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; spectrum span was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= Pulse time (ms) * hope rate/2/ number of hopping channels * hopping No.*0.4 s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Gardon Zhang on 2012-11-06.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
Low	0.4872	0.0205	0.4	Pass
Middle	0.4522	0.0190	0.4	Pass
High	0.4872	0.0205	0.4	Pass

Note: Dwell time = Pulse time (ms) × (210/2/18) × 18 × 0.4 S


Please refer to the following plots.

Low Channel

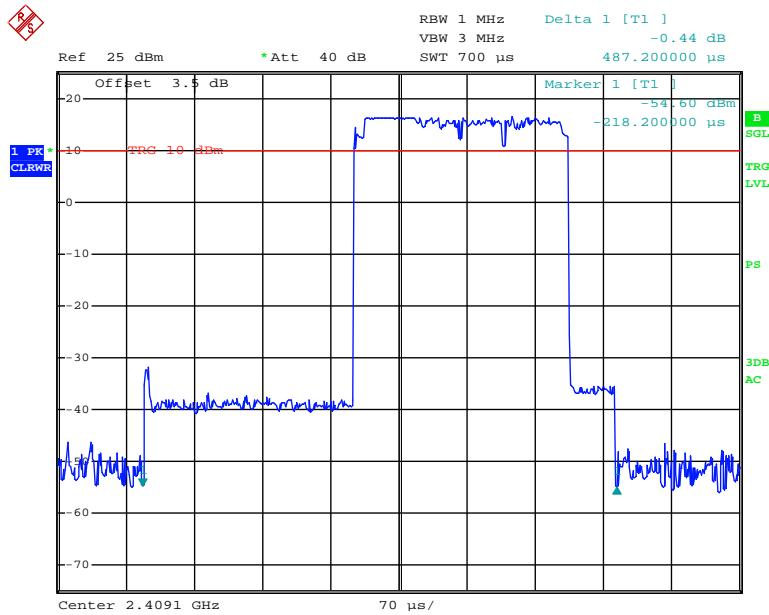


Date: 6.NOV.2012 13:20:16

Middle Channel

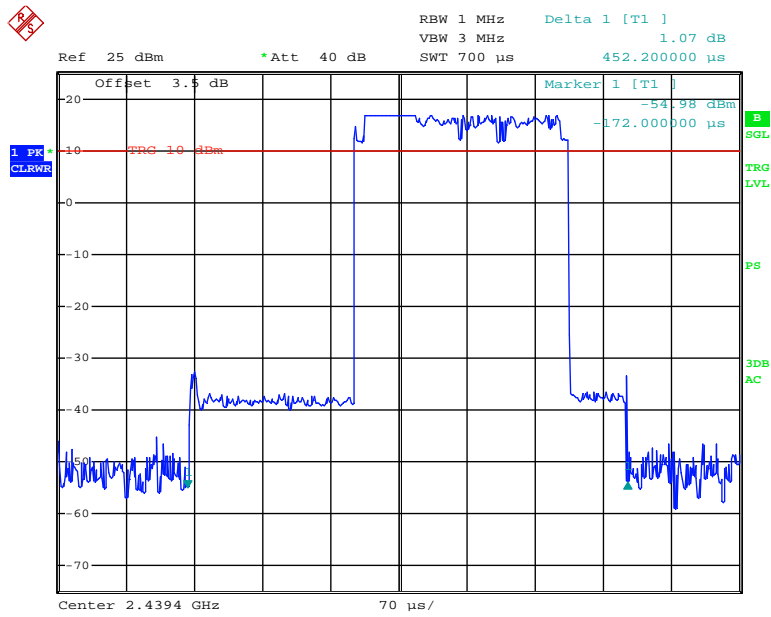

Date: 6.NOV.2012 13:11:58

High Channel

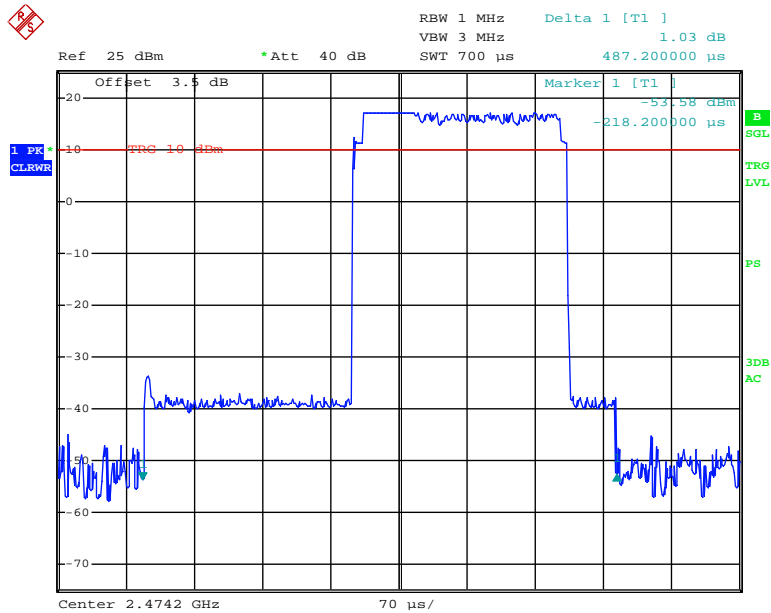

Date: 6.NOV.2012 13:24:25


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

* *The testing was performed by Gardon Zhang on 2012-11-14.*

Test Result: Compliance.


Test Mode: Transmitting

Channel	Channel frequency (MHz)	Peak output power (dBm)	Power output (mW)	Limit (mW)
AC Power Supply				
Low channel	2409.10	18.86	76.913	125
Middle channel	2439.40	18.98	79.068	125
High channel	2474.20	19.04	80.168	125
Battery Power Supply				
Low channel	2409.10	19.13	81.846	125
Middle channel	2439.40	18.92	77.983	125
High channel	2474.20	18.98	79.068	125

Note: The data above was tested in conducted mode.


AC Power Supply

Low Channel

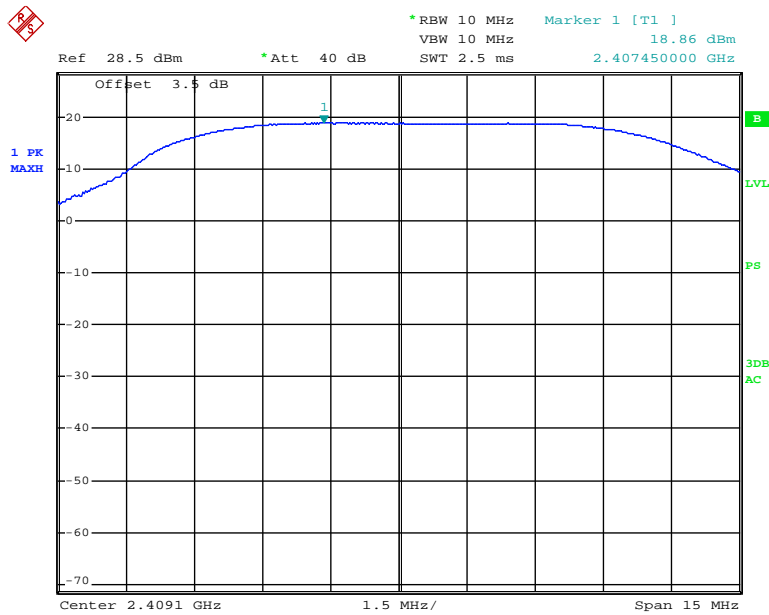


Date: 14.NOV.2012 09:58:26

Middle Channel

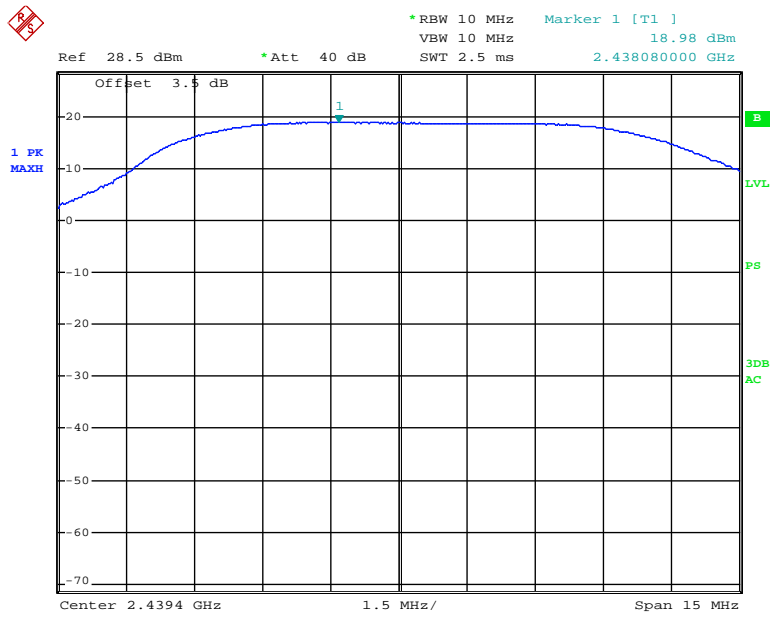

Date: 14.NOV.2012 10:05:27


High Channel

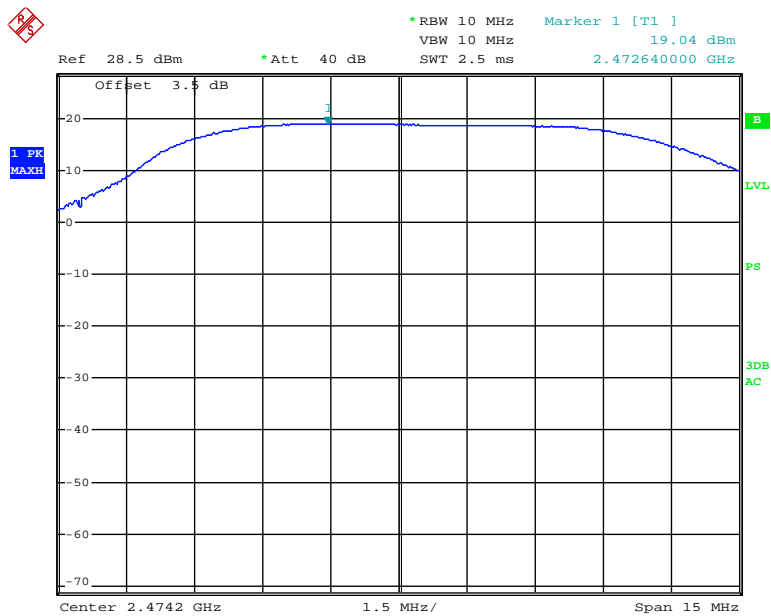

Date: 14.NOV.2012 10:13:00


Battery Power Supply

Low Channel

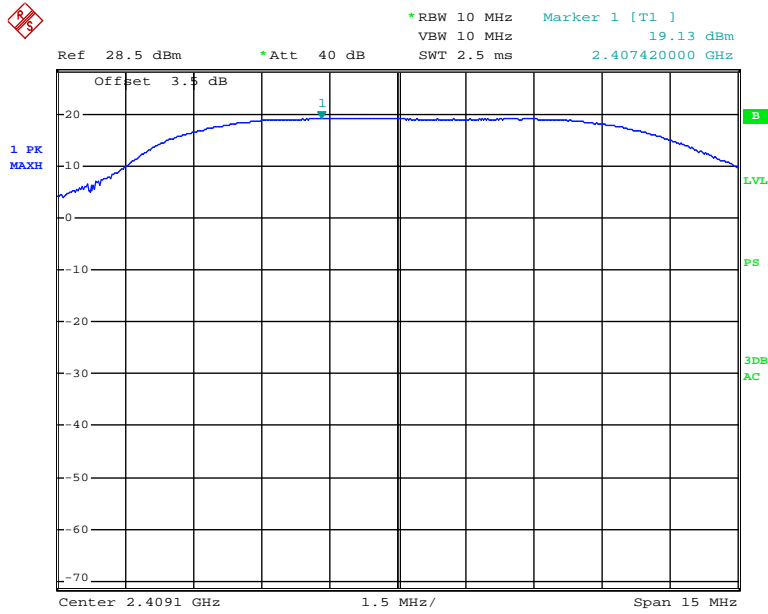


Date: 14.NOV.2012 10:43:41

Middle Channel

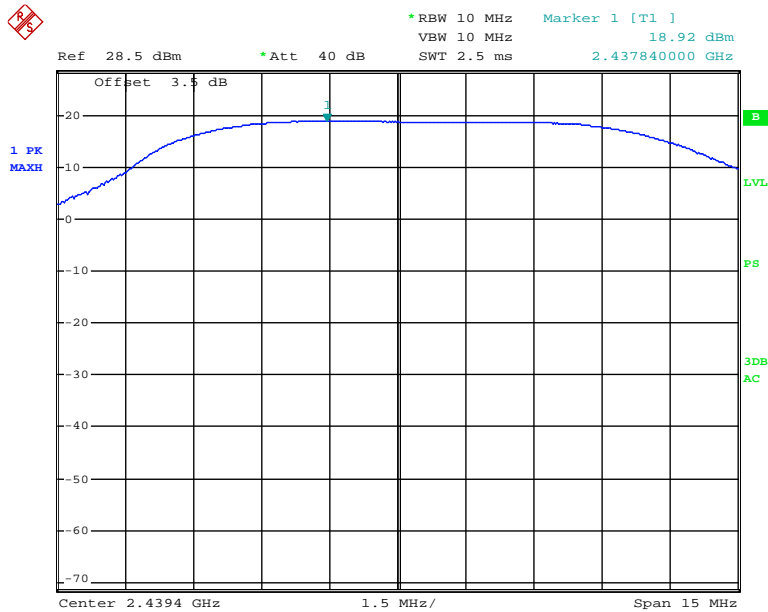

Date: 14.NOV.2012 12:14:05

High Channel

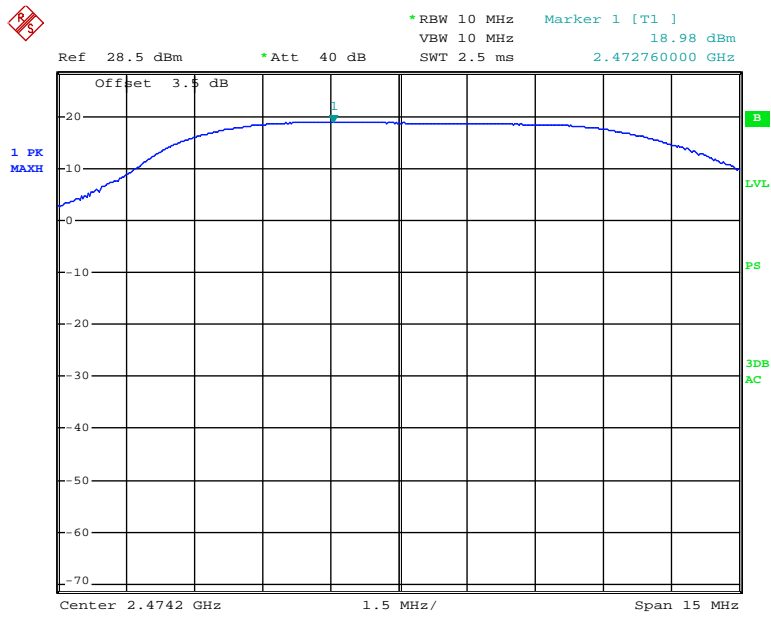

Date: 14.NOV.2012 12:20:28

FCC §15.247(d) - BAND EDGES

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in Operating mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

*The testing was performed by Gardon Zhang on 2012-11-14.


Test Result: Compliance.

Test Mode: Transmitting

Frequency Band	Delta Peak to Band Emission (dBc)	Limit (dBc)
Left Band	40.80	20
Right Band	41.91	20


Please refer to follow plots:

Band Edge: Left Side

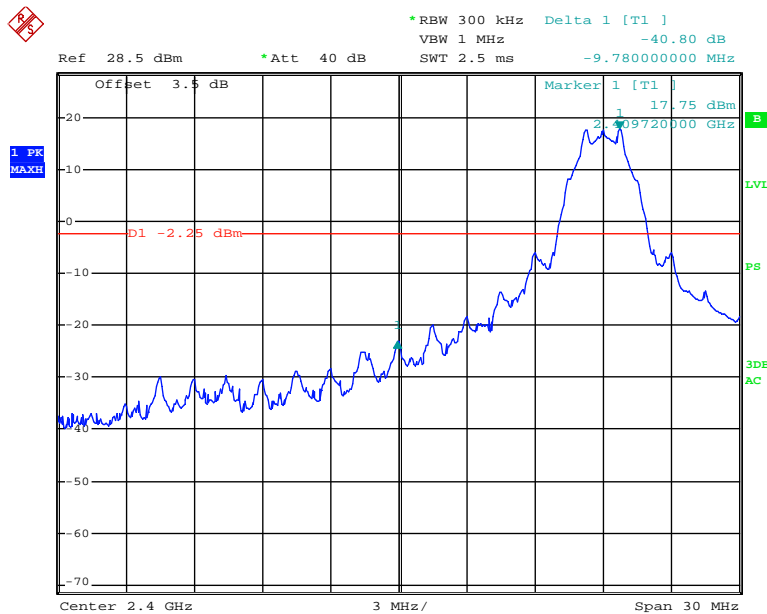

Date: 14.NOV.2012 10:33:06

Band Edge: Right Side

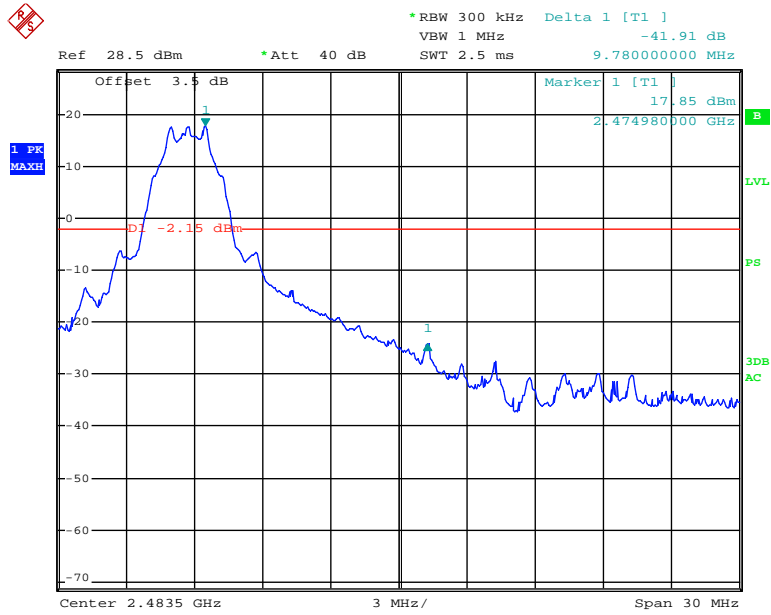

Date: 14.NOV.2012 10:28:08

PRODUCT SIMILARITY DECLARATION LETTER



Summer Infant, Inc.

1275 Park East Drive, Woonsocket, RI 02895, U.S.A

Tel: 401.671.6589 Fax: 401.671.6589

2012-11-1

Product Similarity Declaration

To Whom It May Concern,

We, Summer Infant, Inc. hereby declare that our Baby Touch Digital Color Video Monitor, Model Number: 28810 Receiver is electrically identical with the 28680 Receiver that was certified by BACL. They are just different in color, appearance shape, packaging, model number due to marketing purposes.

Please contact me if you have any question.

Tony Paolo



Vice President - QA

******* END OF REPORT *******