

RADIO TEST REPORT

For

Digital Antenna Inc.

Dual Band Direct Connect Bi-directional Signal Booster

Model No.: DA4500

Prepared for : Digital Antenna Inc.
Address : 5325 NW 108th Avenue, Sunrise, FL 33351, USA

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an District, Shenzhen, Guangdong, China

Date of receipt of test sample : October 12, 2012
Number of tested samples : 1
Serial number : Prototype
Date of Test : October 12, 2012 – October 24, 2012
Date of Report : October 24, 2012

RADIO TEST REPORTFCC CFR 47 PART 22 SUBPART H
FCC CFR 47 PART 24 SUBPART E**Report Reference No.** : **LCS121012031QF**

Date of Issue : October 24, 2012

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd.,
Bao'an District, Shenzhen, Guangdong, China
Full application of Harmonised standards Testing Location/ Procedure : Partial application of Harmonised standards
Other standard testing method **Applicant's Name** : **Digital Antenna Inc.**

Address : 5325 NW 108th Avenue, Sunrise, FL 33351, USA

Test SpecificationStandard : FCC CFR 47 PART 22 SUBPART H
FCC CFR 47 PART 24 SUBPART E**Test Report Form No.** : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.


This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : **Dual Band Direct Connect Bi-directional Signal Booster**

Trade Mark : N/A

Model/ Type reference : DA4500

Ratings : DC 8-15V, Rated current: 500mA

Result : **Positive****Compiled by:**

Ada Liang / File administrators

Supervised by:

Vito Cao/ Technique principal

Approved by:

Gavin Liang/ Manager

RADIO -- TEST REPORT

Test Report No. : LCS121012031QF	<u>October 24, 2012</u> Date of issue
---	--

Type / Model..... : Dual Band Direct Connect Bi-directional Signal Booster

EUT..... : DA4500

Applicant..... : Digital Antenna Inc.

Address..... : 5325 NW 108th Avenue, Sunrise, FL 33351, USA

Telephone..... : /

Fax..... : /

Manufacturer..... : Digital Antenna Inc.

Address..... : 5325 NW 108th Avenue, Sunrise, FL 33351, USA

Telephone..... : /

Fax..... : /

Factory..... : Digital Antenna Inc.

Address..... : 5325 NW 108th Avenue, Sunrise, FL 33351, USA

Telephone..... : /

Fax..... : /

Test Result:	Positive
---------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1. DESCRIPTION OF DEVICE (EUT)	5
1.2. POWER SUPPLY AND LINE FILTERS	5
1.3. DESCRIPTION OF TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
1.5. MEASUREMENT UNCERTAINTY	6
1.6. TEST ENVIRONMENT	6
2. TEST METHODOLOGY	7
2.1. EUT CONFIGURATION	7
2.2. OBJECTIVE	7
2.3. GENERAL TEST PROCEDURES	7
3. SYSTEM TEST CONFIGURATION	8
3.1. JUSTIFICATION	8
3.2. EUT EXERCISE SOFTWARE	8
3.3. SPECIAL ACCESSORIES	8
3.4. BLOCK DIAGRAM/SCHEMATICS	8
3.5. EQUIPMENT MODIFICATIONS	8
3.6. BLOCK DIAGRAM OF TEST SETUP	8
4. SUMMARY OF TEST RESULTS.....	9
5. TEST RESULT	10
5.1. RF OUTPUT POWER	10
5.2. OCCUPIED BANDWIDTH	12
5.3. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL	26
5.4. RADIATED EMISSIONS MEASUREMENT	53
5.5. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS	55
5.6. DEVIATION TO TEST SPECIFICATIONS	56
6. LIST OF MEASURING EQUIPMENTS.....	57
7. MANUFACTURER/ APPROVAL HOLDER DECLARATION.....	58

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Dual Band Direct Connect Bi-directional Signal Booster

Model Number : DA4500

Serial no.(SN) : 01

Type of modulation and Designator GSM (GXW)

GSM EDGE (G7W)

CDMA (F9W)

W-CDMA (F9W)

Power Supply : DC 8-15V, Rated current: 500mA

Frequency Range : Uplink : 824 – 849 MHz

1850 - 1910 MHz

Downlink : 869 – 894 MHz

1930 - 1990 MHz

Modulation Technology : GMSK

RF Output Power : Uplink 30dBm \pm 0.5dBm, Downlink 25dBm \pm 0.5dBm

Max Gain : Uplink 30dB \pm 0.5dB, Downlink 30dB \pm 0.5dB

Antenna Gain : Max 2.0dBi

1.2. Power Supply and Line Filters

Manufacturer	Description	Model	Serial Number
N/A	N/A	N/A	N/A

1.3. Description of Test Facility

Site Description

EMC Lab. : Accredited by CNAS, June 04, 2010

The Certificate Registration Number. is L4595.

Accredited by FCC, July 14, 2011

The Certificate Registration Number. is 899208.

Accredited by Industry Canada, May. 02, 2011

The Certificate Registration Number. is 9642A-1

1.4. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.5. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	30MHz~200MHz	± 2.96dB	(1)
	200MHz~1000MHz	± 3.10dB	(1)
	1GHz~26.5GHz	± 3.80dB	(1)
Conduction Uncertainty	150kHz~30MHz	± 1.63dB	(1)
Power disturbance	30MHz~300MHz	± 1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86kPa	106kPa
Temperature	15°C	30°C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

2. TEST METHODOLOGY

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E – PCS

Applicable Standards: TIA/EIA603-C, ANSI C63.4-2003. The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. Objective

This type approval report is prepared on behalf of Digital Antenna Inc. in accordance with Part 2, Subpart J, Part 22 Subpart H, Part 24 Subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristics, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, frequency stability, band edge, and conducted and radiated margin.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

3.2. EUT Exercise Software

N/A.

3.3. Special Accessories

N/A.


3.4. Block Diagram/Schematics

Please refer to the report.

3.5. Equipment Modifications

No modification on the EUT.

3.6. Block Diagram of Test Setup

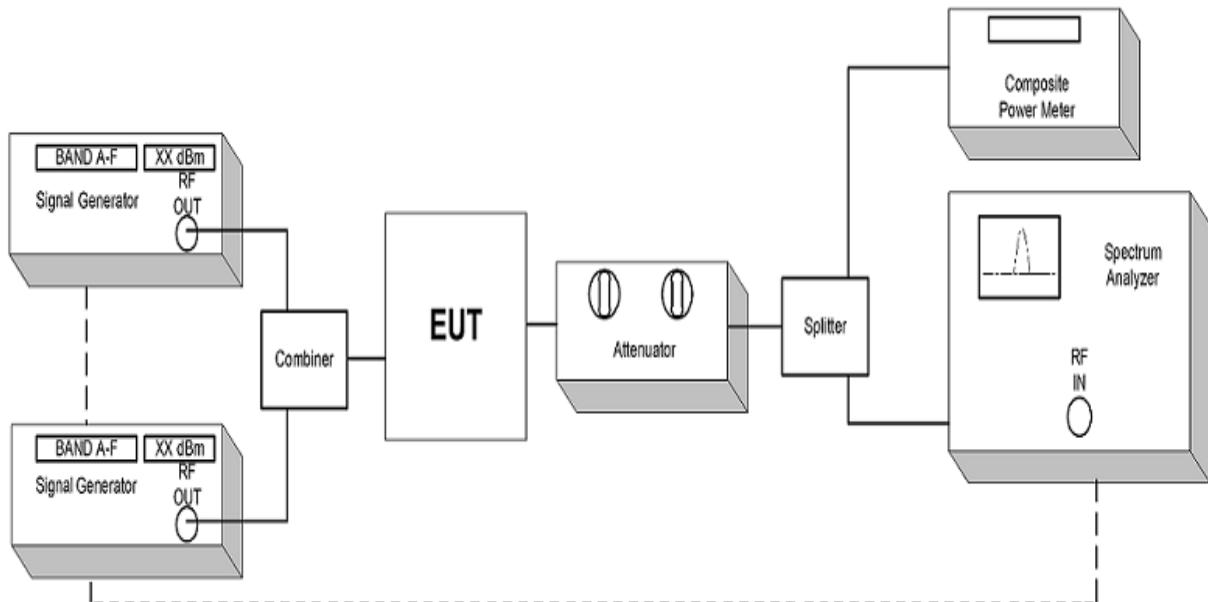

4. SUMMARY OF TEST RESULTS

Applied Standard: 47 CFR FCC Part 22 Subpart H, Part 24 Subpart E		
FCC Rules	Description of Test	Result
§2.1046, §22.913, §24.232	RF Power Output	Compliant
§2.1047	Modulation Characteristics	N/A*
§2.1049, §22.917, §24.238	Occupied Bandwidth	Compliant
§2.1053, §22.917, §24.238	Radiated Spurious Emissions	Compliant
§2.1051, §22.917, §24.238	Spurious Emissions at Antenna Terminals	Compliant
§24.238, §22.917	Band Edge	Compliant
§2.1055; §22.355, §24.235	Frequency Stability	N/A*
§2.1091	RF Exposure Information	Compliant

N/A*: According to FCC §2.1047(d), Part 22H and Part 24E, there is no specific requirement for digital modulation and no oscillator circuit, therefore modulation characteristic is not presented.

5. TEST RESULT

5.1. RF OUTPUT POWER

5.1.1. Standard Applicable

§ 2.1046 Measurements required: RF power output:

§ 2.1046 (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

§ 2.1046 (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

§ 2.1046 (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

§ 22.913 Effective radiated power limits.

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

§ 24.232 Power and antenna height limits.

Mobile and portable stations are limited to 2 watts EIRP.

5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

5.1.3. Test Procedures

As required by 47 CFR 2.1046, RF power output measurements were made at the RF output terminals using an attenuator and spectrum analyzer or power meter. This test was performed in all applicable modulations.

5.1.4. Test Results

Temperature	25°C	Humidity	60%
ATM Pressure:	101.4kPa	Test Engineer	Vito Cao

GSM 850

Carrier Channel	DL		UL	
	Frequency (MHz)	Measured Power (dBm)	Frequency (MHz)	Measured Power (dBm)
Low	869.2	24.9	824.2	29.9
Middle	881.6	25.0	836.6	30.0
High	893.8	24.9	848.8	29.8

INPUT SIGNAL	DL	UL
Source	GSM	GSM
Power Level	0 dBm	0 dBm
Amplitude offset	-20dB	-20dB

GSM 1900

Carrier Channel	DL		UL	
	Frequency (MHz)	Measured Power (dBm)	Frequency (MHz)	Measured Power (dBm)
Low	1930.20	24.9	1850.20	29.9
Middle	1960.00	25.0	1880.00	30.0
High	1989.80	24.9	1908.80	29.9

INPUT SIGNAL	DL	UL
Source	GSM	GSM
Power Level	0 dBm	0 dBm
Amplitude offset	-20dB	-20dB

5.2. OCCUPIED BANDWIDTH

5.2.1. Standard Applicable

§2.1049 Measurements required: Occupied bandwidth: The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.


5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

5.2.3. Test Procedures

As required by 47 CFR 2.1049, occupied bandwidth measurements were made with a Spectrum Analyzer connected to the RF ports for both Uplink and Downlink. The modulation characteristics of signal generator's carrier was measured first at a maximum RF level prescribed by the OEM. The signal generator was then connected to either the Uplink or Downlink input at the appropriate RF level. The resulting modulated signal through the EUT was measured and compared against the original signal.

5.2.4. Test Setup Layout

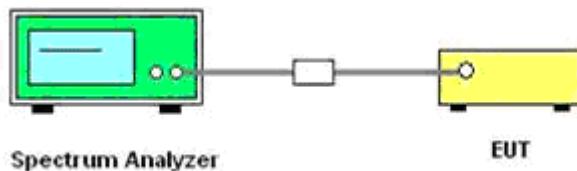

5.2.5. Test Results

Temperature	25°C	Humidity	60%
ATM Pressure:	101.4kPa	Test Engineer	Vito Cao

GSM 850


Carrier Channel	DL		UL	
	Frequency (MHz)	Occupied Bandwidth (KHz)	Frequency (MHz)	Occupied Bandwidth (KHz)
Low	869.2	249.2715	824.2	244.8264
Middle	881.6	243.9956	836.6	244.9444
High	893.8	248.4373	848.8	242.3194

GSM 1900


Carrier Channel	DL		UL	
	Frequency (MHz)	Occupied Bandwidth (KHz)	Frequency (MHz)	Occupied Bandwidth (KHz)
Low	1930.20	242.2933	1850.20	245.7827
Middle	1960.00	244.5316	1880.00	240.7830
High	1989.80	241.0402	1908.80	246.5547

Plots of Occupied Bandwidth


Downlink GSM 850 Low CH Input Signal

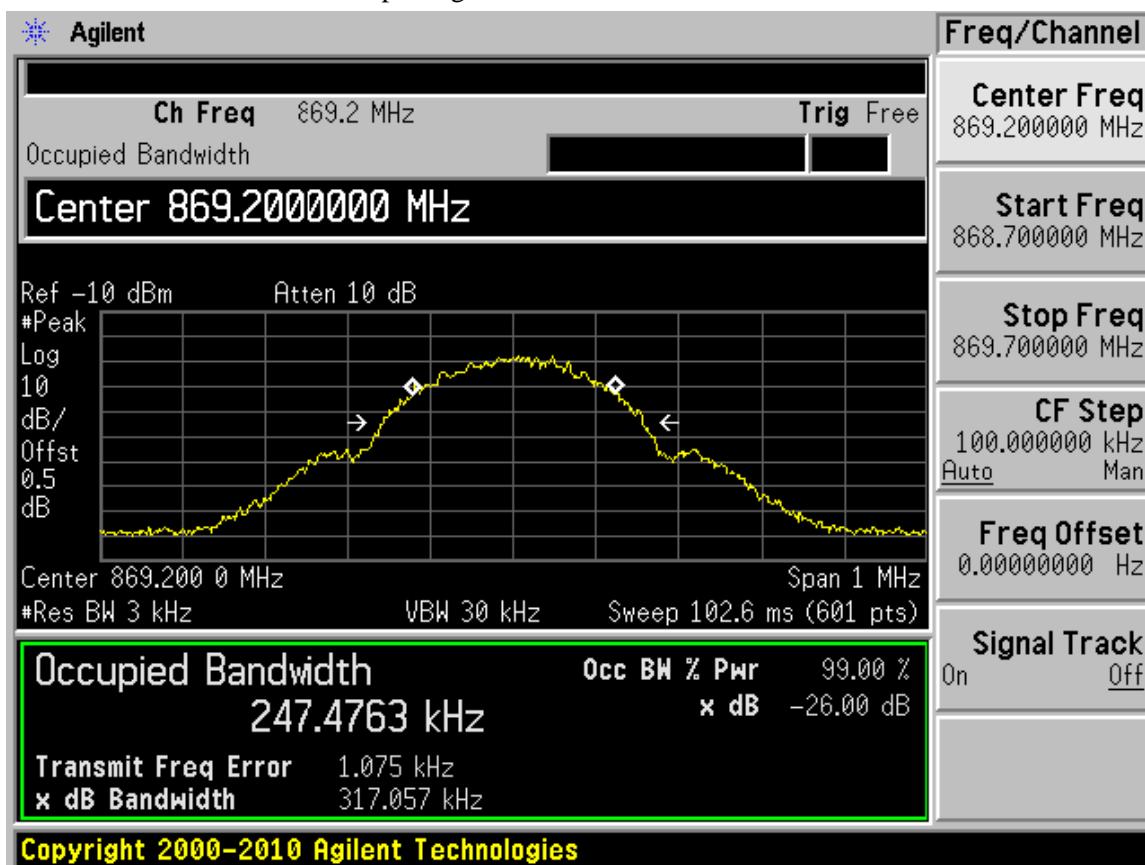

Downlink GSM 850 Low CH Output Signal

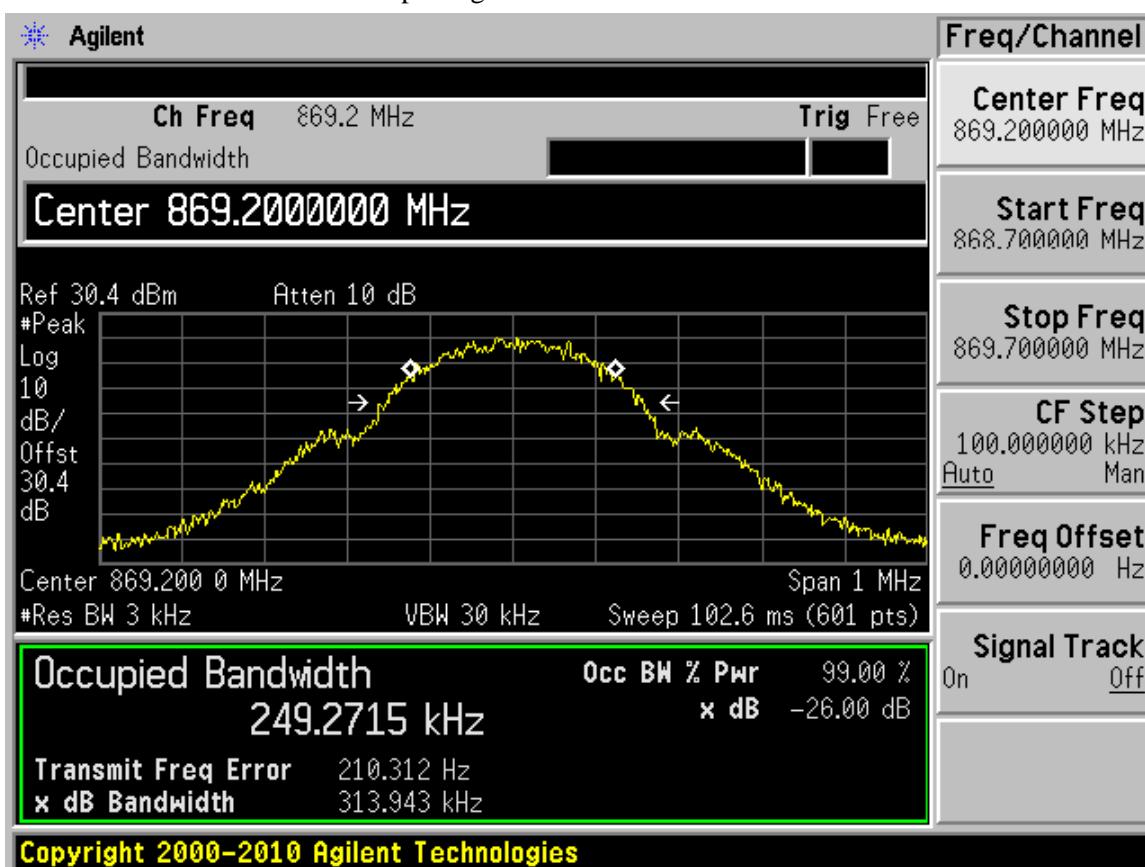


Downlink GSM 850 Middle CH Input Signal

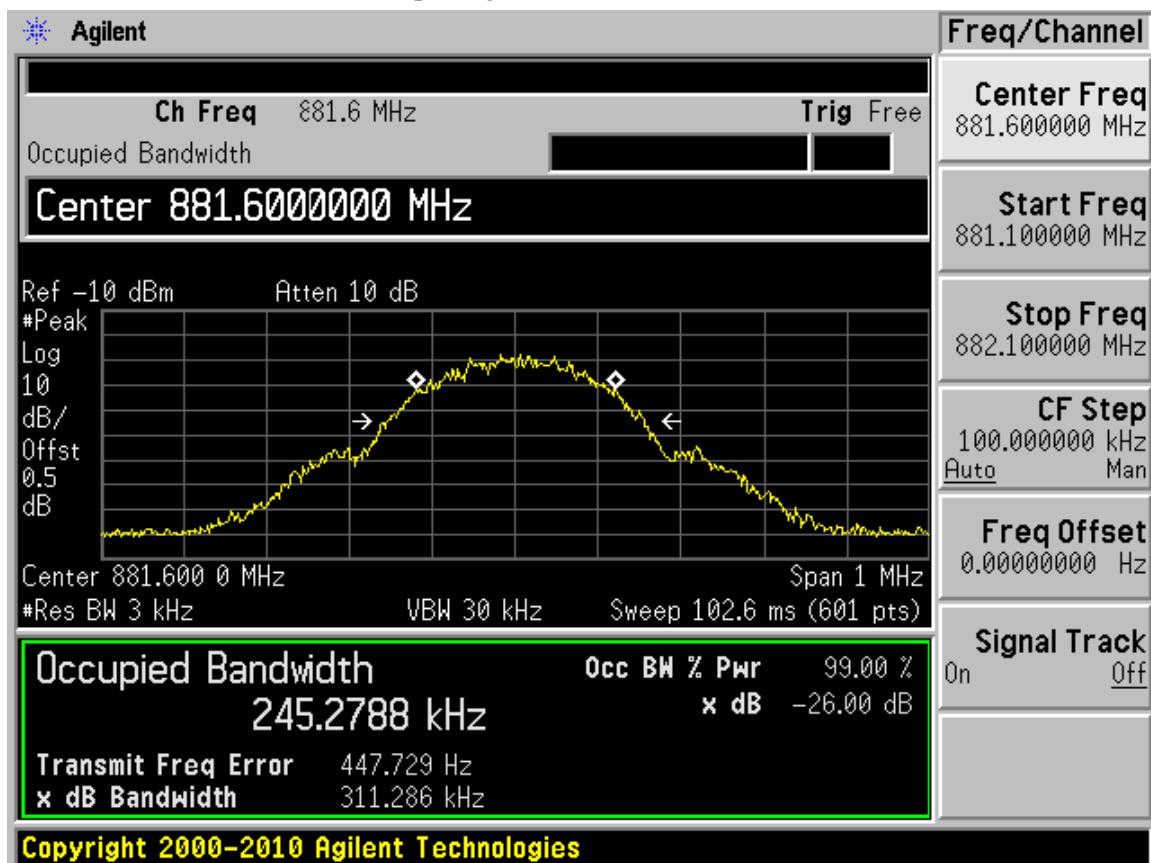


Downlink GSM 850 Middle CH Output Signal




Downlink GSM 850 High CH Input Signal

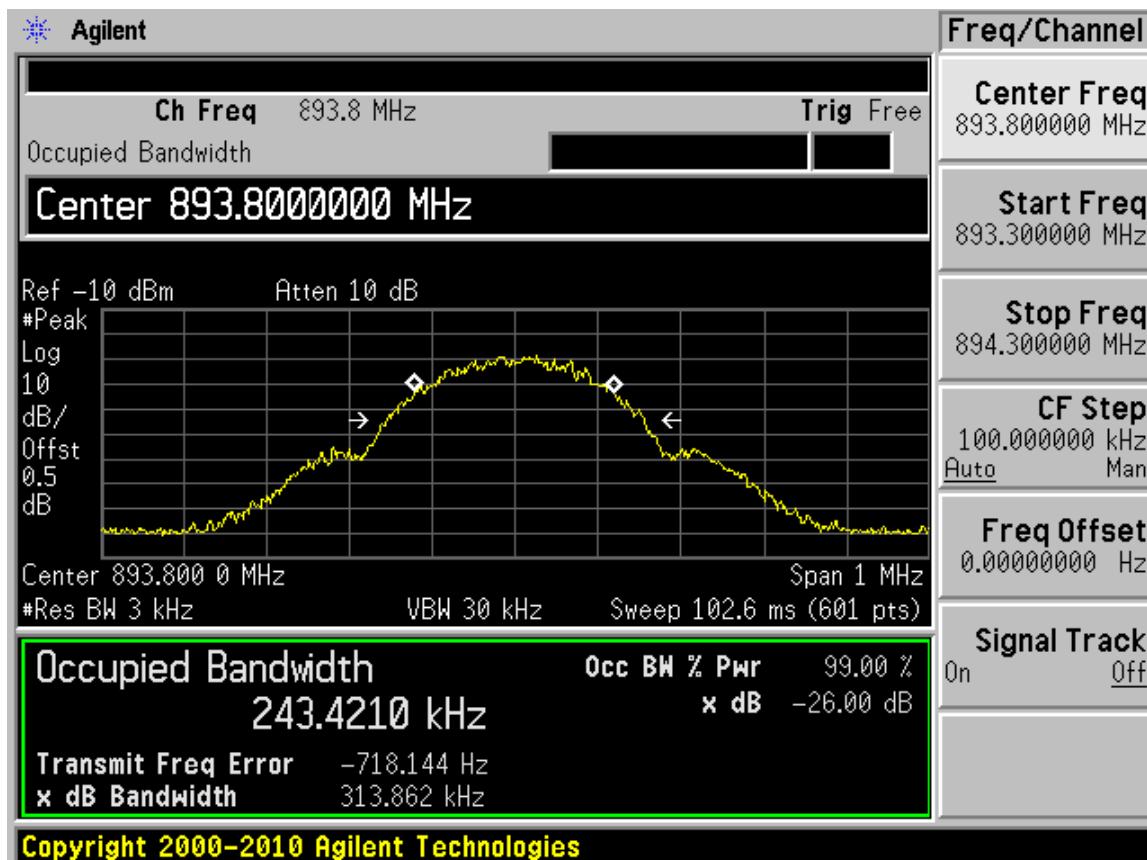


Downlink GSM 850 High CH Output Signal

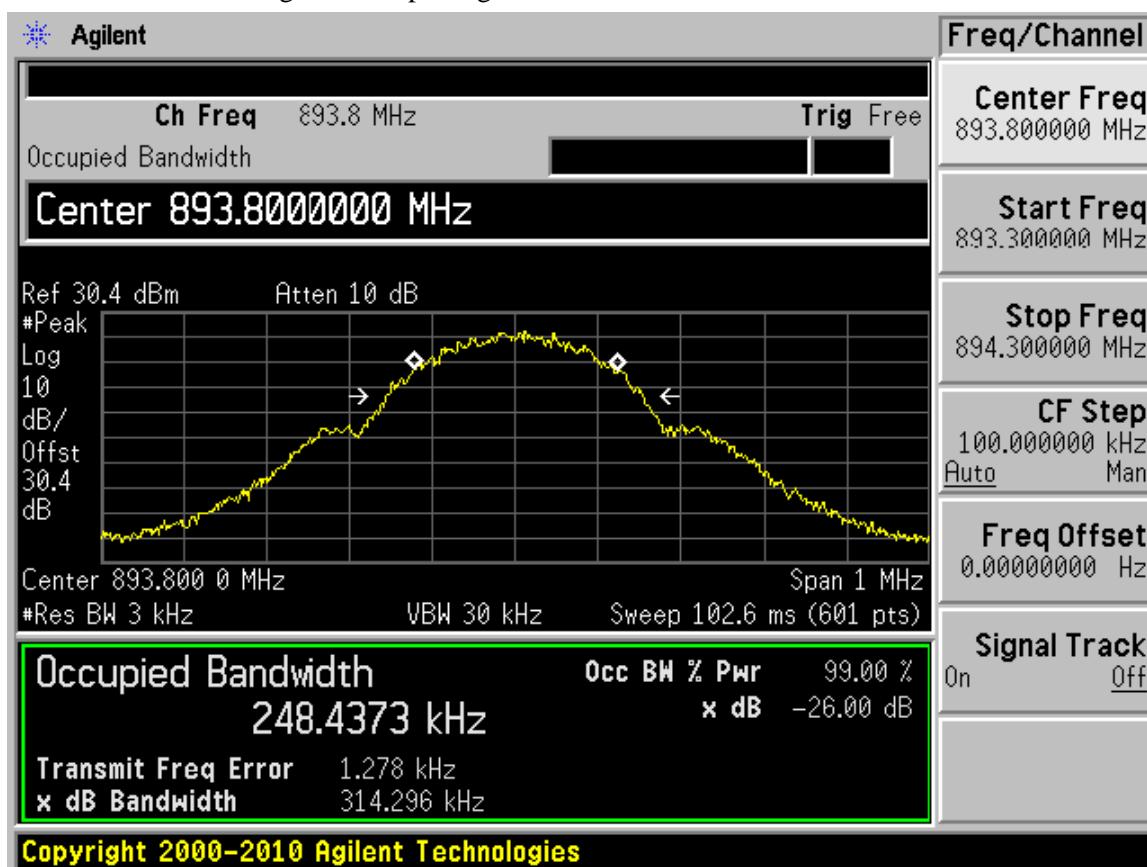


Uplink GSM 850 Low CH Input Signal

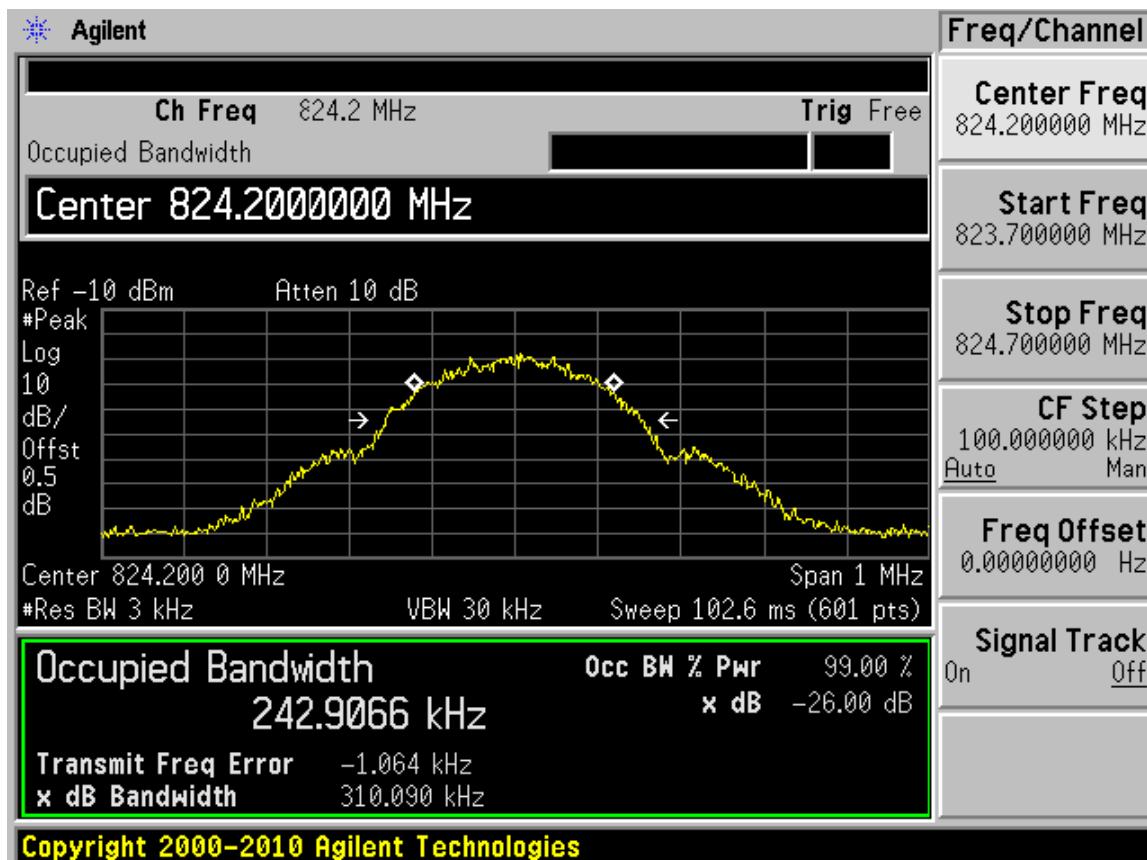

Uplink GSM 850 Low CH Output Signal

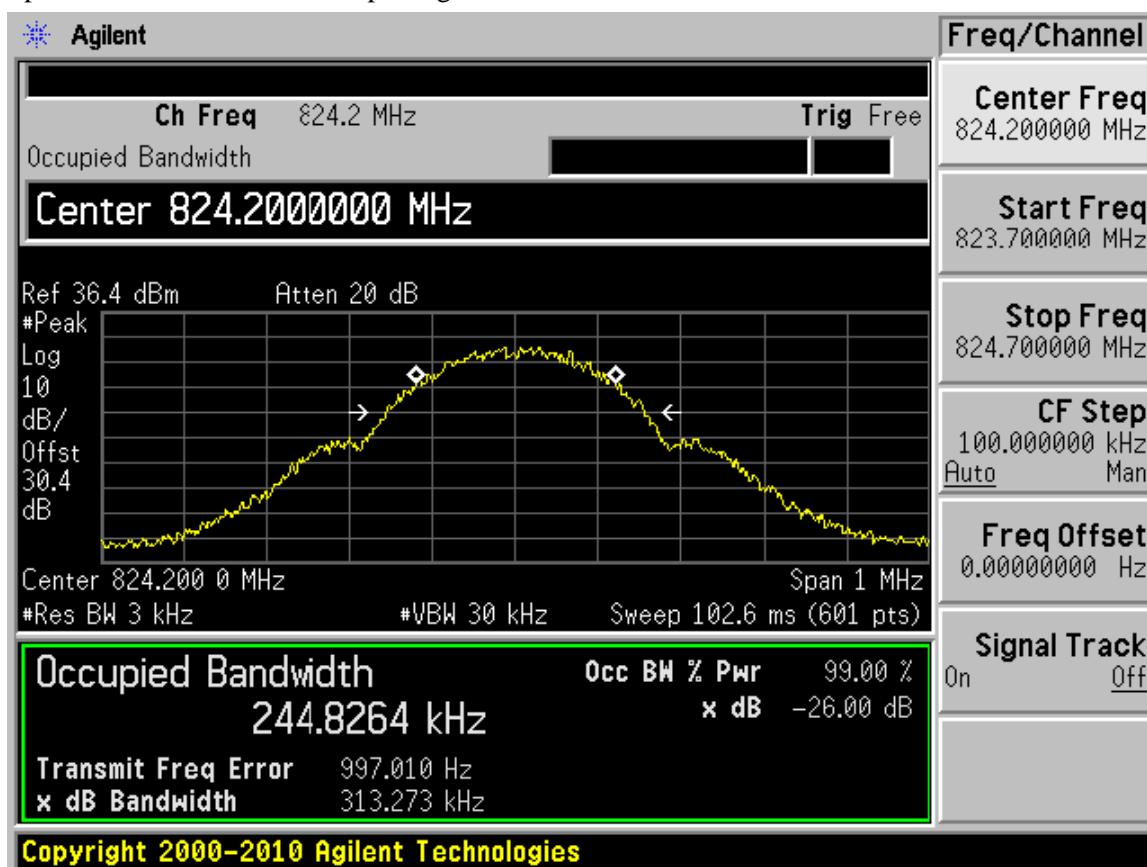


Uplink GSM 850 Middle CH Input Signal

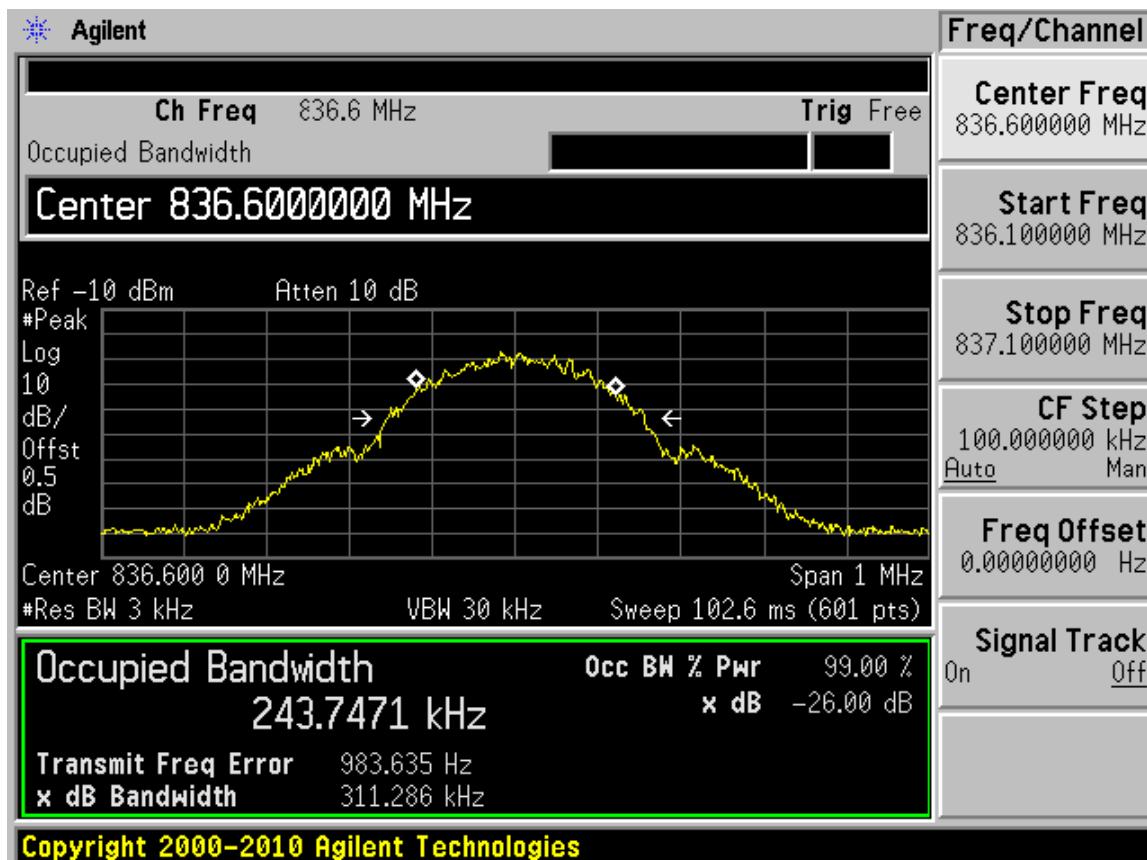

Uplink GSM 850 Middle CH Output Signal




Uplink GSM 850 High CH Input Signal

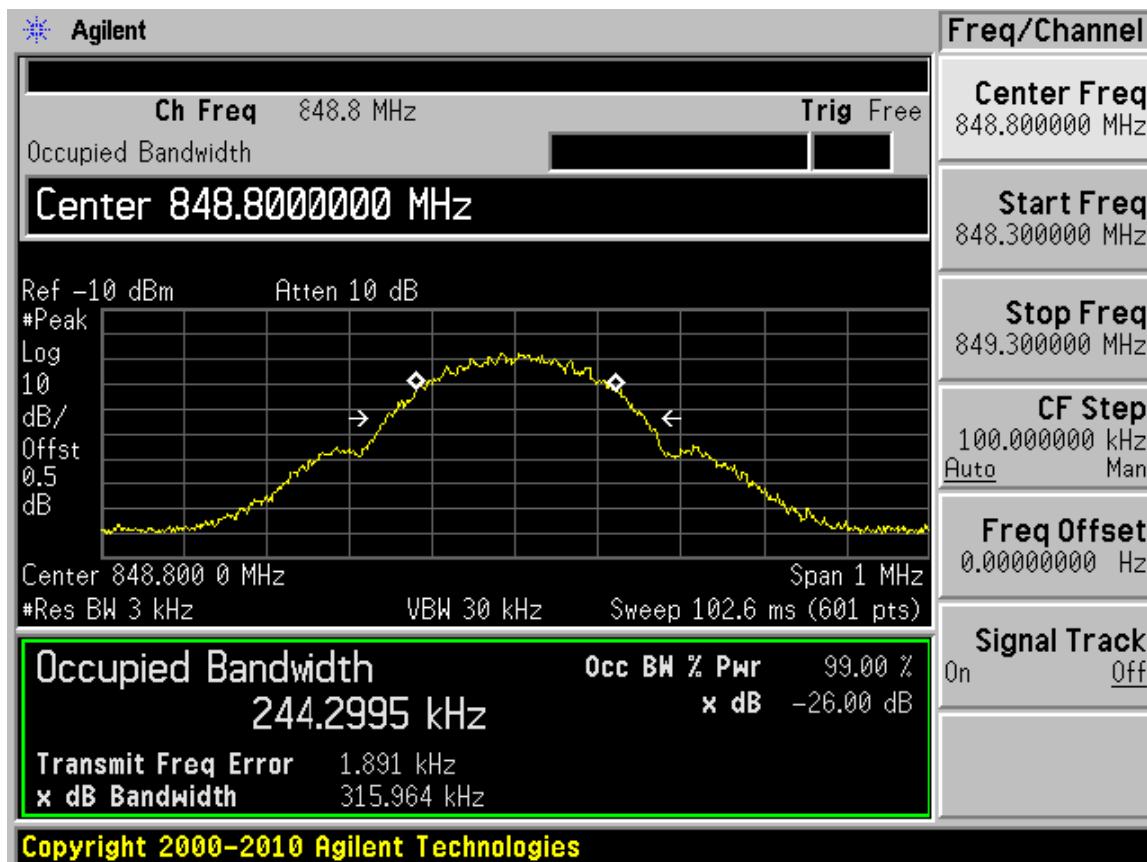


Uplink GSM 850 High CH Output Signal




Downlink GSM 1900 Low CH Input Signal

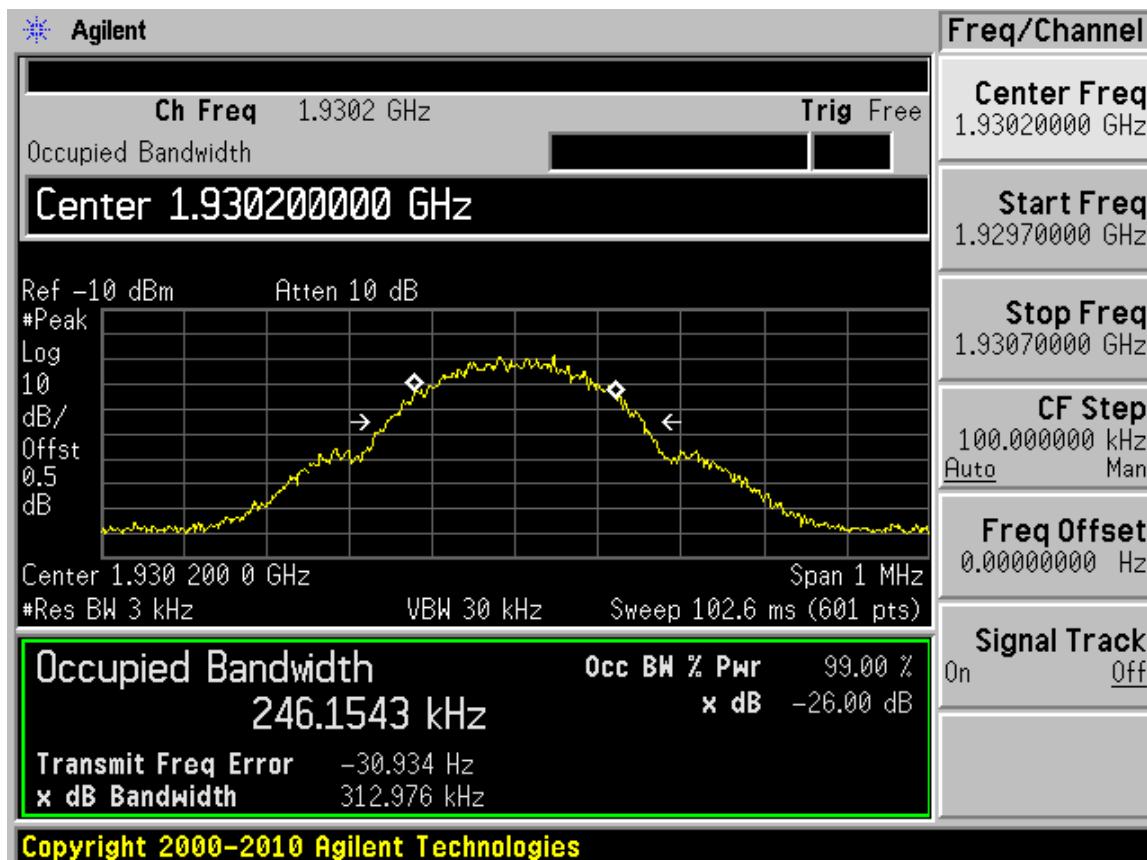


Downlink GSM 1900 Low CH Output Signal

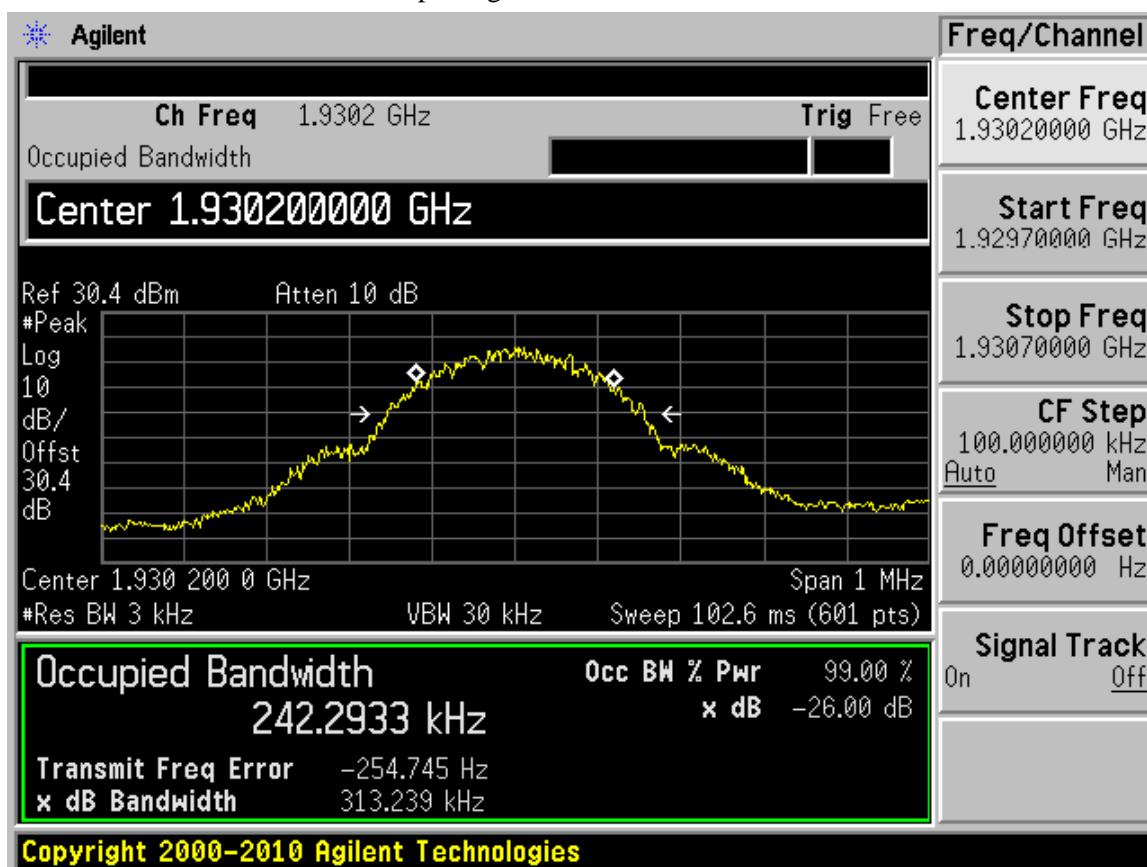


Downlink GSM 1900 Middle CH Input Signal

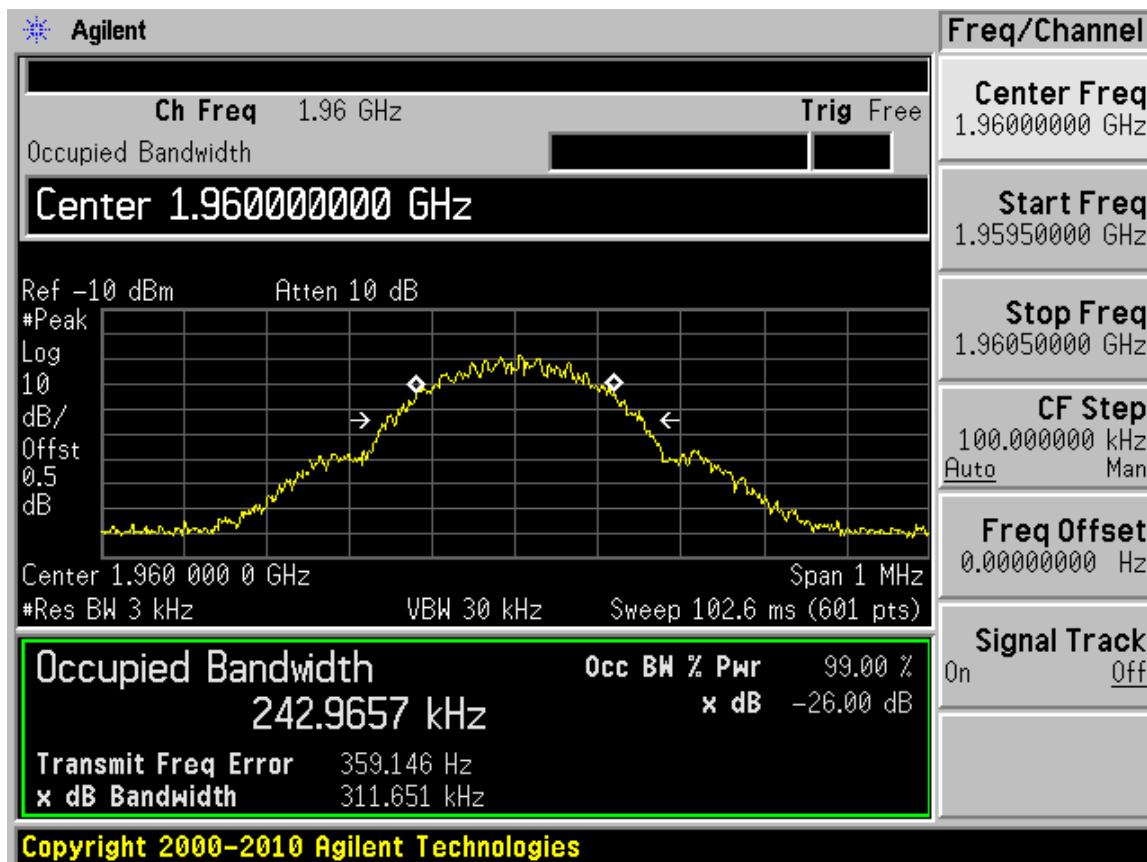


Downlink GSM 1900 Middle CH Output Signal

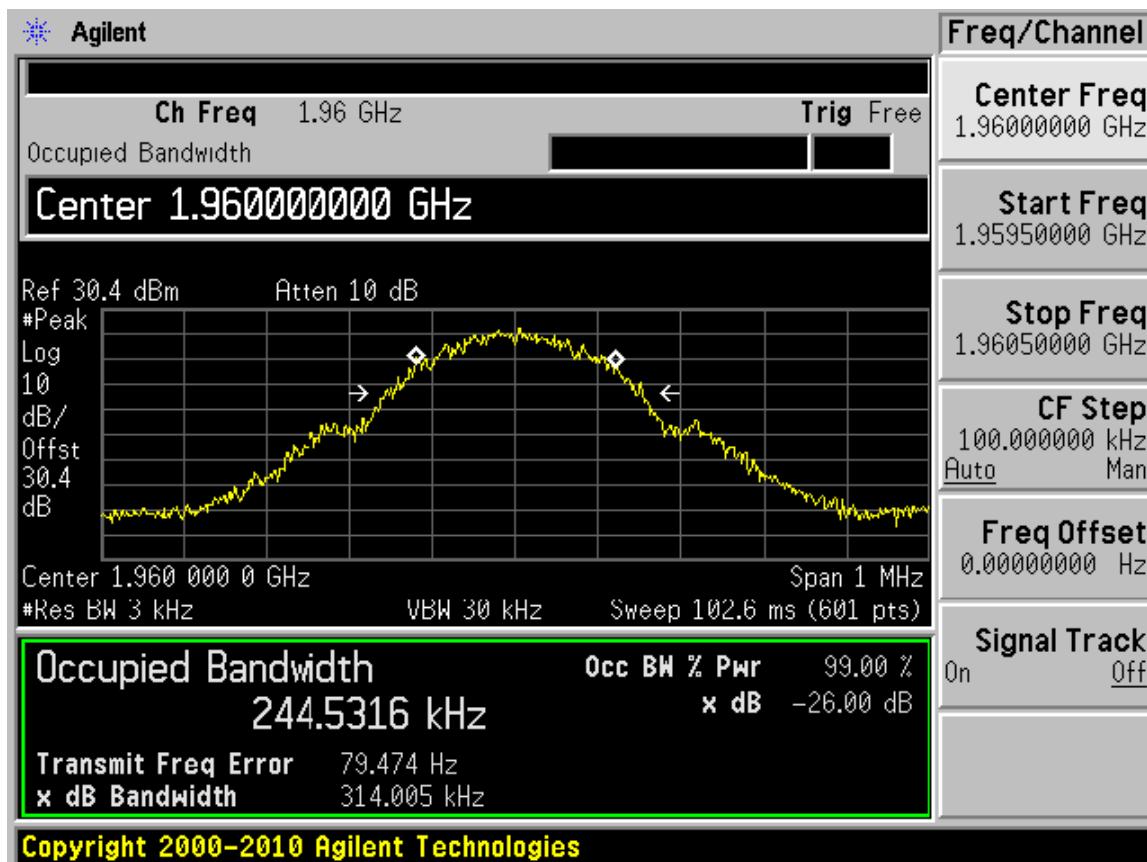

Downlink GSM 1900 High CH Input Signal

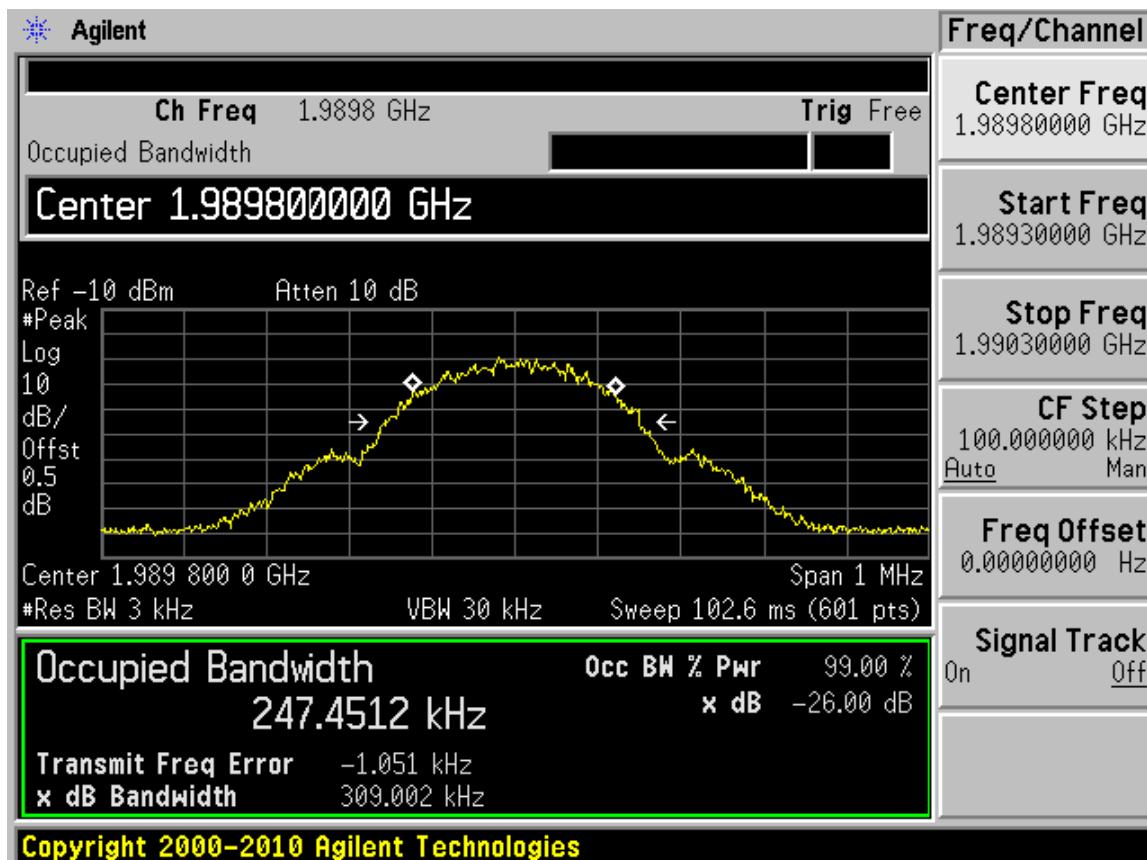

Downlink GSM 1900 High CH Output Signal

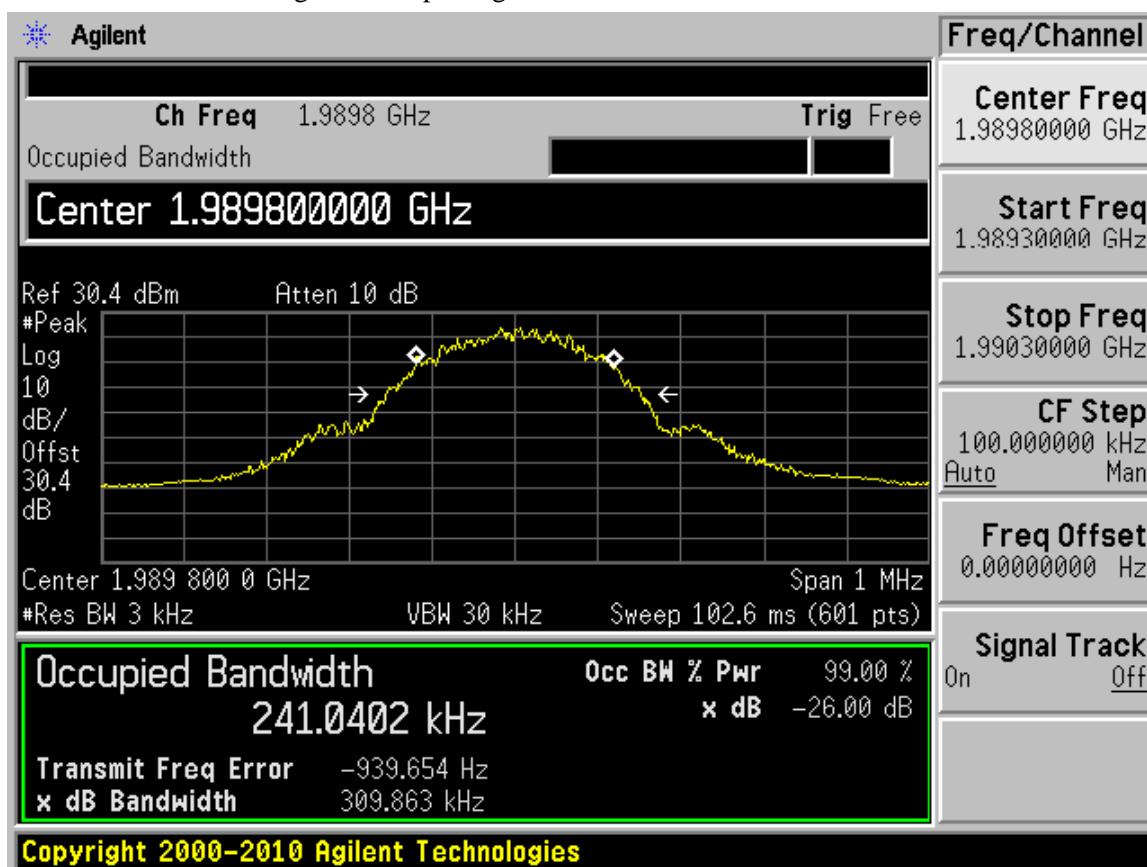


Uplink GSM 1900 Low CH Input Signal




Uplink GSM 1900 Low CH Output Signal




Uplink GSM 1900 Middle CH Input Signal

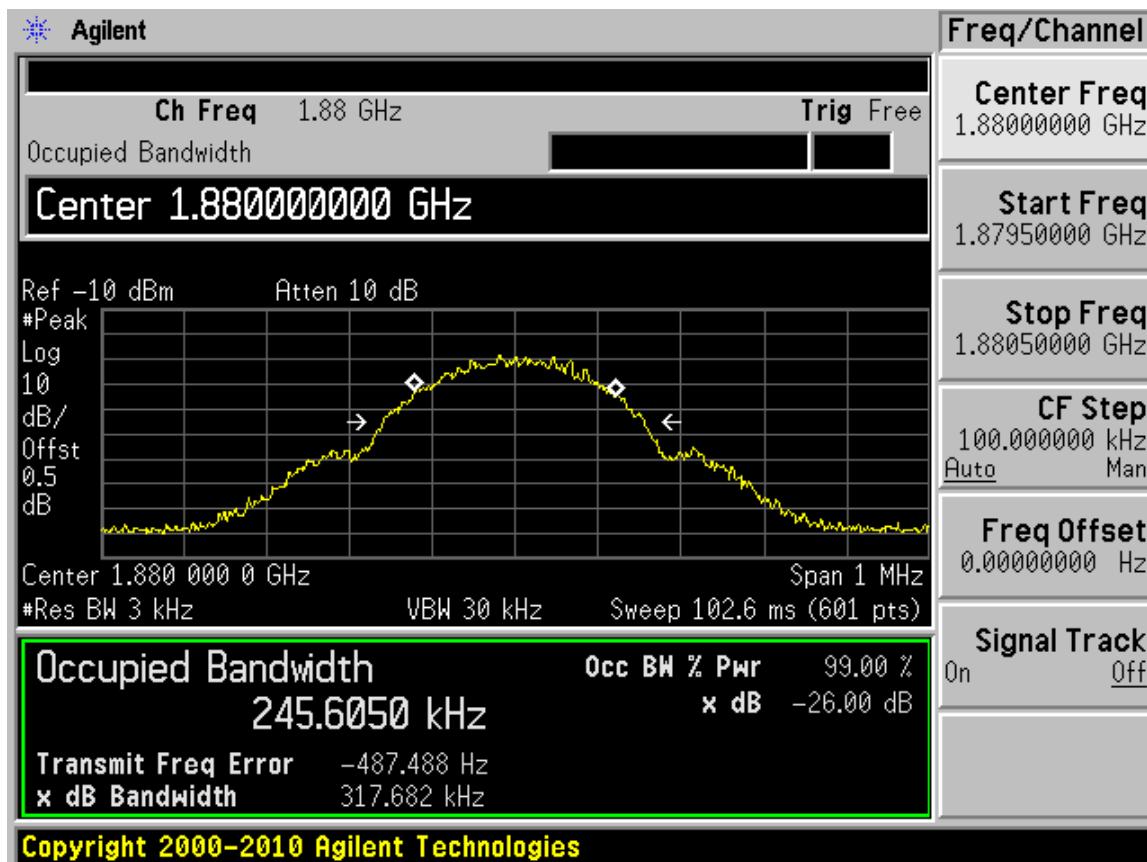

Uplink GSM 1900 Middle CH Output Signal

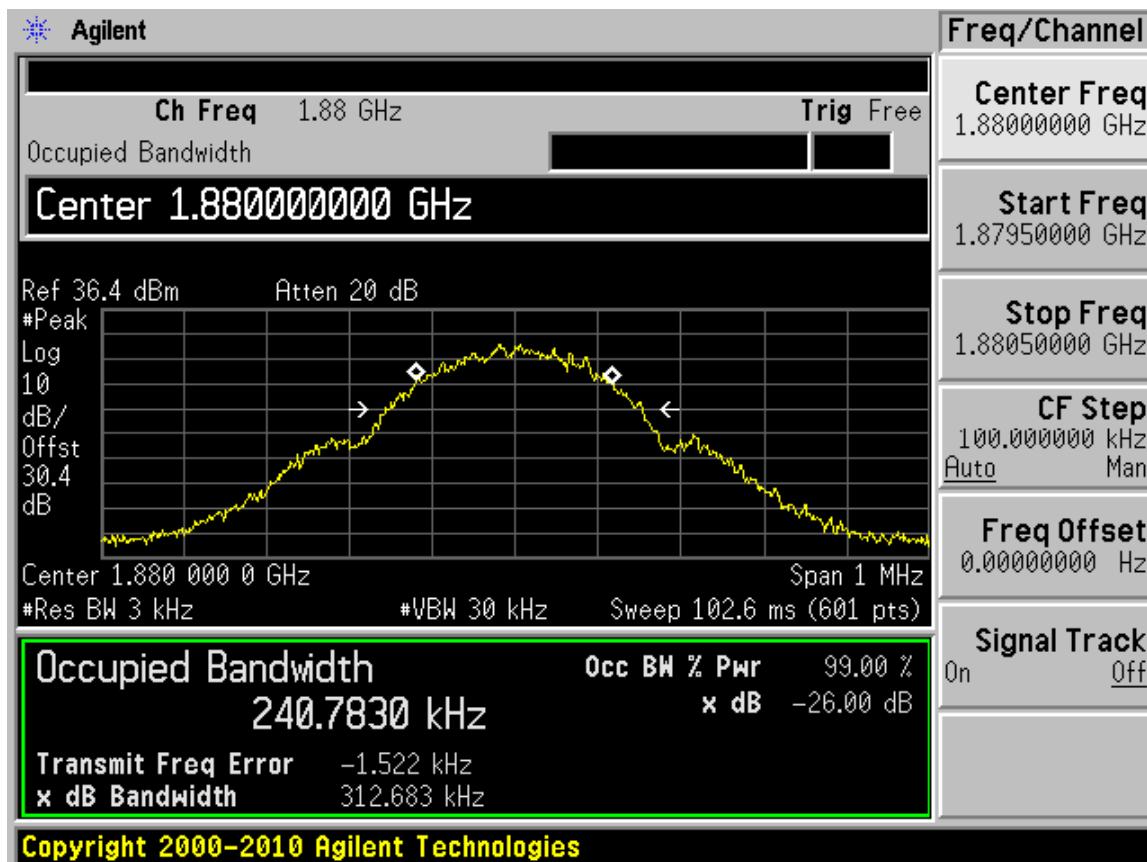

Uplink GSM 1900 High CH Input Signal

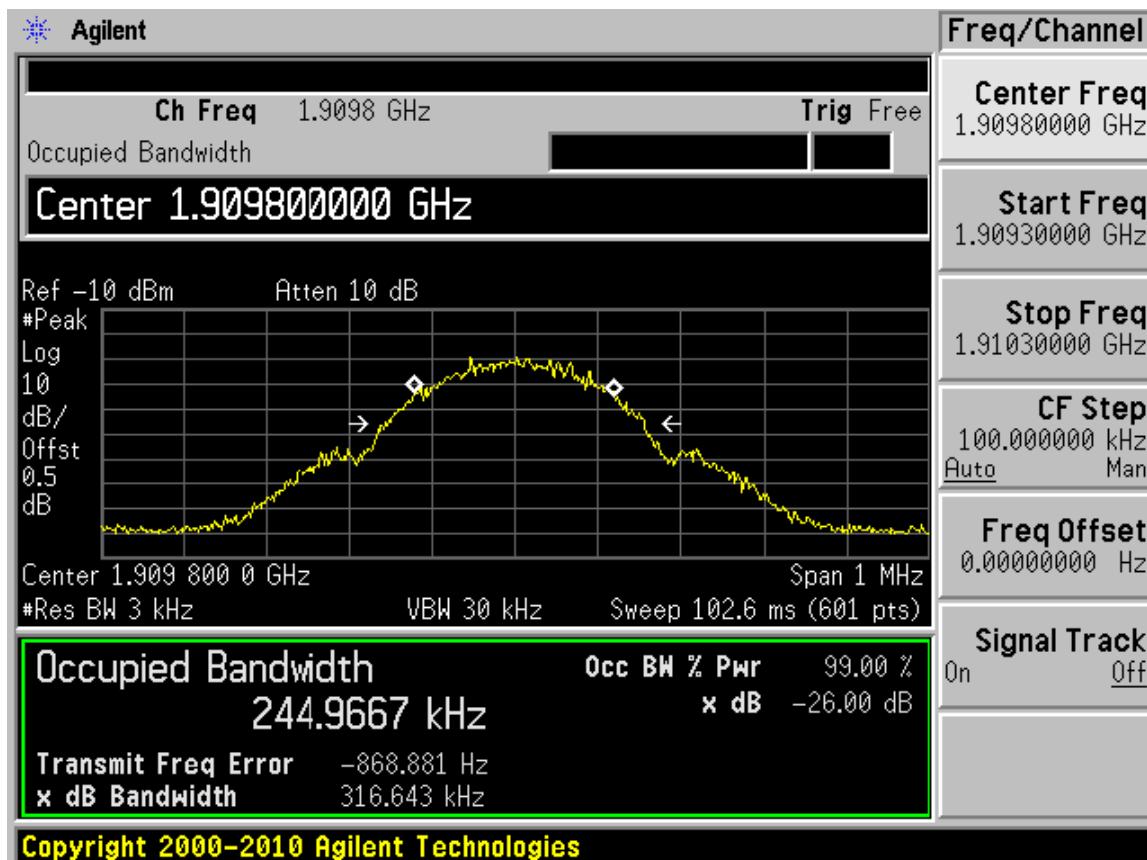

Uplink GSM 1900 High CH Output Signal



5.3. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL

5.3.1. Standard Applicable

§ 2.1051 Measurements required: Spurious emissions at antenna terminals:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 22.917, § 24.238 Emission limitations for Broadband PCS equipment: The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service. § 22.917 (a), § 24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


5.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

5.3.3. Test Procedures

A modulated carrier generated by the signal generator carrier was connected to either the Uplink or Downlink RF port at a maximum level as determined by the OEM A spectrum analyzer was connected to either the Uplink or Downlink port depending on the circuitry being measured. The spectrum was investigated from 30 MHz to the 26.5 GHz of the carrier.

5.3.4. Test Setup Layout

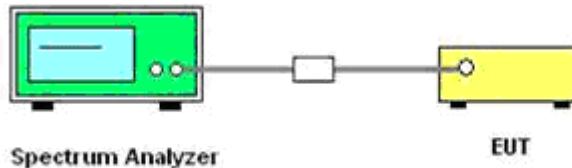


5.3.5. Test Results


The EUT complies with the requirements of this section. There were no detectable spurious emissions for this EUT.

Plots of Band Edge


(Downlink GSM 850 Low CH)

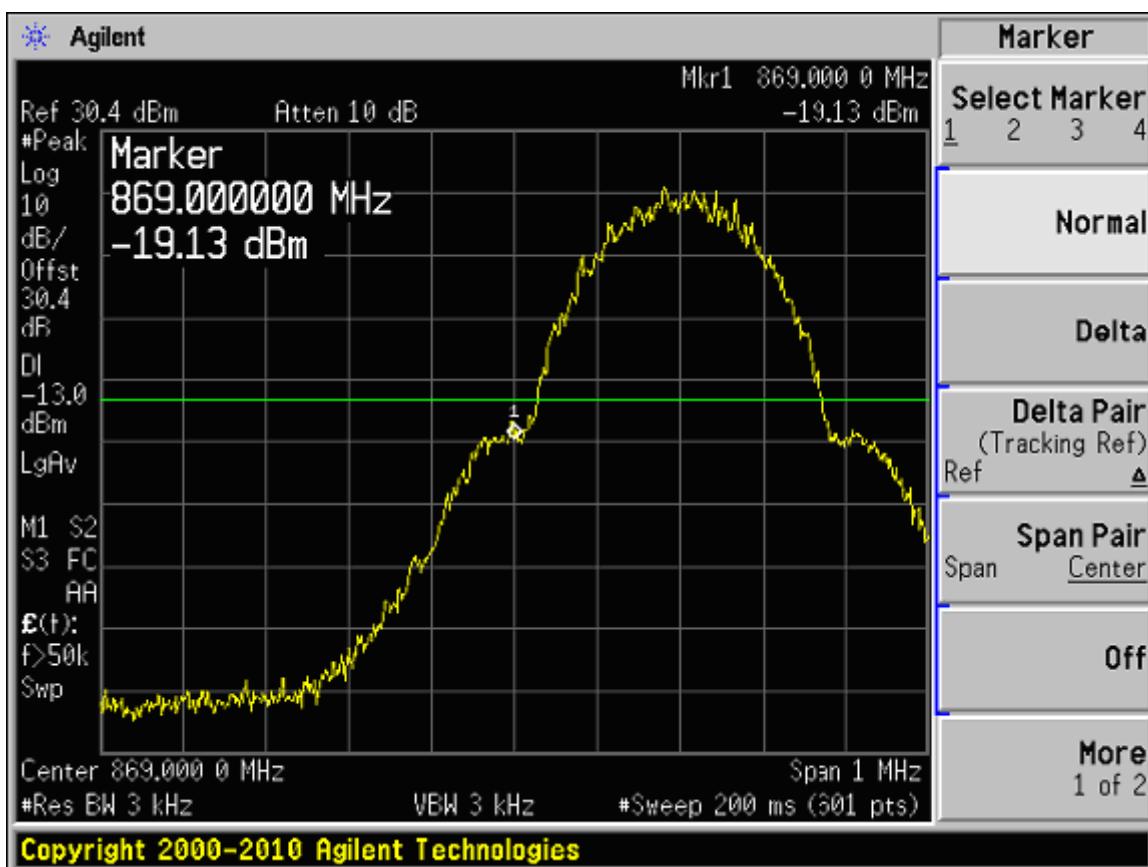


(Downlink GSM 850 High CH)

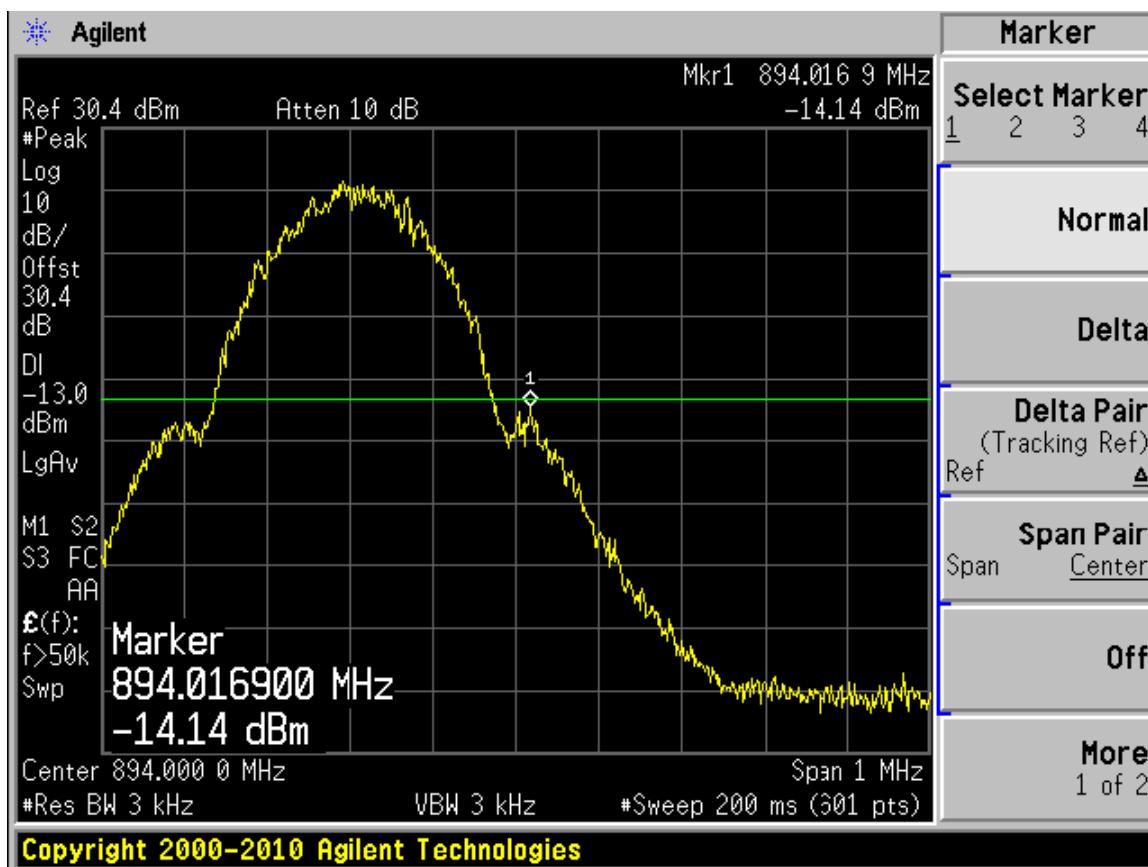


(Uplink GSM 850 Low CH)

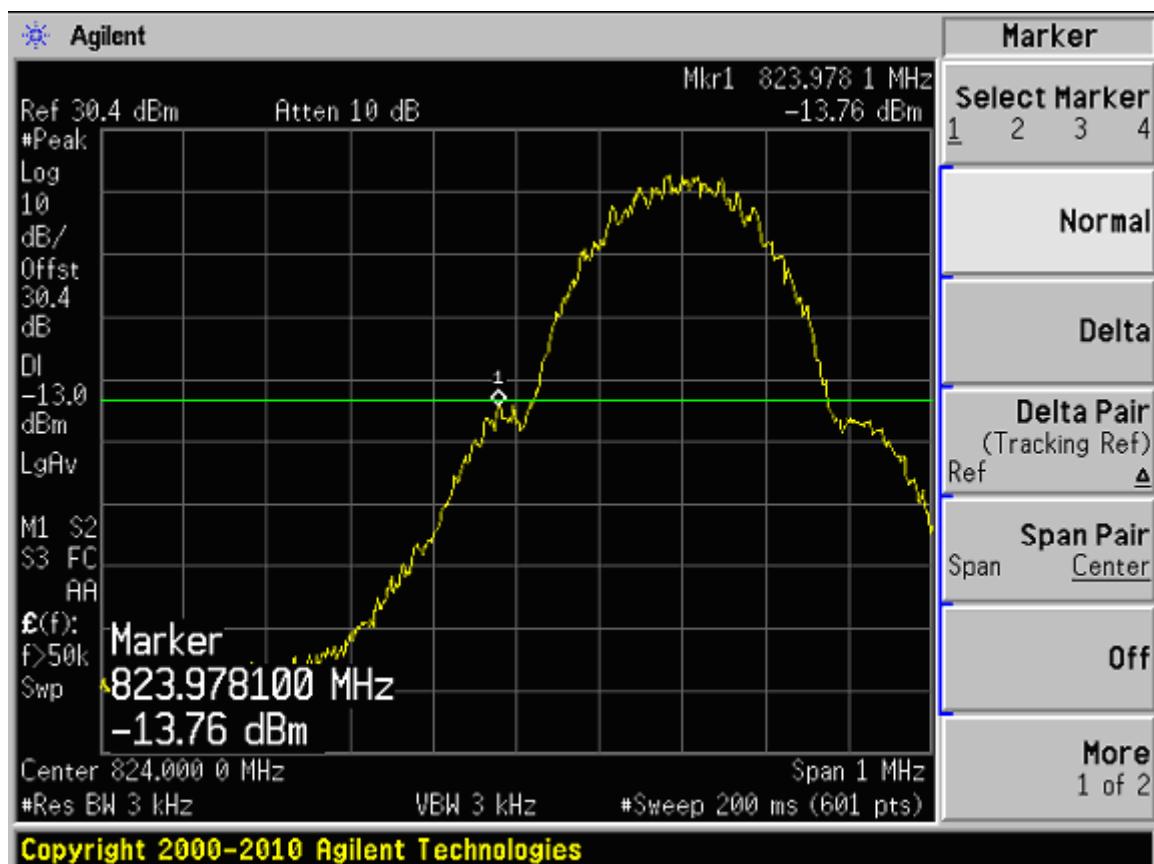


(Uplink GSM 850 High CH)

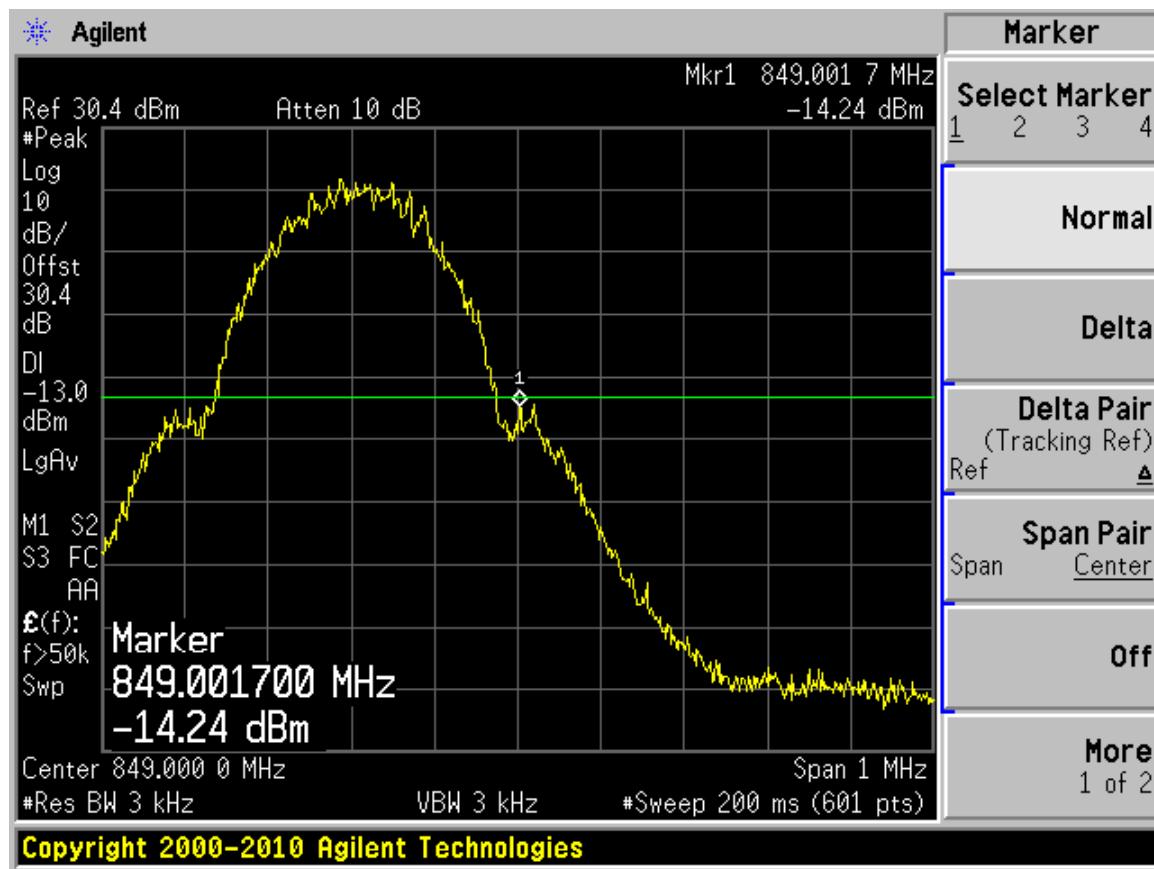


(Downlink GSM 1900 Low CH)

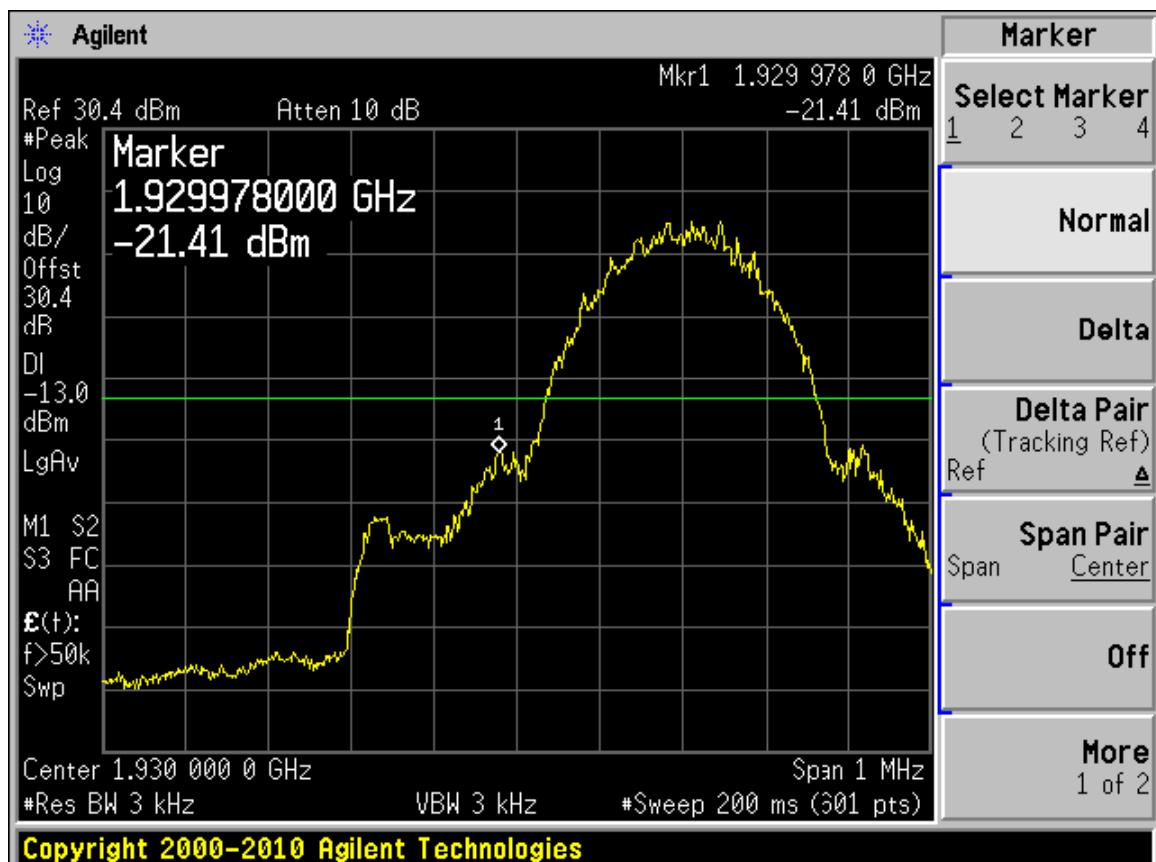


(Downlink GSM 1900 High CH)

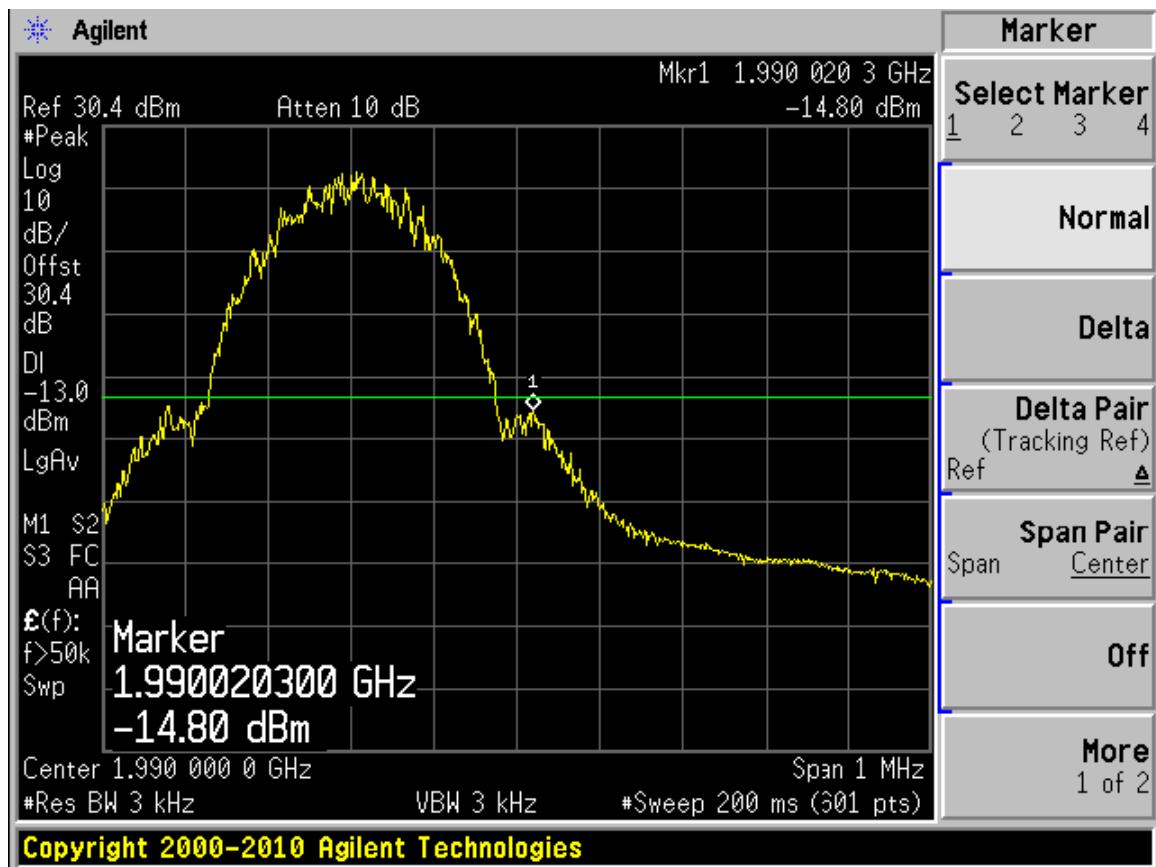

(Uplink GSM 1900 Low CH)

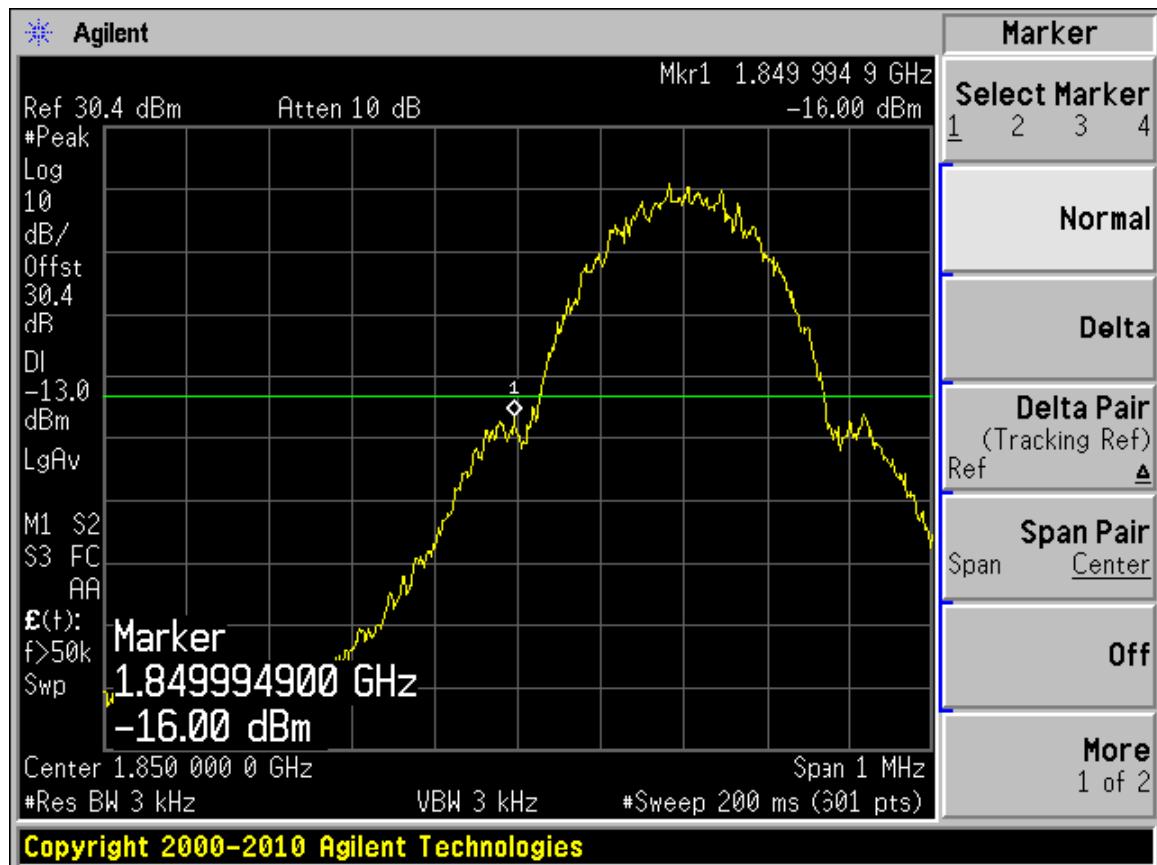


(Uplink GSM 1900 High CH)

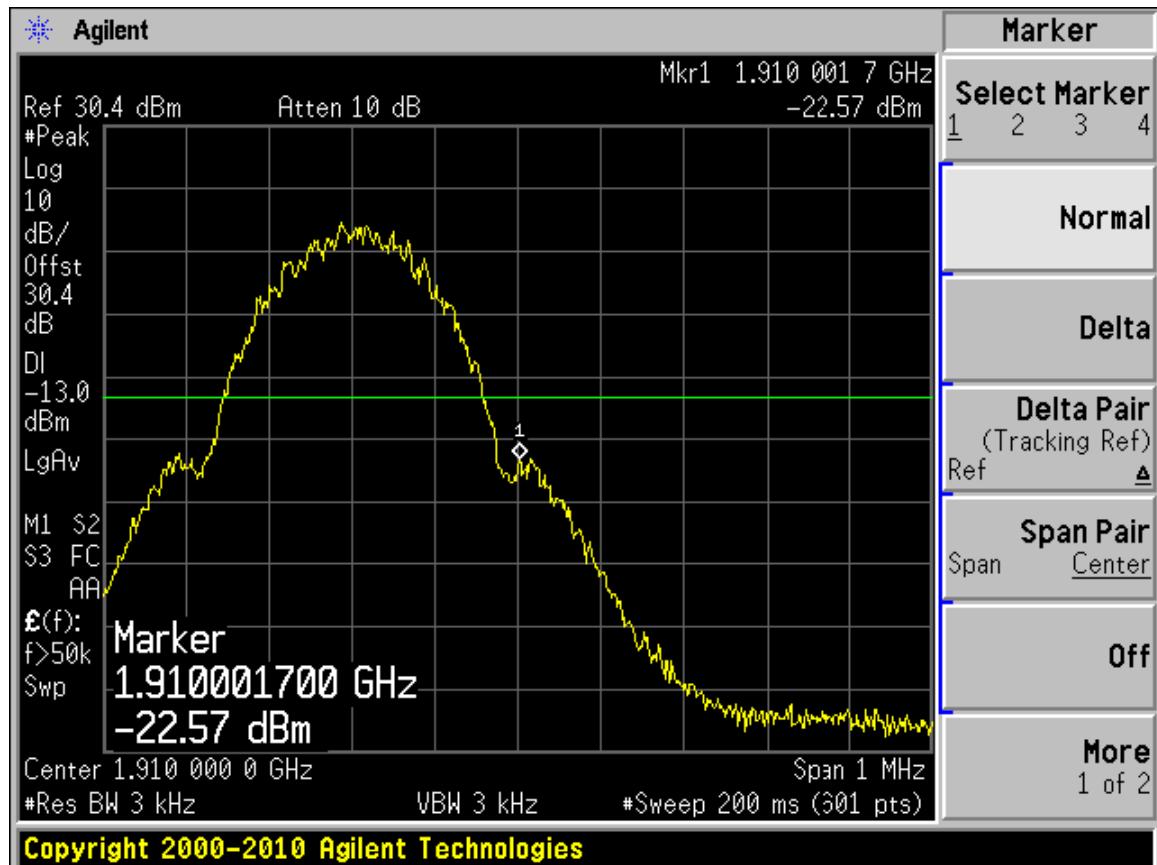


Plots of Spurious Emission

GSM 850 Conducted Spurious Emissions Downlink Low CH

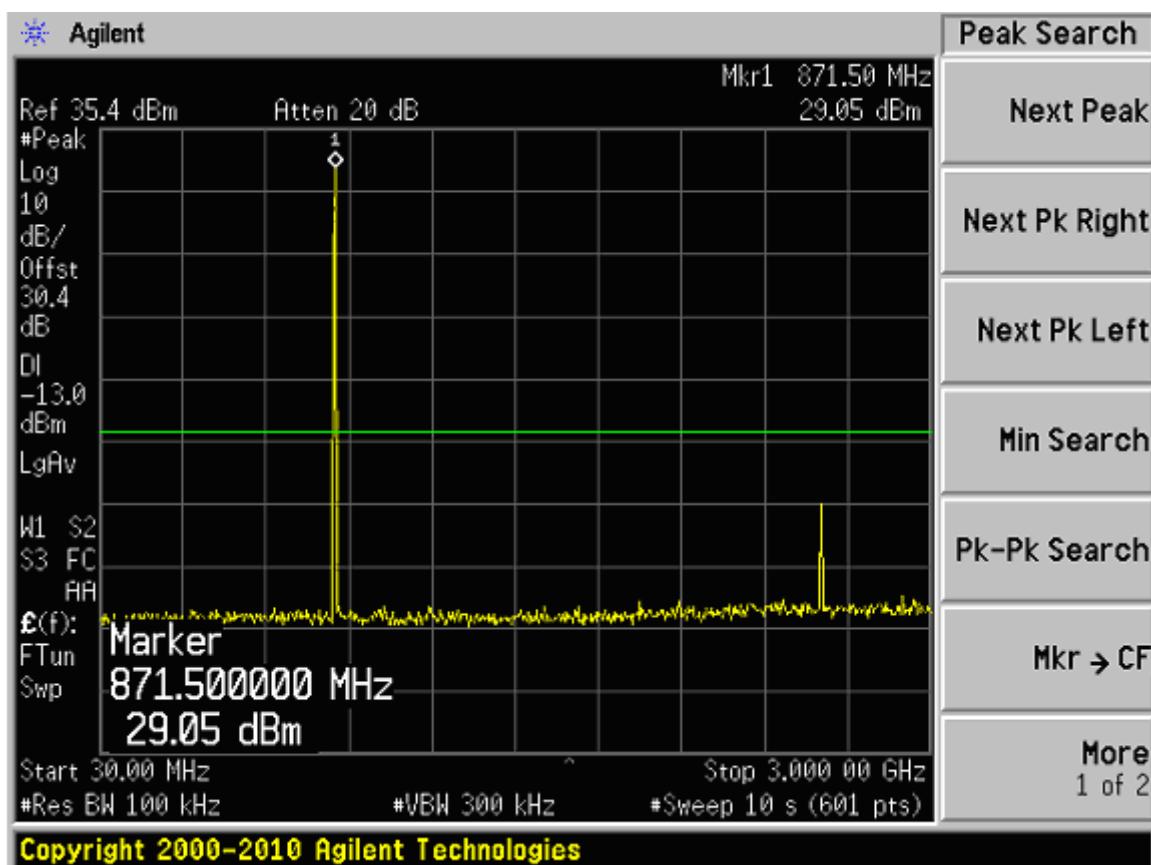


(30MHz – 3GHz)

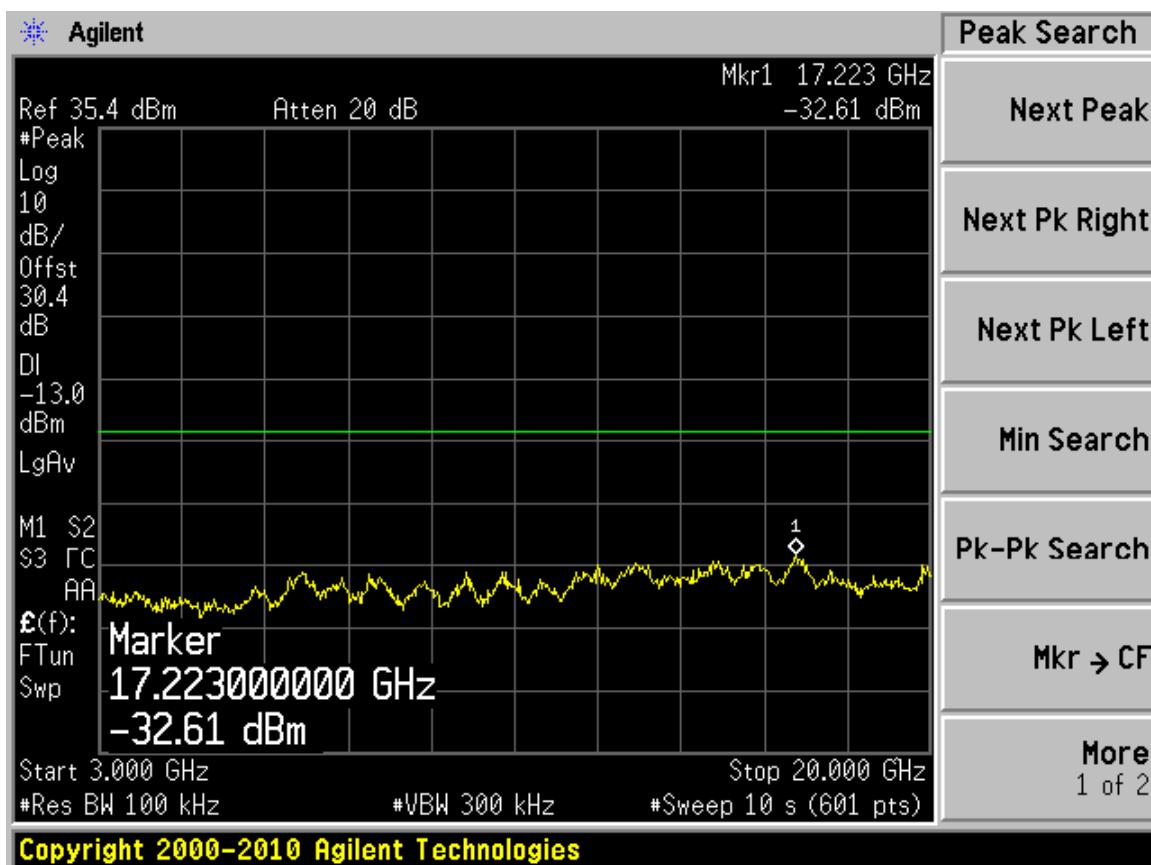


(3GHz – 20GHz)

GSM 850 Conducted Spurious Emissions Downlink Middle CH

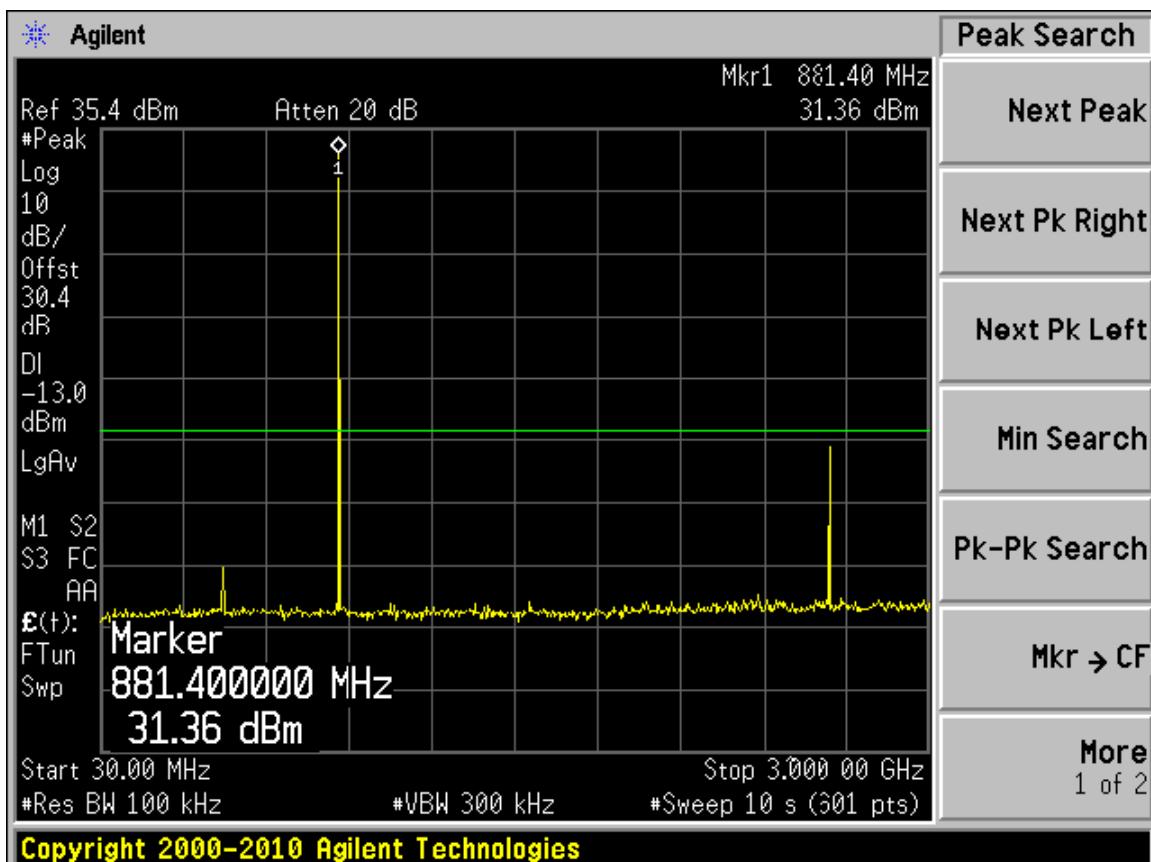


(30MHz – 3GHz)

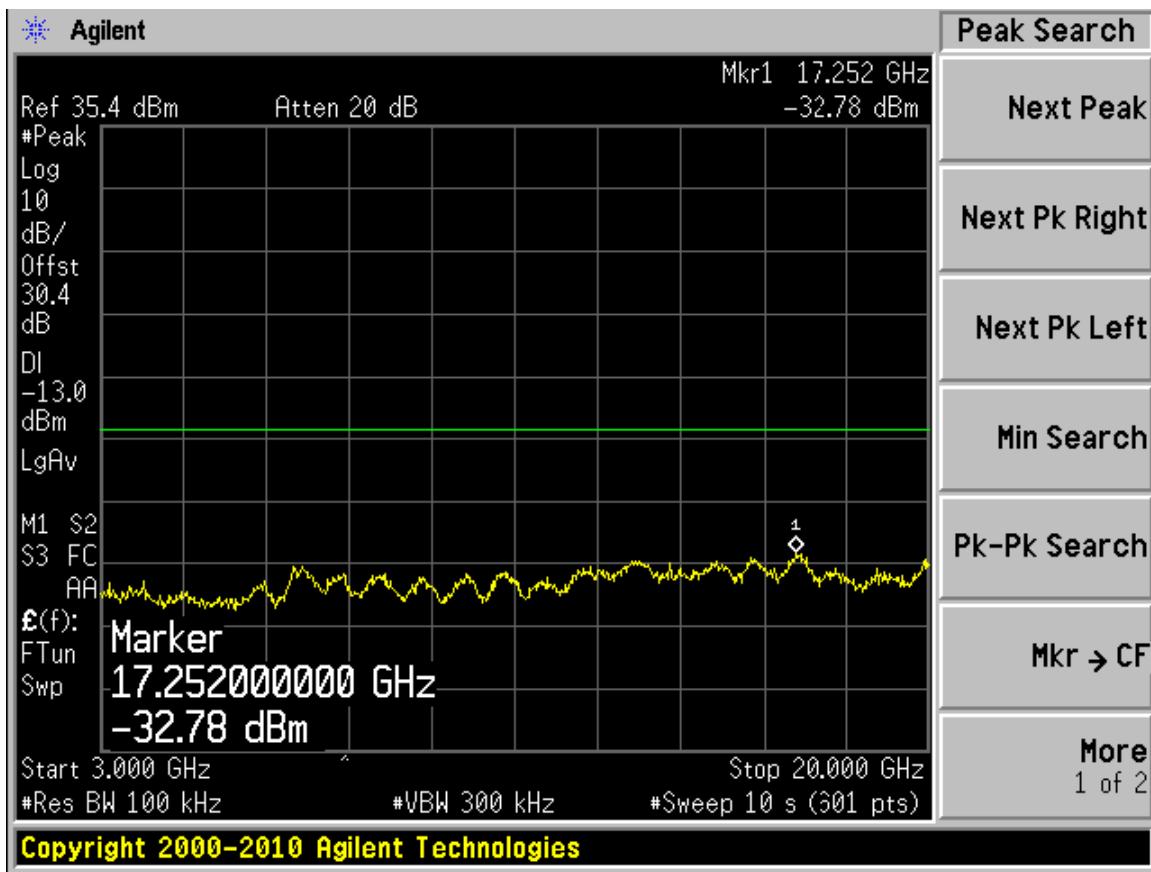


(3GHz – 20GHz)

GSM 850 Conducted Spurious Emissions Downlink High CH

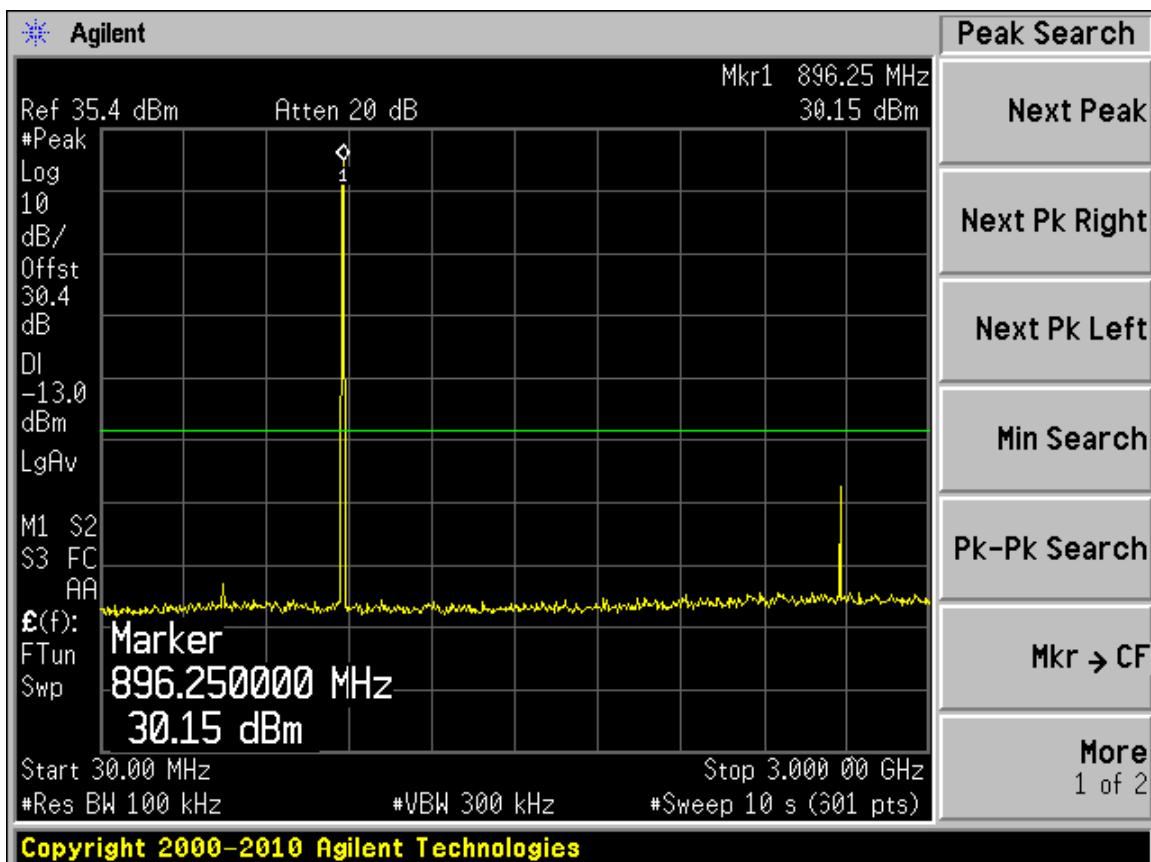


(30MHz – 3GHz)

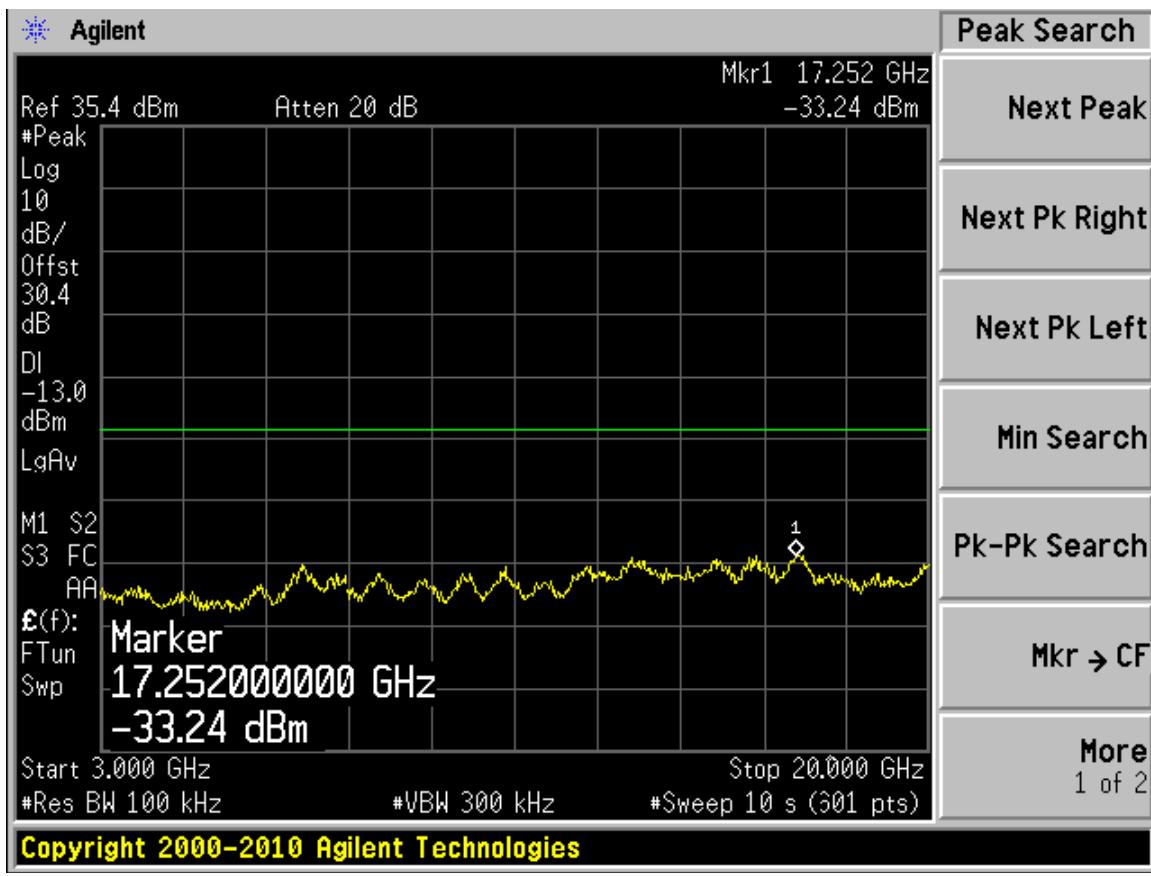


(3GHz – 20GHz)

GSM 850 Conducted Spurious Emissions Uplink Low CH

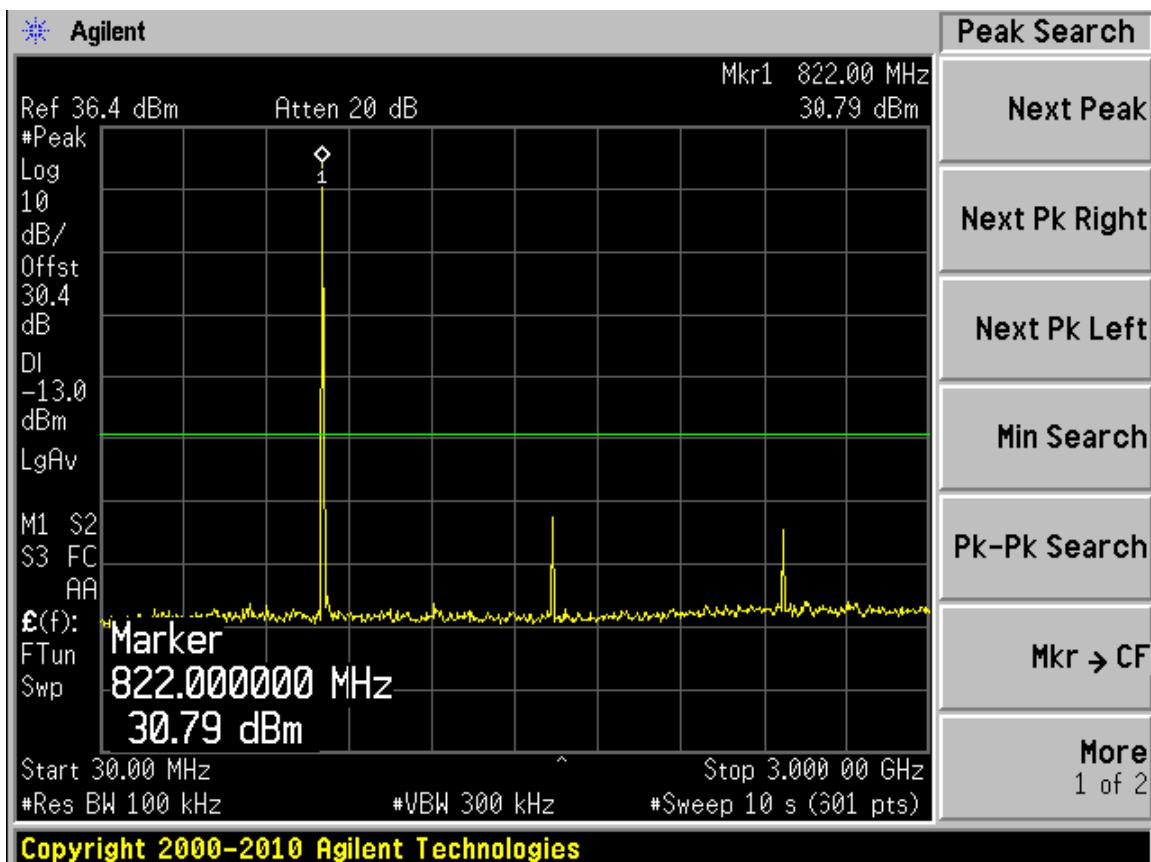


(30MHz – 3GHz)

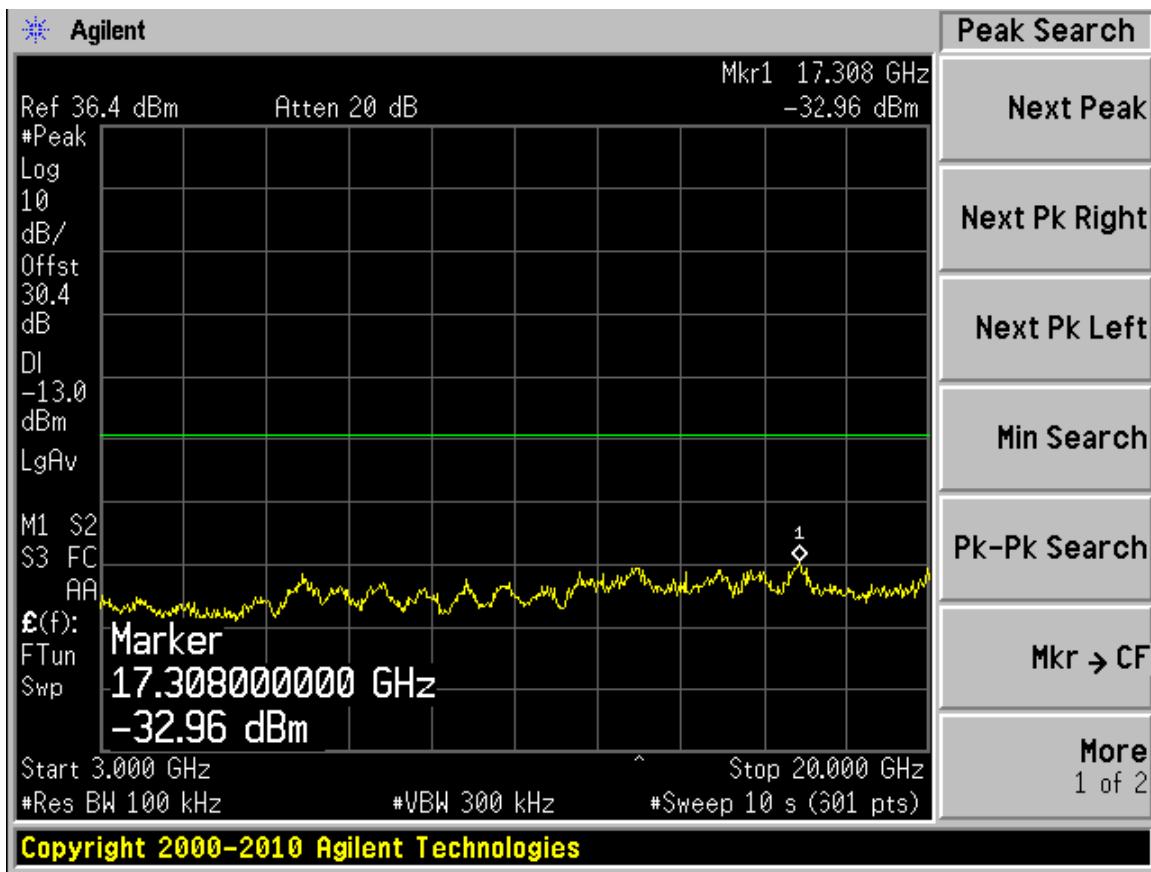


(3Hz – 20GHz)

GSM 850 Conducted Spurious Emissions Uplink Middle CH

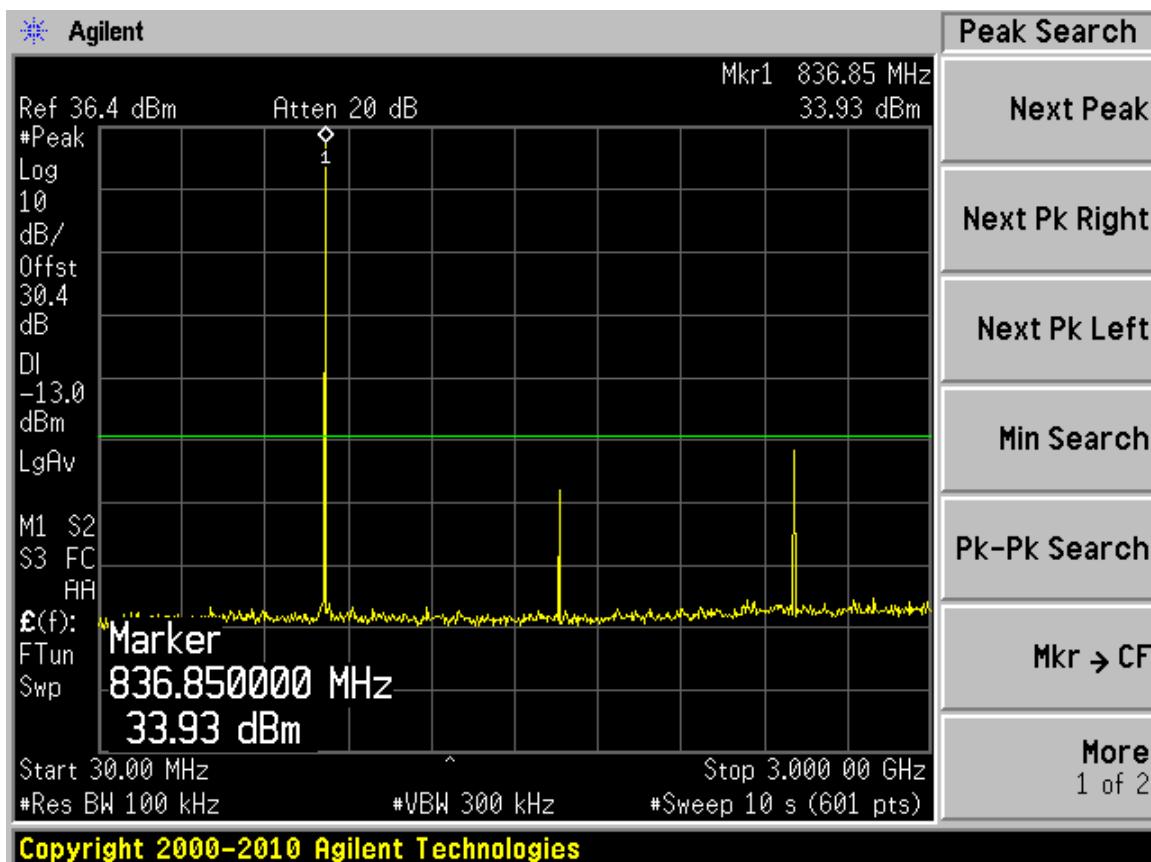


(30MHz – 3GHz)

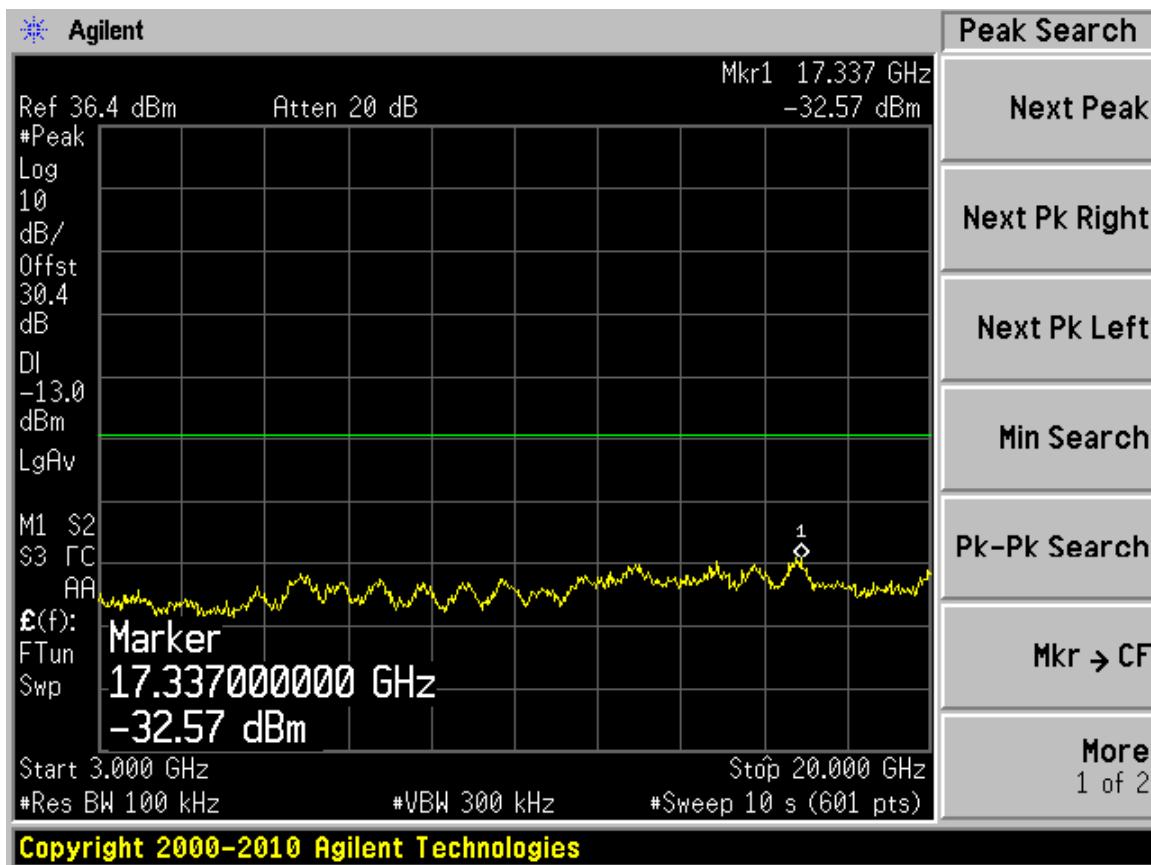


(3Hz – 20GHz)

GSM 850 Conducted Spurious Emissions Uplink High CH

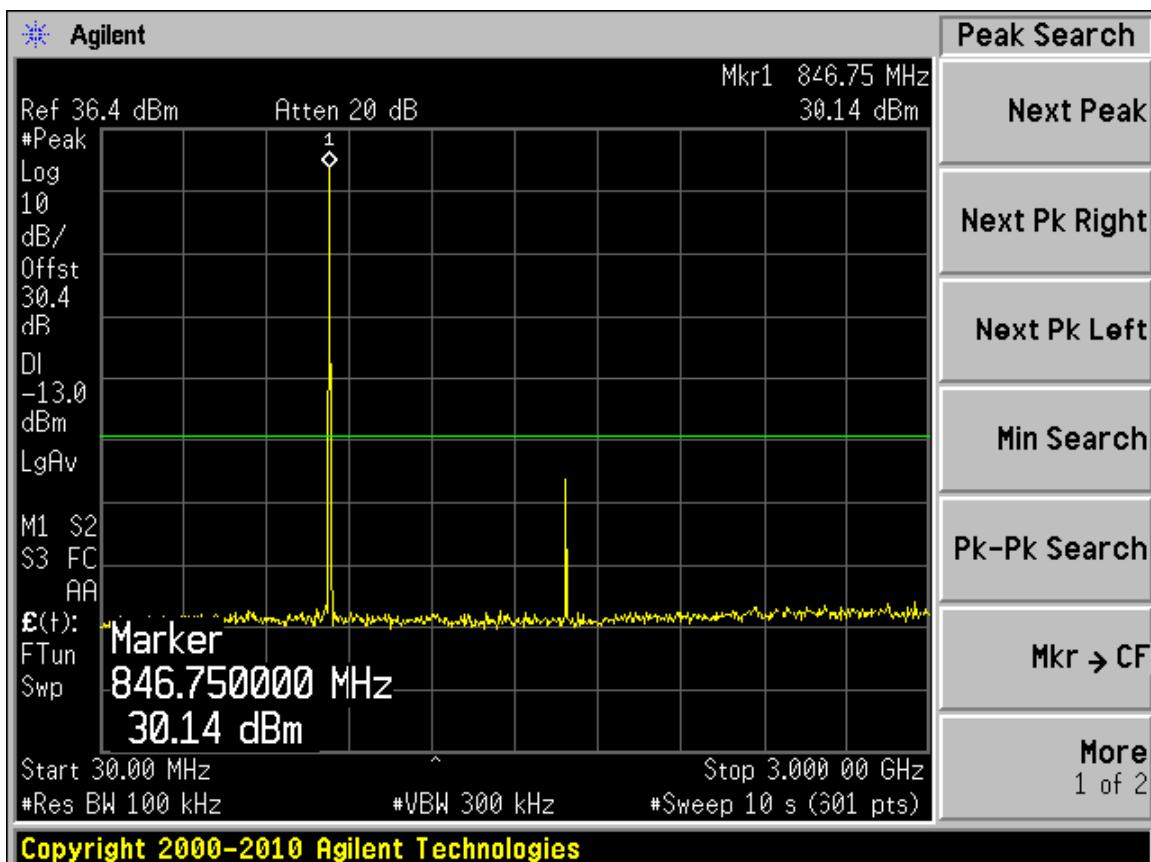


(30MHz – 3GHz)

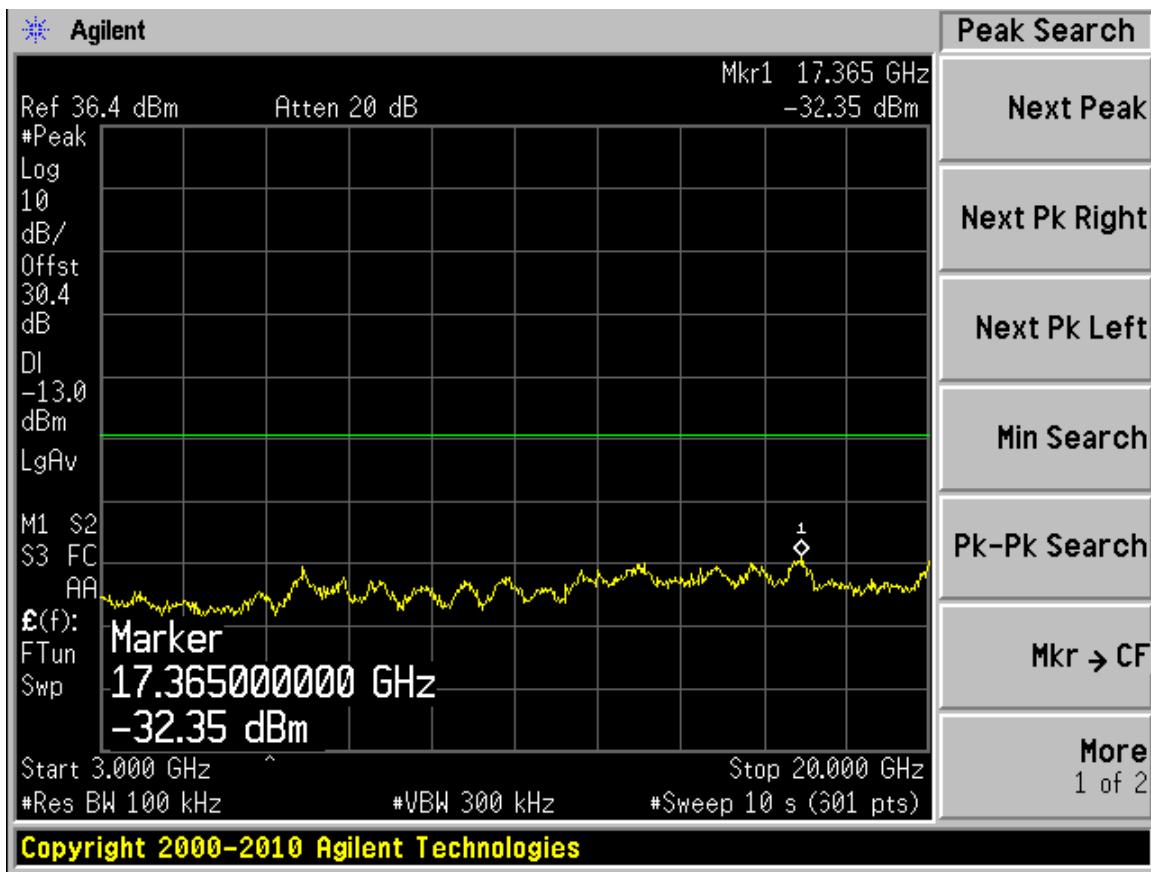


(3Hz – 20GHz)

GSM 1900 Conducted Spurious Emissions Downlink Low CH

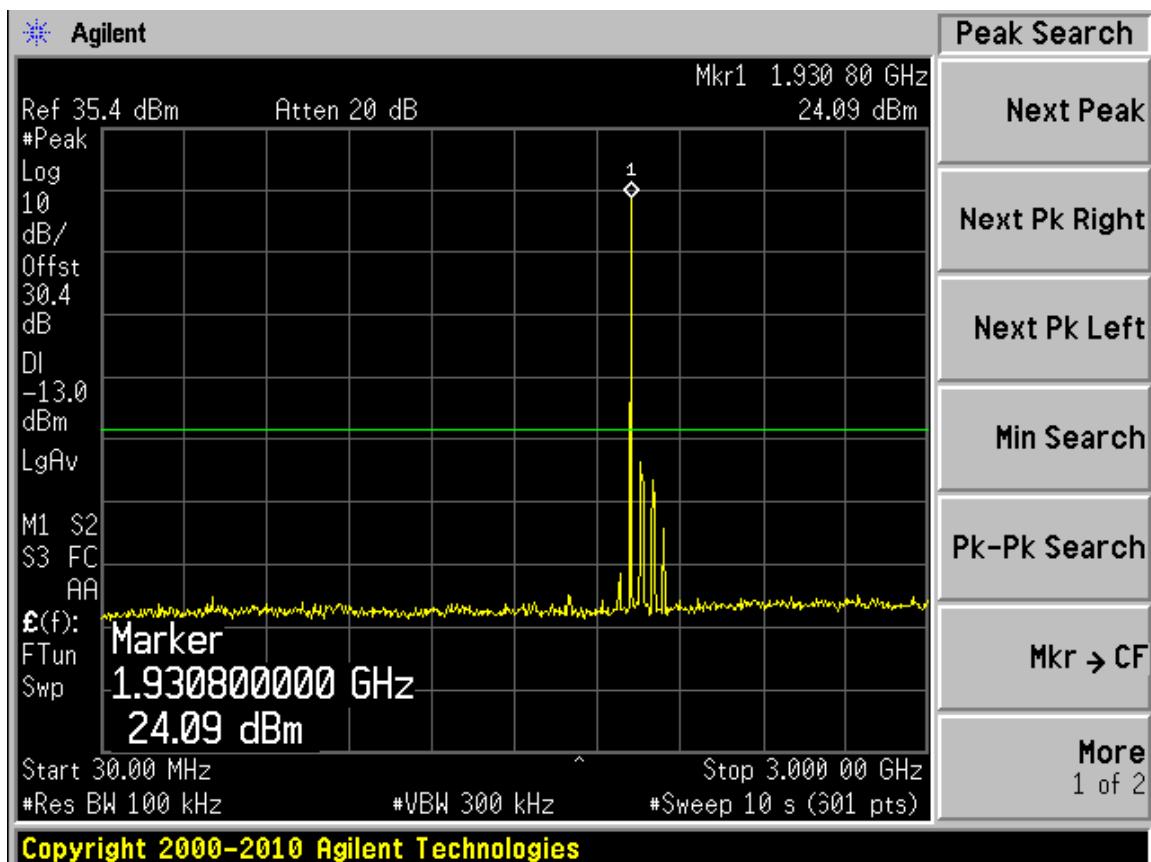


(30MHz – 3GHz)

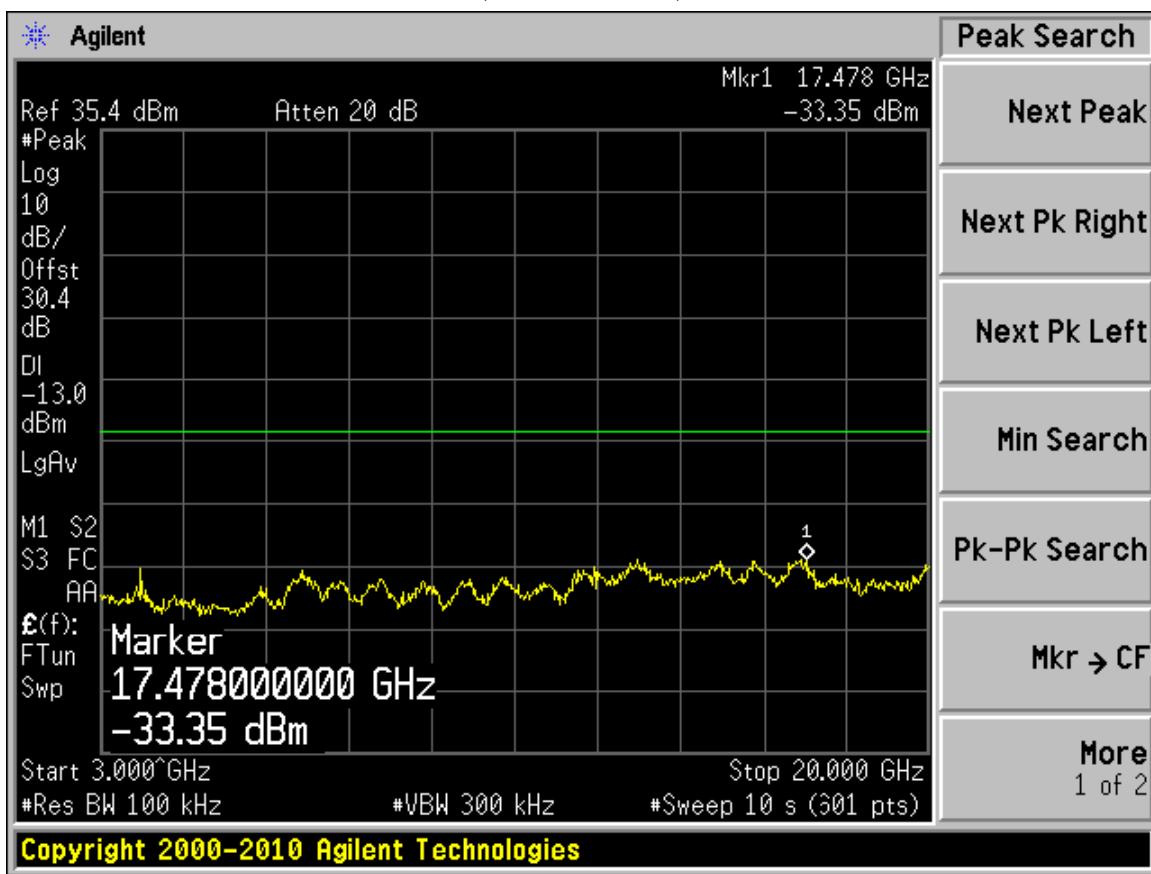


(3Hz – 20GHz)

GSM 1900 Conducted Spurious Emissions Downlink Middle CH

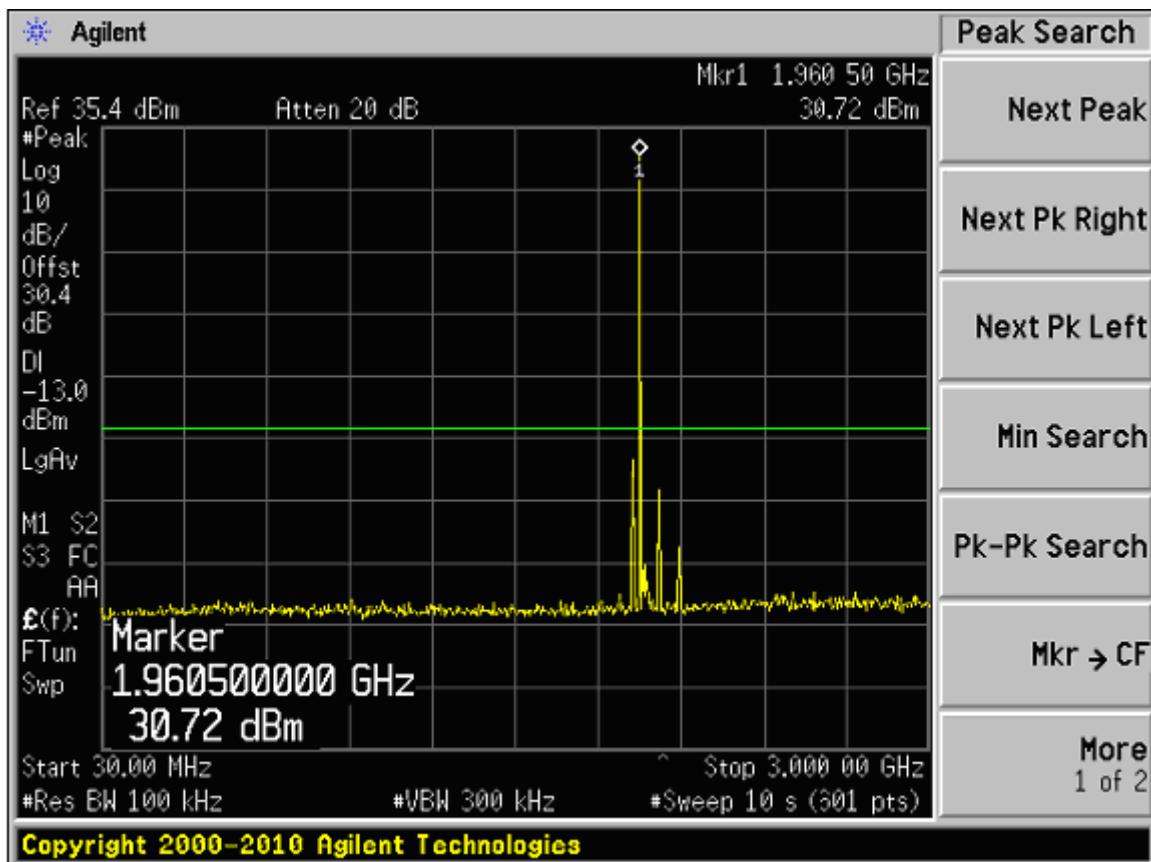


(30MHz – 3GHz)

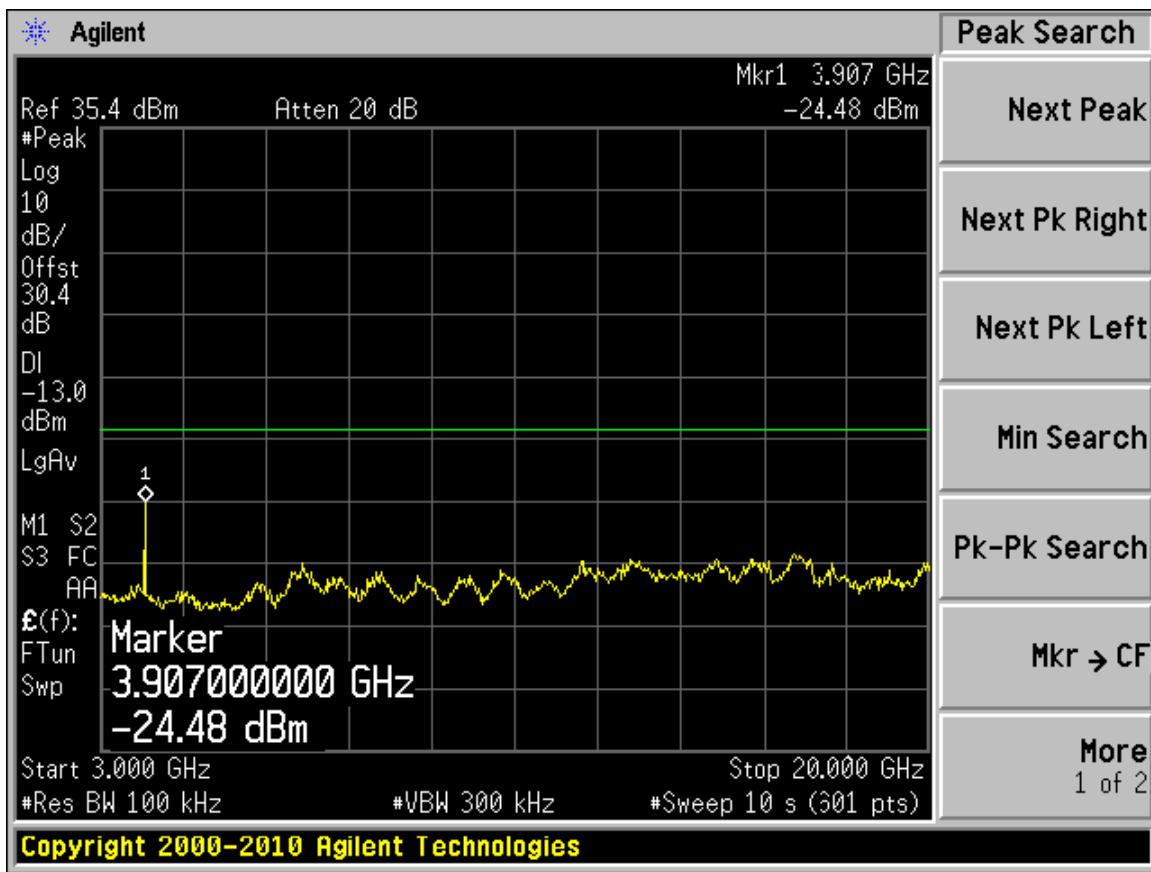


(3Hz – 20GHz)

GSM 1900 Conducted Spurious Emissions Downlink High CH

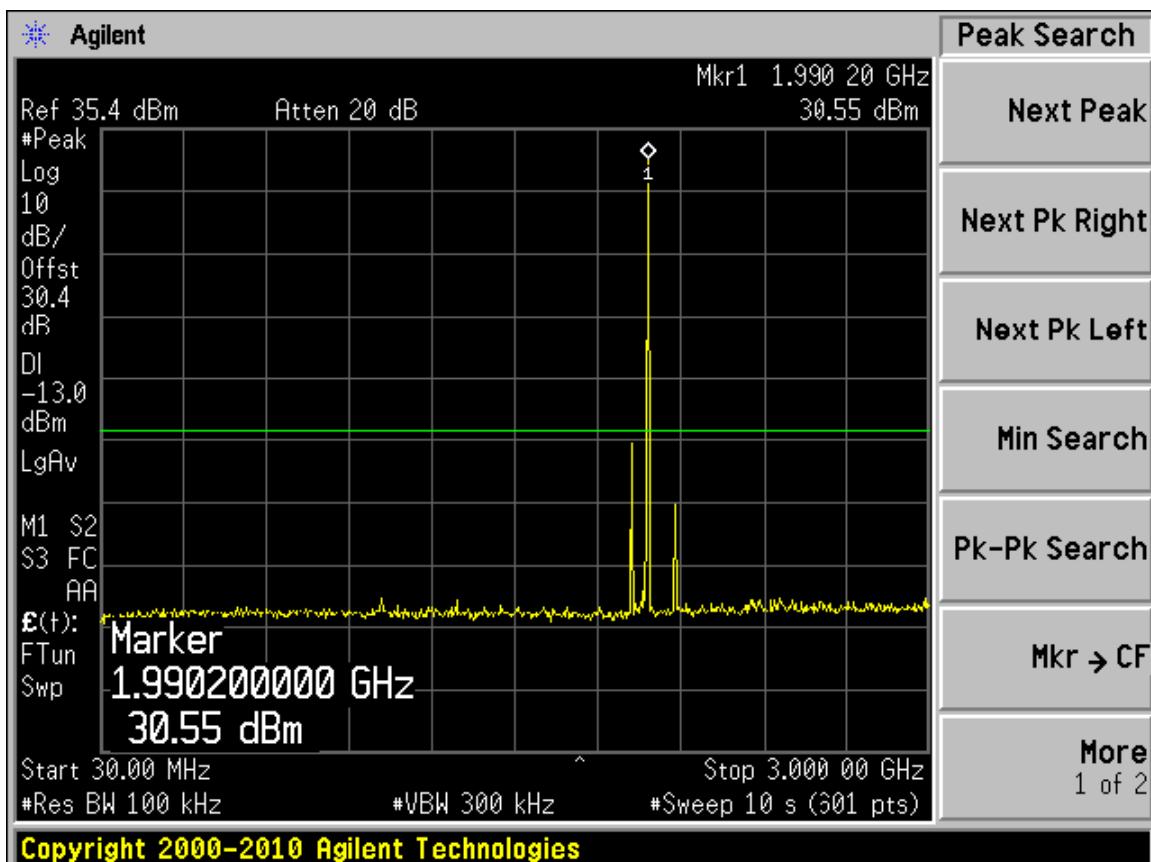


(30MHz – 3GHz)

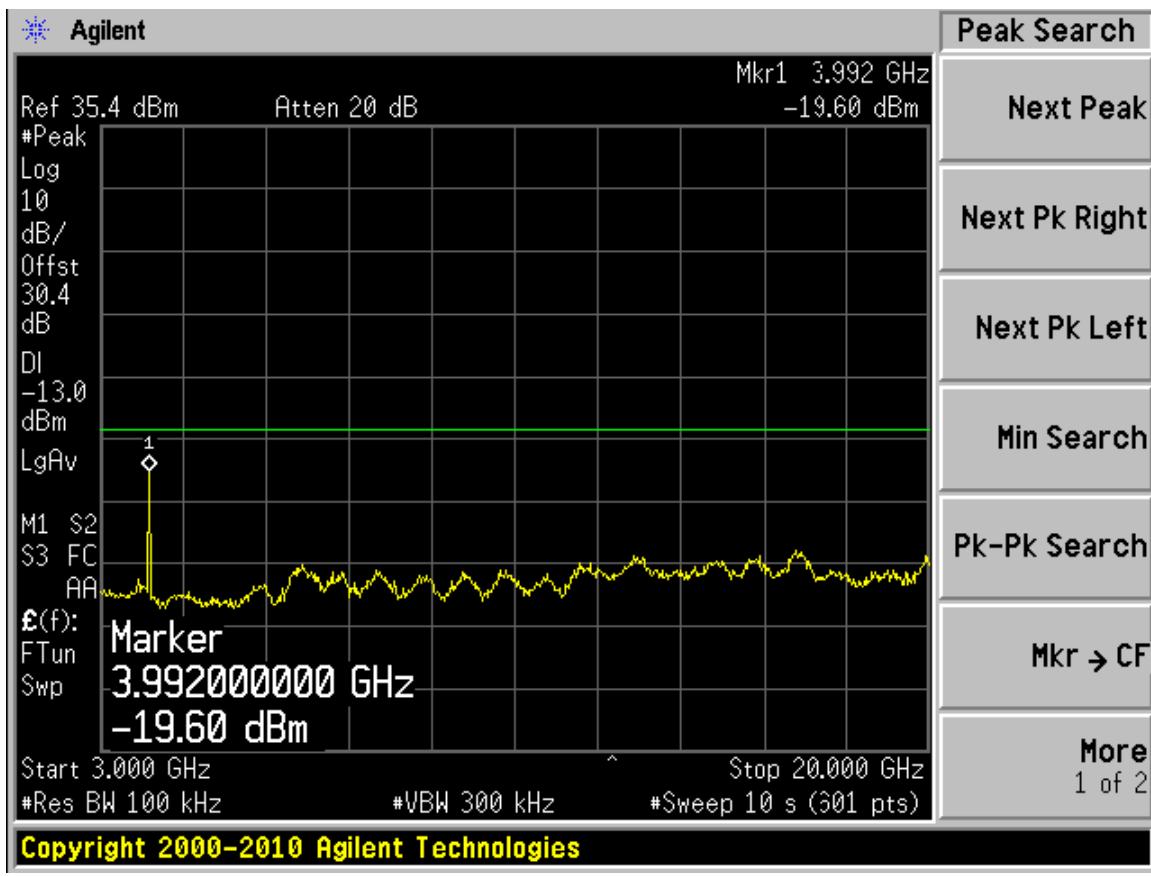


(3Hz – 20GHz)

GSM 1900 Conducted Spurious Emissions Uplink Low CH

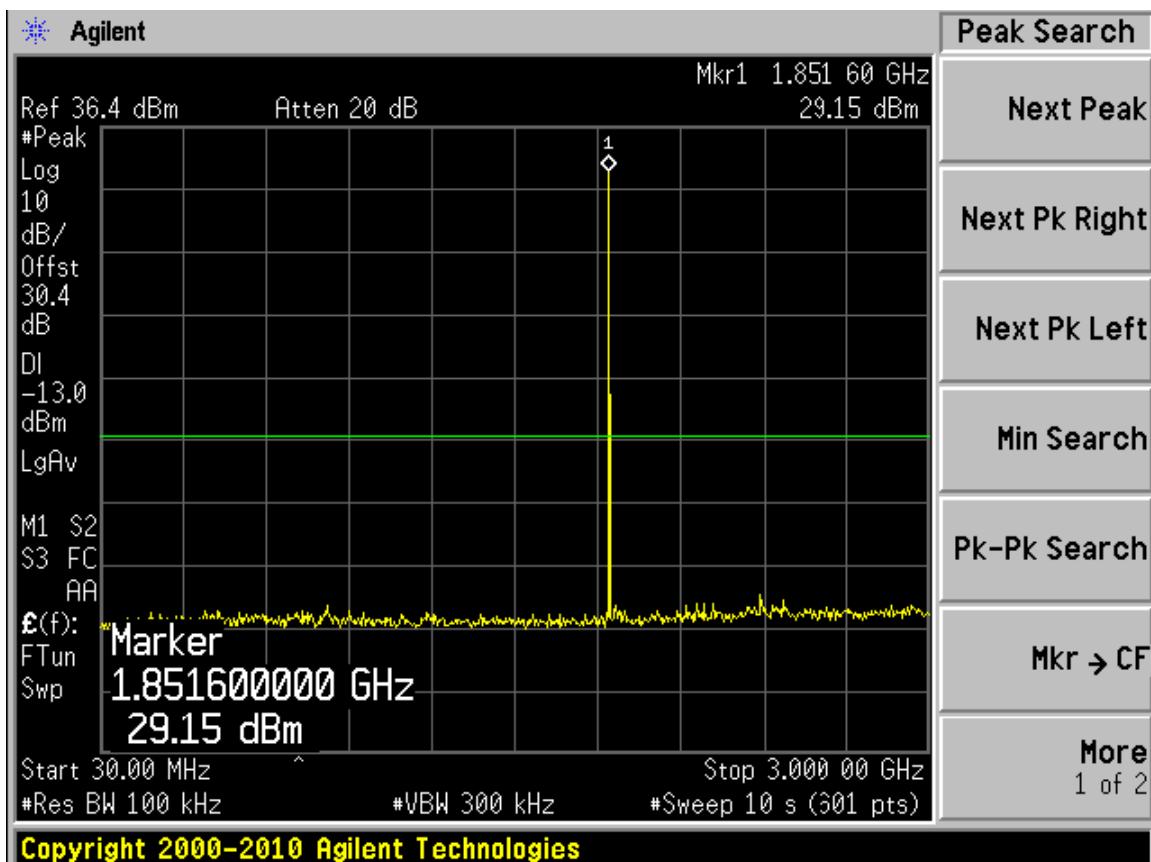

Copyright 2000-2010 Agilent Technologies


(30MHz – 3GHz)

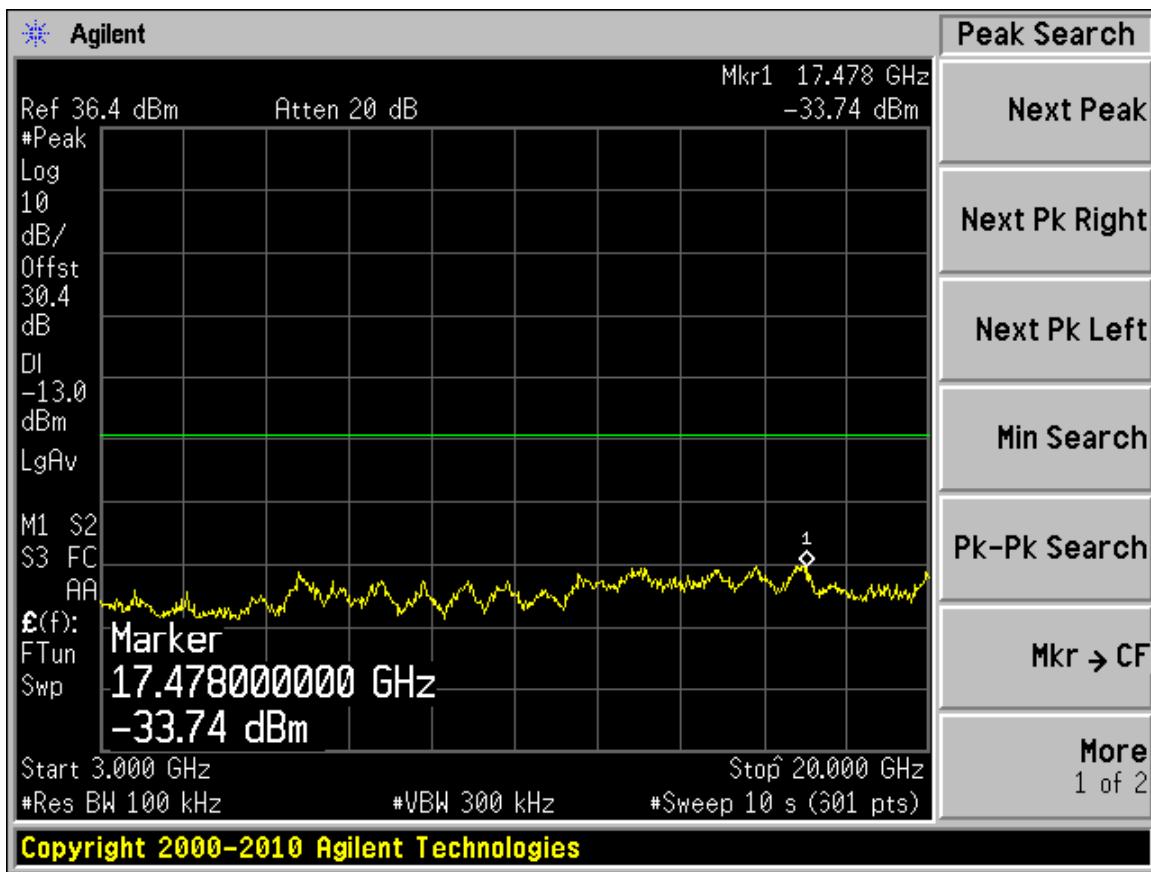


Copyright 2000-2010 Agilent Technologies

(3Hz – 20GHz)

GSM 1900 Conducted Spurious Emissions Uplink Middle CH

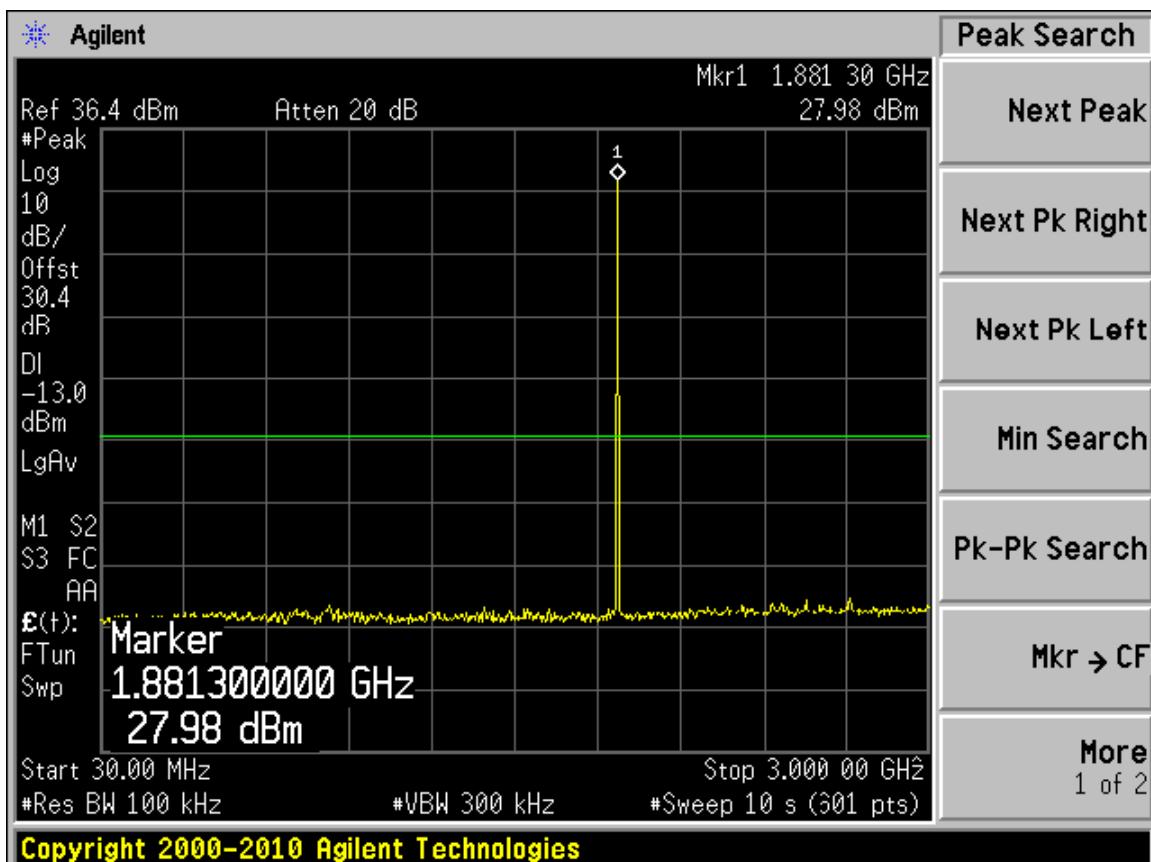


(30MHz – 3GHz)

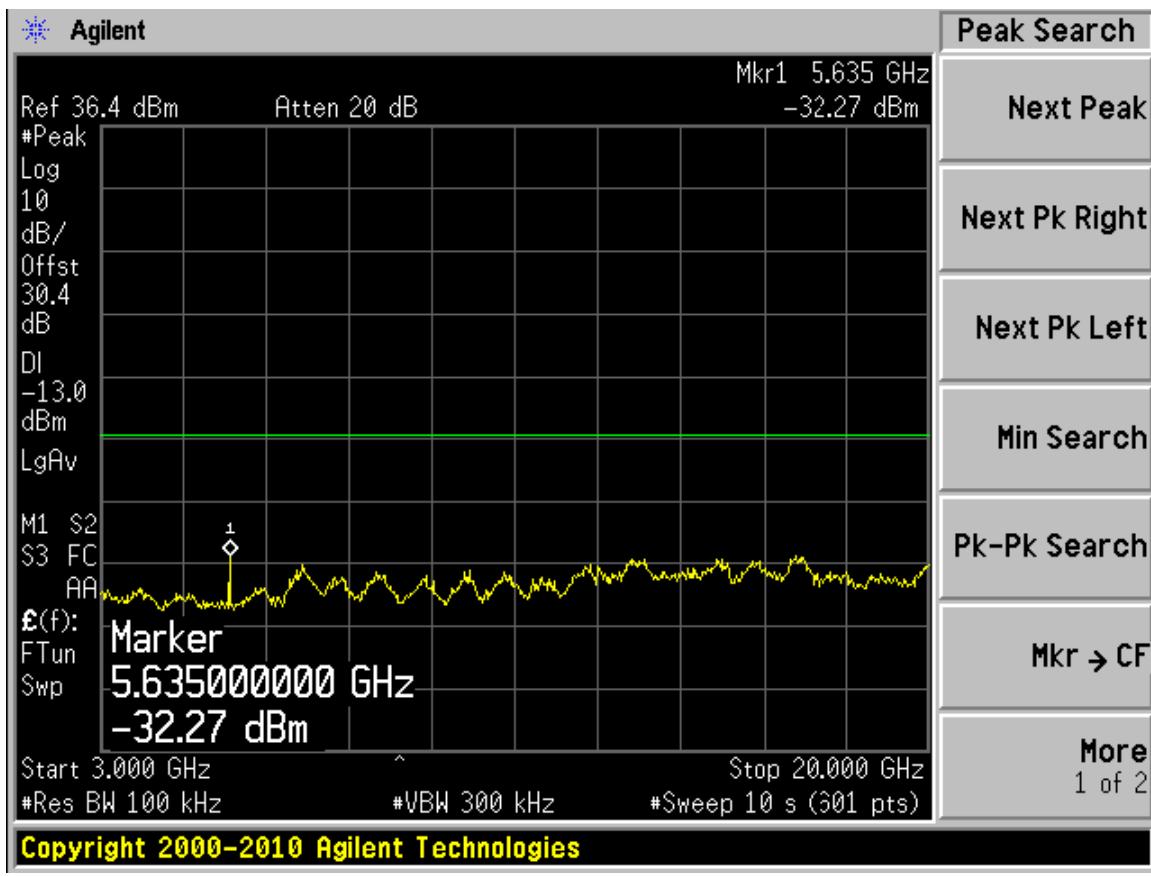


(3Hz – 20GHz)

GSM 1900 Conducted Spurious Emissions Uplink High CH

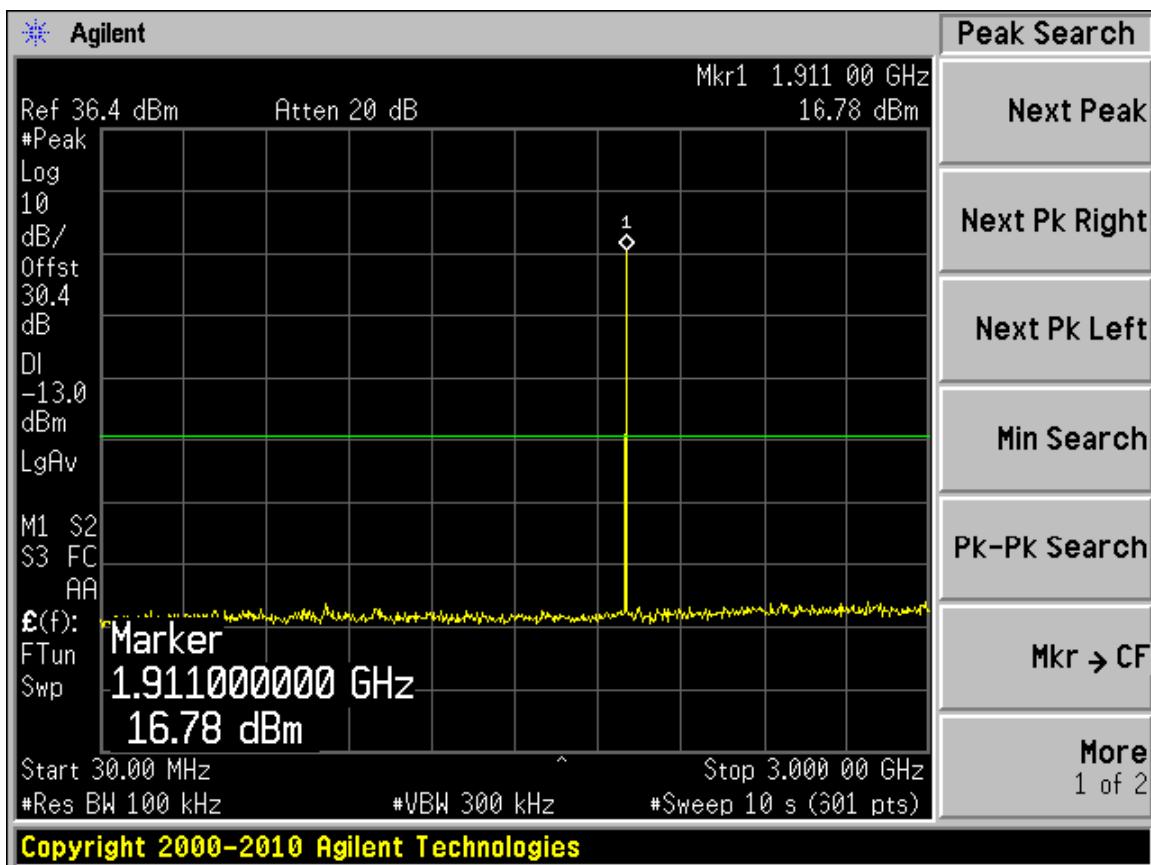


(30MHz – 3GHz)

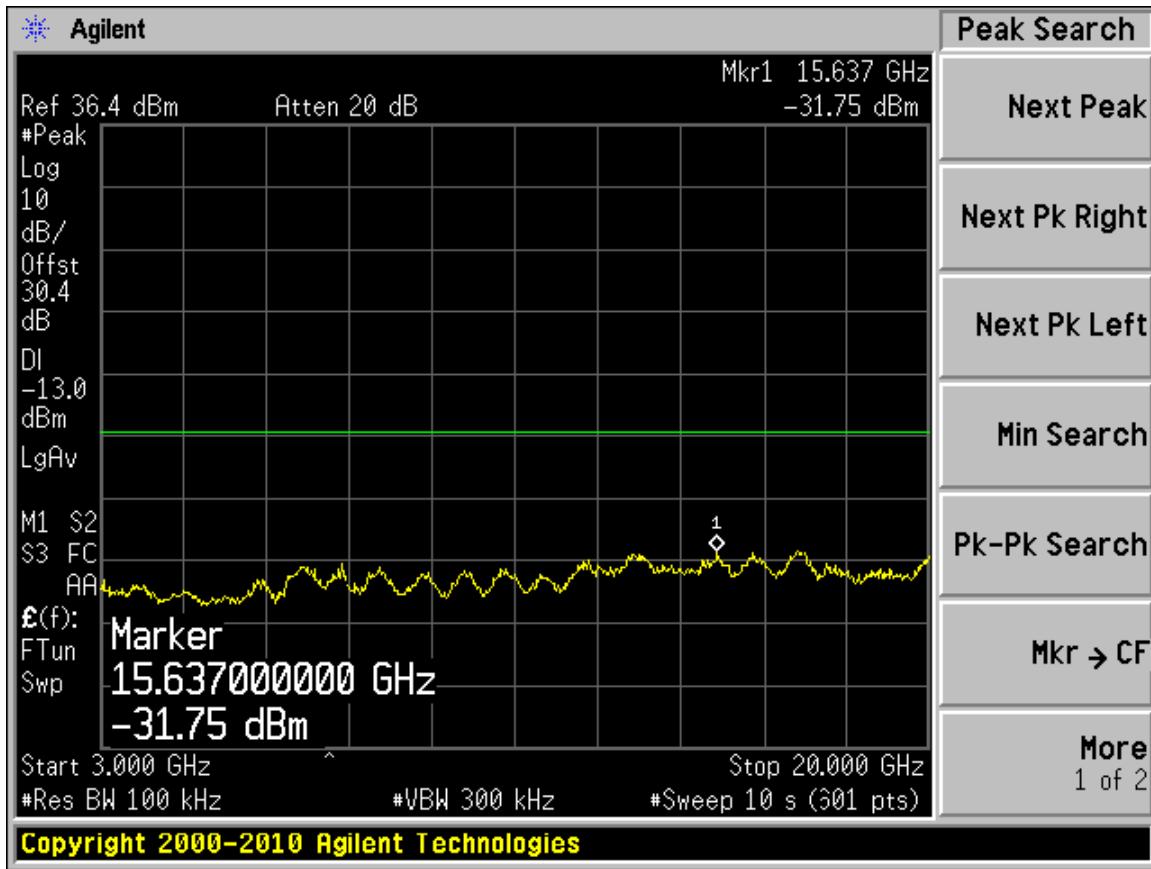


(3Hz – 20GHz)

Inter modulation Downlink GSM 850 Low CH

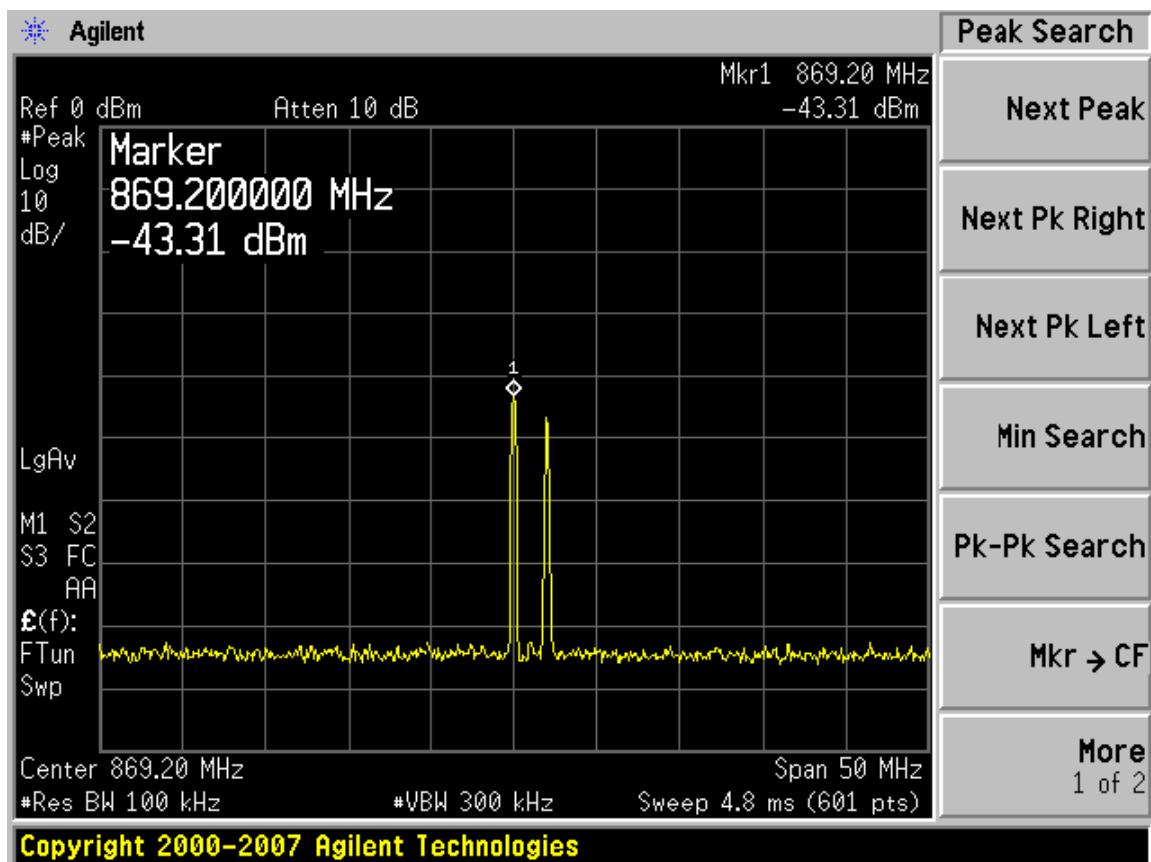


Input

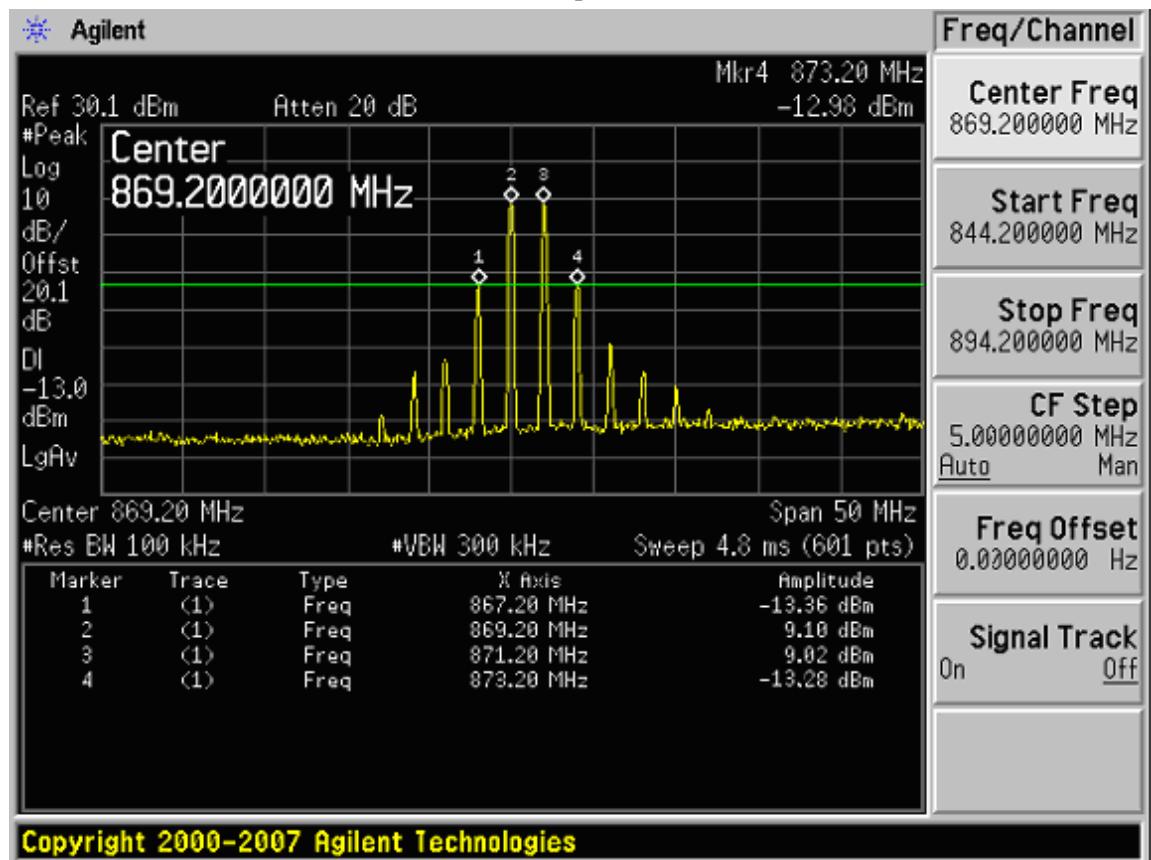


Output

Inter modulation Downlink GSM 850 High CH

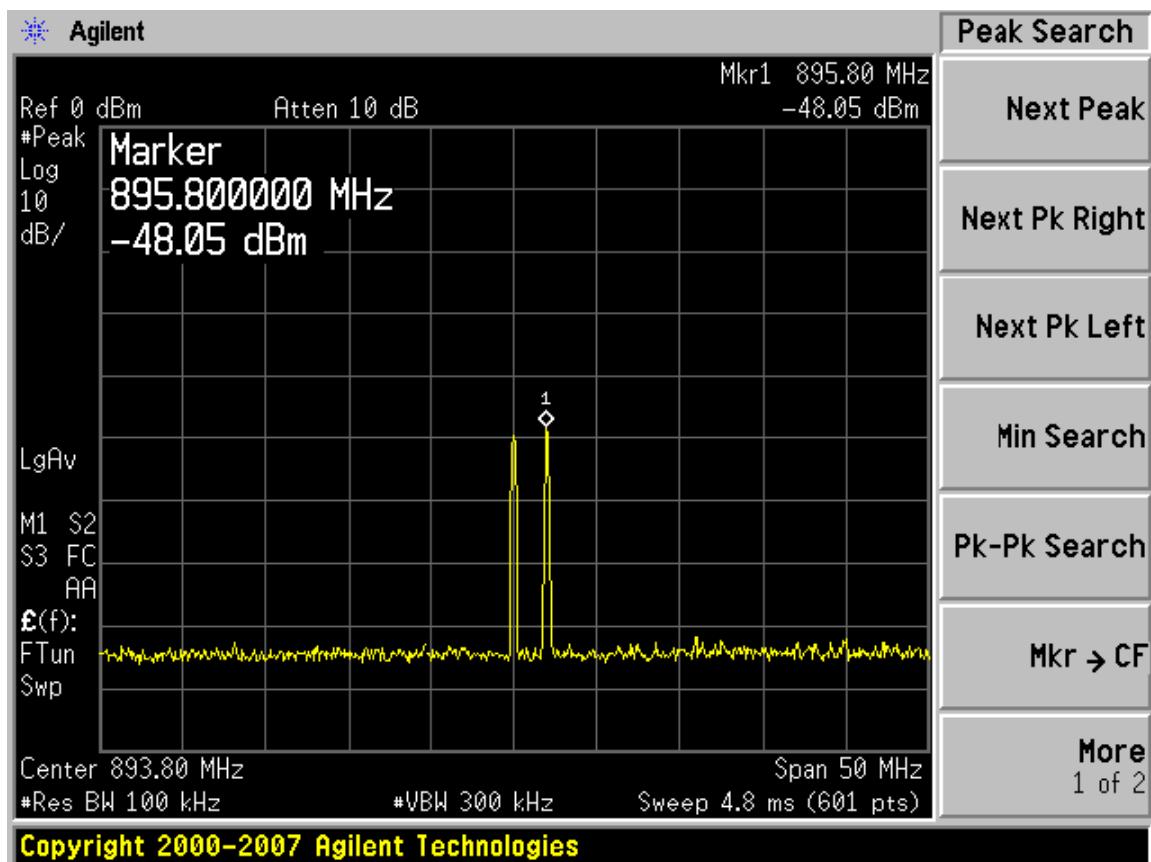


Input

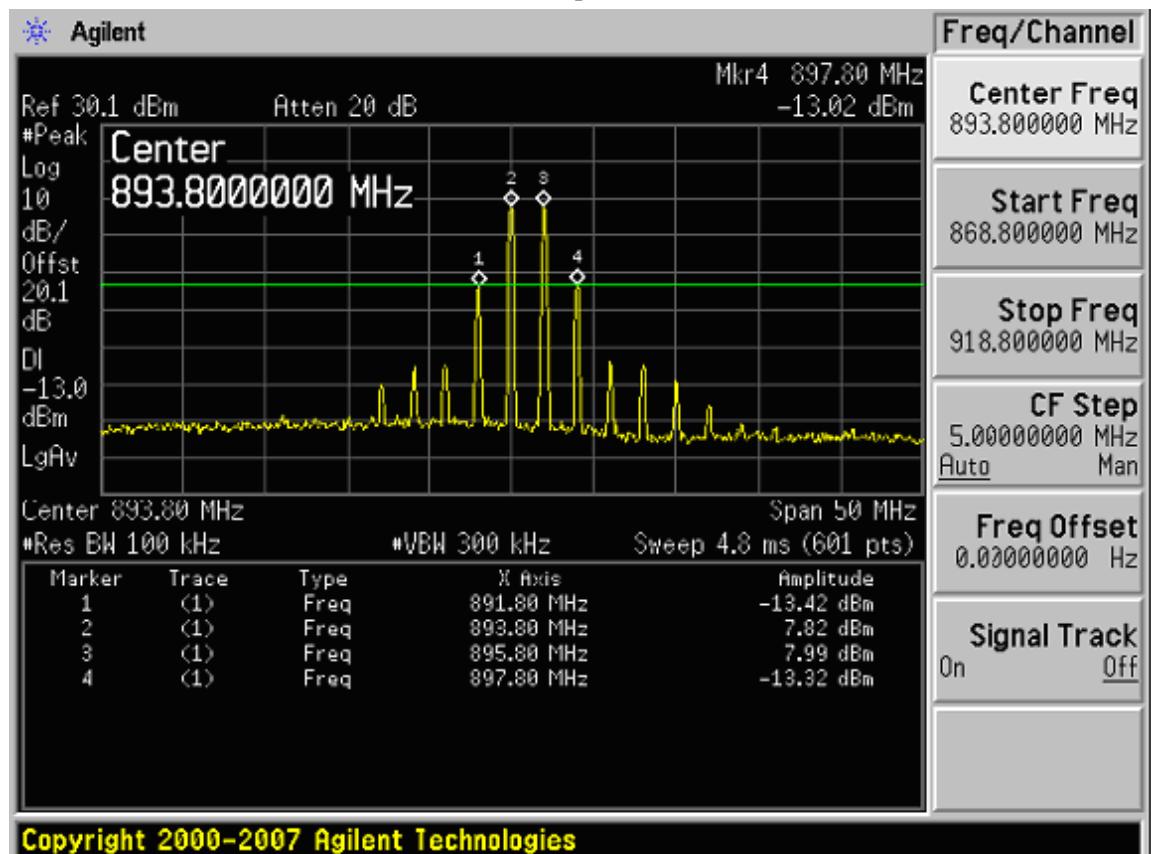


Output

Inter modulation Uplink GSM 850 Low CH

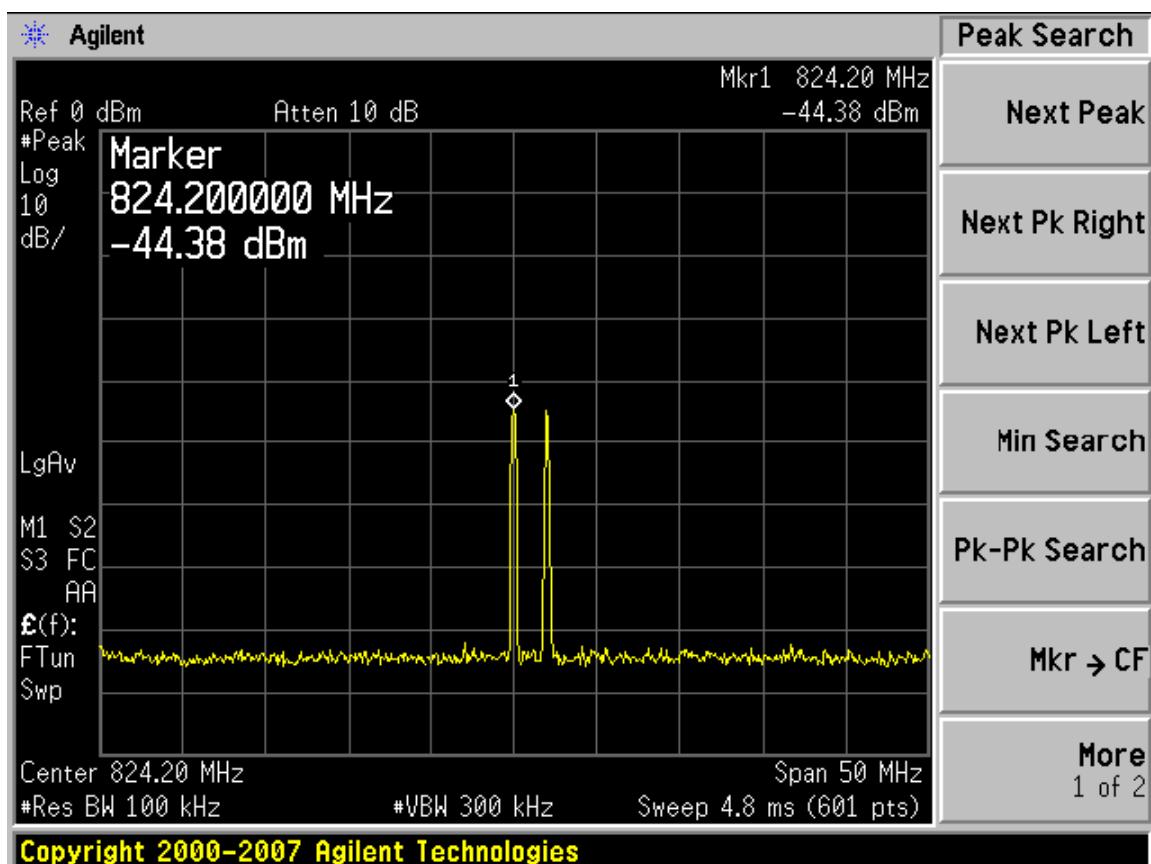


Input

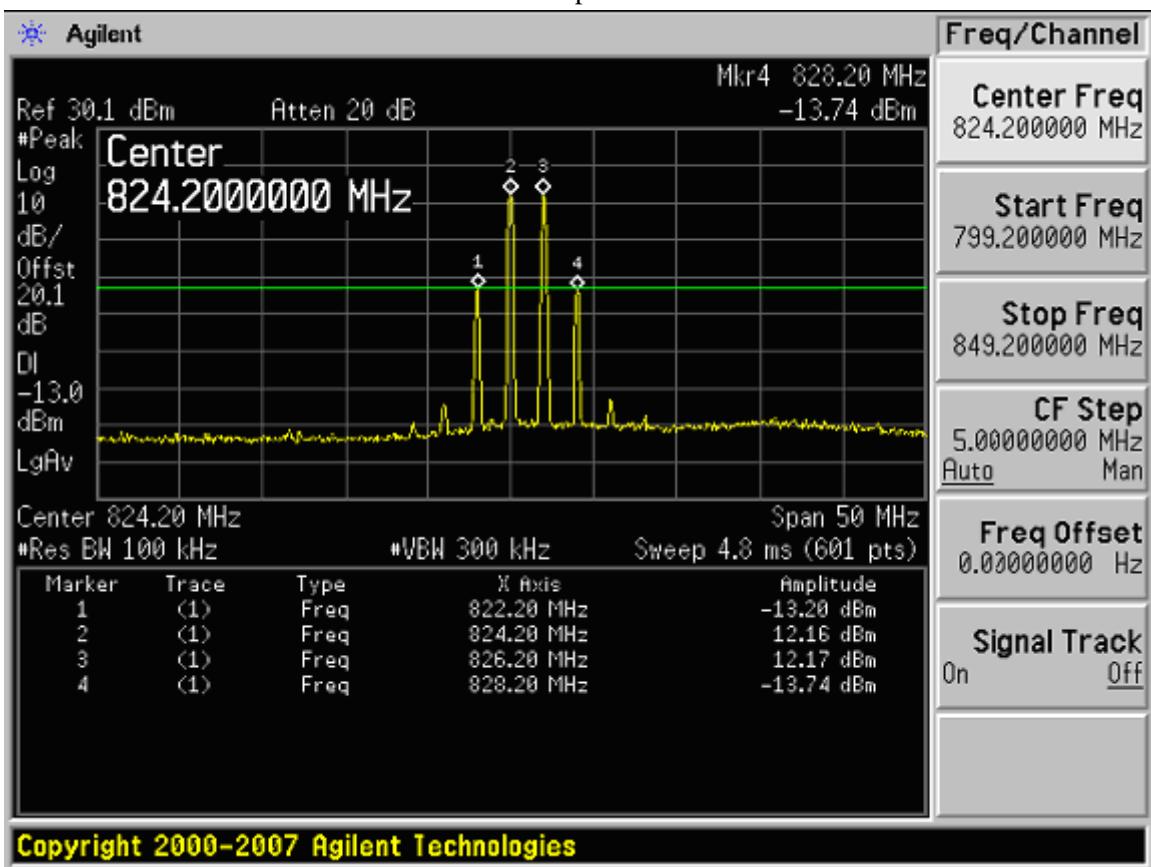


Output

Inter modulation Uplink GSM 850 High CH

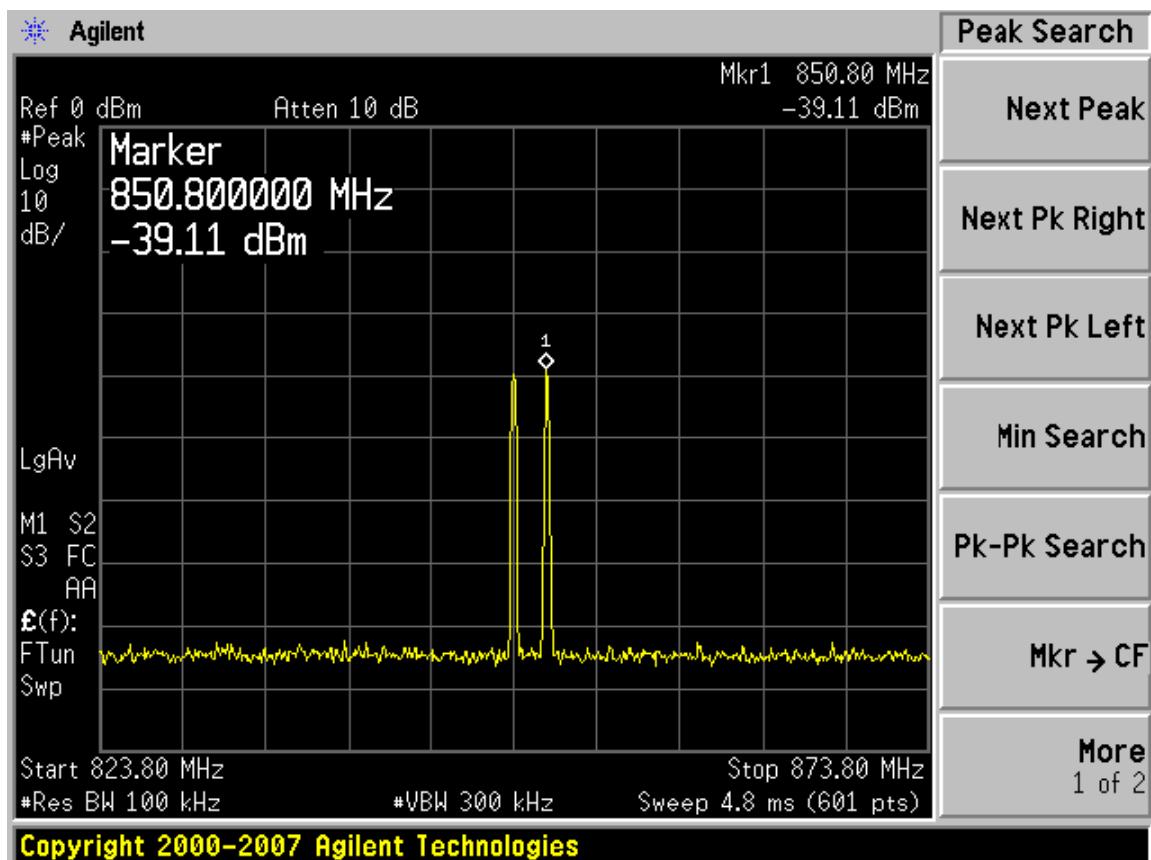


Input

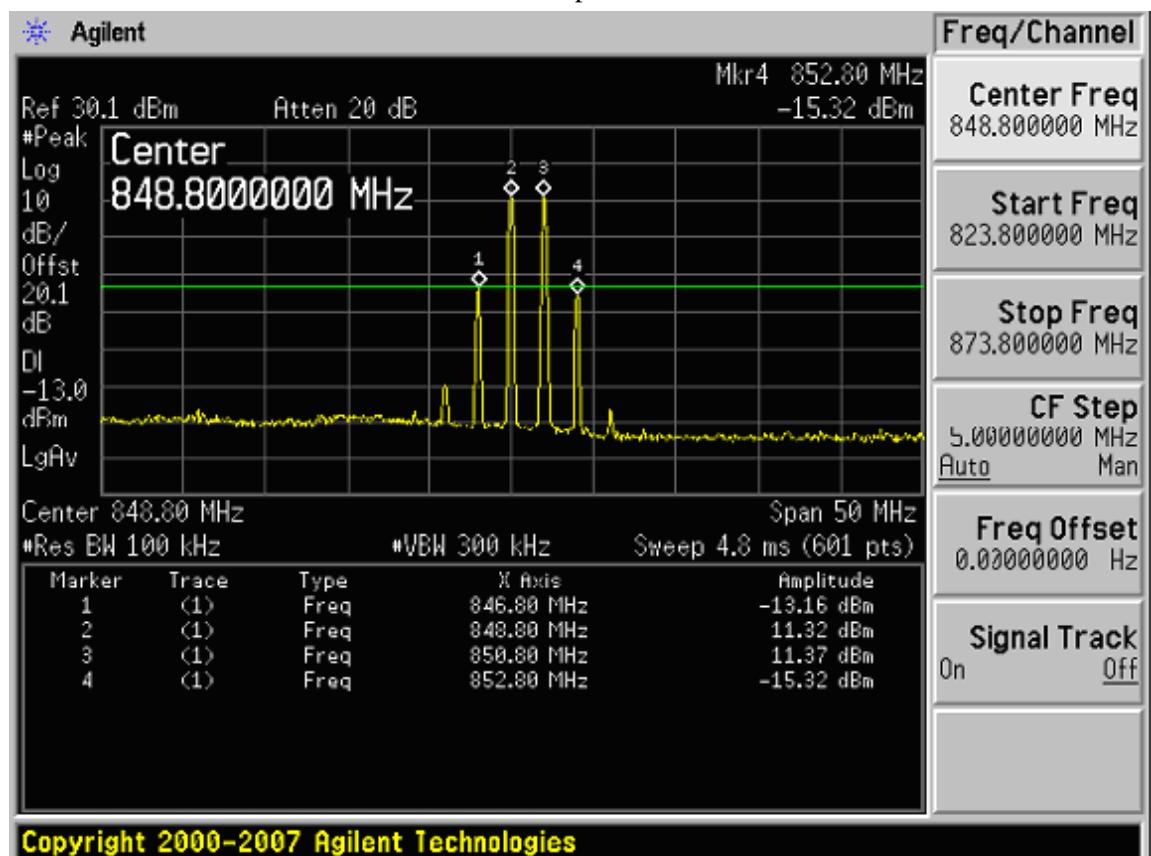


Output

Inter modulation Downlink GSM 1900 Low CH

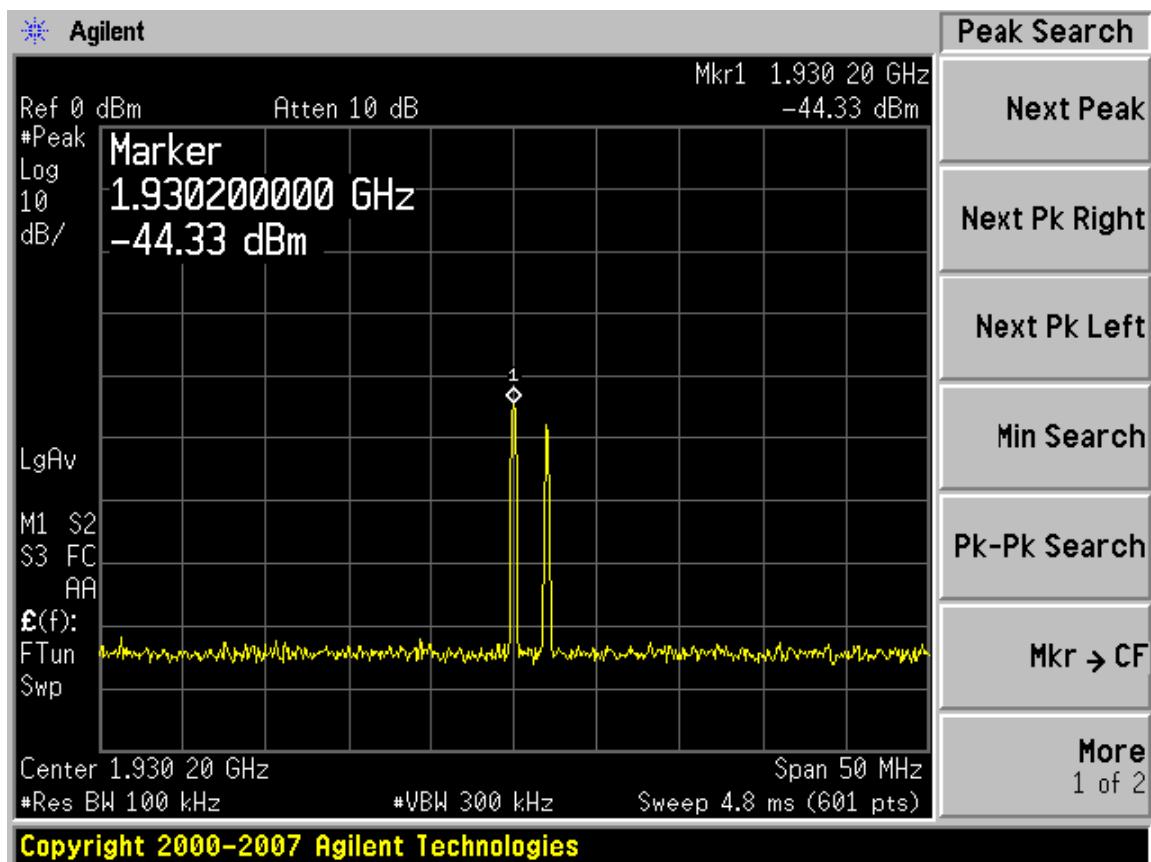


Input

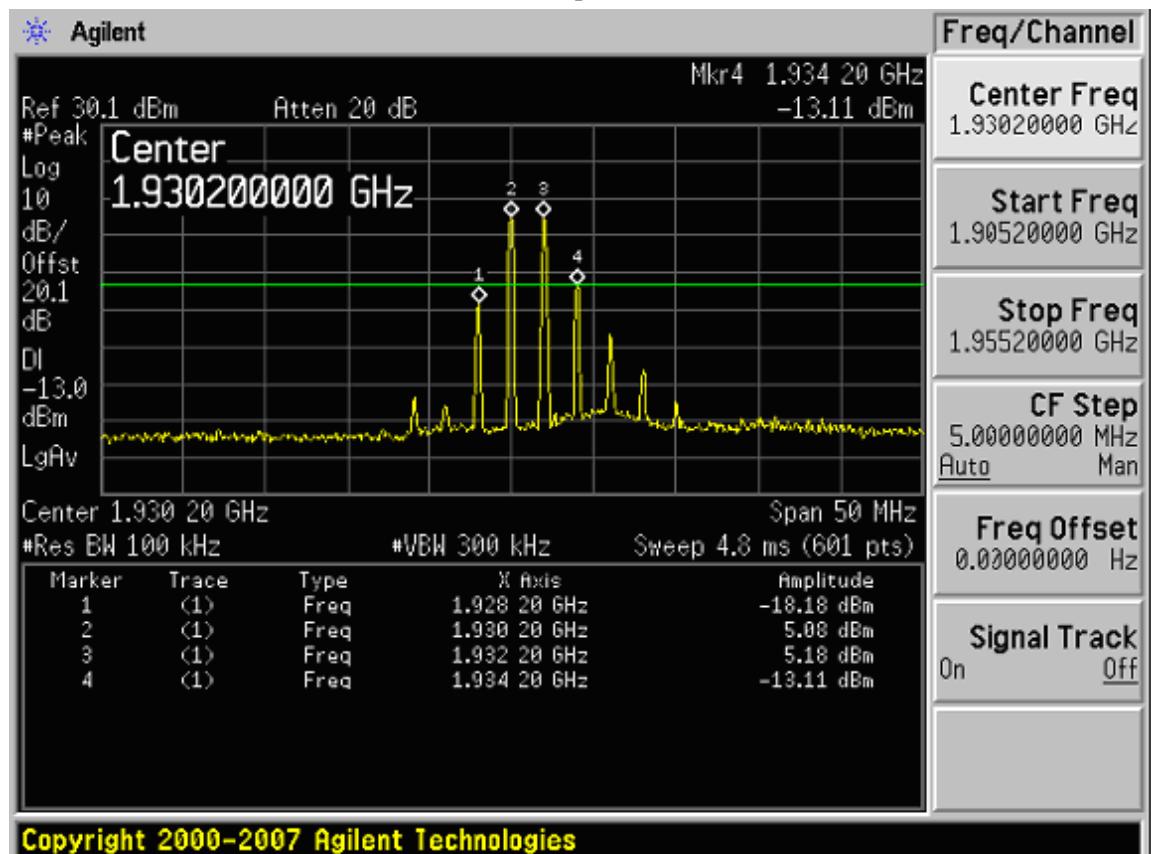


Output

Inter modulation Downlink GSM 1900 High CH

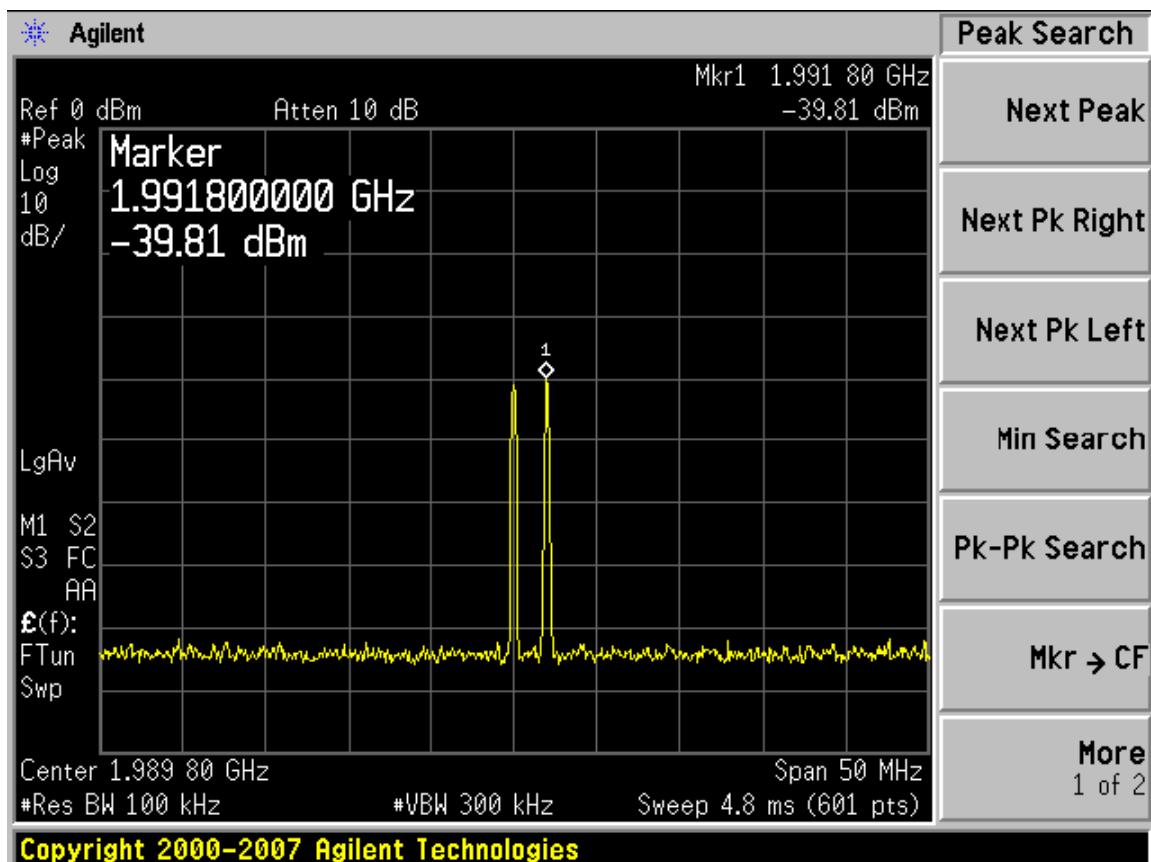


Input

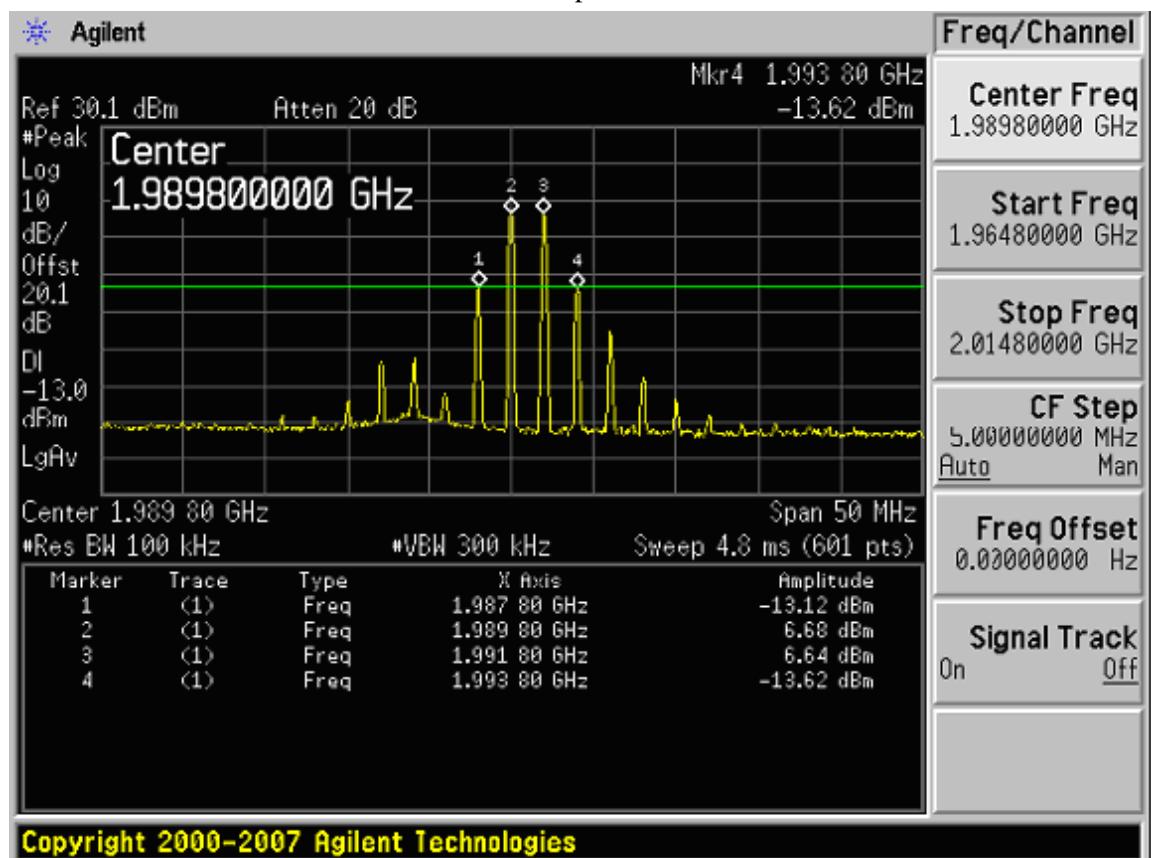


Output

Inter modulation Uplink GSM 1900 Low CH

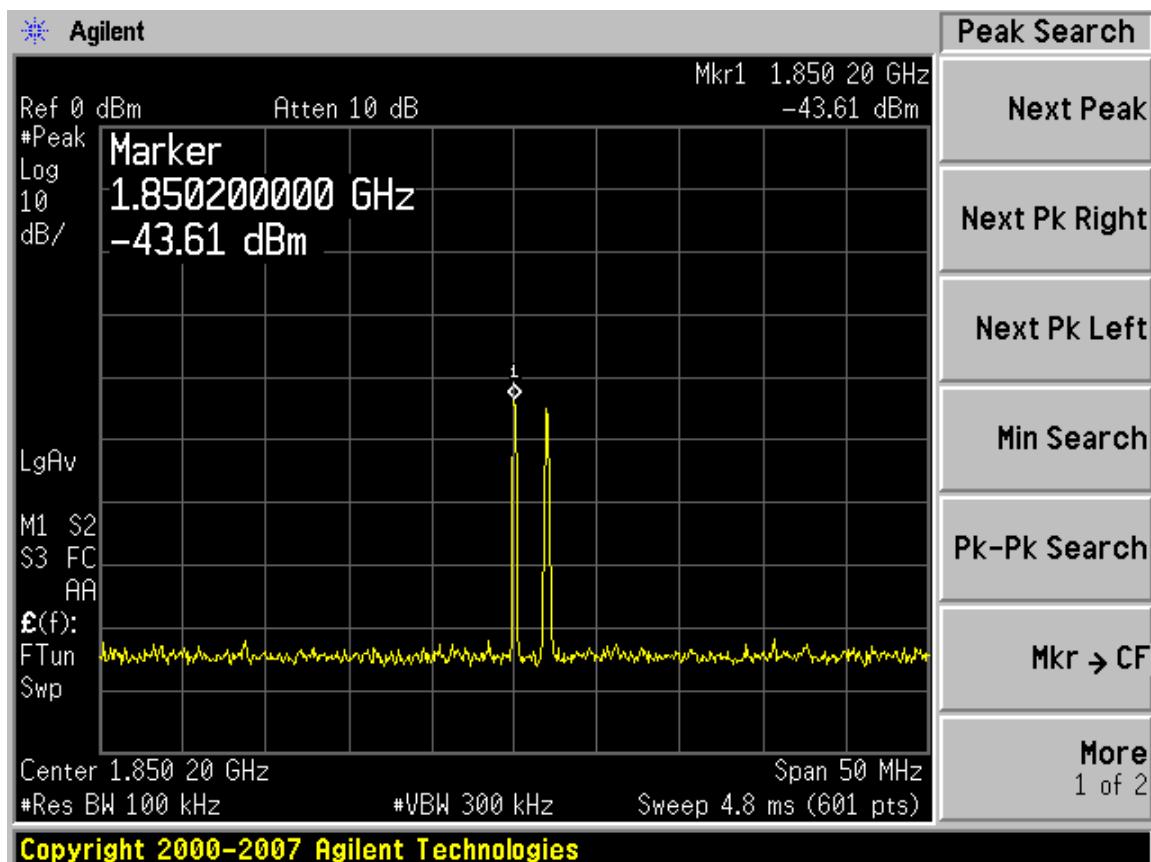


Input

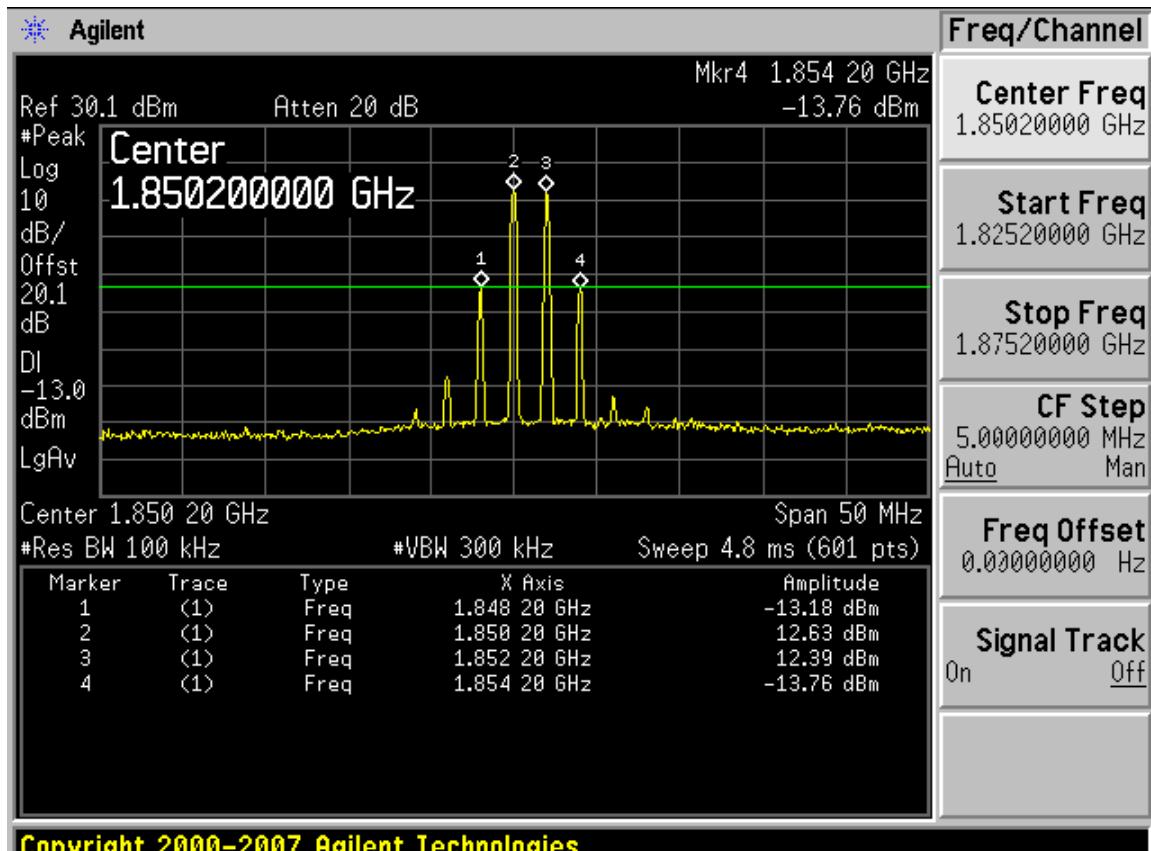


Output

Inter modulation Uplink GSM 1900 High CH

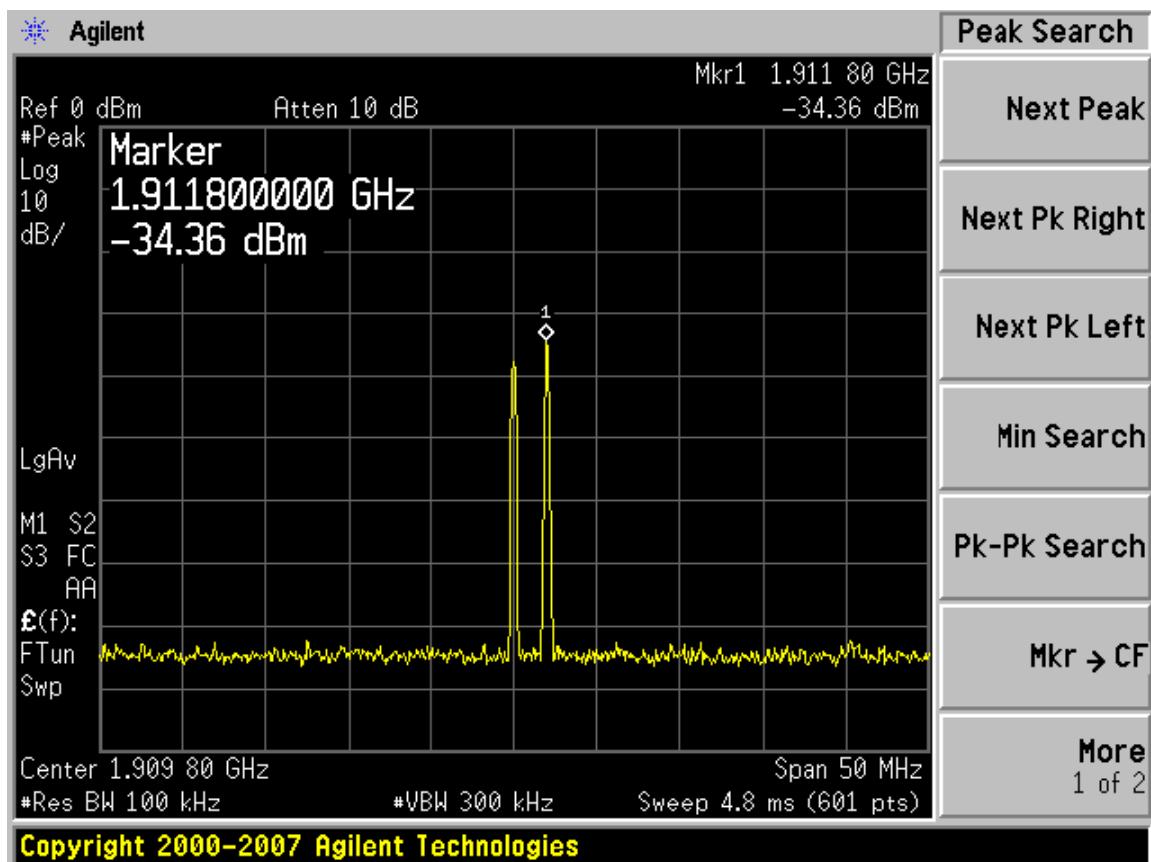


Input

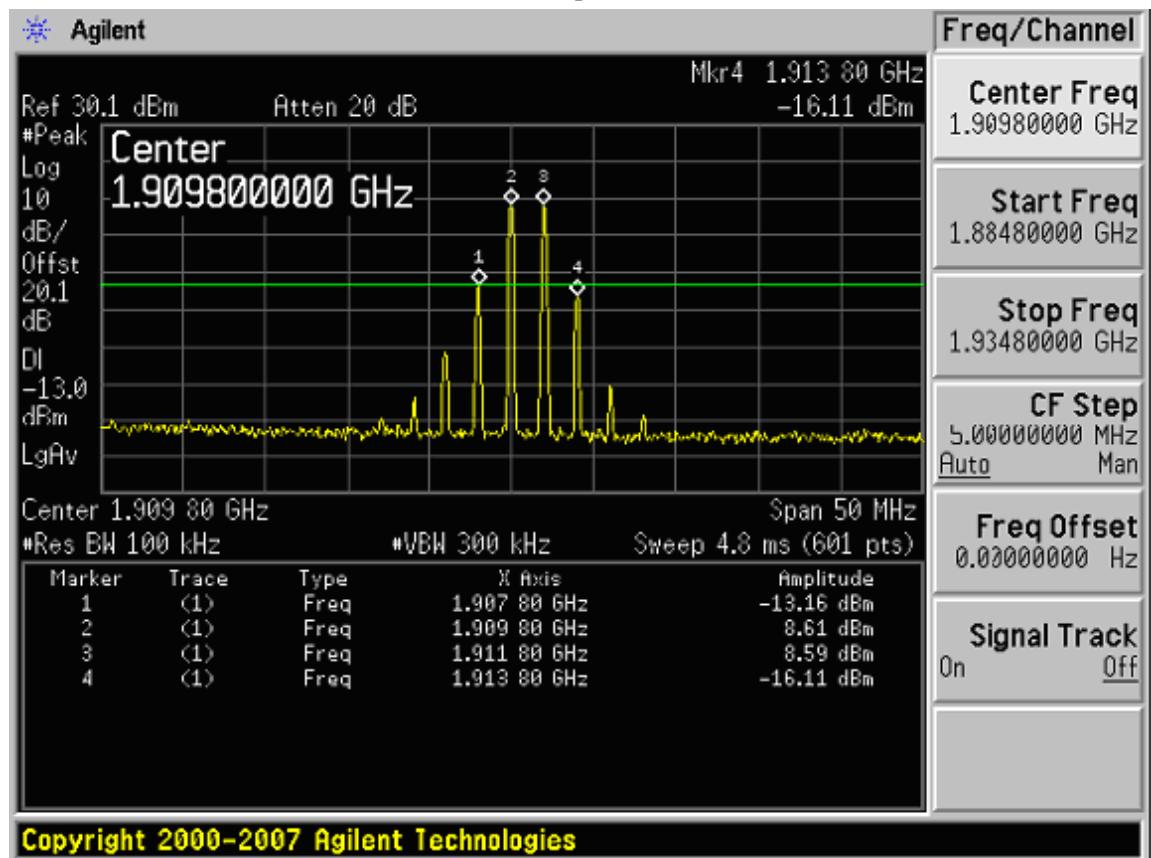


Output


Out of Band Rejection Uplink (GSM 850)

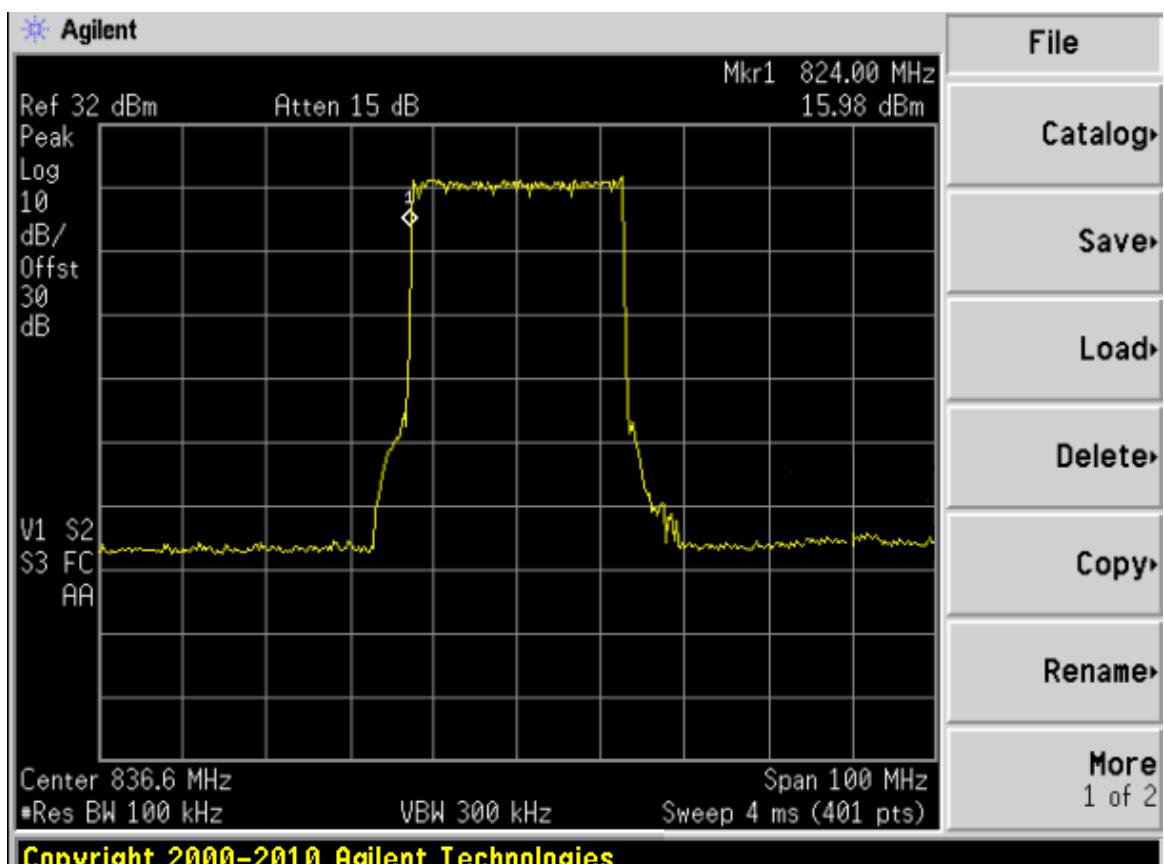


Out of Band Rejection Downlink (GSM 850)

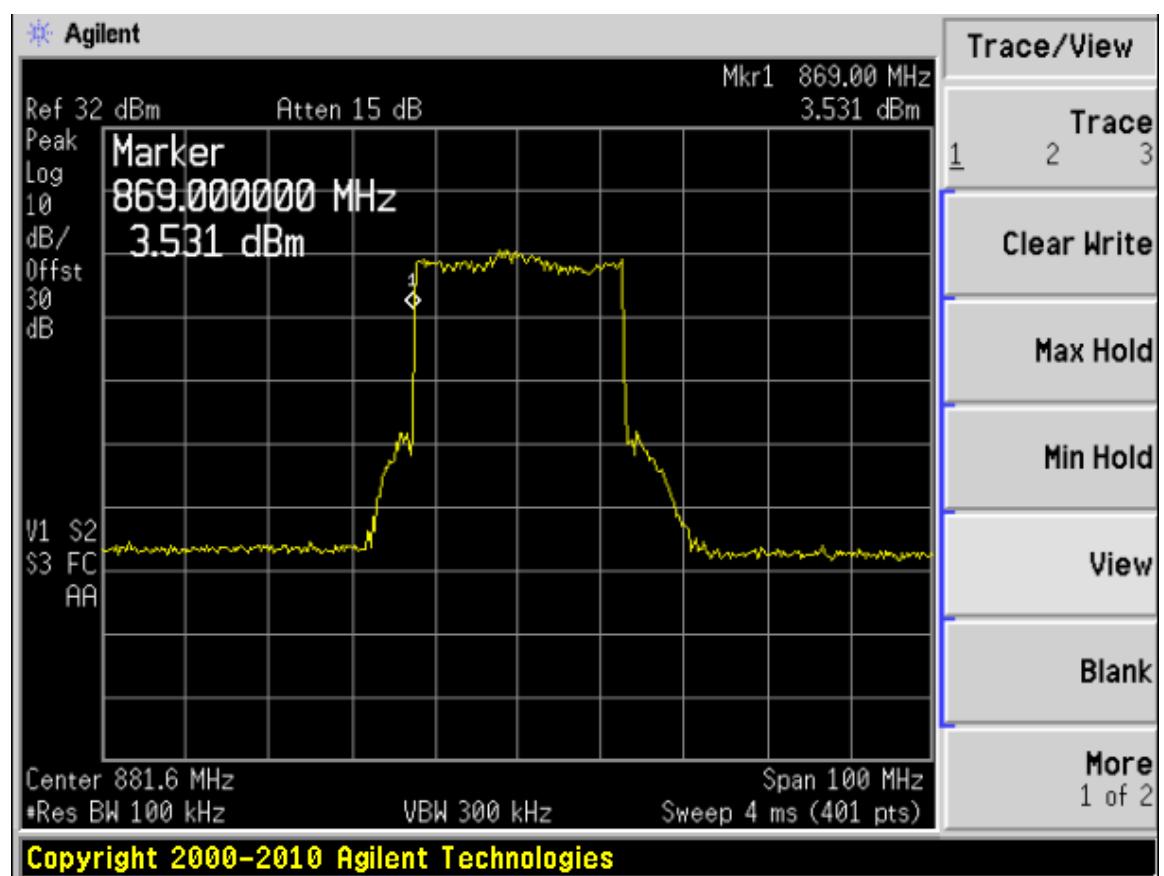

Out of Band Rejection Uplink (GSM 1900)

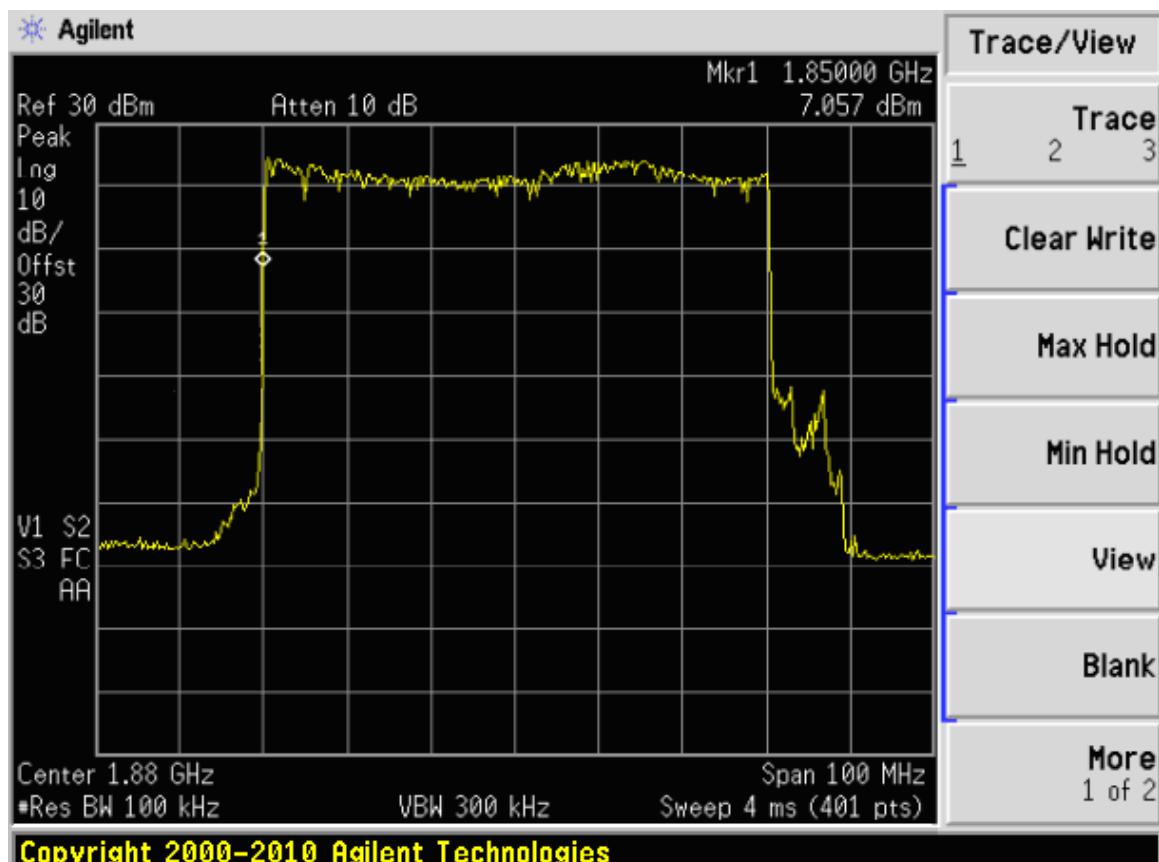

Out of Band Rejection Downlink (GSM 1900)

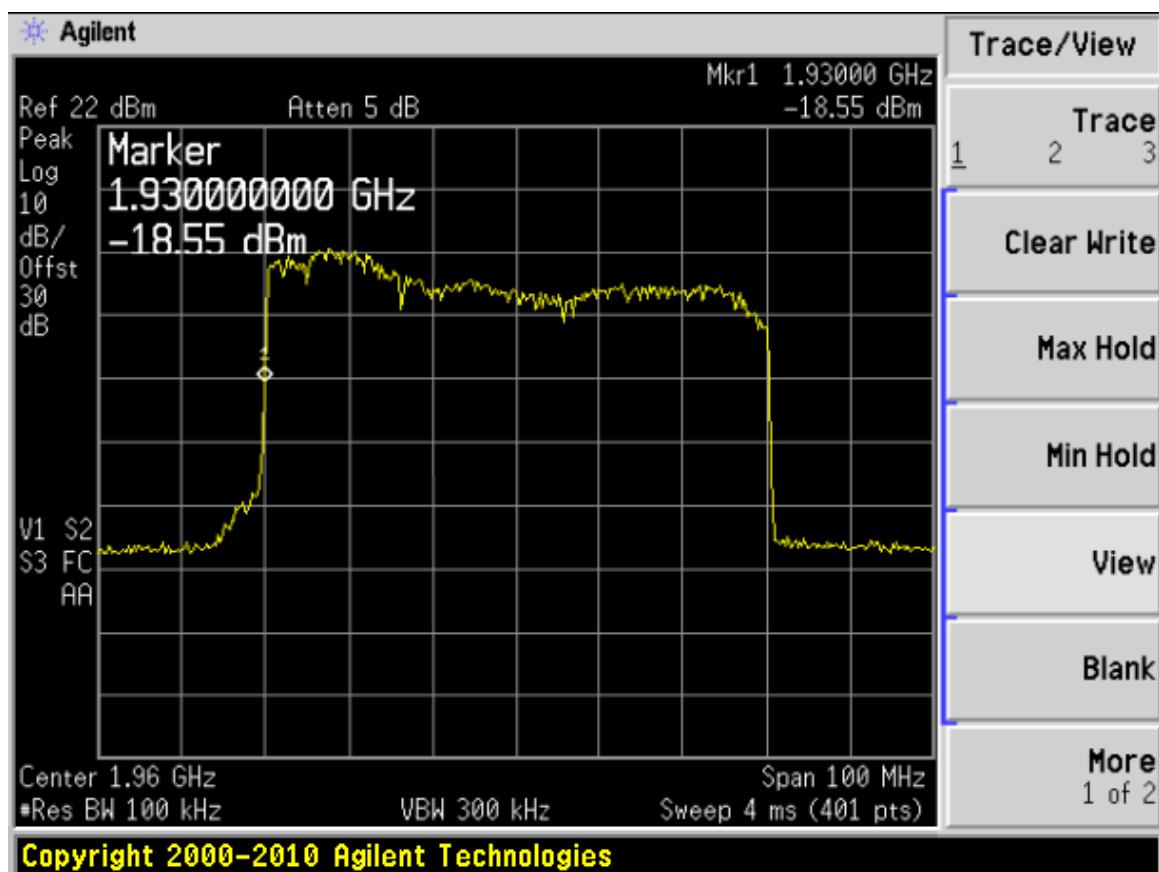

5.4. RADIATED EMISSIONS MEASUREMENT

5.4.1. Standard Applicable

§ 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

5.4.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report.

5.4.3. Test Procedures


As required by 47 CFR 2.1053, field strength of radiated spurious measurements were made in accordance with the procedures of TIA/EIA-603-C-2004 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards". Radiated emission measurements were performed inside a 3 meter semi-anechoic chamber. The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about 360 and the receiving antenna scanned from 1-3m in order to capture the maximum emission. A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated. The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

5.4.4. Test Setup Layout

For radiated emissions below 30MHz

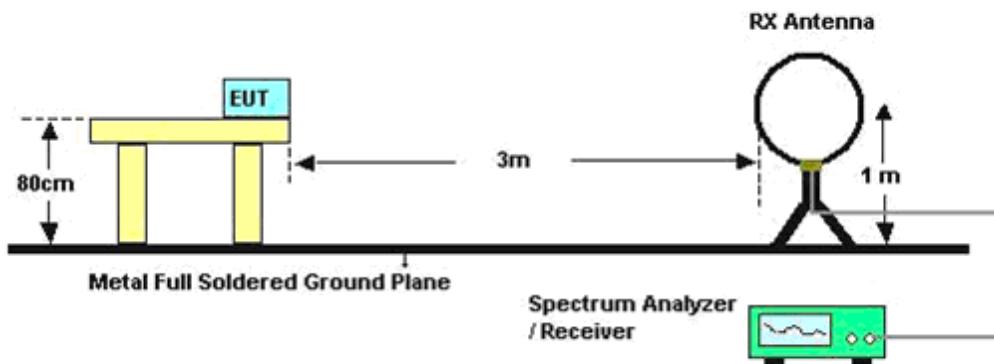

For radiated emissions above 30MHz

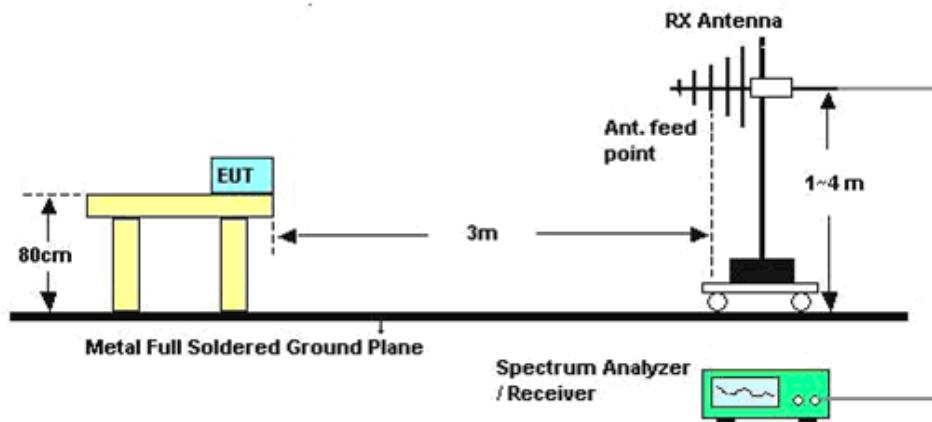

5.4.5. Test Results

Indicated		Table	Test Antenna		Substituted		Antenna Gain Correction	Cable Loss dB	Absolute Level dBm	Limit dBm	Margin dB
Frequency MHz	Reading dBuV/m	Angle Degree	Height Meter	Polar H/V	Frequency MHz	Level dBm					
850 MHz, Downlink, Input frequency = 881.6 MHz											
1673.2	50.27	60	1.1	V	1673.2	-52.41	9.4	1.3	-44.31	-13	31.31
1673.2	53.98	0	1.5	H	1673.2	-48.70	9.4	1.3	-40.60	-13	27.60
850 MHz, Uplink, Input frequency = 836.0 MHz											
1763.2	56.80	90	1.1	V	1763.2	-44.64	9.6	1.3	-36.34	-13	23.34
1763.2	59.53	90	1.1	H	1763.2	-41.91	9.6	1.3	-33.61	-13	20.61

Indicated		Table	Test Antenna		Substituted		Antenna Gain Correction	Cable Loss dB	Absolute Level dBm	Limit dBm	Margin dB
Frequency MHz	Reading dBuV/m	Angle Degree	Height Meter	Polar H/V	Frequency MHz	Level dBm					
1900 MHz, Downlink, Input frequency = 1960 MHz											
3920	45.33	100	1.2	V	2509.8	-50.56	9.5	1.66	-42.72	-13	29.72
3920	37.13	60	1.5	H	2509.8	-58.76	9.5	1.66	-50.92	-13	37.92
1900 MHz, Uplink, Input frequency = 1880 MHz											
3760	51.48	90	1.5	V	3526.4	-42.37	10.0	1.68	-34.05	-13	21.05
3760	54.57	150	1.2	H	3526.4	-41.41	10.0	1.68	-33.09	-13	20.09

5.5. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS

5.5.1. Standard Applicable

According to FCC § 2.1055 the frequency stability shall be sufficient to ensure that the fundamental emissions

5.5.2. Test Procedures

As required by 47 CFR 2.1055, Frequency Stability measurements were made at the RF output terminals using a Spectrum Analyzer.


The EUT was placed in the Environmental Chamber.

A CW signal was injected into the EUT at the appropriate RF level. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations.

The frequency drift was investigated for every 10 °C increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -30 to 50 °C.

Voltage supplied to EUT is 120 Vac reference temperature was done at 20°C. The voltage was varied by $\pm 15\%$ of nominal

5.5.3. Test Setup

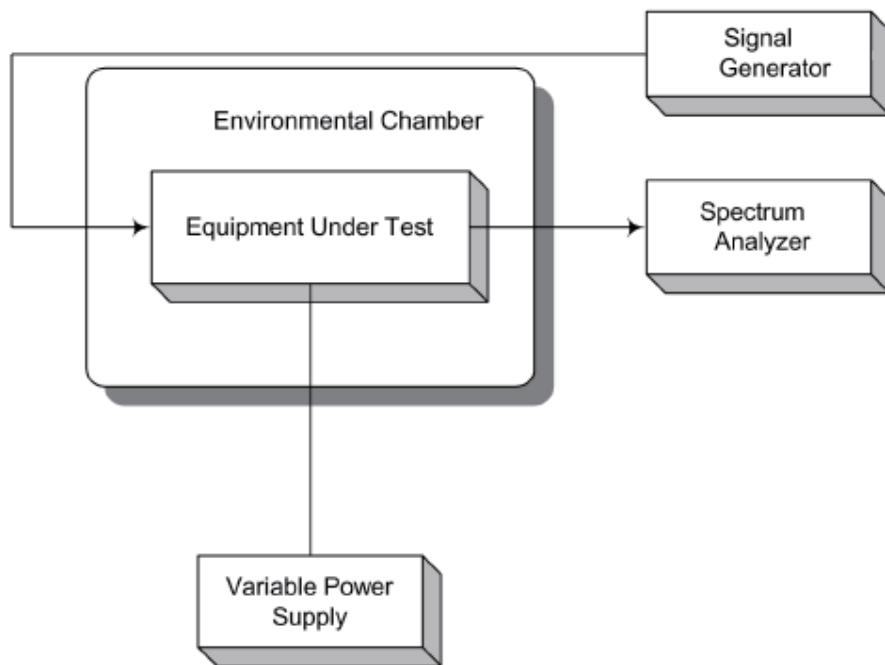

5.5.4. Test Results

This EUT is an amplifier, not a transmitter. There is no oscillator circuit in the EUT, therefore there is no frequency stability measurement required.

N/A.

5.6. DEVIATION TO TEST SPECIFICATIONS

[NONE]

6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
Signal Generator	Agilent	E4438C	MY42082646	June 18,2012	June 17,2013
Power Meter	Agilent	E4416A	GB41291412	June 18,2012	June 17,2013
Attenuator	WEINSCHEL	67-30-33	BR0530	June 18,2012	June 17,2013
Temperature and Humidity Chamber	Korea Eng	KR-1005L	KRAC05063-3C H	June 29,2012	June 28,2013
Signal Analyzer	Agilent	N9020A	US46220219	June 18,2012	June 17,2013
BI-LOG Antenna	Schwarzbeck	VULB 9168	9168-200	June 18,2012	June 17,2013
Antenna Position Tower	HD	MA240	556	N/A	N/A
Turn Table	EMCO	1050	114	N/A	N/A
Controller	HD GmbH	HD 100	13	N/A	N/A
SlideBar	HD GmbH	KMS 560	12	N/A	N/A
Horn Antenna	MITEQ	AFS44-00102650-42-10P44-PS	1532439	June 18,2012	June 17,2013
Horn Antenna	Schwarzbeck	BBHA 9120D	147	July 07,2012	July 06,2013
Loop Antenna	Schwarzbeck	BBHA 9120D	296	July 07,2012	July 06,2013
Signal Generator	EMCO	6502	9009-2536	July 07,2012	July 06,2013
Wireless Communications Test Set	Agilent	8960 E5515C	GB47050534	June 18,2012	June 17,2013
Universal Radio Communication Tester	R&S	CMU200	112012	June 18,2012	June 17,2013
Spectrum	Agilent	E4407B	MY41440754	June 18,2012	June 17,2013

7. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s):

--	--	--	--
----	----	----	----

Belong to the tested device:

Product description : Dual Band Direct Connect Bi-directional Signal Booster

Model name : DA4500

No additional models were tested.

-----THE END OF REPORT-----